



Huawei Technologies Co., Ltd.

TPC Benchmark™ H Full Disclosure Report

Huawei FusionCube V2.01

using

Sybase IQ Version 16

and

Red Hat Enterprise Linux Server Release 6.2

First Edition
November, 2013

Table of Contents

Table of Contents.....	2
Abstract.....	4
Preface.....	11
TPC Benchmark© H Overview.....	11
General Items.....	13
0.1 Test Sponsor.....	13
0.2 Parameter Settings.....	13
0.3 Configuration Diagrams.....	13
Clause 1: Logical Database Design.....	15
1.1 Database Definition Statements.....	15
1.2 Physical Organization.....	15
1.3 Horizontal Partitioning.....	15
1.4 Replication.....	15
Clause 2: Queries and Refresh Functions.....	16
2.1 Query Language.....	16
2.2 Verifying Method of Random Number Generation.....	16
2.3 Generating Values for Substitution Parameters.....	16
2.4 Query Text and Output Data from Qualification Database.....	16
2.5 Query Substitution Parameters and Seeds Used.....	16
2.6 Isolation Level.....	16
2.7 Source Code of Refresh Functions.....	16
Clause 3: Database System Properties.....	17
3.1 ACID Properties.....	17
3.2 Atomicity Requirements.....	17
3.2.1 Atomicity of the Completed Transactions.....	17
3.2.2 Atomicity of Aborted Transactions.....	17
3.3 Consistency Requirements.....	17
3.3.1 Consistency Test.....	18
3.4 Isolation Requirements.....	18
3.4.1 Isolation Test 1 – Read-Write Conflict with Commit.....	18
3.4.2 Isolation Test 2 – Read-Write Conflict with Rollback.....	18
3.4.3 Isolation Test 3 – Write-Write Conflict with Commit.....	18
3.4.4 Isolation Test 4 – Write-Write Conflict with Rollback.....	19
3.4.5 Isolation Test 5 – Concurrent Read and Write Transactions on Different Tables.....	19
3.4.6 Isolation Test 6 – Update Transactions during Continuous Read-Only Query Stream.....	19
3.5 Durability Requirements.....	19
3.5.1 Instantaneous Interruption & Memory Failure.....	19
3.5.1.1 Coordinator Node Failure.....	19
3.5.1.2 Multiplex Node & Cluster Failure.....	20
3.5.2 Power Failure.....	20
3.5.3 Loss of Durable Media.....	20

3.5.3.1 Storage Node Failure	20
3.5.3.2 Coordinator Drive Failure	20
4.1 Initial Cardinality of Tables.....	22
4.2 Distribution of Tables and Logs across Media	22
4.3 Mapping of Database Partitions/Replications.....	24
4.4 Implementation of RAID	24
4.5 DBGEN Modifications	24
4.6 Database Load time	24
4.7 Data Storage Ratio.....	25
4.8 Database Load Mechanism Details and Illustration	25
4.9 Qualification Database Configuration.....	26
Clause 5: Performance Metrics and Execution Rules	27
5.1 Steps in the Power Test.....	27
5.2 Timing Intervals for Each Query and Refresh Function	27
5.3 Number of Streams for the Throughput Test	27
5.4 Start and End Date/Times for Each Query Stream.....	27
5.5 Total Elapsed Time for the Measurement Interval.....	27
5.6 Refresh Function Start Date/Time and Finish Date/Time	27
5.7 Timing Intervals for Each Query and Each Refresh Function for Each Stream.....	27
5.8 Performance Metrics	27
5.9 The Performance Metric and Numerical Quantities from Both Runs	28
5.10 System Activity between Tests	28
Clause 6: SUT and Driver Implementation.....	29
6.1 Driver.....	29
6.2 Implementation Specific Layer	29
6.3 Profile-Directed Optimization	29
Clause 7: Pricing.....	30
7.1 Hardware and Software Pricing.....	30
7.2 Three Year Price	30
7.3 Availability Dates.....	30
Supporting File Index.....	31
Auditors' information and attestation letter	32
Appendix A	35

Abstract

This report documents the methodology and results of the TPC Benchmark© H test conducted on the Huawei FusionCube V2.01 using Red Hat Enterprise Linux Server Release 6.2, Oracle Enterprise Linux 6.2 and database Sybase IQ Version 16 SP02.

Huawei FusionCube V2.01

Company Name	System Name	Database Software	Server Node Operating System
Huawei Technologies Co., Ltd.	Huawei FusionCube V2.01	Sybase IQ Version 16.0 SP02	Red Hat Enterprise Linux Server Release 6.2

TPC Benchmark © H Metrics

Total System Cost	TPC-H Throughput	Price/Performance	Availability Date
\$1,829,327 USD	258,474.4 QphH@1000GB	\$7.08 USD \$/QphH@1000GB	November 20, 2013



Huawei FusionCube V2.01

TPC-H Rev.2.16.0

TPC-Pricing Rev. 1.7.0

Report Date:
November 16, 2013

Total System Cost

Composite Query per Hour Metric

Price / Performance

\$1,829,327 USD

258,474.4
QphH@1000GB

\$7.08 USD
\$/ QphH@1000GB

Database Size

Database Manager

Operating System

Other Software


Availability Date

1000 GB

**Sybase IQ Version 16.0
SP02**

**Red Hat Enterprise Linux
Server Release 6.2**

**November 20,
2013**

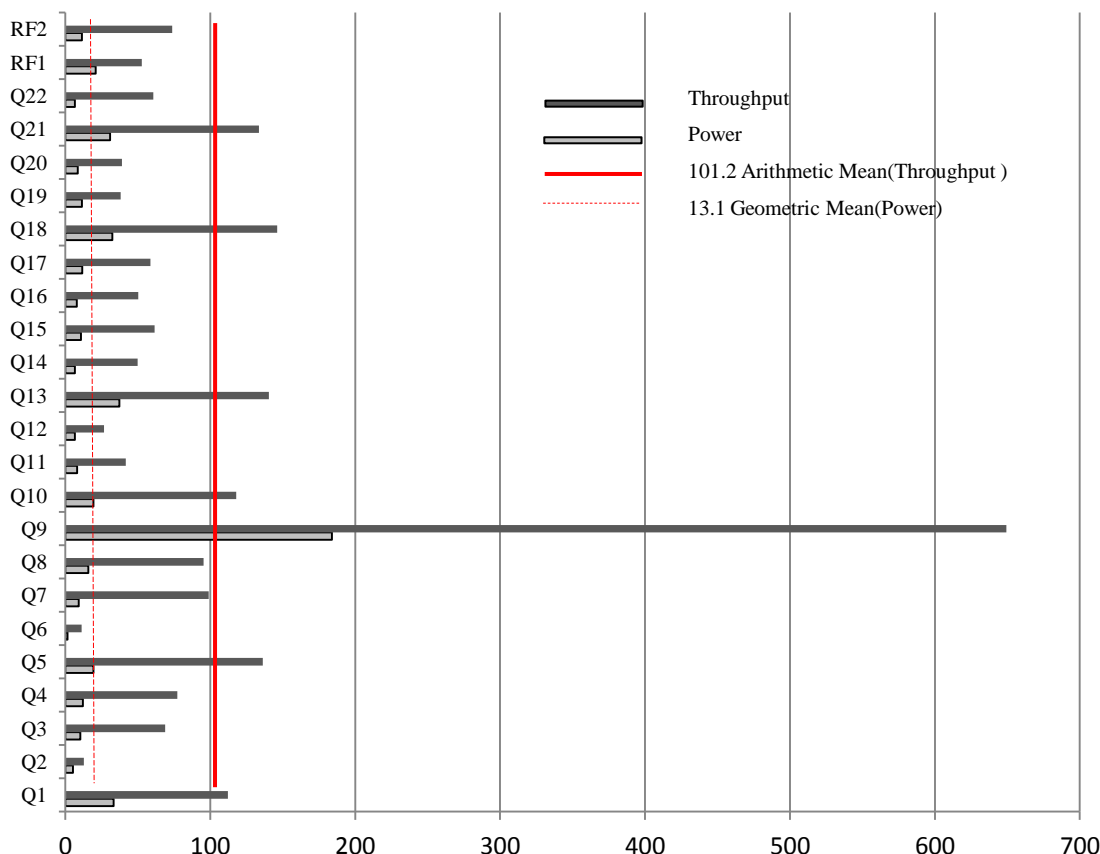

Database Load Time = 48m 23s	Storage Redundancy Level	
Load Includes Backup: N	Base Tables and Auxiliary Data Structures	2
Total Data Storage / Database Size = 30.46	DBMS Temporary Space	2
Memory to Database Size Percentage = 153.6%	OS and DBMS Software	1

Configuration summary:

FusionCube V2.01 Components	Per Blade	Total
Huawei CH121 Server Blade	-	4
Intel Xeon E5-2680 processors (2.70 GHz, 20MB Cache)/ Cores/Threads	2/16/32	8/64/128
Memory	384 GB	1,536 GB
600 GB (10k rpm) SAS disks	2	8
Huawei CH223 Storage Blade	-	4
600 GB (10k rpm) SAS disks	2	8
2.4 TB PCIe SSD Storage cards	2	8
Huawei CH223 Storage Management Blade	-	1
600 GB (10k rpm) SAS disks	2	2
	Total Storage	29.75 TB



Huawei FusionCube

V2.01

TPC-H Rev.2.16.0
TPC-Pricing Rev. 1.7.0

Report Date: Nov 16, 2013

Description	Source Part Number	Qty	Unit Price (USD)	Extended Price (USD)	3 Year. Maint. Price
Server Hardware					
Server Blade					
Romley EP Compute Node,CH121	1 03054855	4	1,299	5,196	
X86 series-FCLGA2011-2700MHz-0.9V-64bit-130000mW-SandyBridge EP	1 41020283	8	3,199	25,592	
Xeon E5-2680-8Core					
MEMORY MODULE,DDR3 RDIMM,16G, 240PIN, 1.5ns, 1333000KHz, 1.35V, ECC&Registered	1 06200107	96	339	32,544	
Hard Disk-600GB-SAS 6.0Gb/s-10000rpm,2.5"-16MB	1 02310KPU	8	509	4,072	
MZ510, 2*10G Port CNA Mezzanine Card, PCIe2.0 X8	1 03021SMG	4	659	2,636	
MZ611-2*56G Port HCA Mezzanine Card	1 03021VNH	4	1,399	5,596	
RU120 SAS/SATA RAID Card,RAID0,1,1E,0 Cache(LSI2308)	1 03021FTX	4	199	796	
Blade - Upgrade Warranty Hi-Care Onsite Premier 24x7,3 year	1 03054855-881 34ULJ	4	810		3,240
Management Storage Blade					
Romley EP Compute Node,CH121	1 03054855	1	1,299	1,299	
X86 series-FCLGA2011-2000MHz-0.9V-64bit-95000mW-SandyBridge EP	1 41020222	2	755	1,510	
Xeon E5-2620-6Core					
MEMORY MODULE,DDR3 RDIMM,16G, 240PIN, 1.5ns, 1333000KHz, 1.35V, ECC&Registered	1 06200107	4	339	1,356	
Hard Disk-600GB-SAS 6.0Gb/s-10000rpm,2.5"-16MB	1 02310KPU	2	509	1,018	
MZ510, 2*10G Port CNA Mezzanine Card, PCIe2.0 X8	1 03021SMG	1	659	659	
RU120 SAS/SATA RAID Card,RAID0,1,1E,0 Cache(LSI2308)	1 03021FTX	1	199	199	
Blade - Upgrade Warranty Hi-Care Onsite Premier 24x7,3 year	1 03054855-881 34ULJ	1	810		810
Storage Blade					
2*X8 PCIe Resource Extended Romley EP Compute Node-CH223	1 03055079	4	1,799	7,196	
X86 series-FCLGA2011-2000MHz-0.9V-64bit-95000mW-SandyBridge EP	1 41020222	8	755	6,040	
Xeon E5-2620-6Core					
MEMORY MODULE,DDR3 RDIMM,16G, 240PIN, 1.5ns, 1333000KHz, 1.35V, ECC&Registered	1 06200107	16	339	5,424	
Hard Disk-600GB-SAS 6.0Gb/s-10000rpm,2.5"-16MB	1 02310KPU	8	509	4,072	
MZ510, 2*10G Port CNA Mezzanine Card, PCIe2.0 X8	1 03021SMG	4	659	2,636	
MZ611-2*56G Port HCA Mezzanine Card	1 03021VNH	4	1,399	5,596	
RU120 SAS/SATA RAID Card,RAID0,1,1E,0 Cache(LSI2308)	1 03021FTX	4	199	796	
The 4th Generation PCIE SSD Card (2.4TB)	1 03030PWG	8	24,000	192,000	
NVDIMM-4G-240pin-10ns-1333Hz-1.5V-8bit-1Bank	1 06200147	4	1,232	4,928	
Blade - Upgrade Warranty Hi-Care Onsite Premier 24x7,3 year	1 03055079-881 34ULJ	4	810		3,240
SSD Card - Upgrade Warranty Hi-Care Onsite Premier 24x7,3 year	1 03030PWG-88 134ULJ	8	320		2,560



Huawei FusionCube

V2.01

TPC-H Rev.2.16.0
TPC-Pricing Rev. 1.7.0

Report Date: November 16, 2013

Description	Source	Part Number	Qty	Unit Price (USD)	Extended Price (USD)	3 Year. Maint. Price
Other Common Part						
Assembly Cabinet,FusionCube,FC0B00GMJG,2m Cabinet	1	02113809	1	1,028	1,028	
PDU2000-32-1PH-9/4-B1-AC220V~240V-9*C13+4*C19-32A	1	02120765	2	120	240	
E9000H 12U high-powered integrative module	1	02300742	1	4,600	4,600	
MM910,Shelf Management Module A	1	03054675	2	500	1,000	
OSCA Fan Box	1	03030QEJ	14	145	2,030	
3000W platinum AC power supply module	1	02310LKL	4	540	2,160	
CX310,16 Optical Port Switch Module	1	03054849	2	10,300	20,600	
CX610,18 External Optical Port, Converged Switch Unit	1	03022BVJ	2	8,900	17,800	
High Speed Transceiver,QSFP+,14.0625Gbps,0.005km	1	34060785	6	1,654	9,924	
Optical transceiver,SFP+,850nm,10Gb/s,-7.3~-1dBm,-11.1dBm,LC,MM,0.3km	1	34060494	4	338	1,352	
Patch cord-LC/PC-LC/PC-Multimode-A1b-2mm-20m-PVC-Orange	1	14130295	8	11	88	
Power Cable,300/500V,60227IEC10(BVV), 46A,3*6mm^2(per meter)	1	25030422	20	6	120	
Wire,450/750V,60227 IEC 02(RV)25mm^2,110A	1	25030431	10	6	60	
High Quality Keyboard & Mouse	1	06060114	1	17	17	
Monitor,Lenovo17 Inch,L1710,Screen ratio 5:4,Native resolution 1280*1024	1	06060153	1	147	147	
Upgrade Warranty Hi-Care Onsite Premier 24x7,3 year	1	03054855-881	1	Included		
		34ULJ				
Server Hardware Subtotal					372,327	9,850
Server Hardware Subdiscount					199,783	0
Software						
Red Hat Enterprise Linux, Enterprise Version, 6.x,4Socket(up to 1 guest),Intel,32&64,1Year 7*24 Premium Service	1	05200169	12	2,400		28,800
Oracle Linux Premier-1 Year Support-per System	1	05200371	12	2,299		27,588
SAP Sybase IQ Enterprise Edition	2	18964	64	72,000	4,608,000	
SAP Sybase IQ Enterprise Edition - sybase extended support fee	2	18964	64	47,520		3,041,280
SAP Sybase IQ Multiplex Grid Option	2	18924	3	50,000	150,000	
SAP Sybase IQ Multiplex Grid Option - sybase extended support fee	2	18924	3	33,000		99,000
SAP Sybase IQ Very Large Database Management Option	2	18922	1	25,000	25,000	
SAP Sybase IQ Very Large Database Management Option - - sybase extended support fee	2	18922	1	16,500		16,500
Distributed Store System Software (FusionStorage) License, per TB,1Year SA&S Bundled	1	88031TRU	20	2,591	51,820	
Distributed Store System Software (FusionStorage),1 Year SA&S,per TB	1	88031TRV	40	648		25,920
Software Subtotal					4,834,820	3,239,088
Software Subdiscount					3,874,103	2,561,872



Huawei FusionCube V2.01

TPC-H Rev.2.16.0
TPC-Pricing Rev. 1.7.0

Report Date: Nov 16, 2013

Description	Source Part Number	Qty	Unit Price (USD)	Extended Price (USD)	3 Year. Maint. Price
Service					
Software Engineering Service	1 88122HDX	1	1,800	1,800	
Engineering Service, FusionCube Cabinet(2M,E9000 and FusionStorage)	1 88122ABB	1	1,200	1,200	
Engineering Service, FusionCube (E9000 10GE)	1 88122ABD	1	6,000	6,000	
Service Subtotal:				9,000	0
Totals:				5,216,147	3,248,938
Total discount:				6,635,758	
3-Year Cost of Ownership:					1,829,327
QphH Rating:					258,474.4
\$/QphH@1000GB:					\$7.08

Price Key:

- 1、Huawei: Pricing may be verified by calling +1 (408) 660 2814,
Contact: James Zhan, zhanjunfeng@huawei.com
- 2、Sybase IQ: Pricing may be verified by calling 925-236-5000, Contact: Bill Dodd, Address: Sybase, an SAP Company, 1 Sybase Drive, Dublin, CA 94568

All discounts are based on list prices and for similar quantities and configurations.

Results independently audited by: Francois Raab of InfoSizing, Inc. (www.sizing.com)

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms please inform the TPC at pricing@tpc.org. Thank you.



Huawei FusionCube

V2.01

TPC-H Rev.2.16.0

TPC-Pricing Rev. 1.7.0

Report Date: Nov 16, 2013

Measurement Results

Database Scale Factor	1000G
Total Data Storage / Database Size	30.46
Percentage Memory/Database Size	153.6%
Start of Database Load	2013-11-13 10:23:03
End of Database Load	2013-11-13 11:11:26
Database Load Time	48mins:23secs
Query Streams for Throughput Test	7
TPC-H Power	274,996.6
TPC-H Throughput	242,944.8
TPC-H Composite Query-per-Hour Metric (QphH@1000GB)	258,474.4
Total System Price Over 3 Years	\$1,829,327
TPC-H Price/ Performance Metric (\$/QphH@1000GB)	\$7.08

Measurement Interval

Measurement Interval in Throughput Test (Ts)	2,282
---	-------

Power Run	Seed	Query Start Time	Duration (sec)	RF1 Start Time	RF2 Start Time
		Query End Time		RF1 End Time	RF2 End Time
	1113111126	2013-11-13 12:22:19 2013-11-13 12:30:28	524	2013-11-13 12:21:57 2013-11-13 12:22:19	2013-11-13 12:30:29 2013-11-13 12:30:41

Stream	Seed	Query Start Time Query End Time	Duration (sec)	RF1 Start Time RF1 End Time	RF2 Start Time RF2 End Time
1	1113111127	2013-11-13 12:30:40 2013-11-13 13:08:17	2,256	2013-11-13 12:31:40 2013-11-13 12:32:35	2013-11-13 12:32:36 2013-11-13 12:33:23
2	1113111128	2013-11-13 12:30:39 2013-11-13 13:07:15	2,196	2013-11-13 12:33:23 2013-11-13 12:33:59	2013-11-13 12:33:59 2013-11-13 12:34:52
3	1113111129	2013-11-13 12:30:40 2013-11-13 13:08:41	2,281	2013-11-13 12:34:52 2013-11-13 12:35:58	2013-11-13 12:35:58 2013-11-13 12:36:46
4	1113111130	2013-11-13 12:30:40 2013-11-13 13:07:01	2,181	2013-11-13 12:36:46 2013-11-13 12:37:48	2013-11-13 12:37:48 2013-11-13 12:39:43
5	1113111131	2013-11-13 12:30:39 2013-11-13 13:08:29	2,270	2013-11-13 12:39:43 2013-11-13 12:40:34	2013-11-13 12:40:34 2013-11-13 12:42:06
6	1113111132	2013-11-13 12:30:40 2013-11-13 13:07:16	2,196	2013-11-13 12:42:06 2013-11-13 12:43:01	2013-11-13 12:43:07 2013-11-13 12:44:24
7	1113111133	2013-11-13 12:30:40 2013-11-13 13:07:37	2,217	2013-11-13 12:44:24 2013-11-13 12:45:09	2013-11-13 12:45:09 2013-11-13 12:46:34



Huawei FusionCube

V2.01

TPC-H Rev.2.16.0
 TPC-Pricing Rev. 1.7.0
 Report Date: Nov 16, 2013

TPC-H Timing Intervals (in seconds)

Stream ID	Q1	Q3	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12
0	33.4	5.2	10.3	12	19.3	1.5	9.3	15.8	183.9	19.4	8.2	6.5
1	97.8	12.7	52.2	40.1	195	17.2	188.9	100.2	535	116.7	53.1	52
2	110.1	18.2	104.6	104.1	214.3	11.1	45.3	136.8	609.2	85.8	27	16.3
3	117.4	7.1	10.9	47.6	77.1	6.9	89.4	101	691.7	178.1	51.9	6.4
4	116.1	11.7	54.8	143.9	98.6	16.9	103	69	762.2	65.2	34.9	34.1
5	125	23.8	167	44.4	128.3	7.9	44.9	109.5	465.5	126.1	47.6	28
6	115.3	10.3	49	85.2	127.9	14.1	98.1	72.7	795.7	98.5	12.6	27.1
7	103.8	5.7	43	75.5	112.8	4.4	123.3	78	686.1	155.4	64.7	22.1
Minimum	33.4	5.2	10.3	12	19.3	1.5	9.3	15.8	183.9	19.4	8.2	6.4
Maximum	125	23.8	167	143.9	214.3	17.2	188.9	136.8	795.7	178.1	64.7	52
Average	102.4	11.8	61.5	69.1	121.7	10	87.8	85.4	591.1	105.6	37.5	24.1

Stream ID	Q13	Q14	Q15	Q16	Q17	Q18	Q19	Q20	Q21	Q22	RF1	RF2
0	37.2	6.6	10.8	7.8	11.7	32.4	11.4	8.6	30.9	6.5	21	11.4
1	169.5	22.4	83.3	126.5	50.5	122.2	14.8	58.5	117.4	29.7	54.2	47.2
2	103.9	28.4	102.5	27.5	72	134.4	26.6	31.1	135.2	51	35.8	52.8
3	114.5	111.4	59.9	7.4	64.3	223.1	22.1	39	204.1	48.7	66.7	47.4
4	124.8	33.5	73.7	34.1	28.9	134.6	45	43.9	105.6	45.4	61.9	114.7
5	158.8	94.4	36.4	33.4	110.2	191.5	48.2	29.8	116.4	132.2	51.2	92.4
6	143.2	27	29.6	97.9	55	116.6	61.3	36.1	102.2	19.2	54.1	77
7	169.1	31.6	45.3	25.8	30.7	101.1	49.5	34.3	154.4	99.4	44.7	85.4
Minimum	37.2	6.6	10.8	7.4	11.7	32.4	11.4	8.6	30.9	6.5	21	11.4
Maximum	169.5	111.4	102.5	126.5	110.2	223.1	61.3	58.5	204.1	132.2	66.7	114.7
Average	127.6	44.4	55.2	45.1	52.9	132	34.9	35.1	120.8	54	48.7	66

Preface

The Processing Performance Council (TPC) is a non-profit corporation founded to define transaction processing and database benchmarks and to disseminate objective, verifiable TPC performance data to the industry. The TPC Benchmark© H (TPC-H) is a decision support benchmark.

TPC Benchmark© H Overview

The TPC Benchmark© H (TPC-H) consists of a suite of business oriented ad-hoc queries and concurrent data modifications. The queries and the data populating the database have been chosen to have broad industry-wide relevance while maintaining a sufficient degree of ease of implementation. This benchmark illustrates decision support systems that

- Examine large volumes of data;
- Execute queries with a high degree of complexity;
- Give answers to critical business questions.

TPC-H evaluates the performance of various decision support systems by the execution of sets of queries against a standard database under controlled conditions. The TPC-H queries:

- Give answers to real-world business questions;
- Simulate generated ad-hoc queries (e.g., via a point and click GUI interface);
- Are far more complex than most OLTP transactions;
- Include a rich breadth of operators and selectivity constraints;
- Generate intensive activity on the part of the database server component of the system under test;
- Are executed against a database complying to specific population and scaling requirements;
- Are implemented with constraints derived from staying closely synchronized with an on-line production database.

The TPC-H operations are modeled as follows:

- The database is continuously available 24 hours a day, 7 days a week, for ad-hoc queries from multiple end users and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance sessions;
- The TPC-H database tracks, possibly with some delay, the state of the OLTP database through on-going refresh functions which batch together a number of modifications impacting some part of the decision support database;
- Due to the world-wide nature of the business data stored in the TPC-H database, the queries and the refresh functions may be executed against the database at any time, especially in relation to each other. In addition, this mix of queries and refresh functions is subject to specific ACID requirements, since queries and refresh functions may execute concurrently;
- To achieve the optimal compromise between performance and operational requirements, the database administrator can set, once and for all, the locking levels and the concurrent scheduling rules for queries and refresh functions.

The performance metric reported by TPC-H is called the TPC-H Composite Query-per-Hour Performance Metric (QphH@Size), and reflects multiple aspects of the capability of the system to process queries. These aspects include the selected database size against which the queries are executed, the query processing power when queries are submitted by a single stream and the query throughput when queries are submitted by multiple concurrent users. The TPC-H Price/Performance metric is expressed as \$/QphH@Size. To be compliant with the TPC-H standard, all references to TPC-H results for a given configuration must include all required reporting components. The TPC believes that comparisons of TPC-H results measured against different database sizes are misleading and discourages such comparisons.

The TPC-H database must be implemented using a commercially available database management system (DBMS) and the queries executed via an interface using dynamic SQL. The specification provides for variants of SQL, as implementers are not required to have implemented a specific SQL standard in full.

TPC-H uses terminology and metrics that are similar to other benchmarks, originated by the TPC and others. Such similarity in terminology does not in any way imply that TPC-H results are comparable to other benchmarks. The only benchmark results comparable to TPC-H are other TPC-H results compliant with the same revision.

Despite the fact that this benchmark offers a rich environment representative of many decision support systems, this benchmark does not reflect the entire range of decision support requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-H approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments.

Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-H should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Further information is available at www.tpc.org

General Items

0.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Huawei technologies, Co. Ltd and developed and engineered in partnership with Sybase an SAP company.

0.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database Tuning Options*
- *Optimizer/Query execution options*
- *Query processing tool/language configuration parameters*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and configuration parameters*
- *Configuration parameters and options for any other software component incorporated into the pricing structure*
- *Compiler optimization options*

This requirement can be satisfied by providing a full list of all parameters and options, as long as all those which have been modified from their default values have been clearly identified and these parameters and options are only set once.

The Supporting File Archive contains the Operating System and DBMS parameters used in this benchmark.

0.3 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Number and type of processors*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g. Ethernet) Connections, including routers, workstations, terminals, etc., those were physically used in the test or are incorporated into the pricing structure.*
- *Type and the run-time execution location of software components (e.g., DBMS, query processing tools/languages, middle-ware components, software drivers, etc.).*

The following Huawei FusionCube V2.01 configuration was used for the TPC-H Benchmark:

E 9000 Chassis:

- 2 x 10GE switch module (for internal communication between blades of the chassis)
- 2 x 56 GB InfiniBand FDR switch module (for Express I/O exchange between storage nodes).

- 2 X MM910 module to manage all of the components of the chassis.

4 x CH121 Blade (as server blades), each with:

- 2 x Intel Xeon E5-2680 processors (2.70 GHz, 8Cores, 20MB Cache)
- 384 GB of memory
- 1 x RU120 SAS/SATA RAID card
- 2 x 600 GB (10k rpm) SAS disks
- 1 x Mz510 Dual-Port 10 Gb CNA Mezzanine card
- 1 x Mz611 Dual-Port 56 Gb HCA Mezzanine card

4 x CH223 Blade (as storage blades), each with:

- 2 x Intel Xeon E5-2620 processors (2.0Ghz, 6Cores, 15MB Cache)
- 64 GB of memory
- 1 x RU120 SAS/SATA RAID card
- 2 x 600 GB (10k rpm) SAS disks
- 1 x Mz510 Dual-Port 10 Gb CNA Mezzanine card
- 1 x Mz611 Dual-Port 56 Gb HCA Mezzanine card
- 2 x PCIe 2.4 TB SSD Storage cards
- 1 x 4GB Nvdimm

1 x CH121 Blade (as storage management blade), with:

- 2 x Intel Xeon E5-2620 processors (2.0Ghz, 6Cores, 15MB Cache)
- 64 GB of memory
- 1 x RU120 SAS/SATA RAID card
- 2 x 600 GB (10k rpm) SAS disks
- 1 x Mz510 Dual-Port 10 Gb CNA Mezzanine card

The benchmarked and priced configurations are identical. The following diagram shows the layout of the configuration in the Chassis:

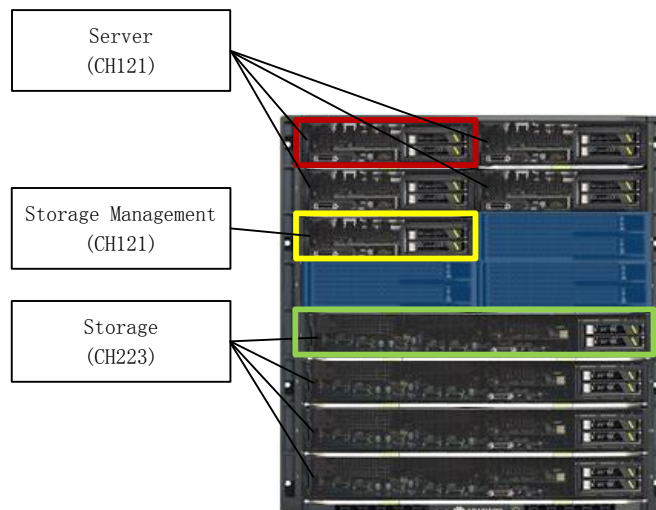


Figure 1.1: Benchmarked and priced system configuration

Clause 1: Logical Database Design

1.1 Database Definition Statements

Listings must be provided for all table definition statements and all other statements used to set up the test and qualification databases

The Supporting File Archive contains the table definitions and all other statements used to set up the test and qualification databases.

1.2 Physical Organization

The physical organization of tables and indices, within the test and qualification databases, must be disclosed. If the column ordering of any table is different from that specified in Clause 1.4, it must be noted.

No column reordering was used.

1.3 Horizontal Partitioning

Horizontal partitioning of tables and rows in the test and qualification databases (see Clause 1.5.4) must be disclosed.

Horizontal partitioning was used for the lineitem and orders tables. The Supporting Files Archive contains the partitioning definitions used.

1.4 Replication

Any replication of physical objects must be disclosed and must conform to the requirements of Clause 1.5.6.

No replication was used.

Clause 2: Queries and Refresh Functions

2.1 Query Language

The query language used to implement the queries must be identified.

SQL was the query language used to implement the queries.

2.2 Verifying Method of Random Number Generation

The method of verification for the random number generation must be described unless the supplied DBGEN and QGEN were used.

TPC-supplied DBGEN and QGEN were used (see sections 2.3 and 4.5)

2.3 Generating Values for Substitution Parameters

The method used to generate values for substitution parameters must be disclosed. If QGEN is not used for this purpose, then the source code of any non-commercial tool used must be disclosed. If QGEN is used, the version number, release number, modification number and patch level of QGEN must be disclosed.

Due to the lack of availability of QGen 2.16.0, QGen 2.15.0 was used with modifications approved by the TPC for release 2.16.0. These approved modifications were detailed in the FDR of the TPC-H result published by Oracle on June 7, 2013 for the SPARC T5-4 Server.

In addition, the reference dataset for the query substitution parameters could not be verified since the 2.16.0 dataset is not available

2.4 Query Text and Output Data from Qualification Database

The executable query text used for query validation must be disclosed along with the corresponding output data generated during the execution of the query text against the qualification database. If minor modifications (see Clause 2.2.3) have been applied to any functional query definitions or approved variants in order to obtain executable query text, these modifications must be disclosed and justified. The justification for a particular minor query modification can apply collectively to all queries for which it has been used. The output data for the power and throughput tests must be made available electronically upon request.

Supporting Files Archive contains the actual query text and query output. Following are the modifications to the query.

- In Q1, Q4, Q5, Q6, Q10, Q12, Q14, Q15 and Q20, the “dateadd” function is used to perform date arithmetic.
- In Q2, Q3, Q10, Q18 and Q21, the “top” function is used to restrict the number of output rows
- In Q7, Q8 and Q9, the “year” function is used to extract part of a date
- The semicolon ‘;’ is used as a command delimiter.

2.5 Query Substitution Parameters and Seeds Used

All the query substitution parameters used during the performance test must be disclosed in tabular format, along with the seeds used to generate these parameters.

Supporting Files Archive contains the query substitution parameters and seed used.

2.6 Isolation Level

The isolation level used to run the queries must be disclosed. If the isolation level does not map closely to one of the isolation levels defined in Clause 3.4, additional descriptive detail must be provided.

The queries and transactions were run with isolation level 3.

2.7 Source Code of Refresh Functions

The details of how the refresh functions were implemented must be disclosed (including source code of any non-commercial program used).

Supporting Files Archive contains the Source Code of refresh functions.

Clause 3: Database System Properties

3.1 ACID Properties

The ACID (Atomicity, Consistency, Isolation, and Durability) properties of transaction processing systems must be supported by the system under test during the timed portion of this benchmark. Since TPC-H is not a transaction processing benchmark, the ACID properties must be evaluated outside the timed portion of the test.

All ACID tests were conducted according to specification. The Supporting Files Archive contains the source code of the ACID test scripts.

3.2 Atomicity Requirements

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing the code written to implement the ACID Transaction and Query.

3.2.1 Atomicity of the Completed Transactions

Perform the ACID Transaction for a randomly selected set of input data and verify that the appropriate rows have been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of completed transactions.

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected orderkey, o_key, and l_linenum, l_key. The number of records in the HISTORY table with selected o_key, l_key was also retrieved.
2. The ACID transaction T1 was executed for the Orderkey used in Step 1.
3. The ACID transaction committed.
4. The total price and the extended price were retrieved for the same orderkey used in step 1 and step 2. It was verified that: $T1.EXTENDEDPRICE = OLD.EXTENDEDPRICE + ((T1.DELTA) * (OLD.EXTENDEDPRICE/OLD.QUANTITY))$, $T1.TOTALPRICE = OLD.TOTALPRICE + ((T1.EXTENDEDPRICE-OLD.EXTENDEDPRICE)*(1-DISCOUNT)*(1+TAX))$, and that the number of records in the history table with o_key, l_key used in step 1 had increased by 1.

3.2.2 Atomicity of Aborted Transactions

Perform the ACID transaction for a randomly selected set of input data, submitting a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the appropriate rows have not been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of the aborted ACID transaction:

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a random Orderkey. The number of records in the HISTORY table was also retrieved.
2. The ACID transaction was executed for the Orderkey used in step 1.
3. The transaction was rolled back.
4. The total price and the extended price were retrieved for the same orderkey used in step 1 and step 2. It was verified that the extended price and the total price were the same as in step 1. The number of records in the HISTORY table was retrieved again and verified to be the same as in step1.

3.3 Consistency Requirements

Consistency is the property of the application that requires any execution of transactions to take the database from one consistent state to another.

A consistent state for the TPC-H database is defined to exist when:

$O_TOTALPRICE = SUM(trunc(trunc(L_EXTENDEDPRICE*(1-L_DISCOUNT),2)*(1+L_TAX),2))$ for each ORDERS and LINEITEM defined by (O_ORDERKEY=L_ORDERKEY)

3.3.1 Consistency Test

Verify that ORDER and LINEITEM tables are initially consistent as defined in Clause 3.3.2.1, based upon a random sample of at least 10 distinct values of O_ORDERKEY.

The following steps were performed to verify consistency:

1. The consistency of the ORDER and LINEITEM tables was verified based on a sample of O_ORDERKEYs.
2. One hundred ACID Transactions were submitted from each of ten execution streams targeting the rows sampled in steps 1 and 3.
3. The consistency of the ORDER and LINEITEM tables was re-verified.

3.4 Isolation Requirements

Operations of concurrent transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.

3.4.1 Isolation Test 1 – Read-Write Conflict with Commit

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is committed.

1. 1st session: Started an ACID transaction with a randomly selected O_KEY, L_KEY and DELTA. The transaction was delayed for 10 seconds just prior to the Commit.
2. 2nd session: Started an ACID query for the same O_KEY as in the ACID transaction. The query completed without blocking and did not see any of the uncommitted changes made by the ACID transaction.
3. 1st session: the ACID transaction resumed and successfully completed the Commit.

3.4.2 Isolation Test 2 – Read-Write Conflict with Rollback

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is rolled back.

The following steps were performed to satisfy the test of isolation for read-only and a rolled back readwrite transaction:

1. 1st session: Performed the ACID transaction for a random O_KEY, L_KEY and DELTA. The transaction was delayed for 10 seconds just prior to the Rollback.
2. 2nd session: Started an ACID query for the same O_KEY as in the ACID transaction. The query completed without blocking and did not see any of the uncommitted changes made by the ACID transaction.
3. 1st session: the ACID transaction resumed and successfully completed the Rollback.

3.4.3 Isolation Test 3 – Write-Write Conflict with Commit

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is committed.

The following steps were performed to verify isolation of two update transactions:

1. An ACID Transaction T1 was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID transaction T1 was suspended prior to Commit.
2. Another ACID Transaction T2 was started using the same O_KEY and L_KEY and a randomly selected DELTA.
3. T2 waited.
4. The ACID transaction T1 was allowed to Commit and T2 completed.
5. It was verified that:
 $T2.L_EXTENDEDPRICE = T1.L_EXTENDEDPRICE + (DELTA1*(T1.L_EXTENDEDPRICE/T1.L_QUANTITY))$

3.4.4 Isolation Test 4 – Write-Write Conflict with Rollback

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is rolled back.

The following steps were performed to verify the isolation of two update transactions after the first one is rolled back:

1. An ACID Transaction T1 was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction T1 was suspended prior to Rollback.
2. Another ACID Transaction T2 was started using the same O_KEY and L_KEY used in step 1 and a randomly selected DELTA.
3. T2 waited.
4. T1 was allowed to ROLLBACK and T2 completed.
5. It was verified that T2.L_EXTENDEDPRISE = T1.L_EXTENDEDPRISE

3.4.5 Isolation Test 5 – Concurrent Read and Write Transactions on Different Tables

Demonstrate the ability of read and write transactions affecting different database tables to make progress concurrently.

The following steps were performed to verify isolation of concurrent read and write transactions on different tables:

1. An ACID Transaction T1 for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction T1 was suspended prior to commit.
2. Another ACID Transaction T2 was started using random values for PS_PARTKEY and PS_SUPPKEY.
3. T2 completed.
4. T1 completed and the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

3.4.6 Isolation Test 6 – Update Transactions during Continuous Read-Only Query Stream

Demonstrate the continuous submission of arbitrary (read-only) queries against one or more tables of the database does not indefinitely delay update transactions affecting those tables from making progress.

The following steps were performed to verify isolation of update transaction during continuous read-only query:

1. An ACID Transaction T1 was started, executing Q1 against the qualification database. The substitution parameter was chosen from the interval [0..2159] so that the query ran for a sufficient amount of time.
2. Before T1 completed, an ACID Transaction T2 was started using randomly selected values of O_KEY, L_KEY and DELTA.
3. T2 completed before T1 completed.
4. It was verified that the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

3.5 Durability Requirements

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.2.

3.5.1 Instantaneous Interruption & Memory Failure

Guarantee the database and committed updates are preserved across an instantaneous interruption (system crash/system hang) in processing which requires the system to reboot to recover or across the failure of all or part of memory (loss of contents).

The Sybase IQ cluster is comprised of 4 nodes, each hosted on a CH121 Server Blade. One blade hosts the IQ Coordinator node and the other 3 blades host an IQ Multiplex node. Failure was tested for both types of nodes as well as for the entire cluster.

3.5.1.1 Coordinator Node Failure

This test was conducted on the qualification database. The following steps were performed:

1. The consistency condition described in section 3.3 was verified.
2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run ACID transactions on each of 10 execution streams was started such that each stream executes a different set of transactions.
4. At least 100 ACID transactions were completed from each of the execution streams.
5. While ACID transactions continued to be executed by all execution streams, the Server Blade hosting the IQ Coordinator node was powered down by removing it from the chassis. Processing of the transactions stopped as a result.
6. The coordinator server was powered back on and rebooted and the database was restarted.
7. Step 2 was repeated giving hist2. It was verified that hist2 – hist1 was greater than or equal to the number of records in the

- success file. The content of the history file was compared against the content of the execution streams' success files.
8. The consistency condition described in section 3.3 was verified.

3.5.1.2 Multiplex Node & Cluster Failure

This test was conducted on the qualification database. The following steps were performed:

1. The consistency condition described in section 3.3 was verified.
2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run ACID transactions on each of 10 execution streams was started such that each stream executes a different set of transactions.
4. At least 100 ACID transactions were completed from each of the execution streams.
5. While ACID transactions continued to be executed by all execution streams, a Server Blade hosting one of the IQ Multiplex nodes was powered down by removing it from the chassis.
6. It was observed that the processing of transactions continued without interruption.
7. While ACID transactions continued to be executed by all execution streams, external power was removed from the whole Chassis by disconnecting the power cords.
8. The Chassis was powered back on and rebooted and the database was restarted.
9. Step 2 was repeated giving hist2. It was verified that hist2 – hist1 was greater than or equal to the number of records in the success file. The content of the history file was compared against the content of the execution streams' success files.
10. The consistency condition described in section 3.3 was verified.

3.5.2 Power Failure

Guarantee the database and committed updates are preserved across the loss of all external power to the SUT for an indefinite time period.

The test in section 3.5.1.2 was used to test the indefinite loss of all external power to the SUT.

3.5.3 Loss of Durable Media

Guarantee the database and committed updates are preserved across the permanent irrecoverable failure of any single durable medium containing TPC-H database tables.

The IQ database tables are distributed across FusionStorage volumes built on top of the 8 PCIe SSD cards hosted by the 4 CH223 Storage Blades. The FusionStorage volumes provide RAID10 redundancy across the Storage Blades.

The main IQ Catalogue and IQ Log files are stored on the two 600GB SAS drives configured on the Server Blade hosting the IQ Coordinator node. These disk drives are configured to provide RAID1 redundancy.

3.5.3.1 Storage Node Failure

Following steps were performed for the Loss of Durable Media which stores the IQ database tables.

1. The consistency condition described in section 3.3 was verified.
2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run ACID transactions on each of 10 execution streams was started such that each stream executes a different set of transactions.
4. At least 100 ACID transactions were completed from each of the execution streams.
5. While ACID transactions continued to be executed by all execution streams, one of Storage Blades which stores the IQ database tables was powered down by removing it from the chassis. Once powered down, the blade's enclosure was opened and one of the PCIe SSD cards was removed.
6. It was observed that the processing of transactions continued without interruption.
7. All ACID transaction streams were eventually stopped by the operator.
8. Step 2 was repeated giving hist2. It was verified that hist2 – hist1 was greater than or equal to the number of records in the success file. The content of the history file was compared against the content of the execution streams' success files.
9. The consistency condition described in section 3.3 was verified.

3.5.3.2 Coordinator Drive Failure

Following steps were performed for the Loss of Durable Media which stores the IQ Catalogue and Log files.

1. The consistency condition described in section 3.3 was verified.
2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run ACID transactions on each of 10 execution streams was started such that each stream executes a different set of transactions.
4. At least 100 ACID transactions were completed from each of the execution streams.
5. While ACID transactions continued to be executed by all execution streams, one of the two 600GB disk drives was removed from the blade hosting the IQ Coordinator node.
6. It was observed that the test continued without any failure after the disk was removed.
7. All ACID transaction streams were eventually stopped by the operator.
8. Step 2 was repeated giving hist2. It was verified that hist2 – hist1 was greater than or equal to the number of records in the success file. The content of the history file was compared against the content of the execution streams' success files.
9. The consistency condition described in section 3.3 was verified.

Clause 4: Scaling and Database Population

4.1 Initial Cardinality of Tables

The cardinality (e.g., the number of rows) of each table of the test database, as it existed at the completion of the database load (see clause 4.2.5) must be disclosed.

Table 4.1 lists the TPC Benchmark H defined tables and the row count for each table as they existed upon completion of the build.

Table 4.1: Initial Number of Rows

Table Name	Row Count
Region	5
Nation	25
Supplier	10,000,000
Customer	150,000,000
Part	200,000,000
Partsupp	800,000,000
Orders	1,500,000,000
Lineitem	59,999,994,267

4.2 Distribution of Tables and Logs across Media

The distribution of tables and logs across all media must be explicitly described for the tested and priced systems.

The IQ database tables and the IQ Temp spaces are distributed across FusionStorage volumes built on top of PCIe SSD cards. The volumes are configured as RAID10 by the FusionStorage Manager hosted on the Storage Management blade. The main copy of the IQ Catalog and Log files, along with the OS and Sybase IQ installations, are placed on a RAID1 Volume managed by the RU120 SAS Controller.

A detailed description of distribution of database file groups and log can be found in Table 4.2.

Table 4.2: Storage to Logical Drive Mapping

GB	Device Type	RAID Level	File System	Capacity (GB)	Device	Data
600	SAS HDD	RAID1	Ext4	600	/dev/sda	OS, Sybase IQ IQ Catalog and log files
600						
2,400	Fusion Storage volumes on PCIe SSD	RAID10	Ext4	1.5TB	/dev/sdb	DBGen Flat files (lineitem)
					/dev/sdc	
/dev/sdd						
		RAID10	Ext4	450	/dev/sde	DBGen Flat files (other tables)
2,400		RAID10	RAW	100	/dev/sdf	IQ Database tables
			RAW	180	/dev/sdg	IQ Database

GB	Device Type	RAID Level	File System	Capacity (GB)	Device	Data
						tables
			RAW	180	/dev/sdh	IQ Database tables
			RAW	180	/dev/sdi	IQ Database tables
			RAW	180	/dev/sdj	IQ Database tables
2,400			RAW	180	/dev/sdk	IQ Database tables
			RAW	180	/dev/sdl	IQ Database tables
			RAW	180	/dev/sdm	IQ Database tables
			RAW	180	/dev/sdn	IQ Database tables
			RAW	180	/dev/sdo	IQ Database tables
2,400			RAW	180	/dev/sdp	IQ Database tables
			RAW	180	/dev/sdq	IQ Database tables
			RAW	180	/dev/sdr	IQ Database tables
			RAW	100	/dev/sds	IQ Shared Temp space
			RAW	100	/dev/sdt	IQ Shared Temp space
2,400			RAW	100	/dev/sdu	IQ Shared Temp space
			RAW	100	/dev/sdu	IQ Shared Temp space
			RAW	100	/dev/sdw	IQ Shared Temp space
			RAW	100	/dev/sdx	IQ Shared Temp space
			RAW	100	/dev/sdy	IQ Shared Temp space
			RAW	100	/dev/sdz	IQ Shared Temp space
			RAW	100	/dev/sdaa	IQ Shared Temp space
			RAW	100	/dev/sdab	IQ Shared Temp space
2,400			RAW	100	/dev/sdac	IQ Shared

GB	Device Type	RAID Level	File System	Capacity (GB)	Device	Data
2,400						Temp space
			RAW	100	/dev/sdad	IQ Shared Temp space
			RAW	100	/dev/sdae	IQ Shared Temp space
			RAW	100	/dev/sdaf	IQ Shared Temp space
			RAW	100	/dev/sdag	IQ Shared Temp space
			RAW	100	/dev/sdah	IQ Shared Temp space
			RAW	100	/dev/sdai	IQ Temp space
			RAW	100	/dev/sdaj	IQ Temp space
			RAW	100	/dev/sdak	IQ Temp space
			RAW	100	/dev/sdal	IQ Temp space
			RAW	100	/dev/sdam	IQ Temp space
			RAW	100	/dev/sdan	IQ Temp space

4.3 Mapping of Database Partitions/Replications

The mapping of database partitions/replications must be explicitly described.

The lineitem and orders tables were partitioned by year. The database was not replicated.

4.4 Implementation of RAID

Implementations may use some form of RAID to ensure high availability. If used for data, auxiliary storage (e.g. indexes) or temporary space, the level of RAID used must be disclosed for each device.

Huawei's storage middleware named FusionStorage is used to provide RAID10 redundancy for the IQ database tables and the IQ Temp spaces. The RU120 SAS controller provides RAID1 redundancy for the IQ Catalog and Log files.

4.5 DBGEN Modifications

The version number, release number, modification number, and patch level of DBGEN must be disclosed. Any modifications to the DBGEN (see Clause 4.2.1) source code must be disclosed. In the event that a program other than DBGEN was used to populate the database, it must be disclosed in its entirety.

DBGEN version 2.15.0 was used with no modifications.

Note: DBGEN version 2.15.0 was used due to the lack of availability of DBGen 2.16.0. TPC did not make any modifications between the two versions. Aside from the release number, the two versions are identical.

4.6 Database Load time

The database load time for the test database (see clause 4.3) must be disclosed.

The database load time was 48 minutes and 23 seconds

4.7 Data Storage Ratio

The data storage ratio must be disclosed. It is computed by dividing the total data storage of the priced configuration (expressed in GB) by the size chosen for the test database as defined in 4.1.3.1. The ratio must be reported to the nearest 1/100th, rounded up.

The database storage ratio can be found in Table 4.7

Table 4.7: Database Storage Ratio


Storage Devices	Storage Capacity	Total Storage Capacity	Scale factor	Data Storage Ratio
4 x 2 x 2.4TB	19,660GB	30,460GB	1000	30.46
4 x 2 x 600GB	4,800GB			
4 x 2 x 600GB	4,800GB			
2 x 600GB	1,200GB			

4.8 Database Load Mechanism Details and Illustration

The details of the database load must be disclosed, including a block diagram illustrating the overall process. Disclosure of the load procedure includes all steps, scripts, input and configuration files required to completely reproduce the test and qualification databases.

Flat files were created using DBGEN. The tables were loaded as shown in Figure 4.8.

Figure 4.8: Block Diagram of Database Load Process

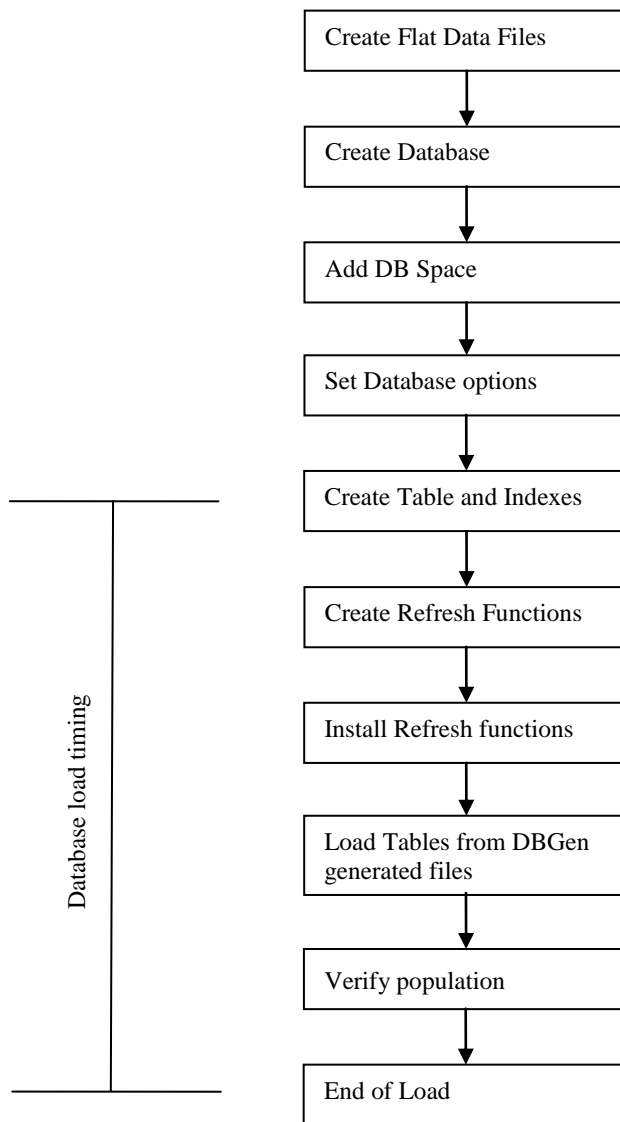

4.9 Qualification Database Configuration

Any differences between the configuration of the qualification database and the test database must be disclosed.

The qualification database used identical scripts to create and load the data with changes to adjust for the database scale factor.

Clause 5: Performance Metrics and Execution Rules

5.1 Steps in the Power Test

The details of the steps followed to implement the power test (e.g., system boot, database restart, etc.) must be disclosed.

The following steps were used to implement the power test:

1. RF1 Refresh Transaction
2. Stream 00 Execution
3. RF2 Refresh Transaction.

5.2 Timing Intervals for Each Query and Refresh Function

The timing intervals (see Clause 5.3.6) for each query of the measured set and for both refresh functions must be reported for the power test.

The timing intervals for each query and both refresh functions are given in the Numerical Quantities Summary earlier in the executive summary.

5.3 Number of Streams for the Throughput Test

The number of execution streams used for the throughput test must be disclosed.

Seven query streams were used for the Throughput Test.

5.4 Start and End Date/Times for Each Query Stream

The start time and finish time for each query execution stream must be reported for the throughput test.

The Numerical Quantities Summary contains the start and stop times for the query execution streams.

5.5 Total Elapsed Time for the Measurement Interval

The total elapsed time of the measurement interval (see Clause 5.3.5) must be reported for the throughput test.

The Numerical Quantities Summary contains the timing intervals for the throughput test.

5.6 Refresh Function Start Date/Time and Finish Date/Time

Start and finish time for each update function in the update stream must be reported for the throughput test.

Start and finish time for each update function in the update stream are included in the Numerical Quantities Summary earlier in the Executive Summary.

5.7 Timing Intervals for Each Query and Each Refresh Function for Each Stream

The timing intervals (see Clause 5.3.6) for each query of each stream and for each update function must be reported for the throughput test.

The timing intervals for each query and each update function are included in the Numerical Quantities Summary earlier in the Executive Summary.

5.8 Performance Metrics

The computed performance metrics, related numerical quantities and the price performance metric must be reported.

The Numerical Quantities Summary contains the performance metrics, related numerical quantities, and the price/performance metric for the system reported.

5.9 The Performance Metric and Numerical Quantities from Both Runs

A description of the method used to determine the reproducibility of the measurement results must be reported. This must include the performance metrics (QppH and QthH) from the reproducibility runs.

Performance results from the first two executions of the TPC-H benchmark indicated the following difference for the metric points:

Table 5.9: Performance Metric

Run	QppH @ 1000GB	QthH @ 1000GB	QphH @ 1000GB
Run 1	223,372.1	311,986.5	263,986.9
Run 2	274,996.6	242,944.8	258,474.4

5.10 System Activity between Tests

Any activity on the SUT that takes place between the conclusion of Run1 and the beginning of Run2 must be disclosed.

Sybase IQ was shut down and restarted between the two runs.

Clause 6: SUT and Driver Implementation

6.1 Driver

A detailed description of how the driver performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the driver.

One script was used to create and load the database, and to run the Power and Throughput tests. The script is in Supporting files.

6.2 Implementation Specific Layer

If an implementation-specific layer is used, then a detailed description of how it performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the implementation-specific layer.

The performance tests are executed using the dbisqlc and iqisql utilities. The dbisqlc and iqisql utilities are Sybase-provided utilities which allow SQL statements to be executed against a Sybase IQ database. The dbisqlc and iqisql utilities are invoked from the command line on the SUT. They read input from files containing SQL statements and sends results to stdout. The dbisqlc utility uses information in the.odbc.ini file to connect to the database while iqisql uses information in the interfaces file to connect to the database. The ACID tests are performed using the dbtest utility. The dbtest utility is a Sybase-provided utility, similar to dbisqlc, but providing additional scripting capabilities. It is invoked from the command-line on the SUT. It reads input from files that determine how and what to execute. It uses information in the.odbc.ini file to connect to the database.

6.3 Profile-Directed Optimization

If profile-directed optimization as described in Clause 5.2.9 is used, such used must be disclosed.

Profile-directed optimization was not used.

Clause 7: Pricing

7.1 Hardware and Software Pricing

A detailed list of hardware and software used in the priced system must be reported. Each item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported.

A detailed list of all hardware and software, including the 3-year support, is provided in the Executive Summary in the Abstract section of this report. The price quotations are included in Appendix A.

7.2 Three Year Price

The total 3-year price of the entire configuration must be reported including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The pricing details for this disclosure are contained in the executive summary pages.

7.3 Availability Dates

The committed delivery date for general availability of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the availability date reported on the executive summary must be the date by which all components are committed to being available. The full disclosure report must report availability dates individually for at least each of the categories for which a pricing subtotal must be provided.

Hardware is available today. Sybase IQ is available November 20, 2013.

Supporting File Index

An index for all files included in the supporting files archive as required by Clause 8.3.2 through 8.3.8 must be provided in the report.

Table 8.0: Supporting File Index

Clause	Description	Archive File
Clause 1	Operating System and Database settings	supporting_files/Clause1
Clause 2	Qualification Queries and Output	supporting_files/Clause2
Clause 3	ACID scripts and output	supporting_files/Clause3
Clause 4	Database load scripts	supporting_files/Clause4
Clause 5	Queries and output	supporting_files/Clause5
Clause 6	Implementation code for measured runs	supporting_files/Clause6
Clause 8	RFs source and parameters	supporting_files/Clause8

Auditors' Information and Attestation Letter

The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

The auditor's letter is included in the following section.

This benchmark was audited by:

Francois Raab
InfoSizing, Inc.
531 Crystal Hills Blvd
Manitou Springs, CO 80829
Phone: 719-473-7555.

James Wang
Huawei Technologies Co., Ltd.
Area B2, Bantian
Longgang District
Shenzhen 518129 - P.R.China

November 15, 2013

I verified the TPC Benchmark H (TPC-H™ v2.16.0) performance of the following configuration:

Platform: Huawei FusionCube V2.01
Operating System: Red Hat Enterprise Linux Server Release 6.2
Database Manager: Sybase IQ Version 16.0 Service Pack 2
Other Software: n/a

The results were:

Performance Metric 258,474.4 QphH@1000GB

TPC-H Power 274,996.6
TPC-H Throughput 242,944.8
Database Load Time 00:48:23

Server Huawei FusionCube V2.01 (4 x CH121 Server Blades)

CPU	8 x Intel Xeon E5-2680 Processor (2.7 GHz, 20MB Cache)		
Memory	1,536 GB		
Disks	Qty	Size	Type
	18	600 GB	SAS 10K rpm HDD
	8	2.4 TB	PCIe SSD cards

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:


- The database records were defined with the proper layout and size
- The database population was generated using DBGen
- The database was properly scaled to 1,000GB and populated accordingly
- The compliance of the database auxiliary data structures was verified
- The database load time was correctly measured and reported

- The required ACID properties were verified and met
- The query input variables were generated by QGen
- The query text was produced using minor modifications and no query variant
- The execution of the queries against the SF1 database produced compliant answers
- A compliant implementation specific layer was used to drive the tests
- The throughput tests involved 7 query streams
- The ratio between the longest and the shortest query was such that no query timings were adjusted
- The execution times for queries and refresh functions were correctly measured and reported
- The repeatability of the measured results was verified
- The system pricing was verified for major components and maintenance
- The major pages from the FDR were verified for accuracy

Additional Audit Notes:

Version 2.16.0 of the DBGen package was not available at the time of testing. DBGen version 2.15.0 was used instead. The TPC did not make any modifications between the two versions. Aside from the release number, the two versions are identical. QGen 2.15.0 was used with the modifications approved by the TPC for release 2.16.0. These approved modifications were detailed in the FDR of the TPC-H result published by Oracle on June 7, 2013 for the SPARC T5-4 Server. In addition, the reference dataset for the query substitution parameters could not be verified since the 2.16.0 dataset is not available.

Respectfully Yours,

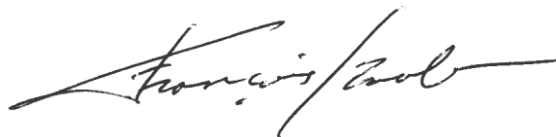A handwritten signature in black ink, appearing to read "François Raab", with a long horizontal flourish extending to the right.

François Raab, President

Appendix A

For: **Quotation for Software and Support**

Company Huawei Enterprise USA
 Contact James Zhan
 Phone (408) 660-2814
 Fax zhanjunfeng@huawei.com
 Address 20400 Stevens Creek, Suite 200, Cupertino, CA 95014

Bill Dodd
 SYBASE Sales Rep: bill.dodd@sap.com
 Phone: 925-236-5000
 Fax:
 Sybase, an SAP Company, 1 Sybase Drive, Dublin, CA 94568

Catalog Number	Program Description	License Type	License Qty	Unit Price		Extended License Price		Extended Support Price	
				License	Support	License	Net	Support	Net
18964	SAP Sybase IQ Enterprise Edition	CP	64	\$72,000.00	\$ 47,520.00	\$ 4,608,000	\$ 864,000	\$ 3,041,280	\$ 570,240
18924	SAP Sybase IQ Multiplex Grid Option	SR	3	\$50,000.00	\$ 33,000.00	\$ 150,000	\$ 56,250	\$ 99,000	\$ 37,125
18922	SAP Sybase IQ Very Large Database Management Option	TB	1	\$25,000.00	\$ 16,500.00	\$ 25,000.00	\$ 9,375.00	\$ 16,500.00	\$ 6,188
TOTALS						\$ 4,783,000	\$ 929,625	\$ 3,156,780	\$ 613,553

Payment Terms: Net 30 days from date of invoice.				Summary Fees					
Quote includes Licence + 3 year support						Extended		Net	
						Price		Totals	
Quote Date:	2013/11/6			License Fees		\$ 4,783,000	\$	929,625	
Valid thru:	2013/12/31			Support Fees		\$ 3,156,780	\$	613,553	
				Education Fees		\$ -	\$	-	
				Consulting Fees		\$ -	\$	-	
				Totals (USD)		\$ 7,939,780	\$	1,543,178	