

Telecommunications Technology Association

TPC Express Benchmark[™] IoT Full Disclosure Report

Machbase 5.7.13

running on

Supermicro A+ Server 2014TP-HTR (TwinPro[™] with 4x H12SST-PS Nodes)

with

Red Hat Enterprise Linux Server Release 7.7

TPCx-IoT Version Report Edition Report Submitted 2.0.0 Second April 2, 2021

Second Edition(First Edition released on <March 2020>)

Telecommunications Technology Association (TTA), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary because of these and other factors. Therefore, the TPC Express Benchmark™ V should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

TTA and the TTA Logo are trademarks of Telecommunications Technology Association and/or its affiliates in the U.S. and other countries. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between TTA and any other company

TPC Express Benchmark[™] IoT, TPCx-IoT, and IoTps, are registered certification marks of the Transaction Processing Performance Council.

The TTA products, services or features identified in this document may not yet be available or may not be available in all areas and may be subject to change without notice. Consult your local TTA business contact for information on the products or services available in your area. You can find additional information via TTA's web site at http://www.tta.or.kr/eng. Actual performance and environmental costs of TTA products will vary depending on individual customer configurations and conditions.

Copyright© 2020 Telecommunications Technology Association

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced

Abstract

TTA conducted the TPC Express BenchmarkTM IoT (TPCx-IoT) on the Supermicro A+ Server 2014TP-HTR with 4x H12SST-PS Nodes. The software used included Machbase 5.7.13. This report provides full disclosure of the methodology and results. All testing was conducted in conformance with the requirements of the TPCx-IoT Standard Specification, Revision 2.0.0.

The benchmark results are summarized below.

Configuration Summary

Sponsor	Cluster Nodes	Storage Software	Operating System
TTA	Supermicro A+ Server 2014TP-HTR	Machbase 5.7.13	Red Hat Enterprise Linux Release 7.7

TPC Express Benchmark[™] IoTMetrics

Total System Cost (USD)	loTps	USD/kloTps	Availability Date
\$429,659	2,480,917.60	\$173.19	April 14, 2020

Executive Summary

The **Executive Summary** follows on the next several pages.

TTA	Maahh	ase 5.7.1	3	TPCx-IoT TPC Pricing	2.0.0 2.5.0
	WachDa	156 0.7.1	3	Report Date	Apr. 2, 2021
Total System Cost	TPCx-IoT Perfo	ormance Metric	P	rice/Perform	-
\$429,659 USD		2,480,917.60 IoTps		73.19 USD/F	
Servers	Operating System	Other Softv	vare	Availability Date	
Supermicro A+ Server 2014TP-HTR	Red Hat Enterprise Linux Server Release 7.7	ed Hat Enterprise None ux Server Release		April 14, 2020	
	System Under Test Co	onfiguration Ove	erview		
	Mellanox SN2700 1000				
	(32 x QSFP)				
Eler. 1	raijaajaan (ingaagaagaa)	niprigrigi (niprigri) referencier (niprigri)			
	<u>+</u> + +	^			
	$\downarrow \downarrow \downarrow$	¥			
	1 x Supermicro A+ Serv TwinPro™ with 4x H12SS		ch with:		
1 x Master Node		3 x Data Nodes			
1 x AMD EPYC 7702		1 x AMD EPY			or
8 x 64GB (512GB) Me 1 x 100GbE 2-Port Ac		8 x 32GB (256 1 x 100GbE 2			
	•	TX TOUGDE 2	-Full Auap	lei	
1 x 25GbE 2-Port and	110GbE 2-Port Adaptor	1 x 25GbE 2-I	Port and 10	GbE 2-Port Ad	daptor
1 x 25GbE 2-Port and 1 x 960GB SATA SSI	-	1 x 25GbE 2-I 1 x 960GB SA		GbE 2-Port Ac	daptor
	С		TA SSD		daptor
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS	D 1x Supermicro A+	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H	TA SSD 2 PCIe SS ITR		daptor
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers:	D D 1x Supermicro A+ (TwinPro™ with 4x	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H	TA SSD 2 PCIe SS ITR		daptor
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers: Total Processors/Cores/Thre	D D 1x Supermicro A+ (TwinPro™ with 4x eads: 4/136/272 1x Master Node	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes	TA SSD 2 PCIe SS HTR 3) 3x Data No	D odes	·
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers: Total Processors/Cores/Three Server Configuration:	D D 1x Supermicro A+ (TwinPro™ with 4x eads: 4/136/272 1x Master Node 1x AMD EPYC 77021	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes	TA SSD 2 PCIe SS HTR 3) 3x Data No 1x AMD F	D odes EPYC 7F72 (3.2	·
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers: Total Processors/Cores/Three Server Configuration: Processor	D D 1x Supermicro A+ (TwinPro™ with 4x eads: 4/136/272 1x Master Node	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes	TA SSD 2 PCIe SS HTR 3) 3x Data No	D odes EPYC 7F72 (3.2	·
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Fotal Servers: Fotal Processors/Cores/Three Server Configuration: Processor Memory	D D 1x Supermicro A+ (TwinPro TM with 4x eads: 4/136/272 1x Master Node 1x AMD EPYC 77021 64-core, 256 MB L3) 512 GiB 1x 960GB SATA SSE	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes P (2.00GHz,	TA SSD 2 PCle SS TTR 3) 3x Data No 1x AMD E 24-core, 19 256 GiB 1x 960GB	D odes EPYC 7F72 (3.2 22 MB L3) SATA SSD	20GHz,
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers: Total Processors/Cores/Three Server Configuration: Processor Memory Storage Device	D D 1x Supermicro A+ (TwinPro [™] with 4x eads: 4/136/272 1x Master Node 1x AMD EPYC 77021 64-core, 256 MB L3) 512 GiB 1x 960GB SATA SSE 1x 1TB M.2 PCIe SSI 1x Mellanox MCX516 1x Supermicro AOC-1	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes P (2.00GHz, C Gen3 5A-CCAT 100GbE	TA SSD 2 PCle SS TTR 3) 3x Data No 1x AMD F 24-core, 19 256 GiB 1x 960GB 4x 3.84TB 1x Melland 1x Superm	D odes PYC 7F72 (3.2 22 MB L3) SATA SSD M.2 PCIe SSD ox MCX516A-0 icro AOC-MH2	20GHz, Gen3 CCAT 100GbI
1 x 960GB SATA SSI 1 x 1TB M.2 PCIe SS Total Servers: Total Processors/Cores/Three Server Configuration: Processor Memory Storage Device Network Controller	D D 1x Supermicro A+ (TwinPro TM with 4x eads: $4/136/272$ 1x Master Node 1x AMD EPYC 77021 64-core, 256 MB L3) 512 GiB 1x 960GB SATA SSE 1x 1TB M.2 PCIe SSI 1x Mellanox MCX516	1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes P (2.00GHz, P (2.00GHz, O Gen3 5A-CCAT 100GbE MH25G-m2S2TM OGbE Switch	TA SSD 2 PCIe SS TTR 3) 3x Data No 1x AMD F 24-core, 19 256 GiB 1x 960GB 4x 3.84TB 1x Melland 1x Superm 10GbE and	D odes EPYC 7F72 (3.2 22 MB L3) SATA SSD M.2 PCIe SSD M.2 PCIe SSD ox MCX516A-0 icro AOC-MH2 25GbE	20GHz, Gen3 CCAT 100GbI
1 x 960GB SATA SSI	D D 1x Supermicro A+ (TwinPro TM with 4x eads: 4/136/272 1x Master Node 1x AMD EPYC 7702l 64-core, 256 MB L3) 512 GiB 1x 960GB SATA SSE 1x 1TB M.2 PCIe SSI 1x Mellanox MCX516 1x Supermicro AOC-1 10GbE and 25GbE Mellanox SN2700 100 (2x 2014TP-HTR) + (1 x 960GB SA 4 x 3.84TB M. Server 2014TP-H H12SST-PS Nodes P (2.00GHz, P (2.00GHz, O Gen3 5A-CCAT 100GbE MH25G-m2S2TM OGbE Switch	TA SSD 2 PCIe SS TTR 3) 3x Data No 1x AMD F 24-core, 19 256 GiB 1x 960GB 4x 3.84TB 1x Melland 1x Superm 10GbE and	D odes EPYC 7F72 (3.2 22 MB L3) SATA SSD M.2 PCIe SSD M.2 PCIe SSD ox MCX516A-0 icro AOC-MH2 25GbE	20GHz, Gen3 CCAT 100Gbl

					TPCx-loT	2.0.
TTA	Machba	se 5	5.7.13	3	TPC Pricing	2.5.
					Report Date	Apr. 2, 202
Description	Part Number	Source	List Price (USD)	Qty	Extended Price (USD)	3 yr. Maint. Pric (USD)
Server Hardware						
upermicro A+ Server 2014TP-HTR	AS -2014TP-HTR	1	4,500.00	1	4,500.00	
AMD EPYC 7702P 64-Core Processor	PSE-ROM7702P-0047	1	4,229.00	1	4,229.00	
MD EPYC 7F72 24-Core Processor	PSE-ROM7F72-0141	1	4,117.00	3	12,351.00	
K hynix 64GB PC4-3200	MEM-DR464L-HL02-ER32	1	320.74	8	2,565.92	
K hynix 32GB PC4-3200	MEM-DR432L-HL01-ER32	1	159.51	24	3,828.24	
Aellanox 100GbE Dual-Port NIC	AOC-MCX516A-CCAT	1	976.35	4	3,905.40	
Pport 25GbE SFP28 Mellanox CX-4 Lx EN nd 2-port 10GbE RJ45 Intel X550	AOC-MH25G-m2S2TM	1	287.39	4	1,149.56	
TB NVMe SSD Toshiba KXG50ZNV1T02	HDS-TMN0-KXG50ZNV1T02	1	175.00	1	175.00	
.84TB NVMe SSD Samsung PM983	HDS-SMN1-MZ1LB3T8HMLA07	1	677.35	12	8,128.20	
amsung PM883 960GB SATA 6Gb/s V4	HDS-S2T1-MZ7LH960HAJR05	1	169.63	4	678.52	
'LC 2.5" 7mm (1.3 DWPD)						
ASSEMBLY FEE	MC0037	1	250.00	1	250.00	
Maintenance - 7x24x4 Care Pack (3-yrs)	OS4HR3	1	3,500.00	1		3,500
				Sub-Total	41,760.84	3,500.
letwork Aellanox MSN2700-CS2F Spectrum 00GbE 1U Open Ethernet Switch Aellanox SUP-SN2000-CL-S-3S-4H	MSN2700-CS2F	2	33,003.00	1	33,003.00	
echnical Support and Warranty - Silver 3 ear with 4 Hours On-Site Support for N2700 Cumulus Series Switch	SUP-SN2000-CL-S-3S-4H	2	3,345.00	1		3,345
Aellanox MCP1600-E002E30 Passive copper Cable IB EDR up to 100Gb/s DSFP28 2m Black 30AWG	MCP1600-E002E30	2	145.00	4	580.00	
SFP28 2111 Black SUAWG				Sub-Total	33,583.00	3,345
oftware						-,
ed Hat Enterprise Linux Server7.7 with	BU00002	2	1 200 00	12		15 500
remium Support 1 Year	RH00003	3	1,299.00	12		15,588
1achbase v5.7.13 Cluster Edition (includes y 7x24x4 Technical Support)	-	4	98,000.00	4	392,000.00	
1achbase v5.7.13 Cluster Edition 7x24x4 echnical Support	-	4	58,800.00	2		117,600
				Sub-Total	392,000.00	133,188.
nfrastructure						
IP EliteDisplay E243 23.8-inch Monitor <i>N</i> / spares)	1FH47A8#ABA	5	179.00	3	537.00	
P Slim USB Keyboard and Mouse (w/	T6T83UT#ABA	5	35.00	3	105.00	
pares)	1018301#ABA	5	55.00			
				Sub-Total	642.00	
liscounts*						
1achbase v5.7.13 Cluster Edition (includes y 7x24x4 Technical Support)					(137,200.00)	
1achbase v5.7.13 Cluster Edition 7x24x4 echnical Support						(41,160.
				Sub-Total	(137,200.00)	(41,160.0
				Total	\$330,785.84 USD	\$98,873.00 U
	nox Technologies, Ltd.		Th	ree-Year Co	ost of Ownership:	\$429,659 U
) Red Hat Inc. 4) Machbase Inc. 5) Audited by Pre-Publication Board	Hewlett Packard Inc.				loTps:	2,480,917
All discounts are based on US list prices configurations. Discounts for similarly size uoted here, but may vary based on the		to those			USD/kloTps:	\$173.19 US

Prices used in TPC benchmarks must reflect the actual prices a customer would pay for purchase of the components in all regions specified in the result. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing conventions for the listed components. For complete details, see the pricing section of the TPC benchmark specification. If you find that stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.

			TPCx-loT	2.0.
ГТА	Machbas	se 5.7.13	TPC Pricing	2.5.
			Report Date	Apr. 2, 202
	Numerical Qu	uantities		
Scale Factor		45	500000000	
	Performance Ru	ın (Run?)		
Warmup Run		2020-03-01 22:	·46·43 000	
Warmup Run		2020-03-01 23:		
Warmup Run			1,821.296	
Measured Rur	Start Time	2020-03-01 23:	:17:05.000	
Measured Rur	End Time	2020-03-01 23:	:47:20.000	
Measured Rur	Elapsed Time		1,813.845	
Performance N	Metric (IoTps)	2,4	180,917.60	
	Repeatability Ru	un (Run1)		
Warmup Run	Start Time	2020-03-01 21:	:43:09.000	
Warmup Run	End Time	2020-03-01 22:	:13:16.000	
Warmup Run	Elapsed Time		1,806.022	
Measured Rur	Start Time	2020-03-01 22:	:13:16.000	
Measured Rur		2020-03-01 22:	:43:29.000	
Measured Rur	Elapsed Time		1,812.287	
Performance M	Aetric (IoTps)	2,4	183,050.42	

		TPCx-loT	2.0.0
TA	Machbase 5.7.13	TPC Pricing	2.5.0
		Report Date	Apr. 2, 202
	Performance Run Report (Run2)		
TPCx-IoT Perf Test Run2 deta Test Run2 deta	1	= = 1,821.296	
TPCx-IoT Perf	ormance Metric (IoTps): 2480917.6087		
		=	
	Repeatability Run Report (Run1)	=	
	Repeatability Run Report (Run1)	= = = 1,806.022	
======================================	Repeatability Run Report (Run1) ormance Metric (IoTps) Report ils : Total Time For Warmup Run In Seconds ils : Total Time In Seconds = 1,812.287		

			TPCx-loT	2.0.0
TTA	Mach	base 5.7.13	TPC Pricing	2.5.0
			Report Date	Apr. 2, 2021
	Revis	ion History		
Date	Edition	Description		
April 14, 202		Initial Publication		
April 2, 202	l Second	Update Price Performance	ce Metric	

Table of Contents

Abstract
Executive Summary
Table of Contents 9
Clause 0 Preamble
0.1 TPC Express Benchmark [™] IoT Overview10
Clause 1 General Items
1.1 Test Sponsor11
1.2 Parameter Settings11
1.3 Configuration Diagrams11
1.3.1 Measured Configuration
1.3.2 Priced Configuration
1.4 Dataset Distribution
1.5 Software Component Distribution
Clause 2 Workload Related Items14
2.1 Hardware and Software Tunable Parameters
2.2 Run Report
2.3 Benchmark Kit Identification
2.4 Benchmark Kit Changes
Clause 3 Scale Factor and Metrics
3.1 Scale Factor, Performance, Price-Performance
Third-Party Price Quotes17
Super Micro Computer Inc
Mellanox Technologies, Ltd
Red Hat Inc21
Machbase Inc
Hewlett Packard Inc
Supporting File Index

Clause 0 Preamble

0.1 TPC Express Benchmark[™] IoT Overview

TPC Express Benchmark[™] IoT (TPCx-IoT) was developed to provide an objective measure of hardware, operating system and commercial NoSQL database software distributions, and to provide the industry with verifiable performance, price-performance and availability metrics. The benchmark models a continuous system availability of 24 hours a day, 7 days a week.

Even though the modeled application is simple, the results are highly relevant to hardware and software dealing with IoT gateway systems in general. TPCx-IoT stresses both hardware and software including database APIs and network connections to the database. This workload can be used to assess a broad range of NoSQL databases. TPCx-IoT can be used to assess a range of NoSQL implementations in a technically rigorous and directly comparable and vendor-neutral manner. The metric effectively represents the total number of records that can be inserted into a NoSQL database per second while running queries against the database.

The TPCx-IoT kit is available from the TPC (See <u>www.tpc.org/tpcx-iot</u> for more information). Users must sign up and agree to the TPCx-IoT User Licensing Agreement (ULA) to download the kit. Redistribution of the kit is prohibited. All related work (such as collaterals, papers, derivatives) must acknowledge the TPC and include TPCx-IoT copyright. The TPCx-IoT Kit includes: the TPCx-IoT Specification document, the TPCx-IoT Users Guide document, shell scripts to set up the benchmark environment and Java code to execute the benchmark load.

The purpose of TPC benchmarks is to provide relevant, objective performance data to industry users. To achieve that purpose, TPC benchmark specifications require that benchmark tests be implemented with systems, products, technologies and pricing that:

- Are generally available to users;
- Are relevant to the market segment that the individual TPC benchmark models or represents (e.g., TPCx- IoT models and represents a NoSQL database mimicking an IoT gateway system)
- Would plausibly be implemented by a significant number of users in the market segment the benchmark models or represents.

The use of new systems, products, technologies (hardware or software) and pricing is encouraged so long as they meet the requirements above. Specifically prohibited are benchmark systems, products, technologies or pricing (hereafter referred to as "implementations") whose primary purpose is performance optimization of TPC benchmark results without any corresponding applicability to real-world applications and environments. In other words, all "benchmark special" implementations that improve benchmark results but not real-world performance or pricing, are prohibited.

The rules for pricing are included in the TPC Pricing Specification. Further information is available at <u>www.tpc.org</u>.

Clause 1 General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Telecommunications Technology Association.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- Configuration parameters and options for server, storage, network and other hardware component incorporated into the pricing structure;
- Configuration parameters and options for operating system and file system component incorporated into the pricing structure;
- Configuration parameters and options for any other software component incorporated into the pricing structure;
- Compiler optimization options.

Comment 1: In the event that some parameters and options are set multiple times, it must be easily discernible by an interested reader when the parameter or option was modified and what new value it received each time.

Comment 2: This requirement can be satisfied by providing a full list of all parameters and options, as long as all those that have been modified from their default values have been clearly identified and these parameters and options are only set once.

The <u>Supporting Files Archive</u> contains the parameters and options used to configure the components involved in this benchmark.

1.3 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

This includes, but is not limited to:


- Total number of nodes used
- Total number and type of processors used/total number of cores used/total number of threads used (including sizes of L2 and L3 caches)
- Size of allocated memory, and any specific mapping/partitioning of memory unique to the test
- Number and type of disk units (and controllers, if applicable)
- Number of channels or bus connections to disk units, including their protocol type
- Number of LAN (for example, Ethernet) connections and speed for switches and other hardware components physically used in the test or are incorporated into the pricing structure
- Type and the run-time execution location of software components

1.3.1 Measured Configuration

Figure 1-1 shows the measured configuration.

Mellanox SN2700 100Gb Ethernet Switch

(32 x QSFP28 Ports)

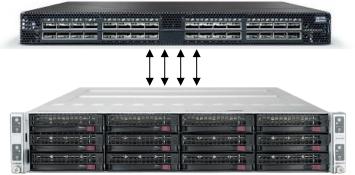

1 x Supermicro A+ Server 2014TP-HTR TwinPro[™] with 4x H12SST-PS Nodes, each with:

1 x Master Node

1 x AMD EPYC 7702P64-Core Processor 8 x 64GB (512GB) Memory 1 x 100GbE 2-Port Adaptor 1 x 25GbE 2-Port and 10GbE 2-Port Adaptor 1 x 960GB SATA SSD 1 x 1TB M.2 PCIe SSD

3 x Data Nodes

1 x AMD EPYC 7F72 24-Core Processor 8 x 32GB (256GB) Memory 1 x 100GbE 2-Port Adapter 1 x 25GbE 2-Port and 10GbE 2-Port Adaptor 1 x 960GB SATA SSD 4 x 3.84TB M.2 PCIe SSD

Figure 1-1 Measured Configuration

The measured configuration consisted of:

Total Nodes:	4
Total Processors/Cores/Threads:	4/136/272
Total Memory:	1.28TB
Total Number of Storage Devices:	17
Total Storage Capacity	50.92TB

Connectivity:

Servers Processors/Cores/Threads: Processor Model:

Memory: Storage Devices:

Network Controller:

Mellanox SN2700 100GbE Switch

a Data Nodes:
24/48
a AMD EPYC 7F72 .20GHz, 24-core, 192MB L3)
x 960GB SATA SSD x 3.84TB M.2 PCIe SSD Gen3
x Mellanox MCX516A-CCAT 00GbE
Supermicro AOC-MH25G-m2s2TM OGbE and 25GbE
x Mellanox MCX516A-CCAT 00GbE x Supermicro AOC-MH25G-m2s2

The distribution of software components over server nodes is detailed in section 1.5.

TPCx-IoT 2.0.0	
Full Disclosure Repo	rt

1.3.2 Priced Configuration

All nodes in the measured configuration used 1x Samsung PM863 Series 960GB SATA SSD as a system disk. All nodes in the priced configuration use 1x Samsung PM883 Series 960GB SATA SSD as a substitute. The substitution was allowed under TPC Pricing rules based on the following data.

Characteristic	Priced 960GB SATA SSD	Measured 960GB SATA SSD
Model (Part Number)	PM883 (MZ7LH960HAJR)	PM863 (MZLM960N)
Interface	SATA3 6Gb/s	SATA3 6Gb/s
NAND type	Samsung V-NAND	Samsung V-NAND
Sequential Read/Write (up to)	550/520 MB/s	520/480 MB/s
Random Read/Write (up to)	98K/28K IOPS	97K/24K IOPS
Form Factor	2.5 inch	2.5 inch
Launch Date	2018/04	2015/07

1.4 Dataset Distribution

The distribution of dataset across all media must be explicitly described.

Table 1-1 describes the distribution of the dataset across all storage media in the system.

Server	Storage	Disk Drive	Description of Content
1	2.5 SATA 6Gb/s	1 x 960GB SATA SSD	Operating System, Root, Swap
	M.2 PCle Gen3	1 x 1TB NVMe SSD	Machbase Broker
2-4	2.5 SATA 6Gb/s	1 x 960GB SATA SSD	Operating System, Root, Swap
	M.2 PCle Gen3	4 x 3.84TB NVMe SSD	Machbase Data, coordinator

Table 1-1 Dataset Distribution Across Storage Media

1.5 Software Component Distribution

The distribution of various software components across the system must be explicitly described.

Table describes the distribution of the software components across the system.

Server	Broker	Coordinator	Warehouse
1	Х		
2		Х	Х
3			Х
4			Х

Table 1-2 Software Component Distribution Across Nodes

The storage system software used was Machbase 5.7.13.

Clause 2 Workload Related Items

2.1 Hardware and Software Tunable Parameters

Script or text used to set all hardware and software tunable parameters must be reported.

The <u>Supporting Files Archive</u> contains all configuration scripts.

2.2 Run Report

The run report generated by the TPCx-IoT Kit for Performance Run and Repeatability Run must be reported.

The <u>Supporting Files Archive</u> contains the full run report. The following excerpts from the run report summarize the Performance Run and the Repeatability Run.

Run Report for Run 1 (Repeatability Run)

TPCx-IoT Performance Metric (IoTps) Report			
Test Run 1 details :	Total Time For Warmup Run In Seconds = 1,806.022		
Test Run 1 details :	Total Time In Seconds $=$ 1,812.287		
	Total Number of Records = 4500000000		

TPCx-IoT Performance Metric (IoTps): 2483050.4219

Run Report for Run 2 (Performance Run)

TPCx-IoT Performance Metric (IoTps) Report			
Test Run 2 details :	Total Time For Warmup Run In Seconds = 1,821.296		
Test Run 2 details :	Total Time In Seconds $= 1,813.845$		
	Total Number of Records = 4500000000		

TPCx-IoT Performance Metric (IoTps): 2480917.6087

2.3 Benchmark Kit Identification

The version of the TPCx-IoT kit and checksums for key files are listed below.

TPCx-IoT Kit Version	1.0.5
----------------------	-------

	110-
File	MD5
TPC-IoT-master.sh	aabeca02709f778295fcd1891ce3f74e
tpcx-iot/machbase-binding/lib/core- 0.13.0-SNAPSHOT.jar	18b59e748a7026036e85e2e70ba45af5
IoT_cluster_validate_suite.sh	1d85705dc67fb3c767d7a1fe8775275f

2.4 Benchmark Kit Changes

No modifications were made to TPC-provided kit.

Clause 3 Scale Factor and Metrics

3.1 Scale Factor, Performance, Price-Performance

The metrics for Run 1 and Run 2 are summarized below.

	Run 1	Run 2
Scale Factor	450000000	450000000
Measured Run Time (seconds)	1,812.287	1,813.845
IoTps	2,483,050.42	2,480,917.60

Run2 Price-Performance: 173.19 \$/kIoTps

Third-Party Price Quotes

Super Micro Computer Inc.

St	JPERMICR
980	Rock Ave.
San	Jose, CA 95131

Quotation

San Jose, CA 95131
US
Phone: (408) 503-8000 Fax: (408) 503-8008
Please email PO to Supermicro Order Desk: epowsupermicro.com and
cc Supermicro Sales Representative.

Sold To:

ADVANCED MICRO DEVICES, INC (CA) DEBBIE CHRISTOPHER 2485 AUGUSTINE DRIVE SANTA CLARA CA 95054-3002 USA

Date	Page			
03/04/2020	1			
Quotation Numb	er			
8600387579				
Expiration Date				
04/17/2020				

S	hi	p	Т	0:		
	-				_	-

ADVANCED MICRO DEVICES, INC (CA) DEBBIE CHRISTOPHER 2485 AUGUSTINE DRIVE SANTA CLARA CA 95054-3002 USA

AM00360000 Item Number c-2014TP-HTR E-ROM7702P-0047 EM-DR464L-HL02-ER32 EM-DR464L-HL01-ER32 C-MCX516A-CCAT C-MH25G-M2S2TM-Q	Nodes 3.5" Rome 7702P HF, RoHS 64GB DDR4-3 32GB DDR4-3	-	048P2, UP,SATA 2U 4 G 256M 200W 4094, ECC RDIMM	Unit Price 4,500.00 4,229.00 320.74	EA	Extended Price 4,500.0 4,229.0
5 -2014TP-HTR E-ROM7702P-0047 EM-DR464L-HL02-ER32 EM-DR432L-HL01-ER32 DC-MCX516A-CCAT	Nodes 3.5" Rome 7702P HF, RoHS 64GB DDR4-3 32GB DDR4-3 MCX516A-CC	CSE-827HQ+ -R2K UP 64C/128T 2.0 3200 2Rx4 (16Gb)	048P2, UP,SATA 2U 4 G 256M 200W 4094, ECC RDIMM	4,500.00	EA	4,500.0
E-ROM7702P-0047 EM-DR464L-HL02-ER32 EM-DR432L-HL01-ER32 DC-MCX516A-CCAT	Nodes 3.5" Rome 7702P HF, RoHS 64GB DDR4-3 32GB DDR4-3 MCX516A-CC	UP 64C/128T 2.0	G 256M 200W 4094, ECC RDIMM	4,229.00	EA	
EM-DR464L-HL02-ER32 EM-DR432L-HL01-ER32 DC-MCX516A-CCAT	HF, RoHS 64GB DDR4-3 32GB DDR4-3 MCX516A-CC	3200 2Rx4 (16Gb)	ECC RDIMM			4,229.0
EM-DR432L-HL01-ER32 DC-MCX516A-CCAT	32GB DDR4-3 MCX516A-C0			320.74		
C-MCX516A-CCAT	MCX516A-CC	3200 2Rx4 ECC R			EA	2,565.9
			EG DIMM	159.51	EA	3,828.2
C-MH25G-M2S2TM-O	garrzo,rules	AT ConnectX-5 E 3x1	N,100GbE 2-p	976.35	EA	3,905.4
	SIOM 2+ 2-po (Retail)	ort 25G & 10G, S	FP28 & RJ45, Mellanox	287.39	EA	1,149.8
S-TMN0-KXG50ZNV1T02	(EOL)Toshiba < 1DWPD	XG5 1TB NVMe I	1.2 22x80mm	175.00	EA	175.(
S-SMN1- Z1LB3T8HMLA07		Samsung PM983 3.84TB NVMe PCle3x4 V4 M.2 22x110mm (1.3 DWPD)			EA	8,128.2
00037	ASSEMBLY F	ASSEMBLY FEE		250.00	EA	250.0
34HR3	3 YR ONSITE 24X7X4 SERVICE		3,500.00	EA	3,500.0	
E-ROM7F72-0141				4,117.00	EA	12,351.0
)S-S2T1- 27LH960HAJR05			6Gb/s V4 TLC 2.5"	169.63	EA	678.5
14 fee 100 days from any	ation data of	March 1945 2020				
no for 120 days from quo	tation date of	march 18th, 2020			ount	
						45,260.8
					ax	45,260.8
005 21 00 64 E	3-SMN1- ILB3T8HMLA07 J037 HR3 -ROM7F72-0141 3-S2T1- 7LH060HAJR05	< 1DWPD	< 1DWPD	< 1DWPD	< 1DWPD	< 1DWPD

SUPERMICRO WILL NOT BE HELD RESPONSIBLE FOR ANY PRCINO, COMPONENT AVAILABILITY, TYPOGRAPHICAL, OR OTHER ERRORS IN ANY FORMAT OF
 SUPERMICRO WILL NOT DE HELD RESPONSIBLE FOR ANY PRCINO, COMPONENT AVAILABILITY, TYPOGRAPHICAL, OR OTHER ERRORS IN ANY FORMAT OF
 COMMUNICATIONS INCLUDING QUOTATIONS. QUOTATIONS, IN ANY FORMAT, FURNISHED BY SUPERMICRO SHALL NOT CONSTITUTE A RIM OFFER AND MAY BE
 CHANGED OR REVORED AT ANY TIME. IT WILL BE SOLELY IN SUPERMICRO'S DISCRETION TO ACCEPT OR REJECT THE ORDERY OU PLACE.
 INFORMATION ENCLOSED IN THE QUOTATION, INCLUDING PRCING, COMPONENTS DESCRETION TO ACCEPT OR REJECT THE ORDERY OU PLACE.
 INFORMATION ENCLOSED IN THE GUOTATION, INCLUDING PRCING, COMPONENTS DESCRETION TO ACCEPT OR REJECT THE ORDERY ON PHOTEMY AND YOU HEREY AGREE THAT SUCH INFORMATION IS CONFIDENTIAL AND SHALL NOT BE DISCLOSED OR OTHERWISE USED WITHOUT
SUPERMICRO'S EXPRESS PROR WRITTEN CONSENT.
 UNLESS OTHERWISE, YOU AS THE CUSTOMER, DULY EXECUTE ANOTHER VALID AGREEMENT APPLICABLE TO THIS PURCHASE WITH SUPERMICRO, OR UNLESS
 THE AUTHORIZED SUPERMICRO REPRESENTATIVE SPECIFIES, IN WRITING, DIFFERENT OR ADDITIONAL TERMS FOR SPECIFIC PRODUCT OR SERVICE, THE TERMS AND
 CONDITIONS AVAILABLE AT <u>HTTP://////WW.SUPERMICRO.COM/ABOUT/POLICIE/#PRO</u>
 SHALL GOVERN PURCHASES MADE HEREINDER.

Mellanox Technologies, Ltd


Mellanox [.]	Call toll-free: (855) 897-1098 International +01-512-220-1515	Currency ~	Sign In Of Register Return to Mellanox	
TECHNOLOGIES	Search the store	Q	Get a Quote	
APTERS - INTERCONNECT - SWITCHE	S 🗸 CERTIFIED REFURBISHED 🗸 SU	PPORT AND SERVICES 🗸 CUSTOM	ER SERVICE 🗸	
me Switches Ethernet Switches SN2000 SN2	700 100GbE Mellanox MSN2700-CS2F Spectr	um 100GbE 1U Open Ethernet Switch with N	ella	
	Mallanay MONO	700 CC2E Crastering 400Ch	E 411 On on Ethomat Owite	
		700-CS2F Spectrum 100Gb nyx 32 QSFP28 Ports 2 Po	-	
		P2C Airflow Rail Kit RoHS		
	MPN: MSN2700-CS2F	Condition: New		
	Availability:	Limited 😆	Recommended Support: 😝	
	MSRP:	\$33,003.00	None	
	Switch Family:	SN2000		
	Condition:	New	Quantity: 🗸 1	
	Max Ports:	32x100GbE		
	Connector Type:	QSFP28		
	Max Speed:	100GbE	Add to Cart	
	ECCN:	5A991		
	Operating System	: Mellanox Onyx		
	Technology:	Ethernet	Get a Quote	
	Product Brief:	Nownload MSN2700-CS2F		
	÷			
	One-Year	Services & Support	Mellanox Specialists	
			menanox opecialioto	

THIRD-PARTY PRICE QUOTES

Mellanox [.]	Call toll-free: (855) 897-1098	urrency ~	Sign In OF Register Return to Mellanox.co	
	Search the store	Q	Get a Quote 📜 🧮 CART 🚺	
PTERS - INTERCONNECT - SWITCHES	S 🗸 CERTIFIED REFURBISHED 🗸 SUPPOR	RT AND SERVICES 🗸 CUSTOMER S	SERVICE V	
ne Support and Services Hardware Support Eth	ernet Hardware Support Ethernet Switch Support St	N2000 Switch Support SN2700 Switch Su	pport	
ellanox SUP-SN2000-CL-S-3S-4H Technical Support a	nd Warranty - Silver 3 Yea			
		000-CL-S-3S-4H Technical Hours On-Site Support fo		
A A M 11	Technology: Contract Length:	Ethernet	Add to Cart	
M Mallar	Contract Length.	3 Years		
Connect. Accelerate. Outp	Program Level:	Silver	Get a Quote	
	Program Level:			

THIRD-PARTY PRICE QUOTES

Page 20 of 24

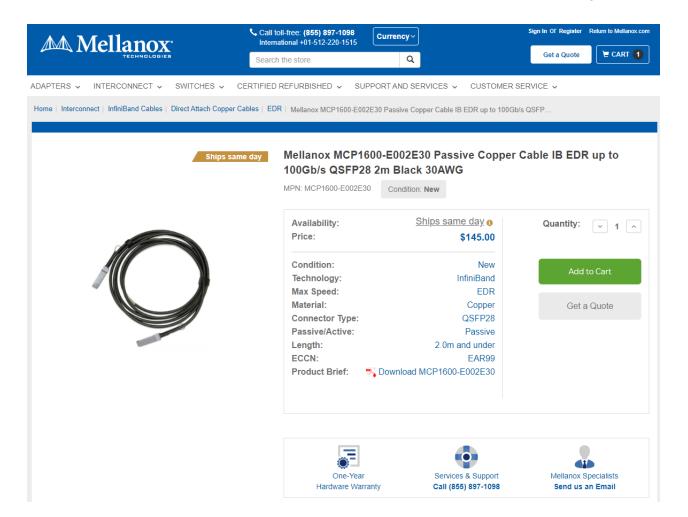

Red Hat Inc.

RED HAT STORE

Shopping Cart

Order summary			
Item	Quantity	Price	Line total
New Subscription Contract			
Red Hat Enterprise Linux Server, Premium (Physical or Virtual Nodes) (RH00003)	12 🛊 Remove	US\$1,299.00	US\$15,588.00
Feb 25, 2020 - Feb 24, 2021			
		Subtota	l: US\$15,588.00
Continue shopping		c	ontinue to checkout
Copyright © 2020 Red Hat, Inc. Privacy.	statement Terms of use <u>All po</u> l	licies and guidelines	SUMMIT

Machbase Inc.

	MACH-SALES-20	200210.01						
Date : 2	: MACH-SALES-20200310-01		Business License	120-87-96403				
	2020-03-30		Company	Machbase Inc.		CEO	Andrew Kim	
То : Т	TTA		BusinessTerritory	Service, Business Service		ProductType	Software	
CC : N	Mr. Ki Han Choi			Rn. 904, 273 Digital		tal-ro, Guro-gu		
Charge	Peter Lee (+82-10-7128-6:	127)	Address		Seoul, k	Korea		
	ere we quote as		Tel.	T : 02-210	9-5607	F : 02-2038-4607		
Quote	364	,364	USD (VAT Incl.)					
No.	Content		List Price (USD/Node)	Proposed Price (USD/Node)			Tax. Incl. (USD)	
1 Ma	achbase Cluste	r Edition V5.7.13	98,000	63,700	4	254,800	280,280	
Ma	achbase Run-Ti	me License						
Ma	achbase Time S	eries DBMS						
Ma	achbase Client I	Developmet Kit						
Ma	achbase Coordi	nator						
Ma	achbase Broker							
Ma	achbase Wareh	ouse						
Ma	Machbase Web Admin							
Ma	Machbase Tag Analyzer							
No.	Content		Ref. Price (USD)	Maintenance Rate (%)	Total Period (Year)	Supply Price (USD)	Tax. Incl. (USD)	
2 M	aintenance		254,800	15%	2.00	76,440	84,084	
Su	pport & On-site	Guide						
Fa	ult Handling							
AP	PI Connection							
Gu	uide for Server &	& Node Configurat	ion					
			Total			331,240	364,364	
CC DEMAD								
	< REMARK >>							
- Quotation : Machbase Cluster Edition Run-Time License 4 nodes and 3 years Maintenance (1 Year for free)								
Maintenance: Free maintenance for one year after the contract, 15% of maintenance rate applied afterwards.								
Payment terms: Cash payment terms. (Within 30 days of issue of tax invoice)								
			ended to separate DB		e server.			
				-		ervice.		
Installation : Cluster Edition - 7 Days, DB Table Guide is seperately guided with DB Professional Service. Quotation validity period: 120 days from the date of guotation								

Hewlett Packard Inc.

HP Store				Sales:	-866-625-3906 Order	Status Live Help	Customer Service S	Sign in/Register 👻
(IP)	Laptops & 2-in-1s	Desktops Printers	3D Print	Ink & toner	Displays & accessories	Business solutions	Support	ζÄ
	PC STORE / COMPUTER ACCESSOR	IES / COMPUTER DISPLAYS / CO	IMPUTER MONITO	RS / HP ELITEDISPLA	Y E243 23.8-INCH MONITOR			
		Image: A state of the state		**** Special (limit 2) • FHD (1 • 1000:1 • 5 ms o	920 x 1080 @ 60 Hz) static; 10000000:1 dynamic	9W		
	-	4		See all S \$17		Ships within 14 busine	ss days	
		•	ļ.	> Product	# 1FH47A8#ABA			
HP Store	Laptops & 2-in-1s	Desktops Printers	3D Print	Sales: Ink & toner	1-866-625-3906 Orde Displays & accessories	r Status Live Help Business solutions	Customer Service	Sign in/Register 🕶
	HOME / BUSINESS / MONITORS 8	ACCESSORIES / MICE & KEYBOA	RDS / HP SLIM U	SB KEYBOARD AND M	OUSE			
					Slim USB Keyl		ouse	
	\bigcirc				offers: Free shipping! Sav se Buy one accessory, get		ories with PC	
				¥	d your input capabilities with k		Р.	
			Ů	\$35	00 Add to cart S	hips within 14 business	days	
				Product	# T6T83UT#ABA			
	<			>				

Supporting File Index

Clause	Description	Archive Pathname
Clause 1	Parameters and options used to configure and tune the SUT	/Clause1
Clause 2	Configuration scripts and Run Report	/Clause2
Clause 3	System configuration details	/Clause3