

TPC Benchmark™ E and
TPC Benchmark™ Energy
Full Disclosure Report for



PRIMERGY RX300 S6

Using

**Microsoft SQL Server 2008 R2
Enterprise x64 Edition**

Using

**Microsoft Windows Server 2008 R2
Enterprise x64 Edition**

TPC-E Version 1.12.0

TPC-Energy Version 1.2.1

Submitted for Review

February 14, 2011

First Edition February 2011

Fujitsu believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. We assume no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, we provide no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark™ E should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. We do not warrant or represent that a user can or will achieve similar performance expressed in transactions per second (tpsE) or normalized price/performance (\$/tpsE). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright © 2010 Fujitsu. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

PRIMERGY RX300 S6, PRIMERGY RX200 S6 and PRIMERGY RX200 S5 are trademarks of Fujitsu.

Microsoft Windows Server 2008 R2, Microsoft SQL Server 2008 R2 and BenchCraft are registered trademarks of Microsoft Corporation.

Intel® Xeon® Processor is a registered trademark of Intel.

TPC Benchmark™ is a trademark of the Transaction Processing Performance Council (TPC).

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Abstract

This report documents the TPC Benchmark™ E results achieved by Fujitsu using Microsoft SQL Server 2008 R2 Enterprise x64 Edition.


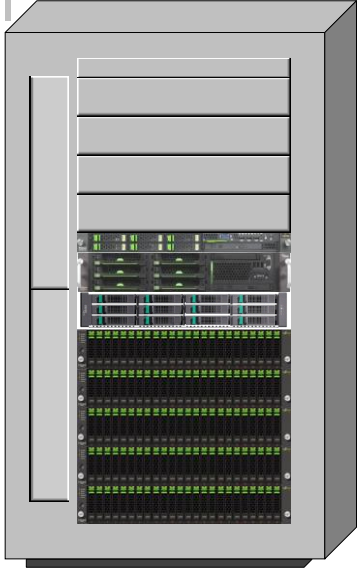
The TPC Benchmark™ E tests were run on a PRIMERGY RX300 S6 system using the Microsoft Windows Server 2008 R2 Enterprise x64 Edition operating system.

The results, summarized below, show the number of TPC Benchmark™ E transactions per second (tpsE), the price per tpsE (\$/tpsE) and the TPC-Energy (Watts/tpsE).

Hardware	Software	Total System Cost	tpsE	\$ USD/tpsE	Availability Date
Fujitsu PRIMERGY RX300 S6 12x2.5	Microsoft SQL Server 2008 R2 Enterprise x64 Edition Microsoft Windows Server 2008 R2 Enterprise x64 Edition	\$ 233,281 USD	1,268.30	\$ 183.94 USD	March 1, 2011

Hardware	TPC-Energy	Average Power of REC	Idle Power of REC
Fujitsu PRIMERGY RX300 S6 12x2.5	0.93 Watts/tpsE	1,181.44 Watts	781.93 Watts

The benchmark implementation and results were audited by Francois Raab for InfoSizing Inc. (www.sizing.com). The auditor's attestation letter is contained in Section 8 of this report.

		PRIMERGY RX300 S6 12x2.5			TPC-E 1.12.0 TPC Pricing 1.5.0 TPC-Energy 1.2.1
					Report Date February 14, 2011
TPC-E Throughput 1,268.30 tpsE	Price/Performance \$ 183.94 USD per tpsE	Availability Date March 1, 2011	Total System Cost \$ 233,281	TPC-Energy Metric 0.93 Watts/tpsE	
Database Server Configuration					
Operating System Microsoft Windows Server 2008 R2 Enterprise x64 Edition		Database Manager Microsoft SQL Server 2008 R2 Enterprise x64 Edition		Processors/Cores/Threads 2/12/24	Memory 96 GB
SUT					
			<p>Tier A PRIMERGY RX200 S6 1x Intel Xeon E5640 2.66 GHz 6 GB Memory 1x 73 GB 15k rpm SAS Drive 2x onboard LAN 1 Gb/s 1x Dual Port LAN 1 Gb/s</p> <p>Tier B PRIMERGY RX300 S6 2x Intel Xeon X5690 3.46 GHz 96 GB Memory 2x 73 GB 15k rpm SAS Drives 4x 146 GB 10k rpm SAS Drives 4x 500 GB 7.2k rpm SATA Drives 2x onboard LAN 1 Gb/s 1x onboard SAS RAID Controller 5x SAS RAID Controller</p> <p>Storage 1x PRIMECENTER Rack 5x ETERNUS JX40 120x 64 GB SSD Drives</p>		
Initial Database Size 5,124 GB		Redundancy Level 1 RAID-5 data and RAID-10 log		Storage 120 x 64 GB SSD 4 x 500 GB 7.2k rpm HDD 4 x 146 GB 10k rpm HDD	



PRIMERGY RX300 S6 12x2.5

**TPC-E 1.12.0
TPC Pricing 1.5.0
TPC-Energy 1.2.1**

Report Date
February 14, 2011

Availability Date
March 1, 2011

Description	Part Number	Price Source	Unit Price USD	Qty	Extended Price USD	3-yr. Maint. Price USD
Database Server (Tier B) Hardware						
FSCR3S6_S26361-K1344-V301_111384-01						
PY RX300S6 12x2.5 gold PSU	S26361-K1344-V301			1	11,514.10	
Intel Xeon X5690 6C/12T 3.46 GHz 12 MB	S26361-F3619-E346			2		
8 GB DDR3 1333 MHz PC3-10600 rg d	S26361-F3604-E515			12		
DVD-RW supermulti slimline SATA	S26361-F3269-E2			1		
HD SAS 6G 146GB 10K HOT PL 2.5" EP	S26361-F4482-E114			4		
HD SAS 6G 73GB 15K HOT PL 2.5" EP	S26361-F4482-E573			2		
HD SATA 3G 500GB 7.2K HOT PLUG 2.5" BC	S26361-F3601-E500			4		
RAID Ctrl SAS 6G 5/6 512MB (D2616)	S26361-F3554-E512			1		
Cable mgmt. for 19" DC- PC- Rack	S26361-F2735-E7			1		
RMK-F1_1-2U Server	S26361-F2735-E101			1		
RAID Ctrl SAS 6G 8Port ex 512M FH/LP LSI	S26361-F3593-L501	1	529.55	5	2,647.75	
PYRX300 S6 Warranty Uplift, 36 Months, Enhanced Plus Level, 24x7x365 Phone Support (Sev1 - Live Transfer), 24x7x365 Onsite and Parts (Sev1 Resp. Time - 4 Hours), Incl. Holidays, Prepaid billing	PYR3S6-U004361-0NA	1	949.00	1		949.00
PYRX300 S6 during normal business hours, Primergy installation, Low-end Server, w/o OS, One Time billing	PYR3S6-N039005-0NA	1	350.00	1		350.00
				Subtotal	14,161.85	1,299.00
Storage						
FSCPCTR_S26361-K826-V102_109065-01						
PRIMECENTER Rack 24 U, 1000 deep	S26361-K826-V102	1	1,899.75	1	1,899.75	
Dummy panel, plastics, 1U + assembly	S26361-F2735-E130			1		
Dummy panel, plastics, 2U + assembly	S26361-F2735-E131			6		
Socket strip 3phase 3x 8 sockets	S26361-F2262-L31	1	157.25	1	157.25	
PYPCTR Warranty Uplift, 36 Months, Enhanced Plus Level, 24x7x365 Phone Support (Sev1 - Live Transfer), 24x7x365 Onsite and Parts (Sev1 Resp. Time - 4 Hours), Incl. Holidays, Prepaid billing	PYPCTR-U004361-0NA	1	720.00	1		720.00
FSCJX40_FTS:ETJXS11BG_106605-02						
ETERNUS JX40	FTS:ETJXS11BG	1	2,611.20	5	13,056.00	
PRIMERGY Rackinstallation SX/DX ex works	D:FCSX-INPSR			5		
SSD SATA 3G 64GB SLC HOT PLUG 2.5" EP	S26361-F3298-L64	1	1,131.35	120	135,762.00	
PYJX40 Warranty Uplift, 12 Months, Enhanced Plus Level, 24x7x365 Phone Support (Sev1 - Live Transfer), 24x7x365 Onsite and Parts (Sev1 Resp. Time - 4 Hours), Incl. Holidays, Prepaid billing	PYJX40-U004121-0NA	1	609.00	5		3,045.00
PYJX40 Post Warranty, 24 Months, Enhanced Plus Level, 24x7x365 Phone Support (Sev1 - Live Transfer), 24x7x365 Onsite and Parts (Sev1 Resp. Time - 4 Hours), Incl. Holidays, Prepaid billing	PYJX40-P004241-0NA	1	1,218.00	5		6,090.00
PYJX40 during normal business hours, Primergy storage installation, One Time billing	PYJX40-N043005-0NA	1	450.00	5		2,250.00
SAS Cable 6Gb 1x SFF 8088-1x SFF 8088 2m	D:KBSAS6G-1S-1S-2M	1	85.00	5	425.00	
				Subtotal	151,300.00	12,105.00



PRIMERGY RX300 S6 12x2.5

**TPC-E 1.12.0
TPC Pricing 1.5.0
TPC-Energy 1.2.1**

Report Date
February 14, 2011

Availability Date
March 1, 2011

Database Server (Tier B) Software						
SQL Server 2008 R2 Enterprise Edition Per Processor License	810-08529	2	23,370.00	2	46,740.00	
Windows Server 2008 R2 Enterprise Edition	P72-04219	2	2,320.00	1	2,320.00	
Microsoft Problem Resolution Services	n/a	2	259.00	1		259.00
				Subtotal	49,060.00	259.00
Application Server (Tier A) Hardware						
FSCR2S6_S26361-K1342-V101_109116-01		1	2,981.80	1	2,981.80	
PY RX200 S6, 6HD-bays 2.5"	S26361-K1342-V101			1		
Intel Xeon E5640 4C/8T 2.66 GHz 12 MB	S26361-F4419-E266			1		
Performance Mode Installation	S26361-F3284-E2			1		
SP 6GB 3x2 DDR3 1333 MHz PC3-10600 rg s	S26361-F3604-E533			1		
DVD-RW supermulti slimline SATA	S26361-F3269-E2			1		
HD SAS 6G 73GB 15K HOT PLUG 2.5" EP	S26361-F4006-E573			1		
RAID 0/1 SAS based on LSI MegaRAID 4Port	S26361-F3257-E4			1		
Eth Ctrl 2x1Gbit PCIe x4 D2735 Cu lp	S26361-F3610-E201			1		
RMK-P_1-2U servers (new)	S26361-F2735-E110			1		
Power Supply Module 450W gold hp	S26113-F570-E1			1		
PYRX200 S6 Warranty Uplift, 36 Months, Enhanced Plus Level, 24x7x365 Phone Support (Sev1 - Live Transfer), 24x7x365 Onsite and Parts (Sev1 Resp. Time - 4 Hours), Incl. Holidays, Prepaid billing	PYR2S6-U004361-0NA	1	550.00	1		550.00
PYRX200 S6 during normal business hours, Primergy installation, Low-end Server, w/o OS, One Time billing	PYR2S6-N039005-0NA	1	200.00	1		200.00
				Subtotal	2,981.80	750.00
Application Server (Tier A) Software						
Windows Server 2008 R2 Standard Edition	P73-00352	2	870.00	1	870.00	
Miscellaneous						
DISPLAY A19-5 ECO (incl. 2 spares)	S26361-K1339-V140	1	125.80	3	377.40	
Infrastructure or Connectivity						
KB400 USB US (incl. 2 spares)	S26381-K550-L402	1	15.30	3	45.90	
Mini Optical Mouse (incl. 2 spares)	S26381-K452-L100	1	11.05	3	33.15	
LAN-CAT 5 Enhanced, l=3m	S26361-F3417-L3	1	18.70	2	37.40	
				Subtotal	1,363.85	0.00
				Total	216,219.75	17,060.75
Notes:			Three-Year Cost of Ownership USD		\$233,281	
Price Source: 1=Fujitsu 1-408-746-7802 http://www.fujitsu.com/us/, 2=Microsoft Corporation			TPC-E Throughput		1,268.30	
			\$ USD/tpsE		\$183.94	

The benchmark results and test methodology were audited by Francois Raab for InfoSizing Inc. (www.sizing.com)

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing section of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.



**PRIMERGY RX300 S6
12x2.5**

**TPC-E 1.12.0
TPC Pricing 1.5.0
TPC-Energy 1.2.1**

Report Date
February 14, 2011

Availability Date
March 1, 2011

Numerical Quantities Summary

Reported Throughput:	1,268.30 tpsE	Configured Customers:	640,000	
Response Times (in seconds)	Minimum	Average	90th%tile	Maximum
Broker Volume	0.00	0.04	0.06	2.43
Customer Position	0.00	0.05	0.07	2.30
Market Feed	0.00	0.04	0.08	7.96
Market Watch	0.00	0.03	0.06	1.81
Security Detail	0.00	0.02	0.04	1.43
Trade Lookup	0.00	0.13	0.17	2.22
Trade Order	0.00	0.11	0.15	3.36
Trade Result	0.00	0.13	0.18	2.57
Trade Status	0.00	0.03	0.05	2.38
Trade Update	0.02	0.15	0.18	1.55
Data Maintenance	0.02	0.13	N/A	1.96
Transaction Mix	Transaction Count		Mix %	
Broker Volume	4,474,811		4.900%	
Customer Position	11,871,511		13.000%	
Market Feed	913,195		1.000%	
Market Watch	16,437,301		18.000%	
Security Detail	12,784,339		14.000%	
Trade Lookup	7,305,295		8.000%	
Trade Order	9,222,980		10.100%	
Trade Result	9,131,801		10.000%	
Trade Status	17,350,870		19.000%	
Trade Update	1,826,336		2.000%	
Data Maintenance	120		N/A	
Test Duration and Timings				
Ramp-up Time (hh:mm:ss)	00:22:41			
Measurement Interval (hh:mm:ss)	02:00:00			
Business Recovery Time (hh:mm:ss)	00:21:16			
Total Number of Transactions Completed in Measurement Interval	91,318,439			

PRIMERGY RX300 S6 12x2.5	Energy Summary			TPC-E 1.12.0 TPC Pricing 1.5.0 TPC-Energy 1.2.1
				Report Date February 14, 2011
				Availability Date March 1, 2011

TPC-E Throughput 1,268.30 tpsE	Price/Performance \$ 183.94 USD per tpsE	Availability Date March 1, 2011	Total System Cost \$ 233,281	TPC-Energy Metric 0.93 Watts/tpsE
---	--	---	--	---

Numerical Quantities For Reported Energy Configuration:

REC Idle Power: 781.93 Watts
Average Power of REC : 1,181.44 Watts

Subsystem Reporting:

	Secondary Metrics	Additional Numerical Quantities			
	watts/tpsE	Full Load Avg Watts	Full Load % of REC	Idle Avg Watts	Idle % of REC
Database Server	0.42	533.38	45.15%	230.72	29.51%
Storage	0.38	486.06	41.14%	465.45	59.53%
Application Server	0.11	143.00	12.10%	85.26	10.90%
Miscellaneous	0.01	19.00	1.61%	0.50	0.06%
Total REC	0.93	1181.44	100.00%	781.93	100.00%

Lowest ambient temperature at air inlet: 20.81 Degrees Celsius

Items in Priced Configuration not in the Reported Energy Configuration
None

Items in the Reported Energy Configuration not in the Measured Energy Configuration
Fujitsu Display A19-5 ECO

Table of Contents

ABSTRACT	3
CLAUSE 0: PREAMBLE.....	11
Introduction	11
Goal of the TPC-E Benchmark	11
Restrictions and Limitations	12
CLAUSE 1: OVERVIEW.....	13
Order and Titles	13
Executive Summary Statement	13
Benchmark Sponsor	13
Configuration Diagram.....	14
Hardware Configuration.....	15
Software Configuration	16
CLAUSE 2: DATABASE DESIGN, SCALING AND POPULATION	17
Database Creation.....	17
Partitioning.....	17
Replication and Duplicated Attributes.....	17
Cardinality of Tables	18
Distribution of Tables, Partitions and Logs	19
Database Interface, Data Model and Load Methodology	20
CLAUSE 3: TRANSACTIONS	21
Vendor-Supplied Code	21
Database Footprint Requirements.....	21
CLAUSE 4: SUT, DRIVER AND NETWORK.....	22
Network Configuration	22
CLAUSE 5: EGEN.....	23
EGen Version	23
EGen Code	23
EGen Modifications.....	23
CLAUSE 6: PERFORMANCE METRICS AND RESPONSE TIME.....	24
EGen Driver	24
Measured Throughput	24
Test Run Graph	24
Steady State	25
Work Performed During Steady State	25
Transaction Input Parameter Averages.....	26
CLAUSE 7: TRANSACTION AND SYSTEM PROPERTIES.....	27
ACID Tests	27
Redundancy Level and Data Accessibility.....	27
Business Recovery	28
CLAUSE 8: PRICING RELATED ITEMS.....	30
60-Day Space	30
Attestation Letter.....	31
CLAUSE 9: SUPPORTING FILES.....	33

Supporting Files Index table	33
APPENDIX A: THIRD PARTY PRICE QUOTATIONS	38
APPENDIX B: TPC-ENERGY DISCLOSURE REPORT	39
TPC-Energy Clause 2-related items (Methodology).....	39
TPC-Energy Clause 3-related items (Metrics).....	39
TPC-Energy Clause 4-related items (Drivers/Controller)	42
TPC-Energy Clause 6-related items (Instrumentation)	43
TPC-Energy Clause 8-related items (Instrumentation)	44

Clause 0: Preamble

Introduction

TPC Benchmark™ E (TPC-E) is an On-Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. The database schema, data population, transactions, and implementation rules have been designed to be broadly representative of modern OLTP systems. The benchmark exercises a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity; Moderate system and application execution time;
- A balanced mixture of disk input/output and processor usage; Transaction integrity (ACID properties);
- A mixture of uniform and non-uniform data access through primary and secondary keys;
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships with realistic content;
- Contention on data access and update.

The TPC-E operations are modelled as follows: The database is continuously available 24 hours a day, 7 days a week, for data processing from multiple Sessions and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance Sessions. Due to the worldwide nature of the application modelled by the TPC-E benchmark, any of the transactions may be executed against the database at anytime, especially in relation to each other.

Goal of the TPC-E Benchmark

The TPC-E benchmark simulates the OLTP workload of a brokerage firm. The focus of the benchmark is the central database that executes transactions related to the firm's customer accounts. In keeping with the goal of measuring the performance characteristics of the database system, the benchmark does not attempt to measure the complex flow of data between multiple application systems that would exist in a real environment.

The mixture and variety of transactions being executed on the benchmark system is designed to capture the characteristic components of a complex system. Different transaction types are defined to simulate the interactions of the firm with its customers as well as its business partners. Different transaction types have varying run-time requirements.

The benchmark defines:

- Two types of transactions to simulate Consumer-to-Business as well as Business-to-Business activities
- Several transactions for each transaction type
- Different execution profiles for each transaction type
- A specific run-time mix for all defined transactions

For example, the database will simultaneously execute transactions generated by systems that interact with customers along with transactions that are generated by systems that interact with financial markets as well as administrative systems. The benchmark system will interact with a set of Driver systems that simulate the various sources of transactions without requiring the benchmark to implement the complex environment.

The Performance Metric reported by TPC-E is a "business throughput" measure of the number of completed Trade-Result transactions processed per second (see Clause 6.7.1). Multiple Transactions are used to simulate the business activity of processing a trade, and each Transaction is subject to a Response Time constraint. The Performance Metric for the benchmark is expressed in transactions-per-second-E (tpsE). To be compliant with the TPC-E standard, all references to tpsE Results must include the tpsE rate, the associated price-per-tpsE, and the Availability Date of the Priced Configuration (See Clause 6.7.3 for more detail).

Although this specification defines the implementation in terms of a relational data model, the database may be implemented using any commercially available Database Management System (DBMS), Database Server, file

system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-E uses terminology and metrics that are similar to other benchmarks, originated by the TPC and others. Such similarity in terminology does not imply that TPC-E Results are comparable to other benchmarks. The only benchmark Results comparable to TPC-E are other TPC-E Results that conform to a comparable version of the TPC-E specification.

Restrictions and Limitations

Despite the fact that this benchmark offers a rich environment that represents many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the Results reported by a vendor is highly dependent on how closely TPC-E approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark Results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary because of these and other factors. Therefore, TPC-E should not be used as a substitute for specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Benchmark Sponsors are permitted various possible implementation designs, insofar as they adhere to the model described and pictorially illustrated in this specification. A Full Disclosure Report (FDR) of the implementation details, as specified in Clause 9.1, must be made available along with the reported Results.

Clause 1: Overview

Order and Titles

The order and titles of sections in the Report and Supporting Files must correspond with the order and titles of sections from the TPC-E Standard Specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Reports (9.1.1.1).

The order and titles in this report correspond to those in the TPC-E specification.

Executive Summary Statement

The TPC Executive Summary Statement must be included near the beginning of the Report (9.2).

The Executive summary has been included near the beginning of this FDR.

Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided (9.3.1.1).

Fujitsu is the sponsor of this TPC Benchmark™ E result.

Configuration Diagram

Diagrams of both measured and Priced Configurations must be reported in the Report, accompanied by a description of the differences (9.3.1.2).

The measured and priced configurations are shown in the following figures. There are differences between both configurations at additional storage used for database setup and backup in the measured configuration. This storage is not used during measurement and not required for pricing.

Figure 1-1: Priced Configuration


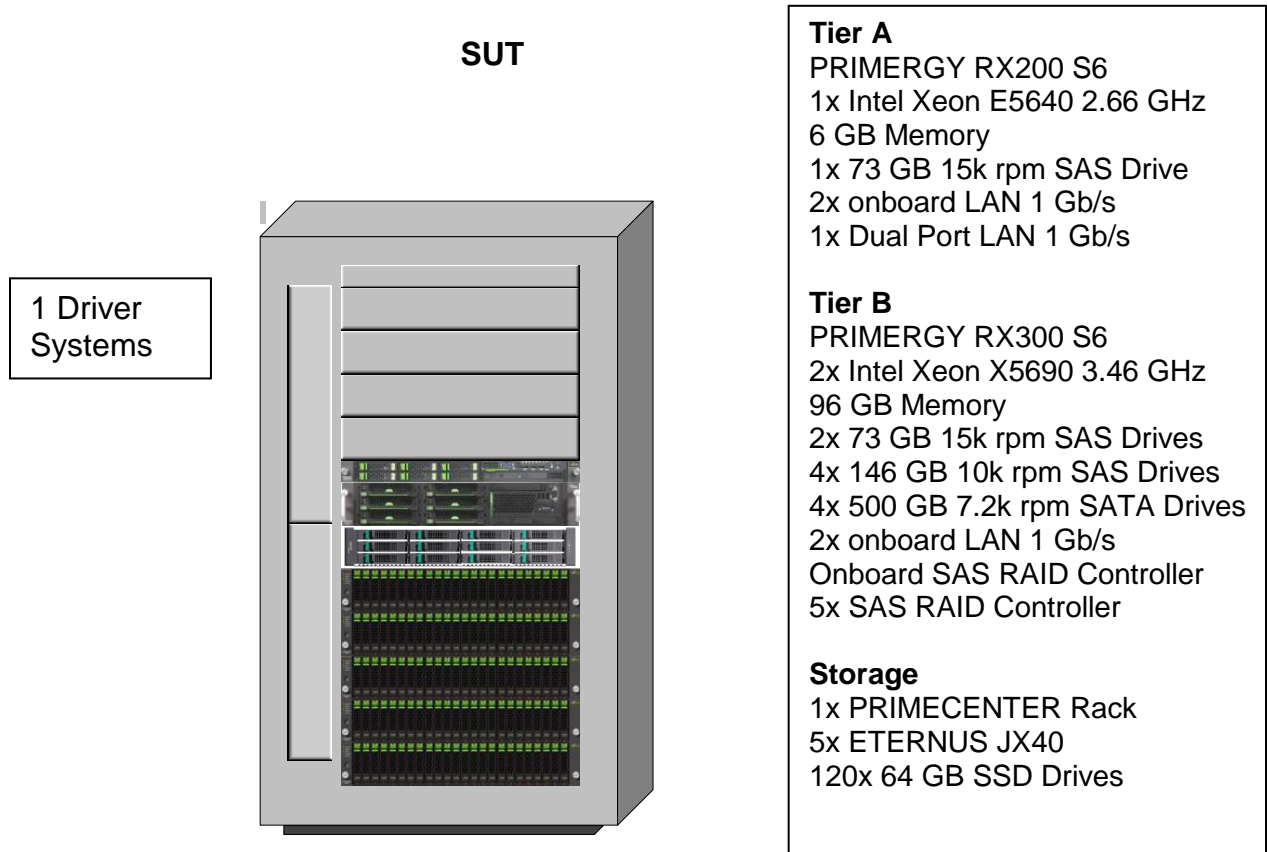


Figure 1-2: Measured Configuration

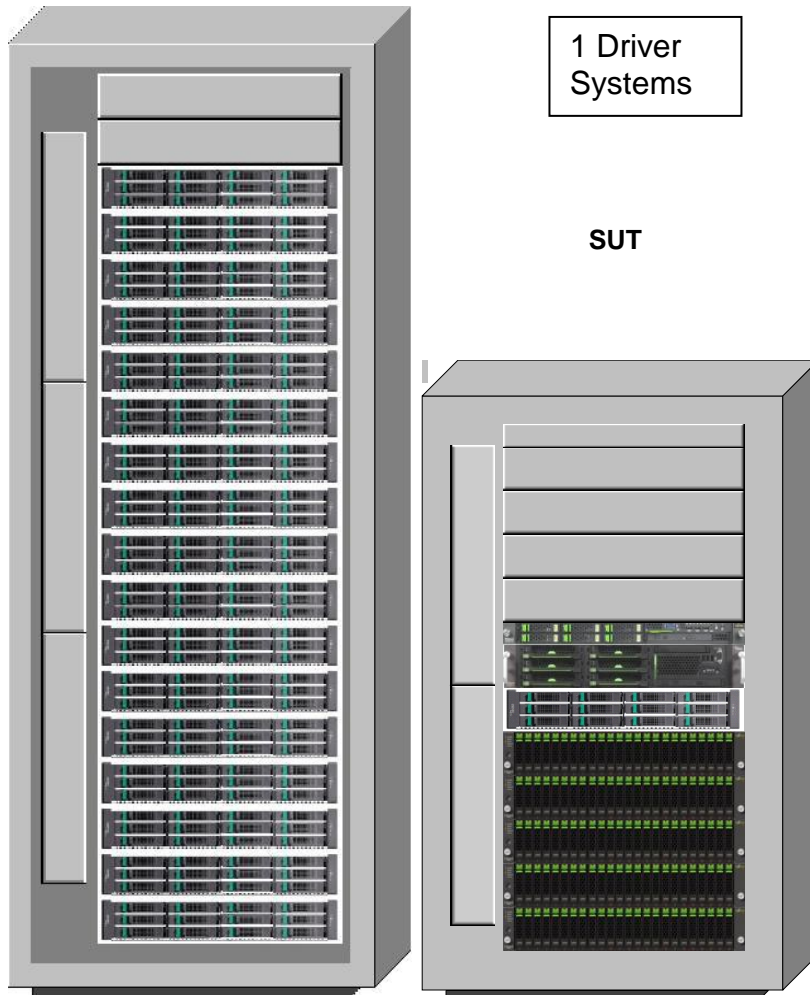

Tier A

PRIMERGY RX200 S6
1x Intel Xeon E5640 2.66 GHz
6 GB Memory
1x 73 GB 15k rpm SAS Drive
2x onboard LAN 1 Gb/s
1x Dual Port LAN 1 Gb/s

Tier B

PRIMERGY RX300 S6
2x Intel Xeon X5690 3.46 GHz
96 GB Memory
2x 73 GB 15k rpm SAS Drives
4x 146 GB 10k rpm SAS Drives
4x 500 GB 7.2k rpm SATA
Drives
2x onboard LAN 1 Gb/s
Onboard SAS RAID Controller
5x SAS RAID Controller

Storage

1x PRIMECENTER Rack
5x ETERNUS JX40
120x 64 GB SSD Drives
Drives
5x FibreCAT SX40
12x 73 GB 15k rpm SAS Drives
5 FibreCAT SX40
12x 146 GB 15k rpm SAS
Drives

Hardware Configuration

A description of the steps taken to configure all the hardware must be reported in the Report (9.3.1.4).

Driver

The driver systems are not part of the System Under Test (SUT) and priced configuration. One system was connected with system Tier A onboard LAN controller using 2 x 1 Gb/s Ethernet. There are two LAN segments for these connections.

Tier A

The Tier A server is a Fujitsu PRIMERGY RX200 S6 with one Intel Xeon E5640 Quad-Core Processor and 6 GB of memory. One SAS 73 GB 15k rpm disk drive is connected to the onboard controller. One 1 Gb/s dual port Ethernet LAN card is plugged in the PCI-E slots. Each of the two ports is directly connected with one of the 1 Gb/s Ethernet onboard LAN ports of Tier B using a LAN crossover cable. There are two LAN segments for these connections.

Tier B

The Tier B or database server is a Fujitsu PRIMERGY RX300 S6 with two Intel Xeon X5690 Six-Core Processors and 96 GB memory. Ten of the twelve 2.5" disk bays are used with 2x SAS 73 GB 15k rpm disk drives RAID1 for OS and database, 4x SAS 146GB 10k rpm disk drives RAID10 for database log and 4x SATA 500GB 7.2k rpm for database data. All drives are connected to a LSI SAS RAID Controller and configured with the MegaRAID BIOS Configuration Utility (enter with <CTRL>H at boot). Five RAID controllers LSI MegaRAID SAS9280-8e with 512MB cache are used to connect the external disk drives to the server. The controller cache is configured with Write Through. The LAN connection of the two onboard 1 Gb/s Ethernet ports is described above.

Storage

5 Fujitsu ETERNUS JX40 are used, each with 24x 64GB SSD 2.5" RAID5. The enclosures are connected to the LSI MegaRAID SAS9280-8e. For details see table 2-2 Disk Configuration. The disk configuration can be done with the MegaRAID BIOS Configuration Utility or ServerView RAID Manager, which is shipped on ServerStart DVD together with the Server.

Software Configuration

A description of the steps taken to configure all the software must be reported in the Report (9.3.1.5).

The default installation of the operating system was executed on Tier A and B as well as the installation of the database SW on Tier B. Information about changes to the software, settings and BenchCraft can be found in the SupportingFiles directory Introduction - Software.

Clause 2: Database Design, Scaling and Population

Database Creation

A description of the steps taken to create the database for the Reported Throughput must be reported in the Report (9.3.2).

The physical organization of tables and indices, within the database, must be reported in the Report. (9.3.2.1)

The database has been created for 640,000 customers. The SQL Server scripts and setup command files are included in the SupportingFiles\Clause2 folder. One file group is used for all tables and indices. The distribution is shown in table 2-1. For creating the database additional storage was assigned to the database (see Figure 1-2 Measured Configuration) and removed at the end before backing up the database.

Partitioning

While few restrictions are placed upon horizontal or vertical partitioning of tables and rows in the TPC-E benchmark (see Clause 2.3.3), any such partitioning must be reported in the Report.(9.3.2.2)

There is no partitioning implemented in this configuration.

Replication and Duplicated Attributes

Replication of tables, if used, must be reported in the Report (9.3.2.3).

Additional and/or duplicated attributes in any table must be reported in the Report along with a statement on the impact on performance (9.3.2.4).

There is no replication implemented in this configuration.
No duplications or additional attributes were used.

Cardinality of Tables

The cardinality (e.g. the number of rows) of each table, as it existed after database load (see Clause 2.6), must be reported in the Report (9.3.2.5).

The database was configured for 640,000 customers. The cardinality of the tables after database load is as shown in the following table 2-1.

Table 2-1: Table Cardinality and File Groups

Table	Cardinality after database load	File Group
ACCOUNT_PERMISSION	4543832	1
ADDRESS	960004	1
BROKER	6400	1
CASH_TRANSACTION	10174433074	1
CHARGE	15	1
COMMISSION_RATE	240	1
COMPANY	320000	1
COMPANY_COMPETITOR	960000	1
CUSTOMER	640000	1
CUSTOMER_ACCOUNT	3200000	1
CUSTOMER_TAXRATE	1280000	1
DAILY_MARKET	572112000	1
EXCHANGE	4	1
FINANCIAL	6400000	1
HOLDING	566173652	1
HOLDING_HISTORY	14821230360	1
HOLDING_SUMMARY	31833493	1
INDUSTRY	102	1
LAST_TRADE	438400	1
NEWS_ITEM	640000	1
NEWS_XREF	640000	1
SECTOR	12	1
SECURITY	438400	1
SETTLEMENT	11059200000	1
STATUS_TYPE	5	1
TAXRATE	320	1
TRADE	11059200000	1
TRADE_HISTORY	26542129188	1
TRADE_REQUEST	0	1
TRADE_TYPE	5	1
WATCH_ITEM	64058729	1
WATCH_LIST	640000	1
ZIP_CODE	14741	1

Distribution of Tables, Partitions and Logs

The distribution of tables, partitions and logs across all media must be explicitly depicted for the measured and Priced Configurations (9.3.2.6).

Table 2-2: Disk Configuration

HBA - Port	Disk	Drives	Partition	Size	Use
Ctrl 0	0 – onboard	2x73GB 15K SAS, RAID1	C:\	68 GB	OS, DB
	1 – onboard	4x146GB 10K SAS, RAID10	L:\	272 GB	DB Log
	2 – onboard	4x500GB 7.2K SATA, RAID5	C:\jp\addsize	1396 GB	DB Data
Ctrl 1 Port 0	3 – JX40	24x64GB SSD, RAID5	C:\jp\tpce01	1360 GB	Filegroup1
Ctrl 1 Port 1	4 – SX40	12x146GB, 15K SAS, RAID0	C:\jp\help01	1635 GB	DB setup Backup
	5 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help02	814 GB	DB setup Backup
Ctrl 2 Port 0	6 – JX40	24x64GB, SSD, RAID5	C:\jp\tpce02	1360 GB	Filegroup1
Ctrl 2 Port 1	7 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help04	814 GB	DB setup Backup
	8 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help04	814 GB	DB setup Backup
Ctrl 3 Port 0	9 – JX40	24x64GB, SSD, RAID5	C:\jp\tpce03	1360 GB	Filegroup1
Ctrl 3 Port 1	10 – SX40	12x146GB, 15K SAS, RAID0	C:\jp\help05	1635 GB	DB setup Backup
	11 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help06	814 GB	DB setup Backup
Ctrl 4 Port 0	12 – JX40	24x64GB, SSD, RAID5	C:\jp\tpce04	1360 GB	Filegroup1
Ctrl 4 Port 1	13 – SX40	12x146GB, 15K SAS, RAID0	C:\jp\help07	1635 GB	DB setup Backup
	14 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help08	814 GB	DB setup Backup
Ctrl 5 Port 0	15 – JX40	24x64GB, SSD, RAID5	C:\jp\tpce05	1360 GB	Filegroup1
Ctrl 5 Port 1	16 – SX40	12x146GB, 15K SAS, RAID0	C:\jp\help09	1635 GB	DB setup Backup
	17 – SX40	12x73GB, 15K SAS, RAID0	C:\jp\help10	814 GB	DB setup Backup

Database Interface, Data Model and Load Methodology

A statement must be provided in the Report that describes:

The Database Interface (e.g., embedded, call level) and access language (e.g., SQL, COBOL read/write) used to implement the TPC-E Transactions. If more than one interface / access language is used to implement TPC-E, each interface / access language must be described and a list of which interface /access language is used with which Transaction type must be reported.

The data model implemented by the DBMS (e.g., relational, network, hierarchical) (9.3.2.7).

The methodology used to load the database must be reported in the Report (9.3.2.8).

Microsoft SQL Server 2008 R2 Enterprise x64 Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C++ code using the Microsoft ODBC interface.

The methodology used to load the database is described in Clause2 of the SupportingFiles directory.

Clause 3: Transactions

Vendor-Supplied Code

A statement that vendor-supplied code is functionally equivalent to Pseudo-code in the specification (see Clause 3.2.1.6) must be reported in the Report (9.3.3.1).

The vendor supplied code is functionally equivalent to the pseudo-code.

Database Footprint Requirements

A statement that the database footprint requirements (as described in Clause 3.3) were met must be reported in the Report (9.3.3.2).

Database footprint requirements were met as described in the specification.

Clause 4: SUT, Driver and Network

Network Configuration

The Network configurations of both the measured and Priced Configurations must be described and reported in the Report. This includes the mandatory Network between the Driver and Tier A (see Clause 4.2.2) and any optional Database Server interface networks (9.3.4.2):

Figures 1-1 and 1-2 show the configuration of the measured and priced configurations. Both are identical in case of the network configuration. Tier B system PRIMERGY RX300 S6 has onboard Ethernet controllers with two 1Gb/s ports. Tier A system PRIMERGY RX200 S6 has an onboard Ethernet controller with two 1Gb/s ports used for driver system connection. Tier A system was extended with one dual-port 1Gb/s Ethernet controller card. These two ports were directly connected with the two onboard ports of Tier B using different LAN segments.

Clause 5: EGen

EGen Version

The version of EGen used in the benchmark must be reported (9.3.5.1).

The EGen version used was 1.12.0.

EGen Code

A statement that all required TPC-provided EGen code was used in the benchmark must be reported (9.3.5.2).

All the required TPC-provided code was used in the benchmark.

EGen Modifications

If the Test Sponsor modified EGen, a statement EGen has been modified must be reported in the Report. All formal waivers from the TPC documenting the allowed changes to EGen must also be reported in the Report (see Clause 5.3.7.1). If any of the changes to EGen do not have a formal waiver that must also be reported (9.3.5.3).

If the Test Sponsor extended EGenLoader (as described in Appendix A.6), the use of the extended EGenLoader and the audit of the extension code by an Auditor must be reported (9.3.5.4).

There were no modifications to the EGen. EGenLoader was not extended for this benchmark.

Clause 6: Performance Metrics and Response time

EGen Driver

The number of EGenDriverMEE and EGenDriverCE instances used in the benchmark must be reported in the Report (see Clause 6.2.5) (9.3.1.1).

One Tier A system was used and configured to drive 4 EGenDriverMEE and 4 EGenDriverCE instances.

Measured Throughput


The Measured Throughput must be reported in the Report (see Clause 6.7.1.2) (9.3.6.2).

The measured throughput was **1268.30 tpsE**.

Test Run Graph

A Test Run Graph of throughput versus elapsed wall clock time must be reported in the Report for the Trade-Result Transaction (see Clause 6.7.2) (9.3.6.3).

Figure 6-1: Test Run Graph

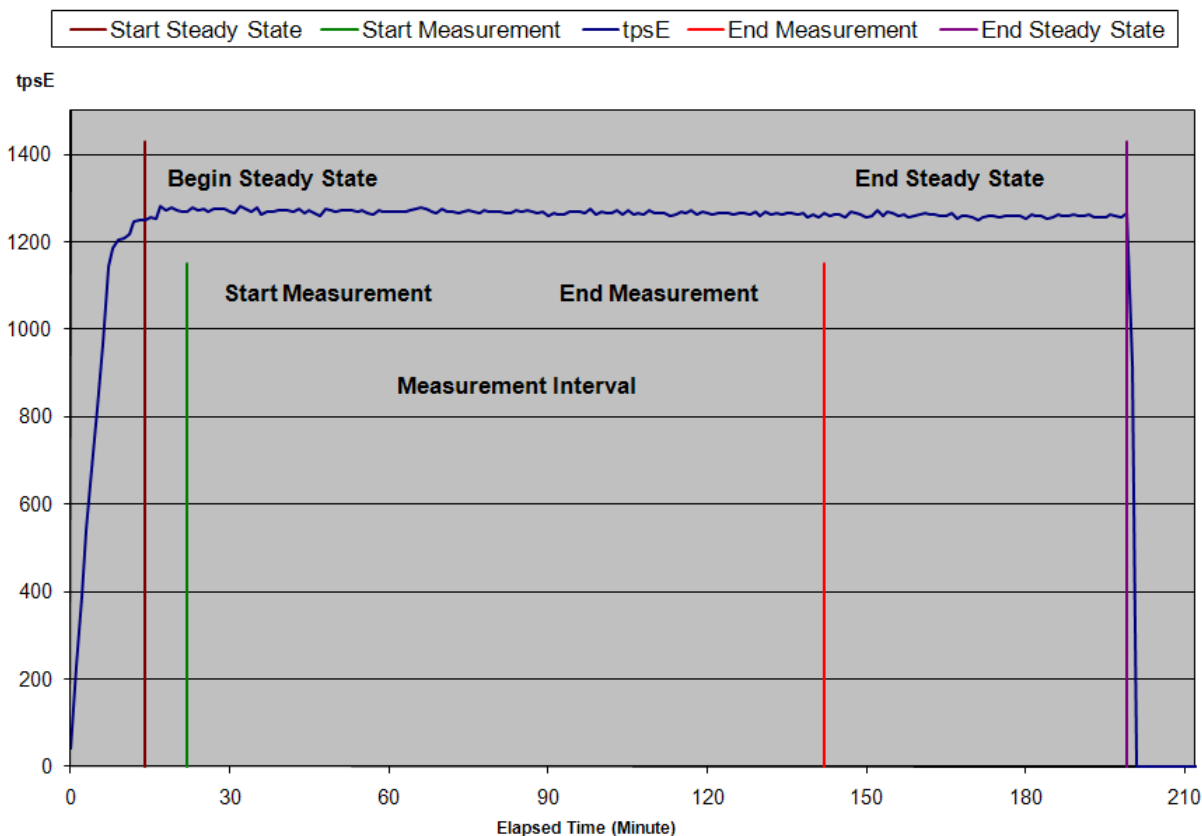

Steady State

The method used to determine that the SUT had reached a Steady State prior to commencing the Measurement Interval must be reported in the Report (9.3.6.4).

During the run the tpsE throughput was observed to determine steady state. After the run steady state was confirmed by:

1. Looked at the Test Run Graph and verified that tpsE was steady prior to commencing the Measurement Interval.
2. Calculated 60 minute average tpsE during the Steady State moving the time window 10 minutes each time. Then confirmed that the minimum 60 minute average tpsE was not less than 98% of the Reported Throughput, and that the maximum 60 minute average tpsE was not greater than 102% of the Reported Throughput.
3. Calculated 10 minute average tpsE during the Steady State moving the window 1 minute each time. Then confirmed that the minimum 10 minute average tpsE was not less than 80% of the Reported Throughput, and that the maximum 10 minute average tpsE was not greater than 120% of the Reported Throughput.
4. Two completed full checkpoints were completed prior to the Measurement Interval.

Work Performed During Steady State

A description of how the work normally performed during a Test Run, actually occurred during the Measurement Interval must be reported in the Report (for example checkpointing, writing Undo/Redo Log records, etc.) (9.3.6.5).

The Microsoft SQL Server recovery interval parameter was set to the maximum allowable value to perform checkpoint at specific intervals. Checkpoints were automatically issued at specified intervals (447 seconds) and specified duration (417 seconds). SQL Server was started with trace flag 3502, which caused it to log the occurrence of the checkpoints. This information was used to verify that the checkpoints occurred at the appropriate times and duration during steady state.

Transaction Input Parameter Averages

The recorded averages over the Measurement Interval for each of the Transaction input parameters specified by clause 6.4.1 must be reported (9.3.6.6).

Table 6-2: Transaction Input Parameter Averages.

Transaction	Parameter	Range Min	Range Max	Value	Check
Customer Position	By Tax ID	48.00%	52.00%	49.99%	Ok
	Get History	48.00%	52.00%	50.01%	Ok
	Overall				Ok
Market Watch	By Watch List	57.00%	63.00%	60.01%	Ok
	By Customer Account	33.00%	37.00%	35.00%	Ok
	By Industry	4.50%	5.50%	4.99%	Ok
	Overall				Ok
Security Detail	Access LOB	0.90%	1.10%	1.00%	Ok
	Overall				Ok
Trade Lookup	Frame 1	28.50%	31.50%	30.05%	Ok
	Frame 2	28.50%	31.50%	29.97%	Ok
	Frame 3	28.50%	31.50%	29.98%	Ok
	Frame 4	9.50%	10.50%	10.00%	Ok
	Overall				Ok
Trade Update	Frame 1	31.00%	35.00%	32.98%	Ok
	Frame 2	31.00%	35.00%	33.01%	Ok
	Frame 3	32.00%	36.00%	34.01%	Ok
	Overall				Ok
Trade Order	By Non-Owner	9.50%	10.50%	9.99%	Ok
	By Company Name	38.00%	42.00%	40.01%	Ok
	Buy On Margin	7.50%	8.50%	8.02%	Ok
	Rollback	0.94%	1.04%	0.99%	Ok
	LIFO	33.00%	37.00%	35.01%	Ok
	Trade Qty 100	24.00%	26.00%	25.01%	Ok
	Trade Qty 200	24.00%	26.00%	24.97%	Ok
	Trade Qty 400	24.00%	26.00%	25.03%	Ok
	Trade Qty 800	24.00%	26.00%	24.99%	Ok
	Market Buy	29.70%	30.30%	30.00%	Ok
	Market Sell	29.70%	30.30%	29.99%	Ok
	Limit Buy	19.80%	20.20%	20.00%	Ok
	Limit Sell	9.90%	10.10%	10.00%	Ok
	Stop Loss	9.90%	10.10%	10.01%	Ok
Overall				Ok	

Clause 7: Transaction and System Properties

ACID Tests

The results of the ACID tests must be reported in the Report along with a description of how the ACID requirements were met, and how the ACID tests were run (9.3.7.1).

The TPC Benchmark™ E Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation and Durability (ACID). This section quotes the specification definition of each of those properties and describes the tests done as specified and monitored by the auditor, to demonstrate compliance. See also file MSTPCE ACID Procedures.pdf in the SupportingFiles directory.

Redundancy Level and Data Accessibility

The Test Sponsor must report in the Report the Redundancy Level (see Clause 7.5.7.1) and describe the Data Accessibility test(s) used to demonstrate compliance (9.3.7.2).


A Data Accessibility Graph for each run demonstrating a Redundancy Level must be reported in the Report (see Clause 7.5.7.2) (9.3.7.3).

Redundancy Level 1 was used for the storage system. To prove Redundancy Level 1, the following steps were successfully performed on a database data and log disk. The test for Redundancy Level 1 is the test for Permanent Irrecoverable Failure of any single Durable Medium. The different steps and the various states of the two disks are reported by ServerView RAID and written to the system event (see SupportingFiles).

1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting Transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 5 minutes.
3. Induce the failure described for the redundancy level being demonstrated. In this case fail a disk in a database data array. The transactions continue since RAID5 is used for at least 5 minutes above 95% of reported throughput.
4. Induce the failure described for the redundancy level being demonstrated. In this case fail a disk in the database log array. The transactions continue since RAID10 is used for at least 5 minutes above 95% of reported throughput.
5. Begin the necessary recovery process, by replacing the failed drives in the database log array and start the rebuild.
6. Begin the necessary recovery process, by replacing the failed drives in the database data array and start the rebuild process.
7. Continue running the Driver for at least 20 minutes with throughput above 95% of reported throughput.
8. Terminate the run gracefully from the Driver.
9. Wait until rebuild process has finished.
10. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
11. Run the evaluation of Trade-Result Transactions executed and compare it with the difference of the SETTLEMENT rows counted. The two numbers matched.

The Graph in Figure 7-1 show the measured throughput versus time and the different test stated.

Figure 7-1: Redundancy Level and Data Accessibility Graph

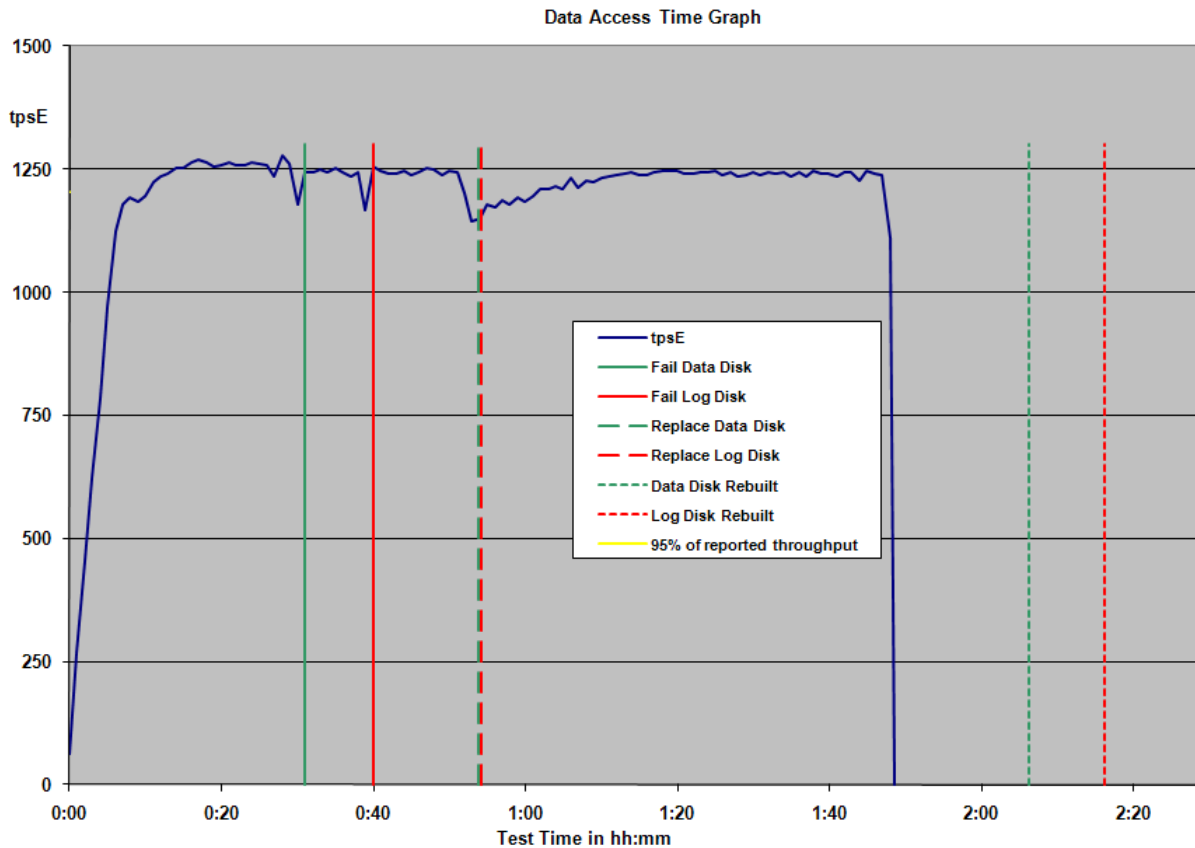

Business Recovery

The Test Sponsor must describe in the Report the test(s) used to demonstrate Business Recovery (9.3.4.7). The Business Recovery Time must be reported on the Executive Summary Statement and in the Report. If the failures described in Clauses 7.5.2.2, 7.5.2.3 and 7.5.2.4 were not combined into one Durability test (usually powering off the Database Server during the run), then the Business Recovery Time for the failure described for instantaneous interruption is the Business Recovery Time that must be reported in the Executive Summary Statement. All the Business Recovery Times for each test requiring Business Recovery must be reported in the Report (9.3.7.6). 9.3.7.6 The Business Recovery Time Graph (see Clause 7.5.7.4) must be reported in the Report for all Business Recovery tests (9.3.7.7).

The tests for "Instantaneous interrupt," "Failure of all or part of memory," and "Loss of external power to the SUT" were combined by power off Tier A and B.


1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes.
3. Induce the failures by power off Tier B and Tier A.
4. On the driver side the number of MEE connections is captured and after transaction failures is noted by the drivers, terminate the run and collect the data for Pre-Failure Run.
5. Re-power and restart Tier B and Tier A.
6. When restarting the database on Tier B, it automatically starts the recovery and records timestamps. The Database Recovery Time was 00:09:48 (hh:mm:ss).
7. After recovery has completed Trade-Cleanup has been executed. A new run started again submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes. The Application Recovery Time was 00:11:28 (hh:mm:ss).

8. Terminate the run gracefully from the Driver and collect the data for Post-Failure Run.
9. Verify that there are no errors in the Post-Failure run and check the consistency of the database as specified in Clause 7.3.1.1.
10. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
11. Run the evaluation of Trade-Result Transactions executed in both runs and compare it with the difference of the SETTLEMENT rows counted. The difference was less than the maximum number of Transactions which can be simultaneously in-flight from the Driver to the SUT.

The Business Recovery Time (per Clause 7.5.7 Step15) was 00:21:16 (hh:mm:ss).

The Graph in Figure 7-2 shows the measured throughput versus time and the Business Recovery.

Figure 7-2: Business Recovery Graph

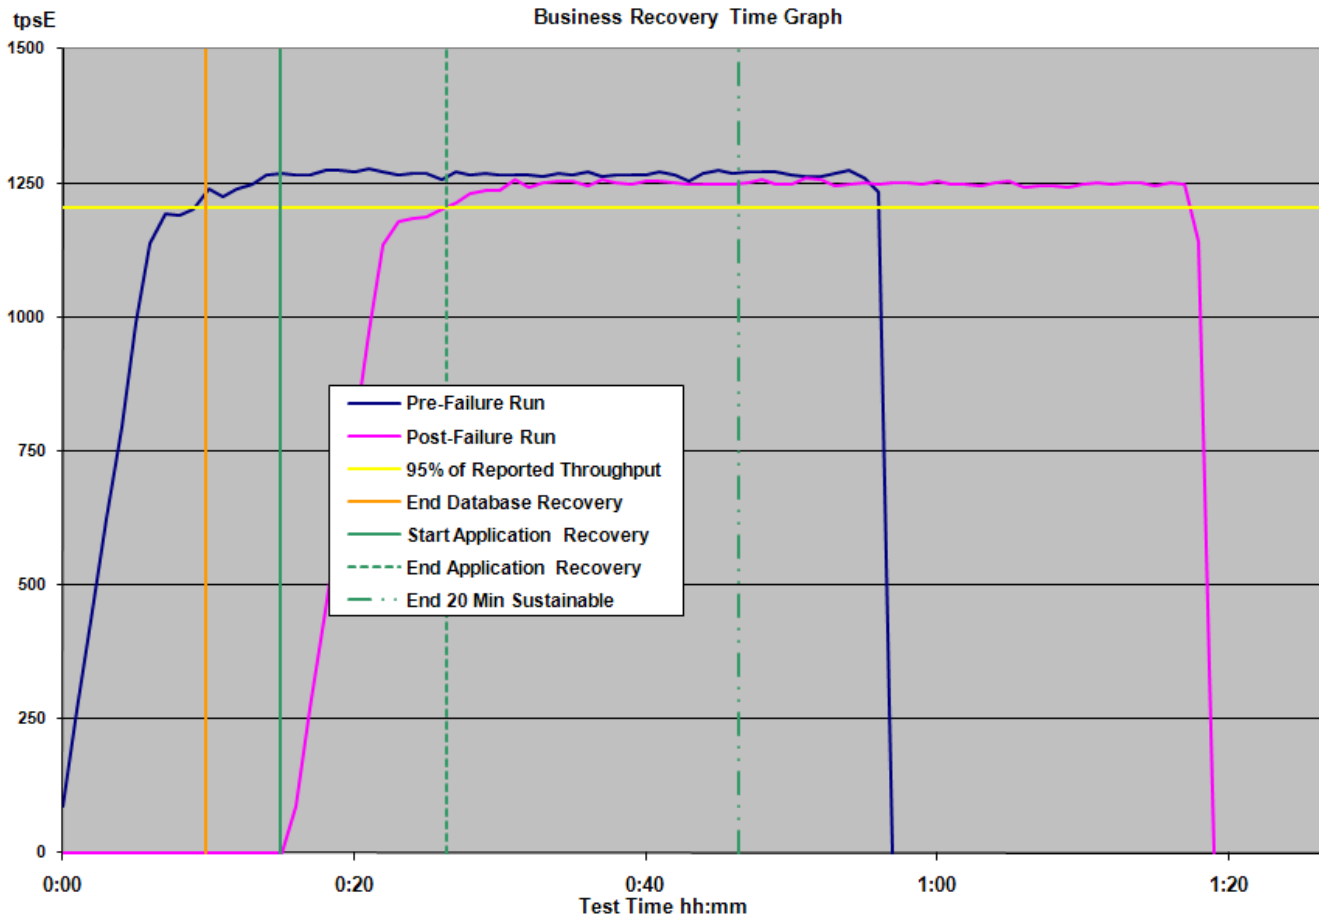

Clause 8: Pricing Related Items

60-Day Space

Details of the 60-Day Space computations along with proof that the database is configured to sustain a Business Day of growth must be reported (9.3.8.1).

Table 8-1: Space Requirements

		TPC-E Disk Space Requirements							
Customers Used	640,000								
Performance	1268.30	TpsE	settlements after 8 hours (Business Day)				36,527,040		
Table	Initial Rows	Data (KB)	Index size (KB)	Extra 5% (KB)	Total + 5% (KB)	initial size	grow size	Growth (KB)	
						After run (KB)			
ACCOUNT_PERMISSION	4543832	250160	1616	12589	264365	251800		24	
ADDRESS	960004	55328	672	2800	58800	56080		80	
BROKER	6400	472	584	53	1109	1056		0	
CASH_TRANSACTION	10174433074	1049231936	2211520	52572173	1104015629	1054105536		2662080	
CHARGE	15	8	8	1	17	16		0	
COMMISSION_RATE	240	16	16	2	34	32		0	
COMPANY	320000	67944	18784	4336	91064	86728		0	
COMPANY_COMPETITOR	960000	25736	20864	2330	48930	46600		0	
CUSTOMER	640000	104832	27600	6622	139054	132488		56	
CUSTOMER_ACCOUNT	3200000	289904	62016			351920		0	
CUSTOMER_TAXRATE	1280000	26648	464	1356	28468	27264		152	
DAILY_MARKET	572112000	26629816	76952	1335338	28042106	26708240		1472	
EXCHANGE	4	8	8	1	17	16		0	
FINANCIAL	6400000	721160	2312	36174	759646	723824		352	
HOLDING	566173652	37639672	23798432	3071905	64510009	62337232		899128	
HOLDING_HISTORY	14821230360	538953880	311514696	42523429	892992005	853425168		2956592	
HOLDING_SUMMARY	31833493	1381280	5304	69329	1455913	1386584		0	
INDUSTRY	102	8	24	2	34	32		0	
LAST_TRADE	438400	27104	472	1379	28955	27576		0	
NEWS_ITEM	640000	69431552	1664			69433216		0	
NEWS_XREF	640000	15896	392	814	17102	16288		0	
SECTOR	12	8	24	2	34	32		0	
SECURITY	438400	60216	15904	3806	79926	76152		32	
SETTLEMENT	11059200000	527345168	1111720	26422844	554879732	529952216		1495328	
STATUS_TYPE	5	8	8	1	17	16		0	
TAXRATE	320	24	16	2	42	56		16	
TRADE	11059200000	1317968736	661881872	98992530	2078843138	1986836400		6985792	
TRADE_HISTORY	26542129188	798259568	2081088	40017033	840357689	803061408		2720752	
TRADE_REQUEST	0	8	56	3	67	106240		106176	
TRADE_TYPE	5	8	1032	52	1092	1040		0	
WATCH_ITEM	64058729	1776288	6728	89151	1872167	1783304		288	
WATCH_LIST	640000	15904	12872	1439	30215	28776		0	
ZIP_CODE	14741	488	96	29	613	584		0	
		Initial Database Size				Settlements		14,928,522	
		5,247,203 (MB)				Grown Database Size			
		5,124 (GB)				5,264,613 (MB)			
DB filegroups	partition size (MB)	file size (MB)	alloc total (MB)	loaded (MB)	loaded +5% (MB)	after run (MB)	Business Day (MB)		
	5	1,392,512	1,390,000	6,962,560	5,247,203	5,509,563	5,264,613	5,289,803	
		Number of disks	120						
		Disk Capacity (MB)	60,544						
		RAIDS Overhead	4%						
Initial Growing Space (MB)	5,149,790	Total Space (MB)	6,962,560						
Final Growing Space (MB)	5,167,198	Number of disks	4	Initial Log Size (MB)	3,638	Log units	1		
Delta (MB)	17,408	Disk Capacity (MB)	476,416	Final Log Size (MB)	103,522	Disks per unit	4		
Data Space per Trade (MB)	0.001166	RAIDS Overhead	33%	Log Growth (MB)	99,884	Disk Capacity (MB)	139,488		
1 Day Data Growth (MB)	42,594	Total Space (MB)	1,270,443	Log Space per Trade	0.006691	RAID10 Overhead	50.0%		
60 Day Space (MB)	7,802,840	Total Space (MB)	8,233,003	1 Day Log Space (MB)	244,395	Log Space (MB)	278,976		

Attestation Letter

The Auditor's Attestation Letter, which indicates compliance, must be included in the Report (9.3.8.2).



Benchmark Sponsors: Detlev Seidel
Primary TPC Representative
Fujitsu Technology Solutions
Heinz-Nixdorf-Ring 1
33106 Paderborn, Germany

January 28, 2011

I verified the TPC Benchmark™ E performance and the TPC-Energy measurement of the following configuration:

Platform: PRIMERGY RX300 S6
Operating system: Microsoft Windows Server 2008 R2 Enterprise x64 Edition
Database Manager: Microsoft SQL Server 2008 R2 Enterprise x64 Edition

The TPC-E results were:

CPU's Speed	Memory	Disks	Trade-Result 90% Response Time	tpsE
Tier B: PRIMERGY RX300 S6				
2 x Intel Xeon X5690 (3.46 GHz)	96 GB (12 MB L2)	2 x 73 GB 15Krpm SAS (int.) 4 x 146 GB 10Krpm SAS (int.) 120 x 64 GB SSD SATA 4 x 500 GB 7.2Krpm SATA (int.)	0.18 Seconds	1,268.30
Tier A: PRIMERGY RX200 S6				
1 x Intel Xeon E5640 (2.66GHz)	6 GB (12 MB L2)	1 x 73 GB 15Krpm SAS	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC-E benchmark requirements and the following verification items were given special attention:

- All EGen components were verified to be v1.12.0
- The transactions were correctly implemented.
- The database was properly scaled and populated for 640,000 Customers.
- The mandatory network between the driver and the SUT was configured.
- The ACID properties were met.

- Input data was generated according to the specified percentages.
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums.
- The measurement interval was representative of steady state conditions.
- The reported measurement interval was 120 minutes.
- The implementation used Redundancy Level 1.
- The Business Recovery Time of 00:21:16 was correctly measured.
- The 60 day storage requirement was correctly computed and configured.
- The system pricing was verified for major components and maintenance.

The TPC-Energy measurements were:

TPC-Energy Metric	REC Idle Power	Average REC Power	Temperature
0.93 Watts/tpsE	781.93 Watts	1,181.44 Watts	20.81 C


In my opinion, these energy measurements were produced in compliance with the TPC-Energy benchmark requirements and the following verification items were given special attention:

- The power analyzers used met the benchmark requirements and were correctly calibrated.
- The primary metric, secondary metrics and the idle power were calculated correctly.
- Version 1.2.0 of the EMS software package was used.

Additional Audit Notes:

The temperature reporting by the PTDM showed some jitter. An examination of the PTDM log showed that all samples were correctly measured and that none were below the required minimum of 20 degree.

Respectfully Yours,



François Raab, President

Clause 9: Supporting Files

Supporting Files Index table

An index for all files required by Clause 9.4 Supporting Files must be provided in the Report. The Supporting Files index is presented in a tabular format where the columns specify the following:

- The first column denotes the clause in the TPC Specification
- The second column provides a short description of the file contents
- The third column contains the path name for the file starting at the SupportingFiles directory.

If there are no Supporting Files provided then the description column must indicate that there is no supporting file and the path name column must be left blank (9.3.9.1).

Clause	Description	Path	Filename
	overview	SupportingFiles	SupportingFiles.doc
Introduction	System Configuration	SupportingFiles/Introduction/	SysInfo_TierA.txt SysInfo_TierB.txt
	Disk Configuration	SupportingFiles/Introduction/Hardware/	DiskConfiguration.doc flatfilelocations.txt makehelpdirff.cmd Readme.txt Remove_Addon_Files.sql tempdb10.sql
	Parameter OS Tunables Database Setup	SupportingFiles/Introduction/Software/	CountOperations.reg MemoryManagement.reg MSTPCE Database Setup Reference.docx SQL_IP.reg SQL_Nodes.reg SQL_Server_Configuration.ver sqlservr_LargePages.reg
	Startup Scripts Tier A	SupportingFiles/Introduction/Software/	start_all_RX300.cmd start_CE1_RX300S6.cmd start_CE2_RX300S6.cmd start_CE3_RX300S6.cmd start_CE4_RX300S6.cmd start_MEE1_RX300S6.cmd start_MEE2_RX300S2.cmd start_MEE3_RX300S6.cmd start_MEE4_RX300S2.cmd
	Startup Scripts Tier B	SupportingFiles/Introduction/Software/	sqlstartR2.cmd
Clause 2	Create Database	SupportingFiles/Clause2	Backup_Database.sql Checkpoint_TPCE_Database.SQL Count_Customers.sql Create_Database.sql Create_DM_Audit_Table.sql Create_TID_Ranges_Table.sql Create_Timer_Table.sql Create_TL_TU_Warnings_Table.sql Create_TPCE_VERSIONS_Table.sql Database_Options_1.sql Database_Options_2.sql Drop_and_Create_TPCE_INFO.sql End_Load_Timer.sql Get_Next_T_ID.sql Install_Load_Timer_Proc.sql Load_TPCE_Info.sql Output_TPCE_VERSIONS_Table.SQL Remove_Database.sql Restore_Database.sql SQL_Server_Configuration.sql tempdb10.sql TPCE_Setup.cmd Trade_Cleanup.cmd

			Trade_Cleanup.sql Version.sql
Create Database output	SupportingFiles/Clause2/DB_setup		640000Customers_Load_Timer1.log 640000Customers_Load_Timer2.log 640000Customers_Load_Timer3.log Backup_Database.log BrokerVolume.log BulkInsert_1.out ... BulkInsert_24.out Check_Constraints_Fixed.log Check_Constraints_Growing.log Check_Constraints_Scaling.log Convert_NI_ITEM_Data.log Create_DB_Audit_Tables.log Create_DM_Audit_Tables.log Create_Indexes_Fixed_Tables.log Create_Indexes_Growing_Tables.log Create_Indexes_Scaling_Tables.log Create_TID_Ranges_Table.log Create_TL_TU_Warnings_Table.log Create_TPCE_VERSIONS_Table.log CreateDB.log CustomerPosition.log Database_Options_1.log Database_Options_2.log DataMaintenance.log DB_Build_Steps1.log DB_Build_Steps2.log DB_Build_Steps3.log DB_Check.log DB_FK_Constraints.log DB_Primary_Key_Check.log DB_RI_Check.log DB_Tables.log Drop_DB_Audit_Tables.log Drop_Fixed_Tables.log Drop_FK_Constraints.log Drop_Growing_Tables.log Drop_Scaling_Tables.log EGenLoaderFrom1To27000.log EGenLoaderFrom27001To53000.log EGenLoaderFrom613001To640000.log ERRORLOG.txt FK_Constraints.log Get_Next_T_ID.log Insert_Duplicates_Tests.log Load_Timer.log Load_Timer_Proc.log Load_TPCE_Info.log MarketFeed.log MarketWatch.log Referential_Integrity_Tests.log Remove_Addon_Files.sql RemoveDB.log SecurityDetail.log spfiles.ver spfiles_setup.ver splog.ver spused.ver spused_setup.ver SQL_Server_Configuration.log Tables_Fixed.log Tables_Growing.log Tables_Scaling.log TPCE_Types.log TPCE_VERSIONS1.log TPCE_VERSIONS2.log TPCE_VERSIONS3.log TradeLookup.log TradeOrder.log

			TradeResult.log TradeStatus.log TradeUpdate.log Version1.log Version2.log Version3.log
	Index Creation Scripts	SupportingFiles/Clause2/DDL	BulkInsert_<1..24>.sql Convert_NI_ITEM_Data.SQL Create_Check_Constraints_Fixed.sql Create_Check_Constraints_Growing.sql Create_Check_Constraints_Scaling.sql Create_FK_Constraints.sql Create_Indexes_Fixed.sql Create_Indexes_Growing.sql Create_Indexes_Scaling.sql Create_Tables_Fixed.sql Create_Tables_Growing.sql Create_Tables_Scaling.sql Create_Tables_Scaling_Flat.sql Create_TPCE_Types.sql Drop_FK_Constraints.sql Drop_Tables_Fixed.sql Drop_Tables_Growing.sql Drop_Tables_Scaling.sql
	Database Audit Scripts	SupportingFiles/Clause2/Audit_Scripts/Database	Create_DB_Audit_Tables.SQL DB_Check.sql DB_FK_Constraints.sql DB_Primary_Key_Check.SQL DB_Tables.sql Drop_DB_Audit_Tables.SQL Insert_Duplicates_Tests.sql Referential_Integrity_Tests.sql
	Database Space Scripts	SupportingFiles/Clause2/Audit_Scripts/Space	SPFiles.sql SPLog.sql SPUsed.sql
Clause3	Transaction Frames	SupportingFiles/Clause3	BrokerVolume.sql CustomerPosition.sql DataMaintenance.sql MarketFeed.sql MarketWatch.sql SecurityDetail.sql TradeLookup.sql TradeOrder.sql TradeResult.sql TradeStatus.sql TradeUpdate.sql
	BaseServer	SupportingFiles/Clause3/BaseServer	BaseServer.cpp BaseServer.h BaseServer.vcproj stdafx.cpp stdafx.h SUTServersLocals.h
	SUT_CE_Server	SupportingFiles/Clause3/SUT_CE_Server	Release\SUT_CE_Server.exe CEServer.cpp CEServer.h CEServerMain.cpp PortDefinitions.h stdafx.cpp stdafx.h SUT_CE_Server.vcproj SUTServer.sln SUTStructs.h
	SUT_MEE_Server	SupportingFiles/Clause3/SUT_MEE_Server	Release\SUT_MEE_Server.exe MEEServer.cpp MEEServer.h MEEServerMain.cpp stdafx.cpp stdafx.h SUT_MEE_Server.vcproj
	TransactionsSP	SupportingFiles/Clause3/TransactionsSP	BrokerVolumeDB_SP.cpp BrokerVolumeDB_SP.h

			CheckpointDB_SP.cpp CheckpointDB_SP.h CustomerPositionDB_SP.cpp CustomerPositionDB_SP.h DataMaintenanceDB_SP.cpp DataMaintenanceDB_SP.h MarketFeedDB_SP.cpp MarketFeedDB_SP.h MarketWatchDB_SP.cpp MarketWatchDB_SP.h SecurityDetailDB_SP.cpp SecurityDetailDB_SP.h stdafx.cpp stdafx.h TradeLookupDB_SP.cpp TradeLookupDB_SP.h TradeOrderDB_SP.cpp TradeOrderDB_SP.h TradeResultDB_SP.cpp TradeResultDB_SP.h TradeStatusDB_SP.cpp TradeStatusDB_SP.h TradeUpdateDB_SP.cpp TradeUpdateDB_SP.h TransactionsSP.vcproj TxnHarnessDBBase.cpp TxnHarnessDBBase.h TxnHarnessDBConn.cpp TxnHarnessDBConn.h
	TxnHarness	SupportingFiles/Clause3/TxnHarness	TxnHarness.vcproj TxnHarness_stdafx.cpp TxnHarness_stdafx.h TxnHarnessSendToMarket.cpp TxnHarnessSendToMarket.h
Clause4			
Clause5	EGen Driver Configuration	SupportingFiles/Clause5	RX300S6_640KCus_4x79_4x80X1user_spidera_RT E01.xml
	EGenLoader Parameter	SupportingFiles/Clause5	BuildSteps1.log BuildSteps2.log BuildSteps3.log EGenLoaderFrom1To27000.log EGenLoaderFrom27001To53000.log EGenLoaderFrom613001To640000.log
	EGenLogger Output	SupportingFiles/Clause5	TxnReportE-MI.xls
Clause6	EGenValidate	SupportingFiles/Clause6	EGenValidate.txt
Clause7	ACID	SupportingFiles/Clause7	MSTPCE ACID Procedures.docx
	ACID Procedures	SupportingFiles/Clause7/AcidProcs	AcidProc.cmd AcidProc.out Remove_AcidProcs.cmd
	ACID Scripts	SupportingFiles/Clause7/AcidProcs/Scripts	AcidProc.vbs CustomerPosition_Iso3.sql CustomerPosition_Iso4.sql Remove_AcidProcs.vbs TradeOrder_C.sql TradeOrder_Iso1_1.sql TradeOrder_Iso1_2.sql TradeOrder_Iso2.sql TradeOrder_Iso3.sql TradeOrder_Iso4.sql TradeOrder_RB.sql TradeResult_Iso1_1.sql TradeResult_Iso1_2.sql TradeResult_Iso2_1.sql TradeResult_Iso2_2.sql TradeResult_Iso3.sql TradeResult_Iso4.sql
	Atomicity	SupportingFiles/Clause7/Atomicity	Atomicity.cmd Atomicity_C.out Atomicity_RB.out

		SupportingFiles/Clause7/Atomicity/Scripts	atom.vbs Atomicity_C.sql Atomicity_RB.sql
	Consistency	SupportingFiles/Clause7/Consistency	Consistency.cmd Consistency.out
		SupportingFiles/Clause7/Consistency/Scripts	Consistency.sql Consistency.vbs
	Durability Business Recovery	SupportingFiles/Clause7/Durability/BusinessRecovery	BR_BenchCraft_Config.xml BR_Consistency.out BR_Count_Settlement1.ver BR_Count_Settlement2.ver BR_ERRORLOG_1.txt BR_ERRORLOG_2.txt BR_SystemEvents_TierB.txt BusinessRecov_Part1_step60.xlt BusinessRecov_Part1_TxnReportE_20.xls BusinessRecov_Part1_TxnReportE_all.xls BusinessRecov_Part2_step60.xlt BusinessRecov_Part2_TxnReportE_20.xls BusinessRecov_Part2_TxnReportE_all.xls BusinessRecov_TimeGraph.xls
	Durability Data Accessibility	SupportingFiles/Clause7/Durability/Data Accessibility	DA_BenchCraft_Config.xml DA_Count_Settlement1.ver DA_Count_Settlement2.ver DA_ERRORLOG.txt DataAccess_TimeGraph.xls DataAccess_TxnReportE_5min1.xls DataAccess_TxnReportE_5min2.xls DataAccess_TxnReportE_20min.xls DataAccess_TxnReportE_all.xls SystemEvents_Application.txt
	Isolation	SupportingFiles/Clause7/Isolation	Isolation1_S1.rpt Isolation1_S2.rpt Isolation1_S3.rpt Isolation1_S4.rpt Isolation2_S1.rpt Isolation2_S2.rpt Isolation2_S3.rpt Isolation2_S4.rpt Isolation3_S1.rpt Isolation3_S2.rpt Isolation3_S3.rpt Isolation4_S1.rpt Isolation4_S2.rpt Isolation4_S3.rpt
		SupportingFiles/Clause7/Isolation/Scripts	Isolation1_S1.sql Isolation1_S2.sql Isolation1_S3.sql Isolation1_S4.sql Isolation2_S1.sql Isolation2_S2.sql Isolation2_S3.sql Isolation2_S4.sql Isolation3_S1.sql Isolation3_S2.sql Isolation3_S3.sql Isolation4_S1.sql Isolation4_S2.sql Isolation4_S3.sql
Clause8	60-Day Space Calculations	SupportingFiles/Clause8	tpce_space.xls

Appendix A: Third Party Price Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

January 20, 2011

Fujitsu Technology Solutions
Detlev Seidel
Heinz Nixdorf Ring 1
Paderborn, DE 33106

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-E benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-08529	SQL Server 2008 R2 Enterprise Edition <i>Per Processor License Open Program - No Level Unit Price reflects a 2% discount from the retail unit price of \$23,848.</i>	\$23,370	2	\$46,740
P72-04219	Windows Server 2008 R2 Enterprise Edition <i>Server License with 25 CALs Open Program - No Level Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,320	1	\$2,320
P73-00352	Windows Server 2008 R2 Standard Edition <i>Server License with 10 CALs Open Program - No Level Unit Price reflects a 15% discount from the retail unit price of \$1,029.</i>	\$870	1	\$870
N/A	Microsoft Problem Resolution Services <i>Professional Support (1 Incident).</i>	\$259	1	\$259

SQL Server 2008 R2 Enterprise Edition, Windows Server 2008 R2 Enterprise Edition, and Windows Server 2008 R2 Standard Edition are currently orderable and available through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found in the Microsoft Product Information Center at <http://www.microsoft.com/products/info/render.aspx?view=22&type=how>

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$259 call.

This quote is valid for the next 90 days.

Reference ID: TPCE_qhtplyIGYLKTVUKfhijHjhiIimhMhqf85757.DOC

Appendix B: TPC-Energy Disclosure Report

TPC-Energy Clause 2-related items (Methodology)

The minimum ambient temperature must be disclosed. (7.3.2.1)

The Minimum Temperature reported by EMS : 20.81 Degrees Celsius

The characteristics of the external electric power source must be disclosed. In particular, the voltage, frequency in Hertz, and phase information must be reported. (7.3.2.2)

The external electric power source has the following characteristics: 230V, 50Hz, single phase

A statement is required that assures that nothing was done to alter the air-pressure in the measurement environment. (7.3.2.3)

Nothing was done to alter the air-pressure in the measurement environment

A description of where the temperature was measured and how it was determined that this was representative of the lowest ambient temperature is required. (7.3.2.4)

The temperature was measured for several air inlets located on different components of SUT and the lowest temperature is reported.

If a method of cooling other than circulation of ambient air is employed in the REC, a statement describing this method must be included. (7.3.2.5)

No other method of cooling was used

7.3.2.6 To be compliant with licenses associated with EMS, the following statement must be included in every FDR which contains a TPC-Energy Metric: (7.3.2.6)

The power and temperature characteristics of the MEC were measured using TPC's Energy Measurement Software (EMS). This includes the EMS-PTD, a modified version of the SPEC PTDaemon, which is provided under license from the Standard Performance Evaluation Corporation (SPEC).

TPC-Energy Clause 3-related items (Metrics)

Primary Metric. (7.3.3.1)

- 1) *The normalized work derived from the Performance Metric (as described in Clause 3.2.1) must be disclosed*
- 2) *The computation for total energy used (REC Energy Consumption) for each measurement segment that contributes to a Performance Metric must be disclosed. If the energy of the entire Priced Configuration is not derived from direct measurements, the methods for deriving the energy for components which were not measured must be disclosed (See Clause 7.3.3.4)*
- 3) *The duration of each measurement that produces a Performance Metric must be disclosed.*
- 4) *The average power requirement for each measurement that produces one of these metrics*
- 5) *The TPC-Energy Primary Metric must be disclosed, including the calculation that is used to derive it.*

PMU-1 = Tier B (Database Server)		Device: Hioki 3334		Calibrated: 07. Jun 10			
Measurement Interval		Meter		Delta		PMU Energy	
Average (watt)	532.32	% of Reading	0.20%	Reading Delta	1.0646	Accuracy Factor	0.20%
Total (watt-sec)	3,832,686.50	% of Range	0.00%	Range Delta	0.0000	Adjusted (watt-sec)	3,840,351.87
Duration (sec)	7,200	Range (watt)	900	Total Delta	1.0646	Avg Power (watt)	533.38

PMU-2 = Tier A (Application Server)		Device: Hioki 3334		Calibrated: 07. Jun 10			
Measurement Interval		Meter		Delta		PMU Energy	
Average (watt)	142.56	% of Reading	0.10%	Reading Delta	0.14	Accuracy Factor	0.31%
Total (watt-sec)	1,026,426.10	% of Range	0.10%	Range Delta	0.30	Adjusted (watt-sec)	1,029,612.51
Duration (sec)	7,200	Range (watt)	300	Total Delta	0.44	Avg Power (watt)	143.00

PMU-3 = Storage		Device: Hioki 3334		Calibrated: 07. Jun 10			
Measurement Interval		Meter		Delta		PMU Energy	
Average (watt)	485.09	% of Reading	0.20%	Reading Delta	0.97	Accuracy Factor	0.20%
Total (watt-sec)	3,492,614.00	% of Range	0.00%	Range Delta	0.00	Adjusted (watt-sec)	3,499,599.23
Duration (sec)	7,200	Range (watt)	900	Total Delta	0.97	Avg Power (watt)	486.06

PMU-4 = Monitor (Nameplate) (Misc)	
PMU Energy	
Average (watt)	19.00
Duration (sec)	7,200.00
Total Energy (watt-sec)	136,800.00

Avg REC Energy (watt)	1,181.44
Total REC Energy (watt-sec)	8,506,364
Run Duration (sec)	7,200
Reported tpsE	1,268.30
Total Transactions	9,131,760.00
Energy (watts/tpsE)	0.93

Total REC Energy Consumption = 8,506,364 watt-seconds

SUT Total Work = Run Duration * Reported tpsE

SUT Total Work = 9,131,760 transactions

8,506,364 watt-seconds / 9,131,760 transactions = 0.93 watts/tpsE

Secondary Metrics At Reported Performance. (7.3.3.2)

If the TPC-Energy Secondary Metrics are reported, the components of the REC which are included in each subsystem must be identified. This can be achieved with separate lists to be included in the FDR or with a specific designation in the price spreadsheet. Every component in the REC that consumes energy must be included in exactly one subsystem.

For each defined subsystem, the calculations defined for the TPC-Energy Secondary Metrics in Clause 3.3 must be reported, using the Performance Metric of the entire SUT and the energy consumption for each REC subsystem.

	Secondary Metrics	Additional Numerical Quantities			
	watts/tpsE	Full Load Avg Watts	Full Load % of REC	Idle Avg Watts	Idle % of REC
Database Server *)	0.42	533.38	45.15%	230.72	29.51%
Storage *)	0.38	486.06	41.14%	465.45	59.53%
Application Server *)	0.11	143.00	12.10%	85.26	10.90%
Miscellaneous *)	0.01	19.00	1.61%	0.50	0.06%
Total REC	0.93	1181.44	100.00%	781.93	100.00%

*)See pricing for list of components

Database Server:	3,840,351.87	watt-seconds /	9,131,760.00	transactions =	0.42 watts/tpsE
Storage:	3,499,599.23	watt-seconds /	9,131,760.00	transactions =	0.38 watts/tpsE
Application Server:	1,029,612.51	watt-seconds /	9,131,760.00	transactions =	0.11 watts/tpsE
Miscellaneous:	136,800.00	watt-seconds /	9,131,760.00	transactions =	0.01 watts/tpsE

Idle Power reporting. (7.3.3.3)

- 1) The Idle Power measurement/calculation for the REC must be reported as numerical quantities.
- 2) If TPC-Energy Secondary Metrics are reported, then the Idle Power measurement/calculation for each subsystem must also be reported as numerical quantities.
- 3) The length of time between the conclusion of the performance measurement and the start of the idle measurement must be reported.
- 4) The duration of the idle measurement must be reported
- 5) A statement is required that assures that the system is in a state that is ready to run the Application(s) of the benchmark for the duration of the idle measurement.

PMU-1 = Tier B (Database Server)		Device: Hioki 3334		Calibrated: 07. Jun 10			
Idle Interval		Meter		Delta		PMU Energy	
Average (watt)	229.59	% of Reading	0.10%	Reading Delta	0.2296	Accuracy Factor	0.49%
Total (watt-sec)	137,755.20	% of Range	0.10%	Range Delta	0.9000	Adjusted (watt-sec)	138,432.96
Duration (sec)	600	Range (watt)	900	Total Delta	1.1296	Avg Power (watt)	230.72

PMU-2 = Tier A (Application Server)		Device: Hioki 3334		Calibrated: 07. Jun 10			
Idle Interval		Meter		Delta		PMU Energy	
Average (watt)	84.88	% of Reading	0.10%	Reading Delta	0.08	Accuracy Factor	0.45%
Total (watt-sec)	50,925.30	% of Range	0.10%	Range Delta	0.30	Adjusted (watt-sec)	51,156.22
Duration (sec)	600	Range (watt)	300	Total Delta	0.38	Avg Power (watt)	85.26

PMU-3 = Storage		Device: Hioki 3334		Calibrated: 07. Jun 10			
Idle Interval		Meter		Delta		PMU Energy	
Average (watt)	464.52	% of Reading	0.20%	Reading Delta	0.93	Accuracy Factor	0.20%
Total (watt-sec)	278,712.80	% of Range	0.00%	Range Delta	0.00	Adjusted (watt-sec)	279,270.23
Duration (sec)	600	Range (watt)	900	Total Delta	0.93	Avg Power (watt)	465.45

PMU-4 = Monitor (Nameplate) (Misc)	
PMU Energy	
Average (watt)	0.50

Idle Power (watt)	781.93
-------------------	--------

Idle power measurement for REC = 781.93 Watts

The Idle measurement was started 7 minutes after all data processing was completed.

Idle measurement duration was 10 minutes

The system was in a state that was ready to run the applications of the benchmark for the duration of the idle measurement. This was verified by executing one transaction after the idle measurement interval was completed. The transaction time was compared to the allowed 90th percentile and found to meet the required specification.

Disclosure requirements when only part of the REC is measured for power. (7.3.3.4)

The monitor power consumption in the PMU-4 was calculated using the Nameplate

Disclosure requirements when component substitution is used. (7.3.3.5)

The Priced Configuration was identical to the Measured Configuration

TPC-Energy Clause 4-related items (Drivers/Controller)

A statement indicating the version of EMS used must be included in the FDR, including a statement that no alterations of this code were made for the benchmark, except as specified by Clause 7.3.4.3. This includes levels for the EMS-PTD Manager, EMS-PTD, EMS Report Generator, and EMS-controller. (7.3.4.1)

The TPC Energy Management System V1.2.0 was used

Input parameters for the EMS software must be disclosed. (7.3.4.2)

See supporting files

Any changes in the EMS components must be documented. Documentation must include a description of the issue, the reason the change was necessary for disclosure of the Result, and the changes made to resolve it. Any change to TPC-Provided Code must be included with the submission as a Supporting File. (7.3.4.3)

No changes to EMS components were made

TPC-Energy Clause 6-related items (Instrumentation)

For each separate energy measurement (each subset measurement for each distinct measurement period), the following must be reported:

- 1) Analyzer used (make, model)
- 2) Date of certification of the analyzer (NIST or equivalent)
- 3) Range settings for Amperage, Voltage, and other settings for the measurement period
- 4) Specifications of any additional probes used in the energy measurement
- 5) The accuracy percentages used in the calculations and the source of those percentages. (7.3.6.1)

Power Analyzer Specifications and Settings										
							Full Load		Idle	
	Make	Model	Serialnumber	Calibration date	Range Settings Current [A]	Range Settings Voltage[V]	%of reading	%of range	%of reading	%of range
PMU1 - Database Server	HIOKI	3334	90604932	07. Jun 10	3	300	0.2	0	0.1	0.1
PMU2 - Application Server	HIOKI	3334	90604934	07. Jun 10	1	300	0.1	0.1	0.1	0.1
PMU3 - Storage	HIOKI	3334	90604933	07. Jun 10	3	300	0.2	0	0.2	0

Accuracy percentages are taken from the HIOKI Instruction Manual 3334 3334-01 AC/DC POWER HiTESTER

The make and model of the temperature sensor and/or probe must be disclosed. (7.3.6.2)

Digi Watchporth

The accuracy percentage for the temperature sensor and/or probe and the source of this information must be disclosed. (7.3.6.3)

Temperature accuracy from Manufacturer's Datasheet:
 +/- 0.5° C at -10° C to 85° C

TPC-Energy Clause 8-related items

Auditor's Attestation Letter. (7.3.8)



Benchmark Sponsors: Detlev Seidel
 Primary TPC Representative
 Fujitsu Technology Solutions
 Heinz-Nixdorf-Ring 1
 33106 Paderborn, Germany

January 28, 2011

I verified the TPC Benchmark™ E performance and the TPC-Energy measurement of the following configuration:

Platform: PRIMERGY RX300 S6
 Operating system: Microsoft Windows Server 2008 R2 Enterprise x64 Edition
 Database Manager: Microsoft SQL Server 2008 R2 Enterprise x64 Edition

The TPC-E results were:

CPU's Speed	Memory	Disks	Trade-Result 90% Response Time	tpsE
Tier B: PRIMERGY RX300 S6				
2 x Intel Xeon X5690 (3.46 GHz)	96 GB (12 MB L2)	2 x 73 GB 15Krpm SAS (int.) 4 x 146 GB 10Krpm SAS (int.) 120 x 64 GB SSD SATA 4 x 500 GB 7.2Krpm SATA (int.)	0.18 Seconds	1,268.30
Tier A: PRIMERGY RX200 S6				
1 x Intel Xeon E5640 (2.66GHz)	6 GB (12 MB L2)	1 x 73 GB 15Krpm SAS	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC-E benchmark requirements and the following verification items were given special attention:

- All EGen components were verified to be v1.12.0
- The transactions were correctly implemented.
- The database was properly scaled and populated for 640,000 Customers.
- The mandatory network between the driver and the SUT was configured.
- The ACID properties were met.

- Input data was generated according to the specified percentages.
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums.
- The measurement interval was representative of steady state conditions.
- The reported measurement interval was 120 minutes.
- The implementation used Redundancy Level 1.
- The Business Recovery Time of 00:21:16 was correctly measured.
- The 60 day storage requirement was correctly computed and configured.
- The system pricing was verified for major components and maintenance.

The TPC-Energy measurements were:

TPC-Energy Metric	REC Idle Power	Average REC Power	Temperature
0.93 Watts/tpsE	781.93 Watts	1,181.44 Watts	20.81 C


In my opinion, these energy measurements were produced in compliance with the TPC-Energy benchmark requirements and the following verification items were given special attention:

- The power analyzers used met the benchmark requirements and were correctly calibrated.
- The primary metric, secondary metrics and the idle power were calculated correctly.
- Version 1.2.0 of the EMS software package was used.

Additional Audit Notes:

The temperature reporting by the PTDM showed some jitter. An examination of the PTD log showed that all samples were correctly measured and that none were below the required minimum of 20 degree.

Respectfully Yours,



François Raab, President

Supporting Files Index (7.4.4)

Clause	Description	Path
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\A-Power-logresults-002.xml
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\A-Temperature-logresults-002.xml
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\B-Power-logresults-002.xml
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\B-Temperature-logresults-002.xml
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\S-Power-logresults-002.xml
7.4.1	PTDM Log Files (XML)	ptdmanager-logs\S-Temperature-logresults-002.xml
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-A-Power.txt
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-A-Temperature.txt
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-B-Power.txt
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-B-Temperature.txt
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-S-Power.txt
7.4.1	EMS-Report Generator output	RUN-REPORTS\rngen-S-Temperature.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-A-Power.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-A-Temperature.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-B-Power.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-B-Temperature.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-S-Power.txt
7.4.1	EMS-Report Generator output	IDLE-REPORTS\rngen-S-Temperature.txt
7.4.1	Calculation Sheet for REC Energy Consumption	RX300S6_TPC-Energy_TPC-E_v4.xlsx
7.4.2	EMS-Controller log	EMSC-log\emsc-002.log
7.4.3	EMS-Controller input	EMSC-log\emsc_commands.ems
7.4.3	PTD output at start	ptd-logs\A-Power-ptd-start.txt
7.4.3	PTD output at start	ptd-logs\A-Temperature-ptd-start.txt
7.4.3	PTD output at start	ptd-logs\B-Power-ptd-start.txt
7.4.3	PTD output at start	ptd-logs\B-Temperature-ptd-start.txt
7.4.3	PTD output at start	ptd-logs\S-Power-ptd-start.txt
7.4.3	PTD output at start	ptd-logs\S-Temperature-ptd-start.txt
7.4.3	PTD Log File	ptd-logs\A-Power-ptd.log
7.4.3	PTD Log File	ptd-logs\A-Temperature-ptd.log
7.4.3	PTD Log File	ptd-logs\B-Power-ptd.log
7.4.3	PTD Log File	ptd-logs\B-Temperature-ptd.log
7.4.3	PTD Log File	ptd-logs\S-Power-ptd.log
7.4.3	PTD Log File	ptd-logs\S-Temperature-ptd.log