

TPC Benchmark™ E
Full Disclosure Report for



PRIMERGY RX600 S4

Using

**Microsoft SQL Server 2008
Enterprise x64 Edition**

Using

**Microsoft Windows Server 2008
Enterprise x64 Edition**

TPC-E Version 1.5.1

Submitted for Review

September 5, 2008

First Edition September 2008

Fujitsu believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. We assume no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, we provide no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark™ E should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. We do not warrant or represent that a user can or will achieve similar performance expressed in transactions per second (tpsE) or normalized price/performance (\$/tpsE). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright © 2008, 2009 Fujitsu. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

PRIMERGY RX600 S4 and PRIMERGY RX300 S4 are trademarks of Fujitsu.

If Fujitsu Siemens Computers is mentioned in this document or Supporting Files this old company name is Fujitsu Technology Solutions since April 1st 2009.

Microsoft Windows Server 2008, Microsoft SQL Server 2008 and BenchCraft are registered trademarks of Microsoft Corporation.

Intel® Xeon® Processor is a registered trademark of Intel.

TPC Benchmark™ is a trademark of the Transaction Processing Performance Council (TPC).

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Abstract


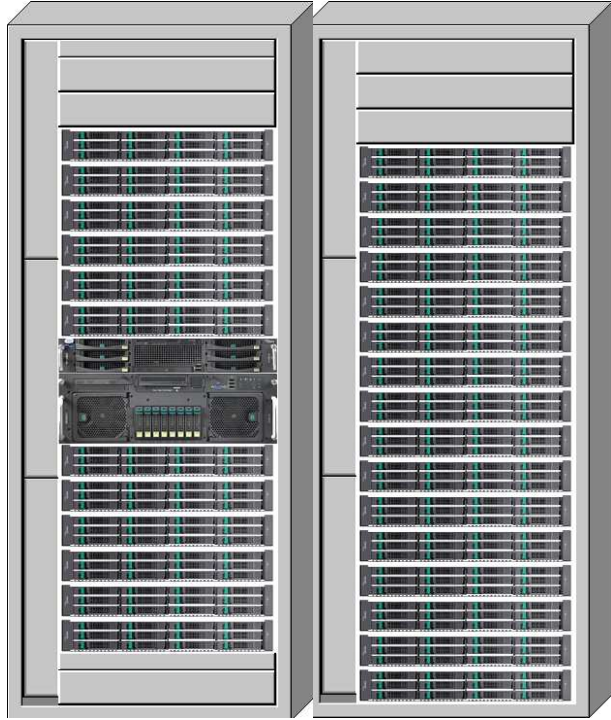
This report documents the TPC Benchmark™ E results achieved by PRIMERGY RX600 S4 using Microsoft SQL Server 2008 Enterprise x64 Edition.

The TPC Benchmark™ E tests were run on a PRIMERGY RX600 S4 system using the Microsoft Windows Server 2008 Enterprise x64 Edition operating system.

The results, summarized below, show the number of TPC Benchmark™ E transactions per second (tpsE) and the price per tpsE (\$/tpsE).

Hardware	Software	Total System Cost	tpsE	\$ USD/tpsE	Availability Date
Fujitsu PRIMERGY RX600 S4	Microsoft SQL Server 2008 Enterprise x64 Edition Microsoft Windows Server 2008 Enterprise x64 Edition	\$ 331,637 USD	721.40	\$ 459.71 USD	January 1, 2009

The benchmark implementation and results were audited by Francois Raab from InfoSizing Inc. (www.sizing.com). The auditor's attestation letter is contained in Section 8 of this report.

		PRIMERGY RX600 S4		TPC-E 1.5.1 TPC Pricing 1.3.0
				Report Date September 5, 2008
TPC-E Throughput 721.40 tpsE	Price/Performance \$ 459.71 USD per tpsE	Availability Date January 1, 2009	Total System Cost \$ 331,637	
Database Server Configuration				
Operating System Microsoft Windows Server 2008 Enterprise x64 Edition	Database Manager Microsoft SQL Server 2008 Enterprise x64 Edition	Processors/Cores/Threads 4/24/24	Memory 128 GB	
SUT				
		Tier A PRIMERGY RX300 S4 2x Intel Xeon E5405 2.00 GHz 4 GB Memory 1x 250 GB SATA Drive Onboard 1 Gb/s Dual Port LAN 1 Gb/s		
		Tier B PRIMERGY RX600 S4 4x Intel Xeon X7460 2.66 GHz 128 GB Memory 2x 36 GB 15K SAS Drives 6x 146 GB 10K SAS Drives Onboard SAS RAID Controller 5x SAS RAID Controller		
		Storage 2x PRIMECENTER Rack 28x FibreCat SX40 192x 73 GB 15K SAS Drives 144x 146 GB 15K SAS Drives		
Initial Database Size 2,798 GB	Redundancy Level 1 RAID-10		Storage 192 x 73 GB15K 144 x 146GB 15K 6 x 146GB 10K	



PRIMERGY RX600 S4

**TPC-E 1.5.1
TPC Pricing 1.3.0**

Report Date
September 5, 2008

Availability Date
January 1, 2009

Description	Part Number	Price Source	Unit Price	Qty	Extended Price	3-yr. Maint. Price
Database Server Hardware						
FSCR6S4_S26361-K998-V200_71390-03		1	5,535.20	1	5,535.20	
PY RX600S4	S26361-K998-V200			1		
Memory Board Kit RX600 S4	S26361-F3125-E440			1		
CD-RW/DVD slimline SATA	S26361-F3268-E1			1		
HD SAS 3Gb/s 146GB 10k hot plug 2.5"	S26361-F3208-E114			6		
HD SAS 3Gb/s 36GB 15k hot plug 2.5"	S26361-F3208-E536			2		
Rack installation ex works	SNP:SY-F1647E301-P			1		
RMK-F1_RX600 S4	S26361-F2735-E106			1		
Cable magnt. for 19" DC- PC- Rack	S26361-F2735-E7			1		
Xeon MP X7460 2.67GHz 16MB 1066MHz	S26361-F3487-E460	1	3,871.75	4	15,487.00	
16GB (2x 8GB) FBDIM, 667MHz	S26361-F3263-E625	1	2,371.50	8	18,972.00	
RAID Ctrl SAS 8Port 512M FHLP LSI	S26361-F3890-L501	1	436.05	5	2,180.25	
SCENICVIEW A17-3	S26361-K1146-V150	1	226.10	1	226.10	
KB SLIM MF USA	S26381-K370-V510	1	24.65	1	24.65	
Optical Wheelmouse USB silver	S26381-K355-L400	1	15.30	1	15.30	
PYT3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	PYR6S4-U004361-0NA	1	1,417.50	1		1,417.50
				Subtotal	42,440.50	1,417.50
Server Storage						
FSC_S26361-K826-V103_71390-01		1	2,362.15	1	2,362.15	
PRIMECENTER Rack 38 U, 1000 deep	S26361-K826-V103			1		
Dummy panel, platics, 1U + assembly	S26361-F2735-E130			2		
Dummy panel, platics, 2U + assembly	S26361-F2735-E131			6		
Socket strip 3phase 3x 8 sockets	S26361-F2262-E31			2		
FSC_S26361-K826-V103_71390-05		1	2,343.45	1	2,343.45	
PRIMECENTER Rack 38 U, 1000 deep	S26361-K826-V103			1		
Dummy panel, platics, 2U + assembly	S26361-F2735-E131			6		
Socket strip 3phase 3x 8 sockets	S26361-F2262-E31			2		
FSC_S26361-K1122-V200_71390-06		1	4,399.60	16	70,393.60	
FibreCAT SX40 SAS Disk Subsystem	S26361-K1122-V200			16		
HD SAS 3Gb/s 73GB 15k hot pl 3.5" SX40	S26361-F3244-E573			192		
Rack installation ex works, SX10, 1U Nod	S26361-F1647-E302			16		
FSCSX40_S26361-K1122-V200_71390-02		1	5,338.00	12	64,056.00	
FibreCAT SX40 SAS Disk Subsystem	S26361-K1122-V200			12		
HD SAS 3Gb/s 164GB 15k hot pl 3.5" SX40	S26361-F3244-E514			144		
Rack installation ex works, SX10, 1U Nod	S26361-F1647-E302			12		
PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	PYSX40-U004361-0NA	1	1,644.30	28		46,040.40
SAS CBL EXT 6m 8088-8470	S26361-F3246-L603	1	107.95	6	647.70	
SAS CBL EXT 2m 8088-8470	S26361-F3246-L203	1	62.90	4	251.60	
SAS cable external 0.5 m	S26361-F3246-L5	1	59.50	18	1,071.00	
				Subtotal	141,125.50	46,040.40



PRIMERGY RX600 S4

**TPC-E 1.5.1
TPC Pricing 1.3.0**

Report Date
September 5, 2008

Availability Date
January 1, 2009

Server Software						
SQL Server 2008 Enterprise x64 Edition Per Processor License	810-07507	2	23,432.00	4	93,728.00	
Windows Server 2008 Enterprise Edition (x64)	P72-03168	2	2,310.00	1	2,310.00	
Microsoft Problem Resolution Services	n/a	2	245.00	1		245.00
				Subtotal	96,038.00	245.00
Tier A Client Hardware						
FSCR3S4_S26361-K1151-V101_71390-04		1	2,304.35	1	2,304.35	
PY RX300S4 6x3.5	S26361-K1151-V101			1		
Xeon DP E5405 2.00 GHz 2x6MB 1333MHz	S26361-F3882-E200			2		
2GB 2x1GB FBD667 PC2-5300F d ECC	S26361-F3263-E522			2		
CD-RW/DVD slimline SATA	S26361-F3268-E1			1		
HD SATA 3Gb/s 250GB 7.2k hot plug 3.5"	S26361-F3265-E250			1		
RAID 0/1 SAS based on LSI MegaRAID 8Port	S26361-F3257-E8			1		
Rack installation ex works	SNP:SY-F1647E301-P			1		
RMK-P_1-2U servers (new)	S26361-F2735-E110			1		
Eth Ctrl 2x1Gbit PCIe PRO/1000PT Cu Ip	S26361-F3228-L201	1	143.65	1	143.65	
SCENICVIEW A17-3	S26361-K1146-V150	1	226.10	1	226.10	
KB SLIM MF USA	S26381-K370-V510	1	24.65	1	24.65	
Optical Wheelmouse USB silver	S26381-K355-L400	1	15.30	1	15.30	
PYR3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	PYR3S4-U004361-0NA	1	854.10	1		854.10
				Subtotal	2,714.05	854.10
Tier A Client Software						
Windows Server 2003 R2 Standard x64 Edition	P73-01664	2	719.00	1	719.00	
Infrastructure or Connectivity						
LAN_crossover-Cat 5e, l=5m	S26361-F3482-L5	1	21.25	2	42.50	
				Total	283,079.55	48,557.00
Notes:				Three-Year Cost of Ownership USD	\$331,637	
Price Source: 1=Fujitsu Computer Systems Corporation, 2=Microsoft Corporation				TPC-E Throughput	721.40	
				USD/tpsE	\$459.71	

The benchmark results and test methodology were audited by Francois Raab of InfoSizing Inc. (www.sizing.com)
 Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing section of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.



PRIMERGY RX600 S4

TPC-E 1.5.1
TPC Rev 1.3.0

Report Date
September 5, 2008

Availability Date
January 1, 2009

Numerical Quantities Summary					
Reported Throughput:		721.40 tpsE		Configured Customers:	362,000
Response Times (in seconds)	Minimum	Average	90th%tile	Maximum	
Broker Volume	0.00	0.04	0.07	0.36	
Customer Position	0.00	0.03	0.05	1.65	
Market Feed	0.00	0.03	0.08	1.64	
Market Watch	0.00	0.03	0.06	1.69	
Security Detail	0.00	0.01	0.03	0.53	
Trade Lookup	0.00	0.58	0.77	1.14	
Trade Order	0.00	0.08	0.14	1.76	
Trade Result	0.00	0.08	0.15	1.86	
Trade Status	0.00	0.02	0.04	0.74	
Trade Update	0.01	0.68	0.83	1.13	
Data Maintenance	0.00	0.13	N/A	1.92	
Transaction Mix		Transaction Count		Mix %	
Broker Volume		2,545,135		4.900%	
Customer Position		6,751,914		13.000%	
Market Feed		519,411		1.000%	
Market Watch		9,349,032		18.000%	
Security Detail		7,271,099		13.999%	
Trade Lookup		4,154,710		7.999%	
Trade Order		5,246,026		10.100%	
Trade Result		5,194,100		10.000%	
Trade Status		9,868,349		19.000%	
Trade Update		1,038,663		2.000%	
Data Maintenance		120		N/A	
Test Duration and Timings					
Ramp-up Time (hh:mm:ss)		00:33:18			
Measurement Interval (hh:mm:ss)		02:00:00			
Business Recovery Time (hh:mm:ss)		00:57:13			
Total Number of Transactions Completed in Measurement Interval		51,938,439			

Table of Contents

ABSTRACT	3
CLAUSE 0: PREAMBLE	10
Introduction	10
Goal of the TPC-E Benchmark	10
Restrictions and Limitations	11
CLAUSE 1: OVERVIEW	12
Order and Titles	12
Executive Summary Statement	12
Benchmark Sponsor	12
Configuration Diagram	13
Hardware Configuration	13
Software Configuration	14
CLAUSE 2: DATABASE DESIGN, SCALING AND POPULATION	15
Database Creation	15
Partitioning	15
Replication and Duplicated Attributes	15
Cardinality of Tables	16
Distribution of Tables, Partitions and Logs	17
Database Interface, Data Model and Load Methodology	18
CLAUSE 3: TRANSACTIONS	19
Vendor-Supplied Code	19
Database Footprint Requirements	19
CLAUSE 4: SUT, DRIVER AND NETWORK	20
Network Configuration	20
CLAUSE 5: EGEN	21
EGen Version	21
EGen Code	21
EGen Modifications	21
CLAUSE 6: PERFORMANCE METRICS AND RESPONSE TIME	22
EGen Driver	22
Measured Throughput	22
Test Run Graph	22
Steady State	23
Work Performed During Steady State	23
Transaction Input Parameter Averages	24
CLAUSE 7: TRANSACTION AND SYSTEM PROPERTIES	25
ACID Tests	25
Redundancy Level and Data Accessibility	25
Business Recovery	26
CLAUSE 8: PRICING RELATED ITEMS	28
60-Day Space	28
Attestation Letter	29
CLAUSE 9: SUPPORTING FILES	31

Supporting Files Index table.....	31
APPENDIX: THIRD PARTY PRICE QUOTATIONS.....	35

Clause 0: Preamble

Introduction

TPC Benchmark™ E (TPC-E) is an On-Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. The database schema, data population, transactions, and implementation rules have been designed to be broadly representative of modern OLTP systems. The benchmark exercises a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity; Moderate system and application execution time;
- A balanced mixture of disk input/output and processor usage; Transaction integrity (ACID properties);
- A mixture of uniform and non-uniform data access through primary and secondary keys;
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships with realistic content;
- Contention on data access and update.

The TPC-E operations are modelled as follows: The database is continuously available 24 hours a day, 7 days a week, for data processing from multiple Sessions and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance Sessions. Due to the worldwide nature of the application modelled by the TPC-E benchmark, any of the transactions may be executed against the database at anytime, especially in relation to each other.

Goal of the TPC-E Benchmark

The TPC-E benchmark simulates the OLTP workload of a brokerage firm. The focus of the benchmark is the central database that executes transactions related to the firm's customer accounts. In keeping with the goal of measuring the performance characteristics of the database system, the benchmark does not attempt to measure the complex flow of data between multiple application systems that would exist in a real environment.

The mixture and variety of transactions being executed on the benchmark system is designed to capture the characteristic components of a complex system. Different transaction types are defined to simulate the interactions of the firm with its customers as well as its business partners. Different transaction types have varying run-time requirements.

The benchmark defines:

- Two types of transactions to simulate Consumer-to-Business as well as Business-to-Business activities
- Several transactions for each transaction type
- Different execution profiles for each transaction type
- A specific run-time mix for all defined transactions

For example, the database will simultaneously execute transactions generated by systems that interact with customers along with transactions that are generated by systems that interact with financial markets as well as administrative systems. The benchmark system will interact with a set of Driver systems that simulate the various sources of transactions without requiring the benchmark to implement the complex environment.

The Performance Metric reported by TPC-E is a "business throughput" measure of the number of completed Trade-Result transactions processed per second (see Clause 6.7.1). Multiple Transactions are used to simulate the business activity of processing a trade, and each Transaction is subject to a Response Time constraint. The Performance Metric for the benchmark is expressed in transactions-per-second-E (tpsE). To be compliant with the TPC-E standard, all references to tpsE Results must include the tpsE rate, the associated price-per-tpsE, and the Availability Date of the Priced Configuration (See Clause 6.7.3 for more detail).

Although this specification defines the implementation in terms of a relational data model, the database may be implemented using any commercially available Database Management System (DBMS), Database Server, file

system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-E uses terminology and metrics that are similar to other benchmarks, originated by the TPC and others. Such similarity in terminology does not imply that TPC-E Results are comparable to other benchmarks. The only benchmark Results comparable to TPC-E are other TPC-E Results that conform to a comparable version of the TPC-E specification.

Restrictions and Limitations

Despite the fact that this benchmark offers a rich environment that represents many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the Results reported by a vendor is highly dependent on how closely TPC-E approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark Results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary because of these and other factors. Therefore, TPC-E should not be used as a substitute for specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Benchmark Sponsors are permitted various possible implementation designs, insofar as they adhere to the model described and pictorially illustrated in this specification. A Full Disclosure Report (FDR) of the implementation details, as specified in Clause 9.1, must be made available along with the reported Results.

Clause 1: Overview

Order and Titles

The order and titles of sections in the Report and Supporting Files must correspond with the order and titles of sections from the TPC-E Standard Specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Reports (9.1.1.1).

The order and titles in this report correspond to those in the TPC-E specification.

Executive Summary Statement

The TPC Executive Summary Statement must be included near the beginning of the Report (9.2).

The Executive summary has been included near the beginning of this FDR.

Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided (9.3.1.1).


Fujitsu is the sponsor of this TPC Benchmark™ E result.

Configuration Diagram

Diagrams of both measured and Priced Configurations must be reported in the Report, accompanied by a description of the differences (9.3.1.2).

The measured and priced configurations are shown in the following figures. There are no differences between both configurations.

Figure 1-1: Measured and Priced Configuration

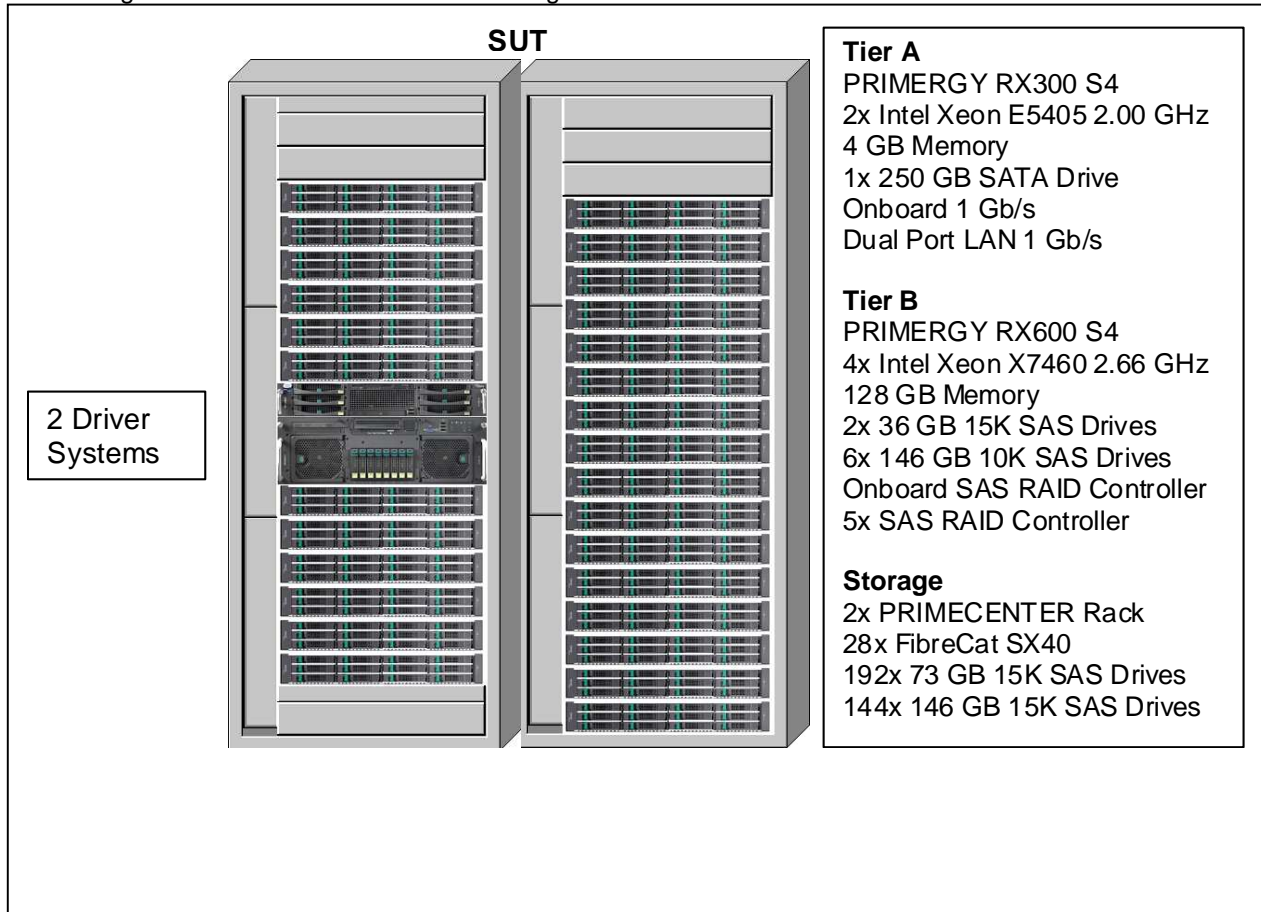

Hardware Configuration

A description of the steps taken to configure all the hardware must be reported in the Report (9.3.1.4).

Driver

The driver systems are not part of the System Under Test (SUT) and priced configuration. Two systems are used and connected with 1 GbE and a 1 GbE Ethernet switch with system Tier A. There is one LAN segment for this connection.

Tier A

The Tier A server is a Fujitsu PRIMERGY RX300 S4 with two Intel Xeon E5405 Quad-Core Processor and 4 GB of memory. One 250 GB SATA disk drive is connected to the onboard controller. A 1 GbE dual port Ethernet LAN card is plugged in a PCI-E slot. Each of the two ports is directly connected with one of the 1 GbE Ethernet onboard LAN ports of Tier B using a LAN crossover cable. There are two LAN segments for these connections

Tier B

The Tier B or database server is a Fujitsu PRIMERGY RX600 S4 with four Intel Xeon X7460 Six-Core Processors and 128 GB memory. Eight of the eight 2.5" disk bays are used with 2x SAS 36GB 15K disk drives 2.5" RAID1 for OS and database and 6x SAS 146GB 10K disk drives 2.5" RAID10 for database log. All drives are connected to a LSI SAS RAID Controller with 512MB onboard controller and configured with the MegaRAID BIOS Configuration Utility (enter with <CTRL>H at boot). Five RAID controllers LSI MegaRAID SAS8880E with 512MB cache are used to connect the 336 external disk drives to the server. The LAN connection of the two onboard 1 GbE is described above.

Storage

16 Fujitsu PRIMERGY SX40 are used, each with 12x SAS 73GB 15K disk drives 3.5" and 12 Fujitsu PRIMERGY SX40 are used, each with 12x SAS 146GB 15K disk drives 3.5". Two or three enclosures are linked and connected to the LSI MegaRAID SAS8880E. Each controller has one external chain with 3x SX40 and one external chain with 2x or 3x SX40. For details see table 2-2 Disk Configuration. The disk configuration can be done with the MegaRAID BIOS Configuration Utility or ServerView RAID Manager, which is shipped on ServerStart DVD together with the Server.

Software Configuration

A description of the steps taken to configure all the software must be reported in the Report (9.3.1.5).

The default installation of the operating system was executed on Tier A and B as well as the installation of the database SW on Tier B. Information about changes to the software, settings and BenchCraft can be found in the SupportingFiles directory Introduction - Software.

Clause 2: Database Design, Scaling and Population

Database Creation

A description of the steps taken to create the database for the Reported Throughput must be reported in the Report (9.3.2).

The physical organization of tables and indices, within the database, must be reported in the Report. (9.3.2.1)

The database has been created for 362,000 customers. The SQL Server scripts and setup command files are included in the SupportingFiles\Clause2 folder. Two file groups are used for tables and indices. The distribution is shown in table 2-1.

Partitioning

While few restrictions are placed upon horizontal or vertical partitioning of tables and rows in the TPC-E benchmark (see Clause 2.3.3), any such partitioning must be reported in the Report.(9.3.2.2)

There is no partitioning implemented in this configuration.

Replication and Duplicated Attributes

Replication of tables, if used, must be reported in the Report (9.3.2.3).

Additional and/or duplicated attributes in any table must be reported in the Report along with a statement on the impact on performance (9.3.2.4).

There is no replication implemented in this configuration.
No duplications or additional attributes were used.

Cardinality of Tables

The cardinality (e.g. the number of rows) of each table, as it existed after database load (see Clause 2.6), must be reported in the Report (9.3.2.5).

The database was configured for 362,000 customers. The cardinality of the tables after database load is as shown in the following table 2-1.

Table 2-1: Table Cardinality and Filegroups

Table	Cardinality after database load	Filegroup
ACCOUNT_PERMISSION	2569814	2
ADDRESS	543004	2
BROKER	3620	2
CASH_TRANSACTION	5754914044	1
CHARGE	15	2
COMMISSION_RATE	240	2
COMPANY	181000	2
COMPANY_COMPETITOR	543000	2
CUSTOMER	362000	2
CUSTOMER_ACCOUNT	1810000	2
CUSTOMER_TAXRATE	724000	2
DAILY_MARKET	323600850	2
EXCHANGE	4	2
FINANCIAL	3620000	2
HOLDING	320285589	2
HOLDING_HISTORY	8383246788	2
HOLDING_SUMMARY	18009422	2
INDUSTRY	102	2
LAST_TRADE	247970	2
NEWS_ITEM	362000	2
NEWS_XREF	362000	2
SECTOR	12	2
SECURITY	247970	2
SETTLEMENT	6255360000	1
STATUS_TYPE	5	2
TAXRATE	320	2
TRADE	6255360000	1
TRADE_HISTORY	15012880304	1
TRADE_REQUEST	0	2
TRADE_TYPE	5	2
WATCH_ITEM	36205633	2
WATCH_LIST	362000	2
ZIP_CODE	14741	2

Distribution of Tables, Partitions and Logs

The distribution of tables, partitions and logs across all media must be explicitly depicted for the measured and Priced Configurations (9.3.2.6).

Table 2-2: Disk Configuration

HBA - Port	Disk	Drives	Partition	Size	Use
Crtl 0 Port 0	0 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst27 C:\jp\else27 C:\jp\data27	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	1 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst26 C:\jp\else26 C:\jp\data26	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	2 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst25 C:\jp\else25 C:\jp\data25	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
Crtl 0 Port 1	3 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst28 C:\jp\else28 C:\jp\data28	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	4 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst24 C:\jp\else24 C:\jp\data24	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	5 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst23 C:\jp\else23 C:\jp\data23	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
Crtl 1	6 – onboard	2x36GB, 15K SAS, RAID10	C:\	~34,457 MB	OS, DB
	7 – onboard	6x146GB, 10K SAS, RAID10	L:\	~418,457 MB	DB Log
Crtl 2 Port 0	8 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst02 C:\jp\else02 C:\jp\data02	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	9 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst04 C:\jp\else04 C:\jp\data04	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	10 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst01 C:\jp\else01 C:\jp\data01	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
Crtl 2 Port 1	11 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst03 C:\jp\else03 C:\jp\data03	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	12 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst05 C:\jp\else05 C:\jp\data05	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
Crtl 3 Port 0	13 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst07 C:\jp\els07 C:\jp\data07	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	14 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst10 C:\jp\else10 C:\jp\data10	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	15 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst06 C:\jp\else06 C:\jp\data06	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
Crtl 3 Port 1	16 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst09 C:\jp\else09 C:\jp\data09	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	17 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst08 C:\jp\else08 C:\jp\data08	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup

Ctrl 4 Port 0	18 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst16 C:\jp\els16 C:\jp\data16	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	19 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst15 C:\jp\else15 C:\jp\data15	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	20 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst14 C:\jp\else14 C:\jp\data14	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
Ctrl 4 Port 1	21 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst13 C:\jp\else13 C:\jp\data13	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	22 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst12 C:\jp\else12 C:\jp\data12	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
	23 – SX40	12x73GB, 15K SAS, RAID10	C:\jp\cst11 C:\jp\else11 C:\jp\data11	106,000 MB 34,000 MB ~271,974 MB	Filegroup1 Filegroup2 Backup
Ctrl 5 Port 0	24– SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst19 C:\jp\else19 C:\jp\data19	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	25– SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst18 C:\jp\else18 C:\jp\data18	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	26– SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst17 C:\jp\else17 C:\jp\data17	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
Ctrl 5 Port 1	27 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst22 C:\jp\else22 C:\jp\data22	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	28 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst21 C:\jp\else21 C:\jp\data21	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup
	29 – SX40	12x146GB, 15K SAS, RAID10	C:\jp\cst20 C:\jp\else20 C:\jp\data20	115,000 MB 37,000 MB ~683,407 MB	Filegroup1 Filegroup2 Backup

Database Interface, Data Model and Load Methodology

A statement must be provided in the Report that describes:

The Database Interface (e.g., embedded, call level) and access language (e.g., SQL, COBOL read/write) used to implement the TPC-E Transactions. If more than one interface / access language is used to implement TPC-E, each interface / access language must be described and a list of which interface /access language is used with which Transaction type must be reported.

The data model implemented by the DBMS (e.g., relational, network, hierarchical) (9.3.2.7).

The methodology used to load the database must be reported in the Report (9.3.2.8).

Microsoft SQL Server 2008 Enterprise x64 Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C++ code using the Microsoft ODBC interface.

The methodology used to load the database is described in Clause2 of the SupportingFiles directory.

Clause 3: Transactions

Vendor-Supplied Code

A statement that vendor-supplied code is functionally equivalent to Pseudo-code in the specification (see Clause 3.2.1.6) must be reported in the Report (9.3.3.1).

The vendor supplied code is functionally equivalent to the pseudo-code.

Database Footprint Requirements

A statement that the database footprint requirements (as described in Clause 3.3) were met must be reported in the Report (9.3.3.2).

Database footprint requirements were met as described in the specification.

Clause 4: SUT, Driver and Network

Network Configuration

The Network configurations of both the measured and Priced Configurations must be described and reported in the Report. This includes the mandatory Network between the Driver and Tier A (see Clause 4.2.2) and any optional Database Server interface networks (9.3.4.2):

Figure 1-1 shows the configuration of the measured and priced configurations. Both are identical. Tier B system PRIMERGY RX600 S4 has an onboard Ethernet controller with two 1Gb/s ports. Tier A system PRIMERGY RX300 S4 has an onboard Ethernet controller with two 1Gb/s ports and was extended with a two port 1Gb/s Ethernet controller card. These two ports of the tier A card were directly connected with the two onboard port of tier B using different LAN segments. One of the onboard ports of tier A and the two driver systems were connected via 1Gb/s switch.

Clause 5: EGen

EGen Version

The version of EGen used in the benchmark must be reported (9.3.5.1).

The EGen version used was 1.5.1.

EGen Code

A statement that all required TPC-provided EGen code was used in the benchmark must be reported (9.3.5.2).

All the required TPC-provided code was used in the benchmark.

EGen Modifications

If the Test Sponsor modified EGen, a statement EGen has been modified must be reported in the Report. All formal waivers from the TPC documenting the allowed changes to EGen must also be reported in the Report (see Clause 5.3.7.1). If any of the changes to EGen do not have a formal waiver that must also be reported (9.3.5.3). If the Test Sponsor extended EGenLoader (as described in Appendix A.6), the use of the extended EGenLoader and the audit of the extension code by an Auditor must be reported (9.3.5.4).

There were no modifications to the EGen and EGenLoader was not extended for this benchmark.

Clause 6: Performance Metrics and Response time

EGen Driver

The number of EGenDriverMEE and EGenDriverCE instances used in the benchmark must be reported in the Report (see Clause 6.2.5) (9.3.1.1).

Two driver systems were used, each configured to drive one EGenDriverMEE and one EGenDriverCE. Tier A system run two EGenDriverMEE and two EGenDriverCE.

Measured Throughput


The Measured Throughput must be reported in the Report (see Clause 6.7.1.2) (9.3.6.2).

The measured throughput was 721.40 tpsE.

Test Run Graph

A Test Run Graph of throughput versus elapsed wall clock time must be reported in the Report for the Trade-Result Transaction (see Clause 6.7.2) (9.3.6.3).

Figure 6-1: Test Run Graph

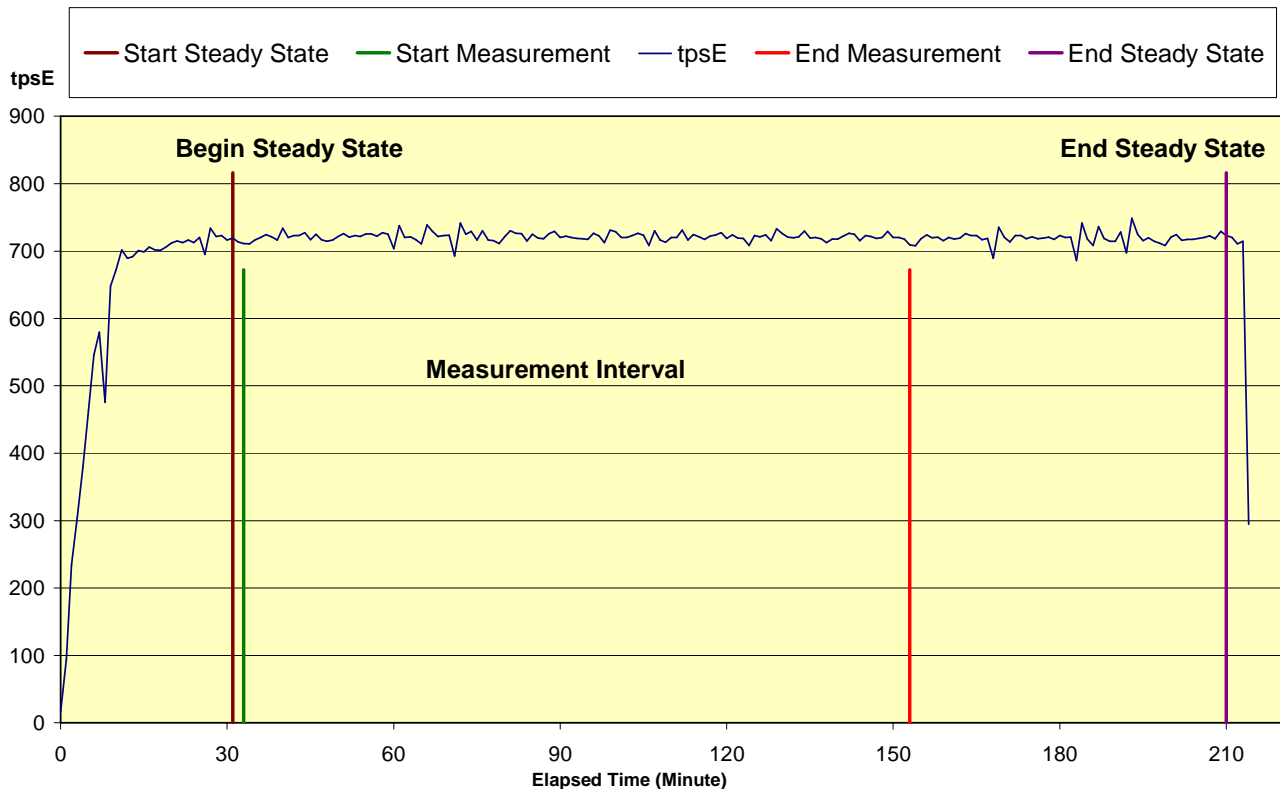

Steady State

The method used to determine that the SUT had reached a Steady State prior to commencing the Measurement Interval must be reported in the Report (9.3.6.4).

During the run the tpsE throughput was observed to determine steady state. After the run steady state was confirmed by:

1. Looked at the Test Run Graph and verified that tpsE was steady prior to commencing the Measurement Interval.
2. Calculated 60 minute average tpsE during the Steady State moving the time window 10 minutes each time. Then confirmed that the minimum 60 minute average tpsE was not less than 98% of the Reported Throughput, and that the maximum 60 minute average tpsE was not greater than 102% of the Reported Throughput.
3. Calculated 10 minute average tpsE during the Steady State moving the window 1 minute each time. Then confirmed that the minimum 10 minute average tpsE was not less than 80% of the Reported Throughput, and that the maximum 10 minute average tpsE was not greater than 120% of the Reported Throughput.
4. Two completed full checkpoints.

Work Performed During Steady State

A description of how the work normally performed during a Test Run, actually occurred during the Measurement Interval must be reported in the Report (for example checkpointing, writing Undo/Redo Log records, etc.) (9.3.6.5).

The Microsoft SQL Server recovery interval parameter was set to the maximum allowable value to perform checkpoint at specific intervals. Checkpoints were automatically issued at specified intervals (450 seconds) and specified duration (420 seconds). SQL Server was started with trace flag 3502, which caused it to log the occurrence of the checkpoints. This information was used to verify that the checkpoints occurred at the appropriate times and duration during steady state.

Transaction Input Parameter Averages

The recorded averages over the Measurement Interval for each of the Transaction input parameters specified by clause 6.4.1 must be reported (9.3.6.6).

Table 6-2: Transaction Input Parameter Averages.

Transaction	Parameter	Range Min	Range Max	Value	Check
Customer Position	By Tax ID	48.00%	52.00%	50.02%	Ok
	Get History	48.00%	52.00%	49.99%	Ok
	Overall				Ok
Market Watch	By Watch List	57.00%	63.00%	60.00%	Ok
	By Customer Account	33.00%	37.00%	35.00%	Ok
	By Industry	4.50%	5.50%	5.00%	Ok
	Overall				Ok
Security Detail	Access LOB	0.90%	1.10%	1.00%	Ok
	Overall				Ok
Trade Lookup	Frame 1	28.50%	31.50%	29.98%	Ok
	Frame 2	28.50%	31.50%	30.03%	Ok
	Frame 3	28.50%	31.50%	29.99%	Ok
	Frame 4	9.50%	10.50%	10.00%	Ok
	Overall				Ok
Trade Update	Frame 1	31.00%	35.00%	32.93%	Ok
	Frame 2	31.00%	35.00%	33.03%	Ok
	Frame 3	32.00%	36.00%	34.04%	Ok
	Overall				Ok
Trade Order	By Non-Owner	9.50%	10.50%	9.98%	Ok
	By Company Name	38.00%	42.00%	39.96%	Ok
	Buy On Margin	7.50%	8.50%	8.00%	Ok
	Rollback	0.94%	1.04%	0.99%	Ok
	LIFO	33.00%	37.00%	35.02%	Ok
	Trade Qty 100	24.00%	26.00%	24.99%	Ok
	Trade Qty 200	24.00%	26.00%	25.00%	Ok
	Trade Qty 400	24.00%	26.00%	25.01%	Ok
	Trade Qty 800	24.00%	26.00%	25.00%	Ok
	Market Buy	29.70%	30.30%	29.98%	Ok
	Market Sell	29.70%	30.30%	30.04%	Ok
	Limit Buy	19.80%	20.20%	20.01%	Ok
	Limit Sell	9.90%	10.10%	9.98%	Ok
	Stop Loss	9.90%	10.10%	9.98%	Ok
Overall				Ok	

Clause 7: Transaction and System Properties

ACID Tests

The results of the ACID tests must be reported in the Report along with a description of how the ACID requirements were met, and how the ACID tests were run (9.3.7.1).

The TPC Benchmark™ E Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation and Durability (ACID). This section quotes the specification definition of each of those properties and describes the tests done as specified and monitored by the auditor, to demonstrate compliance. See also file MSTPCE ACID Procedures.pdf in the SupportingFiles directory.

Redundancy Level and Data Accessibility

The Test Sponsor must report in the Report the Redundancy Level (see Clause 7.5.7.1) and describe the Data Accessibility test(s) used to demonstrate compliance (9.3.7.2).


A Data Accessibility Graph for each run demonstrating a Redundancy Level must be reported in the Report (see Clause 7.5.7.2) (9.3.7.3).

Redundancy Level 1 was used for the storage system. To prove Redundancy Level 1, the following steps were successfully performed on a database data and log disk. The test for Redundancy Level 1 is the test for Permanent Irrecoverable Failure of any single Durable Medium. The different steps and the various states of the two disks are reported by ServerView RAID and written to the system event (see SupportingFiles).

1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting Transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes.
3. Induce the failure described for the redundancy level being demonstrated. In this case fail a disk in a database data array and after 5 minutes a disk in the database log array. The transactions continue since RAID10 is used for about 10 minutes.
4. Begin the necessary recovery process, by replacing the failed drives in the database data array and start the rebuild.
5. Begin the necessary recovery process, by replacing the failed drives in the database log array and start the rebuild process.
6. Continue running the Driver until the rebuilds completed.
7. Terminate the run gracefully from the Driver.
8. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
9. Run the evaluation of Trade-Result Transactions executed and compare it with the difference of the SETTLEMENT rows counted.

The Graph in Figure 7-1 show the measured throughput versus time and the different test stated.

Figure 7-1: Redundancy Level and Data Accessibility Graph

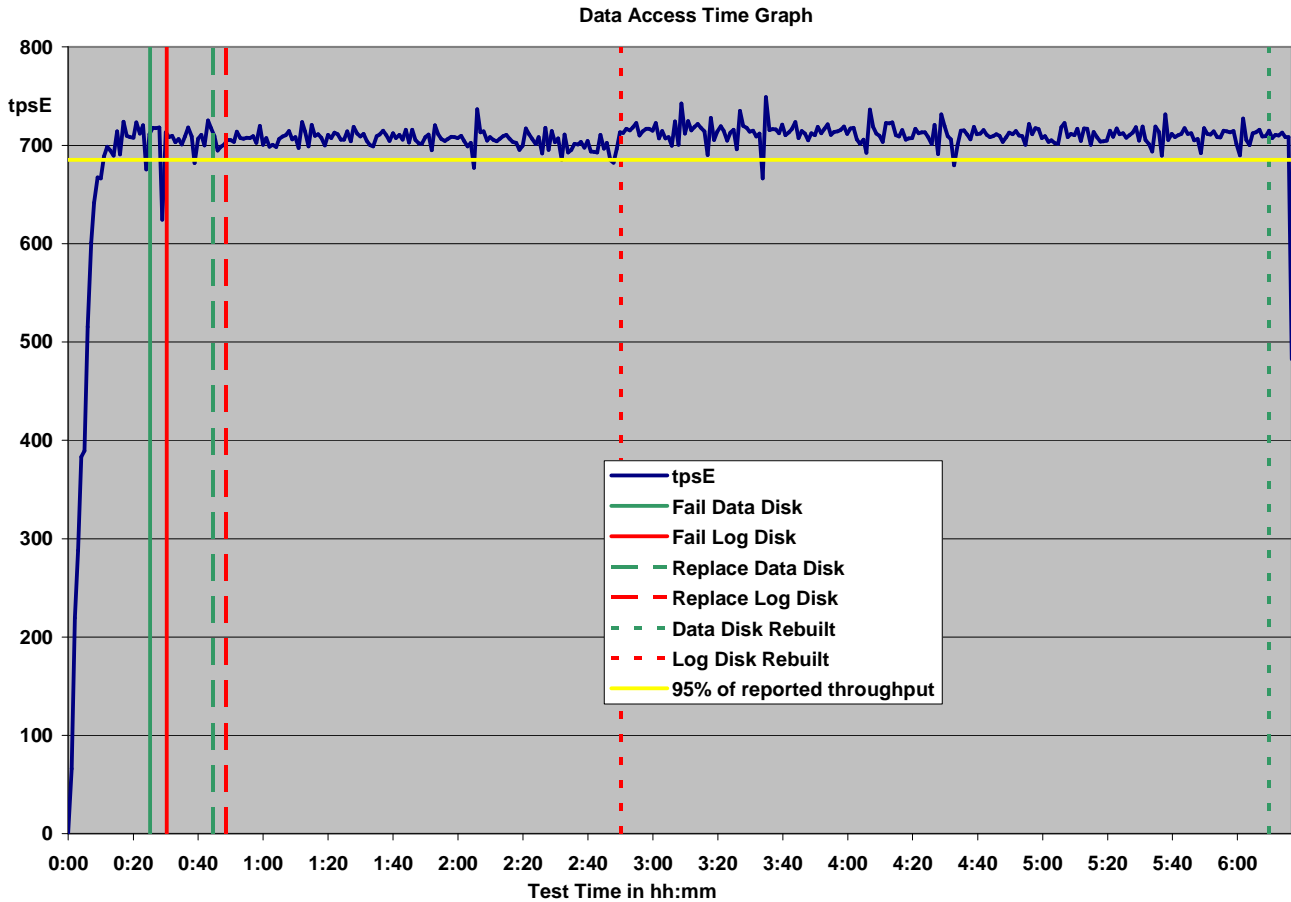

Business Recovery

The Test Sponsor must describe in the Report the test(s) used to demonstrate Business Recovery (9.3.4.7).

The Business Recovery Time must be reported on the Executive Summary Statement and in the Report. If the failures described in Clauses 7.5.2.2, 7.5.2.3 and 7.5.2.4 were not combined into one Durability test (usually powering off the Database Server during the run), then the Business Recovery Time for the failure described for instantaneous interruption is the Business Recovery Time that must be reported in the Executive Summary Statement. All the Business Recovery Times for each test requiring Business Recovery must be reported in the Report (9.3.7.5).

9.3.7.6 The Business Recovery Time Graph (see Clause 7.5.7.4) must be reported in the Report for all Business Recovery tests (9.3.7.6).

The tests for "Instantaneous interrupt," "Failure of all or part of memory," and "Loss of external power to the SUT" were combined by power off Tier A and B.


1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes.
3. Induce the failures by simultaneously power off Tier A and B.
4. On the driver side the number of MEE connections is captured and after transaction failures is noted by the drivers, terminate the run and collect the data for Pre-Failure Run.
5. Re-power and restart Tier A and B.

6. When restarting the database on Tier B, it automatically starts the recovery and records timestamps. The first timestamp defines the beginning of Business Recovery.
7. After recovery completes start a Trade-Cleanup. Just after finishing this start again submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes. The end of this interval is the end of the Business Recovery.
8. Terminate the run gracefully from the Driver and collect the data for Post-Failure Run.
9. Verify that there are no errors in the Post-Failure run and check the consistency of the database as specified in Clause 7.3.1.1.
10. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
11. Run the evaluation of Trade-Result Transactions executed in both runs and compare it with the difference of the SETTLEMENT rows counted. The difference must be less than or equal to the maximum number of Transactions which can be simultaneously in-flight from the Driver to the SUT.

The Business Recovery Time was 00:57:13 (hh:mm:ss).

The Graph in Figure 7-2 shows the measured throughput versus time and the Business Recovery.

Figure 7-2: Business Recovery Graph

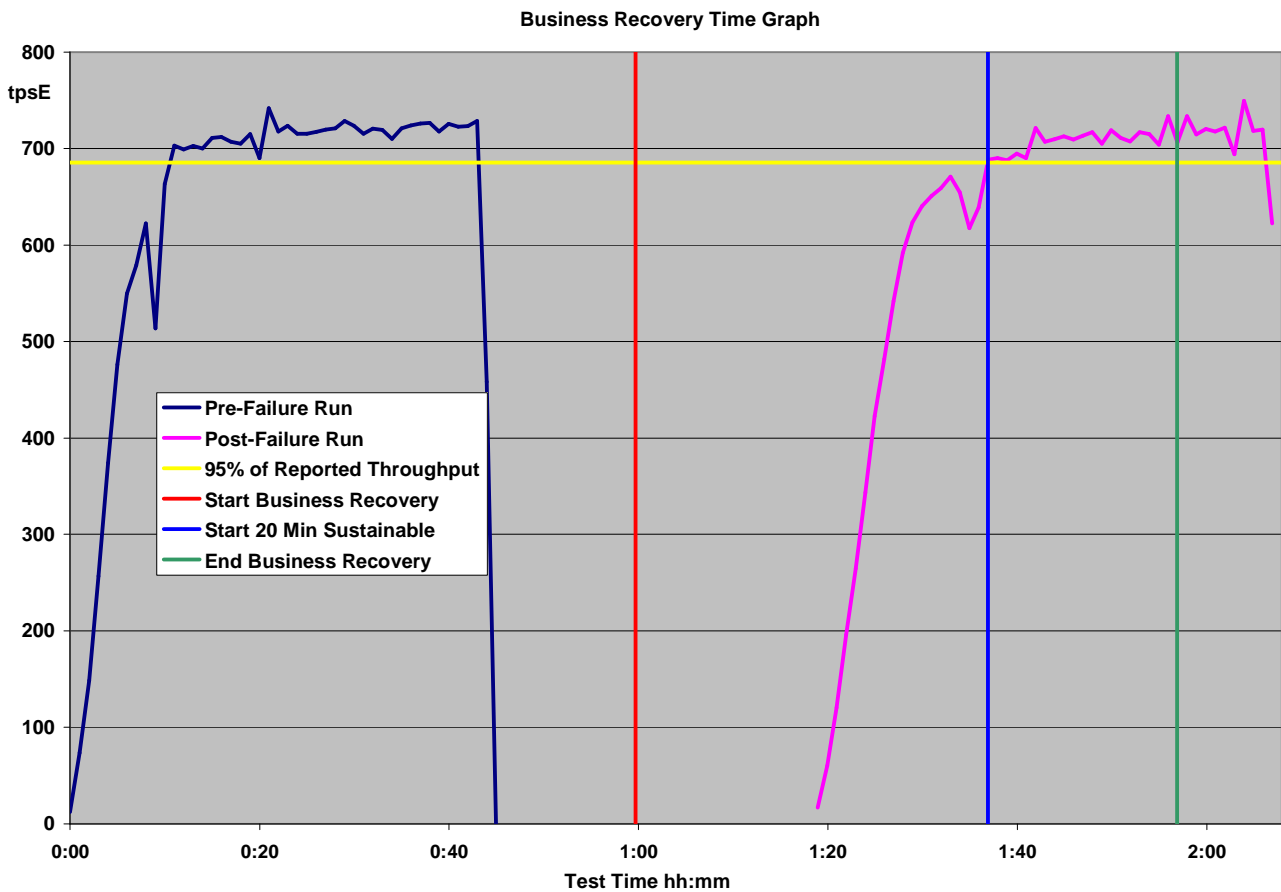

Clause 8: Pricing Related Items

60-Day Space

Details of the 60-Day Space computations (see Clause 8.2.2) along with proof that the database is configured to sustain a Business Day of growth (see Clause 6.6.6.1) must be reported (9.3.8.1).

Table 8-1: Space Requirements

TPC-E Disk Space Requirements							
Customers Used	362,000						
Performance	721.40 TpsE		settlements after 8 hours (Business Day)			20,776,320	
					initial size	grow size	
Table	Initial Rows	Data (KB)	Index size (KB)	Extra 5% (KB)	Total + 5% (KB)	After run (KB)	Growth (KB)
ACCOUNT_PERMISSION	2569814	257064	1888	12948	271900	258952	0
ADDRESS	543004	31344	624	1598	33566	32024	56
BROKER	3620	200	416	31	647	840	224
CASH_TRANSACTION	5754914044	569969832	1201816	28558582	599730230	590570000	19398352
CHARGE	15	8	8	1	17	16	0
COMMISSION_RATE	240	16	16	2	34	32	0
COMPANY	181000	39400	11864	2563	53827	51288	24
COMPANY_COMPETITOR	543000	14632	12568	1360	28560	27200	0
CUSTOMER	362000	61344	16752	3905	82001	78104	8
CUSTOMER_ACCOUNT	1810000	168144	201128			369272	0
CUSTOMER_TAXRATE	724000	15144	624	788	16556	15968	200
DAILY_MARKET	323600850	16600248	7019544	1180990	24800782	23621680	1888
EXCHANGE	4	8	8	1	17	16	0
FINANCIAL	3620000	425968	1776	21387	449131	428160	416
HOLDING	320285589	17042384	12629472	1483593	31155449	44029032	14357176
HOLDING_HISTORY	8383246788	304845432	158871472	23185845	486902749	466070176	2353272
HOLDING_SUMMARY	18009422	610864	2808	30684	644356	1228768	615096
INDUSTRY	102	8	40	2	50	48	0
LAST_TRADE	247970	11584	624	610	12818	23864	11656
NEWS_ITEM	362000	39247600	1000			39248632	32
NEWS_XREF	362000	9080	624	485	10189	9704	0
SECTOR	12	8	24	2	34	32	0
SECURITY	247970	39016	17816	2842	59674	56856	24
SETTLEMENT	6255360000	306977112	647752	15381243	323006107	325808536	18183672
STATUS_TYPE	5	8	8	1	17	16	0
TAXRATE	320	24	16	2	42	56	16
TRADE	6255360000	693045392	371231904	53213865	1117491161	1085986272	21708976
TRADE_HISTORY	15012880304	430476984	1124648	21580082	453181714	433738064	2136432
TRADE_REQUEST	0	0	0	0	0	0	0
TRADE_TYPE	5	8	1032	52	1092	1040	0
WATCH_ITEM	36205633	991488	4128	49781	1045397	995976	360
WATCH_LIST	362000	9048	8136	859	18043	17184	0
ZIP_CODE	14741	488	176	33	697	664	0
			Initial Database Size			Settlements	11,378,041
			2,865,137 (MB)			Grown Database Size	
			2,798 (GB)			2,942,059 (MB)	
DB filegroups	partition size (MB)	file size (MB)	alloc total (MB)	loaded (MB)	loaded +5% (MB)	after run (MB)	Business Day (MB)
16x filegroup1	106,000	103,000	1,696,000				
12x filegroup1	115,000	110,500	1,380,000	2,319,019	2,434,970	2,379,007	2,428,557
16x filegroup2	34,000	29,000	544,000				
12x filegroup2	37,000	31,000	444,000	546,118	573,424	563,052	577,040
Initial Growing Space (MB)	2,801,443	Number of disks	192				
Final Growing Space (MB)	2,878,350	Disk Capacity (MB)	68,664	Initial Log Size (MB)	10,971	Log units	1
Delta (MB)	76,907	Number of disks	144	Final Log Size (MB)	129,356	Disks per unit	6
Data Space per Trade (MB)	0.006759	Disk Capacity (MB)	139,236	Log Growth (MB)	118,385	Disk Capacity (MB)	139,488
1 Day Data Growth (MB)	140,433	RAID10 Overhead	50%	Log Space per Trade	0.010405	RAID10 Overhead	50.0%
60 Day Space (MB)	11,291,097	Total Space (MB)	16,616,736	1 Day Log Space (MB)	216,171	Log Space (MB)	418,464

Attestation Letter

The Auditor's Attestation Letter, which indicates compliance, must be included in the Report (9.3.8.2).



Benchmark Sponsors: Detlev Seidel
Primary TPC Representative
Fujitsu Siemens Computer GmbH
Heinz-Nixdorf-Ring 1
33106 Paderborn, Germany

August 31, 2008

I verified the TPC Benchmark™ E performance of the following configuration:

Platform: PRIMERGY RX600 S4
Operating system: Microsoft Windows Server 2008 Enterprise x64 Edition
Database Manager: Microsoft SQL Server 2008 Enterprise x64 Edition

The results were:

CPU's Speed	Memory	Disks	Trade-Result 90% Response Time	tpsE
Tier B: PRIMERGY RX600 S4				
4 x Intel Xeon X7460 (2.66GHz)	128 GB	2 x 36 GB 15K SAS (int.) 6 x 146 GB 10K SAS (int.) 192 x 73 GB 15K SAS 144 x 146 GB 15K SAS	0.15 Seconds	721.40
Tier A: PRIMERGY RX300 S4				
2 x Intel Xeon E5405 (2.0GHz)	4 GB	1 x 250 GB SATA	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:


- All EGen components were verified to be v1.5.1.
- The transactions were correctly implemented.
- The database was properly scaled and populated for 362,000 Customers.

- The mandatory network between the driver and the SUT was configured.
- The ACID properties were met.
- Input data was generated according to the specified percentages.
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums.
- The measurement interval was representative of steady state conditions.
- The reported measurement interval was 120 minutes.
- The implementation used Redundancy Level 1.
- The Business Recovery Time of 00:57:13 was correctly measured.
- The 60 day storage requirement was correctly computed and configured.
- The system pricing was verified for major components and maintenance.

Additional Audit Notes:

None.

Respectfully Yours,



François Raab, President

Clause 9: Supporting Files

Supporting Files Index table

An index for all files required by Clause 9.4 Supporting Files must be provided in the Report. The Supporting Files index is presented in a tabular format where the columns specify the following:

- The first column denotes the clause in the TPC Specification
- The second column provides a short description of the file contents
- The third column contains the path name for the file starting at the SupportingFiles directory.

If there are no Supporting Files provided then the description column must indicate that there is no supporting file and the path name column must be left blank (9.3.9.1).

Clause	Description	Path	Filename
	overview	SupportingFiles	SupportingFiles.doc
Introduction	System Configuration	SupportingFiles/Introduction/	SysInfo_TierA.txt SysInfo_TierB.txt
	Disk Configuration	SupportingFiles/Introduction/Hardware/	DiskConfiguration.doc RAIDConfiguration.xml DataDisks.txt FormatDisks.cmd HowToConfigure.txt input.txt rc.bat tempdb.sql
	Parameter OS Tunables Database Setup	SupportingFiles/Introduction/Software/	SQL_param.rpt SQL IP Config.reg SQL Node Config.reg SQL Page Config.reg MSTPCE Database Setup Reference.doc
	Startup Scripts Tier A	SupportingFiles/Introduction/Software/	start_CE.cmd start_CE2.cmd start_MEE.cmd start_MEE2.cmd
	Startup Scripts Tier B	SupportingFiles/Introduction/Software/	sqlstart.cmd
Clause 2	Create Database	SupportingFiles/Cause2	Backup_Database.sql Checkpoint_TPCE_Database.SQL Count_Customers.sql Create_Database.sql Create_DM_Audit_Table.sql Create_TID_Ranges_Table.sql Create_Timer_Table.sql Create_TPCE_VERSIONS_Table.sql Database_Options_1.sql Database_Options_2.sql Drop_and_Create_TPCE_INFO.sql End_Load_Timer.sql Get_Next_T_ID.sql Install_Load_Timer_Proc.sql Load_TPCE_Info.sql Remove_Database.sql Restore_Database.sql SQL_Server_Configuration.sql tempdb.sql Trade_Cleanup.cmd Trade_Cleanup.sql Version.sql
	Index Creation Scripts	SupportingFiles/Cause2/DDL	BulkInsert_<1..24>.sql Convert_NI_ITEM_Data.SQL Create_Check_Constraints_Fixed.sql Create_Check_Constraints_Growing.sql Create_Check_Constraints_Scaling.sql Create_Clustered_Indexes_Fixed.sql Create_Clustered_Indexes_Growing.sql Create_Clustered_Indexes_Scaling.sql

			Create_FK_Constraints.sql Create_NC_Indexes_Fixed.sql Create_NC_Indexes_Growing.sql Create_NC_Indexes_Scaling.sql Create_Tables_Fixed.sql Create_Tables_Growing.sql Create_Tables_Scaling.sql Create_Tables_Scaling_Flat.sql Create_TPCE_Types.sql Drop_FK_Constraints.sql Drop_Tables_Fixed.sql Drop_Tables_Growing.sql Drop_Tables_Scaling.sql
	Database Audit Scripts	SupportingFiles/Cause2/DDL/Audit_Scripts/Database	Create_DB_Audit_Tables.SQL DB_Check.sql DB_Primary_Key_Check.SQL DB_Tables.sql Drop_DB_Audit_Tables.SQL Insert_Duplicates_Tests.sql Referential_Integrity_Tests.sql
	Database Space Scripts	SupportingFiles/Cause2/DDL/Audit_Scripts/Space	SPFiles.sql SPLog.sql SPUsed.sql
Clause3	Transaction Frames	SupportingFiles/Cause3	BrokerVolume.sql CustomerPosition.sql DataMaintenance.sql MarketFeed.sql MarketWatch.sql SecurityDetail.sql TradeLookup.sql TradeOrder.sql TradeResult.sql TradeStatus.sql TradeUpdate.sql
	BaseServer	SupportingFiles/Cause3/BaseServer	BaseServer.cpp BaseServer.h BaseServer.vcproj stdafx.cpp stdafx.h SUTServersLocals.h
	SUT_CE_Server	SupportingFiles/Cause3/SUT_CE_Server	Release\SUT_CE_Server.exe CEServer.cpp CEServer.h CEServerMain.cpp PortDefinitions.h stdafx.cpp stdafx.h SUTServer.sln SUTServer.suo SUTStructs.h SUT_CE_Server.vcproj
	SUT_MEE_Server	SupportingFiles/Cause3/SUT_MEE_Server	Release\SUT_MEE_Server.exe MEEServer.cpp MEEServer.h MEEServerMain.cpp stdafx.cpp stdafx.h SUT_MEE_Server.vcproj
	TransactionsSP	SupportingFiles/Cause3/TransactionsSP	BrokerVolumeDB_SP.cpp BrokerVolumeDB_SP.h CheckpointDB_SP.cpp CheckpointDB_SP.h CustomerPositionDB_SP.cpp CustomerPositionDB_SP.h DataMaintenanceDB_SP.cpp DataMaintenanceDB_SP.h MarketFeedDB_SP.cpp MarketFeedDB_SP.h MarketWatchDB_SP.cpp MarketWatchDB_SP.h SecurityDetailDB_SP.cpp

			SecurityDetailDB_SP.h stdafx.cpp stdafx.h TradeLookupDB_SP.cpp TradeLookupDB_SP.h TradeOrderDB_SP.cpp TradeOrderDB_SP.h TradeResultDB_SP.cpp TradeResultDB_SP.h TradeStatusDB_SP.cpp TradeStatusDB_SP.h TradeUpdateDB_SP.cpp TradeUpdateDB_SP.h TransactionsSP.vcproj TxnHarnessDBBase.cpp TxnHarnessDBBase.h TxnHarnessDBConn.cpp TxnHarnessDBConn.h
	TxnHarness	SupportingFiles/Cause3/TxnHarness	TxnHarness.vcproj TxnHarnessSendToMarket.cpp TxnHarnessSendToMarket.h TxnHarness_stdafx.cpp TxnHarness_stdafx.h
Clause4			
Clause5	EGen Driver Configuration	SupportingFiles/Cause5	RX600S4_362KCus_2x305user_CKPT.xml
	EGenLoader Parameter	SupportingFiles/Cause5	BuildSteps.log EGenLoaderFrom1To15000.log EGenLoaderFrom15001To30000.log EGenLoaderFrom347001To362000.log
	EGenLogger Output	SupportingFiles/Cause5	TxnReportE_Ml.xls
Clause6	EGenValidate	SupportingFiles/Cause6	EGenValidate.txt
Clause7	ACID	SupportingFiles/Cause7	MSTPCE ACID Procedures.doc
	ACID Procedures	SupportingFiles/Cause7/AcidProcs	AcidProc.cmd AcidProc.out Remove_AcidProcs.cmd
	ACID Scripts	SupportingFiles/Cause6/AcidProcs/Scripts	AcidProc.vbs CustomerPosition_Iso3.sql CustomerPosition_Iso4.sql Drop_SPROC.sql Remove_AcidProcs.vbs TradeOrder_C.sql TradeOrder_Iso1_1.sql TradeOrder_Iso1_2.sql TradeOrder_Iso2.sql TradeOrder_Iso3.sql TradeOrder_Iso4.sql TradeOrder_RB.sql TradeResult_Iso1_1.sql TradeResult_Iso1_2.sql TradeResult_Iso2_1.sql TradeResult_Iso2_2.sql TradeResult_Iso3.sql TradeResult_Iso4.sql
	Atomicity	SupportingFiles/Cause7/Atomicity	Atomicity.cmd Atomicity_C.out Atomicity_RB.out
		SupportingFiles/Cause7/Atomicity/Scripts	atom.vbs Atomicity_C.sql Atomicity_RB.sql
	Consistency	SupportingFiles/Cause7/Consistency	Consistency.cmd Consistency.out
		SupportingFiles/Cause7/Consistency/Scripts	Consistency.sql Consistency.vbs
Durability Business Recovery	SupportingFiles/Cause7/Durability/BusinessRecovery	BR_BenchCraft_Config.xml BR_Consistency.out BR_Count_Settlement1.ver BR_Count_Settlement2.ver BR_ERRORLOG_1.txt	

			BR_ERRORLOG_2.txt BR_Systemevents_TierA.txt BR_Systemevents_TierB.txt BusinessRecov_Part1_step60.xlt BusinessRecov_Part1_TxnReportE_20.xl BusinessRecov_Part1_TxnReportE_all.xl BusinessRecov_Part2_step60.xlt BusinessRecov_Part2_TxnReportE_20.xl BusinessRecov_Part2_TxnReportE_all.xl BusinessRecov_TimeGraph.xls
	Durability Data Accessibility	SupportingFiles/Cause7/Durability/Data Accessibility	DataAccess_TimeGraph.xls DataAccess_TxnReportE_all.xls DA_BenchCraft_Config.xml DA_Count_Settlement1.ver DA_Count_Settlement2.ver DA_ERRORLOG.txt SystemEvents_Application.txt
	Isolation	SupportingFiles/Cause7/Isolation	Isolation1_S1.rpt Isolation1_S2.rpt Isolation1_S3.rpt Isolation1_S4.rpt Isolation2_S1.rpt Isolation2_S2.rpt Isolation2_S3.rpt Isolation2_S4.rpt Isolation3_S1.rpt Isolation3_S2.rpt Isolation3_S3.rpt Isolation4_S1.rpt Isolation4_S2.rpt Isolation4_S3.rpt
		SupportingFiles/Cause7/Isolation/Scripts	Isolation1_S1.sql Isolation1_S2.sql Isolation1_S3.sql Isolation1_S4.sql Isolation2_S1.sql Isolation2_S2.sql Isolation2_S3.sql Isolation2_S4.sql Isolation3_S1.sql Isolation3_S2.sql Isolation3_S3.sql Isolation4_S1.sql Isolation4_S2.sql Isolation4_S3.sql
Clause8	60-Day Space Calculations	SupportingFiles/Cause8	tpce_space.xls

Appendix: Third Party Price Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

August 19, 2008

Fujitsu Siemens Computers
Detlev Seidel
Heinz Nixdorf Ring 1
Paderborn, Germany 33106

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-E benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-07507	SQL Server 2008 Enterprise x64 Edition <i>Per Processor License</i> <i>Discount Schedule: Open Program - Level C</i> <i>Unit Price reflects a 6% discount from the retail unit price of \$24,999.</i>	\$23,432	4	\$93,728
P72-03168	Windows Server 2008 Enterprise Edition (x64) <i>Server License with 25 CALs</i> <i>Discount Schedule: Open Program - Level C</i> <i>Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,310	1	\$2,310
P73-01664	Windows Server 2003 R2 Standard x64 Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	1	\$719
N/A	Microsoft Problem Resolution Services <i>Professional Support</i> <i>(1 Incident)</i>	\$245	1	\$245

Windows Server 2008 and Windows Server 2003 are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found at <http://www.microsoft.com/products/info/render.aspx?view=22&type=mpn&content=22/licensing>

SQL Server 2008 will be orderable and available by August 30, 2008.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PEdese0808190000007498.

Please include this Reference ID in any correspondence regarding this price quote.



Fujitsu Computer Systems Corporation
 1250 E. Arques Avenue
 MS125
 Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **70016-0**
 Valid through: **01/01/2009**

Quote Date: 08/22/2008		
Customer: TPC-E Configuration		Reference:
Address: PRIMERGY RX600 S4 Sunnyvale, CA 94085		ATTN: Detlev Seidel Phone: 1
Payment Terms: NET30		Freight Terms: FOB
Sales Rep Name: JON RODRIGUEZ	Sales Rep Email: jrodriguez@fujitsupc.com	Sales Rep Phone: 408-764-9586

Item	Part Number	Description	Qty	Sell Price	Ext. Price
1	FSC_S26361-K826-V103_71390-01		1	\$2,362.15	\$2,362.15
	1	PRIMECENTER Rack 38 U, 1000 deep (S26361-K826-V103)			
	2	Dummy panel, platics, 1U + assembly (S26361-F2735-E130)			
	6	Dummy panel, platics, 2U + assembly (S26361-F2735-E131)			
	2	Socket strip 3phase 3x 8 sockets (S26361-F2262-E31)			
2	FSCSX40_S26361-K1122-V200_71390-02		12	\$5,338.00	\$64,056.00
	12	FibreCAT SX40 SAS Disk Subsystem (S26361-K1122-V200)			
	144	HD SAS 3Gb/s 146GB 15k hot pl 3.5" SX40 (S26361-F3244-E514)			
	12	Rack installation ex works, SX10, 1U Nod (S26361-F1647-E302)			
3	PYSX40-W036360-0NA	PYSX40, Standard Warranty, 9 x 5, NBD response time, 36 Months	12	\$0.00	\$0.00
4	PYSX40-U004361-0NA	PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	12	\$1,644.30	\$19,731.60
5	FSCR6S4_S26361-K998-V200_71390-03		1	\$5,535.20	\$5,535.20
	1	PY RX600S4 (S26361-K998-V200)			
	1	Memory Board Kit RX600 S4 (S26361-F3125-E440)			
	1	CD-RW/DVD slimline SATA (S26361-F3268-E1)			
	6	HD SAS 3Gb/s 146GB 10k hot plug 2.5" (S26361-F3208-E114)			
	2	HD SAS 3Gb/s 36GB 15k hot plug 2.5" (S26361-F3208-E536)			
	1	Rack installation ex works (SNP:SY-F1647E301-P)			
	1	RMK-F1_RX600 S4 (S26361-F2735-E106)			
	1	Cable magmt. for 19" DC- PC- Rack (S26361-F2735-E7)			
6	PYR6S4-W036360-0NA	PYRX600 S4, Standard Warranty, 9 x 5, NBD response time, 36 Months	1	\$0.00	\$0.00
7	PYR6S4-U004361-0NA	PYRX600 S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	1	\$1,417.50	\$1,417.50
8	FSCR3S4_S26361-K1151-V101_71390-04		1	\$2,304.35	\$2,304.35
	1	PY RX300S4 6x3.5 (S26361-K1151-V101)			
	2	Xeon DP E5405 2.00 GHz 2x8MB 1333MHz (S26361-F3882-E200)			
	2	2GB 2x1GB FBD867 PC2-5300F d ECC (S26361-F3263-E522)			
	1	CD-RW/DVD slimline SATA (S26361-F3268-E1)			
	1	HD SATA 3Gb/s 250GB 7.2k hot plug 3.5" (S26361-F3265-E250)			
	1	RAID 0/1 SAS based on LSI MegaRAID 8Port (S26361-F3257-E8)			



Fujitsu Computer Systems Corporation
 1250 E. Arques Avenue
 MS125
 Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **70016-0**
 Valid through: **01/01/2009**

Quote Date: 08/22/2008		
Customer: TPC-E Configuration		Reference:
Address: PRIMERGY RX600 S4 Sunnyvale, CA 94085		ATTN: Detlev Seidel Phone: 1
Payment Terms: NET30		Freight Terms: FOB
Sales Rep Name: JON RODRIGUEZ	Sales Rep Email: jrodriguez@fujitsupc.com	Sales Rep Phone: 408-764-9586

Item	Part Number	Description	Qty	Sell Price	Ext. Price
1		Rack installation ex works (SNP:SY-F1647E301-P)			
1		RMK-P_1-2U servers (new) (S26361-F2735-E110)			
9	PYR3S4-W036360-0NA	PYR3S4, Standard Warranty, 9 x 5, NBD response time, 36 Months	1	\$0.00	\$0.00
10	PYR3S4-U004361-0NA	PYR3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	1	\$854.10	\$854.10
11	FSC_S26361-K826-V103_71390-05		1	\$2,343.45	\$2,343.45
	1	PRIMECENTER Rack 38 U, 1000 deep (S26361-K826-V103)			
	6	Dummy panel, platics, 2U + assembly (S26361-F2735-E131)			
	2	Socket strip 3phase 3x 8 sockets (S26361-F2262-E31)			
12	FSCSX40_S26361-K1122-V200_71390-06		16	\$4,399.60	\$70,393.60
	16	FibreCAT SX40 SAS Disk Subsystem (S26361-K1122-V200)			
	192	HD SAS 3Gb/s 73GB 15k hot pl 3.5" SX40 (S26361-F3244-E573)			
	16	Rack installation ex works, SX10, 1U Nod (S26361-F1647-E302)			
13	PYSX40-W036360-0NA	PYSX40, Standard Warranty, 9 x 5, NBD response time, 36 Months	16	\$0.00	\$0.00
14	PYSX40-U004361-0NA	PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing	16	\$1,644.30	\$26,308.80
15	S26361-F3890-L501	RAID Ctrl SAS 8Port 512M FH/LP LSI	5	\$436.05	\$2,180.25
16	S26361-F3228-L201	Eth Ctrl 2x1Gbit PCIe PRO/1000PT Cu lp	1	\$143.65	\$143.65
17	S26361-F3482-L5	LAN_crossover-Cat 5e, l=5m	2	\$21.25	\$42.50
18	S26381-K370-V510	KB SLIM MF USA	2	\$24.65	\$49.30
19	S26361-F3246-L5	SAS cable external 0.5 m	18	\$59.50	\$1,071.00
20	S26361-F3246-L203	SAS CBL EXT 2m 8088-8470	4	\$62.90	\$251.60
21	S26361-F3246-L603	SAS CBL EXT 6m 8088-8470	6	\$107.95	\$647.70
22	S26361-K1146-V150	SCENICVIEW A17-3	2	\$226.10	\$452.20
23	S26381-K355-L400	Optical Wheelmouse USB silver	2	\$15.30	\$30.60
24	S26361-F3487-E460	Xeon MP X7460 2.67GHz 16MB 1066MHz	4	\$3,871.75	\$15,487.00



Fujitsu Computer Systems Corporation
1250 E. Arques Avenue
MS125
Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **70016-0**
Valid through: **01/01/2009**

Quote Date: 08/22/2008		
Customer: TPC-E Configuration	Reference:	
Address: PRIMERGY RX600 S4 Sunnyvale, CA 94085	ATTN: Detlev Seidel Phone: 1	
Payment Terms: NET30	Freight Terms: FOB	
Sales Rep Name: JON RODRIGUEZ	Sales Rep Email: jrodriguez@fujitsupc.com	Sales Rep Phone: 408-764-9586

Item	Part Number	Description	Qty	Sell Price	Ext. Price
25	S26361-F3263-E625	16GB (2x 8GB) FBDIM, 667MHz	8	\$2,371.50	\$18,972.00
Quote Total:					\$234,634.55

Notes:

- * Freight Charge and Sales Tax will be added as applicable.
- * All products subject to availability.
- * PLEASE STATE THIS QUOTE NUMBER WHEN PLACING A PURCHASE ORDER—THIS WILL ENSURE PROMPT HANDLING TO SPEED PROCESSING AND SHIPMENT.**

Warranty/Service Programs

Part No.	Description
PYR364-U004361-QNA	PYR364 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing
PYR364-W036360-QNA	PYR364, Standard Warranty, 9 x 5, NBD response time, 36 Months
PYR664-U004361-QNA	PYRX600 S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing
PYR664-W036360-QNA	PYRX600 S4, Standard Warranty, 9 x 5, NBD response time, 36 Months
PYSX40-U004361-QNA	PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing
PYSX40-W036360-QNA	PYSX40, Standard Warranty, 9 x 5, NBD response time, 36 Months

Terms and Conditions of Order

Special Provisions (if any):

FCS reserves the right to substitute equivalent or better items based upon availability at the time of shipment
Quote Expiration - Unless otherwise agreed to in writing by FCS, this quote is only valid through 01/01/2009

Server Purchase: Customer's acceptance of this Quote by the issuance of an authorized Purchase Order that references said Quote shall constitute Customer's acknowledgement that it has read and understands the terms and conditions set forth in the FCS Products and Services Agreement (FCS-1) and that such Agreement shall exclusively govern the subject matter of the authorized Purchase Order, regardless of any varying or additional terms in any Customer documents. A complete copy of the FCS Products and Services Agreement is available at <http://www.computers.us.fujitsu.com/termsandconditions.shtml>. If a reseller Agreement or other mutually executed Agreement (including a Federal Government GSA Schedule) exists between Customer and FCS and it is referenced on the authorized Purchase Order, then and only then will the terms of said Master Agreement or GSA Schedule apply.

Mobile Purchase: Customer's acceptance of this Quote by the issuance of an authorized Purchase Order that references said Quote shall constitute Customer's acknowledgement that it has read and understands the terms and conditions set forth in (Terms and Conditions of Mobile Sale) and that such Agreement shall exclusively govern the subject matter of the authorized Purchase Order, regardless of any varying or additional terms in any Customer documents. A complete copy of the FCS Mobile Products Agreement is available at http://www.computers.us.fujitsu.com/downloads/FCS-2_EVAL.pdf. Customer's acceptance of this Evaluation Order shall constitute Customer's acknowledgement that it has read and understands the terms and conditions of the FCS Product Evaluation Agreement, and that such terms shall exclusively govern the subject matter of this Order, regardless of any varying or additional terms in any Customer documents.

Server/Mobile Evaluation: This Evaluation Order is subject to the terms and conditions set forth in FCS Product Evaluation Agreement (FCS-2), which are an integral part hereof and are incorporated herein by reference. A complete copy of the FCS Products Evaluation Agreement is available at http://www.computers.us.fujitsu.com/downloads/FCS-2_EVAL.pdf. Customer's acceptance of this Evaluation Order shall constitute Customer's acknowledgement that it has read and understands the terms and conditions of the FCS Product Evaluation Agreement, and that such terms shall exclusively govern the subject matter of this Order, regardless of any varying or additional terms in any Customer documents.

Non FCS Products Notice: Notwithstanding any contrary terms or conditions in any Agreement between the parties, or any Purchase Order submitted by Buyer, Buyer is hereby notified that all products distributed by FCS pursuant to those Non FCS Products are pass-through products only, and are not covered by any warranty obligation from FCS, are not covered by any indemnification provision from FCS, are not covered by any maintenance or service provision by FCS, and FCS does not assume any liability to Buyer for such Non FCS Products or service whatsoever. Buyer shall have recourse only to the manufacturer, not FCS, for all such warranty, indemnity, service or support obligations. Buyers Purchase Order for Non FCS Products signifies agreement to these terms.

