illiilli CISCO

Cisco Systems, Inc.

TPC Express Benchmark™ HS (TPCx-HS)

Full Disclosure Report

for

Cisco UCS Integrated Infrastructure for Big Data and Analytics

(with 17 UCS C240M5 Servers)

using

Cloudera Enterprise Edition V5.13.0

and

Red Hat Enterprise Linux Server Release 7.4

First Edition

January 30, 2018

Cisco Systems, Inc. (Cisco), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, the TPC Express Benchmark TM HS should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company.

TPC BenchmarkTM, TPCx-HS and HSph, are registered certification marks of the Transaction Processing Performance Council.

The Cisco products, services or features identified in this document may not yet be available or may not be available in all areas and may be subject to change without notice. Consult your local Cisco business contact for information on the products or services available in your area. You can find additional information via Cisco's web site at www.cisco.com. Actual performance and environmental costs of Cisco products will vary depending on individual customer configurations and conditions.

Copyright © 2018 Cisco Systems, Inc.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

TPCx-HS FDR 2 Cisco - January, 2018

ıı|ııı|ıı CISCO

Cisco UCS Integrated Infrastructure for Big Data and Analytics

TPCx-HS Rev. v2.0.2 TPC-Pricing Rev. v2.2.0

Report Date: **January 30, 2018**

Total System Cost	TPCx-HS Performance Metric	Price/Performance
-------------------	----------------------------	-------------------


656,096 USD

10.96 HSph@3TB

59,862.78 USD \$/HSph@3TB

Scale Factor	Apache Hadoop Compatible Software	Operating System	Other Software	Availability Date
3	Cloudera Enterprise Edition V5.13.0	Red Hat Enterprise Linux Server Release 7.4	n/a	January 30, 2018

System Configuration



26 x 40G QSFP+ or 98 x 10G SFP+ Ports* 6 x 40G QSFP+

*with QSFP to 4xSFP breakout cable

40GigE

2 x Cisco UCS 6332 32-Port Fabric Interconnect



Physical Storage/Scale Factor: 234.32

Scale Factor/Physical Memory: 0.94

Servers: 17 x UCS C240M5

Total Processors/Cores/Threads 34/476 /952

Server Configuration: Per node:

Processors 2 x Intel® Xeon® Gold Processor 6132, 2.60 GHz, 19.25 MB L3

Memory 192GB

Storage Controller 1 x Cisco 12G SAS Modular Raid Controller Storage Device 24 x 1.8TB 10K RPM SAS HDD (data nodes)

2 x 1.8TB 10K RPM SAS HDD (name node) 2 x 240GB SATA (all nodes, boot disk)

Network 1 x Cisco VIC 1387 Dual Port 40Gb QSFP CNA MLOM

Connectivity: 2 x Cisco UCS 6332 32-Port Fabric Interconnect Total Rack Units: (17*C240M5)+(2*FI) = (17*2)+(2*1) = 36RU

TPCx-HS FDR 3 Cisco - January, 2018



TPCx-HS Rev. v2.0.2 TPC-Pricing Rev. v2.2.0

> Report Date: January 30, 2018

Description	Part Number	Source	Unit Price	Qty	Extended Price	3 Year Maint. Price
UCS C240 M5 24 SFF + 2 rear drives w/o CPU,mem,HD,PCle,PS	UCSC-C240-M5SX	1	\$ 4,399.00	17	\$ 74,783.00	
2.6 GHz 6132/140W 14C/19.25MB Cache/DDR4 2666MHz	UCS-CPU-6132	1	\$ 7,000.00	34	\$ 238,000.00	
16GB DDR4-2666-MHz RDIMWPC4-21300/single rank/x4/1.2v	UCS-MR-X16G1RS-H	1	\$ 900.00	204	\$ 183,600.00	
Riser 1 incl 3 PCle slots (x8, x16, x8); slot 3 req CPU2	UCSC-PCI-1-C240M5	1	\$ 199.00	17	\$ 3,383.00	
Cisco VIC 1387 Dual Port 40Gb QSFP CNA MLOM	UCSC-MLOM-C40Q-03	1	\$ 2,192.00	17	\$ 37,264.00	
240GB SATA M.2	UCS-M2-240GB	1	\$ 535.00	34	\$ 18,190.00	
Cisco UCS 1600W AC Pow er Supply for Rack Server	UCSC-PSU1-1600W	1	\$ 800.00	34	\$ 27,200.00	
Pow er Cord, 125VAC 13A NEWA 5-15 Plug, North America	CAB-9K12A-NA	1	\$ -	34	\$ -	
Ball Bearing Rail Kit for C220 & C240 M4 & M5 rack servers	UCSC-RAILB-M4	1	\$ 220.00	17	\$ 3,740.00	
IMC SW (Recommended) latest release for C-Series Servers.	CIMC-LATEST	1	\$ -	17	\$ -	
Heat sink for UCS C240 M5 rack servers 150W CPUs & below	UCSC-HS-C240M5	1	\$ -	34	\$ -	
UCS C-Series M5 SFF drive blanking panel	UCSC-BBLKD-S2	1	\$ -	56	\$ -	
C240 M5 PCle Riser Blanking Panel	UCSC-PCIF-240M5	1	\$ -	17	\$ -	
Mini Storage carrier for M.2 SATA/NVME (holds up to 2)	UCS-MSTOR-M2	1	\$ -	17	\$ -	
Super Cap for UCSC-RAID-M5, UCSC-MRAID1GB-KIT	UCSC-SCAP-M5	1	\$ -	17	\$ -	
Super Cap cable for UCSC-RAID-M5HD	CBL-SC-MR12GM5P	1	\$ -	17	\$ -	
Cisco 12G Modular RAID controller with 4GB cache	UCSC-RAID-M5HD	1	\$ 2,900.00	17	\$ 49,300.00	
Cisco ONE Data Center Compute Opt Out Option	C1UCS-OPT-OUT	1	\$ -	17	\$ -	
UCS SP 1.8 TB 12G SAS 10K RPM SFF HDD (4K) 4Pk	UCS-SP-H1P8TB-4X	1	\$ -	96	\$ -	
1.8 TB 12G SAS 10K RPM SFF HDD (4K)	UCS-SP-H1P8TB	1	\$ 1,500.00	384	\$ 576,000.00	
1.8 TB 12G SAS 10K RPM SFF HDD (4K)	UCS-HD18TB10K4KN	1	\$ 1,827.00	2	\$ 3,654.00	
SmartNet total care 3YR support (24x7x4)	CON-3OSP-C240M5A2	1	\$ 2,364.00	17		\$40,188
UCS SP Select 2 x 6332 FI	UCS-SP-Fl6332-2X	1	\$ -	1	\$ -	
(Not sold standalone) UCS 6332 1RU FI/12 QSFP+	UCS-SP-Fl6332	1	\$ 22,000.00	2	\$ 44,000.00	
UCS 6332 Pow er Supply/100-240VAC	UCS-PSU-6332-AC	1	\$ -	4	\$ -	
40GBASE-CR4 Passive Copper Cable, 3m	QSFP-H40G-CU3M	1	\$ -	16	\$ -	
QSFP40G BiDi Short-reach Transceiver	QSFP-40G-SR-BD	1	\$ -	8	\$ -	
UCS Manager v3.1	N10-MGT014	1	\$ -	2	\$ -	
UCS 6332 Fan Module	UCS-FAN-6332	1	\$ -	8	\$ -	
UCS 6332 Chassis Accessory Kit	UCS-ACC-6332	1	\$ -	2	\$ -	
40GBASE-CR4 Passive Copper Cable, 3m	QSFP-H40G-CU3M=	1	\$ 250.00	20	\$ 5,000.00	
Pow er Cord, 125VAC 13A NEMA 5-15 Plug, North America	CAB-9K12A-NA	1	\$ -	4	\$ -	
3rd Gen FI Per port License to connect C-direct only	UCS-LIC-6300-40GC=	1	\$ 1,388.00	20	\$ 27,760.00	
3YR SMARTNET24X7X4OS (Not sold standalone) UCS6332	CON-3OSP-SPFI6332	1	\$ 6,678.00	1		\$6,678



TPCx-HS Rev. v2.0.2 TPC-Pricing Rev. v2.2.0

> Report Date: January 30, 2018

Description	Part Number	Source	Unit P	rice	Qty	Extended Price	3 Year Maint. Price
Cisco R42612 standard rack, w/side panels	RACK2-UCS2	1	\$ 6,341.	.00	1	\$ 6,341.00	
Red Hat Enterprise Linux Server, 3Y 24x7	CON-ISV1-EL2S2V3A	1	\$ 3,897	7.00	17	\$66,249	
Cloudera Enterprise Edition, 3Y 24x7	UCS-BD-CEBN-GD=	1	\$14,057.	.00	17	\$238,969	
					Total	\$1,603,433.00	\$46,866
Large Purchase Discount ¹	61% for products and 35% for service	1				\$ (978,094.13)	\$ (16,403.10)
Acer V206HQL-LED monitor -20" (Inc 2 spares)	UM.1V6AA.A02	2	\$ 79.	.99	3	\$ 239.97	
Logitech USB Corded Keyboard/Mouse Combo MK120 (Inc 2 spares)	920-002565	2	\$ 17.	.99	3	\$ 53.97	

Pricing:1 = Cisco, 2 = CDW	Three-Year Cost of Ownership	\$656,096
(1) All discounts are based on US list prices and for similar quantities and configurations. The discounts are based on the overall specific components pricing from respective vendors in this single quotation. Discounts for similarly sized configurations will be similar to those quoted here, but may vary based on the components in the configuration.	HSph@3TB	10.96
Audited by Doug Johnson of InfoSizing	\$/HSph@3TB	\$59,862.78

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms, please inform at pricing@tpc.org. Thank you.

TPCx-HS FDR 5 Cisco - January, 2018



TPCx-HS Rev. v2.0.2 TPC-Pricing Rev. v2.2.0

> Report Date: January 30, 2018

Numerical Quantities

Performance	Run – Run 1
Scale Factor	3TB
Run Start Time	2018-01-22 18:24:41.000
Run End Time	2018-01-22 18:41:04.000
Run Elapsed Time	985.000
HSGen Start Time	2018-01-22 18:24:42.000
HSGen End Time	2018-01-22 18:28:24.000
HSGen Elapsed Time	223.442
HSSort Start Time	2018-01-22 18:28:26.000
HSSort End Time	2018-01-22 18:39:14.000
HSSort Elapsed Time	648.808
HSValidate Start Time	2018-01-22 18:39:18.000
HSValidate End Time	2018-01-22 18:41:04.000
HSValidate Elapsed Time	107.429
Repeatability	Run – Run 2
Scale Factor	3TB
Run Start Time	2018-01-22 18:41:19.000
Run End Time	2018-01-22 18:57:39.000
Run Elapsed Time	982.000
HSGen Start Time	2018-01-22 18:41:20.000
HSGen End Time	2018-01-22 18:45:00.000
HSGen Elapsed Time	220.849
HSSort Start Time	2018-01-22 18:45:02.000
HSSort End Time	2018-01-22 18:55:39.000
HSSort Elapsed Time	637.555
HSValidate Start Time	2018-01-22 18:55:42.000
HSValidate End Time	2018-01-22 18:57:39.000
HSValidate Elapsed Time	118.572

TPCx-HS FDR 6 Cisco - January, 2018



TPCx-HS Rev. v2.0.2 TPC-Pricing Rev. v2.2.0

> Report Date: January 30, 2018

Run Reports

Run Report for Performance Run – Run 1 TPCx-HS Performance Metric (HSph@SF) Report Test Run 1 Details Total Time = 985 Total Size = 3000000000 Scale-Factor = TPCx-HS Performance Metric (HSph@SF): 10.9649 Run Report for Repeatability Run – Run 2 TPCx-HS Performance Metric (HSph@SF) Report Total Time = Test Run 2 Details 982 Total Size = 3000000000 Scale-Factor = TPCx-HS Performance Metric (HSph@SF): 11.0011

Table of Contents

ABSTRACT	9
PREFACE	10
CLAUSE 1: GENERAL ITEMS	11
1.1 TEST SPONSOR	11
1.2 PARAMETER SETTINGS	11
1.3 CONFIGURATION DIAGRAMS	11
1.4 Dataset Distribution	13
1.5 SOFTWARE COMPONENTS DISTRIBUTION	13
CLAUSE 2: WORKLOAD RELATED ITEMS	14
2.1 HARDWARE & SOFTWARE TUNABLE	14
2.2 RUN REPORT	14
2.3 BENCHMARK KIT IDENTIFICATION	14
2.4 BENCHMARK KIT CHANGES	14
CLAUSE 3: SUT RELATED ITEMS	15
3.1 Data Storage Ratio	15
3.2 Memory Ratio	15
CLAUSE 4: SCALE FACTORS AND METRICS	16
4.1 HSGEN TIME	16
4.2 HSSORT TIME	16
4.3 HSVALIDATE TIME	16
4.4 HSDATACHECK TIMES	16
4.5 PERFORMANCE & PRICE-PERFORMANCE	16
AUDITORS' INFORMATION AND ATTESTATION LETTER	17
SUPPORTING FILE INDEX	20
THIRD PARTY PRICE OLIOTES	21

Abstract

This document contains the methodology and results of the TPC Express BenchmarkTM HS (TPCx-HS) test conducted in conformance with the requirements of the TPCx-HS Standard Specification, Revision v2.0.2.

The test was conducted at a Scale Factor of 3 with 17 UCS C240M5 Servers running Cloudera Enterprise Edition V5.13.0 on Red Hat Enterprise Linux Server Release 7.4.

Measured Configuration

Company Name	Cluster Node	Virtualization	Operating System
Cisco Systems, Inc.	UCS C240M5	n/a	Red Hat Enterprise Linux Server Release 7.4

TPC Express Benchmark® HS Metrics

Total System Cost	HSph@3TB	Price/Performance	Availability Date
656,096 USD	10.96	59,862.78 USD	January 30, 2018

TPCx-HS FDR 9 Cisco - January, 2018

Preface

TPC Express Benchmark™ HS Overview

TPC Express BenchmarkTM HS (TPCx-HS) was developed to provide an objective measure of hardware, operating system and commercial Apache Hadoop File System API compatible software distributions, and to provide the industry with verifiable performance, price-performance and availability metrics. The benchmark models a continuous system availability of 24 hours a day, 7 days a week.

Even though the modeled application is simple, the results are highly relevant to hardware and software dealing with Big Data systems in general. The TPCx-HS stresses both hardware and software including Hadoop runtime, Hadoop File-system API compatible systems and MapReduce layers. This workload can be used to asses a broad range of system topologies and implementation of Hadoop clusters. The TPCx-HS can be used to asses a broad range of system topologies and implementation methodologies in a technically rigorous and directly comparable and vendor-neutral manner.

The TPCx-HS kit is available from the TPC (See www.tpc.org/tpcx-hs for more information). Users must sign-up and agree to the TPCx-HS User Licensing Agreement (ULA) to download the kit. Re-distribution of the kit is prohibited. All related work (such as collaterals, papers, derivatives) must acknowledge the TPC and include TPCx-HS copyright. The TPCx-H Kit includes: TPCx-HS Specification document, TPCx-HS Users Guide documentation, shell scripts to set up the benchmark environment and Java code to execute the benchmark load.

The purpose of TPC benchmarks is to provide relevant, objective performance data to industry users. To achieve that purpose, TPC benchmark specifications require that benchmark tests be implemented with systems, products, technologies and pricing that:

- *Are generally available to users;*
- Are relevant to the market segment that the individual TPC benchmark models or represents (e.g., TPCx-HS models and represents Hadoop run-time and Hadoop File-system API compatible systems);
- Would plausibly be implemented by a significant number of users in the market segment the benchmark models or represents.

The use of new systems, products, technologies (hardware or software) and pricing is encouraged so long as they meet the requirements above. Specifically prohibited are benchmark systems, products, technologies or pricing (hereafter referred to as "implementations") whose primary purpose is performance optimization of TPC benchmark results without any corresponding applicability to real-world applications and environments. In other words, all "benchmark special" implementations that improve benchmark results but not real-world performance or pricing, are prohibited.

The rules for pricing are included in the TPC Pricing Specification and rules for energy measurement are included in the TPC Energy Specification.

Further information is available at www.tpc.org

Clause 1: General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Cisco Systems, Inc.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- Configuration parameters and options for server, storage, network and other hardware component incorporated into the pricing structure;
- Configuration parameters and options for operating system and file system component incorporated into the pricing structure:
- Configuration parameters and options for any other software component incorporated into the pricing structure;
- Compiler optimization options.

Comment 1: In the event that some parameters and options are set multiple times, it must be easily discernible by an interested reader when the parameter or option was modified and what new value it received each time.

Comment 2: This requirement can be satisfied by providing a full list of all parameters and options, as long as all those that have been modified from their default values have been clearly identified and these parameters and options are only set once.

The supporting files contain the parameters and options used to configure the components involved in this benchmark.


1.3 Configuration Diagrams

7.4.4 Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Total number of nodes used;*
- Total number and type of processors used/total number of cores used/total number of threads used (including sizes of L2 and L3 caches);
- Size of allocated memory, and any specific mapping/partitioning of memory unique to the test;
- Number and type of disk units (and controllers, if applicable;
- Number of channels or bus connections to disk units, including their protocol type;
- Number of LAN (e.g., Ethernet) connections and speed for switches and other hardware components physically used in the test or are incorporated into the pricing structure;
- Type and the run-time execution location of software components.

TPCx-HS FDR 11 Cisco - January, 2018

Measured Configuration

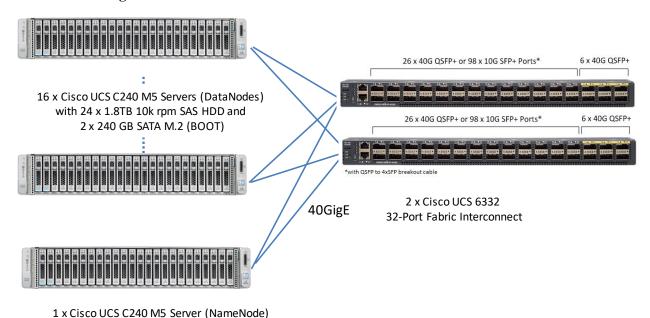

The measured configuration consisted of:

with 2 x 1.8TB 10k rpm SAS HDD and 2 x 240 GB SATA M.2 (BOOT)

• Total Nodes: 17

Total Processors/Cores/Threads: 34/476/952

• Total Memory: 3.19TB

• Total Number of Storage Drives/Devices: 420

• Total Storage Capacity: 702.96TB

Server nodes details:

- 17 x UCS C240M5 Servers, each with:
 - o Processors/Cores/Threads: 2/28 /56
 - o Processor Model: 2 x Intel® Xeon® Gold Processor 6132, 2.60 GHz, 19.25 MB L3
 - o Memory: 192GB
 - Controller: 1 x Cisco 12G SAS Modular Raid Controller
 - o Drives:
 - 24 x 1.8TB 10K RPM SAS HDD (data nodes)
 - 2 x 1.8TB 10K RPM SAS HDD (name node)
 - 2 x 240 GB SATA (all nodes, boot disk)
 - Network: 1 x Cisco VIC 1387 Dual Port 40Gb QSFP CNA MLOM

Network connectivity detail:

• 2 x Cisco UCS 6332 32-Port Fabric Interconnect

The distribution of software components over server nodes is detailed in section 1.5.

Priced Configuration

There are no differences between the priced and measured configurations.

TPCx-HS FDR 12 Cisco - January, 2018

1.4 Dataset Distribution

The distribution of dataset across all media must be explicitly described.

Table 1.4 describes the distribution of the dataset across all media in the system.

Table 1.4: Dataset Distribution

Server Node	Controller	Disk Drive	Description of Content
1	Cisco 12G Modular RAID controller with 4GB cache	1-2 (HDD)	Data, Temp
1	Embedded RAID PCH SATA	0 (2 SSD, RAID-1)	Operating system, Root, Swap, Hadoop Master
2-17	Cisco 12G Modular RAID controller with 4GB cache	1-24 (HDD)	Data, Temp
2-17	Embedded RAID PCH SATA	0 (2 SSD, RAID-1)	Operating system, Root, Swap, Hadoop Master

1.5 Software Components Distribution

The distribution of various software components across the system must be explicitly described.

Table 1.5 describes the distribution of the software components across the system.

Table 1.5: Software Component Distribution

	Map/Reduce		HDFS		ZooKeeper
Node	Resource Manager	Node Manager	NameNode	DataNode	QuorumPeer
1	Χ		X		X
2-3		Х		X	X
4-17		X		X	

Distributed file system implementation and corresponding Hadoop File System API version must be disclosed.

Cloudera Enterprise Edition V5.13.0 (fully HDFS compatible at the API level).

Map/Reduce implementation and corresponding version must be disclosed.

Cloudera Enterprise Edition V5.13.0 (compatible equivalent to Hadoop 2.6.0).

Clause 2: Workload Related Items

2.1 Hardware & Software Tunable

Script or text used to set for all hardware and software tunable parameters must be reported.

The Supporting File Archive contains all configuration scripts.

2.2 Run Report

The run report generated by TPCx-HS benchmark kit must be reported.

The Supporting File Archive contains the full run report. Following are extracts from the run report that lists the performance summary for both runs.

Run Report for Run 1	– Performance Run	
TPCx-HS Performance	e Metric (HSph@SF) Report	
Test Run 1 Details	Total Time = Total Size = Scale-Factor =	985 30000000000 3
TPCx-HS Performance	ee Metric (HSph@SF):	10.9649
Run Report for Run 2	– Repeatability Run	========
=======================================	e Metric (HSph@SF) Report	
Test Run 2 Details	Total Time = Total Size = Scale-Factor =	982 30000000000 3
TPCx-HS Performance	e Metric (HSph@SF):	11.0011

2.3 Benchmark Kit Identification

Version number of TPCx-HS kit and checksum for HSGen, HSSort and HSValidate Programs must be reported.

Kit Version	2.0.2
File	MD5
BigData_cluster_validate_suite.sh	58c13ddb98a2d1228f2df10f4a087a71
HSDataCheck.sh	a621d8a94db9c6015f3463557664ef21
TPCx-HS-master.jar	492cbc51a1a60c28b43d96c79d08683d
TPCx-HS-master.sh	b110d48eab67e21fd88822beb376b1d3

2.4 Benchmark Kit changes

No modifications were made to the TPC-provided kit.

TPCx-HS FDR 14 Cisco - January, 2018

Clause 3: SUT Related Items

3.1 Data Storage Ratio

The data storage ratio must be disclosed.

Table 3.1 describes the details of the storage devices configured on the system and their capacity.

Table 3.1: Storage Device Capacity

Qty	Capacity (GB)	Total (GB)
386	1,800	694,800
34	240	8,160
Total Storage (TB)		702.96

Scale Factor = 3

Data Storage Ratio = (Storage / SF) = 234.32

3.2 Memory Ratio

The Scale Factor to memory ratio must be disclosed.

Total Configured Memory = 3.19TB

Scale Factor to Memory Ratio = (SF / Memory) = 0.94

Clause 4: Scale Factors and Metrics

4.1 HSGen Time

The HSGen time must be disclosed for Run1 and Run2.

	Run1	Run2
HSGen	223.442	220.849

4.2 HSSort Time

The HSSort time must be disclosed for Run1 and Run2.

	Run1	Run2
HSSort	648.808	637.555

4.3 HSValidate Time

The HSValidate time must be disclosed for Run1 and Run2.

	Run1	Run2
HSValidate	107.429	118.572

4.4 HSDataCheck Times

Both HSDataCheck times must be disclosed for Run1 and Run2.

	Run1	Run2
HSDataCheck (pre-Sort)	2.000	2.000
HSDataCheck (post-Sort)	4.000	3.000

4.5 Performance & Price-Performance

The performance metric (HSph@SF) must be disclosed for Run1 and Run2. Price-performance metric (\$/HSph@SF) must be disclosed for the performance run.

	Run1	Run2
HSph@3TB	10.96	11.00

\$/HSph@3TB 59,862.78 USD

Auditors' Information and Attestation Letter

The auditor's agency name, address, phone number, and Attestation letter must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

This benchmark was audited by Doug Johnson, InfoSizing.

www.sizing.com 63 Lourdes Drive Leominster, MA 10453 978-343-6562

This benchmark's Full Disclosure Report (FDR) can be downloaded from www.tpc.org.

A copy of the auditor's attestation letter is included in the next two pages.

TPCx-HS FDR 17 Cisco - January, 2018





Raghunath Nambiar Cisco Systems Inc. 3800 Zanker Road San Jose, CA 95134

January 30, 2018

I verified the TPC Express BenchmarkTM HS v2.0.2 performance of the following configuration:

Platform: Cisco UCS Integrated Infrastructure for Big Data and Analytics

(with 17 UCS C240M5 Servers)

Operating System: Red Hat Enterprise Linux Server 7.4
Apache Hadoop Cloudera Enterprise Edition V5.13.0

Compatible Software:

The results were:

Performance Metric 10.96 HSph@3TB Run Elapsed Time 985.00 Seconds

<u>Cluster</u> <u>17 UCS C240M5 Servers, each node with:</u>

CPUs 2 x Intel Xeon Gold Processor 6132 (2.60 GHz, 14-core, 19.25 MB L3)

Memory 192 GB

Storage **Qty Size Type**

24 1.8TB 10K RPM SAS HDD (Data Nodes)
2 1.8TB 10K RPM SAS HDD (Name Node)
2 240GB SATA (All Nodes, boot disk)

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:

- All TPC-provided components were verified to be v2.0.2
- · No modifications were made to any of the Java code
- · Any and all modifications to shell scripts were reviewed for compliance
- All checksums were validated for compliance
- · The generated dataset was properly scaled to 3TB
- The generated dataset and the sorted dataset were replicated 3-ways

63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | www.sizing.com

TPCx-HS FDR 18 Cisco - January, 2018

- The elapsed times for all phases and runs were correctly measured and reported
- The Storage and Memory Ratios were correctly calculated and reported
- The system pricing was verified for major components and maintenance
- The major pages from the FDR were verified for accuracy

Additional Audit Notes:

None.

Respectfully Yours,

Doug Johnson, Certified TPC Auditor

63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | www.sizing.com

TPCx-HS FDR 19 Cisco - January, 2018


Supporting File Index


The following index outlines the information included in the supporting files archive.

Clause	Description	Archive File Pathname
Clause 1	Parameters and options used to configure the system	SupportingFilesArchive\Clause1
Clause 2	Configuration scripts & Run report	SupportingFilesArchive\Clause2
Clause 3	System configuration details	SupportingFilesArchive\Clause3

Third Party Price Quotes

CDW

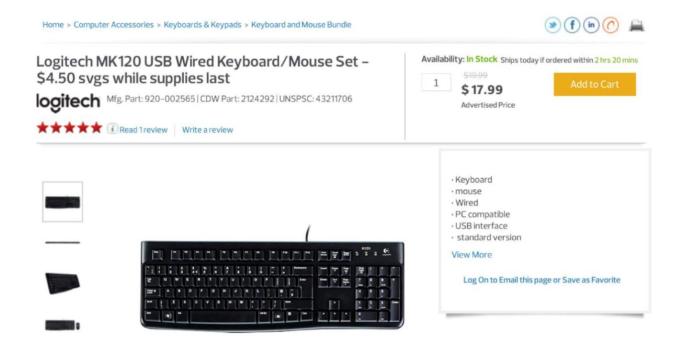

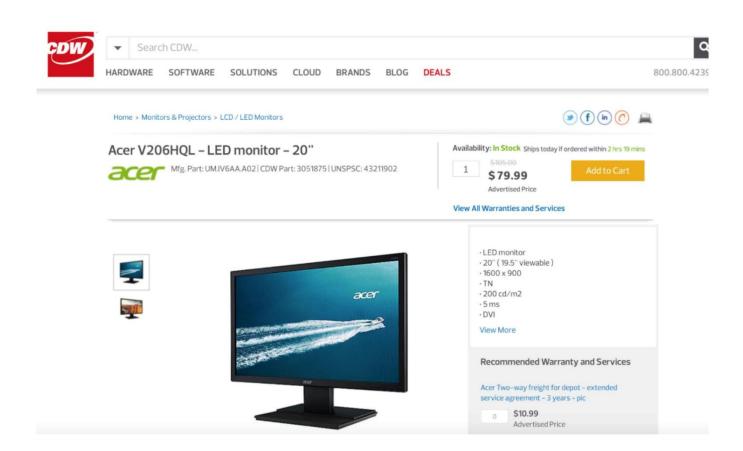

TPCx-HS FDR 21 Cisco - January, 2018