

TPC Express Benchmark™ HS Full Disclosure Report

HPE ProLiant DL325 Gen11

(with 1x ProLiant DL325 Gen11 Server; 16x ProLiant DL325 Gen11 Servers)

Running

CDP Private Cloud Base Edition 7.1.7

on
Red Hat Enterprise Linux 8.6

First Edition - March 2023

Hewlett Packard Enterprise Company (HPE), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary because of these and other factors. Therefore, the TPC Express BenchmarkTM V should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

HPE and the HPE Logo are trademarks of Hewlett Packard Enterprise Company and/or its affiliates in the U.S. and other countries. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between HPE and any other company

TPC Express Benchmark™ HS, TPCx-HS, and HSph, are registered certification marks of the Transaction Processing Performance Council.

The HPE products, services or features identified in this document may not yet be available or may not be available in all areas and may be subject to change without notice. Consult your local HPE business contact for information on the products or services available in your area. You can find additional information via HPE's web site at www.hpe.com. Actual performance and environmental costs of HPE products will vary depending on individual customer configurations and conditions.

Copyright© 2023 Hewlett Packard Enterprise Company

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

ABSTRACT Page 3 of 26

Abstract

This document contains the methodology and results of the TPC Express Benchmark™ HS (TPCx-HS) test conducted in conformance with the requirements of the TPCx-HS Standard Specification, Revision 2.0.3.

The benchmark results are summarized below.

Measured Configuration					
Company Name Cluster Node Hadoop Software Operating System					
HPE	ProLiant DL325 Gen11	CDP Private Cloud Base Edition 7.1.7	Red Hat Enterprise Linux 8.6		

TPC Express Benchmark™ HS Metrics					
Total System Cost	HSph@100TB Price/Performance Availability Date				
\$1,886,046	58.38	\$32,306.38	December 5, 2022		

Executive Summary

The Executive Summary follows on the next several pages.

EXECUTIVE SUMMARY Page 4 of 26

Hewlett Packard Enterprise	HPE ProLiant DL325 Gen11		TPCx-HS TPC Pricing Report Date	2.0.3 2.8.0 Mar. 23, 2023	
Availability Date	TPCx-HS Performance	e Price/Perfor	mance	Total Sys	stem Cost
December 5, 2022	58.38 HSph@100TB	\$32,306 \$ / HSph@ ²		\$1,886,	046 USD
	System Under Test C	onfiguration Ove	erview		
Scale Factor	Hadoop Software	Operating S	ystem	Other S	Software
100	CDP Private Cloud Base Edition 7.1.7	Red Hat Ent Linux 8		N	I/A
1 x HPE ProLiant DL325 Ger 1x AMD EPYC 9374F 32-Cor 384 GB (12 x 32 GB 1Rx4 PC 2x NVMe 3.2 TB PM1735a U 1x USB3.0 to 1 GbE Adapte 1x Mellanox Dual Port Con	e Processor 5-4800) J.3			pectrum SN2700 100 Gigabit QSFI	
Physical Storage/S	Scale Factor: 4.16	Scale Fact	or/Physi	ical Memory	/: 15.69
Total Number of Server Total Processors/Cores		17 (1x ProLiant DL325 Gen11) 17/544/1,088	DL325	Gen11; 16x	ProLiant
Server Configuration: Processors	1x ProLiant DL3			Liant DL32 DEPYC 937	5 Gen11
Processor Memory 384 GiB Storage Device 2x 3.2 TB NVM			Process		
	384 GiB 2x 3.2 TB NVM Mellanox Dual I			3 TB NVMe ox Dual Port	74F 32-Core
Storage Device	2x 3.2 TB NVM Mellanox Dual I	Port 100 GbE ectrum SN2700	8x 3.2 Melland	TB NVMe ox Dual Port	74F 32-Core t 100 GbE

EXECUTIVE SUMMARY Page 5 of 26



HPE ProLiant DL325 Gen11

TPCx-HS 2.0.3
TPC Pricing 2.8.0
Report Date Mar. 23, 2023

Description	Price Key	Part Number	Unit Price	Qty	Extended Price	3 Yr Maint Price
Server Hardware						
Master Node						
HPE DL325 Gen11 8SFF CTO Server	1	P54199-B21	\$2,767	1	\$2,767	
AMD EPYC 9374F 3.85GHz 32-core 320W Processor for HPE	1	P53710-B21	\$11,087	1	\$11,087	
HPE ProLiant DL3X5 Gen11 CPU Performance 1U Heat Sink Kit	1	P58457-B21	\$430	1	\$430	
HPE ProLiant DL3XX Gen11 1U Performance Fan Kit	1	P58462-B21	\$305	7	\$2,135	
HPE 32GB (1x32GB) Single Rank x4 DDR5-4800 EC8 Reg. Smart Memory	1	P50310-B21	\$2,465	12	\$29,580	
HPE DL3X5 Gen11 NS204i-u NVM e Hot Plug Boot Device Cable Kit	1	P57013-B21	\$83	1	\$83	
HPE 3.2TB NVMe MU SFF BC U.3 PM 1735a SSD	1	P50230-B21	\$6,476	2	\$12,952	
HPE 1600W FS Plat Ht Plug LH PS Kit	1	P38997-B21	\$685	2	\$1,370	
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	1	P25960-B21	\$4,373	1	\$4,373	
HPE DL3XX Gen11 Easy Install Rail 2 Kit	1	P52351-B21	\$141	1	\$141	
HPE DL325Gen11 Standard Riser	1	stdDL325Gen11Riser		1		
Data Nodes						
HPE DL325 Gen11 8SFF CTO Server	1	P54199-B21	\$2,767	16	\$44,272	
AMD EPYC 9374F 3.85GHz 32-core 320W Processor for HPE	1	P53710-B21	\$11,087	16	\$177,392	
HPE ProLiant DL3X5 Gen11 CPU Performance 1U Heat Sink Kit	1	P58457-B21	\$430	16	\$6,880	
HPE ProLiant DL3XX Gen11 1U Performance Fan Kit	1	P58462-B21	\$305	112	\$34,160	
HPE 32GB (1x32GB) Single Rank x4 DDR5-4800 EC8 Reg. Smart Memory	1	P50310-B21	\$2,465	192	\$473,280	
HPE DL3X5 Gen11 NS204i-u NVMe Hot Plug Boot Device Cable Kit	1	P57013-B21	\$83	16	\$1,328	
HPE 3.2TB NVMe MU SFF BC U.3 PM 1735a SSD	1	P50230-B21	\$6,476	128	\$828,928	
HPE 1600W FS Plat Ht Plug LH PS Kit	1	P38997-B21	\$685	32	\$21,920	
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	1	P25960-B21	\$4,373	16	\$69,968	
HPE DL3XX Gen11 Easy Install Rail 2 Kit		P52351-B21	\$141	16	\$2,256	
HPE DL325Gen11 Standard Riser		stdDL325Gen11Riser		16		
Other Hardware Components						
HPE 1620 48G Switch (no support available above 90 days, hence increase qty to 3)	1	JG914A	\$630	3	\$1,890	
HPE SN2700M 100GbE 32QSFP28 Switch with 3Y Tech Care Essential Service	1	Q2F21A	\$34,510	1	\$34,510	
HPE USB US Keyboard/Mouse Kit	1	631341-B21	\$32	3	\$96	
HPE 100Gb QSFP28 to QSFP28 3m Direct Attach Copper Cable	1	845406-B21	\$685	20	\$13,700	
Rack 48U 600mmx 1075mm G2 Advanced Pallet	1	P9K19A	\$3,023	1	\$3,023	
HPE C13 - JIS C8303 JP 100V 12Amp 2.0m Power Cord	1	AF572A	\$54	37	\$1,994	
HPE 3 Year Tech Care Essential DL325 GEN11 Service	1	H78S6E	\$2,958	17		\$50,286
			Subto	tal	\$1,780,515	\$50,286
Other						,
HP V22v G5 FHD Monitor	3	65P56AA	\$130	3	\$390	
USB3.0 to 1GbE Adapter	2		\$14.99	20	\$300	
			Subto	tal	\$690	\$0
(Continued	on next page	e.)				

EXECUTIVE SUMMARY Page 6 of 26



HPE ProLiant DL325 Gen11

TPCx-HS 2.0.3
TPC Pricing 2.8.0
Report Date Mar. 23, 2023

(Continued from previous page.)

Description	Price Key	Part Number	Unit Price	Qty	Extended Price	3 Yr Maint Price	
Server Software							
RHEL Svr Sckt/2 Gst 3yr 24x7 E-LTU	1	G3J30AAE	\$3,702	17	\$62,934		
Cloudera Data Platform Private Cloud Base Edition - Annual Subscription per Node for up to 16 Cores/128 GB RAM for compute or up to 48 TB for storage. Business-Level Support. (3 years support)	4	CDP-PVC-BASE-BUS	\$37,200	17	\$632,400		
Support (3 years support)			Subto	tal	\$695,334	\$0	
		Total Extended Price			\$2,476,539	\$50,286	
		Total Discounts			\$623,180	\$17,600	
		Grand Total			\$1,853,359	\$32,686	

Pricing: 1 = HPE; 2 = BestBuy.com; 3 = hp.com; 4 = cloudera.com

* All discounts are based on US list prices and for similar quantities and configurations. A 35% discount was based on the overall specific components pricing from vendor 1 in this single quotation. Discounts for similarly sized configurations will be similar to those quoted here, but may vary based on the components in the configuration.

Three-Year Cost of Ownership: \$1,886,046

HSph@100TB: 58.38

\$ / HSph@100TB: \$32,306.38

Audited by Doug Johnson, InfoSizing

Sales contact: HPE WW Headquarters, 3000 Hanover St., Palo Alto, CA 94304-1185 (650) 857-1501 or HPE: 855-472-5233

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated Line Items. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed Line Items. For complete details, see the pricing section of the TPC Benchmark Standard. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing @tpc.org. Thank you.

EXECUTIVE SUMMARY Page 7 of 26



HPE ProLiant DL325 Gen11

TPCx-HS 2.0.3
TPC Pricing 2.8.0
Report Date Mar. 23, 2023

Numerical Quantities

Performance Run – Run 2				
Scale Factor	100TB			
Run Start Time	2023-03-02 14:29:19.000			
Run End Time	2023-03-02 16:12:02.000			
Run Elapsed Time	6,166.000			
HSGen Start Time	2023-03-02 14:29:19.000			
HSGen End Time	2023-03-02 14:49:59.000			
HSGen Elapsed Time	1,240.993			
HSSort Start Time	2023-03-02 14:50:06.000			
HSSort End Time	2023-03-02 16:00:09.000			
HSSort Elapsed Time	4,203.707			
HSValidate Start Time	2023-03-02 16:00:17.000			
HSValidate End Time	2023-03-02 16:12:02.000			
HSValidate Elapsed Time	706.678			
Repeatability				
Scale Factor	100TB			
Run Start Time	2023-03-02 12:46:39.000			
Run End Time	2023-03-02 14:27:13.000			
Run Elapsed Time	6,037.000			
HSGen Start Time	2023-03-02 12:46:39.000			
HSGen End Time	2023-03-02 13:05:53.000			
HSGen Elapsed Time	1,155.211			
HSGen Elapsed Time HSSort Start Time HSSort End Time HSSort Elapsed Time	2023-03-02 13:06:00.000 2023-03-02 14:15:08.000 4,147.877			

EXECUTIVE SUMMARY Page 8 of 26



HPE ProLiant DL325 Gen11

TPCx-HS 2.0.3

TPC Pricing 2.8.0

Report Date Mar. 23, 2023

Run Reports

Run Report for Performance Run – Run 2

TPCx-HS Performance Metric (HSph@SF) Report

Test Run 2 Details Total Time = 6166

TPCx-HS Performance Metric (HSph@SF): 58.3873

Run Report for Repeatability Run – Run 1

TPCx-HS Performance Metric (HSph@SF) Report

Test Run 1 Details Total Time = 6037

TPCx-HS Performance Metric (HSph@SF): 59.6338

EXECUTIVE SUMMARY Page 9 of 26



HPE ProLiant DL325 Gen11

TPCx-HS 2.0.3
TPC Pricing 2.8.0

Report Date Mar. 23, 2023

Revision History

Date Edition Description

March 23, 2023 First Initial Publication

Table of Contents

Abstra	ct		3
Execut	ive Su	ımmary	3
Table o	of Con	itents	10
Clause	0 —	Preamble	11
0.1	TP	C Express Benchmark™ HS Overview	11
Clause	1 –	General Items	12
1.1	Te	st Sponsor	12
1.2	Pa	rameter Settings	12
1.3	Co	onfiguration Diagrams	12
1.	3.1	Priced Configuration	13
1.	3.2	Measured Configuration	14
1.4	Da	taset Distribution	14
1.5	So	ftware Components Distribution	15
Clause	2 –	Workload Related Items	16
2.1	На	rdware & Software Tunables	16
2.2	Ru	n Report	16
2.3	Be	nchmark Kit Identification	16
2.4	Ве	nchmark Kit Changes	17
Clause	3 –	SUT Related Items	18
3.1	Da	ta Storage Ratio	18
3.2	Me	emory Ratio	18
Clause	4 –	Metrics Related Items	19
4.1	HS	Gen Time	19
4.2	HS	SSort Time	19
4.3	HS	SValidate Time	19
4.4	HS	SDataCheck Times	19
4.5	Pe	rformance & Price-Performance	19
Auditor	's Info	ormation & Letter of Attestation	20
Suppo	rting F	iles Index	23
Third-F	arty F	Price Quotes	24
Best	Buy.c	om	24
HP.	om		25
Clou	idera.d	com	26

PREAMBLE Page 11 of 26

Clause 0 – Preamble

0.1 TPC Express BenchmarkTM HS Overview

The TPC Express Benchmark™ HS (TPCx-HS) was developed to provide an objective measure of hardware, operating system and commercial Apache Hadoop File System API compatible software distributions, and to provide the industry with verifiable performance, price-performance and availability metrics. The benchmark models a continuous system availability of 24 hours a day, 7 days a week.

Even though the modeled application is simple, the results are highly relevant to hardware and software dealing with Big Data systems in general. TPCx-HS stresses both hardware and software including Hadoop run-time, Hadoop File-system API compatible systems and MapReduce layers. This workload can be used to assess a broad range of system topologies and implementation of Hadoop clusters. TPCx-HS can be used to assess a broad range of system topologies and implementation methodologies in a technically rigorous and directly comparable and vendor-neutral manner.

The TPCx-HS kit is available from the TPC (See www.tpc.org/tpcx-hs for more information). Users must sign-up and agree to the TPCx-HS User Licensing Agreement (ULA) to download the kit. Re-distribution of the kit is prohibited. All related work (such as collaterals, papers, derivatives) must acknowledge the TPC and include TPCx-HS copyright. The TPCx-HS Kit includes: TPCx-HS Specification document, TPCx-HS Users Guide documentation, shell scripts to set up the benchmark environment and Java code to execute the benchmark load.

The purpose of TPC benchmarks is to provide relevant, objective performance data to industry users. To achieve that purpose, TPC benchmark specifications require that benchmark tests be implemented with systems, products, technologies and pricing that:

- Are generally available to users;
- Are relevant to the market segment that the individual TPC benchmark models or represents (e.g., TPCx-HS models and represents Hadoop run-time and Hadoop File-system API compatible systems);
- Would plausibly be implemented by a significant number of users in the market segment the benchmark models or represents.

The use of new systems, products, technologies (hardware or software) and pricing is encouraged so long as they meet the requirements above. Specifically prohibited are benchmark systems, products, technologies or pricing (hereafter referred to as "implementations") whose primary purpose is performance optimization of TPC benchmark results without any corresponding applicability to real-world applications and environments. In other words, all "benchmark special" implementations that improve benchmark results but not real-world performance or pricing, are prohibited.

The rules for pricing are included in the TPC Pricing Specification and rules for energy measurement are included in the TPC Energy Specification. Further information is available at www.tpc.org.

GENERAL ITEMS Page 12 of 26

Clause 1 – General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided

This benchmark was sponsored by Hewlett Packard Enterprise Company.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- Configuration parameters and options for server, storage, network and other hardware component incorporated into the pricing structure;
- Configuration parameters and options for operating system and file system component incorporated into the pricing structure;
- Configuration parameters and options for any other software component incorporated into the pricing structure;
- Compiler optimization options.

Comment 1: In the event that some parameters and options are set multiple times, it must be easily discernible by an interested reader when the parameter or option was modified and what new value it received each time.

Comment 2: This requirement can be satisfied by providing a full list of all parameters and options, as long as all those that have been modified from their default values have been clearly identified and these parameters and options are only set once.

The supporting files contain the parameters and options used to configure the components involved in this benchmark.

1.3 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- Total number of nodes used;
- Total number and type of processors used/total number of cores used/total number of threads used (including sizes of L2 and L3 caches);
- Size of allocated memory, and any specific mapping/partitioning of memory unique to the test;
- Number and type of disk units (and controllers, if applicable;
- Number of channels or bus connections to disk units, including their protocol type;
- Number of LAN (e.g., Ethernet) connections and speed for switches and other hardware components physically used in the test or are incorporated into the pricing structure;
- Type and the run-time execution location of software components.

GENERAL ITEMS Page 13 of 26

1.3.1 Priced Configuration

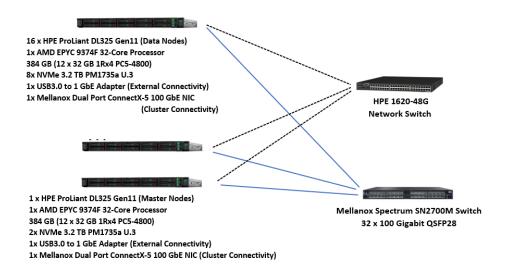


Figure 1-1 Priced Configuration

The priced configuration consists of:

- Total Nodes: 17 (1x ProLiant DL325 Gen11; 16x ProLiant DL325 Gen11)
- Total Processors/Cores/Threads: 17/544/1,088
- Total Memory: 6.38TiB
- Total Number of Storage Drives/Devices: 130
- Total Storage Capacity: 416.00TB

Server node details:

- 1x ProLiant DL325 Gen11 Servers, each with:
 - o Processors/Cores/Threads: 1/32/64
 - o Processor Model: AMD EPYC 9374F 32-Core Processor
 - Memory: 384 GiB
 - Drives: 2x 3.2 TB NVMe
 - o Network: Mellanox Dual Port 100 GbE
- 16x ProLiant DL325 Gen11 Servers, each with:
 - Processors/Cores/Threads: 1/32/64
 - Processor Model: AMD EPYC 9374F 32-Core Processor
 - o Memory: 384 GiB
 - o 8rives: 2x 3.2 TB NVMe
 - Network: Mellanox Dual Port 100 GbE

Network connectivity detail:

- 1x Mellanox Spectrum SN2700M 32x100 GbE (cluster connectivity)
- 1x HPE 1620-48G (admin)

The distribution of software components over server nodes is detailed in section 1.5.

GENERAL ITEMS Page 14 of 26

1.3.2 Measured Configuration

The measured configuration used 8x Mellanox Technologies MT27800 Family [ConnectX-5] MCX556A-ECAT QSFP28 adapters and 9x Mellanox Technologies MT28800 Family [ConnectX-5 Ex] MCX556A-EDAT QSFP28 adapters that were substituted with 17x Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE adapters in the priced configuration.

1.4 Dataset Distribution

The distribution of dataset across all media must be explicitly described.

Table 1-1 describes the distribution of the dataset across all media in the system.

Server Node	Controller	Disk Drive	Description of Content
1	NVMe	nvme0n1, nvme1n1	Operating System, Root, swap, Hadoop Master
2-5	NVMe	nvme0n1	Operating System, Root, swap, Hadoop Master
2-5	NVMe	nvme0n1, nvme1n1, nvme2n1, nvme3n1, nvme4n1, nvme5n1, nvme6n1, nvme7n1	Data, Temp
6-17	NVMe	nvme0n1	Operating System, Root, swap, Hadoop Master
6-17	NVMe	nvme0n1, nvme1n1, nvme2n1, nvme3n1, nvme4n1, nvme5n1, nvme6n1, nvme7n1	Data, Temp

Table 1-1Dataset Distribution

GENERAL ITEMS Page 15 of 26

1.5 Software Components Distribution

The distribution of various software components across the system must be explicitly described.

Table 1-2 Describes the distribution of the software components across the system.

	Map/Re	educe	HDI	FS	ZooKeeper
Node	Resource Manager	Node Manager	NameNode	DataNode	QuorumPeer
1	X		X		X
2-5		Х		X	Х
6-17		Х		X	

Table 1-2 Software Component Distribution

Distributed file system implementation and corresponding Hadoop File System API version must be disclosed.

CDP Private Cloud Base Edition 7.1.7 (fully HDFS compatible at the API level).

Map/Reduce implementation and corresponding version must be disclosed.

CDP Private Cloud Base Edition 7.1.7 (compatible equivalent to Hadoop 3.1.1.7.1.7.0-551).

Clause 2 – Workload Related Items

2.1 Hardware & Software Tunables

Script or text used to set for all hardware and software tunable parameters must be reported.

The Supporting File Archive contains all configuration scripts.

2.2 Run Report

The run report generated by TPCx-HS benchmark kit must be reported.

The Supporting File Archive contains the full run report. Following are extracts from the run report that lists the performance summary for both runs.

Run Report for Run 1 – Repeatability Run

TPCx-HS Performance Metric (HSph@SF) Report

Test Run 1 Details Total Time = 6037

Total Size = 1000000000000 Scale-Factor = 100

TPCx-HS Performance Metric (HSph@SF): 59.6338

Run Report for Run 2 – Performance Run

TPCx-HS Performance Metric (HSph@SF) Report

Test Run 2 Details Total Time = 6166

TPCx-HS Performance Metric (HSph@SF): 58.3873

2.3 Benchmark Kit Identification

Version number of TPCx-HS kit and checksum for HSGen, HSSort and HSValidate Programs must be reported.

Kit Version 2.0.3

File MD5
BigData_cluster_validate_suite.sh 57f7cd68251a9aba0feb6648630ff5da

HSDataCheck.sh bcf0b946a49d1249c9da174b5d9805f1
TPCx-HS-master_MR2.jar 492cbc51a1a60c28b43d96c79d08683d
TPCx-HS-master.sh c619a0819571ecd00cd75d2b76ba8c64

2.4 Benchmark Kit Changes

The required data protection was provided by HDFS Erasure Coding rather than the default three-way data replication. A policy of RS-6-3-1024k was used. Therefore, each block group consisted of 6 data blocks and 3 parity blocks. Each block within a given block group was placed on a different node thus ensuring the required data protection.

In order to collect the necessary data for auditing, the HSDataCheck.sh script was modified. In accordance with the TPCx-HS Standard Specification, this change received prior approval from the TPCx-HS subcommittee.

SUT RELATED ITEMS Page 18 of 26

Clause 3 – SUT Related Items

3.1 Data Storage Ratio

The data storage ratio must be disclosed.

Table 3-1 describes the details of the storage devices configured on the system and their capacity.

Total Storage (TB)		416.00
128	3.2 TB	409.6
2	3.2 TB	6.4
Quantity	Capacity	Total (TB)

Table 3-1 Storage Device Capacities

Scale Factor = 100

Data Storage Ratio = (Total Storage (TB) / SF) = 4.16

3.2 Memory Ratio

The Scale Factor to memory ratio must be disclosed.

Total Configured Memory (TiB) = 6.38

Scale Factor to Memory Ratio = (SF / Total Memory(TiB)) = 15.69

Clause 4 – Metrics Related Items

4.1 HSGen Time

The HSGen time must be disclosed for Run1 and Run2.

	Run 1	Run 2
HSGen	1,155.211	1,240.993

Table 4-1 HSGen Times

4.2 HSSort Time

The HSSort time must be disclosed for Run1 and Run2.

	Run 1	Run 2
HSSort	4,147.877	4,203.707

Table 4-2 HSSort Times

4.3 HSValidate Time

The HSValidate time must be disclosed for Run1 and Run2.

	Run 1	Run 2
HSValidate	719.337	706.678

Table 4-3 HSValidate Times

4.4 HSDataCheck Times

Both HSDataCheck times must be disclosed for Run1 and Run2.

	Run 1	Run 2
HSDataCheck (pre-sort)	7.000	7.000
HSDataCheck (post-sort)	7.000	8.000

Table 4-4 HSDataCheck Times

4.5 Performance & Price-Performance

The performance metric (HSph@SF) must be disclosed for Run 1 and Run 2. Price-performance metric (\$/HSph@SF) must be disclosed for the performance run.

	Run 1	Run 2
HSph@100TB	59.63	58.38

Table 4-5 Performance Metrics

Run 2 Price-Performance: 32,306.38 \$/ HSph@100TB

Auditor's Information & Letter of Attestation

The auditor's agency name, address, phone number, and Attestation letter must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

This benchmark was audited by Doug Johnson, InfoSizing.

www.sizing.com 63 Lourdes Drive Leominster, MA 10453 978-343-6562

This benchmark's Full Disclosure Report (FDR) can be downloaded from www.tpc.org.

A copy of the auditor's Letter of Attestation follows.





Ankit Chouksey Hewlett-Packard Enterprise 192 Mahadevapura, Whitefield Road Bangalore, India 560048

March 22, 2023

I verified the TPC Express Benchmark[™] HS v2.0.3 performance of the following configuration:

Platform: 16x HPE ProLiant DL325 Gen11 Servers (Data Nodes)

1x HPE ProLiant DL325 Gen11 Server (Master Node)

Operating System: Red Hat Enterprise Linux 8.6

Apache Hadoop CDP Private Cloud Base Edition 7.1.7 (using MapReduce)

Compatible Software:

The results were:

Performance 58.38 HSph@100TB

Metric

Run Elapsed Time 6,166.00 Seconds

Cluster 16x ProLiant DL325 Gen11, 1x ProLiant DL325 Gen11 with:

CPUs 1x AMD® EPYC 9374F 32-Core Processor (all nodes)

Memory 384 GiB (all nodes)

Storage Qty Size Type

8 3.2 TB NVMe (data nodes)
2 3.2 TB NVMe (master node)

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:

- All TPC-provided components were verified to be v2.0.3.
- No modifications were made to any of the Java code.
- · Any and all modifications to shell scripts were reviewed for compliance.
- All checksums were validated for compliance.
- The generated dataset was properly scaled to 100 TB.

63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | www.sizing.com

- The generated dataset and the sorted dataset were erasure-coded with a policy of RS-6-3-1024k.
- · The elapsed times for all phases and runs were correctly measured and reported.
- · The Storage and Memory Ratios were correctly calculated and reported.
- · The system pricing was verified for major components and maintenance.
- · The major pages from the FDR were verified for accuracy.

Additional Audit Notes:

The measured configuration used 8x Mellanox Technologies MT27800 Family [ConnectX-5] MCX556A-ECAT QSFP28 adapters and 9x Mellanox Technologies MT28800 Family [ConnectX-5 Ex] MCX556A-EDAT QSFP28 adapters that were substituted with 17x Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE adapters in the priced configuration. The TPCx-HS Subcommittee approved this substitution and based on product specifications it is my opinion that this substitution has no significant effect on performance.

Respectfully Yours,

Doug Johnson, Certified TPC Auditor


63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | www.sizing.com

Supporting Files Index


Clause	Description	Archive File Pathname
Clause 1	Parameters and options used to configure the system	SupportingFiles/Clause1
Clause 2	Configuration scripts and Run Report	SupportingFiles/Clause2
Clause 3	System configuration details	SupportingFiles/Clause3

Third-Party Price Quotes

BestBuy.com

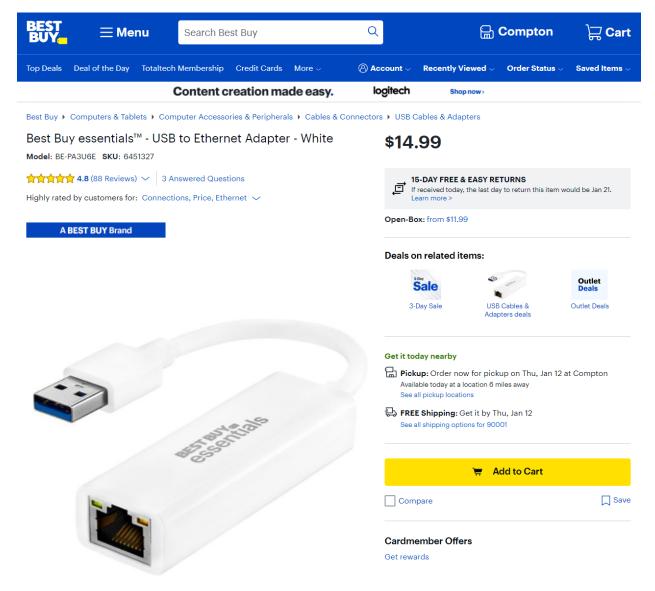

HP.com

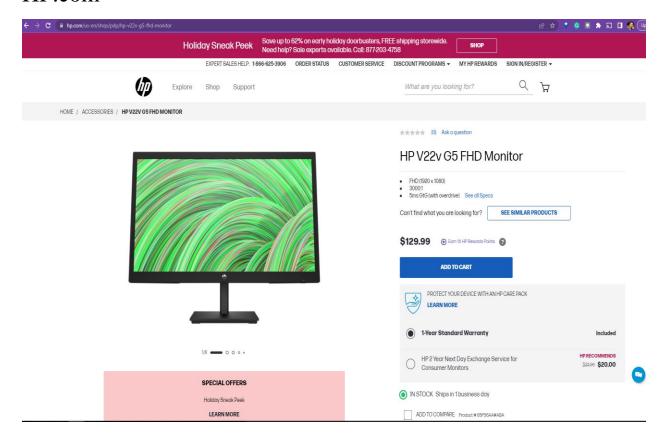

Cloudera.com

