

TPC Express BenchmarkTM IoT Full Disclosure Report for

Supermicro A+ Server 2014TP-HTR

(TwinProTM with 4x H12SST-PS Nodes)

Using

HBase 2.0.0 on Cloudera Distribution for Apache Hadoop Enterprise Edition 6.0.1

anc

Red Hat Enterprise Linux Server Release 7.6

TPCx-IoT Version V1.0.3
Report Edition First
Report Submitted August 07, 2019

ABSTRACT Page 2 of 24

Page **3** of **24**

First Edition - August 2019

Super Micro Computer, Inc (Supermicro), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary because of these and other factors. Therefore, the TPC Express Benchmark $^{\text{TM}}V$ should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

Supermicro, the Supermicro logo, TwinPro, are trademarks and/or registered trademarks of Super Micro Computer, Inc. and/or its affiliates in the U.S. and other countries. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Supermicro and any other company

TPC Express Benchmark™ *IoT, TPCx-IoT, and IoTps, are registered certification marks of the Transaction Processing Performance Council.*

The Supermicro products, services or features identified in this document may not yet be available or may not be available in all areas and may be subject to change without notice. Consult your local Supermicro business contact for information on the products or services available in your area. You can find additional information via Supermicro's web site at www.supermicro.com. Actual performance and environmental costs of Supermicro products will vary depending on individual customer configurations and conditions.

Copyright © 2019 Super Micro Computer, Inc

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

SUPERMICR		_	o A+ Server P-HTR	TPCx-IoT: v1.0.3 TPC-Pricing: v2.4.0 Report Date: Aug 07, 2019
Total System Cost		TPCx-IoT Performance Metric		Price/Performance
138,580 USD		472,200.88 ІоТрѕ		0.29 USD \$/IoTps
Number of Records	DBMS Software	Operating System	Other Software	Availability Date
832 Million	HBase 2.0.0 on Cloudera Distribution for Apache Hadoop 6.0.1	Red Hat Enterprise Linux Server Release 7.6	None	Aug 31, 2019

System Configuration

1x Supermicro A+ Server 2014TP-HTR

TwinProTM with 4x H12SST-PS Nodes, each with:

1x AMD EPYC 7542 32-Core Processor

256 GB (8x 32GB RDIMM 3200MT/s Dual Rank)

1x 256GB M.2 PCle Gen3

1x Mellanox Dual Port 25GbE SFP28 NIC

3x 1TB M.2 PCle Gen3 (Data Nodes)





Mellanox SN2410 Network Switch (48-port 25GbE + 8-port 100GbE)

Total Number of Servers:		1x Supermicro A+ Server 2014TP-HTR (TwinPro™ with 4x H12SST-PS Nodes)
Total Processors/Cores/Threads:		4/128/256
	Processors	1x AMD EPYC 7542 2.9GHz 32-Core
	Memory	256GB
	Storage Device	1x 256GB M.2 PCIe Gen3 (all nodes)
Server Configuration (each)		3x 1TB M.2 PCIe Gen3 (Data Nodes)
C , , ,	Network	1x Supermicro AOC-MH25G-m2S2T Dual Port 25GbE SFP28 NIC
	Connectivity:	Mellanox SN2410 Network Switch
Total Rack Units:		(2x2014TP-HTR) + (1xSN2410) = (2x1) + (1x1) = 3RU



TPCx-IoT: v1.0.3

TPC-Pricing: v2.4.0

Report Date: Aug 07,2019

Description	Part Number	Key	Unit Price	Qty	Extended Price	3 yr. Maint Price
HARDWARE COMPONENTS		,				
Supermicro Super Server H12SST-PS	AS -2014TP-HTR	1	\$2,941.00	1	\$2,941.00	
- Rail, Power Cord (included)						
MMD EPYC™ 7542 2.9GHz/3.4GHz, 32C/64T 225W	PSE-ROM7542-0075	1	\$3,320.00	4	\$13,280.00	
SK hynix 32GB 2Rx4 PC4-3200 HMA84GR7CJR4N-XN	MEM-DR432L-HL01-ER32	1	\$141.20	32	\$4,518.40	
M.2 256GB TOSHIBA KXG50ZNV256G	HDS-TMN0-KXG50ZNV256G	1	\$45.50	4	\$182.00	
И.2 1ТВ TOSHIBA KXG50ZNV1T02	HDS-TMN0-KXG50ZNV1T02	1	\$138.00	9	\$1,242.00	
Mellanox Ethernet CX4LX 25GbE Network Adapter	AOC-MH25G-m2S2TM	1	\$249.90	4	\$999.60	
4-hour 7x24 On-site Service 3years	OS4HR3	1	\$1,888.30	1		\$1,888.
Aellanox SN2410 Switch	MSN2410-CB2F	2	\$25,387.00	1	\$25,387.00	
Mellanox Tech Support and Warranty - Silver 3 years with 4 Hours On-Site Support for SN2000 Series Switch	SUP-SN2000-3S-4H	2	\$2,475.00	1		\$2,475.
Aellanox MCP2M00-A001E30N Ethernet Passive Copper Cable 25GbE SFP28 1m Black 30AWG CA-N	MCP2M00-A001E30N	2	\$52.00	5	\$260.00	
2U Open Frame Server Rack - Adjustable Depth - 4-Post Data Rack	4POSTRACK12U	2	\$195.99	1	\$195.99	
NEMA 5-15P to IEC320 C15 14AWG 125V/15A	P515C15-15ABE-10	2	\$10.00	1	\$10.00	
4" LED Monitor		2	\$79.00	1	\$79.00	
Ceyboard and Mouse		2	\$14.56	1	\$14.56	
ubtotal					\$49,109.55	\$4,363.
HARDWARE COMPONENTS			Subtota	al	\$49,109.55	\$4,363.3



TPCx-IoT: v1.0.3

TPC-Pricing: v2.4.0

Report Date: Aug 07,2019

Description	Part Number	Key	Unit Price	Qty	Extended Price	3 yr. Maint. Price
SOFTWARE COMPONENTS	,					
Cloudera Enterprise Operational DB Edition, Node License, 24x7, 1YR		2	\$6,000.00	12		\$72,000.00
Red Hat Enterprise Linux 7.6, 3yr Premium Subscription		1	\$3,276.86	4		\$13,107.44
SOFTWARE COMPONENTS			Subtot	al	\$0.00	\$85,107.44
Total					\$49,109.55	\$89,470.74
	Thı	ree-Yea	r Cost	of Ov	vnership :	\$138,580
Pricing: 1 Supermicro (based upon total system cost as purchased by a regular customer)					loTps :	472,200.88
Pricing: 2 Obtained from third-party or online					\$ / loTps :	\$0.29

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org.



TPCx-IoT: v1.0.3

TPC-Pricing: v2.4.0

Report Date: Aug 07, 2019

Measurement Results for Performance Run

Total Number of Records 832 Million

 Warmup Run - Start Time
 2019-08-02 18:04:00

 Warmup Run - End Time
 2019-08-02 18:38:41

Warmup Run Elapsed Time in Seconds 2,079.425

 Measured Run Start Time
 2019-08-02 18:38:41

 Measured Run End Time
 2019-08-02 19:08:04

Total Time In Seconds 1,761.962

Measurement Results for Repeatability Run

Total Number of Records 832 Million

 Warmup Run Start Time
 2019-08-02 19:42:53

 Warmup Run End Time
 2019-08-02 20:18:08

Warmup Run Elapsed Time in Seconds 2,113.894

 Measured Run Start Time
 2019-08-02 20:18:08

 Measured Run End Time
 2019-08-02 20:47:00

Total Time In Seconds 1,731.521



TPCx-IoT: v1.0.3

TPC-Pricing: v2.4.0

Report Date: Aug 07, 2019

Run Report for Performance Run

TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,079.425

Total Time In Seconds = 1,761.962

Total Number of Records = 832 Million

TPCx-IoT Performance Metric (IoTps): 472,200.8760

Run Report for Repeatability Run

TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,113.894

Total Time In Seconds = 1,731.521

Total Number of Records = 832 Million

TPCx-IoT Performance Metric (IoTps): 480,502.4022

TABLE OF CONTENTS Page 9 of 24

Table of Contents

Contents

ABSTRACT	10
PREFACE	11
CLAUSE 1: GENERAL ITEMS	12
1.1 TEST SPONSOR	12
1,2 PARAMETER SETTINGS	12
1.3 CONFIGURATION DIAGRAMS	12
1.4 DATASET DISTRIBUTION	14
1.5 SOFTWARE COMPONENTS DISTRIBUTION	14
CLAUSE 2: WORKLOAD RELATED ITEMS	15
2.1 HARDWARE & SOFTWARE TUNABLE	15
2.2 RUN REPORT	15
2.3 BENCHMARK KIT IDENTIFICATION	16
2.4 BENCHMARK KIT CHANGES	16
CLAUSE 3: SCALE FACTORS AND METRICS	17
3.1 TOTAL RUN TIME	17
3.2 PERFORMANCE AND PRICE PERFORMANCE	17
3.3 SYSTEM CONFIGURATION INFORMATION	
SUPPORTING FILE INDEX	18
THIRD PARTY PRICE QUOTES	19
MELLANOX SN2410 SWITCH	19
MICCELL ANEQUE TERMS	20

ABSTRACT Page 10 of 24

Abstract

This document contains the methodology and results of the TPC Express BenchmarkTM IoT (TPCx-IoT) test conducted in conformance with the requirements of the TPCx-IoT Standard Specification, Revision 1.0.3.

The test was conducted for a Scale Factor of 832 Million records with Supermicro A+ Server 2014TP-HTR with 4x H12SST-PS Nodes running HBase 2.0.0 on Cloudera Distribution for Apache Hadoop Edition 6.0.1 on Red Hat Enterprise Linux Server Release 7.6.

Measured Configuration

Company Name	Cluster Node	Virtualization	Operating System
Super Micro Computer,	Supermicro A+ Server	Not Used	Red Hat Enterprise Linux
Inc	2014TP-HTR		Server Release 7.6

TPC Express Benchmark® IoT Metrics

Total System Cost	IoTps	Price/Performance	Availability Date
138,580 USD	472,200.88	0.29 USD	Aug 31, 2019

PREFACE Page 11 of 24

Preface

TPC Express Benchmark TM IoT Overview

TPC Express BenchmarkTM IoT (TPCx-IoT) was developed to provide an objective measure of hardware, operating system and commercial NoSQL database software distributions, and to provide the industry with verifiable performance, price-performance and availability metrics. The benchmark models a continuous system availability of 24 hours a day, 7 days a week.

Even though the modeled application is simple, the results are highly relevant to hardware and software dealing with IoT Gateway systems in general. The TPCx-IoT stresses both hardware and software including database APIs and network connections to the database. This workload can be used to assess a broad range of NoSQL databases. The TPCx-IoT can be used to assess a range of NoSQL implementations in a technically rigorous and directly comparable and vendor-neutral manner. The metric effectively represents the total number of records that can be inserted into a NoSQL database per second while running queries against the database.

The TPCx-IoT kit is available from the TPC (See www.tpc.org/tpcx-iot for more information). Users must sign-up and agree to the TPCx-IoT User Licensing Agreement (ULA) to download the kit. Re-distribution of the kit is prohibited. All related work (such as collaterals, papers, derivatives) must acknowledge the TPC and include TPCx-IoT copyright. The TPCx-IoT Kit includes: TPCx-IoT Specification document, TPCx-IoT Users Guide documentation, shell scripts to set up the benchmark environment and Java code to execute the benchmark load.

The purpose of TPC benchmarks is to provide relevant, objective performance data to industry users. To achieve that purpose, TPC benchmark specifications require that benchmark tests be implemented with systems, products, technologies and pricing that:

- Are generally available to users;
- Are relevant to the market segment that the individual TPC benchmark models or represents (e.g., TPCx- IoT models and represents a NoSQL database mimicking an IoT gateway system)
- Would plausibly be implemented by a significant number of users in the market segment the benchmark models or represents.

The use of new systems, products, technologies (hardware or software) and pricing is encouraged so long as they meet the requirements above. Specifically prohibited are benchmark systems, products, technologies or pricing (hereafter referred to as "implementations") whose primary purpose is performance optimization of TPC benchmark results without any corresponding applicability to real-world applications and environments. In other words, all "benchmark special" implementations that improve benchmark results but not real-world performance or pricing, are prohibited.

The rules for pricing are included in the TPC Pricing Specification.

Further information is available atwww.tpc.org

GENERAL ITEMS Page 12 of 24

Clause 1: General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Super Micro Computer, Inc.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- Configuration parameters and options for server, storage, network and other hardware component incorporated into the pricing structure;
- Configuration parameters and options for operating system and file system component incorporated into the pricing structure;
- Configuration parameters and options for any other software component incorporated into the pricing structure;
- Compiler optimization options.

Comment 1: In the event that some parameters and options are set multiple times, it must be easily discernible by an interested reader when the parameter or option was modified and what new value it received each time.

Comment 2: This requirement can be satisfied by providing a full list of all parameters and options, as long as all those that have been modified from their default values have been clearly identified and these parameters and options are only set once.

The supporting files contain the parameters and options used to configure the components involved in this benchmark.

1.3 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Total number of nodes used;*
- Total number and type of processors used/total number of cores used/total number of threads used (including sizes of L2 and L3 caches);

GENERAL ITEMS Page 13 of 24

• Size of allocated memory, and any specific mapping/partitioning of memory unique to the test;

- Number and type of disk units (and controllers,) if applicable;
- Number of channels or bus connections to disk units, including their protocol type;
- Number of LAN (e.g., Ethernet) connections and speed for switches and other hardware components physically used in the test or are incorporated into the pricing structure;
- Type and the run-time execution location of software components.

Measured Configuration:

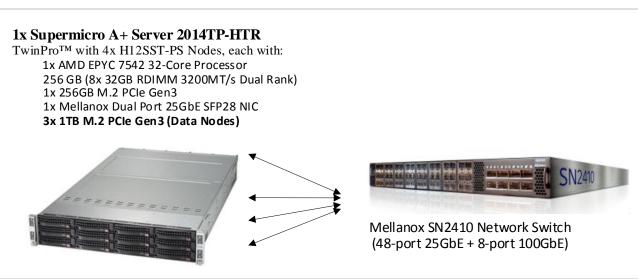


Figure 1-1 Measured Configuration

The measured configuration consisted of

Total Nodes: 4

Total Processor/Cores/Threads: 4/128/256

Total Memory: 1.02TB

Total Number of Storage Devices: 13

Total Storage Capacity: 10 TB

Server nodes details:

- Supermicro A+ Server 2014TP-HTR, TwinProTM with 4x H12SST-PS Nodes, each with:
 - o Processors/Cores/Threads: 1/32/64
 - Processor Model: 1x AMD EPYCTM 7542 2.9GHz 32-core
 - o Memory: 256GB (8 x 32GB RDIMM 3200MT/s Dual Rank)
 - o Drives: 1x 256GB M.2 PCIe Gen3 (for all Servers)
 - 3x 1TB M.2 PCIe Gen3 (for all Data Node Servers)
 - o Network: 1x Supermicro AOC-MH25G-m2S2T Dual Port 25GbE SFP28 NIC

Priced Configuration:

There are no differences between the priced and measured configurations.

TPCx-loT v1.0.3
Full Disclosure Report

GENERAL ITEMS Page 14 of 24

1.4 Dataset Distribution

The distribution of dataset across all media must be explicitly described.

Table 1.4 describes the distribution of the dataset across all media in the system.

Table 1.4: Dataset Distribution

Server Node	Storage	Disk Drive	Description of Content
1	M.2 PCIe Gen3	NVMe2n1	Operating System, Swap, Hadoop Master, Root, Temp
2-4	M.2 PCIe Gen3	NVMe0n1, NVMe1n1, NVMe3n1	Data, Temp

1.5 Software Components Distribution

The distribution of various software components across the system must be explicitly described.

Table 1.5 describes the distribution of the software components across the system.

Table 1.5: Software Component Distribution

	HD	FS	HB	ase	YA	RN	Zoo Keeper
Node	NameNode	DataNode	Master	Region	Resource	Node	
				Server	Manager	Manager	
1	X		X		X		X
2-3		X		X		X	X
4		X		X		X	

NoSQL Database version must be disclosed.

HBase -2.0.0 on Cloudera Distribution for Apache Hadoop 6.0.1

Clause 2: Workload Related Items

2.1 Hardware & Software Tunable

Script or text used to set for all hardware and software tunable parameters must be reported.

The Supporting File Archive contains all configuration scripts.

2.2 Run Report

The run report generated by TPCx-IoT benchmark kit must be reported.

The Supporting File Archive contains the full run report. Following are extracts from the run report that lists the performance summary for both runs.

Run Report for Performance Run

```
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,079.425

Total Time In Seconds = 1,761.962

Total Number of Records = 832 Million

TPCx-IoT Performance Metric (IoTps): 472,200.8760
```

Run Report for Repeatability Run

```
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,113.894

Total Time In Seconds = 1,731.521

Total Number of Records = 832 Million

TPCx-IoT Performance Metric (IoTps): 480,502.4022
```

2.3 Benchmark Kit Identification

Version number of TPCx-IoT kit and checksum for the jar file and master Programs must be reported.

Kit Version		1.0.3
24d1e8079cfdd240f266041bca0333b5	./TPC-loT-	master.sh
68379f9375c7b584fc3253dfe9c4f7a6	./tpcx-iot/	ib/core-0.13.0-SNAPSHOT.jar
7bebf1e17d5c2b380df575fad160d7f8	./loT_clus	ter_validate_suite.sh

2.4 Benchmark Kit changes

No Modifications were made to the TPC provided kit.

Clause 3: Scale Factors and Metrics

3.1 Total Run Time

	Run 1	Run 2
Total Run Time	1,761.962	1,731.521

3.2 Performance and Price Performance

The performance metric (IoTps) must be disclosed for Run1 and Run2. Price-performance metric (\$/IoTps) must be disclosed for the performance run.

	Run 1	Run 2
IoTps	472,200.88	480,502.40

\$/IoTps	\$0.29
----------	--------

3.3 System Configuration Information

Storage System Software	Operating System	Other Software	System Availability Date
	Red Hat Enterprise Linux Server Release 7.6		Aug 31, 2019

Cloudera 6.0.1			
Component	Package Version		
Apache Hadoop	hadoop-3.0.0+cdh6.0.1		
HBase	hbase-2.0.0+cdh6.0.1		
YARN	yarn-3.0.0+cdh6.0.1		
Zookeeper	zookeeper-3.4.5+cdh6.0.1		

SUPPORTING FILE INDEX Page **18** of **24**

Supporting File Index


The following index outlines the information included in the supporting file archive.


Storage System Software	Operating System	System Availability Date
Clause 1	Parameters and options used to configure and tune the SUT	Supporting Files Archive/Clause1
Clause 2	Configuration Scripts and Run Report	Supporting Files Archive/Clause2
Clause 3	System Configuration Details	Supporting Files Archive/Clause3

SUPPORTING FILE INDEX Page 19 of 24

Third party Price Quotes

Mellanox SN2410 Switch

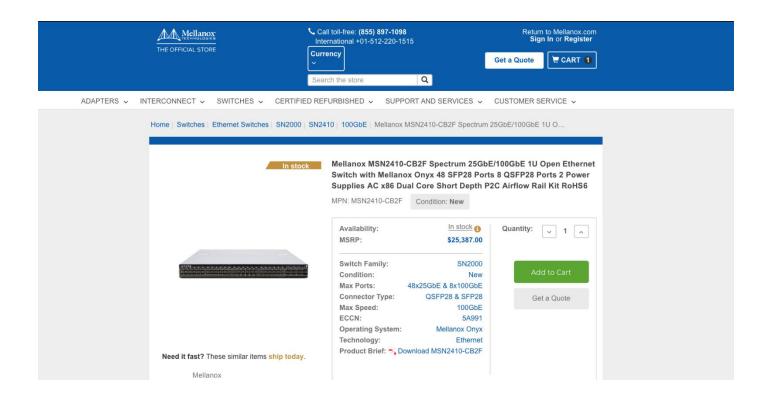

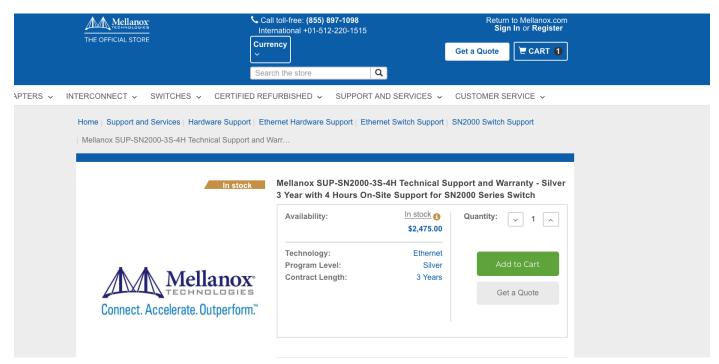


TPCx-loT v1.0.3 Full Disclosure Report


Supermicro
Supermicro A+ Server 2014TP-HTR

SUPPORTING FILE INDEX Page 20 of 24


Miscellaneous Items

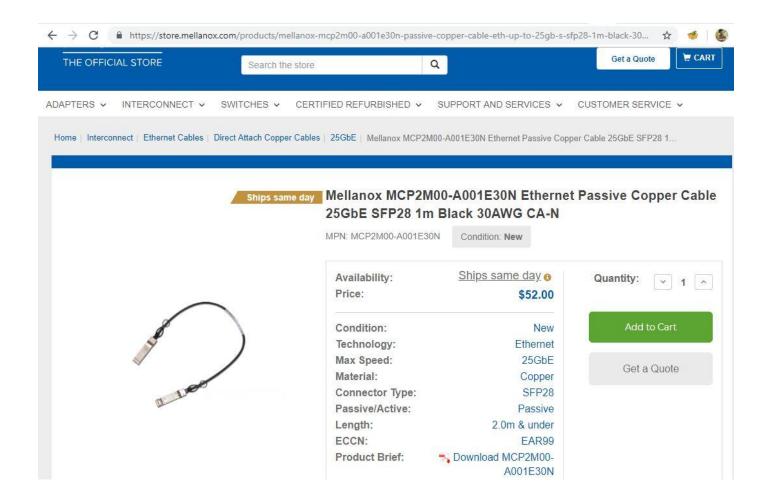

SUPPORTING FILE INDEX Page 21 of 24

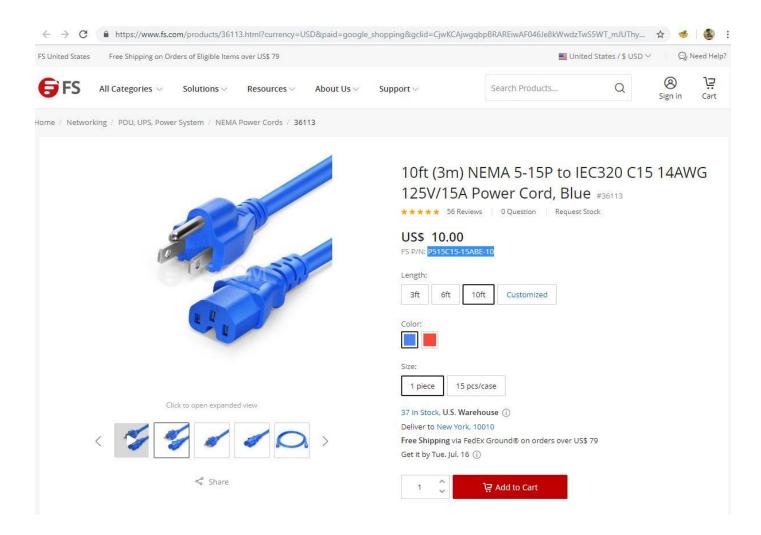

SUPPORTING FILE INDEX Page 22 of 24

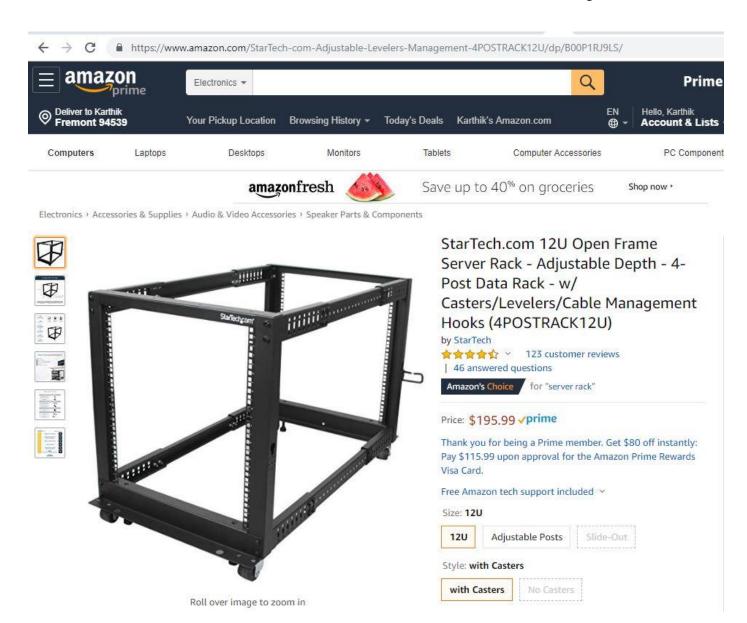

SUPPORTING FILE INDEX Page 23 of 24



SUPPORTING FILE INDEX Page 24 of 24

