



Hewlett-Packard Company

TPC BenchmarkTM H
Full Disclosure Report

**HP BladeSystem c-Class
ProLiant BL480c Cluster 16P DC**
using
Oracle Database 10g Release 2, Enterprise Edition with
Real Application Cluster and
Partitioning; and
Red Hat Enterprise Linux 4

**First Edition
December 2006**

First Edition – December 2006

Hewlett Packard Company, the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, the TPC Benchmark H should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

© Copyright 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

All other brand or product names mentioned herein must be considered trademarks or registered trademarks of their respective owners.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark™ H test conducted on the HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC using Oracle Database 10g Enterprise Edition with Real Application Cluster and Partitioning, in conformance with the requirements of the TPC Benchmark™ H Standard Specification, Revision 2.3.0. The operating system used for the benchmark was Red Hat Enterprise Linux 4.

The benchmark results are summarized in the following table.

Hardware	Software	Total System Cost	QppH @ 300GB	QthH @ 300GB	QphH @ 300GB	\$/QphH @ 300GB
HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC	Oracle Database 10g Enterprise Edition R2 with Real Application Cluster and Partitioning, and Red Hat Enterprise Linux 4	\$754,232 USD	49,769.6	32,812.6	40,411.3	\$18.67 USD

The TPC Benchmark™ H was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry.

Standard and Executive Summary Statements

Executive Summary and Numerical Quantities Summary of the benchmark results for the HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC can be found in the following pages.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics Inc. to verify compliance with the relevant TPC specifications.




HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC

TPC-H Rev. 2.3.0

Report Date:
December 18, 2006

Total System Cost		Composite Query per Hour Metric		Price / Performance	
\$754,232 USD		40,411.3 QphH@300GB		\$18.67 USD \$/ QphH@300GB	
Database Size	Database Manager	Operating System	Other Software	Availability Date	
300GB	Oracle Database 10g Release 2, Enterprise Edition with Oracle Real Application Clusters and Partitioning	Red Hat Enterprise Linux 4		December 18, 2006	

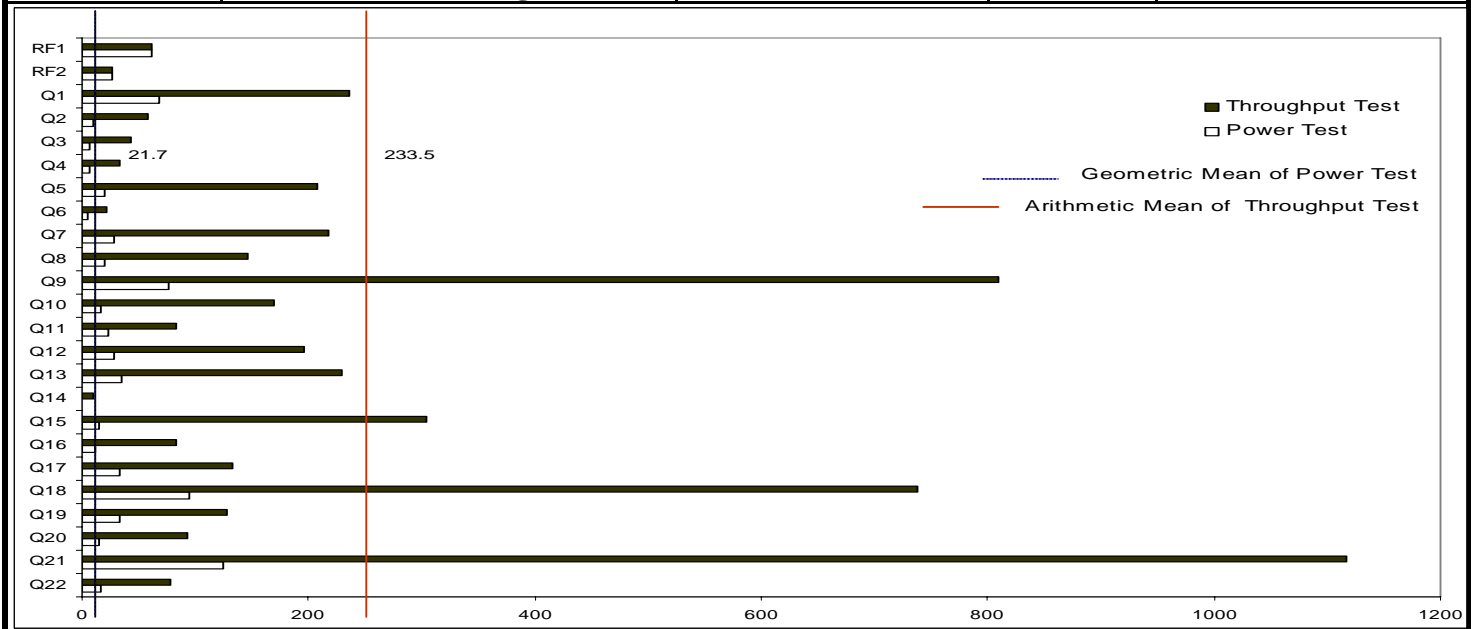

Database Load Time = 01:13:26	Load Included Backup: N	Total Data Storage / Database Size = 55.68
RAID (Base tables only): Y	RAID (Base tables and auxiliary data structures): Y	RAID (All): Y

System Components	System Total	Per Node
Processors (Dual-Core Intel Xeon processor 5160, 3.00GHz, 4M cache, 1333 MHz FSB):	Nodes: 8	n.a.
	16	2
	Cores: 32	4
	Threads: 32	4
	Memory: 128GB	16GB
OS Disk Drives (HP 36GB 10K SAS 2.5 Hot Plug HDD)	16	2
Network Interfaces (embedded Gb NIC Ports):	32	4
Network Switch (HP GbE2 Switch):	2	n.a.
Network Interfaces (HP 4X DDR InfiniBand Mezzanine HCA):	8	1
Network Switch (HP 4X DDR InfiniBand Switch):	1	n.a.
FC Host Bus Adapters (HP QMH2662 4Gb FC HBA):	16	2
SAN Storage Switch (Brocade 4/24 SAN Switch):	4	n.a.
Storage Subsystem (HP StorageWorks MSA1000):	32	n.a.
Storage Subsystem Disk Drives (36GB 15k rpm U320 HDD):	448	n.a.
Total Storage:	16704 GB	n.a.



**HP BladeSystem c-Class
ProLiant BL480c Cluster 16P DC**

TPC-H Rev. 2.3.0

Report Date:

18-Dec-06

Description	Part Number	Brand	Pricing	Unit Price	Qty	Extended Price	3 yr. Maint. Price	
Server Hardware								
HP ProLiant BL480c G1 MOD-FX Svr, 4 embedded NIC ports, HP Smart Array P400i Cntr	404707-B21		1	2,004	8	16,032		
Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 1333 MHz FSB) Option Kit	416673-L21		1	1,499	16	23,984		
4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21		1	1,099	32	35,168		
QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem	403619-B21		1	749	16	11,984		
HP 4X DDR InfiniBand Mezzanine HCA for HP BladeSystem c-Class	410533-B21		1	579	8	4,632		
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21		1	279	16	4,464		
HP 3y 4h 24x7 c-Class Svr Blade HW Supp	UE459E		1	369	8			2,952
HP BLc7000 3PH 6 Fan NA/Jp Full ICDC Kit	412136-B21		1	8,283	1	8,283		
HP 3y 4h 24x7 c7000 Enclosure HW Supp	UE479E		1	927	1			927
HP BLc Bnt 1GbE2 Switch Opt Kit	410917-B21		1	1,399	2	2,798		
HP Brocade 4/24 SAN Switch	AE372A		1	9,500	4	38,000		
HP BLc 4X DDR InfiniBand Switch Option Kit	410398-B21		1	5999	1	5999		
HP 3y 4h 24x7 4/24 B Series 4/24 c-Class SAN Switch	UE438E		1	1957	4			7,828
HP 5642 Pallet Unassembled Rack	358254-B21		1	689	8	5,512		
HP R5500 VA NA/JP UPS	AF426A		1	3,099	1	3,099		
HP CAT5 KVM USB 1 Pack Interface Adapter	336047-B21		1	99	1	99		
HP s7540 CRT Monitor	PF997AA#ABA		1	139	1	139		
HP USB Standard Keyboard	DX752AV#ABA		1	12	1	12		
HP USB 2-Button Optical Scroll Mouse	PT951AV		1	5	1	5		
					Subtotal	160,210		11,707
Storage								
HP Storageworks Modular SAN Array 1000 (32+4 spares)	201723-B22		1	6,995	36	251,820		Included
36GB, 15krpm HDD Ultra320 HP (448+45 spares)	286776-B22		1	269	493	132,617		Included
5m SW LC/LC FC cable kit	221692-B22		1	82	16	1,312		
15m SW LC/LC FC cable kit	221692-B23		1	103	16	1,648		
4GB SW Single Pack SFP Tranceiver	A7446B		1	199	32	6,368		
					Subtotal	393,765		0
Software								
Oracle Database 10g Enterprise Edition Release 2, Named User Plus for 3 Years	run-time	Oracle	2	10,000	16 **	160,000		
Oracle Real Application Clusters, Named User Plus for 3 Years	run-time	Oracle	2	5,000	16 **	80,000		
Partitioning, Named User Plus for 3 Years	run-time	Oracle	2	2,500	16 **	40,000		
Database Server Support Package for 3 Years	run-time	Oracle	2	6,000	8			48,000
Red Hat Ent Linux 4 AS Prm 24X7	384956-B21		1	699	24	16,776		Included
					Subtotal	296,776		48,000
HP Large Purchase and Net30 discount			1			(88,636)		(1,990)
Oracle Mandatory E-Business Discount on Licenses and Support			2			(65,600)		
					Total	696,515		57,717
Pricing: 1- HP Direct at 16% discount 800-203-7648 Pricing: 2- Oracle pricing contact: Herve Lejeune, herve.lejeune@oracle.com, 650 560-1894 (***) 16 = 32 x 0.50. Explanation: for the purposes of counting the number of processors which require licensing for Intel multicore chips, "n" cores shall be determined by multiplying the total number of cores by a core processor licensing factor of .50. All discounts are based on US list prices and for similar quantities and configurations. Oracle Price quote is in Appendix G						3-Year Cost of Ownership in USD:		\$754,232 USD
						QpH Rating:		40,411.3
						USD\$ / QpH@300GB:		\$18.67 USD



HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC

TPC-H Rev. 2.3.0

Report Date:
December 18, 2006

Numerical Quantities

Measurement Results:

Database Scale Factor	= 300
Total Data Storage / Database Size	= 55.68
Start of Database Load	= 12/14/2006 14:58:06
End of Database Load	= 12/14/2006 16:09:49
Database Load Time	= 01:11:43
Query Streams for Throughput Test	= 9
TPC-H Power	= 49,769.6
TPC-H Throughput	= 32,812.6
TPC-H Composite Query-per-Hour Metric (QphH@300GB)	= 40,411.3
Total System Price Over 3 Years	= \$754,232 USD
TPC-H Price/ Performance Metric (\$/QphH@300GB)	= \$18.67 USD

Measurement Intervals:

Measurement Interval in Throughput Test (Ts)	= 6517.0 seconds
--	------------------

Duration of Stream Execution:

Power Stream	Seed	RF1 Start Time	Query Start Time	RF2 Start Time	Duration
		RF1 End Time	Query End Time	RF2 End Time	
	1214160949	12/14/2006 21:31:40	12/14/2006 21:32:41	12/14/2006 21:44:11	0:12:58
		12/14/2006 21:32:41	12/14/2006 21:44:11	12/14/2006 21:44:38	

Throughput Stream	Seed	Query Start Time	Duration	RF1 Start Time	RF2 Start Time
		Query End Time		RF1 End Time	RF2 End Time
1	1214160950	12/14/2006 21:44:39	1:22:58	12/14/2006 23:20:03	12/14/2006 23:21:09
		12/14/2006 23:07:37		12/14/2006 23:21:09	12/14/2006 23:21:31
2	1214160951	12/14/2006 21:44:39	1:18:56	12/14/2006 23:21:31	12/14/2006 23:22:34
		12/14/2006 23:03:35		12/14/2006 23:22:34	12/14/2006 23:23:05
3	1214160952	12/14/2006 21:44:39	1:11:14	12/14/2006 23:23:05	12/14/2006 23:24:18
		12/14/2006 22:55:53		12/14/2006 23:24:18	12/14/2006 23:26:11
4	1214160953	12/14/2006 21:44:39	1:35:24	12/14/2006 23:24:39	12/14/2006 23:25:45
		12/14/2006 23:20:03		12/14/2006 23:25:45	12/14/2006 23:27:23
5	1214160954	12/14/2006 21:44:39	1:25:48	12/14/2006 23:26:11	12/14/2006 23:26:58
		12/14/2006 23:10:27		12/14/2006 23:26:58	12/14/2006 23:28:46
6	1214160955	12/14/2006 21:44:39	1:29:11	12/14/2006 23:27:23	12/14/2006 23:28:15
		12/14/2006 23:13:50		12/14/2006 23:28:15	12/14/2006 23:28:46
7	1214160956	12/14/2006 21:44:39	1:27:22	12/14/2006 23:28:46	12/14/2006 23:29:51
		12/14/2006 23:12:01		12/14/2006 23:29:51	12/14/2006 23:30:19
8	1214160957	12/14/2006 21:44:39	1:28:49	12/14/2006 23:30:19	12/14/2006 23:31:20
		12/14/2006 23:13:28		12/14/2006 23:31:20	12/14/2006 23:31:47
9	1214160958	12/14/2006 21:44:39	1:30:43	12/14/2006 23:31:47	12/14/2006 23:32:49
		12/14/2006 23:15:22		12/14/2006 23:32:49	12/14/2006 23:33:15



HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC

TPC-H Rev. 2.3.0

Report Date:
December 18, 2006

TPC-H Timing Intervals (in seconds)

Query	Stream 0	Stream 1	Stream 2	Stream 3	Stream 4	Stream 5	Stream 6	Stream 7	Stream 8	Stream 9	Min Qi	Max Qi	Avg Qi
1	68.5	130.5	107.7	311.4	68.9	115.4	602.5	117.3	343	325.8	68.9	602.5	235.8
2	10	45.4	74.5	100.3	40.2	51.1	33.5	37.8	40.9	96.5	33.5	100.3	57.8
3	6.9	68.4	37	40	8	27.5	28.9	68.5	24.5	81.9	8.0	81.9	42.7
4	6.3	44.2	14.7	52.4	51.1	16.2	39.8	13.6	9.7	57.9	9.7	57.9	33.3
5	20.5	67.2	142.7	341.4	89.2	153.5	355.7	444.5	248.2	28.5	28.5	444.5	207.9
6	5.1	14.7	9.3	19.2	45.4	13.7	28.2	37.6	11	21.8	9.3	45.4	22.3
7	28.1	122.8	181.8	94.4	27.6	320.1	401.8	236.9	325.4	245.4	27.6	401.8	217.4
8	19.3	74.2	254.7	186.9	244.3	73.3	142	97	85	162.9	73.3	254.7	146.7
9	75.9	873.2	1148.4	296.4	757.6	393.5	1278.7	1430.7	986.8	119.6	119.6	1430.7	809.4
10	17.2	98.8	197.1	69.1	398.8	120.5	104.9	289.7	49.4	197.4	49.4	398.8	169.5
11	22.8	47.1	44	54.4	136.5	75.0	161.1	58.5	50	122.6	44.0	161.1	83.2
12	29	280.4	79.4	362.7	102.6	108.0	376.3	221.7	133.8	92.8	79.4	376.3	195.3
13	34.2	184.1	102.3	401.3	33.1	139.5	118.4	455	194.4	440.9	33.1	455.0	229.9
14	2.4	8.5	14.3	7.8	11.7	12.1	4.8	27.1	6.7	2.8	2.8	27.1	10.6
15	15.4	460.9	480.1	97.4	56.4	537.3	67.1	113.5	360.8	559.7	56.4	559.7	303.7
16	12.2	159.8	83.8	70.3	160.1	47.5	33.3	139.6	40.6	17.2	17.2	160.1	83.6
17	33.3	105.6	295.5	117.4	72.3	119.6	129	99.7	107.3	145.2	72.3	295.5	132.4
18	94.1	373.7	887.5	469.7	1313.6	939.0	433.3	617	371	1235.2	371.0	1313.6	737.8
19	34	96.5	70.5	81.2	201	87.2	77.4	223.1	237.7	82.8	70.5	237.7	128.6
20	15.5	131.2	131.3	44.9	18.1	53.8	171.9	71.1	48.3	174	18.1	174.0	93.8
21	124	1474.7	314.8	993.2	1873.1	1626.4	693.7	402.9	1606.8	1060.5	314.8	1873.1	1116.2
22	15.8	116.9	65	62.4	15	118.2	69.6	39.3	48.1	171.8	15.0	171.8	78.5
RF1	61.4	66.2	63.8	73.5	65.6	46.8	51.7	64.7	61.4	61.6	46.8	73.5	61.7
RF2	26.8	21.5	30	21.3	25.7	25.7	30.9	28.3	26.9	25.9	21.3	30.9	26.2

Table Of Contents

ABSTRACT	II
OVERVIEW	II
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	II
AUDITOR	II
TABLE OF CONTENTS	III
1.0 GENERAL ITEMS	5
1.1 TEST SPONSOR	5
1.2 PARAMETER SETTINGS	5
1.3 CONFIGURATION ITEMS	6
2.0 CLAUSE 1: LOGICAL DATABASE DESIGN	8
2.1 DATABASE DEFINITION STATEMENTS	8
2.2 PHYSICAL ORGANIZATION OF DATABASE	8
2.3 HORIZONTAL PARTITIONING	8
2.4 REPLICATION	8
3.0 CLAUSE 2: QUERIES AND REFRESH FUNCTIONS RELATED ITEMS	9
3.1 QUERY LANGUAGE	9
3.2 RANDOM NUMBER GENERATION	9
3.3 SUBSTITUTION PARAMETERS GENERATION	9
3.4 QUERY TEXT AND OUTPUT DATA FROM DATABASE	9
3.5 QUERY SUBSTITUTION PARAMETERS AND SEEDS USED	9
3.6 ISOLATION LEVEL	9
3.7 REFRESH FUNCTIONS	9
4.0 CLAUSE 3: DATABASE SYSTEM PROPERTIES	11
4.1 ATOMICITY REQUIREMENTS	11
4.2 CONSISTENCY REQUIREMENTS	11
4.3 ISOLATION REQUIREMENTS	12
4.4 DURABILITY REQUIREMENTS	14
5.0 CLAUSE 4: SCALING AND DATABASE POPULATION	15
5.1 INITIAL CARDINALITY OF TABLES	15
5.2 DISTRIBUTION OF TABLES AND LOGS ACROSS MEDIA	15
5.3 MAPPING OF DATABASE PARTITIONS/REPLICATIONS	16
5.4 IMPLEMENTATION OF RAID	16
5.5 DBGEN MODIFICATIONS	16
5.6 DATABASE LOAD TIME	16
5.7 DATA STORAGE RATIO	16
5.8 DATABASE LOAD MECHANISM DETAILS AND ILLUSTRATION	17
5.9 QUALIFICATION DATABASE CONFIGURATION	18
6.0 CLAUSE 5: PERFORMANCE METRICS AND EXECUTION RULES RELATED ITEMS	19
6.1 STEPS IN THE POWER TEST	19
6.2 TIMING INTERVALS FOR EACH QUERY AND REFRESH FUNCTION	19
6.3 NUMBER OF STREAMS FOR THE THROUGHPUT TEST	19
6.4 START AND END DATE/TIMES FOR EACH QUERY STREAM	19
6.5 TOTAL ELAPSED TIME FOR THE MEASUREMENT INTERVAL	19
6.6 REFRESH FUNCTION START DATE/TIME AND FINISH DATE/TIME	19
6.7 TIMING INTERVALS FOR EACH QUERY AND EACH REFRESH FUNCTION FOR EACH STREAM	20
6.8 PERFORMANCE METRICS	20
6.9 THE PERFORMANCE METRIC AND NUMERICAL QUANTITIES FROM BOTH RUNS	20
6.11 SYSTEM ACTIVITY BETWEEN TESTS	20
7.0 CLAUSE 6: SUT AND DRIVER IMPLEMENTATION RELATED ITEMS	21
7.1 DRIVER	21
7.2 IMPLEMENTATION SPECIFIC LAYER (ISL)	21
7.3 PROFILE-DIRECTED OPTIMIZATION	21

8.0 CLAUSE 7: PRICING RELATED ITEMS	22
8.1 HARDWARE AND SOFTWARE USED	22
8.2 TOTAL 3 YEAR PRICE	22
8.3 AVAILABILITY DATE	22
8.4 COUNTRY-SPECIFIC PRICING	22
9.0 CLAUSE 9: RELATED ITEMS	23
9.1 AUDITORS' REPORT	23
APPENDIX A: PARAMETER SETTINGS	24
APPENDIX B: DATABASE BUILD SCRIPTS	26
APPENDIX C: ACID SCRIPTS	38
APPENDIX D: QUALIFICATION QUERY TEXT AND OUTPUT	53
APPENDIX E: SEED AND INPUT PARAMETERS	71
APPENDIX F: BENCHMARK SCRIPTS	75
APPENDIX G: PRICE QUOTES	79

1.0 General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

Hewlett Packard Company sponsored this benchmark. The benchmark was developed and engineered by Hewlett Packard Company and Oracle Corporation. Testing took place at HP Database Performance Engineering Laboratory in Houston, Texas.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database Tuning Options*
- *Optimizer/Query execution options*
- *Query processing tool/language configuration parameters*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and configuration parameters*
- *Configuration parameters and options for any other software component incorporated into the pricing structure*
- *Compiler optimization options*

This requirement can be satisfied by providing a full list of all parameters and options, as long as all those which have been modified from their default values have been clearly identified and these parameters and options are only set once.

Appendix A contains Database and Operating system parameter settings.

1.3 Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- Number and type of processors
- Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.
- Number and type of disk units (and controllers, if applicable).
- Number of channels or bus connections to disk units, including their protocol type.
- Number of LAN (e.g. Ethernet) Connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure.
- Type and the run-time execution location of software components (e.g., DBMS, query processing tools/languages, middle-ware components, software drivers, etc.).

The HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC is depicted in Figure 1.1 consists of:

	System Components	System Total	Per Node
	Nodes:	8	n.a.
Processors (Dual-Core Intel Xeon processor 5160, 3.00GHz, 4M cache, 1333 MHz FSB):		16	2
	Cores:	32	4
	Threads:	32	4
	Memory:	128GB	16GB
	OS Disk Drives (HP 36GB 10K SAS 2.5 Hot Plug HDD)	16	2
	Network Interfaces (embedded Gb NIC Ports)*:	32	4
	Network Switch (HP GbE2 Switch)*:	2	n.a.
	Network Interfaces (HP 4X DDR InfiniBand Mezzanine HCA)**:	8	1
	Network Switch (HP 4X DDR InfiniBand Switch)**:	1	n.a.
	FC Host Bus Adapters (HP QMH2662 4Gb FC HBA):	16	2
	SAN Storage Switch (Brocade 4/24 SAN Switch):	4	n.a.
	Storage Subsystem (HP StorageWorks MSA1000):	32	n.a.
	Storage Subsystem Disk Drives (36GB 15k rpm U320 HDD):	448	n.a.
	Total Storage:	16704	n.a.

*One embedded Gb NIC port is configured for user connectivity and another Gb NIC port is configured for Oracle Cluster Manager. NICs are interconnected using two HP GbE2 Switches.


**The InfiniBand Mezzanine HCA interface is configured for Oracle Cluster Interconnect. InfiniBand interfaces are interconnected using a HP 4X DDR InfiniBand Switch.

Each HP StorageWorks MSA1000 has one RAID10 volume of 14 x 36GB 15krpm HDD U320s. There volumes are partitioned using Linux which hosted database tables, indexes, redo log files. There are 16 redo log file groups; each redo file group has two members residing on two separate MSA1000s to guarantee no single point of controller/cache failure. The MSA1000 array accelerator cache is set to 80% read and 20% write.

A detailed description of distribution of database files can be found in Table 5.2.

Figure 1.1: Benchmarked and Priced Configuration

HP ProLiant BL480c Cluster 16P

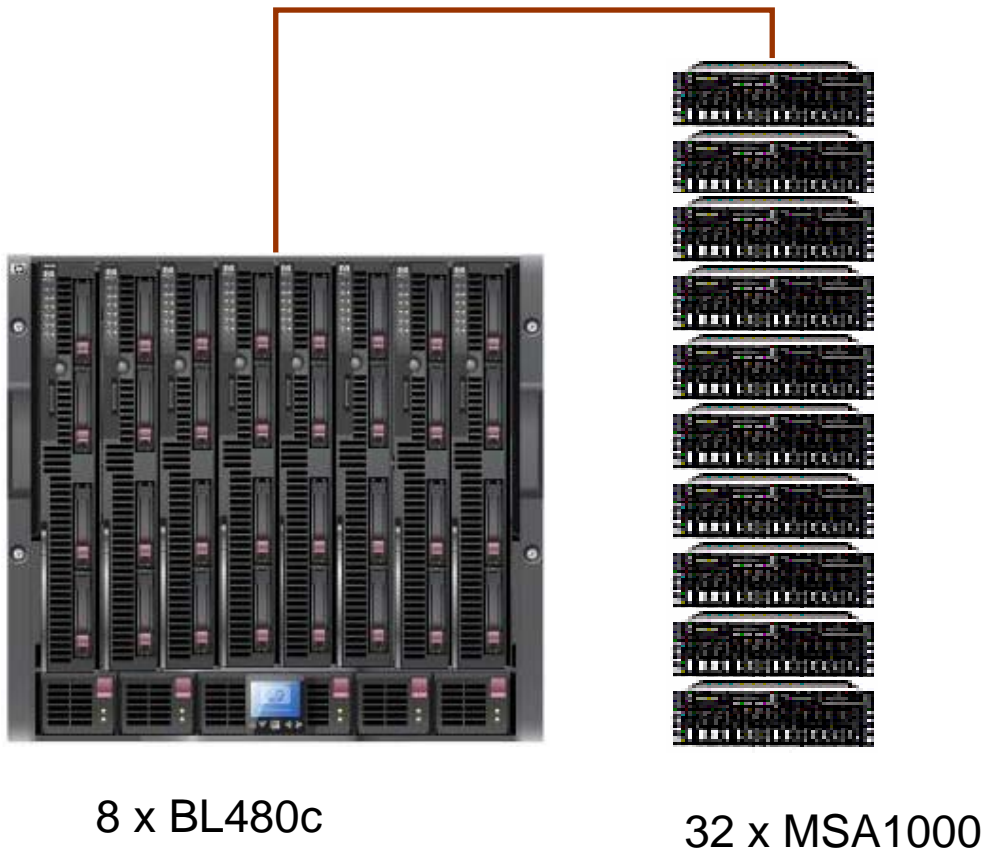

2.0 Clause 1: Logical Database Design

2.1 Database Definition Statements

Listings must be provided for all table definition statements and all other statements used to set up the test and qualification databases. (8.1.2.1)

Appendix B contains the database build scripts.

2.2 Physical Organization of Database

The physical organization of tables and indices, within the test and qualification databases, must be disclosed. If the column ordering of any table is different from that specified in Clause 1.4, it must be noted.

Please refer Appendix B for column reordering of tables.

2.3 Horizontal Partitioning

Horizontal partitioning of tables and rows in the test and qualification databases (see Clause 1.5.4) must be disclosed.

Horizontal partitioning was used for all tables except NATION and REGION as described in Appendix B.

2.4 Replication

Any replication of physical objects must be disclosed and must conform to the requirements of Clause 1.5.6.

The database was not replicated.

3.0 Clause 2: Queries and Refresh Functions Related Items

3.1 Query Language

The query language used to implement the queries must be identified.

SQL was the query language used to implement all queries.

3.2 Random Number Generation

The method of verification for the random number generation must be described unless the supplied DBGEN and QGEN were used.

TPC supplied versions 2.3.0 of DBGEN and QGEN were used for this TPC-H benchmark.

3.3 Substitution Parameters Generation

The method used to generate values for substitution parameters must be disclosed. If QGEN is not used for this purpose, then the source code of any non-commercial tool used must be disclosed. If QGEN is used, the version number, release number, modification number and patch level of QGEN must be disclosed.

The supplied QGEN version 2.3.0 was used to generate the substitution parameters.

3.4 Query Text and Output Data from Database

The executable query text used for query validation must be disclosed along with the corresponding output data generated during the execution of the query text against the qualification database. If minor modifications (see Clause 2.2.3) have been applied to any functional query definitions or approved variants in order to obtain executable query text, these modifications must be disclosed and justified. The justification for a particular minor query modification can apply collectively to all queries for which it has been used. The output data for the power and throughput tests must be made available electronically upon request..

Appendix D contains the query text and output.

3.5 Query Substitution Parameters and Seeds Used

All the query substitution parameters used during the performance test must be disclosed in tabular format, along with the seeds used to generate these parameters.

Appendix E contains the query substitution parameters and seed used.

3.6 Isolation Level

The isolation level used to run the queries must be disclosed. If the isolation level does not map closely to one of the isolation levels defined in Clause 3.4, additional descriptive detail must be provided.

The queries and transactions were run with the isolation level set to “Level 3” (repeatable read).

3.7 Refresh Functions

The details of how the refresh functions were implemented must be disclosed (including source code of any non-commercial program used).

The refresh function is part of the implementation-specific layer/driver code included in Appendix F.

4.0 Clause 3: Database System Properties

4.1 Atomicity Requirements

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing the code written to implement the ACID Transaction and Query.

Appendix C contains the source code for the ACID transactions.

4.1.1 Atomicity of the Completed Transactions

Perform the ACID Transaction for a randomly selected set of input data and verify that the appropriate rows have been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of the completed ACID transactions:

1. The total price from the ORDERS table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1.
3. The ACID Transaction committed.
4. The total price from the ORDERS table and the extended price from the LINEITEM table were retrieved for the same order key. It was verified that the appropriate rows had been changed.

4.1.2 Atomicity of Aborted Transactions

Perform the ACID transaction for a randomly selected set of input data, submitting a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the appropriate rows have not been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of the aborted ACID transactions:

1. The total price from the ORDERS table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1. The transaction was stopped prior to the commit.
3. The ACID Transaction was ROLLED BACK.
4. The total price from the ORDERS table and the extended price from the LINEITEM table were retrieved for the same order key. It was verified that the appropriate rows had not been changed.

4.2 Consistency Requirements

Consistency is the property of the application that requires any execution of transactions to take the database from one consistent state to another.

A consistent state for the TPC-H database is defined to exist when:

$$O_TOTALPRICE = SUM(L_EXTENDEDPRICE - L_DISCOUNT) * (1 + L_TAX)$$
For each ORDER and LINEITEM defined by (O_ORDERKEY = L_ORDERKEY)

The following queries were executed before and after a measurement to show that the database was always in a consistent state both initially and after a measurement.

```
SELECT DECIMAL (SUM (DECIMAL (INTEGER (INTEGER (DECIMAL (INTEGER (100 * DECIMAL (L\_EXTENDEDPRICE, 20, 3)), 20, 3) * (1 - L\_DISCOUNT)) * (1 + L\_TAX)), 20, 3) / 100.0) 20, 3) FROM TPCD.LINEITEM WHERE L_ORDERKEY = okey
```


SELECT DECIMAL(SUM(O_TOTALPRICE, 20, 3)) from TPCB.ORDERS WHERE O_ORDERKEY = okey

4.2.1 Consistency Tests

Verify that ORDER and LINEITEM tables are initially consistent as defined in Clause 3.3.2.1, based upon a random sample of at least 10 distinct values of O_ORDERKEY.

The following steps were performed to verify the Consistency of ACID transactions:

1. The consistency of the ORDERS and LINEITEM tables was verified based on a sample of order keys.
2. 100 ACID Transactions were submitted from each of 10 execution streams.
3. The consistency of the ORDERS and LINEITEM tables was re-verified.

4.3 Isolation Requirements

Operations of concurrent transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.

4.3.1 Isolation Test 1 - Read-Write Conflict with Commit

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is committed.

The following steps were performed to satisfy the test of isolation for a read-only and a read-write committed transaction:

1. An ACID Transaction was started for a randomly selected O_KEY, L_KEY, and DELTA. The ACID Transaction was suspended prior to COMMIT.
2. An ACID Query was started for the same O_KEY used in step 1. The ACID Query blocked and did not see any uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was resumed, and COMMITTED.
4. The ACID Query completed. It returned the data as committed by the ACID Transaction.

4.3.2 Isolation Test 2 - Read-Write Conflict with Rollback

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is rolled back.

The following steps were performed to satisfy the test of isolation for a read-only and a rolled back read-write transaction:

1. An ACID Transaction was started for a randomly selected O_KEY, L_KEY, and DELTA. The ACID Transaction was suspended prior to ROLLBACK.
2. An ACID Query was started for the same O_KEY used in step 1. The ACID Query did not see the uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was ROLLED BACK.
4. The ACID Query completed.

4.3.3 Isolation Test 3 - Write-Write Conflict with Commit

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is committed.

The following steps were performed to verify isolation of two update transactions:

1. An ACID Transaction, T1, was started for a randomly selected O_KEY, L_KEY, and DELTA. The ACID transaction T1 was suspended prior to COMMIT.
2. Another ACID Transaction, T2, was started using the same O_KEY and L_KEY and a randomly selected DELTA.
3. T2 waited.
4. T1 was allowed to COMMIT and T2 completed.
5. It was verified that $T2.L_EXTENDEDPRICE = T1.L_EXTENDEDPRICE + (DELTA1*(T1.L_EXTENDEDPRICE/T1.L_QUANTITY))$

4.3.4 Isolation Test 4 - Write-Write Conflict with Rollback

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is rolled back.

The following steps were performed to verify isolation of two update transactions after the first one is rolled back:

1. An ACID Transaction, T1, was started for a randomly selected O_KEY, L_KEY, and DELTA. The ACID transaction T1 was suspended prior to ROLLBACK.
2. Another ACID Transaction, T2, was started using the same O_KEY and L_KEY and a randomly selected DELTA.
3. T2 waited.
4. T1 was allowed to ROLLBACK and T2 completed.
5. It was verified that $T2.L_EXTENDEDPRICE = T1.L_EXTENDEDPRICE$.

4.3.5 Isolation Test 5 – Concurrent Read and Write Transactions on Different Tables

Demonstrate the ability of read and write transactions affecting different database tables to make progress concurrently.

The following steps were performed to demonstrate the ability of read and write transactions affecting different database tables to make progress concurrently:

1. An ACID Transaction, T1, was started for a randomly selected O_KEY, L_KEY, and DELTA. T1 was suspended prior to COMMIT.
2. Another ACID transaction, T2 was started using random values for PS_PARTKEY and PS_SUPPKEY, all columns of the PARTSUPP table for which PS_PARTKEY and PS_SUPPKEY are equal are returned.
3. ACID Transaction T2 completed.
4. T1 was allowed to COMMIT.
5. It was verified that the appropriate rows in the ORDER, LINEITEM, and HISTORY tables have been changed.

4.3.6 Isolation Test 6 – Update Transactions during Continuous Read-Only Query Stream

Demonstrate the continuous submission of arbitrary (read-only) queries against one or more tables of the database does not indefinitely delay update transactions affecting those tables from making progress.

The following steps were performed to demonstrate that the continuous submission of arbitrary (read-only) queries against one or more tables of the database:

1. A Transaction, T1, was started which executed Q21 against the qualification database, was started using a randomly selected DELTA.
2. An ACID Transaction, T2, was started for a randomly selected O_KEY, L_KEY and DELTA.
3. T2 completed and appropriate rows in the ORDERS, LINEITEM and HISTORY tables had been changed.
4. Transaction T1 completed executing Q21.

4.4 Durability Requirements

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.2.

4.4.1 Permanent Unrecoverable Failure of Any Durable Medium

Guarantee the database and committed updates are preserved across a permanent irrecoverable failure of any single durable medium containing TPC-H database tables or recovery log tables.

Qualification database was brought up on two nodes. Started test transactions. During the test one of the disks (hosting redo log files) and one of the disks (hosting tables and auxiliary structures) were removed. As the database redo log files, tables and auxiliary data structures were stored on RAID1 volumes and each redo file group has two members residing on two separate MSA1000s (to guarantee no single point of controller/cache failure), the test continued uninterrupted. Consistency conditions were verified.

4.4.2 System Crash

Guarantee the database and committed updates are preserved across an instantaneous interruption (system crash/system hang) in processing which requires the system to reboot to recover.

The system crash and memory failure tests were combined. Qualification database was brought up on two nodes. Started test transactions. During the test power to the HP BladeSystem enclosure was turned off. The power was restored. Started Oracle instance, which automatically recovered the database. The durability success file and the HISTORY table were compared and the counts matched.

4.4.3 Memory Failure

Guarantee the database and committed updates are preserved across failure of all or part of memory (loss of contents).

The system crash and memory failure tests were combined as explained in section 4.4.2.

5.0 Clause 4: Scaling and Database Population

5.1 Initial Cardinality of Tables

The cardinality (e.g., the number of rows) of each table of the test database, as it existed at the completion of the database load (see clause 4.2.5) must be disclosed.

Table 5.1 lists the TPC Benchmark H defined tables and the row count for each table as they existed upon completion of the build.

Table Name	Row Count
Region	5
Nation	25
Supplier	3,000,000
Customer	45,000,000
Part	60,000,000
Partsupp	240,000,000
Orders	450,000,000
Lineitem	1,799,989,091

Table 5. 1: Initial Number of Rows

5.2 Distribution of Tables and Logs Across Media

The distribution of tables and logs across all media must be explicitly described for the tested and priced systems.

The HP BladeSystem c-Class ProLiant BL480c Cluster 16P DC is depicted in Figure 1.1 consists of:

	System Components	System Total	Per Node
Processors (Dual-Core Intel Xeon processor 5160, 3.00GHz, 4M cache, 1333 MHz FSB):	Nodes:	8	n.a.
	Cores:	32	4
	Threads:	32	4
	Memory:	128GB	16GB
OS Disk Drives (HP 36GB 10K SAS 2.5 Hot Plug HDD)	16	2	
Network Interfaces (embedded Gb NIC Ports)*:	32	4	
Network Switch (HP GbE2 Switch)*:	2	n.a.	
Network Interfaces (HP 4X DDR InfiniBand Mezzanine HCA)**:	8	1	
Network Switch (HP 4X DDR InfiniBand Switch)**:	1	n.a.	
FC Host Bus Adapters (HP QMH2662 4Gb FC HBA):	16	2	
SAN Storage Switch (Brocade 4/24 SAN Switch):	4	n.a.	
Storage Subsystem (HP StorageWorks MSA1000):	32	n.a.	
Storage Subsystem Disk Drives (36GB 15k rpm U320 HDD):	448	n.a.	
Total Storage:	16704	n.a.	

*One embedded Gb NIC port is configured for user connectivity and another Gb NIC port is configured for Oracle Cluster Manager. NICs are interconnected using two HP GbE2 Switches.

**The InfiniBand Mezzanine HCA interface is configured for Oracle Cluster Interconnect. InfiniBand interfaces are interconnected using a HP 4X DDR InfiniBand Switch.

Each HP StorageWorks MSA1000 has one RAID10 volume of 14 x 36GB 15krpm HDD U320s. There volumes are partitioned using Linux which hosted database tables, indexes, redo log files. There are 16 redo log file groups; each

redo file group has two members residing on two separate MSA1000s to guarantee no single point of controller/cache failure. The MSA1000 array accelerator cache is set to 80% read and 20% write.

A detailed description of distribution of database files can be found in Table 5.2.

SAN Switch, MSA 1000	Disk Drives, Array	Partition	Description	Size	
SAN Switch 1 - MSA [1..8] SAN Switch 2 - MSA [9..16] SAN Switch 3- MSA [17..24] SAN Switch 4- MSA [25..32]	14 x 36GB, One RAID10 Array of 252GB	1	temp	14340MB	
		2	tables and indexes	14340MB	
		3	redo log	2056MB	
		5	undo, *misc	6150MB	
		7	flat files	16387MB	
		8	redo log	3096MB	
		*misc -control1, control2, sys, sysaux, sp_0, default, ocr, quorum			

Table 5.2: SAN configuration and Database Layout

5.3 Mapping of Database Partitions/Replications

The mapping of database partitions/replications must be explicitly described.

Horizontal partitioning was used for all tables except NATION and REGION. Sections 5.2 describe the distribution of tables and redo log files. The database was not replicated.

5.4 Implementation of RAID

Implementations may use some form of RAID to ensure high availability. If used for data, auxiliary storage (e.g. indexes) or temporary space, the level of RAID used must be disclosed for each device.

RAID 1 was used for the entire database and redo log files. Oracle redo file group has two members residing on two separate MSA1000s to guarantee no single point of controller/cache failure.

5.5 DBGEN Modifications

The version number, release number, modification number, and patch level of DBGEN must be disclosed. Any modifications to the DBGEN (see Clause 4.2.1) source code must be disclosed. In the event that a program other than DBGEN was used to populate the database, it must be disclosed in its entirety.

The supplied DBGEN version 2.3.0 was used to generate the database population for this benchmark without any modification.

5.6 Database Load time

The database load time for the test database (see clause 4.3) must be disclosed.

The database load time was 1 hours 11 minutes 43 seconds, includes time to backup database files.

5.7 Data Storage Ratio

The data storage ratio must be disclosed. It is computed by dividing the total data storage of the priced configuration (expressed in GB) by the size chosen for the test database as defined in 4.1.3.1. The ratio must be reported to the nearest 1/100th, rounded up.


Disk Type	Number of Disks	Total Disk Space	Data Storage Ratio
36GB15krpm HDD Ultra320	464	16704 GB	55.68

5.8 Database Load Mechanism Details and Illustration

The details of the database load must be disclosed, including a block diagram illustrating the overall process. Disclosure of the load procedure includes all steps, scripts, input and configuration files required to completely reproduce the test and qualification databases.

Flat files for each of the tables were created using DBGEN, and resided on the SAN.

Figure 5.8: Block Diagram of Database Load Process

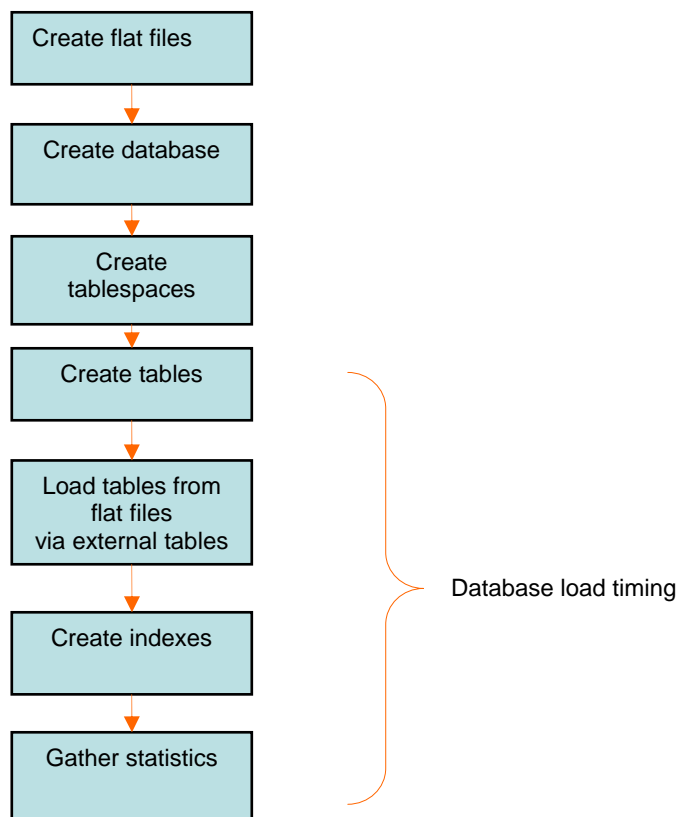

5.9 Qualification Database Configuration

Any differences between the configuration of the qualification database and the test database must be disclosed.

The qualification database used identical scripts to create and load the data with changes to adjust for the database scale factor.

6.0 Clause 5: Performance Metrics and Execution Rules Related Items

6.1 Steps in the Power Test

The details of the steps followed to implement the power test (e.g., system boot, database restart, etc.) must be disclosed.

The following steps were used to implement the power test:

1. The system was rebooted
2. RF1 Refresh Transaction
3. Stream 00 Execution
4. RF2 Refresh Transaction.

6.2 Timing Intervals for Each Query and Refresh Function

The timing intervals (see Clause 5.3.6) for each query of the measured set and for both refresh functions must be reported for the power test.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the timing intervals for queries and refresh functions.

6.3 Number of Streams for The Throughput Test

The number of execution streams used for the throughput test must be disclosed.

Nine streams were used for the Throughput Test.

6.4 Start and End Date/Times for Each Query Stream

The start time and finish time for each query execution stream must be reported for the throughput test.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the start and stop times for the query execution streams.

6.5 Total Elapsed Time for the Measurement Interval

The total elapsed time of the measurement interval (see Clause 5.3.5) must be reported for the throughput test.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the elapsed time for the measurement interval.

6.6 Refresh Function Start Date/Time and Finish Date/Time

Start and finish time for each update function in the update stream must be reported for the throughput test.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the start and finish time for the refresh functions.

6.7 Timing Intervals for Each Query and Each Refresh Function for Each Stream

The timing intervals (see Clause 5.3.6) for each query of each stream and for each update function must be reported for the throughput test.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the timing intervals for queries and refresh functions.

6.8 Performance Metrics

The computed performance metrics, related numerical quantities and the price performance metric must be reported.

Numerical Quantities Summary section of the executive summary, which can be found in the beginning of this document, contains the performance metrics, related numerical quantities and the price performance metric.

6.9 The Performance Metric and Numerical Quantities from Both Runs

A description of the method used to determine the reproducibility of the measurement results must be reported. This must include the performance metrics (QppH and QthH) from the reproducibility runs.

Performance results from the first two executions of the TPC-H benchmark indicated the following difference for the metric points:

Run	QppH@300GB	QthH@300GB	QphH@300GB
Run 1	48,648.6	33,921.3	40,622.9
Run 2	49,769.6	32,812.6	40,411.3

6.11 System Activity Between Tests

Any activity on the SUT that takes place between the conclusion of Run1 and the beginning of Run2 must be disclosed.

No activities performed between Run 1 and Run 2.

7.0 Clause 6: SUT and Driver Implementation Related Items

7.1 Driver

A detailed description of how the driver performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the driver.

A single script performs all stream executions. QGEN is used to produce query text. For each power-test run:
The SQL for RF1 is submitted to the database
Then the queries as generated by QGEN are submitted in the order defined by Clause 5.3.5.4
The SQL for RF2 is submitted to the database.

7.2 Implementation Specific Layer (ISL)

If an implementation-specific layer is used, then a detailed description of how it performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the implementation-specific layer.

The source code for the qexec utility can be found in Appendix F.

7.3 Profile-Directed Optimization

If profile-directed optimization as described in Clause 5.2.9 is used, such used must be disclosed.

Profile-directed optimization was used in this benchmark.

8.0 Clause 7: Pricing Related Items

8.1 Hardware and Software Used

A detailed list of hardware and software used in the priced system must be reported. Each item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported.

A detailed list of hardware and software used in the priced system is included in the pricing sheet in the executive summary. All prices are currently effective. Third-party price quotations are included in Appendix G.

8.2 Total 3 Year Price

The total 3-year price of the entire configuration must be reported including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

A detailed pricing sheet of all the hardware and software used in this configuration and the 3-year maintenance costs, demonstrating the computation of the total 3-year price of the configuration, is included in the executive summary. This purchase qualifies for 16% large purchase discount from Hewlett Packard Company. Oracle Database software qualify for an Oracle mandatory E-Business discount.

8.3 Availability Date

The committed delivery date for general availability of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the availability date reported on the executive summary must be the date by which all components are committed to being available. The full disclosure report must report availability dates individually for at least each of the categories for which a pricing subtotal must be provided.

Availability date is December 18, 2006.

8.4 Country-Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country-specific priced configuration. Country-specific pricing is subject to Clause 7.1.7.

The configuration is priced for the United States of America.

9.0 Clause 9: Related Items

9.1 Auditors' Report

The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

Lorna Livingtree of Performance Metrics Inc audited this implementation of the TPC Benchmark H.

Performance Metrics Inc.
PO Box 984 Klamath, CA 95548
Phone: (707) 482-0523
fax: (707) 482-0575

email: LornaL@PerfMetrics.com

TPC Benchmark H Full Disclosure Report and other information can be downloaded from Transaction Processing Performance Council web site at www.tpc.org.



PERFORMANCE METRICS INC.
TPC Certified Auditors

December 16, 2006

Mr. Raghunath Othayoth-Nambiar
Mr. Bryon Georgson
Hewlett-Packard Company
20555 SH 249
Houston, TX 77077

I have verified the TPC Benchmark™ H for the following configuration:

Platform: ProLiant BL480c 8 node cluster
Database Manager: Oracle Database 10g Enterprise Edition R2
Operating System: Red Hat Enterprise Linux 4

CPU's	Memory	Total Disks	Qpph@ 300GB	QthH@300GB	QphH@300GB
16 Intel Xeon @ 3.0 GHz dual-core	16 GB each node	16 @ 36 GB (OS) 448 @ 36GB	49,769.6	32,812.6	40,411.3

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The database tables were defined with the proper columns, layout and sizes.
- The tested database was correctly scaled and populated for 300GB using DBGEN. The version of DBGEN was 2.3.0.
- The qualification database layout was identical to the tested database except for the number and size of the files and nodes.
- The query text was verified to use only compliant variants and minor modifications.
- The executable query text was generated by QGEN and submitted through Oracle's standard interactive interface. The version of QGEN was 2.3.0.
- The validation of the query text against the qualification database produced compliant results.

PERFORMANCE METRICS INC.
TPC Certified Auditors

- The refresh functions were properly implemented and executed the correct number of inserts and deletes.
- The load timing was properly measured and reported.
- The execution times were correctly measured and reported.
- The performance metrics were correctly computed and reported.
- The repeatability of the measurement was verified.
- The ACID properties were successfully demonstrated and verified.
- Sufficient mirrored log space was present on the tested system.
- The system pricing was checked for major components and maintenance.
- The executive summary pages of the FDR were verified for accuracy.

Auditor's Notes:

None.

Sincerely,



Lorna Livingtree
Auditor

Appendix A: Parameter Settings

```

-----
2shut
-----
#!/bin/ksh

. $FRAME_PATH/env
(( dop = 10 ))
(( c=10 ))
echo $START_NODES
for i in $START_NODES
do
(( c=c+1 ))
echo starting instance on node $i
ssh $i -n /home/oracle/frame/bin/tshut abort &
if (( c>=dop )) then
#wait
(( c=0 ))
fi
done
wait
-----
2start
-----
#!/bin/ksh

. $FRAME_PATH/env
(( dop = 10 ))
(( c=10 ))
echo $START_NODES
for i in $START_NODES
do
(( c=c+1 ))
echo starting instance on node $i
ssh $i -n /home/oracle/frame/bin/tstart &
if (( c>=dop )) then
#wait
(( c=0 ))
fi
done
wait
-----
init_build.ora
-----
aq_tm_processes          = 0
audit_trail              = false
compatible               = 10.2.0.2
control_files            = (/home/oracle/dev/block/control1,/home/oracle/dev/block/control2)
db_block_checksum       = false
db_block_size           = 32768
db_cache_size           = 4000m
db_file_multiblock_read_count = 24
db_files                 = 500
db_name                  = 10i
db_writer_processes     = 4
dml_locks                = 5000
global_names            = false
instance_name           = raca
log_buffer               = 4194304
log_checkpoint_timeout  = 1200
log_checkpoints_to_alert = true
max_dump_file_size      = unlimited
nls_date_format         = YYYY-MM-DD
open_cursors            = 600
optimizer_mode          = CHOOSE
optimizer_features_enable = 10.2.0.2.1
parallel_adaptive_multi_user = true
parallel_execution_message_size = 16384
parallel_max_servers    = 256
parallel_min_servers    = 256
pga_aggregate_target    = 5500m
processes               = 1000
recovery_parallelism    = 8
replication_dependency_tracking = false
statistics_level        = basic
undo_retention          = 400000
optimizer_index_cost_adj = 1400
cpu_count               = 4
shared_pool_size        = 3000m
filesystemio_options    = asynch
undo_management         = auto
-----
init_c1.ora
-----
instance_number = 1
thread = 1
undo_management = auto

undo_tablespace = ts_undo1
cluster_database = true
#cluster_interconnects = 3.3.100.101
cluster_interconnects = 15.15.0.1
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c2.ora
-----
instance_number = 2
thread = 2
undo_management = auto
undo_tablespace = ts_undo2
cluster_database = true
#cluster_interconnects = 3.3.100.102
cluster_interconnects = 15.15.0.2
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c3.ora
-----
instance_number = 3
thread = 3
undo_management = auto
undo_tablespace = ts_undo3
cluster_database = true
#cluster_interconnects = 3.3.100.103
cluster_interconnects = 15.15.0.3
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c4.ora
-----
instance_number = 4
thread = 4
undo_management = auto
undo_tablespace = ts_undo4
cluster_database = true
#cluster_interconnects = 3.3.100.104
cluster_interconnects = 15.15.0.4
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c5.ora
-----
instance_number = 5
thread = 5
undo_management = auto
undo_tablespace = ts_undo5
cluster_database = true
#cluster_interconnects = 3.3.100.105
cluster_interconnects = 15.15.0.5
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c6.ora
-----
instance_number = 6
thread = 6
undo_management = auto
undo_tablespace = ts_undo6
cluster_database = true
#cluster_interconnects = 3.3.100.106
cluster_interconnects = 15.15.0.6
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c7.ora
-----
instance_number = 7
thread = 7
undo_management = auto
undo_tablespace = ts_undo7
cluster_database = true
#cluster_interconnects = 3.3.100.107
cluster_interconnects = 15.15.0.7
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
init_c8.ora
-----
instance_number = 8
thread = 8
undo_management = auto
undo_tablespace = ts_undo8
cluster_database = true
#cluster_interconnects = 3.3.100.108
cluster_interconnects = 15.15.0.8
ifile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora
-----
rawdevices
-----
/home/oracle/dev/raw/ocr1 /dev/sda7

```

```

/home/oracle/dev/raw/ocr2 /dev/sdb7
/home/oracle/dev/raw/quorum1 /dev/sdc7
-----
sysctl.conf
-----
net.ipv4.ip_forward = 0
net.ipv4.conf.default.accept_source_route = 0
kernel.sysrq = 0
kernel.core_uses_pid = 1
fs.file-max = 4194304
kernel.sem = 250 32000 100 128
fs.aio-max-nr = 4194304
kernel.shmmax = 4563402752
kernel.shmall = 409600000
net.ipv4.ip_local_port_range = 1024 65000
net.core.rmem_default = 2097152
net.core.wmem_default = 2097152
net.core.rmem_max = 16777216
net.core.wmem_max = 16777216
net.ipv4.tcp_rmem = 4096 87380 16777216
net.ipv4.tcp_wmem = 4096 65536 16777216
net.ipv4.tcp_no_metrics_save = 1
net.ipv4.tcp_max_syn_backlog = 1536
net.core.netdev_max_backlog = 3000
net.ipv4.tcp_timestamps = 0
net.ipv4.tcp_sack = 1
net.ipv4.tcp_window_scaling = 1
-----
tstart
-----
#!/bin/ksh
#
# $Header: tstart.sh 08-aug-99.18:05:50 mpoess Exp $
#
# tstart.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME

```

```

# tstart.sh
#
# DESCRIPTION
# starts a database with a specific init.ora or uses the default.
#
# NOTES
# <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
# mpoess 08/08/99 - Creation
# mpoess 08/08/99 - Creation
#
#!/bin/ksh

#set -x

DIR=`pwd`
cd $ORACLE_HOME/dbs

if [ "$1" != "" ]; then
    PFILE="$ORACLE_HOME/dbs/$1.ora"
else
    PFILE="$ORACLE_HOME/dbs/init_${ORACLE_SID}.ora"
fi

sqlplus /NOLOG << !
connect / as sysdba
rem shutdown immediate
startup $PFILE

execute dbms_scheduler.disable('AUTO_TASKS_JOB_CLASS');

exit
!

cd $DIR

```


Appendix B: Database Build Scripts

```
-----
addts.sh
-----
sqlplus /NOLOG<<!
connect / as sysdba;
alter tablespace $1 add datafile '$2' size $3 reuse;
!

-----
addtts.sh
-----
sqlplus /NOLOG<<!
connect / as sysdba;
alter tablespace $1 add tempfile '$2' size $3 reuse;
!

-----
addundolog.sh
-----
one=$1
((one=one*2-1))
((two=one+1))
echo start creating undo and log for node $1 `date`
sqlplus /NOLOG <<!
connect / as sysdba;
create undo tablespace ts_undo${1} datafile '/home/oracle/dev/block/undo_${1}' size 1536m
reuse;
alter database add logfile thread ${1} '/home/oracle/dev/block/log_${one}' size 1024m reuse,
'/home/oracle/dev/block/log_${two}' size 1024m reuse,
'/home/oracle/dev/block/log_${one}_a' size 1024m reuse,
'/home/oracle/dev/block/log_${two}_a' size 1024m reuse;
alter database enable public thread ${1};
!
echo end creating undo and log for node $1 `date`

-----
create_et2_driver.sh
-----
i=0;

while (( i<32 ));do
(( i=i+1 ))
/home/oracle/kit/update/scripts/create_et2.sh ${i}
done

-----
create_et2.sh
-----
. $KIT_DIR/env

PAR_HINT=32;
PAR_HINT=64;
SETNUM=$1
sqlplus /NOLOG << !
connect tpch/tpch;
set timing on
set serveroutput on
set echo on
drop directory data_dir;
drop directory ff1;
drop directory ff2;
drop directory ff3;
drop directory ff4;
drop directory ff5;
drop directory ff6;
drop directory ff7;
drop directory ff8;
drop directory ff9;
drop directory ff10;
drop directory ff11;
drop directory ff12;
drop directory ff13;
drop directory ff14;
drop directory ff15;
drop directory ff16;
drop directory ff17;
drop directory ff18;
drop directory ff19;
drop directory ff20;
drop directory ff21;
drop directory ff22;
drop directory ff23;
drop directory ff24;
drop directory ff25;
drop directory ff26;
```

```
drop directory ff27;
drop directory ff28;
drop directory ff29;
drop directory ff30;
drop directory ff31;
drop directory ff32;

create directory data_dir as '/home/oracle/dev/ff_1/update_sets';

create directory ff1 as '/home/oracle/dev/ff_1/update_sets';
create directory ff2 as '/home/oracle/dev/ff_2/update_sets';
create directory ff3 as '/home/oracle/dev/ff_3/update_sets';
create directory ff4 as '/home/oracle/dev/ff_4/update_sets';
create directory ff5 as '/home/oracle/dev/ff_5/update_sets';
create directory ff6 as '/home/oracle/dev/ff_6/update_sets';
create directory ff7 as '/home/oracle/dev/ff_7/update_sets';
create directory ff8 as '/home/oracle/dev/ff_8/update_sets';
create directory ff9 as '/home/oracle/dev/ff_9/update_sets';
create directory ff10 as '/home/oracle/dev/ff_10/update_sets';
create directory ff11 as '/home/oracle/dev/ff_11/update_sets';
create directory ff12 as '/home/oracle/dev/ff_12/update_sets';
create directory ff13 as '/home/oracle/dev/ff_13/update_sets';
create directory ff14 as '/home/oracle/dev/ff_14/update_sets';
create directory ff15 as '/home/oracle/dev/ff_15/update_sets';
create directory ff16 as '/home/oracle/dev/ff_16/update_sets';
create directory ff17 as '/home/oracle/dev/ff_17/update_sets';
create directory ff18 as '/home/oracle/dev/ff_18/update_sets';
create directory ff19 as '/home/oracle/dev/ff_19/update_sets';
create directory ff20 as '/home/oracle/dev/ff_20/update_sets';
create directory ff21 as '/home/oracle/dev/ff_21/update_sets';
create directory ff22 as '/home/oracle/dev/ff_22/update_sets';
create directory ff23 as '/home/oracle/dev/ff_23/update_sets';
create directory ff24 as '/home/oracle/dev/ff_24/update_sets';
create directory ff25 as '/home/oracle/dev/ff_25/update_sets';
create directory ff26 as '/home/oracle/dev/ff_26/update_sets';
create directory ff27 as '/home/oracle/dev/ff_27/update_sets';
create directory ff28 as '/home/oracle/dev/ff_28/update_sets';
create directory ff29 as '/home/oracle/dev/ff_29/update_sets';
create directory ff30 as '/home/oracle/dev/ff_30/update_sets';
create directory ff31 as '/home/oracle/dev/ff_31/update_sets';
create directory ff32 as '/home/oracle/dev/ff_32/update_sets';

drop table temp_et_${SETNUM};
create table temp_et_${SETNUM}(
  l_orderkey number ,
  l_partkey number ,
  l_suppkey number ,
  l_linenum number ,
  l_quantity number ,
  l_extendedprice number ,
  l_discount number ,
  l_tax number ,
  l_returnflag char(1) ,
  l_linestatus char(1) ,
  l_shipdate date ,
  l_commitdate date ,
  l_receiptdate date ,
  l_shipinstruct char(25) ,
  l_shipmode char(10) ,
  l_comment varchar(44)
)
organization external (
type ORACLE_LOADER
default directory data_dir
access parameters
(
records delimited by newline
nobadfile
nologfile
fields terminated by '|'
missing field values are null
)
)
location (
ff1:'lineitem.tbl.us${SETNUM}.1',
ff2:'lineitem.tbl.us${SETNUM}.2',
ff3:'lineitem.tbl.us${SETNUM}.3',
ff4:'lineitem.tbl.us${SETNUM}.4',
ff5:'lineitem.tbl.us${SETNUM}.5',
ff6:'lineitem.tbl.us${SETNUM}.6',
ff7:'lineitem.tbl.us${SETNUM}.7',
ff8:'lineitem.tbl.us${SETNUM}.8',
ff9:'lineitem.tbl.us${SETNUM}.9',
ff10:'lineitem.tbl.us${SETNUM}.10',
```

```

ff11:'lineitem.tbl.u${SETNUM}.11',
ff12:'lineitem.tbl.u${SETNUM}.12',
ff13:'lineitem.tbl.u${SETNUM}.13',
ff14:'lineitem.tbl.u${SETNUM}.14',
ff15:'lineitem.tbl.u${SETNUM}.15',
ff16:'lineitem.tbl.u${SETNUM}.16',
ff17:'lineitem.tbl.u${SETNUM}.17',
ff18:'lineitem.tbl.u${SETNUM}.18',
ff19:'lineitem.tbl.u${SETNUM}.19',
ff20:'lineitem.tbl.u${SETNUM}.20',
ff21:'lineitem.tbl.u${SETNUM}.21',
ff22:'lineitem.tbl.u${SETNUM}.22',
ff23:'lineitem.tbl.u${SETNUM}.23',
ff24:'lineitem.tbl.u${SETNUM}.24',
ff25:'lineitem.tbl.u${SETNUM}.25',
ff26:'lineitem.tbl.u${SETNUM}.26',
ff27:'lineitem.tbl.u${SETNUM}.27',
ff28:'lineitem.tbl.u${SETNUM}.28',
ff29:'lineitem.tbl.u${SETNUM}.29',
ff30:'lineitem.tbl.u${SETNUM}.30',
ff31:'lineitem.tbl.u${SETNUM}.31',
ff32:'lineitem.tbl.u${SETNUM}.32'
))
reject limit unlimited parallel ${PAR_HINT};

drop table temp_o_et_${SETNUM};
create table temp_o_et_${SETNUM}(
  o_orderkey      number ,
  o_custkey       number ,
  o_orderstatus   char(1) ,
  o_totalprice    number ,
  o_orderdate     date ,
  o_orderpriority char(15) ,
  o_clerk         char(15) ,
  o_shippriority  number ,
  o_comment       varchar(79)
)
organization external (
type ORACLE_LOADER
default directory data_dir
access parameters
(
  records delimited by newline
  nobadfile
  nologfile
  fields terminated by '|'
  missing field values are null
)
)
location (
ff1:'orders.tbl.u${SETNUM}.1',
ff2:'orders.tbl.u${SETNUM}.2',
ff3:'orders.tbl.u${SETNUM}.3',
ff4:'orders.tbl.u${SETNUM}.4',
ff5:'orders.tbl.u${SETNUM}.5',
ff6:'orders.tbl.u${SETNUM}.6',
ff7:'orders.tbl.u${SETNUM}.7',
ff8:'orders.tbl.u${SETNUM}.8',
ff9:'orders.tbl.u${SETNUM}.9',
ff10:'orders.tbl.u${SETNUM}.10',
ff11:'orders.tbl.u${SETNUM}.11',
ff12:'orders.tbl.u${SETNUM}.12',
ff13:'orders.tbl.u${SETNUM}.13',
ff14:'orders.tbl.u${SETNUM}.14',
ff15:'orders.tbl.u${SETNUM}.15',
ff16:'orders.tbl.u${SETNUM}.16',
ff17:'orders.tbl.u${SETNUM}.17',
ff18:'orders.tbl.u${SETNUM}.18',
ff19:'orders.tbl.u${SETNUM}.19',
ff20:'orders.tbl.u${SETNUM}.20',
ff21:'orders.tbl.u${SETNUM}.21',
ff22:'orders.tbl.u${SETNUM}.22',
ff23:'orders.tbl.u${SETNUM}.23',
ff24:'orders.tbl.u${SETNUM}.24',
ff25:'orders.tbl.u${SETNUM}.25',
ff26:'orders.tbl.u${SETNUM}.26',
ff27:'orders.tbl.u${SETNUM}.27',
ff28:'orders.tbl.u${SETNUM}.28',
ff29:'orders.tbl.u${SETNUM}.29',
ff30:'orders.tbl.u${SETNUM}.30',
ff31:'orders.tbl.u${SETNUM}.31',
ff32:'orders.tbl.u${SETNUM}.32'
))
reject limit unlimited parallel ${PAR_HINT};

drop table temp_okey_et_${SETNUM};
create table temp_okey_et_${SETNUM}(
  t_orderkey      number
)
organization external (
type ORACLE_LOADER
default directory data_dir
access parameters
(

```

```

records delimited by newline
nobadfile
nologfile
fields terminated by '|'
missing field values are null
)
)
location (
ff1:'delete.u${SETNUM}.1',
ff2:'delete.u${SETNUM}.2',
ff3:'delete.u${SETNUM}.3',
ff4:'delete.u${SETNUM}.4',
ff5:'delete.u${SETNUM}.5',
ff6:'delete.u${SETNUM}.6',
ff7:'delete.u${SETNUM}.7',
ff8:'delete.u${SETNUM}.8',
ff9:'delete.u${SETNUM}.9',
ff10:'delete.u${SETNUM}.10',
ff11:'delete.u${SETNUM}.11',
ff12:'delete.u${SETNUM}.12',
ff13:'delete.u${SETNUM}.13',
ff14:'delete.u${SETNUM}.14',
ff15:'delete.u${SETNUM}.15',
ff16:'delete.u${SETNUM}.16',
ff17:'delete.u${SETNUM}.17',
ff18:'delete.u${SETNUM}.18',
ff19:'delete.u${SETNUM}.19',
ff20:'delete.u${SETNUM}.20',
ff21:'delete.u${SETNUM}.21',
ff22:'delete.u${SETNUM}.22',
ff23:'delete.u${SETNUM}.23',
ff24:'delete.u${SETNUM}.24',
ff25:'delete.u${SETNUM}.25',
ff26:'delete.u${SETNUM}.26',
ff27:'delete.u${SETNUM}.27',
ff28:'delete.u${SETNUM}.28',
ff29:'delete.u${SETNUM}.29',
ff30:'delete.u${SETNUM}.30',
ff31:'delete.u${SETNUM}.31',
ff32:'delete.u${SETNUM}.32'
))
reject limit unlimited parallel ${PAR_HINT2};
!
-----
crts.sh
-----
i=${1};
sqlplus /NOLOG<<!
connect / as sysdba;
drop tablespace tsd${i} including contents;
create tablespace tsd${i} nologging
datafile '/home/oracle/dev/block/lo_${i}' size ${2} reuse extent management dictionary default
storage (initial 25m next 10m maxextents unlimited pctincrease 0);
!
-----
dapop_10gR2_mp2.sh
-----
#!/bin/bash
sqlplus /NOLOG <<EOF
connect / as sysdba
drop user tpch cascade;
grant DBA
to tpch identified by tpch;
connect tpch/tpch;
drop directory ff1;
drop directory ff2;
drop directory ff3;
drop directory ff4;
drop directory ff5;
drop directory ff6;
drop directory ff7;
drop directory ff8;
drop directory ff9;
drop directory ff10;
drop directory ff11;
drop directory ff12;
drop directory ff13;
drop directory ff14;
drop directory ff15;
drop directory ff16;
drop directory ff17;
drop directory ff18;
drop directory ff19;
drop directory ff20;
drop directory ff21;
drop directory ff22;
drop directory ff23;
drop directory ff24;
drop directory ff25;
drop directory ff26;
drop directory ff27;
drop directory ff28;
drop directory ff29;

```

```

drop directory ff30;
drop directory ff31;
drop directory ff32;

create directory ff1 as '/home/oracle/dev/ff_1';
create directory ff2 as '/home/oracle/dev/ff_2';
create directory ff3 as '/home/oracle/dev/ff_3';
create directory ff4 as '/home/oracle/dev/ff_4';
create directory ff5 as '/home/oracle/dev/ff_5';
create directory ff6 as '/home/oracle/dev/ff_6';
create directory ff7 as '/home/oracle/dev/ff_7';
create directory ff8 as '/home/oracle/dev/ff_8';
create directory ff9 as '/home/oracle/dev/ff_9';
create directory ff10 as '/home/oracle/dev/ff_10';
create directory ff11 as '/home/oracle/dev/ff_11';
create directory ff12 as '/home/oracle/dev/ff_12';
create directory ff13 as '/home/oracle/dev/ff_13';
create directory ff14 as '/home/oracle/dev/ff_14';
create directory ff15 as '/home/oracle/dev/ff_15';
create directory ff16 as '/home/oracle/dev/ff_16';
create directory ff17 as '/home/oracle/dev/ff_17';
create directory ff18 as '/home/oracle/dev/ff_18';
create directory ff19 as '/home/oracle/dev/ff_19';
create directory ff20 as '/home/oracle/dev/ff_20';
create directory ff21 as '/home/oracle/dev/ff_21';
create directory ff22 as '/home/oracle/dev/ff_22';
create directory ff23 as '/home/oracle/dev/ff_23';
create directory ff24 as '/home/oracle/dev/ff_24';
create directory ff25 as '/home/oracle/dev/ff_25';
create directory ff26 as '/home/oracle/dev/ff_26';
create directory ff27 as '/home/oracle/dev/ff_27';
create directory ff28 as '/home/oracle/dev/ff_28';
create directory ff29 as '/home/oracle/dev/ff_29';
create directory ff30 as '/home/oracle/dev/ff_30';
create directory ff31 as '/home/oracle/dev/ff_31';
create directory ff32 as '/home/oracle/dev/ff_32';

```

```

drop table l_et;
create table l_et(
  l_orderkey      number ,
  l_partkey       number ,
  l_suppkey       number ,
  l_linenumbr     number ,
  l_quantity      number ,
  l_extendedprice number ,
  l_discount      number ,
  l_tax           number ,
  l_returnflag    char(1) ,
  l_linestatus    char(1) ,
  l_shipdate      date ,
  l_commitdate    date ,
  l_receiptdate   date ,
  l_shipinstruct  char(25) ,
  l_shipmode      char(10) ,
  l_comment       varchar(44)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
      records delimited by newline
      nobadfile
      nologfile
      fields terminated by '|'
      missing field values are null
)
location (
ff1:'lineitem.tbl.1', ff2:'lineitem.tbl.2', ff3:'lineitem.tbl.3',
ff4:'lineitem.tbl.4', ff5:'lineitem.tbl.5', ff6:'lineitem.tbl.6',
ff7:'lineitem.tbl.7', ff8:'lineitem.tbl.8', ff9:'lineitem.tbl.9',
ff10:'lineitem.tbl.10', ff11:'lineitem.tbl.11', ff12:'lineitem.tbl.12',
ff13:'lineitem.tbl.13', ff14:'lineitem.tbl.14', ff15:'lineitem.tbl.15',
ff16:'lineitem.tbl.16', ff17:'lineitem.tbl.17', ff18:'lineitem.tbl.18',
ff19:'lineitem.tbl.19', ff20:'lineitem.tbl.20', ff21:'lineitem.tbl.21',
ff22:'lineitem.tbl.22', ff23:'lineitem.tbl.23', ff24:'lineitem.tbl.24',
ff25:'lineitem.tbl.25', ff26:'lineitem.tbl.26', ff27:'lineitem.tbl.27',
ff28:'lineitem.tbl.28', ff29:'lineitem.tbl.29', ff30:'lineitem.tbl.30',
ff31:'lineitem.tbl.31', ff32:'lineitem.tbl.32'))
reject limit unlimited;

```

```

drop table l_et2;
create table l_et2(
  l_orderkey      number ,
  l_partkey       number ,
  l_suppkey       number ,
  l_linenumbr     number ,
  l_quantity      number ,
  l_extendedprice number ,
  l_discount      number ,
  l_tax           number ,

```

```

  l_returnflag    char(1) ,
  l_linestatus    char(1) ,
  l_shipdate      date ,
  l_commitdate    date ,
  l_receiptdate   date ,
  l_shipinstruct  char(25) ,
  l_shipmode      char(10) ,
  l_comment       varchar(44)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
      records delimited by newline
      nobadfile
      nologfile
      fields terminated by '|'
      missing field values are null
)
location (ff1:'lineitem.tbl.1_2'))
reject limit unlimited;

```

```

drop table o_et;
create table o_et(
  o_orderkey      number ,
  o_custkey       number ,
  o_orderstatus   char(1) ,
  o_totalprice    number ,
  o_orderdate     date ,
  o_orderpriority char(15) ,
  o_clerk         char(15) ,
  o_shippriority  number ,
  o_comment       varchar(79)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
      records delimited by newline
      nobadfile
      nologfile
      fields terminated by '|'
      missing field values are null
)
location (
ff1:'orders.tbl.1', ff2:'orders.tbl.2', ff3:'orders.tbl.3',
ff4:'orders.tbl.4', ff5:'orders.tbl.5', ff6:'orders.tbl.6',
ff7:'orders.tbl.7', ff8:'orders.tbl.8', ff9:'orders.tbl.9',
ff10:'orders.tbl.10', ff11:'orders.tbl.11', ff12:'orders.tbl.12',
ff13:'orders.tbl.13', ff14:'orders.tbl.14', ff15:'orders.tbl.15',
ff16:'orders.tbl.16', ff17:'orders.tbl.17', ff18:'orders.tbl.18',
ff19:'orders.tbl.19', ff20:'orders.tbl.20', ff21:'orders.tbl.21',
ff22:'orders.tbl.22', ff23:'orders.tbl.23', ff24:'orders.tbl.24',
ff25:'orders.tbl.25', ff26:'orders.tbl.26', ff27:'orders.tbl.27',
ff28:'orders.tbl.28', ff29:'orders.tbl.29', ff30:'orders.tbl.30',
ff31:'orders.tbl.31', ff32:'orders.tbl.32'))
reject limit unlimited;

```

```

drop table o_et2;
create table o_et2(
  o_orderkey      number ,
  o_custkey       number ,
  o_orderstatus   char(1) ,
  o_totalprice    number ,
  o_orderdate     date ,
  o_orderpriority char(15) ,
  o_clerk         char(15) ,
  o_shippriority  number ,
  o_comment       varchar(79)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
      records delimited by newline
      nobadfile
      nologfile
      fields terminated by '|'
      missing field values are null
)
location (ff1:'orders.tbl.1_2'))
reject limit unlimited;

```

```

drop table ps_et;
create table ps_et(
  ps_partkey      number ,
  ps_suppkey      number ,
  ps_availqty     number ,

```

```

ps_supplycost    number ,
ps_comment       varchar(199)
)
organization external (
type ORACLE_LOADER
default directory ffl
access parameters
(
records delimited by newline
nobadfile
nologfile
fields terminated by '|'
missing field values are null
)
) location (
ff1:'partsupp.tbl.1',
ff2:'partsupp.tbl.2',
ff3:'partsupp.tbl.3',
ff4:'partsupp.tbl.4',
ff5:'partsupp.tbl.5',
ff6:'partsupp.tbl.6',
ff7:'partsupp.tbl.7',
ff8:'partsupp.tbl.8',
ff9:'partsupp.tbl.9',
ff10:'partsupp.tbl.10',
ff11:'partsupp.tbl.11',
ff12:'partsupp.tbl.12',
ff13:'partsupp.tbl.13',
ff14:'partsupp.tbl.14',
ff15:'partsupp.tbl.15',
ff16:'partsupp.tbl.16',
ff17:'partsupp.tbl.17',
ff18:'partsupp.tbl.18',
ff19:'partsupp.tbl.19',
ff20:'partsupp.tbl.20',
ff21:'partsupp.tbl.21',
ff22:'partsupp.tbl.22',
ff23:'partsupp.tbl.23',
ff24:'partsupp.tbl.24',
ff25:'partsupp.tbl.25',
ff26:'partsupp.tbl.26',
ff27:'partsupp.tbl.27',
ff28:'partsupp.tbl.28',
ff29:'partsupp.tbl.29',
ff30:'partsupp.tbl.30',
ff31:'partsupp.tbl.31',
ff32:'partsupp.tbl.32'
)
)
reject limit unlimited;

drop table p_et;
create table p_et(
p_partkey      number ,
p_name         varchar(55) ,
p_mfg         char(25) ,
p_brand       char(10) ,
p_type        varchar(25) ,
p_size        number ,
p_container   char(10) ,
p_retailprice number ,
p_comment     varchar(23)
)
organization external (
type ORACLE_LOADER
default directory ffl
access parameters
(
records delimited by newline
nobadfile
nologfile
fields terminated by '|'
missing field values are null
)
) location (
ff1:'part.tbl.1',
ff2:'part.tbl.2',
ff3:'part.tbl.3',
ff4:'part.tbl.4',
ff5:'part.tbl.5',
ff6:'part.tbl.6',
ff7:'part.tbl.7',
ff8:'part.tbl.8',
ff9:'part.tbl.9',
ff10:'part.tbl.10',
ff11:'part.tbl.11',
ff12:'part.tbl.12',
ff13:'part.tbl.13',
ff14:'part.tbl.14',
ff15:'part.tbl.15',
ff16:'part.tbl.16',
ff17:'part.tbl.17',
ff18:'part.tbl.18',
ff19:'part.tbl.19',

```

```

ff20:'part.tbl.20',
ff21:'part.tbl.21',
ff22:'part.tbl.22',
ff23:'part.tbl.23',
ff24:'part.tbl.24',
ff25:'part.tbl.25',
ff26:'part.tbl.26',
ff27:'part.tbl.27',
ff28:'part.tbl.28',
ff29:'part.tbl.29',
ff30:'part.tbl.30',
ff31:'part.tbl.31',
ff32:'part.tbl.32'
)
)
reject limit unlimited;

drop table c_et;
create table c_et(
c_custkey     number ,
c_name        varchar(25) ,
c_address     varchar(40) ,
c_nationkey   number ,
c_phone       char(15) ,
c_acctbal     number ,
c_mktsegment  char(10) ,
c_comment     varchar(117)
)
organization external (
type ORACLE_LOADER
default directory ffl
access parameters
(
records delimited by newline
nobadfile
nologfile
fields terminated by '|'
missing field values are null
)
) location (
ff1:'customer.tbl.1',
ff2:'customer.tbl.2',
ff3:'customer.tbl.3',
ff4:'customer.tbl.4',
ff5:'customer.tbl.5',
ff6:'customer.tbl.6',
ff7:'customer.tbl.7',
ff8:'customer.tbl.8',
ff9:'customer.tbl.9',
ff10:'customer.tbl.10',
ff11:'customer.tbl.11',
ff12:'customer.tbl.12',
ff13:'customer.tbl.13',
ff14:'customer.tbl.14',
ff15:'customer.tbl.15',
ff16:'customer.tbl.16',
ff17:'customer.tbl.17',
ff18:'customer.tbl.18',
ff19:'customer.tbl.19',
ff20:'customer.tbl.20',
ff21:'customer.tbl.21',
ff22:'customer.tbl.22',
ff23:'customer.tbl.23',
ff24:'customer.tbl.24',
ff25:'customer.tbl.25',
ff26:'customer.tbl.26',
ff27:'customer.tbl.27',
ff28:'customer.tbl.28',
ff29:'customer.tbl.29',
ff30:'customer.tbl.30',
ff31:'customer.tbl.31',
ff32:'customer.tbl.32'
)
)
reject limit unlimited;

drop table s_et;
create table s_et(
s_suppkey     number ,
s_name        char(25) ,
s_address     varchar(40) ,
s_nationkey   number ,
s_phone       char(15) ,
s_acctbal     number ,
s_comment     varchar(101)
)
organization external (
type ORACLE_LOADER
default directory ffl
access parameters
(
records delimited by newline
nobadfile
nologfile
fields terminated by '|'

```

```

)
location (
ff1:'supplier.tbl.1',
ff2:'supplier.tbl.2',
ff3:'supplier.tbl.3',
ff4:'supplier.tbl.4',
ff5:'supplier.tbl.5',
ff6:'supplier.tbl.6',
ff7:'supplier.tbl.7',
ff8:'supplier.tbl.8',
ff9:'supplier.tbl.9',
ff10:'supplier.tbl.10',
ff11:'supplier.tbl.11',
ff12:'supplier.tbl.12',
ff13:'supplier.tbl.13',
ff14:'supplier.tbl.14',
ff15:'supplier.tbl.15',
ff16:'supplier.tbl.16',
ff17:'supplier.tbl.17',
ff18:'supplier.tbl.18',
ff19:'supplier.tbl.19',
ff20:'supplier.tbl.20',
ff21:'supplier.tbl.21',
ff22:'supplier.tbl.22',
ff23:'supplier.tbl.23',
ff24:'supplier.tbl.24',
ff25:'supplier.tbl.25',
ff26:'supplier.tbl.26',
ff27:'supplier.tbl.27',
ff28:'supplier.tbl.28',
ff29:'supplier.tbl.29',
ff30:'supplier.tbl.30',
ff31:'supplier.tbl.31',
ff32:'supplier.tbl.32'
)
reject limit unlimited;

drop table n_et;
create table n_et(
  n_nationkey number ,
  n_name char(25) ,
  n_regionkey number ,
  n_comment varchar(152)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
  records delimited by newline
  nobadfile
  nologfile
  fields terminated by '|'
  missing field values are null
)
)
location (
ff32:'nation.tbl'
)
reject limit unlimited;

drop table r_et;
create table r_et(
  r_regionkey number ,
  r_name char(25) ,
  r_comment varchar(152)
)
organization external (
type ORACLE_LOADER
default directory ff1
access parameters
(
  records delimited by newline
  nobadfile
  nologfile
  fields terminated by '|'
  missing field values are null
)
)
location (
ff32:'region.tbl'
)
reject limit unlimited;

alter table l_et parallel;
alter table o_et parallel;
alter table ps_et parallel;
alter table p_et parallel;
alter table c_et parallel;
alter table s_et parallel;

alter user tpc default tablespace ts_default;
alter user tpc temporary tablespace ts_temp;

```

missing field values are null

@?/rdbs/admin/utlxplan.sql;

```

set timing on
set echo on
!date
rem drop table orders;
create table orders(
  o_orderdate ,
  o_orderkey NOT NULL,
  o_custkey NOT NULL,
  o_orderpriority ,
  o_shippriority ,
  o_clerk ,
  o_orderstatus ,
  o_totalprice ,
  o_comment
)
pctfree 1
pctused 99
initrans 10
storage (initial 8m next 8m freelist groups 8 freelists 99)
compress
parallel
nologging
partition by range (o_orderdate)
subpartition by hash(o_custkey)
subpartitions 64
(
  partition ord1 values less than (to_date('1992-01-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord2 values less than (to_date('1992-02-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord3 values less than (to_date('1992-03-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord4 values less than (to_date('1992-04-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord5 values less than (to_date('1992-05-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord6 values less than (to_date('1992-06-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord7 values less than (to_date('1992-07-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord8 values less than (to_date('1992-08-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord9 values less than (to_date('1992-09-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord10 values less than (to_date('1992-10-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord11 values less than (to_date('1992-11-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord12 values less than (to_date('1992-12-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
  partition ord13 values less than (to_date('1993-01-01','YYYY-MM-DD'))
  store in
  (ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),

```



```

ps_partkey    NOT NULL,
ps_suppkey   NOT NULL,
ps_supplycost NOT NULL,
ps_availqty  ,
ps_comment
)
partition by hash(ps_partkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
storage (initial 256m next 32m freelist groups 8 freelists 99)
parallel
nologging
as select
ps_partkey ,
ps_suppkey ,
ps_supplycost ,
ps_availqty ,
ps_comment
from ps_et;
!date

rem drop table customer;
create table customer(
c_custkey    NOT NULL,
c_mktsegment ,
c_nationkey  ,
c_name      ,
c_address   ,
c_phone     ,
c_acctbal   ,
c_comment
)
pctfree 0
pctused 99
storage (initial 100m next 20m freelist groups 8 freelists 99)
compress
parallel
nologging
partition by hash (c_custkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
as select
c_custkey ,
c_mktsegment ,
c_nationkey ,
c_name ,
c_address ,
c_phone ,
c_acctbal ,
c_comment
from c_et;
!date

rem drop table part;
create table part(
p_partkey    NOT NULL,
p_type      ,
p_size      ,
p_brand     ,
p_name      ,
p_container ,
p_mfgr      ,
p_retailprice ,
p_comment
)
pctfree 0
pctused 99
storage (initial 132m next 20m freelist groups 8 freelists 99)
compress
parallel
nologging
partition by hash (p_partkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
as select
p_partkey ,
p_type ,
p_size ,
p_brand ,
p_name ,
p_container ,
p_mfgr ,
p_retailprice ,
p_comment

```

```

from p_et;
!date

rem drop table supplier;
create table supplier(
s_suppkey    NOT NULL,
s_nationkey  ,
s_comment    ,
s_name       ,
s_address    ,
s_phone      ,
s_acctbal
)
pctfree 0
pctused 99
storage (initial 8m next 8m freelist groups 8 freelists 99)
compress
parallel
nologging
partition by hash (s_suppkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
as select
s_suppkey ,
s_nationkey ,
s_comment ,
s_name ,
s_address ,
s_phone ,
s_acctbal
from s_et;
!date

rem drop table nation;
create table nation(
n_nationkey  NOT NULL,
n_name       ,
n_regionkey  ,
n_comment    )
as select * from n_et;

rem drop table region;
create table region(
r_regionkey  ,
r_name       ,
r_comment    )
as select * from r_et;
!date

rem drop table lineitem;
create table lineitem(
l_shipdate   ,
l_orderkey   NOT NULL,
l_discount   NOT NULL,
l_extendedprice NOT NULL,
l_suppkey    NOT NULL,
l_quantity   NOT NULL,
l_returnflag ,
l_partkey    NOT NULL,
l_linestatus ,
l_tax        NOT NULL,
l_commitdate ,
l_receiptdate ,
l_shipmode   ,
l_linenumber NOT NULL,
l_shipinstruct ,
l_comment
)
pctfree 1
pctused 99
intrans 10
storage (initial 32m next 8m freelist groups 8 freelists 99)
compress
parallel
nologging
partition by range (l_shipdate)
subpartition by hash(l_partkey)
subpartitions 64
(
partition item1 values less than (to_date('1992-01-01','YYYY-MM-DD')) store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
partition item2 values less than (to_date('1992-02-01','YYYY-MM-DD')) store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32),
partition item3 values less than (to_date('1992-03-01','YYYY-MM-DD')) store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
)

```



```

storage (initial 32m next 32m freelist groups 8 freelists 99)
--storage (initial 8m next 8m freelist groups 8 freelists 99)
parallel
compute statistics
nologging;
alter index i_l_orderkey allocate extent (size 32m);
alter index i_l_orderkey allocate extent (size 32m);
alter index i_l_orderkey allocate extent (size 32m);
alter index i_l_orderkey allocate extent (size 32m);
alter index i_l_orderkey allocate extent (size 32m);

!date

rem drop index i_o_orderkey;
create unique index i_o_orderkey
on orders (o_orderkey) global partition by hash (o_orderkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
pctfree 2
intrans 10
storage (initial 16m next 16m freelist groups 8 freelists 99 )
--storage (initial 4m next 2m freelist groups 8 freelists 99 )
parallel
compute statistics
nologging;
alter index i_o_orderkey allocate extent (size 16m);
alter index i_o_orderkey allocate extent (size 16m);
alter index i_o_orderkey allocate extent (size 16m);
alter index i_o_orderkey allocate extent (size 16m);

!date

rem drop index i_c_custkey;
create unique index i_c_custkey
on customer (c_custkey) global partition by hash (c_custkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
pctfree 2
intrans 10
storage (initial 8m next 8m freelist groups 8 freelists 99)
parallel
compute statistics
nologging;

rem drop table i_ps_partkey_supkey;
create unique index i_ps_partkey_supkey
on partsupp (ps_partkey,ps_supkey) global partition by hash (ps_partkey)
partitions 64
store in
(ts_lo1,ts_lo2,ts_lo3,ts_lo4,ts_lo5,ts_lo6,ts_lo7,ts_lo8,ts_lo9,ts_lo10,ts_lo11,ts_lo12,ts_lo13,ts_lo14,ts_lo15,ts_lo16,ts_lo17,ts_lo18,ts_lo19,ts_lo20,ts_lo21,ts_lo22,ts_lo23,ts_lo24,ts_lo25,ts_lo26,ts_lo27,ts_lo28,ts_lo29,ts_lo30,ts_lo31,ts_lo32)
pctfree 2
intrans 10
storage (initial 8m next 8m freelist groups 8 freelists 99)
parallel
compute statistics
nologging;

alter session force parallel dml parallel (degree 64);

insert into lineitem (
select
l_shipdate ,
l_orderkey ,
l_discount ,
l_extendedprice ,
l_supkey ,
l_quantity ,
l_returnflag ,
l_partkey ,
l_linestatus ,
l_tax ,
l_commitdate ,
l_receiptdate ,
l_shipmode ,
l_linenum ,
l_shipinstruct ,
l_comment
from l_et2);

insert into orders (
select
o_orderdate ,
o_orderkey ,
o_custkey ,
o_orderpriority ,

```

```

o_shippriority ,
o_clerk ,
o_orderstatus ,
o_totalprice ,
o_comment
from o_et2);
commit;
drop table o_et2;
drop table l_et2;
!date
set timing on
execute dbms_stats.gather_schema_stats('TPCH', estimate_percent => 1, degree => 64 ,
granularity => 'GLOBAL' );
connect / as sysdba
execute dbms_stats.gather_system_stats;
exec dbms_scheduler.disable('GATHER_STATS_JOB');
exec dbms_scheduler.disable('AUTO_SPACE_ADVISOR_JOB');
exec dbms_scheduler.disable('AUTO_TASKS_JOB_CLASS');
alter system switch logfile;
!date
EOF

-----
dbcre_10gr2_cclass.sh
-----

#!/bin/ksh
echo "database creation"
date;

sqlplus /NOLOG <<!
connect /as sysdba

startup pfile = /home/oracle/oracle/product/10.2.0/db_1/dbs/init_build.ora nomount;
create database
controlfile reuse
logfile group 1 ('/home/oracle/dev/block/log_1',/home/oracle/dev/block/log_2') size 1024m
reuse,
group 2 ('/home/oracle/dev/block/log_3',/home/oracle/dev/block/log_4') size 1024m reuse
datafile '/home/oracle/dev/block/sys1' size 1024m reuse
sysaux datafile '/home/oracle/dev/block/sysaux1' size 1024m reuse
undo tablespace ts_undo1
datafile '/home/oracle/dev/block/undo_1' size 6140m reuse
default temporary tablespace ts_temp
tempfile '/home/oracle/dev/block/t_1' size 12000m reuse
extent management local uniform size 10m
maxdatafiles 2000
maxinstances 8;

create undo tablespace ts_undo2 datafile '/home/oracle/dev/block/undo_2' size 6140m reuse;
create undo tablespace ts_undo3 datafile '/home/oracle/dev/block/undo_3' size 6140m reuse;
create undo tablespace ts_undo4 datafile '/home/oracle/dev/block/undo_4' size 6140m reuse;
create undo tablespace ts_undo5 datafile '/home/oracle/dev/block/undo_5' size 6140m reuse;
create undo tablespace ts_undo6 datafile '/home/oracle/dev/block/undo_6' size 6140m reuse;
create undo tablespace ts_undo7 datafile '/home/oracle/dev/block/undo_7' size 6140m reuse;
create undo tablespace ts_undo8 datafile '/home/oracle/dev/block/undo_8' size 6140m reuse;

alter database add logfile thread 2 group 3
('/home/oracle/dev/block/log_5',/home/oracle/dev/block/log_6') size 1024m reuse;
alter database add logfile thread 2 group 4
('/home/oracle/dev/block/log_7',/home/oracle/dev/block/log_8') size 1024m reuse;
alter database add logfile thread 3 group 5
('/home/oracle/dev/block/log_9',/home/oracle/dev/block/log_10') size 1024m reuse;
alter database add logfile thread 3 group 6
('/home/oracle/dev/block/log_11',/home/oracle/dev/block/log_12') size 1024m reuse;
alter database add logfile thread 4 group 7
('/home/oracle/dev/block/log_13',/home/oracle/dev/block/log_14') size 1024m reuse;
alter database add logfile thread 4 group 8
('/home/oracle/dev/block/log_15',/home/oracle/dev/block/log_16') size 1024m reuse;
alter database add logfile thread 5 group 9
('/home/oracle/dev/block/log_17',/home/oracle/dev/block/log_18') size 1024m reuse;
alter database add logfile thread 5 group 10
('/home/oracle/dev/block/log_19',/home/oracle/dev/block/log_20') size 1024m reuse;
alter database add logfile thread 6 group 11
('/home/oracle/dev/block/log_21',/home/oracle/dev/block/log_22') size 1024m reuse;
alter database add logfile thread 6 group 12
('/home/oracle/dev/block/log_23',/home/oracle/dev/block/log_24') size 1024m reuse;
alter database add logfile thread 7 group 13
('/home/oracle/dev/block/log_25',/home/oracle/dev/block/log_26') size 1024m reuse;
alter database add logfile thread 7 group 14
('/home/oracle/dev/block/log_27',/home/oracle/dev/block/log_28') size 1024m reuse;
alter database add logfile thread 8 group 15
('/home/oracle/dev/block/log_29',/home/oracle/dev/block/log_30') size 1024m reuse;
alter database add logfile thread 8 group 16
('/home/oracle/dev/block/log_31',/home/oracle/dev/block/log_32') size 1024m reuse;

alter database enable public thread 2;
alter database enable public thread 3;
alter database enable public thread 4;
alter database enable public thread 5;
alter database enable public thread 6;
alter database enable public thread 7;
alter database enable public thread 8;

set termout off

```

```

set echo off
spool /tmp/cat
@?/rdbs/admin/catalog.sql;
@?/rdbs/admin/catproc.sql;
@?/rdbs/admin/catclust.sql;
connect system/manager
@?/sqlplus/admin/pupbld.sql;
spool off
!
echo "end of database creation"
date
-----
tscre_10gR2.sh
-----
#!/bin/ksh
echo "START: tablespace creation"
date;

sqlplus /NOLOG <<!
connect /as sysdba

create tablespace ts_default
datafile '/home/oracle/dev/block/default' size 512m reuse
extent management local autoallocate;
!
i=0

```

```

while [ $i -lt 32 ]
do
    i=`expr $i + 1`
    /home/oracle/kit/schema/10.0/build/crets.sh ts_lo$i /home/oracle/dev/block/lo_$i 14000m
    &
    sleep 3
done
wait;

i=1
while [ $i -lt 32 ]
do
    i=`expr $i + 1`
    /home/oracle/kit/schema/10.0/build/addtts.sh ts_temp /home/oracle/dev/block/t_$i 14000m
    &
    sleep 3
done
wait;

echo "END: tablespace creation"
date;

```

Appendix C: ACID Scripts

```

-----
a_query2.sql
-----
Rem
Rem $Header: aquery2.sql 07-aug-99.23:54:47 mpoess Exp $
Rem
Rem aquery2.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem aquery2.sql - <one-line expansion of the name>
Rem
Rem DESCRIPTION
Rem Performs query on PARTSUPP for TPC-D benchmark
Rem Isolation Test 5.
Rem Asks user to input values for ps_partkey and ps_supkey
Rem The range for ps_partkey is 1 to 20000
Rem The range for ps_supkey is 1 to 1000
Rem A valid combination is 46 and 47
Rem Usage: sqlplus tpcd/tpcd @a_query2 <ps_partkey> <ps_supkey>
Rem
Rem MODIFIED (MM/DD/YY)
Rem mpoess 08/07/99 - Creation
Rem mpoess 08/07/99 - Created
Rem
rem DESCRIPTION
rem Performs query on PARTSUPP for TPC-D benchmark
rem Isolation Test 5.
rem Asks user to input values for ps_partkey and ps_supkey
rem The range for ps_partkey is 1 to 20000
rem The range for ps_supkey is 1 to 1000
rem A valid combination is 46 and 47

set serverout on;

select
'BEFORE PARTSUPP QUERY' as STAGE,
substr(TO_CHAR(sysdate,YYYY-MM-DD HH:MI:SS'),1,20) as CURRENT_TIME
from dual;

select *
from partsupp
where ps_partkey = &&1
and ps_supkey = &&2;

select
'AFTER PARTSUPP QUERY' as STAGE,
substr(TO_CHAR(sysdate,YYYY-MM-DD HH:MI:SS'),1,20) as CURRENT_TIME
from dual;

exit;
-----
a_query.sql
-----
Rem
Rem $Header: a_query.sql 06-aug-99.10:51:10 mpoess Exp $
Rem
Rem a_query.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem a_query.sql - <one-line expansion of the name>
Rem
rem DESCRIPTION
Rem Performs ACID Query for TPC-D benchmark.
Rem Asks user to input values for o_key
Rem The range of okey is 1 to 600000
Rem
=====
Rem
Rem Usage: sqlplus tpcd/tpcd @a_query <o_key>
Rem
Rem
Rem MODIFIED (MM/DD/YY)
Rem mpoess 08/06/99 - Creation
Rem mpoess 08/06/99 - Created
Rem

set serverout on;

select

```

```

'BEFORE ACID QUERY' as STAGE,
substr(TO_CHAR(sysdate,YYYY-MM-DD HH:MI:SS'),1,20) as CURRENT_TIME
from dual;

select SUM(trunc(trunc(l_extendedprice * (1-l_discount),2) * (1+l_tax),2)) AS RESULT
from lineitem
where l_orderkey = &&1;

select
'AFTER ACID QUERY' as STAGE,
substr(TO_CHAR(sysdate,YYYY-MM-DD HH:MI:SS'),1,20) as CURRENT_TIME
from dual;

exit;
-----
atom.sh
-----
#!/bin/ksh
#
# $Header: atom.sh 08-aug-99.13:48:02 mpoess Exp $
#
# atom.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# atom.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Performs atomicity tests.
# Usage: atom.sh [-n iter] [-p prog] [-u usr/pswd] -h
#
# Options: See usage below
#
# NOTES
# <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
# mpoess 08/08/99 - Creation
# mpoess 08/08/99 - Creation
#

. $KIT_DIR/env

OH=$ORACLE_HOME
# ACID_DIR=$TPCD_KIT_DIR/audit set in env
OUT_DIR=$ACID_OUT
DURA_DIR=$ACID_DIR/dura

usage() {
    echo ""
    echo "Usage: $0 [-n iter] [-p prog] [-u usr/pswd] -h"
    echo ""
    echo "-n iter : number of iterations, default is 100"
    echo "-p prog : program to run, default is atranspl.ott"
    echo "-u usr/pswd : user/password combo for database access, default is tpcd/tpcd"
    echo "-h : print this usage summary"
    exit 1;
}

ITER=3
SF=1
PROG=$KIT_DIR/utills/atranspl
OUT=${OUT_DIR}/atom
USER=${DATABASE_USER}

set -- `getopt "n:p:u:h" "$@"` || usage

while :
do
    case "$1" in
    -n) shift; ITER=$1;;
    -p) shift; PROG=$1;;
    -u) shift; USER=$1;;
    -h) usage; exit 0;;
    -) break;;
    esac
    shift
done

echo "Starting Atomicity Test at `date` ..."
echo ""

```

```

echo "Performing $ITER ACID transactions with COMMIT"
echo ""

SKIT_DIR/utlils/randkey $ITER $$F u$USER | $PROG 1 1 1 0 u$USER > ${OUT}c 2>&1

echo "ACID transactions with COMMIT ended. Output in ${OUT}c"
echo ""
echo "Performing $ITER ACID transactions with ROLLBACK"
echo ""

SKIT_DIR/utlils/randkey $ITER $$F u$USER | $PROG 1 1 1 0 u$USER > ${OUT}r 2>&1

echo "ACID transactions with ROLLBACK ended. Output in ${OUT}r"
echo ""
echo "Ending Atomicity Test at `date` ..."
-----
atranspl.c
-----
/* Copyright (c) 2001, 2002, Oracle Corporation. All rights reserved. */

/*
NAME
    atranspl.c - <one-line expansion of the name>

DESCRIPTION
    TPC-HR benchmark ACID transaction driver, OCI version 8

NOTES
    <other useful comments, qualifications, etc.>

MODIFIED (MM/DD/YY)
    mpoess 10/23/02 - mpoess_update_from_visa
    mpoess 10/17/01 - add parameter in ACIDinit
    mpoess 02/22/01 - enlarge timing array
    mpoess 01/04/01 - Creation
*/

#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>

#include "atranspl.h"

/* Declare error handling functions */

double gettime();
void sql_error();
void usage();
void ACIDinit();
void ACIDexit();
int atoi();
void srand48();
long lrand48();

/* declarations for ORDERS */

int o_key = 0;
double o_tprice = 0.0;
double o_newtprice = 0.0;

/* declarations for LINEITEM */

int l_key = 0;
int l_pkey = 0;
int l_skey = 0;

int l_quan = 0;
int l_newquan = 0;
double l_eprice = 0.0;
double l_neweprice = 0.0;
double l_disc = 0.0;
double l_tax = 0.0;

sb2 l_npricei;

/* other declarations */

int delta = 0;
double rprice;
double cost;

int proc_no = 1; /* process number, global */
int num_streams = 1; /* number of transaction streams */
int trig = 0; /* Trigger Time */
int slp = 0; /* Sleep Time */

int logfile; /* fdes for logfile for durability (optional) */
int outfile = 1; /* output file (optional) */
#endif LINUX

```

```

FILE *infile; /* input file (optional) */
#else
FILE *infile = stdin; /* input file (optional) */
/* in the format of <o_key> <delta> */
#endif
char lname[UNAME_LEN]; /* username/passwd combo */
char *passwd; /* pointer to password */

char buf[WRITE_BUF_LEN]; /* buffer to write */

unsigned flag = (unsigned) 0; /* flag to store all sorts of options */

#define INFILE 0x01u
#define OUTFILE 0x02u
#define LOGFILE 0x04u
#define COMMIT 0x08u
#define DELTA 0x10u

double tr_end = 0.0; /* transaction end time */
double tr_start = 0.0; /* transaction start time */

int num_iter = 0; /* number of iterations */

time_t curr_time; /* Current Time */

/* OCI handles */

OCISvcCtx *tpscvc = NULL;
OCIEnv *tpcenv = NULL;
OCIError *errhp = NULL;
OCIStmt *cure1 = NULL;
OCIStmt *curr = NULL;
OCIStmt *cure2 = NULL;

/* OCI bind handles */

#ifdef NOLKEY
OCIBind *l_keyi_bp = NULL;
OCIBind *o_keyi_bp = NULL;
#endif /* NOLKEY */

OCIBind *l_key_bp = NULL;
OCIBind *o_key_bp = NULL;
OCIBind *delta_bp = NULL;
OCIBind *l_pkey_bp = NULL;
OCIBind *l_skey_bp = NULL;
OCIBind *l_quan_bp = NULL;
OCIBind *l_newquan_bp = NULL;
OCIBind *l_tax_bp = NULL;
OCIBind *l_disc_bp = NULL;
OCIBind *l_eprice_bp = NULL;
OCIBind *l_neweprice_bp = NULL;
OCIBind *o_tprice_bp = NULL;
OCIBind *o_newtprice_bp = NULL;
OCIBind *rprice_bp = NULL;
OCIBind *cost_bp = NULL;

OCIBind *l_neweprice1_bp = NULL;
OCIBind *l_newquan1_bp = NULL;
OCIBind *o_key1_bp = NULL;
OCIBind *l_key1_bp = NULL;

OCIBind *o_newtprice2_bp = NULL;
OCIBind *o_key2_bp = NULL;

sword status = OCI_SUCCESS; /* OCI return value */

char sqlstmt[1024];

/* usage: prints the usage of the program */

void usage()
{
    fprintf(stderr, "\nUsage: atrans.o[st]t <proc_no> <num_streams> <commit>
<delta>[n]i<pathname for input> [o<pathname for output>] [d<pathname for durability file>]
[u<uid/passwd>] \n\n");

    fprintf(stderr, " proc_no :the process number within this ACID\n");
    fprintf(stderr, " num_streams :the total number of ACID transaction streams\n");
    fprintf(stderr, " commit :1 to commit transaction, abort otherwise\n");
    fprintf(stderr, " delta :1 to generate new random delta, otherwise obtain delta from
input\n");
    fprintf(stderr, " OPTIONAL PARAMETERS:\n");
    fprintf(stderr, " i-<pathname for input> :full path name for input file - default is stdin\n");
    fprintf(stderr, " o-<pathname for output> :full path name for output file - default is
stdout\n");
    fprintf(stderr, " d-<pathname for durability> :full path name for durability success file - must
specify for durability test\n");
    fprintf(stderr, " u<uid/passwd> :Username/Password string - default is tpcd/tpcd\n");
}

```

```

fprintf(stderr, " t<trigger>          :Trigger Time - sleep <trigger> seconds before start\n\n");
fprintf(stderr, " s<sleep>           :Sleep Time - sleep <sleep> seconds before commit or
rollback\n\n");
exit(-1);
}

void ACIDexit() {
    OCILogoff(tpcscv, errhp);
    OCIHfree(tpcenv, OCI_HTYPE_STMT);
    OCIHfree(tpcscv, OCI_HTYPE_SVCCTX);
    OCIHfree(tpcsrv, OCI_HTYPE_SERVER);
    OCIHfree(tpcusr, OCI_HTYPE_SESSION);
}

/* type: 0 if environment handle is passed, 1 if error handle is passwd */

void sql_error(errhp, status, type)
    OCIError *errhp;
    sword status;
    sword type;
{
    char msg[2048];
    ub4 errcode;
    ub4 msglen;
    int i;

    switch(status) {
    case OCI_SUCCESS_WITH_INFO:
        fprintf(stderr, "Error: Statement returned with info.\n");
        if (type)
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ERROR);
        else
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ENV);
        fprintf(stderr, "%s\n", msg);
        break;
    case OCI_ERROR:
        fprintf(stderr, "Error: OCI call error.\n");
        if (type)
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ERROR);
        else
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ENV);
        fprintf(stderr, "%s\n", msg);
        break;
    case OCI_INVALID_HANDLE:
        fprintf(stderr, "Error: Invalid Handle.\n");
        if (type)
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ERROR);
        else
            (void) OCIErrorGet(errhp, 1, NULL, (sb4*) &errcode, (text*) msg,
                2048, OCI_HTYPE_ENV);
        fprintf(stderr, "%s\n", msg);
        break;
    }
    /* Rollback just in case */

    (void) OCITransRollback(tpcscv, errhp, OCI_DEFAULT);

    fprintf(stderr, "Exiting Oracle...\n");
    fflush(stderr);

    ACIDexit();

    exit(1);
}

#ifdef LINUX
int main(argc, argv)
#else
void main(argc, argv)
#endif
{
    int argc;
    char *argv[];
    {
        int i;
        char line[64];
        ub4 errcode;
        char msg[2048];
        int need_commit = 0;

        /* Initialize some variables */
#ifdef LINUX

```

```

infile=fopen("/dev/stdin", "r");
#endif
strcpy((char *) lname, "tpcd/tpcd");

if ((argc > 10) || (argc < 5)) {
    usage();
}

/* argv[1] -- Process Number */

proc_no = atoi(argv[1]);

/* argv[2] -- Number of Streams */

num_streams = atoi(argv[2]);

/* argv[3] -- Commit? */

if (atoi(argv[3]) == 1)
    BIS(flag, COMMIT);

/* argv[4] -- Delta? */

if (atoi(argv[4]) == 1)
    BIS(flag, DELTA);

/* Process optional parameters */

argc -= 4;
argv += 4;

while(--argc) {
    ++argv;
    switch(argv[0][0]) {
    case 'u':
        strcpy((char *) lname, ++(argv[0]), UNAME_LEN);
        if (streq((char *) lname, "/") == NULL) {
            fprintf(stderr, "Login name must be in the format of userid/passwd\n");
            usage();
            exit(-1);
        }
        break;
    case 'i':
        if ((infile = fopen(++(argv[0]), "r")) == NULL) {
            fprintf(stderr, "Cannot open input file %s\n", argv[0]);
            fprintf(stderr, "%s\n", strerror(errno));
            exit(-1);
        }
        BIS(flag, INFILE);
        break;
    case 'o':
        if ((outfile = open(++(argv[0]), (O_RDWR | O_SYNC | O_CREAT), S_IRWXU)) == -1) {
            fprintf(stderr, "Cannot open output file %s\n", argv[0]);
            fprintf(stderr, "%s\n", strerror(errno));
            exit(-1);
        }
        BIS(flag, OUTFILE);
        break;
    case 'd':
        if ((logfile = open(++(argv[0]), (O_RDWR | O_SYNC | O_CREAT), S_IRWXU)) == -1) {
            fprintf(stderr, "Cannot open durability success file %s\n", argv[0]);
            fprintf(stderr, "%s\n", strerror(errno));
            exit(-1);
        }
        BIS(flag, LOGFILE);
        break;
    case 'b':
        num_iter = atoi(++(argv[0]));
        break;
    case 't':
        trig = atoi(++(argv[0]));
        break;
    case 's':
        slp = atoi(++(argv[0]));
        break;
    default:
        fprintf(stderr, "Unknown argument %s\n", argv[0]);
        usage();
        break;
    }
}

FPRTF(outfile, "-----\n");

/* Initialize the cursors etc. */

(void) ACIDinit();

/* sleep for some time (triggering) */

sleep(trig);

/* start doing the ACID transactions */

```

```

tr_start = gettimeofday();

/* The number of iteration we will run depends on the number of */
/* input lines */

while (fgets(line, 64, infile) != NULL) {
#ifdef NOLKEY
    sscanf(line, "%d %d\n", &o_key, &delta);

    /* Obtain L_key from L_key query */

    OCIExec(tpcscv, curi, errhp, 1);

    /* L_key is the highest L_linenumbr available. We need to pick */
    /* at random a number between 1..L_key. */

    L_key = (int) ((frand48() % L_key) + 1);
#else
    sscanf(line, "%d %d %d\n", &o_key, &L_key, &delta);
#endif /* NOLKEY */

    /* Generate delta if necessary */

    if (BIT(flag, DELTA))
        delta = (int) (floor(drand48() * 100) + 1);

    /* Now, we are ready to run the ACID transaction. */

    curr_time = time(NULL);

    FPRTF2(outfile, "Starting ACID transaction %d at %s...\n", (++num_iter),
           ctime(&curr_time));

    FPRTF1(outfile, "o_key: %d\n", (int) o_key);
    FPRTF1(outfile, "L_key: %d\n", (int) L_key);
    FPRTF1(outfile, "delta: %d\n", (int) delta);

    OCIExec(tpcscv, curr, errhp, 1);

    curr_time = time(NULL);

    if (!BIT(flag, LOGFILE)) {
        FPRTF1(outfile, "BEFORE COMMIT/ROLLBACK TRANSACTION at %s\n",
              ctime(&curr_time));
        FPRTF1(outfile, "L_extendedprice: %.2f\n", L_епrice);
        FPRTF1(outfile, "L_quantity: %d\n", (int) L_quan);
        FPRTF1(outfile, "o_totalprice: %.2f\n", o_тprice);
    }

    FPRTF1(outfile, "Sleep %d seconds before COMMIT/ROLLBACK...\n\n", slp);
    sleep(slp);

    /* Shall we commit? */

    if (BIT(flag, COMMIT)) {
        need_commit = 1;
        while (need_commit) {
            if ((status=OCITransCommit(tpcscv, errhp, OCI_DEFAULT)) != OCI_SUCCESS) {
                OCIExec(tpcscv, errhp);
                OCIExec(tpcscv, curr, errhp, 1);
            } else {
                need_commit = 0;
                curr_time = time(NULL);
                FPRTF2(outfile, "ACID Transaction iteration %d COMMITED at %s\n",
                      num_iter, ctime(&curr_time));
            }
        }
    } else {
        OCIExec(tpcscv, errhp);
        curr_time = time(NULL);
        FPRTF2(outfile, "ACID Transaction iteration %d ROLLBACK at %s\n",
              num_iter, ctime(&curr_time));
    }

    /* Report all results to outfile and if necessary, to success file. */

    /* Report initial and new values for o_totalprice, L_extendedprice, */
    /* L_quantity. */

    /*
curr_time = time(NULL);
FPRTF1(outfile, "Transaction Completed at %s\n", ctime(&curr_time));
*/

    /* Get the values in LINEITEM and ORDERS after the transaction */

    if (BIT(flag, LOGFILE)) {
        FPRTF1(logfile, "p_key: %d\n", (int) L_pkey);
        FPRTF1(logfile, "s_key: %d\n", (int) L_skey);
        FPRTF1(logfile, "o_key: %d\n", (int) o_key);
        FPRTF1(logfile, "L_key: %d\n", (int) L_key);

```

```

FPRTF1(logfile, "delta: %d\n", (int) delta);
FPRTF1(logfile, "Transaction Completed at %s\n", ctime(&curr_time));
FPRTF(logfile, "-----\n");
} else {
    OCIExec(tpcscv, cure1, errhp, 1);
    OCIExec(tpcscv, cure2, errhp, 1);

    FPRTF(outfile, "AFTER TRANSACTION:\n");
    FPRTF1(outfile, "L_extendedprice: %.2f\n", L_newepprice);
    FPRTF1(outfile, "L_quantity: %d\n", (int) L_newquan);
    FPRTF1(outfile, "o_totalprice: %.2f\n", o_newтprice);
    FPRTF1(outfile, "L_tax: %.2f\n", L_tax);
    FPRTF1(outfile, "L_discount: %.2f\n", L_disc);
    FPRTF1(outfile, "rprice: %.2f\n", rprice);
    FPRTF1(outfile, "cost: %.2f\n", cost);
    FPRTF(outfile, "-----\n");
}
}

tr_end = gettimeofday();

if (!BIT(flag, LOGFILE)) {
    FPRTF1(outfile, "Start Time: %.2f\n", tr_start);
    FPRTF1(outfile, "End Time: %.2f\n", tr_end);
    FPRTF1(outfile, "Elapsed Time: %.2f\n", (tr_end - tr_start));
    FPRTF1(outfile, "Transaction Count: %d\n", num_iter);
    FPRTF1(outfile, "Transaction Rate: %.2f\n", num_iter/(tr_end - tr_start));
} else {
    FPRTF1(logfile, "Start Time: %.2f\n", tr_start);
    FPRTF1(logfile, "End Time: %.2f\n", tr_end);
    FPRTF1(logfile, "Elapsed Time: %.2f\n", (tr_end - tr_start));
    FPRTF1(logfile, "Transaction Count: %d\n", num_iter);
}

/* Disconnect from ORACLE. */

if (BIT(flag, INFILE))
    fclose(infile);
if (BIT(flag, OUTFILE))
    close(outfile);
if (BIT(flag, LOGFILE))
    close(logfile);

ACIDexit();

exit(0);
}

void ACIDinit()
{
    /* run random seed */

    srand48(getpid());

    /* Connect to ORACLE. Program will call sql_error()
if an error occurs in connecting to the default database. */

    (void) OCIInitialize(OCI_DEFAULT, (dvoid *)0, 0, 0, 0);
    if ((status=OCIEnvInit((OCIEnv **)&tpcenv, OCI_DEFAULT, 0, (dvoid **)0)) !=
        OCI_SUCCESS)
        sql_error(tpcenv, status, 0);

    OCIAlloc(tpcenv, &errhp, OCI_HTYPE_ERROR);
    OCIAlloc(tpcenv, &curi, OCI_HTYPE_STMT);
    OCIAlloc(tpcenv, &curr, OCI_HTYPE_STMT);
    OCIAlloc(tpcenv, &cure1, OCI_HTYPE_STMT);
    OCIAlloc(tpcenv, &cure2, OCI_HTYPE_STMT);
    OCIAlloc(tpcenv, &tpcscv, OCI_HTYPE_SVCCTX);
    OCIAlloc(tpcenv, &tpcsrv, OCI_HTYPE_SERVER);
    OCIAlloc(tpcenv, &tpcsur, OCI_HTYPE_SESSION);

    /* Disables auto commit */
    /*
if (ocof(&tpclda)) {
    sql_error(&tpclda, &tpclda);
    ologof(&tpclda);
    exit(-1);
}
*/

    /* get username and password */

    passwd = strchr(lname, '?');
    *passwd = '\0';
    passwd++;

    if ((status = OCIServerAttach(tpcsrv, errhp, (text *)0, 0, OCI_DEFAULT)) != OCI_SUCCESS)
        sql_error(errhp, status, 1);

    OCIaset(tpcscv, OCI_HTYPE_SVCCTX, tpcsrv, 0, OCI_ATTR_SERVER, errhp);

```



```

OCIsaset(tpcusr,OCI_HTYPE_SESSION,lname,strlen(lname),OCL_ATTR_USERNAME,
errhp);
OCIsaset(tpcusr,OCI_HTYPE_SESSION,passwd,strlen(passwd),OCL_ATTR_PASSWORD,
errhp);

if ((status = OCISessionBegin(tpcsvc, errhp, tpcusr, OCL_CRED_RDBMS,
OCL_DEFAULT)) != OCL_SUCCESS)
sql_error(errhp,status,1);

OCIsaset(tpcsvc,OCI_HTYPE_SVCCTX,tpcusr,0,OCL_ATTR_SESSION,errhp);

/* Enable session parallel dml */

sprintf((char *) sqlstmt, PDMLTXT);
OCISetPrepare(curi,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);
OCIsExec(tpcsvc,curi,errhp,1);

/* Enable session parallel ddl */

/*sprintf((char *) sqlstmt, PDDLTX);
OCISetPrepare(curi,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);
OCIsExec(tpcsvc,curi,errhp,1);*/

/* Make session serializable */

sprintf ((char *) sqlstmt, ISOTXT);
OCISetPrepare(curi,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);
OCIsExec(tpcsvc,curi,errhp,1);

/* Set optimizer_index_cost_adj = 25 */

sprintf ((char *) sqlstmt, OICATXT);
OCISetPrepare(curi,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);
OCIsExec(tpcsvc,curi,errhp,1);

curr_time = time(NULL);
printf("\nConnected to ORACLE as user: %s at %s\n", lname, ctime(&curr_time));

#ifdef NOLKEY
/* Open and Parse cursor for query to choose determine l_key. */
/* Binds l_key to :l_key. */

sprintf((char *) sqlstmt,SQLTXT1);
OCISetPrepare(curi,errhp,sqlstmt,strlen((char
*)sqlstmt),OCL_NTV_SYNTAX,OCL_DEFAULT);

OCIsbname(curi,&l_keyi_bp,errhp,":l_key",ADR(l_key),SIZ(l_key),SQLT_INT);
OCIsbname(curi,&o_keyi_bp,errhp,":o_key",ADR(o_key),SIZ(o_key),SQLT_INT);

#endif /* NOLKEY */

/* Open and Parse cursor for the ACID transaction. */

sprintf((char *) sqlstmt,SQLTXT2);
OCISetPrepare(curi,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);

/* bind variables */

OCIsbname(curi,l_key_bp,errhp,":l_key",ADR(l_key),SIZ(l_key),SQLT_INT);
OCIsbname(curi,o_key_bp,errhp,":o_key",ADR(o_key),SIZ(o_key),SQLT_INT);
OCIsbname(curi,delta_bp,errhp,":delta",ADR(delta),SIZ(delta),SQLT_INT);
OCIsbname(curi,l_pkey_bp,errhp,":l_pkey",ADR(l_pkey),SIZ(l_pkey),SQLT_INT);
OCIsbname(curi,l_skey_bp,errhp,":l_skey",ADR(l_skey),SIZ(l_skey),SQLT_INT);
OCIsbname(curi,l_quan_bp,errhp,":l_quan",ADR(l_quan),SIZ(l_quan),SQLT_INT);
OCIsbname(curi,l_newquan_bp,errhp,":l_newquan",ADR(l_newquan),
SIZ(l_newquan),SQLT_INT);
OCIsbname(curi,l_tax_bp,errhp,":l_tax",ADR(l_tax),SIZ(l_tax),SQLT_FLT);
OCIsbname(curi,l_disc_bp,errhp,":l_disc",ADR(l_disc),SIZ(l_disc),SQLT_FLT);
OCIsbname(curi,l_eprice_bp,errhp,":l_eprice",ADR(l_eprice),SIZ(l_eprice),
SQLT_FLT);
OCIsbname(curi,l_newprice_bp,errhp,":l_newprice",ADR(l_newprice),
SIZ(l_newprice),SQLT_FLT);

OCIsbname(curi,o_tprice_bp,errhp,":o_tprice",ADR(o_tprice),SIZ(o_tprice),
SQLT_FLT);
OCIsbname(curi,o_newtprice_bp,errhp,":o_newtprice",ADR(o_newtprice),
SIZ(o_newtprice),SQLT_FLT);
OCIsbname(curi,rprice_bp,errhp,":rprice",ADR(rprice),SIZ(rprice),SQLT_FLT);
OCIsbname(curi,cost_bp,errhp,":cost",ADR(cost),SIZ(cost),SQLT_FLT);

/* Open & Parse cursor for end values query */

sprintf((char *) sqlstmt,SQLTXT3);
OCISetPrepare(cure1,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);

```

```

sprintf((char *) sqlstmt,SQLTXT4);
OCISetPrepare(cure2,errhp,(text *)sqlstmt,strlen((char *)sqlstmt),
OCL_NTV_SYNTAX,OCL_DEFAULT);

/* bind variables */

OCIsbname(cure1,l_newprice1_bp,errhp,":l_newprice",ADR(l_newprice),
SIZ(l_newprice),SQLT_FLT);
OCIsbname(cure1,l_newquan1_bp,errhp,":l_newquan",ADR(l_newquan),
SIZ(l_newquan),SQLT_INT);
OCIsbname(cure1,o_key1_bp,errhp,":o_key",ADR(o_key),SIZ(o_key),SQLT_INT);
OCIsbname(cure1,l_key1_bp,errhp,":l_key",ADR(l_key),SIZ(l_key),SQLT_INT);

OCIsbname(cure2,o_newtprice2_bp,errhp,":o_newtprice",ADR(o_newtprice),
SIZ(o_newtprice),SQLT_FLT);
OCIsbname(cure2,o_key2_bp,errhp,":o_key",ADR(o_key),SIZ(o_key),SQLT_INT);

}

```

```

-----
atranspl.h
-----
/* Copyright (c) 2001, 2002, Oracle Corporation. All rights reserved. */

```

```

/*
NAME
atranspl.h - <one-line expansion of the name>

DESCRIPTION

MODIFIED (MM/DD/YY)
mposss 10/23/02 - mposss_update_from_visa
mposss 10/17/01 - add TXT parameter
mposss 04/09/01 - add hint to find max linenumber
mposss 01/04/01 - Creation
*/

```

```

#ifdef ATRANSPL_H
#define ATRANSPL_H

```

```

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/param.h>
#include <sys/types.h>
#include <time.h>
#include <errno.h>
#include <math.h>

```

```

#include <oratypes.h>
#ifdef OCIDFN
#include <ocidfn.h>
#endif /* OCIDFN */

```

```

#ifdef OCI_ORACLE
#include <oci.h>
#endif /* OCI_ORACLE */

```

```

/*
#ifdef __STDC__
#include <ociapr.h>
#else
#include <ocikpr.h>
#endif /* __STDC__ */

```

```

extern int errno;

```

```

#ifdef NULL
#define NULL 0
#endif

```

```

#ifdef NULLP
#define NULLP (void *)NULL
#endif /* NULLP */

```

```

#ifdef DISCARD
#define DISCARD (void)
#endif

```

```

#ifdef sword
#define sword int
#endif

```

```

#ifdef ub1
#define ub1 unsigned char
#endif

```

```

#define UNAME_LEN 64
#define WRITE_BUF_LEN 1024

```

```

#define NA -1 /* ANSI SQL NULL */

```

```

#define VER7 2
#define NOT_SERIALIZABLE 8177 /* ORA-08177: transaction not serializable */
#define WRITE_BUF_LEN 1024

#define ADR(object) ((ub1 *)&(object))
#define SZ(object) ((sword)sizeof(object))
#define BIS(flag,mask) (unsigned) (flag & (unsigned) mask)
#define BIT(flag,mask) (unsigned) (flag & (unsigned) mask)

#define FPRTF(fd,s) \
{sprintf(buf,s); write(fd, buf, strlen(s));}
#define FPRTF1(fd,s,p) \
{sprintf(buf,s,p); write(fd, buf, strlen(buf));}
#define FPRTF2(fd,s,p1,p2) \
{sprintf(buf,s,p1,p2); write(fd, buf, strlen(buf));}

#define OCIhalloc(envh,hndl,htyp) \
if((status=OCIHandleAlloc((dvoid *)envh,(dvoid **)hndl,htyp,0,(dvoid **)0))!=OCI_SUCCESS) \
sql_error(envh,status,0); \
else \
DISCARD 0

#define OCIhfree(hndl,htyp) \
if((status=OCIHandleFree((dvoid *)hndl,htyp))!= OCI_SUCCESS) \
fprintf(stderr, "Error freeing handle of type %d\n", htyp)

#define OCIlget(hndl,htyp,attp,size,atyp,errh) \
if((status=OCIAttrGet((dvoid *)hndl,htyp,(dvoid *)attp,(dvoid *)size,atyp,errh))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIlset(hndl,htyp,attp,size,atyp,errh) \
if((status=OCIAttrSet((dvoid *)hndl,htyp,(dvoid *)attp,size,atyp,errh))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIsexec(svch,stmh,errh,iter) \
if((status=OCIStmtExecute(svch,stmh,errh,iter,0,NULL,NULL,OCI_DEFAULT))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIsbname(stmh,bndp,errh,sqlvar,progv,progv1,ftype) \
if((status=OCIBindByName(stmh,&bndp,errh,(text *)sqlvar,strlen(sqlvar), \
progv,progv1,ftype,0,0,0,OCI_DEFAULT))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIsbnamei(stmh,bndp,errh,sqlvar,progv,progv1,ftype,indp) \
if((status=OCIHandleAlloc((dvoid *)stmh,(dvoid **)&bndp,OCI_HTYPE_BIND, \
0,(dvoid **)0))!=OCI_SUCCESS) \
sql_error(stmh,status,0); \
if((status=OCIBindByName(stmh,&bndp,errh,(text *)sqlvar,strlen(sqlvar), \
progv,progv1,ftype,indp,0,0,0,OCI_DEFAULT))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIscom(svcp,errh) \
if((status=OCITransCommit(svcp,errh,OCI_DEFAULT))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define OCIsrol(svcp,errh) \
if((status=OCITransRollback(svcp,errh,OCI_DEFAULT))!= OCI_SUCCESS) \
sql_error(errh,status,1); \
else \
DISCARD 0

#define ISOTXT "alter session set isolation_level = serializable"
#define PDMLTXT "alter session force parallel dml parallel (degree 2)"
#define PDDLTX "alter session force parallel ddl parallel (degree 2)"
#define OICATXT "alter session set optimizer_index_cost_adj=10"

#define SQLTXT1 "BEGIN SELECT /*+ index(lineitem,i_l_orderkey) */ MAX(l_linenumber) \
INTO :l_key FROM lineitem \
WHERE l_orderkey = :o_key; END;"

#define SQLTXT2 "BEGIN d_atrans.doatrans(:l_key, :o_key, :delta, :l_pkey, \
:l_skey, :l_quan, :l_newquan, :l_tax, :l_disc, :l_eprice, :l_newprice, \
:o_tprice, :o_newprice, :rprice, :cost); END;"

#define SQLTXT3 "BEGIN SELECT l_extendedprice, l_quantity \
INTO :l_newprice, :l_newquan \
FROM lineitem \
WHERE l_orderkey = :o_key \

```

```

AND l_linenumber = :l_key; END;"

#define SQLTXT4 "BEGIN SELECT o_totalprice INTO :o_newtprice \
FROM orders \
WHERE o_orderkey = :o_key; END;"

#define SQLTXT5 "BEGIN SELECT l_extendedprice, l_quantity \
INTO :l_eprice, :l_quan \
FROM lineitem \
WHERE l_orderkey = :o_key \
AND l_linenumber = :l_key; END;"

#define SQLTXT6 "BEGIN SELECT o_totalprice INTO :o_tprice \
FROM orders \
WHERE o_orderkey = :o_key; END;"

#endif /* ATRANSPL_H */
-----
atrans.sql
-----
Rem
Rem $Header: atrans.sql 07-aug-99.21:27:13 mpoess Exp $
Rem
Rem atrans.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem atrans.sql - <one-line expansion of the name>
Rem
Rem DESCRIPTION
Rem Creates ACID Transaction Package for TPC-D benchmark.
Rem Asks user to input values for o_key, delta and output file.
Rem
Rem NOTES
Rem <other useful comments, qualifications, etc.>
Rem
Rem MODIFIED (MM/DD/YY)
Rem mpoess 08/07/99 - Creation
Rem mpoess 08/07/99 - Created
Rem

set serverout on;
set termout on;
set echo on;

CREATE OR REPLACE PACKAGE d_atrans
IS
PROCEDURE doatrans
(
l_key IN OUT integer,
o_key IN OUT integer,
delta IN OUT integer,
l_pkey IN OUT integer,
l_skey IN OUT integer,
l_quan IN OUT integer,
l_newquan IN OUT integer,
l_tax IN OUT number,
l_disc IN OUT number,
l_eprice IN OUT number,
l_newprice IN OUT number,
o_tprice IN OUT number,
o_newtprice IN OUT number,
rprice IN OUT number,
cost IN OUT number
);
END;
/

CREATE OR REPLACE PACKAGE BODY d_atrans
IS
PROCEDURE doatrans
(
l_key IN OUT integer,
o_key IN OUT integer,
delta IN OUT integer,
l_pkey IN OUT integer,
l_skey IN OUT integer,
l_quan IN OUT integer,
l_newquan IN OUT integer,
l_tax IN OUT number,
l_disc IN OUT number,
l_eprice IN OUT number,
l_newprice IN OUT number,
o_tprice IN OUT number,
o_newtprice IN OUT number,
rprice IN OUT number,
cost IN OUT number
)
IS
ototal number;
not_serializable EXCEPTION;

```

```

PRAGMA EXCEPTION_INIT(not_serializable,-8177);
BEGIN
LOOP BEGIN

select o_totalprice
      into o_tprice
      from orders
      where o_orderkey = o_key;

select l_quantity, l_extendedprice, l_partkey, l_suppkey, l_tax, l_discount
      into l_quan, l_eprice, l_pkey, l_skey, l_tax, l_disc
      from lineitem
      where l_orderkey = o_key
      and l_linenumber = l_key;

ototal := o_tprice - trunc((trunc((l_eprice * (1.0-l_disc)),2) * (1.0+l_tax)),2);
rprice := trunc((l_eprice/l_quan), 2);
cost := trunc((rprice * delta), 2);
l_neweprice := l_eprice + cost;
o_newprice := trunc((l_neweprice * (1.0 - l_disc)), 2);
o_newprice := ototal + trunc((o_newprice * (1.0 + l_tax)), 2);
l_newquan := l_quan + delta;

update lineitem
  set l_extendedprice = l_neweprice,
      l_quantity = l_newquan
  where l_orderkey = o_key
  and l_linenumber = l_key;

update orders
  set o_totalprice = o_newprice
  where o_orderkey = o_key;

insert into history (h_p_key, h_s_key, h_o_key, h_l_key, h_delta, h_date_t)
  values (l_pkey, l_skey, o_key, l_key, delta, sysdate);

EXIT;

EXCEPTION
  WHEN not_serializable THEN
    ROLLBACK;
END;

END LOOP;

END doatrans;
END;
/
exit;
-----
ckpt.sh
-----
#!/bin/ksh
#
# $Header: ckpt.sh 08-aug-99.17:37:07 mpoess Exp $
#
# ckpt.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# ckpt.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Usage: ckpt.sh
# Start database checkpoint
#
# NOTES
# <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
# mpoess 08/08/99 - Creation
# mpoess 08/08/99 - Creation
#

.SKIT_DIR/env

sqlplus -s /NOLOG << !

      connect / as sysdba;
      alter system switch logfile;
      alter system switch logfile;
      exit;

!
-----
consist.sh
-----
#!/bin/ksh
#
# $Header: consist.sh 08-aug-99.14:20:51 mpoess Exp $
#
# consist.sh
#

```

```

# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# consist.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Performs consistency tests.
# Usage: consist.sh [-n iter] [-s number of stream] [-p prog]
# [-u usr/pswd] -h
#
# Options: See usage below
#
# NOTES
# <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
# mpoess 08/08/99 - Creation
# mpoess 08/08/99 - Creation
#

.SKIT_DIR/env

OH=$ORACLE_HOME
# ACID_DIR=$TPCD_KIT_DIR/audit set in env
OUT_DIR=$ACID_OUT

KEY=$OUT_DIR/key$$_
OUTFILE=${OUT_DIR}/consrte
CON1=${OUT_DIR}/conb
CON2=${OUT_DIR}/cona
CHK=${OUT_DIR}/conscpkt

/bin/rm -rf ${KEY}* $CON1 $CON2 $OUTFILE $CHK

trap "/bin/rm -rf ${KEY}*" ; exit 1 2 3 15

STREAM=${NUM_STREAMS}
let STREAM="$STREAM + 1" # add one for the update stream
ITER=100
PROG=atranspl
USER=${DATABASE_USER}
CK=10

usage() {
  echo ""
  echo "Usage: $0 [-n iter] [-s number of stream] [-p prog] [-u usr/pswd] -h"
  echo ""
  echo "-n iter          : number of iterations, default is 100"
  echo "-s number of stream : number of streams, default is 2"
  echo "-p prog          : program to run, default is atranspl.ott"
  echo "-u usr/pswd      : user/password for database access, default is tpcd/tpcd"
  echo "-t chkpt        : time after the start of ACID transaction to perform the checkpoint"
  echo "-h              : default is 10 seconds"
  echo "-h              : print this usage summary"
  exit 1;
}

set -- `getopt "n:p:u:s:h" "$@"` || usage

while :
do
  case "$1" in
  -s) shift; STREAM=$1;;
  -n) shift; ITER=$1;;
  -p) shift; PROG=$1;;
  -u) shift; USER=$1;;
  -t) shift; CK=$1;;
  -h) usage; exit 0;;
  --) break;;
  esac
  shift
done

if [ $ITER -lt 100 ]
then
echo "Error: Must at least run 100 iterations!"
echo "Exiting..."
exit 1
fi

if [ $STREAM -lt 2 ]
then
echo "Error: Must at least run 2 streams!"
echo "Exiting..."
exit 1
fi

echo "Starting Consistency Test at `date` ..."
echo ""
echo "Generate some keys first"
echo ""

```

```

i=0

while [ $i -lt $STREAM ]
do
  echo randkey $ITER 1 u$USER
  randkey $ITER 1 u$USER > ${KEY}$i
  i=`expr $i + 1`
done

echo "Check consistency before Submitting Transactions `date`"
echo "Check consistency before Submitting Transactions `date`" >> $CON1

echo "Obtain 10 keys from the each key file to check consistency"

i=0
while [ $i -lt $STREAM ]
do
  KEYS=`head -10 ${KEY}$i | awk '{printf "%d ", $1}`
  echo "The 10 Keys for file $i are: $KEYS"
  #for j in `head -10 ${KEY}$i | awk '{printf "%d ", $1}`
  for j in $KEYS
  do
    sqlplus $USER @consist $j >> $CON1
    echo "-----" >> $CON1
  done
  i=`expr $i + 1`
done

echo ""
echo "Starting ACID transactions at `date`"
echo ""

i=0

while [ $i -lt $STREAM ]
do
  $PROG $i $STREAM 1 0 u${USER} i${KEY}$i o${OUTFILE}$i s1 &
  i=`expr $i + 1`
done

echo "Schedule a Checkpoint"
echo "Checkpoint scheduled at $CK seconds after `date`"

(sleep $CK; $ACID_DIR/ckpt.sh) &

wait

echo ""
echo "Ending ACID transactions at `date`"
echo ""

echo "Completed $STREAM transaction streams with $ITER iterations each"
echo ""

echo "Check consistency after Submitting Transactions `date`"
echo "Check consistency after Submitting Transactions `date`" >> $CON2

cat ${ORACLE_HOME}/rdbms/log/alert_${ORACLE_SID}.log >> $CHK

i=0
while [ $i -lt $STREAM ]
do
  KEYS=`head -10 ${KEY}$i | awk '{printf "%d ", $1}`
  #for j in `head -10 ${KEY}$i | awk '{printf "%d ", $1}`
  echo "The keys to check for consistency after the test from file $i are:"
  echo "$KEYS"
  for j in $KEYS
  do
    sqlplus $USER @consist $j >> $CON2
    echo "-----" >> $CON2
  done
  i=`expr $i + 1`
done
-----
consist.sql
-----

Rem
Rem $Header: consist.sql 08-aug-99.16:59:17 mpoess Exp $
Rem
Rem consist.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem consist.sql - <one-line expansion of the name>
Rem
Rem DESCRIPTION
Rem Verifies the consistency of TPC-D database using the
Rem consistency condition.
Rem
Rem Usage: sqlplus tpcd/tpcd @consist
Rem

```

```

Rem NOTE
Rem REQUIRES PACKAGES prvtotpt and dbmsotpt
rem
Rem MODIFIED (MM/DD/YY)
Rem mpoess 08/08/99 - Creation
Rem mpoess 08/08/99 - Created
Rem

set verify off
rem set termout on
rem set echo on

REM
REM Get today's date.
REM

select
substr(TO_CHAR(sysdate,YYYY-MM-DD HH:MI:SS),1,20) as CURRENT_TIME
from dual;

set serverout on;

DECLARE
o_okey number;
o_tprice number;
l_tprice number;
diff number;

BEGIN
select o_totalprice
into o_tprice
from orders
where o_orderkey = &&1;

select sum(trunc(trunc((l_extendedprice * (1-l_discount)), 2)
* (1+l_tax), 2))
into l_tprice
from lineitem
where l_orderkey = &&1;

diff := l_tprice - o_tprice;

dbms_output.put_line('O_TOTALPRICE: ' || TO_CHAR(trunc(o_tprice,2)));
dbms_output.put_line('L_TOTALPRICE: ' || TO_CHAR(trunc(l_tprice,2)));
dbms_output.put_line('Difference: ' || TO_CHAR(trunc(diff,2)));

END;
.
/

spool off
exit

-----
d_hist.sql
-----

Rem
Rem $Header: d_hist.sql 07-aug-99.21:33:08 mpoess Exp $
Rem
Rem d_hist.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem d_hist.sql - <one-line expansion of the name>
Rem
Rem DESCRIPTION
Rem Creates a history table for ACID test purpose.
Rem
Rem NOTES
Rem <other useful comments, qualifications, etc.>
Rem
Rem MODIFIED (MM/DD/YY)
Rem mpoess 08/07/99 - Creation
Rem mpoess 08/07/99 - Created
Rem

set termout on;
set serverout on;
set echo on;

drop table history;

create table history
(
h_p_key number,
h_s_key number,
h_o_key number,
h_l_key number,
h_delta number,

```

```

        h_date_t date
    );

exit;
-----
end_acid.sh
-----
#!/bin/ksh
#
# $Header: end_acid.sh 08-aug-99.17:06:20 mpoess Exp $
#
# end_acid.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
#   end_acid.sh - <one-line expansion of the name>
#
# DESCRIPTION
#   end_cons.sh <pid of the durability run>
#   Options: See usage below
#
# NOTES
#   <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
#   mpoess   08/08/99 - Creation
#   mpoess   08/08/99 - Creation
#
.SKIT_DIR/env

OH=$ORACLE_HOME
# ACID_DIR=$OH/tpcd/audit set in env
OUT_DIR=$ACID_OUT/
DURA_DIR=$ACID_OUT/dura
RUN_ID_FILE=$ACID_DIR/run_id

SHELL_PID=`cat ${DURA_DIR}/shellpid`
ITER=100
STEM=${NUM_STREAMS}
let STEM="$STEM + 1" # add one for the update stream
PROG=${ACID_DIR}/atranspl.ott
IN=${ACID_DIR}/acid_in
DURA=${DURA_DIR}/drate
OUT=${DURA_DIR}/drate
DSMPL=${DURA_DIR}/durasmpl
KEY=${DURA_DIR}/key${SHELL_PID}_
USER=tpch/tpch
TRIG=1
HCNT=duraenta

# get history count

sqlplus $USER @ent_hist > $DURA_DIR/$HCNT 2>&1

# perform the consistency

i=0
while [ $i -lt $STEM ]
do
    for j in `head -10 ${KEY}${i} | awk '{printf "%d ",$1}'`
    do
        sqlplus tpch/tpch @consist $j >> $DURA_DIR/duraconsa
        done
        i=`expr $i + 1`
    done

i=0
while [ $i -lt $STEM ]
do
    sample.sh $DURAS{i} > ${DSMPL}${i} 2>&1
    i=`expr $i + 1`
done
-----
gtime.c
-----
/* Copyright (c) 2001, 2002, Oracle Corporation. All rights reserved. */

/*

NAME
    gtime.c - <one-line expansion of the name>

DESCRIPTION
    <short description of facility this file declares/defines>

EXPORT FUNCTION(S)
    <external functions defined for use outside package - one-line descriptions>

INTERNAL FUNCTION(S)
    <other external functions defined - one-line descriptions>

```

```

STATIC FUNCTION(S)
    <static functions defined - one-line descriptions>

NOTES
    <other useful comments, qualifications, etc.>

MODIFIED (MM/DD/YY)
    mpoess   10/23/02 - mpoess_update_from_visa
    mpoess   08/29/01 - Creation

*/
#include<stdio.h>
#include<stdlib.h>

#include <sys/time.h>

main ()
{
    struct timeval tv;

    (void) gettimeofday (&tv, (struct timezone *) 0);

    printf ("%0.2f\n", ((double) tv.tv_sec + (1.0e-6 * (double) tv.tv_usec) ) );
}

/* end of file gtime.c */

-----
iso2.sh
-----
#!/bin/ksh
#
# $Header: iso2.sh 04-aug-99.09:19:54 mpoess Exp $
#
# iso2.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
#   iso2.sh - <one-line expansion of the name>
#
# DESCRIPTION
#   Usage: iso2.sh [-u user/password] [-n remote_node] -h
#   Options: See usage below
#
# NOTES
#   For a cross node isolation test, assume the local node is
#   one of the participating nodes. The other node can be
#   specified by the -n option.
#   You need to set the environment variable TPCD_KIT_DIR
#
# MODIFIED (MM/DD/YY)
#   mpoess   08/04/99 - Creation
#   mpoess   08/04/99 - Creation
#
# =====
# May need to change the following:

.SKIT_DIR/env

RSH=ssh

OH=$ORACLE_HOME
# ACID_DIR=$TPCD_KIT_DIR/audit is set in env
OUT_DIR=$ACID_OUT

DURA_DIR=$ACID_DIR/dura

TXN1FILE=$OUT_DIR/txn1$$out
TXN2FILE=$OUT_DIR/txn2$$out
KEYFILE=$OUT_DIR/key$$out
ISOFILE=$OUT_DIR/iso2

USER=$DATABASE_USER
PROG=atranspl

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE

trap "/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE; exit 1" 1 2 3 15

usage() {
    echo ""
    echo "Usage: $0 [-u user/passwd] [-n remote_node] -h"
    echo ""
    exit 1;
}

set -- `getopt "u:n:h:" "$@"` || usage

while :

```

```

do
  case "$1" in
    -u) shift; USER=$1;;
    -n) shift; HOST="$1";;
    -h) usage; exit 0;;
    -) break;;
    *)
      esac
      shift;
  done

# generate key files

randkey 1 0.1 u"$USER" > $KEYFILE

OKEY=`cat $KEYFILE | awk '{print $1}'`
echo "o_key is "$OKEY

# before the ACID transaction, let's run a ACID query to record the
# initial state of lineitem

echo "Running ACID query BEFORE the start of Isolation Test 1" >> $TXN2FILE
echo ""date" >> $TXN2FILE
echo "" >> $TXN2FILE
sqlplus "$USER" @$ACID_DIR/isolation/a_query $OKEY >> $TXN2FILE
echo "" >> $TXN2FILE
echo "-----" >> $TXN2FILE

sleep 1

# start ACID transaction, Sleep for 30 second before ROLLBACK

$PROG 1 1 0 0 i$KEYFILE u$USER s30 >> $TXN1FILE &

# let's sleep 15 seconds before starting ACID query

sleep 15

# start ACID query with the same OKEY

echo "Running ACID query 15 seconds AFTER the start of ACID transaction" \
>> $TXN2FILE
echo ""date" >> $TXN2FILE
if [ "$HOST" != "" ]
then
echo "Starting ACID query on node $HOST" >> $TXN2FILE
${RSH} -n ${HOST} sqlplus "$USER" @$ACID_DIR/isolation/a_query $OKEY >>
$TXN2FILE
else
sqlplus $USER @$ACID_DIR/isolation/a_query $OKEY >> $TXN2FILE
fi

echo "-----" >> $TXN2FILE
wait
echo "-----" >> $TXN1FILE

cat $TXN1FILE $TXN2FILE >> $ISOFILE

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE
-----
iso3.sh
-----
#!/bin/ksh
#
# $Header: iso3.sh 04-aug-99.09:20:35 mpoess Exp $
#
# iso3.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# iso3.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Usage: iso3.sh [-u user/password] [-n remote_node] -h
# Options: See usage below
# NOTES
# For a cross node isolation test, assume the local node is
# one of the participating nodes. The other node can be
# specified by the -n option.
# We need to make sure the remote node has access to the
# file system on the local node. Otherwise, we need to rep
# the keyfile to the remote system.
# You need to set the environment variable TPCD_KIT_DIR
#
# MODIFIED (MM/DD/YY)
# mpoess 08/04/99 - Creation
# mpoess 08/04/99 - Creation
#
.SKIT_DIR/env

# May need to change the following:

```

```

RSH=ssh

OH=$ORACLE_HOME
#ACID_DIR=$TPCD_KIT_DIR/audit is set in env
OUT_DIR=$ACID_OUT

DURA_DIR=$ACID_DIR/dura

TXN1FILE=$OUT_DIR/txn1$$$.out
TXN2FILE=$OUT_DIR/txn2$$$.out
KEYFILE=$OUT_DIR/key$$$.out
ISOFILE=$OUT_DIR/iso3

USER=$DATABASE_USER
PROG=/home/oracle/kit/utl/atranspl

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE

trap "/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE; exit 1" 1 2 3 15

usage() {
  echo ""
  echo "Usage: $0 [-u user/passwd] [-n remote_node] -h"
  echo ""
  exit 1;
}

set -- `getopt "u:n:h" "$@"` || usage

while :
do
  case "$1" in
    -u) shift; USER=$1;;
    -n) shift; HOST="$1";;
    -h) usage; exit 0;;
    -) break;;
    *)
      esac
      shift;
  done

# generate key files

randkey 1 0.1 u"$USER" > $KEYFILE
scp $KEYFILE ${HOST}:$KEYFILE

sleep 1

# start ACID transaction, Sleep for 30 second before COMMIT

$PROG 1 2 1 0 i$KEYFILE u$USER s30 b0 >> $TXN1FILE &

# let's sleep 15 seconds before starting second ACID transaction

sleep 15

# start another ACID transaction with the same LKEY and OKEY
# but different DELTA

# Do not sleep before COMMIT so that we can see TXN2 has waited.

if [ "$HOST" != "" ]
then
echo "Starting TXN2 on node $HOST" >> $TXN2FILE
${RSH} -n ${HOST} $PROG 2 2 1 1 i$KEYFILE u$USER s1 b1 >> $TXN2FILE &
else
$PROG 2 2 1 1 i$KEYFILE u$USER s1 b1 >> $TXN2FILE &
fi

wait
echo "-----" >> $TXN2FILE
echo "-----" >> $TXN1FILE

cat $TXN1FILE $TXN2FILE >> $ISOFILE

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE
-----
iso4.sh
-----
#!/bin/ksh
#
# $Header: iso4.sh 04-aug-99.09:21:12 mpoess Exp $
#
# iso4.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# iso4.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Usage: iso4.sh [-u user/password] [-n remote_node] -h

```

```

# Options: See usage below
# NOTES
# For a cross node isolation test, assume the local node is
# one of the participating nodes. The other node can be
# specified by the -n option.
# We need to make sure the remote node has access to the
# file system on the local node. Otherwise, we need to rcp
# the keyfile to the remote system.
# You need to set the environment variable TPCD_KIT_DIR
#
# MODIFIED (MM/DD/YY)
# mpoess 08/04/99 - Creation
# mpoess 08/04/99 - Creation
#

.SKIT_DIR/env

# May need to change the following:
RSH=ssh

OH=$ORACLE_HOME
# ACID_DIR=$TPCD_KIT_DIR/audit is set in env
OUT_DIR=$ACID_OUT

DURA_DIR=$ACID_DIR/dura

TXN1FILE=$OUT_DIR/txn1$$$.out
TXN2FILE=$OUT_DIR/txn2$$$.out
KEYFILE=$OUT_DIR/key$$$.out
ISOFILE=$OUT_DIR/iso4

USER=$DATABASE_USER
PROG=/home/oracle/kit/utlils/atranspl

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE

trap "/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE; exit 1" 1 2 3 15

usage() {
    echo ""
    echo "Usage: $0 [-u user/passwd] [-n remote_node] -h"
    echo ""
    exit 1;
}

set -- `getopt "u:n:h" "$@"` || usage

while :
do
    case "$1" in
        -u) shift; USER=$1;;
        -n) shift; HOST="$1";;
        -h) usage; exit 0;;
        --) break;;
    esac
    shift
done

# generate key files

randkey 1 0.1 u"$USER" > $KEYFILE
scp $KEYFILE ${HOST}:$KEYFILE

sleep 1

# start ACID transaction, Sleep for 30 second before ROLLBACK

$PROG 1 2 0 0 i$KEYFILE u$USER s30 b0 >> $TXN1FILE &

# let's sleep 15 seconds before starting second ACID transaction

sleep 15

# start another ACID transaction with the same LKEY and OKEY
# but different DELTA

# Do not sleep before COMMIT so that we can see TXN2 has waited.

if [ "$HOST" != "" ]
then
echo "Starting TXN2 on node $HOST" >> $TXN2FILE
${RSH} -n ${HOST} $PROG 2 2 1 1 i$KEYFILE u$USER s1 b1 >> $TXN2FILE &
else
$PROG 2 2 1 1 i$KEYFILE u$USER s1 b1 >> $TXN2FILE &
fi

wait
echo "-----" >> $TXN2FILE
echo "-----" >> $TXN1FILE

cat $TXN1FILE $TXN2FILE >> $ISOFILE

```

```

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE
-----
iso5.sh
-----
#!/bin/ksh
#
# $Header: iso5.sh 04-aug-99.09:21:45 mpoess Exp $
#
# iso5.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
# iso5.sh - <one-line expansion of the name>
#
# DESCRIPTION
# Usage: iso5.sh [-u user/passwd] [-n remote_node] -h
# Options: See usage below
# NOTES
# For a cross node isolation test, assume the local node is
# one of the participating nodes. The other node can be
# specified by the -n option.
# You need to set the environment variable TPCD_KIT_DIR
#
# MODIFIED (MM/DD/YY)
# mpoess 08/04/99 - Creation
# mpoess 08/04/99 - Creation
#

.SKIT_DIR/env

# May need to change the following:
RSH=ssh

OH=$ORACLE_HOME
# ACID_DIR=$TPCD_KIT_DIR/audit is set in env
OUT_DIR=$ACID_OUT
DURA_DIR=$ACID_DIR/dura

TXN1FILE=$OUT_DIR/txn1$$$.out
TXN2FILE=$OUT_DIR/txn2$$$.out
KEYFILE=$OUT_DIR/key$$$.out
ISOFILE=$OUT_DIR/iso5

USER=$DATABASE_USER
PROG=/home/oracle/kit/utlils/atranspl

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE

trap "/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE; exit 1" 1 2 3 15

usage() {
    echo ""
    echo "Usage: $0 [-u user/passwd] [-n remote_node] -h"
    echo ""
    exit 1;
}

set -- `getopt "u:n:h" "$@"` || usage

while :
do
    case "$1" in
        -u) shift; USER=$1;;
        -n) shift; HOST="$1";;
        -h) usage; exit 0;;
        --) break;;
    esac
    shift
done

# generate key files

randkey 1 0.1 u"$USER" > $KEYFILE
scp $KEYFILE ${HOST}:$KEYFILE

OKEY=`cat $KEYFILE | awk '{print $1}'`
echo "o_key is "$OKEY

# before the ACID transaction, let's run a ACID query to record the
# initial state of lineitem

echo "Running ACID query BEFORE the start of Isolation Test 5" >> $TXN1FILE
echo "" >> $TXN1FILE
echo "" >> $TXN1FILE
sqlplus $USER @$ACID_DIR/isolation/a_query $OKEY >> $TXN1FILE
echo "" >> $TXN1FILE
echo "-----" >> $TXN1FILE

sleep 1

```

```

# start ACID transaction, Sleep for 60 second before COMMIT
$PROG 1 1 0 i$KEYFILE u$USER s60 >> $TXN1FILE &

# let's sleep 5 seconds before starting PARTSUPP query
sleep 5

# First generate PS_PARTKEY and PS_SUPPKEY
PSKEY=`randpsup 1`

echo "Running PARTSUPP query 5 seconds AFTER the start of ACID Transaction\"
>> $TXN2FILE
echo "`date`" >> $TXN2FILE
echo "PS_PARTKEY and PS_SUPPKEY are: $PSKEY" >> $TXN2FILE

if [ "$HOST" != "" ]
then
echo "Starting PARTSUPP query on node $HOST" >> $TXN2FILE
${RSH} -n ${HOST} sqlplus $USER @$ACID_DIR/isolation/a_query2 ${PSKEY} >>
$TXN2FILE &
else
sqlplus $USER @$ACID_DIR/isolation/a_query2 ${PSKEY} >> $TXN2FILE &
fi

wait

echo "-----" >> $TXN2FILE
echo "-----" >> $TXN1FILE

cat $TXN1FILE $TXN2FILE >> $ISOFIILE

/bin/rm -rf $TXN1FILE $TXN2FILE $KEYFILE
-----
iso6.sh
-----
#!/bin/ksh
#
# $Header: iso6.sh 04-aug-99.09:22:12 mpoess Exp $
#
# iso6.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
#   iso6.sh - <one-line expansion of the name>
#
# DESCRIPTION
#   Usage: iso6.sh [-u user/password] [-n remote_node] -h
#   Options: See usage below
# NOTES
#   For a cross node isolation test, assume the local node is
#   one of the participating nodes. The other node can be
#   specified by the -n option.
#   We need to make sure the remote node has access to the
#   file system on the local node. Otherwise, we need to rcp
#   the keyfile to the remote system.
#   You need to set the environment variable TPCD_KIT_DIR
#
# MODIFIED (MM/DD/YY)
# mpoess 08/04/99 - Creation
# mpoess 08/04/99 - Creation
#
. $KIT_DIR/env

# May need to change the following:
RSH=ssh

OH=/private/tpcd
# ACID_DIR=$TPCD_KIT_DIR/audit is set in env
OUT_DIR=$ACID_OUT

DURA_DIR=$ACID_DIR/dura

TXN1FILE=$OUT_DIR/txn1$$
TXN2FILE=$OUT_DIR/txn2$$
TXN3FILE=$OUT_DIR/txn3$$
KEYFILE=$OUT_DIR/key$$
ISOFIILE=$OUT_DIR/iso6

USER=$DATABASE_USER
PROG=/home/oracle/kit/utlils/atranspl

/bin/rm -rf $TXN1FILE $TXN2FILE $TXN3FILE $KEYFILE

trap "/bin/rm -rf $TXN1FILE $TXN2FILE $TXN3FILE $KEYFILE; exit 1" 1 2 3 15

usage() {
echo ""

```

```

echo "Usage: $0 [-u user/passwd] [-n remote_node] -h"
echo ""
exit 1;
}

set -- `getopt "u:n:h" "$@"` || usage

while :
do
case "$1" in
-u) shift; USER=$1;;
-n) shift; HOST="$1";;
-h) usage; exit 0;;
--) break;;
esac
shift;
done

# generate key files

randkey 1 0.1 u"$USER" > $KEYFILE
scp $KEYFILE ${HOST}.$KEYFILE

OKEY=`cat $KEYFILE | awk '{print $1}'`
echo "o_key is $OKEY

# before the any transaction, let's run a ACID query to record the
# initial state of lineitem

echo "Running ACID query BEFORE the start of Isolation Test 6" >> $TXN2FILE
echo "`date`" >> $TXN2FILE
echo "" >> $TXN2FILE
sqlplus $USER @$ACID_DIR/isolation/a_query $OKEY >> $TXN2FILE
echo "" >> $TXN2FILE
echo "-----" >> $TXN2FILE

sleep 1

# start Query 1, use 0 as the delta

echo "Running Query 17b at `date`" >> $TXN1FILE
sqlplus $USER @q1 >> $TXN1FILE &

# sleep 2 seconds before starting ACID transaction
sleep 2

# start ACID transaction, COMMIT after one second

echo "Starting AICD transaction at `date`" >> $TXN2FILE

if [ "$HOST" != "" ]
then
echo "Starting ACID transaction on node $HOST" >> $TXN2FILE
${RSH} -n ${HOST} $PROG 1 1 0 i$KEYFILE u$USER s1 >> $TXN2FILE &
else
$PROG 1 1 0 i$KEYFILE u$USER s1 >> $TXN2FILE &
fi

# start Query 17

sleep 2

echo "Running 2nd Query 17b at `date`" >> $TXN3FILE
sqlplus $USER @q1 >> $TXN3FILE &
# wait for everyone to finish

wait

echo "-----" >> $TXN3FILE
echo "-----" >> $TXN2FILE
echo "-----" >> $TXN1FILE

cat $TXN1FILE $TXN2FILE $TXN3FILE >> $ISOFIILE

/bin/rm -rf $TXN1FILE $TXN2FILE $TXN3FILE $KEYFILE
-----
randkey.c
-----
/* Copyright (c) 2001, 2002, Oracle Corporation. All rights reserved. */

/*
NAME
randkey.c - <one-line expansion of the name>

DESCRIPTION
Generate random keys for ACID transactions:
O_ORDERKEY unique random (1..SF*150000*4) and only
first 8 keys out of every 32 are populated.
and
L_ORDERKEY based on Clause 3.1.6.2

```



```

DELTA random (1..100)
*/

#include <stdio.h>
#include <stdlib.h>
#include <math.h>
#include "atranspl.h"

#define ORDERCNT 150000.0

/* MK_SPARSE adopted from dss.h */

#define MK_SPARSE(key, seq) \
((((key>>3)<<2)(seq & 0x0003)<<3)|(key & 0x0007))

void sql_error();
void usage();
void ACIDinit();
long atol();
void srand48();
long lrand48();

/* Not really used here, but retained it for future purposes. */

typedef struct aciddef {
    long okey;
    long lkey;
    int delta;
} adef;

long l_key = 0;
long o_key = 0;
char lname[UNAME_LEN];
char *passwd;

/* OCI handles */

OCIEnv *tpcenv;
OCIServer *tpcsrv;
OCIError *errhp;
OCISvcCtx *tpscvc;
OCISession *tpcusr;
OCIStmt *curi;

OCIBind *l_key_bp;
OCIBind *o_key_bp;

sword status = OCI_SUCCESS; /* OCI return value */

char sqlstmt[1024];

void ACIDexit() {
    OCILogoff(tpscvc,errhp);
    OCIHfree(tpcenv,OCI_HTYPE_STMT);
    OCIHfree(tpscvc,OCI_HTYPE_SVCCTX);
    OCIHfree(tpcsrv,OCI_HTYPE_SERVER);
    OCIHfree(tpcusr,OCI_HTYPE_SESSION);
}

/* type: 0 if environment handle is passed, 1 if error handle is passwd */

void sql_error(OCIError *errhp, sword status, type)
    OCIError *errhp;
    sword status;
    sword type;
{
    char msg[2048];
    sb4  errcode;
    ub4  msglen;
    int  i,j;

    switch(status) {
    case OCI_SUCCESS_WITH_INFO:
        fprintf(stderr, "Error: Statement returned with info.\n");
        if (type)
            (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
                2048,OCI_HTYPE_ERROR);
        else
            (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
                2048,OCI_HTYPE_ENV);
        fprintf(stderr,"%s\n",msg);
        break;
    case OCI_ERROR:
        fprintf(stderr, "Error: OCI call error.\n");
        if (type)
            (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
                2048,OCI_HTYPE_ERROR);
        else
            (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
                2048,OCI_HTYPE_ENV);
        fprintf(stderr,"%s\n",msg);
    }
}

```

```

break;
case OCI_INVALID_HANDLE:
    fprintf(stderr, "Error: Invalid Handle.\n");
    if (type)
        (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
            2048,OCI_HTYPE_ERROR);
    else
        (void) OCIErrorGet(errhp,1,NULL,(sb4 *) &errcode,(text *)msg,
            2048,OCI_HTYPE_ENV);
    fprintf(stderr,"%s\n",msg);
    break;
}
/* Rollback just in case */

(void) OCITransRollback(tpscvc,errhp,OCI_DEFAULT);

fprintf(stderr, "Exiting Oracle...\n");
fflush(stderr);

ACIDexit();

exit(1);
}

main(argc, argv)
    int argc;
    char **argv;
{
    long count;
    long i;
    double sf; /* need to accomodate sf 0.1 */
    double random;
    double ordcnt;
    adef *res;

    if ((argc < 3) || (argc > 4)) {
        usage();
        exit(-1);
    }

    strcpy((char *) lname, "tpcd/tpcd");

    count = atol(argv[1]);
    sf = atof(argv[2]);

    argc -= 2;
    argv += 2;

    while (--argc) {
        ++argv;
        switch(argv[0][0]) {
        case 'u':
            strcpy((char *) lname, ++(argv[0]), UNAME_LEN);
            if (strcmp((char *) lname, '/') == NULL) {
                usage();
                exit(-1);
            }
            break;
        default:
            fprintf(stderr, "Unknown argument %s\n", argv[0]);
            usage();
            break;
        }
    }

    ACIDinit();

    /* initialize array for random numbers */

    res = (adef *) malloc(count*sizeof(adef));
    ordcnt = (double) ORDERCNT * (double) sf;

    for (i=0; i<count; i++) {

        /* The algorithm:
        /* Assumes drand's output is 'unique', first get a number within
        /* the range of [0..sf*ORDERCNT] and then maps the different
        /* ranges to generate the real output.

        random = floor(drand48() * (double) ordcnt) + 1;
        res[i].okey = o_key + (long) MK_SPARSE((long) random, 0);
        res[i].delta = (long) floor(drand48() * 100) + 1;

        /* Obtain l_key from l_key query */

        OCISexec(tpscvc,curi,errhp,1);

        /* l_key is the highest l_linenumbr available. We need to pick
        /* at random a number between 1..l_key.

        res[i].lkey = (lrand48() % l_key) + 1;

```

```

    printf("%ld %ld %d\n", res[i].okey, res[i].lkey, res[i].delta);
}

ACIDexit();
free(res);

}

void usage() {
    fprintf(stderr, "Usage: randkey <number of random keys to generate> <SF>
u<user/password>\n");
    fprintf(stderr, "\n");
}

void ACIDinit()
{
    /* run random seed */

    srand48(getpid());

    /* Connect to ORACLE. Program will call sql_error()
    if an error occurs in connecting to the default database. */

    (void) OCIInitialize(OCI_DEFAULT,(dvoid *)0,0,0);
    if((status=OCIEnvInit((OCIEnv **)&tpcenv,OCI_DEFAULT,0,(dvoid **)0)) !=
    OCI_SUCCESS)
        sql_error(tpcenv, status, 0);

    OCIhalloc(tpcenv,&errhp,OCI_HTYPE_ERROR);
    OCIhalloc(tpcenv,&curi,OCI_HTYPE_STMT);
    OCIhalloc(tpcenv,&tpcsvc,OCI_HTYPE_SVCCTX);
    OCIhalloc(tpcenv,&tpcsrv,OCI_HTYPE_SERVER);
    OCIhalloc(tpcenv,&tpcusr,OCI_HTYPE_SESSION);

    /* get username and password */

    passwd = strchr(lname, '/');
    *passwd = '\0';
    passwd++;

    if ((status=OCIServerAttach(tpcsrv,errhp,(text *)0,0,OCI_DEFAULT))!=OCI_SUCCESS)
        sql_error(errhp,status,1);

    OCIaset(tpcsvc,OCI_HTYPE_SVCCTX,tpcsrv,0,OCI_ATTR_SERVER,errhp);
    OCIaset(tpcusr,OCI_HTYPE_SESSION,lname,strlen(lname),OCI_ATTR_USERNAME,
    errhp);
    OCIaset(tpcusr,OCI_HTYPE_SESSION,passwd,strlen(passwd),OCI_ATTR_PASSWORD,
    errhp);

    if ((status = OCISessionBegin(tpcsvc, errhp, tpcusr, OCI_CRED_RDBMS,
    OCI_DEFAULT)) != OCI_SUCCESS)
        sql_error(errhp,status,1);

    OCIaset(tpcsvc,OCI_HTYPE_SVCCTX,tpcusr,0,OCI_ATTR_SESSION,errhp);

    /* Open and Parse cursor for query to choose determine l_key. */
    /* Binds l_key to :l_key. */

    sprintf((char *) sqlstmt,SQLTXT1);
    OCIStmtPrepare(cur, errhp, (text *)sqlstmt, strlen((char *)sqlstmt),
    OCI_NTV_SYNTAX, OCI_DEFAULT);

    OCIbname(cur, l_key_bp, errhp, ":l_key", ADR(l_key), SIZ(l_key), SQLT_INT);
    OCIbname(cur, o_key_bp, errhp, ":o_key", ADR(o_key), SIZ(o_key), SQLT_INT);
}
-----
randpsup.c
-----
/* Copyright (c) 2001, 2002, Oracle Corporation. All rights reserved. */

/*
NAME
    randpsup.c - <one-line expansion of the name>

DESCRIPTION
    Generate random keys for ACID PARTSUPP transactions:
    (Clause 4.2.3)
    PS_PARTKEY random within [SF*200000]
    and
    PS_SUPPKEY = (PS_PARTKEY + (i * ((S/4) + (int)(PS_PARTKEY - 1)
    /S))) % S + 1
    where i random within [0..3] and S = SF * 10000

MODIFIED
    mpoess    10/23/02 - mpoess_update_from_visa
    mpoess    01/04/01 - Creation
*/

```

```

#include <stdio.h>
#include <stdlib.h>
#include <math.h>

#define PS_PER_SF 20000.0
#define S_PER_SF 10000.0
#define SUPP_PER_PART 4

/* borrowed from build.c in the dbgen distribution */

#define PART_SUPP_BRIDGE(tgt, p, s) \
{ \
    long tot_scnt = (long) (S_PER_SF * sf); \
    tgt = (p + s * (tot_scnt / SUPP_PER_PART + \
    (long) ((p - 1) / tot_scnt))) % tot_scnt + 1; \
}

void usage();
double atof();
void srand48();
long lrand48();

main(argc, argv)
    int argc;
    char **argv;
{
    double sf = 0.1; /* scale factor */
    long supp; /* the i-th supplier */
    long pkey; /* partkey */
    long maxpkey; /* highest partkey */
    long ps_skey; /* ps_suppkey */

    if (argc < 2) {
        usage();
        exit(-1);
    }

    /* seed the random number generator */

    srand48(getpid());

    sf = atof(argv[1]);
    maxpkey = (long) (sf * PS_PER_SF);
    supp = lrand48() % 4;
    pkey = lrand48() % maxpkey + 1;

    PART_SUPP_BRIDGE(ps_skey, pkey, supp);

    fprintf(stdout, "%ld %ld", pkey, ps_skey);

    exit(0);
}

void usage()
{
    fprintf(stderr, "Usage: randpsup <SF>\n\n");
}

-----
run_acid.sh
-----
#!/bin/ksh
#
# $Header: run_acid.sh 08-aug-99.15:30:10 mpoess Exp $
#
# run_acid.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
#    run_acid.sh - <one-line expansion of the name>
#
# DESCRIPTION
#    Usage: run_acid.sh [-n iter] [-s stream] [-p prog] [-i infile]
#                [-o outfile] [-d durafile] [-u usr/pswd]
#                [-t trigger] [-f scale factor] -h
#
#    Options: See usage below
#
# MODIFIED (MM/DD/YY)
#    mpoess    08/08/99 - Creation
#    mpoess    08/08/99 - Creation
#
. $KIT_DIR/env

OH=$ORACLE_HOME
ACID_DIR=$ACID_DIR

```

```

OUT_DIR=$ACID_OUT

usage() {
    echo ""
    echo "Usage: $0 [-n iter] [-s stream] [-p prog] [-i infile] [-o outfile]"
    echo "       [-d durafile] [-u usr/pswd] -h"
    echo ""
    echo "-n iter   : number of iterations, default is 100"
    echo "-s stream : number of streams, default is 2"
    echo "-p prog   : program to run, default is atranspl.ott"
    echo "-i infile : input file prefix, suffix by process number within a"
    echo "           stream and run ID, default is ./acid_in"
    echo "-o outfile : output file prefix, similar to input file"
    echo "           default is ./out/acid_out"
    echo "-d durafile : durability file prefix, used for durability tests"
    echo "           default is ./dura/acid_dura"
    echo "-u usr/pswd : user/password combo for database access, default is tpch/tpch"
    echo "-t trigger : trigger time between process starts, default is 1 second"
    echo "-h         : print this usage summary"
    exit 1;
}

ITER=600
STEM=${NUM_STREAMS}
let STEM="$STEM + 1" # add one for the update stream
SF=1
PROG=atranspl
IN=${ACID_DIR}/acid_in
DURA_DIR=$ACID_OUT/dura
OUT=$DURA_DIR/drate
DURA=$DURA_DIR/dura
KEY=${DURA_DIR}/key$$_
echo "$$" > ${DURA_DIR}/shellpid
USER=tpch/tpch
TRIG=1
HCNT=duracntb

set -- `getopt "n:s:p:i:o:d:u:ht:f:" "$@"` || usage

# get all the options
while :
do
    case "$1" in
        -n) shift; ITER=$1;;
        -s) shift; STEM=$1;;
        -p) shift; PROG=$1;;
        -i) shift; IN=$1;;
        -o) shift; OUT=$1;;
        -d) shift; DURA=$1;;
        -u) shift; USER=$1;;
        -h) usage; exit 0;;
        -t) shift; TRIG=$1;;
        -f) shift; SF=$1;;
        --) break;;
    esac
    shift;
done

echo "Starting ACID run..."

i=0
T=`expr $STEM \* $TRIG + 6`

# Get history count before the run
sqlplus $USER @cnt_hist > $DURA_DIR/$HCNT 2>&1

while [ $i -lt $STEM ]
do
    randkey $ITER ${SF} u${USER} > ${KEY}${i} &
    i=`expr $i + 1`
done

wait
# perform the consistency

i=0
while [ $i -lt $STEM ]
do
    for j in `head -10 ${KEY}${i} | awk '{printf "%d ", $1}'`
    do
        sqlplus tpch/tpch @consist $j >> $DURA_DIR/duraconsb
        done
        i=`expr $i + 1`
    done

    echo "Starting Transaction Counting Program"
    count_tx.sh $STEM 100 $DURA_DIR &

    i=0

```

```

while [ $i -lt $STEM ]
do
    SPROG $i $STEM 1 0 i${KEY}${i} o${OUT}${i} d${DURA}${i} u$USER s1 &
    T=`expr $T - $TRIG`
    i=`expr $i + 1`
done

wait

echo "ACID run completed"
-----
sample.sh
-----
#!/bin/ksh
#
# $Header: sample.sh 08-aug-99.17:10:00 mpoess Exp $
#
# sample.sh
#
# Copyright (c) Oracle Corporation 1999. All Rights Reserved.
#
# NAME
#   sample.sh - <one-line expansion of the name>
#
# DESCRIPTION
#   <short description of component this file declares/defines>
#
# NOTES
#   <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
#   mpoess   08/08/99 - Creation
#   mpoess   08/08/99 - Creation
#

# $1 durability output file
. $KIT_DIR/env

cat $1 | grep o_key | awk '{printf "%d\n", $2}' | head -106 > /tmp/okey$$
cat $1 | grep l_key | awk '{printf "%d\n", $2}' | head -106 > /tmp/lkey$$

paste /tmp/okey$$ /tmp/lkey$$ > /tmp/keys$$
tail -6 /tmp/keys$$ > /tmp/6keys$$

echo "Keys chosen are:"
cat /tmp/6keys$$

i=1
while [ $i -le 6 ]
do
    j=`cat /tmp/6keys$$ | tail -$i | head -1`
    sqlplus tpch/tpch @sample $j
    i=`expr $i + 1`
done

#bin/rm -f /tmp/*key*

-----
sample.sql
-----
Rem
Rem $Header: sample.sql 08-aug-99.17:10:34 mpoess Exp $
Rem
Rem sample.sql
Rem
Rem Copyright (c) Oracle Corporation 1999. All Rights Reserved.
Rem
Rem NAME
Rem   sample.sql - <one-line expansion of the name>
Rem
Rem DESCRIPTION
Rem   <short description of component this file declares/defines>
Rem
Rem NOTES
Rem   <other useful comments, qualifications, etc.>
Rem
Rem MODIFIED (MM/DD/YY)
Rem   mpoess   08/08/99 - Creation
Rem   mpoess   08/08/99 - Created
Rem

alter session set nls_date_format = 'YYYY-MM-DD HH:MI:SS';
select * from history where h_o_key = &&1 and h_l_key = &&2;

exit;

```

Appendix D:

Qualification query

text and output

10.log

Begin Execution at Fri Dec 8 18:08:27 2006

-- using default substitutions

```

select * from (
select
c_custkey,
c_name,
sum(l_extendedprice * (1 - l_discount)) as revenue,
c_acctbal,
n_name,
c_address,
c_phone,
c_comment
from
customer,
orders,
lineitem,
nation
where
c_custkey = o_custkey
and l_orderkey = o_orderkey
and o_orderdate >= to_date ('1993-10-01', 'YYYY-MM-DD')
and o_orderdate < add_months( to_date('1993-10-01', 'YYYY-MM-DD'), 3)
and l_returnflag = 'R'
and c_nationkey = n_nationkey
group by
c_custkey,
c_name,
c_acctbal,
c_phone,
n_name,
c_address,
c_comment
order by
revenue desc)
where rownum <= 20

C_CUSTKEY      C_NAME      REVENUE
C_ACCTBAL      N_NAME
C_ADDRESS      C_PHONE
C_COMMENT
57040.00      Customer#000057040      734235.25
632.87      JAPAN
EioyZjF4pp      22-895-641-3466
requests sleep blithely about the furiously i
143347.00      Customer#000143347      721002.69
2557.47      EGYPT
IaReFYv.Kw4      14-742-935-3718
fluffily bold excuses haggle finally after the u
60838.00      Customer#000060838      679127.31
2454.77      BRAZIL
64EaJ5vMAHWJIBOXJkIpNc2RJiWE      12-913-494-9813
furiously even pinto beans integrate under the ruthless foxes; ironic, even dolphins across the slyl
101998.00      Customer#000101998      637029.57
3790.89      UNITED KINGDOM
01c9CILnNtfOQYmZj      33-593-865-6378
accounts doze blithely! enticing, final deposits sleep blithely special accounts. slyly express
accounts pla
125341.00      Customer#000125341      633508.09
4983.51      GERMANY
S29ODD6bceU8QSuueJznkNaK      17-582-695-5962
quickly express requests wake quickly blithely
25501.00      Customer#000025501      620269.78
7725.04      ETHIOPIA
W556MXuoiaYCCZamJLRn0B4ACUGdkQ8DZ      15-874-808-6793
quickly special requests sleep evenly among the special deposits. special deposi
115831.00      Customer#000115831      596423.87
5098.10      FRANCE
rFeBbEEyk dl ne7zV5fDrmiq1oK09wV7pxqCgIc      16-715-386-3788
carefully bold excuses sleep alongside of the thinly idle

```

```

84223.00      Customer#000084223      594998.02
528.65      UNITED KINGDOM
nAVZCs6BaWap rrM27N 2qBnzc5WBauxBA      33-442-824-8191
pending, final ideas haggle final requests. unusual, regular asymptotes affix according to the
even foxes.
54289.00      Customer#000054289      585603.39
5583.02      IRAN
vXCxoCsU0Bad5JQI .oobkZ      20-834-292-4707
express requests sublate blithely regular requests. regular, even ideas solve.
39922.00      Customer#000039922      584878.11
7321.11      GERMANY
Zgy4s50l2GKN4pLDPBU8m342gIw6R      17-147-757-8036
even pinto beans haggle. slyly bold accounts inte
6226.00      Customer#00006226      576783.76
2230.09      UNITED KINGDOM
8gPu8.NPGkfyQQ0hcIYUGPIBWc.ybP5g,      33-657-701-3391
quickly final requests against the regular instructions wake blithely final instructions. pa
922.00      Customer#00000922      576767.53
3869.25      GERMANY
Az9RFaut7NkPnc5zSD2PwHgVwr4jRzq      17-945-916-9648
boldly final requests cajole blith
147946.00      Customer#000147946      576455.13
2030.13      ALGERIA
iANyZHjghyy7AjahOpTrYyhJ      10-886-956-3143
furiously even accounts are blithely above the furiousl
115640.00      Customer#000115640      569341.19
6436.10      ARGENTINA
Vtgfia9qI 7EpHgecU1X      11-411-543-4901
final instructions are slyly according to the
73606.00      Customer#000073606      568656.86
1785.67      JAPAN
xuR0Tro5yChDfOCrjkd2ol      22-437-653-6966
furiously bold orbits about the furiously busy requests wake across the furiously quiet
theodolites. d
110246.00      Customer#000110246      566842.98
7763.35      VIETNAM
7KzflgX MDOq7sOkI      31-943-426-9837
dolphins sleep blithely among the slyly final
142549.00      Customer#000142549      563537.24
5085.99      INDONESIA
ChqEoK43OysjdHbtKCP6dKqjNyvvi9      19-955-562-2398
regular, unusual dependencies boost slyly; ironic attainments nag fluffily into the unusual
packages?
146149.00      Customer#000146149      557254.99
1791.55      ROMANIA
s87fvzFQpU      29-744-164-6487
silent, unusual requests detect quickly slyly regul
52528.00      Customer#000052528      556397.35
551.79      ARGENTINA
NFztyTOR10UOJ      11-208-192-3205
unusual requests detect. slyly dogged theodolites use slyly. deposit
23431.00      Customer#000023431      554269.54
3381.86      ROMANIA
HgiV0phqhaIa9aydNollb      29-915-458-2654
instructions nag quickly. furiously bold accounts cajol

```

20 rows processed.
Query Processed in 1.80 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:28 2006

Stream Started at 1165622907.17
Stream Ended at 1165622908.97
Stream Processed in 1.80 seconds

SQL statements processed: 1

10.rep

Begin Executing this Stream at Fri Dec 8 18:08:27 2006

Query : Execution Time: 1.80 started 1165622907.17 ended 1165622908.97

Ended Executing this Stream at Fri Dec 8 18:08:28 2006

Stream Started at 1165622907.17
Stream Ended at 1165622908.97
Stream Processed in 1.80 seconds

10.sql

-- using default substitutions

```

select * from (
select
  c_custkey,
  c_name,
  sum(l_extendedprice * (1 - l_discount)) as revenue,
  c_acctbal,
  n_name,
  c_address,
  c_phone,
  c_comment
from
  customer,
  orders,
  lineitem,
  nation
where
  c_custkey = o_custkey
  and l_orderkey = o_orderkey
  and o_orderdate >= to_date('1993-10-01', 'YYYY-MM-DD')
  and o_orderdate < add_months( to_date('1993-10-01', 'YYYY-MM-DD'), 3)
  and l_returnflag = 'R'
  and c_nationkey = n_nationkey
group by
  c_custkey,
  c_name,
  c_acctbal,
  c_phone,
  n_name,
  c_address,
  c_comment
order by
  revenue desc)
where rownum <= 20;

```

11.log

Begin Execution at Fri Dec 8 18:08:29 2006

-- using default substitutions

```

select
  ps_partkey,
  sum(ps_supplycost * ps_availqty) as value
from
  partsupp,
  supplier,
  nation
where
  ps_suppkey = s_suppkey
  and s_nationkey = n_nationkey
  and n_name = 'GERMANY'
group by
  ps_partkey having
  sum(ps_supplycost * ps_availqty) > (
select
  sum(ps_supplycost * ps_availqty) * 0.0001000000
from
  partsupp,
  supplier,
  nation
where
  ps_suppkey = s_suppkey
  and s_nationkey = n_nationkey
  and n_name = 'GERMANY'
)
order by
value desc

```

PS_PARTKEY	VALUE
129760.00	17538456.86
166726.00	16503353.92
191287.00	16474801.97
161758.00	16101755.54
34452.00	15983844.72

139035.00	15907078.34
9403.00	15451755.62
154358.00	15212937.88
38823.00	15064802.86
85606.00	15053957.15

:
:
:
<lines deleted >
:
:

166794.00	7913842.00
77207.00	7897752.72
96712.00	7897575.27
10157.00	7897046.25
171154.00	7896814.50
79373.00	7896186.00
113808.00	7893353.88
27901.00	7892952.00
128820.00	7892882.72
25891.00	7890511.20
122819.00	7888881.02
154731.00	7888301.33
101674.00	7879324.60
51968.00	7879102.21
72073.00	7877736.11
5182.00	7874521.73

1048 rows processed.
Query Processed in 0.39 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:29 2006

Stream Started at 1165622909.01
Stream Ended at 1165622909.40
Stream Processed in 0.39 seconds

SQL statements processed: 1

11.rep

Begin Executing this Stream at Fri Dec 8 18:08:29 2006

Query : Execution Time: 0.39 started 1165622909.01 ended 1165622909.40

Ended Executing this Stream at Fri Dec 8 18:08:29 2006

Stream Started at 1165622909.01
Stream Ended at 1165622909.40
Stream Processed in 0.39 seconds

11.sql

-- using default substitutions

```

select
  ps_partkey,
  sum(ps_supplycost * ps_availqty) as value
from
  partsupp,
  supplier,
  nation
where
  ps_suppkey = s_suppkey
  and s_nationkey = n_nationkey
  and n_name = 'GERMANY'
group by
  ps_partkey having
  sum(ps_supplycost * ps_availqty) > (
select
  sum(ps_supplycost * ps_availqty) * 0.0001000000
from
  partsupp,
  supplier,
  nation
where
  ps_suppkey = s_suppkey
  and s_nationkey = n_nationkey
  and n_name = 'GERMANY'
)
order by
value desc;

```

12.log

Begin Execution at Fri Dec 8 18:08:29 2006

-- using default substitutions

```
select
  l_shipmode,
  sum(case
    when o_orderpriority = '1-URGENT'
      or o_orderpriority = '2-HIGH'
    then 1
    else 0
  end) as high_line_count,
  sum(case
    when o_orderpriority <> '1-URGENT'
      and o_orderpriority <> '2-HIGH'
    then 1
    else 0
  end) as low_line_count
from
  orders,
  lineitem
where
  o_orderkey = l_orderkey
  and l_shipmode in ('MAIL', 'SHIP')
  and l_commitdate < l_receiptdate
  and l_shipdate < l_commitdate
  and l_receiptdate >= to_date('1994-01-01', 'YYYY-MM-DD')
  and l_receiptdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
group by
  l_shipmode
order by
  l_shipmode

L_SHIPMODE HIGH_LINE_COUNT  LOW_LINE_COUNT
MAIL      6202.00           9324.00
SHIP      6200.00           9262.00
```

2 rows processed.
Query Processed in 0.97 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:30 2006

Stream Started at 1165622909.43
Stream Ended at 1165622910.41
Stream Processed in 0.97 seconds

SQL statements processed: 1

12.rep

Begin Executing this Stream at Fri Dec 8 18:08:29 2006

Query : Execution Time: 0.97 started 1165622909.43 ended 1165622910.41

Ended Executing this Stream at Fri Dec 8 18:08:30 2006

Stream Started at 1165622909.43
Stream Ended at 1165622910.41
Stream Processed in 0.97 seconds

12.sql

-- using default substitutions

```
select
  l_shipmode,
  sum(case
    when o_orderpriority = '1-URGENT'
      or o_orderpriority = '2-HIGH'
    then 1
    else 0
  end) as high_line_count,
  sum(case
    when o_orderpriority <> '1-URGENT'
      and o_orderpriority <> '2-HIGH'
    then 1
    else 0
```

```
end) as low_line_count
from
  orders,
  lineitem
where
  o_orderkey = l_orderkey
  and l_shipmode in ('MAIL', 'SHIP')
  and l_commitdate < l_receiptdate
  and l_shipdate < l_commitdate
  and l_receiptdate >= to_date('1994-01-01', 'YYYY-MM-DD')
  and l_receiptdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
group by
  l_shipmode
order by
  l_shipmode;
```

13.log

Begin Execution at Fri Dec 8 18:08:30 2006

-- using default substitutions

```
select
  c_count,
  count(*) as custdist
from
  (
  select
    c_custkey,
    count(o_orderkey) as c_count
  from
    customer, orders where
    c_custkey = o_custkey(+)
    and o_comment(+) not like '%special%requests%'
  group by
    c_custkey
  ) c_orders
group by
  c_count
order by
  custdist desc,
  c_count desc
```

C_COUNT	CUSTDIST
0.00	50004.00
9.00	6641.00
10.00	6566.00
11.00	6058.00
8.00	5949.00
12.00	5553.00
13.00	4989.00
19.00	4748.00
7.00	4707.00
18.00	4625.00
15.00	4552.00
17.00	4530.00
14.00	4484.00
20.00	4461.00
16.00	4323.00
21.00	4217.00
22.00	3730.00
6.00	3334.00
23.00	3129.00
24.00	2622.00
25.00	2079.00
5.00	1972.00
26.00	1593.00
27.00	1185.00
4.00	1033.00
28.00	869.00
29.00	559.00
3.00	398.00
30.00	373.00
31.00	235.00
2.00	144.00
32.00	128.00
33.00	71.00
34.00	48.00
35.00	33.00
1.00	23.00
36.00	17.00
37.00	7.00
40.00	4.00
38.00	4.00
39.00	2.00
41.00	1.00

42 rows processed.
Query Processed in 1.81 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:32 2006

Stream Started at 1165622910.44
Stream Ended at 1165622912.25
Stream Processed in 1.81 seconds

SQL statements processed: 1

13.rep

Begin Executing this Stream at Fri Dec 8 18:08:30 2006

Query : Execution Time: 1.81 started 1165622910.44 ended 1165622912.25

Ended Executing this Stream at Fri Dec 8 18:08:32 2006

Stream Started at 1165622910.44
Stream Ended at 1165622912.25
Stream Processed in 1.81 seconds

13.sql

-- using default substitutions

```
select
  c_count,
  count(*) as custdist
from
  (
    select
      c_custkey,
      count(o_orderkey) as c_count
    from
      customer, orders where
        c_custkey = o_custkey(+)
      and o_comment(+) not like '%special%requests%'
    group by
      c_custkey
  ) c_orders
group by
  c_count
order by
  custdist desc,
  c_count desc;
```

14.log

Begin Execution at Fri Dec 8 18:08:32 2006

-- using default substitutions

```
select
  100.00 * sum(case
    when p_type like 'PROMO%'
      then l_extendedprice * (1 - l_discount)
    else 0
  end) / sum(l_extendedprice * (1 - l_discount)) as promo_revenue
from
  lineitem,
  part
where
  l_partkey = p_partkey
  and l_shipdate >= date '1995-09-01'
  and l_shipdate < date '1995-09-01' + interval '1' month
```

PROMO_REVENUE
16.38

1 row processed.
Query Processed in 0.13 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:32 2006

Stream Started at 1165622912.28
Stream Ended at 1165622912.40
Stream Processed in 0.13 seconds

SQL statements processed: 1

14.rep

Begin Executing this Stream at Fri Dec 8 18:08:32 2006

Query : Execution Time: 0.13 started 1165622912.28 ended 1165622912.40

Ended Executing this Stream at Fri Dec 8 18:08:32 2006

Stream Started at 1165622912.28
Stream Ended at 1165622912.40
Stream Processed in 0.13 seconds

14.sql

-- using default substitutions

```
select
  100.00 * sum(case
    when p_type like 'PROMO%'
      then l_extendedprice * (1 - l_discount)
    else 0
  end) / sum(l_extendedprice * (1 - l_discount)) as promo_revenue
from
  lineitem,
  part
where
  l_partkey = p_partkey
  and l_shipdate >= date '1995-09-01'
  and l_shipdate < date '1995-09-01' + interval '1' month;
```

15.log

Begin Execution at Fri Dec 8 18:08:32 2006

-- using default substitutions

```
create view revenue0 (supplier_no, total_revenue) as
select
  l_suppkey,
  sum(l_extendedprice * (1 - l_discount))
from
  lineitem
where
  l_shipdate >= to_date('1996-01-01', 'YYYY-MM-DD')
  and l_shipdate < add_months(to_date('1996-01-01', 'YYYY-MM-DD'), 3)
group by
  l_suppkey
Query Processed in 0.05 seconds.
```

```
select
  s_suppkey,
  s_name,
  s_address,
  s_phone,
  total_revenue
from
  supplier,
  revenue0
where
  s_suppkey = supplier_no
  and total_revenue = (
    select
      max(total_revenue)
    from
      revenue0
  )
order by
  s_suppkey

S_SUPPKEY      S_NAME
S_ADDRESS      S_PHONE      TOTAL_REVENUE
8449.00        Supplier#000008449
Wp34zim9qYFbVctdW      20-469-856-8873 1772627.21
```

1 row processed.
Query Processed in 0.60 seconds.

drop view revenue0
Query Processed in 0.05 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:33 2006

Stream Started at 1165622912.44
Stream Ended at 1165622913.15
Stream Processed in 0.71 seconds

SQL statements processed: 3

15.rep

Begin Executing this Stream at Fri Dec 8 18:08:32 2006

Query : Execution Time: 0.05 started 1165622912.44 ended 1165622912.49
Query : Execution Time: 0.60 started 1165622912.49 ended 1165622913.09
Query : Execution Time: 0.05 started 1165622913.09 ended 1165622913.15

Ended Executing this Stream at Fri Dec 8 18:08:33 2006

Stream Started at 1165622912.44
Stream Ended at 1165622913.15
Stream Processed in 0.71 seconds

15.sql

-- using default substitutions

```
create view revenue0 (supplier_no, total_revenue) as
select
    l_suppkey,
    sum(l_extendedprice * (1 - l_discount))
from
    lineitem
where
    l_shipdate >= to_date('1996-01-01', 'YYYY-MM-DD')
    and l_shipdate < add_months(to_date('1996-01-01', 'YYYY-MM-DD'), 3)
group by
    l_suppkey;
```

```
select
    s_suppkey,
    s_name,
    s_address,
    s_phone,
    total_revenue
from
    supplier,
    revenue0
where
    s_suppkey = supplier_no
    and total_revenue = (
        select
            max(total_revenue)
        from
            revenue0
    )
order by
    s_suppkey;
```

drop view revenue0;

16.log

Begin Execution at Fri Dec 8 18:08:33 2006

-- using default substitutions

```
select
    p_brand,
    p_type,
    p_size,
    count(distinct ps_suppkey) as supplier_cnt
from
    partsupp,
    part
where
    p_partkey = ps_partkey
```

```
and p_brand <> 'Brand#45'
and p_type not like 'MEDIUM POLISHED%'
and p_size in (49, 14, 23, 45, 19, 3, 36, 9)
and ps_suppkey not in (
select
    s_suppkey
from
    supplier
where
    s_comment like '%Customer%Complaints%'
)
group by
    p_brand,
    p_type,
    p_size
order by
    supplier_cnt desc,
    p_brand,
    p_type,
    p_size
```

P_BRAND	P_TYPE	P_SIZE	SUPPLIER_CNT
Brand#41	MEDIUM BRUSHED TIN	3.00	28.00
Brand#54	STANDARD BRUSHED COPPER	14.00	27.00
Brand#11	STANDARD BRUSHED TIN	23.00	24.00
Brand#11	STANDARD BURNISHED BRASS	36.00	24.00
Brand#15	MEDIUM ANODIZED NICKEL	3.00	24.00
Brand#15	SMALL ANODIZED BRASS	45.00	24.00
Brand#15	SMALL BURNISHED NICKEL	19.00	24.00
Brand#21	MEDIUM ANODIZED COPPER	3.00	24.00
Brand#22	SMALL BRUSHED NICKEL	3.00	24.00
Brand#22	SMALL BURNISHED BRASS	19.00	24.00
Brand#25	MEDIUM BURNISHED COPPER	36.00	24.00
Brand#31	PROMO POLISHED COPPER	36.00	24.00
:	:	:	:
:	:	:	:
:	:	:	:
<lines deleted >			
:	:	:	:
:	:	:	:
Brand#55	STANDARD BURNISHED STEEL	23.00	4.00
Brand#55	STANDARD BURNISHED STEEL	36.00	4.00
Brand#55	STANDARD BURNISHED STEEL	45.00	4.00
Brand#55	STANDARD BURNISHED TIN	9.00	4.00
Brand#55	STANDARD BURNISHED TIN	19.00	4.00
Brand#55	STANDARD BURNISHED TIN	36.00	4.00
Brand#55	STANDARD BURNISHED TIN	49.00	4.00
Brand#55	STANDARD PLATED BRASS	9.00	4.00
Brand#55	STANDARD PLATED BRASS	45.00	4.00
Brand#55	STANDARD PLATED BRASS	49.00	4.00
Brand#55	STANDARD PLATED COPPER	9.00	4.00
Brand#55	STANDARD PLATED COPPER	45.00	4.00
Brand#55	STANDARD PLATED NICKEL	3.00	4.00
Brand#55	STANDARD PLATED NICKEL	19.00	4.00
Brand#55	STANDARD PLATED NICKEL	45.00	4.00
Brand#55	STANDARD PLATED STEEL	14.00	4.00
Brand#55	STANDARD PLATED STEEL	23.00	4.00
Brand#55	STANDARD PLATED STEEL	49.00	4.00
Brand#55	STANDARD PLATED TIN	9.00	4.00
Brand#55	STANDARD PLATED TIN	14.00	4.00
Brand#55	STANDARD PLATED TIN	36.00	4.00
Brand#55	STANDARD POLISHED BRASS	3.00	4.00
Brand#55	STANDARD POLISHED BRASS	9.00	4.00
Brand#55	STANDARD POLISHED BRASS	23.00	4.00
Brand#55	STANDARD POLISHED COPPER	3.00	4.00
Brand#55	STANDARD POLISHED COPPER	23.00	4.00
Brand#55	STANDARD POLISHED COPPER	45.00	4.00
Brand#55	STANDARD POLISHED NICKEL	3.00	4.00
Brand#55	STANDARD POLISHED NICKEL	23.00	4.00
Brand#55	STANDARD POLISHED NICKEL	36.00	4.00
Brand#55	STANDARD POLISHED NICKEL	45.00	4.00
Brand#55	STANDARD POLISHED NICKEL	49.00	4.00
Brand#55	STANDARD POLISHED STEEL	14.00	4.00
Brand#55	STANDARD POLISHED STEEL	23.00	4.00
Brand#55	STANDARD POLISHED TIN	9.00	4.00
Brand#55	STANDARD POLISHED TIN	19.00	4.00
Brand#55	STANDARD POLISHED TIN	36.00	4.00
Brand#11	SMALL BRUSHED TIN	19.00	3.00
Brand#15	LARGE PLATED NICKEL	45.00	3.00
Brand#15	LARGE POLISHED NICKEL	9.00	3.00
Brand#21	PROMO BURNISHED STEEL	45.00	3.00
Brand#22	STANDARD PLATED STEEL	23.00	3.00
Brand#25	LARGE PLATED STEEL	19.00	3.00
Brand#32	STANDARD ANODIZED COPPER	23.00	3.00
Brand#33	SMALL ANODIZED BRASS	9.00	3.00
Brand#35	MEDIUM ANODIZED TIN	19.00	3.00
Brand#51	SMALL PLATED BRASS	23.00	3.00
Brand#52	MEDIUM BRUSHED BRASS	45.00	3.00
Brand#53	MEDIUM BRUSHED TIN	45.00	3.00
Brand#54	ECONOMY POLISHED BRASS	9.00	3.00
Brand#55	PROMO PLATED BRASS	19.00	3.00
Brand#55	STANDARD PLATED TIN	49.00	3.00

18314 rows processed.
Query Processed in 0.75 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:33 2006

Stream Started at 1165622913.18
Stream Ended at 1165622913.92
Stream Processed in 0.75 seconds

SQL statements processed: 1

16.rep

Begin Executing this Stream at Fri Dec 8 18:08:33 2006

Query : Execution Time: 0.75 started 1165622913.18 ended 1165622913.92

Ended Executing this Stream at Fri Dec 8 18:08:33 2006

Stream Started at 1165622913.18
Stream Ended at 1165622913.92
Stream Processed in 0.75 seconds

16.sql

-- using default substitutions

```
select
  p_brand,
  p_type,
  p_size,
  count(distinct ps_suppkey) as supplier_cnt
from
  partsupp,
  part
where
  p_partkey = ps_partkey
  and p_brand <> 'Brand#45'
  and p_type not like 'MEDIUM POLISHED%'
  and p_size in (49, 14, 23, 45, 19, 3, 36, 9)
  and ps_suppkey not in (
    select
      s_suppkey
    from
      supplier
    where
      s_comment like '%Customer%Complaints%'
  )
group by
  p_brand,
  p_type,
  p_size
order by
  supplier_cnt desc,
  p_brand,
  p_type,
  p_size;
```

17.log

Begin Execution at Fri Dec 8 18:08:33 2006

-- using default substitutions

```
select
  sum(l_extendedprice) / 7.0 as avg_yearly
from
  lineitem ,
  part
where
  p_partkey = l_partkey
  and p_brand = 'Brand#23'
  and p_container = 'MED BOX'
  and l_quantity < (
    select
      0.2 * avg(l_quantity)
    from
      lineitem
  where
```

```
l_partkey = p_partkey
)
```

AVG_YEARLY
348406.05

1 row processed.
Query Processed in 4.24 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:38 2006

Stream Started at 1165622913.96
Stream Ended at 1165622918.20
Stream Processed in 4.24 seconds

SQL statements processed: 1

17.rep

Begin Executing this Stream at Fri Dec 8 18:08:33 2006

Query : Execution Time: 4.24 started 1165622913.96 ended 1165622918.20

Ended Executing this Stream at Fri Dec 8 18:08:38 2006

Stream Started at 1165622913.96
Stream Ended at 1165622918.20
Stream Processed in 4.24 seconds

17.sql

-- using default substitutions

```
select
  sum(l_extendedprice) / 7.0 as avg_yearly
from
  lineitem ,
  part
where
  p_partkey = l_partkey
  and p_brand = 'Brand#23'
  and p_container = 'MED BOX'
  and l_quantity < (
    select
      0.2 * avg(l_quantity)
    from
      lineitem
  where
    l_partkey = p_partkey
  );
```

18.log

Begin Execution at Fri Dec 8 18:08:38 2006

-- using default substitutions

```
select * from (
  select
    c_name,
    c_custkey,
    o_orderkey,
    o_orderdate,
    o_totalprice,
    sum(l_quantity)
  from
    customer,
    orders,
    lineitem
  where
    o_orderkey in (
      select
        l_orderkey
      from
        lineitem
      group by
        l_orderkey having
          sum(l_quantity) > 300
    )
  and c_custkey = o_custkey
```

```

and o_orderkey = l_orderkey
group by
c_name,
c_custkey,
o_orderkey,
o_orderdate,
o_totalprice
order by
o_totalprice desc,
o_orderdate
)
where rownum <= 100

```

C_NAME	C_CUSTKEY	O_ORDERKEY	O_ORDERDATE
O_TOTALPRICE	SUM(L_QUANTITY)		
Customer#000128120	128120.00	4722021.00	1994-04-07
544089.09	323.00		
Customer#000144617	144617.00	3043270.00	1997-02-12
530604.44	317.00		
Customer#000013940	13940.00	2232932.00	1997-04-13
522720.61	304.00		
Customer#000066790	66790.00	2199712.00	1996-09-30
515531.82	327.00		
Customer#000046435	46435.00	4745607.00	1997-07-03
508047.99	309.00		
Customer#000015272	15272.00	3883783.00	1993-07-28
500241.33	302.00		
Customer#000146608	146608.00	3342468.00	1994-06-12
499794.58	303.00		
Customer#000096103	96103.00	5984582.00	1992-03-16
494398.79	312.00		
Customer#000024341	24341.00	1474818.00	1992-11-15
491348.26	302.00		
Customer#000137446	137446.00	5489475.00	1997-05-23
487763.25	311.00		
Customer#000107590	107590.00	4267751.00	1994-11-04
485141.38	301.00		
Customer#000050008	50008.00	2366755.00	1996-12-09
483891.26	302.00		
Customer#000015619	15619.00	3767271.00	1996-08-07
480083.96	318.00		
Customer#000077260	77260.00	1436544.00	1992-09-12
479499.43	307.00		
Customer#000109379	109379.00	5746311.00	1996-10-10
478064.11	302.00		
Customer#000054602	54602.00	5832321.00	1997-02-09
471220.08	307.00		
Customer#000105995	105995.00	2096705.00	1994-07-03
469692.58	307.00		
Customer#000148885	148885.00	2942469.00	1992-05-31
469630.44	313.00		
Customer#000114586	114586.00	551136.00	1993-05-19
469605.59	308.00		
Customer#000105260	105260.00	5296167.00	1996-09-06
469360.57	303.00		
Customer#000147197	147197.00	1263015.00	1997-02-02
467149.67	320.00		
Customer#000064483	64483.00	2745894.00	1996-07-04
466991.35	304.00		
Customer#000136573	136573.00	2761378.00	1996-05-31
461282.73	301.00		
Customer#000016384	16384.00	502886.00	1994-04-12
458378.92	312.00		
Customer#000117919	117919.00	2869152.00	1996-06-20
456815.92	317.00		
Customer#000012251	12251.00	735366.00	1993-11-24
455107.26	309.00		
Customer#000120098	120098.00	1971680.00	1995-06-14
453451.23	308.00		
Customer#000066098	66098.00	5007490.00	1992-08-07
453436.16	304.00		
Customer#000117076	117076.00	4290656.00	1997-02-05
449545.85	301.00		
Customer#000129379	129379.00	4720454.00	1997-06-07
448665.79	303.00		
Customer#000126865	126865.00	4702759.00	1994-11-07
447606.65	320.00		
Customer#000088876	88876.00	983201.00	1993-12-30
446717.46	304.00		
Customer#000036619	36619.00	4806726.00	1995-01-17
446704.09	328.00		
Customer#000141823	141823.00	2806245.00	1996-12-29
446269.12	310.00		
Customer#000053029	53029.00	2662214.00	1993-08-13
446144.49	302.00		
Customer#000018188	18188.00	3037414.00	1995-01-25
443807.22	308.00		
Customer#000066533	66533.00	29158.00	1995-10-21
443576.50	305.00		
Customer#000037729	37729.00	4134341.00	1995-06-29
441082.97	309.00		
Customer#000003566	3566.00	2329187.00	1998-01-04
439803.36	304.00		

Customer#000045538	45538.00	4527553.00	1994-05-22
436275.31	305.00		
Customer#000081581	81581.00	4739650.00	1995-11-04
435405.90	305.00		
Customer#000119989	119989.00	1544643.00	1997-09-20
434568.25	320.00		
Customer#000003680	3680.00	3861123.00	1998-07-03
433525.97	301.00		
Customer#000113131	113131.00	967334.00	1995-12-15
432957.75	301.00		
Customer#000141098	141098.00	565574.00	1995-09-24
430986.69	301.00		
Customer#000093392	93392.00	5200102.00	1997-01-22
425487.51	304.00		
Customer#000015631	15631.00	1845057.00	1994-05-12
419879.59	302.00		
Customer#000112987	112987.00	4439686.00	1996-09-17
418161.49	305.00		
Customer#000012599	12599.00	4259524.00	1998-02-12
415200.61	304.00		
Customer#000105410	105410.00	4478371.00	1996-03-05
412754.51	302.00		
Customer#000149842	149842.00	5156581.00	1994-05-30
411329.35	302.00		
Customer#000010129	10129.00	5849444.00	1994-03-21
409129.85	309.00		
Customer#000069904	69904.00	1742403.00	1996-10-19
408513.00	305.00		
Customer#000017746	17746.00	6882.00	1997-04-09
408446.93	303.00		
Customer#000013072	13072.00	1481925.00	1998-03-15
399195.47	301.00		
Customer#000082441	82441.00	857959.00	1994-02-07
382579.74	305.00		
Customer#000088703	88703.00	2995076.00	1994-01-30
363812.12	302.00		

57 rows processed.
Query Processed in 4.49 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:42 2006

Stream Started at 1165622918.24
Stream Ended at 1165622922.73
Stream Processed in 4.49 seconds

SQL statements processed: 1

18.rep

Begin Executing this Stream at Fri Dec 8 18:08:38 2006

Query : Execution Time: 4.49 started 1165622918.24 ended 1165622922.73

Ended Executing this Stream at Fri Dec 8 18:08:42 2006

Stream Started at 1165622918.24
Stream Ended at 1165622922.73
Stream Processed in 4.49 seconds

18.sql

-- using default substitutions

```

select * from (
select
c_name,
c_custkey,
o_orderkey,
o_orderdate,
o_totalprice,
sum(l_quantity)
from
customer,
orders,
lineitem
where
o_orderkey in (
select
l_orderkey
from
lineitem

```

```

group by
  L_orderkey having
    sum(l_quantity) > 300
)
and c_custkey = o_custkey
and o_orderkey = L_orderkey
group by
  c_name,
  c_custkey,
  o_orderkey,
  o_orderdate,
  o_totalprice
order by
  o_totalprice desc,
  o_orderdate
)
where rownum <= 100;

```

19.log

Begin Execution at Fri Dec 8 18:08:42 2006

-- using default substitutions

```

select
  sum(l_extendedprice*(1 - l_discount)) as revenue
from
  lineitem,
  part
where
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#12'
    and p_container in ('SM CASE', 'SM BOX', 'SM PACK', 'SM PKG')
    and l_quantity >= 1 and l_quantity <= 1 + 10
    and p_size between 1 and 5
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
  or
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#23'
    and p_container in ('MED BAG', 'MED BOX', 'MED PKG', 'MED PACK')
    and l_quantity >= 10 and l_quantity <= 10 + 10
    and p_size between 1 and 10
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
  or
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#34'
    and p_container in ('LG CASE', 'LG BOX', 'LG PACK', 'LG PKG')
    and l_quantity >= 20 and l_quantity <= 20 + 10
    and p_size between 1 and 15
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
)

```

REVENUE
3083843.06

1 row processed.
Query Processed in 1.68 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:44 2006

Stream Started at 1165622922.76
Stream Ended at 1165622924.44
Stream Processed in 1.68 seconds

SQL statements processed: 1

19.rep

Begin Executing this Stream at Fri Dec 8 18:08:42 2006

Query : Execution Time: 1.68 started 1165622922.76 ended 1165622924.44

Ended Executing this Stream at Fri Dec 8 18:08:44 2006

Stream Started at 1165622922.76

Stream Ended at 1165622924.44
Stream Processed in 1.68 seconds

19.sql

-- using default substitutions

```

select
  sum(l_extendedprice*(1 - l_discount)) as revenue
from
  lineitem,
  part
where
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#12'
    and p_container in ('SM CASE', 'SM BOX', 'SM PACK', 'SM PKG')
    and l_quantity >= 1 and l_quantity <= 1 + 10
    and p_size between 1 and 5
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
  or
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#23'
    and p_container in ('MED BAG', 'MED BOX', 'MED PKG', 'MED PACK')
    and l_quantity >= 10 and l_quantity <= 10 + 10
    and p_size between 1 and 10
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
  or
  (
    p_partkey = l_partkey
    and p_brand = 'Brand#34'
    and p_container in ('LG CASE', 'LG BOX', 'LG PACK', 'LG PKG')
    and l_quantity >= 20 and l_quantity <= 20 + 10
    and p_size between 1 and 15
    and l_shipmode in ('AIR', 'AIR REG')
    and l_shipinstruct = 'DELIVER IN PERSON'
  )
);

```

l.log

Begin Execution at Fri Dec 8 18:07:58 2006

-- using default substitutions

```

select
  l_returnflag,
  l_linestatus,
  sum(l_quantity) as sum_qty,
  sum(l_extendedprice) as sum_base_price,
  sum(l_extendedprice * (1 - l_discount)) as sum_disc_price,
  sum(l_extendedprice * (1 - l_discount) * (1 + l_tax)) as sum_charge,
  avg(l_quantity) as avg_qty,
  avg(l_extendedprice) as avg_price,
  avg(l_discount) as avg_disc,
  count(*) as count_order
from
  lineitem
where
  l_shipdate <= to_date ('1998-12-01','YYYY-MM-DD') - 90
group by
  l_returnflag,
  l_linestatus
order by
  l_returnflag,
  l_linestatus

```

L_RETURNFLAG	L_LINESTATUS	SUM_QTY	SUM_BASE_PRICE	SUM_DISC_PRICE	SUM_CHARGE	AVG_QTY
A	F	37734107.00	5658654400.73	53758257134.87	55909065222.83	25.52
		38273.13	0.05		1478493.00	
N	F	991417.00	1487504710.38	1413082168.05	1469649223.19	25.52
		38284.47	0.05		38854.00	
N	O	74476040.00	111701729697.74	106118230307.61	110367043872.50	25.50
		38249.12	0.05		2920374.00	
R	F	37719753.00	56568041380.90	53741292684.60	55889619119.83	25.51
		38250.85	0.05		1478870.00	

4 rows processed.
Query Processed in 7.07 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:05 2006

Stream Started at 1165622878.46
Stream Ended at 1165622885.53
Stream Processed in 7.07 seconds

SQL statements processed: 1

1.rep

Begin Executing this Stream at Fri Dec 8 18:07:58 2006

Query : Execution Time: 7.07 started 1165622878.46 ended 1165622885.53

Ended Executing this Stream at Fri Dec 8 18:08:05 2006

Stream Started at 1165622878.46
Stream Ended at 1165622885.53
Stream Processed in 7.07 seconds

1.sql

-- using default substitutions

select

```
l_returnflag,
l_linestatus,
sum(l_quantity) as sum_qty,
sum(l_extendedprice) as sum_base_price,
sum(l_extendedprice * (1 - l_discount)) as sum_disc_price,
sum(l_extendedprice * (1 - l_discount) * (1 + l_tax)) as sum_charge,
avg(l_quantity) as avg_qty,
avg(l_extendedprice) as avg_price,
avg(l_discount) as avg_disc,
count(*) as count_order
```

from

```
lineitem
where
l_shipdate <= to_date ('1998-12-01','YYYY-MM-DD') - 90
```

group by

```
l_returnflag,
l_linestatus
```

order by

```
l_returnflag,
l_linestatus;
```

20.log

Begin Execution at Fri Dec 8 18:08:44 2006

-- using default substitutions

select

```
s_name,
s_address
from
supplier,
nation
where
s_suppkey in (
select
ps_suppkey
from
partsupp
where
ps_partkey in (
select
p_partkey
from
part
where
p_name like 'forest%'
)
and ps_availqty > (
select
0.5 * sum(l_quantity)
```

```
from
lineitem
where
l_partkey = ps_partkey
and l_suppkey = ps_suppkey
and l_shipdate >= to_date ('1994-01-01', 'YYYY-MM-DD')
and l_shipdate < add_months( to_date ('1994-01-01', 'YYYY-MM-DD'), 12)
)
)
and s_nationkey = n_nationkey
and n_name = 'CANADA'
order by
s_name
```

```
S_NAME S_ADDRESS
Supplier#000000020 iybAE,RmTymrZVYaFZva2SH.j
Supplier#000000091 YV45D7TKfdQanOOZ7q9QxkyGUapU1oOWU6q3
Supplier#000000197 YC2Acon6kjY3zj3Fbxs2k4Vdf7X0cd2F
Supplier#000000226 83qOdU2EYRdPQAQhEm GRZEd
Supplier#000000285 Br7e1nntLyxrw6lmgpJ7YdhFDjuBf
Supplier#000000378 FfbhyCxWvcPrO8ltp9
Supplier#000000402 i9Sw4DoyMhzhKXCH9By.AYSgmD
Supplier#000000530 0qwCMwobkY OcmLyrRXlagA8ukENJv,
Supplier#000000688 D fw5ocppmZpYBBIP718hCihLDZ5KhKX
Supplier#000000710 f19YPvOyb QoY wjKC,oPycpGfieBAcwKJo
Supplier#000000736 l6i2nMwVuoovfKnuVgasGK2rDy65DIAFLegil7
Supplier#000000761 zLSLeLQJ2XrvTTFnv7WAcYZGvMTx882d4
Supplier#000000884 bmhEShejaS
Supplier#000000887 urEaTejH5POADP2ARrf
Supplier#000000935 ij98czM 2KzWe7dDT0xB8sq0UfCdrvX
Supplier#000000975 .AC e,tBpNwKb5xMUzeohxRln, hdZJo73gQF8y
Supplier#000001263 rQWr6nF8ZhB2TAiIdIvo5Io
Supplier#000001399 LmrocnIMSyYOWuANx7
Supplier#000001446 lch9HMNU1R7a0LlYbsUodVknk6
Supplier#000001454 TOpimgu2TVXlJhiL93h,
Supplier#000001500 wDmF5xLxtQch9ctVu,
Supplier#000001602 uKNWleafaM644
Supplier#000001626 UhXRzUu1dtFmp0
Supplier#000001682 pXTkGxrTQVYH1Rr
Supplier#000001699 Q9C4rfJ26ojVPqqcqVXeRl
Supplier#000001700 7hMICoflY5zLFg
Supplier#000001726 TeRY7TlTH24sEword7yAaSkjx8
Supplier#000001730 Rc8e.1Pybn r6zo0VJIEIDODD vhk
Supplier#000001746 qWsendlOekQG1aW4uq06uqCm51se8lrv7 hBRd
Supplier#000001752 Fra7outx4lTHYJarThOGIBk
Supplier#000001856 jXcRgzYFOah05iR8p6w58bJLcUGyYiURPfwUWM
Supplier#000001931 FpJbMU2h6ZR2eBv8I9Nxf
Supplier#000001939 Nrk,JA4bfReUs
Supplier#000001990 DSDJkCgBJzuPglYyuM,CUDlnsRliOxkkHezTCA
Supplier#000002020 jB6r1d7MxP6co
Supplier#000002022 dwebGX7ld2pc25YvY33
Supplier#000002036 20ytrTvObjKUI2WCBOA
Supplier#000002204 uYmrlr46C06udCqanj0KirsotQakZsEysL
Supplier#000002243 nSOEV3JeOU79
```

```
:
:
:
<lines deleted >
:
:
```

```
Supplier#000006761 n4jhxGMqB5prD1HhpLvwrStOLlla
Supplier#000006808 HGd2Xo 9nEcHJhZvXjXxWKlpApT
Supplier#000006858 fnlINT885vBBhsWwTGiZ0o22thwGY16h GHJ21
Supplier#000006872 XIDPiA7PLXCWK6SeEclD
Supplier#000006949 mLxUYJhsGcLKe ,GfirNu183AvT
Supplier#000006985 PrUuiboQpy.OtgJ01Z4BxJQUyrw9c3I
Supplier#000007072 2tRyX9M1a 4Rcm57s779F1ANG9jlpK
Supplier#000007098 G3j8g0KC4OcbAu2OV0PHrXQWMCUdjg8wgCHOExu
Supplier#000007135 ls DoKv7V5ulfQy9V
Supplier#000007160 TqDGBULB3cTqIT6FKDvm9BS4e4v,zwYiQPb
Supplier#000007169 tEc95D2moN9S84nd55O,dlnW
Supplier#000007322 wr7dgte5q MAjiY0uwmi3MyDkSMX1
Supplier#000007365 51xhROLvQMj05DndtZWt
Supplier#000007398 V8eE6oZ00OFNU,
Supplier#000007402 4UVv58ery1rjmQSR5
Supplier#000007448 yhhpWiji7EJ6Q5VCaQ
Supplier#000007477 9m9j0wfhWzCvVHxkU,PpAxwSH0h
Supplier#000007509 q8,V6LJR0HjHcOuSG7aLTMg
Supplier#000007561 rMcFg2530VC
Supplier#000007789 rQ7cUcPrtudOyO3svsNSkimqH6qrfWT2Sz
Supplier#000007801 69fi,U1r6enUb
Supplier#000007818 yhhc2CQec Jrv8zqBi83
Supplier#000007885 u3sicchh5ZpyTUpN1cJKNaAoabiWgY
Supplier#000007918 r,v9mBQ6LoEYyj1
Supplier#000007926 ErzCF80K9Uy
Supplier#000007957 ELwnio14ssoU1 dRyZIL OK3Vtzb
Supplier#000007965 F7U5nJ7p5hhj
Supplier#000007968 DsF9UIZ2Fo6HXN9aErvyglkHoD582HSGZpP
Supplier#000007998 LnASFbYRFOo9d6d,asBvVq9Lo2P
Supplier#000008168 aOa82a8ZbKcfnDLX
Supplier#000008231 IK7eGw Yj90sTdpkP.vcqWxLB
```

```

Supplier#000008243 2AyePMkDqmvZvjGtizXthFLo8h EiudCMxOmIIG
Supplier#000008275 B1bNDrWfg.gpXKQILN
Supplier#000008323 75118sZmASwm POeherMjd9tmpyeQ.BfCXN5BIAb
Supplier#000008366 h778cEj14BuW9OEKlvPTWq4iwASR6EBBXN7zeS8
Supplier#000008423 RQhKnkAhROdAr3lx4Q1weMMn00hNe Kq
Supplier#000008480 4sSDA4ACReKlnJEm5T6b
Supplier#000008532 Uc29q4.5xVdDOF87UZrchr4xWS0ihEUxuh
Supplier#000008595 MH0iB73GQ3z UW3O DbCbqmc
Supplier#000008610 SgVgP90vP452sUNTgzL9zKwXHXAzV6tV
Supplier#000008705 aE.trRNdPz.4yinTD9O3DebDlp
Supplier#000008742 HmPIQeZKCPEcTUL14.kKq
Supplier#000008841 I85Lu1sekg2xrSzm0
Supplier#000008895 2cH4okfaLSZTTg8sKRbbJQxkmeFu2Esj
Supplier#000008967 2kwEHyMG 7FwozNImAUE6mH0hYtqYculJM
Supplier#000008972 w2vF6 D5YZO3visPXsqVfLADTK
Supplier#000009032 qK.trB6Sdy4Dz1BRUFNy
Supplier#000009147 rOAuryHxpZ9eOvx
Supplier#000009252 F7cZaPUHwh1 ZKvj3xmAVWC1XdP ue1p5m,i
Supplier#000009278 RqYTzgxj93CLX OmcYfCENOfD
Supplier#000009327 uoqMdl7e7Gj9dbQ53
Supplier#000009430 igRqmeFt
Supplier#000009567 r4Wfx4c3xsEAjcGj71HHZByornl D9vrztXlv4
Supplier#000009601 51m637bO.Rw5DnHWFUvLacRx9
Supplier#000009709 rRnCbHYgdgl9PZYnyWKVYSUW0vKg
Supplier#000009753 wLhVEcrnd7PkJF4BnGK7Z
Supplier#000009796 z.y4ldmr15DOvPUqYG
Supplier#000009799 4wNjXGa4OKW1
Supplier#000009811 E3iuyq7UnZxU7oPZle2Gu6
Supplier#000009812 APFRMy3lCbGfGa53n5i9DxzFPQPgnjrGt32
Supplier#000009862 rJzweWeN58
Supplier#000009868 ROJGgx5gvtkmnUUoeyy7v
Supplier#000009869 ucLqzrpbTRMewGSM29t0rNTM30g1Tu3Xgg3mKag
Supplier#000009899 7XdpaAHzr1t.UQFZE
Supplier#000009974 7wJ.J5DKcxSU4Kp1cQLpbcaVb5AsvKT

```

204 rows processed.
Query Processed in 0.82 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:45 2006

Stream Started at 1165622924.47
Stream Ended at 1165622925.29
Stream Processed in 0.82 seconds

SQL statements processed: 1

20.rep

Begin Executing this Stream at Fri Dec 8 18:08:44 2006

Query : Execution Time: 0.82 started 1165622924.47 ended 1165622925.29

Ended Executing this Stream at Fri Dec 8 18:08:45 2006

Stream Started at 1165622924.47
Stream Ended at 1165622925.29
Stream Processed in 0.82 seconds

20.sql

-- using default substitutions

```

select
  s_name,
  s_address
from
  supplier,
  nation
where
  s_suppkey in (
    select
      ps_suppkey
    from
      partsupp
    where
      ps_partkey in (
        select
          p_partkey
        from
          part
        where
          p_name like 'forest%'
      )
    and ps_availqty > (

```

```

select
  0.5 * sum(l_quantity)
from
  lineitem
where
  l_partkey = ps_partkey
and l_suppkey = ps_suppkey
and l_shipdate >= to_date ('1994-01-01', 'YYYY-MM-DD')
and l_shipdate < add_months(to_date ('1994-01-01', 'YYYY-MM-
DD'), 12)
)
)
and s_nationkey = n_nationkey
and n_name = 'CANADA'
order by
  s_name;

```

21.log

Begin Execution at Fri Dec 8 18:08:45 2006

-- using default substitutions

```

select * from (
select
  s_name,
  count(*) numwait
from
  supplier,
  lineitem l1,
  orders,
  nation
where
  s_suppkey = l1.l_suppkey
and o_orderkey = l1.l_orderkey
and o_orderstatus = 'F'
and l1.l_receiptdate > l1.l_commitdate
and exists (
select
  *
from
  lineitem l2
where
  l2.l_orderkey = l1.l_orderkey
and l2.l_suppkey <> l1.l_suppkey
)
and not exists (
select
  *
from
  lineitem l3
where
  l3.l_orderkey = l1.l_orderkey
and l3.l_suppkey <> l1.l_suppkey
and l3.l_receiptdate > l3.l_commitdate
)
and s_nationkey = n_nationkey
and n_name = 'SAUDI ARABIA'
group by
  s_name
order by
  numwait desc,
  s_name)
where rownum <= 100

```

S_NAME	NUMWAIT
Supplier#000002829	20.00
Supplier#000005808	18.00
Supplier#000000262	17.00
Supplier#000000496	17.00
Supplier#000002160	17.00
Supplier#000002301	17.00
Supplier#000002540	17.00
Supplier#000003063	17.00
Supplier#000005178	17.00
Supplier#000008331	17.00
Supplier#000002005	16.00
Supplier#000002095	16.00
Supplier#000005799	16.00
Supplier#000005842	16.00
Supplier#000006450	16.00
Supplier#000006939	16.00
Supplier#000009200	16.00
Supplier#000009727	16.00
Supplier#000000486	15.00
Supplier#000000565	15.00
Supplier#000001046	15.00
Supplier#000001047	15.00
Supplier#000001161	15.00

```

Supplier#000001336 15.00
Supplier#000001435 15.00
Supplier#000003075 15.00
Supplier#000003335 15.00
Supplier#000005649 15.00
Supplier#000006027 15.00
Supplier#000006795 15.00
Supplier#000006800 15.00
Supplier#000006824 15.00
Supplier#000007131 15.00
Supplier#000007382 15.00
Supplier#000008913 15.00
Supplier#000009787 15.00
Supplier#000000633 14.00
Supplier#000001960 14.00
Supplier#000002323 14.00
Supplier#000002490 14.00
Supplier#000002993 14.00
Supplier#000003101 14.00
Supplier#000004489 14.00
Supplier#000005435 14.00
Supplier#000005583 14.00
Supplier#000005774 14.00
Supplier#000007579 14.00
Supplier#000008180 14.00
Supplier#000008695 14.00
Supplier#000009224 14.00
Supplier#000000357 13.00
Supplier#000000436 13.00
Supplier#000000610 13.00
Supplier#000000788 13.00
Supplier#000000889 13.00
Supplier#000001062 13.00
Supplier#000001498 13.00
Supplier#000002056 13.00
Supplier#000002312 13.00
Supplier#000002344 13.00
Supplier#000002596 13.00
Supplier#000002615 13.00
Supplier#000002978 13.00
Supplier#000003048 13.00
Supplier#000003234 13.00
Supplier#000003727 13.00
Supplier#000003806 13.00
Supplier#000004472 13.00
Supplier#000005236 13.00
Supplier#000005906 13.00
Supplier#000006241 13.00
Supplier#000006326 13.00
Supplier#000006384 13.00
Supplier#000006394 13.00
Supplier#000006624 13.00
Supplier#000006629 13.00
Supplier#000006682 13.00
Supplier#000006737 13.00
Supplier#000006825 13.00
Supplier#000007021 13.00
Supplier#000007417 13.00
Supplier#000007497 13.00
Supplier#000007602 13.00
Supplier#000008134 13.00
Supplier#000008234 13.00
Supplier#000009435 13.00
Supplier#000009436 13.00
Supplier#000009564 13.00
Supplier#000009896 13.00
Supplier#000000379 12.00
Supplier#000000673 12.00
Supplier#000000762 12.00
Supplier#000000811 12.00
Supplier#000000821 12.00
Supplier#000001337 12.00
Supplier#000001916 12.00
Supplier#000001925 12.00
Supplier#000002039 12.00
Supplier#000002357 12.00
Supplier#000002483 12.00

```

100 rows processed.
Query Processed in 3.90 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:49 2006

Stream Started at 1165622925.32
Stream Ended at 1165622929.22
Stream Processed in 3.90 seconds

SQL statements processed: 1

21.rep

Begin Executing this Stream at Fri Dec 8 18:08:45 2006

Query : Execution Time: 3.90 started 1165622925.32 ended 1165622929.22

Ended Executing this Stream at Fri Dec 8 18:08:49 2006

Stream Started at 1165622925.32
Stream Ended at 1165622929.22
Stream Processed in 3.90 seconds

21.sql

-- using default substitutions

```

select * from (
select
  s_name,
  count(*) numwait
from
  supplier,
  lineitem l1,
  orders,
  nation
where
  s_suppkey = l1.l_suppkey
  and o_orderkey = l1.l_orderkey
  and o_orderstatus = 'F'
  and l1.l_receiptdate > l1.l_commitdate
  and exists (
    select
      *
    from
      lineitem l2
    where
      l2.l_orderkey = l1.l_orderkey
      and l2.l_suppkey <> l1.l_suppkey
  )
  and not exists (
    select
      *
    from
      lineitem l3
    where
      l3.l_orderkey = l1.l_orderkey
      and l3.l_suppkey <> l1.l_suppkey
      and l3.l_receiptdate > l3.l_commitdate
  )
  and s_nationkey = n_nationkey
  and n_name = 'SAUDI ARABIA'
group by
  s_name
order by
  numwait desc,
  s_name)
where rownum <= 100;

```

22.log

Begin Execution at Fri Dec 8 18:08:49 2006

-- using default substitutions

```

select
  centrycode,
  count(*) as numcust,
  sum(c_acctbal) as totacctbal
from
  (
select
  substr(c_phone, 1, 2) as centrycode,
  c_acctbal
from
  customer
where
  substr(c_phone, 1, 2) in
  ('13', '31', '23', '29', '30', '18', '17')
  and c_acctbal > (
select
  avg(c_acctbal)
from
  customer
where

```

```

c_acctbal > 0.00
and substr(c_phone, 1, 2) in
('13', '31', '23', '29', '30', '18', '17')
)
and not exists (
select
*
from
orders
where
o_custkey = c_custkey
)
) custsale
group by
cnycode
order by
cnycode

```

CNTRYCODE	NUMCUST	TOTACCTBAL
13	888.00	6737713.99
17	861.00	6460573.72
18	964.00	7236687.40
23	892.00	6701457.95
29	948.00	7158866.63
30	909.00	6808436.13
31	922.00	6806670.18

7 rows processed.
Query Processed in 0.59 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:49 2006

Stream Started at 1165622929.26
Stream Ended at 1165622929.85
Stream Processed in 0.59 seconds

SQL statements processed: 1

22.rep

Begin Executing this Stream at Fri Dec 8 18:08:49 2006

Query : Execution Time: 0.59 started 1165622929.26 ended 1165622929.85

Ended Executing this Stream at Fri Dec 8 18:08:49 2006

Stream Started at 1165622929.26
Stream Ended at 1165622929.85
Stream Processed in 0.59 seconds

22.sql

-- using default substitutions

```

select
  cnycode,
  count(*) as numcust,
  sum(c_acctbal) as totacctbal
from
(
  select
    substr(c_phone, 1, 2) as cnycode,
    c_acctbal
  from
    customer
  where
    substr(c_phone, 1, 2) in
      ('13', '31', '23', '29', '30', '18', '17')
    and c_acctbal > (
      select
        avg(c_acctbal)
      from
        customer
      where
        c_acctbal > 0.00
        and substr(c_phone, 1, 2) in
          ('13', '31', '23', '29', '30', '18', '17')
    )
)
and not exists (
select
*
from
orders
where

```

```

)
) custsale
group by
  cnycode
order by
  cnycode;

```

2.log

Begin Execution at Fri Dec 8 18:08:05 2006

-- using default substitutions

```

select * from (
select
  s_acctbal,
  s_name,
  n_name,
  p_partkey,
  p_mfgr,
  s_address,
  s_phone,
  s_comment
from
  part,
  supplier,
  partsupp,
  nation,
  region
where
  p_partkey = ps_partkey
  and s_suppkey = ps_suppkey
  and p_size = 15
  and p_type like '%BRASS'
  and s_nationkey = n_nationkey
  and n_regionkey = r_regionkey
  and r_name = 'EUROPE'
  and ps_supplycost = (
  select
  min(ps_supplycost)
  from
  partsupp,
  supplier,
  nation,
  region
  where
  p_partkey = ps_partkey
  and s_suppkey = ps_suppkey
  and s_nationkey = n_nationkey
  and n_regionkey = r_regionkey
  and r_name = 'EUROPE'
)
)
order by
  s_acctbal desc,
  n_name,
  s_name,
  p_partkey
)
where rownum <= 100

```

S_ACCTBAL	S_NAME	N_NAME
P_PARTKEY	P_MFGR	
S_ADDRESS		S_PHONE
S_COMMENT		
9938.53	Supplier#000005359	UNITED KINGDOM
185358.00	Manufacturer#4	
QKuHYh.vZGiwu2FWEJoLDx04		33-429-790-6131
blithely silent pinto beans are furiously. slyly final deposits across		
9937.84	Supplier#000005969	ROMANIA
108438.00	Manufacturer#1	
ANDENSOSmk.miq23Xfb5RWt6dvUcvt6Qa		29-520-692-3537
carefully slow deposits use furiously. slyly ironic platelets above the ironic		
9936.22	Supplier#000005250	UNITED KINGDOM
249.00	Manufacturer#4	
B3rq0xbSEim4Mpy2RH J		33-320-228-2957
blithely special packages are. stealthily express deposits across the closely final instruct		
9923.77	Supplier#000002324	GERMANY
29821.00	Manufacturer#4	
y3OD9UywSTOK		17-779-299-1839
quickly express packages breach quiet pinto beans. requ		
9871.22	Supplier#000006373	GERMANY
43868.00	Manufacturer#5	
J8fcXWsTqM		17-813-485-8637
never silent deposits integrate furiously blit		
9870.78	Supplier#000001286	GERMANY
81285.00	Manufacturer#2	
YKA.E2fjVd7eUrzp2Erf8j1QxGo2DFnosaTEH		17-516-924-4574
final theodolites cajole slyly special,		

```

:
:
:
<lines deleted >
:
:
8152.61 Supplier#000002731 ROMANIA
15227.00 Manufacturer#4
nluXJCuY1tu 29-805-463-2030
gifts use. slyly silent ideas are carefully beneath the silent instructions. slyly sil
8109.09 Supplier#000009186 FRANCE
99185.00 Manufacturer#1
wgfosrVPexl9pEXWywaqlBMDYYf 16-668-570-1402
quickly pending requests are blithely along the ironic, final requests; instr
8102.62 Supplier#000003347 UNITED KINGDOM
18344.00 Manufacturer#5
m CXS2S16i 33-454-274-8532
packages grow special orbits. regular theodolites about the carefully pe
8046.07 Supplier#000008780 FRANCE
191222.00 Manufacturer#3
AczzuE0UK9osj ,Lx0Jmh 16-473-215-6395
regular epitaphs integrate slyly.
8042.09 Supplier#000003245 RUSSIA
135705.00 Manufacturer#4
Dh8lkG39onrbOL4DyTfGw8a9oKUX3d9Y 32-836-132-8872
carefully regular instructions integrate blithely silent foxes. furiously express instructions hagg
8042.09 Supplier#000003245 RUSSIA
150729.00 Manufacturer#1
Dh8lkG39onrbOL4DyTfGw8a9oKUX3d9Y 32-836-132-8872
carefully regular instructions integrate blithely silent foxes. furiously express instructions hagg
7992.40 Supplier#000006108 FRANCE
118574.00 Manufacturer#1
8tBydnTDwUqfBFV4l3 16-974-998-8937
regular pinto beans are after
7980.65 Supplier#000001288 FRANCE
13784.00 Manufacturer#4
zE,7HgVPrCn 16-646-464-8247
unusual pinto beans cajole furiously according t
7950.37 Supplier#000008101 GERMANY
33094.00 Manufacturer#5
kkYvL6lujvjgTNG lKkaXQDYgx8lIlohj 17-627-663-8014
quickly regular requests are furiously. pending deposits wake
7937.93 Supplier#000009012 ROMANIA
83995.00 Manufacturer#2
iUiTziH,Ek3i4lwSgunXMgrcTzwdb 29-250-925-9690
blithely bold ideas haggle quickly final, regular request
7914.45 Supplier#000001013 RUSSIA
125988.00 Manufacturer#2
riRcntps4KEDtYScjpMIWeYF6mNnR 32-194-698-3365
final, ironic theodolites alongside of the ironic
7912.91 Supplier#000004211 GERMANY
159180.00 Manufacturer#5
2wQRVovHrm3,v03IKzfTd,1PYsFXQFFOG 17-266-947-7315
final requests integrate slyly above the silent, even
7912.91 Supplier#000004211 GERMANY
184210.00 Manufacturer#4
2wQRVovHrm3,v03IKzfTd,1PYsFXQFFOG 17-266-947-7315
final requests integrate slyly above the silent, even
7894.56 Supplier#000007981 GERMANY
85472.00 Manufacturer#4
NSJ96vMROAbeXP 17-963-404-3760
regular, even theodolites integrate carefully. bold, special theodolites are slyly fluffily iron
7887.08 Supplier#000009792 GERMANY
164759.00 Manufacturer#3
Y28ITVeYriT3kiGdV2K8fSZ V2UqTSH1otz 17-988-938-4296
pending, ironic packages sleep among the carefully ironic accounts. quickly final accounts
7871.50 Supplier#000007206 RUSSIA
104695.00 Manufacturer#1
3w fNCnrVmvJJE95sgWZzvW 32-432-452-7731
furiously dogged pinto beans cajole. bold, express notornis until the slyly pending
7852.45 Supplier#000005864 RUSSIA
8363.00 Manufacturer#4
WCNfBPZzSXh3h,c 32-454-883-3821
blithely regular deposits
7850.66 Supplier#000001518 UNITED KINGDOM
86501.00 Manufacturer#1
ONda3YJiHKJOC 33-730-383-3892
furiously final accounts wake carefully idle requests. even dolphins wake acc
7843.52 Supplier#000006683 FRANCE
11680.00 Manufacturer#4
2Z0lGkiv01Y00oCFwUGfviIbhzcDy 16-464-517-8943
carefully bold accounts doub

```

```

100 rows processed.
Query Processed in 0.59 seconds.

```

Ended Executing this Stream at Fri Dec 8 18:08:06 2006

```

Stream Started at 1165622885.56
Stream Ended at 1165622886.15
Stream Processed in 0.59 seconds

```

SQL statements processed: 1

2.rep

Begin Executing this Stream at Fri Dec 8 18:08:05 2006

Query : Execution Time: 0.59 started 1165622885.56 ended 1165622886.15

Ended Executing this Stream at Fri Dec 8 18:08:06 2006

```

Stream Started at 1165622885.56
Stream Ended at 1165622886.15
Stream Processed in 0.59 seconds

```

2.sql

-- using default substitutions

```

select * from (
select
s_acctbal,
s_name,
n_name,
p_partkey,
p_mfgr,
s_address,
s_phone,
s_comment
from
part,
supplier,
partsupp,
nation,
region
where
p_partkey = ps_partkey
and s_suppkey = ps_suppkey
and p_size = 15
and p_type like '%BRASS'
and s_nationkey = n_nationkey
and n_regionkey = r_regionkey
and r_name = 'EUROPE'
and ps_supplycost = (
select
min(ps_supplycost)
from
partsupp,
supplier,
nation,
region
where
p_partkey = ps_partkey
and s_suppkey = ps_suppkey
and s_nationkey = n_nationkey
and n_regionkey = r_regionkey
and r_name = 'EUROPE'
)
order by
s_acctbal desc,
n_name,
s_name,
p_partkey
)
where rownum <= 100;

```

3.log

Begin Execution at Fri Dec 8 18:08:06 2006

-- using default substitutions

```

select * from (
select
l_orderkey,
sum(l_extendedprice * (1 - l_discount)) as revenue,
o_orderdate,
o_shippriority
from

```



```

customer,
orders,
lineitem
where
c_mktsegment = 'BUILDING'
and c_custkey = o_custkey
and l_orderkey = o_orderkey
and o_orderdate < to_date('1995-03-15', 'YYYY-MM-DD')
and l_shipdate > to_date('1995-03-15', 'YYYY-MM-DD')
group by
l_orderkey,
o_orderdate,
o_shippriority
order by
revenue desc,
o_orderdate)
where rownum <= 10

```

L_ORDERKEY	REVENUE	O_ORDERDATE	O_SHIPPRIORITY
2456423.00	406181.01	1995-03-05	0.00
3459808.00	405838.70	1995-03-04	0.00
492164.00	390324.06	1995-02-19	0.00
1188320.00	384537.94	1995-03-09	0.00
2435712.00	378673.06	1995-02-26	0.00
4878020.00	378376.80	1995-03-12	0.00
5521732.00	375153.92	1995-03-13	0.00
2628192.00	373133.31	1995-02-22	0.00
993600.00	371407.46	1995-03-05	0.00
2300070.00	367371.15	1995-03-13	0.00

10 rows processed.
Query Processed in 1.30 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:07 2006

Stream Started at 1165622886.19
Stream Ended at 1165622887.49
Stream Processed in 1.30 seconds

SQL statements processed: 1

3.rep

Begin Executing this Stream at Fri Dec 8 18:08:06 2006

Query : Execution Time: 1.30 started 1165622886.19 ended 1165622887.49

Ended Executing this Stream at Fri Dec 8 18:08:07 2006

Stream Started at 1165622886.19
Stream Ended at 1165622887.49
Stream Processed in 1.30 seconds

3.sql

-- using default substitutions

```

select * from (
select
l_orderkey,
sum(l_extendedprice * (1 - l_discount)) as revenue,
o_orderdate,
o_shippriority
from
customer,
orders,
lineitem
where
c_mktsegment = 'BUILDING'
and c_custkey = o_custkey
and l_orderkey = o_orderkey
and o_orderdate < to_date('1995-03-15', 'YYYY-MM-DD')
and l_shipdate > to_date('1995-03-15', 'YYYY-MM-DD')
group by
l_orderkey,
o_orderdate,
o_shippriority
order by
revenue desc,
o_orderdate)
where rownum <= 10;

```

4.log

Begin Execution at Fri Dec 8 18:08:07 2006

-- using default substitutions

```

select
o_orderpriority,
count(*) as order_count
from
orders
where
o_orderdate >= to_date('1993-07-01', 'YYYY-MM-DD')
and o_orderdate < add_months(to_date('1993-07-01', 'YYYY-MM-DD'),3)
and exists (
select
*
from
lineitem
where
l_orderkey = o_orderkey
and l_commitdate < l_receiptdate
)
group by
o_orderpriority
order by
o_orderpriority

O_ORDERPRIORITY ORDER_COUNT
1-URGENT 10594.00
2-HIGH 10476.00
3-MEDIUM 10410.00
4-NOT SPECIFIED 10556.00
5-LOW 10487.00

```

5 rows processed.
Query Processed in 1.17 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:08 2006

Stream Started at 1165622887.53
Stream Ended at 1165622888.70
Stream Processed in 1.17 seconds

SQL statements processed: 1

4.rep

Begin Executing this Stream at Fri Dec 8 18:08:07 2006

Query : Execution Time: 1.17 started 1165622887.53 ended 1165622888.70

Ended Executing this Stream at Fri Dec 8 18:08:08 2006

Stream Started at 1165622887.53
Stream Ended at 1165622888.70
Stream Processed in 1.17 seconds

4.sql

-- using default substitutions

```

select
o_orderpriority,
count(*) as order_count
from
orders
where
o_orderdate >= to_date('1993-07-01', 'YYYY-MM-DD')
and o_orderdate < add_months(to_date('1993-07-01', 'YYYY-MM-DD'),3)
and exists (
select
*
from
lineitem
where
l_orderkey = o_orderkey
and l_commitdate < l_receiptdate
)
group by
o_orderpriority
order by
o_orderpriority;

```

5.log

Begin Execution at Fri Dec 8 18:08:08 2006

-- using default substitutions

```
select
n_name,
sum(l_extendedprice * (1 - l_discount)) as revenue
from
customer,
orders,
lineitem,
supplier,
nation,
region
where
c_custkey = o_custkey
and l_orderkey = o_orderkey
and l_suppkey = s_suppkey
and c_nationkey = s_nationkey
and s_nationkey = n_nationkey
and n_regionkey = r_regionkey
and r_name = 'ASIA'
and o_orderdate >= to_date('1994-01-01', 'YYYY-MM-DD')
and o_orderdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
group by
n_name
order by
revenue desc
```

N_NAME	REVENUE
INDONESIA	55502041.17
VIETNAM	55295087.00
CHINA	53724494.26
INDIA	52035512.00
JAPAN	45410175.70

5 rows processed.
Query Processed in 1.66 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:10 2006

Stream Started at 1165622888.73
Stream Ended at 1165622890.40
Stream Processed in 1.66 seconds

SQL statements processed: 1

5.rep

Begin Executing this Stream at Fri Dec 8 18:08:08 2006

Query : Execution Time: 1.66 started 1165622888.73 ended 1165622890.40

Ended Executing this Stream at Fri Dec 8 18:08:10 2006

Stream Started at 1165622888.73
Stream Ended at 1165622890.40
Stream Processed in 1.66 seconds

5.sql

-- using default substitutions

```
select
n_name,
sum(l_extendedprice * (1 - l_discount)) as revenue
from
customer,
orders,
lineitem,
supplier,
nation,
region
where
c_custkey = o_custkey
and l_orderkey = o_orderkey
and l_suppkey = s_suppkey
and c_nationkey = s_nationkey
```

```
and s_nationkey = n_nationkey
and n_regionkey = r_regionkey
and r_name = 'ASIA'
and o_orderdate >= to_date('1994-01-01', 'YYYY-MM-DD')
and o_orderdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
group by
n_name
order by
revenue desc;
```

6.log

Begin Execution at Fri Dec 8 18:08:10 2006

-- using default substitutions

```
select
sum(l_extendedprice * l_discount) as revenue
from
lineitem
where
l_shipdate >= to_date('1994-01-01', 'YYYY-MM-DD')
and l_shipdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
and l_discount between .06 - 0.01 and .06 + 0.01
and l_quantity < 24
```

REVENUE
123141078.23

1 row processed.
Query Processed in 0.13 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:10 2006

Stream Started at 1165622890.43
Stream Ended at 1165622890.56
Stream Processed in 0.13 seconds

SQL statements processed: 1

6.rep

Begin Executing this Stream at Fri Dec 8 18:08:10 2006

Query : Execution Time: 0.13 started 1165622890.43 ended 1165622890.56

Ended Executing this Stream at Fri Dec 8 18:08:10 2006

Stream Started at 1165622890.43
Stream Ended at 1165622890.56
Stream Processed in 0.13 seconds

6.sql

-- using default substitutions

```
select
sum(l_extendedprice * l_discount) as revenue
from
lineitem
where
l_shipdate >= to_date('1994-01-01', 'YYYY-MM-DD')
and l_shipdate < add_months(to_date('1994-01-01', 'YYYY-MM-DD'), 12)
and l_discount between .06 - 0.01 and .06 + 0.01
and l_quantity < 24;
```

7.log

Begin Execution at Fri Dec 8 18:08:10 2006

-- using default substitutions

```
select
supp_nation,
cust_nation,
l_year,
```

```

sum(volume) as revenue
from
(
select
n1.n_name as supp_nation,
n2.n_name as cust_nation,
to_number(to_char(L_shipdate,yyyy)) as L_year,
L_extendedprice * (1 - L_discount) as volume
from
supplier,
lineitem,
orders,
customer,
nation n1,
nation n2
where
s_suppkey = l_suppkey
and o_orderkey = l_orderkey
and c_custkey = o_custkey
and s_nationkey = n1.n_nationkey
and c_nationkey = n2.n_nationkey
and (
(n1.n_name = 'FRANCE' and n2.n_name = 'GERMANY')
or (n1.n_name = 'GERMANY' and n2.n_name = 'FRANCE')
)
and L_shipdate between to_date('1995-01-01', 'YYYY-MM-DD') and to_date('1996-12-31', 'YYYY-MM-DD')
) shipping
group by
supp_nation,
cust_nation,
L_year
order by
supp_nation,
cust_nation,
L_year

```

SUPP_NATION	CUST_NATION	L_YEAR
REVENUE		
FRANCE	GERMANY	1995.00
54639732.73		
FRANCE	GERMANY	1996.00
54633083.31		
GERMANY	FRANCE	1995.00
52531746.67		
GERMANY	FRANCE	1996.00
52520549.02		

4 rows processed.
Query Processed in 0.88 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:11 2006

Stream Started at 1165622890.59
Stream Ended at 1165622891.48
Stream Processed in 0.88 seconds

SQL statements processed: 1

7.rep

Begin Executing this Stream at Fri Dec 8 18:08:10 2006

Query : Execution Time: 0.88 started 1165622890.59 ended 1165622891.48

Ended Executing this Stream at Fri Dec 8 18:08:11 2006

Stream Started at 1165622890.59
Stream Ended at 1165622891.48
Stream Processed in 0.88 seconds

7.sql

-- using default substitutions

```

select
supp_nation,
cust_nation,
L_year,
sum(volume) as revenue
from
(
select
n1.n_name as supp_nation,

```

```

n2.n_name as cust_nation,
to_number(to_char(L_shipdate,yyyy)) as L_year,
L_extendedprice * (1 - L_discount) as volume
from
supplier,
lineitem,
orders,
customer,
nation n1,
nation n2
where
s_suppkey = l_suppkey
and o_orderkey = l_orderkey
and c_custkey = o_custkey
and s_nationkey = n1.n_nationkey
and c_nationkey = n2.n_nationkey
and (
(n1.n_name = 'FRANCE' and n2.n_name = 'GERMANY')
or (n1.n_name = 'GERMANY' and n2.n_name = 'FRANCE')
)
and L_shipdate between to_date('1995-01-01', 'YYYY-MM-DD') and to_date('1996-12-31', 'YYYY-MM-DD')
) shipping
group by
supp_nation,
cust_nation,
L_year
order by
supp_nation,
cust_nation,
L_year;

```

8.log

Begin Execution at Fri Dec 8 18:08:11 2006

-- using default substitutions

```

select
o_year,
sum(case when nation='BRAZIL' then volume else 0 end) / sum(volume)
as mkt_share
from
(
select
to_number(to_char(o_orderdate, 'yyyy')) as o_year,
L_extendedprice * (1 - L_discount) as volume,
n2.n_name as nation
from
part,
supplier,
lineitem,
orders,
customer,
nation n1,
nation n2,
region
where
p_partkey = l_partkey
and s_suppkey = l_suppkey
and l_orderkey = o_orderkey
and o_custkey = c_custkey
and c_nationkey = n1.n_nationkey
and n1.n_regionkey = r_regionkey
and r_name = 'AMERICA'
and s_nationkey = n2.n_nationkey
and o_orderdate between to_date('1995-01-01', 'YYYY-MM-DD') and to_date('1996-12-31', 'YYYY-MM-DD')
and p_type = 'ECONOMY ANODIZED STEEL'
) all_nations
group by
o_year
order by
o_year

```

O_YEAR	MKT_SHARE
1995.00	0.03
1996.00	0.04

2 rows processed.
Query Processed in 7.37 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:18 2006

Stream Started at 1165622891.51
Stream Ended at 1165622898.88

Stream Processed in 7.37 seconds

SQL statements processed: 1

8.rep

Begin Executing this Stream at Fri Dec 8 18:08:11 2006

Query : Execution Time: 7.37 started 1165622891.51 ended 1165622898.88

Ended Executing this Stream at Fri Dec 8 18:08:18 2006

Stream Started at 1165622891.51

Stream Ended at 1165622898.88

Stream Processed in 7.37 seconds

8.sql

-- using default substitutions

```

select
  o_year,
  sum(case when nation='BRAZIL' then volume else 0 end) / sum(volume)
  as mkt_share
from
  (
    select
      to_number(to_char(o_orderdate, 'yyyy')) as o_year,
      l_extendedprice * (1 - l_discount) as volume,
      n2.n_name as nation
    from
      part,
      supplier,
      lineitem,
      orders,
      customer,
      nation n1,
      nation n2,
      region
    where
      p_partkey = l_partkey
      and s_suppkey = l_suppkey
      and l_orderkey = o_orderkey
      and o_custkey = c_custkey
      and c_nationkey = n1.n_nationkey
      and n1.n_regionkey = r_regionkey
      and r_name = 'AMERICA'
      and s_nationkey = n2.n_nationkey
      and o_orderdate between to_date('1995-01-01', 'YYYY-MM-DD') and to_date
      ('1996-12-31', 'YYYY-MM-DD')
      and p_type = 'ECONOMY ANODIZED STEEL'
  ) all_nations
group by
  o_year
order by
  o_year;

```

9.log

Begin Execution at Fri Dec 8 18:08:18 2006

-- using default substitutions

```

select
  nation,
  o_year,
  sum(amount) as sum_profit
from
  (
    select
      n_name as nation,
      to_number(to_char(o_orderdate, 'yyyy')) as o_year,
      l_extendedprice * (1 - l_discount) - ps_supplycost * l_quantity as amount
    from
      part,
      supplier,
      lineitem,
      partsupp,
      nation
  )
where
  s_suppkey = l_suppkey
  and ps_suppkey = l_suppkey

```

```

and ps_partkey = l_partkey
and p_partkey = l_partkey
and o_orderkey = l_orderkey
and s_nationkey = n_nationkey
and p_name like '%green%'
) profit
group by
  nation,
  o_year
order by
  nation,
  o_year desc

```

NATION	O_YEAR	SUM_PROFIT
ALGERIA	1998.00	31342867.23
ALGERIA	1997.00	57138193.02
ALGERIA	1996.00	56140140.13
ALGERIA	1995.00	53051469.65
ALGERIA	1994.00	53867582.13
ALGERIA	1993.00	54942718.13
ALGERIA	1992.00	54628034.71
ARGENTINA	1998.00	30211185.71
ARGENTINA	1997.00	50805741.75
ARGENTINA	1996.00	51923746.58
ARGENTINA	1995.00	49298625.77
ARGENTINA	1994.00	50835610.11
ARGENTINA	1993.00	51646079.18
ARGENTINA	1992.00	50410314.99
BRAZIL	1998.00	27217924.38
BRAZIL	1997.00	48378669.20
BRAZIL	1996.00	50482870.36
BRAZIL	1995.00	47623383.63
BRAZIL	1994.00	47840165.73
BRAZIL	1993.00	49054694.04
BRAZIL	1992.00	48667639.08
CANADA	1998.00	30379833.77
CANADA	1997.00	50465052.31
CANADA	1996.00	52560501.39
CANADA	1995.00	52375332.81
CANADA	1994.00	52600364.66
CANADA	1993.00	52644504.07
CANADA	1992.00	53932871.70
CHINA	1998.00	31075466.16
CHINA	1997.00	50551874.45
CHINA	1996.00	51039293.88
CHINA	1995.00	49287534.62
CHINA	1994.00	50851090.07
CHINA	1993.00	54229629.83
CHINA	1992.00	52400529.37
EGYPT	1998.00	29054433.39
EGYPT	1997.00	50627611.45
EGYPT	1996.00	49542212.84
EGYPT	1995.00	48311550.32
EGYPT	1994.00	49790644.74
EGYPT	1993.00	48904292.97
EGYPT	1992.00	49434932.62
ETHIOPIA	1998.00	28040717.27
ETHIOPIA	1997.00	47455009.87
ETHIOPIA	1996.00	46491097.57
ETHIOPIA	1995.00	46804449.30
ETHIOPIA	1994.00	48516143.92
ETHIOPIA	1993.00	46551891.56
ETHIOPIA	1992.00	44934648.64

```

:
:
:
<lines deleted >
:
:
:

```

SAUDI ARABIA	1996.00	52543737.82
SAUDI ARABIA	1995.00	52938696.53
SAUDI ARABIA	1994.00	51389601.97
SAUDI ARABIA	1993.00	52937508.88
SAUDI ARABIA	1992.00	54843459.64
UNITED KINGDOM	1998.00	28494874.00
UNITED KINGDOM	1997.00	49381810.90
UNITED KINGDOM	1996.00	51386853.96
UNITED KINGDOM	1995.00	51509586.79
UNITED KINGDOM	1994.00	48086499.71
UNITED KINGDOM	1993.00	49166827.22
UNITED KINGDOM	1992.00	49349122.08
UNITED STATES	1998.00	25126238.95
UNITED STATES	1997.00	50077306.42
UNITED STATES	1996.00	48048649.47
UNITED STATES	1995.00	48809032.42
UNITED STATES	1994.00	49296747.18
UNITED STATES	1993.00	48029946.80
UNITED STATES	1992.00	48671944.50
VIETNAM	1998.00	30442736.06
VIETNAM	1997.00	50309179.79
VIETNAM	1996.00	50488161.41

VIETNAM	1995.00	49658284.61
VIETNAM	1994.00	50596057.26
VIETNAM	1993.00	50953919.15
VIETNAM	1992.00	49613838.32

175 rows processed.
Query Processed in 8.23 seconds.

Ended Executing this Stream at Fri Dec 8 18:08:27 2006

Stream Started at 1165622898.92
Stream Ended at 1165622907.14
Stream Processed in 8.23 seconds

SQL statements processed: 1

9.rep

Begin Executing this Stream at Fri Dec 8 18:08:18 2006

Query : Execution Time: 8.23 started 1165622898.92 ended 1165622907.14

Ended Executing this Stream at Fri Dec 8 18:08:27 2006

Stream Started at 1165622898.92
Stream Ended at 1165622907.14
Stream Processed in 8.23 seconds

9.sql

-- using default substitutions

```

select
  nation,
  o_year,
  sum(amount) as sum_profit
from
  (
    select
      n_name as nation,
      to_number(to_char(o_orderdate, 'yyyy')) as o_year,
      l_extendedprice * (1 - l_discount) - ps_supplycost * l_quantity as amount
    from
      part,
      supplier,
      partsupp,
      orders,
      nation
    where
      s_suppkey = l_suppkey
      and ps_suppkey = l_suppkey
      and ps_partkey = l_partkey
      and p_partkey = l_partkey
      and o_orderkey = l_orderkey
      and s_nationkey = n_nationkey
      and p_name like '%green%'
  ) profit
group by
  nation,
  o_year
order by
  nation,
  o_year desc;

```

Appendix E: Seed and Input Parameters

seed

1214160949

qp1.0

14	1995-10-01						
2	4	TIN	ASIA				
9	midnight						
20	tomato	1993-01-01	MOROCCO				
6	1997-01-01	0.09	25				
17	Brand#12	MED PKG					
18	313						
8	ROMANIA	EUROPE	LARGE BURNISHED STEEL				
21	EGYPT						
13	unusual	accounts					
3	FURNITURE	1995-03-18					
22	16	20	29	27	19	30	
	32						
16	Brand#11	MEDIUM BURNISHED	20	8	4		
	32	22	9	33	50		
4	1995-11-01						
11	ETHIOPIA	0.0000003333					
15	1995-02-01						
1	101						
10	1993-10-01						
19	Brand#35	Brand#14	Brand#34	7	10	29	
5	ASIA	1997-01-01					
7	VIETNAM	ROMANIA					
12	AIR	TRUCK	1995-01-01				

qp1.1

21	VIETNAM						
3	MACHINERY		1995-03-04				
18	315						
5	EUROPE	1997-01-01					
11	CHINA	0.0000003333					
7	JORDAN	IRAQ					
6	1997-01-01	0.06	24				
20	green	1997-01-01	ETHIOPIA				
17	Brand#14	JUMBO CASE					
12	REG AIR	TRUCK	1995-01-01				
16	Brand#41	ECONOMY PLATED	17	46	1		
	11	2	50	8	9		
15	1997-09-01						
13	unusual	accounts					
10	1994-07-01						
2	42	COPPER	AFRICA				
8	IRAQ	MIDDLE EAST	MEDIUM BRUSHED COPPER				
14	1996-01-01						
19	Brand#42	Brand#52	Brand#24	2	11	25	
9	lime						
22	28	21	20	13	14	12	
	10						
1	109						
4	1993-08-01						

qp1.2

6	1997-01-01	0.03	24				
17	Brand#11	JUMBO BAG					
14	1996-04-01						
16	Brand#31	STANDARD BRUSHED	28	42	48		
	41	15	5	33	17		
19	Brand#44	Brand#35	Brand#23	8	12	21	
10	1993-04-01						
9	khaki						
2	29	BRASS	EUROPE				
15	1995-06-01						
8	CANADA	AMERICA	MEDIUM PLATED COPPER				
5	MIDDLE EAST		1997-01-01				
22	25	31	21	23	15	24	
	16						
12	SHIP	MAIL	1996-01-01				
7	ETHIOPIA	CANADA					
13	unusual	accounts					
18	312						
1	117						
4	1996-03-01						
20	rosy	1995-01-01	SAUDI ARABIA				
3	BUILDING	1995-03-20					
11	FRANCE	0.0000003333					
21	KENYA						

qp1.3

8	SAUDI ARABIA	MIDDLE EAST	MEDIUM				
	ANODIZED COPPER						
5	AFRICA	1993-01-01					
4	1993-11-01						
6	1993-01-01	0.09	25				
17	Brand#13	JUMBO PKG					
7	RUSSIA	SAUDI ARABIA					
1	64						
18	314						
22	19	15	18	10	30	29	
	14						
14	1996-08-01						
9	green						
10	1994-01-01						
15	1993-02-01						
11	ROMANIA	0.0000003333					
20	cornflower	1994-01-01	INDONESIA				
2	17	NICKEL	AFRICA				
21	FRANCE						
19	Brand#41	Brand#22	Brand#22	3	13	28	
13	unusual	accounts					
16	Brand#11	LARGE ANODIZED	50	19	13		
	20	30	34	12	15		
12	FOB	MAIL	1996-01-01				
3	MACHINERY		1995-03-06				

qp1.4

5	AMERICA	1993-01-01					
21	UNITED KINGDOM						
14	1996-11-01						
19	Brand#54	Brand#55	Brand#11	8	14	24	
15	1995-09-01						
17	Brand#15	WRAP CASE					
12	TRUCK	MAIL	1996-01-01				
6	1993-01-01	0.06	24				
4	1996-06-01						
9	floral						
8	JAPAN	ASIA	SMALL POLISHED COPPER				
16	Brand#41	PROMO PLATED	41	31	47		
	33	12	32	37	21		
11	GERMANY	0.0000003333					
2	5	TIN	EUROPE				
10	1994-11-01						
18	315						
1	72						
13	unusual	deposits					
7	KENYA	JAPAN					
22	34	13	18	28	15	17	
	10						
3	BUILDING	1995-03-22					
20	navy	1997-01-01	UNITED STATES				

qp1.5

21	MOROCCO						
15	1993-06-01						
4	1994-03-01						
6	1993-01-01	0.04	24				
7	FRANCE	CANADA					
16	Brand#31	SMALL POLISHED	36	6	32		
	40	47	23	18	25		
19	Brand#51	Brand#43	Brand#11	3	15	21	
18	313						
14	1997-02-01						
22	28	11	13	10	20	25	
	32						
11	SAUDI ARABIA	0.0000003333					
13	unusual	deposits					
3	HOUSEHOLD		1995-03-08				
1	80						
2	43	COPPER	AMERICA				
5	ASIA	1993-01-01					
8	CANADA	AMERICA	SMALL BURNISHED COPPER				
20	aquamarine	1996-01-01	KENYA				
12	RAIL	MAIL	1997-01-01				
17	Brand#12	WRAP BAG					
10	1993-08-01						

9	dark							

qp1.6								
10	1994-05-01							
3	AUTOMOBILE		1995-03-24					
15	1996-01-01							
13	unusual deposits							
6	1993-01-01	0.09	25					
8	SAUDI ARABIA		MIDDLE EAST		SMALL ANODIZED			

9	chocolate							
7	UNITED KINGDOM		SAUDI ARABIA					
4	1996-10-01							
11	INDIA	0.0000003333						
22	11	18	31	30	24	28		
18	10							
12	314							
AIR	FOB		1997-01-01					
1	88							
5	EUROPE	1993-01-01						
16	Brand#11	ECONOMY ANODIZED	5	33	3			
9	47	44	29	13				
2	30	STEEL	EUROPE					
14	1997-05-01							
19	Brand#53	Brand#21	Brand#15	9	16	28		
20	lavender	1994-01-01	EGYPT					
17	Brand#14	WRAP PKG						
21	GERMANY							

qp1.7								
18	312							
8	JAPAN	ASIA	STANDARD POLISHED TIN					
20	slate	1997-01-01	CHINA					
21	UNITED STATES							
2	18	NICKEL	AMERICA					
4	1994-07-01							
22	28	19	27	11	34	20		
17	Brand#11	SM CASE						
1	96							
11	VIETNAM	0.0000003333						
9	blush							
19	Brand#15	Brand#54	Brand#54	4	17	24		
3	HOUSEHOLD		1995-03-10					
13	express deposits							
5	MIDDLE EAST		1993-01-01					
7	MOROCCO	JAPAN						
10	1993-02-01							
16	Brand#41	STANDARD BURNISHED	22	16	39			
6	24	5	36	13	19			
14	1993-01-01	0.07	25					
15	1997-08-01							
12	1993-09-01							
REG AIR	FOB		1997-01-01					

qp1.8								
19	Brand#12	Brand#42	Brand#53	9	18	20		
1	104							
15	1996-04-01							
17	Brand#13	SM BAG						
5	AMERICA	1994-01-01						
8	EGYPT	MIDDLE EAST			STANDARD BURNISHED TIN			
9	azure							
12	SHIP	FOB	1997-01-01					
14	1997-12-01							
7	GERMANY	EGYPT						
4	1997-02-01							
3	AUTOMOBILE		1995-03-26					
20	drab	1996-01-01	INDIA					
16	Brand#31	MEDIUM POLISHED	4	1	32			
16	36	17	5	24				
6	1994-01-01	0.04	24					
22	12	27	23	11	17	20		
10	1993-11-01							
13	express deposits							
2	6	TIN	MIDDLE EAST					
21	PERU							
18	313							
11	INDONESIA	0.0000003333						

qp1.9								
8	VIETNAM	ASIA	PROMO BRUSHED TIN					
13	express packages							
2	44	COPPER	AMERICA					
20	pink	1994-01-01	UNITED KINGDOM					
17	Brand#15	SM PKG						
3	FURNITURE	1995-03-12						
6	1994-01-01	0.09	25					

21	INDONESIA							
18	315							
11	RUSSIA	0.0000003333						
19	Brand#14	Brand#25	Brand#43	4	19	27		
10	1994-09-01							
15	1994-01-01							
4	1994-11-01							
22	28	13	20	22	31	12		
10								
1	112							
7	UNITED STATES		VIETNAM					
12	MAIL	FOB	1993-01-01					
9	wheat							
14	1993-03-01							
5	ASIA	1994-01-01						
16	Brand#11	ECONOMY BRUSHED	7	35	13			
46	40	21	20	16				

qp2.0								
14	1995-10-01							
2	4	TIN	ASIA					
9	midnight							
20	tomato	1993-01-01	MOROCCO					
6	1997-01-01	0.09	25					
17	Brand#12	MED PKG						
18	313							
8	ROMANIA	EUROPE	LARGE BURNISHED STEEL					
21	EGYPT							
13	unusual accounts							
3	FURNITURE	1995-03-18						
22	16	20	29	27	19	30		
16	Brand#11	MEDIUM BURNISHED	20	8	4			
32	22	9	33	50				
4	1995-11-01							
11	ETHIOPIA	0.0000003333						
15	1995-02-01							
1	101							
10	1993-10-01							
19	Brand#35	Brand#14	Brand#34	7	10	29		
5	ASIA	1997-01-01						
7	VIETNAM	ROMANIA						
12	AIR	TRUCK	1995-01-01					

qp2.1								
21	VIETNAM							
3	MACHINERY		1995-03-04					
18	315							
5	EUROPE	1997-01-01						
11	CHINA	0.0000003333						
7	JORDAN	IRAQ						
6	1997-01-01	0.06	24					
20	green	1997-01-01	ETHIOPIA					
17	Brand#14	JUMBO CASE						
12	REG AIR	TRUCK	1995-01-01					
16	Brand#41	ECONOMY PLATED	17	46	1			
11	2	50	8	9				
15	1997-09-01							
13	unusual accounts							
10	1994-07-01							
2	42	COPPER	AFRICA					
8	IRAQ	MIDDLE EAST	MEDIUM BRUSHED COPPER					
14	1996-01-01							
19	Brand#42	Brand#52	Brand#24	2	11	25		
9	lime							
22	28	21	20	13	14	12		
10								
1	109							
4	1993-08-01							

qp2.2								
6	1997-01-01	0.03	24					
17	Brand#11	JUMBO BAG						
14	1996-04-01							
16	Brand#31	STANDARD BRUSHED	28	42	48			
41	15	5	33	17				
19	Brand#44	Brand#35	Brand#23	8	12	21		
10	1993-04-01							
9	khaki							
2	29	BRASS	EUROPE					
15	1995-06-01							
8	CANADA	AMERICA	MEDIUM PLATED COPPER					
5	MIDDLE EAST		1997-01-01					
22	25	31	21	23	15	24		
12	16	SHIP	MAIL	1996-01-01				
7	ETHIOPIA	CANADA						
13	unusual accounts							
18	312							
1	117							

4	1996-03-01							
20	rosy	1995-01-01	SAUDI ARABIA					
3	BUILDING	1995-03-20						
11	FRANCE	0.0000003333						
21	KENYA							
qp2.3								
8	SAUDI ARABIA		MIDDLE EAST		MEDIUM			
ANODIZED COPPER								
5	AFRICA	1993-01-01						
4	1993-11-01							
6	1993-01-01	0.09	25					
17	Brand#13	JUMBO PKG						
7	RUSSIA	SAUDI ARABIA						
1	64							
18	314							
22	19	15	18	10	30	29		
	14							
14	1996-08-01							
9	green							
10	1994-01-01							
15	1993-02-01							
11	ROMANIA	0.0000003333						
20	cornflower	1994-01-01	INDONESIA					
2	NICKEL		AFRICA					
21	FRANCE							
19	Brand#41	Brand#22	Brand#22	3	13	28		
13	unusual	accounts						
16	Brand#11	LARGE ANODIZED		50	19	13		
	20	30	34	12	15			
12	FOB	MAIL	1996-01-01					
3	MACHINERY		1995-03-06					
qp2.4								
5	AMERICA	1993-01-01						
21	UNITED KINGDOM							
14	1996-11-01							
19	Brand#54	Brand#55	Brand#11	8	14	24		
15	1995-09-01							
17	Brand#15	WRAP CASE						
12	TRUCK	MAIL	1996-01-01					
6	1993-01-01	0.06	24					
4	1996-06-01							
9	floral							
8	JAPAN	ASIA	SMALL POLISHED COPPER					
16	Brand#41	PROMO PLATED		41	31	47		
	33	12	32	37	21			
11	GERMANY	0.0000003333						
2	5	TIN	EUROPE					
10	1994-11-01							
18	315							
1	72							
13	unusual	deposits						
7	KENYA	JAPAN						
22	34	13	18	28	15	17		
	10							
3	BUILDING	1995-03-22						
20	navy	1997-01-01	UNITED STATES					
qp2.5								
21	MOROCCO							
15	1993-06-01							
4	1994-03-01							
6	1993-01-01	0.04	24					
7	FRANCE	CANADA						
16	Brand#31	SMALL POLISHED		36	6	32		
	40	47	23	18	25			
19	Brand#51	Brand#43	Brand#11	3	15	21		
18	313							
14	1997-02-01							
22	28	11	13	10	20	25		
	32							
11	SAUDI ARABIA		0.0000003333					
13	unusual	deposits						
3	HOUSEHOLD		1995-03-08					
1	80							
2	43	COPPER	AMERICA					
5	ASIA	1993-01-01						
8	CANADA	AMERICA	SMALL BURNISHED COPPER					
20	aquamarine	1996-01-01	KENYA					
12	RAIL	MAIL	1997-01-01					
17	Brand#12	WRAP BAG						
10	1993-08-01							
9	dark							
qp2.6								
10	1994-05-01							
3	AUTOMOBILE		1995-03-24					
15	1996-01-01							

13	unusual	deposits						
6	1993-01-01	0.09	25					
8	SAUDI ARABIA		MIDDLE EAST					SMALL ANODIZED
TIN								
9	chocolate							
7	UNITED KINGDOM		SAUDI ARABIA					
4	1996-10-01							
11	INDIA	0.0000003333						
22	11	18	31	30	24	28		
	10							
18	314							
12	AIR	FOB	1997-01-01					
1	88							
5	EUROPE	1993-01-01						
16	Brand#11	ECONOMY ANODIZED		5	33	3		
	9	47	44	29	13			
2	30	STEEL	EUROPE					
14	1997-05-01							
19	Brand#53	Brand#21	Brand#15	9	16	28		
20	lavender	1994-01-01	EGYPT					
17	Brand#14	WRAP PKG						
21	GERMANY							
qp2.7								
18	312							
8	JAPAN	ASIA	STANDARD POLISHED TIN					
20	slate	1997-01-01	CHINA					
21	UNITED STATES							
2	18	NICKEL	AMERICA					
4	1994-07-01							
22	28	19	27	11	34	20		
	30							
17	Brand#11	SM CASE						
1	96							
11	VIETNAM	0.0000003333						
9	blush							
19	Brand#15	Brand#54	Brand#54	4	17	24		
3	HOUSEHOLD		1995-03-10					
13	express	deposits						
5	MIDDLE EAST		1993-01-01					
7	MOROCCO	JAPAN						
10	1993-02-01							
16	Brand#41	STANDARD BURNISHED		22	16	39		
	24	5	36	13	19			
6	1993-01-01	0.07	25					
14	1997-08-01							
15	1993-09-01							
12	REG AIR	FOB	1997-01-01					
qp2.8								
19	Brand#12	Brand#42	Brand#53	9	18	20		
1	104							
15	1996-04-01							
17	Brand#13	SM BAG						
5	AMERICA	1994-01-01						
8	EGYPT	MIDDLE EAST						STANDARD BURNISHED TIN
9	azure							
12	SHIP	FOB	1997-01-01					
14	1997-12-01							
7	GERMANY	EGYPT						
4	1997-02-01							
3	AUTOMOBILE		1995-03-26					
20	drab	1996-01-01	INDIA					
16	Brand#31	MEDIUM POLISHED		4	1	32		
	16	36	17	5	24			
6	1994-01-01	0.04	24					
22	12	27	23	11	17	20		
	31							
10	1993-11-01							
13	express	deposits						
2	6	TIN	MIDDLE EAST					
21	PERU							
18	313							
11	INDONESIA	0.0000003333						
qp2.9								
8	VIETNAM	ASIA	PROMO BRUSHED TIN					
13	express	packages						
2	44	COPPER	AMERICA					
20	pink	1994-01-01	UNITED KINGDOM					
17	Brand#15	SM PKG						
3	FURNITURE	1995-03-12						
6	1994-01-01	0.09	25					
21	INDONESIA							
18	315							
11	RUSSIA	0.0000003333						
19	Brand#14	Brand#25	Brand#43	4	19	27		
10	1994-09-01							
15	1994-01-01							
4	1994-11-01							

22	28	13	20	22	31	12
	10					
1	112					
7	UNITED STATES		VIETNAM			
12	MAIL	FOB	1993-01-01			
9	wheat					
14	1993-03-01					
5	ASIA	1994-01-01				
16	Brand#11	ECONOMY BRUSHED	7	35	13	
	46	40	21	20	16	

seed						

1214160949						

Appendix F: Benchmark Scripts

```

-----
runTPCHbuild
-----
#!/bin/ksh
. $KIT_DIR/env

ECHO=echo

sqlplus=$ORACLE_HOME/bin/sqlplus
GTIME=${KIT_DIR}/utils/gtime

RUN_ID_FILE=${KIT_DIR}/audit/r_id

if [ ! -f $RUN_ID_FILE ]
then
    echo "0" > $RUN_ID_FILE
fi

RUN_ID=`cat $RUN_ID_FILE`
#RUN_ID=expr $RUN_ID + 1
RUN_ID=expr $RUN_ID + 1
echo $RUN_ID > $RUN_ID_FILE

OUT_DIR=${KIT_DIR}/audit/tests/$RUN_ID
if [ ! -d $OUT_DIR ]
then
    mkdir $OUT_DIR
fi

SCRIPT_LOG_FILE=${OUT_DIR}/main.out
RDB_TABLES=${OUT_DIR}/rdbtablest
FIRST_TEN=${OUT_DIR}/firstten
LD1DBCRE=${OUT_DIR}/Ld1dbcre
LD2SCTSO=${OUT_DIR}/Ld2sctso
LD3DAPOP=${OUT_DIR}/Ld3dapop

echo Start TPC-H Benchmark SEQUENCE NUMBER: $RUN_ID > $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE
echo "Starting a new Oracle log file:
$ORACLE_HOME/rdbms/log/alert_${ORACLE_SID}.log" >> $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE
###
mv $ORACLE_HOME/rdbms/log/alert_${ORACLE_SID}.log
$ORACLE_HOME/rdbms/log/alert_${ORACLE_SID}.log.preAudit.$RUN_ID
touch $ORACLE_HOME/rdbms/log/alert_${ORACLE_SID}.log
#home/oracle/kit/schema/10.0/build/dbcre_10gr2_cclass.sh >> $LD1DBCRE
#home/oracle/kit/schema/10.0/build/tscrc_10gr2.sh >> $LD2SCTSO
#~/frame/bin/2start
STIME=$GTIME
echo "Start: timed load portion `date`" >> $SCRIPT_LOG_FILE
/home/oracle/kit/schema/10.0/build/dapop_10gr2_mp2.sh >> $LD3DAPOP
/home/oracle/kit/schema/10.0/build/create_et2_driver.sh >> $LD3DAPOP
$KIT_DIR/audit/gen_seed.sh $KIT_DIR/audit/seed
echo Generated seed: `cat $KIT_DIR/audit/seed` >> $SCRIPT_LOG_FILE
echo "End: timed load portion `date`" >> $SCRIPT_LOG_FILE
-----
runTPCHpt
-----
#!/bin/ksh
. $KIT_DIR/env
#ECHO=/bin/echo
SCRIPT_DIR=${KIT_DIR}/scripts
SQL_DIR=${KIT_DIR}/sql
UPD_DIR=${KIT_DIR}/update
SRC_DIR=${KIT_DIR}/utils
QRY_DIR=${KIT_DIR}/queries # this is the location of the query template file
QGEN_DIR=${KIT_DIR}/dbgen
QGEN=${QGEN_DIR}/qgen
QEXEC=${SRC_DIR}

DSS_QUERY=${KIT_DIR}/queries
export DSS_QUERY

UPD_SQL=${UPD_DIR}/sql
UPD_SPT=${UPD_DIR}/scripts
UPD_SRC=${UPD_DIR}/source
UPD_DAT=${UPD_DIR}/data

TPCD_BIN=${KIT_DIR}/audit/bin

GTIME=${SRC_DIR}/gtime
SEED_FILE=${KIT_DIR}/audit/seed

```

```

DF=/dev/null
HID=1
INTERVAL=60
COUNT=1200

# The defaults

QPROG=${QEXEC}/qexec

usage () {

echo ""
echo "Usage: $0 [-p <program for query stream>] [-u1 <program for UF1>]"
echo "          [-u2 <program for UF2>] [-o] [-s] [-h] [-u <user/password>]"
echo "          <scale factor> <run_number>"
echo ""
echo "scale factor    : The scale factor of the run."
echo "update ||ism    : The parallelism to use for the UFs."
echo ""
echo "-p <program>    : Program for Query Stream."
echo "                Default is $QPROG."
echo "-u1 <program>   : Program for UF1."
echo "                Default is $U1PROG."
echo "-u2 <program>   : Program for UF2."
echo "                Default is $U2PROG."
echo "-o              : Collect Oracle statistics."
echo "-s              : Collect System statistics."
echo "-u <user/passwd> : User/Password. Default is tpch/tpch."
echo "-h              : Displays this message."
}

set -- `getopt "p:u1:u2:osu:h" "$@"` || usage

while :
do
    case "$1" in
        -u1) shift; U1PROG=$1;;
        -u2) shift; U2PROG=$1;;
        -p) shift; QPROG=$1;;
        -o) OSTAT=1;;
        -s) SSTAT=1;;
        -h) usage; exit 0;;
        --) shift; break;;
    esac
    shift;
done

if [ "$#" -ne "3" ]
then
    usage
    exit 1
fi

SF=$1
PARA=$2
RUN_ID=$3

OUT_DIR=${KIT_DIR}/audit/tests/$RUN_ID
if [ ! -d $OUT_DIR ]
then
    mkdir $OUT_DIR
fi

TPCD_LOG=${OUT_DIR}
TPCD_RPT=${OUT_DIR}
OUT=${OUT_DIR}

let UF_SET="(PARA-1)*(SNUM_STREAMS+1)+1"
START_SET=1
let STOP_SET=SNUM_STREAMS
let START_SET_UPDATE="(PARA-1)*(SNUM_STREAMS+1)+2"
let STOP_SET_UPDATE="$START_SET_UPDATE+SNUM_STREAMS-1"

TPCD_LOG_FILE=${TPCD_LOG}/m${PARA}s0
TPCD_RPT_FILE=${TPCD_RPT}/m${PARA}s0inter
QRY_FILE=${TPCD_RPT}/qtemp.${PARA}s0
QUERY_PARAMETER=${TPCD_LOG}/qp${PARA}.0
SCRIPT_LOG_FILE=${TPCD_LOG}/m${PARA}timing
UF1_LOG=${TPCD_LOG}/m${PARA}s0r1f1
UF2_LOG=${TPCD_LOG}/m${PARA}s0r1f2
STREAM_COUNT_LOG=${TPCD_LOG}/m${PARA}tstrent

echo "TPC-H Test - RUN:$PARA SEQUENCE:$RUN_ID `date`" > $SCRIPT_LOG_FILE

```

```

echo "TPC-H Test - RUN:${PARAM} SEQUENCE:${RUN_ID} `date`" > $TPCD_RPT_FILE
echo "Generates query template file with seed: `cat $SEED_FILE` for stream 0" >>
$SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE

${QGEN} -c -r `cat $SEED_FILE` -p 0 -s ${SF} -l $QUERY_PARAMETER > ${QRY_FILE}
START=`$GTIME`
echo "Start Power Test - RUN:${PARAM} SEQUENCE:${RUN_ID} Execution Starts $START,
`date`" >> $SCRIPT_LOG_FILE
echo "" >> $SCRIPT_LOG_FILE

# Execute UF1

SDATE=`date`
UF1_START=`$GTIME`
echo "Start UF1 $UF1_START, `date`" >> $SCRIPT_LOG_FILE

${ECHO} ${UPD_SPT}/runuf1.sh ${UF_SET} >> UF1_LOG 2>&1
# Execute Query Stream

UF1_END=`$GTIME`
E1DATE=`date`

UF1_TIME=`echo $UF1_END - $UF1_START | bc`
echo UF1: Execution Time: $UF1_TIME >> ${TPCD_RPT_FILE}
echo Start Time: $UF1_START, $E1DATE >> ${TPCD_RPT_FILE}
echo End Time: $UF1_END, $E1DATE >> ${TPCD_RPT_FILE}
echo "" >> ${TPCD_RPT_FILE}

echo "End UF1 $UF1_END, $E1DATE" >> $SCRIPT_LOG_FILE
echo UF1: Execution Time: $UF1_TIME >> $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE

echo "Start Query Part `$GTIME`, `date`" >> $SCRIPT_LOG_FILE
${QPROG} ${DATABASE_USER} q${QRY_FILE} | ${TPCD_LOG_FILE}
r${TPCD_RPT_FILE} > $DF 2>&1
# Execute UF2

UF2_START=`$GTIME`
E2DATE=`date`

echo "End Query Part `$GTIME`, `$E2DATE`" >> $SCRIPT_LOG_FILE
echo "" >> $SCRIPT_LOG_FILE

echo "Start UF2 $UF2_START, `date`" >> $SCRIPT_LOG_FILE
${ECHO} ${UPD_SPT}/runuf2.sh ${UF_SET} >> UF2_LOG 2>&1
UF2_END=`$GTIME`
END=`$GTIME`
EDATE=`date`

UF2_TIME=`echo $UF2_END - $UF2_START | bc`
echo UF2: Execution Time: $UF2_TIME >> ${TPCD_RPT_FILE}
echo Start Time: $UF2_START, $E2DATE >> ${TPCD_RPT_FILE}
echo End Time: $UF2_END, $E2DATE >> ${TPCD_RPT_FILE}

echo "End UF2 $UF2_END, $E2DATE" >> $SCRIPT_LOG_FILE
echo UF2: Execution Time: $UF2_TIME >> $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE
echo "End TPC-H Power Test - RUN:${PARAM} SEQUENCE:${RUN_ID}, $END, $E2DATE"
>> $SCRIPT_LOG_FILE
MEA_INT=`echo $END - $START | bc`
echo "Elapsed Time for TPC-H Power Test - RUN:${PARAM} SEQUENCE:${RUN_ID} is
$MEA_INT" >> $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE

${KIT_DIR}/audit/abridge.pl ${TPCD_LOG_FILE}
i=$START_SET
PSEED=`cat $SEED_FILE`
while [ $i -le $STOP_SET ]; do
  TPCD_LOG_FILE=${TPCD_LOG}/mt${RUN_ID}_$i.log
  TPCD_RPT_FILE=${TPCD_RPT}/mt${RUN_ID}_$i.rpt
  QUERY_PARAMETER=${TPCD_LOG}/qp${PARAM}_$i
  QRY_FILE=${TPCD_RPT}/qtemp.${PARAM}$s{i}

  PSEED=`expr $PSEED + 1`
  ${QGEN} -c -r ${PSEED} -p $i -s ${SF} -l $QUERY_PARAMETER > ${QRY_FILE}
  i=`expr $i + 1`
done

#sleep 400
TH_START_D=`date`
TH_START_T=`$GTIME`
echo >> $SCRIPT_LOG_FILE
rm -f /tmp/th_pipe1
mknod /tmp/th_pipe1 p
rm -f /tmp/th_pipe2
mknod /tmp/th_pipe2 p
i=$START_SET

echo "Start Throughput Test - RUN:${PARAM} SEQUENCE:${RUN_ID} $TH_START_T,
$TH_START_D" >> $SCRIPT_LOG_FILE

```

```

# starts a script to count the streams during the throughput run
(scnt.sh $PARAM $RUN_ID > $STREAM_COUNT_LOG &)

while [ $i -le $STOP_SET ]; do
  M_SDATE=`date`
  M_STIME=`$GTIME`
  TPCD_LOG_FILE=${TPCD_LOG}/m${PARAM}$s{i}
  TPCD_RPT_FILE=${TPCD_RPT}/m${PARAM}$s{i}inter
  echo "Start Query Stream $i $M_STIME, $M_SDATE" >> $SCRIPT_LOG_FILE
  QRY_FILE=${TPCD_RPT}/qtemp.${PARAM}$s{i}
  ${QPROG} ${DATABASE_USER} q${QRY_FILE} | ${TPCD_LOG_FILE}
  r${TPCD_RPT_FILE} | grep -v "Connected to ORACLE" >> $SCRIPT_LOG_FILE &
  i=`expr $i + 1`
done

${KIT_DIR}/audit/runTPCHus $RUN_ID $START_SET_UPDATE $STOP_SET_UPDATE
${SF} $PARAM >> $SCRIPT_LOG_FILE 2>&1 &)

wait
THQ_END_T=`$GTIME`
THQ_END_D=`date`
echo End all Query Streams $THQ_END_T, $THQ_END_D >> $SCRIPT_LOG_FILE
print > /tmp/th_pipe1
read < /tmp/th_pipe2

TH_END_D=`date`
TH_END_T=`$GTIME`
echo End Update Stream ${TH_END_T}, ${TH_END_D} >> $SCRIPT_LOG_FILE
echo >> $SCRIPT_LOG_FILE
echo "End Throughput Test ${TH_END_T}, ${TH_END_D}" >> $SCRIPT_LOG_FILE
echo Execution Time Throughput Test: `echo ${TH_END_T} - ${TH_START_T} | bc` >>
$SCRIPT_LOG_FILE

i=$START_SET
while [ $i -le $STOP_SET ]; do
  TPCD_LOG_FILE=${TPCD_LOG}/m${PARAM}$s{i}
  ${KIT_DIR}/audit/abridge.pl ${TPCD_LOG_FILE}
  i=`expr $i + 1`
done
PIDS=`ps -fu oracle | grep scnt.sh | grep -v grep | awk '{print $2}'`
kill -9 $PIDS
#calculate the metric
#analyze_streams.pl -f p -n $RUN_ID > ${TPCD_RPT}/tpch_metric.${RUN_ID}.${HID}.rpt
-----
runTPCHrun
-----
#!/bin/ksh
. $KIT_DIR/env

ECHO=echo

sqlplus=$ORACLE_HOME/bin/sqlplus
GTIME=${KIT_DIR}/utils/gtime

RUN_ID_FILE=${KIT_DIR}/audit/r_id

RUN_ID=`cat $RUN_ID_FILE`

OUT_DIR=${KIT_DIR}/audit/tests/${RUN_ID}
if [ -d $OUT_DIR ]
then
  mkdir $OUT_DIR
fi

SCRIPT_LOG_FILE=${OUT_DIR}/main.out
RDB_TABLES=${OUT_DIR}/rdbtablest
FIRST_TEN=${OUT_DIR}/firstten
LD1DBCRE=${OUT_DIR}/Ld1dbcre
LD2SCTSO=${OUT_DIR}/Ld2sctso
LD3DAPOP=${OUT_DIR}/Ld3dapop

ckpnt.sh
ckpnt.sh
echo "Start: dbtables.sql and count.sql" >> $SCRIPT_LOG_FILE
$sqlplus ${DATABASE_USER} @$KIT_DIR/audit/dbtables > ${RDB_TABLES} 2>&1
$sqlplus ${DATABASE_USER} @$KIT_DIR/audit/firstten > ${FIRST_TEN} 2>&1
echo "End: dbtables.sql and count.sql `date`" >> $SCRIPT_LOG_FILE
runTPCHpt ${SCALE_FACTOR} 1 ${RUN_ID}
ckpnt.sh
ckpnt.sh
runTPCHpt ${SCALE_FACTOR} 2 ${RUN_ID}

cp $ORACLE_HOME/rdbms/log/alert_${ORACLE_SID}.log $OUT_DIR

echo "End TPC-H Benchmark SEQUENCE NUMBER: $RUN_ID `date`" >>
$SCRIPT_LOG_FILE
-----
runTPCHus
-----
#!/bin/ksh
. $KIT_DIR/env

```

```

SCRIPT_DIR=${KIT_DIR}/scripts
SQL_DIR=${KIT_DIR}/sql
UPD_DIR=${KIT_DIR}/update
UPD_SPT=${UPD_DIR}/scripts
SRC_DIR=${KIT_DIR}/utils
QRY_DIR=${KIT_DIR}/queries # this is the location of the query template file
QGEN_DIR=${KIT_DIR}/dbgen
QGEN=${QGEN_DIR}/qgen

DSS_QUERY=${KIT_DIR}/queries
export DSS_QUERY

RUN_ID=$1
START_SET_UPDATE=$2
STOP_SET_UPDATE=$3
SF=$4
PARAM=$5

OUT_DIR=${KIT_DIR}/audit/tests/${RUN_ID}
if [ ! -d $OUT_DIR ]
then
    mkdir $OUT_DIR
fi

TPCD_RPT=$OUT_DIR
SCRIPT_LOG_FILE=${OUT_DIR}/m${PARAM}timing
OUT=$OUT_DIR

GTIME=${SRC_DIR}/gtime
HID=1

START=`GTIME`
echo "Start Update Stream $START, `date`" >> $SCRIPT_LOG_FILE
echo "" >> $SCRIPT_LOG_FILE

#waiting for all the query streams to finish first
read < /tmp/th_pipe1

i=$START_SET_UPDATE
j=1
while [ $i -le $STOP_SET_UPDATE ]; do

    # Execute UF1

    UF1_LOG=${OUT_DIR}/m${PARAM}s${j}rf1
    UF2_LOG=${OUT_DIR}/m${PARAM}s${j}rf2
    RPT_FILE=${OUT_DIR}/m${PARAM}s${j}inter

    SDATE=`date`
    UF1_START=`GTIME`
    echo "Start UF1-$(j) at ${UF1_START}, ${SDATE}" >> ${RPT_FILE}

    ${UPD_SPT}/runuf1.sh ${i} >> ${UF1_LOG} 2>&1
    UF1_END=`GTIME`
    EDATE=`date`
    echo "End UF1-$(j) at ${UF1_END}, ${EDATE}" >> ${RPT_FILE}
    echo UF1-$(j) Execution Time: `echo ${UF1_END} - ${UF1_START} | bc` >>
    ${RPT_FILE}

    # Execute UF2

    SDATE=`date`
    UF2_START=`GTIME`
    echo "Start UF2-$(j) at ${UF2_START}, ${SDATE}" >> ${RPT_FILE}

    ${UPD_SPT}/runuf2.sh ${i} >> ${UF2_LOG} 2>&1
    UF2_END=`GTIME`
    EDATE=`date`
    echo "End UF2-$(j) at ${UF2_END}, ${EDATE}" >> ${RPT_FILE}
    echo UF2-$(j) Execution Time: `echo ${UF2_END} - ${UF2_START} | bc` >>
    ${RPT_FILE}

    i=`expr $i + 1`
    j=`expr $j + 1`
done

print > /tmp/th_pipe2

-----
runuf1.sh
-----
#
# $Header: runuf1.sh 25-oct-2001.15:56:04 mpoess Exp $
#
# runuf1.sh
#
# Copyright (c) 1999, 2001, Oracle Corporation. All rights reserved.
#
# NAME

```

```

# runuf1.sh - <one-line expansion of the name>
#
# DESCRIPTION
# runuf1.sh -l [<path name for reports>] -u [<uid/passwd>]
# -p [<program>] <run_id> <scale factor> <pair number>
# <parallelism>
# USAGE
# To execute UF1.
#
# NOTES
# <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
# mpoess 10/25/01 - change default directory for update sets
# mpoess 10/17/01 - add support for external tables
# mpoess 08/15/99 - Creation
# mpoess 08/15/99 - Creation
#
#
. $KIT_DIR/env
O=${ORACLE_HOME}
UPDATE_DIR=${KIT_DIR}/update
SCRIPT_DIR=${UPDATE_DIR}/scripts
UTILS_DIR=${KIT_DIR}/utils
LOG_DIR=${UPDATE_DIR}/log
GTIME=${UTILS_DIR}/gtime
SF=${SCALE_FACTOR}
PAR_HINT=32

LOGPATH=
PASSWD=${DATABASE_USER}

if [ $# -lt 1 ];
then
    echo runuf1.sh setnum
    exit 1
fi
SETNUM=$1
i=1
PID=""

# perform the update function 1

START=`GTIME`

sqlplus /NOLOG << !

connect $PASSWD;
set timing on
set serveroutput on
set echo on

alter session force parallel dml parallel (degree ${PAR_HINT});
alter session set isolation_level = serializable;
alter session set optimizer_index_cost_adj = 10;
alter system set db_file_multiblock_read_count = 1 SCOPE=memory sid=*;

insert into orders(
select
o_orderdate ,
o_orderkey ,
o_custkey ,
o_orderpriority ,
o_shippriority ,
o_clerk ,
o_orderstatus ,
o_totalprice ,
o_comment
from temp_o_et_${SETNUM});

insert into lineitem(
select
l_shipdate ,
l_orderkey ,
l_discount ,
l_extendedprice ,
l_supplykey ,
l_quantity ,
l_returnflag ,
l_partkey ,
l_linestatus ,
l_tax ,
l_commitdate ,
l_receiptdate ,
l_shipmode ,
l_linenum ,
l_shipinstruct ,
l_comment
from temp_l_et_${SETNUM});

commit;
alter system set db_file_multiblock_read_count = 24 SCOPE=memory sid=*;

```

```

exit;
!

END=`$GTIME`

# Done

echo ""
echo "Update Function 1 Set $SETNUM done!"
echo "Elapsed Time is `echo SEND - $START | bc`"
echo ""

-----
runuf2.sh
-----
#!/bin/ksh
#
# $Header: runuf2.sh 25-oct-2001.15:56:05 mpoess Exp $
#
# runuf2.sh
#
# Copyright (c) 1999, 2001, Oracle Corporation. All rights reserved.
#
# NAME
#   runuf2.sh - <one-line expansion of the name>
#
# DESCRIPTION
#   runuf2.sh [-u <uid/passwd to login>] [-p <program>] <run_id>
#   <scale factor> <pair number> <parallelism>
#
# USAGE
#   To execute UF2.
#
# NOTES
#   <other useful comments, qualifications, etc.>
#
# MODIFIED (MM/DD/YY)
#   mpoess 10/25/01 - change default directory for update sets
#   mpoess 10/17/01 - add support for external tables
#   mpoess 08/15/99 - Creation
#   mpoess 08/15/99 - Creation
#
. $KIT_DIR/env
UPDATE_DIR=${KIT_DIR}/update
SCRIPT_DIR=${UPDATE_DIR}/scripts
UTILS_DIR=${KIT_DIR}/utils
GTIME=${UTILS_DIR}/gtime
LOG_DIR=${UPDATE_DIR}/log
PAR_HINT=128
PAR_HINT1=4
SF=${SCALE_FACTOR}
PASSWD=${DATABASE_USER}

if [ $# -lt 1 ]
then
  usage
  exit 1
fi

SETNUM=$1

i=1
PID=""

START=`$GTIME`
# first create the temp tables

sqlplus /NOLOG << !

connect $PASSWD;
set timing on
set serveroutput on
set echo on

create table temp_okey${SETNUM} tablespace TSD1 parallel ${PAR_HINT1} nologging as
select * from temp_okey_et${SETNUM};

create unique index i_temp_okey${SETNUM} on temp_okey${SETNUM} (t_orderkey)
tablespace TSD1 parallel ${PAR_HINT1} nologging compute statistics;

analyze table temp_okey${SETNUM} estimate statistics sample 1 percent;

alter session force parallel dml parallel ${PAR_HINT};
alter session set isolation_level=serializable;
alter session set optimizer_index_cost_adj = 10;

delete from (select /*+ use_nl(o) */ o.rowid from orders o, temp_okey${SETNUM} t where
o.o_orderkey = t.t_orderkey order by 1);

delete from (select /*+ use_nl(l) */ l.rowid from lineitem l,temp_okey${SETNUM} t where
l.l_orderkey = t.t_orderkey order by 1);

```

```

commit;
exit;
!

END=`$GTIME`

# Done

echo ""
echo "Update Function 2 Set $SETNUM done!"
echo "Elapsed Time is `echo SEND - $START | bc`"

```

Appendix G: Price Quotes

From: Ray Glasstone [mailto:ray.glasstone@oracle.com]
Sent: Tuesday, December 12, 2006 1:39 PM
To: Othayoth N., Raghu
Subject: Re: 8x BL480c RAC TPC-H

Product	Price	Quantity	Extended Price
Oracle Database 10g Enterprise Edition Release2, Named User Plus for 3 years	10,000	16**	160,000
Partitioning, Named User Plus for 3 years	2,500	16**	40,000
Oracle Real Application Clusters, Named User Plus for 3 years	5,000	16**	80,000
Oracle Database Server Support Package for 3 years	6,000	8	48,000
Oracle Mandatory E-Business Discount (license and support)*			<65,600>

(*) Oracle pricing contact: Herve Lejeune, herve.lejeune@oracle.com, 650 560-1894

(**) 16 = 32 x 0.50. Explanation: for the purposes of counting the number of processors which require licensing for Intel multicore chips, “n” cores shall be determined by multiplying the total number of cores by a core processor licensing factor of .50.