



# Hewlett-Packard Company

---

TPC Benchmark™ H  
Full Disclosure Report  
for  
HP ProLiant DL585 G2  
using  
Microsoft SQL Server 2005 Enterprise x64 Edition SP2  
and  
Windows Server 2003 Enterprise x64 Edition SP1

---

**First Edition**  
**April 2007**

First Edition – April, 2007

Hewlett-Packard Company (HP), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, the TPC Benchmark H should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2007 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

NonStop, ProLiant DL585 G2, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003 and SQL Server 2005 are registered trademarks of Microsoft Corporation.

TPC Benchmark, TPC-H, QppH, QthH and QphH are trademarks of the Transaction Processing Performance Council.

All other brand or product names mentioned herein must be considered trademarks or registered trademarks of their respective owners.



# HP ProLiant DL585 G2

TPC-H Rev. 2.6.0

Report Date:  
**Apr 25, 2007**

Total System Cost

Composite Query per Hour Metric

Price / Performance

**\$143,736 USD**

**14,772.9**  
QphH@1000GB

**\$9.73 USD**  
\$/ QphH@1000GB

Database Size

Database Manager

Operating System

Other Software

Availability Date


**1000GB**

**Microsoft SQL Server  
2005 Enterprise x64  
Edition**

**Windows Server  
2003, Enterprise  
x64 Edition**

**Visual C++  
Visual Basic**

**Apr 25, 2007**

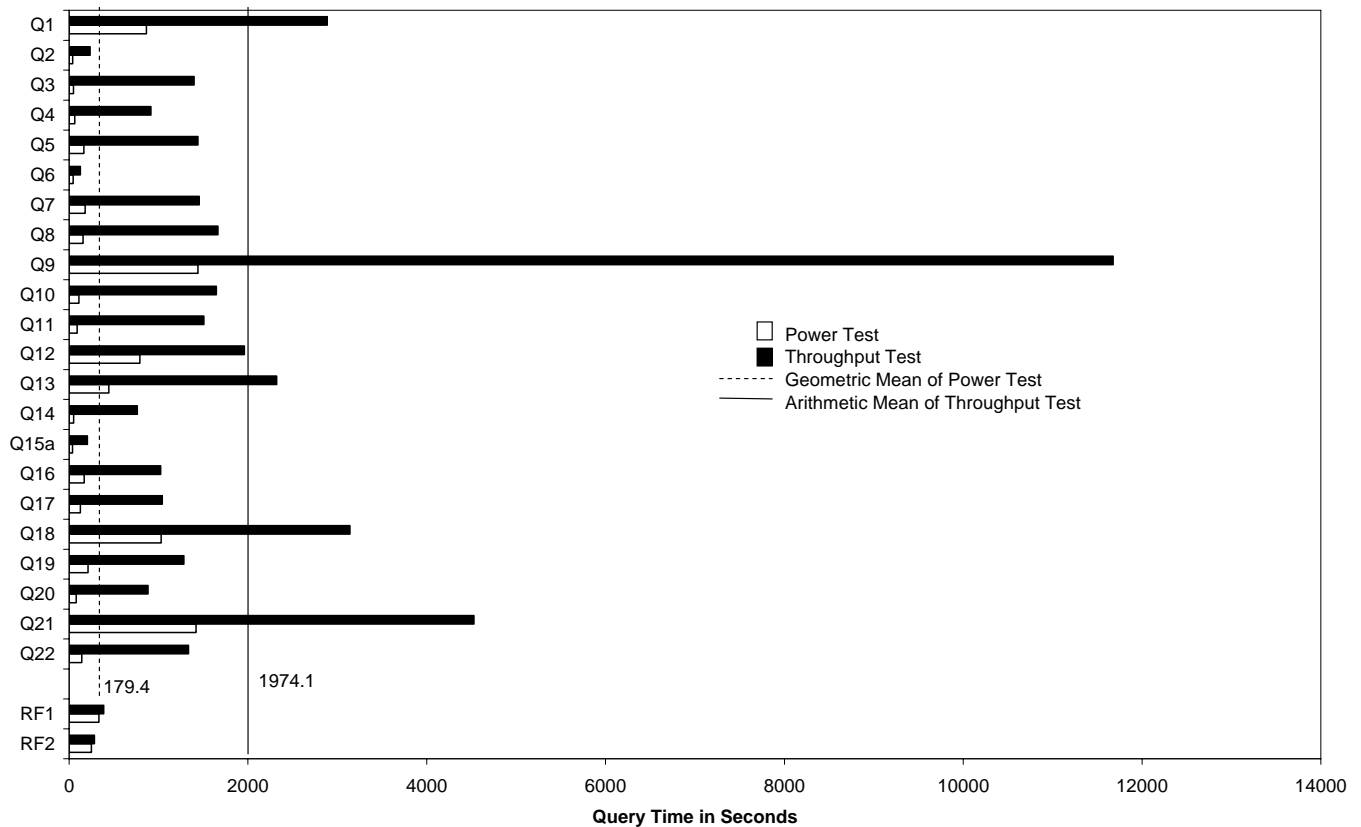

Database Load Time = 10:40:41

Load Included Backup: Y

Total Data Storage / Database Size = 7.85

RAID (Base tables only): N

RAID (Base tables and auxiliary data structures): N

RAID (All): N

### System Configuration:

**Processors/Cores/Threads:** 4/8/8 2.8 GHz DC AMD 8220SE

**Memory :** 32 GB memory

**Disk Controllers :** 6x Smart Array P800, 1x Smart Array P600, 1x Smart Array E500

**Disks :** 200x 36 GB 15K rpm SFF SAS drives (external)

4x 146 GB 10k rpm SFF SAS drives + 2x 36 GB 15k rpm SFF SAS drives

**Total Disk Storage:** 7856 GB

Note: Database Size includes only raw data (e.g., no temp, index, redundant storage space, etc).

**HP ProLiant DL585G2**

TPC-H Rev. 2.6.0

Report Date: 25-Apr-07

Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price
<b>Server Hardware</b>						
<b>Brand Pricing</b>						
HP DL585R02 CTO Chassis	418633-B21	1	3,914	1	3,914	
HP O8220 PC5300 DL585 G2 2P FIO Kit	413934-L21	1	5,053	1	5,053	
HP O8220 PC5300 DL585G2 2P Kit	413934-B21	1	5,349	1	5,349	
HP 4GB Reg PC2-5300 2x2GB Kit	408853-B21	1	1,099	8	8,792	
HP s7540 17in CRT Monitor	PF997AA#ABA	1	139	1	139	
HP 3y 4h 24x7 ProLiant DL58x HW Support	U4608E	1	1,575	1		1,575
<b>Subtotal</b>					<b>23,247</b>	<b>1,575</b>
<b>Storage</b>						
HP Smart Array P600 Controller	337972-B21	1	729	1	729	
HP Smart Array E500 Controller	435129-B21	1	649	1	649	
HP Smart Array P800 Controller	381513-B21	1	1,099	6	6,594	
HP StgWks 70 Modular Smart Arry ALL	418800-B21	1	3,199	8	25,592	
HP 36GB 15K SAS Single Port SFF Hard Drive (internal)	431933-B21	1	369	2	738	
HP 36GB 15K SAS Single Port SFF Hard Drive (external)	431933-B21	1	369	200	73,800	
146GB 10K SAS 2.5 HP HDD (internal)	431958-B21	1	439	4	1,756	
HP 5642 Unassembled Rack	358254-B21	1	865	1	865	
HP StgWks 70 Modular Smart Arry ALL (10%)	418800-B21	1	3,199	2		6,398
HP 36GB 15K SAS Single Port SFF Hard Drive (10%)	431933-B21	1	369	20		7,380
<b>Subtotal</b>					<b>110,723</b>	<b>13,778</b>
<b>Hardware and Maintenance Discount</b>						
Large Purchase and Net 30 discount	16.0%	1			(\$21,435)	(\$2,456)
<b>Hardware Subtotal</b>					<b>112,535</b>	<b>12,897</b>
<b>Software</b>						
SQL Server 2005 Enterprise x64 Edition with 25 CALs	810-04779	Microsoft	2	8,487	1	8,487
SQL Server 2005 Client License	359-01911	Microsoft	2	156	45	7,020
Windows Server 2003 Enterprise x64 Edition	P72-00274	Microsoft	2	2,334	1	2,334
Microsoft Problem Resolution Services		Microsoft	2	245	1	245
Microsoft Visual C++ .NET Standard 2003	254-00170	Microsoft	2	109	1	109
Microsoft Visual Basic .Net Standard 2003	046-00856	Microsoft	2	109	1	109
<b>Subtotal</b>					<b>18,059</b>	<b>245</b>
<b>Total</b>					<b>\$130,594</b>	<b>\$13,142</b>

**Three-Year Cost of Ownership: \$143,736 USD****QpH @ 1000GB: 14772.9****\$/ QpH @ 1000GB: \$9.73 USD**

Pricing: 1=HP Direct: 800-203-6748; 2=Microsoft

Note 1 = Discount based on HP Direct guidance with large purchase and Net 30 discount. Applies to all lines with 1 in pricing column.

\* = These components are not immediately orderable. See the FDR for more information.

Note: The benchmark results and test methodology were audited by Lorna Livingtree of Performance Metrics, Inc. (www.perfmetrics.com).

**Audited by: Lorna Livingtree of Performance Metrics Inc.**

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms, please inform at [pricing@tpc.org](mailto:pricing@tpc.org). Thank you.



# HP ProLiant DL585 G2

TPC-H Rev. 2.6.0

Report Date:  
Apr 25, 2007

## Numerical Quantities

### Measurement Results:

Database Scale Factor	= 1000
Total Data Storage / Database Size	= 7.85
Start of Database Load	= 2007-04-04 00:21:15.890
End of Database Load	= 2007-04-04 11:01:57.357
Database Load Time	= 10:40:41
Query Streams for Throughput Test	= 7
TPC-H Power	= 20,065.6
TPC-H Throughput	= 10,876.3
TPC-H Composite Query-per-Hour Metric (QphH@1000GB)	= 14,772.9
Total System Price Over 3 Years	= \$143,736 USD
TPC-H Price/ Performance Metric (\$/QphH@1000GB)	= \$9.73 USD

### Measurement Intervals:

Measurement Interval in Throughput Test (Ts)	= 50,973 seconds
--	------------------

### Duration of Stream Execution:

Stream ID	Seed	Start Date	Start time	Stop Date	Stop Time	Duration
Stream00	404110157	4/4/2007	11:37:02	4/4/2007	13:45:19	2:08:18
Stream01	404110158	4/4/2007	13:49:29	4/5/2007	2:40:55	12:51:26
Stream02	404110159	4/4/2007	13:49:29	4/5/2007	1:45:27	11:55:58
Stream03	404110160	4/4/2007	13:49:29	4/5/2007	0:30:25	10:40:56
Stream04	404110161	4/4/2007	13:49:29	4/5/2007	2:17:02	12:27:32
Stream05	404110162	4/4/2007	13:49:30	4/5/2007	2:29:39	12:40:09
Stream06	404110163	4/4/2007	13:49:30	4/5/2007	1:18:02	11:28:32
Stream07	404110164	4/4/2007	13:49:30	4/5/2007	2:11:55	12:22:25
Refresh00		4/4/2007	11:31:28	4/4/2007	13:49:29	2:18:01
Refresh01		4/5/2007	2:40:55	4/5/2007	2:50:47	0:09:52
Refresh02		4/5/2007	2:50:48	4/5/2007	3:01:45	0:10:57
Refresh03		4/5/2007	3:01:46	4/5/2007	3:13:51	0:12:06
Refresh04		4/5/2007	3:13:52	4/5/2007	3:25:29	0:11:36
Refresh05		4/5/2007	3:25:29	4/5/2007	3:36:08	0:10:39
Refresh06		4/5/2007	3:36:09	4/5/2007	3:47:39	0:11:29
Refresh07		4/5/2007	3:47:40	4/5/2007	3:59:02	0:11:23



# HP ProLiant DL585 G2

TPC-H Rev. 2.6.0

Report Date:  
Apr 25, 2007

## TPC-H Timing Intervals (in seconds)

Query	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
Stream 00	863.1	39.3	48.7	64.1	164.7	44.6	180.3	156.9
Stream 01	882.6	131.2	817.6	67.7	1029.0	80.9	1318.2	1278.8
Stream 02	2790.1	279.2	238.6	2019.5	662.5	164.2	1834.4	2286.3
Stream 03	3796.7	181.8	1654.1	851.0	3842.8	151.9	2285.2	458.8
Stream 04	2270.6	119.9	48.9	567.4	679.3	73.5	279.7	3080.4
Stream 05	2086.1	293.1	1682.8	536.5	1336.6	148.8	1700.4	1380.8
Stream 06	4552.1	159.0	3607.2	579.2	992.1	140.0	2376.5	1979.7
Stream 07	3832.5	479.0	1738.0	1776.5	1532.2	110.1	394.7	1183.9
Min Qi	882.6	119.9	48.9	67.7	662.5	73.5	279.7	458.8
Max Qi	4552.1	479.0	3607.2	2019.5	3842.8	164.2	2376.5	3080.4
Avg Qi	2887.2	234.7	1398.2	914.0	1439.2	124.2	1455.6	1664.1
Query	Q9	Q10	Q11	Q12	Q13	Q14	Q15	Q16
Stream 00	1440.3	110.7	88.8	791.7	444.0	49.7	37.9	168.7
Stream 01	17136.7	2228.5	3755.7	4064.4	1208.3	214.2	133.9	549.9
Stream 02	10785.9	1644.0	427.6	1357.7	2685.0	2759.6	362.4	916.8
Stream 03	8408.3	659.8	1278.1	1835.3	2484.5	194.0	134.6	733.7
Stream 04	11979.1	1712.7	673.2	2183.4	3019.4	397.3	276.9	1751.6
Stream 05	12299.2	2086.8	397.2	1971.1	3207.0	1172.8	228.8	760.9
Stream 06	9797.4	958.0	3080.8	1517.4	1786.2	175.4	209.6	754.3
Stream 07	11339.3	2241.9	941.4	781.2	1852.5	422.5	94.2	1709.0
Min Qi	8408.3	659.8	397.2	781.2	1208.3	175.4	94.2	549.9
Max Qi	17136.7	2241.9	3755.7	4064.4	3207.0	2759.6	362.4	1751.6
Avg Qi	11678.0	1647.4	1507.7	1958.6	2320.4	762.3	205.8	1025.2
Query	Q17	Q18	Q19	Q20	Q21	Q22	RF1	RF2
Stream 00	125.1	1029.4	211.4	78.4	1419.0	140.9	334.2	249.2
Stream 01	388.7	3642.7	1648.7	1425.3	4133.7	149.3	311.6	280.3
Stream 02	984.3	3053.5	841.2	237.5	3648.9	2978.3	373.2	283.9
Stream 03	588.2	2417.8	757.8	1169.5	3143.8	1428.5	480.2	245.0
Stream 04	3022.5	2744.1	1388.1	104.6	7686.1	793.4	386.6	309.6
Stream 05	1585.6	4082.6	1393.2	1314.1	4412.1	1532.7	380.3	258.4
Stream 06	325.9	2248.9	1998.0	997.8	2323.4	753.1	376.5	312.3
Stream 07	387.8	3788.8	964.2	927.3	6347.3	1700.5	391.6	290.6
Min Qi	325.9	2248.9	757.8	104.6	2323.4	149.3	311.6	245.0
Max Qi	3022.5	4082.6	1998.0	1425.3	7686.1	2978.3	480.2	312.3
Avg Qi	1040.4	3139.8	1284.5	882.3	4527.9	1333.7	385.7	282.9

# Abstract

## Overview

This report documents the methodology and results of the TPC Benchmark™ H test conducted on the HP ProLiant DL585 G2 using Microsoft SQL Server 2005 x64 Enterprise Edition SP2, in conformance with the requirements of the TPC Benchmark™ H Standard Specification, Revision 2.6.0. The operating system used for the benchmark was Microsoft Windows 2003 x64 Enterprise Edition SP1.

The benchmark results are summarized in the following table.

<b>Hardware</b>	<b>Software</b>	<b>Total System Cost</b>	<b>QppH @ 1000GB</b>	<b>QthH @ 1000GB</b>	<b>QphH @ 1000GB</b>	<b>\$/ QphH @ 1000GB</b>
<b>HP ProLiant DL585 G2</b>	<b>SQL Server 2005 Enterprise x64 Edition SP2</b> <b>Windows Server 2003, Enterprise x64 Edition SP1</b>	<b>\$143,736</b>	<b>20,065.6</b>	<b>10,876.3</b>	<b>14,772.9</b>	<b>\$ 9.73</b>

The TPC Benchmark™ H was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry.

## Standard and Executive Summary Statements

Pages ii-iv contains the Executive Summary and Numerical Quantities Summary of the benchmark results for the HP ProLiant DL585 G2.

## Auditor

The benchmark configuration, environment and methodology used to produce and validate the test results, and the pricing model used to calculate the cost per QppH and QthH were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications. The auditor's letter of attestation is attached in Section 9.1 "Auditors' Report."

# Table of Contents

---

ABSTRACT .....	I
OVERVIEW .....	I
STANDARD AND EXECUTIVE SUMMARY STATEMENTS .....	I
AUDITOR .....	I
TABLE OF CONTENTS .....	II
1.0 GENERAL ITEMS.....	5
1.1 TEST SPONSOR.....	5
1.2 PARAMETER SETTINGS.....	5
1.3 CONFIGURATION ITEMS.....	5
2.0 CLAUSE 1: LOGICAL DATABASE DESIGN .....	7
2.1 TABLE DEFINITIONS .....	7
2.2 PHYSICAL ORGANIZATION OF DATABASE.....	7
2.3 HORIZONTAL PARTITIONING .....	7
2.4 REPLICATION.....	7
3.0 CLAUSE 2: QUERIES AND REFRESH FUNCTIONS RELATED ITEMS .....	8
3.1 QUERY LANGUAGE.....	8
3.2 RANDOM NUMBER GENERATION .....	8
3.3 SUBSTITUTION PARAMETERS GENERATION.....	8
3.4 QUERY TEXT AND OUTPUT DATA FROM DATABASE .....	8
3.5 QUERY SUBSTITUTION PARAMETERS AND SEEDS USED.....	8
3.6 ISOLATION LEVEL .....	9
3.7 REFRESH FUNCTIONS .....	9
4.0 CLAUSE 3: DATABASE SYSTEM PROPERTIES .....	10
4.1 ATOMICITY REQUIREMENTS .....	10
4.2 CONSISTENCY REQUIREMENTS .....	10
4.3 ISOLATION REQUIREMENTS.....	11
4.4 DURABILITY REQUIREMENTS.....	12
5.0 CLAUSE 4: SCALING AND DATABASE POPULATION .....	14
5.1 INITIAL CARDINALITY OF TABLES .....	14
5.2 DISTRIBUTION OF TABLES AND LOGS ACROSS MEDIA .....	14
5.3 MAPPING OF DATABASE PARTITIONS/REPLICATIONS.....	16
5.4 IMPLEMENTATION OF RAID.....	16
5.5 DBGEN MODIFICATIONS.....	16
5.6 DATABASE LOAD TIME.....	16
5.7 DATA STORAGE RATIO.....	16
5.8 DATABASE LOAD MECHANISM DETAILS AND ILLUSTRATION.....	17
6.0 CLAUSE 5: PERFORMANCE METRICS AND EXECUTION RULES RELATED ITEMS.....	19
6.1 STEPS IN THE POWER TEST.....	19
6.2 TIMING INTERVALS FOR EACH QUERY AND REFRESH FUNCTION .....	19
6.3 NUMBER OF STREAMS FOR THE THROUGHPUT TEST .....	19
6.4 START AND END DATE/TIMES FOR EACH QUERY STREAM .....	19
6.5 TOTAL ELAPSED TIME FOR THE MEASUREMENT INTERVAL.....	19
6.6 REFRESH FUNCTION START DATE/TIME AND FINISH DATE/TIME .....	19
6.7 TIMING INTERVALS FOR EACH QUERY AND EACH REFRESH FUNCTION FOR EACH STREAM .....	20



6.8 PERFORMANCE METRICS.....	20
6.9 THE PERFORMANCE METRIC AND NUMERICAL QUANTITIES FROM BOTH RUNS .....	20
6.11 SYSTEM ACTIVITY BETWEEN TESTS.....	21
7.0 CLAUSE 6: SUT AND DRIVER IMPLEMENTATION RELATED ITEMS.....	22
7.1 DRIVER .....	22
7.2 IMPLEMENTATION SPECIFIC LAYER (ISL).....	22
7.3 PROFILE-DIRECTED OPTIMIZATION .....	23
8.0 CLAUSE 7: PRICING RELATED ITEMS .....	24
8.1 HARDWARE AND SOFTWARE USED.....	24
8.2 TOTAL 3 YEAR PRICE .....	24
8.3 AVAILABILITY DATE.....	24
8.4 COUNTRY-SPECIFIC PRICING.....	24
9.0 CLAUSE 9: RELATED ITEMS .....	25
9.1 AUDITORS' REPORT.....	25
APPENDIX A: TUNABLE PARAMETERS .....	28
A.1 MICROSOFT SQL SERVER 2005 VERSION .....	28
A.2 SQL SERVER 2005 INSTALLATION.....	28
A.3 SQL SERVER 2005 STARTUP PARAMETERS .....	28
A.4 MICROSOFT SQL SERVER 2005 CONFIGURATION PARAMETERS.....	28
A.5 WINDOWS 2003 CONFIGURATION .....	28
A.6 SYSTEM HARDWARE INFORMATION .....	29
APPENDIX B: DATABASE BUILD SCRIPTS .....	64
B.1 CREATEDATABASE.SQL.....	64
B.2 CREATETABLES.SQL .....	64
B.3 CREATETABLELI.SQL .....	65
B.4 CREATETABLEORDERS.SQL .....	65
B.5 CREATEINDEXESSTREAM1.SQL.....	65
B.6 CREATEINDEXESSTREAM2.SQL.....	65
B.7 CREATEINDEXESSTREAM3.SQL.....	65
B.8 CREATECLUSTEREDINDEXLI.SQL .....	65
B.9 CREATECLUSTEREDINDEXO.SQL .....	65
B.10 CREATEFK.SQL.....	65
B.11 PK_LARGE_TABLES.SQL.....	66
B.12 PK_SMALL_TABLES.SQL.....	66
B.13 BACKUPDATABASE.SQL .....	66
B.14 RESTOREDATABASE.SQL .....	66
B.15 MOVETEMPDB.SQL .....	66
B.16 RESIZETEMPDB.SQL.....	66
B.17 REMOVE_LOAD_FG.SQL.....	66
B.18 REMOVEFF.CMD.....	67
APPENDIX C: QUERY TEXT AND OUTPUT .....	68
C.1 QUALIFICATION QUERIES AND OUTPUT .....	68
APPENDIX D: SEEDS AND QUERY SUBSTITUTION PARAMETERS.....	79
APPENDIX E: REFRESH FUNCTION SOURCE CODE.....	81
E.1 CREATERF1PROC.SQL .....	81
E.2 CREATERF2PROC.SQL .....	82

APPENDIX G: PRICE QUOTATIONS ..... 84

# 1.0 General Items

---

## 1.1 Test Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

## 1.2 Parameter Settings

*Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:*

- *Database Tuning Options*
- *Optimizer/Query execution options*
- *Query processing tool/language configuration parameters*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and configuration parameters*
- *Configuration parameters and options for any other software component incorporated into the pricing structure*
- *Compiler optimization options*

*This requirement can be satisfied by providing a full list of all parameters and options, as long as all those which have been modified from their default values have been clearly identified and these parameters and options are only set once.*

Appendix A, "Tunable Parameters," contains a list of all database parameters and operating system parameters.

## 1.3 Configuration Items


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:*

- *Number and type of processors*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g. Ethernet) Connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure.*
- *Type and the run-time execution location of software components (e.g., DBMS, query processing tools/languages, middle-ware components, software drivers, etc.).*

The server System Under Test (SUT), a HP ProLiant DL585 G2, depicted in Figure 1.1, consisted of :

- 4x 2.8GHz dual core AMD 8220SE
- 32 GB of memory
- 6 x HP Smart Array P800 Controllers
- 1 x HP Smart Array E500 Controller
- 1 x HP Smart Array P600 Controller
- 8 x HP StorageWorks MSA70 Enclosures
- 200 x 36GB Pluggable SFF SAS 15K rpm drives (external)
- 2 x 36GB Pluggable SFF SAS 15K rpm drives (internal OS)
- 4 x 146GB Pluggable SFF SAS 10K rpm drives (internal)

**Figure 1.1 Benchmarked & Priced configuration**

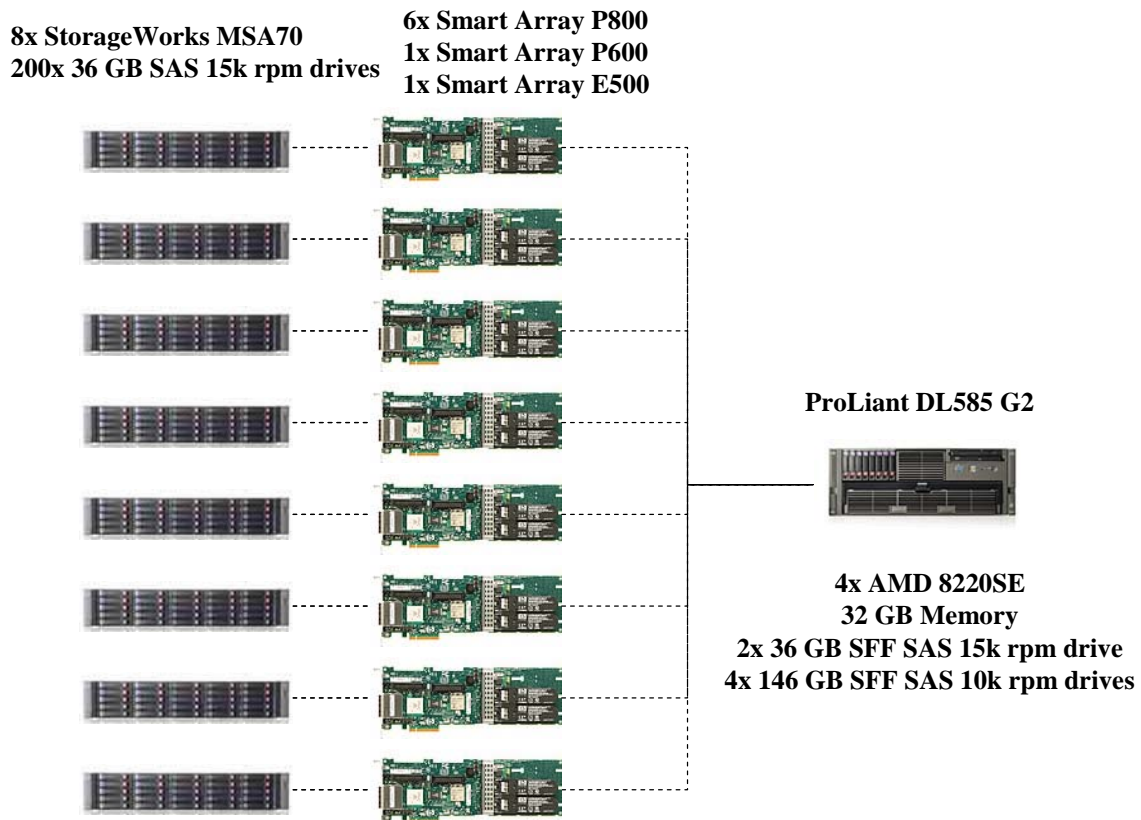

# 2.0 Clause 1: Logical Database Design

---

## 2.1 Table Definitions

*Listings must be provided for all table definition statements and all other statements used to set up the test and qualification databases. (8.1.2.1)*

Appendix B, "Database Build Scripts," contains the table definitions and the program used to load the database.

## 2.2 Physical Organization of Database

*The physical organization of tables and indices, within the test and qualification databases, must be disclosed. If the column ordering of any table is different from that specified in Clause 1.4, it must be noted.*

Appendix B, "Database Build Scripts," contains the DDL for the index definitions.

## 2.3 Horizontal Partitioning

*Horizontal partitioning of tables and rows in the test and qualification databases (see Clause 1.5.4) must be disclosed.*

Horizontal partitioning was not used

## 2.4 Replication

*Any replication of physical objects must be disclosed and must conform to the requirements of Clause 1.5.6.*

No replication was used.

## 3.0 Clause 2: Queries and Refresh Functions Related Items

---

### 3.1 Query Language

*The query language used to implement the queries must be identified.*

SQL was the query language used.

### 3.2 Random Number Generation

*The method of verification for the random number generation must be described unless the supplied DBGEN and QGEN were used.*

The TPC-supplied DBGEN version 2.6.0 and QGEN version 2.6.0 were used to generate all database populations.

### 3.3 Substitution Parameters Generation

*The method used to generate values for substitution parameters must be disclosed. If QGEN is not used for this purpose, then the source code of any non-commercial tool used must be disclosed. If QGEN is used, the version number, release number, modification number and patch level of QGEN must be disclosed.*

The supplied QGEN version 2.6.0 was used to generate the substitution parameters.

### 3.4 Query Text and Output Data from Database

*The executable query text used for query validation must be disclosed along with the corresponding output data generated during the execution of the query text against the qualification database. If minor modifications (see Clause 2.2.3) have been applied to any functional query definitions or approved variants in order to obtain executable query text, these modifications must be disclosed and justified. The justification for a particular minor query modification can apply collectively to all queries for which it has been used. The output data for the power and throughput tests must be made available electronically upon request..*

Appendix C contains the query text and query output. The following modifications were used:

- In Q1, Q4, Q5, Q6, Q10, Q12, Q14, Q15 and Q20, the “dateadd” function is used to perform date arithmetic.
- In Q7, Q8 and Q9, the “datepart” function is used to extract part of a date (e.g., “YY”).
- In Q2, Q3, Q10, Q18 and Q21, the “top” function is used to restrict the number of output rows.
- The word GO is used as a command delimiter.

### 3.5 Query Substitution Parameters and Seeds Used

*All the query substitution parameters used during the performance test must be disclosed in tabular format, along with the seeds used to generate these parameters.*

Appendix D contains the seed and query substitution parameters used.

## 3.6 Isolation Level

*The isolation level used to run the queries must be disclosed. If the isolation level does not map closely to one of the isolation levels defined in Clause 3.4, additional descriptive detail must be provided.*

The queries and transactions were run with isolation level 1.

## 3.7 Refresh Functions

*The details of how the refresh functions were implemented must be disclosed (including source code of any non-commercial program used).*

Appendix E contains the source code for the refresh functions.

# 4.0 Clause 3: Database System Properties

## 4.1 Atomicity Requirements

*The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing the code written to implement the ACID Transaction and Query.*

All ACID tests were conducted according to specification. The Atomicity, Isolation, Consistency and Durability tests were performed on the HP ProLiant DL585 G2.

### 4.1.1 Atomicity of the Completed Transactions

*Perform the ACID Transaction for a randomly selected set of input data and verify that the appropriate rows have been changed in the ORDER, LINEITEM, and HISTORY tables.*

The following steps were performed to verify the Atomicity of completed transactions.

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1.
3. The ACID Transaction committed.
4. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for the same order key. It was verified that the appropriate rows had been changed.

### 4.1.2 Atomicity of Aborted Transactions

*Perform the ACID transaction for a randomly selected set of input data, submitting a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the appropriate rows have not been changed in the ORDER, LINEITEM, and HISTORY tables.*

The following steps were performed to verify the Atomicity of the aborted ACID transaction:

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1. The transaction was stopped prior to the commit.
3. The ACID Transaction was ROLLED BACK. .
4. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for the same order key used in steps 1 and 2. It was verified that the appropriate rows had not been changed.

## 4.2 Consistency Requirements

*Consistency is the property of the application that requires any execution of transactions to take the database from one consistent state to another.*

*A consistent state for the TPC-H database is defined to exist when:*

$$O\_TOTALPRICE = SUM(L\_EXTENDEDPRICE - L\_DISCOUNT) * (1 + L\_TAX)$$

*For each ORDER and LINEITEM defined by (O\_ORDERKEY = L\_ORDERKEY)*

### 4.2.1 Consistency Tests

*Verify that ORDER and LINEITEM tables are initially consistent as defined in Clause 3.3.2.1, based upon a random sample of at least 10 distinct values of O\_ORDERKEY.*

The following steps were performed to verify consistency:

1. The consistency of the ORDER and LINEITEM tables was verified based on a sample of O\_ORDERKEYs.



2. One hundred ACID Transactions were submitted from each of 8 execution streams.
3. The consistency of the ORDER and LINEITEM tables was reverified.

## 4.3 Isolation Requirements

*Operations of concurrent transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.*

### 4.3.1 Isolation Test 1 - Read-Write Conflict with Commit

*Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is committed.*

The following steps were performed to satisfy the test of isolation for a read-only and a read-write committed transaction:

1. An ACID Transaction was started for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID Transaction was suspended prior to Commit.
2. An ACID query was started for the same O\_KEY used in step 1. The ACID query blocked and did not see any uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was resumed and committed.
4. The ACID query completed. It returned the data as committed by the ACID Transaction.

### 4.3.2 Isolation Test 2 - Read-Write Conflict with Rollback

*Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is rolled back.*

The following steps were performed to satisfy the test of isolation for read-only and a rolled back read-write transaction:

1. An ACID transaction was started for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID Transaction was suspended prior to Rollback.
2. An ACID query was started for the same O\_KEY used in step 1. The ACID query did not see any uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was ROLLED BACK.
4. The ACID query completed.

### 4.3.3 Isolation Test 3 - Write-Write Conflict with Commit

*Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is committed.*

The following steps were performed to verify isolation of two update transactions:

1. An ACID Transaction T1 was started for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID transaction T1 was suspended prior to Commit.
2. Another ACID Transaction T2 was started using the same O\_KEY and L\_KEY and a randomly selected DELTA.
3. T2 waited.
4. The ACID transaction T1 was allowed to Commit and T2 completed.
5. It was verified that:

$$T2.L\_EXTENDEDPRICE = T1.L\_EXTENDEDPRICE + (DELTA1*(T1.L\_EXTENDEDPRICE/T1.L\_QUANTITY))$$

### 4.3.4 Isolation Test 4 - Write-Write Conflict with Rollback

*Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is rolled back.*

The following steps were performed to verify the isolation of two update transactions after the first one is rolled back:

1. An ACID Transaction T1 was started for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID Transaction T1 was suspended prior to Rollback.
2. Another ACID Transaction T2 was started using the same O\_KEY and L\_KEY used in step 1 and a randomly selected DELTA.
3. T2 waited.
4. T1 was allowed to ROLLBACK and T2 completed.
5. It was verified that T2.L\_EXTENDEDPRICE = T1.L\_EXTENDEDPRICE.

#### 4.3.5 Isolation Test 5 – Concurrent Read and Write Transactions on Different Tables

*Demonstrate the ability of read and write transactions affecting different database tables to make progress concurrently.*

The following steps were performed:

1. An ACID Transaction T1 for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID Transaction T1 was suspended prior to Commit.
2. Another ACID Transaction T2 was started using random values for PS\_PARTKEY and PS\_SUPPKEY.
3. T2 completed.
4. T1 completed and the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

#### 4.3.6 Isolation Test 6 – Update Transactions During Continuous Read-Only Query Stream

*Demonstrate the continuous submission of arbitrary (read-only) queries against one or more tables of the database does not indefinitely delay update transactions affecting those tables from making progress.*

The following steps were performed:

1. An ACID Transaction T1 was started, executing Q1 against the qualification database. The substitution parameter was chosen from the interval [0..2159] so that the query ran for a sufficient amount of time.
2. Before T1 completed, an ACID Transaction T2 was started using randomly selected values of O\_KEY, L\_KEY and DELTA.
3. T2 completed before T1 completed.
4. It was verified that the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

### 4.4 Durability Requirements

*The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.2.*

#### 4.4.1 Permanent Unrecoverable Failure of Any Durable Medium and Loss of System Power

*Guarantee the database and committed updates are preserved across a permanent irrecoverable failure of any single durable medium containing TPC-H database tables or recovery log tables.*

The database log was stored on a RAID-1 protected array of four physical drives. The tables for the database were stored on 8 RAID-0 arrays each containing 25 physical drives. A backup of the database was taken. The backup was spread across 8 RAID5 arrays.

The tests were conducted on the qualification database. The steps performed are shown below:

1. The complete database was backed up.
2. 8 streams of ACID transactions were started. Each stream executed a minimum of 100 transactions.
3. While the test was running, one of the disks from the database RAID-1 log was removed.
4. After it was determined that the test would still run with the loss of a log disk, one physical drive of a RAID-0 data volume was removed.
5. A checkpoint was issued to force a failure.
6. The 8 streams of ACID transactions failed and recorded their number of committed transaction in success files.

7. The database log was dumped to disk.
8. The database and log disks were replaced with new disks and RAID rebuild process started
9. When log RAID rebuild process finished a database restore was done.
10. A command was issued causing the database to run through its roll-forward recovery.
11. The counts in the success files and the HISTORY table count were compared and were found to match.

#### **4.4.2 System Crash**

*Guarantee the database and committed updates are preserved across an instantaneous interruption (system crash/system hang) in processing which requires the system to reboot to recover.*

1. 8 streams of ACID transactions were started. Each stream executed a minimum of 100 transactions.
2. While the streams of ACID transactions were running, the system was powered off.
3. When power was restored, the system rebooted and the database was restarted.
4. The database went through a recovery period.
5. The success file and the HISTORY table counts were compared and were found to match.

#### **4.4.3 Memory Failure**

*Guarantee the database and committed updates are preserved across failure of all or part of memory (loss of contents).*

See section 4.4.2

## 5.0 Clause 4: Scaling and Database Population

### 5.1 Initial Cardinality of Tables

The cardinality (e.g., the number of rows) of each table of the test database, as it existed at the completion of the database load (see clause 4.2.5) must be disclosed.

Table 5.1 lists the TPC Benchmark H defined tables and the row count for each table as they existed upon completion of the build.

**Table 5.1: Initial Number of Rows**

Table Name	Row Count
Region	5
Nation	25
Supplier	10,000,000
Customer	150,000,000
Part	200,000,000
Partsupp	800,000,000
Orders	1,500,000,000
Lineitem	5,999,989,709

### 5.2 Distribution of Tables and Logs Across Media

The distribution of tables and logs across all media must be explicitly described for the tested and priced systems.

Microsoft SQL Server was configured on a HP ProLiant DL585 G2 with the following configuration:

- 6 x Smart Array P800 disk controllers
- 1 x Smart Array P600 disk controller
- 1 x Smart Array E500 disk controller
- 8 x StorageWorks MSA70 Enclosures
- 200 x 36GB SFF SAS 15k rpm external disk drives
- 2 x 36GB SFF SAS 15k rpm internal disk drives
- 4 x 146GB SFF SAS 10k rpm internal disk drives

All 206 disks were used to hold table data, indexes, database log and the temporary database (TempDB).

A detailed description of distribution of database filegroups and log can be found in Table 5.2.1

**Table 5.2.1: SMART Array Controller Disk Array to Logical Drive Mapping**

SMART Array Controller	SMART Logical Drive Array Letter	Number of Physical Drives in SMART LDA	SMART Logical Drive Number	SMART Fault Tolerance	Disk Format	Size (MB)	Contents
Slot 2	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 9	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 8	A	2	1	RAID1	RAW	36000	OS
Slot 8	B	25	2	RAID0	RAW	240000	Tpch1000g
			3	RAID0	RAW	150000	TempDB
			4	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 8	C	4	5	RAID1	RAW	200000	TpchLog
			6	RAID1	RAW	79000	TempLog
			7	RAID1	RAW	500	Tpch1GBlog
Slot 5	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
			4	RAID0	RAW	2000	Tpch1GB
Slot 7	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 3	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 6	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB

			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles
Slot 4	A	25	1	RAID0	RAW	240000	Tpch1000g
			2	RAID0	RAW	150000	TempDB
			3	RAID5	NTFS	460000	LoadFg & Backup & Flatfiles

### 5.3 Mapping of Database Partitions/Replications

*The mapping of database partitions/replications must be explicitly described.*

Database partitioning/replication was not used..

### 5.4 Implementation of RAID

*Implementations may use some form of RAID to ensure high availability. If used for data, auxiliary storage (e.g. indexes) or temporary space, the level of RAID used must be disclosed for each device.*

RAID 0 was used for database filegroups and tempdb, and RAID 1 for database recovery logs.

### 5.5 DBGEN Modifications

*The version number, release number, modification number, and patch level of DBGEN must be disclosed. Any modifications to the DBGEN (see Clause 4.2.1) source code must be disclosed. In the event that a program other than DBGEN was used to populate the database, it must be disclosed in its entirety.*

A modified DBGEN version 2.6.0 was used for database population. The modified version differs only in column order for output flatfile. The only modified file, Print.C, is included in Appendix F.1

### 5.6 Database Load time

*The database load time for the test database (see clause 4.3) must be disclosed.*

The database load time was 10 hours 40 minutes 41 seconds.

### 5.7 Data Storage Ratio

*The data storage ratio must be disclosed. It is computed by dividing the total data storage of the priced configuration (expressed in GB) by the size chosen for the test database as defined in 4.1.3.1. The ratio must be reported to the nearest 1/100<sup>th</sup>, rounded up.*


Disk Type	Number of Disks	Total Disk Space	Data Storage Ratio
36 GB	202	7272 GB	
146 GB	4	584 GB	7.85

## 5.8 Database Load Mechanism Details and Illustration

*The details of the database load must be disclosed, including a block diagram illustrating the overall process. Disclosure of the load procedure includes all steps, scripts, input and configuration files required to completely reproduce the test and qualification databases.*

Flat files for each of the tables were created using DBGEN.  
The tables were loaded as depicted in Figure 5-8.

**Figure 5.8: Block Diagram of Database Load Process**

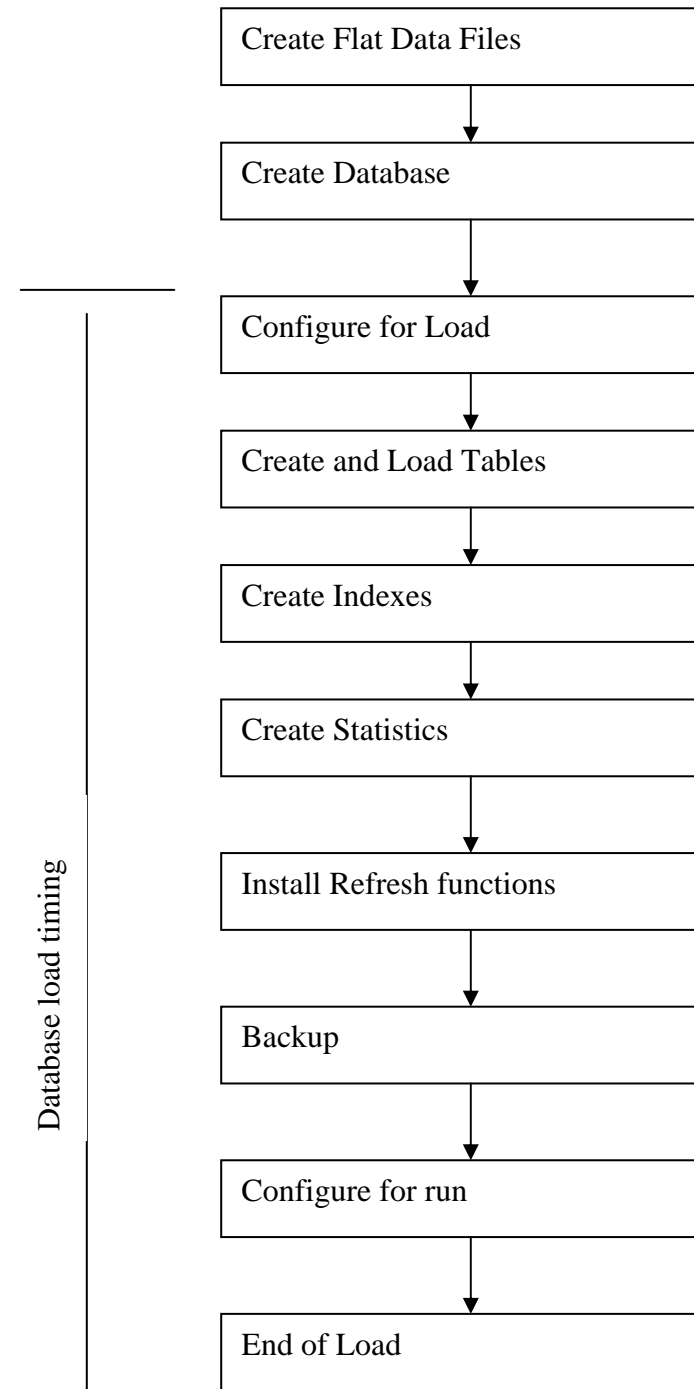



## ***6.0 Clause 5: Performance Metrics and Execution Rules Related Items***

### **6.1 Steps in the Power Test**

*The details of the steps followed to implement the power test (e.g., system boot, database restart, etc.) must be disclosed.*

The following steps were used to implement the power test:

1. The system was rebooted
2. RF1 Refresh Transaction
3. Stream 00 Execution
4. RF2 Refresh Transaction.

### **6.2 Timing Intervals for Each Query and Refresh Function**

*The timing intervals (see Clause 5.3.6) for each query of the measured set and for both refresh functions must be reported for the power test.*

The timing intervals for each query and both refresh functions are given in the Numerical Quantities Summary earlier in the executive summary.

### **6.3 Number of Streams for The Throughput Test**

*The number of execution streams used for the throughput test must be disclosed.*

Five streams were used for the Throughput Test.

### **6.4 Start and End Date/Times for Each Query Stream**

*The start time and finish time for each query execution stream must be reported for the throughput test.*

The Numerical Quantities Summary contains the start and stop times for the query execution streams run on the system reported.

### **6.5 Total Elapsed Time for the Measurement Interval**

*The total elapsed time of the measurement interval(see Clause 5.3.5) must be reported for the throughput test.*

The Numerical Quantities Summary contains the timing intervals for the throughput test run on the system reported.

### **6.6 Refresh Function Start Date/Time and Finish Date/Time**

*Start and finish time for each update function in the update stream must be reported for the throughput test.*

Stream ID	RF	Start Date	Start time	Stop Date	Stop Time
Stream00	RF1	4/4/2007	11:31:28	4/4/2007	11:37:02
Stream00	RF2	4/4/2007	13:45:20	4/4/2007	13:49:29
Stream01	RF1	4/5/2007	2:40:55	4/5/2007	2:46:07
Stream01	RF2	4/5/2007	2:46:07	4/5/2007	2:50:47
Stream02	RF1	4/5/2007	2:50:48	4/5/2007	2:57:01
Stream02	RF2	4/5/2007	2:57:01	4/5/2007	3:01:45
Stream03	RF1	4/5/2007	3:01:46	4/5/2007	3:09:46
Stream03	RF2	4/5/2007	3:09:46	4/5/2007	3:13:51
Stream04	RF1	4/5/2007	3:13:52	4/5/2007	3:20:19
Stream04	RF2	4/5/2007	3:20:19	4/5/2007	3:25:29
Stream05	RF1	4/5/2007	3:25:29	4/5/2007	3:31:50
Stream05	RF2	4/5/2007	3:31:50	4/5/2007	3:36:08
Stream06	RF1	4/5/2007	3:36:09	4/5/2007	3:42:26
Stream06	RF2	4/5/2007	3:42:26	4/5/2007	3:47:39
Stream07	RF1	4/5/2007	3:47:40	4/5/2007	3:54:11
Stream07	RF2	4/5/2007	3:54:12	4/5/2007	3:59:02

## 6.7 Timing Intervals for Each Query and Each Refresh Function for Each Stream

*The timing intervals (see Clause 5.3.6) for each query of each stream and for each update function must be reported for the throughput test.*

The timing intervals for each query and each update function are given in the Numerical Quantities Summary earlier in the executive summary.

## 6.8 Performance Metrics

*The computed performance metrics, related numerical quantities and the price performance metric must be reported.*

The Numerical Quantities Summary contains the performance metrics, related numerical quantities, and the price/performance metric for the system reported.

## 6.9 The Performance Metric and Numerical Quantities from Both Runs

*A description of the method used to determine the reproducibility of the measurement results must be reported. This must include the performance metrics (QppH and QthH) from the reproducibility runs.*

Performance results from the first two executions of the TPC-H benchmark indicated the following difference for the metric points:

Run	QppH @ 1000GB	QthH @ 1000GB	QphH @ 1000GB
Run 1	20065.6	10876.3	14772.9
Run 2	20261.7	11179.9	14976.2

## 6.11 System Activity Between Tests

*Any activity on the SUT that takes place between the conclusion of Run1 and the beginning of Run2 must be disclosed.*

SQL Server was restarted between runs.

# 7.0 Clause 6: SUT and Driver Implementation Related Items

## 7.1 Driver

*A detailed description of how the driver performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the driver.*

The TPC-H benchmark was implemented using a Microsoft tool called StepMaster. This tool consist of GUI tool that allows the configuration of steps and a run only version which was used to execute the load and runs. StepMaster is a general purpose test tool which can drive ODBC and shell commands. Within StepMaster, the user designs a workspace corresponding to the sequence of operations (or steps) to be executed. When the workspace is executed, StepMaster records information about the run into a database as well as a log file for later analysis.

StepMaster provides a mechanism for creating parallel streams of execution. This is used in the throughput tests to drive the query and refresh streams. Each step is timed using a millisecond resolution timer. A timestamp T1 is taken before beginning the operation and a timestamp T2 is taken after completing the operation. These times are recorded in a database as well as a log file for later analysis.

Two types of ODBC connections are supported. A dynamic connection is used to execute a single operation and is closed when the operation finishes. A static connection is held open until the run completes and may be used to execute more than one step. A connection (either static or dynamic) can only have one outstanding operation at any time.

In TPC-H, static connections are used for the query streams in the power and throughput tests. StepMaster reads an Access database to determine the sequence of steps to execute. These commands are represented as the Implementation Specific Layer. StepMaster records its execution history, including all timings, in the Access database. Additionally, StepMaster writes a textual log file of execution for each run.

The source code is disclosed on Appendix F

## 7.2 Implementation Specific Layer (ISL)

*If an implementation-specific layer is used, then a detailed description of how it performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the implementation-specific layer.*

The StepMaster Runonly program is used to control and track the execution of queries, via commands stored in a Microsoft Access database. The source of this program is contained in Appendix F. The following steps are performed, to accomplish the Power and Throughput Runs:

### 1. Power Run

- Execute 16 concurrent RF1 threads, each of which will apply a segment of a refresh set generated by dbgen. Each thread submits multiple transactions, where a transaction spans a set of orders and their associated line items.
- Execute the Stream 0 queries in the order according to TPC Benchmark H Specification, Appendix A
- Execute 16 concurrent RF2 threads, each of which will apply a segment of a refresh set generated by dbgen. Each thread submits multiple transactions, where a transaction spans a set of orders and their associated line items.

### 2. Throughput Run

- Execute 5 concurrent query streams. Each stream executes queries in the order according to TPC Benchmark H Specification, Appendix A, for the appropriate Stream ID (01-07). Upon completion of each stream, a semaphore is set to indicate completion.
- Execute 5 consecutive RF1/RF2 transactions, against ascending Refresh sets produced by dbgen.

- The first RF1 waits on a semaphore prior to beginning its insert operations. Each step is timed by StepMaster. The timing information, together with an activity log, are stored for later analysis. The inputs and results of steps are stored in text files for later analysis.

## 7.3 Profile-Directed Optimization

*If profile-directed optimization as described in Clause 5.2.9 is used, such used must be disclosed.*

Profile-directed optimization was not used.

## 8.0 Clause 7: Pricing Related Items

### 8.1 Hardware and Software Used

*A detailed list of hardware and software used in the priced system must be reported. Each item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. The price quotations are included in Appendix G, at the end of this document.

### 8.2 Total 3 Year Price

*The total 3-year price of the entire configuration must be reported including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. The price quotations are included in Appendix G, at the end of this document. As a large purchase, this purchase qualifies for a 16% discount from Hewlett-Packard Company.

### 8.3 Availability Date

*The committed delivery date for general availability of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the availability date reported on the executive summary must be the date by which all components are committed to being available. The full disclosure report must report availability dates individually for at least each of the categories for which a pricing subtotal must be provided.*

The HP ProLiant DL585 G2, system memory, additional processors, disk controllers and hard drives are available at the time of publication. All other hardware is generally available at the time of publication.

The system software, Microsoft Windows Server 2003, Enterprise Edition and the database software, Microsoft SQL Server 2005 x64 Enterprise Edition are generally available at the time of publication.

### 8.4 Country-Specific Pricing

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country-specific priced configuration. Country-specific pricing is subject to Clause 7.1.7.*

The configuration is priced for the United States of America.

## ***9.0 Clause 9: Related Items***

### **9.1 Auditors' Report**

*The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.*

This implementation of the TPC Benchmark H was audited by Lorna Livingtree of Performance Metrics. Further information regarding the audit process may be obtained from:

Performance Metrics, Inc.  
PO Box 984  
Klamath, CA 95548  
Telephone: (707) 482-0523  
Fax: (707) 482-0575

For a copy of this disclosure, go to [www.tpc.org](http://www.tpc.org).



**PERFORMANCE METRICS INC.**  
TPC Certified Auditors

April 25, 2007

Mr. Daniel Pol  
Hewlett-Packard Company  
20555 SH 249  
Houston, TX 77077

I have verified by remote the TPC Benchmark™ H for the following configuration:

Platform: ProLiant DL585 G2  
Database Manager: Microsoft SQL Server 2005 Enterprise x64 Edition  
Operating System: Windows Server 2003 Enterprise x64 Edition

CPU's	Memory	Total Disks	Qpph@ 1000GB	QthH @ 1000GB	QphH@1000GB
4 AMD64 @ 2.8 Ghz	32 GB	202 @ 36 GB 4 @ 146 GB	<b>20,065.6</b>	<b>10,876.3</b>	<b>14,772.9</b>

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The database tables were defined with the proper columns, layout and sizes.
- The tested database was correctly scaled and populated for 1000GB using DBGEN. The version of DBGEN was 2.6.0.
- The data generated by DBGEN was successfully compared to reference data.
- The qualification database layout was identical to the tested database except for the size of the files.
- The query text was verified to use only compliant variants and minor modifications.
- The executable query text was generated by QGEN and submitted through a standard interactive interface. The version of QGEN was 2.6.0.
- The validation of the query text against the qualification database produced compliant results.

PO Box 984 Klamath, CA 95548  
(707) 482-0523 fax: (707) 482-0575

Page 1  
email: LornaL@PerfMetrics.com



**PERFORMANCE METRICS INC.**  
**TPC Certified Auditors**

---

- The refresh functions were properly implemented and executed the correct number of inserts and deletes.
- The load timing was properly measured and reported.
- The execution times were correctly measured and reported.
- The performance metrics were correctly computed and reported.
- The repeatability of the measurement was verified.
- The ACID properties were successfully demonstrated and verified.
- The system pricing was checked for major components and maintenance.
- The executive summary pages of the FDR were verified for accuracy.

Auditor's Notes: None

Sincerely,



Lorna Livingtree  
Auditor

# Appendix A: Tunable Parameters

- Note: These are the settings used during the power test. The settings altered for the load are documented in Appendix B.

## A.1 Microsoft SQL Server 2005 Version

The following text was output was generated by executing the select @@version command:

```
Microsoft SQL Server 2005 - 9.00.3042.00 (X64)
Feb 10 2007 00:59:02
Copyright (c) 1988-2005 Microsoft Corporation
Enterprise Edition (64-bit) on Windows NT 5.2 (Build 3790: Service
Pack 1)
```

## A.2 SQL Server 2005 Installation

The installation followed the default options. For the sort order Latin1\_General\_binary was chosen. Client tools and development tools were not installed on the server. Mixed mode authentication was used.

## A.3 SQL Server 2005 Startup Parameters

```
SQLSERVER -c -x -E -T697
-x Disable the Keeping of CPU time and cache-hit ratio statistics.
-c Start SQL Server independently of Windows NT Service
Control Manager
-E Increase the number of consecutive extents allocated per file to
4
```

## A.4 Microsoft SQL Server 2005 Configuration Parameters

name	minimum	maximum	config_value	run_value
Ad Hoc Distributed Queries	0	1	0	0
affinity I/O mask	-2147483648	2147483647	0	0
affinity mask	-2147483648	2147483647	255	255
affinity64 I/O mask	-2147483648	2147483647	0	0
affinity64 mask	-2147483648	2147483647	0	0
Agent XPs	0	1	0	0
allow updates	0	1	1	1
awe enabled	0	1	0	0
blocked process threshold	0	86400	0	0
c2 audit mode	0	1	0	0
clr enabled	0	1	0	0
common criteria compliance enabled	0	1	0	0
cost threshold for parallelism	0	32767	0	0
cross db ownership chaining	0	1	0	0
cursor threshold	-1	2147483647	-1	-1
Database Mail XPs	0	1	0	0
default full-text language	0	2147483647	1033	1033
default language	0	9999	0	0
default trace enabled	0	1	1	1
disallow results from triggers	0	1	0	0

fill factor (%)	0	100	0	0
ft crawl bandwidth (max)	0	32767	100	100
ft crawl bandwidth (min)	0	32767	0	0
ft notify bandwidth (max)	0	32767	100	100
ft notify bandwidth (min)	0	32767	0	0
in-doubt xact resolution	0	2	0	0
index create memory (KB)	704	2147483647	0	0
lightweight pooling	0	1	1	1
locks	5000	2147483647	0	0
max degree of parallelism	0	64	0	0
max full-text crawl range	0	256	4	4
max server memory (MB)	16	2147483647	31000	31000
max text repl size (B)	0	2147483647	65536	65536
max worker threads	128	32767	1024	1024
media retention	0	365	0	0
min memory per query (KB)	512	2147483647	512	512
min server memory (MB)	0	2147483647	0	0
nested triggers	0	1	1	1
network packet size (B)	512	32767	32767	32767
Ole Automation Procedures	0	1	0	0
open objects	0	2147483647	0	0
PH timeout (s)	1	3600	60	60
precompute rank	0	1	0	0
priority boost	0	1	0	0
query governor cost limit	0	2147483647	0	0
query wait (s)	-1	2147483647	2147483647	2147483647
recovery interval (min)	0	32767	32767	32767
remote access	0	1	1	1
remote admin connections	0	1	0	0
remote login timeout (s)	0	2147483647	20	20
remote proc trans	0	1	0	0
remote query timeout (s)	0	2147483647	600	600
Replication XPs	0	1	0	0
scan for startup procs	0	1	0	0
server trigger recursion	0	1	1	1
set working set size	0	1	0	0
show advanced options	0	1	1	1
SMO and DMO XPs	0	1	1	1
SQL Mail XPs	0	1	0	0
transform noise words	0	1	0	0
two digit year cutoff	1753	9999	2049	2049
user connections	0	32767	0	0
user options	0	32767	0	0
Web Assistant Procedures	0	1	0	0
xp_cmdshell	0	1	0	0

## A.5 Windows 2003 Configuration

The default installation of Windows 2003 Enterprise Edition was used. All default options were selected during the install except:

- A TCP/IP address was configured on the system.

Updated installation to optimize performance for applications. (System Properties > Advanced > Performance Options > Programs)

## A.6 System Hardware Information

System Information report written at: 04/16/07 12:18:47  
 System Name: BULLSEYE  
 [System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	BULLSEYE
System Manufacturer	HP
System Model	ProLiant DL585 G2
System Type	x64-based PC
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2 AuthenticAMD ~2813 Mhz
BIOS Version/Date	HP A07, 2/27/2007
SMBIOS Version	2.3
Windows Directory	C:\WINDOWS
System Directory	C:\WINDOWS\system32
Boot Device	\Device\HarddiskVolume3
Locale	United States
Hardware Abstraction Layer	Version = "5.2.3790.1830 (srv03_sp1_rtm.050324-1447)"
User Name	BULLSEYE\Administrator
Time Zone	Central Daylight Time
Total Physical Memory	32,765.62 MB
Available Physical Memory	27.28 GB
Total Virtual Memory	33.06 GB
Available Virtual Memory	29.26 GB
Page File Space	2.00 GB
Page File	C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device
I/O Port 0x0000A000-0x0000AFFF	PCI standard PCI-to-PCI bridge
I/O Port 0x0000A000-0x0000AFFF	Smart Array P800 Controller
I/O Port 0x00000000-0x000003AF	PCI bus
I/O Port 0x00000000-0x000003AF	Direct memory access controller
I/O Port 0x000003C0-0x000003DF	PCI bus

I/O Port 0x000003C0-0x000003DF	Standard VGA Graphics Adapter
IRQ 11	Base System Device
IRQ 11	PCI Device
I/O Port 0x000002F8-0x000002FF	Motherboard resources
I/O Port 0x000002F8-0x000002FF	Communications Port (COM2)
Memory Address 0xE8000000-0xF7FFFFFF	PCI bus
Memory Address 0xE8000000-0xF7FFFFFF	Standard VGA Graphics Adapter
I/O Port 0x00009000-0x00009FFF	PCI standard PCI-to-PCI bridge
I/O Port 0x00009000-0x00009FFF	Smart Array P800 Controller
I/O Port 0x00006000-0x00006FFF	PCI standard PCI-to-PCI bridge
I/O Port 0x00006000-0x00006FFF	Smart Array E500 Controller
Memory Address 0x80000000-0x83FFFFFF	PCI bus
Memory Address 0x80000000-0x83FFFFFF	Motherboard resources
I/O Port 0x0000B000-0x0000BFFF	PCI standard PCI-to-PCI bridge
I/O Port 0x0000B000-0x0000BFFF	Smart Array P800 Controller
I/O Port 0x00005000-0x00005FFF	PCI standard PCI-to-PCI bridge
I/O Port 0x00005000-0x00005FFF	Smart Array P800 Controller
Memory Address 0xA0000-0xBFFFF	PCI bus
Memory Address 0xA0000-0xBFFFF	Standard VGA Graphics Adapter
Memory Address 0xF8000000-0xFBFFFFFF	PCI standard PCI-to-PCI bridge
Memory Address 0xF8000000-0xFBFFFFFF	HP NC371i Virtual Bus Device
I/O Port 0x00007000-0x0000FFFF	PCI bus
I/O Port 0x00007000-0x0000FFFF	PCI standard PCI-to-PCI bridge
I/O Port 0x00007000-0x0000FFFF	Smart Array P600 Controller
I/O Port 0x00001000-0x00006FFF	PCI bus
I/O Port 0x00001000-0x00006FFF	Standard Dual Channel PCI IDE Controller
I/O Port 0x000003B0-0x000003BB	PCI bus
I/O Port 0x000003B0-0x000003BB	Standard VGA Graphics Adapter
I/O Port 0x00004000-0x00004FFF	PCI standard PCI-to-PCI bridge
I/O Port 0x00004000-0x00004FFF	Smart Array P800 Controller
I/O Port 0x00008000-0x00008FFF	PCI standard PCI-to-PCI bridge

I/O Port 0x00008000-0x00008FFF	Smart Array P800 Controller	0x000000F0-0x000000F0	Motherboard resources	OK
		0x00000CA0-0x00000CA1	Motherboard resources	OK
[DMA]		0x00000CA4-0x00000CA5	Motherboard resources	OK
Resource Device Status		0x00000C00-0x00000C03	Motherboard resources	OK
Channel 7 Direct memory access controller	OK			
Channel 2 Standard floppy disk controller	OK	0x000002F8-0x000002FF	Motherboard resources	OK
[Forced Hardware]		0x000002F8-0x000002FF	Communications Port (COM2)	OK
Device PNP Device ID		0x00000CA2-0x00000CA3	OK	
		0x00000040-0x00000043	System timer	OK
[I/O]		0x00000080-0x0000008F	Direct memory access controller	OK
Resource Device Status		0x000000C0-0x000000DF	Direct memory access controller	OK
0x00000000-0x000003AF	PCI bus OK			
0x00000000-0x000003AF	Direct memory access controller	OK		
0x000003B0-0x000003BB	PCI bus OK			
0x000003B0-0x000003BB	Standard VGA Graphics Adapter	OK		
0x000003C0-0x000003DF	PCI bus OK			
0x000003C0-0x000003DF	Standard VGA Graphics Adapter	OK		
0x000003E0-0x00000FFF	PCI bus OK			
0x00001000-0x00006FFF	PCI bus OK			
0x00001000-0x00006FFF	Standard Dual Channel PCI IDE Controller	OK		
0x00000070-0x00000079	Motherboard resources	OK		
0x00000408-0x0000040F	Motherboard resources	OK		
0x000004D0-0x000004D1	Motherboard resources	OK		
0x00000020-0x0000003F	Motherboard resources	OK		
0x000000A0-0x000000BF	Motherboard resources	OK		
0x00000090-0x0000009F	Motherboard resources	OK		
0x00000050-0x00000053	Motherboard resources	OK		
0x00000700-0x0000073F	Motherboard resources	OK		
0x00000800-0x000008FE	Motherboard resources	OK		
0x00000900-0x000009FE	Motherboard resources	OK		
0x000009FF-0x000009FF	Motherboard resources	OK		
0x00000A00-0x00000AFE	Motherboard resources	OK		
0x00000AFF-0x00000AFF	Motherboard resources	OK		
0x00000B00-0x00000BFE	Motherboard resources	OK		
0x00000BFF-0x00000BFF	Motherboard resources	OK		
0x00000010-0x0000001F	Motherboard resources	OK		
0x00000C80-0x00000C83	Motherboard resources	OK		
0x00000CD4-0x00000CD7	Motherboard resources	OK		
0x00000CF9-0x00000CF9	Motherboard resources	OK		
0x00000F50-0x00000F58	Motherboard resources	OK		
		0x00000061-0x00000061	System speaker	OK
		0x00000060-0x00000060	Standard 101/102-Key or Microsoft	OK
			Natural PS/2 Keyboard	OK
		0x00000064-0x00000064	Standard 101/102-Key or Microsoft	OK
			Natural PS/2 Keyboard	OK
		0x0000002E-0x0000002F	Extended IO Bus	OK
		0x0000004E-0x0000004F	Extended IO Bus	OK
		0x00000620-0x0000065F	Extended IO Bus	OK
		0x00000680-0x0000069F	Extended IO Bus	OK
		0x00000600-0x0000061F	Extended IO Bus	OK
		0x00000660-0x0000067F	Extended IO Bus	OK
		0x00000300-0x0000030F	Extended IO Bus	OK
		0x000003F8-0x000003FF	Communications Port (COM1)	OK
		0x000003F0-0x000003F5	Standard floppy disk controller	OK
		0x000003F7-0x000003F7	Standard floppy disk controller	OK
		0x000001F0-0x000001F7	Primary IDE Channel	OK
		0x000003F6-0x000003F6	Primary IDE Channel	OK
		0x00000170-0x00000177	Secondary IDE Channel	OK
		0x00000376-0x00000376	Secondary IDE Channel	OK
		0x00003000-0x000030FF	Standard VGA Graphics Adapter	OK
		0x00002800-0x000028FF	Base System Device	OK
		0x00003400-0x000034FF	Base System Device	OK
		0x00003800-0x0000381F	Standard Universal PCI to USB Host	OK
			Controller	OK
		0x00006000-0x00006FFF	PCI standard PCI-to-PCI bridge	OK
		0x00006000-0x00006FFF	Smart Array E500 Controller	OK
		0x00005000-0x00005FFF	PCI standard PCI-to-PCI bridge	OK
		0x00005000-0x00005FFF	Smart Array P800 Controller	OK
		0x00004000-0x00004FFF	PCI standard PCI-to-PCI bridge	OK
		0x00004000-0x00004FFF	Smart Array P800 Controller	OK
		0x00007000-0x0000FFFF	PCI bus	OK
		0x00007000-0x0000FFFF	PCI standard PCI-to-PCI bridge	OK
		0x00007000-0x0000FFFF	Smart Array P600 Controller	OK
		0x0000B000-0x0000BFFF	PCI standard PCI-to-PCI bridge	OK
		0x0000B000-0x0000BFFF	Smart Array P800 Controller	OK

0x0000A000-0x0000AFFF	PCI standard PCI-to-PCI bridge	OK
0x0000A000-0x0000AFFF	Smart Array P800 Controller	OK
0x00009000-0x00009FFF	PCI standard PCI-to-PCI bridge	OK
0x00009000-0x00009FFF	Smart Array P800 Controller	OK
0x00008000-0x00008FFF	PCI standard PCI-to-PCI bridge	OK
0x00008000-0x00008FFF	Smart Array P800 Controller	OK

[IRQs]

Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 0	System timer	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 4	Communications Port (COM1)	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 22	Standard OpenHCD USB Host Controller	OK
IRQ 23	Standard Enhanced PCI to USB Host Controller	OK
IRQ 14	Primary IDE Channel	OK
IRQ 11	Base System Device	OK
IRQ 11	PCI Device	OK
IRQ 10	Base System Device	OK
IRQ 17	Standard Universal PCI to USB Host Controller	OK
IRQ 16	Smart Array E500 Controller	OK
IRQ 19	Smart Array P800 Controller	OK
IRQ 18	Smart Array P800 Controller	OK
IRQ 55	Smart Array P800 Controller	OK
IRQ 54	Smart Array P800 Controller	OK
IRQ 57	Smart Array P800 Controller	OK
IRQ 56	Smart Array P800 Controller	OK
IRQ 31	HP NC371i Virtual Bus Device	OK
IRQ 32	HP NC371i Virtual Bus Device	OK
IRQ 26	Smart Array P600 Controller	OK
IRQ 3	Communications Port (COM2)	OK

[Memory]

Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	Standard VGA Graphics Adapter	OK
0x80000000-0x83FFFFFF	PCI bus	OK
0x80000000-0x83FFFFFF	Motherboard resources	OK
0xE8000000-0xF7EFFFFF	PCI bus	OK
0xE8000000-0xF7EFFFFF	Standard VGA Graphics Adapter	OK
0xFED00000-0xFED003FF	High precision event timer	OK
0xF76E0000-0xF76E0FFF	Standard OpenHCD USB Host Controller	OK
0xF76D0000-0xF76D00FF	Standard Enhanced PCI to USB Host Controller	OK
0xF78F0000-0xF78FFFFF	Standard VGA Graphics Adapter	OK
0xF78E0000-0xF78E01FF	Base System Device	OK
0xF78D0000-0xF78D07FF	Base System Device	OK
0xF78C0000-0xF78C1FFF	Base System Device	OK
0xF7800000-0xF787FFFF	Base System Device	OK
0xF77F0000-0xF77F00FF	PCI Device	OK
0xF7D00000-0xF7EFFFFF	PCI standard PCI-to-PCI bridge	OK

0xF7E00000-0xF7EFFFFF	Smart Array E500 Controller	OK
0xF7DF0000-0xF7DF0FFF	Smart Array E500 Controller	OK
0xF7B00000-0xF7CFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF7C00000-0xF7CFFFFF	Smart Array P800 Controller	OK
0xF7BF0000-0xF7BF0FFF	Smart Array P800 Controller	OK
0xF7900000-0xF7AFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF7A00000-0xF7AFFFFF	Smart Array P800 Controller	OK
0xF79F0000-0xF79F0FFF	Smart Array P800 Controller	OK
0xF76F0000-0xF76F0FFF	Advanced programmable interrupt controller	OK
0x84000000-0x8FFFFFFF	PCI bus	OK
0xF7F00000-0xFDFFFFFFFF	PCI bus	OK
0xFDE00000-0xFDFFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFDF00000-0xFDFFFFFFFF	Smart Array P800 Controller	OK
0xFDEF0000-0xFDEF0FFF	Smart Array P800 Controller	OK
0xFDC00000-0xFDDFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFDD00000-0xFDDFFFFFFF	Smart Array P800 Controller	OK
0xFDCF0000-0xFDCF0FFF	Smart Array P800 Controller	OK
0xFDA00000-0xFDBFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFDB00000-0xFDBFFFFFFF	Smart Array P800 Controller	OK
0xFDAF0000-0xFDAF0FFF	Smart Array P800 Controller	OK
0xFD800000-0xFD9FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFD900000-0xFD9FFFFFFF	Smart Array P800 Controller	OK
0xFD8F0000-0xFD8F0FFF	Smart Array P800 Controller	OK
0xF8000000-0xFBFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF8000000-0xFBFFFFFFF	HP NC371i Virtual Bus Device	OK
0xFA000000-0xFBFFFFFFF	HP NC371i Virtual Bus Device	OK
0xFD700000-0xFD7FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFD7F0000-0xFD7F1FFF	Smart Array P600 Controller	OK
0xFD780000-0xFD7BFFFF	Smart Array P600 Controller	OK
0xF7FD0000-0xF7FD0FFF	Advanced programmable interrupt controller	OK
0xF7FE0000-0xF7FE0FFF	Advanced programmable interrupt controller	OK
0xF7FF0000-0xF7FF0FFF	Advanced programmable interrupt controller	OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File
Version	Size	Creation Date		
c:\windows\system32\msadp32.acm	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSADP32.ACM			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	23.50 KB			
(24,064 bytes)	3/25/2005 6:00 AM			
c:\windows\system32\msg711.acm	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSG711.ACM			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	13.50 KB			
(13,824 bytes)	3/25/2005 6:00 AM			
c:\windows\system32\tssoft32.acm	DSP GROUP, INC.			
OK	C:\WINDOWS\system32\TSSOFT32.ACM	1.01		
13.50 KB (13,824 bytes)	3/25/2005 6:00 AM			
c:\windows\system32\msgsm32.acm	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSGSM32.ACM	5.2.3790.1830		
(srv03_sp1_rtm.050324-1447)	34.50 KB (35,328 bytes)			
3/25/2005 6:00 AM				
c:\windows\system32\imaadp32.acm	Microsoft Corporation			
OK	C:\WINDOWS\system32\IMAADP32.ACM	5.2.3790.1830		
(srv03_sp1_rtm.050324-1447)	24.00 KB (24,576 bytes)			
3/25/2005 6:00 AM				

[Video Codecs]

CODEC	Manufacturer	Description	Status	File
Version	Size	Creation Date		
c:\windows\system32\iyuv_32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\IYUV_32.DLL			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	52.50 KB			
(53,760 bytes)	3/24/2005 11:19 AM			
c:\windows\system32\msrle32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSRLE32.DLL			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	15.50 KB			
(15,872 bytes)	3/25/2005 6:00 AM			
c:\windows\system32\msvidc32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3790.1830		
(srv03_sp1_rtm.050324-1447)	43.00 KB (44,032 bytes)			
3/25/2005 6:00 AM				
c:\windows\system32\msyuv.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSYUV.DLL			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	21.00 KB			
(21,504 bytes)	3/24/2005 11:21 AM			
c:\windows\system32\tsbyuv.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\TSBYUV.DLL			
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	12.50 KB			
(12,800 bytes)	3/24/2005 11:34 AM			

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	TEAC DV-28E-N
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMTEAC_DV-28E-N_____C.6B____\5&2270D2F8&0&0.0.0

Driver c:\windows\system32\drivers\cdrom.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 75.50 KB (77,312 bytes), 3/25/2005 6:00 AM)

[Sound Device]

Item	Value
[Display]	
Item	Value
Name	Standard VGA Graphics Adapter
PNP Device ID	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_02\4&21887AE&0&1848
Adapter Type	ATI ES1000, (Standard display types) compatible
Adapter Description	Standard VGA Graphics Adapter
Adapter RAM	32.00 MB (33,554,432 bytes)
Installed Drivers	vga.dll,framebuf.dll,vga256,vga64k
Driver Version	5.2.3790.1830
INF File	display.inf (vga section)
Color Planes	1
Color Table Entries	4294967296
Resolution	1024 x 768 x 1 hertz
Bits/Pixel	32
Memory Address	0xE8000000-0xF7FFFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF78F0000-0xF78FFFFFF
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFFF
Driver	c:\windows\system32\drivers\vgapnp.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 33.00 KB (33,792 bytes), 2/15/2007 4:44 AM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&142B453B&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2005 6:00 AM)
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&0000
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 3/25/2005 6:00 AM)

[Pointing Device]

Item Value  
 Hardware Type PS/2 Compatible Mouse  
 Number of Buttons 5  
 Status OK  
 PNP Device ID ACPI\PNP0F13\4&142B453B&0  
 Power Management Supported No  
 Double Click Threshold 6  
 Handedness Right Handed Operation  
 IRQ Channel IRQ 12  
 Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2005 6:00 AM)

Hardware Type USB Human Interface Device  
 Number of Buttons 5  
 Status OK  
 PNP Device ID USB\VID\_03F0&PID\_1027&MI\_01\7&3B124F76&0&0001

Power Management Supported No  
 Double Click Threshold 6  
 Handedness Right Handed Operation  
 Driver c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 18.50 KB (18,944 bytes), 3/25/2005 6:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item Value  
 Name [00000001] Broadcom NetXtreme Gigabit Ethernet  
 Adapter Type Not Available  
 Product Type Broadcom NetXtreme Gigabit Ethernet  
 Installed Yes  
 PNP Device ID Not Available  
 Last Reset 4/16/2007 11:31 AM  
 Index 1  
 Service Name b57nd  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled Yes  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

Name [00000002] RAS Async Adapter  
 Adapter Type Not Available  
 Product Type RAS Async Adapter  
 Installed Yes  
 PNP Device ID Not Available  
 Last Reset 4/16/2007 11:31 AM  
 Index 2  
 Service Name AsyncMac  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available

DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

Name [00000003] WAN Miniport (L2TP)  
 Adapter Type Not Available  
 Product Type WAN Miniport (L2TP)  
 Installed Yes  
 PNP Device ID ROOT\MS\_L2TPMINIPORT\0000  
 Last Reset 4/16/2007 11:31 AM  
 Index 3  
 Service Name Rasl2tp  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 132.00 KB (135,168 bytes), 3/25/2005 6:00 AM)

Name [00000004] WAN Miniport (PPTP)  
 Adapter Type Wide Area Network (WAN)  
 Product Type WAN Miniport (PPTP)  
 Installed Yes  
 PNP Device ID ROOT\MS\_PPTPMINIPORT\0000  
 Last Reset 4/16/2007 11:31 AM  
 Index 4  
 Service Name PptpMiniport  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 50:50:54:50:30:30  
 Driver c:\windows\system32\drivers\raspptp.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 117.50 KB (120,320 bytes), 3/25/2005 6:00 AM)

Name [00000005] WAN Miniport (PPPOE)  
 Adapter Type Wide Area Network (WAN)  
 Product Type WAN Miniport (PPPOE)  
 Installed Yes  
 PNP Device ID ROOT\MS\_PPPOEMINIPOINT\0000  
 Last Reset 4/16/2007 11:31 AM  
 Index 5  
 Service Name RasPppoe  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 33:50:6F:45:30:30  
 Driver c:\windows\system32\drivers\raspppoe.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 67.50 KB (69,120 bytes), 3/25/2005 6:00 AM)

Name [00000006] Direct Parallel  
 Adapter Type Not Available  
 Product Type Direct Parallel  
 Installed Yes  
 PNP Device ID ROOT\MS\_PTMINIPORT\0000  
 Last Reset 4/16/2007 11:31 AM

Index 6  
 Service Name Raspti  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\raspti.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 30.50 KB (31,232 bytes), 3/25/2005 6:00 AM)

Name [00000007] WAN Miniport (IP)  
 Adapter Type Not Available  
 Product Type WAN Miniport (IP)  
 Installed Yes  
 PNP Device ID ROOT\MS\_NDISWANIP\0000  
 Last Reset 4/16/2007 11:31 AM

Index 7  
 Service Name NdisWan  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 157.50 KB (161,280 bytes), 3/25/2005 6:00 AM)

Name [00000008] HP NC371i Multifunction Gigabit Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Type HP NC371i Multifunction Gigabit Server Adapter

Installed Yes  
 PNP Device ID B06BDRV\L2ND&PCI\_164A14E4&SUBSYS\_1709103C&REV\_02\5&B64F98D&0&20054101  
 Last Reset 4/16/2007 11:31 AM  
 Index 8  
 Service Name l2nd  
 IP Address 130.168.250.49  
 IP Subnet 255.255.0.0  
 Default IP Gateway Not Available  
 DHCP Enabled Yes  
 DHCP Server 130.168.253.2  
 DHCP Lease Expires 4/17/2007 11:38 AM  
 DHCP Lease Obtained 4/16/2007 11:38 AM  
 MAC Address 00:15:60:54:E7:BE  
 Driver c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 2/28/2007 10:05 AM)

Name [00000009] HP NC371i Multifunction Gigabit Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Type HP NC371i Multifunction Gigabit Server Adapter  
 Installed Yes  
 PNP Device ID B06BDRV\L2ND&PCI\_164A14E4&SUBSYS\_1709103C&REV\_02\5&2945E16&0&20054102  
 Last Reset 4/16/2007 11:31 AM  
 Index 9  
 Service Name l2nd  
 IP Address 0.0.0.0

IP Subnet 0.0.0.0  
 Default IP Gateway Not Available  
 DHCP Enabled Yes  
 DHCP Server  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:15:60:54:E7:C0  
 Driver c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 2/28/2007 10:05 AM)

Name [00000010] Intel (R) 82544GC Based Network Connection  
 Adapter Type Not Available  
 Product Type Intel (R) 82544GC Based Network Connection

Installed Yes  
 PNP Device ID Not Available  
 Last Reset 4/16/2007 11:31 AM  
 Index 10  
 Service Name E1000

IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

Name [00000011] HP NC373i Multifunction Gigabit Server Adapter  
 Adapter Type Not Available  
 Product Type HP NC373i Multifunction Gigabit Server Adapter

Installed Yes  
 PNP Device ID Not Available  
 Last Reset 4/16/2007 11:31 AM  
 Index 11  
 Service Name l2nd  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled Yes  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

Name [00000012] HP NC373i Multifunction Gigabit Server Adapter  
 Adapter Type Not Available  
 Product Type HP NC373i Multifunction Gigabit Server Adapter

Installed Yes  
 PNP Device ID Not Available  
 Last Reset 4/16/2007 11:31 AM  
 Index 12  
 Service Name l2nd  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled Yes  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

[Protocol]  
 Item Value



Name MSAFD Tcpip [TCP/IP]  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 16 bytes  
 Maximum Message Size 0 bytes  
 Message Oriented No  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data Yes  
 Supports Graceful Closing Yes  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 16 bytes  
 Maximum Message Size 63.93 KB (65,467 bytes)  
 Message Oriented Yes  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting Yes

Name RSVP UDP Service Provider  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 16 bytes  
 Maximum Message Size 63.93 KB (65,467 bytes)  
 Message Oriented Yes  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption Yes  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting Yes

Name RSVP TCP Service Provider  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 16 bytes  
 Maximum Message Size 0 bytes  
 Message Oriented No  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption Yes  
 Supports Expedited Data Yes  
 Supports Graceful Closing Yes  
 Supports Guaranteed Bandwidth No

Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\wssock32.dll
Size	24.50 KB (25,088 bytes)
Version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK
PNP Device ID	ROOT\*PNP0501\1_0_17_1_0_0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLSD	Yes
Supports RLSD	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXMit Threshold	512
XOn Character	17
XOnXMit Threshold	2048
XOnXOff InFlow Control	0
XOnXOff OutFlow Control	0
I/O Port	0x000002F8-0x000002FF
IRQ Channel	IRQ 3
Driver	c:\windows\system32\drivers\serial.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 118.50 KB (121,344 bytes), 3/25/2005 6:00 AM)

Item	Value
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes

Settable Parity Yes  
 Settable Parity Check Yes  
 Settable Stop Bits Yes  
 Settable RLSD Yes  
 Supports RLSD Yes  
 Supports 16 Bit Mode No  
 Supports Special Characters No  
 Baud Rate 9600  
 Bits/Byte 8  
 Stop Bits 1  
 Parity None  
 Busy No  
 Abort Read/Write on Error No  
 Binary Mode Enabled Yes  
 Continue XMit on XOff No  
 CTS Outflow Control No  
 Discard NULL Bytes No  
 DSR Outflow Control 0  
 DSR Sensitivity 0  
 DTR Flow Control Type Enable  
 EOF Character 0  
 Error Replace Character 0  
 Error Replacement Enabled No  
 Event Character 0  
 Parity Check Enabled No  
 RTS Flow Control Type Enable  
 XOff Character 19  
 XOffXMit Threshold 512  
 XOn Character 17  
 XOnXMit Threshold 2048  
 XOnXOff InFlow Control 0  
 XOnXOff OutFlow Control 0  
 IRQ Channel IRQ 4  
 I/O Port 0x000003F8-0x000003FF  
 Driver c:\windows\system32\drivers\serial.sys (5.2.3790.1830  
 (srv03\_sp1\_rtm.050324-1447), 118.50 KB (121,344 bytes), 3/25/2005 6:00  
 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value  
 Drive A:  
 Description 3 1/2 Inch Floppy Drive  
  
 Drive C:  
 Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 33.88 GB (36,381,306,880 bytes)  
 Free Space 13.66 GB (14,667,677,696 bytes)  
 Volume Name  
 Volume Serial Number 18DB8253  
  
 Drive D:  
 Description CD-ROM Disc  
  
 Drive Z:  
 Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 3.51 TB (3,858,700,955,648 bytes)  
 Free Space 805.22 GB (864,600,772,608 bytes)

Volume Name New Volume  
 Volume Serial Number 1C7521B7  
  
 [Disks]  
  
 Item Value  
 Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 3  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #3, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes  
  
 Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 3  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #4, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes  
  
 Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 3  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #5, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes  
  
 Description Disk drive

Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 5  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #13, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 5  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #14, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 5  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #15, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0

SCSI Logical Unit 0  
 SCSI Port 5  
 SCSI Target ID 7  
 Sectors/Track 63  
 Size 1.95 GB (2,089,221,120 bytes)  
 Total Cylinders 254  
 Total Sectors 4,080,510  
 Total Tracks 64,770  
 Tracks/Cylinder 255  
 Partition Disk #16, Partition #0  
 Partition Size 1.95 GB (2,089,188,864 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 8  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #23, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 8  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #24, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 8  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665

Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #25, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 2  
 SCSI Target ID 4  
 Sectors/Track 32  
 Size 230.47 GB (247,462,379,520 bytes)  
 Total Cylinders 59,231  
 Total Sectors 483,324,960  
 Total Tracks 15,103,905  
 Tracks/Cylinder 255  
 Partition Disk #0, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 2  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #1, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 2  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #2, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive

Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 4  
 Sectors/Track 32  
 Size 33.89 GB (36,385,505,280 bytes)  
 Total Cylinders 8,709  
 Total Sectors 71,065,440  
 Total Tracks 2,220,795  
 Tracks/Cylinder 255  
 Partition Disk #6, Partition #0  
 Partition Size 33.88 GB (36,381,310,976 bytes)  
 Partition Starting Offset 16,384 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 5  
 Sectors/Track 32  
 Size 230.47 GB (247,462,379,520 bytes)  
 Total Cylinders 59,231  
 Total Sectors 483,324,960  
 Total Tracks 15,103,905  
 Tracks/Cylinder 255  
 Partition Disk #7, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 6  
 Sectors/Track 32  
 Size 146.48 GB (157,286,154,240 bytes)  
 Total Cylinders 37,647  
 Total Sectors 307,199,520  
 Total Tracks 9,599,985  
 Tracks/Cylinder 255  
 Partition Disk #8, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0

SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 7  
 Sectors/Track 32  
 Size 449.22 GB (482,345,041,920 bytes)  
 Total Cylinders 115,451  
 Total Sectors 942,080,160  
 Total Tracks 29,440,005  
 Tracks/Cylinder 255  
 Partition Disk #9, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 8  
 Sectors/Track 32  
 Size 195.31 GB (209,714,872,320 bytes)  
 Total Cylinders 50,196  
 Total Sectors 409,599,360  
 Total Tracks 12,799,980  
 Tracks/Cylinder 255  
 Partition Disk #10, Partition #0  
 Partition Size 195.31 GB (209,711,005,696 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 9  
 Sectors/Track 32  
 Size 77.15 GB (82,835,619,840 bytes)  
 Total Cylinders 19,827  
 Total Sectors 161,788,320  
 Total Tracks 5,055,885  
 Tracks/Cylinder 255  
 Partition Disk #11, Partition #0  
 Partition Size 77.15 GB (82,835,406,848 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 10  
 Sectors/Track 32  
 Size 498.05 MB (522,240,000 bytes)  
 Total Cylinders 125  
 Total Sectors 1,020,000

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #28, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Total Tracks 31,875  
 Tracks/Cylinder 255  
 Partition Disk #12, Partition #0  
 Partition Size 494.16 MB (518,160,384 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 9  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #26, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 9  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #27, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 9  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #28, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 9  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #28, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive

Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 7  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #20, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 7  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #21, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 7  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #22, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0

SCSI Logical Unit 0  
 SCSI Port 6  
 SCSI Target ID 4  
 Sectors/Track 63  
 Size 230.46 GB (247,457,548,800 bytes)  
 Total Cylinders 30,085  
 Total Sectors 483,315,525  
 Total Tracks 7,671,675  
 Tracks/Cylinder 255  
 Partition Disk #17, Partition #0  
 Partition Size 230.46 GB (247,456,595,968 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 6  
 SCSI Target ID 5  
 Sectors/Track 63  
 Size 146.48 GB (157,283,804,160 bytes)  
 Total Cylinders 19,122  
 Total Sectors 307,194,930  
 Total Tracks 4,876,110  
 Tracks/Cylinder 255  
 Partition Disk #18, Partition #0  
 Partition Size 146.48 GB (157,283,254,272 bytes)  
 Partition Starting Offset 131,072 bytes

Description Disk drive  
 Manufacturer (Standard disk drives)  
 Model HP LOGICAL VOLUME SCSI Disk Device  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus 0  
 SCSI Logical Unit 0  
 SCSI Port 6  
 SCSI Target ID 6  
 Sectors/Track 63  
 Size 449.21 GB (482,338,644,480 bytes)  
 Total Cylinders 58,641  
 Total Sectors 942,067,665  
 Total Tracks 14,953,455  
 Tracks/Cylinder 255  
 Partition Disk #19, Partition #0  
 Partition Size 449.21 GB (482,338,612,224 bytes)  
 Partition Starting Offset 32,256 bytes

[SCSI]

Item	Value
Name	Smart Array E500 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_03\4
	&22FE8B0D&0&0060
Memory Address	0xF7E00000-0xF7EFFFFF
I/O Port	0x00006000-0x00006FFF
Memory Address	0xF7DF0000-0xF7DF0FFF
IRQ Channel	IRQ 16

Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &B98F5C4&0&0068  
Memory Address 0xF7C00000-0xF7CFFFFF  
I/O Port 0x00005000-0x00005FFF  
Memory Address 0xF7BF0000-0xF7BF0FFF  
IRQ Channel IRQ 19  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &13700CED&0&0070  
Memory Address 0xF7A00000-0xF7AFFFFF  
I/O Port 0x00004000-0x00004FFF  
Memory Address 0xF79F0000-0xF79F0FFF  
IRQ Channel IRQ 18  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &300C8240&0&0058  
Memory Address 0xFDF00000-0xFDFFFFFFFF  
I/O Port 0x0000B000-0x0000BFFF  
Memory Address 0xFDEF0000-0xFDEF0FFF  
IRQ Channel IRQ 55  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &137ABAEA&0&0060  
Memory Address 0xFDD00000-0xFDDFFFFFFF  
I/O Port 0x0000A000-0x0000AFFF  
Memory Address 0xFDCF0000-0xFDCF0FFF  
IRQ Channel IRQ 54  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &1B1CF5E7&0&0068  
Memory Address 0xFDB00000-0xFDBFFFFFFF  
I/O Port 0x00009000-0x00009FFF  
Memory Address 0xFDAF0000-0xFDAF0FFF  
IRQ Channel IRQ 57

Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P800 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_03\4 &3EC0CCA&0&0070  
Memory Address 0xFD900000-0xFD9FFFFFFF  
I/O Port 0x00008000-0x00008FFF  
Memory Address 0xFD8F0000-0xFD8F0FFF  
IRQ Channel IRQ 56  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

Name Smart Array P600 Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID PCI\VEN\_103C&DEV\_3220&SUBSYS\_3225103C&REV\_00\4 &24CF26E8&0&1088  
Memory Address 0xFD7F0000-0xFD7F1FFF  
I/O Port 0x00007000-0x0000FFFF  
Memory Address 0xFD780000-0xFD7BFFFF  
IRQ Channel IRQ 26  
Driver c:\windows\system32\drivers\hpciss2.sys (6.6.0.64 Build 4a (x86-64) built by: phiwong, 53.00 KB (54,272 bytes), 2/28/2007 10:04 AM)

[IDE]  
Item Value  
Name Standard Dual Channel PCI IDE Controller  
Manufacturer (Standard IDE ATA/ATAPI controllers)  
Status OK  
PNP Device ID PCI\VEN\_10DE&DEV\_0053&SUBSYS\_31F8103C&REV\_A3\3&20FEA912&0&30  
I/O Port 0x00001000-0x00006FFF  
Driver c:\windows\system32\drivers\pciide.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 6.00 KB (6,144 bytes), 3/25/2005 6:00 AM)

Name Primary IDE Channel  
Manufacturer (Standard IDE ATA/ATAPI controllers)  
Status OK  
PNP Device ID PCI\IDE\IDECHANNEL\4&23A0739C&0&0  
I/O Port 0x00001F0-0x00001F7  
I/O Port 0x000003F6-0x000003F6  
IRQ Channel IRQ 14  
Driver c:\windows\system32\drivers\atapi.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 145.00 KB (148,480 bytes), 3/25/2005 6:00 AM)

Name Secondary IDE Channel  
Manufacturer (Standard IDE ATA/ATAPI controllers)  
Status OK  
PNP Device ID PCI\IDE\IDECHANNEL\4&23A0739C&0&1  
I/O Port 0x00000170-0x00000177  
I/O Port 0x00000376-0x00000376  
Driver c:\windows\system32\drivers\atapi.sys (5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447), 145.00 KB (148,480 bytes), 3/25/2005 6:00 AM)  
[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code  
 Not Available ACPI\IPI0001\0 The drivers for this device are not installed.  
 Base System Device  
 PCI\VEN\_0E11&DEV\_B203&SUBSYS\_3305103C&REV\_03\4  
 &21887AE&0&2048 The drivers for this device are not installed.  
 Base System Device  
 PCI\VEN\_0E11&DEV\_B204&SUBSYS\_3305103C&REV\_03\4  
 &21887AE&0&2248 The drivers for this device are not installed.  
 PCI Device  
 PCI\VEN\_103C&DEV\_3302&SUBSYS\_3305103C&REV\_00\4  
 &21887AE&0&2648 The drivers for this device are not installed.

[USB]

Device PNP Device ID  
 Standard OpenHCD USB Host Controller  
 PCI\VEN\_10DE&DEV\_005A&SUBSYS\_31F8103C&REV\_A2\3  
 &20FEA912&0&10  
 Standard Enhanced PCI to USB Host Controller  
 PCI\VEN\_10DE&DEV\_005B&SUBSYS\_31F8103C&REV\_A4\3  
 &20FEA912&0&11  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_103C&DEV\_3300&SUBSYS\_3305103C&REV\_00\4  
 &21887AE&0&2448

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start
Mode	State	Status	Error Control	Accept	Pause
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	Normal
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No	No
adpu160m	adpu160m	Not Available	Kernel Driver	No	No
adpu320	adpu320	Not Available	Kernel Driver	No	No
afd	AFD	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes	Normal
aic78u2	aic78u2	Not Available	Kernel Driver	No	No
aic78xx	aic78xx	Not Available	Kernel Driver	No	No
aliide	AliIde	Not Available	Kernel Driver	No	No

amdide	AmdIde	Not Available	Kernel Driver	No	No
arc	arc	Not Available	Kernel Driver	No	No
asynctac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asynctac.sys	Kernel Driver	No	No
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel Driver	Yes	Normal
atdisk	Atdisk	Not Available	Kernel Driver	No	No
ati2mtag	ati2mtag	c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver	No	No
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver	No	No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver	Yes	Normal
b06bdrv	HP Virtual Bus Device	c:\windows\system32\drivers\bxvbda.sys	Kernel Driver	Yes	No
b57nd	Broadcom NetXtreme Gigabit Ethernet	c:\windows\system32\drivers\b57amd64.sys	Kernel Driver	No	No
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes	Normal
cdac15ba	CdaC15BA	c:\windows\system32\drivers\cdac15ba.sys	Kernel Driver	Yes	Running
cdad10ba	CdaD10BA	c:\windows\system32\drivers\cdad10ba.sys	Kernel Driver	Yes	Running
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes	Normal
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	Running
changer	Changer	Not Available	Kernel Driver	No	No
clusdisk	Cluster Disk Driver	c:\windows\system32\drivers\clusdisk.sys	Kernel Driver	No	OK
cmdide	CmdIde	Not Available	Kernel Driver	No	No
cpqccissm	cpqccissm	Not Available	Kernel Driver	No	No
crdisk	CRC Disk Filter Driver	c:\windows\system32\drivers\crdisk.sys	Kernel Driver	Yes	No
dfsdriver	DfsDriver	c:\windows\system32\drivers\dfs.sys	File System Driver	Yes	Normal



disk	Disk Driver	c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes	Boot	Running	OK	
	Normal	No	Yes					
dmboot Driver	dmboot	c:\windows\system32\drivers\dmboot.sys	Kernel Driver	Yes	Disabled	Running	OK	Normal No
	Yes							
dmio	Logical Disk Manager Driver	c:\windows\system32\drivers\dmio.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
dmload Driver	dmload	c:\windows\system32\drivers\dmload.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
dpti2o	dpti2o	Not Available	Kernel Driver	Disabled	Stopped	OK		Normal No No
e1000	Intel(R) PRO/1000 Device Driver	c:\windows\system32\drivers\elg5132e.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No
	No							
elxstor	elxstor	Not Available	Kernel Driver	Disabled	Stopped	OK		Normal No No
fastfat System Driver	Fastfat	c:\windows\system32\drivers\fastfat.sys	File System Driver	No	Disabled	Stopped	OK	Normal
	No							
fdc	Floppy Disk Controller Driver	c:\windows\system32\drivers\fdc.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No
	Yes							
fips Driver	Fips	c:\windows\system32\drivers\fips.sys	Kernel Driver	Yes	System	Running	OK	Normal No
	Yes							
flpydisk	Floppy Disk Driver	c:\windows\system32\drivers\flpydisk.sys	Kernel Driver	Normal	No	Yes		Running OK
	Kernel Driver							
fltmgr System Driver	FltMgr	c:\windows\system32\drivers\fltmgr.sys	File System Driver	Yes	Boot	Running	OK	Normal
	No							
ftdisk	Volume Manager Driver	c:\windows\system32\drivers\ftdisk.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
gpc	Generic Packet Classifier	c:\windows\system32\drivers\msgpc.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No
	Yes							
hidusb	Microsoft HID Class Driver	c:\windows\system32\drivers\hidusb.sys	Kernel Driver	Yes	Manual	Running	OK	Ignore No
	Yes							
hpcisss Driver	hpcisss	c:\windows\system32\drivers\hpcisss.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
hpcisss2 Driver	HpCISSs2	c:\windows\system32\drivers\hpcisss2.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
http Driver	HTTP	c:\windows\system32\drivers\http.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No
	No							
i2omgmt	i2omgmt	Not Available	Kernel Driver	System	Stopped	OK		Normal No No
	System							
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver	c:\windows\system32\drivers\i8042prt.sys	Kernel Driver	Yes	System	Running	OK	Normal No
	Yes							
iirsp	iirsp	Not Available	Kernel Driver	Disabled	Stopped	OK		Normal No No
	Disabled							

imapi	CD-Burning Filter Driver	c:\windows\system32\drivers\imapi.sys	Kernel Driver	No	System	Stopped	OK	Normal No
	No							
intelide	IntelIde	Not Available	Kernel Driver	Disabled	Stopped	OK		Normal No No
	Disabled							
intelppm	Intel Processor Driver	c:\windows\system32\drivers\intelppm.sys	Kernel Driver	Normal	No	No		Manual Stopped OK
	Kernel Driver							
ip6fw	IPv6 Windows Firewall Driver	c:\windows\system32\drivers\ip6fw.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No
	No							
ipfilterdriver	IP Traffic Filter Driver	c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No
	No							
ipinip	IP in IP Tunnel Driver	c:\windows\system32\drivers\ipinip.sys	Kernel Driver	Normal	No	No		Manual Stopped OK
	Kernel Driver							
ipnat	IP Network Address Translator	c:\windows\system32\drivers\ipnat.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No
	No							
ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys	Kernel Driver	Normal	No	Yes		System Running OK
	Kernel Driver							
isapnp	PnP ISA/EISA Bus Driver	c:\windows\system32\drivers\isapnp.sys	Kernel Driver	Yes	Boot	Running	OK	Critical No
	Yes							
kbdclass	Keyboard Class Driver	c:\windows\system32\drivers\kbdclass.sys	Kernel Driver	Yes	System	Running	OK	Normal No
	Yes							
kbdhid	Keyboard HID Driver	c:\windows\system32\drivers\kbdhid.sys	Kernel Driver	Ignore	No	Yes		System Running OK
	Kernel Driver							
ksecdd Driver	KSecDD	c:\windows\system32\drivers\ksecdd.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							
ksthunk	Kernel Streaming WOW64 Thunk Service	c:\windows\system32\drivers\ksthunk.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No
	Yes							
l2nd	HP NC370 Multifunction Gigabit Server Adapter	c:\windows\system32\drivers\bxnd52a.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No
	Yes							
lp6nds35	lp6nds35	Not Available	Kernel Driver	Disabled	Stopped	OK		Normal No No
	Disabled							
mmdd Driver	mmdd	c:\windows\system32\drivers\mmdd.sys	Kernel Driver	Yes	System	Running	OK	Ignore No
	Yes							
modem Driver	Modem	c:\windows\system32\drivers\modem.sys	Kernel Driver	No	Manual	Stopped	OK	Ignore No
	No							
mouclass	Mouse Class Driver	c:\windows\system32\drivers\mouclass.sys	Kernel Driver	Normal	No	Yes		System Running OK
	Kernel Driver							
mouhid	Mouse HID Driver	c:\windows\system32\drivers\mouhid.sys	Kernel Driver	Ignore	No	Yes		Manual Running OK
	Kernel Driver							
mountmgr	Mount Point Manager	c:\windows\system32\drivers\mountmgr.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No
	Yes							

mraid35x	mraid35x	Not Available Disabled Stopped OK	Kernel Driver Normal No	No	No	No	pcmcia Driver	Pcmcia No	c:\windows\system32\drivers\pcmcia.sys	Kernel Driver	Normal No
mrxdav	WebDav Client Redirector						pdcomp	PDCOMP	Not Available Manual Stopped OK	Kernel Driver Ignore No	No
mrxdav	WebDav Client Redirector						pdframe	PDFFRAME	Not Available Manual Stopped OK	Kernel Driver Ignore No	No
mrxdav	WebDav Client Redirector						pdreli	PDRELI	Not Available Manual Stopped OK	Kernel Driver Ignore No	No
mrxsmb	MRXSMB	c:\windows\system32\drivers\mrxsmb.sys	File System Driver	Yes	System Running OK	Normal	pdiframe	PDRFRAME	Not Available Manual Stopped OK	Kernel Driver Ignore No	No
msfs	Msfs	c:\windows\system32\drivers\msfs.sys	File System Driver	Yes	System Running OK	Normal	pptpminiport	WAN Miniport (PPTP)			
mssmbios	Microsoft System Management BIOS Driver						processor	Processor Driver	c:\windows\system32\drivers\processr.sys	Kernel Driver	Normal No
mup	Mup	c:\windows\system32\drivers\mup.sys	File System Driver	Yes	Boot Running OK	Normal	ptilink	Direct Parallel Link Driver		Kernel Driver	Normal No
ndis	NDIS System Driver	c:\windows\system32\drivers\ndis.sys	Kernel Driver	Yes	Boot Running OK	Normal	ql2300	ql2300	Not Available Disabled Stopped OK	Kernel Driver Normal No	No
ndistapi	Remote Access NDIS TAPI Driver						rasacd	Remote Access Auto Connection Driver		Kernel Driver	Normal No
ndisuio	NDIS Usermode I/O Protocol						rasl2tp	WAN Miniport (L2TP)		Kernel Driver	Normal No
ndiswan	Remote Access NDIS WAN Driver						rasppoe	Remote Access PPPOE Driver		Kernel Driver	Normal No
ndproxy	NDIS Proxy	c:\windows\system32\drivers\ndproxy.sys	Kernel Driver	Yes	Manual Running OK	Normal	raspti	Direct Parallel	c:\windows\system32\drivers\raspti.sys	Kernel Driver	Normal No
netbios	NetBIOS Interface	c:\windows\system32\drivers\netbios.sys	File System Driver	Yes	System Running OK	Normal	rdbss	Rdbss	c:\windows\system32\drivers\rdbss.sys	File System Driver	Normal No
netbt	NetBios over Tcpip	c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes	System Running OK	Normal	rdpcdd	RDPCDD	c:\windows\system32\drivers\rdpcdd.sys	Kernel Driver	Ignore No
nfrd960	nfrd960	Not Available Disabled Stopped OK	Kernel Driver Normal No	No	No	No	rdpdr	Terminal Server Device Redirector Driver		Kernel Driver	Normal No
npfs	Npfs	c:\windows\system32\drivers\npfs.sys	File System Driver	Yes	System Running OK	Normal	rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys	Kernel Driver	Ignore No
ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys	File System Driver	Yes	Disabled Running OK	Normal	redbook	Digital CD Audio Playback Filter Driver		Kernel Driver	Normal No
null	Null	c:\windows\system32\drivers\null.sys	Kernel Driver	Yes	System Running OK	Normal	secdrv	Security Driver	c:\windows\system32\drivers\secdrv.sys	Kernel Driver	Normal No
parport	Parport	c:\windows\system32\drivers\parport.sys	Kernel Driver	No	Manual Stopped OK	Ignore	serenum	Serenum Filter Driver	c:\windows\system32\drivers\serenum.sys	Kernel Driver	Normal No
partmgr	Partition Manager	c:\windows\system32\drivers\partmgr.sys	Kernel Driver	Yes	Boot Running OK	Normal	serial	Serial port driver	c:\windows\system32\drivers\serial.sys	Kernel Driver	Ignore No
pci	PCI Bus Driver	c:\windows\system32\drivers\pci.sys	Kernel Driver	Yes	Boot Running OK	Critical					
pciide	PCIIde	c:\windows\system32\drivers\pciide.sys	Kernel Driver	Yes	Boot Running OK	Normal					

sfloppy Driver	Sfloppy No	c:\windows\system32\drivers\sfloppy.sys	Kernel Driver	No	No	No
simbad	Simbad Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
srv System Driver	Srv Yes	c:\windows\system32\drivers\srv.sys	File Driver	Normal	Running	OK
swenum	Software Bus Driver	c:\windows\system32\drivers\swenum.sys	Kernel Driver	Normal	Running	OK
symc8xx	symc8xx Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
symmpi	symmpi Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
sym_hi	sym_hi Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
sym_u3	sym_u3 Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
tcpip	TCP/IP Protocol Driver	c:\windows\system32\drivers\tcpip.sys	Kernel Driver	Normal	Running	OK
tdpipe Driver	TDPIPE No	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver	Normal	Stopped	OK
tdtcp Driver	TDTCP Yes	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	Running	OK
termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	Normal	Running	OK
toside	TosIde Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
udfs System Driver	Udfs No	c:\windows\system32\drivers\udfs.sys	File Driver	Normal	Stopped	OK
ultra	ultra Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
update	Microcode Update Driver	c:\windows\system32\drivers\update.sys	Kernel Driver	Normal	Running	OK
usbccgp	Microsoft USB Generic Parent Driver	c:\windows\system32\drivers\usbccgp.sys	Kernel Driver	Normal	Running	OK
usbehci	Microsoft USB 2.0 Enhanced Host Controller Miniport Driver	c:\windows\system32\drivers\usbehci.sys	Kernel Driver	Normal	Running	OK
usbhub	Microsoft USB Standard Hub Driver	c:\windows\system32\drivers\usbhub.sys	Kernel Driver	Normal	Running	OK
usbohci	Microsoft USB Open Host Controller Miniport Driver	c:\windows\system32\drivers\usbohci.sys	Kernel Driver	Normal	Running	OK
usbstor	USB Mass Storage Driver	c:\windows\system32\drivers\usbstor.sys	Kernel Driver			

usuhci	Microsoft USB Universal Host Controller Miniport Driver	c:\windows\system32\drivers\usuhci.sys	Kernel Driver	Normal	Running	OK
vga Driver	vga Yes	c:\windows\system32\drivers\vgapnp.sys	Kernel Driver	Normal	Running	OK
vgasave	VGA Display Controller.	c:\windows\system32\drivers\vga.sys	Kernel Driver	Normal	Stopped	OK
viaide	Vialde Disabled	Not Available Stopped	Kernel Driver Normal	No	No	No
volsnap	Storage volumes	c:\windows\system32\drivers\volsnap.sys	Kernel Driver	Normal	Running	OK
wanarp	Remote Access IP ARP Driver	c:\windows\system32\drivers\wanarp.sys	Kernel Driver	Normal	Running	OK
wdica	WDICA Manual	Not Available Stopped	Kernel Driver	Normal	Stopped	OK
wlbs	Network Load Balancing	c:\windows\system32\drivers\wlbs.sys	Kernel Driver	Normal	Stopped	OK
[Signed Drivers]						
Device Name		Signed	Device Class	Driver Version		
Name		Driver Date	Manufacturer	INF Name	Driver	
Communications Port		Yes	PORTS	5.2.3790.1830	msports.inf	
Available		10/1/2002 (Standard port types)	msports.inf	Not	Available	
Microsoft System Management BIOS Driver		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\SYSTEM\0002			
Microcode Update Device		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\SYSTEM\0001			
Plug and Play Software Device Enumerator		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\SYSTEM\0000			
Terminal Server Mouse Driver		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\RDP_MOU\0000			
Terminal Server Keyboard Driver		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\RDP_KBD\0000			
Terminal Server Device Redirector		Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	
machine.inf		Not Available	ROOT\RDPDR\0000			
Direct Parallel		Yes	NET	5.2.3790.1830	10/1/2002 Microsoft netrasa.inf	
ROOT\MS_PTMINIPORT\0000						
WAN Miniport (PPTP)		Yes	NET	5.2.3790.1830	10/1/2002 Microsoft netrasa.inf	
ROOT\MS_PPTPMINIPORT\0000						
WAN Miniport (PPPOE)		Yes	NET	5.2.3790.1830	10/1/2002 Microsoft netrasa.inf	
ROOT\MS_PPPOEMINIPORT\0000						

WAN Miniport (IP)	Yes	NET	5.2.3790.1830	Not Available	Not Available
10/1/2002 Microsoft	netrasa.inf	Not Available		ROOT\LEGACY_NDISUIO\0000	
ROOT\MS_NDISWANIP\0000				Remote Access NDIS TAPI Driver	Not Available
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830	LEGACYDRIVER	Not Available
10/1/2002 Microsoft	netrasa.inf	Not Available		Not Available	Not Available
ROOT\MS_L2TPMINIPORT\0000				ROOT\LEGACY_NDISTAPI\0000	
Video Codecs	Yes	MEDIA	5.2.3790.1830	NDIS System Driver	Not Available
10/1/2002 (Standard system devices)	wave.inf	Not Available		LEGACYDRIVER	Not Available
Available	ROOT\MEDIA\MS_MMVID			Not Available	ROOT\LEGACY_NDIS\0000
Legacy Video Capture Devices	Yes	MEDIA	5.2.3790.1830	mountmgr	Not Available
10/1/2002 (Standard system devices)	wave.inf	Not Available		Not Available	Not Available
Available	ROOT\MEDIA\MS_MMVCD			Not Available	ROOT\LEGACY_MOUNTMGR\0000
Media Control Devices	Yes	MEDIA	5.2.3790.1830	mmdd	Not Available
10/1/2002 (Standard system devices)	wave.inf	Not Available		LEGACYDRIVER	Not Available
Available	ROOT\MEDIA\MS_MMMCI			Not Available	Not Available
Legacy Audio Drivers	Yes	MEDIA	5.2.3790.1830	Not Available	ROOT\LEGACY_MNMDD\0000
10/1/2002 (Standard system devices)	wave.inf	Not Available			
Available	ROOT\MEDIA\MS_MMDRV			ksecdd	Not Available
Audio Codecs	Yes	MEDIA	5.2.3790.1830	Not Available	LEGACYDRIVER
10/1/2002 (Standard system devices)	wave.inf	Not Available		Not Available	Not Available
Available	ROOT\MEDIA\MS_MMACM			Not Available	ROOT\LEGACY_KSECDD\0000
Remote Access IP ARP Driver	Not Available			IPSEC driver	Not Available
Not Available	LEGACYDRIVER	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Available	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
ROOT\LEGACY_WANARP\0000				ROOT\LEGACY_IPSEC\0000	
volsnap	Not Available	LEGACYDRIVER	Not Available	IP Network Address Translator	Not Available
Not Available	Not Available	Not Available		Not Available	LEGACYDRIVER
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_VOLSAP\0000			ROOT\LEGACY_IPNAT\0000	
TDTCP	Not Available	LEGACYDRIVER	Not Available	hpciss	Not Available
Not Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_TDTCP\0000			Not Available	ROOT\LEGACY_HPCISS\0000
TDPIPE	Not Available	LEGACYDRIVER	Not Available	Generic Packet Classifier	Not Available
Not Available	Not Available	Not Available		Not Available	LEGACYDRIVER
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_TDPIPE\0000			Not Available	Not Available
TCP/IP Protocol Driver	Not Available	LEGACYDRIVER	Not Available	ROOT\LEGACY_GPC\0000	
Not Available	Not Available	Not Available		Fips	Not Available
Not Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	ROOT\LEGACY_TCPIP\0000			Not Available	Not Available
Not Available	ROOT\LEGACY_TCPIP\0000			Not Available	ROOT\LEGACY_FIPS\0000
Security Driver	Not Available	LEGACYDRIVER	Not Available	dmload	Not Available
Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_SECDRV\0000			Not Available	ROOT\LEGACY_DMLOAD\0000
RDPWD	Not Available	LEGACYDRIVER	Not Available	dmboot	Not Available
Not Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_RDPWD\0000			Not Available	ROOT\LEGACY_DMBOOT\0000
RDPCCD	Not Available	LEGACYDRIVER	Not Available	CRC Disk Filter Driver	Not Available
Not Available	Not Available	Not Available		Not Available	LEGACYDRIVER
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_RDPCCD\0000			Not Available	Not Available
Remote Access Auto Connection Driver	Not Available			ROOT\LEGACY_CRCDISK\0000	
LEGACYDRIVER	Not Available	Not Available		CdaD10BA	Not Available
Not Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Available	Not Available
Not Available	ROOT\LEGACY_RASACD\0000			Not Available	Not Available
Not Available	ROOT\LEGACY_RASACD\0000			Not Available	ROOT\LEGACY_CDAD10BA\0000
Partition Manager	Not Available	LEGACYDRIVER	Not Available	CdaC15BA	Not Available
Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Available	Not Available
Not Available	ROOT\LEGACY_PARTMGR\0000			Not Available	Not Available
Not Available	ROOT\LEGACY_PARTMGR\0000			Not Available	ROOT\LEGACY_CDAC15BA\0000
Null	Not Available	LEGACYDRIVER	Not Available	Beep	Not Available
Not Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_NULL\0000			Not Available	ROOT\LEGACY_BEEP\0000
NetBios over Tcpip	Not Available	LEGACYDRIVER	Not Available	AFD	Not Available
Available	Not Available	Not Available		LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	ROOT\LEGACY_NETBT\0000			Not Available	Not Available
NDProxy	Not Available	LEGACYDRIVER	Not Available	Not Available	ROOT\LEGACY_AFD\0000
Not Available	Not Available	Not Available		Not Available	Not Available
Not Available	Not Available	Not Available		Generic volume	Yes
Not Available	ROOT\LEGACY_NDPROXY\0000			VOLUME	5.2.3790.1830
NDIS Usermode I/O Protocol	Not Available	LEGACYDRIVER	Not Available	10/1/2002 Microsoft	volume.inf
Not Available	Not Available	Not Available		Not Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174
Not Available	Not Available	Not Available		8OFFSET20000LENGTH249ED00000	

Generic volume	Yes	VOLUME 5.2.3790.1830	STORAGE\VOLUME\1&30A96598&0&SIGNATURE7F207F2
	10/1/2002	Microsoft volume.inf Not Available	0OFFSET4000LENGTH8787EC000
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	Generic volume
	10/1/2002	Microsoft volume.inf Not Available	Yes
A0FFSET20000LENGTH399D900000			VOLUME 5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	STORAGE\VOLUME\1&30A96598&0&SIGNATURE10FFSE
	10/1/2002	Microsoft volume.inf Not Available	T20000LENGTH249ED00000
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Generic volume
FDOFFSET7E00LENGTH7C867E00			Yes
Generic volume	Yes	VOLUME 5.2.3790.1830	VOLUME 5.2.3790.1830
	10/1/2002	Microsoft volume.inf Not Available	10/1/2002
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D616	Microsoft volume.inf Not Available
B2OFFSET20000LENGTH249ED00000			STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D616
Generic volume	Yes	VOLUME 5.2.3790.1830	Volume Manager
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D616	SYSTEM 5.2.3790.1830
B3OFFSET20000LENGTH399D900000			10/1/2002 (Standard system devices)
Generic volume	Yes	VOLUME 5.2.3790.1830	machine.inf
	10/1/2002	Microsoft volume.inf Not Available	Not Available
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D616	ROOT\FTDISK\0000
B3OFFSET20000LENGTH399D900000			Generic volume
Generic volume	Yes	VOLUME 5.2.3790.1830	Yes
	10/1/2002	Microsoft volume.inf Not Available	VOLUME 5.2.3790.1830
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	10/1/2002
00FFSET20000LENGTH249ED00000			Microsoft volume.inf Not Available
Generic volume	Yes	VOLUME 5.2.3790.1830	STORAGE\VOLUME\1&30A96598&0&LDM#{9419C6AF-
	10/1/2002	Microsoft volume.inf Not Available	9CA6-49FC-8EAA-ACEB607022A2}
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	Logical Disk Manager
00FFSET20000LENGTH249ED00000			Yes
Generic volume	Yes	VOLUME 5.2.3790.1830	SYSTEM 5.2.3790.1830
	10/1/2002	Microsoft volume.inf Not Available	10/1/2002 (Standard system devices)
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	machine.inf
20FFSET20000LENGTH399D900000			Not Available
Generic volume	Yes	VOLUME 5.2.3790.1830	ROOT\DMIO\0000
	10/1/2002	Microsoft volume.inf Not Available	ACPI Fixed Feature Button
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	Yes
20FFSET20000LENGTH399D900000			SYSTEM 5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard system devices)
	10/1/2002	Microsoft volume.inf Not Available	machine.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	Not Available
FOFFSET20000LENGTH249ED00000			ACPI\FIXEDBUTTON\2&DABA3FF&0
Generic volume	Yes	VOLUME 5.2.3790.1830	Advanced programmable interrupt controller
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	SYSTEM
FOFFSET20000LENGTH249ED00000			5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard system devices)
	10/1/2002	Microsoft volume.inf Not Available	machine.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	Not Available
90FFSET20000LENGTH399D900000			ACPI\PNP0003\4
Generic volume	Yes	VOLUME 5.2.3790.1830	Advanced programmable interrupt controller
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	SYSTEM
90FFSET20000LENGTH399D900000			5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard system devices)
	10/1/2002	Microsoft volume.inf Not Available	machine.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	Not Available
BOFFSET20000LENGTH249ED00000			ACPI\PNP0003\3
Generic volume	Yes	VOLUME 5.2.3790.1830	Advanced programmable interrupt controller
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6175	SYSTEM
BOFFSET20000LENGTH249ED00000			5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard system devices)
	10/1/2002	Microsoft volume.inf Not Available	machine.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	Not Available
50FFSET20000LENGTH399D900000			ACPI\PNP0003\2
Generic volume	Yes	VOLUME 5.2.3790.1830	AMD-8132 HyperTransport IOAPIC Controller
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	SYSTEM
50FFSET20000LENGTH399D900000			2.0.0.0
Generic volume	Yes	VOLUME 5.2.3790.1830	5/25/2006
	10/1/2002	Microsoft volume.inf Not Available	Hewlett-Packard Company
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	oem0.inf
50FFSET20000LENGTH399D900000			Not Available
Generic volume	Yes	VOLUME 5.2.3790.1830	PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_12\3
	10/1/2002	Microsoft volume.inf Not Available	&33B859B7&0&89
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	Disk drive
COFFSET20000LENGTH249ED00000			Yes
Generic volume	Yes	VOLUME 5.2.3790.1830	DISKDRIVE
	10/1/2002	Microsoft volume.inf Not Available	5.2.3790.1830
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	10/1/2002 (Standard disk drives)
COFFSET20000LENGTH249ED00000			disk.inf
Generic volume	Yes	VOLUME 5.2.3790.1830	Not Available
	10/1/2002	Microsoft volume.inf Not Available	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	50\5&68D3C3A&0&060
DOFFSET20000LENGTH399D900000			Disk drive
Generic volume	Yes	VOLUME 5.2.3790.1830	Yes
	10/1/2002	Microsoft volume.inf Not Available	DISKDRIVE
		STORAGE\VOLUME\1&30A96598&0&SIGNATURE63D6174	5.2.3790.1830
DOFFSET20000LENGTH399D900000			10/1/2002 (Standard disk drives)
Generic volume	Yes	VOLUME 5.2.3790.1830	disk.inf
	10/1/2002	Microsoft volume.inf Not Available	Not Available
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
FAOFFSET7E00LENGTH1EE28000			50\5&68D3C3A&0&050
Generic volume	Yes	VOLUME 5.2.3790.1830	Disk drive
	10/1/2002	Microsoft volume.inf Not Available	Yes
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	DISKDRIVE
F8OFFSET20000LENGTH1349600000			5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard disk drives)
	10/1/2002	Microsoft volume.inf Not Available	disk.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Not Available
F8OFFSET20000LENGTH1349600000			SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
Generic volume	Yes	VOLUME 5.2.3790.1830	50\5&68D3C3A&0&040
	10/1/2002	Microsoft volume.inf Not Available	Disk drive
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Yes
F8OFFSET20000LENGTH1349600000			DISKDRIVE
Generic volume	Yes	VOLUME 5.2.3790.1830	5.2.3790.1830
	10/1/2002	Microsoft volume.inf Not Available	10/1/2002 (Standard disk drives)
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	disk.inf
F8OFFSET20000LENGTH1349600000			Not Available
Generic volume	Yes	VOLUME 5.2.3790.1830	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
	10/1/2002	Microsoft volume.inf Not Available	50\5&68D3C3A&0&000
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	HP Virtual LUN
F8OFFSET20000LENGTH1349600000			Yes
Generic volume	Yes	VOLUME 5.2.3790.1830	SYSTEM 5.2.3790.1830
	10/1/2002	Microsoft volume.inf Not Available	10/1/2002
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Compaq
F8OFFSET20000LENGTH1349600000			scsudev.inf
Generic volume	Yes	VOLUME 5.2.3790.1830	Not Available
	10/1/2002	Microsoft volume.inf Not Available	SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICA
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	TE&REV_CIS2\5&68D3C3A&0&000
F8OFFSET20000LENGTH1349600000			Smart Array P600 Controller
Generic volume	Yes	VOLUME 5.2.3790.1830	Yes
	10/1/2002	Microsoft volume.inf Not Available	SCSIADAPTER
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	6.2.0.64
E0FFSET20000LENGTH30D3C00000			11/1/2006
Generic volume	Yes	VOLUME 5.2.3790.1830	Hewlett-Packard Company
	10/1/2002	Microsoft volume.inf Not Available	oem1.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Not Available
E0FFSET20000LENGTH30D3C00000			PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_00\4
Generic volume	Yes	VOLUME 5.2.3790.1830	&24CF26E8&0&1088
	10/1/2002	Microsoft volume.inf Not Available	PCI standard PCI-to-PCI bridge
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Yes
B5OFFSET20000LENGTH249ED00000			SYSTEM 5.2.3790.1830
Generic volume	Yes	VOLUME 5.2.3790.1830	10/1/2002 (Standard system devices)
	10/1/2002	Microsoft volume.inf Not Available	machine.inf
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Not Available
B5OFFSET20000LENGTH249ED00000			PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_12\3
Generic volume	Yes	VOLUME 5.2.3790.1830	&33B859B7&0&88
	10/1/2002	Microsoft volume.inf Not Available	AMD-8132 HyperTransport IOAPIC Controller
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Yes
B6OFFSET20000LENGTH399D900000			SYSTEM
Generic volume	Yes	VOLUME 5.2.3790.1830	2.0.0.0
	10/1/2002	Microsoft volume.inf Not Available	5/25/2006
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	Hewlett-Packard Company
B6OFFSET20000LENGTH399D900000			oem0.inf
Generic volume	Yes	VOLUME 5.2.3790.1830	Not Available
	10/1/2002	Microsoft volume.inf Not Available	
		STORAGE\VOLUME\1&30A96598&0&SIGNATUREEED0425	
B6OFFSET20000LENGTH399D900000			

PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_12\3	HP Virtual LUN	Yes	SYSTEM	5.2.3790.1830
&33B859B7&0&81	10/1/2002 Compaq	scsidev.inf	Not Available	
HP NC371i Multifunction Gigabit Server Adapter	Yes	NET		
2.8.13.0 6/30/2006 Hewlett-Packard Company	oem3.inf			
Not Available				
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&REV	TE&REV_CIS2\5&6352F4D&0&000	Yes	SCSIADAPTER	6.2.0.64
_02\5&2945E16&0&20054102	11/1/2006 Hewlett-Packard Company	oem1.inf	Not	
HP NC371i Virtual Bus Device	Yes	SYSTEM	2.8.18.0	
10/18/2006 Hewlett-Packard Company	oem6.inf			
Not Available				
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_02\4	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4			
&9C889E9&0&1080	&1B1CF5E7&0&0068			
HP NC371i Multifunction Gigabit Server Adapter	Yes	SYSTEM	5.2.3790.1830	
2.8.13.0 6/30/2006 Hewlett-Packard Company	10/1/2002 (Standard system devices)	machine.inf		
Not Available	Not Available			
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&REV	PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\			
_02\5&B64F98D&0&20054101	3&33B859B7&0&68			
HP NC371i Virtual Bus Device	Yes	DISKDRIVE	5.2.3790.1830	
10/18/2006 Hewlett-Packard Company	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Not Available	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_02\4	50\5&1CC70BE&0&060			
&9C889E9&0&0880	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
PCI standard PCI-to-PCI bridge	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Yes	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
SYSTEM	50\5&1CC70BE&0&050			
5.2.3790.1830	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
10/1/2002 (Standard system devices)	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Not Available	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_12\3	50\5&1CC70BE&0&040			
&33B859B7&0&80	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
Disk drive	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Yes	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
DISKDRIVE	50\5&10FC6F5E&0&070			
5.2.3790.1830	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
10/1/2002 (Standard disk drives)	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Not Available	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.	50\5&10FC6F5E&0&060			
50\5&10FC6F5E&0&050	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
Disk drive	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
Yes	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
DISKDRIVE	50\5&10FC6F5E&0&040			
5.2.3790.1830	HP Virtual LUN	Yes	SYSTEM	5.2.3790.1830
10/1/2002 (Standard disk drives)	10/1/2002 Compaq	scsidev.inf	Not Available	
Not Available	SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICA			
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.	TE&REV_CIS2\5&10FC6F5E&0&000			
50\5&10FC6F5E&0&050	Smart Array P800 Controller	Yes	SCSIADAPTER	6.2.0.64
Disk drive	11/1/2006 Hewlett-Packard Company	oem1.inf	Not	
Yes	Available			
DISKDRIVE	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4			
5.2.3790.1830	&3EC0CCA&0&0070			
10/1/2002 (Standard disk drives)	PCI standard PCI-to-PCI bridge	Yes	SYSTEM	5.2.3790.1830
Not Available	10/1/2002 (Standard system devices)	machine.inf		
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.	Not Available			
50\5&6352F4D&0&060	PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\			
Disk drive	3&33B859B7&0&70			
Yes	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
DISKDRIVE	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
5.2.3790.1830	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
10/1/2002 (Standard disk drives)	50\5&6352F4D&0&050			
Not Available	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
50\5&6352F4D&0&040	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
Disk drive	50\5&1167F8B&0&060			
Yes	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
DISKDRIVE	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
5.2.3790.1830	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
10/1/2002 (Standard disk drives)	50\5&1167F8B&0&050			
Not Available	Disk drive	Yes	DISKDRIVE	5.2.3790.1830
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.	10/1/2002 (Standard disk drives)	disk.inf	Not Available	
50\5&1167F8B&0&040	SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3.			
HP Virtual LUN	Yes	SYSTEM	5.2.3790.1830	
10/1/2002 Compaq	scsidev.inf	Not Available		
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICA				
TE&REV_CIS2\5&1167F8B&0&000	Smart Array P800 Controller	Yes	SCSIADAPTER	6.2.0.64
11/1/2006 Hewlett-Packard Company	oem1.inf	Not		
Available	Available			
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4			
&300C8240&0&0058	&300C8240&0&0058			
PCI standard PCI-to-PCI bridge	Yes	SYSTEM	5.2.3790.1830	
10/1/2002 (Standard system devices)	machine.inf			
Not Available	Not Available			
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\	PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\			
3&33B859B7&0&58	3&33B859B7&0&58			
NVIDIA nForce4 Low Pin Count Controller	Yes	SYSTEM		
5.2.3790.1830	10/1/2002 NVIDIA	machine.inf		
Not Available	Not Available			



SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3_50\5&19F386C&0&060	Disk drive	Yes	DISKDRIVE	5.2.3790.1830	10/1/2002 (Standard disk drives)	disk.inf	Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3_50\5&19F386C&0&050	Disk drive	Yes	DISKDRIVE	5.2.3790.1830	10/1/2002 (Standard disk drives)	disk.inf	Not Available
HP Virtual LUN	Yes	SYSTEM	5.2.3790.1830	10/1/2002 Compaq	scsidev.inf	Not Available	
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICA	TE&REV_CIS2\5&19F386C&0&000	Smart Array P800 Controller	Yes	SCSIADAPTER	6.2.0.64	11/1/2006 Hewlett-Packard Company	oem1.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4	&B98F5C4&0&0068	PCI standard PCI-to-PCI bridge	Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	machine.inf Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\3	&20FEA912&0&68	Disk drive	Yes	DISKDRIVE	5.2.3790.1830	10/1/2002 (Standard disk drives)	disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3_50\5&17A88D94&0&060	Disk drive	Yes	DISKDRIVE	5.2.3790.1830	10/1/2002 (Standard disk drives)	disk.inf	Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_3_50\5&17A88D94&0&050	Disk drive	Yes	DISKDRIVE	5.2.3790.1830	10/1/2002 (Standard disk drives)	disk.inf	Not Available
HP Virtual LUN	Yes	SYSTEM	5.2.3790.1830	10/1/2002 Compaq	scsidev.inf	Not Available	
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICA	TE&REV_CIS2\5&17A88D94&0&000	Smart Array E500 Controller	No	SCSIADAPTER	6.6.0.64	3/14/2007 Hewlett-Packard Company	oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_03\4	&22FEBB0D&0&0060	PCI standard PCI-to-PCI bridge	Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	machine.inf Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A3\3	&20FEA912&0&60	PCI Device	Not Available	UNKNOWN	Not Available	Not Available	Not Available
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_00\4	&21887AE&0&2648	Generic USB Hub	Yes	USB	5.2.3790.1830	10/1/2002 (Generic USB Hub)	usb.inf Not Available
HID-compliant mouse	Yes	MOUSE	5.2.3790.1830	10/1/2002 Microsoft	msmouse.inf	Not Available	
HID\VID_03F0&PID_1027&MI_01\8&ACF5F7&0&0000	USB Human Interface Device	Yes	HIDCLASS	5.2.3790.1830	10/1/2002 (Standard system devices)	input.inf	Not Available
HID Keyboard Device	Yes	KEYBOARD	5.2.3790.1830	10/1/2002 (Standard keyboards)	keyboard.inf	Not Available	
HID\VID_03F0&PID_1027&MI_00\8&2270823C&0&0000	USB Human Interface Device	Yes	HIDCLASS	5.2.3790.1830	10/1/2002 (Standard system devices)	input.inf	Not Available
USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&0000	USB Composite Device	Yes	USB	5.2.3790.1830	10/1/2002 (Standard USB Host Controller)	usbport.inf	Not Available
USB\VID_03F0&PID_1027\6&5F1B1E&0&1	USB Root Hub	Yes	USB	5.2.3790.1830	10/1/2002 (Standard USB Host Controller)	usbport.inf	Not Available
USB\ROOT_HUB\5&246EAE08&0	Standard Universal PCI to USB Host Controller	Yes	USB	5.2.3790.1830	10/1/2002 (Standard USB Host Controller)	usbport.inf	Not Available
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_00\4	&21887AE&0&2448	Base System Device	Not Available	UNKNOWN	Not Available	Not Available	Not Available
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_03\4	&21887AE&0&2248	Base System Device	Not Available	UNKNOWN	Not Available	Not Available	Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_03\4	&21887AE&0&2048	Plug and Play Monitor	Yes	MONITOR	5.2.3790.1830	10/1/2002 (Standard monitor types)	monitor.inf Not Available
DISPLAY\AVO0000\5&292E0C71&0&12345678&01&03	Standard VGA Graphics Adapter	Yes	DISPLAY	5.2.3790.1830	10/1/2002 (Standard display types)	display.inf	Not Available
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_02\4	&21887AE&0&1848	PCI standard PCI-to-PCI bridge	Yes	SYSTEM	5.2.3790.1830	10/1/2002 (Standard system devices)	machine.inf Not Available
PCI\VEN_10DE&DEV_005C&SUBSYS_00000000&REV_A2\3	&20FEA912&0&48	Secondary IDE Channel	Yes	HDC	5.2.3790.1830	10/1/2002 (Standard IDE ATA/ATAPI controllers)	mshdc.inf Not Available
PCI\IDE\IDECHANNEL\4&23A0739C&0&1	CD-ROM Drive	Yes	CDROM	5.2.3790.1830	10/1/2002 (Standard CD-ROM drives)	cdrom.inf	Not Available
Available IDE\CDROMTEAC_DV-28E-N_____C.6B____\5&2270D2F8&0&0.0.0	Primary IDE Channel	Yes	HDC	5.2.3790.1830	10/1/2002 (Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available
PCI\IDE\IDECHANNEL\4&23A0739C&0&0	Standard Dual Channel PCI IDE Controller	Yes	HDC	5.2.3790.1830	10/1/2002 (Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available
PCI\VEN_10DE&DEV_0053&SUBSYS_31F8103C&REV_A3\3	&20FEA912&0&30	Generic USB Hub	Yes	USB	5.2.3790.1830	10/1/2002 (Generic USB Hub)	usb.inf Not Available
USB\VID_04B4&PID_6560\5&2941608A&0&6	USB Root Hub	Yes	USB	5.2.3790.1830	10/1/2002 (Standard USB Host Controller)	usbport.inf	Not Available
USB\ROOT_HUB20\4&26DB321C&0	Standard Enhanced PCI to USB Host Controller	Yes	USB	5.2.3790.1830	10/1/2002 (Standard USB Host Controller)	usbport.inf	Not Available



PCI\VEN\_10DE&DEV\_005B&SUBSYS\_31F8103C&REV\_A4\3&20FEA912&0&11  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 USB\ROOT\_HUB\4&1EFC638D&0  
 Standard OpenHCD USB Host Controller Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 PCI\VEN\_10DE&DEV\_005A&SUBSYS\_31F8103C&REV\_A2\3&20FEA912&0&10  
 Floppy disk drive Yes FLOPPYDISK 5.2.3790.1830  
 10/1/2002 (Standard floppy disk drives) floppydisk.inf Not Available  
 FDC\GENERIC\_FLOPPY\_DRIVE\6&211CE946&0&0  
 Standard floppy disk controller Yes FDC 5.2.3790.1830  
 10/1/2002 (Standard floppy disk controllers) fdc.inf Not Available  
 ACPI\PNP0700\5&23664957&0  
 Communications Port Yes PORTS 5.2.3790.1830  
 10/1/2002 (Standard port types) mspports.inf Not Available  
 ACPI\PNP0501\0  
 Extended IO Bus Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0A06\4&142B453B&0  
 PS/2 Compatible Mouse Yes MOUSE 5.2.3790.1830  
 10/1/2002 Microsoft msmouse.inf Not Available  
 ACPI\PNP0F13\4&142B453B&0  
 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard Yes  
 KEYBOARD 5.2.3790.1830 10/1/2002 (Standard keyboards) keyboard.inf Not Available  
 ACPI\PNP0303\4&142B453B&0  
 System speaker Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0800\4&142B453B&0  
 Direct memory access controller Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0200\4&142B453B&0  
 High precision event timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0103\0  
 System timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0100\4&142B453B&0  
 Not Available Not Available Not Available Not Available  
 Available Not Available Not Available Not Available  
 Not Available ACPI\IPI0001\0  
 Motherboard resources Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0C02\0  
 PCI standard ISA bridge Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 PCI\VEN\_10DE&DEV\_0051&SUBSYS\_00000000&REV\_B1\3&20FEA912&0&08  
 NVIDIA nForce4 HyperTransport Bridge Yes SYSTEM  
 5.2.3790.1830 10/1/2002 NVIDIA machine.inf Not Available  
 PCI\VEN\_10DE&DEV\_005E&SUBSYS\_00000000&REV\_A4\3&20FEA912&0&00  
 PCI bus Yes SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0A03\7  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\7

Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\6  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\5  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\4  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\3  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\2  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\1  
 Processor Yes PROCESSOR 5.2.3790.1830  
 10/1/2002 (Standard processor types) cpu.inf Not Available  
 ACPI\AUTHENTICAMD\_-\_AMD64\_FAMILY\_15\_MODEL\_65\0  
 Microsoft ACPI-Compliant System Yes SYSTEM  
 5.2.3790.1830 10/1/2002 Microsoft acpi.inf Not Available  
 ACPI\_HAL\PNP0C08\0  
 ACPI Multiprocessor x64-based PC Yes COMPUTER  
 5.2.3790.1830 10/1/2002 (Standard computers) hal.inf Not Available  
 ROOT\ACPI\_HAL\0000  
 Not Available Not Available Not Available Not Available  
 Available Not Available Not Available Not Available  
 Not Available Not Available Not Available Not Available  
 HTR\ROOT\0  
 [Environment Variables]  
 Variable Value User Name  
 ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>  
 Path  
 %SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\Program Files (x86)\Microsoft SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft SQL Server\90\Tools\bin\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\bin\;C:\Program Files (x86)\Microsoft SQL Server\90\DTS\Binn\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\Binn\VSShell\IDE\;C:\Program Files (x86)\Microsoft Visual Studio 8\Common7\IDE\PrivateAssemblies\;C:\Program Files\Microsoft SQL Server\90\DTS\Binn\ <SYSTEM>  
 windir %SystemRoot% <SYSTEM>  
 FP\_NO\_HOST\_CHECK NO <SYSTEM>  
 OS Windows\_NT <SYSTEM>  
 PROCESSOR\_ARCHITECTURE AMD64 <SYSTEM>  
 PROCESSOR\_LEVEL 15 <SYSTEM>  
 PROCESSOR\_IDENTIFIER AMD64 Family 15 Model 65 Stepping 2, AuthenticAMD <SYSTEM>  
 PROCESSOR\_REVISION 4102 <SYSTEM>  
 NUMBER\_OF\_PROCESSORS 8 <SYSTEM>  
 ClusterLogC:\WINDOWS\Cluster\cluster.log <SYSTEM>  
 PATHEXT  
 .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH <SYSTEM>  
 TEMP %SystemRoot%\TEMP <SYSTEM>

```

TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\ <SYSTEM>

TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp
BULLSEYE\Administrator
TMP %USERPROFILE%\Local Settings\Temp
BULLSEYE\Administrator

```

[Print Jobs]

Document	Size	Owner	Notify	Status	Time Submitted
Start Time	Until Time	Elapsed Time	Job ID	Priority	Parameters
Host Print Queue	Driver	Data Type	Printer	Processor	

[Network Connections]

Local Name	Remote Name	Type	Status	User
Not Available	\\inforb\audit_fdr	Disk	Current Connection	
	BULLSEYE\dpol			

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max Working Set
system idle process		Not Available	0	0	Not Available
system		Not Available	4	8	0 1413120
smss.exe		Not Available	344	11	204800 1413120
csrss.exe		Not Available	424	13	Not Available
winlogon.exe	c:\windows\system32\winlogon.exe	13	204800	1413120	4/16/2007 11:38 AM
KB (922,624 bytes)		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	3/25/2005 6:00 AM		901.00
services.exe	c:\windows\system32\services.exe	9	204800	1413120	4/16/2007 11:38 AM
KB (221,696 bytes)		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	3/25/2005 6:00 AM		216.50
lsass.exe	c:\windows\system32\lsass.exe	1413120	4/16/2007 11:38 AM	5.2.3790.1830	204800
(srv03_sp1_rtm.050324-1447)		14.00 KB (14,336 bytes)	3/25/2005 6:00 AM		
svchost.exe	c:\windows\system32\svchost.exe	8	204800	1413120	4/16/2007 11:38 AM
(25,088 bytes)		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	3/25/2005 6:00 AM		24.50 KB
svchost.exe		Not Available	836	8	Not Available
Available	Not Available	4/16/2007 11:38 AM	Not Available		
	Not Available	Not Available			

```

svchost.exe Not Available 944 8 Not
Available Not Available 4/16/2007 11:38 AM Not Available
Not Available Not Available
svchost.exe Not Available 1036 8 Not
Available Not Available 4/16/2007 11:38 AM Not Available
Not Available Not Available
svchost.exe c:\windows\system32\svchost.exe 1052
8 204800 1413120 4/16/2007 11:38 AM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB
(25,088 bytes) 3/25/2005 6:00 AM
spoolsv.exe c:\windows\system32\spoolsv.exe 1536
8 204800 1413120 4/16/2007 11:38 AM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 107.00
KB (109,568 bytes) 3/25/2005 6:00 AM
svchost.exe c:\windows\system32\svchost.exe 1600
8 204800 1413120 4/16/2007 11:38 AM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB
(25,088 bytes) 3/25/2005 6:00 AM
svchost.exe Not Available 1652 8 Not
Available Not Available 4/16/2007 11:38 AM Not Available
Not Available Not Available
sqlwriter.exe c:\program files\microsoft sql
server\90\shared\sqlwriter.exe 1716 8 204800 1413120
4/16/2007 11:38 AM 2005.090.3042.00 152.36 KB (156,016
bytes) 2/10/2007 10:03 AM
svchost.exe c:\windows\system32\svchost.exe 256
8 204800 1413120 4/16/2007 11:38 AM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB
(25,088 bytes) 3/25/2005 6:00 AM
explorer.exe c:\windows\explorer.exe 1340 8
204800 1413120 4/16/2007 11:42 AM 6.00.3790.1830
(srv03_sp1_rtm.050324-1447) 1.30 MB (1,364,480 bytes)
3/25/2005 6:00 AM
sqlservr.exe c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlservr.exe 1792 8 204800
1413120 4/16/2007 11:49 AM 2005.090.3042.00 36.72
MB (38,507,376 bytes) 2/10/2007 10:03 AM
cmd.exe c:\windows\system32\cmd.exe 1500 8 204800
1413120 4/16/2007 11:49 AM 5.2.3790.1830
(srv03_sp1_rtm.050324-1447) 538.50 KB (551,424 bytes)
3/25/2005 6:00 AM
csrss.exe Not Available 11128 13 Not Available
Not Available 4/16/2007 12:14 PM Not Available
Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe 11216
13 204800 1413120 4/16/2007 12:14 PM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 901.00
KB (922,624 bytes) 3/25/2005 6:00 AM
rdpclip.exe c:\windows\system32\rdpclip.exe 11312 8 204800
1413120 4/16/2007 12:14 PM 5.2.3790.1830
(srv03_sp1_rtm.050324-1447) 99.00 KB (101,376 bytes)
2/15/2007 10:57 AM
explorer.exe c:\windows\explorer.exe 11540 8
204800 1413120 4/16/2007 12:14 PM 6.00.3790.1830
(srv03_sp1_rtm.050324-1447) 1.30 MB (1,364,480 bytes)
3/25/2005 6:00 AM
helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr.exe 2348
8 204800 1413120 4/16/2007 12:17 PM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.30 MB
(1,363,456 bytes) 2/15/2007 11:00 AM
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsvc.exe
2556 8 204800 1413120 4/16/2007 12:17 PM
5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.52 MB
(1,591,296 bytes) 2/15/2007 11:00 AM
wmiprvse.exe Not Available 2684 8 Not
Available Not Available 4/16/2007 12:17 PM Not Available
Not Available Not Available

```

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path	msgina	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.14 MB	
winlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	901.00 KB (922,624 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\winlogon.exe	(1,193,472 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	
ntdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.20 MB (1,257,472 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntdll.dll	shsvcs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	193.50 KB (198,144 bytes)	
kernel32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.43 MB (1,500,160 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\kernel32.dll	shlwapi	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	606.50 KB (621,056 bytes)	
advapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.00 MB (1,051,136 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll	sfc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	6.00 KB (6,144 bytes)	
rpert4	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.63 MB (1,714,176 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll	sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	183.50 KB (187,904 bytes)	
crypt32	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	1.36 MB (1,428,992 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\rpert4.dll	wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	297.50 KB (304,640 bytes)	
msasn1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	152.50 KB (156,160 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll	imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	57.50 KB (58,880 bytes)	
msvcrt	7.0.3790.1830 (srv03_sp1_rtm.050324-1447)	508.00 KB (520,192 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msasn1.dll	ole32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.43 MB (2,543,616 bytes)	
user32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.04 MB (1,085,952 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msvcrt.dll	comctl32	6.0 (srv03_sp1_rtm.050324-1447)	1.51 MB (1,584,128 bytes)	
gdi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	592.00 KB (606,208 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\user32.dll	c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccf1df_6.0.3790.1830_x-ww_aced72fa\comctl32.dll	winscard	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	230.00 KB (235,520 bytes)
nddeapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	25.00 KB (25,600 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\gdi32.dll	wtsapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	29.00 KB (29,696 bytes)	
profmap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\nddeapi.dll	winmm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	303.50 KB (310,784 bytes)	
netapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	589.00 KB (603,136 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\profmap.dll	sxs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.91 MB (2,003,968 bytes)	
userenv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.02 MB (1,069,056 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netapi32.dll	shell32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	10.01 MB (10,492,416 bytes)	
psapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	29.00 KB (29,696 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll	wldap32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	390.00 KB (399,360 bytes)	
regapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	108.50 KB (111,104 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\psapi.dll	rsaenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	241.96 KB (247,768 bytes)	
secur32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	120.00 KB (122,880 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\regapi.dll	cscdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	151.50 KB (155,136 bytes)	
setupapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.45 MB (1,523,200 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\secur32.dll	dimsntfy	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	28.00 KB (28,672 bytes)	
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	28.00 KB (28,672 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll	wlnotify	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	148.00 KB (151,552 bytes)	
winsta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	89.00 KB (91,136 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\version.dll	mpr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	115.00 KB (117,760 bytes)	
ws2_32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	176.50 KB (180,736 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\winsta.dll	oleaut32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.06 MB (1,116,160 bytes)	
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	30.50 KB (31,232 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ws2_32.dll	winspool	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	247.00 KB (252,928 bytes)	
					c:\windows\system32\ws2help.dll	comctl32	5.82 (srv03_sp1_rtm.050324-1447)	934.50 KB (956,928 bytes)	

c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccf1df_5.82.3790.1830_x-ww_4d792d2a\comctl32.dll	msv1_0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	253.00 KB (259,072 bytes)	3/25/2005 6:00 AM	Microsoft Corporation
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	494.50 KB (506,368 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\uxtheme.dll
samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	69.00 KB (70,656 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\samlib.dll
cscui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	441.00 KB (451,584 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\cscui.dll
clbcatq	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	865.00 KB (885,760 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\clbcatq.dll
comres	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	779.50 KB (798,208 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll
xpsp2res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.77 MB (2,899,456 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\xpsp2res.dll
ntmarta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	222.50 KB (227,840 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntmarta.dll
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	216.50 KB (221,696 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\services.exe
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	80.00 KB (81,920 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ncobjapi.dll
msvcp60	7.0.3790.1830 (srv03_sp1_rtm.050324-1447)	919.50 KB (941,568 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msvcp60.dll
scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	594.50 KB (608,768 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\scesrv.dll
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	167.00 KB (171,008 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\authz.dll
umpnprmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	205.00 KB (209,920 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\umpnprmgr.dll
eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	127.00 KB (130,048 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\eventlog.dll
lsass	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\lsass.exe
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.50 MB (1,568,256 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\lsasrv.dll
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	127.50 KB (130,560 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntdsapi.dll
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	297.50 KB (304,640 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\dnsapi.dll
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.01 MB (1,059,328 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\samsrv.dll
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	47.00 KB (48,128 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\cryptdll.dll
msprivs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	47.50 KB (48,640 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msprivs.dll
kerberos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	698.00 KB (714,752 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\kerberos.dll
iphlpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	177.00 KB (181,248 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\iphlpapi.dll
netlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	666.00 KB (681,984 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netlogon.dll
w32time	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	400.50 KB (410,112 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\w32time.dll
schannel	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	248.00 KB (253,952 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\schannel.dll
wdigest	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	130.50 KB (133,632 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wdigest.dll
rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\rassfm.dll
kdcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	409.00 KB (418,816 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\kdcsvc.dll
ntdsa	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.81 MB (2,948,096 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntdsa.dll
esent	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.26 MB (2,366,976 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\esent.dll
ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	51.00 KB (52,224 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntdsatq.dll
mwssock	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	478.00 KB (489,472 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\mwssock.dll
scecli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	308.00 KB (315,392 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\scecli.dll
ws03res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	794.00 KB (813,056 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ws03res.dll
ipsevsv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	358.50 KB (367,104 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ipsevsv.dll
oakley	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	372.50 KB (381,440 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\oakley.dll
winipsec	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	52.50 KB (53,760 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\winipsec.dll
ptstorsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ptstorsvc.dll
psbase	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	124.00 KB (126,976 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\psbase.dll
hnetcfg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	561.00 KB (574,464 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\hnetcfg.dll
wshtcpip	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	29.00 KB (29,696 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wshtcpip.dll
dsenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	226.96 KB (232,408 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\dsenh.dll
wlbcstrl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	137.50 KB (140,800 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wlbcstrl.dll

svchost	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.50 KB	cryptsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	114.00 KB
(25,088 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (116,736 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\svchost.exe			c:\windows\system32\cryptsvc.dll		
rpcss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	672.00 KB	certcli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	372.00 KB
(688,128 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (380,928 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\rpcss.dll			c:\windows\system32\certcli.dll		
wzcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	492.00 KB	vssapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.26 MB
(503,808 bytes)	3/24/2005 11:35 AM Microsoft Corporation		(1,320,960 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\wzcsvc.dll			c:\windows\system32\vssapi.dll		
rtutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	66.00 KB	dmserver	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	36.50 KB
(67,584 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(37,376 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\rtutils.dll			c:\windows\system32\dmserver.dll		
wmi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	5.50 KB	es	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	357.00 KB
(5,632 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (365,568 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\wmi.dll			c:\windows\system32\es.dll		
dhcpcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	219.00 KB	pchsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	76.00 KB
(224,256 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(77,824 bytes)	2/15/2007 11:00 AM Microsoft Corporation	
c:\windows\system32\dhcpcsvc.dll			c:\windows\pchealth\helpctr\binaries\pchsvc.dll		
atl	3.05.2284 96.50 KB (98,816 bytes)		srvsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	156.50 KB
	3/25/2005 6:00 AM Microsoft Corporation		KB (160,256 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\atl.dll		c:\windows\system32\srvsvc.dll		
rastls	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	236.50 KB	seclogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	27.50 KB
(242,176 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(28,160 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\rastls.dll			c:\windows\system32\seclogon.dll		
cryptui	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	705.50 KB	sens	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	63.50 KB
(722,432 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(65,024 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\cryptui.dll			c:\windows\system32\sens.dll		
mprapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	154.50 KB	trkwks	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	177.50 KB
(158,208 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (181,760 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\mprapi.dll			c:\windows\system32\trkwks.dll		
activeds	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	348.50 KB	wmisvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	227.00 KB
(356,864 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (232,448 bytes)	2/15/2007 10:57 AM Microsoft Corporation	
c:\windows\system32\activeds.dll			c:\windows\system32\wbem\wmisvc.dll		
adslidpc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	240.50 KB	wuauerv	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	12.00 KB
(246,272 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(12,288 bytes)	2/15/2007 11:00 AM Microsoft Corporation	
c:\windows\system32\adslidpc.dll			c:\windows\system32\wuauerv.dll		
credui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	202.00 KB	wuaueng	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	2.17 MB
(206,848 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(2,270,720 bytes)	2/15/2007 11:00 AM Microsoft Corporation	
c:\windows\system32\credui.dll			c:\windows\system32\wuaueng.dll		
rasapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	410.00 KB	advpack	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	146.00 KB
(419,840 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (149,504 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\rasapi32.dll			c:\windows\system32\advpack.dll		
rasman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	95.50 KB	cabinet	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	138.50 KB
(97,792 bytes)	3/25/2005 6:00 AM Microsoft Corporation		KB (141,824 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\rasman.dll			c:\windows\system32\cabinet.dll		
tapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	332.50 KB	mspatcha	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	48.00 KB
(340,480 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(49,152 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\tapi32.dll			c:\windows\system32\mspach.dll		
raschap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	141.00 KB	shfolder	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	34.00 KB
(144,384 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(34,816 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\raschap.dll			c:\windows\system32\shfolder.dll		
schedsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	308.50 KB	winhttp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	508.50 KB
(315,904 bytes)	2/15/2007 10:59 AM Microsoft Corporation		KB (520,704 bytes)	2/15/2007 4:39 AM Microsoft Corporation	
c:\windows\system32\schedsvc.dll			c:\windows\winsxs\amd64_microsoft.windows.winhttp_6595b64		
msidle	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	9.00 KB	144ccf1df_5.1.3790.1830_x-ww_a61ef4db\winhttp.dll		
(9,216 bytes)	3/25/2005 6:00 AM Microsoft Corporation		comsvcs	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	2.06 MB
c:\windows\system32\msidle.dll			(2,156,544 bytes)	2/15/2007 10:57 AM Microsoft Corporation	
wkssvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	221.00 KB	c:\windows\system32\comsvcs.dll		
(226,304 bytes)	3/25/2005 6:00 AM Microsoft Corporation		browser	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	125.50 KB
c:\windows\system32\wkssvc.dll			KB (128,512 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
wiarpc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	57.00 KB	c:\windows\system32\browser.dll		
(58,368 bytes)	3/25/2005 6:00 AM Microsoft Corporation		netrap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	26.00 KB
c:\windows\system32\wiarpc.dll			(26,624 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
aelupsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.50 KB	c:\windows\system32\netrap.dll		
(32,256 bytes)	3/25/2005 6:00 AM Microsoft Corporation		wbemcore	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.24 MB
c:\windows\system32\aelupsvc.dll			(1,299,968 bytes)	2/15/2007 10:57 AM Microsoft Corporation	
apphelp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	241.00 KB	c:\windows\system32\wbem\wbemcore.dll		
(246,784 bytes)	3/25/2005 6:00 AM Microsoft Corporation		esscli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	626.50 KB
c:\windows\system32\apphelp.dll			KB (641,536 bytes)	2/15/2007 10:57 AM Microsoft Corporation	
			c:\windows\system32\wbem\esscli.dll		

wbemcomn	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	524.00 KB (536,576 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomn.dll
fastprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	866.50 KB (887,296 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll
wmiutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	171.00 KB (175,104 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\wmiutils.dll
repdrvfs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	353.50 KB (361,984 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	743.00 KB (760,832 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\wmiprvsd.dll
wbemess	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	532.50 KB (545,280 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemess.dll
wbemsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	58.00 KB (59,392 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll
netman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	457.00 KB (467,968 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netman.dll
netshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.32 MB (2,437,120 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netshell.dll
clusapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	127.00 KB (130,048 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\clusapi.dll
wininet	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.13 MB (1,186,304 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wininet.dll
wzcsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	49.00 KB (50,176 bytes)	3/24/2005 11:35 AM	Microsoft Corporation	c:\windows\system32\wzcsapi.dll
rasdlg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	859.50 KB (880,128 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\rasdlg.dll
rasadhlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	12.00 KB (12,288 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\rasadhlp.dll
netcfgx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.29 MB (1,354,240 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netcfgx.dll
actxprxy	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	220.50 KB (225,792 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\actxprxy.dll
spoolsv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	107.00 KB (109,568 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\spoolsv.exe
spoolss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	163.00 KB (166,912 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\spoolss.dll
localspl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	730.50 KB (748,032 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\localspl.dll
cnbjmon	5.2.3790.1224 (dnsvr\skatari).040514-1058	63.00 KB (64,512 bytes)	3/24/2005 11:15 AM	Microsoft Corporation	c:\windows\system32\cnbjmon.dll
pjlmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	25.50 KB (26,112 bytes)	3/24/2005 11:22 AM	Microsoft Corporation	c:\windows\system32\pjlmon.dll
tcpmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	91.00 KB (93,184 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\tcpmon.dll
wsnmp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	67.50 KB (69,120 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wsnmp32.dll
tcpmib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	25.00 KB (25,600 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\tcpmib.dll
wsock32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.50 KB (25,088 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wsock32.dll
mgmtapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	22.50 KB (23,040 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\mgmtapi.dll
snmpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.50 KB (32,256 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\snmpapi.dll
usbmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	28.50 KB (29,184 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\usbmon.dll
winmr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	30.00 KB (30,720 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\winmr.dll
wshqos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	33.50 KB (34,304 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\wshqos.dll
win32spl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	167.00 KB (171,008 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\win32spl.dll
inetpp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	148.50 KB (152,064 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\inetpp.dll
icmp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	3.50 KB (3,584 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\icmp.dll
ersvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.00 KB (31,744 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ersvc.dll
sqlwriter	2005.090.3042.00	152.36 KB (156,016 bytes)	2/10/2007 10:03 AM	Microsoft Corporation	c:\program files\microsoft sql server\90\shared\sqlwriter.exe
msvcr80	8.00.50727.42	803.50 KB (822,784 bytes)	9/23/2005 12:26 AM	Microsoft Corporation	c:\windows\winsxs\amd64_microsoft.vc80.crt_1fc8b3b9a1e18e3b_8.0.50727.42_x-ww_3fea50ad\msvcr80.dll
sqlwvss	2005.090.3042.00	365.86 KB (374,640 bytes)	2/10/2007 10:03 AM	Microsoft Corporation	c:\program files\microsoft sql server\90\shared\sqlwvss.dll
msvc80	8.00.50727.42	1.05 MB (1,097,728 bytes)	9/23/2005 12:28 AM	Microsoft Corporation	c:\windows\winsxs\amd64_microsoft.vc80.crt_1fc8b3b9a1e18e3b_8.0.50727.42_x-ww_3fea50ad\msvc80.dll
termsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	354.50 KB (363,008 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\termsrv.dll
icaapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	27.50 KB (28,160 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\icaapi.dll
mstlsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	187.00 KB (191,488 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll
rdpwsx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	170.13 KB (174,216 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\rdpwsx.dll
explorer	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.30 MB (1,364,480 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\explorer.exe
browseui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.53 MB (1,601,536 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\browseui.dll
shdocvw	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	2.30 MB (2,416,128 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\shdocvw.dll

themeui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	530.50 KB (543,232 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\themeui.dll
msimg32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	6.50 KB (6,656 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msimg32.dll
linkinfo	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	30.00 KB (30,720 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\linkinfo.dll
ntshrui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	184.00 KB (188,416 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntshrui.dll
webcheck	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	439.00 KB (449,536 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\webcheck.dll
stobject	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	142.50 KB (145,920 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\stobject.dll
batmeter	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	41.50 KB (42,496 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\batmeter.dll
powrprof	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	32.50 KB (33,280 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\powrprof.dll
drprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.00 KB (24,576 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\drprov.dll
ntlanman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	71.50 KB (73,216 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\ntlanman.dll
netui0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	130.00 KB (133,120 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netui0.dll
netui1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	338.50 KB (346,624 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\netui1.dll
davclnt	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.00 KB (38,912 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\davclnt.dll
browseic	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	63.00 KB (64,512 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\browseic.dll
urlmon	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.02 MB (1,074,176 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\urlmon.dll
shdoclc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	589.50 KB (603,648 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\shdoclc.dll
sqlservr	2005.090.3042.00	36.72 MB (38,507,376 bytes)	2/10/2007 10:03 AM	Microsoft Corporation	c:\program files\microsoft sql server\mssql.1\mssql\bin\sqlservr.exe
opens60	2005.090.1399.00	22.21 KB (22,744 bytes)	10/14/2005 3:31 PM	Microsoft Corporation	c:\program files\microsoft sql server\mssql.1\mssql\bin\opens60.dll
instapi	2005.090.1399.00	40.71 KB (41,688 bytes)	10/14/2005 3:23 PM	Microsoft Corporation	c:\program files\microsoft sql server\90\shared\instapi.dll
sqllevn70	2005.090.3042.00	1.66 MB (1,740,656 bytes)	2/10/2007 10:02 AM	Microsoft Corporation	c:\program files\microsoft sql server\mssql.1\mssql\bin\resources\1033\sqllevn70.rll
sqlos	2005.090.3042.00	17.86 KB (18,288 bytes)	2/10/2007 10:03 AM	Microsoft Corporation	c:\program files\microsoft sql server\mssql.1\mssql\bin\sqlos.dll
mscoree	2.0.50727.42 (RTM.050727-4200)	441.00 KB (451,584 bytes)	9/23/2005 12:37 AM	Microsoft Corporation	c:\windows\system32\mscoree.dll
xolehlp	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	10.50 KB (10,752 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\xolehlp.dll
msdtcprx	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	805.50 KB (824,832 bytes)	2/15/2007 10:57 AM	Microsoft Corporation	c:\windows\system32\msdtcprx.dll
mtxclu	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	141.50 KB (144,896 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\mtxclu.dll
resutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	98.50 KB (100,864 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\resutils.dll
security	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	6.00 KB (6,144 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\security.dll
msfte	12.0.6828.0	3.63 MB (3,804,952 bytes)	8/28/2006 5:17 AM	Microsoft Corporation	c:\program files\microsoft sql server\mssql.1\mssql\bin\msfte.dll
dbghelp	6.6.0007.5 (debuggers(dbg).051022-1733)	1.27 MB (1,329,520 bytes)	2/10/2007 9:56 AM	Microsoft Corporation	c:\program files\microsoft sql server\90\shared\dbghelp.dll
sqlncli	2005.090.3042.00	2.74 MB (2,868,592 bytes)	2/10/2007 10:03 AM	Microsoft Corporation	c:\windows\system32\sqlncli.dll
comdlg32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	446.50 KB (457,216 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\comdlg32.dll
sqlnclir	2005.090.1399.00	201.21 KB (206,040 bytes)	10/14/2005 3:31 PM	Microsoft Corporation	c:\windows\system32\sqlnclir.rll
cmd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	538.50 KB (551,424 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\cmd.exe
rdpsnd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	25.00 KB (25,600 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\rdpsnd.dll
scredir	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.50 KB (39,424 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\scredir.dll
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.00 KB (31,744 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msacm32.drv
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	112.00 KB (114,688 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msacm32.dll
imaadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.00 KB (24,576 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm
msadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	23.50 KB (24,064 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msadp32.acm
msg711	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	13.50 KB (13,824 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msg711.acm
msgsm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	34.50 KB (35,328 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\msgsm32.acm
tssoft32	1.01	13.50 KB (13,824 bytes)	3/25/2005 6:00 AM	DSP GROUP, INC.	c:\windows\system32\tssoft32.acm
tsd32	1.03	24.50 KB (25,088 bytes)	3/25/2005 6:00 AM	DSP GROUP, INC.	c:\windows\system32\tsd32.dll
printui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	928.50 KB (950,784 bytes)	3/25/2005 6:00 AM	Microsoft Corporation	c:\windows\system32\printui.dll

cfgmgr32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	18.00 KB	riched32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	7.00 KB
(18,432 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(7,168 bytes)	3/25/2005 6:00 AM Microsoft Corporation	
c:\windows\system32\cfgmgr32.dll			c:\windows\system32\riched32.dll		
rdpclip	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	99.00 KB	riched20	5.31.23.1224	1.10 MB (1,157,120 bytes)
(101,376 bytes)	2/15/2007 10:57 AM Microsoft Corporation		3/25/2005 6:00 AM Microsoft Corporation		
c:\windows\system32\rdpclip.exe			c:\windows\system32\riched20.dll		
zipfldr	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	449.50 KB	wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.00 KB
(460,288 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(38,912 bytes)	2/15/2007 10:57 AM Microsoft Corporation	
c:\windows\system32\zipfldr.dll			c:\windows\system32\wbem\wbemprox.dll		
sendmail	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	64.00 KB	helpsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.52 MB
(65,536 bytes)	3/25/2005 6:00 AM Microsoft Corporation		(1,591,296 bytes)	2/15/2007 11:00 AM Microsoft Corporation	
c:\windows\system32\sendmail.dll			c:\windows\pchealth\helpctr\binaries\helpsvc.exe		
mydocs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	101.00 KB			
(103,424 bytes)	3/25/2005 6:00 AM Microsoft Corporation		[Services]		
c:\windows\system32\mydocs.dll					
mmcshext	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	75.50 KB	Display Name	Name	State
(77,312 bytes)	3/25/2005 6:00 AM Microsoft Corporation		Path	Error Control	Start Mode
c:\windows\system32\mmcshext.dll					Service Type
hhsetup	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	78.00 KB			Start Name
(79,872 bytes)	3/25/2005 6:00 AM Microsoft Corporation		Application Experience	Lookup Service	AeLookupSvc
c:\windows\system32\hhsetup.dll			Auto Share Process		Running
helpctr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.30 MB	c:\windows\system32\svchost.exe -k netsvcs		
(1,363,456 bytes)	2/15/2007 11:00 AM Microsoft Corporation		LocalSystem	0	
c:\windows\pchealth\helpctr\binaries\helpctr.exe			Alerter	Alerter	Stopped
hcappres	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	7.50 KB	Disabled	Share Process	
(7,680 bytes)	2/15/2007 11:00 AM Microsoft Corporation		c:\windows\system32\svchost.exe -k localservice		Normal
c:\windows\pchealth\helpctr\binaries\hcappres.dll			NT AUTHORITY\LocalService	0	
itss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	208.00 KB	Application Layer Gateway Service	ALG	Stopped
(212,992 bytes)	3/25/2005 6:00 AM Microsoft Corporation		Own Process	c:\windows\system32\alg.exe	Manual
c:\windows\system32\itss.dll			NT AUTHORITY\LocalService	0	Normal
msxml3	8.70.1104.0	2.04 MB (2,141,184 bytes)	Application Management	AppMgmt	Stopped
3/25/2005 6:00 AM Microsoft Corporation			c:\windows\system32\svchost.exe -k netsvcs		Normal
c:\windows\system32\msxml3.dll			LocalSystem	0	
pchshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	155.00 KB	ASP.NET State Service	aspnet_state	Stopped
(158,720 bytes)	2/15/2007 11:00 AM Microsoft Corporation		Own Process		Manual
c:\windows\pchealth\helpctr\binaries\pchshell.dll			c:\windows\microsoft.net\framework64\v2.0.50727\aspnet_state.exe		
mlang	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	686.00 KB	xe	Normal	NT AUTHORITY\NetworkService
(702,464 bytes)	3/25/2005 6:00 AM Microsoft Corporation			0	
c:\windows\system32\mlang.dll			Windows Audio	AudioSrv	Stopped
mshtml	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	5.65 MB	c:\windows\system32\svchost.exe -k netsvcs		Normal
(5,928,448 bytes)	3/25/2005 6:00 AM Microsoft Corporation		LocalSystem	0	
c:\windows\system32\mshtml.dll			Background Intelligent Transfer Service	BITS	Stopped
msls31	3.10.349.0	357.00 KB (365,568 bytes)	Share Process	c:\windows\system32\svchost.exe -k	Manual
3/25/2005 6:00 AM Microsoft Corporation			netsvcs	Normal	LocalSystem
c:\windows\system32\msls31.dll			0		
msimtf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	380.50 KB	Computer Browser	Browser	Running
(389,632 bytes)	3/25/2005 6:00 AM Microsoft Corporation		c:\windows\system32\svchost.exe -k netsvcs		Auto
c:\windows\system32\msimtf.dll			LocalSystem	0	Share Process
mctf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	617.50 KB	Indexing Service	CiSvc	Stopped
(632,320 bytes)	3/25/2005 6:00 AM Microsoft Corporation		c:\windows\system32\cisvc.exe		Disabled
c:\windows\system32\mctf.dll			0	Normal	LocalSystem
jscrip	5.6.0.8827	974.50 KB (997,888 bytes)	0		
3/25/2005 6:00 AM Microsoft Corporation			ClipBook	ClipSrv	Stopped
c:\windows\system32\jscrip.dll			c:\windows\system32\clipsrv.exe		Disabled
imm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	208.00 KB	0	Own Process	
(212,992 bytes)	3/25/2005 6:00 AM Microsoft Corporation		.NET Runtime Optimization Service v2.0.50727_X86		
c:\windows\system32\imm32.dll			clr_optimization_v2.0.50727_32	Stopped	Manual
mshtml	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	905.50 KB	c:\windows\microsoft.net\framework\v2.0.50727\mscorlib.exe		Own
(927,232 bytes)	3/25/2005 6:00 AM Microsoft Corporation		Ignore	LocalSystem	0
c:\windows\system32\mshtml.dll			.NET Runtime Optimization Service v2.0.50727_x64		
vbscript	5.6.0.8827	646.50 KB (662,016 bytes)	clr_optimization_v2.0.50727_64	Stopped	Manual
3/25/2005 6:00 AM Microsoft Corporation			0		Own
c:\windows\system32\vbscript.dll			Process		
msinfo	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	636.00 KB	c:\windows\microsoft.net\framework64\v2.0.50727\mscorlib.exe		
(651,264 bytes)	2/15/2007 11:00 AM Microsoft Corporation		Ignore	LocalSystem	0
c:\windows\pchealth\helpctr\binaries\msinfo.dll			COM+ System Application	COMSysApp	Stopped
mfc42u	6.50.9146.0	1.39 MB (1,462,272 bytes)	Own Process	c:\windows\system32\dllhost.exe	Manual
3/25/2005 6:00 AM Microsoft Corporation			/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}		Normal
c:\windows\system32\mfc42u.dll			LocalSystem	0	
			Cryptographic Services	CryptSvc	Running
			Process	c:\windows\system32\svchost.exe -k netsvcs	Auto
			LocalSystem	0	Share
			DCOM Server Process Launcher	DcomLaunch	Running
			Share Process	c:\windows\system32\svchost.exe -k	Auto
			dcomlaunch	Normal	LocalSystem
				0	



Distributed File System Process	Dfs	Stopped	Manual	Own	LocalSystem	server\mssql.1\mssql\binn\msftesql.exe" -s:mssql.1 -f:mssqlserver	Normal
	c:\windows\system32\dfssvc.exe	Normal				NT AUTHORITY\NetworkService	0
DHCP Client	Dhcp	Running	Auto	Share	Process	Windows Installer	MSIServer
	c:\windows\system32\svchost.exe -k networkservice	Normal				Stopped	Manual
	NT AUTHORITY\NetworkService	0				c:\windows\system32\msiexec.exe /v	Share Process
Logical Disk Manager	Administrative Service			dmadmin	Stopped	LocalSystem	0
	Manual	Share	Process			SQL Server (MSSQLSERVER)	MSSQLSERVER
	c:\windows\system32\dmadmin.exe /com	Normal				Own Process	"c:\program files\microsoft sql
	LocalSystem	0				server\mssql.1\mssql\binn\sqlservr.exe" -smssqlserver	Normal
Logical Disk Manager	dmserver	Running	Auto	Share	Process	SQL Server Active Directory Helper	MSSQLServerADHelper
	c:\windows\system32\svchost.exe -k netsvcs	Normal				Stopped	Disabled
	LocalSystem	0				Own Process	"c:\program
						files\microsoft sql server\90\shared\sqladhlp90.exe"	Normal
DNS Client	Dnscache	Running	Auto	Share	Process	NT AUTHORITY\NetworkService	0
	c:\windows\system32\svchost.exe -k networkservice	Normal				Network DDE	NetDDE
	NT AUTHORITY\NetworkService	0				Stopped	Disabled
Error Reporting Service	ERSvc	Running	Auto	Share	Process	Network DDE DSDM	NetDDEdsdm
	c:\windows\system32\svchost.exe -k winerr	Ignore				Stopped	Disabled
	LocalSystem	0				Process	c:\windows\system32\netdde.exe
Event Log	Eventlog	Running	Auto	Share	Process	Net Logon	Netlogon
	c:\windows\system32\services.exe	Normal				Stopped	Manual
	LocalSystem	0				Share Process	
COM+ Event System	EventSystem	Running	Auto	Share	Process	c:\windows\system32\lsass.exe	Normal
	c:\windows\system32\svchost.exe -k netsvcs	Normal				0	
	LocalSystem	0				Network Connections	Netman
Help and Support	helpsvc	Running	Auto	Share	Process	c:\windows\system32\svchost.exe -k netsvcs	Normal
	c:\windows\system32\svchost.exe -k netsvcs	Normal				LocalSystem	0
Human Interface Device	Access HidServ	Stopped	Disabled	Share	Process	Network Location Awareness (NLA)	Nla
	c:\windows\system32\svchost.exe -k netsvcs	Normal				Share Process	c:\windows\system32\svchost.exe -k
	LocalSystem	0				netsvcs	Normal
HTTP SSLHTTPFilter		Stopped	Manual	Share	Process	File Replication	NtFrs
	c:\windows\system32\lsass.exe	Normal				Stopped	Manual
	0					Own Process	
IAS Jet Database Access	IASJet	Stopped	Manual	Share	Process	c:\windows\system32\ntfrs.exe	Ignore
	c:\windows\syswow64\svchost.exe -k iasjet	Normal				0	
	LocalSystem	0				NT LM Security Support Provider	NtLmSsp
IMAPI CD-Burning COM Service		Stopped	Manual	Share	Process	Share Process	c:\windows\system32\lsass.exe
	Disabled	Own Process				LocalSystem	0
	Normal	LocalSystem	0			Removable Storage	NtmsSvc
Intersite Messaging	IsmServ	Stopped	Disabled	Own Process	Process	c:\windows\system32\svchost.exe -k netsvcs	Normal
	c:\windows\system32\ismsserv.exe	Normal				LocalSystem	0
	LocalSystem	0				Office Source Engine	ose
Kerberos Key Distribution Center		kdc	Stopped	Disabled	Process	"c:\program files (x86)\common files\microsoft shared\source	Normal
	Share Process	c:\windows\system32\lsass.exe	Normal			engine\ose.exe"	Normal
	LocalSystem	0				LocalSystem	0
Server	lanmanserver	Running	Auto	Share	Process	Plug and Play	PlugPlay
	c:\windows\system32\svchost.exe -k netsvcs	Normal				Running	Auto
	LocalSystem	0				Share Process	
Workstation	lanmanworkstation	Running	Auto	Share	Process	c:\windows\system32\services.exe	Normal
	c:\windows\system32\svchost.exe -k netsvcs	Normal				LocalSystem	0
	LocalSystem	0				IPSEC Services	PolicyAgent
License Logging	LicenseService	Stopped	Disabled	Own	Process	Running	Auto
	c:\windows\system32\llsrv.exe	Normal				Process	c:\windows\system32\lsass.exe
	AUTHORITY\NetworkService	0				0	Normal
						Protected Storage	ProtectedStorage
TCP/IP NetBIOS Helper	LmHosts	Running	Auto	Share	Process	Running	Auto
	c:\windows\system32\svchost.exe -k localservice	Normal				Process	c:\windows\system32\lsass.exe
	NT AUTHORITY\LocalService	0				0	Normal
Messenger	Messenger	Stopped	Disabled	Share	Process	Remote Access Auto Connection Manager	RasAuto
	c:\windows\system32\svchost.exe -k netsvcs	Normal				Share Process	c:\windows\system32\svchost.exe -k
	LocalSystem	0				netsvcs	Normal
NetMeeting	Remote Desktop Sharing	mnmsrv	Stopped	Disabled	Process	Remote Access Connection Manager	RasMan
	Own Process	c:\windows\system32\mnmsrv.exe	Normal			Share Process	c:\windows\system32\svchost.exe -k
	Normal	LocalSystem	0			netsvcs	Normal
Distributed Transaction Coordinator		MSDTC	Stopped	Disabled	Process	Remote Desktop Help Session Manager	RDSessMgr
	Own Process	c:\windows\system32\msdtc.exe	Normal			Manual	Own Process
	NT AUTHORITY\NetworkService	0				c:\windows\system32\sessmgr.exe	Normal
SQL Server FullText Search (MSSQLSERVER)		msftesql	Stopped	Disabled	Process	LocalSystem	0
	Disabled	Own Process				Routing and Remote Access	RemoteAccess
						Share Process	c:\windows\system32\svchost.exe -k
						netsvcs	Normal
						Remote Registry	RemoteRegistry
						Process	c:\windows\system32\svchost.exe -k regsvc
						AUTHORITY\LocalService	0
						Remote Procedure Call (RPC) Locator	RpcLocator
						Manual	Own Process
						c:\windows\system32\locator.exe	Normal
						AUTHORITY\NetworkService	0

Remote Procedure Call (RPC) Process	RpcSs	Running	Auto	Share	NT	Distributed Link Tracking Client Process	TrkWks	Running	Auto	Share	
c:\windows\system32\svchost.exe -k rpcss						c:\windows\system32\svchost.exe -k netsvcs					
AUTHORITY\NetworkService	0					LocalSystem	0				
Resultant Set of Policy Provider Process	RSOPProv	Stopped	Manual	Share	Normal	Terminal Services Session Directory	Tssdis	Stopped	Disabled		
c:\windows\system32\rsopprov.exe						c:\windows\system32\tssdis.exe					
LocalSystem	0					LocalSystem	0				
Special Administration Console Helper	sacsvr	Stopped	Manual	Share	Process	Windows User Mode Driver Framework	UMWdf	Stopped	Manual		
c:\windows\system32\svchost.exe -k						c:\windows\system32\wdfmgr.exe					
netsvcs	Normal	LocalSystem	0			Normal	NT AUTHORITY\LocalService	0			
Security Accounts Manager Process	SamSs	Running	Auto	Share	LocalSystem	Uninterruptible Power Supply Process	UPS	Stopped	Manual	Own	
c:\windows\system32\lsass.exe						c:\windows\system32\ups.exe					
0						AUTHORITY\LocalService	0				
Smart Card	SCardSvr	Stopped	Manual	Share	Process	Virtual Disk Service	vds	Stopped	Manual	Own Process	
c:\windows\system32\scardsvr.exe						c:\windows\system32\vds.exe					
AUTHORITY\LocalService	0				Ignore	LocalSystem	0				
Task Scheduler	Schedule	Running	Auto	Share	Process	Volume Shadow Copy Process	VSS	Stopped	Manual	Own	
c:\windows\system32\svchost.exe -k						c:\windows\system32\vssvc.exe					
LocalSystem	0				Normal	LocalSystem	0				
Secondary Logon	seclogon	Running	Auto	Share	Process	Windows Time	W32Time	Running	Auto	Share	
c:\windows\system32\svchost.exe -k						c:\windows\system32\svchost.exe -k					
LocalSystem	0				Ignore	NT AUTHORITY\LocalService	0			Normal	
System Event Notification Process	SENS	Running	Auto	Share	LocalSystem	WebClient	WebClient	Stopped	Disabled	Share	
c:\windows\system32\svchost.exe -k						c:\windows\system32\svchost.exe -k					
LocalSystem	0				Normal	NT AUTHORITY\LocalService	0			Normal	
Windows Firewall/Internet Connection Sharing (ICS)	SharedAccess	Stopped	Disabled	Share	Process	WinHTTP	Web Proxy Auto-Discovery Service				
c:\windows\system32\svchost.exe -k						WinHttpAutoProxySvc					
LocalSystem	0				Normal	Process	c:\windows\system32\svchost.exe -k	NT AUTHORITY\LocalService	0	Share	
Shell Hardware Detection	ShellHWDetection	Running	Auto	Share	Process	Windows Management Instrumentation	winmgmt	Running	Auto		
c:\windows\system32\svchost.exe -k						c:\windows\system32\svchost.exe -k					
netsvcs	Ignore	LocalSystem	0			netsvcs	Ignore	LocalSystem	0		
Print Spooler	Spooler	Running	Auto	Own	Process	Portable Media Serial Number Service	WmdmPmSN			Stopped	
c:\windows\system32\spoolsv.exe						c:\windows\system32\svchost.exe -k					
LocalSystem	0				Normal	LocalSystem	0			Normal	
SQL Server Browser Process	SQLBrowser	Stopped	Disabled	Own	Process	Windows Management Instrumentation Driver Extensions				Wmi	
"c:\program files (x86)\microsoft sql server\90\shared\sqlbrowser.exe"						c:\windows\system32\svchost.exe -k					
Normal	NT AUTHORITY\LocalService	0				LocalSystem	0				
SQL Server Agent (MSSQLSERVER)	SQLSERVERAGENT	Stopped	Manual	Own	Process	WMI Performance Adapter	WmiApSrv	Stopped	Manual		
"c:\program files\microsoft sql server\mssql.1\mssql\bin\sqlagent90.exe" -i mssqlserver						c:\windows\system32\wbem\wmiapsrv.exe					
Normal	LocalSystem	0				Normal	LocalSystem	0			
SQL Server VSS Writer Process	SQLWriter	Running	Auto	Own	Process	Automatic Updates	wuauclt	Running	Auto	Share	
"c:\program files\microsoft sql server\90\shared\sqlwriter.exe"						c:\windows\system32\svchost.exe -k					
Normal	LocalSystem	0				LocalSystem	0			Normal	
Windows Image Acquisition (WIA)	stisvc	Stopped	Disabled	Share	Process	Wireless Configuration	WZCSVC	Running	Auto	Share	
c:\windows\system32\svchost.exe -k						c:\windows\system32\svchost.exe -k					
imgsvc	Normal	NT AUTHORITY\LocalService	0			LocalSystem	0			Normal	
Microsoft Software Shadow Copy Provider	swprv	Stopped	Manual	Share	Process	Network Provisioning Service	xmlprov	Stopped	Manual	Share	
c:\windows\system32\svchost.exe -k						c:\windows\system32\svchost.exe -k					
Normal	LocalSystem	0				LocalSystem	0			Normal	
Performance Logs and Alerts	SysmonLog	Stopped	Auto	Own	Process	[Program Groups]					
c:\windows\system32\smlogsvc.exe						Group Name					
Normal	NT Authority\NetworkService	0				Accessories					
Telephony	TapiSrv	Stopped	Manual	Share	Process	Name					
c:\windows\system32\svchost.exe -k						Default User:Accessories					
LocalSystem	0				Normal	User Name					
Terminal Services	TermService	Running	Manual	Share	Process	Default User					
c:\windows\system32\svchost.exe -k						Accessories\Accessibility					
LocalSystem	0				Normal	Default User					
Themes	Themes	Stopped	Disabled	Share	Process	Accessories\Entertainment					
c:\windows\system32\svchost.exe -k						Default User					
LocalSystem	0				Normal	Startup					
Telnet	TlntSvr	Stopped	Disabled	Own	Process	Default User:Startup					
c:\windows\system32\tlntsvr.exe						Default User					
Normal	NT					Accessories\Accessibility					
AUTHORITY\LocalService	0					All Users:Accessories All Users					
Distributed Link Tracking Server Process	TrkSvr	Stopped	Disabled	Share	Process	Accessories\Accessibility					
c:\windows\system32\svchost.exe -k						All Users:Accessories\Accessibility					
LocalSystem	0				Normal	All Users					
						Accessories\Communications					
						All Users					
						Accessories\Entertainment					
						All Users					

Accessories\System Tools All Users:Accessories\System Tools  
All Users  
Administrative Tools All Users:Administrative Tools All Users  
HP System Tools All Users:HP System Tools All Users  
HP System Tools\HP Array Configuration Utility All Users:HP  
System Tools\HP Array Configuration Utility All Users  
HP System Tools\HP Array Diagnostic Utility All Users:HP  
System Tools\HP Array Diagnostic Utility All Users  
Microsoft SQL Server 2005 All Users:Microsoft SQL Server 2005  
All Users  
Microsoft SQL Server 2005\Analysis Services All Users:Microsoft  
SQL Server 2005\Analysis Services All Users  
Microsoft SQL Server 2005\Configuration Tools All Users:Microsoft  
SQL Server 2005\Configuration Tools All Users  
Microsoft SQL Server 2005\Documentation and Tutorials All  
Users:Microsoft SQL Server 2005\Documentation and Tutorials All Users

Microsoft SQL Server 2005\Documentation and Tutorials\Tutorials  
All Users:Microsoft SQL Server 2005\Documentation and  
Tutorials\Tutorials All Users  
Microsoft SQL Server 2005\Performance Tools All Users:Microsoft  
SQL Server 2005\Performance Tools All Users  
Microsoft Visual Studio 2005 All Users:Microsoft Visual Studio 2005  
All Users  
Microsoft Visual Studio 2005\Visual Studio Tools All Users:Microsoft  
Visual Studio 2005\Visual Studio Tools All Users  
Startup All Users:Startup All Users  
Accessories NT AUTHORITY\SYSTEM:Accessories NT  
AUTHORITY\SYSTEM  
Accessories\Accessibility NT  
AUTHORITY\SYSTEM:Accessories\Accessibility NT  
AUTHORITY\SYSTEM  
Accessories\Entertainment NT  
AUTHORITY\SYSTEM:Accessories\Entertainment NT  
AUTHORITY\SYSTEM  
Startup NT AUTHORITY\SYSTEM:Startup NT  
AUTHORITY\SYSTEM  
Accessories BULLSEYE\Administrator:Accessories  
BULLSEYE\Administrator  
Accessories\Accessibility  
BULLSEYE\Administrator:Accessories\Accessibility  
BULLSEYE\Administrator  
Accessories\Entertainment  
BULLSEYE\Administrator:Accessories\Entertainment  
BULLSEYE\Administrator  
Administrative Tools BULLSEYE\Administrator:Administrative Tools  
BULLSEYE\Administrator  
Iometer 2004.07.30 BULLSEYE\Administrator:Iometer 2004.07.30  
BULLSEYE\Administrator  
Startup BULLSEYE\Administrator:Startup  
BULLSEYE\Administrator

[Startup Programs]

Program	Command	User Name	Location
desktop	desktop.ini	NT AUTHORITY\SYSTEM	Startup
desktop	desktop.ini	BULLSEYE\Administrator	Startup
desktop	desktop.ini	.DEFAULT	Startup
desktop	desktop.ini	All Users	Common Startup

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /midi
Sound	Not Available
Media Clip	Not Available

WordPad Document "%programfiles%\windows  
nt\accessories\wordpad.exe"  
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time	Type	Details
4/16/2007 11:17 AM	Application Hang	Hanging application IEXPLORE.EXE, version 6.0.3790.1830, hang module hungapp, version 0.0.0.0, hang address 0x00000000.&#x000d;&#x000a;

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category ]  
[Summary]

Item	Value
Version	6.0.3790.1830
Build	63790.1830
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3790.1830	221 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
advpack.dll	6.0.3790.1830	146 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
asctrls.ocx	6.0.3790.1830	147 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browsecl.dll	6.0.3790.1830	63 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3790.1830	1,564 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
cdfview.dll	6.0.3790.1830	216 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3790.1830	935 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtrans.dll	6.3.3790.1830	320 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtrans.dll	6.3.3790.1830	549 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available		Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available		Not Available
iedkcs32.dll	16.0.3790.1830	417 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation

iepeers.dll	6.0.3790.1830	361 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
iesetup.dll	6.0.3790.1830	71 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
ieunit.inf	Not Available	24 KB	3/25/2005 7:00:00 AM	Not Available
C:\WINDOWS\system32				
ieexplore.exe	6.0.3790.1830	94 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\Program Files\Internet Explorer				
imgutil.dll	6.0.3790.1830	61 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
inetctl.cpl	6.0.3790.1830	428 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
inetctlc.dll	6.0.3790.1830	110 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
inseng.dll	6.0.3790.1830	147 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mlang.dll	6.0.3790.1830	686 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
msencode.dll	<File Missing>	Not Available	Not Available	Not Available
Available Not Available Not Available				
mshta.exe	6.0.3790.1830	38 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mshtml.dll	6.0.3790.1830	5,790 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mshtml.tlb	6.0.3790.1830	1,320 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mshtmlmed.dll	6.0.3790.1830	906 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mshtmlmer.dll	6.0.3790.1830	56 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
msident.dll	6.0.3790.1830	69 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
msidentld.dll	6.0.3790.1830	16 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
msieftp.dll	6.0.3790.1830	369 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
msrating.dll	6.0.3790.1830	240 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
mstime.dll	6.0.3790.1830	878 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
occache.dll	6.0.3790.1830	126 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
proctexe.ocx	<File Missing>	Not Available	Not Available	Not Available
Available Not Available Not Available				
sendmail.dll	6.0.3790.1830	64 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
shdoclc.dll	6.0.3790.1830	590 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				

shdocvw.dll	6.0.3790.1830	2,360 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
shfolder.dll	6.0.3790.1830	34 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
shlwapi.dll	6.0.3790.1830	607 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
tdc.ocx	1.3.0.3130	91 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
url.dll	6.0.3790.1830	40 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
urlmon.dll	6.0.3790.1830	1,049 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
webcheck.dll	6.0.3790.1830	439 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				
wininet.dll	6.0.3790.1830	1,159 KB	3/25/2005 7:00:00 AM	Microsoft Corporation
C:\WINDOWS\system32				

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	wininet.dll
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[ Following are sub-categories of this main category ]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[ Following are sub-categories of this main category ]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
-----------	-----------	----------	-----------	-----------

No personal certificate information available

[Other People Certificates]

Issued To	Issued By	Validity	Signature Algorithm
No other people certificate information available			

[Publishers]

Name

No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Custom
Internet High	
Restricted sites	Custom

# Appendix B: Database Build Scripts

## B.1 CreateDatabase.sql

```
-- CreateDatabase
-- for use with StepMaster
-- Uses FileGroups

--
-- Drop the existing database
--

if exists (select name from sysdatabases where name = '%DBNAME%')
    drop database %DBNAME%

CREATE DATABASE %DBNAME%
ON PRIMARY
(
    NAME = %DBNAME%_root,
    FILENAME = "c:\dev\tpch1000g.mdf",
    SIZE = 10MB,
    FILEGROWTH = 10MB),
FILEGROUP DATA_FG

(name=%DBNAME%_data1,filename='c:\dev\tpch_1\',size=235500mb,file
growth=0),

(name=%DBNAME%_data2,filename='c:\dev\tpch_2\',size=235500mb,file
growth=0),

(name=%DBNAME%_data3,filename='c:\dev\tpch_3\',size=235500mb,file
growth=0),

(name=%DBNAME%_data4,filename='c:\dev\tpch_4\',size=235500mb,file
growth=0),

(name=%DBNAME%_data5,filename='c:\dev\tpch_5\',size=235500mb,file
growth=0),

(name=%DBNAME%_data6,filename='c:\dev\tpch_6\',size=235500mb,file
growth=0),

(name=%DBNAME%_data7,filename='c:\dev\tpch_7\',size=235500mb,file
growth=0),

(name=%DBNAME%_data8,filename='c:\dev\tpch_8\',size=235500mb,file
growth=0),

FILEGROUP LOAD_FG
(name=%DBNAME%_load1,
filename='z:\load\load1.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load2,
filename='z:\load\load2.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load3,
filename='z:\load\load3.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load4,
filename='z:\load\load4.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load5,
filename='z:\load\load5.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load6,
filename='z:\load\load6.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load7,
filename='z:\load\load7.ldf',size=120000mb,filegrowth=0),
(name=%DBNAME%_load8,
filename='z:\load\load8.ldf',size=120000mb,filegrowth=0)
```

```
LOG ON
(
    NAME = tpchlog1,
    FILENAME = 'c:\dev\tpchlog1',
    SIZE = 199500MB,
    FILEGROWTH = 0)
```

## B.2 CreateTables.sql

```
if exists ( select name from sysobjects where name = 'PARTSUPP' ) drop
table PARTSUPP
```

```
if exists ( select name from sysobjects where name = 'PART' ) drop table
PART
```

```
if exists ( select name from sysobjects where name = 'SUPPLIER' ) drop
table SUPPLIER
```

```
if exists ( select name from sysobjects where name = 'CUSTOMER' ) drop
table CUSTOMER
```

```
if exists ( select name from sysobjects where name = 'REGION' ) drop
table REGION
```

```
if exists ( select name from sysobjects where name = 'NATION' ) drop
table NATION
```

```
create table PARTSUPP
(PS_PARTKEY int not null,
PS_SUPPKEY int not null,
PS_SUPPLYCOST float not null,
PS_AVAILQTY int not null,
PS_COMMENT varchar(199) not null)
on LOAD_FG
```

```
create table PART
(P_PARTKEY int not null,
P_TYPE varchar(25) not null,
P_SIZE int not null,
P_BRAND char(10) not null,
P_NAME varchar(55) not null,
P_CONTAINER char(10) not null,
P_MFGR char(25) not null,
P_RETAILPRICE float not null,
P_COMMENT varchar(23) not null)
on LOAD_FG
```

```
create table CUSTOMER
(C_CUSTKEY int not null,
C_MKTSEGMENT char(10) not null,
C_NATIONKEY int not null,
C_NAME varchar(25) not null,
C_ADDRESS varchar(40) not null,
C_PHONE char(15) not null,
C_ACCTBAL float not null,
C_COMMENT varchar(117) not null)
on LOAD_FG
```

```
create table SUPPLIER
(S_SUPPKEY int not null,
S_NATIONKEY int not null,
S_NAME char(25) not null,
```

```

S_ADDRESS      varchar(40)      not null,
S_PHONE        char(15)      not null,
S_ACCTBAL      float          not null,
S_COMMENT      varchar(101)   not null,
on LOAD_FG

```

```

create table NATION
(N_NATIONKEY   int          not null,
 N_NAME        char(25)   not null,
 N_REGIONKEY   int          not null,
 N_COMMENT     varchar(152) not null)
on LOAD_FG

```

```

create table REGION
(R_REGIONKEY   int          not null,
 R_NAME        char(25)   not null,
 R_COMMENT     varchar(152) not null)
on LOAD_FG

```

### B.3 CreateTableLI.sql

if exists ( select name from sysobjects where name = 'LINEITEM' ) drop table LINEITEM

```

create table LINEITEM
(L_SHIPDATE     datetime  not null,
 L_ORDERKEY     bigint     not null,
 L_DISCOUNT    float      not null,
 L_EXTENDEDPRI float      not null,
 L_SUPPKEY      int        not null,
 L_QUANTITY     float      not null,
 L_RETURNFLAG   char(1)    not null,
 L_PARTKEY      int        not null,
 L_LINESTATUS   char(1)    not null,
 L_TAX          float      not null,
 L_COMMITDATE   datetime  not null,
 L_RECEIPTDATE  datetime  not null,
 L_SHIPMODE     char(10)   not null,
 L_LINENUMBER   int        not null,
 L_SHIPINSTRUCT char(25)   not null,
 L_COMMENT      varchar(44) not null)
on LOAD_FG

```

### B.4 CreateTableOrders.sql

if exists ( select name from sysobjects where name = 'ORDERS' ) drop table ORDERS

```

create table ORDERS
(O_ORDERDATE    datetime  not null,
 O_ORDERKEY     bigint     not null,
 O_CUSTKEY      int        not null,
 O_ORDERPRIORITY char(15)  not null,
 O_SHIPPRIORITY int        not null,
 O_CLERK        char(15)   not null,
 O_ORDERSTATUS  char(1)    not null,
 O_TOTALPRICE   float      not null,
 O_COMMENT      varchar(79) not null)
on LOAD_FG

```

### B.5 CreateIndexesStream1.sql

```
create index PS_SUPPKEY_IDX
```

```

on PARTSUPP(PS_SUPPKEY)
with fillfactor=100, SORT_IN_TEMPDB
on DATA_FG

```

```

create index N_REGIONKEY_IDX
on NATION(N_REGIONKEY)
with fillfactor=100, SORT_IN_TEMPDB
on DATA_FG

```

```

create index S_NATIONKEY_IDX
on SUPPLIER(S_NATIONKEY)
with fillfactor=100, SORT_IN_TEMPDB
on DATA_FG

```

### B.6 CreateIndexesStream2.sql

```
create index L_ORDERKEY_IDX on LINEITEM(L_ORDERKEY)
with FILLFACTOR=95, SORT_IN_TEMPDB on DATA_FG
```

### B.7 CreateIndexesStream3.sql

```
create index L_PARTKEY_SUPPKEY_IDX on
LINEITEM(L_PARTKEY)
with FILLFACTOR=95, SORT_IN_TEMPDB on DATA_FG
```

### B.8 CreateClusteredIndexLI.sql

```
create clustered index L_SHIPDATE_CLUIDX
on LINEITEM(L_SHIPDATE)
WITH FILLFACTOR=95, SORT_IN_TEMPDB
on DATA_FG
```

### B.9 CreateClusteredIndexO.sql

```
create clustered index O_ORDERDATE_CLUIDX
on ORDERS(O_ORDERDATE)
WITH FILLFACTOR=95, SORT_IN_TEMPDB
on DATA_FG
```

### B.10 CreateFK.sql

```
-- create FK
```

```
ALTER table SUPPLIER ADD constraint FK_S_NATIONKEY foreign
key (S_NATIONKEY) references NATION(N_NATIONKEY)
```

```
ALTER table PARTSUPP ADD constraint FK_PS_PARTKEY foreign key
(PS_PARTKEY) references PART(P_PARTKEY)
ALTER table PARTSUPP ADD constraint FK_PS_SUPPKEY foreign key
(PS_SUPPKEY) references SUPPLIER(S_SUPPKEY)
```

```
ALTER table CUSTOMER ADD constraint FK_C_NATIONKEY foreign
key (C_NATIONKEY) references NATION (N_NATIONKEY)
```

```
ALTER table ORDERS ADD constraint FK_O_CUSTKEY foreign key
(O_CUSTKEY) references CUSTOMER (C_CUSTKEY)
```

```
ALTER table NATION ADD constraint FK_N_REGIONKEY foreign key
(N_REGIONKEY) references REGION (R_REGIONKEY)
```

```
ALTER table LINEITEM ADD constraint FK_L_ORDERKEY foreign
key (L_ORDERKEY) references ORDERS (O_ORDERKEY)
ALTER table LINEITEM ADD constraint FK_L_PARTKEY foreign key
(L_PARTKEY) references PART (P_PARTKEY)
ALTER table LINEITEM ADD constraint FK_L_SUPPKEY foreign key
(L_SUPPKEY) references SUPPLIER (S_SUPPKEY)
ALTER table LINEITEM ADD constraint FK_L_PARTKEY_SUPPKEY
foreign key (L_PARTKEY,L_SUPPKEY) references
PARTSUPP(PS_PARTKEY, PS_SUPPKEY)
```

## B.11 PK\_Large\_Tables.sql

```
ALTER table ORDERS ADD constraint PK_O_ORDERKEY primary key
(O_ORDERKEY) WITH (FILLFACTOR = 95) ON DATA_FG
```

```
ALTER table PARTSUPP ADD constraint
PK_PS_PARTKEY_PS_SUPPKEY primary key (PS_PARTKEY,
PS_SUPPKEY) ON DATA_FG
```

```
ALTER table PART ADD constraint PK_P_PARTKEY primary key
(P_PARTKEY) ON DATA_FG
```

## B.12 PK\_Small\_Tables.sql

```
ALTER table NATION ADD constraint PK_N_NATIONKEY primary key
(N_NATIONKEY) ON DATA_FG
```

```
ALTER table REGION ADD constraint PK_R_REGIONKEY primary key
(R_REGIONKEY) ON DATA_FG
```

```
ALTER table SUPPLIER ADD constraint PK_S_SUPPKEY primary key
(S_SUPPKEY) ON DATA_FG
```

```
ALTER table CUSTOMER ADD constraint PK_C_CUSTKEY primary
key (C_CUSTKEY) ON DATA_FG
```

## B.13 BackupDatabase.sql

```
-- Backup Database
```

```
backup database tpch1000g to
```

```
disk='Z:\MS_BACKUP\tpch1000g1.bak',
disk='Z:\MS_BACKUP\tpch1000g2.bak',
disk='Z:\MS_BACKUP\tpch1000g3.bak',
disk='Z:\MS_BACKUP\tpch1000g4.bak',
disk='Z:\MS_BACKUP\tpch1000g5.bak',
disk='Z:\MS_BACKUP\tpch1000g6.bak',
disk='Z:\MS_BACKUP\tpch1000g7.bak',
disk='Z:\MS_BACKUP\tpch1000g8.bak'
```

```
with init,maxtransfersize=1048576,BUFFERCOUNT=100,stats = 1
```

## B.14 RestoreDatabase.sql

```
-- select @@version
-- shutdown
-- drop database tpch1000g
-- sp_helpdb tpch1000g
-- sp_createstats
-- select count_big(*) from LINEITEM with (Index(0))
```

```
if exists (select name from sysdatabases where name = 'tpch1000g') drop
database tpch1000g
```

```
restore database tpch1000g from
```

```
disk='Z:\MS_BACKUP\tpch1000g1.bak',
disk='Z:\MS_BACKUP\tpch1000g2.bak',
disk='Z:\MS_BACKUP\tpch1000g3.bak',
disk='Z:\MS_BACKUP\tpch1000g4.bak',
disk='Z:\MS_BACKUP\tpch1000g5.bak',
disk='Z:\MS_BACKUP\tpch1000g6.bak',
disk='Z:\MS_BACKUP\tpch1000g7.bak',
disk='Z:\MS_BACKUP\tpch1000g8.bak'
```

```
with replace, maxtransfersize=1048576, stats = 1, BUFFERCOUNT=100
```

## B.15 MoveTempDB.sql

```
-- File: MOVETEMPDB.SQL
-- Microsoft TPC-H Benchmark Kit Ver. 2.00
-- Copyright Microsoft, 1999
```

```
alter database tempdb modify file
(name=tempdev,filename='c:\dev\tempdev\',size=125MB)
alter database tempdb modify file
(name=templog,filename='c:\dev\templog\',size=125MB)
```

## B.16 ResizeTempDB.sql

```
-- File: RESIZETEMPDB.SQL
-- Microsoft TPC-H Benchmark Kit Ver. 2.00
-- Copyright Microsoft, 1999
```

```
alter database tempdb modify file
(name=tempdev,
filename='c:\dev\tempdev\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=templog,
filename='c:\dev\templog\',size=500mb,filegrowth=500mb)
alter database tempdb modify file
(name=tempdev2,
filename='c:\dev\tempdev_2\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev3,
filename='c:\dev\tempdev_3\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev4,
filename='c:\dev\tempdev_4\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev5,
filename='c:\dev\tempdev_5\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev6,
filename='c:\dev\tempdev_6\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev7,
filename='c:\dev\tempdev_7\',size=149500mb,filegrowth=0)
alter database tempdb modify file
(name=tempdev8,
filename='c:\dev\tempdev_8\',size=149500mb,filegrowth=0)
```

## B.17 Remove\_Load\_Fg.sql



```
-- Drop the LOAD_FG

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load1

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load2

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load3

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load4

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load5

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load6

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load7

ALTER DATABASE %DBNAME% REMOVE FILE
%DBNAME%_load8

ALTER DATABASE %DBNAME% REMOVE FILEGROUP LOAD_FG
```

## B.18 RemoveFF.cmd

```
REM Remove Flatfiles
RMDIR Z:\MS_FLATFILES /S /Q
```

# Appendix C: Query Text and Output

## C.1 Qualification Queries and Output

### Qualification Query 1

-- using default substitutions

/\* TPC\_H Query 1 - Pricing Summary Report \*/

```

SELECT  L_RETURNFLAG,
        L_LINESTATUS,
        SUM(L_QUANTITY)
          AS SUM_QTY,
        SUM(L_EXTENDEDPRICE)
          AS SUM_BASE_PRICE,
        SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT))
          AS SUM_DISC_PRICE,
        SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT)*(1+L_TAX))
          AS SUM_CHARGE,
        AVG(L_QUANTITY)
          AS AVG_QTY,
        AVG(L_EXTENDEDPRICE)
          AS AVG_PRICE,
        AVG(L_DISCOUNT)
          AS AVG_DISC,
        COUNT_BIG(*)
          AS COUNT_ORDER
FROM    LINEITEM
WHERE   L_SHIPDATE      <= dateadd(dd, -90, '1998-12-01')
GROUP  BY              L_RETURNFLAG,
                      L_LINESTATUS
ORDER  BY              L_RETURNFLAG,
                      L_LINESTATUS

L_RETURNFLAG L_LINESTATUS SUM_QTY
SUM_BASE_PRICE  SUM_DISC_PRICE  SUM_CHARGE
AVG_QTY        AVG_PRICE        AVG_DISC
COUNT_ORDER
-----

```

```

A      F      37734107.000000      56586554400.730301
53758257134.870041      55909065222.827415      25.522006
38273.129735      0.049985      1478493
N      F      991417.000000      1487504710.380000
1413082168.054097      1469649223.194375      25.516472
38284.467761      0.050093      38854
N      O      74476040.000000      111701729697.739110
106118230307.605260      110367043872.498210      25.502227
38249.117989      0.049997      2920374
R      F      37719753.000000      56568041380.899857
53741292684.604156      55889619119.832260      25.505794
38250.854626      0.050009      1478870

```

(4 row(s) affected)

### Qualification Query 2

-- using default substitutions

/\* TPC\_H Query 2 - Minimum Cost Supplier \*/

```

SELECT  TOP 100
        S_ACCTBAL,
        S_NAME,
        N_NAME,
        P_PARTKEY,
        P_MFGR,
        S_ADDRESS,
        S_PHONE,
        S_COMMENT
FROM    PART,
        SUPPLIER,
        PARTSUPP,
        NATION,
        REGION
WHERE   P_PARTKEY      = PS_PARTKEY AND
        S_SUPPKEY      = PS_SUPPKEY AND
        P_SIZE         = 15 AND
        P_TYPE         LIKE '%%BRASS' AND
        S_NATIONKEY    = N_NATIONKEY AND
        N_REGIONKEY    = R_REGIONKEY AND
        R_NAME         = 'EUROPE' AND
        PS_SUPPLYCOST = (
        SELECT
        MIN(PS_SUPPLYCOST)
        FROM  PARTSUPP,
        SUPPLIER,
        NATION,
        REGION
        WHERE P_PARTKEY
        = PS_PARTKEY AND
        S_SUPPKEY
        = PS_SUPPKEY AND
        S_NATIONKEY
        = N_NATIONKEY AND
        N_REGIONKEY
        = R_REGIONKEY AND
        R_NAME
        = 'EUROPE'
        )
ORDER  BY  S_ACCTBAL DESC,
          N_NAME,
          S_NAME,
          P_PARTKEY
S_ACCTBAL      S_NAME      N_NAME
P_PARTKEY P_MFGR      S_ADDRESS
S_PHONE      S_COMMENT
-----
9938.530000      Supplier#000005359      UNITED KINGDOM
185358      Manufacturer#4      QKuHYh,vZGiwu2FWEJoLDx04
33-429-790-6131 blithely silent pinto beans are furiously. slyly final deposits
acros
9937.840000      Supplier#000005969      ROMANIA
108438      Manufacturer#1
ANDENSOSmk,miq23Xfb5RWt6dvUcvt6Qa      29-520-692-3537
carefully slow deposits use furiously. slyly ironic platelets above the ironic
9936.220000      Supplier#000005250      UNITED KINGDOM
249      Manufacturer#4      B3rqp0xbSEim4Mpy2RH J      33-
320-228-2957 blithely special packages are. stealthily express deposits
across the closely final instructi
9923.770000      Supplier#000002324      GERMANY
29821      Manufacturer#4      y3OD9UywSTok      17-
779-299-1839 quickly express packages breach quiet pinto beans. requ

```

```

9871.220000 Supplier#000006373 GERMANY
43868 Manufacturer#5 J8fcXW5TqM 17-813-
485-8637 never silent deposits integrate furiously blit
9870.780000 Supplier#000001286 GERMANY
81285 Manufacturer#2
YKA,E2fjiVd7eUrzp2Ef8j1QxGo2DFnosaTEH 17-516-924-4574 final
theodolites cajole slyly special,
9870.780000 Supplier#000001286 GERMANY
181285 Manufacturer#4
YKA,E2fjiVd7eUrzp2Ef8j1QxGo2DFnosaTEH 17-516-924-4574 final
theodolites cajole slyly special,
9852.520000 Supplier#000008973 RUSSIA 18972
Manufacturer#2 t5L67YdBYH6o,Vz24jpDyQ9 32-188-
594-7038 quickly regular instructions wake-- carefully unusual braids into
the expres
9847.830000 Supplier#000008097 RUSSIA 130557
Manufacturer#2 xMe97bpE69NzdwLoX 32-375-640-
3593 slyly regular dependencies sleep slyly furiously express dep
9847.570000 Supplier#000006345 FRANCE 86344
Manufacturer#1 VSt3rzK3qG698u6ld8HhOByvrTcSTsvQIDQDag
16-886-766-7945 silent pinto beans should have to snooze carefully along
the final reques
9847.570000 Supplier#000006345 FRANCE
173827 Manufacturer#2
VSt3rzK3qG698u6ld8HhOByvrTcSTsvQIDQDag 16-886-766-7945 silent
pinto beans should have to snooze carefully along the final reques
9836.930000 Supplier#000007342 RUSSIA 4841
Manufacturer#4 JOIK7C1,7xrEZSSow 32-399-414-
5385 final accounts haggle. bold accounts are furiously dugouts. furiously
silent asymptotes are slyly

```

..... additional rows deleted .....

```

7887.080000 Supplier#000009792 GERMANY
164759 Manufacturer#3 Y28ITVeYriT3kIGdV2K8fSZ
V2UqT5HI0tz 17-988-938-4296 pending, ironic packages sleep among
the carefully ironic accounts. quickly final accounts
7871.500000 Supplier#000007206 RUSSIA 104695
Manufacturer#1 3w fNcNrVmvJJE95sgWZzvW 32-432-
452-7731 furiously dogged pinto beans cajole. bold, express notornis until
the slyly pending
7852.450000 Supplier#000005864 RUSSIA 8363
Manufacturer#4 WCNfBPZeSXh3h,c 32-454-883-
3821 blithely regular deposits
7850.660000 Supplier#000001518 UNITED KINGDOM
86501 Manufacturer#1 ONda3YJiHKJOC 33-
730-383-3892 furiously final accounts wake carefully idle requests. even
dolphins wake acc
7843.520000 Supplier#000006683 FRANCE 11680
Manufacturer#4 2Z0JGkiv01Y0oCFwUGfviIbhZCdy 16-464-
517-8943 carefully bold accounts doub

```

(100 row(s) affected)

### Qualification Query 3

-- using default substitutions

/\* TPC\_H Query 3 - Shipping Priority \*/

```

SELECT TOP 10
      L_ORDERKEY,
      SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT)) AS
REVENUE,
      O_ORDERDATE,
      O_SHIPPRIORITY
FROM CUSTOMER,

```

```

ORDERS,
LINEITEM
WHERE C_MKTSEGMENT = 'BUILDING' AND
      C_CUSTKEY = O_CUSTKEY AND
      L_ORDERKEY = O_ORDERKEY AND
      O_ORDERDATE < '1995-03-15' AND
      L_SHIPDATE > '1995-03-15'

```

```

GROUP BY L_ORDERKEY,
          O_ORDERDATE,
          O_SHIPPRIORITY
ORDER BY REVENUE DESC,
          O_ORDERDATE

```

```

L_ORDERKEY REVENUE O_ORDERDATE
O_SHIPPRIORITY
-----

```

```

2456423 406181.011100 1995-03-05 00:00:00.000 0
3459808 405838.698900 1995-03-04 00:00:00.000 0
492164 390324.061000 1995-02-19 00:00:00.000 0
1188320 384537.935900 1995-03-09 00:00:00.000 0
2435712 378673.055800 1995-02-26 00:00:00.000 0
4878020 378376.795200 1995-03-12 00:00:00.000 0
5521732 375153.921500 1995-03-13 00:00:00.000 0
2628192 373133.309400 1995-02-22 00:00:00.000 0
993600 371407.459500 1995-03-05 00:00:00.000 0
2300070 367371.145200 1995-03-13 00:00:00.000 0

```

(10 row(s) affected)

### Qualification Query 4

-- using default substitutions

/\* TPC\_H Query 4 - Order Priority Checking \*/

```

SELECT O_ORDERPRIORITY,
      COUNT(*) AS ORDER_COUNT
FROM ORDERS
WHERE O_ORDERDATE >= '1993-07-01' AND
      O_ORDERDATE < dateadd(mm, 3, '1993-07-01') AND
      EXISTS (
        SELECT *
        FROM LINEITEM
        WHERE L_ORDERKEY
              = O_ORDERKEY AND
              L_COMMITDATE
              < L_RECEIPTDATE
      )
GROUP BY O_ORDERPRIORITY
ORDER BY O_ORDERPRIORITY

```

```

O_ORDERPRIORITY ORDER_COUNT
-----

```

```

1-URGENT 10594
2-HIGH 10476
3-MEDIUM 10410
4-NOT SPECIFIED 10556
5-LOW 10487

```

(5 row(s) affected)

### Qualification Query 5

-- using default substitutions

/\* TPC\_H Query 5 - Local Supplier Volume \*/

```

SELECT  N_NAME,
        SUM(L_EXTENDEDPRI*(1-L_DISCOUNT))  AS
REVENUE
FROM    CUSTOMER,
        ORDERS,
        LINEITEM,
        SUPPLIER,
        NATION,
        REGION
WHERE   C_CUSTKEY      = O_CUSTKEY AND
        L_ORDERKEY    = O_ORDERKEY AND
        L_SUPPKEY     = S_SUPPKEY AND
        C_NATIONKEY   = S_NATIONKEY AND
        S_NATIONKEY   = N_NATIONKEY AND
        N_REGIONKEY   = R_REGIONKEY AND
        R_NAME        = 'ASIA' AND
        O_ORDERDATE   >= '1994-01-01' AND
        O_ORDERDATE   < DATEADD(YEAR, 1, '1994-01-01')
GROUP  BY      N_NAME
ORDER  BY      REVENUE DESC

N_NAME      REVENUE
-----
INDONESIA    55502041.169700
VIETNAM     55295086.996700
CHINA       53724494.256600
INDIA       52035512.000200
JAPAN       45410175.695400

```

(5 row(s) affected)

### Qualification Query 6

-- using default substitutions

/\* TPC\_H Query 6 - Forecasting Revenue Change \*/

```

SELECT  SUM(L_EXTENDEDPRI*L_DISCOUNT)  AS
REVENUE
FROM    LINEITEM
WHERE   L_SHIPDATE   >= '1994-01-01' AND
        L_SHIPDATE   < dateadd (yy, 1, '1994-01-01') AND
        L_DISCOUNT  BETWEEN .06 - 0.01 AND .06 + 0.01
AND
        L_QUANTITY    < 24

```

```

REVENUE
-----
123141078.228300

```

(1 row(s) affected)

### Qualification Query 7

-- using default substitutions

/\* TPC\_H Query 7 - Volume Shipping \*/

```

SELECT  SUPP_NATION,
        CUST_NATION,
        L_YEAR,
        SUM(VOLUME)  AS REVENUE

```

```

FROM    (
        SELECT  N1.N_NAME
        AS SUPP_NATION,
              N2.N_NAME
        AS CUST_NATION,
              datepart(yy,L_SHIPDATE)
        AS L_YEAR,
              L_EXTENDEDPRI*(1-L_DISCOUNT)
        AS VOLUME
        FROM    SUPPLIER,
              LINEITEM,
              ORDERS,
              CUSTOMER,
              NATION N1,
              NATION N2
        WHERE   S_SUPPKEY      = L_SUPPKEY
        AND
              O_ORDERKEY      = L_ORDERKEY
        AND
              C_CUSTKEY       = O_CUSTKEY
        AND
              S_NATIONKEY     =
N1.N_NATIONKEY AND
              C_NATIONKEY     =
N2.N_NATIONKEY AND
              (
              (N1.N_NAME      =
'FRANCE' AND N2.N_NAME     = 'GERMANY')
              OR
              (N1.N_NAME      =
'GERMANY' AND N2.N_NAME    = 'FRANCE')
              ) AND
              L_SHIPDATE      BETWEEN '1995-
01-01' AND '1996-12-31'
        )
        AS SHIPPING
GROUP  BY  SUPP_NATION,
          CUST_NATION,
          L_YEAR
ORDER  BY  SUPP_NATION,
          CUST_NATION,
          L_YEAR

```

```

SUPP_NATION  CUST_NATION  L_YEAR
REVENUE
-----
FRANCE       GERMANY      1995    54639732.733600
FRANCE       GERMANY      1996    54633083.307600
GERMANY      FRANCE       1995    52531746.669700
GERMANY      FRANCE       1996    52520549.022400

```

(4 row(s) affected)

### Qualification Query 8

-- using default substitutions

/\* TPC\_H Query 8 - National Market Share \*/

```

SELECT  O_YEAR,
        SUM(CASE
              WHEN  NATION = 'BRAZIL'
              THEN  VOLUME
              ELSE  0
            END) / SUM(VOLUME)  AS
MKT_SHARE
FROM    (
        SELECT  datepart(yy,O_ORDERDATE)
        AS O_YEAR,
              L_EXTENDEDPRI * (1-
L_DISCOUNT)  AS VOLUME,
              N2.N_NAME
        AS NATION

```

```

FROM PART,
SUPPLIER,
LINEITEM,
ORDERS,
CUSTOMER,
NATION N1,
NATION N2,
REGION
WHERE P_PARTKEY = L_PARTKEY
AND
S_SUPPKEY = L_SUPPKEY
AND
L_ORDERKEY = O_ORDERKEY
AND
O_CUSTKEY = C_CUSTKEY
AND
C_NATIONKEY =
N1.N_NATIONKEY AND
N1.N_REGIONKEY = R_REGIONKEY
AND
R_NAME = 'AMERICA' AND
S_NATIONKEY =
N2.N_NATIONKEY AND
O_ORDERDATE BETWEEN '1995-
01-01' AND '1996-12-31' AND
P_TYPE = 'ECONOMY
ANODIZED STEEL'
) AS ALL_NATIONS
GROUP BY O_YEAR
ORDER BY O_YEAR
O_YEAR MKT_SHARE
-----
1995 0.034436
1996 0.041486
(2 row(s) affected)

```

### Qualification Query 9

```

-- using default substitutions
/* TPC_H Query 9 - Product Type Profit Measure */
SELECT NATION,
O_YEAR,
SUM(AMOUNT) AS SUM_PROFIT
FROM (
SELECT N_NAME
AS NATION,
datepart(yy, O_ORDERDATE)
AS O_YEAR,
L_EXTENDEDPRI*(1-
L_DISCOUNT)-PS_SUPPLYCOST*L_QUANTITY AS AMOUNT
FROM PART,
SUPPLIER,
LINEITEM,
PARTSUPP,
ORDERS,
NATION
WHERE S_SUPPKEY = L_SUPPKEY
AND
PS_SUPPKEY = L_SUPPKEY
AND
PS_PARTKEY = L_PARTKEY
AND
P_PARTKEY = L_PARTKEY

```

```

O_ORDERKEY = L_ORDERKEY
AND
S_NATIONKEY = N_NATIONKEY
AND
P_NAME LIKE '%green%'
) AS PROFIT
GROUP BY NATION,
O_YEAR
ORDER BY NATION,
O_YEAR DESC
NATION O_YEAR SUM_PROFIT
-----
ALGERIA 1998 31342867.234500
ALGERIA 1997 57138193.023300
ALGERIA 1996 56140140.133000
ALGERIA 1995 53051469.653400
ALGERIA 1994 53867582.128600
ALGERIA 1993 54942718.132400
ALGERIA 1992 54628034.712700
ARGENTINA 1998 30211185.708100
ARGENTINA 1997 50805741.752300
ARGENTINA 1996 51923746.575500
ARGENTINA 1995 49298625.766600
ARGENTINA 1994 50835610.109500
ARGENTINA 1993 51646079.177500
ARGENTINA 1992 50410314.994800
BRAZIL 1998 27217924.383200
BRAZIL 1997 48378669.198900
BRAZIL 1996 50482870.357200
BRAZIL 1995 47623383.634900
BRAZIL 1994 47840165.725600
BRAZIL 1993 49054694.035100
BRAZIL 1992 48667639.084200
CANADA 1998 30379833.768500
CANADA 1997 50465052.311400
CANADA 1996 52560501.390400
CANADA 1995 52375332.809200
CANADA 1994 52600364.658700

```

..... additional rows deleted .....

```

UNITED STATES 1993 48029946.801400
UNITED STATES 1992 48671944.498300
VIETNAM 1998 30442736.059400
VIETNAM 1997 50309179.794200
VIETNAM 1996 50488161.410000
VIETNAM 1995 49658284.612500
VIETNAM 1994 50596057.260700
VIETNAM 1993 50953919.151900
VIETNAM 1992 49613838.315100

```

(175 row(s) affected)

### Qualification Query 10

```

-- using default substitutions
/* TPC_H Query 10 - Returned Item Reporting */
SELECT TOP 20
C_CUSTKEY,
C_NAME,
SUM(L_EXTENDEDPRI*(1-L_DISCOUNT)) AS
REVENUE,
C_ACCTBAL,
N_NAME,

```

```

C_ADDRESS,
C_PHONE,
C_COMMENT
FROM CUSTOMER,
ORDERS,
LINEITEM,
NATION
WHERE C_CUSTKEY = O_CUSTKEY AND
L_ORDERKEY = O_ORDERKEY AND
O_ORDERDATE >= '1993-10-01'
AND
O_ORDERDATE < dateadd(mm, 3, '1993-10-01') AND
L_RETURNFLAG = 'R' AND
C_NATIONKEY = N_NATIONKEY
GROUP BY C_CUSTKEY,
C_NAME,
C_ACCTBAL,
C_PHONE,
N_NAME,
C_ADDRESS,
C_COMMENT
ORDER BY REVENUE DESC
C_CUSTKEY C_NAME REVENUE C_ACCTBAL
N_NAME C_ADDRESS C_PHONE
C_COMMENT
-----
-----
-----

```

```

57040 Customer#000057040 734235.245500 632.870000
JAPAN Eioyzjf4pp 22-895-641-3466
requests sleep blithely about the furiously i
143347 Customer#000143347 721002.694800 2557.470000
EGYPT 1aReFYv,Kw4 14-742-935-3718
fluffily bold excuses haggle finally after the u
60838 Customer#000060838 679127.307700 2454.770000
BRAZIL 64EaJ5vMAHWJIBOXkIpNc2RJiWE 12-913-
494-9813 furiously even pinto beans integrate under the ruthless foxes;
ironic, even dolphins across the slyl
101998 Customer#000101998 637029.566700 3790.890000
UNITED KINGDOM 01c9CILnNtfOQYmZj 33-593-
865-6378 accounts doze blithely! enticing, final deposits sleep blithely
special accounts. slyly express accounts pla
125341 Customer#000125341 633508.086000 4983.510000
GERMANY S29ODD6bceJ8QSuuEJznkNaK 17-582-
695-5962 quickly express requests wake quickly blithely
25501 Customer#000025501 620269.784900 7725.040000
ETHIOPIA W556MXuoiaYCCZamJI,Rn0B4ACUGdkQ8DZ
15-874-808-6793 quickly special requests sleep evenly among the special
deposits. special deposi
115831 Customer#000115831 596423.867200 5098.100000
FRANCE rFeBbEEyk dl ne7zV5fDrmiq1oK09wV7pxqCgIc 16-
715-386-3788 carefully bold excuses sleep alongside of the thinly idle
84223 Customer#000084223 594998.023900 528.650000
UNITED KINGDOM nAVZCs6BaWap rrM27N 2qBnze5WBauxbA
33-442-824-8191 pending, final ideas haggle final requests. unusual, regular
asymptotes affix according to the even foxes.
54289 Customer#000054289 585603.391800 5583.020000
IRAN vXCxoCsU0Bad5JQI ,oobkZ 20-834-292-
4707 express requests sublate blithely regular requests. regular, even ideas
solve.
39922 Customer#000039922 584878.113400 7321.110000
GERMANY Zgy4s50l2GKN4pLDPBU8m342glw6R 17-
147-757-8036 even pinto beans haggle. slyly bold accounts inte
6226 Customer#000006226 576783.760600 2230.090000
UNITED KINGDOM 8gPu8,NPGkfyQQ0hcIYUGPIBwC,ybP5g,
33-657-701-3391 quickly final requests against the regular instructions wake
blithely final instructions. pa

```

```

922 Customer#000000922 576767.533300 3869.250000
GERMANY Az9RFaut7NkPnc5zSD2PwHgVvr4JRzq 17-
945-916-9648 boldly final requests cajole blith
147946 Customer#000147946 576455.132000 2030.130000
ALGERIA iANyZHjqhyy7AJahOpTrYyhJ 10-886-956-
3143 furiously even accounts are blithely above the furiousl
115640 Customer#000115640 569341.193300 6436.100000
ARGENTINA Vtgfia9ql 7EpHgecU1X 11-411-543-
4901 final instructions are slyly according to the
73606 Customer#000073606 568656.857800 1785.670000
JAPAN xuR0Tro5yChDfOCrjkd2ol 22-437-653-
6966 furiously bold orbits about the furiously busy requests wake across the
furiously quiet theodolites. d
110246 Customer#000110246 566842.981500 7763.350000
VIETNAM 7KzflgX MDOq7sOkI 31-943-426-
9837 dolphins sleep blithely among the slyly final
142549 Customer#000142549 563537.236800 5085.990000
INDONESIA ChqEoK43OysjdHbtKCP6dKqjNyyvi9 19-
955-562-2398 regular, unusual dependencies boost slyly; ironic attainments
nag fluffily into the unusual packages?
146149 Customer#000146149 557254.986500 1791.550000
ROMANIA s87fvzFQpU 29-744-164-6487
silent, unusual requests detect quickly slyly regul
52528 Customer#000052528 556397.350900 551.790000
ARGENTINA NFztyTOR10UOJ 11-208-192-
3205 unusual requests detect. slyly dogged theodolites use slyly. deposit
23431 Customer#000023431 554269.536000 3381.860000
ROMANIA HgiV0phqhaIa9aydNoIib 29-915-458-
2654 instructions nag quickly. furiously bold accounts cajol

```

(20 row(s) affected)

## Qualification Query 11

-- using default substitutions

/\* TPC\_H Query 11 - Important Stock Identification \*/

```

SELECT PS_PARTKEY,
SUM(PS_SUPPLYCOST*PS_AVAILQTY) AS
VALUE
FROM PARTSUPP,
SUPPLIER,
NATION
WHERE PS_SUPPKEY = S_SUPPKEY AND
S_NATIONKEY = N_NATIONKEY AND
N_NAME = 'GERMANY'
GROUP BY PS_PARTKEY
HAVING SUM(PS_SUPPLYCOST*PS_AVAILQTY) >
(
SELECT
SUM(PS_SUPPLYCOST*PS_AVAILQTY) * 0.0001000000
FROM PARTSUPP,
SUPPLIER,
NATION
WHERE PS_SUPPKEY =
S_SUPPKEY AND
S_NATIONKEY =
N_NATIONKEY AND
N_NAME =
'GERMANY'
)
ORDER BY VALUE DESC
PS_PARTKEY VALUE
-----
129760 17538456.860000
166726 16503353.920000

```

```

191287 16474801.970000
161758 16101755.540000
34452 15983844.720000
139035 15907078.340000
9403 15451755.620000
154358 15212937.880000
38823 15064802.860000
85606 15053957.150000
33354 14408297.400000
154747 14407580.680000
82865 14235489.780000
76094 14094247.040000
222 13937777.740000
121271 13908336.000000
55221 13716120.470000
22819 13666434.280000
76281 13646853.680000
85298 13581154.930000
85158 13554904.000000
139684 13535538.720000
31034 13498025.250000

```

... additional rows deleted ...

```

122819 7888881.020000
154731 7888301.330000
101674 7879324.600000
51968 7879102.210000
72073 7877736.110000
5182 7874521.730000

```

(1048 row(s) affected)

## Qualification Query 12

-- using default substitutions

/\* TPC\_H Query 12 - Shipping Modes and Order Priority \*/

```

SELECT L_SHIPMODE,
       SUM( CASE WHEN O_ORDERPRIORITY = '1-
URGENT' OR
              O_ORDERPRIORITY = '2-HIGH'
            THEN 1
            ELSE 0
            END) AS HIGH_LINE_COUNT,
       SUM( CASE WHEN O_ORDERPRIORITY <> '1-
URGENT' AND
              O_ORDERPRIORITY <> '2-HIGH'
            THEN 1
            ELSE 0
            END) AS LOW_LINE_COUNT
FROM   ORDERS,
       LINEITEM
WHERE  O_ORDERKEY = L_ORDERKEY AND
       L_SHIPMODE IN ('MAIL','SHIP') AND
       L_COMMITDATE < L_RECEIPTDATE AND
       L_SHIPDATE < L_COMMITDATE AND
       L_RECEIPTDATE >= '1994-01-01'
AND
       L_RECEIPTDATE < dateadd(yy, 1, '1994-01-01')
GROUP BY L_SHIPMODE
ORDER BY L_SHIPMODE

L_SHIPMODE HIGH_LINE_COUNT LOW_LINE_COUNT
-----
MAIL 6202 9324

```

SHIP 6200 9262

(2 row(s) affected)

## Qualification Query 13

-- using default substitutions

/\* TPC\_H Query 13 - Customer Distribution \*/

```

SELECT C_COUNT,
       COUNT(*) AS CUSTDIST
FROM   ( SELECT C_CUSTKEY,
              COUNT(O_ORDERKEY)
        FROM CUSTOMER left outer join ORDERS on
              C_CUSTKEY = O_CUSTKEY
        AND
              O_COMMENT not like
              '%special%requests%'
        )
GROUP BY C_CUSTKEY
AS C_ORDERS (C_CUSTKEY, C_COUNT)
ORDER BY C_COUNT
        CUSTDIST DESC,
        C_COUNT DESC

```

C\_COUNT CUSTDIST

```

-----
0 50004
9 6641
10 6566
11 6058
8 5949
12 5553
13 4989
19 4748
7 4707
18 4625
15 4552
17 4530
14 4484
20 4461
16 4323
21 4217
22 3730
6 3334
23 3129
24 2622
25 2079
5 1972
26 1593
27 1185
4 1033
28 869
29 559
3 398
30 373
31 235
2 144
32 128
33 71
34 48
35 33
1 23
36 17
37 7
40 4
38 4

```

39 2  
41 1

(42 row(s) affected)

### Qualification Query 14

-- using default substitutions

/\* TPC\_H Query 14 - Promotion Effect \*/

```

SELECT 100.00 * SUM ( CASE WHEN P_TYPE
LIKE 'PROMO%%' THEN
L_EXTENDEDPRI*(1-L_DISCOUNT) ELSE 0
END) /
SUM(L_EXTENDEDPRI*(1-L_DISCOUNT)) AS
PROMO_REVENUE
FROM LINEITEM,
PART
WHERE L_PARTKEY = P_PARTKEY AND
L_SHIPDATE >= '1995-09-01' AND
L_SHIPDATE < dateadd(mm, 1, '1995-09-01')

```

PROMO\_REVENUE

-----  
16.380779

(1 row(s) affected)

### Qualification Query 15

-- using default substitutions

/\* TPC\_H Query 15 - Create View for Top Supplier Query \*/

```

CREATE VIEW REVENUE0 (SUPPLIER_NO, TOTAL_REVENUE)
AS
SELECT L_SUPPKEY,
SUM(L_EXTENDEDPRI*(1-L_DISCOUNT))
FROM LINEITEM
WHERE L_SHIPDATE >= '1996-01-01' AND
L_SHIPDATE < dateadd(mm, 3, '1996-01-01')
GROUP BY L_SUPPKEY
GO

```

/\* TPC\_H Query 15 - Top Supplier \*/

```

SELECT S_SUPPKEY,
S_NAME,
S_ADDRESS,
S_PHONE,
TOTAL_REVENUE
FROM SUPPLIER,
REVENUE0
WHERE S_SUPPKEY = SUPPLIER_NO AND
TOTAL_REVENUE = ( SELECT
MAX(TOTAL_REVENUE)
FROM REVENUE0
)
ORDER BY S_SUPPKEY
DROP VIEW REVENUE0

```

```

S_SUPPKEY S_NAME S_ADDRESS
S_PHONE TOTAL_REVENUE
-----
-----

```

```

8449 Supplier#000008449 Wp34zim9qYFbVctdW
20-469-856-8873 1772627.208700

```

(1 row(s) affected)

### Qualification Query 16

-- using default substitutions

/\* TPC\_H Query 16 - Parts/Supplier Relationship \*/

```

SELECT P_BRAND,
P_TYPE,
P_SIZE,
COUNT(DISTINCT PS_SUPPKEY) AS
SUPPLIER_CNT
FROM PARTSUPP,
PART
WHERE P_PARTKEY = PS_PARTKEY
AND
P_BRAND <> 'Brand#45'
AND
P_TYPE NOT LIKE 'MEDIUM POLISHED%%'
AND
P_SIZE IN (49, 14, 23, 45, 19, 3, 36, 9) AND
PS_SUPPKEY NOT IN ( SELECT
S_SUPPKEY
FROM
SUPPLIER
WHERE
S_COMMENT LIKE '%%Customer%%Complaints%%'
)

```

```

GROUP BY P_BRAND,
P_TYPE,
P_SIZE
ORDER BY SUPPLIER_CNT DESC,
P_BRAND,
P_TYPE,
P_SIZE

```

P_BRAND	P_TYPE	P_SIZE	SUPPLIER_CNT
Brand#41	MEDIUM BRUSHED TIN	3	28
Brand#54	STANDARD BRUSHED COPPER	14	27
Brand#11	STANDARD BRUSHED TIN	23	24
Brand#11	STANDARD BURNISHED BRASS	36	24
Brand#15	MEDIUM ANODIZED NICKEL	3	24
Brand#15	SMALL ANODIZED BRASS	45	24
Brand#15	SMALL BURNISHED NICKEL	19	24
Brand#21	MEDIUM ANODIZED COPPER	3	24
Brand#22	SMALL BRUSHED NICKEL	3	24
Brand#22	SMALL BURNISHED BRASS	19	24
Brand#25	MEDIUM BURNISHED COPPER	36	24
Brand#31	PROMO POLISHED COPPER	36	24
Brand#33	LARGE POLISHED TIN	23	24
Brand#33	PROMO POLISHED STEEL	14	24
Brand#52	MEDIUM BRUSHED BRASS	45	3
Brand#53	MEDIUM BRUSHED TIN	45	3
Brand#54	ECONOMY POLISHED BRASS	9	3

```

P_BRAND P_TYPE P_SIZE SUPPLIER_CNT
-----
Brand#41 MEDIUM BRUSHED TIN 3 28
Brand#54 STANDARD BRUSHED COPPER 14 27
Brand#11 STANDARD BRUSHED TIN 23 24
Brand#11 STANDARD BURNISHED BRASS 36 24
Brand#15 MEDIUM ANODIZED NICKEL 3 24
Brand#15 SMALL ANODIZED BRASS 45 24
Brand#15 SMALL BURNISHED NICKEL 19 24
Brand#21 MEDIUM ANODIZED COPPER 3 24
Brand#22 SMALL BRUSHED NICKEL 3 24
Brand#22 SMALL BURNISHED BRASS 19 24
Brand#25 MEDIUM BURNISHED COPPER 36 24
Brand#31 PROMO POLISHED COPPER 36 24
Brand#33 LARGE POLISHED TIN 23 24
Brand#33 PROMO POLISHED STEEL 14 24

```

.... Additional rows deleted .....

```

Brand#52 MEDIUM BRUSHED BRASS 45 3
Brand#53 MEDIUM BRUSHED TIN 45 3
Brand#54 ECONOMY POLISHED BRASS 9 3

```



Brand#55 PROMO PLATED BRASS 19 3  
 Brand#55 STANDARD PLATED TIN 49 3

(18314 row(s) affected)

### Qualification Query 17

-- using default substitutions

/\* TPC\_H Query 17 - Small-Quantity-Order Revenue \*/

```
SELECT SUM(L_EXTENDEDPRI)/7.0 AS AVG_YEARLY
FROM LINEITEM,
PART
WHERE P_PARTKEY = L_PARTKEY AND
P_BRAND = 'Brand#23'
AND
P_CONTAINER = 'MED BOX' AND
L_QUANTITY < ( SELECT 0.2 *
AVG(L_QUANTITY)
FROM
LINEITEM
WHERE
L_PARTKEY = P_PARTKEY
)
```

AVG\_YEARLY

-----  
 348406.054286

(1 row(s) affected)

### Qualification Query 18

-- using default substitutions

/\* TPC\_H Query 18 - Large Volume Customer \*/

```
SELECT TOP 100
C_NAME,
C_CUSTKEY,
O_ORDERKEY,
O_ORDERDATE,
O_TOTALPRICE,
SUM(L_QUANTITY)
FROM CUSTOMER,
ORDERS,
LINEITEM
WHERE O_ORDERKEY IN ( SELECT
L_ORDERKEY
FROM
LINEITEM
GROUP BY
L_ORDERKEY HAVING SUM(L_QUANTITY) > 300
)
AND
C_CUSTKEY = O_CUSTKEY AND
O_ORDERKEY = L_ORDERKEY
GROUP BY C_NAME,
C_CUSTKEY,
O_ORDERKEY,
O_ORDERDATE,
O_TOTALPRICE
ORDER BY O_TOTALPRICE DESC,
O_ORDERDATE
```

C_NAME	C_CUSTKEY	O_ORDERKEY	O_ORDERDATE	O_TOTALPRICE
Customer#000128120	128120	4722021	1994-04-07	323.000000
00:00:00.000 544089.090000				3043270
Customer#000144617	144617	3043270	1997-02-12	317.000000
00:00:00.000 530604.440000				2232932
Customer#000013940	13940	2232932	1997-04-13	304.000000
00:00:00.000 522720.610000				2199712
Customer#000066790	66790	2199712	1996-09-30	327.000000
00:00:00.000 515531.820000				4745607
Customer#000046435	46435	4745607	1997-07-03	309.000000
00:00:00.000 508047.990000				3883783
Customer#000015272	15272	3883783	1993-07-28	302.000000
00:00:00.000 500241.330000				3342468
Customer#000146608	146608	3342468	1994-06-12	303.000000
00:00:00.000 499794.580000				5984582
Customer#000096103	96103	5984582	1992-03-16	312.000000
00:00:00.000 494398.790000				1474818
Customer#000024341	24341	1474818	1992-11-15	302.000000
00:00:00.000 491348.260000				5489475
Customer#000137446	137446	5489475	1997-05-23	311.000000
00:00:00.000 487763.250000				4267751
Customer#000107590	107590	4267751	1994-11-04	301.000000
00:00:00.000 485141.380000				2366755
Customer#000050008	50008	2366755	1996-12-09	302.000000
00:00:00.000 483891.260000				3767271
Customer#000015619	15619	3767271	1996-08-07	318.000000
00:00:00.000 480083.960000				1436544
Customer#000077260	77260	1436544	1992-09-12	307.000000
00:00:00.000 479499.430000				5746311
Customer#000109379	109379	5746311	1996-10-10	302.000000
00:00:00.000 478064.110000				5832321
Customer#000054602	54602	5832321	1997-02-09	307.000000
00:00:00.000 471220.080000				2096705
Customer#000105995	105995	2096705	1994-07-03	307.000000
00:00:00.000 469692.580000				2942469
Customer#000148885	148885	2942469	1992-05-31	313.000000
00:00:00.000 469630.440000				551136
Customer#000114586	114586	551136	1993-05-19	308.000000
00:00:00.000 469605.590000				5296167
Customer#000105260	105260	5296167	1996-09-06	303.000000
00:00:00.000 469360.570000				1263015
Customer#000147197	147197	1263015	1997-02-02	320.000000
00:00:00.000 467149.670000				2745894
Customer#000064483	64483	2745894	1996-07-04	304.000000
00:00:00.000 466991.350000				2761378
Customer#000136573	136573	2761378	1996-05-31	301.000000
00:00:00.000 461282.730000				502886
Customer#000016384	16384	502886	1994-04-12	312.000000
00:00:00.000 458378.920000				2869152
Customer#000117919	117919	2869152	1996-06-20	317.000000
00:00:00.000 456815.920000				735366
Customer#000012251	12251	735366	1993-11-24	309.000000
00:00:00.000 455107.260000				1971680
Customer#000120098	120098	1971680	1995-06-14	308.000000
00:00:00.000 453451.230000				5007490
Customer#000066098	66098	5007490	1992-08-07	304.000000
00:00:00.000 453436.160000				4290656
Customer#000117076	117076	4290656	1997-02-05	301.000000
00:00:00.000 449545.850000				4720454
Customer#000129379	129379	4720454	1997-06-07	303.000000
00:00:00.000 448665.790000				4702759
Customer#000126865	126865	4702759	1994-11-07	320.000000
00:00:00.000 447606.650000				983201
Customer#000088876	88876	983201	1993-12-30	304.000000
00:00:00.000 446717.460000				4806726
Customer#000036619	36619	4806726	1995-01-17	328.000000
00:00:00.000 446704.090000				

Customer#000141823	141823	2806245	1996-12-29
00:00:00.000 446269.120000		310.000000	
Customer#000053029	53029	2662214	1993-08-13
00:00:00.000 446144.490000		302.000000	
Customer#000018188	18188	3037414	1995-01-25
00:00:00.000 443807.220000		308.000000	
Customer#000066533	66533	29158	1995-10-21
00:00:00.000 443576.500000		305.000000	
Customer#000037729	37729	4134341	1995-06-29
00:00:00.000 441082.970000		309.000000	
Customer#000003566	3566	2329187	1998-01-04
00:00:00.000 439803.360000		304.000000	
Customer#000045538	45538	4527553	1994-05-22
00:00:00.000 436275.310000		305.000000	
Customer#000081581	81581	4739650	1995-11-04
00:00:00.000 435405.900000		305.000000	
Customer#000119989	119989	1544643	1997-09-20
00:00:00.000 434568.250000		320.000000	
Customer#000003680	3680	3861123	1998-07-03
00:00:00.000 433525.970000		301.000000	
Customer#000113131	113131	967334	1995-12-15
00:00:00.000 432957.750000		301.000000	
Customer#000141098	141098	565574	1995-09-24
00:00:00.000 430986.690000		301.000000	
Customer#000093392	93392	5200102	1997-01-22
00:00:00.000 425487.510000		304.000000	
Customer#000015631	15631	1845057	1994-05-12
00:00:00.000 419879.590000		302.000000	
Customer#000112987	112987	4439686	1996-09-17
00:00:00.000 418161.490000		305.000000	
Customer#000012599	12599	4259524	1998-02-12
00:00:00.000 415200.610000		304.000000	
Customer#000105410	105410	4478371	1996-03-05
00:00:00.000 412754.510000		302.000000	
Customer#000149842	149842	5156581	1994-05-30
00:00:00.000 411329.350000		302.000000	
Customer#000010129	10129	5849444	1994-03-21
00:00:00.000 409129.850000		309.000000	
Customer#000069904	69904	1742403	1996-10-19
00:00:00.000 408513.000000		305.000000	
Customer#000017746	17746	6882	1997-04-09
00:00:00.000 408446.930000		303.000000	
Customer#000013072	13072	1481925	1998-03-15
00:00:00.000 399195.470000		301.000000	
Customer#000082441	82441	857959	1994-02-07
00:00:00.000 382579.740000		305.000000	
Customer#000088703	88703	2995076	1994-01-30
00:00:00.000 363812.120000		302.000000	

(57 row(s) affected)

## Qualification Query 19

-- using default substitutions

/\* TPC\_H Query 19 - Discounted Revenue \*/

```

SELECT SUM(L_EXTENDEDPRICE*(1 - L_DISCOUNT)) AS
REVENUE
FROM LINEITEM,
PART
WHERE ( P_PARTKEY = L_PARTKEY
AND
P_BRAND = 'Brand#12'

AND

```

```

P_CONTAINER IN ('SM CASE', 'SM BOX',
'SM PACK', 'SM PKG')
AND
L_QUANTITY >= 1
AND
L_QUANTITY <= 1 + 10
AND
P_SIZE BETWEEN 1 AND 5
AND
L_SHIPMODE IN ('AIR', 'AIR REG')
AND
L_SHIPINSTRUCT = 'DELIVER IN PERSON'
)
OR
( P_PARTKEY = L_PARTKEY
AND
P_BRAND = 'Brand#23'

AND
P_CONTAINER IN ('MED BAG', 'MED BOX',
'MED PKG', 'MED PACK')
AND
L_QUANTITY >= 10
AND
L_QUANTITY <= 10 + 10
AND
P_SIZE BETWEEN 1 AND 10
AND
L_SHIPMODE IN ('AIR', 'AIR REG')
AND
L_SHIPINSTRUCT = 'DELIVER IN PERSON'
)
OR
( P_PARTKEY = L_PARTKEY
AND
P_BRAND = 'Brand#34'

AND
P_CONTAINER IN ('LG CASE', 'LG BOX', 'LG
PACK', 'LG PKG')
AND
L_QUANTITY >= 20
AND
L_QUANTITY <= 20 + 10
AND
P_SIZE BETWEEN 1 AND 15
AND
L_SHIPMODE IN ('AIR', 'AIR REG')
AND
L_SHIPINSTRUCT = 'DELIVER IN PERSON'
)
)

```

REVENUE

-----  
3083843.057800

(1 row(s) affected)

## Qualification Query 20

-- using default substitutions

/\* TPC\_H Query 20 - Potential Part Promotion \*/

```

SELECT S_NAME,
S_ADDRESS
FROM SUPPLIER,
NATION

```

```

WHERE S_SUPPKEY IN ( SELECT
      PS_SUPPKEY FROM
      PARTSUPP WHERE
      PS_PARTKEY in ( SELECT P_PARTKEY
      FROM PART
      WHERE P_NAME like 'forest%'
      ) AND
      PS_AVAILQTY
      > ( SELECT 0.5 * sum(L_QUANTITY)
      FROM LINEITEM
      WHERE L_PARTKEY =
      PS_PARTKEY AND
      L_SUPPKEY =
      PS_SUPPKEY AND
      L_SHIPDATE >= '1994-
      01-01' AND
      L_SHIPDATE <
      dateadd(yy,1,'1994-01-01')
      ) AND
      S_NATIONKEY = N_NATIONKEY AND
      N_NAME = 'CANADA'
ORDER BY S_NAME
S_NAME S_ADDRESS
-----
Supplier#000000020 iybAE,RmTymrZVYafZva2SH,j
Supplier#000000091
YV45D7TkfdQanOOZ7q9QxkyGUapU1oOWU6q3
Supplier#000000197 YC2Acon6kjY3zj3Fbxs2k4Vdf7X0cd2F
Supplier#000000226 83qOdU2EYRdPQAQhEtn GRZEd
Supplier#000000285 Br7e1nnt1yxrw6ImgpJ7YdhFDjuBf
Supplier#000000378 FfbhyCxWvcPrO8ltp9
Supplier#000000402 i9Sw4DoyMhzhKXCH9By,AYSgmD
Supplier#000000530 0qwCMwobKY OcmLyfRXlagA8ukENJv,
Supplier#000000688 D fw5ocppmZpYBBIP1718hCihLDZ5KhKX
Supplier#000000710 f19YPvOyb QoYwjKC,oPycpGfieBAcwKJo
Supplier#000000736 l6i2nMwVuoVfKnuVgaSGK2rDy65DIAFLegiL7
Supplier#000000761 zlSLelQUj2XrvTTFnv7WAcYZGvvMTx882d4
Supplier#000000884 bmhEShejaS
Supplier#000000887 urEaTejH5POADP2ARrf
Supplier#000000935 ij98czM 2KzWe7dDToxB8sq0UfCdvX
Supplier#000000975 ,AC e,tBpNwKb5xMUzeohxIRn, hdZJo73gFQF8y
Supplier#000001263 rQWr6nf8ZhB2TAiIDlvo5Io
... additional rows deleted ....
Supplier#000009812 APFRMy3lCbgFga53n5t9DxzFPQPgnjrGt32
Supplier#000009862 rJzweWeN58
Supplier#000009868 ROjGgx5gvtkmmUUoeyy7v
Supplier#000009869
ucLqxzrpBTRMewGSM29t0rNTM30g1Tu3Xgg3mKag
Supplier#000009899 7XdpaHrzr1t,UQFZE
Supplier#000009974 7wJ,J5DKcxSU4Kp1cQLpbcAvB5AsvKT
(204 row(s) affected)

```

## Qualification Query 21

```

-- using default substitutions
/* TPC_H Query 21 - Suppliers Who Kept Orders Waiting */
SELECT TOP 100
      S_NAME,
      COUNT(*) AS NUMWAIT
FROM SUPPLIER,
      LINEITEM L1,
      ORDERS,
      NATION
WHERE S_SUPPKEY = L1.L_SUPPKEY
      AND
      O_ORDERKEY = L1.L_ORDERKEY
      AND
      O_ORDERSTATUS = 'F'
      AND
      L1.L_RECEIPTDATE > L1.L_COMMITDATE
      AND
      EXISTS ( SELECT *
      FROM LINEITEM L2
      WHERE L2.L_ORDERKEY =
      L1.L_ORDERKEY AND
      L2.L_SUPPKEY <>
      L1.L_SUPPKEY
      ) AND
      ( SELECT *
      FROM LINEITEM L3
      WHERE L3.L_ORDERKEY
      AND
      L3.L_SUPPKEY
      AND
      L3.L_RECEIPTDATE > L3.L_COMMITDATE
      )
      AND
      S_NATIONKEY = N_NATIONKEY AND
      N_NAME = 'SAUDI ARABIA'
GROUP BY S_NAME
ORDER BY NUMWAIT DESC,
      S_NAME
S_NAME NUMWAIT
-----
Supplier#000002829 20
Supplier#000005808 18
Supplier#000000262 17
Supplier#000000496 17
Supplier#000002160 17
Supplier#000002301 17
Supplier#000002540 17
Supplier#000003063 17
Supplier#000005178 17
Supplier#000008331 17
Supplier#000002005 16
Supplier#000002095 16
Supplier#000005799 16
Supplier#000005842 16
... additional rows deleted ...
Supplier#00000811 12
Supplier#00000821 12
Supplier#00001337 12
Supplier#00001916 12
Supplier#00001925 12
Supplier#00002039 12
Supplier#00002357 12

```

Supplier#000002483 12

(100 row(s) affected)

## Qualification Query 22

-- using default substitutions

/\* TPC\_H Query 22 - Global Sales Opportunity \*/

```

SELECT  C_NTRYCODE,
        COUNT(*)          AS NUMCUST,
        SUM(C_ACCTBAL) AS TOTACCTBAL
FROM    (
        SELECT  SUBSTRING(C_PHONE,1,2) AS
C_NTRYCODE,
                C_ACCTBAL
        FROM    CUSTOMER
        WHERE   SUBSTRING(C_PHONE,1,2) IN
('13', '31', '23', '29', '30', '18', '17') AND
                C_ACCTBAL
        (
        SELECT  AVG(C_ACCTBAL)
        FROM    CUSTOMER
        WHERE   C_ACCTBAL > 0.00 AND
                SUBSTRING(C_PHONE,1,2) IN
('13', '31', '23', '29', '30', '18', '17')
        )
        )
        AND
        NOT EXISTS (
        SELECT
        FROM
        ORDERS
        WHERE
        O_CUSTKEY = C_CUSTKEY
        )
        )
        AS CUSTSALE
GROUP BY C_NTRYCODE
ORDER BY C_NTRYCODE

```

C_NTRYCODE	NUMCUST	TOTACCTBAL
13	888	6737713.990000
17	861	6460573.720000
18	964	7236687.400000
23	892	6701457.950000
29	948	7158866.630000
30	909	6808436.130000
31	922	6806670.180000

(7 row(s) affected)

# Appendix D: Seeds and Query Substitution Parameters

## Stream0 Seed : 404110157

```

14 1996-01-01
2 20 BRASS MIDDLE EAST
9 thistle
20 peach 1996-01-01 MOROCCO
6 1994-01-01 0.04 24
17 Brand#25 SM JAR
18 315
8 ETHIOPIA AFRICA PROMO PLATED STEEL
21 MOROCCO
13 special accounts
3 MACHINERY 1995-03-30
22 30 34 24 25 21 10
20
16 Brand#52 ECONOMY BRUSHED 20 13
31 3 28 1 35 23
4 1997-09-01
11 MOZAMBIQUE 0.0000010000
15 1994-01-01
1 73
10 1994-07-01
19 Brand#14 Brand#44 Brand#55 1 14 25
5 AFRICA 1994-01-01
7 GERMANY ETHIOPIA
12 TRUCK REG AIR 1996-01-01

```

## Stream1 Seed : 404110158

```

21 GERMANY
3 BUILDING 1995-03-16
18 312
5 AMERICA 1994-01-01
11 EGYPT 0.0000010000
7 UNITED STATES RUSSIA
6 1994-01-01 0.09 25
20 blush 1994-01-01 ETHIOPIA
17 Brand#22 SM CAN
12 RAIL REG AIR 1996-01-01
16 Brand#42 SMALL BURNISHED 44 8
16 10 31 41 15 27
15 1997-01-01
13 special deposits
10 1993-05-01
2 7 NICKEL ASIA
8 RUSSIA EUROPE PROMO ANODIZED COPPER
14 1997-01-01
19 Brand#11 Brand#22 Brand#55 6 15 21
9 slate
22 15 32 20 21 17 23
19
1 81
4 1995-06-01

```

## Stream2 Seed : 404110159

```

6 1994-01-01 0.07 25
17 Brand#23 LG BOX
14 1997-01-01
16 Brand#22 LARGE PLATED 19 41 50
40 7 34 35 32
19 Brand#23 Brand#54 Brand#54 1 16 29
10 1994-02-01
9 saddle
2 45 TIN AFRICA
15 1994-01-01
8 KENYA AFRICA ECONOMY POLISHED COPPER
5 EUROPE 1994-01-01
22 19 30 13 26 21 11
31
12 REG AIR FOB 1994-01-01
7 MOZAMBIQUE KENYA
13 special deposits
18 314
1 89
4 1993-03-01
20 magenta 1997-01-01 ROMANIA
3 HOUSEHOLD 1995-03-01
11 PERU 0.0000010000
21 UNITED STATES

```

## Stream3 Seed : 404110160

```

8 FRANCE EUROPE ECONOMY BURNISHED COPPER
5 MIDDLE EAST 1994-01-01
4 1995-10-01
6 1994-01-01 0.04 24
17 Brand#25 LG JAR
7 INDIA FRANCE
1 97
18 315
22 31 28 22 15 30 18
20
14 1997-01-01
9 puff
10 1994-11-01
15 1997-01-01
11 ETHIOPIA 0.0000010000
20 tomato 1996-01-01 INDONESIA
2 33 COPPER ASIA
21 MOZAMBIQUE
19 Brand#25 Brand#42 Brand#43 7 17 25
13 special deposits
16 Brand#52 PROMO BRUSHED 9 44 34
20 41 26 31 11
12 SHIP REG AIR 1997-01-01
3 AUTOMOBILE 1995-03-18

```

**Stream4 Seed : 404110161**

5 AFRICA 1995-01-01  
 21 INDONESIA  
 14 1997-01-01  
 19 Brand#22 Brand#25 Brand#42 2 18 21  
 15 1995-01-01  
 17 Brand#22 LG CAN  
 12 FOB AIR 1997-01-01  
 6 1995-01-01 0.02 25  
 4 1993-06-01  
 9 papaya  
 8 UNITED KINGDOM EUROPE LARGE BRUSHED COPPER  
 16 Brand#42 MEDIUM ANODIZED 11 18  
 21 10 28 2 26 7  
 11 CHINA 0.0000010000  
 2 21 STEEL AFRICA  
 10 1993-08-01  
 18 313  
 1 105  
 13 special deposits  
 7 ALGERIA UNITED KINGDOM  
 22 17 11 18 28 30 13  
 25  
 3 HOUSEHOLD 1995-03-03  
 20 goldenrod 1994-01-01 UNITED STATES

**Stream5 Seed : 404110162**

21 ARGENTINA  
 15 1997-01-01  
 4 1996-01-01  
 6 1995-01-01 0.07 25  
 7 PERU MOROCCO  
 16 Brand#22 ECONOMY PLATED 19 39  
 29 44 1 11 34 18  
 19 Brand#34 Brand#13 Brand#42 7 19 28  
 18 314  
 14 1998-01-01  
 22 16 25 28 24 32 29  
 34  
 11 FRANCE 0.0000010000  
 13 special deposits  
 3 AUTOMOBILE 1995-03-20  
 1 113  
 2 9 NICKEL EUROPE  
 5 AMERICA 1995-01-01  
 8 MOROCCO AFRICA LARGE PLATED COPPER  
 20 rose 1993-01-01 JORDAN  
 12 MAIL AIR 1997-01-01  
 17 Brand#24 MED BOX  
 10 1994-05-01  
 9 navajo

**Stream6 Seed : 404110163**

10 1993-03-01  
 3 FURNITURE 1995-03-05  
 15 1995-01-01  
 13 special packages  
 6 1995-01-01 0.05 24  
 8 GERMANY EUROPE LARGE BURNISHED TIN  
 9 medium  
 7 INDONESIA GERMANY  
 4 1993-10-01  
 11 ROMANIA 0.0000010000  
 22 33 17 23 14 18 21  
 31  
 18 312  
 12 TRUCK AIR 1993-01-01  
 1 60  
 5 ASIA 1995-01-01  
 16 Brand#52 STANDARD POLISHED 27 10  
 35 8 28 37 30 18  
 2 46 TIN AFRICA  
 14 1993-01-01  
 19 Brand#31 Brand#41 Brand#31 2 20 24  
 20 cornflower 1996-01-01 CANADA  
 17 Brand#21 MED JAR  
 21 CHINA

**Stream7 Seed : 404110164**

18 314  
 8 UNITED STATES AMERICA MEDIUM  
 BRUSHED TIN  
 20 navajo 1995-01-01 CHINA  
 21 IRAN  
 2 34 COPPER EUROPE  
 4 1996-05-01  
 22 31 23 12 27 32 14  
 18  
 17 Brand#23 MED CAN  
 1 68  
 11 GERMANY 0.0000010000  
 9 lemon  
 19 Brand#34 Brand#34 Brand#35 8 10 21  
 3 AUTOMOBILE 1995-03-22  
 13 pending packages  
 5 EUROPE 1995-01-01  
 7 ARGENTINA UNITED STATES  
 10 1993-12-01  
 16 Brand#42 LARGE ANODIZED 29 49 22  
 40 44 12 4 15  
 6 1995-01-01 0.02 25  
 14 1993-01-01  
 15 1997-01-01  
 12 RAIL AIR 1993-01-01

# Appendix E: Refresh Function Source Code

## E.1 CreateRF1Proc.sql

```
-- File:  CREATERF1PROC.SQL
--      Microsoft TPC-H Benchmark Kit Ver. 1.00
--      Copyright Microsoft, 1999
--
IF exists (SELECT name FROM sysobjects WHERE name = 'RF1')
    DROP PROCEDURE RF1
GO
--
-- Create a stored RefreshInsert procedure which will catch the deadlock
-- victim abort and restart the insert transaction.
--
CREATE PROCEDURE RF1
    @current_execution INTEGER, @insert_sets INTEGER,
    @parallel_executions INTEGER, @total_executions INTEGER
AS
BEGIN
    DECLARE @startdate DATETIME
    DECLARE @enddate DATETIME
    DECLARE @edate DATETIME
    DECLARE @rangeStart INTEGER
    DECLARE @rangeSize INTEGER
    DECLARE @range INTEGER
    DECLARE @success INTEGER
    DECLARE @index INTEGER
    DECLARE @div INTEGER
    DECLARE @mod INTEGER
    DECLARE @skip INTEGER
    DECLARE @i INTEGER
    DECLARE @rangeSum INTEGER
    DECLARE @totRangeSize INTEGER
    DECLARE @stmt NCHAR(1000)
    DECLARE @orderSql NCHAR(1000)
    DECLARE @liSql NCHAR(1000)
    SET @skip = @total_executions/@parallel_executions
    SET @div = (@current_execution - 1)/@parallel_executions
    SET @mod = (@current_execution - 1) - @div * @parallel_executions
    SET @index = @mod*@skip + @div + 1
    --
    -- Get the range for this execution
    --
    SET @stmt = N'SELECT @sdate = dateadd(day,-1,min(O_ORDERDATE)),
    @edate = max(O_ORDERDATE)
    FROM NEWORDERS'
    EXEC sp_executesql @stmt,N'@sdate datetime output, @edate datetime
    output',@startdate output, @enddate output
    IF (@total_executions > @parallel_executions)
        BEGIN
            SET @div = (@index-1)/@skip
            SET @mod = (@index-1) - @div * @skip
            SET @rangeSize = datediff(day, @startdate,
    @enddate)/@parallel_executions + 1
            SET @totRangeSize = @rangeSize
            SET @rangeSum = 0
            SET @rangeStart = @div * @rangeSize
            SET @i = @mod
            while (@i > 0)
                BEGIN
                    SET @rangeSize = (@totRangeSize - @rangeSum)/2
                    SET @rangeSum = @rangeSum + @rangeSize
                    SET @rangeStart = @rangeStart + @rangeSize
                    SET @insert_sets = @insert_sets/2
                    SET @i = @i - 1
                end
            IF (@mod + 1 = @skip) -- last allocation
                SET @rangeSize = @totRangeSize - @rangeSum
            ELSE
                SET @rangeSize = (@totRangeSize - @rangeSum)/2
            IF (@rangeSize < 0)
                SET @rangeSize = 0
            IF (@insert_sets <= 0)
                SET @insert_sets = 1
            end
        ELSE
            BEGIN
                SET @rangeSize = datediff(day, @startdate,
    @enddate)/@total_executions
                SET @rangeStart = @rangeSize * (@index - 1)
            end
            SET @startdate = dateadd(day, @rangeStart, @startdate)
            IF (@index < @total_executions)
                SET @enddate = dateadd(day, @rangeSize, @startdate)
            SET @range = datediff(day, @startdate, @enddate) / @insert_sets
            --
            -- This handles the case when the max-min/insert_sets is less than 1
            --
            IF @range = 0
                SET @range = 1
            --
            -- Generate the two insert statements
            --
            SET @edate = dateadd(day, @range, @startdate)
            SET @orderSql = N'INSERT INTO ORDERS (O_ORDERKEY,
    O_CUSTKEY, O_ORDERSTATUS, O_TOTALPRICE,
    O_ORDERDATE,
    O_ORDERPRIORITY, O_CLERK, O_SHIPRIORITY, O_COMMENT)
    (SELECT O_ORDERKEY, O_CUSTKEY,
    O_ORDERSTATUS, O_TOTALPRICE,
    O_ORDERDATE,
    O_ORDERPRIORITY, O_CLERK, O_SHIPRIORITY, O_COMMENT
    FROM NEWORDERS
    WHERE O_ORDERDATE > @startdate
    AND O_ORDERDATE <= @edate)
    option (loop join)'
            SET @liSql = N'INSERT INTO LINEITEM
    (L_ORDERKEY,L_PARTKEY,L_SUPPKEY,L_LINENUMBER,L_QUAN
    TITY,
    L_EXTENDEDPRICE,
    L_DISCOUNT, L_TAX, L_RETURNFLAG, L_LINESTATUS,
    L_SHIPDATE,
    L_COMMITDATE, L_RECEIPTDATE, L_SHIPINSTRUCT,
    L_SHIPMODE, L_COMMENT)
    (SELECT
    L_ORDERKEY,L_PARTKEY,L_SUPPKEY,L_LINENUMBER,L_QUAN
    TITY,
```

```

                L_EXTENDEDPRI,
L_DISCOUNT, L_TAX, L_RETURNFLAG, L_LINESTATUS,
                L_SHIPDATE,
L_COMMITDATE, L_RECEIPTDATE, L_SHIPINSTRUCT,
L_SHIPMODE, L_COMMENT
                FROM NEWLINEITEM, NEWORDERS
                WHERE L_ORDERKEY =
O_ORDERKEY AND O_ORDERDATE > @startdate AND
                O_ORDERDATE
<= @edate)
                option (loop join)'

--
-- Loop through the order keys inserting sets into the
-- ORDERS and LINTEITEM tables
--
WHILE @startdate < @enddate
    BEGIN
        --
        -- Insert into ORDERS and LINEITEM tables
        --
        INSERT_TRANS:
        SET @success = 1
        BEGIN TRANSACTION

        BEGIN TRY
            EXEC sp_executesql @orderSql, N'@startdate
datetime, @edate datetime', @startdate, @edate
            EXEC sp_executesql @liSql, N'@startdate datetime,
@edate datetime', @startdate, @edate
        END TRY
        BEGIN CATCH
            SET @success = 0
            IF (error_number() = 1205) -- deadlock victim
                PRINT 'Insert deadlock - restarting RF1'
            ELSE
                BEGIN -- not a
deadlock
                    PRINT 'Error - Not a deadlock'
                    PRINT ERROR_NUMBER()
                    PRINT ERROR_SEVERITY()
                    PRINT ERROR_MESSAGE()
                    PRINT ERROR_STATE()
                    PRINT XACT_STATE()
                    END
                IF (@@trancount>0)
                    ROLLBACK TRANSACTION
            END CATCH

            IF (@success = 0) -- deadlock - redo
the inserts
                GOTO INSERT_TRANS

        COMMIT TRANSACTION

        SET @startdate = @edate
        SET @edate = dateadd(day, @range, @edate)

        IF (@edate > @enddate)
            SET @edate = @enddate

        END
    END
GO

```

## E.2 CreateRF2Proc.sql

```

-- File: CREATERF2PROC.SQL
-- Microsoft TPC-H Benchmark Kit Ver. 1.00
-- Copyright Microsoft, 1999
--
IF exists (SELECT name FROM sysobjects WHERE name = 'RF2')
    DROP PROCEDURE RF2
GO

--
-- Create a stored Refresh Delete procedure which will catch the deadlock
-- victim abort and restart the delete transaction.
--
CREATE PROCEDURE RF2
    @current_execution INTEGER, @delete_sets INTEGER,
    @parallel_executions INTEGER, @total_executions INTEGER
AS
BEGIN
    DECLARE @startdate DATETIME
    DECLARE @enddate DATETIME
    DECLARE @edate DATETIME
    DECLARE @rangeStart INTEGER
    DECLARE @rangeSize INTEGER
    DECLARE @range INTEGER

    declare @success INTEGER
    declare @index INTEGER
    declare @div INTEGER
    declare @mod INTEGER
    declare @skip INTEGER
    declare @i INTEGER
    declare @rangeSum INTEGER
    declare @totRangeSize INTEGER
    declare @sql NCHAR(1000)
    declare @orderSql NCHAR(1000)
    declare @liSql NCHAR(1000)

    SET @skip = @total_executions/@parallel_executions
    SET @div = floor((@current_execution-1)/@parallel_executions)
    SET @mod = (@current_execution - 1) - @div * @parallel_executions
    SET @index = @mod*@skip + @div + 1

    SET @sql = N'SELECT @sdate = dateadd(day,-1,min(O_ORDERDATE)),
@edate = max(O_ORDERDATE)
                FROM MOD_OLDORDERS'
    EXEC sp_executesql @sql,N'@sdate datetime output, @edate datetime
output',@startdate output, @enddate output

    IF (@total_executions > @parallel_executions)
        BEGIN
            SET @div = (@index-1)/@skip
            SET @mod = (@index-1) - @div * @skip
            SET @rangeSize = datediff(day, @startdate,
@enddate)/@parallel_executions + 1
            SET @totRangeSize = @rangeSize
            SET @rangeSum = 0
            SET @rangeStart = @div * @rangeSize
            SET @i = @mod
            WHILE (@i > 0)
                BEGIN
                    SET @rangeSize = (@totRangeSize - @rangeSum)/2
                    SET @rangeSum = @rangeSum + @rangeSize
                    SET @rangeStart = @rangeStart + @rangeSize
                    SET @delete_sets = @delete_sets/2
                    SET @i = @i - 1
                END
        END

```



```

IF (@mod + 1 = @skip) -- last allocation
    SET @rangeSize = @totRangeSize - @rangeSum
ELSE
    SET @rangeSize = (@totRangeSize - @rangeSum)/2
IF (@rangeSize < 0)
    SET @rangeSize = 0
IF (@delete_sets <= 0)
    SET @delete_sets = 1
END
ELSE
    BEGIN
    SET @rangeSize = datediff(day, @startdate,
@enddate)/@total_executions
    SET @rangeStart = @rangeSize * (@index - 1)
    END

SET @startdate = dateadd(day, @rangeStart, @startdate)
IF (@index < @total_executions)
    SET @enddate = dateadd(day, @rangeSize, @startdate)

SET @range = datediff(day, @startdate, @enddate) / @delete_sets

--
-- This handles the case when the max-min/delete_sets is less than 1
--
IF @range = 0
    SET @range = 1

--
-- Loop through the order keys deleting sets from orders
-- and lineitem tables
--
SET @edate = dateadd(day, @range, @startdate)
SET @liSql = N'DELETE FROM LINEITEM WHERE L_ORDERKEY in
(SELECT O_ORDERKEY FROM
MOD_OLDORDERS
        WHERE O_ORDERDATE > @startdate
AND O_ORDERDATE <= @edate)
        option (loop join)'
SET @orderSql = N'DELETE FROM ORDERS WHERE O_ORDERKEY
in
        (SELECT O_ORDERKEY FROM
MOD_OLDORDERS
        WHERE O_ORDERDATE > @startdate
AND O_ORDERDATE <= @edate)
        option (loop join)'
}

```

```

WHILE @startdate < @enddate
    BEGIN
        DELETE_TRANS:
        SET @success = 1
        BEGIN TRANSACTION

        BEGIN TRY
            EXEC sp_executesql @liSql, N'@startdate datetime,
@edate datetime', @startdate, @edate
            EXEC sp_executesql @orderSql, N'@startdate
datetime, @edate datetime', @startdate, @edate
        END TRY
        BEGIN CATCH
            SET @success = 0
            IF (error_number() = 1205) -- deadlock victim
                PRINT 'Insert deadlock - restarting RF2'
            ELSE
                BEGIN -- not a
                    deadlock
                        PRINT 'Error - Not a deadlock'
                        PRINT ERROR_NUMBER()
                        PRINT ERROR_SEVERITY()
                        PRINT ERROR_MESSAGE()
                        PRINT ERROR_STATE()
                        PRINT XACT_STATE()
                        END
                    IF (@@trancount>0)
                        ROLLBACK TRANSACTION
                END CATCH

                IF (@success = 0) -- deadlock - redo
                    the inserts
                        GOTO DELETE_TRANS

                COMMIT TRANSACTION

                SET @startdate = @edate
                SET @edate = dateadd(day, @range, @edate)

                IF (@edate > @enddate)
                    SET @edate = @enddate

            END
        GO

```

# Appendix F: Implementation Specific Layer and Source Code

## F.1 Print.C for DBGEN

```
/*
 * $Id: print.c,v 1.2 2005/01/03 20:08:59 jms
Exp $
 *
 * Revision History
 * =====
 * $Log: print.c,v $
 * Revision 1.2 2005/01/03 20:08:59 jms
 * change line terminations
 *
 * Revision 1.1.1.1 2004/11/24 23:31:47 jms
 * re-establish external server
 *
 * Revision 1.4 2004/02/18 16:26:49 jms
 * 32/64 bit changes for overflow handling
 * needed additional changes when ported back to
 * windows
 *
 * Revision 1.3 2004/02/18 14:05:53 jms
 * porting changes for LINUX and 64 bit RNG
 *
 * Revision 1.2 2004/01/22 05:49:29 jms
```

```
 * AIX porting (AIX 5.1)
 *
 * Revision 1.1.1.1 2003/08/07 17:58:34 jms
 * recreation after CVS crash
 *
 * Revision 1.2 2003/08/07 17:58:34 jms
 * Convery RNG to 64bit space as preparation
 * for new large scale RNG
 *
 * Revision 1.1.1.1 2003/04/03 18:54:21 jms
 * initial checkin
 *
 *
 */
/* generate flat files for data load */
#include <stdio.h>
#ifdef VMS
#include <sys/types.h>
#endif
#ifdef SUN
#include <unistd.h>
#endif
#include <math.h>

#include "dss.h"
#include "dsstypes.h"
#include <string.h>

/*
 * Function Prototypes
 */
FILE *print_prep_PROTO((int table, int
update));
int pr_drange_PROTO((int tbl, DSS_HUGE
min, DSS_HUGE cnt, long num));

FILE *
```

```
print_prep(int table, int update)
{
    char upath[128];
    FILE *res;

    if (updates)
    {
        if (update > 0) /* updates */
            if ( insert_segments
)
                {
                    int
this_segment;

                    if(strcmp(tdefs[table].name,"orders.tbl
"))
                        this_segment=++insert_orders_segme
nt;
                    else
                        this_segment=++insert_lineitem_segme
nt;

                    sprintf(upath, "%s%c%s.u%d.%d",
                        env_config(PATH_TAG,
PATH_DFLT),
                        PATH_SEP, tdefs[table].name,
update%10000,this_segment);
                }
            else
                {
                    sprintf(upath, "%s%c%s.u%d",
```

```

    env_config(PATH_TAG,
PATH_DFLT),
    PATH_SEP, tdefs[table].name,
update);
    }
    else /* deletes */
        if ( delete_segments
)
        {
            ++delete_segment;

            sprintf(upath, "%s%cdelete.u%d.%d",

env_config(PATH_TAG,
PATH_DFLT), PATH_SEP, -update%10000,

delete_segment);
        }
        else
        {
            sprintf(upath, "%s%cdelete.%d",

env_config(PATH_TAG,
PATH_DFLT), PATH_SEP, -update);
        }
        return(fopen(upath, "w"));
    }
    res = tbl_open(table, "w");
    OPEN_CHECK(res, tdefs[table].name);
    return(res);
}
int

```

```

dbg_print(int format, FILE *target, void *data,
int len, int sep)
{
    int dollars,
        cents;

    switch(format)
    {
    case DT_STR:
        if (columnar)
            fprintf(target, "%-
*s", len, (char *)data);
        else
            fprintf(target, "%s",
(char *)data);
        break;
#ifdef MVS
    case DT_VSTR:
        /* note: only used in MVS,
assumes columnar output */
        fprintf(target, "%c%c%-*s",
(len >> 8) & 0xFF,
len & 0xFF, len, (char *)data);
        break;
#endif /* MVS */
    case DT_INT:
        if (columnar)
            fprintf(target,
"%12ld", (long)data);
        else
            fprintf(target, "%ld",
(long)data);
        break;
    case DT_HUGE:
        fprintf(target,
HUGE_FORMAT, *(DSS_HUGE *)data);
        break;

```

```

    case DT_KEY:
        fprintf(target, "%ld",
(long)data);
        break;
    case DT_MONEY:
        cents = (int)*(DSS_HUGE
*)data;
        if (cents < 0)
            {
                fprintf(target, "-");
                cents = -cents;
            }
        dollars = cents / 100;
        cents %= 100;
        if (columnar)
            fprintf(target,
"%12ld.%02ld", dollars, cents);
        else
            fprintf(target,
"%ld.%02ld", dollars, cents);
        break;
    case DT_CHR:
        if (columnar)
            fprintf(target, "%c ",
(char *)data);
        else
            fprintf(target, "%c",
(char *)data);
        break;
    }
#ifdef EOL_HANDLING
    if (sep)
#endif /* EOL_HANDLING */
        if (!columnar)
            fprintf(target, "%c",
SEPARATOR);

```

```

        return(0);
    }

int
pr_cust(customer_t *c, int mode)
{
    static FILE *fp = NULL;

    if (fp == NULL)
        fp = print_prep(CUST, 0);

    PR_STRT(fp);
    PR_HUGE(fp, &c->custkey);
    PR_STR(fp, c->mktsegment,
C_MSEG_LEN);
    PR_HUGE(fp, &c->nation_code);
    PR_VSTR(fp, c->name, C_NAME_LEN);
    PR_VSTR(fp, c->address,
        (columnar)?(long)(ceil(C_ADDR_LEN *
V_STR_HGH)):c->alen);
    PR_STR(fp, c->phone, PHONE_LEN);
    PR_MONEY(fp, &c->acctbal);
    PR_VSTR_LAST(fp, c->comment,
        (columnar)?(long)(ceil(C_CMNT_LEN *
V_STR_HGH)):c->clen);
    PR_END(fp);

    return(0);
}

/*
 * print the numbered order
 */
int
pr_order(order_t *o, int mode)
{

```

```

    static FILE *fp_o = NULL;
    static int last_mode = 0;

    if (fp_o == NULL || mode != last_mode)
    {
        if (fp_o)
            fclose(fp_o);
        fp_o = print_prep(ORDER, mode);
        last_mode = mode;
    }
    PR_STRT(fp_o);
    PR_STR(fp_o, o->odate, DATE_LEN);
    PR_HUGE(fp_o, &o->okey);
    PR_HUGE(fp_o, &o->custkey);
    PR_STR(fp_o, o->opriority,
O_OPRIO_LEN);
    PR_INT(fp_o, o->spriority);
    PR_STR(fp_o, o->clerk, O_CLRK_LEN);
    PR_CHR(fp_o, &o->orderstatus);
    PR_MONEY(fp_o, &o->totalprice);
    PR_VSTR_LAST(fp_o, o->comment,
        (columnar)?(long)(ceil(O_CMNT_LEN *
V_STR_HGH)):o->clen);
    PR_END(fp_o);

    return(0);
}

/*
 * print an order's lineitems
 */
int
pr_line(order_t *o, int mode)
{
    static FILE *fp_l = NULL;
    static int last_mode = 0;
    long i;

```

```

    if (fp_l == NULL || mode != last_mode)
    {
        if (fp_l)
            fclose(fp_l);
        fp_l = print_prep(LINE, mode);
        last_mode = mode;
    }

    for (i = 0; i < o->lines; i++)
    {
        PR_STRT(fp_l);
        PR_STR(fp_l, o->l[i].sdate, DATE_LEN);
        PR_HUGE(fp_l, &o->l[i].okey);
        PR_MONEY(fp_l, &o->l[i].discount);
        PR_MONEY(fp_l, &o->l[i].eprice);
        PR_HUGE(fp_l, &o->l[i].suppkey);
        PR_HUGE(fp_l, &o->l[i].quantity);
        PR_CHR(fp_l, &o->l[i].rflag[0]);
        PR_HUGE(fp_l, &o->l[i].partkey);
        PR_CHR(fp_l, &o->l[i].lstatus[0]);
        PR_MONEY(fp_l, &o->l[i].tax);
        PR_STR(fp_l, o->l[i].cdate, DATE_LEN);
        PR_STR(fp_l, o->l[i].rdate, DATE_LEN);
        PR_STR(fp_l, o->l[i].shipmode,
L_SMODE_LEN);
        PR_HUGE(fp_l, &o->l[i].lcnt);
        PR_STR(fp_l, o->l[i].shipinstruct,
L_INST_LEN);
        PR_VSTR_LAST(fp_l, o->l[i].comment,
            (columnar)?(long)(ceil(L_CMNT_LEN
* V_STR_HGH)):o->l[i].clen);
        PR_END(fp_l);
    }

    return(0);
}

```

```

/*
 * print the numbered order *and* its
associated lineitems
 */
int
pr_order_line(order_t *o, int mode)
{
    tdefs[ORDER].name =
tdefs[ORDER_LINE].name;
    pr_order(o, mode);
    pr_line(o, mode);

    return(0);
}

/*
 * print the given part
 */
int
pr_part(part_t *part, int mode)
{
    static FILE *p_fp = NULL;

    if (p_fp == NULL)
        p_fp = print_prep(PART, 0);

    PR_STRT(p_fp);
    PR_HUGE(p_fp, &part->partkey);
    PR_VSTR(p_fp, part->type,
        (columnar)?(long)P_TYPE_LEN:part-
>tlen);
    PR_HUGE(p_fp, &part->size);
    PR_STR(p_fp, part->brand, P_BRND_LEN);
    PR_VSTR(p_fp, part->name,
        (columnar)?(long)P_NAME_LEN:part-
>nlen);

    PR_STR(p_fp, part->container,
P_CNTR_LEN);
    PR_STR(p_fp, part->mfgr, P_MFG_LEN);
    PR_MONEY(p_fp, &part->retailprice);
    PR_VSTR_LAST(p_fp, part->comment,
        (columnar)?(long)(ceil(P_CMNT_LEN *
V_STR_HGH)):part->clen);
    PR_END(p_fp);

    return(0);
}

/*
 * print the given part's suppliers
 */
int
pr_psupp(part_t *part, int mode)
{
    static FILE *ps_fp = NULL;
    long i;

    if (ps_fp == NULL)
        ps_fp = print_prep(PSUPP, mode);

    for (i = 0; i < SUPP_PER_PART; i++)
    {
        PR_STRT(ps_fp);
        PR_HUGE(ps_fp, &part->s[i].partkey);
        PR_HUGE(ps_fp, &part->s[i].suppkey);
        PR_MONEY(ps_fp, &part->s[i].scost);
        PR_HUGE(ps_fp, &part->s[i].qty);
        PR_VSTR_LAST(ps_fp, part-
>s[i].comment,
            (columnar)?(long)(ceil(PS_CMNT_LEN *
V_STR_HGH)):part->s[i].clen);
        PR_END(ps_fp);
    }

    return(0);
}

}

/*
 * print the given part *and* its suppliers
 */
int
pr_part_psupp(part_t *part, int mode)
{
    tdefs[PART].name =
tdefs[PART_PSUPP].name;
    pr_part(part, mode);
    pr_psupp(part, mode);

    return(0);
}

int
pr_supp(supplier_t *supp, int mode)
{
    static FILE *fp = NULL;

    if (fp == NULL)
        fp = print_prep(SUPP, mode);

    PR_STRT(fp);
    PR_HUGE(fp, &supp->suppkey);
    PR_HUGE(fp, &supp->nation_code);
    PR_STR(fp, supp->name, S_NAME_LEN);
    PR_VSTR(fp, supp->address,
        (columnar)?(long)(ceil(S_ADDR_LEN *
V_STR_HGH)):supp->alen);
    PR_STR(fp, supp->phone, PHONE_LEN);
    PR_MONEY(fp, &supp->acctbal);
    PR_VSTR_LAST(fp, supp->comment,

```

```

    (columnar)?(long)(ceil(S_CMNT_LEN *
V_STR_HGH)):supp->cLen);
    PR_END(fp);

    return(0);
}

int
pr_nation(code_t *c, int mode)
{
    static FILE *fp = NULL;

    if (fp == NULL)
        fp = print_prep(NATION, mode);

    PR_START(fp);
    PR_HUGE(fp, &c->code);
    PR_STR(fp, c->text, NATION_LEN);
    PR_INT(fp, c->join);
    PR_VSTR_LAST(fp, c->comment,
        (columnar)?(long)(ceil(N_CMNT_LEN *
V_STR_HGH)):c->cLen);
    PR_END(fp);

    return(0);
}

int
pr_region(code_t *c, int mode)
{
    static FILE *fp = NULL;

    if (fp == NULL)
        fp = print_prep(REGION, mode);

    PR_START(fp);
    PR_HUGE(fp, &c->code);

```

```

    PR_STR(fp, c->text, REGION_LEN);
    PR_VSTR_LAST(fp, c->comment,
        (columnar)?(long)(ceil(R_CMNT_LEN *
V_STR_HGH)):c->cLen);
    PR_END(fp);

    return(0);
}

/*
 * NOTE: this routine does NOT use the
BCD2_* routines. As a result,
 * it WILL fail if the keys being deleted exceed
32 bits. Since this
 * would require ~660 update iterations, this
seems an acceptable
 * oversight
 */
int
pr_drange(int tbl, DSS_HUGE min,
DSS_HUGE cnt, long num)
{
    static int last_num = 0;
    static FILE *dfp = NULL;
    DSS_HUGE child = -1;
    DSS_HUGE start, last, new;

    static DSS_HUGE
rows_per_segment=0;
    static DSS_HUGE
rows_this_segment=0;

    if (last_num != num)
    {
        if (dfp)
            fclose(dfp);
        dfp = print_prep(tbl, -num);
    }

```

```

    if (dfp == NULL)
        return(-1);
    last_num = num;
    rows_this_segment=0;
}

start = MK_SPARSE(min, num/ (10000 /
refresh));
last = start - 1;
for (child=min; cnt > 0; child++, cnt--)
{
    new = MK_SPARSE(child, num/ (10000 /
refresh));
    if (gen_rng == 1 && new - last == 1)
    {
        last = new;
        continue;
    }
    if (gen_sql)
    {
        fprintf(dfp,
            "delete from %s where %s
between %ld and %ld;\n",
            tdefs[ORDER].name,
            "o_orderkey", start, last);
        fprintf(dfp,
            "delete from %s where %s
between %ld and %ld;\n",
            tdefs[LINE].name,
            "l_orderkey", start, last);
        fprintf(dfp, "commit work;\n");
    }
}
else
    if (gen_rng)
    {
        PR_START(dfp);
        PR_HUGE(dfp, &start);
    }

```

```

        PR_HUGE(dfp, &last);
        PR_END(dfp);
    }
    else
    {
        if
(delete_segments)
    {

        if(rows_per_segment==0)

        rows_per_segment = (cnt /
delete_segments) + 1;

        if(++rows_this_segment) >
rows_per_segment)

        {

        fclose(dfp);

        dfp = print_prep(tbl, -num);

        if (dfp == NULL) return(-1);

        last_num = num;

        rows_this_segment=1;

        }

        PR_STRT(dfp);
        PR_HUGE(dfp, &new);
        PR_END(dfp);
    }
    start = new;

```

```

        last = new;
    }
    if (gen_rng)
    {
        PR_STRT(dfp);
        PR_HUGE(dfp, &start);
        PR_HUGE(dfp, &last);
        PR_END(dfp);
    }

    return(0);
}

/*
 * verify functions: routines which replace the
pr_routines and generate a pseudo checksum
 * instead of generating the actual contents of
the tables. Meant to allow large scale data
 * validation without requiring a large amount
of storage
 */
int
vrf_cust(customer_t *c, int mode)
{
    VRF_STRT(CUST);
    VRF_INT(CUST, c->custkey);
    VRF_STR(CUST, c->name);
    VRF_STR(CUST, c->address);
    VRF_INT(CUST, c->nation_code);
    VRF_STR(CUST, c->phone);
    VRF_MONEY(CUST, c->acctbal);
    VRF_STR(CUST, c->mktsegment);
    VRF_STR(CUST, c->comment);
    VRF_END(CUST);

    return(0);
}

```

```

/*
 * print the numbered order
 */
int
vrf_order(order_t *o, int mode)
{
    VRF_STRT(ORDER);
    VRF_HUGE(ORDER, o->okey);
    VRF_INT(ORDER, o->custkey);
    VRF_CHR(ORDER, o->orderstatus);
    VRF_MONEY(ORDER, o->totalprice);
    VRF_STR(ORDER, o->odate);
    VRF_STR(ORDER, o->opriority);
    VRF_STR(ORDER, o->clerk);
    VRF_INT(ORDER, o->spriority);
    VRF_STR(ORDER, o->comment);
    VRF_END(ORDER);

    return(0);
}

/*
 * print an order's lineitems
 */
int
vrf_line(order_t *o, int mode)
{
    int i;

    for (i = 0; i < o->lines; i++)
    {
        VRF_STRT(LINE);
        VRF_HUGE(LINE, o->l[i].okey);
        VRF_INT(LINE, o->l[i].partkey);
        VRF_INT(LINE, o->l[i].suppkey);
        VRF_INT(LINE, o->l[i].lcnt);
    }
}

```

```

VRF_INT(LINE, o->l[i].quantity);
VRF_MONEY(LINE, o->l[i].eprice);
VRF_MONEY(LINE, o->l[i].discount);
VRF_MONEY(LINE, o->l[i].tax);
VRF_CHR(LINE, o->l[i].rflag[0]);
VRF_CHR(LINE, o->l[i].lstatus[0]);
VRF_STR(LINE, o->l[i].sdate);
VRF_STR(LINE, o->l[i].cdate);
VRF_STR(LINE, o->l[i].rdate);
VRF_STR(LINE, o->l[i].shipinstruct);
VRF_STR(LINE, o->l[i].shipmode);
VRF_STR(LINE, o->l[i].comment);
VRF_END(LINE);
}

return(0);
}

/*
 * print the numbered order *and* its
associated lineitems
 */
int
vrf_order_line(order_t *o, int mode)
{
    vrf_order(o, mode);
    vrf_line(o, mode);

    return(0);
}

/*
 * print the given part
 */
int
vrf_part(part_t *part, int mode)
{

```

```

VRF_STRT(PART);
VRF_INT(PART, part->partkey);
VRF_STR(PART, part->name);
VRF_STR(PART, part->mfgr);
VRF_STR(PART, part->brand);
VRF_STR(PART, part->type);
VRF_INT(PART, part->size);
VRF_STR(PART, part->container);
VRF_MONEY(PART, part->retailprice);
VRF_STR(PART, part->comment);
VRF_END(PART);

return(0);
}

/*
 * print the given part's suppliers
 */
int
vrf_psupp(part_t *part, int mode)
{
    long    i;

    for (i = 0; i < SUPP_PER_PART; i++)
    {
        VRF_STRT(PSUPP);
        VRF_INT(PSUPP, part->s[i].partkey);
        VRF_INT(PSUPP, part->s[i].suppkey);
        VRF_INT(PSUPP, part->s[i].qty);
        VRF_MONEY(PSUPP, part->s[i].scost);
        VRF_STR(PSUPP, part->s[i].comment);
        VRF_END(PSUPP);
    }

    return(0);
}

```

```

/*
 * print the given part *and* its suppliers
 */
int
vrf_part_psupp(part_t *part, int mode)
{
    vrf_part(part, mode);
    vrf_psupp(part, mode);

    return(0);
}

int
vrf_supp(supplier_t *supp, int mode)
{
    VRF_STRT(SUPP);
    VRF_INT(SUPP, supp->suppkey);
    VRF_STR(SUPP, supp->name);
    VRF_STR(SUPP, supp->address);
    VRF_INT(SUPP, supp->nation_code);
    VRF_STR(SUPP, supp->phone);
    VRF_MONEY(SUPP, supp->acctbal);
    VRF_STR(SUPP, supp->comment);
    VRF_END(SUPP);

    return(0);
}

int
vrf_nation(code_t *c, int mode)
{
    VRF_STRT(NATION);
    VRF_INT(NATION, c->code);
    VRF_STR(NATION, c->text);
    VRF_INT(NATION, c->join);
    VRF_STR(NATION, c->comment);

```



```

VRF_END(NATION);

return(0);
}

int
vrf_region(code_t *c, int mode)
{
    VRF_START(REGION);
    VRF_INT(REGION, c->code);
    VRF_STR(REGION, c->text);
    VRF_STR(REGION, c->comment);
    VRF_END(fp);

return(0);
}

```

## **cArrConstraint s.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cArrConstraints"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrConstraints.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of cConstraint
objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions
that determine all the
' constraints for a step, all
constraints in a workspace,
' validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

```

```

Option Explicit

Private mcarrConstraints As cNodeCollections

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrConstraints."
Public Sub SaveWspConstraints(ByVal lngWorkspace As
Long)
' Calls a procedure to commit all changes to the
constraints
' in the passed in workspace.

    Call mcarrConstraints.Save(lngWorkspace)
End Sub
Public Property Set ConstraintDB(vdata As Database)

    Set mcarrConstraints.NodeDB = vdata
End Property
Public Property Get ConstraintDB() As Database

    Set ConstraintDB = mcarrConstraints.NodeDB
End Property

Public Sub Modify(cConstToUpdate As cConstraint)

' Modify the constraint record
Call mcarrConstraints.Modify(cConstToUpdate)
End Sub
Public Sub CreateNewConstraintVersion(ByVal lngStepId
As Long, _
    ByVal strNewVersion As String, _
    ByVal strOldVersion As String, _
    ByVal intStepType As Integer)

' Does all the processing needed to create new
versions of
' all the constraints for a given step
' It inserts new constraint records in the
database with
' the new version numbers on them
' It also updates the version number on all
constraints
' for the step in the array to the new version
passed in
' Since it handles both global and manager/worker
steps,
' it checks for the step_id or global_step_id
fields,
' depending on the type of step

    Dim lngIndex As Long
    Dim cUpdateConstraint As cConstraint

    On Error GoTo CreateNewConstraintVersionErr
    mstrSource = mstrModuleName &
"CreateNewConstraintVersion"

```

```

' Update the version/global version on Constraint
with the
' passed in step/global step id
For lngIndex = 0 To mcarrConstraints.Count - 1
    Set cUpdateConstraint =
mcarrConstraints(lngIndex)
    If intStepType = gintGlobalStep Then
        If cUpdateConstraint.GlobalStepId =
lngStepId And _
            cUpdateConstraint.IndOperation <>
DeleteOp Then
            cUpdateConstraint.GlobalVersionNo =
strNewVersion

' Set the operation to indicate an
insert
            cUpdateConstraint.IndOperation =
InsertOp
        End If
    Else
        If cUpdateConstraint.StepId = lngStepId
And _
            cUpdateConstraint.IndOperation <>
DeleteOp Then
            cUpdateConstraint.VersionNo =
strNewVersion

' Set the operation to indicate an
insert
            cUpdateConstraint.IndOperation =
InsertOp
        End If
    End If
Next lngIndex
Exit Sub

CreateNewConstraintVersionErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"CreateNewConstraintVersion"
    On Error GoTo 0
    Err.Raise vbObjectError +
errCreateNewConstraintVersionFailed, _
        mstrSource, _

LoadResString(errCreateNewConstraintVersionFailed)
End Sub
Private Sub Class_Initialize()

    Set mcarrConstraints = New cNodeCollections
    BugMessage "cArrConstraints: Initialize event -
setting Constraint count to 0"
End Sub

Private Sub Class_Terminate()

    Set mcarrConstraints = Nothing
    BugMessage "cArrConstraints: Terminate event
triggered"

```

```

End Sub

Public Sub Add(ByVal cConstraintToAdd As cConstraint)
    Set cConstraintToAdd.NodeDB =
mccarrConstraints.NodeDB

    ' Retrieve a unique constraint identifier
    cConstraintToAdd.ConstraintId =
cConstraintToAdd.NextIdentifier

    ' Call a procedure to load the constraint record
in the array
    Call mccarrConstraints.Add(cConstraintToAdd)
End Sub

Public Sub Delete(ByVal cOldConstraint As
cConstraint)

    Dim lngDeleteElement As Long
    Dim cConsToDelete As cConstraint

    lngDeleteElement =
QueryConstraintIndex(cOldConstraint.ConstraintId)
    Set cConsToDelete =
mccarrConstraints(lngDeleteElement)

    Call
mccarrConstraints.Delete(cConsToDelete.Position)

    Set cConsToDelete = Nothing
End Sub

Private Function QueryConstraintIndex(lngConstraintId
As Long) _
    As Long

    Dim lngIndex As Integer

    ' Find the element in the array to be deleted
    For lngIndex = 0 To mccarrConstraints.Count - 1

        ' Note: The constraint id is not a primary
key field in
        ' the database - there can be multiple
records with the
        ' same constraint_id but for different
versions of a step
        ' However, since we'll always load the
constraint
information
        ' for the latest version of a step, we'll
have just one
        ' constraint record with a given
constraint_id
        If mccarrConstraints(lngIndex).ConstraintId =
lngConstraintId Then
            QueryConstraintIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

```

```

' Raise error that Constraint has not been found
ShowError errConstraintNotFound
On Error GoTo 0
Err.Raise vbObjectError + errConstraintNotFound,
mstrSource, _
    LoadResString(errConstraintNotFound)
End Function

Public Function QueryConstraint(ByVal lngConstraintId
As Long) _
    As cConstraint

    ' Returns a cConstraint object with the property
values
    ' corresponding to the Constraint Identifier,
lngConstraintId

    Dim lngQueryElement As Long

    lngQueryElement =
QueryConstraintIndex(lngConstraintId)

    ' Set the return value to the queried Constraint
    Set QueryConstraint =
mccarrConstraints(lngQueryElement)
End Function

Public Sub LoadConstraints(ByVal lngWorkspaceId As
Long, rstStepsInWsp As Recordset)

    ' Loads the constraints array with all the
constraints
    ' for the workspace
    Dim recConstraints As Recordset
    Dim qryCons As DAO.QueryDef
    Dim strSQL As String
    Dim dtStart As Date

    On Error GoTo LoadConstraintsErr
    mstrSource = mstrModuleName & "LoadConstraints"

    If rstStepsInWsp.RecordCount = 0 Then
        Exit Sub
    End If

    ' First check if the database object has been set
    If mccarrConstraints.NodeDB Is Nothing Then
        On Error GoTo 0
        Err.Raise vbObjectError + errSetDBBeforeLoad,
        _
            mstrSource, _
            LoadResString(errSetDBBeforeLoad)
    End If

    dtStart = Now

    ' Select based on the global step id since there
might
    ' be constraints for a global step that run are
executed
    ' for the workspace

```

```

' This method has the advantage that if the steps
are queried right, everything else follows
    strSQL = "Select a.constraint_id, a.step_id,
a.version_no, " & _
        " a.constraint_type, a.global_step_id,
a.global_version_no, " & _
        " a.sequence_no, b.workspace_id " & _
        " from step_constraints a, att_steps b " & _
        " where a.global_step_id = b.step_id " & _
        " and a.global_version_no = b.version_no " & _
    & _
    " and a.global_step_id = [g_s_id] " & _
    " and a.global_version_no = [g_ver_no] " & _
    " and b.archived_flag = [archived] "

    ' Find the highest X-component of the version
number
    strSQL = strSQL & " AND ( a.step_id = 0 or (
cint( mid( a.version_no, 1, instr( a.version_no, " &
gstrDQ & gstrVerSeparator & gstrDQ & " ) - 1 ) ) = "
& _
        " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
        " from att_steps AS d " & _
        " WHERE a.step_id = d.step_id " & _
        " and d.archived_flag = [archived] ) "

    ' Find the highest Y-component of the version
number for the highest X-component
    strSQL = strSQL & " AND cint( mid( a.version_no,
instr( a.version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) + 1 ) ) = " & _
        " ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) + 1 ) ) ) " & _
        " from att_steps AS y " & _
        " Where a.step_id = y.step_id " & _
        " AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) - 1 ) ) = " & _
        " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
        " from att_steps AS c " & _
        " WHERE y.step_id = c.step_id " & _
        " and c.archived_flag = [archived] ) ) ) "

    ' Order the constraints by sequence within a
given step
    strSQL = strSQL & " order by a.sequence_no "

    Set qryCons =
mccarrConstraints.NodeDB.CreateQueryDef(gstrEmptyStrin
g, strSQL)
    qryCons.Parameters("archived").Value = False

    rstStepsInWsp.MoveFirst

    While Not rstStepsInWsp.EOF

        If Not (rstStepsInWsp!global_flag) Then
            qryCons.Close

```

```

        BugMessage "Query constraints Read + load
took: " & CStr(DateDiff("s", dtStart, Now))
        Exit Sub
    End If

    qyCons.Parameters("g_s_id").Value =
rstStepsInWsp!step_id
    qyCons.Parameters("g_ver_no").Value =
rstStepsInWsp!version_no

    Set recConstraints =
qyCons.OpenRecordset(dbOpenSnapshot)

    Call
LoadRecordsetInConstraintArray(recConstraints)
    recConstraints.Close

    rstStepsInWsp.MoveNext
Wend

    qyCons.Close
    BugMessage "Query constraints Read + load took: "
& CStr(DateDiff("s", dtStart, Now))

    Exit Sub

LoadConstraintsErr:
    LogErrors Errors
    gstrSource = mstrModuleName & "LoadConstraints"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadDataFailed, _
        mstrSource, _
        LoadResString(errLoadDataFailed)

End Sub
Public Sub UnloadStepConstraints(ByVal lngStepId As
Long)

    ' Unloads all the constraints for the workspace
from
    ' the constraints array

    Dim lngIndex As Long

    ' Find all constraints in the array with a
matching step id
    ' It is important to step in reverse order
through the array,
    ' since we delete constraint records!
    For lngIndex = mcarrConstraints.Count - 1 To 0
Step -1
        If mcarrConstraints(lngIndex).GlobalStepId =
lngStepId Then

            ' Unload the constraint from the array
            Call mcarrConstraints.Unload(lngIndex)

        End If
    Next lngIndex

End Sub
Public Sub UnloadConstraint(cOldConstraint As
cConstraint)

```

```

    ' Unloads the constraint from the constraints
array

    Dim lngDeleteElement As Long

    lngDeleteElement =
QueryConstraintIndex(cOldConstraint.ConstraintId)

    Call mcarrConstraints.Unload(lngDeleteElement)

End Sub
Private Sub LoadRecordsetInConstraintArray(ByVal
recConstraints As Recordset)

    ' Loads all the constraint records in the passed
in
    ' recordset into the array

    Dim cNewConstraint As cConstraint

    On Error GoTo LoadRecordsetInConsArrayErr
    mstrSource = mstrModuleName &
"LoadRecordsetInConstraintArray"

    If recConstraints.RecordCount = 0 Then
        Exit Sub
    End If

    recConstraints.MoveFirst
    While Not recConstraints.EOF
        Set cNewConstraint = New cConstraint

        ' Initialize Constraint values
        cNewConstraint.ConstraintId =
CLng(ErrorOnNullField(recConstraints,
"Constraint_id"))
        cNewConstraint.StepId =
CLng(ErrorOnNullField(recConstraints, "step_id"))
        cNewConstraint.VersionNo =
CStr(ErrorOnNullField(recConstraints, "version_no"))

        cNewConstraint.GlobalStepId =
CLng(ErrorOnNullField(recConstraints,
"global_step_id"))
        cNewConstraint.GlobalVersionNo =
CStr(ErrorOnNullField(recConstraints,
"global_version_no"))
        cNewConstraint.SequenceNo =
CInt(ErrorOnNullField(recConstraints, "sequence_no"))

        cNewConstraint.WorkspaceId =
CLng(ErrorOnNullField(recConstraints,
FLD_ID_WORKSPACE))
        cNewConstraint.ConstraintType =
CInt(ErrorOnNullField(recConstraints,
"constraint_type"))

        ' Add this record to the array of Constraints
mcarrConstraints.Load cNewConstraint

        Set cNewConstraint = Nothing
        recConstraints.MoveNext
    Wend

```

```

    Exit Sub

LoadRecordsetInConsArrayErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadRecordsetInConstraintArray"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadRsInArrayFailed,
_
        mstrSource, _
        LoadResString(errLoadRsInArrayFailed)

End Sub

Public Function ConstraintsForStep( _
    ByVal lngStepId As Long, _
    ByVal strVersionNo As String, _
    Optional ByVal intConstraintType As
ConstraintType = 0, _
    Optional ByVal blnSort As Boolean = True, _
    Optional ByVal blnGlobal As Boolean = False,
_
    Optional ByVal blnGlobalConstraintsOnly As
Boolean = False) _
    As Variant

    ' Returns a variant containing an array of
cConstraint objects,
    ' containing all the constraints that have been
defined for the
    ' given step. If the Global flag is set to true,
the
    ' search will be made for all the constraints
that have
    ' a matching global_step_id

    Dim lngIndex As Long
    Dim cStepConstraint() As cConstraint
    Dim lngConstraintCount As Long
    Dim cTempConstraint As cConstraint

    On Error GoTo ConstraintsForStepErr
    mstrSource = mstrModuleName &
"ConstraintsForStep"

    lngConstraintCount = 0

    ' Find each element in the constraints array
    For lngIndex = 0 To mcarrConstraints.Count - 1
        ' If a constraint type has been specified
then check
        ' if the constraint type for the record
matches the
        ' passed in type
        Set cTempConstraint =
mcarrConstraints(lngIndex)
        If Not blnGlobal Then
            If cTempConstraint.StepId = lngStepId And
_
                cTempConstraint.VersionNo =
strVersionNo And _
                cTempConstraint.IndOperation <>
DeleteOp And _

```

```

                (intConstraintType = 0 Or _
                cTempConstraint.ConstraintType =
intConstraintType) Then
    ' We have a matching constraint for
the given step
    AddArrayElement cStepConstraint, _
        cTempConstraint,
lngConstraintCount
    End If
    Else
        If cTempConstraint.GlobalStepId =
lngStepId And _
            cTempConstraint.GlobalVersionNo =
strVersionNo And _
                cTempConstraint.IndOperation <>
DeleteOp Then
            If blnGlobalConstraintsOnly = False
Or _
                (blnGlobalConstraintsOnly And
                cTempConstraint.StepId = 0
And _
                cTempConstraint.VersionNo =
gstrMinVersion) Then
                ' We have a matching constraint
for the global step
                AddArrayElement cStepConstraint,
                cTempConstraint,
lngConstraintCount
            End If
        End If
    End If
Next lngIndex

' Set the return value of the function to the
array of
' constraints that has been built above
If lngConstraintCount = 0 Then
    ConstraintsForStep = Empty
Else
    ConstraintsForStep = cStepConstraint()
End If

' Sort the constraints
If blnSort Then
    Call QuickSort(ConstraintsForStep)
End If

Exit Function

ConstraintsForStepErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintsForStepFailed, _
        mstrSource, _

LoadResString(errConstraintsForStepFailed)

End Function

```

```

Private Sub AddArrayElement(ByRef arrNodes() As
cConstraint, _
    ByVal objToAdd As cConstraint, _
    ByVal lngCount As Long)
    ' Adds the passed in object to the array

    ' Increase the array dimension and add the object
to it
    ReDim Preserve arrNodes(lngCount)
    Set arrNodes(lngCount) = objToAdd
    lngCount = lngCount + 1
End Sub

Public Function ConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal intConstraintType As Integer =
0, _
    Optional ByVal blnSort As Boolean = True, _
    Optional ByVal blnGlobalConstraintsOnly As
Boolean = False) _
    As Variant

    ' Returns a variant containing an array of
cConstraint objects,
    ' containing all the constraints that have been
defined for the
    ' given workspace.

    Dim lngIndex As Long
    Dim cWspConstraint() As cConstraint
    Dim lngConstraintCount As Long
    Dim cTempConstraint As cConstraint

    On Error GoTo ConstraintsForWspErr
    mstrSource = mstrModuleName & "ConstraintsForWsp"

    lngConstraintCount = 0

    ' Find each element in the constraints array
    For lngIndex = 0 To mcarrConstraints.Count - 1
        ' If a constraint type has been specified
then check
        ' if the constraint type for the record
matches the
        ' passed in type
        Set cTempConstraint =
mcarrConstraints(lngIndex)
        If cTempConstraint.WorkspaceId =
lngWorkspaceId And _
            cTempConstraint.IndOperation <>
DeleteOp And _
                (intConstraintType = 0 Or _
                cTempConstraint.ConstraintType =
intConstraintType) Then
                If blnGlobalConstraintsOnly = False Or _
                    (blnGlobalConstraintsOnly And _
                    cTempConstraint.StepId = 0 And _
                    cTempConstraint.VersionNo =
gstrMinVersion) Then

```

```

        ' We have a matching constraint for
the workspace
        AddArrayElement cWspConstraint, _
            cTempConstraint,
lngConstraintCount
        End If
    End If
Next lngIndex

' Set the return value of the function to the
array of
' constraints that has been built above
If lngConstraintCount = 0 Then
    ConstraintsForWsp = Empty
Else
    ConstraintsForWsp = cWspConstraint()
End If

' Sort the constraints
If blnSort Then
    Call QuickSort(ConstraintsForWsp)
End If

Exit Function

ConstraintsForWspErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintsForWspFailed, _
        mstrSource, _
        LoadResString(errConstraintsForWspFailed)

End Function

Public Function PreConstraintsForStep( _
    ByVal lngStepId As Long, _
    ByVal strVersionNo As String, _
    Optional ByVal blnSort As Boolean) As Variant

    ' Returns a variant containing an array of
cConstraint objects,
    ' containing all the pre-execution constraints
that have
    ' been defined for the given step_id and version

    ' Call a function that will return a variant
containing
    ' all the constraints of the passed in type
    PreConstraintsForStep =
ConstraintsForStep(lngStepId, _
        strVersionNo, gintPreStep, blnSort)

End Function

Public Function PostConstraintsForStep( _
    ByVal lngStepId As Long, _
    ByVal strVersionNo As String, _
    Optional ByVal blnSort As Boolean) As Variant

    ' Returns a variant containing an array of
cConstraint objects,
    ' containing all the Post-execution constraints
that have
    ' been defined for the given step_id and version

```

```

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PostConstraintsForStep =
ConstraintsForStep(lngStepId, _
    strVersionNo, gintPostStep, blnSort)
End Function
Public Function PostConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal blnSort As Boolean) As Variant
' Returns a variant containing an array of
cConstraint objects,
' containing all the Post-execution globals that
have
' been defined for the workspace
' Call a function that will return a variant
containing
' all the constraints of the passed in type
PostConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
    gintPostStep, blnSort, True)
End Function
Public Function PreConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal blnSort As Boolean) As Variant
' Returns a variant containing an array of
cConstraint objects,
' containing all the Pre-execution globals that
have
' been defined for the workspace
' Call a function that will return a variant
containing
' all the constraints of the passed in type
PreConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
    gintPreStep, blnSort, True)
End Function
Public Property Get ConstraintCount() As Long
ConstraintCount = mcarrConstraints.Count
End Property

```

## **cArrParameter s.cls**

```

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cArrParameters"

```

```

Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrParameters.cls
Microsoft TPC-H Kit Ver. 1.00
Copyright Microsoft, 1999
All Rights Reserved
'
' PURPOSE: Implements an array of cParameter
objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions to
determine parameter
' values, validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit
Private mcarrParameters As cNodeCollections
' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrParameters."
Public Sub InitBuiltInsForRun(lWspId As Long, lRunId
As Long)
Dim cParamRec As cParameter
' Initialize the values of the run_id and
output_dir built-in parameters and save them
' to the database
Set cParamRec = GetParameterValue(lWspId,
PARAM_RUN_ID)
cParamRec.ParameterValue = CStr(lRunId)
Call Modify(cParamRec)
Set cParamRec = GetParameterValue(lWspId,
PARAM_OUTPUT_DIR)
cParamRec.ParameterValue = GetDefaultDir(lWspId,
Me)
cParamRec.ParameterValue =
cParamRec.ParameterValue & gstrFileSeparator &
CStr(lRunId)
Call Modify(cParamRec)
Call SaveParametersInWsp(lWspId)
End Sub
Public Property Set ParamDatabase(vdata As Database)
Set mcarrParameters.NodeDB = vdata
End Property
Public Sub Modify(cModifiedParam As cParameter)

```

```

' First check if the parameter record is valid
Call CheckDupParamName(cModifiedParam)
Call mcarrParameters.Modify(cModifiedParam)
End Sub
Public Sub Load(ByRef cParamToAdd As cParameter)
Call mcarrParameters.Load(cParamToAdd)
End Sub
Public Sub Add(ByRef cParamToAdd As cParameter)
Set cParamToAdd.NodeDB = mcarrParameters.NodeDB
' First check if the parameter record is valid
Call Validate(cParamToAdd)
' Retrieve a unique parameter identifier
cParamToAdd.ParameterId =
cParamToAdd.NextIdentifier
Call mcarrParameters.Add(cParamToAdd)
End Sub
Public Sub Unload(lngParamToDelete As Long)
Dim lngDeleteElement As Long
lngDeleteElement = QueryIndex(lngParamToDelete)
Call mcarrParameters.Unload(lngDeleteElement)
End Sub
Public Sub SaveParametersInWsp(ByVal lngWorkspace As
Long)
' Calls a procedure to commit all changes to the
parameters
' for the passed in workspace.
' Call a procedure to save all parameter records
for the
' workspace
Call mcarrParameters.Save(lngWorkspace)
End Sub
Public Function GetParameterValue(ByVal lngWorkspace
As Long, _
ByVal strParamName As String) As cParameter
' Returns the value for the passed in workspace
parameter
Dim cParamRec As cParameter
Dim lngIndex As Long
On Error GoTo GetParameterValueErr
' Find all parameters in the array with a
matching workspace id
For lngIndex = 0 To mcarrParameters.Count - 1

```

```

        Set cParamRec = mcarrParameters(lngIndex)
        If cParamRec.WorkspaceId = lngWorkspace And _
            cParamRec.ParameterName =
strParamName Then

            Set GetParameterValue = cParamRec
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcarrParameters.Count - 1 Then
        ' The parameter has not been defined for the
workspace
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError +
errParamNameInvalid, _
mstrModuleName & "GetParameterValue",
-
        LoadResString(errParamNameInvalid)
    End If

    Exit Function

GetParameterValueErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "GetParameterValue"
On Error GoTo 0
Err.Raise vbObjectError + errGetParamValueFailed,
-
gstrSource, _
LoadResString(errGetParamValueFailed)

End Function
Public Sub Delete(lngParamToDelete As Long)
' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lngParamToDelete)
    Call mcarrParameters.Delete(lngDeleteElement)

End Sub
Private Function QueryIndex(lngParameterId As Long)
As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in the array
    For lngIndex = 0 To mcarrParameters.Count - 1
        If mcarrParameters(lngIndex).ParameterId =
lngParameterId And _

mcarrParameters(lngIndex).IndOperation <> DeleteOp
Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that parameter has not been found
    On Error GoTo 0

```

```

        Err.Raise vbObjectError + errParamNotFound,
"cArrParameters.QueryIndex", _
        LoadResString(errParamNotFound)

    End Function

    Public Function QueryParameter(lngParameterId As
Long) _
        As cParameter

        Dim lngQueryElement As Long

        lngQueryElement = QueryIndex(lngParameterId)

        ' Return the queried parameter object
        Set QueryParameter =
mcarrParameters(lngQueryElement)

    End Function

    Public Property Get ParameterCount() As Long

        ParameterCount = mcarrParameters.Count

    End Property

    Public Property Get Item(lngIndex As Long) As
cParameter
    Attribute Item.VB_UserMemId = 0

        Set Item = mcarrParameters(lngIndex)

    End Property

    Public Sub Validate(ByVal cParamToValidate As
cParameter)
        ' This procedure is necessary since the class
cannot validate
        ' all the parameter properties on it's own. This
is 'coz we
        ' might have created new parameters in the
workspace, but not
        ' saved them to the database yet - hence the
duplicate check
        ' has to be repeated in the array

        Dim lngIndex As Long
        Dim cTempParam As cParameter

        On Error GoTo ValidateErr

        ' Check if the parameter name already exists in
the workspace
        For lngIndex = 0 To mcarrParameters.Count - 1
            Set cTempParam = mcarrParameters(lngIndex)
            If cTempParam.WorkspaceId =
cParamToValidate.WorkspaceId And _
                cTempParam.ParameterName =
cParamToValidate.ParameterName And _
                cTempParam.IndOperation <> DeleteOp
Then
                    On Error GoTo 0
                    Err.Raise vbObjectError +
errDuplicateParameterName, _
                    mstrSource,
                    LoadResString(errDuplicateParameterName)
                End If
            Next lngIndex

        End Sub

        Private Sub Class_Initialize()

            'bugmessage "cArrParameters: Initialize event -
setting parameter count to 0"
            Set mcarrParameters = New cNodeCollections

        End Sub

        Private Sub Class_Terminate()

            Set mcarrParameters = Nothing

        End Sub

        On Error GoTo 0
        Err.Raise vbObjectError +
errDuplicateParameterName, _

```

```

        mstrSource,
LoadResString(errDuplicateParameterName)
    End If
Next lngIndex

Exit Sub

ValidateErr:
LogErrors Errors
mstrSource = mstrModuleName & "Validate"
On Error GoTo 0
Err.Raise vbObjectError + errValidateFailed, _
mstrSource, LoadResString(errValidateFailed)

End Sub
Public Sub CheckDupParamName(ByVal cParamToValidate
As cParameter)

    Dim lngIndex As Long
    Dim cTempParam As cParameter

    ' Check if the parameter name already exists in
the workspace
    For lngIndex = 0 To mcarrParameters.Count - 1
        Set cTempParam = mcarrParameters(lngIndex)
        If cTempParam.WorkspaceId =
cParamToValidate.WorkspaceId And _
            cTempParam.ParameterName =
cParamToValidate.ParameterName And _
            cTempParam.IndOperation <> DeleteOp
Then
                ShowError errDuplicateParameterName
                On Error GoTo 0
                Err.Raise vbObjectError +
errDuplicateParameterName, _
                mstrSource,
                LoadResString(errDuplicateParameterName)
            End If
        Next lngIndex

    End Sub

    Private Sub Class_Initialize()

        'bugmessage "cArrParameters: Initialize event -
setting parameter count to 0"
        Set mcarrParameters = New cNodeCollections

    End Sub

    Private Sub Class_Terminate()

        Set mcarrParameters = Nothing

    End Sub


```

**cArrSteps.cls**

VERSION 1.0 CLASS

```

BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cArrSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cArrSteps.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Implements an array of cStep objects.
'           Type-safe wrapper around
cNodeCollections.
'           Also contains additional functions to
update parent version
'           on substeps, validation functions,
etc.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrSteps As cNodeCollections

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cArrSteps."

Public Sub Unload(lngStepToDelete As Long)

    Dim lngDeleteElement As Long
    Dim cUnloadStep As cStep

    lngDeleteElement =
QueryStepIndex(lngStepToDelete)
Set cUnloadStep = QueryStep(lngStepToDelete)

' First unload all iterators for the step
Call cUnloadStep.UnloadIterators

' Unload the step from the collection
Call mcarrSteps.Unload(lngDeleteElement)

End Sub
Public Sub Modify(cModifiedStep As cStep)

    Dim iAppend As Integer
    Dim sLabel As String

    On Error GoTo ModifyErr

    iAppend = 0
    sLabel = cModifiedStep.StepLabel

    Validate cModifiedStep

    Call mcarrSteps.Modify(cModifiedStep)

```

```

Exit Sub

ModifyErr:
' If the error raised by the add function is due
to a duplication
' of the step label, then try to generate a
unique label
If Err.Number - vbObjectError =
errStepLabelUnique Then
    iAppend = iAppend + 1
    cModifiedStep.StepLabel = sLabel &
CStr(iAppend)
' Try to insert the step record again
Resume
End If

' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errModifyStepFailed, _
gstrSource, _
LoadResString(errModifyStepFailed)

End Sub
Public Sub UpdateParentVersion(ByVal lngStepId As
Long, _
    ByVal strNewVersion As String, _
    ByVal strOldVersion As String, _
    ByVal intStepType As Integer)

' Does all the processing needed to update the
parent version
' number on all the sub-steps for a given step
' It updates the parent version no in the
database for all
' sub-steps of the passed in step id
' It also updates the parent version number on
all sub-steps
' in the array to the new version passed in

Dim lngIndex As Long
Dim cUpdateStep As cStep

On Error GoTo UpdateParentVersionErr

If intStepType <> gintManagerStep Then
' Only a manager can have sub-steps - if the
passed
' in step is not a manager, exit
Exit Sub
End If

' For all steps in the array
For lngIndex = 0 To mcarrSteps.Count - 1

    Set cUpdateStep = mcarrSteps(lngIndex)

' If the current step is a sub-step of the
passed in step
If cUpdateStep.ParentStepId = lngStepId And _
cUpdateStep.ParentVersionNo =
strOldVersion And _
Not cUpdateStep.ArchivedFlag Then

```

```

' Update the parent version number for
the sub-step
' in the array
cUpdateStep.ParentVersionNo =
strNewVersion

' Update the parent version number for
the sub-step
' in the array
Call Modify(cUpdateStep)

End If
Next lngIndex

Exit Sub

UpdateParentVersionErr:
LogErrors Errors
mstrSource = mstrModuleName &
"UpdateParentVersion"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateParentVersionFailed, _
mstrSource, _

LoadResString(errUpdateParentVersionFailed)

End Sub
Private Sub Validate(cCheckStep As cStep)

' Step validations that depend on other steps in
the collection

Dim lngIndex As Long

' Ensure that the step label is unique in the
workspace
For lngIndex = 0 To mcarrSteps.Count - 1

' If the current step is a sub-step of the
passed in step
If mcarrSteps(lngIndex).WorkspaceId =
cCheckStep.WorkspaceId And _
mcarrSteps(lngIndex).StepLabel =
cCheckStep.StepLabel And _
mcarrSteps(lngIndex).StepId <>
cCheckStep.StepId And _
mcarrSteps(lngIndex).IndOperation <>
DeleteOp Then
    On Error GoTo 0
    Err.Raise vbObjectError +
errStepLabelUnique, _
mstrModuleName & "Validate", _
LoadResString(errStepLabelUnique)

End If
Next lngIndex

End Sub

Public Sub ValidateStep(cCheckStep As cStep)

    On Error GoTo ValidateStepErr

```

```

'Public wrapper for Validate function (2 many
Validates)
Call Validate(cCheckStep)

Exit Sub

ValidateStepErr:
ShowError errStepLabelUnique
On Error GoTo 0
Err.Raise vbObjectError + errValidateFailed, _
    gstrSource, _
    LoadResString(errValidateFailed)
End Sub

Private Sub Class_Initialize()

    BugMessage "cArrSteps: Initialize event - setting
step count to 0"
    Set mcarrSteps = New cNodeCollections
End Sub

Private Sub Class_Terminate()

    BugMessage "cArrSteps: Terminate event triggered"
    Set mcarrSteps = Nothing
End Sub

Public Sub Add(ByVal cStepToAdd As cStep)

    Dim iAppend As Integer
    Dim sLabel As String

    On Error GoTo AddErr

    iAppend = 0
    sLabel = cStepToAdd.StepLabel

    Set cStepToAdd.NodeDB = mcarrSteps.NodeDB

    ' Retrieve a unique step identifier
    cStepToAdd.StepID = cStepToAdd.NextStepID

    Validate cStepToAdd

    ' Call a procedure to add the step record
    Call mcarrSteps.Add(cStepToAdd)

    ' Call a procedure to add all iterators for the
step
    cStepToAdd.AddAllIterators

    Exit Sub

AddErr:
    ' If the error raised by the add function is due
to a duplication
    ' of the step label, then try to generate a
unique label
    If Err.Number = vbObjectError =
errStepLabelUnique Then

```

```

        iAppend = iAppend + 1
        cStepToAdd.StepLabel = sLabel & CStr(iAppend)
        ' Try to insert the step record again
        Resume
    End If

    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInsertStepFailed, _
        gstrSource, _
        LoadResString(errInsertStepFailed)
End Sub

Public Sub Load(cStepToLoad As cStep)

    Call mcarrSteps.Load(cStepToLoad)
End Sub

Public Sub SaveStepsInWsp(ByVal lngWorkspace As Long)
    ' Calls a procedure to commit all changes to the
steps
    ' in the passed in workspace.

    Dim lngIndex As Integer

    ' Find all steps in the array with a matching
workspace id
    ' It is important to step in reverse order
through the array,
    ' since we delete step records sometimes!
    For lngIndex = mcarrSteps.Count - 1 To 0 Step -1
        If mcarrSteps(lngIndex).WorkspaceId =
lngWorkspace Then

            ' Call a procedure to commit all changes
to the
            ' Step record, if any
            Call CommitStep(mcarrSteps(lngIndex),
lngIndex)

            End If
        Next lngIndex
    End Sub

Private Sub CommitStep(ByVal cCommitStep As cStep, _
    ByVal intIndex As Integer)
    ' This procedure checks if any changes have been
made to the
    ' passed in Step. If so, it calls the step
methods to commit
    ' the changes.

    ' First commit all changes to the iterator
records for
    ' the step
    cCommitStep.SaveIterators

    Call mcarrSteps.Commit(cCommitStep, intIndex)
End Sub

Public Sub Delete(lngStepToDelete As Long)

```

```

    Dim lngDeleteElement As Long

    lngDeleteElement =
QueryStepIndex(lngStepToDelete)
    Call mcarrSteps.Delete(lngDeleteElement)

End Sub

Public Function QueryStepIndex(lngStepId As Long) As
Long

    Dim lngIndex As Long

    ' Find the element in the array that corresponds
to the
    ' passed in step id - note that while there will
be multiple
    ' versions of a step in the database, only one
version will
    ' be currently loaded in the array - meaning that
the stepid
    ' is enough to uniquely identify a step
    For lngIndex = 0 To mcarrSteps.Count - 1
        If mcarrSteps(lngIndex).StepId = lngStepId
Then
            QueryStepIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that step has not been found
    On Error GoTo 0
    Err.Raise vbObjectError + errStepNotFound,
mstrSource, _
    LoadResString(errStepNotFound)

End Function

Public Function QueryStep(ByVal lngStepId As Long) As
cStep

    ' Populates the passed in cStep object with the
property
    ' values corresponding to the Step Identifier,
lngStepId

    Dim lngQueryElement As Integer

    lngQueryElement = QueryStepIndex(lngStepId)

    ' Initialize the passed in step object to the
queried step
    Set QueryStep = mcarrSteps(lngQueryElement)

End Function

Public Property Get Item(ByVal Position As Long) As
cStep
    Attribute Item.VB_UserMemId = 0

    ' Returns the element at the passed in position
in the array
    If Position >= 0 And Position < mcarrSteps.Count
Then
        Set Item = mcarrSteps(Position)
    End If
End Property

```



```

Else
    On Error GoTo 0
    Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
        LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Set Item(ByVal Position As Long, _
    ByVal cStepRec As cStep)

    ' Returns the element at the passed in position
in the array
    If Position >= 0 And Position < mcarrSteps.Count
Then
        Set mcarrSteps(Position) = cStepRec
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Property Set StepDB(vdata As Database)

    Set mcarrSteps.NodeDB = vdata

End Property
Public Function SubSteps(ByVal lngStepId As Long, _
    ByVal strVersionNo As String) As Variant

    ' Returns a variant containing an array of all
the substeps
    ' for the passed in step

    Dim intIndex As Integer
    Dim cSubSteps() As cStep
    Dim lngStepCount As Long
    Dim cQueryStep As cStep

    On Error GoTo SubStepsErr

    lngStepCount = 0

    Set cQueryStep = QueryStep(lngStepId)

    ' Only a manager can have sub-steps
    If cQueryStep.StepType = gintManagerStep Then

        ' For each element in the Steps array
        For intIndex = 0 To mcarrSteps.Count - 1
            ' Check if the parent step id and parent
version number
            ' match the passed in step
            If mcarrSteps(intIndex).ParentStepId =
lngStepId And _

mcarrSteps(intIndex).ParentVersionNo = strVersionNo
And _

                mcarrSteps(intIndex).IndOperation
<> DeleteOp Then

```

```

        ' Increase the array dimension and
add the step
        ' to it
        ReDim Preserve
cSubSteps(lngStepCount)
        Set cSubSteps(lngStepCount) =
mcarrSteps(intIndex)
        lngStepCount = lngStepCount + 1
    End If
    Next intIndex

    End If

    ' Set the return value of the function to the
array of
    ' Steps that has been built above
    If lngStepCount = 0 Then
        SubSteps = Empty
    Else
        SubSteps = cSubSteps()
    End If

    Exit Function

SubStepsErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "SubSteps"
    On Error GoTo 0
    Err.Raise vbObjectError + errSubStepsFailed, _
        mstrSource, _
        LoadResString(errSubStepsFailed)

End Function

Public Property Get StepCount() As Integer

    StepCount = mcarrSteps.Count

End Property

```

## ***cAsyncShell.cl***

### **S**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cAsyncShell"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
'-----
' Copyright © 1997 Microsoft Corporation. All rights
reserved.
'

```

```

' You have a royalty-free right to use, modify,
reproduce and distribute the
' Sample Application Files (and/or any modified
version) in any way you find
' useful, provided that you agree that Microsoft has
no warranty, obligations or
' liability for any Sample Application Files.
'-----
'-----
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cAsyncShell."

Public Event Terminated()

Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Private proc As PROCESS_INFORMATION
Private mfShelling As Boolean

'-----
'-----
'Initialization and cleanup:

Private Sub Class_Initialize()
    Set moTimer = New cTimerSM
End Sub

Private Sub Class_Terminate()
    If mfShelling Then CloseHandle proc.hProcess
End Sub

'-----
'-----
'Shelling:

Public Sub Shell(CommandLine As String, Optional
PollingInterval As Long = 1000)
    Dim Start As STARTUPINFO

    If mfShelling Then
        On Error GoTo 0
        Err.Raise vbObjectError + errInstanceInUse, _
            mstrSource, _
            LoadResString(errInstanceInUse)
    End If
    mfShelling = True

    ' Initialize the STARTUPINFO structure:
    Start.cb = Len(Start)
    Start.dwFlags = STARTF_USESHOWWINDOW
    Start.wShowWindow = SW_SHOWMINNOACTIVE

    ' Start the shelled application:
    CreateProcessA 0&, CommandLine, 0&, 0&, 1&, _
        NORMAL_PRIORITY_CLASS, 0&, 0&, Start, proc

```

```

With moTimer
  If PollingInterval > 0 Then
    .Interval = PollingInterval
  Else
    .Interval = 1000
  End If
  .Enabled = True
End With
End Sub
-----
'Aborting:
Public Sub Abort()
  Dim nCode As Long
  Dim X As Integer
  Dim ReturnVal As Integer

  On Error GoTo AbortErr

  If Not mfShelling Then
    Call WriteError(errProgramError, mstrSource)
  Else
    If IsWindow(proc.hProcess) = False Then Exit Sub
  '
  '      If (GetWindowLong(proc.hProcess, GWL_STYLE)
  And WS_DISABLED) Then Exit Sub
  '
  '      If IsWindow(proc.hProcess) Then
  '        If Not (GetWindowLong(proc.hProcess,
  GWL_STYLE) And WS_DISABLED) Then
  '          X = PostMessage(proc.hProcess,
  WM_CANCELMODE, 0, 0&)
  '          X = PostMessage(proc.hProcess,
  WM_CLOSE, 0, 0&)
  '        End If
  '      End If

  If TerminateProcess(proc.hProcess, 0&) = 0
  Then
    Debug.Print "Unable to terminate process:
  " & proc.hProcess
    Call
  WriteError(errTerminateProcessFailed, mstrSource, _
    ApiError(GetLastError()))
  Else
    ' Should always come here!
    GetExitCodeProcess proc.hProcess, nCode
    If nCode = STILL_ACTIVE Then
      ' Write an error and close the
  handles to the
      ' process anyway
      Call
  WriteError(errTerminateProcessFailed, mstrSource)
    End If
  End If

  ' Close all open handles to the shelled
  process, even
  ' if any of the above calls error out
  CloseHandle proc.hProcess
  moTimer.Enabled = False
  mfShelling = False

```

```

  RaiseEvent Terminated
End If

Exit Sub

AbortErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName & "Abort"
On Error GoTo 0
Err.Raise vbObjectError + errProgramError, _
  mstrSource, _
  LoadResString(errProgramError)

End Sub

Private Sub moTimer_Timer()
  Dim nCode As Long

  GetExitCodeProcess proc.hProcess, nCode
  If nCode <> STILL_ACTIVE Then
    CloseHandle proc.hProcess
    moTimer.Enabled = False
    mfShelling = False
    RaiseEvent Terminated
  End If
End Sub

```

---

## **cConnDtl.cls**

```

VERSION 1.0 CLASS
BEGIN
  MultiUse = -1 'True
END
Attribute VB_Name = "cConnDtl"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConnDtl.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
  methods of a connection.
'           Contains functions to insert, update
  and delete
'           connection_dtls records from the
  database.
' Contact:   Reshma Tharamal
  (reshmat@microsoft.com)
'
Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnNameId As Long
Public ConnName As String
Public ConnectionString As String
Public ConnType As ConnectionType

```

```

Public Position As Long
Public NodeDB As Database

Private mintOperation As Operation

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cConnDtl."

' The cSequence class is used to generate unique
  Connection identifiers
Private mConnectionSeq As cSequence

' The StringSM class is used to carry out string
  operations
Private mFieldValue As cStringSM

Private Sub AssignParameters(qyExec As DAO.QueryDef)
  ' Assigns values to the parameters in the
  querydef object
  ' The parameter names are cryptic to
  differentiate them from the field names.
  ' When the parameter names are the same as the
  field names, parameters in the where
  ' clause do not get created.

  Dim prmParam As DAO.Parameter

  On Error GoTo AssignParametersErr

  For Each prmParam In qyExec.Parameters
    Select Case prmParam.Name
      Case "[w_id]"
        prmParam.Value = WorkspaceId
      Case "[c_id]"
        prmParam.Value = ConnNameId
      Case "[c_name]"
        prmParam.Value = ConnName
      Case "[c_str]"
        prmParam.Value = ConnectionString
      Case "[c_type]"
        prmParam.Value = ConnType
      Case Else
        ' Write the parameter name that is
  faulty
        WriteError errInvalidParameter,
  mstrSource, prmParam.Name
        On Error GoTo 0
        Err.Raise errInvalidParameter,
  mstrModuleName & "AssignParameters", _

  LoadResString(errInvalidParameter)
    End Select
    Next prmParam

  Exit Sub

```

```

AssignParametersErr:

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
    mstrModuleName & "AssignParameters",
LoadResString(errAssignParametersFailed)

End Sub

Public Function Clone() As cConnDtl

    ' Creates a copy of a given Connection

    Dim cCloneConn As cConnDtl

    On Error GoTo CloneErr

    Set cCloneConn = New cConnDtl

    ' Copy all the Connection properties to the newly
created Connection
    cCloneConn.WorkspaceId = WorkspaceId
    cCloneConn.ConnNameId = ConnNameId
    cCloneConn.ConnName = ConnName
    cCloneConn.ConnectionString = ConnectionString
    cCloneConn.ConnType = ConnType
    cCloneConn.IndOperation = mintOperation
    cCloneConn.Position = Position

    ' And set the return value to the newly created
Connection
    Set Clone = cCloneConn
    Set cCloneConn = Nothing

    Exit Function

CloneErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Clone"
    On Error GoTo 0
    Err.Raise vbObjectError + errCloneFailed,
mstrSource, LoadResString(errCloneFailed)

End Function
Private Sub CheckDupConnectionName()
    ' Check if the Connection name already exists in
the workspace

    Dim rstConnection As Recordset
    Dim strSql As String
    Dim qy As DAO.QueryDef

    On Error GoTo CheckDupConnectionNameErr
    mstrSource = mstrModuleName &
"CheckDupConnectionName"

    ' Create a recordset object to retrieve the count
of all Connections
    ' for the workspace with the same name
    strSql = "Select count(*) as Connection_count " &

```

```

    " from " & TBL_CONNECTION_DTLS & _
    " where " & FLD_ID_WORKSPACE & " = [w_id]" &
-
    " and " & FLD_CONN_DTL_CONNECTION_NAME & " =
[c_name]" & _
    " and " & FLD_ID_CONN_NAME & " <> [c_id]"

    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
    Call AssignParameters(qy)

    Set rstConnection =
qy.OpenRecordset(dbOpenForwardOnly)

    If rstConnection![Connection_count] > 0 Then
        rstConnection.Close
        qy.Close
        ShowError errDupConnDtlName
        On Error GoTo 0
        Err.Raise vbObjectError + errDupConnDtlName,
-
        mstrSource,
LoadResString(errDupConnDtlName)
    End If

    rstConnection.Close
    qy.Close

    Exit Sub

CheckDupConnectionNameErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"CheckDupConnectionName"
    On Error GoTo 0
    Err.Raise vbObjectError + errProgramError, _
    mstrSource, LoadResString(errProgramError)

End Sub
Public Property Let IndOperation(ByVal vdata As
Operation)

    ' The valid operations are define in the
cOperations
    ' class. Check if the operation is valid
    Select Case vdata
        Case QueryOp, InsertOp, UpdateOp, DeleteOp
            mintOperation = vdata

        Case Else
            BugAssert True
    End Select

End Property
Public Sub Validate()
    ' Each distinct object will have a Validate
method which
    ' will check if the class properties are valid.
This method
    ' will be used to check interdependant properties
that
    ' cannot be validated by the let procedures.

```

```

    ' It should be called by the add and modify
methods of the class

    If ConnName = gstrEmptyString Then

        ShowError errConnectionNameMandatory
        On Error GoTo 0
        ' Propagate this error back to the caller
        Err.Raise vbObjectError +
errConnectionNameMandatory, _
        mstrSource,
LoadResString(errConnectionNameMandatory)
    End If

    ' Raise an error if the Connection name already
exists in the workspace
    Call CheckDupConnectionName

End Sub
Public Sub Add()

    Dim strInsert As String
    Dim qy As DAO.QueryDef

    On Error GoTo AddErr

    ' Validate the record before trying to insert the
record
    Call Validate

    ' Create a temporary querydef object
    strInsert = "insert into " & TBL_CONNECTION_DTLS
& _
        "( " & FLD_ID_WORKSPACE & _
        ", " & FLD_ID_CONN_NAME & _
        ", " & FLD_CONN_DTL_CONNECTION_NAME & _
        ", " & FLD_CONN_DTL_CONNECTION_STRING &
-
        ", " & FLD_CONN_DTL_CONNECTION_TYPE & "
) " & _
        " values ( [w_id], [c_id], " & _
        " [c_name], [c_str], [c_type] )"

    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString, strInsert)

    ' Call a procedure to assign the Connection
values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

    Exit Sub

AddErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInsertFailed, _
    mstrModuleName & "Add",
LoadResString(errInsertFailed)

```

```

End Sub
Public Sub Delete()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteErr

    strDelete = "delete from " & TBL_CONNECTION_DTLS
    & _
        " where " & FLD_ID_CONN_NAME & " =
[c_id]"
    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString, strDelete)

    Call AssignParameters(qy)
    qy.Execute dbFailOnError

    qy.Close

    Exit Sub

DeleteErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteFailed, _
        mstrModuleName & "Delete",
LoadResString(errDeleteFailed)

End Sub

Public Sub Modify()

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo ModifyErr

    ' Validate the updated values before trying to
    modify the db
    Call Validate

    ' Create a temporary querydef object with the
    modify string
    strUpdate = "update " & TBL_CONNECTION_DTLS & _
        " set " & FLD_ID_WORKSPACE & " = [w_id],
" & _
        FLD_CONN_DTL_CONNECTION_NAME & " =
[c_name], " & _
        FLD_CONN_DTL_CONNECTION_STRING & " =
[c_str], " & _
        FLD_CONN_DTL_CONNECTION_TYPE & " =
[c_type] " & _
        " where " & FLD_ID_CONN_NAME & " =
[c_id]"
    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString, strUpdate)

    ' Call a procedure to assign the Connection
    values to the
    ' querydef object
    Call AssignParameters(qy)
    qy.Execute dbFailOnError

```

```

qy.Close

Exit Sub

ModifyErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errModifyFailed, _
        mstrModuleName & "Modify",
LoadResString(errModifyFailed)

End Sub

Public Property Get NextIdentifier() As Long

    Dim lngNextId As Long

    On Error GoTo NextIdentifierErr

    ' Retrieve the next identifier using the sequence
class
    Set mConnectionSeq = New cSequence
    Set mConnectionSeq.IdDatabase = dbsAttTool
    mConnectionSeq.IdentifierColumn =
FLD_ID_CONN_NAME
    lngNextId = mConnectionSeq.Identifier
    Set mConnectionSeq = Nothing

    NextIdentifier = lngNextId
    Exit Property

NextIdentifierErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errIdGetFailed, _
        mstrModuleName & "NextIdentifier",
LoadResString(errIdGetFailed)

End Property

Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property

Private Sub Class_Initialize()

    Set mFieldValue = New cStringSM

    ' Initialize the operation indicator variable to
    Query
    ' It will be modified later by the collection
    class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp

    ConnType = giDefaultConnType

End Sub

Private Sub Class_Terminate()

```

```

Set mFieldValue = Nothing

End Sub

cConnDtls.cls
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnDtls"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cConnDtls.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of cConnDtl
objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions to
determine the connection
' string value, validation functions,
etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Private mcarrConnDtls As cNodeCollections

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cConnDtls."

Public Property Set ConnDb(vdata As Database)

    Set mcarrConnDtls.NodeDB = vdata

End Property

Public Sub Modify(cModifiedConn As cConnDtl)

    ' First check if the parameter record is valid
    Call CheckDupConnName(cModifiedConn)

    Call mcarrConnDtls.Modify(cModifiedConn)

End Sub

Public Sub Load(ByRef cConnToAdd As cConnDtl)

    Call mcarrConnDtls.Load(cConnToAdd)

End Sub

Public Sub Add(ByRef cConnToAdd As cConnDtl)

    ' First check if the record is valid

```

```

Call Validate(cConnToAdd)

' Retrieve a unique identifier
cConnToAdd.ConnNameId = cConnToAdd.NextIdentifier

Call mcarrConnDtIs.Add(cConnToAdd)

End Sub

Public Sub Unload(lConnNameId As Long)

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lConnNameId)

    Call mcarrConnDtIs.Unload(lngDeleteElement)

End Sub

Public Sub SaveConnDtIsInWsp(ByVal lngWorkspace As Long)
' Call a procedure to save all connection details
records for the workspace
    Call mcarrConnDtIs.Save(lngWorkspace)

End Sub

Public Function GetConnectionDtl(ByVal lngWorkspace As Long, _
    ByVal strConnectionName As String) As cConnDtl
' Returns the connection dtl for the passed in
connection name

    Dim lngIndex As Long

    ' Find all parameters in the array with a
    matching workspace id
    For lngIndex = 0 To mcarrConnDtIs.Count - 1
        If mcarrConnDtIs(lngIndex).WorkspaceId = lngWorkspace And _
            mcarrConnDtIs(lngIndex).ConnName = strConnectionName Then

            Set GetConnectionDtl = mcarrConnDtIs(lngIndex)
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcarrConnDtIs.Count - 1 Then
        ' The parameter has not been defined for the
        workspace
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError + errConnNameInvalid, mstrModuleName & "GetConnection", _
            LoadResString(errConnNameInvalid)
    End If

End Function

Public Sub Delete(lConnNameId As Long)
' Delete the passed in parameter

```

```

Dim lngDeleteElement As Long

lngDeleteElement = QueryIndex(lConnNameId)
Call mcarrConnDtIs.Delete(lngDeleteElement)

End Sub

Private Function QueryIndex(lConnNameId As Long) As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in the array
    For lngIndex = 0 To mcarrConnDtIs.Count - 1
        If mcarrConnDtIs(lngIndex).ConnNameId = lConnNameId And _
            mcarrConnDtIs(lngIndex).IndOperation <> DeleteOp Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that parameter has not been found
    On Error GoTo 0
    Err.Raise vbObjectError + errQueryIndexFailed, "cArrParameters.QueryIndex", _
        LoadResString(errQueryIndexFailed)

End Function

Public Function QueryConnDtl(lConnNameId As Long) As cConnDtl

    Dim lngQueryElement As Long

    lngQueryElement = QueryIndex(lConnNameId)

    ' Return the queried connection object
    Set QueryConnDtl = mcarrConnDtIs(lngQueryElement)

End Function

Public Property Get Count() As Long

    Count = mcarrConnDtIs.Count

End Property

Public Property Get Item(lngIndex As Long) As cConnDtl
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrConnDtIs(lngIndex)

End Property

Private Sub Validate(ByVal cConnToValidate As cConnDtl)
' This procedure is necessary since the class
cannot validate
' all the connection_dtl properties on it's own.
This is 'coz we
' might have created new connections in the
workspace, but not

```

```

' saved them to the database yet - hence the
duplicate check
' has to be repeated in the array

Dim lngIndex As Long
Dim cTempParam As cConnDtl

' Check if the parameter name already exists in
the workspace
For lngIndex = 0 To mcarrConnDtIs.Count - 1
    Set cTempParam = mcarrConnDtIs(lngIndex)
    If cTempParam.WorkspaceId = cConnToValidate.WorkspaceId And _
        cTempParam.ConnName = cConnToValidate.ConnName And _
        cTempParam.IndOperation <> DeleteOp Then
        On Error GoTo 0
        Err.Raise vbObjectError + errDupConnDtlName, _
            mstrSource, LoadResString(errDupConnDtlName)
    End If
Next lngIndex

End Sub

Private Sub CheckDupConnName(ByVal cConnToValidate As cConnDtl)

    Dim lngIndex As Long
    Dim cTempParam As cConnDtl

    ' Check if the parameter name already exists in
    the workspace
    For lngIndex = 0 To mcarrConnDtIs.Count - 1
        Set cTempParam = mcarrConnDtIs(lngIndex)
        If cTempParam.WorkspaceId = cConnToValidate.WorkspaceId And _
            cTempParam.ConnName = cConnToValidate.ConnName And _
            cTempParam.ConnNameId <> cConnToValidate.ConnNameId And _
            cTempParam.IndOperation <> DeleteOp Then
            ShowError errDupConnDtlName
            On Error GoTo 0
            Err.Raise vbObjectError + errDupConnDtlName, _
                mstrSource, LoadResString(errDupConnDtlName)
        End If
    Next lngIndex

End Sub

Private Sub Class_Initialize()

    Set mcarrConnDtIs = New cNodeCollections

End Sub

Private Sub Class_Terminate()

```

```

Set mcarrConnDtIs = Nothing
End Sub

```

## cConnection.cl

### S

```

VERSION 1.0 CLASS
BEGIN
  MultiUse = -1 'True
END
Attribute VB_Name = "cConnection"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConnection.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a connection string.
'           Contains functions to insert, update
and delete      workspace_connections records from
the database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnectionId As Long
Public ConnectionValue As String
Public Description As String
Public NodeDB As Database
Public Position As Long
Public NoCountDisplay As Boolean
Public NoExecute As Boolean
Public ParseQueryOnly As Boolean
Public QuotedIdentifiers As Boolean
Public AnsiNulls As Boolean
Public ShowQueryPlan As Boolean
Public ShowStatsTime As Boolean
Public ShowStatsIO As Boolean
Public ParseOdbcMsg As Boolean
Public RowCount As Long
Public TsqlBatchSeparator As String
Public QueryTimeout As Long
Public ServerLanguage As String
Public CharacterTranslation As Boolean
Public RegionalSettings As Boolean

Private mstrConnectionName As String
Private mintOperation As Operation

```

```

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnection."

' The cSequence class is used to generate unique
Connection identifiers
Private mConnectionSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Private Sub AssignParameters(qyExec As DAO.QueryDef)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to
differentiate them from the field names.
' When the parameter names are the same as the
field names, parameters in the where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr

For Each prmParam In qyExec.Parameters
  Select Case prmParam.Name
    Case "[w_id]"
      prmParam.Value = WorkspaceId

    Case "[c_id]"
      prmParam.Value = ConnectionId

    Case "[c_name]"
      prmParam.Value = mstrConnectionName

    Case "[c_value]"
      prmParam.Value = ConnectionValue

    Case "[desc]"
      prmParam.Value = Description

    Case "[no_count]"
      prmParam.Value = NoCountDisplay

    Case "[no_exec]"
      prmParam.Value = NoExecute

    Case "[parse_only]"
      prmParam.Value = ParseQueryOnly

    Case "[quoted_id]"
      prmParam.Value = QuotedIdentifiers

    Case "[a_nulls]"
      prmParam.Value = AnsiNulls

    Case "[show_qp]"
      prmParam.Value = ShowQueryPlan

    Case "[stats_tm]"

```

```

      prmParam.Value = ShowStatsTime

    Case "[stats_io]"
      prmParam.Value = ShowStatsIO

    Case "[parse_odbc]"
      prmParam.Value = ParseOdbcMsg

    Case "[row_cnt]"
      prmParam.Value = RowCount

    Case "[batch_sep]"
      prmParam.Value = TsqlBatchSeparator

    Case "[qry_tmout]"
      prmParam.Value = QueryTimeout

    Case "[lang]"
      prmParam.Value = ServerLanguage

    Case "[char_trans]"
      prmParam.Value = CharacterTranslation

    Case "[reg_settings]"
      prmParam.Value = RegionalSettings

    Case Else
      ' Write the parameter name that is
      faulty
      WriteError errInvalidParameter,
mstrSource, prmParam.Name
      On Error GoTo 0
      Err.Raise errInvalidParameter,
mstrModuleName & "AssignParameters", _

LoadResString(errInvalidParameter)
      End Select
      Next prmParam

Exit Sub

AssignParametersErr:
  Call LogErrors(Errors)
  On Error GoTo 0
  Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrModuleName & "AssignParameters",
LoadResString(errAssignParametersFailed)

End Sub

Public Function Clone() As cConnection

' Creates a copy of a given Connection

Dim cCloneConn As cConnection

On Error GoTo CloneErr

Set cCloneConn = New cConnection

' Copy all the Connection properties to the newly

```

```

' created Connection
Set cCloneConn.NodeDB = NodeDB
cCloneConn.WorkspaceId = WorkspaceId
cCloneConn.ConnectionId = ConnectionId
cCloneConn.ConnectionName = mstrConnectionName
cCloneConn.ConnectionValue = ConnectionValue
cCloneConn.Description = Description
cCloneConn.IndOperation = mintOperation
cCloneConn.Position = Position
cCloneConn.NoCountDisplay = NoCountDisplay
cCloneConn.NoExecute = NoExecute
cCloneConn.ParseQueryOnly = ParseQueryOnly
cCloneConn.QuotedIdentifiers = QuotedIdentifiers
cCloneConn.AnsiNulls = AnsiNulls
cCloneConn.ShowQueryPlan = ShowQueryPlan
cCloneConn.ShowStatsTime = ShowStatsTime
cCloneConn.ShowStatsIO = ShowStatsIO
cCloneConn.ParseOdbcMsg = ParseOdbcMsg
cCloneConn.RowCount = RowCount
cCloneConn.TsqlBatchSeparator =
TsqlBatchSeparator
cCloneConn.QueryTimeOut = QueryTimeOut
cCloneConn.ServerLanguage = ServerLanguage
cCloneConn.CharacterTranslation =
CharacterTranslation
cCloneConn.RegionalSettings = RegionalSettings

' And set the return value to the newly created
Connection
Set Clone = cCloneConn
Set cCloneConn = Nothing

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName & "Clone"
On Error GoTo 0
Err.Raise vbObjectError + errCloneFailed,
mstrSource, LoadResString(errCloneFailed)

End Function
Private Sub CheckDupConnectionName()
' Check if the Connection name already exists in
the workspace

Dim rstConnection As Recordset
Dim strSql As String
Dim qy As DAO.QueryDef

On Error GoTo CheckDupConnectionNameErr
mstrSource = mstrModuleName &
"CheckDupConnectionName"

' Create a recordset object to retrieve the count
of all Connections
' for the workspace with the same name
strSql = "Select count(*) as Connection_count " &
-
" from workspace_connections " & _
" where workspace_id = [w_id]" & _
" and connection_name = [c_name]" & _
" and connection_id <> [c_id]"

```

```

Set qy = NodeDB.CreateQueryDef(gstrEmptyString,
strSql)
Call AssignParameters(qy)

Set rstConnection =
qy.OpenRecordset(dbOpenForwardOnly)

If rstConnection![Connection_count] > 0 Then
rstConnection.Close
qy.Close
ShowError errDuplicateConnectionName
On Error GoTo 0
Err.Raise vbObjectError +
errDuplicateConnectionName, _
mstrSource,
LoadResString(errDuplicateConnectionName)
End If

rstConnection.Close
qy.Close

Exit Sub

CheckDupConnectionNameErr:
LogErrors Errors
mstrSource = mstrModuleName &
"CheckDupConnectionName"
On Error GoTo 0
Err.Raise vbObjectError + errProgramError, _
mstrSource, LoadResString(errProgramError)

End Sub
Private Sub CheckDB()
' Check if the database object has been
initialized

If NodeDB Is Nothing Then
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB, _
mstrModuleName & "CheckDB",
LoadResString(errInvalidDB)
End If

End Sub
Public Property Let ConnectionName(vdata As String)

If vdata = gstrEmptyString Then

ShowError errConnectionNameMandatory
On Error GoTo 0
' Propagate this error back to the caller
Err.Raise vbObjectError +
errConnectionNameMandatory, _
mstrSource,
LoadResString(errConnectionNameMandatory)
Else
mstrConnectionName = vdata
End If

End Property

```

```

Public Property Let IndOperation(ByVal vdata As
Operation)

' The valid operations are define in the
cOperations
' class. Check if the operation is valid
Select Case vdata
Case QueryOp, InsertOp, UpdateOp, DeleteOp
mintOperation = vdata

Case Else
BugAssert True
End Select

End Property
Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are valid.
This method
' will be used to check interdependant properties
that
' cannot be validated by the let procedures.
' It should be called by the add and modify
methods of the class

' Check if the db object is valid
Call CheckDB

' Raise an error if the Connection name already
exists in the workspace
Call CheckDupConnectionName

End Sub
Public Sub Add()

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' Validate the record before trying to insert the
record
Call Validate

' Create a temporary querydef object
strInsert = "insert into workspace_connections "
& _
" ( workspace_id, connection_id, " & _
"connection_name, connection_value, " &
-
"description, no_count_display, " & _
"no_execute, parse_query_only, " & _
"ANSI_quoted_identifiers, ANSI_nulls, "
& _
"show_query_plan, show_stats_time, " & _
"show_stats_io, parse_odbc_msg_prefixes,
" & _
"row_count, tsql_batch_separator, " & _
"query_time_out, server_language, " & _
"character_translation,
regional_settings ) " & _

```

```

        " values ( [w_id], [c_id], [c_name],
[c_value], " & _
        " [desc], [no_count], [no_exec],
[parse_only], " & _
        " [quoted_id], [a_nulls], [show_qp],
[stats_tm], " & _
        " [stats_io], [parse_odbc], [row_cnt],
[batch_sep], " & _
        " [qry_tmout], [lang], [char_trans],
[reg_settings] ) "

        Set qy = NodeDB.CreateQueryDef(gstrEmptyString,
strInsert)

        ' Call a procedure to assign the Connection
values
        Call AssignParameters(qy)

        qy.Execute dbFailOnError
        qy.Close

        Exit Sub

AddErr:

        Call LogErrors(Errors)
        On Error GoTo 0
        Err.Raise vbObjectError + errInsertFailed, _
            mstrModuleName & "Add",
LoadResString(errInsertFailed)

End Sub
Public Sub Delete()

        Dim strDelete As String
        Dim qy As DAO.QueryDef

        On Error GoTo DeleteErr

        ' Check if the db object is valid
        Call CheckDB

        strDelete = "delete from workspace_connections "
& _
            " where connection_id = [c_id]"
        Set qy = NodeDB.CreateQueryDef(gstrEmptyString,
strDelete)

        Call AssignParameters(qy)
        qy.Execute dbFailOnError

        qy.Close

        Exit Sub

DeleteErr:
        LogErrors Errors
        On Error GoTo 0
        Err.Raise vbObjectError + errDeleteFailed, _
            mstrModuleName & "Delete",
LoadResString(errDeleteFailed)

End Sub

```

```

Public Sub Modify()

        Dim strUpdate As String
        Dim qy As QueryDef

        On Error GoTo ModifyErr

        ' Validate the updated values before trying to
modify the db
        Call Validate

        ' Create a temporary querydef object with the
modify string
        strUpdate = "update workspace_connections " & _
            " set workspace_id = [w_id], " & _
            "connection_name = [c_name], " & _
            "connection_value = [c_value], " & _
            "description = [desc], " & _
            "no_count_display = [no_count], " & _
            "no_execute = [no_exec], " & _
            "parse_query_only = [parse_only], " & _
            "ANSI_quoted_identifiers = [quoted_id], "
& _
            "ANSI_nulls = [a_nulls], " & _
            "show_query_plan = [show_qp], " & _
            "show_stats_time = [stats_tm], " & _
            "show_stats_io = [stats_io], " & _
            "parse_odbc_msg_prefixes = [parse_odbc],
" & _
            "row_count = [row_cnt], " & _
            "tsql_batch_separator = [batch_sep], " &
_
            "query_time_out = [qry_tmout], " & _
            "server_language = [lang], " & _
            "character_translation = [char_trans], "
& _
            "regional_settings = [reg_settings] " & _
            " where connection_id = [c_id]"
        Set qy = NodeDB.CreateQueryDef(gstrEmptyString,
strUpdate)

        ' Call a procedure to assign the Connection
values to the
        ' querydef object
        Call AssignParameters(qy)
        qy.Execute dbFailOnError

        qy.Close

        Exit Sub

ModifyErr:

        Call LogErrors(Errors)
        On Error GoTo 0
        Err.Raise vbObjectError + errModifyFailed, _
            mstrModuleName & "Modify",
LoadResString(errModifyFailed)

End Sub
Public Property Get ConnectionName() As String

```

```

        ConnectionName = mstrConnectionName

End Property

Public Property Get NextIdentifier() As Long

        Dim lngNextId As Long

        On Error GoTo NextIdentifierErr

        ' First check if the database object is valid
        Call CheckDB

        ' Retrieve the next identifier using the sequence
class
        Set mConnectionSeq = New cSequence
        Set mConnectionSeq.IdDatabase = NodeDB
        mConnectionSeq.IdentifierColumn = "connection_id"
        lngNextId = mConnectionSeq.Identifier
        Set mConnectionSeq = Nothing

        NextIdentifier = lngNextId
        Exit Property

NextIdentifierErr:
        LogErrors Errors
        On Error GoTo 0
        Err.Raise vbObjectError + errIdGetFailed, _
            mstrModuleName & "NextIdentifier",
LoadResString(errIdGetFailed)

End Property
Public Property Get IndOperation() As Operation

        IndOperation = mintOperation

End Property

Private Sub Class_Initialize()

        Set mFieldValue = New cStringSM

        ' Initialize the operation indicator variable to
Query
        ' It will be modified later by the collection
class when
        ' inserts, updates or deletes are performed
        mintOperation = QueryOp

        ' Initialize connection properties to their
default values
        NoCountDisplay = DEF_NO_COUNT_DISPLAY
        NoExecute = DEF_NO_EXECUTE
        ParseQueryOnly = DEF_PARSE_QUERY_ONLY
        QuotedIdentifiers = DEF_ANSI_QUOTED_IDENTIFIERS
        AnsiNulls = DEF_ANSI_NULLS
        ShowQueryPlan = DEF_SHOW_QUERY_PLAN
        ShowStatsTime = DEF_SHOW_STATS_TIME
        ShowStatsIO = DEF_SHOW_STATS_IO
        ParseOdbcMsg = DEF_PARSE_ODBC_MSG_PREFIXES
        RowCount = DEF_ROW_COUNT
        TsqlBatchSeparator = DEF_TSQL_BATCH_SEPARATOR
        QueryTimeOut = DEF_QUERY_TIME_OUT

```



```

ServerLanguage = DEF_SERVER_LANGUAGE
CharacterTranslation = DEF_CHARACTER_TRANSLATION
RegionalSettings = DEF_REGIONAL_SETTINGS

End Sub

Private Sub Class_Terminate()

    Set NodeDB = Nothing
    Set mFieldValue = Nothing

End Sub

```

## ***cConnections.c*** ***Is***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnections"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConnections.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Implements an array of cConnection
objects.
'           Type-safe wrapper around
cNodeCollections.
'           Also contains validation functions,
etc.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit

Private mcarrConnections As cNodeCollections

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnections."

Public Property Set ConnDb(vdata As Database)

    Set mcarrConnections.NodeDB = vdata

End Property
Public Sub Modify(cModifiedConn As cConnection)

    ' First check if the parameter record is valid
    Call CheckDupConnName(cModifiedConn)

```

```

    Call mcarrConnections.Modify(cModifiedConn)
End Sub
Public Sub Load(ByRef cConnToAdd As cConnection)

    Call mcarrConnections.Load(cConnToAdd)

End Sub
Public Sub Add(ByRef cConnToAdd As cConnection)

    Set cConnToAdd.NodeDB = mcarrConnections.NodeDB

    ' First check if the record is valid
    Call Validate(cConnToAdd)

    ' Retrieve a unique identifier
    cConnToAdd.ConnectionId =
cConnToAdd.NextIdentifier

    Call mcarrConnections.Add(cConnToAdd)

End Sub

Public Sub Unload(lngConnId As Long)

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lngConnId)

    Call mcarrConnections.Unload(lngDeleteElement)

End Sub

Public Sub SaveConnectionsInWsp(ByVal lngWorkspace As
Long)
    ' Call a procedure to save all connection records
for the workspace
    Call mcarrConnections.Save(lngWorkspace)

End Sub
Public Function GetConnection(ByVal lngWorkspace As
Long, _
    ByVal strConnectionName As String) As
cConnection
    ' Returns the connection string for the passed in
connection name

    Dim lngIndex As Long

    ' Find all parameters in the array with a
matching workspace id
    For lngIndex = 0 To mcarrConnections.Count - 1
        If mcarrConnections(lngIndex).WorkspaceId =
lngWorkspace And _
mcarrConnections(lngIndex).ConnectionName =
strConnectionName Then

            Set GetConnection =
mcarrConnections(lngIndex)
            Exit For
        End If
    Next lngIndex

```

```

    If lngIndex > mcarrConnections.Count - 1 Then
        ' The parameter has not been defined for the
workspace
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError + errConnNameInvalid,
mstrModuleName & "GetConnection", _
            LoadResString(errConnNameInvalid)
    End If

End Function
Public Sub Delete(lngConnId As Long)
    ' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lngConnId)
    Call mcarrConnections.Delete(lngDeleteElement)

End Sub
Private Function QueryIndex(lngConnId As Long) As
Long

    Dim lngIndex As Long

    ' Find the matching parameter record in the array
For lngIndex = 0 To mcarrConnections.Count - 1
        If mcarrConnections(lngIndex).ConnectionId =
lngConnId And _
mcarrConnections(lngIndex).IndOperation <> DeleteOp
Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that parameter has not been found
    On Error GoTo 0
    Err.Raise vbObjectError + errQueryIndexFailed,
"cArrParameters.QueryIndex", _
        LoadResString(errQueryIndexFailed)

End Function

Public Function QueryConnection(lngConnId As Long) As
cConnection

    Dim lngQueryElement As Long

    lngQueryElement = QueryIndex(lngConnId)

    ' Return the queried connection object
    Set QueryConnection =
mcarrConnections(lngQueryElement)

End Function
Public Property Get Count() As Long

    Count = mcarrConnections.Count

End Property

```

```

Public Property Get Item(lngIndex As Long) As
cConnection
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrConnections(lngIndex)

End Property

Public Sub Validate(ByVal cConnToValidate As
cConnection)
' This procedure is necessary since the class
cannot validate
' all the parameter properties on it's own. This
is 'coz we
' might have created new parameters in the
workspace, but not
' saved them to the database yet - hence the
duplicate check
' has to be repeated in the array

Dim lngIndex As Long
Dim cTempParam As cConnection

' Check if the parameter name already exists in
the workspace
For lngIndex = 0 To mcarrConnections.Count - 1
    Set cTempParam = mcarrConnections(lngIndex)
    If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
cConnToValidate.ConnectionName And _
        cTempParam.IndOperation <> DeleteOp
Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errDuplicateConnectionName, _
            mstrSource,
LoadResString(errDuplicateConnectionName)
        End If
    Next lngIndex

End Sub

Public Sub CheckDupConnName(ByVal cConnToValidate As
cConnection)

Dim lngIndex As Long
Dim cTempParam As cConnection

' Check if the parameter name already exists in
the workspace
For lngIndex = 0 To mcarrConnections.Count - 1
    Set cTempParam = mcarrConnections(lngIndex)
    If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
cConnToValidate.ConnectionName And _
        cTempParam.ConnectionId <>
cConnToValidate.ConnectionId And _
        cTempParam.IndOperation <> DeleteOp
Then
        ShowError errDuplicateConnectionName
        On Error GoTo 0
    End If
Next lngIndex

End Sub

```

```

Err.Raise vbObjectError +
errDuplicateConnectionName, _
    mstrSource,
LoadResString(errDuplicateConnectionName)
End If
Next lngIndex

End Sub

Private Sub Class_Initialize()

    Set mcarrConnections = New cNodeCollections

End Sub

Private Sub Class_Terminate()

    Set mcarrConnections = Nothing

End Sub

```

## **cConstraint.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConstraint"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:
'     cConstraint.cls
'     Microsoft TPC-H Kit Ver. 1.00
'     Copyright Microsoft, 1999
'     All Rights Reserved
'
' PURPOSE: Encapsulates the properties and
methods of a constraint.
'     Contains functions to insert, update
and delete
'     step_constraints records from the
database.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Module level variables to store the property values
Private mlngConstraintId As Long
Private mlngStepId As Long
Private mstrVersionNo As String
Private mintConstraintType As Integer
Private mlngGlobalStepId As Long
Private mstrGlobalVersionNo As String
Private mintSequenceNo As Integer
Private mdbConstraintDB As Database
Private mlngWorkspaceId As Integer
Private mintOperation As Operation
Private mlngPosition As Long

```

```

' The cSequence class is used to generate unique step
identifiers
Private mConstraintSeq As cSequence

Private Const mstrModuleName As String =
"cConstraint."
Private mstrSource As String

Public Enum ConstraintType
    gintPreStep = 1
    gintPostStep = 2
End Enum

Private Const mstrSQ As String = ""
Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property
Public Property Let WorkspaceId(ByVal vdata As Long)
    mlngWorkspaceId = vdata
End Property

Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property
Public Property Let IndOperation(ByVal vdata As
Operation)

    On Error GoTo IndOperationErr
    mstrSource = mstrModuleName & "IndOperation"

' The valid operations are define in the
cOperations
' class. Check if the operation is valid
Select Case vdata
    Case QueryOp, InsertOp, UpdateOp, DeleteOp
        mintOperation = vdata

    Case Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidOperation, _
            mstrSource,
LoadResString(errInvalidOperation)
        End Select

    Exit Property

IndOperationErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "IndOperation"
    On Error GoTo 0
    Err.Raise vbObjectError + errLetOperationFailed,
-
        mstrSource,
LoadResString(errLetOperationFailed)

End Property

Public Function Clone() As cConstraint

' Creates a copy of a given constraint

```

```

Dim cConsClone As cConstraint

On Error GoTo CloneErr
mstrSource = mstrModuleName & "Clone"

Set cConsClone = New cConstraint

' Copy all the workspace properties to the newly
' created workspace
cConsClone.ConstraintId = mlngConstraintId
cConsClone.StepId = mlngStepId
cConsClone.VersionNo = mstrVersionNo
cConsClone.ConstraintType = mintConstraintType
cConsClone.GlobalStepId = mlngGlobalStepId
cConsClone.GlobalVersionNo = mstrGlobalVersionNo
cConsClone.SequenceNo = mintSequenceNo
cConsClone.WorkspaceId = mlngWorkspaceId
cConsClone.IndOperation = mintOperation

' And set the return value to the newly created
constraint
Set Clone = cConsClone

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName & "Clone"
On Error GoTo 0
Err.Raise vbObjectError + errCloneFailed, _
    mstrSource, LoadResString(errCloneFailed)

End Function

Public Property Get SequenceNo() As Integer

    SequenceNo = mintSequenceNo

End Property

Public Property Let SequenceNo(ByVal vdata As
Integer)
    mintSequenceNo = vdata
End Property

Public Sub Add()
' Inserts a new step constraint into the database

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' First check if the database object is valid
Call CheckDB

' Any record validations
Call Validate

' Create a temporary querydef object
strInsert = "insert into step_constraints " & _

```

```

    "( constraint_id, step_id, version_no, "
    & _
    " constraint_type, global_step_id,
    global_version_no, sequence_no )" & _
    " values ( [cons_id], [s_id], [ver_no], "
    & _
    " [cons_type], [g_step_id], [g_ver_no], "
    & _
    " [seq_no] )"

    Set qy =
mddbConstraintDB.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

' strInsert = "insert into step_constraints " & _
' "( constraint_id, step_id, version_no, " & _
' " constraint_type, global_step_id,
' global_version_no, sequence_no )" & _
' " values ( " & _
' Str(mlngConstraintId) & ", " &
' Str(mlngStepId) & ", " & _
' mstrSQ & mstrVersionNo & mstrSQ & ", " &
' Str(mintConstraintType) & ", " & _
' Str(mlngGlobalStepId) & ", " & mstrSQ &
' mstrGlobalVersionNo & mstrSQ & ", " & _
' Str(mintSequenceNo) & " )"

' BugMessage strInsert
' mddbConstraintDB.Execute strInsert,
dbFailOnError
Exit Sub

AddErr:
LogErrors Errors
mstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError + errAddConstraintFailed,
    mstrSource, _
    LoadResString(errAddConstraintFailed)

End Sub

Private Sub AssignParameters(qyExec As DAO.QueryDef)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to make them
different
' from the field names. When the parameter names
are
' the same as the field names, parameters in the
where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName & "AssignParameters"

For Each prmParam In qyExec.Parameters

```

```

Select Case prmParam.Name
Case "[cons_id]"
    prmParam.Value = mlngConstraintId

Case "[s_id]"
    prmParam.Value = mlngStepId

Case "[ver_no]"
    prmParam.Value = mstrVersionNo

Case "[cons_type]"
    prmParam.Value = mintConstraintType

Case "[g_step_id]"
    prmParam.Value = mlngGlobalStepId

Case "[g_ver_no]"
    prmParam.Value = mstrGlobalVersionNo

Case "[seq_no]"
    prmParam.Value = mintSequenceNo

Case Else
' Write the parameter name that is
faulty
WriteError errInvalidParameter,
mstrSource, _
    prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrSource, _
    LoadResString(errInvalidParameter)

End Select
Next prmParam

Exit Sub

AssignParametersErr:
mstrSource = mstrModuleName & "AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
    mstrSource,
    LoadResString(errAssignParametersFailed)

End Sub

Public Property Get NextIdentifier() As Long

Dim lngNextId As Long

On Error GoTo NextIdentifierErr

' First check if the database object is valid
Call CheckDB

' Retrieve the next constraint identifier using
the
' sequence class
Set mConstraintSeq = New cSequence
Set mConstraintSeq.IdDatabase = mddbConstraintDB

```

```

mConstraintSeq.IdentifierColumn = "constraint_id"
lngNextId = mConstraintSeq.Identifier
Set mConstraintSeq = Nothing

NextIdentifier = lngNextId
Exit Property

NextIdentifierErr:
LogErrors Errors
mstrSource = mstrModuleName & "NextIdentifier"
On Error GoTo 0
Err.Raise vbObjectError + errStepIdGetFailed, _
mstrSource, LoadResString(errStepIdGetFailed)

End Property

Private Sub CheckDB()
' Check if the database object has been
initialized

If mDBsConstraintDB Is Nothing Then
ShowError errInvalidDB
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB, _
mstrModuleName,
LoadResString(errInvalidDB)
End If

End Sub

Public Sub Delete()
' Deletes the step constraint record from the
database

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr
mstrSource = mstrModuleName & "Delete"

' There can be multiple constraints for a step,
' meaning that there can be multiple constraint
records
' with the same constraint_id. Only a combination
' of the step_id, version and constraint_id will
be
' unique
strDelete = "delete from step_constraints " & _
" where constraint_id = [cons_id]" & _
" and step_id = [s_id]" & _
" and version_no = [ver_no]"

Set qy =
mDBsConstraintDB.CreateQueryDef(gstrEmptyString,
strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

strDelete = "Delete from step_constraints " & _
" where constraint_id = " & _
Str(mlngConstraintId) & _

```

```

' " and step_id = " & Str(mlngStepId) & _
' " and version_no = " & mstrSQ & _
mstrVersionNo & mstrSQ
'
' BugMessage strDelete
' mDBsConstraintDB.Execute strDelete,
dbFailOnError

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName & "Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteConstraintFailed, _
mstrSource, _
LoadResString(errDeleteConstraintFailed)

End Sub

Public Sub Modify()
' Updates the sequence no of the step constraint
record
' in the database

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo Modify

' First check if the database object is valid
Call CheckDB

' Any record validations
Call Validate

' There can be multiple constraints for a step,
' meaning that there can be multiple constraint
records
' with the same constraint_id. Only a combination
' of the step_id, version and constraint_id will
be
' unique
' Create a temporary querydef object with the
modify string
strUpdate = "Update step_constraints " & _
" set sequence_no = [seq_no]" & _
" where constraint_id = [cons_id]" & _
" and step_id = [s_id]" & _
" and version_no = [ver_no]"

Set qy =
mDBsConstraintDB.CreateQueryDef(gstrEmptyString,
strUpdate)

' Call a procedure to assign the parameter values
to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

strUpdate = "Update step_constraints " & _

```

```

' " set sequence_no = " & _
Str(mintSequenceNo) & _
' " where constraint_id = " & _
Str(mlngConstraintId) & _
' " and step_id = " & Str(mlngStepId) & _
' " and version_no = " & mstrSQ & _
mstrVersionNo & mstrSQ
'
' BugMessage strUpdate
' mDBsConstraintDB.Execute strUpdate,
dbFailOnError
Exit Sub

Modify:
LogErrors Errors
mstrSource = mstrModuleName & "Modify"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateConstraintFailed, _
mstrSource, _
LoadResString(errUpdateConstraintFailed)

End Sub

Public Property Get Position() As Long

Position = mlngPosition

End Property

Public Property Let Position(ByVal RHS As Long)

mlngPosition = RHS

End Property

Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are valid.
This method
' will be used to check interdependant properties
that
' cannot be validated by the let procedures.
' It should be called by the add and modify
methods of the class

' No validations are necessary for the constraint
object

End Sub

Public Property Set NodeDB(vdata As Database)

Set mDBsConstraintDB = vdata

End Property

Public Property Get NodeDB() As Database

Set NodeDB = mDBsConstraintDB

End Property

Public Property Get GlobalVersionNo() As String

```

```

GlobalVersionNo = mstrGlobalVersionNo
End Property
Public Property Let GlobalVersionNo(ByVal vdata As String)
    mstrGlobalVersionNo = vdata
End Property
Public Property Get GlobalStepId() As Long
    GlobalStepId = mlngGlobalStepId
End Property
Public Property Get ConstraintId() As Long
    ConstraintId = mlngConstraintId
End Property
Public Property Get VersionNo() As String
    VersionNo = mstrVersionNo
End Property
Public Property Get StepId() As Long
    StepId = mlngStepId
End Property
Public Property Let VersionNo(ByVal vdata As String)
    mstrVersionNo = vdata
End Property
Public Property Let StepId(ByVal vdata As Long)
    mlngStepId = vdata
End Property
Public Property Let ConstraintId(ByVal vdata As Long)
    On Error GoTo ConstraintIdErr
    mstrSource = mstrModuleName & "ConstraintId"
    If (vdata > 0) Then
        mlngConstraintId = vdata
    Else
        ' Propagate this error back to the caller
        On Error GoTo 0
        Err.Raise vbObjectError +
errConstraintIdInvalid, _
        mstrSource,
LoadResString(errConstraintIdInvalid)
    End If
End Property
Exit Property

```

```

ConstraintIdErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "ConstraintId"
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintIdSetFailed, _
    mstrSource,
LoadResString(errConstraintIdSetFailed)
End Property
Public Property Let GlobalStepId(ByVal vdata As Long)
    On Error GoTo GlobalStepIdErr
    mstrSource = mstrModuleName & "GlobalStepId"
    If (vdata > 0) Then
        mlngGlobalStepId = vdata
    Else
        ' Propagate this error back to the caller
        On Error GoTo 0
        Err.Raise vbObjectError +
errGlobalStepIdInvalid, _
        mstrSource,
LoadResString(errGlobalStepIdInvalid)
    End If
End Property
Exit Property
GlobalStepIdErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "GlobalStepId"
    On Error GoTo 0
    Err.Raise vbObjectError +
errGlobalStepIdSetFailed, _
    mstrSource,
LoadResString(errGlobalStepIdSetFailed)
End Property
Public Property Let ConstraintType(ByVal vdata As ConstraintType)
    On Error GoTo ConstraintTypeErr
    ' A global step can be either a pre- or a post-
    execution step.
    ' These constants have been defined in the
    enumeration,
    ' ConstraintType, which is exposed
    Select Case vdata
        Case gintPreStep, gintPostStep
            mintConstraintType = vdata
        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errConstraintTypeInvalid, _
            mstrSource,
LoadResString(errConstraintTypeInvalid)
    End Select
End Property

```

```

Exit Property
ConstraintTypeErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "ConstraintType"
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintTypeLetFailed, _
    mstrSource,
LoadResString(errConstraintTypeLetFailed)
End Property
Public Property Get ConstraintType() As ConstraintType
    ConstraintType = mintConstraintType
End Property
Private Sub Class_Initialize()
    ' Initialize the operation indicator variable to
    Query
    ' It will be modified later by the collection
    class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp
End Sub

```

## ***cFailedStep.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFailedStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFailedStep.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Properties of a step execution
failure.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit
Public InstanceId As Long
Public StepId As Long
Public ParentStepId As Long
Public ContCriteria As ContinuationCriteria
Public EndTime As Currency

```

Public AskResponse As Long

## **cFailedSteps.cl**

### **S**

```
VERSION 1.0 CLASS
BEGIN
  MultiUse = -1 'True
END
Attribute VB_Name = "cFailedSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFailedSteps.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module encapsulates a collection
of failed steps. It
'           also determines whether sub-steps of
a passed in step need
'           to be skipped due to a failure.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcFailedSteps As cVector
Public Function ExecuteSubStep(lParentStepId As Long)
As Boolean
  ' Returns False if there is any condition that
prevents sub-steps of the passed
  ' in instance from being executed
  Dim lIndex As Long

  ExecuteSubStep = True

  For lIndex = 0 To Count() - 1
    If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureCompleteSiblings And _
      lParentStepId <>
mcFailedSteps(lIndex).ParentStepId Then
      ExecuteSubStep = False
      Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureAbortSiblings And _
      lParentStepId =
mcFailedSteps(lIndex).ParentStepId Then
      ExecuteSubStep = False
      Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureSkipSiblings And _
```

```
      lParentStepId =
mcFailedSteps(lIndex).ParentStepId Then
      ExecuteSubStep = False
      Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureAbort Then
      ExecuteSubStep = False
      Exit For
    End If

    Next lIndex

  End Function
Public Sub Add(ByVal objItem As cFailedStep)

  mcFailedSteps.Add objItem

End Sub
Public Function Delete(ByVal lPosition As Long) As
cFailedStep

  Set Delete = mcFailedSteps.Delete(lPosition)

End Function
Public Sub Clear()

  mcFailedSteps.Clear

End Sub
Public Function Count() As Long

  Count = mcFailedSteps.Count

End Function
Public Property Get Item(ByVal Position As Long) As
cFailedStep
  Attribute Item.VB_UserMemId = 0

  Set Item = mcFailedSteps.Item(Position)

End Property
Public Function StepFailed(lStepId As Long) As
Boolean

  ' Returns True if a failure record already exists
for the passed in step
  Dim lIndex As Long

  StepFailed = False

  For lIndex = 0 To Count() - 1
    If mcFailedSteps(lIndex).StepId = lStepId
Then
      StepFailed = True
      Exit For
    End If
  Next lIndex

End Function
```

```
Private Sub Class_Initialize()

  Set mcFailedSteps = New cVector

End Sub

Private Sub Class_Terminate()

  Set mcFailedSteps = Nothing

End Sub
```

## **cFileInfo.cls**

```
VERSION 1.0 CLASS
BEGIN
  MultiUse = -1 'True
END
Attribute VB_Name = "cFileInfo"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFileInfo.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   File Properties viz. name, handle,
etc.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mstrFileName As String
Private mintFileHandle As Integer
Private mdbsNodeDb As Database ' Since it is used to
form a cNodeCollection
Private mlngPosition As Long ' Since it is used to
form a cNodeCollection
Public Property Get FileName() As String

  FileName = mstrFileName

End Property
Public Property Let FileName(ByVal vdata As String)

  mstrFileName = vdata

End Property
Public Property Let FileHandle(ByVal vdata As
Integer)

  mintFileHandle = vdata

End Property
Public Property Set NodeDB(vdata As Database)

  Set mdbsNodeDb = vdata
```

```

End Property
Public Property Get NodeDB() As Database
    Set NodeDB = mdbNodeDb
End Property
Public Property Get Position() As Long
    Position = mlngPosition
End Property
Public Property Let Position(ByVal vdata As Long)
    mlngPosition = vdata
End Property
Public Property Get FileHandle() As Integer
    FileHandle = mintFileHandle
End Property

```

## **cFileSM.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFileSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = "SavedWithClassBuilder" ,"Yes"
Attribute VB_Ext_KEY = "Top_Level" ,"Yes"
' FILE:
'     cFileSM.cls
'     Microsoft TPC-H Kit Ver. 1.00
'     Copyright Microsoft, 1999
'     All Rights Reserved
'
' PURPOSE:   Encapsulates functions to open a file
and write to it.
' Contact:   Reshma Tharamal
(resmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cFileSM."
Private mstrSource As String

Private mstrFileName As String
Private mintHFile As Integer
Private mstrFileHeader As String
Private mstrProjectName As String

```

```

Public Sub CloseFile()
    ' Close the file
    If mintHFile > 0 Then
        Call CloseFileSM(mstrFileName)
        mintHFile = 0
    End If
End Sub

Public Property Let ProjectName(ByVal vdata As String)
    ' An optional field - will be appended to the
file
    ' header string if specified

    Const strProjectHdr As String = "Project Name:"

    mstrProjectName = vdata
    mstrFileHeader = mstrFileHeader & _
        Space$(1) & strProjectHdr & Space$(1) & _
        gstrSQ & vdata & gstrSQ
End Property
Public Property Get ProjectName() As String
    ProjectName = mstrProjectName
End Property
Public Property Get FileName() As String
    FileName = mstrFileName
End Property
Public Property Let FileName(ByVal vdata As String)
    mstrFileName = vdata
End Property
Public Sub WriteLine(strMsg As String)
    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, False)
End Sub

Public Sub WriteField(strMsg As String)
    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, True)
End Sub

Private Sub WriteToFile(strMsg As String, _
    blnContinue As Boolean)
    ' Writes the passed in string to the file - the
' Continue flag indicates whether the next line
will
' be continued on the same line or printed on a
new one

    On Error GoTo WriteToFileErr

```

```

' Open the file if it hasn't been already
If mintHFile = 0 Then

    ' If the filename has not been initialized,
do not
    ' attempt to open it
    If mstrFileName <> gstrEmptyString Then

        mintHFile = OpenFileSM(mstrFileName)

        If mintHFile = 0 Then
            ' The Open File command failed for
some reason
            ' No point in trying to write the
file header
        Else
            ' Print a file header, if a header
string has been
            ' initialized
            If mstrFileHeader <> gstrEmptyString
Then
                Print #mintHFile,
                Print #mintHFile, mstrFileHeader
                Print #mintHFile,
            End If
        End If
    End If
End If

If mintHFile <> 0 Then
    If strMsg = gstrEmptyString Then
        Print #mintHFile,
    Else
        If blnContinue Then
            ' Write the message to the file -
continue
            ' all subsequent characters on the
same line
            Print #mintHFile, strMsg;
        Else
            ' Write the message to the file
            Print #mintHFile, strMsg
        End If
    End If
Else
    ' Display the string to the user instead of
' trying to write it to the file
    ' This could be the project error log that we
were
    ' trying to open! Play it safe and display
errors - do
    ' not try to log them.
    MsgBox strMsg, vbOKOnly
End If

Exit Sub

WriteToFileErr:
' Log the error code raised by Visual Basic
Call DisplayErrors(Errors)

' Display the string to the user instead of
' trying to write it to the file

```

```

MsgBox strMsg, vbOKOnly

End Sub
Public Property Let FileHeader(ByVal vdata As String)

    mstrFileHeader = vdata

End Property
Public Property Get FileHeader() As String

    FileHeader = mstrFileHeader

End Property

Private Sub Class_Terminate()

    ' Close the file opened by this instance
    Call CloseFile

End Sub

```

## **cGlobalStep.cl**

### **S**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cGlobalStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cGlobalStep.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a global step.
'            Implements the cStep class - carries
out initializations
'            and validations that are specific to
global steps.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Implements cStep

' Object variable to keep the reference in
Private mcStep As cStep

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String

```

```

Private Const mstrModuleName As String =
"cGlobalStep."

Private Sub cStep_AddAllIterators()

    Call mcStep.AddAllIterators

End Sub

Private Sub cStep_AddIterator(cItRecord As cIterator)

    Call mcStep.AddIterator(cItRecord)

End Sub

Private Property Let cStep_ArchivedFlag(ByVal RHS As
Boolean)

    mcStep.ArchivedFlag = RHS

End Property

Private Property Get cStep_ArchivedFlag() As Boolean

    cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property

Private Sub Class_Initialize()

    ' Create the object
    Set mcStep = New cStep

    ' Initialize the object with valid values for a
global step
    ' The global flag should be the first field to be
initialized
    ' since subsequent validations might try to check
if the
    ' step being created is global
    mcStep.GlobalFlag = True
    mcStep.StepType = gintGlobalStep

    ' A global step cannot have any sub-steps
associated with it
    ' Hence, it will always be at Step Level 0
    mcStep.ParentStepId = 0
    mcStep.ParentVersionNo = gstrMinVersion
    mcStep.StepLevel = 0

    ' The enabled flag must be False for all global
steps
    ' Global steps can be of two types
    ' a. Those that are run globally within a
workspace either
    ' before every step, after every step or
during the entire
    ' run, depending on the global run method
    ' b. Those that are not run globally, but qualify
to be either
    ' pre or post-execution steps for other steps
in the workspace.

```

```

    ' Whether or not such a step will be executed
depends on
    ' whether the step for which it is defined as
a pre/post
    ' step will be executed
    mcStep.EnabledFlag = False

    mcStep.ContinuationCriteria = gintNoOption
    mcStep.DegreeParallelism = gstrGlobalParallelism

End Sub
Private Sub Class_Terminate()

    ' Remove the step object
    Set mcStep = Nothing

End Sub

Private Sub cStep_Add()

    ' Call a private procedure to see if the step
text has been
    ' entered - since a global step actually executes
a step, entry
    ' of the text is mandatory
    Call StepTextOrFileEntered

    ' Call the Add method of the step class to carry
out the insert
    mcStep.Add

End Sub

Private Function cStep_Clone(Optional cCloneStep As
cStep) As cStep

    Dim cNewGlobal As cGlobalStep

    Set cNewGlobal = New cGlobalStep
    Set cStep_Clone = mcStep.Clone(cNewGlobal)

End Function

Private Property Get cStep_ContinuationCriteria() As
ContinuationCriteria

    cStep_ContinuationCriteria =
mcStep.ContinuationCriteria

End Property

Private Property Let cStep_ContinuationCriteria(ByVal
RHS As ContinuationCriteria)

    ' The continuation criteria field will always be
empty for a
    ' global step
    mcStep.ContinuationCriteria = 0

End Property

```



```

Private Property Let cStep_DegreeParallelism(ByVal
RHS As String)

    ' Will always be zero for a global step
    mcStep.DegreeParallelism = gstrGlobalParallelism

End Property

Private Property Get cStep_DegreeParallelism() As
String

    cStep_DegreeParallelism =
mcStep.DegreeParallelism

End Property

Private Sub cStep_DeleteIterator(cItRecord As
cIterator)

    Call mcStep.DeleteIterator(cItRecord)

End Sub

Private Sub cStep_Delete()

    mcStep.Delete

End Sub

Private Property Get cStep_EnabledFlag() As Boolean

    cStep_EnabledFlag = mcStep.EnabledFlag

End Property

Private Property Let cStep_EnabledFlag(ByVal RHS As
Boolean)

    ' The enabled flag must be False for all global
steps
    ' Global steps can be of two types
    ' a. Those that are run globally within a
workspace either
    '     before every step, after every step or
during the entire
    '     run, depending on the global run method
    ' b. Those that are not run globally, but qualify
to be either
    '     pre or post-execution steps for other steps
in the workspace.
    '     Whether or not such a step will be executed
depends on
    '     whether the step for which it is defined as
a pre/post
    '     step will be executed
    mcStep.EnabledFlag = False

End Property

Private Property Let cStep_ErrorFile(ByVal RHS As
String)

    mcStep.ErrorFile = RHS

```

```

End Property

Private Property Get cStep_ErrorFile() As String

    cStep_ErrorFile = mcStep.ErrorFile

End Property

Private Property Let cStep_ExecutionMechanism(ByVal
RHS As ExecutionMethod)

    ' Whether or not the Execution Mechanism is valid
will be
    ' checked by the Step class
    mcStep.ExecutionMechanism = RHS

End Property

Private Property Get cStep_ExecutionMechanism() As
ExecutionMethod

    cStep_ExecutionMechanism =
mcStep.ExecutionMechanism

End Property

Private Property Let cStep_FailureDetails(ByVal RHS
As String)

    ' Whether or not the Failure Details are valid
for the
    ' selected failure criteria will be checked by
the Step class
    mcStep.FailureDetails = RHS

End Property

Private Property Get cStep_FailureDetails() As String

    cStep_FailureDetails = mcStep.FailureDetails

End Property

Private Property Get cStep_GlobalFlag() As Boolean

    cStep_GlobalFlag = mcStep.GlobalFlag

End Property

Private Property Let cStep_GlobalFlag(ByVal RHS As
Boolean)

    ' Set the global flag to true
    mcStep.GlobalFlag = True

End Property

Private Function cStep_IncVersionX() As String

    cStep_IncVersionX = mcStep.IncVersionX

End Function

```

```

Private Function cStep_IncVersionY() As String

    cStep_IncVersionY = mcStep.IncVersionY

End Function

Private Property Let cStep_GlobalRunMethod(ByVal RHS
As Integer)

    ' Whether or not the Global Run Method is valid
for the step
    ' will be checked by the Step class
    mcStep.GlobalRunMethod = RHS

End Property

Private Property Get cStep_GlobalRunMethod() As
Integer

    cStep_GlobalRunMethod = mcStep.GlobalRunMethod

End Property

Private Property Get cStep_IndOperation() As
Operation

    cStep_IndOperation = mcStep.IndOperation

End Property

Private Property Let cStep_IndOperation(ByVal RHS As
Operation)

    mcStep.IndOperation = RHS

End Property

Private Sub cStep_InsertIterator(cItRecord As
cIterator)

    Call mcStep.InsertIterator(cItRecord)

End Sub

Private Function cStep_IsNewVersion() As Boolean

    cStep_IsNewVersion = mcStep.IsNewVersion

End Function

Private Function cStep_IteratorCount() As Long

    cStep_IteratorCount = mcStep.IteratorCount

End Function

Private Property Let cStep_IteratorName(ByVal RHS As
String)

    mcStep.IteratorName = RHS

End Property

```

```

Private Property Get cStep_IteratorName() As String
    cStep_IteratorName = mcStep.IteratorName
End Property

Private Function cStep_Iterators() As Variant
    cStep_Iterators = mcStep.Iterators
End Function

Private Sub cStep_LoadIterator(cItRecord As
cIterator)
    Call mcStep.LoadIterator(cItRecord)
End Sub

'Private Property Let cStep_LogFile(ByVal RHS As
String)
'
'    mcStep.LogFile = RHS
'
'End Property
'Private Property Get cStep_LogFile() As String
'
'    cStep_LogFile = mcStep.LogFile
'
'End Property

Private Sub cStep_ModifyIterator(cItRecord As
cIterator)
    Call mcStep.ModifyIterator(cItRecord)
End Sub

Private Sub cStep_Modify()
    ' Call a private procedure to see if the step
text has been
    ' entered - since a global step actually executes
a step,
    ' entry of the text is mandatory
    Call StepTextOrFileEntered

    ' Call the Modify method of the step class to
carry out the update
    mcStep.Modify
End Sub

Private Property Get cStep_NextStepId() As Long
    cStep_NextStepId = mcStep.NextStepId
End Property

Private Property Set cStep_NodeDB(RHS As
DAO.Database)

```

```

    Set mcStep.NodeDB = RHS
End Property

Private Property Get cStep_NodeDB() As DAO.Database
    Set cStep_NodeDB = mcStep.NodeDB
End Property

Private Function cStep_OldVersionNo() As String
    cStep_OldVersionNo = mcStep.OldVersionNo
End Function

Private Property Let cStep_OutputFile(ByVal RHS As
String)
    mcStep.OutputFile = RHS
End Property

Private Property Get cStep_OutputFile() As String
    cStep_OutputFile = mcStep.OutputFile
End Property

Private Property Let cStep_ParentStepId(ByVal RHS As
Long)
    ' A global step cannot have any sub-steps
associated with it
    ' Hence, the parent step id and parent version
number will be zero
    mcStep.ParentStepId = 0
End Property

Private Property Get cStep_ParentStepId() As Long
    cStep_ParentStepId = mcStep.ParentStepId
End Property

Private Property Let cStep_ParentVersionNo(ByVal RHS
As String)
    ' A global step cannot have any sub-steps
associated with it
    ' Hence, the parent step id and parent version
number will be zero
    mcStep.ParentVersionNo = gstrMinVersion
End Property

Private Property Get cStep_ParentVersionNo() As
String
    cStep_ParentVersionNo = mcStep.ParentVersionNo
End Property

```

```

Private Property Let cStep_Position(ByVal RHS As
Long)
    mcStep.Position = RHS
End Property

Private Property Get cStep_Position() As Long
    cStep_Position = mcStep.Position
End Property

Private Sub cStep_RemoveIterator(cItRecord As
cIterator)
    Call mcStep.RemoveIterator(cItRecord)
End Sub

Private Sub cStep_SaveIterators()
    Call mcStep.SaveIterators
End Sub

Private Property Let cStep_SequenceNo(ByVal RHS As
Integer)
    mcStep.SequenceNo = RHS
End Property

Private Property Get cStep_SequenceNo() As Integer
    cStep_SequenceNo = mcStep.SequenceNo
End Property

Private Property Let cStep_StepId(ByVal RHS As Long)
    mcStep.StepId = RHS
End Property

Private Property Get cStep_StepId() As Long
    cStep_StepId = mcStep.StepId
End Property

Private Property Let cStep_StepLabel(ByVal RHS As
String)
    mcStep.StepLabel = RHS
End Property

Private Property Get cStep_StepLabel() As String
    cStep_StepLabel = mcStep.StepLabel
End Property

```

```

Private Property Let cStep_StartDir(ByVal RHS As String)
    mcStep.StartDir = RHS
End Property

Private Property Get cStep_StartDir() As String
    cStep_StartDir = mcStep.StartDir
End Property

Private Property Let cStep_StepLevel(ByVal RHS As Integer)
    ' A global step cannot have any sub-steps associated with it
    ' Hence, it will always be at step level 0
    mcStep.StepLevel = 0
End Property

Private Property Get cStep_StepLevel() As Integer
    cStep_StepLevel = mcStep.StepLevel
End Property

Private Property Let cStep_StepText(ByVal RHS As String)
    mcStep.StepText = RHS
End Property

Private Property Get cStep_StepText() As String
    cStep_StepText = mcStep.StepText
End Property

Private Property Let cStep_StepTextFile(ByVal RHS As String)
    mcStep.StepTextFile = RHS
End Property

Private Property Get cStep_StepTextFile() As String
    cStep_StepTextFile = mcStep.StepTextFile
End Property

Private Property Let cStep_StepType(RHS As gintStepType)
    mcStep.StepType = gintGlobalStep
End Property

```

```

Private Property Get cStep_StepType() As gintStepType
    cStep_StepType = mcStep.StepType
End Property

Private Sub cStep_UnloadIterators()
    Call mcStep.UnloadIterators
End Sub

Private Sub cStep_UpdateIterator(cItRecord As cIterator)
    Call mcStep.UpdateIterator(cItRecord)
End Sub

Private Sub cStep_UpdateIteratorVersion()
    Call mcStep.UpdateIteratorVersion
End Sub

Private Sub cStep_Validate()
    ' The validate routines for each of the steps will
    ' carry out the specific validations for the type and
    ' call the generic validation routine

    On Error GoTo cStep_ValidateErr
    mstrSource = mstrModuleName & "cStep_Validate"

    ' Validations specific to global steps

    ' Check if the step text or a file name has been specified
    Call StepTextOrFileEntered

    ' The step level must be zero for all globals
    If mcStep.StepLevel <> 0 Then
        ShowError errStepLevelZeroForGlobal
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
        -
        gstrSource, _
        LoadResString(errValidateFailed)
    End If

    If mcStep.EnabledFlag Then
        ShowError errEnabledFlagFalseForGlobal
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
        -
        gstrSource, _
        LoadResString(errValidateFailed)
    End If

    If mcStep.DegreeParallelism > 0 Then
        ShowError errDegParallelismNullForGlobal
        On Error GoTo 0

```

```

        Err.Raise vbObjectError + errValidateFailed,
        -
        gstrSource, _
        LoadResString(errValidateFailed)
    End If

    If mcStep.ContinuationCriteria > 0 Then
        ShowError errContCriteriaNullForGlobal
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
        -
        gstrSource, _
        LoadResString(errValidateFailed)
    End If

    mcStep.Validate

    Exit Sub

cStep_ValidateErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "cStep_Validate"
    On Error GoTo 0
    Err.Raise vbObjectError + errValidateFailed, _
    mstrSource, _
    LoadResString(errValidateFailed)
End Sub

Private Sub StepTextOrFileEntered()
    ' Checks if either the step text or the name of the file containing
    ' the text has been entered
    ' If both of them are null or both of them are not null,
    ' the global step is invalid and an error is raised

    If StringEmpty(mcStep.StepText) And StringEmpty(mcStep.StepTextFile) Then
        ShowError errStepTextAndFileNull
        On Error GoTo 0
        Err.Raise vbObjectError + errStepTextAndFileNull, _
        mstrSource,
        LoadResString(errStepTextAndFileNull)
    ElseIf Not StringEmpty(mcStep.StepText) And Not StringEmpty(mcStep.StepTextFile) Then
        ShowError errStepTextOrFile
        On Error GoTo 0
        Err.Raise vbObjectError + errStepTextOrFile,
        -
        mstrSource,
        LoadResString(errStepTextOrFile)
    End If

End Sub

Private Property Let cStep_VersionNo(ByVal RHS As String)
    mcStep.VersionNo = RHS
End Property

```

```

Private Property Get cStep_VersionNo() As String

    cStep_VersionNo = mcStep.VersionNo

End Property

Private Property Let cStep_WorkspaceId(ByVal RHS As Long)

    mcStep.WorkspaceId = RHS

End Property

Private Property Get cStep_WorkspaceId() As Long

    cStep_WorkspaceId = mcStep.WorkspaceId

End Property

```

## **clnstance.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cInstance"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cInstance.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of an instance.
'           An instance is created when a step is
executed for a
'           particular iterator value (if
applicable) at 'run' time.
'           Contains functions to determine if an
instance is running,
'           complete, and so on.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cInstance."
Private mstrSource As String

Private mcStep As cStep
Public Key As String ' Node key for the step being
executed
Public InstanceId As Long
Public ParentInstanceId As Long ' The parent instance
Private mblnNoMoreToStart As Boolean
Private mblnComplete As Boolean

```

```

Public StartTime As Currency
Public EndTime As Currency
Public ElapsedTime As Currency
Private mintStatus As InstanceStatus
Public DegreeParallelism As Integer
Private mcIterators As cRunCollt

' A collection of all the sub-steps for this step
Private mcSubSteps As cSubSteps
Public Sub UpdateStartTime(lStepId As Long, Optional
ByVal StartTm As Currency = gdtmEmpty, _
    Optional ByVal EndTm As Currency = gdtmEmpty,
    Optional ByVal Elapsed As Currency = 0)
    ' We do not maintain start and end timestamps for
the constraint
    ' of a step. Hence we check if the process that
just started/
    ' terminated is the worker step that is being
executed. If so,
    ' we update the start/end time and status on the
instance record.

    BugAssert (StartTm <> gdtmEmpty) Or (EndTm <>
gdtmEmpty), "Mandatory parameter missing."

    ' Make sure that we are executing the actual step
and not
    ' a pre or post-execution constraint
If mcStep.StepId = lStepId Then
    If StartTm <> 0 Then
        StartTime = StartTm
        mintStatus = gintRunning
    Else
        EndTime = EndTm
        ElapsedTime = Elapsed
        mintStatus = gintComplete
    End If
End If

End Sub
Public Function ValidForIteration(cParentInstance As
cInstance, _
    ByVal intConsType As ConstraintType) As
Boolean
    ' Returns true if the instance passed in is the
first or
    ' last iteration for the step, depending on the
constraint type

    Dim cSubStepRec As cSubStep
    Dim vntIterators As Variant

    On Error GoTo ValidForIterationErr

    If cParentInstance Is Nothing Then
        ' This will only be true for the dummy
instance, which
        ' cannot have any iterators defined for it
ValidForIteration = True
        Exit Function
    End If

```

```

        vntIterators = mcStep.Iterators

        If Not StringEmpty(mcStep.IteratorName) And Not
IsEmpty(vntIterators) Then
            Set cSubStepRec =
cParentInstance.QuerySubStep(mcStep.StepId)

            If intConsType = gintPreStep Then
                ' Pre-execution constraints will only be
executed
                ' before the first iteration
                If cSubStepRec.LastIterator.IteratorType
= gintValue Then
                    ValidForIteration =
(cSubStepRec.LastIterator.Sequence = _
                        gintMinIteratorSequence)
                Else
                    ValidForIteration =
(cSubStepRec.LastIterator.Value = _
                        cSubStepRec.LastIterator.RangeFrom)
                End If
            Else
                ' Post-execution constraints will only be
executed
                ' after the last iteration - check if
there are any
                ' pending iterations
                ValidForIteration =
cSubStepRec.NextIteration(mcStep) Is Nothing
            End If
        Else
            ValidForIteration = True
        End If

        Exit Function

ValidForIterationErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName & "ValidForIteration"
    Err.Raise vbObjectError + errExecInstanceFailed,
        _
        mstrSource,
        LoadResString(errExecInstanceFailed)

End Function

Public Sub CreateSubStep(cSubStepDtls As cStep,
RunParams As cArrParameters)

    Dim cNewSubStep As cSubStep

    On Error GoTo CreateSubStepErr

    Set cNewSubStep = New cSubStep

    cNewSubStep.StepId = cSubStepDtls.StepId
    cNewSubStep.TasksComplete = 0
    cNewSubStep.TasksRunning = 0

```

```

' Initialize the iterator for the instance
Set cNewSubStep.LastIterator = New cRunItDetails
Call cNewSubStep.InitializeIt(cSubStepDtIs,
RunParams)

' Add add the substep to the collection
mcSubSteps.Add cNewSubStep

Set cNewSubStep = Nothing

Exit Sub

CreateSubStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "CreateSubStep"
Err.Raise vbObjectError + errProgramError,
mstrSource, _
LoadResString(errProgramError)

End Sub

Public Function QuerySubStep(ByVal SubStepId As Long)
As cSubStep
' Retrieves the sub-step record for the passed in
sub-step id

Dim lngIndex As Long

On Error GoTo QuerySubStepErr

' Find the sub-step node with the matching step
id
For lngIndex = 0 To mcSubSteps.Count - 1
If mcSubSteps(lngIndex).StepId = SubStepId
Then
Set QuerySubStep = mcSubSteps(lngIndex)
Exit For
End If
Next lngIndex

Exit Function

QuerySubStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "QuerySubStep"
Err.Raise vbObjectError + errNavInstancesFailed,
_
mstrSource,
LoadResString(errNavInstancesFailed)

End Function
Public Property Let AllStarted(ByVal vdata As
Boolean)

'bugmessage "Set All Started to " & vData & " for
: " & _
mstrKey

mblnNoMoreToStart = vdata

```

```

End Property
Public Property Get AllStarted() As Boolean

AllStarted = mblnNoMoreToStart

End Property
Public Property Let AllComplete(ByVal vdata As
Boolean)

'bugmessage "Set All Complete to " & vData & "
for : " & _
mstrKey

mblnComplete = vdata

End Property

Public Property Get AllComplete() As Boolean

AllComplete = mblnComplete

End Property

Public Sub ChildExecuted(mlngStepId As Long)
' This procedure is called when a sub-step
executes.

Dim lngIndex As Long

On Error GoTo ChildExecutedErr

BugAssert mcStep.StepType = gintManagerStep

For lngIndex = 0 To mcSubSteps.Count - 1
If mcSubSteps(lngIndex).StepId = mlngStepId
Then
mcSubSteps(lngIndex).TasksRunning = _
mcSubSteps(lngIndex).TasksRunning
+ 1
'
' BugMessage "Tasks Running for Step Id :
" & _
'
CStr(mcSubSteps(lngIndex).StepId) & _
" Instance Id: " & InstanceId &
_
" = " &
mcSubSteps(lngIndex).TasksRunning
Exit For
End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
' The child step wasn't found - raise an
error
On Error GoTo 0
Err.Raise vbObjectError + errInvalidChild,
mstrModuleName, _
LoadResString(errInvalidChild)

End If

Exit Sub

```

```

ChildExecutedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInstanceOpFailed,
mstrModuleName & "ChildExecuted", _
LoadResString(errInstanceOpFailed)

End Sub
Public Sub ChildTerminated(mlngStepId As Long)
' This procedure is called when any sub-step
process
' terminates. Note: The TasksComplete field will
be
' updated only when all the instances for a sub-
step
' complete execution.
Dim lngIndex As Long

On Error GoTo ChildTerminatedErr

BugAssert mcStep.StepType = gintManagerStep

For lngIndex = 0 To mcSubSteps.Count - 1

If mcSubSteps(lngIndex).StepId = mlngStepId
Then
mcSubSteps(lngIndex).TasksRunning = _
mcSubSteps(lngIndex).TasksRunning
- 1
'
' BugMessage "Tasks Running for Step Id :
" & _
'
CStr(mcSubSteps(lngIndex).StepId) & _
" Instance Id: " & InstanceId &
_
" = " &
mcSubSteps(lngIndex).TasksRunning

BugAssert
mcSubSteps(lngIndex).TasksRunning >= 0, _
"Tasks running for " &
CStr(mlngStepId) & _
" Instance Id " & InstanceId &
"
is less than 0."
Exit For
End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
' The child step wasn't found - raise an
error
On Error GoTo 0
Err.Raise errInvalidChild, mstrModuleName &
"ChildTerminated", _
LoadResString(errInvalidChild)

End If

Exit Sub

ChildTerminatedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)

```

```

    On Error GoTo 0
    mstrSource = mstrModuleName & "ChildTerminated"
    Err.Raise vbObjectError + errInstanceOpFailed,
mstrSource, _
        LoadResString(errInstanceOpFailed)

End Sub
Public Sub ChildCompleted(mlngStepId As Long)
' This procedure is called when any a sub-step
completes
' execution. Note: The TasksComplete field will
be
' incremented.
Dim lngIndex As Long

On Error GoTo ChildCompletedErr

BugAssert mcStep.StepType = gintManagerStep

For lngIndex = 0 To mcSubSteps.Count - 1
BugAssert mcSubSteps(lngIndex).TasksComplete
>= 0, _
    "Tasks complete for " &
CStr(mcSubSteps(lngIndex).StepId) & _
    " Instance Id " & InstanceId & " is
less than 0."

    If mcSubSteps(lngIndex).StepId = mlngStepId
Then
        mcSubSteps(lngIndex).TasksComplete = _
mcSubSteps(lngIndex).TasksComplete + 1
        BugMessage "Tasks Complete for Step Id :
" & _
        CStr(mcSubSteps(lngIndex).StepId) & _
        " Instance Id: " & InstanceId &
_
        " = " &
mcSubSteps(lngIndex).TasksComplete
        Exit For
    End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
' The child step wasn't found - raise an
error
On Error GoTo 0
Err.Raise errInvalidChild, mstrModuleName, _
    LoadResString(errInvalidChild)

End If

Exit Sub

ChildCompletedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInstanceOpFailed,
mstrModuleName & "ChildCompleted", _
    LoadResString(errInstanceOpFailed)

End Sub

```

```

Public Sub ChildDeleted(mlngStepId As Long)
' This procedure is called when a sub-step needs
to be re-executed
' Note: The TasksComplete field is decremented.
We needn't worry about
' the TasksRunning field since no steps are
currently running.
Dim lngIndex As Long

On Error GoTo ChildDeletedErr

BugAssert mcStep.StepType = gintManagerStep

For lngIndex = 0 To mcSubSteps.Count - 1

    If mcSubSteps(lngIndex).StepId = mlngStepId
Then
        mcSubSteps(lngIndex).TasksRunning = _
mcSubSteps(lngIndex).TasksRunning
- 1

        BugAssert
mcSubSteps(lngIndex).TasksRunning >= 0, _
        "Tasks running for " &
CStr(mcSubSteps(lngIndex).StepId) & _
        " Instance Id " & InstanceId & "
is less than 0."
        Exit For
    End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
' The child step wasn't found - raise an
error
On Error GoTo 0
Err.Raise errInvalidChild, mstrModuleName, _
    LoadResString(errInvalidChild)

End If

Exit Sub

ChildDeletedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInstanceOpFailed,
mstrModuleName & "ChildDeleted", _
    LoadResString(errInstanceOpFailed)

End Sub

Private Sub RaiseErrForWorker()

    If mcStep.StepType <> gintManagerStep Then
On Error GoTo 0
mstrSource = mstrModuleName &
"RaiseErrForWorker"
Err.Raise vbObjectError +
errInvalidForWorker, _
mstrSource, _
    LoadResString(errInvalidForWorker)

    End If

End Sub

```

```

Public Property Get Step() As cStep

    Set Step = mcStep

End Property
Public Property Get Iterators() As cRunColIt

    Set Iterators = mcIterators

End Property
Public Property Get SubSteps() As cSubSteps

    Call RaiseErrForWorker

    Set SubSteps = mcSubSteps

End Property
Public Property Set Step(cRunStep As cStep)

    Set mcStep = cRunStep

End Property

Public Property Set Iterators(cIts As cRunColIt)

    Set mcIterators = cIts

End Property
Public Property Get IsPending() As Boolean
' Returns true if the step has any substeps that
need
' execution
Dim lngIndex As Long
Dim lngRunning As Long

    Call RaiseErrForWorker

    If Not mblnComplete And Not mblnNoMoreToStart
Then
        ' Get a count of all the substeps that are
already being
        ' executed
        lngRunning = 0
        For lngIndex = 0 To mcSubSteps.Count - 1
            lngRunning = lngRunning +
mcSubSteps(lngIndex).TasksRunning
        Next lngIndex

        IsPending = (lngRunning < DegreeParallelism)
    Else
        ' This should be sufficient to prove that
there r no
        ' more sub-steps to be executed.
        ' mblnComplete: Handles the case where all
steps have
        ' been executed
        ' mblnNoMoreToStart: Handles the case where
the step
        ' has a degree of parallelism greater than
the total
        ' number of sub-steps available to execute
        IsPending = False
    End If

```

```

End If
End Property
Public Property Get IsRunning() As Boolean
    ' Returns true if the any one of the substeps is
    still
    ' executing
    Dim lngIndex As Long

    Call RaiseErrForWorker

    IsRunning = False

    ' If a substep has no currently executing tasks
    and
    ' the tasks completed is greater than zero, then
    we can
    ' assume that it has completed execution
    (otherwise we
    ' would've run a new task the moment one
    completed!)
    For lngIndex = 0 To mcSubSteps.Count - 1
        If mcSubSteps(lngIndex).TasksRunning > 0 Then
            IsRunning = True
            Exit For
        End If
    Next lngIndex
End Property
Public Property Get TotalRunning() As Long
    ' Returns the total number of substeps that are
    executing
    Dim lngTotalProcesses As Long
    Dim lngIndex As Long

    Call RaiseErrForWorker

    lngTotalProcesses = 0
    For lngIndex = 0 To mcSubSteps.Count - 1
        BugAssert mcSubSteps(lngIndex).TasksRunning
    >= 0, _
        "Tasks running for " &
    CStr(mcSubSteps(lngIndex).StepId) & _
        " is less than 0."
        lngTotalProcesses = lngTotalProcesses +
    mcSubSteps(lngIndex).TasksRunning
    Next lngIndex

    TotalRunning = lngTotalProcesses
End Property
Public Property Get RunningForStep(lngSubStepId As
Long) As Long
    ' Returns the total number of instances of the
    substep
    ' that are executing
    Dim lngIndex As Long

    Call RaiseErrForWorker

    For lngIndex = 0 To mcSubSteps.Count - 1
        BugAssert mcSubSteps(lngIndex).TasksRunning
    >= 0, _

```

```

        "Tasks running for " &
    CStr(mcSubSteps(lngIndex).StepId) & _
        " is less than 0."
    Then
        If mcSubSteps(lngIndex).StepId = lngSubStepId
        Then
            RunningForStep =
    mcSubSteps(lngIndex).TasksRunning
            Exit For
        End If
        Next lngIndex

        If lngIndex > mcSubSteps.Count - 1 Then
            ' The child step wasn't found - raise an
            error
            On Error GoTo 0
            Err.Raise errInvalidChild, mstrSource, _
                LoadResString(errInvalidChild)
        End If
    End Property

    Public Property Let Status(ByVal vdata As
    InstanceStatus)

        mintStatus = vdata
    End Property

    Public Property Get Status() As InstanceStatus

        Status = mintStatus
    End Property

    Private Sub Class_Initialize()

        Set mcSubSteps = New cSubSteps

        mblnNoMoreToStart = False
        mblnComplete = False
        StartTime = gdtmEmpty
        EndTime = gdtmEmpty
    End Sub

    Private Sub Class_Terminate()

        mcSubSteps.Clear
        Set mcSubSteps = Nothing
    End Sub

```

---

***clInstances.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cInstances"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False

```

```

Attribute VB_Exposed = False
' FILE: cInstances.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
'
' PURPOSE: Implements a collection of cInstance
objects.
' Type-safe wrapper around cVector.
' Also contains additional functions to
query an instance, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cInstance."
Private mstrSource As String

Private mcInstances As cVector

Public Function QueryInstance(ByVal InstanceId As
Long) As cInstance
    ' Retrieves the record for the passed in instance
    from
    ' the collection

    Dim lngIndex As Long

    On Error GoTo QueryInstanceErr

    ' Check for valid values of the instance id
    If InstanceId > 0 Then
        ' Find the run node with the matching step id
        For lngIndex = 0 To Count() - 1
            If mcInstances(lngIndex).InstanceId =
InstanceId Then
                Set QueryInstance =
    mcInstances(lngIndex)
                Exit For
            End If
        Next lngIndex

        If lngIndex > mcInstances.Count - 1 Then
            On Error GoTo 0
            Err.Raise vbObjectError + errQueryFailed,
    mstrSource, _
                LoadResString(errQueryFailed)
        End If
    Else
        On Error GoTo 0
        Err.Raise vbObjectError + errQueryFailed,
    mstrSource, _
                LoadResString(errQueryFailed)
    End If

    Exit Function
QueryInstanceErr:
    ' Log the error code raised by Visual Basic

```

```

    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName & "QueryInstance"
    Err.Raise vbObjectError + errQueryFailed, _
        mstrSource, LoadResString(errQueryFailed)
End Function

Public Function QueryPendingInstance(ByVal
ParentInstanceId As Long, _
    ByVal lngSubStepId As Long) As cInstance
    ' Retrieves a pending instance for the passed in
    substep
    ' and the given parent instance id.

    Dim lngIndex As Long

    On Error GoTo QueryPendingInstanceErr

    ' Find the run node with the matching step id
    For lngIndex = 0 To Count() - 1
        If mcInstances(lngIndex).ParentInstanceId =
ParentInstanceId And _
            mcInstances(lngIndex).Step.StepId =
lngSubStepId Then
            ' Put in a separate if condition since
            the IsPending
            ' property is valid only for manager
            steps. If the
            ' calling procedure does not pass a
            manager step
            ' identifier, the procedure will error
            out.
            If mcInstances(lngIndex).IsPending Then
                Set QueryPendingInstance =
                mcInstances(lngIndex)
            Exit For
        End If
    End If
    Next lngIndex

    Exit Function

QueryPendingInstanceErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
"QueryPendingInstance"
    Err.Raise vbObjectError + errQueryFailed, _
        mstrSource, LoadResString(errQueryFailed)
End Function

Public Function InstanceAborted(cSubStepRec As
cSubStep) As Boolean

    Dim lIndex As Long

    InstanceAborted = False

    For lIndex = 0 To Count() - 1
        If mcInstances(lIndex).Step.StepId =
cSubStepRec.StepId And _

```

```

        mcInstances(lIndex).Status =
gintAborted Then
            InstanceAborted = True
            Exit For
        End If
    Next lIndex

End Function

Public Function
CompletedInstanceExists(lParentInstance As Long, _
    cSubStepDtIs As cStep) As Boolean
    ' Checks if there is a completed instance of the
    passed in step

    Dim lngIndex As Long

    CompletedInstanceExists = False

    If cSubStepDtIs.StepType = gintManagerStep Then
        ' Find the run node with the matching step id
        For lngIndex = 0 To Count() - 1
            If mcInstances(lngIndex).ParentInstanceId
= lParentInstance And _
                mcInstances(lngIndex).Step.StepId
= cSubStepDtIs.StepId Then
                ' Put in a separate if condition
                since the IsPending
                ' property is valid only for manager
                steps.
                BugAssert (Not
                mcInstances(lngIndex).IsPending), "Pending instance
                exists!"

                CompletedInstanceExists = True
            Exit Function
        End If
    End If
    Next lngIndex

    End If

End Function

Public Sub Add(ByVal objItem As cInstance)

    mcInstances.Add objItem

End Sub

Public Sub Clear()

    mcInstances.Clear

End Sub

Public Function Count() As Long

    Count = mcInstances.Count

End Function

Public Function Delete(ByVal lngDelete As Long) As
cInstance

```

```

        Set Delete = mcInstances.Delete(lngDelete)
End Function

Public Property Set Item(Optional ByVal Position As
Long, _
    RHS As cInstance)

    If Position = -1 Then
        Position = 0
    End If
    Set mcInstances(Position) = RHS

End Property

Public Property Get Item(Optional ByVal Position As
Long = -1) _
    As cInstance
    Attribute Item.VB_UserMemId = 0

    If Position = -1 Then
        Position = 0
    End If
    Set Item = mcInstances.Item(Position)

End Property

Private Sub Class_Initialize()

    Set mcInstances = New cVector

End Sub

Private Sub Class_Terminate()

    Set mcInstances = Nothing

End Sub

```

## ***cIterator.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cIterator"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cIterator.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
'

```



```

' PURPOSE:      Encapsulates the properties and
methods of an iterator.
'             Contains functions to insert, update
and delete    iterator_values records from the
database.
' Contact:     Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Implements cNode

' Module level variables to store the property values
Private mintType As Integer
Private mintSequenceNo As Integer
Private mstrValue As String
Private mdbIteratorDB As Database
Private mintOperation As Integer
Private mlngPosition As Long

Private Const mstrModuleName As String = "cIterator."
Private mstrSource As String

Public Enum ValueType
    gintFrom = 1
    gintTo
    gintStep
    gintValue
End Enum
Public Property Get Value() As String
    Value = mstrValue
End Property
Public Property Let Value(ByVal vdata As String)
    mstrValue = vdata
End Property

Public Property Get IndOperation() As Operation
    IndOperation = mintOperation
End Property
Public Property Let IndOperation(ByVal vdata As
Operation)
    On Error GoTo IndOperationErr
    mstrSource = mstrModuleName & "IndOperation"

' The valid operations are define in the
cOperations
' class. Check if the operation is valid
Select Case vdata
    Case QueryOp, InsertOp, UpdateOp, DeleteOp
        mintOperation = vdata

    Case Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidOperation, _

```

```

mstrSource,
LoadResString(errInvalidOperation)
End Select

Exit Property

IndOperationErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "IndOperation"
    On Error GoTo 0
    Err.Raise vbObjectError + errLetOperationFailed,
    -
    mstrSource,
LoadResString(errLetOperationFailed)
End Property

Public Function Clone() As cIterator
    ' Creates a copy of a given Iterator

    Dim cItClone As cIterator

    On Error GoTo CloneErr

    Set cItClone = New cIterator

    ' Copy all the iterator properties to the newly
    ' created object
    cItClone.IteratorType = mintType
    cItClone.SequenceNo = mintSequenceNo
    cItClone.IndOperation = mintOperation
    cItClone.Value = mstrValue

    ' And set the return value to the newly created
    Iterator
    Set Clone = cItClone

    Exit Function

CloneErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Clone"
    On Error GoTo 0
    Err.Raise vbObjectError + errCloneFailed, _
    mstrSource, LoadResString(errCloneFailed)
End Function
Public Property Get SequenceNo() As Integer
    SequenceNo = mintSequenceNo
End Property

Public Property Let SequenceNo(ByVal vdata As
Integer)
    mintSequenceNo = vdata
End Property

Public Sub Add(ByVal lngStepId As Long, _
strVersion As String)
    ' Inserts a new iterator values record into the
database

```

```

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddIteratorErr

' First check if the database object is valid
Call CheckDB

' Create a temporary querydef object
strInsert = "insert into iterator_values " & _
"(" & step_id, version_no, type, " & _
" iterator_value, sequence_no )" & _
" values ( [st_id], [ver_no], [it_tpy], "
& _
" [it_val], [seq_no] )"

Set qy =
mdbIteratorDB.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy, lngStepId, strVersion)

qy.Execute dbFailOnError
qy.Close

Exit Sub

AddIteratorErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "AddIterator"
    On Error GoTo 0
    Err.Raise vbObjectError +
errInsertIteratorFailed, _
    mstrSource, _
    LoadResString(errInsertIteratorFailed)
End Sub

Private Sub AssignParameters(qyExec As DAO.QueryDef,
ByVal lngStepId As Long, _
strVersion As String)
    ' Assigns values to the parameters in the
querydef object
    ' The parameter names are cryptic to make them
different
    ' from the field names. When the parameter names
are
    ' the same as the field names, parameters in the
where
    ' clause do not get created.

    Dim prmParam As DAO.Parameter

    On Error GoTo AssignParametersErr
    mstrSource = mstrModuleName & "AssignParameters"

    For Each prmParam In qyExec.Parameters
        Select Case prmParam.Name
            Case "[st_id]"
                prmParam.Value = lngStepId

            Case "[ver_no]"

```

```

        prmParam.Value = strVersion
    Case "[it_typ]"
        prmParam.Value = mintType
    Case "[it_val]"
        prmParam.Value = mstrValue
    Case "[seq_no]"
        prmParam.Value = mintSequenceNo
    Case Else
        ' Write the parameter name that is
        faulty
        WriteError errInvalidParameter,
mstrSource, _
                prmParam.Name
        On Error GoTo 0
        Err.Raise errInvalidParameter,
mstrSource, _

LoadResString(errInvalidParameter)
    End Select
    Next prmParam

    Exit Sub

AssignParametersErr:
    mstrSource = mstrModuleName & "AssignParameters"
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
        mstrSource,
LoadResString(errAssignParametersFailed)

End Sub
Private Sub CheckDB()
    ' Check if the database object has been
    initialized

    If mdbaIteratorDB Is Nothing Then
        ShowError errInvalidDB
        On Error GoTo 0
        Err.Raise vbObjectError + errInvalidDB, _
            mstrModuleName,
LoadResString(errInvalidDB)
        End If
    End Sub

Public Sub Delete(ByVal lngStepId As Long, _
    strVersion As String)
    ' Deletes the step iterator record from the
    database

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteIteratorErr
    mstrSource = mstrModuleName & "DeleteIterator"

```

```

    ' There can be multiple iterators for a step.
    ' However the values that an iterator for a step
    can
    ' assume will be unique, meaning that a
    combination of
    ' the iterator_id and value will be unique.
    strDelete = "delete from iterator_values " & _
        " where step_id = [st_id]" & _
        " and version_no = [ver_no]" & _
        " and iterator_value = [it_val]"

    Set qy =
mdbaIteratorDB.CreateQueryDef(gstrEmptyString,
strDelete)

    Call AssignParameters(qy, lngStepId, strVersion)
    qy.Execute dbFailOnError

    qy.Close

    Exit Sub

DeleteIteratorErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "DeleteIterator"
    On Error GoTo 0
    Err.Raise vbObjectError +
errDeleteIteratorFailed, _
        mstrSource, _
LoadResString(errDeleteIteratorFailed)

End Sub
Public Sub Update(ByVal lngStepId As Long, strVersion
As String)
    ' Updates the sequence no of the step iterator
    record
    ' in the database

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo UpdateErr

    ' First check if the database object is valid
    Call CheckDB

    If mintType = gintValue Then
        ' If the iterator is of type value, only the
        sequence of the values can get updated
        strUpdate = "Update iterator_values " & _
            " set sequence_no = [seq_no]" & _
            " where step_id = [st_id]" & _
            " and version_no = [ver_no]" & _
            " and iterator_value = [it_val]"

    Else
        ' If the iterator is of type range, only the
        values can get updated
        strUpdate = "Update iterator_values " & _
            " set iterator_value = [it_val]" & _
            " where step_id = [st_id]" & _
            " and version_no = [ver_no]" & _
            " and type = [it_typ]"

    End If

```

```

    Set qy =
mdbaIteratorDB.CreateQueryDef(gstrEmptyString,
strUpdate)

    ' Call a procedure to assign the parameter values
    to the
    ' querydef object
    Call AssignParameters(qy, lngStepId, strVersion)
    qy.Execute dbFailOnError

    qy.Close

    Exit Sub

UpdateErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Update"
    On Error GoTo 0
    Err.Raise vbObjectError +
errUpdateConstraintFailed, _
        mstrSource, _
LoadResString(errUpdateConstraintFailed)

End Sub
Public Property Set NodeDB(vdata As Database)

    Set mdbaIteratorDB = vdata

End Property

Public Property Get NodeDB() As Database

    Set NodeDB = mdbaIteratorDB

End Property

Public Property Get Position() As Long

    Position = mlngPosition

End Property
Public Property Let Position(ByVal vdata As Long)

    mlngPosition = vdata

End Property

Public Property Let IteratorType(ByVal vdata As
ValueType)

    On Error GoTo TypeError
    mstrSource = mstrModuleName & "Type"

    ' These constants have been defined in the
    enumeration,
    ' Type, which is exposed
    Select Case vdata
        Case gintFrom, gintTo, gintStep, gintValue
            mintType = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError + errTypeInvalid,
_

```

```

        mstrSource,
LoadResString(errTypeInvalid)
End Select

Exit Property

TypeErr:
LogErrors Errors
mstrSource = mstrModuleName & "Type"
On Error GoTo 0
Err.Raise vbObjectError + errTypeInvalid, _
    mstrSource, LoadResString(errTypeInvalid)

End Property

Public Property Get IteratorType() As ValueType

    IteratorType = mintType

End Property

Public Sub Validate()

    ' No validations necessary for the iterator class

End Sub

Private Sub Class_Initialize()

    ' Initialize the operation indicator variable to
Query
    ' It will be modified later by the collection
class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp

End Sub

Private Property Let cNode_IndOperation(ByVal vdata As
Operation)

    On Error GoTo IndOperationErr
mstrSource = mstrModuleName & "IndOperation"

    ' The valid operations are define in the
cOperations
    ' class. Check if the operation is valid
Select Case vdata
    Case QueryOp, InsertOp, UpdateOp, DeleteOp
        mintOperation = vdata

    Case Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidOperation, _
            mstrSource,
LoadResString(errInvalidOperation)
    End Select

Exit Property

IndOperationErr:
LogErrors Errors

```

```

        mstrSource = mstrModuleName & "IndOperation"
On Error GoTo 0
Err.Raise vbObjectError + errLetOperationFailed,

-
        mstrSource,
LoadResString(errLetOperationFailed)

End Property

Private Property Get cNode_IndOperation() As
Operation

    IndOperation = mintOperation

End Property

Private Property Set cNode_NodeDB(RHS As
DAO.Database)

    Set mdsIteratorDB = RHS

End Property

Private Property Get cNode_NodeDB() As DAO.Database

    Set cNode_NodeDB = mdsIteratorDB

End Property

Private Property Let cNode_Position(ByVal vdata As
Long)

    mlngPosition = vdata

End Property

Private Property Get cNode_Position() As Long

    cNode_Position = mlngPosition

End Property

Private Sub cNode_Validate()

    ' No validations necessary for the iterator class

End Sub

Private Property Let cNode_Value(ByVal vdata As
String)

    mstrValue = vdata

End Property

Private Property Get cNode_Value() As String

    Value = mstrValue

```

End Property

## ***cManager.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cManager"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:          cManager.cls
'               Microsoft TPC-H Kit Ver. 1.00
'               Copyright Microsoft, 1999
'               All Rights Reserved
'
' PURPOSE:      Encapsulates the properties and
methods of a manager step.
'               Implements the cStep class - carries
out initializations
'               and validations that are specific to
manager steps.
' Contact:      Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Implements cStep

' Object variable to keep the step reference in
Private mcStep As cStep

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cManager."
Private Sub cStep_AddAllIterators()

    Call mcStep.AddAllIterators

End Sub

Private Property Let cStep_StartDir(ByVal RHS As
String)

    mcStep.StartDir = RHS

End Property

Private Property Get cStep_StartDir() As String

    cStep_StartDir = mcStep.StartDir

End Property
Private Sub cStep_Delete()

    Call mcStep.Delete

End Sub

```

```

Private Property Set cStep_NodeDB(RHS As
DAO.Database)

    Set mcStep.NodeDB = RHS

End Property

Private Function cStep_IncVersionY() As String

    cStep_IncVersionY = mcStep.IncVersionY

End Function

Private Function cStep_IsNewVersion() As Boolean
cStep_IsNewVersion = mcStep.IsNewVersion
End Function

Private Function cStep_OldVersionNo() As String
cStep_OldVersionNo = mcStep.OldVersionNo
End Function

Private Function cStep_IncVersionX() As String

    cStep_IncVersionX = mcStep.IncVersionX

End Function

Private Sub cStep_UpdateIteratorVersion()

    Call mcStep.UpdateIteratorVersion

End Sub

Private Function cStep_IteratorCount() As Long

    cStep_IteratorCount = mcStep.IteratorCount

End Function

Private Sub cStep_UnloadIterators()

    Call mcStep.UnloadIterators

End Sub

Private Sub cStep_DeleteIterator(cItRecord As
cIterator)

    Call mcStep.DeleteIterator(cItRecord)

End Sub

Private Property Get cStep_IteratorName() As String

    cStep_IteratorName = mcStep.IteratorName

End Property

Private Property Let cStep_IteratorName(ByVal RHS As
String)

    mcStep.IteratorName = RHS

End Property

Private Sub cStep_SaveIterators()

```

```

    Call mcStep.SaveIterators

End Sub

Private Sub cStep_LoadIterator(cItRecord As
cIterator)

    Call mcStep.LoadIterator(cItRecord)

End Sub

Private Property Let cStep_Position(ByVal RHS As
Long)

    mcStep.Position = RHS

End Property

Private Sub cStep_InsertIterator(cItRecord As
cIterator)

    Call mcStep.InsertIterator(cItRecord)

End Sub

Private Function cStep_Iterators() As Variant

    cStep_Iterators = mcStep.Iterators

End Function

Private Sub cStep_ModifyIterator(cItRecord As
cIterator)

    Call mcStep.ModifyIterator(cItRecord)

End Sub

Private Sub cStep_RemoveIterator(cItRecord As
cIterator)

    Call mcStep.RemoveIterator(cItRecord)

End Sub

Private Sub cStep_UpdateIterator(cItRecord As
cIterator)

    Call mcStep.UpdateIterator(cItRecord)

End Sub

Private Sub cStep_AddIterator(cItRecord As cIterator)

    Call mcStep.AddIterator(cItRecord)

End Sub

Private Property Get cStep_Position() As Long

    cStep_Position = mcStep.Position

End Property

Private Function cStep_Clone(Optional cCloneStep As
cStep) As cStep

    Dim cNewManager As cManager

    Set cNewManager = New cManager

```

```

    Set cStep_Clone = mcStep.Clone(cNewManager)

End Function

Private Property Get cStep_IndOperation() As
Operation

    cStep_IndOperation = mcStep.IndOperation

End Property

Private Property Let cStep_IndOperation(ByVal RHS As
Operation)

    mcStep.IndOperation = RHS

End Property

Private Property Get cStep_NextStepId() As Long

    cStep_NextStepId = mcStep.NextStepId

End Property

Private Property Let cStep_OutputFile(ByVal RHS As
String)

    mcStep.OutputFile = RHS

End Property

Private Property Get cStep_OutputFile() As String

    cStep_OutputFile = mcStep.OutputFile

End Property

Private Property Let cStep_ErrorFile(ByVal RHS As
String)

    mcStep.ErrorFile = RHS

End Property

Private Property Get cStep_ErrorFile() As String

    cStep_ErrorFile = mcStep.ErrorFile

End Property

Private Property Let cStep_LogFile(ByVal RHS As
String)

    '
    '    mcStep.LogFile = RHS
    '

End Property

Private Property Get cStep_LogFile() As String

    '
    '    cStep_LogFile = mcStep.LogFile
    '

End Property

```

```

Private Property Let cStep_ArchivedFlag(ByVal RHS As Boolean)

    mcStep.ArchivedFlag = RHS

End Property

Private Property Get cStep_ArchivedFlag() As Boolean

    cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property

Private Property Get cStep_NodeDB() As DAO.Database

    Set cStep_NodeDB = mcStep.NodeDB

End Property

Private Sub Class_Initialize()

    ' Create the object
    Set mcStep = New cStep

    ' Initialize the object with valid values for a
    manager step
    ' The global flag should be the first field to be
    initialized
    ' since subsequent validations might try to check
    if the
    ' step being created is global
    mcStep.GlobalFlag = False
    ' mcStep.GlobalRunMethod = gintNoOption
    mcStep.StepType = gintManagerStep

    ' Since the manager step does not take any
    action, the step
    ' text and file name will always be empty
    mcStep.StepText = gstrEmptyString
    mcStep.StepTextFile = gstrEmptyString

    ' Since the manager step does not take any
    action, execution
    ' properties for the step will be empty
    mcStep.ExecutionMechanism = gintNoOption
    mcStep.FailureDetails = gstrEmptyString
    mcStep.ContinuationCriteria = gintNoOption

End Sub

Private Sub Class_Terminate()

    ' Remove the step object
    Set mcStep = Nothing

End Sub

Private Sub cStep_Add()

    ' Call the Add method of the step class to carry
    out the insert
    mcStep.Add

End Sub

```

```

Private Property Get cStep_ContinuationCriteria() As ContinuationCriteria

    cStep_ContinuationCriteria = mcStep.ContinuationCriteria

End Property

Private Property Let cStep_ContinuationCriteria(ByVal RHS As ContinuationCriteria)

    ' Since a manager step cannot take any action,
    the continuation
    ' criteria property does not apply to it
    mcStep.ContinuationCriteria = gintNoOption

End Property

Private Property Let cStep_DegreeParallelism(ByVal RHS As String)

    mcStep.DegreeParallelism = RHS

End Property

Private Property Get cStep_DegreeParallelism() As String

    cStep_DegreeParallelism = mcStep.DegreeParallelism

End Property

Private Sub cStep_DeleteStep()

    On Error GoTo cStep_DeleteStepErr
    mstrSource = mstrModuleName & "cStep_DeleteStep"

    mcStep.Delete
    Exit Sub

cStep_DeleteStepErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "cStep_DeleteStep"
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteStepFailed, _
        mstrSource, _
        LoadResString(errDeleteStepFailed)

End Sub

Private Property Get cStep_EnabledFlag() As Boolean

    cStep_EnabledFlag = mcStep.EnabledFlag

End Property

Private Property Let cStep_EnabledFlag(ByVal RHS As Boolean)

    mcStep.EnabledFlag = RHS

End Property

```

```

Private Property Let cStep_ExecutionMechanism(ByVal RHS As ExecutionMethod)

    ' Since a manager step cannot take any action,
    the Execution
    ' Mechanism property does not apply to it
    mcStep.ExecutionMechanism = gintNoOption

End Property

Private Property Get cStep_ExecutionMechanism() As ExecutionMethod

    cStep_ExecutionMechanism = mcStep.ExecutionMechanism

End Property

Private Property Let cStep_FailureDetails(ByVal RHS As String)

    ' Since a manager step cannot take any action,
    the Failure
    ' Details property does not apply to it
    mcStep.FailureDetails = gstrEmptyString

End Property

Private Property Get cStep_FailureDetails() As String

    cStep_FailureDetails = mcStep.FailureDetails

End Property

Private Property Get cStep_GlobalFlag() As Boolean

    cStep_GlobalFlag = mcStep.GlobalFlag

End Property

Private Property Let cStep_GlobalFlag(ByVal RHS As Boolean)

    ' Set the global flag to false - this flag is
    initialized when
    ' an instance of the class is created. Just
    making sure that
    ' nobody changes the value inadvertently
    mcStep.GlobalFlag = False

End Property

Private Sub cStep_Modify()

    ' Call the Modify method of the step class to
    carry out the update
    mcStep.Modify

End Sub

Private Property Let cStep_ParentStepId(ByVal RHS As Long)

```

```

    mcStep.ParentStepId = RHS
End Property

Private Property Get cStep_ParentStepId() As Long
    cStep_ParentStepId = mcStep.ParentStepId
End Property

Private Property Let cStep_ParentVersionNo(ByVal RHS As String)
    mcStep.ParentVersionNo = RHS
End Property

Private Property Get cStep_ParentVersionNo() As String
    cStep_ParentVersionNo = mcStep.ParentVersionNo
End Property

Private Property Let cStep_SequenceNo(ByVal RHS As Integer)
    mcStep.SequenceNo = RHS
End Property

Private Property Get cStep_SequenceNo() As Integer
    cStep_SequenceNo = mcStep.SequenceNo
End Property

Private Property Let cStep_StepId(ByVal RHS As Long)
    mcStep.StepId = RHS
End Property

Private Property Get cStep_StepId() As Long
    cStep_StepId = mcStep.StepId
End Property

Private Property Let cStep_StepLabel(ByVal RHS As String)
    mcStep.StepLabel = RHS
End Property

Private Property Get cStep_StepLabel() As String
    cStep_StepLabel = mcStep.StepLabel
End Property

```

```

Private Property Let cStep_StepLevel(ByVal RHS As Integer)
    mcStep.StepLevel = RHS
End Property

Private Property Get cStep_StepLevel() As Integer
    cStep_StepLevel = mcStep.StepLevel
End Property

Private Property Let cStep_StepText(ByVal RHS As String)
    ' Since the manager step does not take any
    ' action, the step
    ' text and file name will always be empty
    mcStep.StepText = gstrEmptyString
End Property

Private Property Get cStep_StepText() As String
    cStep_StepText = mcStep.StepText
End Property

Private Property Let cStep_StepTextFile(ByVal RHS As String)
    ' Since the manager step does not take any
    ' action, the step
    ' text and file name will always be empty
    mcStep.StepTextFile = gstrEmptyString
End Property

Private Property Get cStep_StepTextFile() As String
    cStep_StepTextFile = mcStep.StepTextFile
End Property

Private Property Let cStep_StepType(RHS As gintStepType)
    mcStep.StepType = gintManagerStep
End Property

Private Property Get cStep_StepType() As gintStepType
    cStep_StepType = mcStep.StepType
End Property

Private Sub cStep_Validate()
    ' The validate routines for each of the steps
    will

```

```

    ' carry out the specific validations for the type
and
    ' call the generic validation routine

    On Error GoTo cStep_ValidateErr
    mstrSource = mstrModuleName & "cStep_Validate"

    ' Validations specific to manager steps

    ' Check if the step text or a file name has been
    ' specified
    If Not StringEmpty(mcStep.StepText) Or Not
StringEmpty(mcStep.StepTextFile) Then
        ShowError errTextAndFileNullOrManager
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
-
            gstrSource, _
            LoadResString(errValidateFailed)
    End If

    If mcStep.ExecutionMechanism <> gintNoOption Then
        ShowError errExecutionMechanismInvalid
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
-
            gstrSource, _
            LoadResString(errValidateFailed)
    End If

    If mcStep.FailureDetails <> gstrEmptyString Then
        ShowError errFailureDetailsNullOrMgr
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
-
            gstrSource, _
            LoadResString(errValidateFailed)
    End If

    If mcStep.ContinuationCriteria <> gintNoOption
Then
        ShowError errContCriteriaInvalid
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
-
            gstrSource, _
            LoadResString(errValidateFailed)
    End If

    mcStep.Validate

    Exit Sub

cStep_ValidateErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "cStep_Validate"
    On Error GoTo 0
    Err.Raise vbObjectError + errValidateFailed, _
        mstrSource, _
        LoadResString(errValidateFailed)
End Sub

```

```

Private Property Let cStep_VersionNo(ByVal RHS As String)

    mcStep.VersionNo = RHS

End Property

Private Property Get cStep_VersionNo() As String

    cStep_VersionNo = mcStep.VersionNo

End Property

Private Property Let cStep_WorkspaceId(ByVal RHS As Long)

    mcStep.WorkspaceId = RHS

End Property

Private Property Get cStep_WorkspaceId() As Long

    cStep_WorkspaceId = mcStep.WorkspaceId

End Property

```

## ***cNode.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cNode"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cNode.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Defines the properties that an object
has to implement.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public Property Get IndOperation() As Operation
End Property
Public Property Let IndOperation(ByVal vdata As Operation)
End Property
Public Sub Validate()
End Sub
Public Property Get Value() As String
End Property
Public Property Let Value(ByVal vdata As String)
End Property

```

```

Public Property Get NodeDB() As Database
End Property
Public Property Set NodeDB(vdata As Database)
End Property

Public Property Get Position() As Long
End Property
Public Property Let Position(ByVal vdata As Long)
End Property

```

## ***cNodeCollectio ns.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cNodeCollections"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cNodeCollections.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Implements an array of objects.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Node counter
Private mlngNodeCount As Long
Private mddbNodeDb As Database
Private mcarrNodes() As Object

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cNodeCollections."

Public Property Set Item(ByVal Position As Long, _
    ByVal objNode As Object)

' Returns the element at the passed in position
in the array
If Position >= 0 And Position < mlngNodeCount
Then
    Set mcarrNodes(Position) = objNode
Else
    On Error GoTo 0
    Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
        LoadResString(errItemDoesNotExist)
End If

```

```

End Property
Public Property Get Item(ByVal Position As Long) As Object
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in position
in the array
If Position >= 0 And Position < mlngNodeCount
Then
    Set Item = mcarrNodes(Position)
Else
    On Error GoTo 0
    Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
        LoadResString(errItemDoesNotExist)
End If

End Property

Public Sub Commit(ByVal cSaveObj As Object, _
    ByVal lngIndex As Long)
' This procedure checks if any changes have been
made to the
' passed in object. If so, it calls the
corresponding method
' to commit the changes.

On Error GoTo CommitErr
mstrSource = mstrModuleName & "Commit"

Select Case cSaveObj.IndOperation
Case QueryOp
    ' No changes were made to the queried
parameter.
    ' Do nothing

Case InsertOp
    cSaveObj.Add
    cSaveObj.IndOperation = QueryOp

Case UpdateOp
    cSaveObj.Modify
    cSaveObj.IndOperation = QueryOp

Case DeleteOp
    cSaveObj.Delete
    ' Now we can remove the record from the
array
    Call Unload(lngIndex)

End Select

Exit Sub

CommitErr:
LogErrors Errors
mstrSource = mstrModuleName & "Commit"
On Error GoTo 0
Err.Raise vbObjectError + errCommitFailed, _
    mstrSource, _
        LoadResString(errCommitFailed)

```

```

End Sub
Public Sub Save(ByVal lngWorkspace As Long)
    ' Calls a procedure to commit all changes for the
    passed
    ' in workspace.

    Dim lngIndex As Long

    On Error GoTo SaveErr

    ' Find all parameters in the array with a
    matching workspace id
    ' It is important to step backwards through the
    array, since
    ' we delete parameter records as we go along!
    For lngIndex = mlngNodeCount - 1 To 0 Step -1
        If mcarrNodes(lngIndex).WorkspaceId =
        lngWorkspace Then

            ' Call a procedure to commit all changes
            to the
            ' parameter record, if any
            Call Commit(mcarrNodes(lngIndex),
            lngIndex)

            End If
        Next lngIndex

    Exit Sub

SaveErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Save"
    On Error GoTo 0
    Err.Raise vbObjectError + errSaveFailed, _
        mstrSource, _
        LoadResString(errSaveFailed)

End Sub
Public Property Get Count() As Long

    Count = mlngNodeCount

End Property

Public Property Get NodeDB() As Database

    Set NodeDB = mdbaNodeDb

End Property
Public Property Set NodeDB(vdata As Database)

    Set mdbaNodeDb = vdata

End Property

Public Sub Load(cNodeToLoad As Object)
    ' Adds the passed in object to the array

    On Error GoTo LoadErr

    ' If this procedure is called by the add to array
    procedure,

```

```

    ' the database object has already been
    initialized
    If cNodeToLoad.NodeDB Is Nothing Then

        ' All the Nodes will be initialized with the
        database
        ' objects before being added to the array
        Set cNodeToLoad.NodeDB = mdbaNodeDb

    End If

    ReDim Preserve mcarrNodes(mlngNodeCount)

    ' Set the newly added element in the array to the
    passed in Node
    cNodeToLoad.Position = mlngNodeCount
    Set mcarrNodes(mlngNodeCount) = cNodeToLoad

    mlngNodeCount = mlngNodeCount + 1

    Exit Sub

LoadErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadFailed,
    mstrModuleName & "Load", _
        LoadResString(errLoadFailed)

End Sub
Public Sub Unload(lngDeletePosition As Long)
    ' Unloads the passed in object from the array

    On Error GoTo UnloadErr

    If lngDeletePosition < (mlngNodeCount - 1) Then

        ' Set the Node at the position being deleted
        to
        ' the last Node in the Node array
        Set mcarrNodes(lngDeletePosition) =
        mcarrNodes(mlngNodeCount - 1)
        mcarrNodes(lngDeletePosition).Position =
        lngDeletePosition
    End If

    ' Delete the last Node from the array
    mlngNodeCount = mlngNodeCount - 1
    If mlngNodeCount > 0 Then
        ReDim Preserve mcarrNodes(0 To mlngNodeCount
        - 1)
    Else
        ReDim mcarrNodes(0)
    End If

    Exit Sub

UnloadErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Unload"
    On Error GoTo 0
    Err.Raise vbObjectError + errUnloadFailed, _
        mstrSource, _

```

```

        LoadResString(errUnloadFailed)

End Sub
Public Sub Delete(lngDeletePosition As Long)
    ' Deletes the object at the specified position in
    the
    ' array

    Dim cDeleteObj As Object

    On Error GoTo DeleteErr
    mstrSource = mstrModuleName & "Delete"

    Set cDeleteObj = mcarrNodes(lngDeletePosition)

    If cDeleteObj.IndOperation = InsertOp Then
        ' If we are deleting a record that has just
        been inserted,
        ' blow it away
        Call Unload(lngDeletePosition)
    Else
        ' Set the operation for the deleted object to
        indicate a
        ' delete - we actually delete the element
        only at the time
        ' of a save operation
        cDeleteObj.IndOperation = DeleteOp
    End If

    Exit Sub

DeleteErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Delete"
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteFailed, _
        mstrSource, _
        LoadResString(errDeleteFailed)

End Sub
Public Sub Modify(cModifiedNode As Object)
    ' Sets the object at the passed in position to
    the
    ' modified object passed in

    On Error GoTo ModifyErr

    ' First check if the record is valid - all
    objects that
    ' use this collection class must have a Validate
    routine
    cModifiedNode.Validate

    ' If we are updating a record that hasn't yet
    been inserted,
    ' do not change the operation indicator - or we
    try to update
    ' a non-existent record
    If cModifiedNode.IndOperation <> InsertOp Then
        ' Set the operations to indicate an update
        cModifiedNode.IndOperation = UpdateOp
    End If

```



```

' Modify the object at the queried position - the
Position
' will be maintained by this class
Set mcarrNodes(cModifiedNode.Position) =
cModifiedNode

Exit Sub

ModifyErr:
LogErrors Errors
mstrSource = mstrModuleName & "Modify"
On Error GoTo 0
Err.Raise vbObjectError + errModifyFailed, _
mstrSource, _
LoadResString(errModifyFailed)

End Sub
Public Sub Add(cNodeToAdd As Object)

On Error GoTo AddErr

Set cNodeToAdd.NodeDB = mdbNodeDB

' First check if the record is valid
cNodeToAdd.Validate

' Set the operation to indicate an insert
cNodeToAdd.IndOperation = InsertOp

' Call a procedure to load the record in the
array
Call Load(cNodeToAdd)

Exit Sub

AddErr:
LogErrors Errors
mstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError + errAddFailed, _
mstrSource, _
LoadResString(errAddFailed)

End Sub

Private Sub Class_Terminate()

ReDim mcarrNodes(0)
mlngNodeCount = 0

End Sub

```

## Common.bas

```

Attribute VB_Name = "Common"
' FILE: Common.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'

```

```

'
' PURPOSE: Module containing common functionality
throughout
' StepMaster
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private Const mstrModuleName As String = "Common."

' Used to separate the variable data from the
constant error
' message being raised when a context-sensitive error
is displayed
Private Const mintDelimiter As String = " : "
Private Const mstrFormatString = "mmddy"

' Identifiers for the different labels that need to
be loaded
' into the tree view for each workspace
Public Const mstrWorkspacePrefix = "W"
Public Const mstrParameterPrefix = "P"
Public Const mstrParamConnectionPrefix = "C"
Public Const mstrConnectionDtlPrefix = "N"
Public Const mstrParamExtensionPrefix = "E"
Public Const mstrParamBuiltInPrefix = "B"
Public Const gstrGlobalStepPrefix = "G"
Public Const gstrManagerStepPrefix = "M"
Public Const gstrWorkerStepPrefix = "S"
Public Const gstrDummyPrefix = "D"
Public Const mstrLabelPrefix = "L"
Public Const mstrInstancePrefix = "I"
Public Function LabelStep(lngWorkspaceIdentifier As
Long) As String
' Returns the step label for the workspace
identifier passed in
' Basically this is a wrapper around the
MakeKeyValid function

LabelStep = MakeKeyValid(gintStepLabel,
gintStepLabel, lngWorkspaceIdentifier)

End Function

Public Function JulianDateToString(dt64Bit As
Currency) As String

Dim lYear As Long
Dim lMonth As Long
Dim lDay As Long
Dim lHour As Long
Dim lMin As Long
Dim lSec As Long
Dim lMs As Long

Call JulianToTime(dt64Bit, lYear, lMonth, lDay,
lHour, lMin, lSec, lMs)
JulianDateToString = Format$(lYear, gsYearFormat)
& gsDateSeparator & _
Format$(lMonth, gsDtFormat) &
gsDateSeparator & _

```

```

Format$(lDay, gsDtFormat) & gstrBlank & _
Format$(lHour, gsTmFormat) &
gsTimeSeparator & _
Format$(lMin, gsTmFormat) &
gsTimeSeparator & _
Format$(lSec, gsTmFormat) & gsMsSeparator
& _
Format$(lMs, gsMSecondFormat)

End Function
Public Sub DeleteFile(strFile As String, Optional
ByVal bCheckIfEmpty As Boolean = False)

' Ensure that there is only a single file of the
name before delete, since
' Kill supports wildcards and can potentially
delete a number of files
Dim strTemp As String

If CheckFileExists(strFile) Then
If bCheckIfEmpty Then
If FileLen(strFile) = 0 Then
Kill strFile
End If
Else
Kill strFile
End If
End If

End Sub
Public Function CheckFileExists(strFile As String) As
Boolean

' Returns true if the passed in file exists
' Raises an error if multiple files are found
(filename contains a wildcard)
CheckFileExists = False

If Not StringEmpty(Dir(strFile)) Then
If Not StringEmpty(Dir()) Then
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteSingleFile, _
mstrModuleName & "DeleteFile",
LoadResString(errDeleteSingleFile)
End If

CheckFileExists = True

End If

End Function

Public Function GetVersionString() As String
GetVersionString = "Version " & gsVersion
End Function

Function IsLabel(strKey As String) As Boolean

' The tree view control on frmMain can contain
two types of
' nodes -
' 1. Nodes that contain data for the workspace -
this could

```

```

' be data for the different types of steps or
parameters
' 2. Nodes that display static data - these kind
of nodes
' are referred to as label nodes e.g. "Global
Steps" is a
' label node
' This function returns True if the passed in key
corresponds
' to a label node

IsLabel = InStr(strKey, mstrLabelPrefix) > 0

End Function

Function MakeKeyValid(lngIdentifier As Long, _
intTypeOfNode As Integer, _
Optional ByVal WorkspaceId As Long = 0, _
Optional ByVal InstanceId As Long = 0) As String

' We use a numbering scheme while loading the
tree view with
' all node data, since it needs a unique key and
we want to
' use the key to identify the data it contains.
' Moreover, add a character to the beginning of
the identifier
' so that the tree view control accepts it as a
valid string,
' viz. "456" doesn't work, so change it to "W456"
' The general scheme is to concatenate a Label
with the Identifier
' e.g A Global Step Node will have the Label, G
and the Step Id
' concatenated to form the unique key
' The list of all such node types is given below
' 1. "W" + Workspace_Id for Workspace nodes
' 2. "P" + Parameter_Id for Parameter nodes
' 3. "M" + Step_Id for Manager Step nodes
' 4. "S" + Step_Id for Worker Step nodes
' 5. "G" + Step_Id for Global Step nodes
' 6. Instance_id + "I" + Step_Id for Instance
nodes
' 7. Workspace_id + "L" + the label identifier =
node type for all Label nodes
' Since the manager, worker and global steps are
stored in the
' same table and the step identifiers will always
be unique, we
' can use the same character as the prefix, but
this is a
' convenient way to know the type of step being
processed.
' The workspace id is appended to the label
identifier to make
' it unique, since multiple workspaces may be
open during a session
' Strip the prefix characters off while saving the
Ids to the db

Dim strPrefixChar As String

On Error GoTo MakeKeyValidErr

```

```

gstrSource = mstrModuleName & "MakeKeyValid"

Select Case intTypeOfNode
Case gintWorkspace
strPrefixChar = mstrWorkspacePrefix
Case gintGlobalStep
strPrefixChar = gstrGlobalStepPrefix
Case gintManagerStep
strPrefixChar = gstrManagerStepPrefix
Case gintWorkerStep
strPrefixChar = gstrWorkerStepPrefix
Case gintRunManager, gintRunWorker
If InstanceId = 0 Then
On Error GoTo 0
Err.Raise vbObjectError +
errMandatoryParameterMissing, _
gstrSource, _

LoadResString(errMandatoryParameterMissing)
End If
' Concatenate the instance identifier and
the step
' identifier to form a unique key
strPrefixChar = Trim$(Str$(InstanceId)) &
mstrInstancePrefix
Case gintParameter
strPrefixChar = mstrParameterPrefix
Case gintNodeParamConnection
strPrefixChar = mstrParamConnectionPrefix
Case gintConnectionDtl
strPrefixChar = mstrConnectionDtlPrefix
Case gintNodeParamExtension
strPrefixChar = mstrParamExtensionPrefix
Case gintNodeParamBuiltIn
strPrefixChar = mstrParamBuiltInPrefix
Case gintGlobalsLabel, gintParameterLabel,
gintParamConnectionLabel, _
gintConnDtlLabel, _
gintParamExtensionLabel,
gintParamBuiltInLabel, gintGlobalStepLabel, _
gintStepLabel
If WorkspaceId = 0 Then
' The Workspace Id has to be
specified for a label node
' Otherwise it will not be possible
to generate unique label
' identifiers if multiple workspaces
are open
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceIdMandatory, _
gstrSource, _

LoadResString(errWorkspaceIdMandatory)
End If
' For all labels, the workspace
identifier and the
' label prefix are concatenated to form
the key
strPrefixChar = Trim$(Str$(WorkspaceId))
& mstrLabelPrefix
Case Else
On Error GoTo 0

```

```

Err.Raise vbObjectError +
errInvalidNodeType, _
gstrSource, _
LoadResString(errInvalidNodeType)

End Select

MakeKeyValid = strPrefixChar &
Trim$(Str$(lngIdentifier))

Exit Function

MakeKeyValidErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errMakeKeyValidFailed,
_
gstrSource, _
LoadResString(errMakeKeyValidFailed)

End Function

Function MakeIdentifierValid(strKey As String) As
Long

' Returns the Identifier corresponding to the
passed in key
' (Reverse of what was done in MakeKeyValid)

On Error GoTo MakeIdentifierValidErr

If IsLabel(strKey) Then
' If the key corresponds to a label node, the
identifier
' appears to the right of the label prefix
MakeIdentifierValid = Val(Mid(strKey,
InStr(strKey, mstrLabelPrefix) + 1))
ElseIf InStr(strKey, mstrInstancePrefix) = 0 Then
' For all other nodes, stripping the first
character off
' returns a valid Id
MakeIdentifierValid = Val(Mid(strKey, 2))
Else
' Instance node - strip of all characters
till the
' instance prefix
MakeIdentifierValid = Val(Mid(strKey,
InStr(strKey, mstrInstancePrefix) + 1))
End If

Exit Function

MakeIdentifierValidErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errMakeIdentifierValidFailed, _
mstrModuleName & "MakeIdentifierValid", _

LoadResString(errMakeIdentifierValidFailed)

End Function

Public Function IsInstanceNode(strNodeKey As String)
As Boolean

```

```

' Returns true if the passed in node key
corresponds to a step instance
IsInstanceNode = InStr(strNodeKey,
mstrInstancePrefix) > 0

End Function
Public Function IsBuiltInLabel(strNodeKey As String)
As Boolean

' Returns true if the passed in node key
corresponds to a step instance
IsBuiltInLabel = (IsLabel(strNodeKey) And _
(MakeIdentifierValid(strNodeKey) =
gintParamBuiltInLabel))

End Function

Public Sub ShowBusy()
' Modifies the mousepointer to indicate that the
' application is busy

On Error Resume Next

Screen.MousePointer = vbHourglass

End Sub

Public Sub ShowFree()
' Modifies the mousepointer to indicate that the
' application has finished processing and is
ready
' to accept user input

On Error Resume Next

Screen.MousePointer = vbDefault

End Sub

Public Function InstrR(strMain As String, _
strSearch As String) As Integer
' Finds the last occurrence of the passed in
string

Dim intPos As Integer
Dim intPrev As Integer

On Error GoTo InstrRErr

intPrev = intPos
intPos = InStr(1, strMain, strSearch)

Do While intPos > 0
intPrev = intPos
intPos = InStr(intPos + 1, strMain,
strSearch)
Loop
InstrR = intPrev

Exit Function

InstrRErr:
Call LogErrors(Errors)

```

```

gstrSource = mstrModuleName & "InstrR"
On Error GoTo 0
Err.Raise vbObjectError + errInstrRFailed, _
gstrSource, _
LoadResString(errInstrRFailed)

End Function

Public Function GetDefaultDir(lWspId As Long,
WspParameters As cArrParameters) As String

Dim sDir As String
sDir = SubstituteParameters( _
gstrEnvVarSeparator & PARAM_DEFAULT_DIR &
gstrEnvVarSeparator, _
lWspId, WspParameters:=WspParameters)
MakePathValid (sDir & gstrFileSeparator &
"a.txt")
GetDefaultDir = GetShortName(sDir)
If StringEmpty(GetDefaultDir) Then
GetDefaultDir = App.Path
End If

End Function

Public Sub AddArrayElement(ByRef arrNodes() As
Object, _
ByVal objToAdd As Object, _
ByRef lngCount As Long)
' Adds the passed in object to the array

On Error GoTo AddArrayElementErr

' Increase the array dimension and add the object
to it
ReDim Preserve arrNodes(lngCount)
Set arrNodes(lngCount) = objToAdd
lngCount = lngCount + 1

Exit Sub

AddArrayElementErr:
LogErrors Errors
gstrSource = mstrModuleName & "AddArrayElement"
On Error GoTo 0
Err.Raise vbObjectError +
errAddArrayElementFailed, _
gstrSource, _
LoadResString(errAddArrayElementFailed)

End Sub

Public Function CheckForNullField(rstRecords As
Recordset, strFieldName As String) As String

' Returns an empty string if a given field is
null
On Error GoTo CheckForNullFieldErr

If IsNull(rstRecords.Fields(strFieldName)) Then
CheckForNullField = gstrEmptyString
Else

```

```

CheckForNullField =
rstRecords.Fields(strFieldName)
End If
Exit Function

CheckForNullFieldErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errCheckForNullFieldFailed, _
mstrModuleName & "CheckForNullField", _
LoadResString(errCheckForNullFieldFailed)

End Function

Public Function ErrorOnNullField(rstRecords As
Recordset, strFieldName As String) As Variant

' If a given field is null, raises an error
' Else, returns the field value in a variant
' The calling function must convert the return
value to the
' appropriate type
On Error GoTo ErrorOnNullFieldErr
gstrSource = mstrModuleName & "ErrorOnNullField"

If IsNull(rstRecords.Fields(strFieldName)) Then
On Error GoTo 0
Err.Raise vbObjectError +
errMandatoryFieldNull, _
gstrSource, _
strFieldName & mintDelimiter &
LoadResString(errMandatoryFieldNull)
Else
ErrorOnNullField =
rstRecords.Fields(strFieldName)
End If
Exit Function

ErrorOnNullFieldErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errUnableToCheckNull, _
gstrSource, _
strFieldName & mintDelimiter &
LoadResString(errUnableToCheckNull)

End Function
Public Function StringEmpty(strCheckString As String)
As Boolean

StringEmpty = (strCheckString = gstrEmptyString)

End Function
Public Function GetIteratorValue(cStepIterators As
cRunColIt, _
ByVal strItName As String)

Dim lngIndex As Long
Dim strValue As String

On Error GoTo GetIteratorValueErr
gstrSource = mstrModuleName & "GetIteratorValue"

```

```

' Find the iterator in the Iterators collection
For lngIndex = 0 To cStepIterators.Count - 1
    If cStepIterators(lngIndex).IteratorName =
strItName Then
        strValue = cStepIterators(lngIndex).Value
        Exit For
    End If
Next lngIndex

If lngIndex > cStepIterators.Count - 1 Then
' The iterator has not been defined for the
branch
    ' Raise an error
    On Error GoTo 0
    Err.Raise vbObjectError +
errParamNameInvalid, _
        gstrSource, _
        LoadResString(errParamNameInvalid)
End If

GetIteratorValue = strValue
Exit Function

GetIteratorValueErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "GetIteratorValue"
On Error GoTo 0
Err.Raise vbObjectError + errGetParamValueFailed,
_
    gstrSource, _
    LoadResString(errGetParamValueFailed)

End Function
Public Function SubstituteParameters(ByVal
strComString As String, _
    ByVal lngWorkspaceId As Long, _
    Optional StepIterators As cRunColIt =
Nothing, _
    Optional WspParameters As cArrParameters =
Nothing) As String
' This function substitutes all parameter names
and
' environment variables in the passed in string
with
' their values. It also substitutes the value for
the
' iterators, if any.
' Since the syntax is to enclose parameter names
and
' environment variables in "%", we check if a
given
' variable is a parameter - if so, we substitute
the
' parameter value - else we try to get the value
from
' the environment

Dim intPos As Integer
Dim intEndPos As Integer
Dim strEnvVariable As String
Dim strValue As String

```

```

Dim strCommand As String
Dim cTempStr As cStringSM

' Initialize the return value of the function to
the
' passed in command
strCommand = strComString

If WspParameters Is Nothing Then Set
WspParameters = gcParameters

Set cTempStr = New cStringSM

intPos = InStr(strCommand, gstrEnvVarSeparator)
Do While intPos <> 0
    If Mid(strCommand, intPos + 1, 1) =
gstrEnvVarSeparator Then
        ' Wildcard character - to be substituted
by a single % - later!
        intPos = intPos + 2
        If intPos > Len(strCommand) Then Exit Do
    Else
        ' Extract the environment variable from
the passed
        ' in string
        intEndPos = InStr(intPos + 1, strCommand,
gstrEnvVarSeparator)

        If intEndPos > 0 Then
            strEnvVariable = Mid(strCommand,
intPos + 1, intEndPos - intPos - 1)
        Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errParamSeparatorMissing, _
                gstrSource, _
                LoadResString(errParamSeparatorMissing)
        End If
        strValue = gstrEmptyString

' Get the value of the variable and call
a function
' to replace the variable with it's value
strValue = GetValue(strEnvVariable,
lngWorkspaceId, StepIterators, WspParameters)
' The function raises an error if the
variable is
' not found
strCommand =
cTempStr.ReplaceSubString(strCommand, _
    gstrEnvVarSeparator &
strEnvVariable & gstrEnvVarSeparator, _
    strValue)
    End If

    intPos = InStr(intPos, strCommand,
gstrEnvVarSeparator)
Loop

strCommand =
cTempStr.ReplaceSubString(strCommand, _

```

```

gstrEnvVarSeparator &
gstrEnvVarSeparator, gstrEnvVarSeparator)

Set cTempStr = Nothing
SubstituteParameters = strCommand

End Function
Private Function GetValue(ByVal strParameter As
String, _
    ByVal lngWorkspaceId As Long, _
    cStepIterators As cRunColIt, _
    WspParameters As cArrParameters) As String
' This function returns the value for the passed
in
' parameter - it may be a workspace parameter, an
' environment variable or an iterator

Dim intPos As Integer
Dim intEndPos As Integer
Dim strVariable As String
Dim strValue As String
Dim cParamRec As cParameter

On Error GoTo GetValueErr

' Initialize the return value of the function to
the
' empty
strValue = gstrEmptyString

intPos = InStr(strParameter, gstrEnvVarSeparator)
If intPos > 0 Then
    ' Extract the variable from the passed in
string
    intEndPos = InStr(intPos + 1, strParameter,
gstrEnvVarSeparator)
    If intEndPos = 0 Then
        intEndPos = Len(strParameter)
    End If

    strVariable = Mid(strParameter, intPos + 1,
intEndPos - intPos - 1)
    Else
        ' The separator character has not been passed
in -
        ' try to find the value of the passed in
parameter
        strVariable = strParameter
    End If

    If Not StringEmpty(strVariable) Then
        ' Check if this is the timestamp parameter
first
        If strVariable = gstrTimeStamp Then
            strValue = Format$(Now, mstrFormatString,
_
                vbUseSystemDayOfWeek,
vbUseSystem)
        Else
            ' Try to find a parameter for the
workspace with
            ' the same name

```

```

Set cParamRec =
WspParameters.GetParameterValue(lngWorkspaceId, _
    strVariable)
If cParamRec Is Nothing Then
    If Not cStepIterators Is Nothing Then
        ' If the string is not a
parameter, then check
        ' if it is an iterator
        strValue =
GetIteratorValue(cStepIterators, strVariable)
    End If

    If StringEmpty(strValue) Then
        ' Neither - Check if it is an
environment variable
        strValue = Environ$(strVariable)
        If StringEmpty(strValue) Then
            On Error GoTo 0
            WriteError
errSubValuesFailed, _
                OptArgs:="Invalid
parameter: " & gstrSQ & strVariable & gstrSQ
errSubValuesFailed, _
                Err.Raise vbObjectError +
                mstrModuleName &
"GetValue", _

LoadResString(errSubValuesFailed) & "Invalid
parameter: " & gstrSQ & strVariable & gstrSQ
    End If
    End If
Else
    strValue = cParamRec.ParameterValue
    End If
End If
End If

GetValue = strValue

Exit Function

GetValueErr:
If Err.Number = vbObjectError +
errParamNameInvalid Then
    ' If the parameter has not been defined for
the
    ' workspace then check if it is an
environment
    ' variable
    Resume Next
End If

' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "GetValue"
WriteError errSubValuesFailed, gstrSource,
"Parameter: " & gstrSQ & strVariable & gstrSQ
On Error GoTo 0
Err.Raise vbObjectError + errSubValuesFailed, _
    gstrSource, _
LoadResString(errSubValuesFailed) &
"Parameter: " & gstrSQ & strVariable & gstrSQ

```

```

End Function
Public Function SQLFixup(strField As String) As
String
    ' Returns a string that can be executed by SQL
Server

    Dim cMyStr As New cStringSM
    Dim strTemp As String

    On Error GoTo SQLFixupErr

    strTemp = strField
    SQLFixup = strTemp

    ' Single-quotes have to be replaced by two
single-quotes,
    ' since a single-quote is the identifier
delimiter
    ' character - call a procedure to do the replace
    SQLFixup = cMyStr.ReplaceSubString(strTemp,
gstrDQ, "\" & gstrDQ)

    ' Replace pipe characters with the corresponding
chr function
    SQLFixup = cMyStr.ReplaceSubString(strTemp,
gstrDQ, gstrDQ & gstrDQ)

Exit Function

SQLFixupErr:
gstrSource = mstrModuleName & "SQLFixup"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errMakeFieldValidFailed, _
    gstrSource, _
LoadResString(errMakeFieldValidFailed)

End Function
Public Function TranslateStepLabel(sLabel As String)
As String
    ' Translates the passed in step label to a valid
file name
    ' All characters in the label that are invalid
for filenames (viz. \ / : * ? " < > |)
    ' and spaces are substituted with underscores -
also ensure that the resulting filename
    ' is not greater than 255 characters
    Dim cTempStr As New cStringSM
    TranslateStepLabel =
cTempStr.ReplaceSubString(sLabel, gstrFileSeparator,
" _")
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, "/",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, ":",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, "*",
gstrUnderscore)

```

```

    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, "?",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, gstrDQ,
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, "<",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, ">",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, "|",
gstrUnderscore)
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
gstrBlank, gstrUnderscore)

    ' Commas are substituted with underscores since
the command shell uses a comma to
    ' delimit commands
    TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel, ",",
gstrUnderscore)

    If Len(TranslateStepLabel) > MAX_PATH Then
        TranslateStepLabel = Mid(TranslateStepLabel,
1, MAX_PATH)
    End If

End Function

Public Function TypeOfObject(ByVal objNode As Object)
As Integer
    ' Determines the type of object that is passed in

On Error GoTo TypeOfObjectErr
gstrSource = mstrModuleName & "TypeOfObject"

Select Case TypeName(objNode)
Case "cWorkspace"
    TypeOfObject = gintWorkspace
Case "cParameter"
    TypeOfObject = gintParameter
Case "cConnection"
    TypeOfObject = gintParameterConnect
Case "cConnDtl"
    TypeOfObject = gintConnectionDtl
Case "cGlobalStep"
    TypeOfObject = gintGlobalStep
Case "cManager"
    TypeOfObject = gintManagerStep
Case "cWorker"
    TypeOfObject = gintWorkerStep
Case "cStep"

```

```

' If a step record is passed in, call a
function
' to determine the type of step
TypeOfObject =
TypeOfStep(StepClass:=objNode)

Case Else
WriteError errTypeOfObjectFailed,
gstrSource, _
TypeName(objNode)
On Error GoTo 0
Err.Raise vbObjectError +
errTypeOfObjectFailed, _
gstrSource, _

LoadResString(errTypeOfObjectFailed)
End Select

Exit Function

TypeOfObjectErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errTypeOfObjectFailed,
-
gstrSource, _
LoadResString(errTypeOfObjectFailed)

End Function

```

## ConnDtlComm on.bas

```

Attribute VB_Name = "ConnDtlCommon"
' FILE: ConnDtlCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains functionality common across
StepMaster and
' SMRunOnly, pertaining to connections
' Specifically, functions to load
connections in an array
' and so on.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"ConnDtlCommon."

Public Sub LoadRSInConnDtlArray(rstConns As
Recordset, cConns As cConnDtl)

```

```

Dim cNewConnDtl As cConnDtl

On Error GoTo LoadRSInConnDtlArrayErr

If rstConns.RecordCount = 0 Then
Exit Sub
End If

rstConns.MoveFirst
While Not rstConns.EOF

Set cNewConnDtl = New cConnDtl

' Initialize ConnDtl values
' Call a procedure to raise an error if
mandatory fields are null.
cNewConnDtl.ConnNameId =
ErrorOnNullField(rstConns, FLD_ID_CONN_NAME)
cNewConnDtl.WorkspaceId =
ErrorOnNullField(rstConns, FLD_ID_WORKSPACE)
cNewConnDtl.ConnName =
CStr(ErrorOnNullField(rstConns,
FLD_CONN_DTL_CONNECTION_NAME))
cNewConnDtl.ConnectionString =
CheckForNullField(rstConns,
FLD_CONN_DTL_CONNECTION_STRING)
cNewConnDtl.ConnType =
CheckForNullField(rstConns,
FLD_CONN_DTL_CONNECTION_TYPE)

cConns.Load cNewConnDtl

Set cNewConnDtl = Nothing
rstConns.MoveNext

Wend

Exit Sub

LoadRSInConnDtlArrayErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadRSInConnDtlArray"
On Error GoTo 0
Err.Raise vbObjectError + errLoadRsInArrayFailed,
gstrSource, _
LoadResString(errLoadRsInArrayFailed)

End Sub

```

## ConnectionCo mmon.bas

```

Attribute VB_Name = "ConnectionCommon"
' FILE: ConnectionCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains functionality common across
StepMaster and

```

```

' SMRunOnly, pertaining to connection
strings
' Specifically, functions to load
connections strings
' in an array and so on.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"ConnectionCommon."

Public Sub LoadRecordsetInConnectionArray(rstConns As
Recordset, cConns As cConnections)

Dim cNewConnection As cConnection

On Error GoTo LoadRecordsetInConnectionArrayErr

If rstConns.RecordCount = 0 Then
Exit Sub
End If

rstConns.MoveFirst
While Not rstConns.EOF

Set cNewConnection = New cConnection

' Initialize Connection values
' Call a procedure to raise an error if
mandatory fields are null.
cNewConnection.ConnectionId =
ErrorOnNullField(rstConns, "connection_id")
cNewConnection.WorkspaceId =
CStr(ErrorOnNullField(rstConns, FLD_ID_WORKSPACE))
cNewConnection.ConnectionName =
CStr(ErrorOnNullField(rstConns, "connection_name"))
cNewConnection.ConnectionValue =
CheckForNullField(rstConns, "connection_value")
cNewConnection.Description =
CheckForNullField(rstConns, "description")

cNewConnection.NoCountDisplay =
CheckForNullField(rstConns, "no_count_display")
cNewConnection.NoExecute =
CheckForNullField(rstConns, "no_execute")
cNewConnection.ParseQueryOnly =
CheckForNullField(rstConns, "parse_query_only")
cNewConnection.QuotedIdentifiers =
CheckForNullField(rstConns,
"ANSI_quoted_identifiers")
cNewConnection.AnsiNulls =
CheckForNullField(rstConns, "ANSI_nulls")
cNewConnection.ShowQueryPlan =
CheckForNullField(rstConns, "show_query_plan")
cNewConnection.ShowStatsTime =
CheckForNullField(rstConns, "show_stats_time")
cNewConnection.ShowStatsIO =
CheckForNullField(rstConns, "show_stats_io")

```

```

        cNewConnection.ParseOdbcMsg =
CheckForNullField(rstConns,
"parse_odbc_msg_prefixes")
        cNewConnection.RowCount =
CheckForNullField(rstConns, "row_count")
        cNewConnection.TsqlBatchSeparator =
CheckForNullField(rstConns, "tsql_batch_separator")
        cNewConnection.QueryTimeOut =
CheckForNullField(rstConns, "query_time_out")
        cNewConnection.ServerLanguage =
CheckForNullField(rstConns, "server_language")
        cNewConnection.CharacterTranslation =
CheckForNullField(rstConns, "character_translation")
        cNewConnection.RegionalSettings =
CheckForNullField(rstConns, "regional_settings")

        cConns.Load cNewConnection

        Set cNewConnection = Nothing
        rstConns.MoveNext
    Wend

Exit Sub

LoadRecordsetInConnectionArrayErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadRecordsetInConnectionArray"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadRsInArrayFailed,
gstrSource, _
        LoadResString(errLoadRsInArrayFailed)
End Sub

```

## ***cParameter.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cParameter"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cParameter.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a parameter.
'           Contains functions to insert, update
and delete
'           workspace_parameters records from the
database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Option Base 0

```

```

' Local variable(s) to hold property value(s)
Private mlngWorkspaceId As Long
Private mlngParameterId As Long
Private mstrParameterName As String
Private mstrParameterValue As String
Private mstrDescription As String
Private mintParameterType As Integer
Private mdbStepMaster As Database
Private mintOperation As Operation
Private mlngPosition As Long

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cParameter."

' The cSequence class is used to generate unique
parameter identifiers
Private mParameterSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

' Parameter types
Public Enum ParameterType
    gintParameterGeneric = 0
    gintParameterConnect
    gintParameterApplication
    gintParameterBuiltIn
End Enum

Private Sub AssignParameters(qyExec As DAO.QueryDef)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to make them
different
' from the field names. When the parameter names
are
' the same as the field names, parameters in the
where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr

For Each prmParam In qyExec.Parameters
    Select Case prmParam.Name
        Case "[w_id]"
            prmParam.Value = mlngWorkspaceId

        Case "[p_id]"
            prmParam.Value = mlngParameterId

        Case "[p_name]"
            prmParam.Value = mstrParameterName

        Case "[p_value]"
            prmParam.Value = mstrParameterValue

```

```

        Case "[desc]"
            prmParam.Value = mstrDescription

        Case "[p_type]"
            prmParam.Value = mintParameterType

        Case Else
            ' Write the parameter name that is
            faulty
            WriteError errInvalidParameter,
mstrSource, _
                prmParam.Name
            On Error GoTo 0
            Err.Raise errInvalidParameter,
mstrModuleName & "AssignParameters", _

LoadResString(errInvalidParameter)
        End Select
        Next prmParam

        ' qyExec.Parameters("w_id").Value =
mlngWorkspaceId
        ' qyExec.Parameters("p_id").Value =
mlngParameterId
        ' qyExec.Parameters("p_name").Value =
mstrParameterName
        ' qyExec.Parameters("p_value").Value =
mstrParameterValue

        Exit Sub

AssignParametersErr:

        mstrSource = mstrModuleName & "AssignParameters"
        Call LogErrors(Errors)
        On Error GoTo 0
        Err.Raise vbObjectError +
errAssignParametersFailed, _
            mstrSource,
LoadResString(errAssignParametersFailed)

    End Sub

Public Property Let Position(ByVal RHS As Long)

        mlngPosition = RHS

    End Property

Public Property Get Position() As Long

        Position = mlngPosition

    End Property

Public Function Clone() As cParameter

        ' Creates a copy of a given parameter

        Dim cCloneParam As cParameter

```

```

On Error GoTo CloneErr
mstrSource = mstrModuleName & "Clone"

Set cCloneParam = New cParameter

' Copy all the parameter properties to the newly
' created parameter
Set cCloneParam.NodeDB = mdbStepMaster
cCloneParam.WorkspaceId = mngWorkspaceId
cCloneParam.ParameterId = mngParameterId
cCloneParam.ParameterName = mstrParameterName
cCloneParam.ParameterValue = mstrParameterValue
cCloneParam.Description = mstrDescription
cCloneParam.ParameterType = mintParameterType
cCloneParam.IndOperation = mintOperation
cCloneParam.Position = mngPosition

' And set the return value to the newly created
parameter
Set Clone = cCloneParam
Set cCloneParam = Nothing

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName & "Clone"
On Error GoTo 0
Err.Raise vbObjectError + errCloneFailed, _
mstrSource, LoadResString(errCloneFailed)

End Function
Public Property Set NodeDB(vdata As Database)

Set mdbStepMaster = vdata

End Property
Public Property Get NodeDB() As Database

Set NodeDB = mdbStepMaster

End Property

Private Sub CheckDupParameterName()
' Check if the parameter name already exists in
the workspace

Dim rstParameter As Recordset
Dim strSql As String
Dim qy As DAO.QueryDef

On Error GoTo CheckDupParameterNameErr
mstrSource = mstrModuleName &
"CheckDupParameterName"

' Create a recordset object to retrieve the count
of all parameters
' for the workspace with the same name
strSql = "Select count(*) as parameter_count " &
-
" from workspace_parameters " & _
" where workspace_id = [w_id]" & _
" and parameter_name = [p_name]" & _

```

```

" and parameter_id <> [p_id]"

Set qy =
mdbStepMaster.CreateQueryDef(gstrEmptyString,
strSql)
Call AssignParameters(qy)

Set rstParameter =
qy.OpenRecordset(dbOpenForwardOnly)

If rstParameter![parameter_count] > 0 Then
rstParameter.Close
qy.Close
ShowError errDuplicateParameterName
On Error GoTo 0
Err.Raise vbObjectError +
errDuplicateParameterName, _
mstrSource,
LoadResString(errDuplicateParameterName)
End If

rstParameter.Close
qy.Close

Exit Sub

CheckDupParameterNameErr:
LogErrors Errors
mstrSource = mstrModuleName &
"CheckDupParameterName"
On Error GoTo 0
Err.Raise vbObjectError +
errCheckDupParameterNameFailed, _
mstrSource,
LoadResString(errCheckDupParameterNameFailed)

End Sub
Private Sub CheckDB()
' Check if the database object has been
initialized

If mdbStepMaster Is Nothing Then
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB, _
mstrModuleName & "CheckDB",
LoadResString(errInvalidDB)
End If

End Sub
Public Property Let ParameterValue(vdata As String)

mstrParameterValue = vdata

End Property
Public Property Let Description(vdata As String)

mstrDescription = vdata

End Property
Public Property Let ParameterType(vdata As
ParameterType)

mintParameterType = vdata

```

```

End Property

Public Property Let ParameterName(vdata As String)

If vdata = gstrEmptyString Then

ShowError errParameterNameMandatory
On Error GoTo 0
' Propagate this error back to the caller
Err.Raise vbObjectError +
errParameterNameMandatory, _
mstrSource,
LoadResString(errParameterNameMandatory)
Else
mstrParameterName = vdata
End If

End Property

Public Property Let ParameterId(vdata As Long)
mngParameterId = vdata
End Property

Public Property Let IndOperation(ByVal vdata As
Operation)

' The valid operations are define in the
cOperations
' class. Check if the operation is valid
Select Case vdata
Case QueryOp, InsertOp, UpdateOp, DeleteOp
mintOperation = vdata

Case Else
On Error GoTo 0
Err.Raise vbObjectError +
errInvalidOperation, _
mstrSource,
LoadResString(errInvalidOperation)
End Select

End Property
Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are valid.
This method
' will be used to check interdependant properties
that
' cannot be validated by the let procedures.
' It should be called by the add and modify
methods of the class

On Error GoTo ValidateErr

' Check if the db object is valid
Call CheckDB

' Call procedure to raise an error if the
parameter name
' already exists in the workspace -

```



```

' if there are duplicates, we don't know what
value for the
' parameter to use at runtime
Call CheckDupParameterName

Exit Sub

ValidateErr:

mstrSource = mstrModuleName & "Validate"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errValidateFailed, _
mstrSource, LoadResString(errValidateFailed)

End Sub
Public Property Let WorkspaceId(vdata As Long)

m lngWorkspaceId = vdata

End Property

Public Sub Add()

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' Validate the record before trying to insert the
record
Call Validate

' Create a temporary querydef object
strInsert = "insert into workspace_parameters " &
-
" ( workspace_id, parameter_id, " & _
" parameter_name, parameter_value, " & _
" description, parameter_type ) " & _
" values ( [w_id], [p_id], [p_name],
[p_value], [desc], [p_type] )"
Set qy =
m mdsStepMaster.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to assign the parameter values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

strInsert = "insert into workspace_parameters "
& _
" ( workspace_id, parameter_id, " & _
" parameter_name, parameter_value )" &
-
" values ( " & _
Str(m lngWorkspaceId) & ", " &
" , " &
mFieldValue.MakeStringFieldValid(mstrParameterName) &
-

```

```

" , " &
mFieldValue.MakeStringFieldValid(mstrParameterValue)
& " )"
' mdsStepMaster.Execute strInsert, dbFailOnError
+ dbSQLPassThrough

Exit Sub

AddErr:

mstrSource = mstrModuleName & "Add"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errParameterInsertFailed, _
mstrSource,
LoadResString(errParameterInsertFailed)

End Sub
Public Sub Delete()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr

' Check if the db object is valid
Call CheckDB

strDelete = "delete from workspace_parameters " &
-
" where parameter_id = [p_id]"
Set qy =
m mdsStepMaster.CreateQueryDef(gstrEmptyString,
strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName & "Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteParameterFailed, _
mstrSource, _
LoadResString(errDeleteParameterFailed)

End Sub

Public Sub Modify()

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo ModifyErr

' Validate the updated values before trying to
modify the db

```

```

Call Validate

' Create a temporary querydef object with the
modify string
strUpdate = "update workspace_parameters " & _
" set workspace_id = [w_id], " & _
" parameter_name = [p_name], " & _
" parameter_value = [p_value], " & _
" description = [desc], " & _
" parameter_type = [p_type] " & _
" where parameter_id = [p_id]"

Set qy =
m mdsStepMaster.CreateQueryDef(gstrEmptyString,
strUpdate)

' Call a procedure to assign the parameter values
to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

' mdsStepMaster.Execute strUpdate, dbFailOnError

Exit Sub

ModifyErr:

mstrSource = mstrModuleName & "Modify"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errParameterUpdateFailed, _
mstrSource,
LoadResString(errParameterUpdateFailed)

End Sub
Public Property Get ParameterName() As String

ParameterName = mstrParameterName

End Property

Public Property Get ParameterId() As Long

ParameterId = m lngParameterId

End Property

Public Property Get NextIdentifier() As Long

Dim lngNextId As Long

On Error GoTo NextIdentifierErr

' First check if the database object is valid
Call CheckDB

' Retrieve the next identifier using the sequence
class
Set mParameterSeq = New cSequence
Set mParameterSeq.IdDatabase = m mdsStepMaster
mParameterSeq.IdentifierColumn = FLD_ID_PARAMETER

```

```

lngNextId = mParameterSeq.Identifier
Set mParameterSeq = Nothing

NextIdentifier = lngNextId
Exit Property

NextIdentifierErr:
LogErrors Errors
mstrSource = mstrModuleName & "NextIdentifier"
On Error GoTo 0
Err.Raise vbObjectError + errIdGetFailed, _
    mstrSource, LoadResString(errIdGetFailed)

End Property
Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property

Public Property Get WorkspaceId() As Long

    WorkspaceId = mlngWorkspaceId

End Property

Public Property Get ParameterValue() As String

    ParameterValue = mstrParameterValue

End Property
Public Property Get Description() As String

    Description = mstrDescription

End Property
Public Property Get ParameterType() As ParameterType

    ParameterType = mintParameterType

End Property

Private Sub Class_Initialize()

    Set mFieldValue = New cStringSM

    ' Initialize the operation indicator variable to
    Query
    ' It will be modified later by the collection
    class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp

End Sub

Private Sub Class_Terminate()

    Set mdbStepMaster = Nothing
    Set mFieldValue = Nothing

End Sub

```

## ***cRunCollt.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunCollt"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cRunCollt.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   This module implements a stack of
Iterator nodes.
'           Ensures that only cRunItNode objects
are stored in the stack.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cRunCollt."
Private mstrSource As String

Private mcIterators As cStack
Public Sub Clear()

    mcIterators.Clear

End Sub

Private Sub Class_Initialize()

    Set mcIterators = New cStack

End Sub

Private Sub Class_Terminate()

    Set mcIterators = Nothing

End Sub

Public Function Value(strItName As String) As String

    Dim lngIndex As Long

    For lngIndex = 0 To mcIterators.Count - 1
        If mcIterators(lngIndex).IteratorName =
strItName Then
            Value = mcIterators(lngIndex).Value
            Exit For
        End If
    Next lngIndex

```

```

End Function

Public Property Get Item(ByVal Position As Long) As
cRunItNode
Attribute Item.VB_UserMemId = 0

    Set Item = mcIterators(Position)

End Property

Public Function Count() As Long

    Count = mcIterators.Count

End Function

Public Function Pop() As cRunItNode

    Set Pop = mcIterators.Pop

End Function

Public Sub Push(objToPush As cRunItNode)

    Call mcIterators.Push(objToPush)

End Sub

```

## ***cRunInst.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
    Persistable = 0 'NotPersistable
    DataBindingBehavior = 0 'vbNone
    DataSourceBehavior = 0 'vbNone
    MTSTransactionMode = 0 'NotAnMTSObject
END
Attribute VB_Name = "cRunInst"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cRunCollt.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   This module controls the run
processing. It runs a branch
'           at a time and raises events when each
step completes execution.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

```

```

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cRunInst."
Private mstrSource As String

' Local variable(s) to hold property value(s)
Private mstrRootKey As String
Public WspId As Long
Private mcParameters As cArrParameters
Private mRunSteps As cArrSteps
Private mRunConstraints As cArrConstraints
Public RunConnections As cConnections
Public RunConnDtIs As cConnDtIs
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mcNavSteps As cStepTree

Private mcInstances As cInstances
Private mcFreeSteps As cVectorLng
Private mcFailures As cFailedSteps
Private mblnAsk As Boolean ' Set to True when the a
step with continuation criteria=Ask fails
Private mblnAbort As Boolean ' Set to True when the
run is aborted
Private msAbortDtIs As String
Private mbarrFree() As Byte
Private WithEvents mcTermSteps As cTermSteps
Attribute mcTermSteps.VB_VarHelpID = -1
Public RunId As Long
Public CreateInputFiles As Boolean

Private Enum WspLogEvents
    mintRunStart
    mintRunComplete
    mintStepStart
    mintStepComplete
End Enum

Private mcWspLog As cFileSM

Private mstrCurBranchRoot As String
Private mcDummyRootInstance As cInstance

' Key for the dummy root instance - Should be a key
that is invalid for an actual step record
Private Const mstrDummyRootKey As String = "D"

' Public events to notify the calling function of the
' start and end time for each step
Public Event RunStart(dtmStartTime As Currency,
strWspLog As String)
Public Event RunComplete(dtmEndTime As Currency)
Public Event StepStart(cStepRecord As cStep,
dtmStartTime As Currency, _
lngInstanceId As Long, lParentInstanceId As
Long, sPath As String, _
sIts As String, sItValue As String)
Public Event StepComplete(cStepRecord As cStep,
dtmEndTime As Currency, lngInstanceId As Long,
lElapsed As Long)
Public Event ProcessStart(cStepRecord As cStep,
strCommand As String, _

```

```

dtmStartTime As Currency, lngInstanceId As
Long, lParentInstanceId As Long, _
sItValue As String)
Public Event ProcessComplete(cStepRecord As cStep,
dtmEndTime As Currency, lngInstanceId As Long,
lElapsed As Long)

' The class that will execute each step - we trap the
events
' that are raised by it when a step starts/completes
' execution
Private WithEvents cExecStep1 As cRunStep
Attribute cExecStep1.VB_VarHelpID = -1
Private WithEvents cExecStep2 As cRunStep
Attribute cExecStep2.VB_VarHelpID = -1
Private WithEvents cExecStep3 As cRunStep
Attribute cExecStep3.VB_VarHelpID = -1
Private WithEvents cExecStep4 As cRunStep
Attribute cExecStep4.VB_VarHelpID = -1
Private WithEvents cExecStep5 As cRunStep
Attribute cExecStep5.VB_VarHelpID = -1
Private WithEvents cExecStep6 As cRunStep
Attribute cExecStep6.VB_VarHelpID = -1
Private WithEvents cExecStep7 As cRunStep
Attribute cExecStep7.VB_VarHelpID = -1
Private WithEvents cExecStep8 As cRunStep
Attribute cExecStep8.VB_VarHelpID = -1
Private WithEvents cExecStep9 As cRunStep
Attribute cExecStep9.VB_VarHelpID = -1

Private WithEvents cExecStep10 As cRunStep
Attribute cExecStep10.VB_VarHelpID = -1
Private WithEvents cExecStep11 As cRunStep
Attribute cExecStep11.VB_VarHelpID = -1
Private WithEvents cExecStep12 As cRunStep
Attribute cExecStep12.VB_VarHelpID = -1
Private WithEvents cExecStep13 As cRunStep
Attribute cExecStep13.VB_VarHelpID = -1
Private WithEvents cExecStep14 As cRunStep
Attribute cExecStep14.VB_VarHelpID = -1
Private WithEvents cExecStep15 As cRunStep
Attribute cExecStep15.VB_VarHelpID = -1
Private WithEvents cExecStep16 As cRunStep
Attribute cExecStep16.VB_VarHelpID = -1
Private WithEvents cExecStep17 As cRunStep
Attribute cExecStep17.VB_VarHelpID = -1
Private WithEvents cExecStep18 As cRunStep
Attribute cExecStep18.VB_VarHelpID = -1
Private WithEvents cExecStep19 As cRunStep
Attribute cExecStep19.VB_VarHelpID = -1

Private WithEvents cExecStep20 As cRunStep
Attribute cExecStep20.VB_VarHelpID = -1
Private WithEvents cExecStep21 As cRunStep
Attribute cExecStep21.VB_VarHelpID = -1
Private WithEvents cExecStep22 As cRunStep
Attribute cExecStep22.VB_VarHelpID = -1
Private WithEvents cExecStep23 As cRunStep
Attribute cExecStep23.VB_VarHelpID = -1
Private WithEvents cExecStep24 As cRunStep
Attribute cExecStep24.VB_VarHelpID = -1
Private WithEvents cExecStep25 As cRunStep
Attribute cExecStep25.VB_VarHelpID = -1

```

```

Private WithEvents cExecStep26 As cRunStep
Attribute cExecStep26.VB_VarHelpID = -1
Private WithEvents cExecStep27 As cRunStep
Attribute cExecStep27.VB_VarHelpID = -1
Private WithEvents cExecStep28 As cRunStep
Attribute cExecStep28.VB_VarHelpID = -1
Private WithEvents cExecStep29 As cRunStep
Attribute cExecStep29.VB_VarHelpID = -1

Private WithEvents cExecStep30 As cRunStep
Attribute cExecStep30.VB_VarHelpID = -1
Private WithEvents cExecStep31 As cRunStep
Attribute cExecStep31.VB_VarHelpID = -1
Private WithEvents cExecStep32 As cRunStep
Attribute cExecStep32.VB_VarHelpID = -1
Private WithEvents cExecStep33 As cRunStep
Attribute cExecStep33.VB_VarHelpID = -1
Private WithEvents cExecStep34 As cRunStep
Attribute cExecStep34.VB_VarHelpID = -1
Private WithEvents cExecStep35 As cRunStep
Attribute cExecStep35.VB_VarHelpID = -1
Private WithEvents cExecStep36 As cRunStep
Attribute cExecStep36.VB_VarHelpID = -1
Private WithEvents cExecStep37 As cRunStep
Attribute cExecStep37.VB_VarHelpID = -1
Private WithEvents cExecStep38 As cRunStep
Attribute cExecStep38.VB_VarHelpID = -1
Private WithEvents cExecStep39 As cRunStep
Attribute cExecStep39.VB_VarHelpID = -1

Private WithEvents cExecStep40 As cRunStep
Attribute cExecStep40.VB_VarHelpID = -1
Private WithEvents cExecStep41 As cRunStep
Attribute cExecStep41.VB_VarHelpID = -1
Private WithEvents cExecStep42 As cRunStep
Attribute cExecStep42.VB_VarHelpID = -1
Private WithEvents cExecStep43 As cRunStep
Attribute cExecStep43.VB_VarHelpID = -1
Private WithEvents cExecStep44 As cRunStep
Attribute cExecStep44.VB_VarHelpID = -1
Private WithEvents cExecStep45 As cRunStep
Attribute cExecStep45.VB_VarHelpID = -1
Private WithEvents cExecStep46 As cRunStep
Attribute cExecStep46.VB_VarHelpID = -1
Private WithEvents cExecStep47 As cRunStep
Attribute cExecStep47.VB_VarHelpID = -1
Private WithEvents cExecStep48 As cRunStep
Attribute cExecStep48.VB_VarHelpID = -1
Private WithEvents cExecStep49 As cRunStep
Attribute cExecStep49.VB_VarHelpID = -1

Private WithEvents cExecStep50 As cRunStep
Attribute cExecStep50.VB_VarHelpID = -1
Private WithEvents cExecStep51 As cRunStep
Attribute cExecStep51.VB_VarHelpID = -1
Private WithEvents cExecStep52 As cRunStep
Attribute cExecStep52.VB_VarHelpID = -1
Private WithEvents cExecStep53 As cRunStep
Attribute cExecStep53.VB_VarHelpID = -1
Private WithEvents cExecStep54 As cRunStep
Attribute cExecStep54.VB_VarHelpID = -1
Private WithEvents cExecStep55 As cRunStep
Attribute cExecStep55.VB_VarHelpID = -1

```

```
Private WithEvents cExecStep56 As cRunStep
Attribute cExecStep56.VB_VarHelpID = -1
Private WithEvents cExecStep57 As cRunStep
Attribute cExecStep57.VB_VarHelpID = -1
Private WithEvents cExecStep58 As cRunStep
Attribute cExecStep58.VB_VarHelpID = -1
Private WithEvents cExecStep59 As cRunStep
Attribute cExecStep59.VB_VarHelpID = -1
```

```
Private WithEvents cExecStep60 As cRunStep
Attribute cExecStep60.VB_VarHelpID = -1
Private WithEvents cExecStep61 As cRunStep
Attribute cExecStep61.VB_VarHelpID = -1
Private WithEvents cExecStep62 As cRunStep
Attribute cExecStep62.VB_VarHelpID = -1
Private WithEvents cExecStep63 As cRunStep
Attribute cExecStep63.VB_VarHelpID = -1
Private WithEvents cExecStep64 As cRunStep
Attribute cExecStep64.VB_VarHelpID = -1
Private WithEvents cExecStep65 As cRunStep
Attribute cExecStep65.VB_VarHelpID = -1
Private WithEvents cExecStep66 As cRunStep
Attribute cExecStep66.VB_VarHelpID = -1
Private WithEvents cExecStep67 As cRunStep
Attribute cExecStep67.VB_VarHelpID = -1
Private WithEvents cExecStep68 As cRunStep
Attribute cExecStep68.VB_VarHelpID = -1
Private WithEvents cExecStep69 As cRunStep
Attribute cExecStep69.VB_VarHelpID = -1
```

```
Private WithEvents cExecStep70 As cRunStep
Attribute cExecStep70.VB_VarHelpID = -1
Private WithEvents cExecStep71 As cRunStep
Attribute cExecStep71.VB_VarHelpID = -1
Private WithEvents cExecStep72 As cRunStep
Attribute cExecStep72.VB_VarHelpID = -1
Private WithEvents cExecStep73 As cRunStep
Attribute cExecStep73.VB_VarHelpID = -1
Private WithEvents cExecStep74 As cRunStep
Attribute cExecStep74.VB_VarHelpID = -1
Private WithEvents cExecStep75 As cRunStep
Attribute cExecStep75.VB_VarHelpID = -1
Private WithEvents cExecStep76 As cRunStep
Attribute cExecStep76.VB_VarHelpID = -1
Private WithEvents cExecStep77 As cRunStep
Attribute cExecStep77.VB_VarHelpID = -1
Private WithEvents cExecStep78 As cRunStep
Attribute cExecStep78.VB_VarHelpID = -1
Private WithEvents cExecStep79 As cRunStep
Attribute cExecStep79.VB_VarHelpID = -1
```

```
Private WithEvents cExecStep80 As cRunStep
Attribute cExecStep80.VB_VarHelpID = -1
Private WithEvents cExecStep81 As cRunStep
Attribute cExecStep81.VB_VarHelpID = -1
Private WithEvents cExecStep82 As cRunStep
Attribute cExecStep82.VB_VarHelpID = -1
Private WithEvents cExecStep83 As cRunStep
Attribute cExecStep83.VB_VarHelpID = -1
Private WithEvents cExecStep84 As cRunStep
Attribute cExecStep84.VB_VarHelpID = -1
Private WithEvents cExecStep85 As cRunStep
Attribute cExecStep85.VB_VarHelpID = -1
```

```
Private WithEvents cExecStep86 As cRunStep
Attribute cExecStep86.VB_VarHelpID = -1
Private WithEvents cExecStep87 As cRunStep
Attribute cExecStep87.VB_VarHelpID = -1
Private WithEvents cExecStep88 As cRunStep
Attribute cExecStep88.VB_VarHelpID = -1
Private WithEvents cExecStep89 As cRunStep
Attribute cExecStep89.VB_VarHelpID = -1
```

```
Private WithEvents cExecStep90 As cRunStep
Attribute cExecStep90.VB_VarHelpID = -1
Private WithEvents cExecStep91 As cRunStep
Attribute cExecStep91.VB_VarHelpID = -1
Private WithEvents cExecStep92 As cRunStep
Attribute cExecStep92.VB_VarHelpID = -1
Private WithEvents cExecStep93 As cRunStep
Attribute cExecStep93.VB_VarHelpID = -1
Private WithEvents cExecStep94 As cRunStep
Attribute cExecStep94.VB_VarHelpID = -1
Private WithEvents cExecStep95 As cRunStep
Attribute cExecStep95.VB_VarHelpID = -1
Private WithEvents cExecStep96 As cRunStep
Attribute cExecStep96.VB_VarHelpID = -1
Private WithEvents cExecStep97 As cRunStep
Attribute cExecStep97.VB_VarHelpID = -1
Private WithEvents cExecStep98 As cRunStep
Attribute cExecStep98.VB_VarHelpID = -1
Private WithEvents cExecStep99 As cRunStep
Attribute cExecStep99.VB_VarHelpID = -1
```

```
Private Const msIt As String = " Iterator: "
Private Const msItValue As String = " Value: "
Public Sub Abort()
```

```
On Error GoTo AbortErr
```

```
' Make sure that we don't execute any more steps
Call StopRun
```

```
If cExecStep1 Is Nothing And cExecStep2 Is
Nothing And cExecStep3 Is Nothing And cExecStep4 Is
Nothing And cExecStep5 Is Nothing And cExecStep6 Is
Nothing And cExecStep7 Is Nothing And cExecStep8 Is
Nothing And cExecStep9 Is Nothing And _
cExecStep10 Is Nothing And cExecStep11 Is
Nothing And cExecStep12 Is Nothing And cExecStep13 Is
Nothing And cExecStep14 Is Nothing And cExecStep15 Is
Nothing And cExecStep16 Is Nothing And cExecStep17 Is
Nothing And cExecStep18 Is Nothing And cExecStep19 Is
Nothing And _
cExecStep20 Is Nothing And cExecStep21 Is
Nothing And cExecStep22 Is Nothing And cExecStep23 Is
Nothing And cExecStep24 Is Nothing And cExecStep25 Is
Nothing And cExecStep26 Is Nothing And cExecStep27 Is
Nothing And cExecStep28 Is Nothing And cExecStep29 Is
Nothing And _
cExecStep30 Is Nothing And cExecStep31 Is
Nothing And cExecStep32 Is Nothing And cExecStep33 Is
Nothing And cExecStep34 Is Nothing And cExecStep35 Is
Nothing And cExecStep36 Is Nothing And cExecStep37 Is
Nothing And cExecStep38 Is Nothing And cExecStep39 Is
Nothing And _
```

```
cExecStep40 Is Nothing And cExecStep41 Is
Nothing And cExecStep42 Is Nothing And cExecStep43 Is
Nothing And cExecStep44 Is Nothing And cExecStep45 Is
Nothing And cExecStep46 Is Nothing And cExecStep47 Is
Nothing And cExecStep48 Is Nothing And cExecStep49 Is
Nothing And _
cExecStep50 Is Nothing And cExecStep51 Is
Nothing And cExecStep52 Is Nothing And cExecStep53 Is
Nothing And cExecStep54 Is Nothing And cExecStep55 Is
Nothing And cExecStep56 Is Nothing And cExecStep57 Is
Nothing And cExecStep58 Is Nothing And cExecStep59 Is
Nothing And _
cExecStep60 Is Nothing And cExecStep61 Is
Nothing And cExecStep62 Is Nothing And cExecStep63 Is
Nothing And cExecStep64 Is Nothing And cExecStep65 Is
Nothing And cExecStep66 Is Nothing And cExecStep67 Is
Nothing And cExecStep68 Is Nothing And cExecStep69 Is
Nothing And _
cExecStep70 Is Nothing And cExecStep71 Is
Nothing And cExecStep72 Is Nothing And cExecStep73 Is
Nothing And cExecStep74 Is Nothing And cExecStep75 Is
Nothing And cExecStep76 Is Nothing And cExecStep77 Is
Nothing And cExecStep78 Is Nothing And cExecStep79 Is
Nothing And _
cExecStep80 Is Nothing And cExecStep81 Is
Nothing And cExecStep82 Is Nothing And cExecStep83 Is
Nothing And cExecStep84 Is Nothing And cExecStep85 Is
Nothing And cExecStep86 Is Nothing And cExecStep87 Is
Nothing And cExecStep88 Is Nothing And cExecStep89 Is
Nothing And _
cExecStep90 Is Nothing And cExecStep91 Is
Nothing And cExecStep92 Is Nothing And cExecStep93 Is
Nothing And cExecStep94 Is Nothing And cExecStep95 Is
Nothing And cExecStep96 Is Nothing And cExecStep97 Is
Nothing And cExecStep98 Is Nothing And cExecStep99 Is
Nothing Then
Then...
WriteToWspLog (mintRunComplete)
RaiseEvent RunComplete(Determine64BitTime())
Else
' Abort each of the steps that is currently
executing.
If Not cExecStep1 Is Nothing Then
cExecStep1.Abort
End If
If Not cExecStep2 Is Nothing Then
cExecStep2.Abort
End If
If Not cExecStep3 Is Nothing Then
cExecStep3.Abort
End If
If Not cExecStep4 Is Nothing Then
cExecStep4.Abort
End If
If Not cExecStep5 Is Nothing Then
cExecStep5.Abort
End If
If Not cExecStep6 Is Nothing Then
```

```

    cExecStep6.Abort
End If

If Not cExecStep7 Is Nothing Then
    cExecStep7.Abort
End If

If Not cExecStep8 Is Nothing Then
    cExecStep8.Abort
End If

If Not cExecStep9 Is Nothing Then
    cExecStep9.Abort
End If

If Not cExecStep10 Is Nothing Then
    cExecStep10.Abort
End If

If Not cExecStep11 Is Nothing Then
    cExecStep11.Abort
End If

If Not cExecStep12 Is Nothing Then
    cExecStep12.Abort
End If

If Not cExecStep13 Is Nothing Then
    cExecStep13.Abort
End If

If Not cExecStep14 Is Nothing Then
    cExecStep14.Abort
End If

If Not cExecStep15 Is Nothing Then
    cExecStep15.Abort
End If

If Not cExecStep16 Is Nothing Then
    cExecStep16.Abort
End If

If Not cExecStep17 Is Nothing Then
    cExecStep17.Abort
End If

If Not cExecStep18 Is Nothing Then
    cExecStep18.Abort
End If

If Not cExecStep19 Is Nothing Then
    cExecStep19.Abort
End If

If Not cExecStep20 Is Nothing Then
    cExecStep20.Abort
End If

If Not cExecStep21 Is Nothing Then
    cExecStep21.Abort
End If

```

```

If Not cExecStep22 Is Nothing Then
    cExecStep22.Abort
End If

If Not cExecStep23 Is Nothing Then
    cExecStep23.Abort
End If

If Not cExecStep24 Is Nothing Then
    cExecStep24.Abort
End If

If Not cExecStep25 Is Nothing Then
    cExecStep25.Abort
End If

If Not cExecStep26 Is Nothing Then
    cExecStep26.Abort
End If

If Not cExecStep27 Is Nothing Then
    cExecStep27.Abort
End If

If Not cExecStep28 Is Nothing Then
    cExecStep28.Abort
End If

If Not cExecStep29 Is Nothing Then
    cExecStep29.Abort
End If

' ===== 30 - 39 =====
If Not cExecStep30 Is Nothing Then
    cExecStep30.Abort
End If

If Not cExecStep31 Is Nothing Then
    cExecStep31.Abort
End If

If Not cExecStep32 Is Nothing Then
    cExecStep32.Abort
End If

If Not cExecStep33 Is Nothing Then
    cExecStep33.Abort
End If

If Not cExecStep34 Is Nothing Then
    cExecStep34.Abort
End If

If Not cExecStep35 Is Nothing Then
    cExecStep35.Abort
End If

If Not cExecStep36 Is Nothing Then
    cExecStep36.Abort
End If

If Not cExecStep37 Is Nothing Then
    cExecStep37.Abort

```

```

End If

If Not cExecStep38 Is Nothing Then
    cExecStep38.Abort
End If

If Not cExecStep39 Is Nothing Then
    cExecStep39.Abort
End If

' ===== 40 - 49 =====
If Not cExecStep40 Is Nothing Then
    cExecStep40.Abort
End If

If Not cExecStep41 Is Nothing Then
    cExecStep41.Abort
End If

If Not cExecStep42 Is Nothing Then
    cExecStep42.Abort
End If

If Not cExecStep43 Is Nothing Then
    cExecStep43.Abort
End If

If Not cExecStep44 Is Nothing Then
    cExecStep44.Abort
End If

If Not cExecStep45 Is Nothing Then
    cExecStep45.Abort
End If

If Not cExecStep46 Is Nothing Then
    cExecStep46.Abort
End If

If Not cExecStep47 Is Nothing Then
    cExecStep47.Abort
End If

If Not cExecStep48 Is Nothing Then
    cExecStep48.Abort
End If

If Not cExecStep49 Is Nothing Then
    cExecStep49.Abort
End If

' ===== 50 - 59 =====
If Not cExecStep50 Is Nothing Then
    cExecStep50.Abort
End If

If Not cExecStep51 Is Nothing Then
    cExecStep51.Abort
End If

If Not cExecStep52 Is Nothing Then
    cExecStep52.Abort
End If

```

```

If Not cExecStep53 Is Nothing Then
  cExecStep53.Abort
End If

If Not cExecStep54 Is Nothing Then
  cExecStep54.Abort
End If

If Not cExecStep55 Is Nothing Then
  cExecStep55.Abort
End If

If Not cExecStep56 Is Nothing Then
  cExecStep56.Abort
End If

If Not cExecStep57 Is Nothing Then
  cExecStep57.Abort
End If

If Not cExecStep58 Is Nothing Then
  cExecStep58.Abort
End If

If Not cExecStep59 Is Nothing Then
  cExecStep59.Abort
End If

' ===== 60 - 69 =====
If Not cExecStep60 Is Nothing Then
  cExecStep60.Abort
End If

If Not cExecStep61 Is Nothing Then
  cExecStep61.Abort
End If

If Not cExecStep62 Is Nothing Then
  cExecStep62.Abort
End If

If Not cExecStep63 Is Nothing Then
  cExecStep63.Abort
End If

If Not cExecStep64 Is Nothing Then
  cExecStep64.Abort
End If

If Not cExecStep65 Is Nothing Then
  cExecStep65.Abort
End If

If Not cExecStep66 Is Nothing Then
  cExecStep66.Abort
End If

If Not cExecStep67 Is Nothing Then
  cExecStep67.Abort
End If

If Not cExecStep68 Is Nothing Then

```

```

  cExecStep68.Abort
End If

If Not cExecStep69 Is Nothing Then
  cExecStep69.Abort
End If

' ===== 70 - 79 =====
If Not cExecStep70 Is Nothing Then
  cExecStep70.Abort
End If

If Not cExecStep71 Is Nothing Then
  cExecStep71.Abort
End If

If Not cExecStep72 Is Nothing Then
  cExecStep72.Abort
End If

If Not cExecStep73 Is Nothing Then
  cExecStep73.Abort
End If

If Not cExecStep74 Is Nothing Then
  cExecStep74.Abort
End If

If Not cExecStep75 Is Nothing Then
  cExecStep75.Abort
End If

If Not cExecStep76 Is Nothing Then
  cExecStep76.Abort
End If

If Not cExecStep77 Is Nothing Then
  cExecStep77.Abort
End If

If Not cExecStep78 Is Nothing Then
  cExecStep78.Abort
End If

If Not cExecStep79 Is Nothing Then
  cExecStep79.Abort
End If

' ===== 80 - 89 =====
If Not cExecStep80 Is Nothing Then
  cExecStep80.Abort
End If

If Not cExecStep81 Is Nothing Then
  cExecStep81.Abort
End If

If Not cExecStep82 Is Nothing Then
  cExecStep82.Abort
End If

If Not cExecStep83 Is Nothing Then
  cExecStep83.Abort

```

```

End If

If Not cExecStep84 Is Nothing Then
  cExecStep84.Abort
End If

If Not cExecStep85 Is Nothing Then
  cExecStep85.Abort
End If

If Not cExecStep86 Is Nothing Then
  cExecStep86.Abort
End If

If Not cExecStep87 Is Nothing Then
  cExecStep87.Abort
End If

If Not cExecStep88 Is Nothing Then
  cExecStep88.Abort
End If

If Not cExecStep89 Is Nothing Then
  cExecStep89.Abort
End If

' ===== 90 - 99 =====
If Not cExecStep90 Is Nothing Then
  cExecStep90.Abort
End If

If Not cExecStep91 Is Nothing Then
  cExecStep91.Abort
End If

If Not cExecStep92 Is Nothing Then
  cExecStep92.Abort
End If

If Not cExecStep93 Is Nothing Then
  cExecStep93.Abort
End If

If Not cExecStep94 Is Nothing Then
  cExecStep94.Abort
End If

If Not cExecStep95 Is Nothing Then
  cExecStep95.Abort
End If

If Not cExecStep96 Is Nothing Then
  cExecStep96.Abort
End If

If Not cExecStep97 Is Nothing Then
  cExecStep97.Abort
End If

If Not cExecStep98 Is Nothing Then
  cExecStep98.Abort
End If

```

```

        If Not cExecStep99 Is Nothing Then
            cExecStep99.Abort
        End If

    End If

Exit Sub

AbortErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    ShowError errAbortFailed
    ' Try to abort the remaining steps, if any
    Resume Next

End Sub
Public Sub AbortSiblings(cTermInstance As cInstance)

    On Error GoTo AbortSiblingsErr

    ' Abort each of the steps that is currently
    executing.
    If Not cExecStep1 Is Nothing Then
        If cExecStep1.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep1.Abort
        End If
    End If

    If Not cExecStep2 Is Nothing Then
        If cExecStep2.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep2.Abort
        End If
    End If

    If Not cExecStep3 Is Nothing Then
        If cExecStep3.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep3.Abort
        End If
    End If

    If Not cExecStep4 Is Nothing Then
        If cExecStep4.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep4.Abort
        End If
    End If

    If Not cExecStep5 Is Nothing Then
        If cExecStep5.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep5.Abort
        End If
    End If

    If Not cExecStep6 Is Nothing Then
        If cExecStep6.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep6.Abort
        End If
    End If

```

```

        If Not cExecStep7 Is Nothing Then
            If cExecStep7.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
                cExecStep7.Abort
            End If
        End If

    End If

    If Not cExecStep8 Is Nothing Then
        If cExecStep8.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep8.Abort
        End If
    End If

    If Not cExecStep9 Is Nothing Then
        If cExecStep9.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep9.Abort
        End If
    End If

    If Not cExecStep10 Is Nothing Then
        If cExecStep10.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep10.Abort
        End If
    End If

    If Not cExecStep11 Is Nothing Then
        If cExecStep11.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep11.Abort
        End If
    End If

    If Not cExecStep12 Is Nothing Then
        If cExecStep12.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep12.Abort
        End If
    End If

    If Not cExecStep13 Is Nothing Then
        If cExecStep13.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep13.Abort
        End If
    End If

    If Not cExecStep14 Is Nothing Then
        If cExecStep14.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep14.Abort
        End If
    End If

    If Not cExecStep15 Is Nothing Then
        If cExecStep15.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep15.Abort
        End If
    End If

```

```

        If Not cExecStep16 Is Nothing Then
            If cExecStep16.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
                cExecStep16.Abort
            End If
        End If

    End If

    If Not cExecStep17 Is Nothing Then
        If cExecStep17.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep17.Abort
        End If
    End If

    If Not cExecStep18 Is Nothing Then
        If cExecStep18.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep18.Abort
        End If
    End If

    If Not cExecStep19 Is Nothing Then
        If cExecStep19.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep19.Abort
        End If
    End If

    If Not cExecStep20 Is Nothing Then
        If cExecStep20.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep20.Abort
        End If
    End If

    If Not cExecStep21 Is Nothing Then
        If cExecStep21.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep21.Abort
        End If
    End If

    If Not cExecStep22 Is Nothing Then
        If cExecStep22.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep22.Abort
        End If
    End If

    If Not cExecStep23 Is Nothing Then
        If cExecStep23.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep23.Abort
        End If
    End If

    If Not cExecStep24 Is Nothing Then
        If cExecStep24.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
            cExecStep24.Abort
        End If
    End If

```

```

If Not cExecStep25 Is Nothing Then
  If cExecStep25.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep25.Abort
  End If
End If

If Not cExecStep26 Is Nothing Then
  If cExecStep26.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep26.Abort
  End If
End If

If Not cExecStep27 Is Nothing Then
  If cExecStep27.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep27.Abort
  End If
End If

If Not cExecStep28 Is Nothing Then
  If cExecStep28.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep28.Abort
  End If
End If

If Not cExecStep29 Is Nothing Then
  If cExecStep29.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep29.Abort
  End If
End If

' ===== 30 =====
If Not cExecStep30 Is Nothing Then
  If cExecStep30.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep30.Abort
  End If
End If

If Not cExecStep31 Is Nothing Then
  If cExecStep31.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep31.Abort
  End If
End If

If Not cExecStep32 Is Nothing Then
  If cExecStep32.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep32.Abort
  End If
End If

If Not cExecStep33 Is Nothing Then
  If cExecStep33.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep33.Abort
  End If

```

```

End If

If Not cExecStep34 Is Nothing Then
  If cExecStep34.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep34.Abort
  End If
End If

If Not cExecStep35 Is Nothing Then
  If cExecStep35.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep35.Abort
  End If
End If

If Not cExecStep36 Is Nothing Then
  If cExecStep36.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep36.Abort
  End If
End If

If Not cExecStep37 Is Nothing Then
  If cExecStep37.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep37.Abort
  End If
End If

If Not cExecStep38 Is Nothing Then
  If cExecStep38.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep38.Abort
  End If
End If

If Not cExecStep39 Is Nothing Then
  If cExecStep39.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep39.Abort
  End If
End If

' ===== 40 =====
If Not cExecStep40 Is Nothing Then
  If cExecStep40.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep40.Abort
  End If
End If

If Not cExecStep41 Is Nothing Then
  If cExecStep41.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep41.Abort
  End If
End If

If Not cExecStep42 Is Nothing Then
  If cExecStep42.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep42.Abort

```

```

End If

If Not cExecStep43 Is Nothing Then
  If cExecStep43.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep43.Abort
  End If
End If

If Not cExecStep44 Is Nothing Then
  If cExecStep44.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep44.Abort
  End If
End If

If Not cExecStep45 Is Nothing Then
  If cExecStep45.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep45.Abort
  End If
End If

If Not cExecStep46 Is Nothing Then
  If cExecStep46.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep46.Abort
  End If
End If

If Not cExecStep47 Is Nothing Then
  If cExecStep47.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep47.Abort
  End If
End If

If Not cExecStep48 Is Nothing Then
  If cExecStep48.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep48.Abort
  End If
End If

If Not cExecStep49 Is Nothing Then
  If cExecStep49.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep49.Abort
  End If
End If

' ===== 50 =====
If Not cExecStep50 Is Nothing Then
  If cExecStep50.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep50.Abort
  End If
End If

If Not cExecStep51 Is Nothing Then
  If cExecStep51.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then

```



```

        cExecStep51.Abort
    End If
End If

If Not cExecStep52 Is Nothing Then
    If cExecStep52.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep52.Abort
    End If
End If

If Not cExecStep53 Is Nothing Then
    If cExecStep53.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep53.Abort
    End If
End If

If Not cExecStep54 Is Nothing Then
    If cExecStep54.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep54.Abort
    End If
End If

If Not cExecStep55 Is Nothing Then
    If cExecStep55.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep55.Abort
    End If
End If

If Not cExecStep56 Is Nothing Then
    If cExecStep56.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep56.Abort
    End If
End If

If Not cExecStep57 Is Nothing Then
    If cExecStep57.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep57.Abort
    End If
End If

If Not cExecStep58 Is Nothing Then
    If cExecStep58.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep58.Abort
    End If
End If

If Not cExecStep59 Is Nothing Then
    If cExecStep59.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep59.Abort
    End If
End If

' ===== 60 =====
If Not cExecStep60 Is Nothing Then

```

```

    If cExecStep60.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep60.Abort
    End If
End If

If Not cExecStep61 Is Nothing Then
    If cExecStep61.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep61.Abort
    End If
End If

If Not cExecStep62 Is Nothing Then
    If cExecStep62.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep62.Abort
    End If
End If

If Not cExecStep63 Is Nothing Then
    If cExecStep63.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep63.Abort
    End If
End If

If Not cExecStep64 Is Nothing Then
    If cExecStep64.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep64.Abort
    End If
End If

If Not cExecStep65 Is Nothing Then
    If cExecStep65.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep65.Abort
    End If
End If

If Not cExecStep66 Is Nothing Then
    If cExecStep66.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep66.Abort
    End If
End If

If Not cExecStep67 Is Nothing Then
    If cExecStep67.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep67.Abort
    End If
End If

If Not cExecStep68 Is Nothing Then
    If cExecStep68.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep68.Abort
    End If
End If

If Not cExecStep69 Is Nothing Then

```

```

    If cExecStep69.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep69.Abort
    End If
End If

' ===== 70 =====
If Not cExecStep70 Is Nothing Then
    If cExecStep70.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep70.Abort
    End If
End If

If Not cExecStep71 Is Nothing Then
    If cExecStep71.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep71.Abort
    End If
End If

If Not cExecStep72 Is Nothing Then
    If cExecStep72.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep72.Abort
    End If
End If

If Not cExecStep73 Is Nothing Then
    If cExecStep73.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep73.Abort
    End If
End If

If Not cExecStep74 Is Nothing Then
    If cExecStep74.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep74.Abort
    End If
End If

If Not cExecStep75 Is Nothing Then
    If cExecStep75.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep75.Abort
    End If
End If

If Not cExecStep76 Is Nothing Then
    If cExecStep76.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep76.Abort
    End If
End If

If Not cExecStep77 Is Nothing Then
    If cExecStep77.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
        cExecStep77.Abort
    End If
End If

```

```

If Not cExecStep78 Is Nothing Then
  If cExecStep78.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep78.Abort
  End If
End If

If Not cExecStep79 Is Nothing Then
  If cExecStep79.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep79.Abort
  End If
End If

' ===== 80 =====
If Not cExecStep80 Is Nothing Then
  If cExecStep80.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep80.Abort
  End If
End If

If Not cExecStep81 Is Nothing Then
  If cExecStep81.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep81.Abort
  End If
End If

If Not cExecStep82 Is Nothing Then
  If cExecStep82.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep82.Abort
  End If
End If

If Not cExecStep83 Is Nothing Then
  If cExecStep83.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep83.Abort
  End If
End If

If Not cExecStep84 Is Nothing Then
  If cExecStep84.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep84.Abort
  End If
End If

If Not cExecStep85 Is Nothing Then
  If cExecStep85.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep85.Abort
  End If
End If

If Not cExecStep86 Is Nothing Then
  If cExecStep86.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep86.Abort
  End If
End If

```

```

If Not cExecStep87 Is Nothing Then
  If cExecStep87.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep87.Abort
  End If
End If

If Not cExecStep88 Is Nothing Then
  If cExecStep88.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep88.Abort
  End If
End If

If Not cExecStep89 Is Nothing Then
  If cExecStep89.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep89.Abort
  End If
End If

' ===== 90 =====
If Not cExecStep90 Is Nothing Then
  If cExecStep90.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep90.Abort
  End If
End If

If Not cExecStep91 Is Nothing Then
  If cExecStep91.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep91.Abort
  End If
End If

If Not cExecStep92 Is Nothing Then
  If cExecStep92.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep92.Abort
  End If
End If

If Not cExecStep93 Is Nothing Then
  If cExecStep93.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep93.Abort
  End If
End If

If Not cExecStep94 Is Nothing Then
  If cExecStep94.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep94.Abort
  End If
End If

If Not cExecStep95 Is Nothing Then
  If cExecStep95.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep95.Abort
  End If
End If

```

```

End If

If Not cExecStep96 Is Nothing Then
  If cExecStep96.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep96.Abort
  End If
End If

If Not cExecStep97 Is Nothing Then
  If cExecStep97.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep97.Abort
  End If
End If

If Not cExecStep98 Is Nothing Then
  If cExecStep98.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep98.Abort
  End If
End If

If Not cExecStep99 Is Nothing Then
  If cExecStep99.ExecuteStep.ParentStepId =
cTermInstance.Step.ParentStepId Then
    cExecStep99.Abort
  End If
End If

Exit Sub

AbortSiblingsErr:
Call LogErrors(Errors)
On Error GoTo 0
ShowError errAbortFailed
' Try to abort the remaining steps, if any
Resume Next

End Sub
Private Sub ExecutionFailed(cTermStep As cRunStep)
' Called when execution of a step fails for any
reason - ensure that execution
' continues

On Error GoTo ExecutionFailedErr

Call AddFreeProcess(cTermStep.Index)

Call RunBranch(mstrCurBranchRoot)

Exit Sub

ExecutionFailedErr:
' Log the error code raised by Visual Basic - do
not raise an error here!
Call LogErrors(Errors)

End Sub
Private Sub FreeExecStep(lngIndex As Long)
' Frees an instance of a cExecutesM object
depending on the index
On Error GoTo FreeExecStepErr

```

```
Select Case lngIndex + 1
Case 1
  Set cExecStep1 = Nothing
Case 2
  Set cExecStep2 = Nothing
Case 3
  Set cExecStep3 = Nothing
Case 4
  Set cExecStep4 = Nothing
Case 5
  Set cExecStep5 = Nothing
Case 6
  Set cExecStep6 = Nothing
Case 7
  Set cExecStep7 = Nothing
Case 8
  Set cExecStep8 = Nothing
Case 9
  Set cExecStep9 = Nothing
Case 10
  Set cExecStep10 = Nothing
Case 11
  Set cExecStep11 = Nothing
Case 12
  Set cExecStep12 = Nothing
Case 13
  Set cExecStep13 = Nothing
Case 14
  Set cExecStep14 = Nothing
Case 15
  Set cExecStep15 = Nothing
Case 16
  Set cExecStep16 = Nothing
Case 17
  Set cExecStep17 = Nothing
Case 18
  Set cExecStep18 = Nothing
Case 19
  Set cExecStep19 = Nothing
Case 20
  Set cExecStep20 = Nothing
Case 21
  Set cExecStep21 = Nothing
Case 22
  Set cExecStep22 = Nothing
Case 23
  Set cExecStep23 = Nothing
Case 24
  Set cExecStep24 = Nothing
Case 25
  Set cExecStep25 = Nothing
Case 26
  Set cExecStep26 = Nothing
Case 27
  Set cExecStep27 = Nothing
Case 28
  Set cExecStep28 = Nothing
Case 29
  Set cExecStep29 = Nothing
Case 30
  Set cExecStep30 = Nothing
Case 31
```

```
Set cExecStep31 = Nothing
Case 32
  Set cExecStep32 = Nothing
Case 33
  Set cExecStep33 = Nothing
Case 34
  Set cExecStep34 = Nothing
Case 35
  Set cExecStep35 = Nothing
Case 36
  Set cExecStep36 = Nothing
Case 37
  Set cExecStep37 = Nothing
Case 38
  Set cExecStep38 = Nothing
Case 39
  Set cExecStep39 = Nothing
Case 40
  Set cExecStep40 = Nothing
Case 41
  Set cExecStep41 = Nothing
Case 42
  Set cExecStep42 = Nothing
Case 43
  Set cExecStep43 = Nothing
Case 44
  Set cExecStep44 = Nothing
Case 45
  Set cExecStep45 = Nothing
Case 46
  Set cExecStep46 = Nothing
Case 47
  Set cExecStep47 = Nothing
Case 48
  Set cExecStep48 = Nothing
Case 49
  Set cExecStep49 = Nothing
Case 50
  Set cExecStep50 = Nothing
Case 51
  Set cExecStep51 = Nothing
Case 52
  Set cExecStep52 = Nothing
Case 53
  Set cExecStep53 = Nothing
Case 54
  Set cExecStep54 = Nothing
Case 55
  Set cExecStep55 = Nothing
Case 56
  Set cExecStep56 = Nothing
Case 57
  Set cExecStep57 = Nothing
Case 58
  Set cExecStep58 = Nothing
Case 59
  Set cExecStep59 = Nothing
Case 60
  Set cExecStep60 = Nothing
Case 61
  Set cExecStep61 = Nothing
Case 62
  Set cExecStep62 = Nothing
```

```
Case 63
  Set cExecStep63 = Nothing
Case 64
  Set cExecStep64 = Nothing
Case 65
  Set cExecStep65 = Nothing
Case 66
  Set cExecStep66 = Nothing
Case 67
  Set cExecStep67 = Nothing
Case 68
  Set cExecStep68 = Nothing
Case 69
  Set cExecStep69 = Nothing
Case 70
  Set cExecStep70 = Nothing
Case 71
  Set cExecStep71 = Nothing
Case 72
  Set cExecStep72 = Nothing
Case 73
  Set cExecStep73 = Nothing
Case 74
  Set cExecStep74 = Nothing
Case 75
  Set cExecStep75 = Nothing
Case 76
  Set cExecStep76 = Nothing
Case 77
  Set cExecStep77 = Nothing
Case 78
  Set cExecStep78 = Nothing
Case 79
  Set cExecStep79 = Nothing
Case 80
  Set cExecStep80 = Nothing
Case 81
  Set cExecStep81 = Nothing
Case 82
  Set cExecStep82 = Nothing
Case 83
  Set cExecStep83 = Nothing
Case 84
  Set cExecStep84 = Nothing
Case 85
  Set cExecStep85 = Nothing
Case 86
  Set cExecStep86 = Nothing
Case 87
  Set cExecStep87 = Nothing
Case 88
  Set cExecStep88 = Nothing
Case 89
  Set cExecStep89 = Nothing
Case 90
  Set cExecStep90 = Nothing
Case 91
  Set cExecStep91 = Nothing
Case 92
  Set cExecStep92 = Nothing
Case 93
  Set cExecStep93 = Nothing
Case 94
```

```

        Set cExecStep94 = Nothing
    Case 95
        Set cExecStep95 = Nothing
    Case 96
        Set cExecStep96 = Nothing
    Case 97
        Set cExecStep97 = Nothing
    Case 98
        Set cExecStep98 = Nothing
    Case 99
        Set cExecStep99 = Nothing
    Case Else
        BugAssert False, "FreeExecStep: Invalid
index value!"
    End Select

    Exit Sub

FreeExecStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)

End Sub
Private Sub ProcessAskFailures()
' This procedure is called when a step with a
continuation criteria = Ask has failed.
' Wait for all running processes to complete
before displaying an Abort/Retry/Fail
' message to the user. We process every Ask step
that has failed and use a simple
' algorithm to determine what to do next.
' 1. An abort response to any failure results in
an immediate abort of the run
' 2. A continue means the run continues - this
failure is popped off the failure list.
' 3. A retry means that the execution details for
the instance are cleared and the
' step is re-executed.
Dim lIndex As Long
Dim cStepRec As cStep
Dim cNextInst As cInstance
Dim cFailureRec As cFailedStep

On Error GoTo ProcessAskFailuresErr

' Display a popup message for all steps that have
failed with a continuation
' criteria of Ask
For lIndex = mcFailures.Count - 1 To 0 Step -1

    Set cFailureRec = mcFailures(lIndex)

    If cFailureRec.ContCriteria =
gintOnFailureAsk Then
        Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)
        ' Ask the user whether to
abort/retry/continue
        #If RUN_ONLY Then
            cFailureRec.AskResponse =
ShowMessageBox(0, _
                "Step '" &
GetStepNodeText(cStepRec) & "' failed." & _

```

```

                "Select Abort to abort run
and Ignore to continue." & _
                "Select Retry to re-execute
the failed step.", _
                "Step Failure", _
                MB_ABORTRETRYIGNORE +
                MB_APPLMODAL + MB_ICONEXCLAMATION)
            #Else
                cFailureRec.AskResponse =
ShowMessageBox(frmRunning.hWnd, _
                "Step '" &
GetStepNodeText(cStepRec) & "' failed." & _
                "Select Abort to abort run
and Ignore to continue." & _
                "Select Retry to re-execute
the failed step.", _
                "Step Failure", _
                MB_ABORTRETRYIGNORE +
                MB_APPLMODAL + MB_ICONEXCLAMATION)
            #End If

' Process an abort response immediately
If cFailureRec.AskResponse = IDABORT Then
    mblnAbort = True
    Set cNextInst =
mcInstances.QueryInstance(cFailureRec.InstanceId)
    Call RunPendingSiblings(cNextInst,
cFailureRec.EndTime)
    Exit For
    End If
End If

Next lIndex

' Process all failed steps for which we have
Ignore and Retry responses.
If Not mblnAbort Then
    ' Navigate in reverse order since we'll be
deleting items from the collection
    For lIndex = mcFailures.Count - 1 To 0 Step -
1
        If mcFailures(lIndex).ContCriteria =
gintOnFailureAsk Then
            mblnAsk = False
            Set cFailureRec =
mcFailures.Delete(lIndex)

            Select Case cFailureRec.AskResponse
                Case IDABORT
                    BugAssert True

                Case IDRETRY
                    ' Delete all instances for
the failed step and re-try
                    ' Returns a parent instance
                    Set cNextInst =
ProcessRetryStep(cFailureRec)
                    Call
RunPendingStepInBranch(mstrCurBranchRoot, cNextInst)

                Case IDIGNORE

```

```

                Set cNextInst =
mcInstances.QueryInstance(cFailureRec.InstanceId)
                Call
RunPendingSiblings(cNextInst, cFailureRec.EndTime)
            End Select
        End If
        Next lIndex
    End If

Exit Sub

ProcessAskFailuresErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Err.Raise vbObjectError + errExecuteBranchFailed,
mstrModuleName, _
    LoadResString(errExecuteBranchFailed)

End Sub
Private Function ProcessRetryStep(cFailureRec As
cFailedStep) As cInstance
' This procedure is called when a step with a
continuation criteria = Ask has failed
' and the user wants to re-execute the step.
' We delete all existing instances for the step
and reset the iterator, if
' any on the parent instance - this way we ensure
that the step will be executed
' in the next pass.
Dim lIndex As Long
Dim cParentInstance As cInstance
Dim cSubStepRec As cSubStep
Dim cStepRec As cStep

On Error GoTo ProcessRetryStepErr

' Navigate in reverse order since we'll be
deleting items from the collection
For lIndex = mcInstances.Count - 1 To 0 Step -1

    If mcInstances(lIndex).Step.StepId =
cFailureRec.StepId Then
        Set cParentInstance =
mcInstances.QueryInstance(mcInstances(lIndex).ParentI
nstanceId)
        Set cSubStepRec =
cParentInstance.QuerySubStep(cFailureRec.StepId)
        Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)

        ' Decrement the child count on the parent
instance and
reset the
' step iterators on the sub-step record,
if any -
' all the iterations of the step will be
re-executed.
        cParentInstance.ChildDeleted
cFailureRec.StepId
        cParentInstance.AllComplete = False
        cParentInstance.AllStarted = False

```

```

        cSubStepRec.InitializeIt cStepRec,
mcParameters

        ' Now delete the current instance
        Set ProcessRetryStep =
mcInstances.Delete(lIndex)
        End If
        Next lIndex

        Exit Function

ProcessRetryStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Err.Raise vbObjectError + errExecuteBranchFailed,
mstrModuleName, _
        LoadResString(errExecuteBranchFailed)

End Function

Private Sub RunNextStep(ByVal dtmCompleteTime As
Currency, ByVal lngIndex As Long, _
        ByVal InstanceId As Long, ByVal
ExecutionStatus As InstanceStatus)
' Checks if there are any steps remaining to be
' executed in the current branch. If so, it
executes
' the step.
Dim cTermInstance As cInstance
Dim cFailure As cFailedStep

On Error GoTo RunNextStepErr

        BugMessage "RunNextStep: cExecStep" &
CStr(lngIndex + 1) & " has completed."

        Call mcTermSteps.Delete
        Call FreeExecStep(lngIndex)

' Call a procedure to add the freed up object to
the list
        Call AddFreeProcess(lngIndex)

        Set cTermInstance =
mcInstances.QueryInstance(InstanceId)
        cTermInstance.Status = ExecutionStatus

        If ExecutionStatus = gintFailed Then
                If cTermInstance.Step.ContinuationCriteria =
gintOnFailureAbortSiblings Then
                        Call AbortSiblings(cTermInstance)
                End If

                If Not
mcFailures.StepFailed(cTermInstance.Step.StepId) Then
                        Set cFailure = New cFailedStep
                        cFailure.InstanceId =
cTermInstance.InstanceId
                        cFailure.StepId =
cTermInstance.Step.StepId
                        cFailure.ParentStepId =
cTermInstance.Step.ParentStepId

```

```

        cFailure.ContCriteria =
cTermInstance.Step.ContinuationCriteria
        cFailure.EndTime = dtmCompleteTime
        mcFailures.Add cFailure
        Set cFailure = Nothing
        End If
        End If

        If ExecutionStatus = gintFailed And
cTermInstance.Step.ContinuationCriteria =
gintOnFailureAbort Then
                If StringEmpty(msAbortDtIs) Then
                        ' Initialize the abort message
                        msAbortDtIs = "Step '" &
GetStepNodeText(cTermInstance.Step) & "' failed." &
_
                        "Aborting execution. Please check
the error file for details."
                End If
                Call Abort

                ElseIf ExecutionStatus = gintFailed And
cTermInstance.Step.ContinuationCriteria =
gintOnFailureAsk Then
                        mblnAsk = True

                ' If the step failed due to a Cancel
operation (Abort), abort the run
                If mblnAbort Then
                        Call RunPendingSiblings(cTermInstance,
dtmCompleteTime)
                End If
                Else
                        Call RunPendingSiblings(cTermInstance,
dtmCompleteTime)
                End If

                If mblnAbort Then
                        If Not AnyStepRunning(mcFreeSteps, mbarrFree)
And Not StringEmpty(msAbortDtIs) Then
                                ' Display an error only if the abort is
due to a failure
                                ' We had to abort since a step failed -
since no other steps are currently
                                ' running, we can display a message to
the user saying that we had to abort
                                #If RUN_ONLY Then
                                        Call ShowMessageBox(0, msAbortDtIs,
"Run Aborted", _
                                                MB_APPLMODAL + MB_OK +
MB_ICONEXCLAMATION)
                                #Else
                                        Call ShowMessageBox(frmRunning.hWnd,
msAbortDtIs, "Run Aborted", _
                                                MB_APPLMODAL + MB_OK +
MB_ICONEXCLAMATION)
                                #End If
                                '
                                MsgBox msAbortDtIs, vbOKOnly, "Run
Aborted"
                                End If
                                ElseIf mblnAsk Then
                                        If Not AnyStepRunning(mcFreeSteps, mbarrFree)
Then

```

```

                ' Ask the user whether to
abort/retry/ignore failed steps
                Call ProcessAskFailures
                End If
                End If

                Exit Sub

RunNextStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errExecuteBranchFailed, mstrSource
Call ResetForm(lngIndex)

End Sub
Public Sub StopRun()

        ' Setting the Abort flag to True will ensure that
we
        ' don't execute any more steps
        mblnAbort = True

End Sub

Private Sub CreateDummyInstance(strRootKey As String)

        Dim cNewInstance As cInstance
        Dim cSubStepDtIs As cStep
        Dim lngSubStepId As Long

        On Error GoTo CreateDummyInstanceErr

        ' Create a new instance of the step
        ' initialize substeps for the step
        Set cNewInstance = New cInstance

        ' There can be multiple iterations of the top
level nodes
        ' running at the same time, but only one branch
at any
        ' time - so enforce a degree of parallelism of 1
on this
        ' node!
        Set cNewInstance.Step = New cStep
        cNewInstance.DegreeParallelism = 1
        cNewInstance.Key = mstrDummyRootKey

        cNewInstance.InstanceId = NewInstanceId
        cNewInstance.ParentInstanceId = 0

        lngSubStepId = MakeIdentifierValid(strRootKey)

        Set cSubStepDtIs =
mcRunSteps.QueryStep(lngSubStepId)
        If cSubStepDtIs.EnabledFlag Then
                ' Create a child node for the step
corresponding to
                ' the root node of the branch being currently
executed,
                ' only if it has been enabled
                Call cNewInstance.CreateSubStep(cSubStepDtIs,
mcParameters)
        End If

```

```

mcInstances.Add cNewInstance
Set cNewInstance.Iterators =
DetermineIterators(cNewInstance)

' Set a reference to the newly created dummy
instance
Set mcDummyRootInstance = cNewInstance

Set cNewInstance = Nothing

Exit Sub

CreateDummyInstanceErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"CreateDummyInstance"
Err.Raise vbObjectError +
errCreateInstanceFailed, _
mstrSource,
LoadResString(errCreateInstanceFailed)

End Sub
Private Function CreateInstance(cExecStep As cStep, _
cParentInstance As cInstance) As cInstance
' Creates a new instance of the passed in step.
Returns
' a reference to the newly created instance
object.

Dim cNewInstance As cInstance
Dim nodChild As cStep
Dim lngSubStepId As Long

On Error GoTo CreateInstanceErr

' Create a new instance of the step
' initialize substeps for the step
Set cNewInstance = New cInstance
Set cNewInstance.Step = cExecStep
cNewInstance.Key = MakeKeyValid(cExecStep.StepId,
cExecStep.StepType)
cNewInstance.ParentInstanceId =
cParentInstance.InstanceId
cNewInstance.InstanceId = NewInstanceId
' Validate the degree of parallelism field before
assigning it to the instance -
' (the parameter value might have been set to an
invalid value at runtime)
Call
ValidateParallelism(cExecStep.DegreeParallelism, _
cExecStep.WorkspaceId,
ParamsInWsp:=mcParameters)
cNewInstance.DegreeParallelism =
SubstituteParameters(cExecStep.DegreeParallelism, _
cExecStep.WorkspaceId,
WspParameters:=mcParameters)

If mcNavSteps.HasChild(StepKey:=cNewInstance.Key)
Then

```

```

Set nodChild =
mcNavSteps.ChildStep(StepKey:=cNewInstance.Key)
Do
If nodChild.EnabledFlag Then
' Create nodes for all it's substeps
only
' if the substeps have been enabled
Call
cNewInstance.CreateSubStep(nodChild, mcParameters)
End If

Set nodChild =
mcNavSteps.NextStep(StepId:=nodChild.StepId)
Loop While (Not nodChild Is Nothing)
End If

mcInstances.Add cNewInstance
Set cNewInstance.Iterators =
DetermineIterators(cNewInstance)

' Increment the number of executing steps on the
parent
cParentInstance.ChildExecuted (cExecStep.StepId)

Set CreateInstance = cNewInstance

Exit Function

CreateInstanceErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "CreateInstance"
Err.Raise vbObjectError +
errCreateInstanceFailed, _
mstrSource,
LoadResString(errCreateInstanceFailed)

End Function
Private Function DetermineIterators(cInstanceRec As
cInstance) As cRunColIt
' Returns a collection of all the iterator values
for this
' instance - since an iterator that is defined at
a
' particular level can be used in all it's
substeps, we
' need to navigate the step tree all the way to
the root

Dim cRunIts As cRunColIt
Dim cRunIt As cRunItNode
Dim cStepIt As cIterator
Dim cParentInst As cInstance
Dim cSubStepRec As cSubStep
Dim cSubStepDtIs As cStep
Dim lngSubStepId As Long
Dim lngIndex As Long

On Error GoTo DetermineIteratorsErr

Set cRunIts = New cRunColIt

```

```

If cInstanceRec.ParentInstanceId > 0 Then
' The last iterator for an instance of a step
is stored
' on it's parent! So navigate up before
beginning the
' search for iterator values.
Set cParentInst =
mcInstances.QueryInstance(cInstanceRec.ParentInstanceId)

' Get the sub-step record for the current
step
' on it's parent's instance!
lngSubStepId = cInstanceRec.Step.StepId
Set cSubStepRec =
cParentInst.QuerySubStep(lngSubStepId)
Set cSubStepDtIs =
mcRunSteps.QueryStep(lngSubStepId)

' And determine the next iteration value for
the
' substep in this instance
Set cStepIt =
cSubStepRec.NewIteration(cSubStepDtIs)

If Not cStepIt Is Nothing Then
' Add the iterator details to the
collection since
' an iterator has been defined for the
step
Set cRunIt = New cRunItNode
cRunIt.IteratorName =
cSubStepDtIs.IteratorName
cRunIt.Value =
SubstituteParameters(cStepIt.Value,
cSubStepDtIs.WorkspaceId,
WspParameters:=mcParameters)
cRunIt.StepId = cSubStepRec.StepId
cRunIts.Push cRunIt
End If

' Since the parent instance has all the
iterators upto
' that level, read them and push them on to
the stack for
' this instance
For lngIndex = 0 To
cParentInst.Iterators.Count - 1
Set cRunIt =
cParentInst.Iterators(lngIndex)
cRunIts.Push cRunIt
Next lngIndex
End If

Set DetermineIterators = cRunIts

Exit Function

DetermineIteratorsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0

```

```

    mstrSource = mstrModuleName &
"DetermineIterators"
    Err.Raise vbObjectError + errExecInstanceFailed,
-
    mstrSource,
LoadResString(errExecInstanceFailed)
End Function
Private Function DetermineConstraints(cInstanceRec As
cInstance, _
    intConsType As ConstraintType) As Variant
' Returns a collection of all the constraints for
this
' instance of the passed in type - all the
constraints defined
' for the manager are executed first, followed by
those defined
' for the step. If a step has an iterator defined
for it, each
' constraint is executed only once.

Dim cParentInst As cInstance
Dim cTempInst As cInstance
Dim vntConstraints As Variant
Dim vntTempCons As Variant
Dim cColConstraints() As Variant
Dim lngConsCount As Long

On Error GoTo DetermineConstraintsErr

Set cTempInst = cInstanceRec
lngConsCount = 0

' Go all the way to the root
Do
    If cTempInst.ParentInstanceId > 0 Then
        Set cParentInst =
mcInstances.QueryInstance(cTempInst.ParentInstanceId)
    Else
        Set cParentInst = Nothing
    End If

' Check if the step has an iterator defined
for it
    If cTempInst.ValidForIteration(cParentInst,
intConsType) Then
        vntTempCons =
mcRunConstraints.ConstraintsForStep( _
            cTempInst.Step.StepId,
cTempInst.Step.VersionNo, _
            intConsType, blnSort:=True, _
            blnGlobal:=False,
blnGlobalConstraintsOnly:=False)

        If Not IsEmpty(vntTempCons) Then
            ReDim Preserve
cColConstraints(lngConsCount)
            cColConstraints(lngConsCount) =
vntTempCons
            lngConsCount = lngConsCount + 1
        End If
    End If
End Do

```

```

    Set cTempInst = cParentInst
Loop While Not cTempInst Is Nothing

If lngConsCount > 0 Then
    vntTempCons =
OrderConstraints(cColConstraints, intConsType)
End If

DetermineConstraints = vntTempCons

Exit Function

DetermineConstraintsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"DetermineConstraints"
Err.Raise vbObjectError + errExecInstanceFailed,
-
    mstrSource,
LoadResString(errExecInstanceFailed)
End Function
Private Function GetInstanceToExecute(cParentNode As
cInstance, _
    cSubStepRec As cSubStep, _
    cSubStepDtIs As cStep) As cInstance

Dim cSubStepInst As cInstance

On Error GoTo GetInstanceToExecuteErr

BugAssert Not (cParentNode Is Nothing Or _
    cSubStepRec Is Nothing Or _
    cSubStepDtIs Is Nothing), _
    "GetInstanceToExecute: Input invalid"

' Check if it has iterators
If cSubStepDtIs.IteratorCount = 0 Then
' Check if the step has been executed
If cSubStepRec.TasksRunning = 0 And
cSubStepRec.TasksComplete = 0 And _
    Not
mcInstances.CompletedInstanceExists(cParentNode.Insta
nceId, cSubStepDtIs) Then
' The sub-step hasn't been executed yet.
' Create an instance for it and exit
Set cSubStepInst =
CreateInstance(cSubStepDtIs, cParentNode)
Else
Set cSubStepInst = Nothing
End If
Else
' Check if there are pending iterations for
the sub-step
If Not
cSubStepRec.NextIteration(cSubStepDtIs) Is Nothing
Then
' Pending iterations exist - create an
instance for the sub-step and exit

```

```

    Set cSubStepInst =
CreateInstance(cSubStepDtIs, cParentNode)
Else
' No more iterations - continue with the
next substep
Set cSubStepInst = Nothing
End If
End If

Set GetInstanceToExecute = cSubStepInst
Exit Function

GetInstanceToExecuteErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"GetInstanceToExecute"
Err.Raise vbObjectError + errNavInstancesFailed,
-
    mstrSource,
LoadResString(errNavInstancesFailed)
End Function

Public Function InstancesForStep(lngStepId As Long,
ByRef StepStatus As InstanceStatus) As cInstances
' Returns an array of all the instances for a
step
Dim lngIndex As Long
Dim cTempInst As cInstance
Dim cStepInstances As cInstances
Dim cStepRec As cStep

On Error GoTo InstancesForStepErr

Set cStepInstances = New cInstances

For lngIndex = 0 To mcInstances.Count - 1
    Set cTempInst = mcInstances(lngIndex)

    If cTempInst.Step.StepId = lngStepId Then
        cStepInstances.Add cTempInst
    End If
Next lngIndex

If cStepInstances.Count = 0 Then
    Set cStepRec =
mcRunSteps.QueryStep(lngStepId)
    If Not
mcFailures.ExecutesSubStep(cStepRec.ParentStepId) Then
        StepStatus = gintAborted
    End If
    Set cStepRec = Nothing
End If

' Set the return value of the function to the
array of
' constraints that has been built above
Set InstancesForStep = cStepInstances

Set cStepInstances = Nothing
Exit Function

```

```

InstancesForStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "InstancesForStep"
Err.Raise vbObjectError + errNavInstancesFailed,
mstrSource, _
    LoadResString(errNavInstancesFailed)

End Function
Private Sub RemoveFreeProcess(lngRunningProcess As
Long)
' Removes the passed in element from the
collection of
' free objects

' Confirm that the last element in the array is
the one
' we need to delete
If mcFreeSteps(mcFreeSteps.Count - 1) =
lngRunningProcess Then
    mcFreeSteps.Delete
Position:=mcFreeSteps.Count - 1
Else
' Ask the class to find the element and
delete it
    mcFreeSteps.Delete Item:=lngRunningProcess
End If

End Sub
Private Sub AddFreeProcess(lngTerminatedProcess As
Long)
' Adds the passed in element to the collection of
' free objects

    mcFreeSteps.Add lngTerminatedProcess

End Sub

Private Sub ResetForm(Optional ByVal lngIndex As
Long)

    Dim lngTemp As Long

    On Error GoTo ResetFormErr

' Check if there are any running instances to
wait for
If mcFreeSteps.Count <>
gLngNumConcurrentProcesses Then

    For lngTemp = 0 To mcFreeSteps.Count - 1
        If mcFreeSteps(lngTemp) = lngIndex Then
            Exit For
        End If
    Next lngTemp

    If lngTemp <= mcFreeSteps.Count - 1 Then
' This process that just completed did
not exist in the list of
' free processes
        Call AddFreeProcess(lngIndex)

```

```

    End If

    If Not AnyStepRunning(mcFreeSteps, mbarrFree)
Then
        WriteToWspLog (mintRunComplete)
' All steps are complete
        RaiseEvent
RunComplete(Determine64BitTime())
    End If
Else
    WriteToWspLog (mintRunComplete)
        RaiseEvent RunComplete(Determine64BitTime())
    End If

    Exit Sub

ResetFormErr:

End Sub
Private Function NewInstanceId() As Long
' Will return new instance id's - uses a static
counter
' that it increments each time
Static lngInstance As Long

    lngInstance = lngInstance + 1
    NewInstanceId = lngInstance

End Function

Private Function
RunPendingStepInBranch(strCurBranchRoot As String, _
Optional cExecInstance As cInstance =
Nothing) As cInstance
' Runs a worker step in the branch being
executed, if
' there are any pending execution
' This function is also called when a step has
just completed
' execution - in which case the terminated
instance is
' passed in as the optional parameter. When that
happens,
' we first try to execute the siblings of the
terminated
' step if any are pending execution.
' If the terminated instance has not been passed
in, we
' start with the dummy root instance and navigate
down,
' trying to find a pending worker step.

    Dim cExecSubStep As cStep
    Dim cParentInstance As cInstance
    Dim cNextInst As cInstance

    On Error GoTo RunPendingStepInBranchErr

    If Not cExecInstance Is Nothing Then
' Called when an instance has terminated
' When a worker step terminates, then we need
to

```

```

' decrement the number of running steps on
it's
' manager
Set cParentInstance = _

mcInstances.QueryInstance(cExecInstance.ParentInstanc
eId)

    Else
        If StringEmpty(strCurBranchRoot) Or
mcDummyRootInstance Is Nothing Then
' Run complete - event raised by Run
method
            Set RunPendingStepInBranch = Nothing
            Exit Function
        End If

' If there are no pending steps on the root
instance,
' then there are no steps within the branch
that need
' to be executed
        If mcDummyRootInstance.AllComplete Or
mcDummyRootInstance.AllStarted Then
            Set RunPendingStepInBranch = Nothing
            Exit Function
        End If

        Set cParentInstance = mcDummyRootInstance
    End If

    Do
        Set cNextInst =
GetSubStepToExecute(cParentInstance)
        If cNextInst Is Nothing Then
' There are no steps within the branch
that can
' be executed - If we are at the dummy
instance,
' this branch has completed executing
        If cParentInstance.Key = mstrDummyRootKey

Then
            Set cNextInst = Nothing
            Exit Do
        Else
' Go to the parent instance and try
to find
' some other sibling is pending
execution
            Set cNextInst =
mcInstances.QueryInstance(cParentInstance.ParentInsta
nceId)

            If cParentInstance.SubSteps.Count = 0

Then
                cNextInst.ChildTerminated
                cParentInstance.Step.StepId
            End If
        End If
    End If

    BugAssert Not cNextInst Is Nothing
    Set cParentInstance = cNextInst

```



```

Loop While cNextInst.Step.StepType <>
gintWorkerStep

If Not cNextInst Is Nothing Then
Call ExecuteStep(cNextInst)
End If

Set RunPendingStepInBranch = cNextInst

Exit Function

RunPendingStepInBranchErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errNavInstancesFailed,
-
mstrModuleName &
"RunPendingStepInBranch",
LoadResString(errNavInstancesFailed)

End Function
Private Function RunPendingSibling(cTermInstance As
cInstance, _
dtmCompleteTime As Currency) As cInstance
' This process is called when a step terminates.
Tries to
' run a sibling of the terminated step, if one is
pending
' execution.

Dim cParentInstance As cInstance
Dim cNextInst As cInstance

On Error GoTo RunPendingSiblingErr

If StringEmpty(mstrCurBranchRoot) Or
mcDummyRootInstance Is Nothing Then
' Run complete - event raised by Run method
Set RunPendingSibling = Nothing
Exit Function
End If

BugAssert cTermInstance.ParentInstanceId > 0,
"Orphaned instance in array!"

' When a worker step terminates, then we need to
' decrement the number of running steps on it's
' manager
Set cParentInstance =
mcInstances.QueryInstance(cTermInstance.ParentInstanc
eId)

' Decrement the number of running processes on
the
' parent by 1
Call
cParentInstance.ChildTerminated(cTermInstance.Step.St
epId)

' The first step that terminates has to be a
worker

```

```

' If it is complete, update the completed steps
on the
' parent by 1.
Call
cParentInstance.ChildCompleted(cTermInstance.Step.Ste
pId)
cParentInstance.AllStarted = False

Do
Set cNextInst =
GetSubStepToExecute(cParentInstance, dtmCompleteTime)
If cNextInst Is Nothing Then
If cParentInstance.Key = mstrDummyRootKey

Then
Set cNextInst = Nothing
Exit Do
Else
' Go to the parent instance and try
to find
' some other sibling is pending
execution
Set cNextInst =
mcInstances.QueryInstance(cParentInstance.ParentInsta
nceId)

If cParentInstance.IsRunning Then
cNextInst.AllStarted = True
Else
' No more sub-steps to execute
Call
cNextInst.ChildCompleted(cParentInstance.Step.StepId)
Call
cNextInst.ChildTerminated(cParentInstance.Step.StepId
)
cNextInst.AllStarted = False
End If
End If

BugAssert Not cNextInst Is Nothing
Set cParentInstance = cNextInst

Loop While cNextInst.Step.StepType <>
gintWorkerStep

If Not cNextInst Is Nothing Then
Call ExecuteStep(cNextInst)
End If

Set RunPendingSibling = cNextInst

Exit Function

RunPendingSiblingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "RunPendingSibling"
Err.Raise vbObjectError + errNavInstancesFailed,
mstrSource, _
LoadResString(errNavInstancesFailed)

End Function

```

```

Private Sub RunPendingSiblings(cTermInstance As
cInstance, _
dtmCompleteTime As Currency)
' This process is called when a step terminates.
Tries to
' run siblings of the terminated step, if they
are pending
' execution.

Dim cExecInst As cInstance

On Error GoTo RunPendingSiblingsErr
BugMessage "In RunPendingSiblings"

' Call a procedure to run the sibling of the
terminated
' step, if any. This procedure will also update
the
' number of complete/running tasks on the manager
steps.
Set cExecInst = RunPendingSibling(cTermInstance,
dtmCompleteTime)

If Not cExecInst Is Nothing Then
Do
' Execute any other pending steps in the
branch.
' The step that has just terminated might
be
' the last one that was executing in a
sub-branch.
' That would mean that we can execute
another
' sub-branch that might involve more than
1 step.
' Pass the just executed step as a
parameter.
Set cExecInst =
RunPendingStepInBranch(mstrCurBranchRoot, cExecInst)
Loop While Not cExecInst Is Nothing
Else
If Not mcDummyRootInstance.IsRunning Then
' All steps have been executed in the
branch - run
' a new branch
Call RunNewBranch
Else
' There are no more steps to execute in
the current
' branch but we have running processes.
End If
End If

Exit Sub

RunPendingSiblingsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunPendingSiblings"
Err.Raise vbObjectError + errNavInstancesFailed,
-

```

```

        mstrSource,
LoadResString(errNavInstancesFailed)
End Sub

Private Sub NoSubStepsToExecute(cMgrInstance As
cInstance, Optional dtmCompleteTime As Currency =
gdtmEmpty)
' Called when we cannot find any more substeps to
run for
' manager step - set the allcomplete or
allstarted
' properties to true

If cMgrInstance.IsRunning() Then
cMgrInstance.AllStarted = True
Else
cMgrInstance.AllComplete = True
If dtmCompleteTime <> gdtmEmpty Then
' Update the end time on the manager step
Call
TimeCompleteUpdateForStep(cMgrInstance,
dtmCompleteTime)
End If
End If

End Sub

Private Function GetSubStepToExecute(cParentNode As
cInstance, _
Optional dtmCompleteTime As Currency = 0) As
cInstance
' Returns the child of the passed in node that is
to be
' executed next. Checks if we are in the middle
of an instance
' being executed in which case it returns the
pending
' instance. Creates a new instance if there are
pending
' instances for a sub-step.

Dim lngIndex As Long
Dim cSubStepRec As cSubStep
Dim cSubStepDtls As cStep
Dim cSubStepInst As cInstance

On Error GoTo GetSubStepToExecuteErr

' There are a number of cases that need to be
accounted
' for here.
' 1. While traversing through all enabled nodes
for the
' first time - instance records may not exist for
the
' substeps.
' 2. Instance records exist, and there are
processes
' that need to be executed for a sub-step
' 3. There are no more processes that need to be
currently
' executed (till a process completes)

```

```

' 4. There are no more processes that need to be
executed
' (All substeps have completed execution)

' This is the only point where we check the Abort
flag -
' since this is the heart of the navigation
routine that
' selects processes to execute. Also, when a step
terminates
' selection of the next process goes through
here.
If mblnAbort Then
Set GetSubStepToExecute = Nothing
cParentNode.Status = gintAborted
Exit Function
End If

If mblnAsk Then
Set GetSubStepToExecute = Nothing
Exit Function
End If

If Not
mcFailures.ExecuteSubStep(cParentNode.Step.StepId)
Then
Set GetSubStepToExecute = Nothing
cParentNode.Status = gintAborted
Exit Function
End If

' First check if there are pending steps for the
parent!
If cParentNode.IsPending Then
' Loop through all the sub-steps for the
parent node
For lngIndex = 0 To
cParentNode.SubSteps.Count - 1
Set cSubStepRec =
cParentNode.SubSteps(lngIndex)
Set cSubStepDtls =
mcRunSteps.QueryStep(cSubStepRec.StepId)
If Not
mcInstances.InstanceAborted(cSubStepRec) Then
' Check if the sub-step is a worker
If cSubStepDtls.StepType =
gintWorkerStep Then
' Find/create an instance to
execute
Set cSubStepInst =
GetInstanceToExecute( _
cParentNode, cSubStepRec,
cSubStepDtls)
If Not cSubStepInst Is Nothing
Then
Exit For
Else
' Continue w/ the next sub-
step
End If
Else
' The sub-step is a manager step

```

```

' Check if there are any pending
instances for
' the manager
Set cSubStepInst =
mcInstances.QueryPendingInstance( _
cParentNode.InstanceId,
cSubStepRec.StepId)
If cSubStepInst Is Nothing Then
' Find/create an instance to
execute
Set cSubStepInst =
GetInstanceToExecute( _
cParentNode,
cSubStepRec, cSubStepDtls)
If Not cSubStepInst Is
Nothing Then
Exit For
Else
' Continue w/ the next
sub-step
End If
Else
' We have found a pending
instance for the
' sub-step (manager) - exit
the loop
Exit For
End If
End If
Next lngIndex

If lngIndex > cParentNode.SubSteps.Count - 1
Or cParentNode.SubSteps.Count = 0 Then
' If we could not find any sub-steps to
execute,
' mark the parent node as complete/all
started
Call NoSubStepsToExecute(cParentNode,
dtmCompleteTime)
Set cSubStepInst = Nothing
End If
End If

Set GetSubStepToExecute = cSubStepInst
Exit Function

GetSubStepToExecuteErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"GetSubStepToExecute"
Err.Raise vbObjectError + errNavInstancesFailed,
mstrSource, _
LoadResString(errNavInstancesFailed)

End Function

Private Sub TimeCompleteUpdateForStep(cMgrInstance As
cInstance, ByVal EndTime As Currency)

```

```

' Called when there are no more sub-steps to
execute for
' the manager step. It updates the end time and
status on
' the manager.
Dim lElapsed As Long

On Error GoTo TimeCompleteUpdateForStepErr

If cMgrInstance.Key <> mstrDummyRootKey Then
cMgrInstance.EndTime = EndTime
cMgrInstance.Status = gintComplete
lElapsed = (EndTime - cMgrInstance.StartTime)
* 10000
cMgrInstance.ElapsedTime = lElapsed
RaiseEvent StepComplete(cMgrInstance.Step,
EndTime, cMgrInstance.InstanceId, lElapsed)
End If

Exit Sub

TimeCompleteUpdateForStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed, mstrModuleName
& "TimeCompleteUpdateForStep"

End Sub

Private Function GetFreeObject() As Long

' Check the array of free objects and retrieve
the first one
If mcFreeSteps.Count > 0 Then
GetFreeObject = mcFreeSteps(mcFreeSteps.Count
- 1)
Else
mstrSource = mstrModuleName & "GetFreeObject"
ShowError errMaxProcessesExceeded
On Error GoTo 0
Err.Raise vbObjectError +
errMaxProcessesExceeded, _
mstrSource, _

LoadResString(errMaxProcessesExceeded)
End If

End Function
Private Function StepTerminated(cCompleteStep As
cStep, ByVal dtmCompleteTime As Currency, _
ByVal lngIndex As Long, ByVal InstanceId As
Long, ByVal ExecutionStatus As InstanceStatus) As
cStep
' This procedure is called whenever a step
terminates.
Dim cTermRec As cTermStep
Dim cInstRec As cInstance
Dim cStartInst As cInstance
Dim lElapsed As Long
Dim sLogLabel As String
Dim LogLabels As New cVectorStr
Dim iItIndex As Long

```

```

On Error GoTo StepTerminatedErr

Set cInstRec =
mcInstances.QueryInstance(InstanceId)
If dtmCompleteTime <> 0 And cInstRec.StartTime <>
0 Then
' Convert to milliseconds since that is the
default precision
lElapsed = (dtmCompleteTime -
cInstRec.StartTime) * 10000
Else
lElapsed = 0
End If

Set cStartInst = cInstRec
iItIndex = 0
Do While cInstRec.Key <> mstrDummyRootKey
sLogLabel = gstrSQ & cInstRec.Step.StepLabel
& gstrSQ

If iItIndex < cInstRec.Iterators.Count Then
If cStartInst.Iterators(iItIndex).StepId
= cInstRec.Step.StepId Then
sLogLabel = sLogLabel & msIt & gstrSQ
& cStartInst.Iterators(iItIndex).IteratorName &
gstrSQ & _
msItValue & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
iItIndex = iItIndex + 1
End If
End If

If cInstRec.Key = cStartInst.Key Then
' Append the execution status
sLogLabel = sLogLabel & " Status: " &
gstrSQ & gsExecutionStatus(ExecutionStatus) & gstrSQ
If ExecutionStatus = gintFailed Then
' Append the continuation criteria
for the step since it failed
sLogLabel = sLogLabel & "
Continuation Criteria: " & gstrSQ &
gsContCriteria(cInstRec.Step.ContinuationCriteria) &
gstrSQ

End If
End If
LogLabels.Add sLogLabel

Set cInstRec =
mcInstances.QueryInstance(cInstRec.ParentInstanceId)
Loop

Call WriteToWspLog(mintStepComplete, LogLabels,
dtmCompleteTime)
Set LogLabels = Nothing

' Adds the terminated step details to a queue.
Set cTermRec = New cTermStep
cTermRec.ExecutionStatus = ExecutionStatus
cTermRec.Index = lngIndex
cTermRec.InstanceId = InstanceId
cTermRec.TimeComplete = dtmCompleteTime
Call mcTermSteps.Add(cTermRec)
Set cTermRec = Nothing

```

```

RaiseEvent StepComplete(cCompleteStep,
dtmCompleteTime, InstanceId, lElapsed)

Exit Function

StepTerminatedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errExecuteBranchFailed, mstrSource
Call ResetForm(lngIndex)

End Function
Public Property Let RootKey(ByVal vdata As String)

mstrRootKey = vdata

End Property

Public Property Get RootKey() As String
RootKey = mstrRootKey
End Property

Private Function InitExecStep() As cRunStep
' Since arrays of objects cannot be declared as
WithEvents,
' we use a limited number of objects and set a
maximum
' on the number of steps that can run in parallel
' This is a wrapper that will create an instance
of
' a cExecuteSM object depending on the index
Dim lngIndex As Long

On Error GoTo InitExecStepErr

lngIndex = GetFreeObject

Select Case lngIndex + 1
Case 1
Set cExecStep1 = New cRunStep
Set InitExecStep = cExecStep1
Case 2
Set cExecStep2 = New cRunStep
Set InitExecStep = cExecStep2
Case 3
Set cExecStep3 = New cRunStep
Set InitExecStep = cExecStep3
Case 4
Set cExecStep4 = New cRunStep
Set InitExecStep = cExecStep4
Case 5
Set cExecStep5 = New cRunStep
Set InitExecStep = cExecStep5
Case 6
Set cExecStep6 = New cRunStep
Set InitExecStep = cExecStep6
Case 7
Set cExecStep7 = New cRunStep
Set InitExecStep = cExecStep7
Case 8
Set cExecStep8 = New cRunStep
Set InitExecStep = cExecStep8

```



```

Case 72
Set cExecStep72 = New cRunStep
Set InitExecStep = cExecStep72
Case 73
Set cExecStep73 = New cRunStep
Set InitExecStep = cExecStep73
Case 74
Set cExecStep74 = New cRunStep
Set InitExecStep = cExecStep74
Case 75
Set cExecStep75 = New cRunStep
Set InitExecStep = cExecStep75
Case 76
Set cExecStep76 = New cRunStep
Set InitExecStep = cExecStep76
Case 77
Set cExecStep77 = New cRunStep
Set InitExecStep = cExecStep77
Case 78
Set cExecStep78 = New cRunStep
Set InitExecStep = cExecStep78
Case 79
Set cExecStep79 = New cRunStep
Set InitExecStep = cExecStep79
Case 80
Set cExecStep80 = New cRunStep
Set InitExecStep = cExecStep80
Case 81
Set cExecStep81 = New cRunStep
Set InitExecStep = cExecStep81
Case 82
Set cExecStep82 = New cRunStep
Set InitExecStep = cExecStep82
Case 83
Set cExecStep83 = New cRunStep
Set InitExecStep = cExecStep83
Case 84
Set cExecStep84 = New cRunStep
Set InitExecStep = cExecStep84
Case 85
Set cExecStep85 = New cRunStep
Set InitExecStep = cExecStep85
Case 86
Set cExecStep86 = New cRunStep
Set InitExecStep = cExecStep86
Case 87
Set cExecStep87 = New cRunStep
Set InitExecStep = cExecStep87
Case 88
Set cExecStep88 = New cRunStep
Set InitExecStep = cExecStep88
Case 89
Set cExecStep89 = New cRunStep
Set InitExecStep = cExecStep89
Case 90
Set cExecStep90 = New cRunStep
Set InitExecStep = cExecStep90
Case 91
Set cExecStep91 = New cRunStep
Set InitExecStep = cExecStep91
Case 92
Set cExecStep92 = New cRunStep
Set InitExecStep = cExecStep92

```

```

Case 93
Set cExecStep93 = New cRunStep
Set InitExecStep = cExecStep93
Case 94
Set cExecStep94 = New cRunStep
Set InitExecStep = cExecStep94
Case 95
Set cExecStep95 = New cRunStep
Set InitExecStep = cExecStep95
Case 96
Set cExecStep96 = New cRunStep
Set InitExecStep = cExecStep96
Case 97
Set cExecStep97 = New cRunStep
Set InitExecStep = cExecStep97
Case 98
Set cExecStep98 = New cRunStep
Set InitExecStep = cExecStep98
Case 99
Set cExecStep99 = New cRunStep
Set InitExecStep = cExecStep99
Case Else
Set InitExecStep = Nothing
End Select

BugMessage "Sending cExecStep" & (lngIndex + 1) &
"! "

If Not InitExecStep Is Nothing Then
InitExecStep.Index = lngIndex

' Remove this element from the collection of
free objects
Call RemoveFreeProcess(lngIndex)
End If

Exit Function

InitExecStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Set InitExecStep = Nothing

End Function
Public Sub Run()
' Calls procedures to build a list of all the
steps that
' need to be executed and to execute them
' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cTempStep As cStep

On Error GoTo RunErr

If StringEmpty(mstrRootKey) Then
Call ShowError(errExecuteBranchFailed)
On Error GoTo 0
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName & "Run", _
LoadResString(errExecuteBranchFailed)
Else
' Execute the first branch

```

```

WriteToWspLog (mintRunStart)
RaiseEvent RunStart(Determine64BitTime(),
mcWspLog.FileName)

If mcNavSteps.HasChild(StepKey:=mstrRootKey)
Then
Set cTempStep =
mcNavSteps.ChildStep(StepKey:=mstrRootKey)
mstrCurBranchRoot =
MakeKeyValid(cTempStep.StepId, cTempStep.StepType)

Call
CreateDummyInstance(mstrCurBranchRoot)

' Run all pending steps in the branch
If Not RunBranch(mstrCurBranchRoot) Then
' Execute a new branch if there
aren't any
' steps to run
Call RunNewBranch
End If
Else
WriteToWspLog (mintRunComplete)
' No children to execute - the run is
complete
RaiseEvent
RunComplete(Determine64BitTime())
End If
End Sub

Exit Sub

RunErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
Call ResetForm

End Sub
Private Sub RunNewBranch()
' We will build a tree of all instances that
occur and
' the count of the sub-steps that are running
will be
' stored at each node in the tree (maintained
internally
' as an array). Since there can be multiple
iterations
' of the top level nodes running at the same
time, we
' create a dummy node at the root that keeps a
record of
' the instances of the top level node.

' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cNextStep As cStep
Dim bRunComplete As Boolean

On Error GoTo RunNewBranchErr

```

```

bRunComplete = False

Do
    If StringEmpty(mstrCurBranchRoot) Then
        Exit Do
        On Error GoTo 0
        Err.Raise vbObjectError +
errExecuteBranchFailed, mstrSource, _
LoadResString(errExecuteBranchFailed)
    Else
        Set cNextStep =
mcNavSteps.NextStep(StepKey:=mstrCurBranchRoot)
        If cNextStep Is Nothing Then
            mstrCurBranchRoot = gstrEmptyString
            bRunComplete = True
            Exit Do
        Else
            ' Starting execution of a new branch
            - initialize the
            ' module-level variable
            mstrCurBranchRoot =
MakeKeyValid(cNextStep.StepId, cNextStep.StepType)
            Call
CreateDummyInstance(mstrCurBranchRoot)
            End If
            Debug.Print "Running new branch: " &
mstrCurBranchRoot

            ' Loop until we find a branch that has steps to
            execute
            Loop While Not RunBranch(mstrCurBranchRoot)

            If bRunComplete Then
                WriteToWspLog (mintRunComplete)
                ' Run is complete
                RaiseEvent RunComplete(Determine64BitTime())
            End If

            Exit Sub

RunNewBranchErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
    On Error GoTo 0
    mstrSource = mstrModuleName & "RunNewBranch"
    Err.Raise vbObjectError + errExecuteBranchFailed,
mstrSource, _
        LoadResString(errExecuteBranchFailed)

End Sub
Private Function RunBranch(strRootNode As String) As
Boolean
    ' This procedure is called to run all the
    necessary steps
    ' in a branch. It can also be called when a step
    terminates,
    ' in which case the terminated step is passed in
    as the

```

```

' optional parameter. When a step terminates, we
need to
' either wait for some other steps to terminate
before
' we execute more steps or run as many steps as
necessary
' Returns True if there are steps currently
executing
' in the branch, else returns False
Dim cRunning As cInstance

On Error GoTo RunBranchErr

If Not StringEmpty(strRootNode) Then
    ' Call a procedure to execute all the enabled
    steps
    ' in the branch - will return the step node
    that is
    ' being executed - nothing means 'No more
    steps to
    ' execute in the branch'.
    Do
        Set cRunning =
RunPendingStepInBranch(strRootNode, cRunning)

        Loop While Not cRunning Is Nothing

        RunBranch = mcDummyRootInstance.IsRunning
    End If

Exit Function

RunBranchErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName & "RunBranch"
    Err.Raise vbObjectError + errExecuteBranchFailed,
-
        mstrSource,
LoadResString(errExecuteBranchFailed)

End Function
Private Sub TimeUpdateForProcess(StepRecord As cStep,
-
    ByVal InstanceId As Long, _
    Optional ByVal StartTime As Currency = 0, _
    Optional ByVal EndTime As Currency = 0, _
    Optional ByVal ElapsedTime As Long = 0, _
    Optional Command As String)
    ' We do not maintain start and end timestamps for
    the constraint
    ' of a step. Hence we check if the process that
    just started/
    ' terminated is the worker step that is being
    executed. If so,
    ' we update the start/end time and status on the
    instance record.

    Dim cInstanceRec As cInstance
    Dim sItVal As String

    On Error GoTo TimeUpdateForProcessErr

```

```

Set cInstanceRec =
mcInstances.QueryInstance(InstanceId)

If StartTime = 0 Then
    RaiseEvent ProcessComplete(StepRecord,
EndTime, InstanceId, ElapsedTime)
Else
    sItVal = GetInstanceItValue(cInstanceRec)
    RaiseEvent ProcessStart(StepRecord, Command,
StartTime, InstanceId, _
        cInstanceRec.ParentInstanceId,
sItVal)
End If

Call
cInstanceRec.UpdateStartTime(StepRecord.StepId,
StartTime, EndTime, ElapsedTime)

Exit Sub

TimeUpdateForProcessErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    WriteError errUpdateDisplayFailed, mstrModuleName
& "TimeUpdateForProcess"

End Sub
Private Sub TimeStartUpdateForStep(StepRecord As
cStep, _
    ByVal InstanceId As Long, _
    ByVal StartTime As Currency)

    ' Called when a step starts execution. Checks if
    this is the
    ' first enabled child of the manager step. If so,
    updates
    ' the start time and status on the manager.
    ' Also raises the Step Start event for the
    completed step.

    Dim cStartInst As cInstance
    Dim cInstanceRec As cInstance
    Dim LogLabels As New cVectorStr
    Dim iItIndex As Long
    Dim sLogLabel As String
    Dim sPath As String
    Dim sIt As String
    Dim sItVal As String

    On Error GoTo TimeStartUpdateForStepErr

    Set cStartInst =
mcInstances.QueryInstance(InstanceId)

    ' Determine the step path and iterator values for
    the step and raise a step start event
    Set cInstanceRec = cStartInst
    Do While cInstanceRec.Key <> mstrDummyRootKey
        If Not StringEmpty(sPath) Then
            sPath = sPath & gstrFileSeparator
        End If

```

```

        sPath = sPath & gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
        Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.ParentInstance
Id)
        Loop
        For iItIndex = cStartInst.Iterators.Count - 1 To
0 Step -1
            If Not StringEmpty(sIt) Then
                sIt = sIt & gstrFileSeparator
            End If
            sIt = sIt & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
        Next iItIndex

        sItVal = GetInstanceItValue(cStartInst)
        RaiseEvent StepStart(StepRecord, StartTime,
InstanceID, cStartInst.ParentInstanceID, _
        sPath, sIt, sItVal)

        iItIndex = 0
        Set cInstanceRec = cStartInst
        ' Raise a StepStart event for the manager step,
if this is it's first sub-step being executed
        Do While cInstanceRec.Key <> mstrDummyRootKey

            sLogLabel = gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
            If iItIndex < cStartInst.Iterators.Count Then
                If cStartInst.Iterators(iItIndex).StepID
= cInstanceRec.Step.StepID Then
                    sLogLabel = sLogLabel & msIt & gstrSQ
& cStartInst.Iterators(iItIndex).IteratorName &
gstrSQ & _
                        msItValue & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
                    iItIndex = iItIndex + 1
                End If
            End If
            LogLabels.Add sLogLabel

            If cInstanceRec.Key <> cStartInst.Key And
cInstanceRec.StartTime = 0 Then
                cInstanceRec.StartTime = StartTime
                cInstanceRec.Status = gintRunning
                sItVal = GetInstanceItValue(cInstanceRec)
                ' The step path and iterator values are
not needed for manager steps, since
                ' they are primarily used by the run
status form
                RaiseEvent StepStart(cInstanceRec.Step,
StartTime, cInstanceRec.InstanceID, _
                    cInstanceRec.ParentInstanceID,
gstrEmptyString, gstrEmptyString, _
                        sItVal)
            End If

            Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.ParentInstance
Id)
        Loop

```

```

        Call WriteToWspLog(mintStepStart, LogLabels,
StartTime)
        Set LogLabels = Nothing
        Exit Sub

TimeStartUpdateForStepErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    WriteError errUpdateDisplayFailed, mstrModuleName
& "TimeStartUpdateForStep"
End Sub
Private Sub WriteToWspLog(iLogEvent As WspLogEvents,
Optional StepDtIs As cVectorStr, _
Optional dtStamp As Currency = gdtmEmpty)

    ' Writes to the workspace log that is generated
for the run. The last three
    ' parameters are valid only for Step Start and
Step Complete events.
    Static bError As Boolean
    Dim sLabel As String
    Dim lIndex As Long
    Dim bHdr As Boolean
    Dim cTempConn As cConnection

    On Error GoTo WriteToWspLogErr

    Select Case iLogEvent
        Case mintRunStart
            Set mcWspLog = New cFileSM
            mcWspLog.FileName = GetDefaultDir(WspID,
mcParameters) & gstrFileSeparator & _
                Trim(Str(RunID)) &
gstrFileSeparator & "SMLog-" & Format(Now,
FMT_WSP_LOG_FILE) & gstrLogFileSuffix
            mcWspLog.WriteLine
            (JulianDateToString(Determine64BitTime()) & " Start
Run: " & vbTab & gstrSQ &
                GetWorkspaceDetails(WorkspaceID:=WspID)) & gstrSQ

            ' Write all current parameter values to
the log
            bHdr = False
            For lIndex = 0 To
mcParameters.ParameterCount - 1
                If mcParameters(lIndex).ParameterType
<> gintParameterApplication Then
                    If Not bHdr Then
                        mcWspLog.WriteLine
                        JulianDateToString(Determine64BitTime()) & "
Parameters: "
                            bHdr = True
                    Else
                        mcWspLog.WriteLine vbTab &
vbTab & vbTab
                            End If
                        mcWspLog.WriteLine vbTab & gstrSQ
& mcParameters(lIndex).ParameterName & gstrSQ & vbTab
& vbTab & gstrSQ &
                            mcParameters(lIndex).ParameterValue & gstrSQ
                    End If
                End If
            Next lIndex

```

```

        Next lIndex

        ' Write all connection properties to the
log
        For lIndex = 0 To RunConnections.Count -
1
            Set cTempConn =
RunConnections(lIndex)
            If lIndex = 0 Then
                mcWspLog.WriteLine
                JulianDateToString(Determine64BitTime()) & "
Connections: "
            Else
                mcWspLog.WriteLine vbTab & vbTab
& vbTab
                    End If
                mcWspLog.WriteLine vbTab & gstrSQ &
cTempConn.ConnectionName & gstrSQ & _
                    vbTab & vbTab & gstrSQ &
cTempConn.ConnectionValue & gstrSQ & _
                    vbTab & "No Count: " & gstrSQ
& cTempConn.NoCountDisplay & gstrSQ & gstrBlank & _
                    "No Execute: " & gstrSQ &
cTempConn.NoExecute & gstrSQ & gstrBlank & _
                    "Parse Query Only: " & gstrSQ
& cTempConn.ParseQueryOnly & gstrSQ & gstrBlank & _
                    "Quoted Identifiers: " &
gstrSQ & cTempConn.QuotedIdentifiers & gstrSQ &
gstrBlank & _
                    "ANSI Nulls: " & gstrSQ &
cTempConn.AnsiNulls & gstrSQ & gstrBlank & _
                    "Show Query Plan: " & gstrSQ
& cTempConn.ShowQueryPlan & gstrSQ & gstrBlank & _
                    "Show Stats Time: " & gstrSQ
& cTempConn.ShowStatsTime & gstrSQ & gstrBlank & _
                    "Show Stats IO: " & gstrSQ &
cTempConn.ShowStatsIO & gstrSQ & gstrBlank & _
                    "Row Count" & gstrSQ &
cTempConn.RowCount & gstrSQ & gstrBlank & _
                    "Query Timeout" & gstrSQ &
cTempConn.QueryTimeout & gstrSQ
            Next lIndex

        Case mintRunComplete
            BugAssert Not mcWspLog Is Nothing
            mcWspLog.WriteLine
            (JulianDateToString(Determine64BitTime()) & " Comp.
Run: " & vbTab & gstrSQ &
                GetWorkspaceDetails(WorkspaceID:=WspID)) & gstrSQ
            Set mcWspLog = Nothing

        Case mintStepStart
            For lIndex = StepDtIs.Count - 1 To 0 Step
-1
                sLabel = StepDtIs(lIndex)
                If lIndex = StepDtIs.Count - 1 Then
                    mcWspLog.WriteLine
                    JulianDateToString(dtStamp) & " Start Step: " & vbTab
& sLabel
                Else
                    mcWspLog.WriteLine vbTab & vbTab
& vbTab & vbTab & sLabel
                End If
            Next lIndex

```

```

        Next lIndex
    Case mintStepComplete
        For lIndex = StepDtls.Count - 1 To 0 Step
-1
            sLabel = StepDtls(lIndex)
            If lIndex = StepDtls.Count - 1 Then
                mcWspLog.WriteLine
                JulianDateToString(dtStamp) & " Comp. Step: " & vbTab
                & sLabel
            Else
                mcWspLog.WriteLine vbTab & vbTab
                & vbTab & vbTab & sLabel
            End If
            Next lIndex

        End Select

    Exit Sub

WriteToWspLogErr:
    If Not bError Then
        bError = True
    End If

End Sub

'Private Sub WriteToWspLog(iLogEvent As WspLogEvents,
Optional StepDtls As cVectorStr, _
Optional dtStamp As Date = gdtmEmpty)
'
' This function uses the LogWriter dll - memory
corruption problems since the vb exe
' and the vc Execute Dll both use the same dll to
write.
' Writes to the workspace log that is generated
for the run. The last three
' parameters are valid only for StepStart and
StepComplete events.
' Static bError As Boolean
' Static sFile As String
' Dim sLabel As String
' Dim lIndex As Long
' Dim bHdr As Boolean
'
    On Error GoTo WriteToWspLogErr

    Select Case iLogEvent
    Case mintRunStart
        Set mcWspLog = New LOGWRITERLib.SMLog
        sFile = App.Path & "\ " & "SMLog-" &
Format(Now, FMT_WSP_LOG_FILE) & gstrLogFileSuffix
        mcWspLog.FileName = sFile
        mcWspLog.Init
        mcWspLog.WriteLine (Format(Now,
FMT_WSP_LOG_DATE) & " Start Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId)) & gstrSQ
        ' Write all current parameter values to
the log
        bHdr = False
        For lIndex = 0 To
mcParameters.ParameterCount - 1

```

```

        If
mcParameters(lIndex).ParameterType <>
gintParameterApplication Then
            If Not bHdr Then
                'mcWspLog.WriteLine
                Format(Now, FMT_WSP_LOG_DATE) & " Parameters: " &
vbTab & gstrSQ & mcParameters(lIndex).ParameterName &
gstrSQ & vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterValue & gstrSQ
                bHdr = True
            Else
                'mcWspLog.WriteLine vbTab &
vbTab & vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterName & gstrSQ & vbTab &
vbTab & gstrSQ & mcParameters(lIndex).ParameterValue
                & gstrSQ
            End If
        End If
    Next lIndex

    Case mintRunComplete
        BugAssert Not mcWspLog Is Nothing
        mcWspLog.WriteLine (Format(Now,
FMT_WSP_LOG_DATE) & " Comp. Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId)) & gstrSQ
        Set mcWspLog = Nothing

    Case mintStepStart
        For lIndex = StepDtls.Count - 1 To 0
Step -1
            sLabel = StepDtls(lIndex)
            If lIndex = StepDtls.Count - 1 Then
                mcWspLog.WriteLine
                Format(dtStamp, FMT_WSP_LOG_DATE) & " Start Step: " &
vbTab & sLabel
            Else
                mcWspLog.WriteLine vbTab & vbTab
                & vbTab & vbTab & sLabel
            End If
            Next lIndex

    Case mintStepComplete
        For lIndex = StepDtls.Count - 1 To 0
Step -1
            sLabel = StepDtls(lIndex)
            If lIndex = StepDtls.Count - 1 Then
                mcWspLog.WriteLine
                Format(dtStamp, FMT_WSP_LOG_DATE) & " Comp. Step: " &
vbTab & sLabel
            Else
                mcWspLog.WriteLine vbTab & vbTab
                & vbTab & vbTab & sLabel
            End If
            Next lIndex

        End Select

    Exit Sub

WriteToWspLogErr:
    If Not bError Then
        bError = True
    End If

```

```

'End Sub
'
Public Property Get WspPreExecution() As Variant
    WspPreExecution = mcvntWspPreCons
End Property
Public Property Let WspPreExecution(ByVal vdata As
Variant)
    mcvntWspPreCons = vdata
End Property

Public Property Get WspPostExecute() As Variant
    WspPostExecute = mcvntWspPostCons
End Property
Public Property Let WspPostExecute(ByVal vdata As
Variant)
    mcvntWspPostCons = vdata
End Property

Private Sub ExecuteStep(cCurStep As cInstance)
' Initializes a cRunStep object with all the
properties
' corresponding to the step to be executed and
calls it's
' execute method to execute the step

    Dim cExecStep As cRunStep

    On Error GoTo ExecuteStepErr
    mstrSource = mstrModuleName & "ExecuteStep"

' Confirm that the step is a worker
If cCurStep.Step.StepType <> gintWorkerStep Then
    On Error GoTo 0
    Err.Raise vbObjectError +
errExecInstanceFailed, mstrSource, _
        LoadResString(errExecInstanceFailed)
End If

    Set cExecStep = InitExecStep()
' Exceeded the number of processes that we can
run simultaneously
If cExecStep Is Nothing Then
' Raise an error
    On Error GoTo 0
    Err.Raise vbObjectError + errProgramError,
mstrSource, _
        LoadResString(errProgramError)
End If
' Initialize the instance id - not needed for
step execution
' but necessary to identify later which instance
completed
cExecStep.InstanceId = cCurStep.InstanceId

    Set cExecStep.ExecuteStep = cCurStep.Step
    Set cExecStep.Iterators = cCurStep.Iterators
    Set cExecStep.Globals = mcRunSteps
    Set cExecStep.WspParameters = mcParameters
    Set cExecStep.WspConnections = RunConnections
    Set cExecStep.WspConnDtls = RunConnDtls

```



```

' Initialize all the pre and post-execution
constraints that
' have been defined globally for the workspace
cExecStep.WspPreCons = mcvntWspPreCons
cExecStep.WspPostCons = mcvntWspPostCons

' Initialize all the pre and post-execution
constraints for
' the step being executed
cExecStep.PreCons =
DetermineConstraints(cCurStep, gintPreStep)
cExecStep.PostCons =
DetermineConstraints(cCurStep, gintPostStep)

cExecStep.RunId = RunId
cExecStep.CreateInputFiles = CreateInputFiles

' Call the execute method to execute the step
cExecStep.Execute

Set cExecStep = Nothing

Exit Sub

ExecuteStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Call ExecutionFailed(cExecStep)

End Sub

Public Property Set Steps(cRunSteps As cArrSteps)

Set mcRunSteps = cRunSteps
Set mcNavSteps.StepRecords = cRunSteps

End Property
Public Property Set Parameters(cParameters As
cArrParameters)
' A reference to the parameter array - we use it
to
' substitute parameter values in the step text

Set mcParameters = cParameters

End Property
Public Property Get Steps() As cArrSteps

Set Steps = mcRunSteps

End Property
Public Property Get Constraints() As cArrConstraints

Set Constraints = mcRunConstraints

End Property
Public Property Set Constraints(vdata As
cArrConstraints)

Set mcRunConstraints = vdata

End Property

```

```

Private Sub cExecStep1_ProcessComplete(cStepRecord As
cStep, _
dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep1_ProcessStart(cStepRecord As
cStep, _
strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep1_StepComplete(cStepRecord As
cStep, _
dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep1.Index, InstanceId, Status)

End Sub

Private Sub cExecStep1_StepStart(cStepRecord As
cStep, _
dtmStartTime As Currency, InstanceId As Long)

Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep9_ProcessComplete(cStepRecord As
cStep, _
dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep9_ProcessStart(cStepRecord As
cStep, _
strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

```

```

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep9_StepComplete(cStepRecord As
cStep, _
dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep9.Index, InstanceId, Status)

End Sub

Private Sub cExecStep9_StepStart(cStepRecord As
cStep, _
dtmStartTime As Currency, InstanceId As Long)

Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep10_ProcessComplete(cStepRecord
As cStep, _
dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep10_ProcessStart(cStepRecord As
cStep, _
strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep10_StepComplete(cStepRecord As
cStep, _
dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep10.Index, InstanceId, Status)

End Sub

Private Sub cExecStep10_StepStart(cStepRecord As
cStep, _
dtmStartTime As Currency, InstanceId As Long)

```

```

        Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep11_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep11_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep11_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep11.Index, InstanceId, Status)
End Sub

Private Sub cExecStep11_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep12_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep12_ProcessStart(cStepRecord As
cStep, _

```

```

    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep12_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep12.Index, InstanceId, Status)
End Sub

Private Sub cExecStep12_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep13_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep13_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep13_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep13.Index, InstanceId, Status)
End Sub

```

```

Private Sub cExecStep13_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep14_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep14_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep14_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep14.Index, InstanceId, Status)
End Sub

Private Sub cExecStep14_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep15_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

```

```

Private Sub cExecStep15_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep15_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep15.Index, InstanceId, Status)

End Sub

Private Sub cExecStep15_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub cExecStep16_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep16_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep16_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep16.Index, InstanceId, Status)

End Sub

```

```

Private Sub cExecStep16_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub cExecStep17_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep17_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep17_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep17.Index, InstanceId, Status)

End Sub

Private Sub cExecStep17_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep18_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep18_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep18_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep18.Index, InstanceId, Status)

End Sub

Private Sub cExecStep18_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep19_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep19_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep19_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep19.Index, InstanceId, Status)

```

```

End Sub

Private Sub cExecStep19_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep20_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep20_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep20_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep20.Index, InstanceId, Status)

End Sub

Private Sub cExecStep20_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep21_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep21_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep21_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep21.Index, InstanceId, Status)

End Sub

Private Sub cExecStep21_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep22_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep22_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep22_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep22.Index, InstanceId, Status)

End Sub

```

```

Private Sub cExecStep22_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep23_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep23_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep23_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep23.Index, InstanceId, Status)

End Sub

Private Sub cExecStep23_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep24_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep24_ProcessStart(cStepRecord As
cStep, _

```

```

        strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep24_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep24.Index, InstanceId, Status)
End Sub

Private Sub cExecStep24_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep25_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep25_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep25_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep25.Index, InstanceId, Status)
End Sub

Private Sub cExecStep25_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep26_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep26_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep26_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep26.Index, InstanceId, Status)
End Sub

Private Sub cExecStep26_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep27_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep27_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep27_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep27.Index, InstanceId, Status)
End Sub

Private Sub cExecStep27_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep28_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep28_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep28_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep28.Index, InstanceId, Status)
End Sub

Private Sub cExecStep28_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

```

```

End Sub

Private Sub cExecStep29_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep29_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep29_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep29.Index, InstanceId, Status)

End Sub

Private Sub cExecStep29_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep30_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep30_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```

```

End Sub

Private Sub cExecStep30_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep30.Index, InstanceId, Status)

End Sub

Private Sub cExecStep30_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep31_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep31_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep31_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep31.Index, InstanceId, Status)

End Sub

Private Sub cExecStep31_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

```

```

Private Sub cExecStep32_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep32_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep32_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep32.Index, InstanceId, Status)

End Sub

Private Sub cExecStep32_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep33_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep33_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```

```

Private Sub cExecStep33_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep33.Index, InstanceId, Status)
End Sub

Private Sub cExecStep33_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep34_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep34_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep34_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep34.Index, InstanceId, Status)
End Sub

Private Sub cExecStep34_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep35_ProcessComplete(cStepRecord
As cStep, _

```

```

    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep35_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep35_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep35.Index, InstanceId, Status)
End Sub

Private Sub cExecStep35_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep36_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep36_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep36_StepComplete(cStepRecord As
cStep, _

```

```

    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep36.Index, InstanceId, Status)
End Sub

Private Sub cExecStep36_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep37_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep37_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep37_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep37.Index, InstanceId, Status)
End Sub

Private Sub cExecStep37_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep38_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep38_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep38_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep38.Index, InstanceId, Status)
End Sub

Private Sub cExecStep38_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep39_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep39_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep39_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep39.Index, InstanceId, Status)
End Sub

Private Sub cExecStep39_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

```

```

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep39.Index, InstanceId, Status)
End Sub

Private Sub cExecStep39_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep40_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep40_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep40_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep40.Index, InstanceId, Status)
End Sub

Private Sub cExecStep40_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep41_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

```

```

End Sub

Private Sub cExecStep41_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep41_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep41.Index, InstanceId, Status)
End Sub

Private Sub cExecStep41_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep42_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep42_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep42_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep42.Index, InstanceId, Status)
End Sub

```



```

End Sub

Private Sub cExecStep42_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep43_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep43_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep43_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep43.Index, InstanceId, Status)

End Sub

Private Sub cExecStep43_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep44_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep44_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep44_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep44.Index, InstanceId, Status)

End Sub

Private Sub cExecStep44_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep45_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep45_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep45_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep45.Index, InstanceId, Status)

End Sub

```

```

Private Sub cExecStep45_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep46_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep46_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep46_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep46.Index, InstanceId, Status)

End Sub

Private Sub cExecStep46_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep47_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep47_ProcessStart(cStepRecord As
cStep, _

```

```

        strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep47_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep47.Index, InstanceId, Status)
End Sub

Private Sub cExecStep47_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep48_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep48_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep48_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep48.Index, InstanceId, Status)
End Sub

Private Sub cExecStep48_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep49_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep49_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep49_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep49.Index, InstanceId, Status)
End Sub

Private Sub cExecStep49_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep50_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep50_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep50_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep50.Index, InstanceId, Status)
End Sub

Private Sub cExecStep50_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep51_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep51_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep51_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep51.Index, InstanceId, Status)
End Sub

Private Sub cExecStep51_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

```

```

End Sub

Private Sub cExecStep52_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep52_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep52_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep52.Index, InstanceId, Status)

End Sub

Private Sub cExecStep52_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep53_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep53_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```

```

End Sub

Private Sub cExecStep53_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep53.Index, InstanceId, Status)

End Sub

Private Sub cExecStep53_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep54_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep54_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep54_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep54.Index, InstanceId, Status)

End Sub

Private Sub cExecStep54_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

```

```

Private Sub cExecStep55_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep55_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep55_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep55.Index, InstanceId, Status)

End Sub

Private Sub cExecStep55_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep56_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep56_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```

```

Private Sub cExecStep56_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep56.Index, InstanceId, Status)
End Sub

Private Sub cExecStep56_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep57_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep57_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep57_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep57.Index, InstanceId, Status)
End Sub

Private Sub cExecStep57_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep58_ProcessComplete(cStepRecord
As cStep, _

```

```

    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep58_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep58_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep58.Index, InstanceId, Status)
End Sub

Private Sub cExecStep58_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep59_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep59_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep59_StepComplete(cStepRecord As
cStep, _

```

```

    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep59.Index, InstanceId, Status)
End Sub

Private Sub cExecStep59_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep60_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep60_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep60_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep60.Index, InstanceId, Status)
End Sub

Private Sub cExecStep60_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep61_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)

```

```

        Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep61_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep61_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep61.Index, InstanceId, Status)
End Sub

Private Sub cExecStep61_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep62_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep62_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep62_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

```

```

        Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep62.Index, InstanceId, Status)
End Sub

Private Sub cExecStep62_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep63_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep63_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep63_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep63.Index, InstanceId, Status)
End Sub

Private Sub cExecStep63_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep64_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

```

```

End Sub

Private Sub cExecStep64_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep64_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep64.Index, InstanceId, Status)
End Sub

Private Sub cExecStep64_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep65_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep65_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep65_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep65.Index, InstanceId, Status)

```

```

End Sub

Private Sub cExecStep65_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep66_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep66_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep66_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep66.Index, InstanceId, Status)

End Sub

Private Sub cExecStep66_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep67_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep67_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep67_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep67.Index, InstanceId, Status)

End Sub

Private Sub cExecStep67_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep68_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep68_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep68_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep68.Index, InstanceId, Status)

End Sub

```

```

Private Sub cExecStep68_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep69_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep69_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep69_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep69.Index, InstanceId, Status)

End Sub

Private Sub cExecStep69_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep70_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep70_ProcessStart(cStepRecord As
cStep, _

```

```

        strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep70_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep70.Index, InstanceId, Status)
End Sub

Private Sub cExecStep70_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep71_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)
End Sub

Private Sub cExecStep71_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep71_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep71.Index, InstanceId, Status)
End Sub

Private Sub cExecStep71_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep72_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)
End Sub

Private Sub cExecStep72_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep72_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep72.Index, InstanceId, Status)
End Sub

Private Sub cExecStep72_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep73_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)
End Sub

Private Sub cExecStep73_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep73_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep73.Index, InstanceId, Status)
End Sub

Private Sub cExecStep73_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep74_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)
End Sub

Private Sub cExecStep74_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep74_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep74.Index, InstanceId, Status)
End Sub

Private Sub cExecStep74_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

```

```

End Sub

Private Sub cExecStep75_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep75_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep75_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep75.Index, InstanceId, Status)

End Sub

Private Sub cExecStep75_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep76_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep76_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```

```

End Sub

Private Sub cExecStep76_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep76.Index, InstanceId, Status)

End Sub

Private Sub cExecStep76_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep77_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep77_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep77_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep77.Index, InstanceId, Status)

End Sub

Private Sub cExecStep77_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

```

```

Private Sub cExecStep78_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep78_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep78_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep78.Index, InstanceId, Status)

End Sub

Private Sub cExecStep78_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep79_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep79_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, dtmStartTime, Command:=strCommand)

End Sub

```



```

Private Sub cExecStep79_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep79.Index, InstanceId, Status)
End Sub

Private Sub cExecStep79_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep80_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep80_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep80_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep80.Index, InstanceId, Status)
End Sub

Private Sub cExecStep80_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep81_ProcessComplete(cStepRecord
As cStep, _

```

```

    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep81_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep81_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep81.Index, InstanceId, Status)
End Sub

Private Sub cExecStep81_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep82_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep82_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep82_StepComplete(cStepRecord As
cStep, _

```

```

    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep82.Index, InstanceId, Status)
End Sub

Private Sub cExecStep82_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep83_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep83_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
    Currency, lngInstanceId As Long)
    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep83_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
    Status As InstanceStatus)
    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep83.Index, InstanceId, Status)
End Sub

Private Sub cExecStep83_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)
    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep84_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
    Long, lElapsed As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep84_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep84_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep84.Index, InstanceId, Status)
End Sub

Private Sub cExecStep84_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep85_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep85_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep85_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep85.Index, InstanceId, Status)
End Sub

```

```

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep85.Index, InstanceId, Status)
End Sub

Private Sub cExecStep85_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep86_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep86_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep86_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep86.Index, InstanceId, Status)
End Sub

Private Sub cExecStep86_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep87_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

```

```

End Sub

Private Sub cExecStep87_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep87_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep87.Index, InstanceId, Status)
End Sub

Private Sub cExecStep87_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep88_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep88_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep88_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep88.Index, InstanceId, Status)
End Sub

```

```

End Sub

Private Sub cExecStep88_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep89_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep89_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep89_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep89.Index, InstanceId, Status)

End Sub

Private Sub cExecStep89_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep90_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep90_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep90_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep90.Index, InstanceId, Status)

End Sub

Private Sub cExecStep90_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep91_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep91_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep91_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep91.Index, InstanceId, Status)

End Sub

```

```

Private Sub cExecStep91_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep92_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep92_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep92_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep92.Index, InstanceId, Status)

End Sub

Private Sub cExecStep92_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep93_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep93_ProcessStart(cStepRecord As
cStep, _

```

```

        strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep93_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep93.Index, InstanceId, Status)
End Sub

Private Sub cExecStep93_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep94_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep94_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep94_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep94.Index, InstanceId, Status)
End Sub

Private Sub cExecStep94_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep95_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep95_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep95_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep95.Index, InstanceId, Status)
End Sub

Private Sub cExecStep95_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep96_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep96_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep96_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep96.Index, InstanceId, Status)
End Sub

Private Sub cExecStep96_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub cExecStep97_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)
End Sub

Private Sub cExecStep97_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)
End Sub

Private Sub cExecStep97_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep97.Index, InstanceId, Status)
End Sub

Private Sub cExecStep97_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

```

```

End Sub

Private Sub cExecStep98_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep98_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep98_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep98.Index, InstanceId, Status)

End Sub

Private Sub cExecStep98_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep99_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep99_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

```

```

End Sub

Private Sub cExecStep99_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep99.Index, InstanceId, Status)

End Sub

Private Sub cExecStep99_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep2_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep2_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep2_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep2.Index, InstanceId, Status)

End Sub

Private Sub cExecStep2_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

```

```

End Sub

Private Sub cExecStep3_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep3_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

Private Sub cExecStep3_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep3.Index, InstanceId, Status)

End Sub

Private Sub cExecStep3_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep4_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep4_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

End Sub

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep4_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep4.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep4_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep5_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep5_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep5_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep5.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep5_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep6_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep6_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep6_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep6.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep6_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep7_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep7_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep7_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep7.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep7_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub cExecStep8_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub cExecStep8_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub cExecStep8_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep8.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep8_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As Long)

```

```

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)
End Sub

Private Sub Class_Initialize()

    Dim lngCount As Long
    Dim lngTemp As Long

    On Error GoTo InitializeErr

    Set mcFreeSteps = New cVectorLng
    ' Initialize the array of free objects with all
elements
    ' for now
    For lngCount = 0 To glngNumConcurrentProcesses -
1 Step 1
        mcFreeSteps.Add lngCount
    Next lngCount

    ' Initialize a byte array with the number of free
processes. It will
    ' be used later to determine if any step is
running
    ' Each element in the array can represent 8
steps, 1 for each bit
    ReDim mbarrFree(glngNumConcurrentProcesses \
gintBitsPerByte)

    ' Initialize each element in the byte array w/
all 1's
    ' (upto glngNumConcurrentProcesses)
    For lngCount = LBound(mbarrFree) To
UBound(mbarrFree) Step 1
        lngTemp = IIf( _
            glngNumConcurrentProcesses -
(gintBitsPerByte * lngCount) > gintBitsPerByte, _
            gintBitsPerByte, _
            glngNumConcurrentProcesses -
(gintBitsPerByte * lngCount))

        mbarrFree(lngCount) = (2 ^ lngTemp) - 1
    Next lngCount

    Set mcInstances = New cInstances
    Set mcFailures = New cFailedSteps
    Set mcNavSteps = New cStepTree
    Set mcTermSteps = New cTermSteps

    ' Initialize the Abort flag to False
    mblnAbort = False
    mblnAsk = False

    Exit Sub

InitializeErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInitializeFailed,
mstrModuleName & "Initialize", _

```

```

        LoadResString(errInitializeFailed)
    End Sub
    Private Sub Class_Terminate()

        On Error GoTo Class_TerminateErr

        mcFreeSteps.Clear
        Set mcFreeSteps = Nothing
        ReDim mbarrFree(0)

        mcInstances.Clear
        Set mcInstances = Nothing

        Set mcFailures = Nothing
        Set mcNavSteps = Nothing
        Set mcTermSteps = Nothing

    Exit Sub

Class_TerminateErr:
    Call LogErrors(Errors)

End Sub

Private Sub mcTermSteps_TermStepExists(cStepDetails
As cTermStep)

    Call RunNextStep(cStepDetails.TimeComplete,
cStepDetails.Index, _
        cStepDetails.InstanceId,
cStepDetails.ExecutionStatus)

End Sub

```

---

## ***cRunItDetails.c Is***

---

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunItDetails"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:          cRunItDetails.cls
'                Microsoft TPC-H Kit Ver. 1.00
'                Copyright Microsoft, 1999
'                All Rights Reserved
'
' PURPOSE:       This module encapsulates the
properties of iterator values
'                that are used by the step being
executed at runtime.
' Contact:       Reshma Tharamal
(reshmat@microsoft.com)

```

```

'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String =
"cRunItDetails."
Private mstrSource As String

Private mstrIteratorName As String
Private mintType As ValueType
Private mlngSequence As Long
Private mlngFrom As Long
Private mlngTo As Long
Private mlngStep As Long
Private mstrValue As String

Public Property Get RangeTo() As Long

    RangeTo = mlngTo

End Property
Public Property Let RangeTo(ByVal vdata As Long)

    mlngTo = vdata

End Property

Public Property Get RangeFrom() As Long

    RangeFrom = mlngFrom

End Property
Public Property Get Sequence() As Long

    Sequence = mlngSequence

End Property

Public Property Get RangeStep() As Long

    RangeStep = mlngStep

End Property
Public Property Let RangeStep(vdata As Long)

    mlngStep = vdata

End Property

Public Property Let RangeFrom(ByVal vdata As Long)

    mlngFrom = vdata

End Property
Public Property Let Sequence(ByVal vdata As Long)

    mlngSequence = vdata

End Property

Public Property Get IteratorType() As ValueType

```

```

        IteratorType = mintType
    End Property
    Public Property Let IteratorType(ByVal vdata As
    ValueType)

        On Error GoTo TypeErr
        mstrSource = mstrModuleName & "Type"

        ' These constants have been defined in the
        enumeration,
        ' Type, which is exposed
        Select Case vdata
            Case gintFrom, gintTo, gintStep, gintValue
                mintType = vdata

            Case Else
                On Error GoTo 0
                Err.Raise vbObjectError + errTypeInvalid, _
                _
                mstrSource,
                LoadResString(errTypeInvalid)
            End Select

        Exit Property

    TypeErr:
        LogErrors Errors
        mstrSource = mstrModuleName & "Type"
        On Error GoTo 0
        Err.Raise vbObjectError + errTypeInvalid, _
        mstrSource, LoadResString(errTypeInvalid)

    End Property
    Private Sub IsList()

        If mintType <> gintValue Then
            On Error GoTo 0
            Err.Raise vbObjectError + errInvalidProperty,
            mstrSource, _
            LoadResString(errInvalidProperty)
        End If

    End Sub
    Private Sub IsRange()

        If mintType = gintValue Then
            On Error GoTo 0
            Err.Raise vbObjectError + errInvalidProperty,
            mstrSource, _
            LoadResString(errInvalidProperty)
        End If

    End Sub

    Public Property Get Value() As String

        Value = mstrValue

    End Property
    Public Property Let Value(vdata As String)

```

```

        mstrValue = vdata
    End Property

    Public Property Get IteratorName() As String

        IteratorName = mstrIteratorName

    End Property
    Public Property Let IteratorName(ByVal vdata As
    String)

        mstrIteratorName = vdata

    End Property

```

## ***cRunItNode.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunItNode"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' An iterator class containing the properties that
are used
' by the stpe being executed.
' These iterators might actually come from steps that
are at
' a higher level than the step actually being
executed (viz.
' direct ascendants of the step at any level).

Option Explicit

Public IteratorName As String
Public Value As String
Public StepId As Long

```

## ***cRunOnly.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunOnly"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Option Explicit

Public Event Done()
Private WithEvents mcRunWsp As cRunWorkspace
Attribute mcRunWsp.VB_VarHelpID = -1

```

```

Public WspName As String
Public WorkspaceId As Long
Public WspLog As String

Public Sub RunWsp()

    On Error GoTo RunWspErr

    Set mcRunWsp = New cRunWorkspace
    Set mcRunWsp.LoadDb = dbsAttTool
    mcRunWsp.WorkspaceId = WorkspaceId
    mcRunWsp.CreateInputFiles = True
    mcRunWsp.RunWorkspace

    Exit Sub

RunWspErr:
    ' Log the VB error code
    LogErrors Errors

End Sub

Private Sub mcRunWsp_RunComplete(dtmEndTime As
Currency)

    MsgBox "Completed executing workspace: " & gstrSQ
    & WspName & gstrSQ & " at " & _
    JulianDateToString(dtmEndTime) & ". " &
    vbCrLf & vbCrLf & _
    "The log file for the run is: " & gstrSQ
    & WspLog & gstrSQ & ". "
    RaiseEvent Done

End Sub

Private Sub mcRunWsp_RunStart(dtmStartTime As
Currency, strWspLog As String, lRunId As Long)
    WspLog = strWspLog
End Sub

```

## ***cRunStep.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class executes the step that is
assigned to the

```



```

' ExecuteStep property. It executes the
pre-execution constraints
' in sequence and then the step itself.
At the end it executes
' the post-execution constraints. Since
these steps should always
' be executed in sequence, each step is
only fired on the
' completion of the previous step.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cRunStep."
Private mstrSource As String

' Local variable(s) to hold property value(s)
Private mcStep As cStep
Private mcGlobals As cArrSteps
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mcvntPreCons As Variant
Private mcvntPostCons As Variant
Private mcIterators As cRunColIt
Private mlngInstanceId As Long ' Identifier for the
current instance
Private mlngIndex As Long ' Index value for the
current instance
Private mstrCommand As String ' The command string
Private msRunStepDtl As String ' Step text/file name
that will go into the run_step_details table
Private mblnAbort As Boolean ' Set to True when the
user aborts the run
Private msOutputFile As String
Private msErrorFile As String
Private miStatus As InstanceStatus
Private mcVBErr As cvBErrorsSM
Public WspParameters As cArrParameters
Public WspConnections As cConnections
Public WspConnDtls As cConnDtls

Private WithEvents mcTermProcess As cTermProcess
Attribute mcTermProcess.VB_VarHelpID = -1
Public RunId As Long
Public CreateInputFiles As Boolean
Private msOutputDir As String

' Object that will execute the step
Private WithEvents mcExecObj As EXECUTEDLLib.Execute
Attribute mcExecObj.VB_VarHelpID = -1

' Holds the step that is currently being executed
(constraint or
' worker step)
Private mcExecStep As cStep

Private Const msCompareExe As String = "\diff.exe"

Private Enum NextNodeType
mintWspPreConstraint = 1

```

```

mintPreConstraint
mintStep
mintWspPostConstraint
mintPostConstraint
End Enum

' Public events to notify the calling function of the
' start and end time for each step
Public Event StepStart(cStepRecord As cStep, _
dtmStartTime As Currency, InstanceId As Long)
Public Event StepComplete(cStepRecord As cStep, _
dtmEndTime As Currency, InstanceId As Long,
Status As InstanceStatus)
Public Event ProcessStart(cStepRecord As cStep, _
strCommand As String, dtmStartTime As
Currency, _
InstanceId As Long)
Public Event ProcessComplete(cStepRecord As cStep, _
dtmStartTime As Currency, InstanceId As Long,
lElapsed As Long)

Private Function AppendDiffErrors(sDiffFile As
String)
' The file containing the errors generated by the
diff utility is passed in
' These errors are appended to the error file for
the step

Dim sTemp As String
Dim InputFile As Integer

If Not StringEmpty(sDiffFile) Then

InputFile = FreeFile
Open sDiffFile For Input Access Read As
InputFile

Do While Not EOF(InputFile) ' Loop
until end of file.
Line Input #InputFile, sTemp ' Read
line into variable.
mcVBErr.LogMessage sTemp

Loop

Close InputFile
End If

End Function

Private Sub CreateStepTextFile()
' Creates a file containing the step text being
executed
On Error GoTo CreateStepTextFileErr

Dim sInputFile As String

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
sInputFile = GetOutputFile(gsCmdFileSuffix)
Else
sInputFile = GetOutputFile(gsSqlFileSuffix)
End If

```

```

' Generate a file containing the step text being
executed
If Not StringEmpty(mcExecStep.StepTextFile) Or
mcExecStep.ExecutionMechanism = gintExecuteShell Then
FileCopy mstrCommand, sInputFile
Else
Call WriteCommandToFile(mstrCommand,
sInputFile)
End If

Exit Sub

CreateStepTextFileErr:

mcVBErr.LogVBErrors

End Sub
Private Function GetOutputFile(strFileExt As String)
As String
' This function generates the output file name
for the step currently being executed
' The value of the built-in parameter
'DefaultDir' is appended with the run identifier
' for the file location
' The step label is used for the file name and a
combination of all iterator values
' for the step is used to make the output files
unique for each instance
Dim sFile As String
Dim sIt As String
Dim lIt As Long

On Error GoTo GetOutputFileErr

sFile =
SubstituteParametersIfPossible(mcExecStep.StepLabel)

sFile = TranslateStepLabel(sFile)

If mcExecStep Is mcStep Then
' Use iterators that have been defined for
the worker or any of it's managers
' to make the error/log file unique for this
instance
For lIt = mcIterators.Count - 1 To 0 Step -1
sIt = sIt & gsExtSeparator &
mcIterators(lIt).Value
Next lIt
End If
sIt = sIt & strFileExt

' Ensure that the length of the complete path
does not exceed 255 characters
If Len(msOutputDir) + Len(sFile) + Len(sIt) >
MAX_PATH Then
sFile = Mid(sFile, 1, MAX_PATH - Len(sIt) -
Len(msOutputDir))
End If
GetOutputFile = msOutputDir & sFile & sIt
Exit Function

GetOutputFileErr:

```

```

' Does not make sense to log error to the error
file yet. Write to the project
' log and return the step label as default
GetOutputFile = mcExecStep.StepLabel &
gsExtSeparator & strFileExt

End Function

Private Sub HandleExecutionError()

    On Error GoTo HandleExecutionError

    ' Log the error code raised by Visual Basic
    miStatus = gintFailed
    mcVBErr.LogVBErrors
    Call mcVBErr.WriteError(errExecuteStepFailed, _
        OptArgs:="Continuation criteria for the
step is: " &
gsContCriteria(mcStep.ContinuationCriteria))

HandleExecutionError:

    ' Logging failed - return

End Sub

Public Property Get Index() As Long

    Index = mlngIndex

End Property
Public Property Let Index(ByVal vdata As Long)

    mlngIndex = vdata

End Property
Private Function InitializeExecStatus() As
InstanceStatus
    Dim sCompareFile As String

    On Error GoTo InitializeExecStatusErr

    InitializeExecStatus = mcExecObj.StepStatus

    If InitializeExecStatus = gintComplete Then
        If Not StringEmpty(mcExecStep.FailureDetails)
Then
            ' Compare output to determine whether the
step failed
            sCompareFile =
GetShortName(SubstituteParameters( _
                mcExecStep.FailureDetails,
mcExecStep.WorkspaceId, mcIterators, _
                WspParameters))
            InitializeExecStatus =
IIf(CompareOutput(sCompareFile, msOutputFile),
gintComplete, gintFailed)
        End If
    End If

Exit Function

```

```

InitializeExecStatusErr:
    mcVBErr.LogVBErrors
    ' Call LogErrors(Errors)
    InitializeExecStatus = mcExecObj.StepStatus

End Function
Private Function CompareOutput(sCompareFile As
String, sOutputFile As String) As Boolean

    Dim sCmpOutput As String
    Dim sDiffOutput As String

    On Error GoTo CompareOutputErr

    ' Create temporary files to store the file
compare output and
    ' the errors generated by the compare function
    sCmpOutput = CreateTempFile()
    sDiffOutput = CreateTempFile()

    ' Run the compare utility and redirect it's
output and errors
    SyncShell ("cmd /c " & _
        GetShortName(App.Path & msCompareExe) &
gstrBlank & _
        sCompareFile & gstrBlank & sOutputFile &
_
        " > " & sCmpOutput & " 2> " &
sDiffOutput)

    If FileLen(sDiffOutput) > 0 Then
        ' The compare generated errors - append error
msgs to the error file
        Call AppendDiffErrors(sDiffOutput)
        CompareOutput = False
    Else
        CompareOutput = (FileLen(sCmpOutput) = 0)
    End If

    If Not CompareOutput Then
        mcVBErr.WriteError errDiffFailed
    End If

    ' Delete the temporary files used to store the
output of the compare and
    ' the errors generated by the compare
    Kill sDiffOutput
    Kill sCmpOutput

Exit Function

CompareOutputErr:
    mcVBErr.LogVBErrors
    CompareOutput = False

End Function
Public Property Get InstanceId() As Long

    InstanceId = mlngInstanceId

End Property
Public Property Let InstanceId(ByVal vdata As Long)

```

```

    mlngInstanceId = vdata

End Property

Private Function ExecuteConstraint(vntConstraints As
Variant, _
    ByRef intLoopIndex As Integer) As Boolean

    ' Returns True if there is a constraint in the
passed in
    ' array that remains to be executed

    If IsArray(vntConstraints) And Not
IsEmpty(vntConstraints) Then
        ExecuteConstraint = (LBound(vntConstraints)
<= intLoopIndex) And (intLoopIndex <=
UBound(vntConstraints))
    Else
        ExecuteConstraint = False
    End If

End Function
Private Function NextStep() As cStep

    ' Determines which is the next step to be
executed - it could
    ' be either a pre-execution step, the worker step
itself
    ' or a post-execution step

    Dim cConsRec As cConstraint
    Dim cNextStepRec As cStep
    Dim vntStepConstraints As Variant

    ' Static variable to remember exactly where we
are in the
    ' processing
    Static intIndex As Integer
    Static intNextStepType As NextNodeType

    On Error GoTo NextStepErr

    If mblnAbort = True Then
        ' The user has aborted the run - do not run
any more
        ' processes for the step
        Set NextStep = Nothing
        Exit Function
    End If

    If intNextStepType = 0 Then
        ' First time through this function - set the
Index and
        ' node type to initial values
        intNextStepType = mintWspPreConstraint
        intIndex = 0
        RaiseEvent StepStart(mcStep,
Determine64BitTime(), mlngInstanceId)
    End If

Do
    Select Case intNextStepType
        Case mintWspPreConstraint

```

```

vntStepConstraints = mcvntWspPreCons

Case mintPreConstraint
vntStepConstraints = mcvntPreCons

Case mintStep
' CONS:
If mcStep.StepType = gintWorkerStep
Then
    Set cNextStepRec = mcStep
End If

Case mintWspPostConstraint
vntStepConstraints = mcvntWspPostCons

Case mintPostConstraint
vntStepConstraints = mcvntPostCons

End Select

If intNextStepType <> mintStep Then
' Check if there is a constraint to be
executed
If ExecuteConstraint(vntStepConstraints,
intIndex) Then
' Get the corresponding step record
to be executed
' Query the global step record for
the current
' constraint
Set cConsRec =
vntStepConstraints(intIndex)

Set cNextStepRec =
mcGlobals.QueryStep(cConsRec.GlobalStepId)
intIndex = intIndex + 1
Else
If intNextStepType =
mintPostConstraint Then
' No more stuff to be executed
for the step
' Raise a Done event
Set cNextStepRec = Nothing

' Set the next step type to an
invalid value
intNextStepType = -1
Else
Call NextType(intNextStepType,
intIndex)
End If
End If
Else
' Increment the step type so we look at
the post-
' execution steps the next time through
Call NextType(intNextStepType, intIndex)
End If

Loop Until (Not cNextStepRec Is Nothing) Or _
intNextStepType = -1

Set NextStep = cNextStepRec

```

```

Exit Function

NextStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName & "NextStep"
Err.Raise vbObjectError + errNextStepFailed,
mstrSource, _
LoadResString(errNextStepFailed)

End Function

Public Sub Execute()
' This procedure is the method that executes the
step that
' is assigned to the ExecuteStep property. It
call a procedure
' to determine the next step to be executed.
' Then it initializes all the properties of the
cExecuteSM object
' and calls it's run method to execute it.
Dim cConn As cConnection
Dim cRunConnDtl As cConnDtl

On Error GoTo ExecuteErr

' If this procedure is called after a step has
completed,
' we would have to check if we created any
temporary files
' while executing that step
If Not mcExecStep Is Nothing Then
If Not StringEmpty(mcExecStep.StepTextFile)
Or mcExecStep.ExecutionMechanism = gintExecuteShell
Then
' Remove the temporary file that we
created while
' running this command
Kill mstrCommand
End If

Call StepCompleted

' The VB errors class stores a reference to
the Execute class since it uses
' a method of the class to write errors to
the error log. Hence,
' release all references to the Execute
object before destroying it.
Set mcVBErr.ErrorFile = Nothing
Set mcExecObj = Nothing

' Delete empty output and error files
(generated by shell commands)
' (Can be done only after cleaning up
cExecObj)
Call DeleteEmptyOutputFiles

Else
' First time through - initialize the
location of output files
msOutputDir =
GetDefaultDir(mcStep.WorkspaceId, WspParameters)

```

```

msOutputDir = msOutputDir & gstrFileSeparator
& Trim(Str(RunId)) & gstrFileSeparator
' Dummy file since the function expects a
file name
MakePathValid (msOutputDir & ".txt")
End If

' Call a procedure to determine the next step to
be executed
' - could be a constraint or the step itself
' Initialize a module-level variable to the step
being
' executed
Set mcExecStep = NextStep
If mcExecStep Is Nothing Then
RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mlngInstanceId, miStatus)
' No more stuff to execute
Exit Sub
End If

Dim sStartDir As String

Set mcExecObj = New EXECUTEDLLLib.Execute

' The VB errors class uses the WriteError method
of the Execute class to write
' all VB errors to the error file for the step
(this prevents a clash when the
' VB errors and Execution errors have to be
written to the same log). Hence, store
' a reference to the Execute object in mcVBErr
msErrorFile = GetOutputFile(gsErrorFileSuffix)
mcExecObj.ErrorFile = msErrorFile
Call DeleteFile(msErrorFile,
bCheckIfEmpty:=False)
Set mcVBErr.ErrorFile = mcExecObj

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
sStartDir =
Trim$(GetShortName(SubstituteParameters( _
mcExecStep.StartDir,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)))
' Dummy connection object
Set cConn = New cConnection
Set cRunConnDtl = New cConnDtl

Else
' Find the connection string value and
substitute parameter values in it
Set cRunConnDtl =
WspConnDtls.GetConnectionDtl(mcExecStep.WorkspaceId,
mcExecStep.StartDir)
Set cConn =
WspConnections.GetConnection(mcExecStep.WorkspaceId,
cRunConnDtl.ConnectionString)
sStartDir =
Trim$(SubstituteParameters(cConn.ConnectionValue, _
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters))
End If

```

```

msOutputFile = GetOutputFile(gsOutputFileSuffix)
Call DeleteFile(msOutputFile,
bCheckIfEmpty:=False)
mcExecObj.OutputFile = msOutputFile
'
mcExecObj.LogFile =
GetShortName(SubstituteParameters( _
'
mcExecStep.LogFile,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters))
If mcExecStep.ExecutionMechanism =
gintExecuteODBC And _
cRunConnDtl.ConnType = ConnTypeDynamic
Then
Call
mcExecObj.DoExecute(BuildCommandString(), sStartDir,
mcExecStep.ExecutionMechanism, _
cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
cConn.AnsiNulls, cConn.ShowQueryPlan,
cConn.ShowStatsTime, cConn.ShowStatsIO, _
cConn.RowCount, cConn.QueryTimeout,
gstrEmptyString)
Else
Call
mcExecObj.DoExecute(BuildCommandString(), sStartDir,
mcExecStep.ExecutionMechanism, _
cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
cConn.AnsiNulls, cConn.ShowQueryPlan,
cConn.ShowStatsTime, cConn.ShowStatsIO, _
cConn.RowCount, cConn.QueryTimeout,
mcExecStep.StartDir)
End If

Exit Sub

ExecuteErr:
Call HandleExecutionError

' We can assume that if we are in this function,
a StepStart event has been triggered already.
RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mlngInstanceId, miStatus)

End Sub
Private Function BuildCommandString() As String
' Process text to be executed - either from the
text
' field or read it from a file.
' This function will always return the command
text for ODBC commands
' and a file name for Shell commands
Dim sFile As String
Dim sCommand As String
Dim sTemp As String

On Error GoTo BuildCommandStringErr

If Not StringEmpty(mcExecStep.StepTextFile) Then
' Substitute parameter values and environment
variables

```

```

' in the filename
msRunStepDtl =
SubstituteParameters(mcExecStep.StepTextFile, _
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)

sFile = GetShortName(msRunStepDtl)

mstrCommand =
SubstituteParametersInText(sFile,
mcExecStep.WorkspaceId)

If mcExecStep.ExecutionMechanism =
gintExecuteODBC Then
' Read the contents of the file and pass
it to ODBC
BuildCommandString =
ReadCommandFromFile(mstrCommand)
Else
BuildCommandString = mstrCommand
End If
Else
' Substitute parameter values and environment
variables
' in the step text
msRunStepDtl =
SubstituteParameters(mcExecStep.StepText, _
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)
mstrCommand = msRunStepDtl

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
' Write the command to a temp file
(enables us to execute multiple
' commands via the command interpreter)
mstrCommand =
WriteCommandToFile(msRunStepDtl)
BuildCommandString = mstrCommand
Else
BuildCommandString =
SQLFixup(msRunStepDtl)
End If
End If

If CreateInputFiles Then
Call CreateStepTextFile
End If

Exit Function

BuildCommandStringErr:
' Log the error code raised by the Execute
procedure
' Call LogErrors(Errors)
mcVBErr.LogVBErrors

On Error GoTo 0
mstrSource = mstrModuleName & "Execute"
Err.Raise vbObjectError + errExecuteStepFailed,
mstrSource, _
LoadResString(errExecuteStepFailed) &
mstrCommand

```

```

End Function
Public Sub Abort()

On Error GoTo AbortErr

' Setting the Abort flag to True will ensure that
we
' don't execute any more processes for this step
mblnAbort = True

If Not mcExecObj Is Nothing Then
mcExecObj.Abort
Else
' We are not in the middle of execution yet
End If

Exit Sub

AbortErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errProgramError, _
mstrModuleName & "Abort", _
LoadResString(errProgramError)

End Sub
Private Sub NextType(ByRef StepType As NextNodeType,
ByRef Position As Integer)

StepType = StepType + 1
Position = 0

End Sub
Private Sub StepCompleted()

On Error GoTo StepCompletedErr

If Not mcExecStep Is Nothing Then
If mcExecStep Is mcStep Then
miStatus = InitializeExecStatus
If miStatus = gintFailed Then
' Create input files if the step
failed execution and one hasn't been created already
If Not CreateInputFiles Then
CreateStepTextFile
Call
mcVBErr.WriteError(errExecuteStepFailed, _
OptArgs:="Continuation
criteria for the step is: " &
gsContCriteria(mcStep.ContinuationCriteria))
End If
End If
End If

Exit Sub

StepCompletedErr:
' Log the error code raised by Visual Basic
miStatus = gintFailed
mcVBErr.LogVBErrors
Call mcVBErr.WriteError(errExecuteStepFailed, _

```

```

        OptArgs:="Continuation criteria for the
step is: " &
gsContCriteria(mcStep.ContinuationCriteria))
End Sub
Private Sub DeleteEmptyOutputFiles()

    On Error GoTo DeleteEmptyOutputFilesErr

    ' Delete empty output and error files
    If Not mcExecStep Is Nothing Then
        Call DeleteFile(msErrorFile,
bCheckIfEmpty:=True)
        Call DeleteFile(msOutputFile,
bCheckIfEmpty:=True)
    End If

    Exit Sub

DeleteEmptyOutputFilesErr:
    ' Not a critical error - continue

End Sub
Private Function ReadCommandFromFile(strFileName As
String) As String

    ' Returns the contents of the passed in file

    Dim sCommand As String
    Dim sTemp As String
    Dim InputFile As Integer

    On Error GoTo ReadCommandFromFileErr

    If Not StringEmpty(strFileName) Then

        InputFile = FreeFile
        Open strFileName For Input Access Read As
InputFile

        Line Input #InputFile, sCommand ' Read line
into variable.

        Do While Not EOF(InputFile) ' Loop until end
of file.
            Line Input #InputFile, sTemp ' Read line
into variable.
            sCommand = sCommand & vbCrLf & sTemp
        Loop

        Close InputFile
    End If

    ReadCommandFromFile = sCommand

    Exit Function

ReadCommandFromFileErr:

    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    mstrSource = mstrModuleName &
"ReadCommandFromFile"

```

```

    On Error GoTo 0
    Err.Raise vbObjectError + errSubValuesFailed, _
        gstrSource, _
        LoadResString(errSubValuesFailed)
End Function
Private Function
SubstituteParametersIfPossible(strLabel As String)

    On Error GoTo SubstituteParametersIfPossibleErr

    SubstituteParametersIfPossible =
SubstituteParameters(strLabel, _
        mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)
    Exit Function

SubstituteParametersIfPossibleErr:
    SubstituteParametersIfPossible = strLabel

End Function
Private Function
SubstituteParametersInText(strFileName As String, _
lngWorkspace As Long) As String

    ' Reads each line in the passed in file,
substitutes parameter
    ' values in the line and writes out the modified
line to a
    ' temporary file that we create. The temporary
file will be
    ' removed once the step completes execution.
    ' Returns the name of the newly created temporary
file.

    Dim strTempFile As String
    Dim strTemp As String
    Dim strOutput As String
    Dim InputFile As Integer
    Dim OutputFile As Integer

    On Error GoTo SubstituteParametersInTextErr

    strTempFile = CreateTempFile()

    If Not StringEmpty(strFileName) Then

        InputFile = FreeFile
        Open strFileName For Input Access Read As
InputFile

        OutputFile = FreeFile
        Open strTempFile For Output Access Write As
OutputFile

        Do While Not EOF(InputFile) ' Loop until end
of file.
            Line Input #InputFile, strTemp ' Read
line into variable.
            strOutput = SubstituteParameters(strTemp,
lngWorkspace, mcIterators,
WspParameters:=WspParameters)

```

```

        If mcExecStep.ExecutionMechanism =
gintExecuteODBC Then strOutput = SQLFixup(strOutput)

        Print #OutputFile, strOutput
        BugMessage strOutput
    Loop

End If

Close InputFile
Close OutputFile

SubstituteParametersInText = strTempFile

Exit Function

SubstituteParametersInTextErr:

    ' Log the error code raised by Visual Basic
    ' Call LogErrors(Errors)
    mcVBErr.LogVBErrors
    mstrSource = mstrModuleName &
"SubstituteParametersInText"
    On Error GoTo 0
    Err.Raise vbObjectError + errSubValuesFailed, _
        gstrSource, _
        LoadResString(errSubValuesFailed)

End Function

Private Function WriteCommandToFile(sCommand As
String, Optional sFile As String = gstrEmptyString)
As String

    ' Writes the command text to a temporary file
    ' Returns the name of the temporary file

    Dim OutputFile As Integer

    On Error GoTo WriteCommandToFileErr

    If StringEmpty(sFile) Then
        sFile = CreateTempFile()
    End If

    OutputFile = FreeFile
    Open sFile For Output Access Write As OutputFile

    Print #OutputFile, sCommand

    Close OutputFile

    WriteCommandToFile = sFile

    Exit Function

WriteCommandToFileErr:

    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    mstrSource = mstrModuleName &
"WriteCommandToFile"
    On Error GoTo 0

```

```

Err.Raise vbObjectError + errSubValuesFailed, _
    gstrSource, _
    LoadResString(errSubValuesFailed)
End Function

Public Property Get WspPreCons() As Variant
    WspPreCons = mcvntWspPreCons
End Property
Public Property Let WspPreCons(ByVal vdata As Variant)
    mcvntWspPreCons = vdata
End Property

Public Property Get WspPostCons() As Variant
    WspPostCons = mcvntWspPostCons
End Property
Public Property Let WspPostCons(ByVal vdata As Variant)
    mcvntWspPostCons = vdata
End Property

Public Property Get PreCons() As Variant
    PreCons = mcvntPreCons
End Property
Public Property Let PreCons(ByVal vdata As Variant)
    mcvntPreCons = vdata
End Property

Public Property Get PostCons() As Variant
    PostCons = mcvntPostCons
End Property
Public Property Let PostCons(ByVal vdata As Variant)
    mcvntPostCons = vdata
End Property

Public Property Set Globals(cRunSteps As cArrSteps)
    Set mcGlobals = cRunSteps
End Property
Public Property Set ExecuteStep(cRunStep As cStep)
    Set mcStep = cRunStep
End Property
Public Property Get Globals() As cArrSteps
    Set Globals = mcGlobals
End Property
Public Property Get ExecuteStep() As cStep
    Set ExecuteStep = mcStep
End Property
Public Property Set Iterators(vdata As cRunColIt)
    Set mcIterators = vdata
End Property
Private Sub Class_Initialize()

```

```

' Initialize the Abort flag to False
mblnAbort = False
Set mcVBErr = New cVBErrorsSM
Set mcTermProcess = New cTermProcess

End Sub

Private Sub Class_Terminate()
    On Error GoTo Class_TerminateErr

    Set mcExecObj = Nothing
    Set mcVBErr = Nothing
    Set mcTermProcess = Nothing

    Exit Sub

Class_TerminateErr:
    Call LogErrors(Errors)

End Sub

Private Sub mcExecObj_Start(ByVal StartTime As Currency)
    ' Raise an event indicating that the step has
    begun execution
    RaiseEvent ProcessStart(mcExecStep, msRunStepDtl,
    StartTime, mlngInstanceId)
End Sub

Private Sub mcExecObj_Complete(ByVal EndTime As Currency, ByVal Elapsed As Long)
    On Error GoTo mcExecObj_CompleteErr

    Debug.Print Elapsed
    RaiseEvent ProcessComplete(mcExecStep, EndTime,
    mlngInstanceId, Elapsed)
    mcTermProcess.ProcessTerminated

    Exit Sub

mcExecObj_CompleteErr:
    Call LogErrors(Errors)

End Sub

Private Sub mcTermProcess_TermProcessExists()
    On Error GoTo TermProcessExistsErr

    ' Call a procedure to execute the next step, if
    any
    Call Execute

    Exit Sub

TermProcessExistsErr:
    ' Log the error code raised by the Execute
    procedure
    Call LogErrors(Errors)

```

End Sub

## **cRunWorkspac e.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunWorkspace"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunWorkspace.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class loads all the information
necessary to
' execute a workspace and calls
cRunInst to execute the workspace.
' It also propagates Step start and
complete and
' Run start and complete events.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"cRunWorkspace."
Private mstrSource As String

Private mcRunSteps As cArrSteps
Private mcRunParams As cArrParameters
Private mcRunConstraints As cArrConstraints
Private mcRunConnections As cConnections
Private mcRunConnDtIs As cConnDtIs
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mdbLoadDb As Database
Private mlngRunId As Long
Private mlngWorkspaceId As Long
Private mField As cStringSM
Public CreateInputFiles As Boolean

Private WithEvents mcRun As cRunInst
Attribute mcRun.VB_VarHelpID = -1

Public Event RunStart(dtmStartTime As Currency,
strWspLog As String, lRunId As Long)
Public Event RunComplete(dtmEndTime As Currency)
Public Event StepStart(cStepRecord As cStep,
dtmStartTime As Currency, lngInstanceId As Long, _
sPath As String, sIts As String)

```

```

Public Event StepComplete(cStepRecord As cStep,
dtmEndTime As Currency, lngInstanceId As Long)
Public Event ProcessStart(cStepRecord As cStep,
strCommand As String, _
dtmStartTime As Currency, lngInstanceId As
Long)
Public Event ProcessComplete(cStepRecord As cStep,
dtmEndTime As Currency, lngInstanceId As Long)
Public Function InstancesForStep(lngStepId As Long,
iStatus As InstanceStatus) As cInstances
' Returns an array of all the instances for a
step

If mcRun Is Nothing Then
Set InstancesForStep = Nothing
Else
Set InstancesForStep =
mcRun.InstancesForStep(lngStepId, iStatus)
End If

End Function
Private Sub InsertRunDetail(cStepRecord As cStep, _
strCommand As String, dtmStartTime As
Currency, _
lngInstanceId As Long, lParentInstanceId As
Long, sItValue As String)
' Inserts a new run detail record into the
database

Dim strInsert As String
Dim qy As QueryDef

On Error GoTo InsertRunDetailErr
mstrSource = mstrModuleName & "InsertRunDetail"

strInsert = "insert into run_step_details " & _
"( run_id, step_id, version_no,
instance_id, parent_instance_id, " & _
" command, start_time, iterator_value ) "
& _
" values ( "

#If USE_JET Then

strInsert = strInsert & " [r_id], [s_id],
[ver_no], [i_id], [p_i_id], " & _
" [com], [s_date], [it_val] )"

Set qy = mdbLoadDb.CreateQueryDef( _
gstrEmptyString, strInsert)

' Call a procedure to assign the Querydef
parameters
Call AssignParameters(qy,
StartTime:=dtmStartTime, _
StepId:=cStepRecord.StepId, _
Version:=cStepRecord.VersionNo, _
InstanceId:=lngInstanceId, _
Command:=strCommand)

qy.Execute dbFailOnError
qy.Close

```

```

#Else

strInsert = strInsert & Str(mlngRunId) _
& ", " & Str(cStepRecord.StepId) _
& ", " &
mField.MakeStringFieldValid(cStepRecord.VersionNo) _
& ", " & Str(lngInstanceId) _
& ", " & Str(lParentInstanceId) _
& ", " &
mField.MakeStringFieldValid(strCommand) _
& ", " & Str(dtmStartTime) _
& ", " &
mField.MakeStringFieldValid(sItValue)

strInsert = strInsert & " ) "

mdbLoadDb.Execute strInsert, dbFailOnError

#End If

Exit Sub

InsertRunDetailErr:
LogErrors Errors
mstrSource = mstrModuleName & "InsertRunDetail"
On Error GoTo 0
Err.Raise vbObjectError + errUpdateRunDataFailed,
-
mstrSource, _
LoadResString(errUpdateRunDataFailed)

End Sub
Private Sub UpdateRunDetail(cStepRecord As cStep, _
dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)
' Updates the run detail record in the database

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo UpdateRunDetailErr

strUpdate = "update run_step_details " & _
" set end_time = [e_date], elapsed_time =
[elapsed] " & _
" where run_id = [r_id] " & _
" and step_id = [s_id] " & _
" and version_no = [ver_no] " & _
" and instance_id = [i_id] "

Set qy = mdbLoadDb.CreateQueryDef( _
gstrEmptyString, strUpdate)

' Call a procedure to assign the Querydef
parameters
Call AssignParameters(qy, EndTime:=dtmEndTime, _
StepId:=cStepRecord.StepId, _
Version:=cStepRecord.VersionNo, _
InstanceId:=lngInstanceId, _
Elapsed:=lElapsed)

qy.Execute dbFailOnError
qy.Close

```

```

Exit Sub

UpdateRunDetailErr:
LogErrors Errors
mstrSource = mstrModuleName & "UpdateRunDetail"
On Error GoTo 0
Err.Raise vbObjectError + errUpdateRunDataFailed,
-
mstrSource, _
LoadResString(errUpdateRunDataFailed)

End Sub
Private Function InsertRunHeader(dtmStartTime As
Currency) As Long
' Inserts a new run header record into the
database
' and returns the id for the run

Dim strInsert As String
Dim qy As QueryDef

On Error GoTo InsertRunHeaderErr

strInsert = "insert into run_header " & _
"( run_id, workspace_id, start_time ) " & _
" values ( " & _
" [r_id], [w_id], [s_date] )"

Set qy = mdbLoadDb.CreateQueryDef( _
gstrEmptyString, strInsert)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy,
StartTime:=dtmStartTime)

qy.Execute dbFailOnError
qy.Close

InsertRunHeader = mlngRunId
Exit Function

InsertRunHeaderErr:
LogErrors Errors
mstrSource = mstrModuleName & "InsertRunHeader"
On Error GoTo 0
Err.Raise vbObjectError + errUpdateRunDataFailed,
-
mstrSource, _
LoadResString(errUpdateRunDataFailed)

End Function
Private Sub InsertRunParameters(dtmStartTime As
Currency)
' Inserts a new run header record into the
database
' and returns the id for the run

Dim strInsert As String
Dim qy As QueryDef
Dim cParamRec As cParameter
Dim lngIndex As Long

```

```

On Error GoTo InsertRunParametersErr

strInsert = "insert into run_parameters " & _
           "( run_id, parameter_name, parameter_value )
" & _
           " values ( " & _
           " [r_id], [p_name], [p_value] )"

Set qy = mdsLoadDb.CreateQueryDef( _
      gstrEmptyString, strInsert)
qy.Parameters("r_id").Value = mlngRunId

For lngIndex = 0 To mcRunParams.ParameterCount -
1
    Set cParamRec = mcRunParams(lngIndex)

    qy.Parameters("p_name").Value =
cParamRec.ParameterName
    qy.Parameters("p_value").Value =
cParamRec.ParameterValue
    qy.Execute dbFailOnError

Next lngIndex

qy.Close

Exit Sub

InsertRunParametersErr:
LogErrors Errors
mstrSource = mstrModuleName &
"InsertRunParameters"
On Error GoTo 0
Err.Raise vbObjectError + errUpdateRunDataFailed,
-
    mstrSource, _
    LoadResString(errUpdateRunDataFailed)

End Sub
Private Sub AssignParameters(qyExec As DAO.QueryDef,
-
    Optional StartTime As Currency = 0, _
    Optional EndTime As Currency = 0, _
    Optional StepId As Long = 0, _
    Optional Version As String = gstrEmptyString,
-
    Optional InstanceId As Long = 0, _
    Optional ParentInstanceId As Long = 0, _
    Optional Command As String = gstrEmptyString,
-
    Optional Elapsed As Long = 0, _
    Optional ItValue As String = gstrEmptyString)
' Assigns values to the parameters in the
querydef object

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName & "AssignParameters"

For Each prmParam In qyExec.Parameters
    Select Case prmParam.Name
        Case "[w_id]"

```

```

        prmParam.Value = mlngWorkspaceId

    Case "[r_id]"
        prmParam.Value = mlngRunId

    Case "[s_id]"
        BugAssert StepId <> 0
        prmParam.Value = StepId

    Case "[ver_no]"
        BugAssert Not StringEmpty(Version)
        prmParam.Value = Version

    Case "[i_id]"
        BugAssert InstanceId <> 0
        prmParam.Value = InstanceId

    Case "[p_i_id]"
        prmParam.Value = ParentInstanceId

    Case "[com]"
        BugAssert Not StringEmpty(Command)
        prmParam.Value = Command

    Case "[s_date]"
        BugAssert StartTime <> 0
        prmParam.Value = StartTime

    Case "[e_date]"
        BugAssert EndTime <> 0
        prmParam.Value = EndTime

    Case "[elapsed]"
        prmParam.Value = Elapsed

    Case "[it_val]"
        prmParam.Value = ItValue

    Case Else
        ' Write the parameter name that is
        faulty
        WriteError errInvalidParameter,
mstrSource, _
            prmParam.Name
        On Error GoTo 0
        Err.Raise errInvalidParameter,
mstrSource, _
            LoadResString(errInvalidParameter)
    End Select
Next prmParam

Exit Sub

AssignParametersErr:
mstrSource = mstrModuleName & "AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
    mstrSource,
    LoadResString(errAssignParametersFailed)

```

```

End Sub
Private Sub RunStartProcessing(dtmStartTime As
Currency)

    On Error GoTo RunStartProcessingErr

    ' Insert the run header into the database
    Call InsertRunHeader(dtmStartTime)

    ' Insert the run parameters into the database
    Call InsertRunParameters(dtmStartTime)

Exit Sub

RunStartProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"RunStartProcessing"
ShowError errUpdateRunDataFailed
WriteError errUpdateRunDataFailed, mstrSource

End Sub
Private Sub ProcessStartProcessing(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long, _
    lParentInstanceId As Long, sItValue As
String)

    On Error GoTo ProcessStartProcessingErr

    ' Insert the run detail into the database
    Call InsertRunDetail(cStepRecord, strCommand,
dtmStartTime, lngInstanceId, _
        lParentInstanceId, sItValue)

Exit Sub

ProcessStartProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ProcessStartProcessing"
ShowError errUpdateRunDataFailed
WriteError errUpdateRunDataFailed, mstrSource

End Sub
Private Sub StepStartProcessing(cStepRecord As cStep,
dtmStartTime As Currency, _
    lngInstanceId As Long, lParentInstanceId As
Long, sItValue As String)

    On Error GoTo StepStartProcessingErr

    ' Since ProcessStart events won't be triggered
for manager steps
    If cStepRecord.StepType = gintManagerStep Then
        ' Insert the run detail into the database
        Call InsertRunDetail(cStepRecord,
cStepRecord.StepLabel, _

```



```

        dtmStartTime, lngInstanceId,
lParentInstanceId, sItValue)
    End If

    Exit Sub

StepStartProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"StepStartProcessing"
ShowError errUpdateRunDataFailed

End Sub
Private Sub ProcessCompleteProcessing(cStepRecord As
cStep, _
    dtmStartTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    On Error GoTo ProcessCompleteProcessingErr

' Insert the run detail into the database
Call UpdateRunDetail(cStepRecord, dtmStartTime,
lngInstanceId, lElapsed)

    Exit Sub

ProcessCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ProcessCompleteProcessing"
ShowError errUpdateRunDataFailed

End Sub
Private Sub StepCompleteProcessing(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    On Error GoTo StepCompleteProcessingErr

' Since ProcessComplete events won't be triggered
for manager steps
If cStepRecord.StepType = gintManagerStep Then
' Update the run detail in the database
    Call UpdateRunDetail(cStepRecord, dtmEndTime,
lngInstanceId, lElapsed)
    End If

    Exit Sub

StepCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
ShowError errUpdateRunDataFailed

End Sub
Private Sub RunCompleteProcessing(dtmEndTime As
Currency)

    On Error GoTo RunCompleteProcessingErr

```

```

' Update the header record with the end time for
the run
Call UpdateRunHeader(dtmEndTime)

    Exit Sub

RunCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
ShowError errUpdateRunDataFailed

End Sub

Private Sub UpdateRunHeader(ByVal dtmEndTime As
Currency)
' Updates the run header record with the end date

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo UpdateRunHeaderErr

    strUpdate = "update run_header " & _
        " set end_time = [e_date] " & _
        " where run_id = [r_id] "

    Set qy = mddbLoadDb.CreateQueryDef( _
        gstrEmptyString, strUpdate)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy, EndTime:=dtmEndTime)

    qy.Execute dbFailOnError
    qy.Close

    Exit Sub

UpdateRunHeaderErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "UpdateRunHeader"
    On Error GoTo 0
    Err.Raise vbObjectError + errUpdateRunDataFailed,
    _
        mstrSource, _
        LoadResString(errUpdateRunDataFailed)

End Sub

Public Property Let WorkspaceId(ByVal vdata As Long)
    mlngWorkspaceId = vdata
End Property
Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property
Public Sub RunWorkspace()

    Dim cRunSeq As cSequence

    On Error GoTo RunWorkspaceErr

' Call a procedure to load the module-level
structures

```

```

' with all the step and parameter data for the
run
If LoadRunData = False Then
' Error handled by the function already
    Exit Sub
End If

' Retrieve the next run identifier using the
sequence class
Set cRunSeq = New cSequence
Set cRunSeq.IdDatabase = dbsAttTool
cRunSeq.IdentifierColumn = "run_id"
mlngRunId = cRunSeq.Identifier
Set cRunSeq = Nothing

    Call
mcRunParams.InitBuiltInsForRun(mlngWorkspaceId,
mlngRunId)

    Set mcRun.Constraints = mcRunConstraints
    mcRun.WspPreExecution = mcvntWspPreCons
    mcRun.WspPostExecution = mcvntWspPostCons

    Set mcRun.Steps = mcRunSteps
    Set mcRun.Parameters = mcRunParams
    Set mcRun.RunConnections = mcRunConnections
    Set mcRun.RunConnDtIs = mcRunConnDtIs

    mcRun.WspId = mlngWorkspaceId
    mcRun.RootKey = LabelStep(mlngWorkspaceId)
    mcRun.RunId = mlngRunId
    mcRun.CreateInputFiles = CreateInputFiles

    mcRun.Run

    Exit Sub

RunWorkspaceErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)

End Sub
Public Property Get LoadDb() As Database

    Set LoadDb = mddbLoadDb

End Property
Public Property Set LoadDb(vdata As Database)

    Set mddbLoadDb = vdata

End Property
Private Function LoadRunData() As Boolean

' Loads the step, parameter and constraint arrays
' with all the data for the workspace. Returns
False
' if a failure occurs

    Dim strWorkspaceName As String
    Dim recWspSteps As Recordset
    Dim qySteps As DAO.QueryDef
    Dim recWspParams As Recordset

```

```

Dim qyParams As DAO.QueryDef
Dim recWspConns As Recordset
Dim qyConns As DAO.QueryDef
Dim recWspConnDtls As Recordset
Dim qyConnDtls As DAO.QueryDef

On Error GoTo LoadRunDataErr

Set mcRunSteps.StepDB = mdfsLoadDb
Set mcRunParams.ParamDatabase = mdfsLoadDb
Set mcRunConstraints.ConstraintDB = mdfsLoadDb
Set mcRunConnections.ConnDb = mdfsLoadDb
Set mcRunConnDtls.ConnDb = mdfsLoadDb

' Read all the step and parameter data for the
workspace
Call ReadWorkspaceData(mlngWorkspaceId,
mcRunSteps, _
    mcRunParams, mcRunConstraints,
mcRunConnections, mcRunConnDtls, _
    recWspSteps, qySteps, recWspParams,
qyParams, recWspConns, qyConns, _
    recWspConnDtls, qyConnDtls)

' Load all the pre- and post-execution
constraints that
' have been defined for the workspace
mcvntWspPreCons =
mcRunConstraints.ConstraintsForWsp( _
    mlngWorkspaceId, _
    gintPreStep, _
    blnSort:=True, _
    blnGlobalConstraintsOnly:=True)
mcvntWspPostCons =
mcRunConstraints.ConstraintsForWsp( _
    mlngWorkspaceId, _
    gintPostStep, _
    blnSort:=True, _
    blnGlobalConstraintsOnly:=True)

On Error Resume Next
recWspSteps.Close
qySteps.Close
recWspParams.Close
qyParams.Close
recWspConns.Close
qyConns.Close

LoadRunData = True

Exit Function

LoadRunDataErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
ShowError errLoadRunDataFailed
LoadRunData = False

End Function
Public Sub StopRun()

On Error GoTo StopRunErr

```

```

If mcRun Is Nothing Then
' We haven't been the run yet, so do nothing
Else
    mcRun.StopRun
End If

Exit Sub

StopRunErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' Errors would have been displayed by the called
process

End Sub
Public Sub AbortRun()

On Error GoTo AbortRunErr

If mcRun Is Nothing Then
' We haven't been the run yet, so do nothing
Else
    mcRun.Abort
End If

Exit Sub

AbortRunErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' Errors would have been displayed by the called
process

End Sub

Private Sub Class_Initialize()

' Create instances of the step, parameter and
constraint arrays
Set mcRunSteps = New cArrSteps
Set mcRunParams = New cArrParameters
Set mcRunConstraints = New cArrConstraints
Set mcRunConnections = New cConnections
Set mcRunConnDtls = New cConnDtls
Set mcRun = New cRunInst
Set mField = New cStringSM

End Sub
Private Sub Class_Terminate()

On Error GoTo UnLoadRunDataErr

' Clears the step, parameter and constraint
arrays
Set mcRunSteps = Nothing
Set mcRunParams = Nothing
Set mcRunConstraints = Nothing
Set mcRunConnections = Nothing
Set mcRunConnDtls = Nothing

Set mcRun = Nothing
Set mdfsLoadDb = Nothing
Set mField = Nothing

```

```

Exit Sub

UnLoadRunDataErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' Not a critical error - continue
Resume Next

End Sub

Private Sub mcRun_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    RaiseEvent ProcessComplete(cStepRecord,
dtmEndTime, lngInstanceId)
    Call ProcessCompleteProcessing(cStepRecord,
dtmEndTime, lngInstanceId, lElapsed)

End Sub

Private Sub mcRun_ProcessStart(cStepRecord As cStep,
_
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long, _
    lParentInstanceId As Long, sItValue As
String)

    RaiseEvent ProcessStart(cStepRecord, strCommand,
dtmStartTime, lngInstanceId)
    Call ProcessStartProcessing(cStepRecord,
strCommand, dtmStartTime, lngInstanceId, _
    lParentInstanceId, sItValue)

End Sub

Private Sub mcRun_RunComplete(dtmEndTime As Currency)

    Debug.Print "Run ended at: " & CStr(dtmEndTime)
    Call RunCompleteProcessing(dtmEndTime)

    RaiseEvent RunComplete(dtmEndTime)

End Sub
Private Sub mcRun_RunStart(dtmStartTime As Currency,
strWspLog As String)

    RaiseEvent RunStart(dtmStartTime, strWspLog,
mlngRunId)
    Debug.Print "Run started at: " &
CStr(dtmStartTime)

    Call RunStartProcessing(dtmStartTime)

End Sub
Private Sub mcRun_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

```

```

        RaiseEvent StepComplete(cStepRecord, dtmEndTime, lngInstanceID)
    ' BugMessage "Step: " & cStepRecord.StepLabel & "
    has completed!"

    Call StepCompleteProcessing(cStepRecord, dtmEndTime, lngInstanceID, lElapsed)

End Sub
Private Sub mcRun_StepStart(cStepRecord As cStep, dtmStartTime As Currency, _ lngInstanceID As Long, lParentInstanceID As Long, sPath As String, sIts As String, sItValue As String)

    RaiseEvent StepStart(cStepRecord, dtmStartTime, lngInstanceID, sPath, sIts)
    'bugmessage "Step: " & cStepRecord.StepLabel & "
    has started."

    Call StepStartProcessing(cStepRecord, dtmStartTime, lngInstanceID, lParentInstanceID, sItValue)

End Sub

```

## **cSequence.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cSequence"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cSequence.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class uses the att_identifiers
table to generate unique
' identifiers.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mlngIdentifier As Long
Private mstrIdentifierColumn As String
Private mreclIdentifiers As Recordset
Private mdsDatabase As Database

Private Const mstrEmptyString = ""

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String

```

```

Private Const mstrModuleName As String = "cSequence."
Private Sub CreateIdRecord()
    ' Creates a record with all identifiers having an
    initial value of 1

    Dim sSql As String
    Dim pId As DAO.Parameter
    Dim qyId As DAO.QueryDef

    sSql = "insert into att_identifiers (" & _
    " workspace_id, parameter_id, step_id, "
    & _
    " constraint_id, run_id, connection_id "
    & _
    ", " & FLD_ID_CONN_NAME & _
    " ) values ( " & _
    "[w_id], [p_id], [s_id], [c_id], [r_id],
[conn_id], [conn_dtl_id] )"
    Set qyId =
mdsDatabase.CreateQueryDef(gstrEmptyString, sSql)
    For Each pId In qyId.Parameters
        pId.Value = glMinId
    Next pId
    qyId.Execute dbFailOnError
    qyId.Close

End Sub
Private Sub CreateIdRecordset()

    Dim strSql As String

    ' Initialize the recordset with all identifiers
    strSql = "select * from att_identifiers"
    Set mreclIdentifiers =
mdsDatabase.OpenRecordset(strSql, dbOpenForwardOnly)

    If mreclIdentifiers.RecordCount = 0 Then
        CreateIdRecord
        Set mreclIdentifiers =
mdsDatabase.OpenRecordset(strSql, dbOpenForwardOnly)
    End If

    BugAssert mreclIdentifiers.RecordCount <> 0

End Sub

Public Property Set IdDatabase(vdata As Database)

    Set mdsDatabase = vdata

End Property

Public Property Let IdentifierColumn(vdata As String)

    Dim intIndex As Integer

    On Error GoTo IdentifierColumnErr

    ' Initialize the return value to an empty string
    mstrIdentifierColumn = mstrEmptyString
    Call CreateIdRecordset

```

```

    For intIndex = 0 To mreclIdentifiers.Fields.Count
    - 1
        If
        LCase(Trim(mreclIdentifiers.Fields(intIndex).Name)) =
        -
            LCase(Trim(vdata)) Then

                ' Valid column name
                mstrIdentifierColumn = vdata
                Exit Property
            End If

        Next intIndex

        BugAssert True, "Invalid column name!"

        Exit Property

IdentifierColumnErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "IdentifierColumn"
    On Error GoTo 0
    Err.Raise vbObjectError +
errIdentifierColumnFailed, _
        mstrSource, _
        LoadResString(errIdentifierColumnFailed)

End Property
Public Property Get Identifier() As Long
    Dim strSql As String

    On Error GoTo GetIdentifierErr

    BugAssert mstrIdentifierColumn <> mstrEmptyString

    ' Increment the identifier column by 1
    strSql = "update att_identifiers " & _
    " set " & mstrIdentifierColumn & _
    " = " & mstrIdentifierColumn & " + 1"
    mdsDatabase.Execute strSql, dbFailOnError

    ' Refresh the recordset with identifier values
    Call CreateIdRecordset

    mlngIdentifier =
mreclIdentifiers.Fields(mstrIdentifierColumn).Value

    Identifier = mlngIdentifier

    Exit Property

GetIdentifierErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Identifier"
    On Error GoTo 0
    Err.Raise vbObjectError + errGetIdentifierFailed,
    -
        mstrSource, _
        LoadResString(errGetIdentifierFailed)

End Property
Private Sub Class_Terminate()

```

```

mrecIdentifiers.Close
End Sub

```

## **cStack.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cStack"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cStack.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   This class implements a stack of
objects.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cStack."
Private mstrSource As String

Private mcVector As cVector
Private mlngCount As Long
Public Property Get Item(ByVal Position As Long) As Object
Attribute Item.VB_UserMemId = 0

    Set Item = mcVector(Position)
End Property

Public Sub Push(objToPush As Object)

    mcVector.Add objToPush
End Sub
Public Sub Clear()

    mcVector.Clear
End Sub

Public Function Pop() As Object

    If mcVector.Count > 0 Then
        Set Pop = mcVector.Delete(mcVector.Count - 1)
    Else
        Set Pop = Nothing
    End If
End Function

```

```

End If
End Function
Public Function Count() As Long

    Count = mcVector.Count
End Function

Private Sub Class_Initialize()

    Set mcVector = New cVector
End Sub

Private Sub Class_Terminate()

    Set mcVector = Nothing
End Sub

```

## **cStep.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = "SavedWithClassBuilder" ,"Yes"
Attribute VB_Ext_KEY = "Top_Level" ,"Yes"
' FILE:      cStep.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a step.
'            Contains functions to insert, update
and delete
'            att_steps records from the database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Local variable(s) to hold property value(s)
Private mlngStepId As Long
Private mstrVersionNo As String
Private mstrStepLabel As String
Private mstrStepTextFile As String
Private mstrStepText As String
Private mstrStartDir As String
Private mlngWorkspaceId As Integer

```

```

Private mlngParentStepId As Integer
Private mstrParentVersionNo As String
Private mintSequenceNo As Integer
Private mintStepLevel As Integer
Private mblnEnabledFlag As Boolean
Private mstrDegreeParallelism As String
Private mintExecutionMechanism As Integer
Private mstrFailureDetails As String
Private mintContinuationCriteria As Integer
Private mblnGlobalFlag As Boolean
Private mblnArchivedFlag As Boolean
Private mstrOutputFile As String
'Private mstrLogFile As String
Private mstrErrorFile As String
Private mdbDatabase As Database
Private mintStepType As Integer
Private mintOperation As Operation
Private mlngPosition As Long
Private mstrIteratorName As String
Private mcIterators As cNodeCollections
Private mblsNewVersion As Boolean
Private msOldVersion As String

```

```

' The following constants are used throughout the
project to
' indicate the different options selected by the user
' The options are presented to the user as control
arrays of
' option buttons. These constants have to be in sync
with the
' indexes of the option buttons.
' All the control arrays have an lbound of 1. The
value 0 is
' used to indicate that the property being
represented by the
' control array is not valid for the step
' Public enums are used since we cannot expose public
constants
' in class modules. gintNoOption is applicable to all
enums,
' but declared in the Execution method enum, since we
cannot
' declare it more than once.

' Is here as a comment
' Has been defined in public.bas with the other
object types
'Public Enum gintStepType
'    gintGlobalStep = 3
'    gintManagerStep
'    gintWorkerStep
'End Enum

' Execution Method options
Public Enum ExecutionMethod
    gintNoOption = 0
    gintExecuteODBC
    gintExecuteShell
End Enum

' Failure criteria options
Public Enum FailureCriteria
    gintFailureODBC = 1

```

```

    gintFailureTextCompare
End Enum

' Continuation criteria options
' Note: Update the initialization of gsContCriteria
in Initialize() if the
' continuation criteria are modified
Public Enum ContinuationCriteria
    gintOnFailureAbort = 1
    gintOnFailureContinue
    gintOnFailureCompleteSiblings
    gintOnFailureAbortSiblings
    gintOnFailureSkipSiblings
    gintOnFailureAsk
End Enum

' The initial version #
Private Const mstrMinVersion As String = "0.0"

' End of constants for option button control arrays
' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cStep."

' The cSequence class is used to generate unique step
identifiers
Private mStepSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM
Private Sub NewVersion()

mbIsNewVersion = True
msOldVersion = mstrVersionNo

End Sub
Public Function IsNewVersion() As Boolean
    IsNewVersion = mbIsNewVersion
End Function

Public Function OldVersionNo() As String
    OldVersionNo = msOldVersion
End Function

Public Sub SaveIterators()
' This procedure checks if any changes have been
made
' to the iterators for the step. If so, it calls
the
' methods of the iterator class to commit the
changes
Dim cItRec As cIterator
Dim lngIndex As Long

On Error GoTo SaveIteratorsErr

For lngIndex = 0 To mcIterators.Count - 1
    Set cItRec = mcIterators(lngIndex)

    Select Case cItRec.IndOperation
        Case QueryOp

```

```

' No changes were made to the queried
Step.

' Do nothing

Case InsertOp
    cItRec.Add mlngStepId, mstrVersionNo
    cItRec.IndOperation = QueryOp

Case UpdateOp
    cItRec.Update mlngStepId,
mstrVersionNo
    cItRec.IndOperation = QueryOp

Case DeleteOp
    cItRec.Delete mlngStepId,
mstrVersionNo
' Remove the record from the
collection
    mcIterators.Delete lngIndex

End Select
Next lngIndex

Exit Sub

SaveIteratorsErr:
LogErrors Errors
mstrSource = mstrModuleName & "SaveIterators"
On Error GoTo 0
Err.Raise vbObjectError + errSaveFailed, _
    mstrSource, _
    LoadResString(errSaveFailed)

End Sub
Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property
Public Property Let IndOperation(ByVal vdata As
Operation)

    BugAssert vdata = QueryOp Or vdata = InsertOp Or
vdata = UpdateOp Or vdata = DeleteOp, "Invalid
operation"
    mintOperation = vdata

End Property

Public Function Iterators() As Variant
' Returns a variant containing all the iterators
that
' have been defined for the step

Dim cStepIterators() As cIterator
Dim cTempIt As cIterator
Dim lngIndex As Long
Dim lngItCount As Long

On Error GoTo IteratorsErr

lngItCount = 0
For lngIndex = 0 To mcIterators.Count - 1

```

```

' Increase the array dimension and add the
constraint
' to it
Set cTempIt = mcIterators(lngIndex)

If cTempIt.IndOperation <> DeleteOp Then
    ReDim Preserve cStepIterators(lngItCount)
    Set cStepIterators(lngItCount) = cTempIt
    lngItCount = lngItCount + 1
End If

Next lngIndex

If lngItCount = 0 Then
    Iterators = Empty
Else
    Iterators = cStepIterators()
End If

Call QuickSort(Iterators)

Exit Function

IteratorsErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errIteratorsFailed, _
    mstrModuleName & "Iterators", _
    LoadResString(errIteratorsFailed)

End Function
Public Function IteratorCount() As Long
' Returns a count of all the iterators for the
step

Dim lngItCount As Long
Dim lngIndex As Long
Dim cTempIt As cIterator

On Error GoTo IteratorsErr

lngItCount = 0
For lngIndex = 0 To mcIterators.Count - 1

    If mcIterators(lngIndex).IndOperation <>
DeleteOp Then
        lngItCount = lngItCount + 1
    End If

Next lngIndex

IteratorCount = lngItCount

Exit Function

IteratorsErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errIteratorsFailed, _
    mstrSource, _
    LoadResString(errIteratorsFailed)

End Function

```

```

Public Sub Validate()
    ' Each distinct object will have a Validate
    method which
    ' will check if the class properties are valid.
    This method
    ' will be used to check interdependant properties
    that
    ' cannot be validated by the let procedures.
    ' It should be called by the add and modify
    methods of the class

    ' Check if the step label has been specified
    If StringEmpty(mstrStepLabel) Then
        ShowError errStepLabelMandatory
        On Error GoTo 0
        Err.Raise vbObjectError + errValidateFailed,
    -
        "Validate",
    LoadResString(errValidateFailed)
    End If

    If Not IsStringEmpty(mstrStepText) And Not
    IsStringEmpty(mstrStepTextFile) Then
        ShowError errStepTextOrFile
        On Error GoTo 0
        Err.Raise vbObjectError + errStepTextOrFile,
    -
        "Validate",
    LoadResString(errStepTextOrFile)
    End If

End Sub

Public Function IncVersionY() As String
    ' The version number for a step is stored in the
    x.y
    ' format where x is the parent component and y is
    the
    ' child component of the step. This function will
    increment
    ' the y component of the step by 1

    On Error GoTo IncVersionYErr

    ' Store the old version number for the step
    Call NewVersion

    mstrVersionNo = Trim$(Str$(GetX(mstrVersionNo))
    & gstrVerSeparator & _
        Trim$(Str(GetY(mstrVersionNo) + 1)))
    IncVersionY = mstrVersionNo

    Exit Function

IncVersionYErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName & "IncVersionY"
    On Error GoTo 0
    Err.Raise vbObjectError + errIncVersionYFailed, _
        gstrSource, _
        LoadResString(errIncVersionYFailed)

```

```

End Function

Public Function IncVersionX() As String
    ' The version number for a step is stored in the
    x.y
    ' format where x is the parent component and y is
    the
    ' child component of the step. This function will
    increment
    ' the y component of the step by 1 and reset the
    x component
    ' to 0

    On Error GoTo IncVersionXErr

    ' Store the old version number for the step
    Call NewVersion

    mstrVersionNo = Trim$(Str$(GetX(mstrVersionNo) +
    1)) & gstrVerSeparator & "0"
    IncVersionX = mstrVersionNo

    Exit Function

IncVersionXErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName & "IncVersionX"
    On Error GoTo 0
    Err.Raise vbObjectError + errIncVersionXFailed, _
        gstrSource, _
        LoadResString(errIncVersionXFailed)

End Function

Private Function GetY(strVersion As String) As Long
    ' The version number for a step is stored in the
    x.y
    ' format where x is the parent component and y is
    the
    ' child component of the step. Given an argument
    of type
    ' x.y, it returns y

    ' Truncate the fractional part to get the parent
    component
    ' of the version number (x.y)
    GetY = Val(Mid(strVersion, InStr(strVersion,
    gstrVerSeparator) + 1))

End Function

Private Function GetX(strVersion As String) As Long
    ' The version number for a step is stored in the
    x.y
    ' format where x is the parent component and y is
    the
    ' child component of the step. Given an argument
    of type
    ' x.y, it returns x

    ' Truncate the fractional part to get the parent
    component
    ' of the version number (x.y)

```

```

    GetX = Val(Left(strVersion, InStr(strVersion,
    gstrVerSeparator) - 1))

End Function

Public Function Clone(Optional cCloneStep As cStep)
    As cStep

    ' Creates a copy of a given step

    Dim lngIndex As Long
    Dim cItRec As cIterator
    Dim cItClone As cIterator

    On Error GoTo CloneErr

    If cCloneStep Is Nothing Then
        Set cCloneStep = New cStep
    End If

    ' Copy all the step properties to the newly
    created step
    ' Initialize the global flag first since
    subsequent
    ' validations might depend on it
    cCloneStep.GlobalFlag = mblnGlobalFlag
    cCloneStep.GlobalRunMethod = mintGlobalRunMethod

    cCloneStep.StepType = mintStepType
    cCloneStep.StepId = mlngStepId
    cCloneStep.VersionNo = mstrVersionNo
    cCloneStep.StepLabel = mstrStepLabel
    cCloneStep.StepTextFile = mstrStepTextFile
    cCloneStep.StepText = mstrStepText
    cCloneStep.StartDir = mstrStartDir
    cCloneStep.WorkspaceId = mlngWorkspaceId
    cCloneStep.ParentStepId = mlngParentStepId
    cCloneStep.ParentVersionNo = mstrParentVersionNo
    cCloneStep.StepLevel = mintStepLevel
    cCloneStep.SequenceNo = mintSequenceNo
    cCloneStep.EnabledFlag = mblnEnabledFlag
    cCloneStep.DegreeParallelism =
    mstrDegreeParallelism
    cCloneStep.ExecutionMechanism =
    mintExecutionMechanism
    cCloneStep.FailureDetails = mstrFailureDetails
    cCloneStep.ContinuationCriteria =
    mintContinuationCriteria
    cCloneStep.ArchivedFlag = mblnArchivedFlag
    cCloneStep.OutputFile = mstrOutputFile
    cCloneStep.LogFile = mstrLogFile
    cCloneStep.ErrorFile = mstrErrorFile
    cCloneStep.IteratorName = mstrIteratorName

    cCloneStep.IndOperation = mintOperation
    cCloneStep.Position = mlngPosition

    Set cCloneStep.NodeDB = mdbDatabase

    ' Clone all the iterators for the step
    For lngIndex = 0 To mcIterators.Count - 1
        Set cItRec = mcIterators(lngIndex)
        Set cItClone = cItRec.Clone

```



```

    " parent_step_id, parent_version_no,
sequence_no, " & _
    " enabled_flag, step_level, " & _
    " degree_parallelism, execution_mechanism, "
& _
    " failure_details, " & _
    " continuation_criteria, global_flag, " & _
    " archived_flag, " & _
    " output_file_name, error_file_name, " & _
    " iterator_name ) values ( "

' log_file_name,

#If USE_JET Then
    strInsert = strInsert & " [w_id], [s_id],
[ver_no], " & _
    " [s_label], [s_file_name], [s_text],
[s_start_dir], " & _
    " [p_step_id], [p_version_no], [seq_no], " & _
-
    " [enabled], [s_level], [deg_parallelism], "
& _
    " [exec_mechanism], [fail_dtls], " & _
    " [cont_criteria], [global], [archived], " & _
-
    " [output_file], [error_file], " & _
    " [it_name] )"

' [log_file],

Set qy =
mdbsDatabase.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close
#Else
    strInsert = strInsert & Str(mlngWorkspaceId)
& ", " & Str(mlngStepId) & _
    ", " &
mFieldValue.MakeStringFieldValid(mstrVersionNo)

' For fields that may be null, call a function to
determine
' the string to be appended to the insert
statement
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrStepLabel)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrStepTextFile)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrStepText)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrStartDir)

    strInsert = strInsert & ", " &
Str(mlngParentStepId) & _

```

```

    ", " &
mFieldValue.MakeStringFieldValid(mstrParentVersionNo)
& _
    ", " & Str(mintSequenceNo) & _
    ", " & Str(mblnEnabledFlag) & ", " &
Str(mintStepLevel)

    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrDegreeParallelis
m)
    strInsert = strInsert & ", " &
Str(mintExecutionMechanism)

    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrFailureDetails)
& _
    ", " & Str(mintContinuationCriteria) & _
    ", " & Str(mblnGlobalFlag) & _
    ", " & Str(mblnArchivedFlag)

    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrOutputFile)
' strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrLogFile)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrErrorFile)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrIteratorName)

    strInsert = strInsert & " )"

    BugMessage strInsert
mdbsDatabase.Execute strInsert, dbFailOnError

#End If

Exit Sub

InsertStepRecErr:
mstrSource = mstrModuleName & "InsertStepRec"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errInsertStepFailed, _
mstrSource,
LoadResString(errInsertStepFailed)
End Sub
Private Sub UpdOldVersionsArchFlg()
' Updates the archived flag on all old version
for the step to True

Dim sUpdate As String
Dim qy As DAO.QueryDef

On Error GoTo UpdOldVersionsArchFlgErr
mstrSource = mstrModuleName &
"UpdOldVersionsArchFlg"

#If USE_JET Then
    sUpdate = "update att_steps " & _
" set archived_flag = True "

' Append the Where clause

```

```

sUpdate = sUpdate & " where step_id = [s_id] " &
-
" and version_no <> [ver_no]"

Set qy =
mdbsDatabase.CreateQueryDef(gstrEmptyString, sUpdate)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

If qy.RecordsAffected = 0 Then
On Error GoTo 0
Err.Raise vbObjectError +
errModifyStepFailed, _
mstrSource,
LoadResString(errModifyStepFailed)
End If

qy.Close

#Else
    sUpdate = "update att_steps " & _
" set archived_flag = True "

    sUpdate = sUpdate & " where step_id = " &
Str(mlngStepId) & _
" and version_no <> " &
mFieldValue.MakeStringFieldValid(mstrVersionNo)

    BugMessage sUpdate
mdbsDatabase.Execute sUpdate, dbFailOnError
#End If

Exit Sub

UpdOldVersionsArchFlgErr:
mstrSource = mstrModuleName &
"UpdOldVersionsArchFlg"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errModifyStepFailed, _
mstrSource,
LoadResString(errModifyStepFailed)
End Sub
Public Sub InsertIterator(cItRecord As cIterator)
' Inserts the iterator record into the database

Call cItRecord.Add(mlngStepId, mstrVersionNo)

End Sub
Public Sub UpdateIterator(cItRecord As cIterator)
' Updates the iterator record in the database

Call cItRecord.Update(mlngStepId, mstrVersionNo)

End Sub
Public Sub UpdateIteratorVersion()
' Updates the iterator record in the database

Dim lngIndex As Long
Dim cTempIt As cIterator

```



```

On Error GoTo UpdateIteratorVersionErr

For lngIndex = 0 To mcIterators.Count - 1
    ' Increase the array dimension and add the
constraint
    ' to it
    Set cTempIt = mcIterators(lngIndex)

    If cTempIt.IndOperation <> DeleteOp Then
        ' Set the operation to indicate an insert
        cTempIt.IndOperation = InsertOp
    End If

Next lngIndex

Exit Sub

UpdateIteratorVersionErr:
mstrSource = mstrModuleName &
"UpdateIteratorVersion"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errUpdateFailed, _
    mstrSource,
LoadResString(errUpdateFailed)

End Sub
Public Sub AddIterator(cItRecord As cIterator)
    ' Adds the iterator record to the collection of
iterators
    ' for the step

    Call mcIterators.Add(cItRecord)

End Sub
Public Sub AddAllIterators()
    ' Sets the indicator variable for all iterators
to insert

    Dim lngIndex As Long

    For lngIndex = 0 To mcIterators.Count - 1
        mcIterators(lngIndex).Validate
        mcIterators(lngIndex).IndOperation = InsertOp
    Next lngIndex

End Sub

Public Sub LoadIterator(cItRecord As cIterator)
    ' Adds the iterator record to the collection of
iterators
    ' for the step

    Call mcIterators.Load(cItRecord)

End Sub
Public Sub UnloadIterators()
    ' Unloads all iterator records for the step

    Dim lngIndex As Long

    For lngIndex = mcIterators.Count - 1 To 0 Step -1

```

```

        ' Calls the collection method to unload the
node
        ' from the array
        mcIterators.Unload lngIndex
    Next lngIndex

End Sub
Public Sub ModifyIterator(cItRecord As cIterator)
    ' Modifies the iterator record in the collection

    Call mcIterators.Modify(cItRecord)

End Sub
Public Sub DeleteIterator(cItRecord As cIterator)
    ' Deletes the iterator record from the database

    Call cItRecord.Delete(mlngStepId, mstrVersionNo)

End Sub
Public Sub RemoveIterator(cItRecord As cIterator)
    ' Marks the iterator record in the collection to
' indicate a delete

    Call mcIterators.Delete(cItRecord.Position)

End Sub

Private Sub AssignParameters(qyExec As DAO.QueryDef)
    ' Assigns values to the parameters in the
querydef object
    ' The parameter names are cryptic to make them
different
    ' from the actual field names. When the parameter
names
    ' are the same as the field names, parameters in
the
    ' where clause do not get created.

    Dim prmParam As DAO.Parameter

    On Error GoTo AssignParametersErr
mstrSource = mstrModuleName & "AssignParameters"

For Each prmParam In qyExec.Parameters
    Select Case prmParam.Name
        Case "[w_id]"
            prmParam.Value = mlngWorkspaceId
        Case "[s_id]"
            prmParam.Value = mlngStepId
        Case "[ver_no]"
            prmParam.Value = mstrVersionNo
        Case "[s_label]"
            prmParam.Value = mstrStepLabel
        Case "[s_file_name]"
            prmParam.Value = mstrStepTextFile
        Case "[s_text]"
            prmParam.Value = mstrStepText
        Case "[s_start_dir]"
            prmParam.Value = mstrStartDir
        Case "[p_step_id]"
            prmParam.Value = mlngParentStepId
        Case "[p_version_no]"

```

```

            prmParam.Value = mstrParentVersionNo
        Case "[seq_no]"
            prmParam.Value = mintSequenceNo
        Case "[enabled]"
            prmParam.Value = mblnEnabledFlag
        Case "[s_level]"
            prmParam.Value = mintStepLevel
        Case "[deg_parallelism]"
            prmParam.Value =
mstrDegreeParallelism
        Case "[exec_mechanism]"
            prmParam.Value =
mintExecutionMechanism
        Case "[fail_dtls]"
            prmParam.Value = mstrFailureDetails
        Case "[cont_criteria]"
            prmParam.Value =
mintContinuationCriteria
        Case "[global]"
            prmParam.Value = mblnGlobalFlag
        Case "[archived]"
            prmParam.Value = mblnArchivedFlag
        Case "[output_file]"
            prmParam.Value = mstrOutputFile
        Case "[log_file]"
            prmParam.Value = mstrLogFile
        Case "[error_file]"
            prmParam.Value = mstrErrorFile
        Case "[it_name]"
            prmParam.Value = mstrIteratorName
        Case Else
            ' Write the parameter name that is
faulty
            WriteError errInvalidParameter,
mstrSource, _
                prmParam.Name
            On Error GoTo 0
            Err.Raise errInvalidParameter,
mstrSource, _
                LoadResString(errInvalidParameter)
        End Select
    Next prmParam

    If qyExec.Parameters("s_id") = 0 Or
StringEmpty(qyExec.Parameters("ver_no")) Then
        WriteError errInvalidParameter, mstrSource
        On Error GoTo 0
        Err.Raise errInvalidParameter, mstrSource,
LoadResString(errInvalidParameter)
    End If

Exit Sub

AssignParametersErr:
    mstrSource = mstrModuleName & "AssignParameters"
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
        mstrSource,
LoadResString(errAssignParametersFailed)

```

```

End Sub

Public Sub Modify()

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo ModifyErr
    mstrSource = mstrModuleName & "Modify"

    ' Check if the database object is valid
    Call CheckDB

    ' Check if the step record is valid
    Call Validate

    ' The step_id and version_no will never be
    updated -
    ' whenever a step is modified a copy of the old
    step will
    ' be created with an incremented version_no

    #If USE_JET Then

        strUpdate = "update att_steps " & _
            " set step_label = [s_label] " & _
            " , step_file_name = [s_file_name] " & _
            " , step_text = [s_text] " & _
            " , start_directory = [s_start_dir] " & _
            " , workspace_id = [w_id] " & _
            " , parent_step_id = [p_step_id] " & _
            " , parent_version_no = [p_version_no] " & _
            " , sequence_no = [seq_no] " & _
            " , step_level = [s_level] " & _
            " , enabled_flag = [enabled] " & _
            " , degree_parallelism = [deg_parallelism] " & _
            " , execution_mechanism = [exec_mechanism] " & _
            " , failure_details = [fail_dtls] " & _
            " , continuation_criteria = [cont_criteria] " & _
            " , global_flag = [global] " & _
            " , archived_flag = [archived] " & _
            " , output_file_name = [output_file] " & _
            " , error_file_name = [error_file] " & _
            " , iterator_name = [it_name] " & _
            " , log_file_name = [log_file] " & _

        ' Append the Where clause
        strUpdate = strUpdate & " where step_id = [s_id]
    " & _
        " and version_no = [ver_no]"

        Set qy =
mdbContext.CreateQueryDef(gstrEmptyString,
strUpdate)

        ' Call a procedure to execute the Querydef object
        Call AssignParameters(qy)
        qy.Execute dbFailOnError
    
```

```

    If qy.RecordsAffected = 0 Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errModifyStepFailed, _
            mstrSource,
LoadResString(errModifyStepFailed)
        End If

        qy.Close

    #Else

        strUpdate = "update att_steps " & _
            " set step_label = "

        ' For fields that may be null, call a function to
        determine
        ' the string to be appended to the update
        statement
        strUpdate = strUpdate &
mFieldValue.MakeStringFieldValid(mstrStepLabel)

        strUpdate = strUpdate & " , step_file_name = " &
mFieldValue.MakeStringFieldValid(mstrStepTextFile)
        strUpdate = strUpdate & " , step_text = " &
mFieldValue.MakeStringFieldValid(mstrStepText)
        strUpdate = strUpdate & " , start_directory = " &
mFieldValue.MakeStringFieldValid(mstrStartDir)

        strUpdate = strUpdate & " , workspace_id = " &
Str(mlngWorkspaceId) & _
            " , parent_step_id = " &
Str(mlngParentStepId) & _
            " , parent_version_no = " &
mFieldValue.MakeStringFieldValid(mstrParentVersionNo)
            & _
            " , sequence_no = " & Str(mintSequenceNo) & _
            " , step_level = " & Str(mintStepLevel) & _
            " , enabled_flag = " & Str(mblnEnabledFlag) & _
            " , degree_parallelism = " &
mFieldValue.MakeStringFieldValid(mstrDegreeParallelism)
            & _
            " , execution_mechanism = " &
Str(mintExecutionMechanism) & _
            " , failure_details = " &
mFieldValue.MakeStringFieldValid(mstrFailureDetails)
            & _
            " , continuation_criteria = " &
Str(mintContinuationCriteria) & _
            " , global_flag = " & Str(mblnGlobalFlag) & _
            " , archived_flag = " & Str(mblnArchivedFlag)
            & _
            " , output_file_name = " &
mFieldValue.MakeStringFieldValid(mstrOutputFile) & _
            " , error_file_name = " &
mFieldValue.MakeStringFieldValid(mstrErrorFile) & _
            " , iterator_name = " &
mFieldValue.MakeStringFieldValid(mstrIteratorName)

        '
            " , log_file_name = " &
mFieldValue.MakeStringFieldValid(mstrLogFile) & _
    
```

```

        strUpdate = strUpdate & " where step_id = " &
Str(mlngStepId) & _
            " and version_no = " &
mFieldValue.MakeStringFieldValid(mstrVersionNo)

        BugMessage strUpdate
mdbContext.Execute strUpdate, dbFailOnError
    #End If

    Exit Sub

ModifyErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Modify"
    On Error GoTo 0
    Err.Raise vbObjectError + errModifyStepFailed, _
        mstrSource,
LoadResString(errModifyStepFailed)
    End Sub
Private Sub CheckDB()
    ' Check if the database object has been
    initialized

    If mdbContext.Is Nothing Then
        ShowError errInvalidDB
        On Error GoTo 0
        Err.Raise vbObjectError + errInvalidDB, _
            mstrModuleName,
LoadResString(errInvalidDB)
        End If
    End Sub

Public Sub Delete()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteErr

    Call CheckDB

    strDelete = "delete from att_steps " & _
        " where step_id = [s_id] " & _
        " and version_no = [ver_no] "
        ' mdbContext.Execute strDelete, dbFailOnError
        Set qy =
mdbContext.CreateQueryDef(gstrEmptyString,
strDelete)

        Call AssignParameters(qy)
        qy.Execute dbFailOnError

        qy.Close

    Exit Sub

DeleteErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteStepFailed, _
    
```

```

        mstrModuleName & "Delete",
LoadResString(errDeleteStepFailed)
End Sub
Public Property Get DegreeParallelism() As String

    DegreeParallelism = mstrDegreeParallelism

End Property
Public Property Get Position() As Long

    Position = mlngPosition

End Property

Public Property Let DegreeParallelism(ByVal vdata As String)

    ' The degree of parallelism must be zero for all
global steps
    ' This check must be made by the global step
class. Only
    ' generic step validations will be carried out by
this
    ' class
    mstrDegreeParallelism = vdata

End Property

Public Property Let ExecutionMechanism(ByVal vdata As ExecutionMethod)

    BugAssert vdata = gintExecuteODBC Or vdata =
gintExecuteShell Or vdata = gintNoOption, _
"Execution mechanism invalid"
    mintExecutionMechanism = vdata

End Property

Public Property Let FailureDetails(ByVal vdata As String)

    mstrFailureDetails = vdata

End Property

Public Property Let SequenceNo(ByVal vdata As Integer)

    mintSequenceNo = vdata

End Property

Public Property Let Position(ByVal vdata As Long)

    mlngPosition = vdata

End Property

Public Property Let ParentStepId(ByVal vdata As Long)

    mlngParentStepId = vdata

End Property

Public Property Get SequenceNo() As Integer

    SequenceNo = mintSequenceNo

End Property

```

```

Public Property Get StepLevel() As Integer
    StepLevel = mintStepLevel
End Property

Public Property Get ParentVersionNo() As String
    ParentVersionNo = mstrParentVersionNo
End Property

Public Property Let ParentVersionNo(ByVal vdata As String)
    mstrParentVersionNo = vdata
End Property

Public Property Get ParentStepId() As Long
    ParentStepId = mlngParentStepId
End Property

Public Property Let WorkspaceId(ByVal vdata As Long)
    mlngWorkspaceId = vdata
End Property

Public Property Let VersionNo(ByVal vdata As String)
    ' The version number of a step is stored in the
x.y format where
    ' x represents a change to the step as a result
of modifications
    ' to any of the step properties
    ' y represents a change to the step as a result
of modifications
    ' to the sub-steps associated with it. Hence the
y-component
    ' of the version will be incremented when a sub-
step is added,
    ' modified or deleted
    ' x will be referred to throughout this code as
the parent
    ' component of the version and y will be referred
to as the
    ' child component of the version
    ' The version information for a step is
maintained by the
    ' calling function

    mstrVersionNo = vdata

End Property

Public Property Get StepType() As gintStepType

    On Error GoTo StepTypeErr

    If mintStepType = 0 Then
        ' The step type variable has not been
initialized -
        If mblnGlobalFlag Then
            mintStepType = gintGlobalStep
        ElseIf IsStringEmpty(mstrStepText) And _
            IsStringEmpty(mstrStepTextFile) Then
            mintStepType = gintManagerStep
        Else
            mintStepType = gintWorkerStep
        End If
    End If

```

```

    StepType = mintStepType

Exit Property

StepTypeErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "StepType"
    On Error GoTo 0
    Err.Raise vbObjectError + errGetStepTypeFailed, _
        mstrSource, _
        LoadResString(errGetStepTypeFailed)

End Property

Public Property Let StepType(vdata As gintStepType)

    On Error GoTo StepTypeErr

    Select Case vdata
        Case gintGlobalStep, gintManagerStep,
gintWorkerStep
            mintStepType = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errStepTypeInvalid, _
                mstrModuleName & "StepType",
                LoadResString(errStepTypeInvalid)
    End Select
    Exit Property

StepTypeErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "StepType"
    On Error GoTo 0
    Err.Raise vbObjectError + errLetStepTypeFailed, _
        mstrSource, _
        LoadResString(errLetStepTypeFailed)

End Property

Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property

Public Property Get ContinuationCriteria() As ContinuationCriteria

    ContinuationCriteria = mintContinuationCriteria

End Property

Public Property Let ContinuationCriteria(ByVal vdata As ContinuationCriteria)

    ' The Continuation criteria must be null for all
global steps
    ' and non-null for all manager and worker steps
    ' These checks will have to be made by the
corresponding

```

```

' classes - only generic step validations will be
made
' by this class
BugAssert vdata = gintOnFailureAbortSiblings Or
vdata = gintOnFailureCompleteSiblings _
Or vdata = gintOnFailureSkipSiblings
Or vdata = gintOnFailureAbort _
Or vdata = gintOnFailureContinue Or
vdata = gintOnFailureAsk _
Or vdata = gintNoOption, _
"Invalid continuation criteria"
mintContinuationCriteria = vdata

End Property
Public Property Get ExecutionMechanism() As
ExecutionMethod

ExecutionMechanism = mintExecutionMechanism

End Property

Public Property Get FailureDetails() As String

FailureDetails = mstrFailureDetails

End Property

Public Property Let StepText(ByVal vdata As String)
' Has to be null for manager steps
' The check will have to be made by the user
interface or
' by the manager step class
mstrStepText = vdata
End Property
Public Property Let StepLevel(ByVal vdata As Integer)

' The step level must be zero for all global
steps
' This check must be made in the global step
class
mintStepLevel = vdata

End Property
Public Property Get StepText() As String
StepText = mstrStepText
End Property

Public Property Let StepTextFile(ByVal vdata As
String)
' Has to be null for manager steps
' The check will have to be made by the user
interface and
' by the manager step class
mstrStepTextFile = vdata
End Property

Public Property Get StepTextFile() As String
StepTextFile = mstrStepTextFile
End Property

Public Property Let StepLabel(ByVal vdata As String)
' Cannot be null for manager steps

```

```

' But this check cannot be made here since we do
not know
' at this point if the step being created is a
manager
' or a worker step
' The check will have to be made by the user
interface and
' by the manager step class
mstrStepLabel = vdata
End Property

Public Property Get StepLabel() As String
StepLabel = mstrStepLabel
End Property

Public Property Let StartDir(ByVal vdata As String)
mstrStartDir = vdata
End Property

Public Property Get StartDir() As String
StartDir = mstrStartDir
End Property

Public Property Get VersionNo() As String
' The version number of a step is stored in the
x.y format where
' x represents a change to the step as a result
of modifications
' to any of the step properties
' y represents a change to the step as a result
of modifications
' to the sub-steps associated with it. Hence the
y-component
' of the version will be incremented when a sub-
step is added,
' modified or deleted
' x will be referred to throughout this code as
the parent
' component of the version and y will be referred
to as the
' child component of the version
' The version information for a step is
maintained by the
' calling function

VersionNo = mstrVersionNo

End Property

Public Property Get StepId() As Long

StepId = mlngStepId

End Property

Public Property Get NextStepId() As Long

Dim lngNextId As Long

On Error GoTo NextStepIdErr

' First check if the database object is valid
Call CheckDB

```

```

' Retrieve the next identifier using the sequence
class
Set mStepSeq = New cSequence
Set mStepSeq.IdDatabase = mdbDatabase
mStepSeq.IdentifierColumn = "step_id"
lngNextId = mStepSeq.Identifier
Set mStepSeq = Nothing

NextStepId = lngNextId
Exit Property

NextStepIdErr:
LogErrors Errors
mstrSource = mstrModuleName & "NextStepId"
On Error GoTo 0
Err.Raise vbObjectError + errStepIdGetFailed, _
mstrSource, LoadResString(errStepIdGetFailed)

End Property
Public Property Let StepId(ByVal vdata As Long)

mlngStepId = vdata

End Property

Private Sub Class_Initialize()

' Initialize the operation indicator variable to
Query
' It will be modified later by the collection
class when
' inserts, updates or deletes are performed
mintOperation = QueryOp
mbIsNewVersion = False
msOldVersion = gstrEmptyString

Set mFieldValue = New cStringSM
Set mcIterators = New cNodeCollections

End Sub

Private Sub Class_Terminate()

Set mFieldValue = Nothing
Set mcIterators = Nothing

End Sub



---


cStepTree.cls


---


VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cStepTree"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cStepTree.cls

```

```

'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
'
' PURPOSE:   Implements step navigation functions
such as determining
'           the child of a step and so on.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cStepTree."
Private mstrSource As String

Public StepRecords As cArrSteps
Public Property Get HasChild(Optional ByVal StepKey
As String, _
Optional ByVal StepId As Long = 0) As Boolean

Dim lTemp As Long

HasChild = False
StepId = GetStepId(StepKey, StepId)

For lTemp = 0 To StepRecords.StepCount - 1
If StepRecords(lTemp).StepType <>
gintGlobalStep And StepRecords(lTemp).ParentStepId =
StepId Then
HasChild = True
Exit For
End If
Next lTemp

End Property
Public Property Get ChildStep(Optional ByVal StepKey
As String, _
Optional ByVal StepId As Long = 0) As cStep

Dim lTemp As Long

Set ChildStep = Nothing
StepId = GetStepId(StepKey, StepId)

For lTemp = 0 To StepRecords.StepCount - 1
If StepRecords(lTemp).StepType <>
gintGlobalStep And StepRecords(lTemp).ParentStepId =
StepId And _
StepRecords(lTemp).SequenceNo =
gintMinSequenceNo Then
Set ChildStep = StepRecords(lTemp)
Exit For
End If
Next lTemp

End Property
Public Property Get NextStep(Optional ByVal StepKey
As String, _
Optional ByVal StepId As Long = 0) As cStep

```

```

Dim lTemp As Long
Dim cChildStep As cStep

Set NextStep = Nothing
StepId = GetStepId(StepKey, StepId)
Set cChildStep = StepRecords.QueryStep(StepId)

For lTemp = 0 To StepRecords.StepCount - 1
If StepRecords(lTemp).StepType <>
gintGlobalStep And _
StepRecords(lTemp).ParentStepId =
cChildStep.ParentStepId And _
StepRecords(lTemp).SequenceNo =
cChildStep.SequenceNo + 1 Then
Set NextStep = StepRecords(lTemp)
Exit For
End If
Next lTemp

End Property
Private Function GetStepId(Optional ByVal StepKey As
String, _
Optional ByVal StepId As Long = 0) As Long
If StepId = 0 Then
If StringEmpty(StepKey) Then
Err.Raise vbObjectError +
errMandatoryParameterMissing, _
mstrModuleName & "GetStepId",
LoadResString(errMandatoryParameterMissing)
Else
GetStepId = IIf(IsLabel(StepKey), 0,
MakeIdentifierValid(StepKey))
End If
Else
GetStepId = StepId
End If
End Function

```

## ***cStringSM.cls***

```

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cStringSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:           cStringSM.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:       This module contains common
procedures that can be used
'               to manipulate strings
'               It is called StringSM, since String
is a Visual Basic keyword
' Contact:       Reshma Tharamal
(reshmat@microsoft.com)

```

```

Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cStringSM."

Private mstrText As String

Private Const mstrNullValue = "null"
Private Const mstrSQ = ""
Private Const mstrEnvVarSeparator = "%"
Public Function InsertEnvVariables(_
Optional ByVal strComString As String) As
String
' This function replaces all environment
variables in
' the passed in string with their values - they
are
' enclosed by "%"

Dim intPos As Integer
Dim intEndPos As Integer
Dim strEnvVariable As String
Dim strValue As String
Dim strCommand As String

On Error GoTo InsertEnvVariablesErr
mstrSource = mstrModuleName &
"InsertEnvVariables"

' Initialize the return value of the function to
the
' passed in command
If IsStringEmpty(strComString) Then
strCommand = mstrText
Else
strCommand = strComString
End If

intPos = InStr(strCommand, mstrEnvVarSeparator)
Do While intPos <> 0
' Extract the environment variable from the
passed
' in string
intEndPos = InStr(intPos + 1, strCommand,
mstrEnvVarSeparator)
strEnvVariable = Mid(strCommand, intPos + 1,
intEndPos - intPos - 1)

' Get the value of the variable and call a
function
' to replace the variable with it's value
strValue = Environ$(strEnvVariable)
strCommand = ReplaceSubString(strCommand, _
mstrEnvVarSeparator & strEnvVariable
& mstrEnvVarSeparator, _
strValue)

intPos = InStr(strCommand,
mstrEnvVarSeparator)
Loop

```

```

InsertEnvVariables = strCommand
Exit Function

InsertEnvVariablesErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' Return an empty string
InsertEnvVariables = gstrEmptyString

End Function
Public Function MakeStringFieldValid( _
Optional strField As String =
gstrEmptyString) As String
' Returns a string that can be appended to any
insert
' or modify (sql) statement
' If an argument is not passed to this function,
the
' default text property is used

Dim strTemp As String

On Error GoTo MakeStringFieldValidErr

If IsStringEmpty(strField) Then
strTemp = mstrText
Else
strTemp = strField
End If

' It checks whether the text is empty
' If so, it returns the string, "null"
If IsStringEmpty(strTemp) Then
MakeStringFieldValid = mstrNullValue
Else
' Single-quotes have to be replaced by two
single-quotes,
' since a single-quote is the identifier
delimiter
' character - call a procedure to do the
replace
strTemp = ReplaceSubString(strTemp, mstrSQ,
mstrSQ & mstrSQ)

' Replace pipe characters with the
corresponding chr function
strTemp = ReplaceSubString(strTemp, "|" & Chr(124) & "'")

' Enclose the string in single quotes
MakeStringFieldValid = mstrSQ & strTemp &
mstrSQ

End If

Exit Function

MakeStringFieldValidErr:
mstrSource = mstrModuleName &
"MakeStringFieldValid"
LogErrors Errors
On Error GoTo 0

```

```

Err.Raise vbObjectError +
errMakeFieldValidFailed, _
mstrSource,
LoadResString(errMakeFieldValidFailed)

End Function
Public Function MakeDateFieldValid( _
Optional dtmField As Date = gdtmEmpty) As
String
' Returns a string that can be appended to any
insert
' or modify (sql) statement

' Enclose the date in single quotes
MakeDateFieldValid = mstrSQ & dtmField & mstrSQ

End Function

Private Function IsStringEmpty(strToCheck As String)
As Boolean

If strToCheck = gstrEmptyString Then
IsStringEmpty = True
Else
IsStringEmpty = False
End If

End Function
Public Function ReplaceSubString(ByVal MainString As
String, _
ByVal ReplaceString As String, _
ByVal ReplaceWith As String) As String

' Replaces all occurrences of ReplaceString in
MainString with ReplaceWith

Dim intPos As Integer
Dim strTemp As String

On Error GoTo ReplaceSubStringErr

strTemp = MainString

intPos = InStr(strTemp, ReplaceString)
Do While intPos <> 0
strTemp = Left(strTemp, intPos - 1) &
ReplaceWith & _ Mid(strTemp, intPos +
Len(ReplaceString))
intPos = InStr(intPos + Len(ReplaceString) +
1, strTemp, ReplaceString)
Loop
ReplaceSubString = strTemp

Exit Function

ReplaceSubStringErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName & "ReplaceSubString"
On Error GoTo 0
Err.Raise vbObjectError + errParseStringFailed, _
mstrSource, _
LoadResString(errParseStringFailed)

```

```

End Function

Public Property Get Text() As String
Attribute Text.VB_UserMemId = 0
Text = mstrText
End Property

Public Property Let Text(ByVal vdata As String)
mstrText = vdata
End Property

```

## ***cSubStep.cls***

```

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cSubStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cSubStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates the
properties of sub-steps
' that are used during the execution of
a workspace.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cSubStep"

Private mlngStepId As Long
Private mintRunning As Integer ' Number of running
tasks
Private mintComplete As Integer ' Number of completed
tasks
' The last iterator for this sub-step
Private mclastIterator As cRunItDetails

Public Function NewIteration(cStepRec As cStep) As
cIterator
' Calls a procedure to determine the next
iterator value
' for the passed in step - returns the value to
be used
' in the iteration.
' It updates the instance node with the new
iteration
' for the step.

```

```

Dim cItRec As cIterator

On Error GoTo NewIterationErr

' Call a function that will populate an iterator
record
' with the iterator values
Set cItRec = NextIteration(cStepRec)

' Initialize the run node with the new iterator
' values
If Not mcLastIterator Is Nothing Then
    If cItRec Is Nothing Then
        mcLastIterator.Value = gstrEmptyString
    Else
        mcLastIterator.Value = cItRec.Value

' And if the iterator is a list of
values, then update
' the sequence number as well
' mcLastIterator.IteratorType =
gintValue Then
        mcLastIterator.Sequence =
cItRec.SequenceNo
    End If
End If
End If

Set NewIteration = cItRec
Set cItRec = Nothing

Exit Function

NewIterationErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
    LoadResString(errIterateFailed)

End Function
Public Function NextIteration(cStepRec As cStep) As
cIterator

' Retrieves the next iterator value for the
passed in step -
' returns an iterator record with the new
iterator values

Dim cItRec As cIterator
Dim vntIterators As Variant
Dim lngValue As String

On Error GoTo NextIterationErr

vntIterators = cStepRec.Iterators

If Not mcLastIterator Is Nothing Then
' The run node contains the iterator details
' Get the next value for the iterator
If mcLastIterator.IteratorType = gintValue
Then

```

```

' Find the next iterator that appears in
the list of
' iterator values
Set cItRec = NextInSequence(vntIterators,
mcLastIterator.Sequence)
Else
    lngValue =
CLng(Trim$(mcLastIterator.Value))
' Determine whether the new iterator
value falls in the
' range between From and To
If (mcLastIterator.RangeStep > 0 And _
(mcLastIterator.RangeFrom <=
mcLastIterator.RangeTo) And _
(mcLastIterator.RangeStep +
lngValue) <= mcLastIterator.RangeTo) Or _
(mcLastIterator.RangeStep < 0 And
_
(mcLastIterator.RangeFrom >=
mcLastIterator.RangeTo) And _
(mcLastIterator.RangeStep +
lngValue) >= mcLastIterator.RangeTo) Then
    Set cItRec = New cIterator
    cItRec.Value =
Trim$(CStr(mcLastIterator.RangeStep + lngValue))
Else
    Set cItRec = Nothing
End If
Else
    Set cItRec = Nothing
End If

Set NextIteration = cItRec
Exit Function

NextIterationErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
    LoadResString(errIterateFailed)

End Function
Public Sub InitializeIt(cPendingStep As cStep, _
ColParameters As cArrParameters, _
Optional vntIterators As Variant)

' Initializes the LastIteration structure with
the iterator details for the
' passed in step

On Error GoTo InitializeItErr

If IsMissing(vntIterators) Then
    vntIterators = cPendingStep.Iterators
End If

If IsArray(vntIterators) And Not
IsEmpty(vntIterators) Then
    mcLastIterator.IteratorName =
cPendingStep.IteratorName

```

```

If
vntIterators(LBound(vntIterators)).IteratorType = _
gintValue Then
    mcLastIterator.IteratorType = gintValue
' Since the sequence numbers begin at 0
mcLastIterator.Sequence =
gintMinIteratorSequence - 1
Else
    mcLastIterator.IteratorType = gintFrom
Call InitializeItRange(vntIterators,
cPendingStep.WorkspaceId, _
ColParameters)
End If
Else
    Set mcLastIterator = Nothing
End If

Exit Sub

InitializeItErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
    LoadResString(errIterateFailed)

End Sub

Private Sub InitializeItRange(vntIterators As
Variant, ByVal lWorkspace As Long, _
ColParameters As cArrParameters)

' Initializes the LastIteration structure for
range iterators from the
' passed in variant containing the iterator
records

Dim lngIndex As Long
Dim cItRec As cIterator

On Error GoTo InitializeItRangeErr

If IsArray(vntIterators) And Not
IsEmpty(vntIterators) Then

' Check if the iterator range has been
completely initialized
RangeComplete (vntIterators)

' Initialize the Run node with the values for
the From,
' To and Step boundaries
For lngIndex = LBound(vntIterators) To
UBound(vntIterators)
    Set cItRec = vntIterators(lngIndex)
    Select Case cItRec.IteratorType
        Case gintFrom
            mcLastIterator.RangeFrom =
SubstituteParameters(cItRec.Value, lWorkspace,
WspParameters:=ColParameters)
        Case gintTo

```

```

        mcLastIterator.RangeTo =
SubstituteParameters(cItRec.Value, lWorkspace,
WspParameters:=ColParameters)
        Case gintStep
            mcLastIterator.RangeStep =
SubstituteParameters(cItRec.Value, lWorkspace,
WspParameters:=ColParameters)
        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errTypeInvalid, mstrModuleName, _
LoadResString(errTypeInvalid)
            End Select
            Next lngIndex

            mcLastIterator.Value =
Trim$(CStr(mcLastIterator.RangeFrom -
mcLastIterator.RangeStep))
            End If

        Exit Sub

InitializeItRangeErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
    LoadResString(errIterateFailed)

End Sub
Private Function NextInSequence(vntIterators As
Variant, _
    lngOldSequence As Long) As cIterator

    Dim lngIndex As Long
    Dim cItRec As cIterator

    On Error GoTo NextInSequenceErr

    If IsArray(vntIterators) And Not
IsEmpty(vntIterators) Then
        For lngIndex = LBound(vntIterators) To
UBound(vntIterators)
            Set cItRec = vntIterators(lngIndex)
            If cItRec.IteratorType <> gintValue Then
                On Error GoTo 0
                Err.Raise vbObjectError +
errTypeInvalid, mstrModuleName, _
                    LoadResString(errTypeInvalid)
            End If
            If cItRec.SequenceNo = lngOldSequence + 1
Then
                Exit For
            End If

            Next lngIndex

        If cItRec.SequenceNo <> lngOldSequence + 1
Then
            Set cItRec = Nothing
        End If

```

```

Else
    Set cItRec = Nothing
End If

Set NextInSequence = cItRec

Exit Function

NextInSequenceErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
    LoadResString(errIterateFailed)

End Function

Public Property Get LastIterator() As cRunItDetails

    Set LastIterator = mcLastIterator

End Property
Public Property Set LastIterator(vdata As
cRunItDetails)

    Set mcLastIterator = vdata

End Property

Public Property Get TasksRunning() As Integer

    TasksRunning = mintRunning

End Property

Public Property Let TasksRunning(ByVal vdata As
Integer)

    mintRunning = vdata

End Property

Public Property Get TasksComplete() As Integer

    TasksComplete = mintComplete

End Property
Public Property Let TasksComplete(ByVal vdata As
Integer)

    mintComplete = vdata

End Property
Public Property Get StepId() As Long

    StepId = mlngStepId

End Property
Public Property Let StepId(ByVal vdata As Long)

    mlngStepId = vdata

```

End Property

## ***cSubSteps.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cSubSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cSubSteps.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   This module provides a type-safe
'            wrapper around cVector to
'            implement a collection of cSubStep
'            objects.
' Contact:   Reshma Tharamal
'            (reshmat@microsoft.com)
'
Option Explicit

Private mcSubSteps As cVector

Public Sub Add(ByVal objItem As cSubStep)

    mcSubSteps.Add objItem

End Sub

Public Sub Clear()

    mcSubSteps.Clear

End Sub

Public Function Count() As Long

    Count = mcSubSteps.Count

End Function

Public Function Delete(ByVal lngDelete As Long) As
cSubStep

    Set Delete = mcSubSteps.Delete(lngDelete)

End Function

Public Property Get Item(ByVal Position As Long) As
cSubStep
Attribute Item.VB_UserMemId = 0

```



```

        Set Item = mcSubSteps.Item(Position)
    End Property

    Private Sub Class_Initialize()

        Set mcSubSteps = New cVector
    End Sub

    Private Sub Class_Terminate()

        Set mcSubSteps = Nothing
    End Sub

```

## ***cTermProcess. cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTermProcess"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:          cTermProcess.cls
'               Microsoft TPC-H Kit Ver. 1.00
'               Copyright Microsoft, 1999
'               All Rights Reserved
'
' PURPOSE:      This module raises an event if a
'               completed step exists.
' Contact:      Reshma Tharamal
'               (reshmat@microsoft.com)
'
Option Explicit

Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Private bTermProcessExists As Boolean
Public Event TermProcessExists()

Public Sub ProcessTerminated()

    bTermProcessExists = True
    moTimer.Enabled = True

End Sub

Private Sub Class_Initialize()

    bTermProcessExists = False

```

```

        Set moTimer = New cTimerSM
        moTimer.Enabled = False
    End Sub

    Private Sub Class_Terminate()

        Set moTimer = Nothing
    End Sub

    Private Sub moTimer_Timer()

        On Error GoTo moTimer_TimerErr

        If bTermProcessExists Then
            RaiseEvent TermProcessExists
        End If

        moTimer.Enabled = False
        bTermProcessExists = False

        Exit Sub

moTimer_TimerErr:
    LogErrors Errors

End Sub

```

## ***cTermStep.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTermStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:          cTermStep.cls
'               Microsoft TPC-H Kit Ver. 1.00
'               Copyright Microsoft, 1999
'               All Rights Reserved
'
' PURPOSE:      This module encapsulates the
'               properties of steps that
'               have completed execution such as
'               status and time of completion.
' Contact:      Reshma Tharamal
'               (reshmat@microsoft.com)
'
Option Explicit

Public TimeComplete As Currency
Public Index As Long
Public InstanceId As Long
Public ExecutionStatus As InstanceStatus

```

## ***cTermSteps.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTermSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:          cTermSteps.cls
'               Microsoft TPC-H Kit Ver. 1.00
'               Copyright Microsoft, 1999
'               All Rights Reserved
'
' PURPOSE:      This module provides a type-safe
'               wrapper around cVector to
'               implement a collection of cTermStep
'               objects. Raises an
'               event if a step that has completed
'               execution exists.
' Contact:      Reshma Tharamal
'               (reshmat@microsoft.com)
'
Option Explicit

Private mcTermSteps As cVector
Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Public Event TermStepExists(cStepDetails As
cTermStep)

Public Sub Add(ByVal citem As cTermStep)

    Call mcTermSteps.Add(citem)
    moTimer.Enabled = True

End Sub

Public Sub Clear()

    mcTermSteps.Clear

End Sub

Public Function Delete()

    Call mcTermSteps.Delete(0)
    ' Disable the timer if there are no more pending
    events
    If mcTermSteps.Count = 0 Then moTimer.Enabled =
    False

End Function

Public Property Get Item(ByVal Position As Long) As
cTermStep

    Set Item = mcTermSteps(Position)

```

```

End Property

Public Function Count() As Long
    Count = mcTermSteps.Count
End Function

Private Sub Class_Initialize()
    Set mcTermSteps = New cVector

    Set moTimer = New cTimerSM
    moTimer.Enabled = False
End Sub

Private Sub Class_Terminate()
    Set mcTermSteps = Nothing
    Set moTimer = Nothing
End Sub

Private Sub moTimer_Timer()
    On Error GoTo moTimer_TimerErr

    If mcTermSteps.Count > 0 Then
        ' Since items are appended to the end of the
array
        RaiseEvent TermStepExists(mcTermSteps(0))
    Else
        moTimer.Enabled = False
    End If
    Exit Sub

moTimer_TimerErr:
    LogErrors Errors
End Sub

```

## **cTimerSM.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTimerSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cTimer.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module implements a timer.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)

```

```

'
Option Explicit

Public Event Timer()

Private Const mnDefaultInterval As Long = 1

Private mnTimerID As Long
Private mnInterval As Long
Private mfEnabled As Boolean

Public Property Get Interval() As Long
    Interval = mnInterval
End Property
Public Property Let Interval(Value As Long)
    If mnInterval <> Value Then
        mnInterval = Value
        If mfEnabled Then
            SetInterval mnInterval, mnTimerID
        End If
    End If
End Property

Public Property Get Enabled() As Boolean
    Enabled = mfEnabled
End Property
Public Property Let Enabled(Value As Boolean)
    If mfEnabled <> Value Then
        If Value Then
            mnTimerID = StartTimer(mnInterval)
            If mnTimerID <> 0 Then
                mfEnabled = True
                'Storing Me in the global would add a
reference to Me, which
                ' would prevent Me from being
released, which in turn would
                ' prevent my Class_Terminate code
from running. To prevent
                ' this, I store a "soft reference"
- the collection holds a
                ' pointer to me without
incrementing my reference count.
                gcTimerObjects.Add ObjPtr(Me),
Str$(mnTimerID)
            End If
        Else
            StopTimer mnTimerID
            mfEnabled = False
            gcTimerObjects.Remove Str$(mnTimerID)
        End If
    End If
End Property

Private Sub Class_Initialize()
    If gcTimerObjects Is Nothing Then Set
gcTimerObjects = New Collection
    mnInterval = mnDefaultInterval
End Sub

Private Sub Class_Terminate()
    Enabled = False
End Sub

```

```

Friend Sub Tick()
    RaiseEvent Timer
End Sub

```

## **cVBErrorsSM.c ls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cVBErrorsSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = "SavedWithClassBuilder" ,"Yes"
Attribute VB_Ext_KEY = "Top_Level" ,"Yes"
' FILE:      cVBErrors.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module encapsulates the handling
of Visual Basic errors.
'           This module does not do any error
handling - any error handler
'           will erase the errors object!
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' The Execute class exposes a method, WriteError
through which we can write to the
' error log that is currently being used by the
Execute object. Store a reference to
' Execute object locally.
Private mcExecObjRef As EXECUTEDLLLib.Execute
Public Sub WriteError(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString)

    Dim sError As String

    sError = "StepMaster Error:" & ErrorCode & vbCrLf
& LoadResString(ErrorCode) & vbCrLf

    If Not StringEmpty(ErrorSource) Then
        sError = sError & "(Source: " & ErrorSource &
")" & vbCrLf
    End If
    sError = sError & OptArgs

    Call LogMessage(sError)

```

```

End Sub
Private Function InitErrorString() As String
' Initializes a string with all the properties of
the
' Err object

Dim strError As String
Dim errCode As Long

If Err.Number = 0 Then
InitErrorString = gstrEmptyString
Else
With Err
If Err.Number > vbObjectError And Err.Number
< (vbObjectError + 65536) Then
errCode = .Number - vbObjectError
Else
errCode = .Number
End If
strError = "Error #: " & errCode & vbCrLf
strError = strError & "Description: " &
.Description & vbCrLf
strError = strError & "Source: " & Err.Source
& vbCrLf
End With

Debug.Print strError
InitErrorString = strError
End If

End Function
Public Sub LogVBErrors()

Dim strErr As String

strErr = InitErrorString

On Error GoTo LogVBErrorsErr

If Not StringEmpty(strErr) Then
' Write an error using the WriteError method
of the Execute object.
If Not mcExecObjRef Is Nothing Then
mcExecObjRef.WriteError strErr
Else
WriteMessage strErr
End If
End If

Err.Clear

Exit Sub

LogVBErrorsErr:
Call LogErrors(Errors)
' Since write to the error file for the step has
failed, write to the project log
Call WriteMessage(strErr)

End Sub
Public Sub DisplayErrors()

```

```

Dim strErr As String

strErr = InitErrorString

If Not StringEmpty(strErr) Then
' Display the error message
MsgBox strErr
End If

Err.Clear

End Sub
Public Sub LogMessage(strMsg As String)

On Error GoTo LogMessageErr

' Write an error using the WriteError method of
the Execute object.
If Not mcExecObjRef Is Nothing Then
mcExecObjRef.WriteError strMsg
Else
WriteMessage strMsg
End If

Exit Sub

LogMessageErr:
Call LogErrors(Errors)
' Since write to the error file for the step has
failed, write to the project log
Call WriteMessage(strMsg)

End Sub
Public Property Set ErrorFile(vdata As
EXECUTEDLLLib.Execute)

Set mcExecObjRef = vdata

End Property
Private Sub Class_Terminate()

Set mcExecObjRef = Nothing

End Sub

```

## ***cVector.cls***

```

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cVector"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cVector.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
'

```

```

' PURPOSE: This class implements an array of
objects.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cVector."

' Array counter
Private mlngCount As Long
Private mcarrItems() As Object

Public Sub Add(ByVal objItem As Object)
' Adds the passed in Object variable to the array

On Error GoTo AddErr

ReDim Preserve mcarrItems(mlngCount)

' Set the newly added element in the array to the
' passed in variable
Set mcarrItems(mlngCount) = objItem
mlngCount = mlngCount + 1

Exit Sub

AddErr:
LogErrors Errors
gstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError + errLoadInArrayFailed, _
mstrSource, _
LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

' Clear the array
ReDim mcarrItems(0)
mlngCount = 0

End Sub

Public Function Delete(ByVal lngDelete As Long) As
Object

Dim lngIndex As Long

On Error GoTo DeleteErr

If lngDelete < (mlngCount - 1) Then

' We want to maintain the order of all items
in the
' array - so move all remaining elements in
the array
' up by 1
For lngIndex = lngDelete To mlngCount - 2
MoveDown lngIndex

```

```

        Next lngIndex
    End If

    ' Return the deleted node
    Set Delete = mcarrItems(mlngCount - 1)

    ' Delete the last Node from the array
    mlngCount = mlngCount - 1
    If mlngCount > 0 Then
        ReDim Preserve mcarrItems(0 To mlngCount - 1)
    Else
        ReDim mcarrItems(0)
    End If

    Exit Function

DeleteErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Delete"
    On Error GoTo 0
    Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
        mstrSource, _

LoadResString(errDeleteArrayElementFailed)

End Function
Public Property Get Item(ByVal Position As Long) As Object
Attribute Item.VB_UserMemId = 0

    ' Returns the element at the passed in position
    in the array
    If Position >= 0 And Position < mlngCount Then
        Set Item = mcarrItems(Position)
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Property Set Item(ByVal Position As Long, _
    ByVal Value As Object)

    ' Returns the element at the passed in position
    in the array
    If Position >= 0 Then
        ' If the passed in position is outside the
array
        ' bounds, then resize the array
        If Position >= mlngCount Then
            ReDim Preserve mcarrItems(Position)
            mlngCount = Position + 1
        End If

        ' Set the newly added element in the array to
the
        ' passed in variable
        Set mcarrItems(Position) = Value
    Else

```

```

        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Sub MoveUp(ByVal Position As Long)
    ' Moves the element at the passed in position up
    by 1

    Dim cTemp As Object

    If Position > 0 And Position < mlngCount Then
        Set cTemp = mcarrItems(Position)

        Set mcarrItems(Position) =
mcarrItems(Position - 1)
        Set mcarrItems(Position - 1) = cTemp
    End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
    ' Moves the element at the passed in position
    down by 1

    Dim cTemp As Object

    If Position >= 0 And Position < mlngCount - 1
Then
        Set cTemp = mcarrItems(Position)

        Set mcarrItems(Position) =
mcarrItems(Position + 1)
        Set mcarrItems(Position + 1) = cTemp
    End If

End Sub

Public Function Count() As Long

    Count = mlngCount

End Function

Private Sub Class_Initialize()

    mlngCount = 0

End Sub

Private Sub Class_Terminate()

    Call Clear

End Sub

```

**cVectorLng.cls**

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cVectorLng"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:        cVectorLng.cls
'              Microsoft TPC-H Kit Ver. 1.00
'              Copyright Microsoft, 1999
'              All Rights Reserved
'
' PURPOSE:     This class implements an array of
longs.
' Contact:    Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVectorLng."

' Array counter
Private mlngCount As Long
Private mcarrItems() As Long

Public Sub Add(ByVal lngItem As Long)
    ' Adds the passed in long variable to the array

    On Error GoTo AddErr

    ReDim Preserve mcarrItems(mlngCount)

    ' Set the newly added element in the array to the
' passed in variable
    mcarrItems(mlngCount) = lngItem
    mlngCount = mlngCount + 1

    Exit Sub

AddErr:
    LogErrors Errors
    gstrSource = mstrModuleName & "Add"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadInArrayFailed, _
        mstrSource, _
            LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

    ' Clear the array
    ReDim mcarrItems(0)

End Sub

```

```

Public Sub Delete(Optional ByVal Position As Long = -
1, _
Optional ByVal Item As Long = -1)
' The user can opt to delete either a specific
item in
' the list or the item at a specified position.
If no
' parameters are passed in, we delete the element
at
' position 0!

Dim lngDelete As Long
Dim lngIndex As Long

On Error GoTo DeleteErr

If Position = -1 Then
' Since we can never store an element at
position -1,
' we can be sure that the user is trying to
delete
' a given item
lngDelete = Find(Item)
Else
lngDelete = Position
End If

If lngDelete < (mLngCount - 1) Then

' We want to maintain the order of all items
in the
' array - so move all remaining elements in
the array
' up by 1
For lngIndex = lngDelete To mLngCount - 2
MoveDown lngIndex
Next lngIndex

End If

' Delete the last Node from the array
mLngCount = mLngCount - 1
If mLngCount > 0 Then
ReDim Preserve mcarrItems(0 To mLngCount - 1)
Else
ReDim mcarrItems(0)
End If

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName & "Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
mstrSource, _

LoadResString(errDeleteArrayElementFailed)

End Sub
Public Function Find(ByVal Item As Long) As Long

```

```

' Returns the position at which the passed in
value occurs
' in the array

Dim lngIndex As Long

On Error GoTo FindErr

' Find the element in the array to be deleted
For lngIndex = 0 To mLngCount - 1

If mcarrItems(lngIndex) = Item Then
Find = lngIndex
Exit Function
End If

Next lngIndex

Find = -1

Exit Function

FindErr:
LogErrors Errors
mstrSource = mstrModuleName & "Find"
On Error GoTo 0
Err.Raise vbObjectError + errItemNotFound,
mstrSource, _
LoadResString(errItemNotFound)

End Function
Public Property Get Item(ByVal Position As Long) As
Long
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in position
in the array
If Position >= 0 And Position < mLngCount Then
Item = mcarrItems(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Let Item(ByVal Position As Long, _
ByVal Value As Long)

' Returns the element at the passed in position
in the array
If Position >= 0 Then
' If the passed in position is outside the
array
' bounds, then resize the array
If Position >= mLngCount Then
ReDim Preserve mcarrItems(Position)
mLngCount = Position + 1
End If

' Set the newly added element in the array to
the

```

```

' passed in variable
mcarrItems(Position) = Value
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Sub MoveUp(ByVal Position As Long)
' Moves the element at the passed in position up
by 1

Dim lngTemp As Long

If Position > 0 And Position < mLngCount Then
lngTemp = mcarrItems(Position)

mcarrItems(Position) = mcarrItems(Position -
1)
mcarrItems(Position - 1) = lngTemp
End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
' Moves the element at the passed in position
down by 1

Dim lngTemp As Long

If Position >= 0 And Position < mLngCount - 1
Then
lngTemp = mcarrItems(Position)

mcarrItems(Position) = mcarrItems(Position +
1)
mcarrItems(Position + 1) = lngTemp
End If

End Sub

Public Function Count() As Long

Count = mLngCount

End Function

Private Sub Class_Initialize()

mLngCount = 0

End Sub

Private Sub Class_Terminate()

Call Clear

End Sub

```

## cVectorStr.cls

```
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cVectorStr"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:
'       cVectorStr.cls
'       Microsoft TPC-H Kit Ver. 1.00
'       Copyright Microsoft, 1999
'       All Rights Reserved
'
' PURPOSE:   This class implements an array of
strings.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVectorStr."

' Array counter
Private mlngCount As Long
Private mcarrItems() As String

Public Sub Add(ByVal strItem As String)
    ' Adds the passed in string variable to the array

    On Error GoTo AddErr

    ReDim Preserve mcarrItems(mlngCount)

    ' Set the newly added element in the array to the
    ' passed in variable
    mcarrItems(mlngCount) = strItem
    mlngCount = mlngCount + 1

    Exit Sub

AddErr:
    Call LogErrors(Errors)
    gstrSource = mstrModuleName & "Add"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadInArrayFailed, _
        mstrSource, _
        LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

    ' Clear the array
    ReDim mcarrItems(0)
```

```
End Sub

Public Sub Delete(Optional ByVal Position As Long = -
1, _
    Optional ByVal Item As String = -1)
    ' The user can opt to delete either a specific
    item in
    ' the list or the item at a specified position.
    If no
    ' parameters are passed in, we delete the element
    at
    ' position 0!

    Dim lngDelete As Long
    Dim lngIndex As Long

    On Error GoTo DeleteErr
    mstrSource = mstrModuleName & "Delete"

    If Position = -1 Then
        ' Since we can never store an element at
        position -1,
        ' we can be sure that the user is trying to
        delete
        ' a given item
        lngDelete = Find(Item)
    Else
        lngDelete = Position
    End If

    If lngDelete < (mlngCount - 1) Then

        ' We want to maintain the order of all items
        in the
        ' array - so move all remaining elements in
        the array
        ' up by 1
        For lngIndex = lngDelete To mlngCount - 2
            MoveDown lngIndex
        Next lngIndex

    End If

    ' Delete the last Node from the array
    mlngCount = mlngCount - 1
    If mlngCount > 0 Then
        ReDim Preserve mcarrItems(0 To mlngCount - 1)
    Else
        ReDim mcarrItems(0)
    End If

    Exit Sub

DeleteErr:
    Call LogErrors(Errors)
    mstrSource = mstrModuleName & "Delete"
    On Error GoTo 0
    Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
        mstrSource, _
        LoadResString(errDeleteArrayElementFailed)
```

```
End Sub
Public Function Find(ByVal Item As String) As Long

    ' Returns the position at which the passed in
    value occurs
    ' in the array

    Dim lngIndex As Long

    On Error GoTo FindErr
    mstrSource = mstrModuleName & "Find"

    ' Find the element in the array to be deleted
    For lngIndex = 0 To mlngCount - 1

        If mcarrItems(lngIndex) = Item Then
            Find = lngIndex
            Exit Function
        End If

    Next lngIndex

    Find = -1

    Exit Function

FindErr:
    Call LogErrors(Errors)
    mstrSource = mstrModuleName & "Find"
    On Error GoTo 0
    Err.Raise vbObjectError + errItemNotFound,
mstrSource, _
        LoadResString(errItemNotFound)

End Function
Public Property Get Item(ByVal Position As Long) As
String
Attribute Item.VB_UserMemId = 0

    ' Returns the element at the passed in position
    in the array
    If Position >= 0 And Position < mlngCount Then
        Item = mcarrItems(Position)
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Property Let Item(ByVal Position As Long, _
ByVal Value As String)

    ' Returns the element at the passed in position
    in the array
    If Position >= 0 Then
        ' If the passed in position is outside the
        array
        ' bounds, then resize the array
        If Position >= mlngCount Then
            ReDim Preserve mcarrItems(Position)
            mlngCount = Position + 1
```

```

        End If

        ' Set the newly added element in the array to
the
        ' passed in variable
        mcarrItems(Position) = Value
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
        LoadResString(errItemDoesNotExist)
    End If
End Property
Public Sub MoveUp(ByVal Position As Long)
    ' Moves the element at the passed in position up
by 1
    Dim strTemp As String

    If Position > 0 And Position < mlngCount Then
        strTemp = mcarrItems(Position)

        mcarrItems(Position) = mcarrItems(Position -
1)
        mcarrItems(Position - 1) = strTemp
    End If
End Sub
Public Sub MoveDown(ByVal Position As Long)
    ' Moves the element at the passed in position
down by 1
    Dim strTemp As String

    If Position >= 0 And Position < mlngCount - 1
Then
        strTemp = mcarrItems(Position)

        mcarrItems(Position) = mcarrItems(Position +
1)
        mcarrItems(Position + 1) = strTemp
    End If
End Sub
Public Function Count() As Long
    Count = mlngCount
End Function
Private Sub Class_Initialize()
    mlngCount = 0
End Sub
Private Sub Class_Terminate()
    Call Clear
End Sub

```

## ***cWorker.cls***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cWorker"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cWorker.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a worker step.
'            Implements the cStep class - carries
out initializations
'            and validations that are specific to
worker steps.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit
Implements cStep

' Object variable to keep the step reference in
Private mcStep As cStep

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cWorker."
Private Sub cStep_AddAllIterators()

    Call mcStep.AddAllIterators
End Sub

Private Property Let cStep_StartDir(ByVal RHS As
String)

    mcStep.StartDir = RHS
End Property

Private Property Get cStep_StartDir() As String

    cStep_StartDir = mcStep.StartDir
End Property

Private Property Set cStep_NodeDB(RHS As
DAO.Database)

    Set mcStep.NodeDB = RHS
End Property

Private Property Get cStep_NodeDB() As DAO.Database

    Set cStep_NodeDB = mcStep.NodeDB
End Property

Private Function cStep_IncVersionY() As String

    cStep_IncVersionY = mcStep.IncVersionY
End Function
Private Function cStep_IsNewVersion() As Boolean
    cStep_IsNewVersion = mcStep.IsNewVersion
End Function
Private Function cStep_OldVersionNo() As String
    cStep_OldVersionNo = mcStep.OldVersionNo
End Function
Private Function cStep_IncVersionX() As String

    cStep_IncVersionX = mcStep.IncVersionX
End Function
Private Sub cStep_UpdateIteratorVersion()

    Call mcStep.UpdateIteratorVersion
End Sub

Private Function cStep_IteratorCount() As Long

    cStep_IteratorCount = mcStep.IteratorCount
End Function
Private Sub cStep_UnloadIterators()

    Call mcStep.UnloadIterators
End Sub

Private Sub cStep_SaveIterators()

    Call mcStep.SaveIterators
End Sub
Private Property Get cStep_IteratorName() As String

    cStep_IteratorName = mcStep.IteratorName
End Property
Private Property Let cStep_IteratorName(ByVal RHS As
String)

    mcStep.IteratorName = RHS
End Property

```

```

Private Sub cStep_LoadIterator(cItRecord As
cIterator)

    Call mcStep.LoadIterator(cItRecord)

End Sub
Private Sub cStep_DeleteIterator(cItRecord As
cIterator)

    Call mcStep.DeleteIterator(cItRecord)

End Sub
Private Sub cStep_InsertIterator(cItRecord As
cIterator)

    Call mcStep.InsertIterator(cItRecord)

End Sub
Private Function cStep_Iterators() As Variant

    cStep_Iterators = mcStep.Iterators

End Function
Private Sub cStep_ModifyIterator(cItRecord As
cIterator)

    Call mcStep.ModifyIterator(cItRecord)

End Sub
Private Sub cStep_RemoveIterator(cItRecord As
cIterator)

    Call mcStep.RemoveIterator(cItRecord)

End Sub
Private Sub cStep_UpdateIterator(cItRecord As
cIterator)

    Call mcStep.UpdateIterator(cItRecord)

End Sub
Private Sub cStep_AddIterator(cItRecord As cIterator)

    Call mcStep.AddIterator(cItRecord)

End Sub
Private Property Let cStep_Position(ByVal RHS As
Long)

    mcStep.Position = RHS

End Property
Private Property Get cStep_Position() As Long

    cStep_Position = mcStep.Position

End Property
Private Function cStep_Clone(Optional cCloneStep As
cStep) As cStep

```

```

Dim cNewWorker As cWorker

Set cNewWorker = New cWorker
Set cStep_Clone = mcStep.Clone(cNewWorker)

End Function
Private Sub StepTextOrFileEntered()
' Checks if either the step text or the name of
the file containing
' the text has been entered
' If both of them are null or both of them are
not null,
' the worker step is invalid and an error is
raised
If StringEmpty(mcStep.StepText) And
StringEmpty(mcStep.StepTextFile) Then
    ShowError errStepTextAndFileNull
    On Error GoTo 0
    Err.Raise vbObjectError +
errStepTextAndFileNull, _
    mstrSource,
LoadResString(errStepTextAndFileNull)
End If

End Sub
Private Property Get cStep_IndOperation() As
Operation

    cStep_IndOperation = mcStep.IndOperation

End Property
Private Property Let cStep_IndOperation(ByVal RHS As
Operation)

    mcStep.IndOperation = RHS

End Property
Private Property Get cStep_NextStepId() As Long

    cStep_NextStepId = mcStep.NextStepId

End Property
Private Property Let cStep_OutputFile(ByVal RHS As
String)

    mcStep.OutputFile = RHS

End Property
Private Property Get cStep_OutputFile() As String

    cStep_OutputFile = mcStep.OutputFile

End Property
Private Property Let cStep_ErrorFile(ByVal RHS As
String)

```

```

    mcStep.ErrorFile = RHS

End Property
Private Property Get cStep_ErrorFile() As String

    cStep_ErrorFile = mcStep.ErrorFile

End Property
Private Property Let cStep_LogFile(ByVal RHS As
String)

    mcStep.LogFile = RHS

End Property
Private Property Get cStep_LogFile() As String

    cStep_LogFile = mcStep.LogFile

End Property
Private Property Let cStep_ArchivedFlag(ByVal RHS As
Boolean)

    mcStep.ArchivedFlag = RHS

End Property
Private Property Get cStep_ArchivedFlag() As Boolean

    cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property
Private Sub Class_Initialize()

' Create the object
Set mcStep = New cStep

' Initialize the object with valid values for a
Worker step
' The global flag should be the first field to be
initialized
' since subsequent validations might try to check
if the
' step being created is global
mcStep.GlobalFlag = False
' mcStep.GlobalRunMethod = gintNoOption
mcStep.StepType = gintWorkerStep

End Sub
Private Sub Class_Terminate()

' Remove the step object
Set mcStep = Nothing

End Sub
Private Sub cStep_Add()

' Call a private procedure to see if the step
text has been

```



```

' entered - since a worker step actually executes
a step, entry
' of the text is mandatory
Call StepTextOrFileEntered

' Call the Add method of the step class to carry
out the insert
mcStep.Add

End Sub

Private Property Get cStep_ContinuationCriteria() As
ContinuationCriteria

    cStep_ContinuationCriteria =
mcStep.ContinuationCriteria

End Property

Private Property Let cStep_ContinuationCriteria(ByVal
RHS As ContinuationCriteria)

' The Continuation criteria must be non-null for
all worker steps.
' Check if the Continuation Criteria is valid
Select Case RHS
    Case gintOnFailureAbortSiblings,
gintOnFailureCompleteSiblings, _
    gintOnFailureSkipSiblings,
gintOnFailureAbort, _
    gintOnFailureContinue,
gintOnFailureAsk
        mcStep.ContinuationCriteria = RHS

    Case Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errContCriteriaInvalid, _
            mstrModuleName,
LoadResString(errContCriteriaInvalid)
    End Select

End Property

Private Property Let cStep_DegreeParallelism(ByVal
RHS As String)

    mcStep.DegreeParallelism = RHS

End Property

Private Property Get cStep_DegreeParallelism() As
String

    cStep_DegreeParallelism =
mcStep.DegreeParallelism

End Property

Private Sub cStep_Delete()

    mcStep.Delete

```

```

End Sub

Private Property Get cStep_EnabledFlag() As Boolean

    cStep_EnabledFlag = mcStep.EnabledFlag

End Property

Private Property Let cStep_EnabledFlag(ByVal RHS As
Boolean)

    mcStep.EnabledFlag = RHS

End Property

Private Property Let cStep_ExecutionMechanism(ByVal
RHS As ExecutionMethod)

    On Error GoTo ExecutionMechanismErr
    mstrSource = mstrModuleName &
"cStep_ExecutionMechanism"

    Select Case RHS
        Case gintExecuteShell, gintExecuteODBC
            mcStep.ExecutionMechanism = RHS

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errExecutionMechanismInvalid, _
                mstrSource,
LoadResString(errExecutionMechanismInvalid)
    End Select

    Exit Property

ExecutionMechanismErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"cStep_ExecutionMechanism"
    On Error GoTo 0
    Err.Raise vbObjectError +
errExecutionMechanismLetFailed, _
        mstrSource,
LoadResString(errExecutionMechanismLetFailed)

End Property

Private Property Get cStep_ExecutionMechanism() As
ExecutionMethod

    cStep_ExecutionMechanism =
mcStep.ExecutionMechanism

End Property

Private Property Let cStep_FailureDetails(ByVal RHS
As String)

    mcStep.FailureDetails = RHS

End Property

```

```

Private Property Get cStep_FailureDetails() As String

    cStep_FailureDetails = mcStep.FailureDetails

End Property

Private Property Get cStep_GlobalFlag() As Boolean

    cStep_GlobalFlag = mcStep.GlobalFlag

End Property

Private Property Let cStep_GlobalFlag(ByVal RHS As
Boolean)

' Set the global flag to false - this flag is
initialized when
' an instance of the class is created. Just
making sure that
' nobody changes the value inadvertently
mcStep.GlobalFlag = False

End Property

Private Sub cStep_Modify()

' Call a private procedure to see if the step
text has been
' entered - since a worker step actually executes
a step, entry
' of the text is mandatory
Call StepTextOrFileEntered

' Call the Modify method of the step class to
carry out the update
mcStep.Modify

End Sub

Private Property Let cStep_ParentStepId(ByVal RHS As
Long)

    mcStep.ParentStepId = RHS

End Property

Private Property Get cStep_ParentStepId() As Long

    cStep_ParentStepId = mcStep.ParentStepId

End Property

Private Property Let cStep_ParentVersionNo(ByVal RHS
As String)

    mcStep.ParentVersionNo = RHS

End Property

Private Property Get cStep_ParentVersionNo() As
String

    cStep_ParentVersionNo = mcStep.ParentVersionNo

```

```

End Property

Private Property Let cStep_SequenceNo(ByVal RHS As Integer)

    mcStep.SequenceNo = RHS

End Property

Private Property Get cStep_SequenceNo() As Integer

    cStep_SequenceNo = mcStep.SequenceNo

End Property

Private Property Let cStep_StepId(ByVal RHS As Long)

    mcStep.StepId = RHS

End Property

Private Property Get cStep_StepId() As Long

    cStep_StepId = mcStep.StepId

End Property

Private Property Let cStep_StepLabel(ByVal RHS As String)

    mcStep.StepLabel = RHS

End Property

Private Property Get cStep_StepLabel() As String

    cStep_StepLabel = mcStep.StepLabel

End Property

Private Property Let cStep_StepLevel(ByVal RHS As Integer)

    mcStep.StepLevel = RHS

End Property

Private Property Get cStep_StepLevel() As Integer

    cStep_StepLevel = mcStep.StepLevel

End Property

Private Property Let cStep_StepText(ByVal RHS As String)

    mcStep.StepText = RHS

End Property

Private Property Get cStep_StepText() As String

```

```

    cStep_StepText = mcStep.StepText

End Property

Private Property Let cStep_StepTextFile(ByVal RHS As String)

    mcStep.StepTextFile = RHS

End Property

Private Property Get cStep_StepTextFile() As String

    cStep_StepTextFile = mcStep.StepTextFile

End Property

Private Property Let cStep_StepType(RHS As gintStepType)

    mcStep.StepType = gintWorkerStep

End Property

Private Property Get cStep_StepType() As gintStepType

    cStep_StepType = mcStep.StepType

End Property

Private Sub cStep_Validate()
    ' The validate routines for each of the steps
will ' carry out the specific validations for the type
and ' call the generic validation routine

    On Error GoTo cStep_ValidateErr

    ' Validations specific to worker steps

    ' Check if the step text or a file name has been
    ' specified
    Call StepTextOrFileEntered

    mcStep.Validate

    Exit Sub

cStep_ValidateErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "cStep_Validate"
    On Error GoTo 0
    Err.Raise vbObjectError + errValidateFailed, _
        mstrSource, _
        LoadResString(errValidateFailed)

End Sub

Private Property Let cStep_VersionNo(ByVal RHS As String)

    mcStep.VersionNo = RHS

```

```

End Property

Private Property Get cStep_VersionNo() As String

    cStep_VersionNo = mcStep.VersionNo

End Property

Private Property Let cStep_WorkspaceId(ByVal RHS As Long)

    mcStep.WorkspaceId = RHS

End Property

Private Property Get cStep_WorkspaceId() As Long

    cStep_WorkspaceId = mcStep.WorkspaceId

End Property

```

## ***cWorkspace.cl***

### ***S***

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cWorkspace"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cWorkspace.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a workspace.
'           Contains functions to insert, update
and delete
'           att_workspaces records from the
database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Local variable(s) to hold property value(s)
Private mlngWorkspaceId As Long
Private mstrWorkspaceName As String
Private mblnArchivedFlag As Boolean
Private mdbStepMaster As Database

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String

```

```

Private Const mstrModuleName As String =
"cWorkspace."

' The cSequence class is used to generate unique
workspace identifiers
Private mWorkspaceSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Public Function Clone() As cWorkspace

' Creates a copy of a given workspace

Dim cCloneWsp As cWorkspace

On Error GoTo CloneErr

Set cCloneWsp = New cWorkspace

' Copy all the workspace properties to the newly
created workspace
cCloneWsp.WorkspaceId = mlngWorkspaceId
cCloneWsp.WorkspaceName = mstrWorkspaceName
cCloneWsp.ArchivedFlag = mblnArchivedFlag

' And set the return value to the newly created
workspace
Set Clone = cCloneWsp

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName & "Clone"
On Error GoTo 0
Err.Raise vbObjectError + errCloneFailed, _
mstrSource, LoadResString(errCloneFailed)

End Function

Public Property Let ArchivedFlag(ByVal vdata As
Boolean)

mblnArchivedFlag = vdata

End Property

Public Property Get ArchivedFlag() As Boolean

ArchivedFlag = mblnArchivedFlag

End Property

Public Property Set WorkDatabase(vdata As Database)

Set mdbStepMaster = vdata

End Property

Private Sub WorkspaceNameDuplicate()

```

```

' Check if the workspace name already exists in
the workspace

Dim rstWorkspace As Recordset
Dim strSql As String
Dim qy As DAO.QueryDef

On Error GoTo WorkspaceNameDuplicateErr
mstrSource = mstrModuleName &
"WorkspaceNameDuplicate"

' Create a recordset to retrieve the count of
records
' having the same workspace name
strSql = " Select count(*) as workspace_count " &
-
" from att_workspaces " & _
" where workspace_name = [w_name] " & _
" and workspace_id <> [w_id] "
Set qy =
mdbStepMaster.CreateQueryDef(gstrEmptyString,
strSql)

' Call a procedure to assign the parameter values
Call AssignParameters(qy)

Set rstWorkspace =
qy.OpenRecordset(dbOpenForwardOnly)

' mFieldValue.MakeStringFieldValid
(mstrWorkspaceName) & _
" and workspace_id <> " & _
Str(mlngWorkspaceId)

Set rstWorkspace = mdbStepMaster.OpenRecordset(
-
strSQL, dbOpenForwardOnly)

If rstWorkspace![workspace_count] > 0 Then
rstWorkspace.Close
qy.Close
ShowError errDuplicateWorkspaceName
On Error GoTo 0
Err.Raise vbObjectError +
errDuplicateWorkspaceName, _
mstrSource,
LoadResString(errDuplicateWorkspaceName)
End If
rstWorkspace.Close
qy.Close

Exit Sub

WorkspaceNameDuplicateErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"WorkspaceNameDuplicate"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceNameDuplicateFailed, _
mstrSource,
LoadResString(errWorkspaceNameDuplicateFailed)

```

```

End Sub

Public Property Let WorkspaceName(vdata As String)

On Error GoTo WorkspaceNameErr
mstrSource = mstrModuleName & "WorkspaceName"

If vdata = gstrEmptyString Then

On Error GoTo 0
' Propagate this error back to the caller
Err.Raise vbObjectError +
errWorkspaceNameMandatory, _
mstrSource,
LoadResString(errWorkspaceNameMandatory)
Else
mstrWorkspaceName = vdata
End If
Exit Property

WorkspaceNameErr:
LogErrors Errors
mstrSource = mstrModuleName & "WorkspaceName"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceNameSetFailed, _
mstrSource,
LoadResString(errWorkspaceNameSetFailed)

End Property

Public Property Let WorkspaceId(vdata As Long)

On Error GoTo WorkspaceIdErr
mstrSource = mstrModuleName & "WorkspaceId"

If (vdata > 0) Then
mlngWorkspaceId = vdata
Else
' Propagate this error back to the caller
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceIdInvalid, _
mstrSource,
LoadResString(errWorkspaceIdInvalid)
End If

Exit Property

WorkspaceIdErr:
LogErrors Errors
mstrSource = mstrModuleName & "WorkspaceId"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceIdSetFailed, _
mstrSource,
LoadResString(errWorkspaceIdSetFailed)

End Property

Public Sub AddWorkspace()

Dim strInsert As String
Dim qy As DAO.QueryDef

```

```

On Error GoTo AddWorkspaceErr

' Retrieve the next identifier using the sequence
class
Set mWorkspaceSeq = New cSequence
Set mWorkspaceSeq.IdDatabase = mDBsStepMaster
mWorkspaceSeq.IdentifierColumn = FLD_ID_WORKSPACE
mWorkspaceSeq.IdDatabase = mDBsStepMaster
Set mWorkspaceSeq = Nothing

' Call procedure to raise an error if the
Workspace name
' already exists in the db
Call WorkspaceNameDuplicate

' A new record will have the archived_flag turned
off
mblnArchivedFlag = False

' Create a temporary querydef object
strInsert = "insert into att_workspaces " & _
           "( workspace_id, workspace_name, " & _
           " archived_flag ) " & _
           " values ( " & _
           " values ( [w_id], [w_name], [archived] ) "
"
Set qy =
mDBsStepMaster.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to assign the parameter values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

' strInsert = "insert into att_workspaces " & _
'           "( workspace_id, workspace_name, " & _
'           " archived_flag ) " & _
'           " values ( " & _
'           " values ( [w_id], [w_name], [archived] ) "
'
mFieldValue.MakeStringFieldValid(mstrWorkspaceName) &
"
" & Str(mblnArchivedFlag) & _
" ) "
mDBsStepMaster.Execute strInsert, dbFailOnError

Exit Sub

AddWorkspaceErr:

Call LogErrors(Errors)
mstrSource = mstrModuleName & "AddWorkspace"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceInsertFailed, _
mstrSource,
LoadResString(errWorkspaceInsertFailed)

End Sub
Private Sub AssignParameters(qyExec As DAO.QueryDef)

```

```

' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to make them
different
' from the field names. When the parameter names
are
' the same as the field names, parameters in the
where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName & "AssignParameters"

For Each prmParam In qyExec.Parameters
Select Case prmParam.Name
Case "[w_id]"
prmParam.Value = mlngWorkspaceId

Case "[w_name]"
prmParam.Value = mstrWorkspaceName

Case "[archived]"
prmParam.Value = mblnArchivedFlag

Case Else
' Write the parameter name that is
faulty
WriteError errInvalidParameter,
mstrSource, _
prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:

mstrSource = mstrModuleName & "AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrSource,
LoadResString(errAssignParametersFailed)

End Sub

Public Sub DeleteWorkspace()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteWorkspaceErr

strDelete = "delete from att_workspaces " & _
           " where workspace_id = [w_id]"

```

```

Set qy =
mDBsStepMaster.CreateQueryDef(gstrEmptyString,
strDelete)

' Call a procedure to assign the parameter values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

' mDBsStepMaster.Execute strDelete, dbFailOnError
' " where workspace_id = " & _
' Str(mlngWorkspaceId)

Exit Sub

DeleteWorkspaceErr:

Call LogErrors(Errors)
mstrSource = mstrModuleName & "DeleteWorkspace"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceDeleteFailed, _
mstrSource,
LoadResString(errWorkspaceDeleteFailed)
End Sub

Public Sub ModifyWorkspace()

Dim strUpdate As String
Dim qy As DAO.QueryDef

On Error GoTo ModifyWorkspaceErr

' Call procedure to raise an error if the
Workspace name
' already exists in the db
Call WorkspaceNameDuplicate

strUpdate = "update att_workspaces " & _
           " set workspace_name = [w_name] " & _
           ", archived_flag = [archived] " & _
           " where workspace_id = [w_id] "

Set qy =
mDBsStepMaster.CreateQueryDef(gstrEmptyString,
strUpdate)

' Call a procedure to assign the parameter values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

' strUpdate = "update att_workspaces " & _
' " set workspace_name = " & _
'
mFieldValue.MakeStringFieldValid(mstrWorkspaceName) &
"
", archived_flag = " & _
Str(mblnArchivedFlag) & _
" where workspace_id = " & _
Str(mlngWorkspaceId)

mDBsStepMaster.Execute strUpdate, dbFailOnError

```

```

Exit Sub

ModifyWorkspaceErr:

    Call LogErrors(Errors)
    mstrSource = mstrModuleName & "ModifyWorkspace"
    On Error GoTo 0
    Err.Raise vbObjectError +
errWorkspaceUpdateFailed, _
    mstrSource,
LoadResString(errWorkspaceUpdateFailed)

End Sub
Public Property Get WorkspaceName() As String

    WorkspaceName = mstrWorkspaceName

End Property

Public Property Get WorkspaceId() As Long

    WorkspaceId = mlngWorkspaceId

End Property

Private Sub Class_Initialize()

    ' Each function will append it's own name to this
    ' variable
    mstrSource = "cWorkspace."

    Set mFieldValue = New cStringSM

End Sub

Private Sub Class_Terminate()

    Set mdbStepMaster = Nothing
    Set mFieldValue = Nothing

End Sub

```

## DatabaseSM.ba

### S

```

Attribute VB_Name = "DatabaseSM"
' FILE: DatabaseSM.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains all the database
initialization/cleanup
' procedures for the project. Also
contains upgrade
' database upgrade functions.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

```

```

' This module is called DatabaseSM, since Database is
a standard
' Visual Basic object and we want to avoid any
confusion with it.

Option Explicit

Public wrkJet As Workspace
Public dbsAttTool As Database
Public gblnDbOpen As Boolean
Public gRunEngine As rdoEngine

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"DatabaseSM."
Public Const gsDefDBFileExt As String = ".stp"
Private Const msDefDBFile As String = "\SMDData" &
gsDefDBFileExt

Private Const merrFileNotFound As Integer = 3024
Private Const merrDaoTableMissing As Integer = 3078

Private Const STEPMaster_SETTINGS_VAL_NAME_DBFILE As
String = "WorkspaceFile"

Public Const DEF_NO_COUNT_DISPLAY As Boolean
= False
Public Const DEF_NO_EXECUTE As Boolean
= False
Public Const DEF_PARSE_QUERY_ONLY As Boolean
= False
Public Const DEF_ANSI_QUOTED_IDENTIFIERS As Boolean
= False
Public Const DEF_ANSI_NULLS As Boolean
= True
Public Const DEF_SHOW_QUERY_PLAN As Boolean
= False
Public Const DEF_SHOW_STATS_TIME As Boolean
= False
Public Const DEF_SHOW_STATS_IO As Boolean
= False
Public Const DEF_PARSE_ODBC_MSG_PREFIXES As Boolean
= True
Public Const DEF_ROW_COUNT As Long
= 0
Public Const DEF_TSQL_BATCH_SEPARATOR As String
= "GO"
Public Const DEF_QUERY_TIME_OUT As Long
= 0
Public Const DEF_SERVER_LANGUAGE As String
= "(Default)"
Public Const DEF_CHARACTER_TRANSLATION As Boolean
= True
Public Const DEF_REGIONAL_SETTINGS As Boolean
= False

Public Const PARAM_DEFAULT_DIR As String
= "DEFAULT_DIR"
Public Const PARAM_DEFAULT_DIR_DESC As String
= "Default destination directory " & _

```

```

"for all output and error files. If
it is blank, the StepMaster installation directory
will be used."

Public Const PARAM_RUN_ID As String
= "RUN_ID"
Public Const PARAM_RUN_ID_DESC As String
= "The run identifier for a run. " & _
"Any modifications will be
overwritten before each run."

Public Const PARAM_OUTPUT_DIR As String
= "OUTPUT_DIR"
Public Const PARAM_OUTPUT_DIR_DESC As String
= "The output directory for a run. " & _
"Any modifications will be
overwritten before each run."

Public Const CONNECTION_STRINGS_TO_NAME_SUFFIX As
String = "_NAME"

Private Const TBL_RUN_STEP_HDR As String =
"run_header"
Private Const TBL_RUN_STEP_DTLS As String =
"run_step_details"
Public Const TBL_CONNECTION_DTLS As String =
"connection_dtls"
Public Const TBL_CONNECTION_STRINGS As String =
"workspace_connections"
Public Const TBL_STEPS As String = "att_steps"

Public Const FLD_ID_CONN_NAME As String =
"connection_name_id"
Public Const FLD_ID_WORKSPACE As String =
"workspace_id"
Public Const FLD_ID_STEP As String = "step_id"
Public Const FLD_ID_PARAMETER As String =
"parameter_id"

Public Const FLD_CONN_DTL_CONNECTION_NAME As String =
"connection_name"
Public Const FLD_CONN_DTL_CONNECTION_STRING As String =
"connection_string_name"
Public Const FLD_CONN_DTL_CONNECTION_TYPE As String =
"connection_type"

Public Const FLD_CONN_STR_CONNECTION_NAME As String =
"connection_name"

Public Const FLD_STEPS_EXEC_MECHANISM As String =
"execution_mechanism"
Public Const FLD_STEPS_EXEC_DTL As String =
"start_directory"
Public Const FLD_STEPS_VERSION_NO As String =
"version_no"

Public Const DATA_TYPE_CURRENCY As String =
"CURRENCY"
Public Const DATA_TYPE_LONG As String = "Long"
Public Const DATA_TYPE_INTEGER As String = "INTEGER"
Public Const DATA_TYPE_TEXT255 As String =
"Text(255)"

```

```

Private Sub InsertBuiltInParameter(dbFile As
Database, sParamName As String, _
    sParamValue As String, sParamDesc As String)

    Dim sBuf As String
    Dim cTempStr As New cStringSM
    Dim lId As Long
    Dim rTemp As DAO.Recordset
    Dim rParam As DAO.Recordset
    Dim cTempSeq As cSequence

    ' Create the passed in built-in parameter, for
each workspace in the db
    Set cTempSeq = New cSequence
    Set cTempSeq.IdDatabase = dbFile
    cTempSeq.IdentifierColumn = FLD_ID_PARAMETER

    sBuf = "select * from att_workspaces "
    Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
    If rTemp.RecordCount <> 0 Then
        rTemp.MoveFirst

        While Not rTemp.EOF
            sBuf = "select * from
workspace_parameters " & _
                " where workspace_id = " &
Str(rTemp!workspace_id) & _
                " and parameter_name = " &
cTempStr.MakeStringFieldValid(sParamName)
            Set rParam = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
            If rParam.RecordCount <> 0 Then
                rParam.MoveFirst
                ' Since the parameter already exists,
change it to a built-in type
                sBuf = "update workspace_parameters "
                & _
                    " set parameter_type = " &
CStr(gintParameterBuiltIn) & _
                    ", description = " &
cTempStr.MakeStringFieldValid(sParamDesc) & _
                    " where workspace_id = " &
Str(rTemp!workspace_id) & _
                    " and parameter_id = " &
Str(rParam!parameter_id)
                Else
                    ' Else, insert a parameter record
                    lId = cTempSeq.Identifier
                    sBuf = "insert into
workspace_parameters " & _
                        "( workspace_id,
parameter_id, " & _
                        " parameter_name,
parameter_value, " & _
                        " description, parameter_type
) " & _
                            " values ( " & _
                                Str(rTemp!workspace_id) & ",
" & Str(lId) & ", " & _
                                cTempStr.MakeStringFieldValid(sParamName) & ", " & _

```

```

cTempStr.MakeStringFieldValid(sParamValue) & ", " & _
cTempStr.MakeStringFieldValid(sParamDesc) & ", " & _
CStr(gintParameterBuiltIn) &
-
                " ) "
            End If
            dbFile.Execute sBuf, dbFailOnError
            rParam.Close

            rTemp.MoveNext
        Wend
    End If
    rTemp.Close

End Sub
Public Sub InitRunEngine()

    Set gRunEngine = New rdoEngine
    gRunEngine.rdoDefaultCursorDriver = rdUseServer

End Sub

Public Function DefaultDBFile() As String
    DefaultDBFile = GetSetting(App.Title, "Settings",
STEPMASTER_SETTINGS_VAL_NAME_DBFILE, App.Path &
msDefDBFile)
End Function

Public Sub CloseDatabase()

    Dim dbsInstance As Database
    Dim recInstance As Recordset

    On Error GoTo CloseDatabaseErr

    ' Close all open recordsets and databases in the
workspace
    For Each dbsInstance In wrkJet.Databases
        For Each recInstance In dbsAttTool.Recordsets
            recInstance.Close
        Next recInstance
        dbsInstance.Close

    Next dbsInstance

    Set dbsAttTool = Nothing

    gblnDbOpen = False
    wrkJet.Close

    Exit Sub

CloseDatabaseErr:

    Call LogErrors(Errors)
    Resume Next

End Sub

```

```

Private Function NoDbChanges(sVerTo As String,
sVerFrom As String) As Boolean

    If sVerTo = gsVersion242 And sVerFrom =
gsVersion241 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion242 And sVerFrom =
gsVersion24 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion253 And sVerFrom =
gsVersion251 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion255 And sVerFrom =
gsVersion251 Then
        NoDbChanges = True
    Else
        NoDbChanges = False
    End If

End Function

Public Function SMOpenDatabase(Optional strDbName As
String = gstrEmptyString) As Boolean
    Dim sVersion As String
    Dim bOpeningDb As Boolean ' This flag is used to
check if OpenDatabase failed

    On Error GoTo OpenDatabaseErr

    bOpeningDb = False
    SMOpenDatabase = False

    ' Create Microsoft Jet Workspace object.
    If Not gblnDbOpen Then
        Set wrkJet =
CreateWorkspace("att_tool_workspace_setup", "admin",
gstrEmptyString, dbUseJet)
    End If

    ' Prompt the user for the database file if it is
not passed in
    If StringEmpty(strDbName) Then
        strDbName = BrowseDBFile
        If StringEmpty(strDbName) Then
            Exit Function
        End If
    End If

    Do
        If gblnDbOpen Then
            #If Not RUN_ONLY Then
                CloseOpenWorkspaces
            #End If
            Set wrkJet =
CreateWorkspace("att_tool_workspace_setup", "admin",
gstrEmptyString, dbUseJet)
        End If

        ' Toggle the bOpeningDb flag around the
OpenDatabase method - the value
        ' of this flag will be checked by the error
handler to determine if it is
        ' the OpenDatabase that failed.

```

```

BugMessage "DB File: " & strDbName

bOpeningDb = True
' Open the database for exclusive use
Set dbsAttTool =
wrkJet.OpenDatabase(strDbName, Options:=True)
bOpeningDb = False

If dbsAttTool Is Nothing Then
' If the file is not present in the
directory, display
' an error and ask the user to enter a
new path
Call ShowError(errOpenDbFailed,
OptArgs:=strDbName)

strDbName = BrowseDBFile
Else
sVersion = DBVersion(dbsAttTool)

' Make sure the application and db
version numbers match
If sVersion = gsVersion Then
Call InitializeData(strDbName)
gblnDbOpen = True
SMOpenDatabase = True
Else
If UpgradeDb(wrkJet, dbsAttTool,
gsVersion, sVersion) Then
Call InitializeData(strDbName)
gblnDbOpen = True
SMOpenDatabase = True
Else
dbsAttTool.Close
Set dbsAttTool = Nothing

ShowError errVersionMismatch, _
OptArgs:=" Please install
Version '" & gsVersion & "' of the workspace
definition file."
strDbName = BrowseDBFile
End If
End If
Loop While gblnDbOpen = False And Not
StringEmpty(strDbName)

Exit Function

OpenDatabaseErr:
Call DisplayErrors(Errors)

' If the OpenDatabase failed, continue
If bOpeningDb Then
Resume Next
End If

Call ShowError(errOpenDbFailed,
OptArgs:=strDbName)

End Function
Private Sub InitializeData(sDb As String)

```

```

Set gcParameters = New cArrParameters
Set gcParameters.ParamDatabase = dbsAttTool

Set gcSteps = New cArrSteps
Set gcSteps.StepDB = dbsAttTool

Set gcConstraints = New cArrConstraints
Set gcConstraints.ConstraintDB = dbsAttTool

Set gcConnections = New cConnections
Set gcConnections.ConnDb = dbsAttTool

Set gcConnDtls = New cConnDtls
Set gcConnDtls.ConnDb = dbsAttTool

' Disable the error handler since this is not a
critical step
On Error GoTo 0
SaveSetting App.Title, "Settings",
STEPMASTER_SETTINGS_VAL_NAME_DBFILE, sDb
End Sub
Private Sub UpdateContinuationCriteria(dbFile As
DAO.Database)

Dim qyTemp As DAO.QueryDef
Dim sBuf As String

On Error GoTo UpdateContinuationCriteriaErr

sBuf = "Since this version of the executable
incorporates failure processing, " & _
"the upgrade will update the On Failure
field for each of the steps " & _
"to 'Continue' to be compatible with the
existing behaviour. " & _
"Proceed?"

If Not Confirm(Buttons:=vbYesNo,
strMessage:=sBuf, strTitle:"Upgrade database") Then
Exit Sub
End If

' Create a recordset object to retrieve all steps
for
' the given workspace
sBuf = " update att_steps a " & _
" set continuation_criteria = " &
CStr(gintOnFailureContinue) & _
" where archived_flag = [archived] "

' Find the highest X-component of the version
number
sBuf = sBuf & " AND cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS d " & _
" WHERE a.step_id = d.step_id ) "

' Find the highest Y-component of the version
number for the highest X-component

```

```

sBuf = sBuf & " AND cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) + 1 ) ) = " & _
" ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) + 1 ) ) ) " & _
" from att_steps AS b " & _
" Where a.step_id = b.step_id " & _
" AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS c " & _
" WHERE a.step_id = c.step_id ) ) "

' Create a temporary Querydef object
Set qyTemp =
dbFile.CreateQueryDef(gstrEmptyString, sBuf)
qyTemp.Parameters("archived").Value = False

qyTemp.Execute dbFailOnError
qyTemp.Close

Exit Sub

UpdateContinuationCriteriaErr:
Call LogErrors(Errors)
Err.Raise vbObjectError + errModifyStepFailed,
mstrModuleName, _
LoadResString(errModifyStepFailed)

End Sub

Private Sub UpdateDbDtls(dbFile As Database,
sNewVersion As String)

Dim sSql As String
Dim cTemp As New cStringSM

On Error GoTo UpdateDbDtlsErr

sSql = "update db_details " & _
" set db_version = " &
cTemp.MakeStringFieldValid(sNewVersion)

dbFile.Execute sSql, dbFailOnError

Exit Sub

UpdateDbDtlsErr:
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgradel0to21(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

```

```

Dim sSql As String

On Error GoTo Upgrade10to21Err

Call UpdateDbDtls(dbFile, sVersion)

Call UpdateContinuationCriteria(dbFile)

Exit Sub

Upgrade10to21Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade21to23(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

Dim sBuf As String
Dim cTempStr As New cStringSM

On Error GoTo Upgrade21to23Err

' Add a parameter type field and a description
field to the parameter table
sBuf = "alter table workspace_parameters " & _
    " add column description TEXT(255) "
dbFile.Execute sBuf, dbFailOnError

sBuf = "alter table workspace_parameters " & _
    " add column parameter_type INTEGER "
dbFile.Execute sBuf, dbFailOnError

' Initialize the parameter type on all parameters
to indicate generic parameters
sBuf = "update workspace_parameters " & _
    " set parameter_type = " & _
CStr(gintParameterGeneric)
dbFile.Execute sBuf, dbFailOnError

sBuf = "Release 2.3 onwards, connection string
parameters will be " & _
    "displayed in a separate node. After this
upgrade, all connection " & _
    "string parameters will appear under the
Globals/Connection Strings " & _
    "node in the workspace. "
Call MsgBox(sBuf, vbOKOnly + vbApplicationModal,
"Upgrade database")

' Update the parameter type on all parameters
that look like db connection strings
sBuf = "update workspace_parameters " & _
    " set parameter_type = " & _
CStr(gintParameterConnect) & _
    " where UCase(parameter_value) like
'*DRIVER*' " & _
    " or UCase(parameter_value) like '*DSN*' "
dbFile.Execute sBuf, dbFailOnError

```

```

' Add an elapsed time field to the
run_step_details table - this field is
' needed to store the elapsed time in
milliseconds.
sBuf = "alter table run_step_details " & _
    " add column elapsed_time LONG "
dbFile.Execute sBuf, dbFailOnError

' The failure_details field has some data for the
case when an ODBC failure
' threshold was specified. Since that's no longer
relevant, update the failure_details
' field for records with failure_criteria =
gintFailureODBC to empty.
' failure_criteria = gintFailureODBC = 1
sBuf = "update att_steps " & _
    " set failure_details = " & _
CTempStr.MakeStringFieldValid(gstrEmptyString) & _
    " where failure_criteria = '1'"
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtls(dbFile, sVersion)

UpgradeWsp.CommitTrans

On Error GoTo DropColumnErr

UpgradeWsp.BeginTrans

' This ddl cannot be in the same transaction as
the failure_details update
' But we can do this in a separate transaction
since we do not expect this
' statement to fail - AND, it doesn't matter if
this transaction fails
' Drop the failure_criteria column from the
att_steps table
sBuf = "alter table att_steps " & _
    " drop column failure_criteria "
dbFile.Execute sBuf, dbFailOnError

Exit Sub

DropColumnErr:
Call LogErrors(Errors)
ShowError errDeleteColumnFailed
Exit Sub

Upgrade21to23Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade23to24(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

Dim sBuf As String
Dim lId As Long

```

```

Dim rTemp As DAO.Recordset
Dim cTempStr As New cStringSM

On Error GoTo Upgrade23to24Err

' Add a new table for connection properties
sBuf = CreateConnectionsTableScript()
' TODO: Not sure of column sizes for row count,
tsql_batch_separator and server_language
dbFile.Execute sBuf, dbFailOnError

' Move all connection parameters from the
parameter table to the connections tables
' Insert default values for the newly added
connection properties
sBuf = "select * from workspace_parameters " & _
    "where parameter_type = " & _
CStr(gintParameterConnect)
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
lId = 1
If rTemp.RecordCount <> 0 Then
    rTemp.MoveFirst

    While Not rTemp.EOF
        sBuf = "insert into workspace_connections
" & _
            "( workspace_id, connection_id, " & _
            "connection_name, connection_value, " & _
            "description, no_count_display, " & _
            "no_execute, parse_query_only, " & _
            "ANSI_quoted_identifiers, ANSI_nulls, "
& _
            "show_query_plan, show_stats_time, " & _
            "show_stats_io, parse_odbc_msg_prefixes,
" & _
            "row_count, tsql_batch_separator, " & _
            "query_time_out, server_language, " & _
            "character_translation,
regional_settings ) " & _
            " values ( " & _
            Str(rTemp!workspace_id) & ", " & Str(lId)
& ", " & _
            CTempStr.MakeStringFieldValid(" " &
rTemp!parameter_name) & ", " & _
            CTempStr.MakeStringFieldValid(" " &
rTemp!parameter_value) & ", " & _
            CTempStr.MakeStringFieldValid(" " &
rTemp!Description) & ", " & _
            Str(DEF_NO_COUNT_DISPLAY) & ", " & _
            Str(DEF_NO_EXECUTE) & ", " &
Str(DEF_PARSE_QUERY_ONLY) & ", " & _
            Str(DEF_ANSI_QUOTED_IDENTIFIERS) & ", " &
Str(DEF_ANSI_NULLS) & ", " & _
            Str(DEF_SHOW_QUERY_PLAN) & ", " &
Str(DEF_SHOW_STATS_TIME) & ", " & _
            Str(DEF_SHOW_STATS_IO) & ", " &
Str(DEF_PARSE_ODBC_MSG_PREFIXES) & ", " & _
            Str(DEF_ROW_COUNT) & ", " &
CTempStr.MakeStringFieldValid(DEF_TSQL_BATCH_SEPARATO
R) & ", " & _

```



```

        Str(DEF_QUERY_TIME_OUT) & ", " &
cTempStr.MakeStringFieldValid(DEF_SERVER_LANGUAGE) &
", " & _
        Str(DEF_CHARACTER_TRANSLATION) & ", " &
Str(DEF_REGIONAL_SETTINGS) & _
        ) "
        dbFile.Execute sBuf, dbFailOnError

        lId = lId + 1
        rTemp.MoveNext
    Wend
End If
rTemp.Close

' Add an identifier column for the connection_id
field
sBuf = "alter table att_identifiers " & _
        " add column connection_id long "
dbFile.Execute sBuf, dbFailOnError

' Initialize the value of the connection
identifier, initialized above
sBuf = "update att_identifiers " & _
        " set connection_id = " & Str(lId)
dbFile.Execute sBuf, dbFailOnError

' Delete all connection strings from the
parameter table
sBuf = "delete from workspace_parameters " & _
        "where parameter_type = " &
CStr(gintParameterConnect)
dbFile.Execute sBuf, dbFailOnError

' Create the built-in parameter, default
directory, for each workspace in the db
Call InsertBuiltInParameter(dbFile,
PARAM_DEFAULT_DIR, gstrEmptyString,
PARAM_DEFAULT_DIR_DESC)

Call UpdateDbDtIs(dbFile, sVersion)

Exit Sub

Upgrade23to24Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade243to25(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sBuf As String
    Dim qy As DAO.QueryDef
    Dim rTemp As DAO.Recordset
    Dim lId As Long
    Dim cTempStr As New cStringsSM

    On Error GoTo Upgrade243to25Err

```

```

        sBuf = "Release " & gsVersion25 & " onwards, new
'Connections' must be created for all " & _
        "connection strings. " & vbCrLf & vbCrLf
& _
        "Connections will appear under the
Globals/Connections " & _
        "node in the workspace. " & vbCrLf & _
        "A list of all 'Connections' (instead of
'Connection Strings') " & _
        "in the workspace will be displayed in
the 'Connections' field for " & _
        "ODBC steps on the Step definition
screen. " & vbCrLf & vbCrLf & _
        "Each Connection can be marked as static
or dynamic. " & vbCrLf & _
        "Dynamic connections will be created when
a step starts execution and " & _
        "closed once the step completes. " &
vbCrLf & _
        "Static connections will be kept open
till the run completes." & vbCrLf & vbCrLf & _
        "Currently dynamic 'Connections' have
been created for all existing 'Connection Strings' "
& _
        "with the suffix " &
CONNECTION_STRINGS_TO_NAME_SUFFIX
        Call MsgBox(sBuf, vbOKOnly + vbApplicationModal,
"Upgrade database")

' Add a new table for the connection name entity
' This table has been added in order to satisfy
the TPC-H requirement that
' all the queries in a stream need to be executed
on a single connection.
sBuf = CreateConnectionDtIsTableScript()
dbFile.Execute sBuf, dbFailOnError

' Add an identifier column for the
connection_name_id field
sBuf = "alter table att_identifiers " & _
        " add column " & FLD_ID_CONN_NAME & "
long "
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtIs(dbFile, sVersion)

' insert connection_dtl records for each of the
connection strings
sBuf = "select * from " & TBL_CONNECTION_STRINGS
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)

sBuf = "insert into " & TBL_CONNECTION_DTLS & _
        "( " & FLD_ID_WORKSPACE & _
        ", " & FLD_ID_CONN_NAME & _
        ", " & FLD_CONN_DTL_CONNECTION_NAME & _
        ", " & FLD_CONN_DTL_CONNECTION_STRING & _
        _
        ", " & FLD_CONN_DTL_CONNECTION_TYPE &
) " & _
        " values ( [w_id], [c_id], [c_name],
[c_str], [c_type] )"
        Set qy = dbFile.CreateQueryDef("", sBuf)

```

```

        lId = glMinId
        If rTemp.RecordCount <> 0 Then
            rTemp.MoveFirst

            While Not rTemp.EOF
                qy.Parameters("w_id").Value =
rTemp.Fields(FLD_ID_WORKSPACE)
                qy.Parameters("c_id").Value = lId
                qy.Parameters("c_name").Value =
rTemp.Fields(FLD_CONN_STR_CONNECTION_NAME) &
CONNECTION_STRINGS_TO_NAME_SUFFIX
                qy.Parameters("c_str").Value =
rTemp.Fields(FLD_CONN_STR_CONNECTION_NAME)
                qy.Parameters("c_type").Value =
ConnTypeDynamic

                qy.Execute dbFailOnError

                lId = lId + 1
                rTemp.MoveNext
            Wend
        End If
        qy.Close
        rTemp.Close

' Initialize the value of the connection_name_id
sBuf = "update att_identifiers " & _
        " set " & FLD_ID_CONN_NAME & " = " &
Str(lId)
dbFile.Execute sBuf, dbFailOnError

' Update the start_directory field in att_steps
to point to the newly
' created connections
Call ReadStepsInWorkspace(rTemp, qy, glInvalidId,
dbLoad:=dbFile, _
        bSelectArchivedRecords:=False)

sBuf = "update " & TBL_STEPS & _
        " set " & FLD_STEPS_EXEC_DTL & " = [c_name] "
& _
        " where " & FLD_ID_STEP & " = [s_id] " & _
        " and " & FLD_STEPS_VERSION_NO & " = [ver_no]
"

Set qy = dbFile.CreateQueryDef("", sBuf)

If rTemp.RecordCount <> 0 Then
    rTemp.MoveFirst

    While Not rTemp.EOF
        If
rTemp.Fields(FLD_STEPS_EXEC_MECHANISM).Value =
gintExecuteODBC Then
            If Not (StringEmpty(" " &
rTemp.Fields(FLD_STEPS_EXEC_DTL)) Then
                sBuf =
rTemp.Fields(FLD_STEPS_EXEC_DTL)
                ' Strip the enclosing "%&
characters
                sBuf = Mid(sBuf, 2, Len(sBuf) -
2) & CONNECTION_STRINGS_TO_NAME_SUFFIX

```

```

        gy.Parameters("c_name").Value =
sBuf
        gy.Parameters("s_id").Value =
rTemp.Fields(FLD_ID_STEP)
        gy.Parameters("ver_no").Value =
rTemp.Fields(FLD_STEPS_VERSION_NO)

        gy.Execute dbFailOnError
        End If
        End If
        rTemp.MoveNext
    Wend
    End If

    gy.Close
    rTemp.Close

Exit Sub

Upgrade243to25Err:
    UpgradeWsp.Rollback
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade25to251(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    On Error GoTo Upgrade25to251Err

    ' Create the built-in parameters, run_id and
output_dir, for each workspace in the db
    Call InsertBuiltInParameter(dbFile, PARAM_RUN_ID,
gstrEmptyString, PARAM_RUN_ID_DESC)
    Call InsertBuiltInParameter(dbFile,
PARAM_OUTPUT_DIR, gstrEmptyString,
PARAM_OUTPUT_DIR_DESC)

    Call UpdatedbDtls(dbFile, sVersion)

Exit Sub

Upgrade25to251Err:
    UpgradeWsp.Rollback
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade242to243(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sBuf As String
    Dim cTempStr As New cStringsM
    Dim iResponse As Integer

    On Error GoTo DeleteHistoryErr

```

```

Call DeleteRunHistory(dbFile)

On Error GoTo Upgrade242to243Err

UpgradeWsp.CommitTrans

UpgradeWsp.BeginTrans

' Add a parameter type field and a description
field to the parameter table
sBuf = "alter table run_step_details " & _
        " add column parent_instance_id LONG "

dbFile.Execute sBuf, dbFailOnError

sBuf = "alter table run_step_details " & _
        " add column iterator_value TEXT(255) "

dbFile.Execute sBuf, dbFailOnError

Call AlterFieldType(dbFile, TBL_RUN_STEP_DTLS,
"start_time", DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile, TBL_RUN_STEP_DTLS,
"end_time", DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile, TBL_RUN_STEP_HDR,
"start_time", DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile, TBL_RUN_STEP_HDR,
"end_time", DATA_TYPE_CURRENCY)

Call UpdatedbDtls(dbFile, sVersion)

Exit Sub

DeleteHistoryErr:
' This is not a critical error - continue with
upgrade
Call LogErrors(Errors)
Resume Next

Upgrade242to243Err:
    UpgradeWsp.Rollback
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub
*****
' The AlterFieldType Sub procedure requires three
string
' parameters. The first string specifies the name of
the table
' containing the field to be changed. The second
string specifies
' the name of the field to be changed. The third
string specifies
' the new data type for the field.
*****

```

```

Private Sub AlterFieldType(dbFile As Database,
TblName As String, FieldName As String, _
        NewDataType As String)
    Dim qdf As DAO.QueryDef
    Dim sSql As String

    ' Add a temporary field to the table.
    sSql = "ALTER TABLE [" & TblName & _
        " ] ADD COLUMN AlterTempField " &
NewDataType
    Set qdf = dbFile.CreateQueryDef("", sSql)
    qdf.Execute

    ' Copy the data from old field into the new
field.
    qdf.SQL = "UPDATE DISTINCTROW [" & TblName & " ]
SET AlterTempField = [" & FieldName & "]"
    qdf.Execute

    ' Delete the old field.
    qdf.SQL = "ALTER TABLE [" & TblName & " ] DROP
COLUMN [" & FieldName & "]"
    qdf.Execute

    ' Rename the temporary field to the old field's
name.
    dbFile.TableDefs("[[" & TblName &
    "]" ).Fields("AlterTempField").Name = FieldName
    dbFile.TableDefs.Refresh

    ' Clean up.
End Sub
Private Sub Upgrade01to21(UpgradeWsp As
DAO.Workspace, dbFile As DAO.Database, sVersion As
String)
    Dim sSql As String

    On Error GoTo Upgrade01to21Err

    sSql = "Create table db_details (" & _
        "db_version          Text(50) " &
_
        ");"

    dbFile.Execute sSql, dbFailOnError

    sSql = "insert into db_details " & _
        "( db_version ) values ( ' " & sVersion &
" ' ) "

    dbFile.Execute sSql, dbFailOnError

    Call UpdateContinuationCriteria(dbFile)

Exit Sub

Upgrade01to21Err:
    Call LogErrors(Errors)
    UpgradeWsp.Rollback
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

```

```

End Sub
Private Function UpgradeDb(UpgradeWsp As
DAO.Workspace, dbFile As Database, _
sVerTo As String, sVerFrom As String) As
Boolean
    Dim sMsg As String
    On Error GoTo UpgradeDbErr
    UpgradeDb = False
    If Not ValidUpgrade(sVerTo, sVerFrom) Then Exit
Function
    If NoDbChanges(sVerTo, sVerFrom) Then
        UpgradeDb = True
        Exit Function
    End If
    sMsg = "The database needs to be upgraded from
Version " & sVerFrom & _
" to Version " & sVerTo & "." & vbCrLf &
-
"Proceed?"
    If Not Confirm(Buttons:=vbYesNo,
strMessage:=sMsg, strTitle:="Upgrade database") Then
        Exit Function
    End If
    UpgradeWsp.BeginTrans
    Select Case sVerFrom
        Case gsVersion25
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion243
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion24, gsVersion241, gsVersion242
            sMsg = "After this upgrade, the run
history for previous runs will no longer be
available." & _
"Continue?"
            If Not Confirm(Buttons:=vbYesNo,
strMessage:=sMsg, strTitle:="Upgrade database") Then
                UpgradeWsp.CommitTrans
                Exit Function
            End If
            Call Upgrade242to243(UpgradeWsp, dbFile,
gsVersion243)
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion23
            Call Upgrade23to24(UpgradeWsp, dbFile,
gsVersion24)

```

```

            Call Upgrade242to243(UpgradeWsp, dbFile,
gsVersion242)
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion21
            Call Upgrade21to23(UpgradeWsp, dbFile,
gsVersion23)
            Call Upgrade23to24(UpgradeWsp, dbFile,
gsVersion24)
            Call Upgrade242to243(UpgradeWsp, dbFile,
gsVersion242)
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion10
            Call Upgrade10to21(UpgradeWsp, dbFile,
gsVersion21)
            Call Upgrade21to23(UpgradeWsp, dbFile,
gsVersion23)
            Call Upgrade23to24(UpgradeWsp, dbFile,
gsVersion24)
            Call Upgrade242to243(UpgradeWsp, dbFile,
gsVersion242)
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
        Case gsVersion01
            Call Upgrade01to21(UpgradeWsp, dbFile,
gsVersion21)
            Call Upgrade21to23(UpgradeWsp, dbFile,
gsVersion23)
            Call Upgrade23to24(UpgradeWsp, dbFile,
gsVersion24)
            Call Upgrade242to243(UpgradeWsp, dbFile,
gsVersion242)
            Call Upgrade243to25(UpgradeWsp, dbFile,
gsVersion25)
            Call Upgrade25to251(UpgradeWsp, dbFile,
gsVersion251)
    End Select
    UpgradeWsp.CommitTrans
    UpgradeDb = True
    Exit Function
UpgradeDbErr:
    Call LogErrors(Errors)
    ShowError errUpgradeFailed
End Function
Private Function DBVersion(TestDb As Database) As
String
    ' Retrieves the database version
    Dim rVersion As Recordset

```

```

    On Error GoTo DBVersionErr
    Set rVersion = TestDb.OpenRecordset("Select
db_version from db_details ", _
dbOpenForwardOnly)
    BugAssert rVersion.RecordCount <> 0
    DBVersion = rVersion!db_version
    rVersion.Close
    Exit Function
DBVersionErr:
    If Err.Number = merrDaoTableMissing Then
        DBVersion = gsVersion01
    Else
        LogErrors Errors
        Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)
    End If
End Function
Private Function ValidUpgrade(sVerTo As String,
sVerFrom As String) As Boolean
    If sVerTo = gsVersion And sVerFrom = gsVersion251
Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion25 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion243 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion242 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion241 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion24 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion23 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion21 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion10 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion01 Then
        ValidUpgrade = True
    Else
        ValidUpgrade = False
    End If
End Function

```

## DebugSM.bas

```
Attribute VB_Name = "DebugSM"
' FILE:      DebugSM.bas
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Contains all the functions that carry
out error/debug
'            processing for the project.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
' Most of the functions in this module that
manipulate the
' error object do not have an On Error GoTo statement
- this
' is because it will clear the passed in error object
- let
' the calling functions handle the errors raised by
this
' module, if any
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String = "DebugSM."

Private mcLogFile As cFileSM
Private mcErrorFile As cFileSM

Private Const FORMAT_MESSAGE_FROM_SYSTEM = &H1000
Private Const FORMAT_MESSAGE_IGNORE_INSERTS = &H200
Private Const pNull = 0

Declare Function FormatMessage Lib "kernel32" Alias
"FormatMessageA" (ByVal dwFlags As Long, lpSource As
Any, ByVal dwMessageId As Long, ByVal dwLanguageId As
Long, ByVal lpbuffer As String, ByVal nSize As Long,
Arguments As Long) As Long
Public Function Confirm(Optional lngMessageCode As
conConfirmMsgCodes, _
Optional lngTitleCode As
conConfirmMsgTitleCodes, _
Optional TitleParameter As String, _
Optional ByVal Buttons As Integer = -1, _
Optional strMessage As String =
gstrEmptyString, _
Optional strTitle As String =
gstrEmptyString) _
As Boolean
' Displays a confirmation message corresponding
to the
' passed in message code. Returns True if the
user says
' Ok and False otherwise

Dim intResponse As Integer
```

```
Dim intButtonStyle As Integer

On Error GoTo ConfirmErr

Confirm = False

' If the buttons style hasn't been specified, set
the
' default style to display OK and Cancel buttons
If Buttons = -1 Then
intButtonStyle = vbOKCancel
Else
intButtonStyle = Buttons
End If

' Find the message string for the passed in code
If StringEmpty(strMessage) Then
strMessage =
Trim$(LoadResString(lngMessageCode))
End If

If StringEmpty(strTitle) Then
strTitle = Trim$(LoadResString(lngTitleCode))
End If

If Not StringEmpty(TitleParameter) Then
strTitle = strTitle & Chr$(vbKeySpace) & _
gstrSQ & TitleParameter & gstrSQ
End If

' Display the confirmation message with the
Cancel button
' set to the default - assume that we are
confirming
' potentially dangerous operations!
intResponse = MsgBox(strMessage, _
intButtonStyle + vbQuestion +
vbApplicationModal, _
strTitle)

' Translate the user response into a True/False
return code
If intButtonStyle = vbOKCancel Then
If intResponse = vbOK Then
Confirm = True
Else
Confirm = False
End If
Else
If intResponse = vbYes Then
Confirm = True
Else
Confirm = False
End If
End If

Exit Function

ConfirmErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
gstrSource = mstrModuleName & "Confirm"
```

```
Err.Raise vbObjectError + errConfirmFailed, _
gstrSource, _
LoadResString(errConfirmFailed)

End Function

Public Sub LogSystemError()
Dim eErrCode As Long

eErrCode = GetLastError()
If eErrCode <> 0 Then
WriteToFile "System Error: " & eErrCode &
vbCrLf & ApiError(eErrCode), _
blnError:=True
End If

End Sub

Public Function ApiError(ByVal e As Long) As String

Dim s As String
Dim c As Long

s = String(256, 0)
c = FormatMessage(FORMAT_MESSAGE_FROM_SYSTEM Or _
FORMAT_MESSAGE_IGNORE_INSERTS, _
pNull, e, 0&, s, Len(s), ByVal pNull)
If c Then ApiError = e & ": " & Left$(s, c)

End Function

' Output flags determine output destination of
BugAsserts and messages
#Const afLogFile = 1
#Const afMsgBox = 2
#Const afDebugWin = 4
#Const afAppLog = 8

' Display appropriate error message, and then stop
' program. These errors should NOT be possible in
' shipping product.
Sub BugAssert(ByVal fExpression As Boolean, _
Optional sExpression As String)
#If afDebug Then
If fExpression Then Exit Sub
BugMessage "BugAssert failed: " & sExpression
Stop
#End If
End Sub

Sub BugMessage(sMsg As String)

#If afDebug And afLogFile Then
' Since we are writing log messages, the error
flag is turned off
Call WriteToFile(sMsg, False)
#End If
#If afDebug And afMsgBox Then
MsgBox sMsg
#End If
#If afDebug And afDebugWin Then
Debug.Print sMsg
#End If
#If afDebug And afAppLog Then
App.LogEvent sMsg
```

```

#End If
End Sub
Public Function ProjectLogFile() As String
    ProjectLogFile = mcLogFile.FileName
End Function
Public Function ProjectErrorFile() As String
    ProjectErrorFile = mcErrorFile.FileName
End Function
Private Sub WriteToFile(sMsg As String, Optional
ByVal blnError As Boolean)
    ' Calls procedures to write the passed in message
to the log -
    ' The blnError flag is used to indicate that the
message
    ' should be logged to the error file - by default
the log
    ' file is used
    Dim mcFileObj As cFileSM
    Dim strFileName As String
    Dim strFileHdr As String
    On Error GoTo WriteToFileErr
    If blnError Then
        If mcErrorFile Is Nothing Then
            Set mcErrorFile = New cFileSM
            End If
            Set mcFileObj = mcErrorFile
        Else
            If mcLogFile Is Nothing Then
                Set mcLogFile = New cFileSM
            End If
            Set mcFileObj = mcLogFile
        End If
        If StringEmpty(mcFileObj.FileName) Then
            If blnError Then
                strFileName = gstrProjectPath & "\" &
App.EXENAME & ".ERR"
                strFileHdr = "Stepmaster Errors"
            Else
                strFileName = gstrProjectPath & "\" &
App.EXENAME & ".DBG"
                strFileHdr = "Stepmaster Log"
            End If
            mcFileObj.FileName = strFileName
            mcFileObj.WriteLine strFileHdr
            mcFileObj.WriteLine "Log start time : " & Now
        End If
        mcFileObj.WriteLine sMsg
    End Sub

```

```

WriteToFileErr:
    ' Display the error code raised by Visual Basic
    Call DisplayErrors(Errors)
    ' An error message would've been displayed by the
called
    ' procedures
End Sub
Public Sub WriteMessage(sMsg As String)
    Call WriteToFile(sMsg, True)
End Sub
Sub BugTerm()
    #If afDebug And afLogFile Then
        ' Close log file
        mcLogFile.CloseFile
    #End If
End Sub
Public Sub ShowError(ByVal ErrorCode As
errErrorConstants, _
Optional ByVal ErrorSource As String =
gstrEmptyString, _
Optional ByVal OptArgs As String =
gstrEmptyString, _
Optional ByVal DoWriteError As Boolean =
True)
    If DoWriteError Then
        ' Call a procedure to write the error to a
log file
        Call WriteError(ErrorCode, ErrorSource,
OptArgs)
    End If
    ' Re-initialize the values of the Error object
before
    ' displaying the error to the user
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)
    Call DisplayErrors(Errors)
    Err.Clear
End Sub
Public Sub WriteError(ByVal ErrorCode As
errErrorConstants, _
Optional ByVal ErrorSource As String =
gstrEmptyString, _
Optional ByVal OptArgs As String =
gstrEmptyString)
    ' Initialize the values of the Error object
before
    ' calling the log function
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)
    Call LogErrors(Errors)

```

```

Err.Clear
End Sub
Private Sub InitErrObject(ByVal ErrorCode As
errErrorConstants, _
Optional ByVal ErrorSource As String =
gstrEmptyString, _
Optional ByVal OptArgs As String =
gstrEmptyString)
    Dim lngError As Long
    lngError = IIf(ErrorCode > vbObjectError And
ErrorCode < vbObjectError + 65535, _
        ErrorCode - vbObjectError, ErrorCode)
    Err.Number = lngError + vbObjectError
    Err.Description = LoadResString(lngError) &
OptArgs
    Err.Source = App.EXENAME & ErrorSource
End Sub
Public Sub ShowMessage(ByVal MessageCode As
errErrorConstants, _
Optional ByVal OptArgs As String)
    Dim strMessage As String
    On Error GoTo ShowMessageErr
    strMessage = LoadResString(MessageCode) & OptArgs
    ' Write the error to a log file
    BugMessage strMessage
    MsgBox strMessage, vbOKOnly
    Exit Sub
ShowMessageErr:
    ' Log the error and exit
    Call DisplayErrors(Errors)
End Sub
Public Sub ShowMessageStr(sMessage As String)
    ' Write the error to a log file
    BugMessage sMessage
    MsgBox sMessage, vbOKOnly
End Sub
Public Sub DisplayErrors(myErrCollection As Errors)
    Dim strError As String
    Dim errLoop As Error
    Dim errCode As Long
    ' Enumerate Errors collection and display
properties of
    ' each Error object.
    If Err.Number <> 0 Then
        If Err.Number > vbObjectError And Err.Number
< (vbObjectError + 65536) Then

```

```

        errCode = Err.Number - vbObjectError
    Else
        errCode = Err.Number
    End If
    strError = "Error # " & Str(errCode) & " was
generated by " & _
    & Err.Source & Chr(13) & Err.Description
    MsgBox strError, , "Error", Err.HelpFile,
Err.HelpContext
    Else
        For Each errLoop In myErrCollection
            With errLoop
                If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536) Then
                    errCode = .Number - vbObjectError
                Else
                    errCode = .Number
                End If
                strError = "Error #" & errCode &
vbCrLf
                strError = strError & " " &
.Description & vbCrLf
                strError = strError & _
                    " (Source: " & .Source & ") " &
vbCrLf
                strError = strError & _
                    "Press F1 to see topic " &
.HelpContext & vbCrLf
                strError = strError & _
                    " in the file " & .HelpFile &
                    ",."
            End With
            MsgBox strError
        Next
    End If
End Sub
Public Sub LogErrors(myErrCollection As Errors)
    Dim cColErrors As cVectorStr
    Dim strError As String
    Dim errLoop As Error
    Dim errCode As Long
    Dim lngIndex As Long

    Set cColErrors = New cVectorStr

    ' Enumerate Errors collection and display
    properties of
    ' each Error object.
    If Err.Number <> 0 Then
        If Err.Number > vbObjectError And Err.Number
< (vbObjectError + 65536) Then
            errCode = Err.Number - vbObjectError
        Else
            errCode = Err.Number
        End If
        strError = "Error # " & Str(errCode) & " was
generated by " & _
            & Err.Source & vbCrLf & Err.Description

        cColErrors.Add strError
    End If

```

```

' Log all database errors, if any
For Each errLoop In myErrCollection
    With errLoop
        If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536) Then
            errCode = .Number - vbObjectError
        Else
            errCode = .Number
        End If
        strError = "Error #" & errCode & vbCrLf
        strError = strError & " " &
.Description & vbCrLf
        strError = strError & _
            " (Source: " & .Source & ") " &
vbCrLf
    End With
    cColErrors.Add strError
Next

' We can have a error handler now that we have
stored all
' errors away safely! - having an error handler
before
' enumerating all the errors would have cleared
the error
' collection
On Error GoTo LogErrorsErr
gstrSource = mstrModuleName & "LogErrors"

For lngIndex = 0 To cColErrors.Count - 1
    strError = cColErrors(lngIndex)
    Debug.Print strError
    Call WriteToFile(strError, True)
Next lngIndex

Set cColErrors = Nothing

Exit Sub

LogErrorsErr:
' Display the error code raised by Visual Basic
DisplayErrors Errors
On Error GoTo 0
ShowError errUnableToWriteError,
DoWriteError:=False
End Sub

```

## FileCommon.b as

```

Attribute VB_Name = "FileCommon"
' FILE: FileCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
'

```

```

' PURPOSE: This module contains common
functionality to display
' the File Open dialog.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"FileCommon."

Private Enum EOpenFile
    OFN_OVERWRITEPROMPT = &H2
    OFN_HIDEREADONLY = &H4
    OFN_FILEMUSTEXIST = &H1000
    OFN_EXPLORER = &H8000
End Enum

' The locations for the different output files are
presented to
' the user in a list box. These constants are used
while loading the
' data and while reading the data from the list box.
' These constants also represent the different file
types that are
' displayed to the user in File Open dialogs
Public Enum gFileTypes
    gintOutputFile = 0
    gintLogFile = 1
    gintErrorFile
    gintStepTextFile
    gintOutputCompareFile
    gintDBFile
    gintDBFileNew
    gintImportFile
    gintExportFile
End Enum

Public Const gsSqlFileSuffix = ".sql"
Public Const gsCmdFileSuffix = ".cmd"

Public Const gsOutputFileSuffix = ".out"
Public Const gstrLogFileSuffix = ".log"
Public Const gsErrorFileSuffix = ".err"
Public Function BrowseDBFile() As String
    ' Prompts the user for a database file with the
workspace information
    ' Call CallFileDialog to display the open file
dialog
    BrowseDBFile = CallFileDialog(gintDBFile)

End Function
Public Function CallFileDialog(intFileType As
Integer, _
    Optional ByVal strDefaultFile As String =
gstrEmptyString) As String
    ' This function initializes the values of the
filter property,
    ' the dialog title and flags for the File Open
dialog depending
    ' on the FileType passed in

```

```

' It then calls ShowFileOpenDialog to set these
properties and
' display the File Open dialog to the user

' All the properties used by the File Open dialog
are defined
' as constants in this function and passed to
ShowFileOpenDialog
' as parameters. So if any of the dialog
properties need to be
' modified, these constants are what need to be
changed
Const s_DLG_TITLE_OPEN = "Open"
Const s_DLG_TITLE_NEW = "New"
Const s_DLG_TITLE_IMPORT = "Import From"
Const s_DLG_TITLE_EXPORT = "Export To"

Const mlng_FILE_STEP_TEXT_FLAGS = OFN_EXPLORER Or
OFN_FILEMUSTEXIST Or OFN_HIDEREADONLY
Const mlng_FILE_OUTPUT_COMPARE_FLAGS =
mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_DB_FLAGS =
mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_OUTPUT_FLAGS = OFN_EXPLORER Or
OFN_HIDEREADONLY Or OFN_OVERWRITEPROMPT
Const mlng_FILE_LOG_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_ERROR_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_DB_NEW_FLAGS =
mlng_FILE_OUTPUT_FLAGS

Const mstr_FILE_ALL_FILTER = "|All Files
(*.*)|*.*"
Const mstr_FILE_STEP_TEXT_FILTER = "Query Files
(*) & gsSqlFileSuffix & _
)|*" & gsSqlFileSuffix & "|Command
Script Files (*) & gsCmdFileSuffix & _
)|*" & gsCmdFileSuffix
Const mstr_FILE_OUTPUT_COMPARE_FILTER = "Text
Files (*.txt)|*.txt"
Const mstr_FILE_OUTPUT_FILTER = "Output Files
(*.out)|*.out"
Const mstr_FILE_LOG_FILTER = "Log Files
(*.log)|*.log"
Const mstr_FILE_ERROR_FILTER = "Error Files
(*.err)|*.err"
Const mstr_FILE_DB_FILTER = "Stepmaster Workspace
Files (*) & gsDefDBFileExt & "|*" & gsDefDBFileExt

Dim strFileName As String

On Error GoTo CallFileDialogErr

Select Case intFileType
Case gintStepTextFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_STEP_TEXT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_STEP_TEXT_FLAGS, _
strDefaultFile)

```

```

Case gintOutputCompareFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_OUTPUT_COMPARE_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_COMPARE_FLAGS, _
strDefaultFile)

Case gintOutputFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

' Case gintLogFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_LOG_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_LOG_FLAGS, _
strDefaultFile)

' Case gintErrorFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_ERROR_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_ERROR_FLAGS, _
strDefaultFile)

Case gintDBFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintDBFileNew
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_NEW, _
mlng_FILE_DB_NEW_FLAGS, _
strDefaultFile)

Case gintImportFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_IMPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintExportFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_EXPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

```

```

Case Else
BugAssert True, "Incorrect file type
passed in." ' Default processing will be for the
output file
strFileName = ShowFileOpenDialog( _
mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

End Select
CallFileDialog = strFileName

Exit Function

CallFileDialogErr:
CallFileDialog = gstrEmptyString
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "CallFileDialog"
Call ShowError(errBrowseFailed)

End Function

```

## frmSplash.frm

```

VERSION 5.00
Begin VB.Form frmSplash
BorderStyle = 3 'Fixed Dialog
ClientHeight = 4710
ClientLeft = 45
ClientTop = 45
ClientWidth = 7455
ControlBox = 0 'False
Icon = "frmSplash.frx":0000
LinkTopic = "Form1"
LockControls = -1 'True
MaxButton = 0 'False
MinButton = 0 'False
ScaleHeight = 4710
ScaleWidth = 7455
ShowInTaskbar = 0 'False
StartupPosition = 2 'CenterScreen
Visible = 0 'False
Begin VB.Frame fraMainFrame
Height = 4590
Left = 45
TabIndex = 0
Top = -15
Width = 7380
Begin VB.PictureBox picLogo
Height = 2385
Left = 510
Picture = "frmSplash.frx":0442
ScaleHeight = 2325
ScaleWidth = 1755
TabIndex = 1
Top = 855

```

```

        Width           = 1815
    End
    Begin VB.Label lblReserved
        AutoSize         = -1 'True
        Caption          = "All Rights Reserved."
        Height           = 195
        Left             = 5520
        TabIndex         = 8
        Top              = 4080
        Width           = 1440
    End
    Begin VB.Label lblCopyright
        AutoSize         = -1 'True
        Caption          = "Copyright © 1998"
    BeginProperty Font
        Name             = "Arial"
        Size             = 8.25
        Charset          = 0
        Weight           = 400
        Underline        = 0 'False
        Italic           = 0 'False
        Strikethrough    = 0 'False
    EndProperty
        Height           = 210
        Left             = 5550
        TabIndex         = 7
        Tag              = "Copyright"
        Top              = 3850
        Width           = 1380
        WordWrap         = -1 'True
    End
    Begin VB.Label lblCompany
        AutoSize         = -1 'True
        Caption          = "Microsoft Corporation"
    BeginProperty Font
        Name             = "Arial"
        Size             = 8.25
        Charset          = 0
        Weight           = 400
        Underline        = 0 'False
        Italic           = 0 'False
        Strikethrough    = 0 'False
    EndProperty
        Height           = 210
        Left             = 5460
        TabIndex         = 6
        Tag              = "Company"
        Top              = 3640
        Width           = 1560
    End
    Begin VB.Label lblRestrictions
        AutoSize         = -1 'True
        Caption          = "See License Agreement
for Restrictions"
        Height           = 195
        Left             = 460
        TabIndex         = 5
        Top              = 4080
        Width           = 2790
    End
    Begin VB.Label lblProductName
        AutoSize         = -1 'True
        Caption          = "StepMaster"

```

```

    BeginProperty Font
        Name             = "Arial"
        Size             = 32.25
        Charset          = 0
        Weight           = 700
        Underline        = 0 'False
        Italic           = 0 'False
        Strikethrough    = 0 'False
    EndProperty
        Height           = 765
        Left             = 2670
        TabIndex         = 4
        Tag              = "Product"
        Top              = 1200
        Width           = 3495
    End
    Begin VB.Label lblVersion
        Alignment        = 1 'Right Justify
        AutoSize         = -1 'True
        Caption          = "Version 2.4"
    BeginProperty Font
        Name             = "Arial"
        Size             = 12
        Charset          = 0
        Weight           = 700
        Underline        = 0 'False
        Italic           = 0 'False
        Strikethrough    = 0 'False
    EndProperty
        Height           = 285
        Left             = 4800
        TabIndex         = 3
        Tag              = "Version"
        Top              = 2040
        Width           = 1275
    End
    Begin VB.Label lblWarning
        AutoSize         = -1 'True
        Caption          = "Do Not Redistribute"
    BeginProperty Font
        Name             = "Arial"
        Size             = 8.25
        Charset          = 0
        Weight           = 400
        Underline        = 0 'False
        Italic           = 0 'False
        Strikethrough    = 0 'False
    EndProperty
        Height           = 210
        Left             = 480
        TabIndex         = 2
        Tag              = "Warning"
        Top              = 3850
        Width           = 1380
    End
End
Attribute VB_Name = "frmSplash"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE: frmSplash.frm

```

```

' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Splash screen for StepMaster
' Contact: Reshma Tharamal
' (reshmat@microsoft.com)
'
Option Explicit

Private Sub Form_Load()
    lblVersion.Caption = "Version " & App.Major &
"." & App.Minor & "." & App.Revision
    lblProductName.Caption = App.Title
    lblVersion.Caption = GetVersionString
End Sub

VERSION 5.00
Begin VB.Form frmWorkspaceOpen
    BorderStyle       = 3 'Fixed Dialog
    Caption           = "Open Workspace"
    ClientHeight      = 2550
    ClientLeft        = 45
    ClientTop         = 330
    ClientWidth       = 4695
    LinkTopic         = "Form1"
    LockControls      = -1 'True
    MaxButton         = 0 'False
    MinButton         = 0 'False
    ScaleHeight       = 2550
    ScaleWidth        = 4695
    ShowInTaskbar     = 0 'False
    StartUpPosition  = 1 'CenterOwner
    Begin VB.CommandButton cmdOK
        Caption        = "OK"
        Default        = -1 'True
        Height         = 375
        Left           = 2160
        TabIndex       = 2
        Top            = 2040
        Width          = 1095
    End
    Begin VB.CommandButton cmdCancel
        Cancel         = -1 'True
        Caption        = "Cancel"
        Height         = 375
        Left           = 3360
        TabIndex       = 3
        Top            = 2040
        Width          = 1095
    End
End

```

## frmWorkspace Open.frm



```

Begin VB.ListBox lstWorkspaces
    Height           = 1425
    ItemData         = "frmWorkspaceOpen.frx":0000
    Left             = 240
    List             = "frmWorkspaceOpen.frx":0002
    MultiSelect      = 2 'Extended
    TabIndex         = 1
    Top              = 480
    Width            = 4215
End
Begin VB.Label lblWorkspaces
    AutoSize         = -1 'True
    Caption          = "Workspace"
    Height           = 195
    Left             = 240
    TabIndex         = 0
    Top              = 120
    Width            = 825
End
Attribute VB_Name = "frmWorkspaceOpen"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE:      frmWorkspaceOpen.frm
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:  Used to display a list of all
workspaces in a
'           workspace definition file for Open,
Import, Export
'           and Run (in SMRunOnly) workspace
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
#If RUN_ONLY Then
    Private WithEvents cRunOnlyInst As cRunOnly
    Attribute cRunOnlyInst.VB_VarHelpID = -1

Private Sub cRunOnlyInst_Done()
    ShowFree
End Sub

Private Sub Run()
    Dim iIndex As Integer

    Set cRunOnlyInst = New cRunOnly

    For iIndex = 0 To Me.lstWorkspaces.ListCount - 1
        If Me.lstWorkspaces.Selected(iIndex) Then
            ShowBusy
            cRunOnlyInst.WorkspaceId =
Me.lstWorkspaces.ItemData(Me.lstWorkspaces.ListIndex)
            cRunOnlyInst.WspName =
Me.lstWorkspaces.List(Me.lstWorkspaces.ListIndex)
            cRunOnlyInst.RunWsp
        End If
    Next iIndex
End

```

```

End Sub

#End If

Private Sub cmdCancel_Click()

    Unload Me

End Sub

Private Sub cmdOK_Click()

#If RUN_ONLY Then
    Call Run
#Else
    Call WorkspaceOpenOk
#End If

End Sub

Private Sub lstWorkspaces_DblClick()

' A double click on the workspaces list box is
considered
' equivalent to selecting an item in the list and
then selecting
' the OK command
    Call cmdOK_Click

End Sub

```

## ***IteratorCommo n.bas***

```

Attribute VB_Name = "IteratorCommon"
' FILE:      IteratorCommon.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:  Contains functionality common across
StepMaster and
'           SMRunOnly, pertaining to iterators
'           Specifically, functions to read
iterators records
'           in the workspace, load them in an
array and so on.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"IteratorCommon."

```

```

Public Const gintMinIteratorSequence As Integer = 0

Public Sub RangeComplete(vntIterators As Variant)
' This is a debug procedure
' Checks if the from, to and step values are
present in
' the array

    Dim bReset As Byte
    Dim bShift As Byte
    Dim lngIndex As Long

' Set the three lowest order bits to 1
    bReset = 7

    BugAssert IsArray(vntIterators) And Not
IsEmpty(vntIterators), _
"Iterators not specified!"

    For lngIndex = LBound(vntIterators) To _
UBound(vntIterators)
        bShift = 1
        bShift = bShift * (2 ^
(vntIterators(lngIndex).IteratorType - 1))

        bReset = bReset Xor bShift
    Next lngIndex

' Assert that all the elements are present
BugAssert bReset = 0, "Range not completely
specified!"

End Sub

Public Sub LoadIteratorsForWsp(cStepsCol As
cArrSteps, _
ByVal lngWorkspaceId As Long, rstStepsInWsp
As Recordset)
' Initializes the step records in with all the
iterator
' values for each step

    Dim recIterators As Recordset

    On Error GoTo LoadIteratorsForWspErr

#If QUERY_ALL Then
    Dim dtStart As Date

    dtStart = Now
    Set recIterators =
ReadWspIterators(lngWorkspaceId)

    Call LoadIteratorsArray(cStepsCol, recIterators)

    recIterators.Close

    BugMessage "QueryAll Read + load took: " &
CStr(DateDiff("s", dtStart, Now))

#Else
    Dim dtStart As Date
    Dim gyIt As DAO.QueryDef

```

```

Dim sSql As String

dtStart = Now
If rstStepsInWsp.RecordCount = 0 Then
    Exit Sub
End If

' This method has the advantage that if the steps
are queried right, everything else follows
sSql = "Select step_id, version_no, type,
iterator_value, " & _
" sequence_no " & _
" from iterator_values " & _
" where step_id = [s_id] " & _
" and version_no = [ver_no] "

' Order the iterators by sequence within a step
sSql = sSql & " order by sequence_no "

Set qyIt =
dbsAttTool.CreateQueryDef(gstrEmptyString, sSql)
rstStepsInWsp.MoveFirst

While Not rstStepsInWsp.EOF

    qyIt.Parameters("s_id").Value =
rstStepsInWsp!step_id
    qyIt.Parameters("ver_no").Value =
rstStepsInWsp!version_no

    Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

    Call LoadIteratorsArray(cStepsCol,
recIterators)
    recIterators.Close

    rstStepsInWsp.MoveNext
Wend

qyIt.Close

BugMessage "Query step at a time Read + load
took: " & CStr(DateDiff("s", dtStart, Now))

#End If

Exit Sub

LoadIteratorsForWspErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadIteratorsForWsp"
On Error GoTo 0
Err.Raise vbObjectError + errLoadRsInArrayFailed,
-
    gstrSource, _
    LoadResString(errLoadRsInArrayFailed)

End Sub
Private Function ReadWspIterators(ByVal
lngWorkspaceId As Long) As Recordset

```

```

' This function will return a recordset that is
populated
' with the iterators for all the steps in a given
workspace

Dim recIterators As Recordset
Dim qyIt As DAO.QueryDef
Dim strSql As String

On Error GoTo ReadWspIteratorsErr
gstrSource = mstrModuleName & "ReadWspIterators"

strSql = "Select i.step_id, i.version_no, " & _
" i.type, i.iterator_value, " & _
" i.sequence_no " & _
" from iterator_values i, att_steps a " & _
" where i.step_id = a.step_id " & _
" and i.version_no = a.version_no " & _
" and a.workspace_id = [w_id] " & _
" and a.archived_flag = [archived] "

' Find the highest X-component of the version
number
strSql = strSql & " AND cint( mid( a.version_no,
1, instr( a.version_no, " & gstrDQ & gstrVerSeparator
& gstrDQ & " ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS d " & _
" WHERE a.step_id = d.step_id ) "

' Find the highest Y-component of the version
number for the highest X-component
strSql = strSql & " AND cint( mid( a.version_no,
instr( a.version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) + 1 ) ) = " & _
" ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) + 1 ) ) ) " & _
" from att_steps AS b " & _
" Where a.step_id = b.step_id " & _
" AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS c " & _
" WHERE a.step_id = c.step_id ) ) "

' Order the iterators by sequence within a step
strSql = strSql & " order by i.step_id,
i.sequence_no "

Set qyIt =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qyIt.Parameters("w_id").Value = lngWorkspaceId
qyIt.Parameters("archived").Value = False

Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

```

```

qyIt.Close
Set ReadWspIterators = recIterators

Exit Function

ReadWspIteratorsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errReadDataFailed, _
    gstrSource,
    LoadResString(errReadDataFailed)

End Function
Private Sub LoadIteratorsArray(cStepsCol As
cArrSteps, _
recIterators As Recordset)
' Initializes the step records with the iterators
for
' the step

Dim cNewIt As cIterator
Dim cStepRec As cStep
Dim lngStepId As Long

On Error GoTo LoadIteratorsArrayErr
gstrSource = mstrModuleName &
"LoadIteratorsArray"

If recIterators.RecordCount = 0 Then
    Exit Sub
End If

recIterators.MoveFirst
While Not recIterators.EOF
    Set cNewIt = New cIterator

    lngStepId =
CInt(ErrorOnNullField(recIterators, "step_id"))
    If Not cStepRec Is Nothing Then
        If cStepRec.StepId <> lngStepId Then
            Set cStepRec =
cStepsCol.QueryStep(lngStepId)
        End If
    Else
        Set cStepRec =
cStepsCol.QueryStep(lngStepId)
    End If

    ' Initialize iterator values
    cNewIt.IteratorType =
CInt(ErrorOnNullField(recIterators, "type"))
    cNewIt.Value =
CStr(ErrorOnNullField(recIterators,
"iterator_value"))
    cNewIt.SequenceNo =
CInt(ErrorOnNullField(recIterators, "sequence_no"))

    ' Add this record to the array of iterators
    cStepRec.LoadIterator cNewIt

    Set cNewIt = Nothing

```

```

        recIterators.MoveNext
    Wend

    Exit Sub

LoadIteratorsArrayErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadIteratorsArray"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadRsInArrayFailed,
-
        gstrSource, _
        LoadResString(errLoadRsInArrayFailed)

End Sub

```

## MsgConfirm.ba

### S

```

Attribute VB_Name = "MsgConfirm"
' FILE:      MsgConfirm.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Contains constants for confirmation
messages that
'           will be displayed by StepMaster
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' A public enum containing the codes for all the
confirmation
' messages that will be used by the project - each of
the codes
' has the prefix, con
Public Enum conConfirmMsgCodes
    conWspDelete = 2000
    conSave
    conStopRun
    conSaveConnect
    conSaveDB
End Enum

' A public enum containing the titles for all the
confirmation
' messages that will be used by the project - each of
the codes
' has the prefix, cont - most confirmation message
codes will
' have a corresponding title code in here
Public Enum conConfirmMsgTitleCodes
    contWspDelete = 3000
    contSave

```

```

    contStopRun
    contSaveConnect
    contSaveDB
End Enum

```

## OpenFiles.bas

```

Attribute VB_Name = "OpenFiles"
' FILE:      OpenFiles.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module holds a list of all files
that have been
'           opened by the project. This module is
needed since there
'           is no way to share static data between
different instances
'           of a class.
'           Many procedure in this module do not
do any error handling -
'           this is 'coz it is also used by
procedures that log error
'           messages and any error handler will
erase the collection
'           of errors!
'
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String =
".OpenFiles."

Private mOpenFiles As cNodeCollections

Private Const mstrTempDir As String = "\Temp\"

' The maximum number of temporary files that we can
create in a
' session
Private Const mlngMaxFileIndex As Long = 999999
Private Const mstrFileIndexFormat As String =
"000000"
Private Const mstrTempFilePrefix As String = "SM"
Private Const mstrTempFileSuffix As String = ".cmd"

Private Const merrFileNotFound As Long = 76
Private Function GetFileHandle(strFileName) As
cFileInfo

    Dim lngIndex As Long
    Dim blnFileOpen As Boolean

    If Not mOpenFiles Is Nothing Then

```

```

        blnFileOpen = False
        For lngIndex = 0 To mOpenFiles.Count - 1
            If mOpenFiles(lngIndex).FileName =
strFileName Then
                blnFileOpen = True
                Exit For
            End If
        Next lngIndex

        If blnFileOpen Then
            Set GetFileHandle = mOpenFiles(lngIndex)
        Else
            Set GetFileHandle = Nothing
        End If
    Else
        Set GetFileHandle = Nothing
    End If
End Function

Private Function GetTempFileDir() As String

    Dim strTempFileDir As String

    On Error GoTo GetTempFileDirErr

    strTempFileDir = gstrProjectPath & mstrTempDir

    If StringEmpty(Dir$(strTempFileDir, vbDirectory))
Then
        MkDir strTempFileDir
    End If

    GetTempFileDir = strTempFileDir

Exit Function

GetTempFileDirErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "GetTempFileDir"
On Error GoTo 0
Err.Raise vbObjectError + errProgramError,
gstrSource, _
    LoadResString(errProgramError)

End Function
Public Function MakePathValid(strFileName As String)
As String
' Checks if the passed in file path is valid

    Dim strFileDir As String
    Dim strTempDir As String
    Dim strTempFile As String
    Dim intPos As Integer
    Dim intStart As Integer

    On Error GoTo MakePathValidErr
    gstrSource = mstrModuleName & "MakePathValid"

    strTempFile = strFileName
    intPos = InstrR(strFileName, gstrFileSeparator)

```

```

If intPos > 0 Then
    strFileDir = Left$(strTempFile, intPos - 1)
    If StringEmpty(Dir$(strFileDir, vbDirectory))
Then
    ' Loop through the entire path starting
at the root
    ' since Mkdir can create only one level
of sub-directory
    ' at a time
    intStart = InStr(strFileDir,
gstrFileSeparator)

    Do While strTempDir <> strFileDir

        If intStart > 0 Then
            strTempDir = Left$(strFileDir,
intStart - 1)
        Else
            strTempDir = strFileDir
        End If

        If StringEmpty(Dir$(strTempDir,
vbDirectory)) Then
            ' If the specified directory
doesn't exist, try to
            ' create it.
            Mkdir strTempDir
        Else
            ' The directory exists - go to
it's sub-directory
            End If
            intStart = InStr(intStart + 1,
strFileDir, gstrFileSeparator)
            Loop

            ' Sanity check
            If StringEmpty(Dir$(strFileDir,
vbDirectory)) Then
                ' We were unable to create the file
directory
                ShowError errCreateDirectoryFailed,
gstrSource, _
                    strFileDir,
DoWriteError:=False
                MakePathValid = gstrEmptyString
            Else
                MakePathValid = strTempFile
            End If
        Else
            ' The specified directory exists - we
should be able
            ' to create the output file in it
            MakePathValid = strTempFile
        End If
    Else
        ' The user has only specified a filename - VB
will try
        ' to create it in the current directory
        MakePathValid = strTempFile
    End If

Exit Function

```

```

MakePathValidErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName & "MakePathValid"
' Log the filename for debug
Call WriteError(errInvalidFile, gstrSource,
strTempFile)
On Error GoTo 0
Err.Raise vbObjectError + errProgramError,
gstrSource, _
    LoadResString(errProgramError)

End Function
Public Function OpenFileSM(strFileName As String) As
Integer
    Dim intHFile As Integer
    Dim NewFileInfo As cFileInfo

    On Error GoTo OpenFileSMErr
    gstrSource = mstrModuleName & "OpenFileSM"

    If StringEmpty(strFileName) Then
        On Error GoTo 0
        Err.Raise vbObjectError + errInvalidFile,
gstrSource, _
            LoadResString(errInvalidFile)
    End If

    If mOpenFiles Is Nothing Then
        Set mOpenFiles = New cNodeCollections
    End If

    Set NewFileInfo = GetFileHandle(strFileName)

    If NewFileInfo Is Nothing Then
        ' The file has not been opened yet

        ' If the filename has not been initialized,
do not
        ' attempt to open it
        strFileName = MakePathValid(strFileName)

        If strFileName <> gstrEmptyString Then
            intHFile = FreeFile
            Open strFileName For Output Shared As
intHFile

            Set NewFileInfo = New cFileInfo
            NewFileInfo.FileHandle = intHFile
            NewFileInfo.FileName = strFileName
            mOpenFiles.Load NewFileInfo
        Else
            ' Either the directory was invalid or
s'thing failed
            ' Display the error to the user instead
of trying
            ' to log to the file
            ShowError errInvalidFile, gstrSource,
strFileName, _
                DoWriteError:=False
            intHFile = 0
        End If

```

```

Else
    intHFile = NewFileInfo.FileHandle
End If

OpenFileSM = intHFile

Exit Function

OpenFileSMErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' The Open command failed for some reason - write
an error
' and let the calling function handle the error
ShowError errInvalidFile, gstrSource,
strFileName, _
    DoWriteError:=False
OpenFileSM = 0

End Function
Public Function CreateTempFile() As String

    Dim strTempFileDir As String
    Dim strTempFileName As String

    Static lngLastFileIndex As Long

    On Error GoTo CreateTempFileErr

    strTempFileDir = GetTempFileDir()

    Do
        If lngLastFileIndex = mlngMaxFileIndex Then
            On Error GoTo 0
            Err.Raise vbObjectError +
errMaxTempFiles, gstrSource, _
                LoadResString(errMaxTempFiles)
        End If

        lngLastFileIndex = lngLastFileIndex + 1
        strTempFileName = mstrTempFilePrefix & _
            Format$(lngLastFileIndex,
mstrFileIndexFormat) & _
                mstrTempFileSuffix

        If Not StringEmpty(Dir$(strTempFileDir &
strTempFileName)) Then
            ' Remove any files left over from a
previous run,
            ' if they still exist
            Kill strTempFileDir & strTempFileName
        End If

        ' Looping in case the file delete doesn't go
through for
        ' some reason
        Loop While Not StringEmpty(Dir$(strTempFileDir &
strTempFileName))

        CreateTempFile = GetShortName(strTempFileDir)
        CreateTempFile = CreateTempFile & strTempFileName

Exit Function

```

```

CreateTempFileErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = gstrSource & "CreateTempFile"
On Error GoTo 0
Err.Raise vbObjectError + errProgramError,
gstrSource, _
    LoadResString(errProgramError)

End Function
Public Sub CloseFileSM(strFileName As String)
Dim FileToClose As cFileInfo

If Not mOpenFiles Is Nothing Then

' Get the handle to the open file, if it
exists
Set FileToClose = GetFileHandle(strFileName)

If Not FileToClose Is Nothing Then
Close FileToClose.FileHandle

' Remove the file info from the
collection of open files
mOpenFiles.Unload FileToClose.Position
End If
End If

End Sub
Public Sub CloseOpenFiles()
Dim lIndex As Long

If Not mOpenFiles Is Nothing Then
For lIndex = mOpenFiles.Count - 1 To 0
CloseFileSM (mOpenFiles(lIndex).FileName)
Next lIndex
End If

End Sub

```

## ParameterCommon.bas

```

Attribute VB_Name = "ParameterCommon"
' FILE:      ParameterCommon.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Contains functionality common across
StepMaster and
'           SMRunOnly, pertaining to parameters
'           Specifically, functions to load
parameter records
'           in an array.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)

```

```

Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"ParameterCommon."

Public Sub
LoadRecordsetInParameterArray(rstWorkSpaceParameters
As Recordset, _
    cParamCol As cArrParameters)

Dim cNewParameter As cParameter

On Error GoTo LoadRecordsetInParameterArrayErr

If rstWorkSpaceParameters.RecordCount = 0 Then
Exit Sub
End If

rstWorkSpaceParameters.MoveFirst
While Not rstWorkSpaceParameters.EOF

Set cNewParameter = New cParameter

' Initialize parameter values
cNewParameter.ParameterId =
rstWorkSpaceParameters.Fields(0)

' Call a procedure to raise an error if
mandatory fields are
' null.
cNewParameter.ParameterName = CStr( _

ErrorOnNullField(rstWorkSpaceParameters,
"parameter_name")
cNewParameter.ParameterValue =
CheckForNullField( _
    rstWorkSpaceParameters,
"parameter_value")
cNewParameter.WorkspaceId = CStr( _

ErrorOnNullField(rstWorkSpaceParameters,
FLD_ID_WORKSPACE)
cNewParameter.ParameterType = CStr( _

ErrorOnNullField(rstWorkSpaceParameters,
"parameter_type")
cNewParameter.Description =
CheckForNullField( _
    rstWorkSpaceParameters,
"description")

cParamCol.Load cNewParameter

Set cNewParameter = Nothing
rstWorkSpaceParameters.MoveNext
Wend

Exit Sub

LoadRecordsetInParameterArrayErr:

```

```

LogErrors Errors
gstrSource = mstrModuleName &
"LoadRecordsetInParameterArray"
On Error GoTo 0
Err.Raise vbObjectError + errLoadRsInArrayFailed,
gstrSource, _
    LoadResString(errLoadRsInArrayFailed)
End Sub

```

## Public.bas

```

Attribute VB_Name = "Public"
' FILE:      Public.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains all the public
constants for this project
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public Const gsVersion01 As String = "0.1"
Public Const gsVersion10 As String = "1.0"
Public Const gsVersion21 As String = "2.1"
Public Const gsVersion23 As String = "2.3"
Public Const gsVersion24 As String = "2.4"
Public Const gsVersion241 As String = "2.4.1"
Public Const gsVersion242 As String = "2.4.2"
Public Const gsVersion243 As String = "2.4.3"
Public Const gsVersion25 As String = "2.5"
Public Const gsVersion251 As String = "2.5.1"
Public Const gsVersion253 As String = "2.5.3"
Public Const gsVersion254 As String = "2.5.4"
Public Const gsVersion255 As String = "2.5.5"
Public Const gsVersion As String = gsVersion255

' The same form is used for the creation of new nodes
and
' updates to existing nodes (where each node can be a
parameter,
' global step, etc.) A tag is set on each flag is
used to indicate
' whether it is being called in the insert or update
mode. The
' constants for these modes are defined below
Public Const gstrInsertMode = "Insert"
Public Const gstrUpdateMode = "Update"
Public Const gstrPropertiesMode = "View"

Public Const gstrEmptyString = ""
Public Const gstrSQ = " "
Public Const gstrDQ = " "
Public Const gstrVerSeparator = "."
Public Const gstrBlank = " "

' Constants used to indicate type of node being
processed

```

```

' The constants for the different objects correspond
to the
' indexes in the menu control arrays (for both the
main and popup
' menus) that are used to create new objects. That
way we can
' use the index passed in by the click event to
determine the
' type of node being processed
Public Const gintWorkspace = 1

' Decided to leave it here after some debate over
whether it
' actually belongs in the cStep class definition
Public Enum gintStepType
    gintGlobalStep = 3
    gintManagerStep
    gintWorkerStep
End Enum

Public Const gintRunManager = 6
Public Const gintRunWorker = 7

Public Enum gintParameterNodeType
    gintParameter = 8
    gintNodeParamConnection
    gintNodeParamExtension
    gintNodeParamBuiltIn
End Enum

' Leave some constants free for newer types of
parameters (?)
Public Const gintConnectionDtl = 15

Public Enum gintLabelNodeType
    gintGlobalsLabel = 21
    gintParameterLabel
    gintParamConnectionLabel
    gintParamExtensionLabel
    gintParamBuiltInLabel
    gintConnDtlLabel
    gintGlobalStepLabel
    gintStepLabel
End Enum

Public Enum ConnectionType
    ConnTypeStatic = 1
    ConnTypeDynamic
End Enum

Public Const giDefaultConnType As Integer =
ConnTypeStatic

' The constants defined below are used to identify
the different
' tabs. If any more step properties and thereby tabs
are added
' to the tabbed dialog on the Step Properties form,
they should
' be defined here and accessed in the code only using
these
' pre-defined constants

```

```

' Note: These constants will mainly be used by the
functions that
' initialize, customize and display the Step
Properties form
Public Const gintDefinition = 0
Public Const gintExecution = 1
Public Const gintMgrDefinition = 2
Public Const gintPreExecutionSteps = 3
Public Const gintPostExecutionSteps = 4
Public Const gintFileLocations = 5

' These constants correspond to the index values in
the imagelist
' associated with the tree view control. The
imagelist contains
' the icons that will be displayed for each node.
Public Enum TreeImages
    gintImageWorkspaceClosed = 1
    gintImageWorkspaceOpen
    gintImageLabelClosed
    gintImageLabelOpen
    gintImageManagerClosedDis
    gintImageManagerClosedEn
    gintImageManagerOpenDis
    gintImageManagerOpenEn
    gintImageWorkerDis
    gintImageWorkerEn
    gintImageGlobalClosed
    gintImageGlobalOpen
    gintImageParameter
    gintImageRun
    gintImagePending
    gintImageStop
    gintImageDisabled
    gintImageAborted
    gintImageFailed
End Enum

' Public variable used to indicate the name of the
function
' that raises an error
Public gstrSource As String

' Public instances of the different collections
Public gcParameters As cArrParameters
Public gcSteps As cArrSteps
Public gcConstraints As cArrConstraints
Public gcConnections As cConnections
Public gcConnDtls As cConnDtls

' Public constants for the index values of the
different toolbar
' options. Will be used while dynamically
enabling/disabling
' these options.
Public Const tbNew = 1
Public Const tbOpen = 2
Public Const tbSave = 3

Public Const tbCut = 5
Public Const tbCopy = 6
Public Const tbPaste = 7
Public Const tbDelete = 8

```

```

Public Const tbProperties = 10
Public Const tbRun = 11
Public Const tbStop = 12

' The initial version #
Public Const gstrMinVersion As String = "0.0"
Public Const gstrGlobalParallelism As String = "0"
Public Const gintMinParallelism As Integer = 1
Public Const gintMaxParallelism As Integer = 100

' Constant for the minimum identifier, used for all
identifier, viz.
' step, workspace, etc.
Public Const glMinId As Long = 1
Public Const glInvalidId As Long = -1

' A parameter that has a special meaning to
Stepmaster
' The system time will be substituted wherever it
occurs
' (typically as a part of the error, log ... file
names
Public Const gstrTimeStamp As String = "TIMESTAMP"
Public Const gstrEnvVarSeparator = "%"
Public Const gstrFileSeparator = "\"
Public Const gstrUnderscore = "_"

' Constants used by date and time formatting
functions
Public Const gsTimeSeparator = ":"
Public Const gsDateSeparator = "-"
Public Const gsMsSeparator = "."
Public Const gsDtFormat = "00"
Public Const gsYearFormat = "0000"
Public Const gsTmFormat = "00"
Public Const gsMSecondFormat = "000"

' Default nothing value for a date variable
Public Const gdtmEmpty As Currency = 0

Public Const FMT_WSP_LOG_FILE As String = "yyyyymmdd-
hhmmss"

Public gsContCriteria() As String
' Note: Update the initialization of
gsExecutionStatus in Initialize() if the
' InstanceStatus values are modified - also the
boundary checks
Public gsExecutionStatus() As String

Public Const gsConnTypeStatic As String = "Static"
Public Const gsConnTypeDynamic As String = "Dynamic"

#if RUN_ONLY Then
Public Const gsCaptionRunWsp As String = "Run
Workspace"
#End If

' Valid operations on a cNode object
Public Enum Operation
    QueryOp = 1
    InsertOp = 2

```

```

UpdateOp = 3
DeleteOp = 4
End Enum

```

## RunCommon.bas

```

Attribute VB_Name = "RunCommon"
' FILE:      RunCommon.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   Contains common functions that are
used during the execution
'           of a workspace.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String =
".RunCommon."

Public Function GetInstanceItValue(cInstanceRec As
cInstance) As String

' Returns the iterator value for the instance, if
an
' iterator has been defined for it
Dim cStepIt As cRunColIt
Dim cRunIterator As cRunItNode

On Error GoTo GetInstanceItValueErr

' Since we create a dummy instance for Disabled
and Pending steps,
' doesn't make sense to look at their iterators
If cInstanceRec.Status <> gintDisabled And
cInstanceRec.Status <> gintPending Then
Set cStepIt = cInstanceRec.Iterators

If Not
StringEmpty(cInstanceRec.Step.IteratorName) Then
If cStepIt.Count > 0 Then
Set cRunIterator = cStepIt(0)
BugAssert cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName, _
"The first iterator in the
collection is the " & _
"one that has been defined
for the step."
If cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName Then

```

```

GetInstanceItValue =
cRunIterator.Value
Else
GetInstanceItValue =
gstrEmptyString
End If
Else
GetInstanceItValue = gstrEmptyString
End If
Else
GetInstanceItValue = gstrEmptyString
End If

Exit Function

GetInstanceItValueErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
gstrSource = mstrModuleName &
"GetInstanceItValue"
Err.Raise vbObjectError + errProgramError,
gstrSource, _
LoadResString(errProgramError)

End Function

```

## RunInstHelper.bas

```

Attribute VB_Name = "RunInstHelper"
' FILE:      RunInstHelper.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains helper procedures
that are called by
'           cRunInst.cls
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String =
"RunInstHelper."

' Should be equal to the number of steps defined in
cRunInst.cls
Public Const glngNumConcurrentProcesses As Long = 99
Public Const gintBitsPerByte = 8

```

```

Public Function AnyStepRunning(cFreeSteps As
cVectorLng, arrFree() As Byte) As Boolean

Dim lngIndex As Long
Dim intPosInByte As Integer
Dim lngTemp As Long

' Check if there are any running instances to
wait for
If cFreeSteps.Count <> glngNumConcurrentProcesses
Then

' For every free step, reset the
corresponding element
' in the byte array to 0
For lngIndex = 0 To cFreeSteps.Count - 1

lngTemp = cFreeSteps(lngIndex) \
gintBitsPerByte
intPosInByte = cFreeSteps(lngIndex) Mod
gintBitsPerByte

arrFree(lngTemp) = arrFree(lngTemp) Xor 2
^ intPosInByte
Next lngIndex

AnyStepRunning = False

' Check if we have a non-zero bit in the byte
array
For lngIndex = LBound(arrFree) To
UBound(arrFree) Step 1
If arrFree(lngIndex) <> 0 Then
' We are waiting for a step to
complete

AnyStepRunning = True
Exit For
End If
Next lngIndex

Else
AnyStepRunning = False
End If

End Function

Public Function OrderConstraints(vntTempCons() As
Variant, _
intConsType As ConstraintType) As Variant
' Returns a variant containing all the constraint
records in the order
' in which they should be executed

Dim vntTemp As Variant
Dim lngOuter As Long
Dim lngInner As Long
Dim cTempConstraint As cConstraint
Dim cConstraints() As cConstraint
Dim lngConsCount As Long
Dim lngLbound As Long
Dim lngUbound As Long
Dim lngStep As Long

```

```

On Error GoTo OrderConstraintsErr

If intConsType = gintPreStep Then
    ' Since we are travelling up and we need to
    execute the constraints
    ' for the top-level steps first, reverse the
    order that they
    ' have been stored in the array
    lngLbound = UBound(vntTempCons)
    lngUbound = LBound(vntTempCons)
    lngStep = -1
Else
    lngLbound = LBound(vntTempCons)
    lngUbound = UBound(vntTempCons)
    lngStep = 1
End If

lngConsCount = 0

For lngOuter = lngLbound To lngUbound Step
lngStep
    vntTemp = vntTempCons(lngOuter)

    If Not IsEmpty(vntTemp) Then
        ' Each of the elements is an array
        For lngInner = LBound(vntTemp) To
        UBound(vntTemp) Step 1
            If Not IsEmpty(vntTemp(lngInner))
Then
                Set cTempConstraint =
                vntTemp(lngInner)

                If Not cTempConstraint Is Nothing
Then
                    ReDim Preserve
                    cConstraints(lngConsCount)
                    Set
                    cConstraints(lngConsCount) = cTempConstraint
                    lngConsCount = lngConsCount +
                    1

                    End If
                End If
                Next lngInner
            End If
        Next lngOuter

        ' Set the return value of the function to the
        array of
        ' constraints that has been built above
        If lngConsCount = 0 Then
            OrderConstraints = Empty
        Else
            OrderConstraints = cConstraints()
        End If

        Exit Function
    OrderConstraintsErr:
        ' Log the error code raised by Visual Basic
        Call LogErrors(Errors)
        On Error GoTo 0

```

```

Err.Raise vbObjectError + errExecInstanceFailed,
-
    mstrModuleName,
    LoadResString(errExecInstanceFailed)

End Function

```

## ShellSM.bas

```

Attribute VB_Name = "ShellSM"
' FILE: ShellSM.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains a function that
creates a process and
' waits for it to complete.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public Function SyncShell(CommandLine As String,
Optional Timeout As Long, _
Optional WaitForInputIdle As Boolean) As Boolean

Dim proc As PROCESS_INFORMATION
Dim Start As STARTUPINFO
Dim ret As Long
Dim nMilliseconds As Long

BugMessage "Executing: " & CommandLine
If Timeout > 0 Then
    nMilliseconds = Timeout
Else
    nMilliseconds = INFINITE
End If

'Initialize the STARTUPINFO structure:
Start.cb = Len(Start)
Start.dwFlags = STARTF_USESHOWWINDOW
Start.wShowWindow = SW_SHOWMINNOACTIVE

'Start the shelled application:
CreateProcessA 0&, CommandLine, 0&, 0&, 1&, _
NORMAL_PRIORITY_CLASS, 0&, 0&, Start, proc

If WaitForInputIdle Then
    'Wait for the shelled application to finish
    setting up its UI:
    ret = InputIdle(proc.hProcess, nMilliseconds)
Else
    'Wait for the shelled application to
    terminate:
    ret = WaitForSingleObject(proc.hProcess,
nMilliseconds)
    End If

CloseHandle proc.hProcess

```

```

'Return True if the application finished.
Otherwise it timed out or erred.
SyncShell = (ret = WAIT_OBJECT_0)
End Function

```

## SMErr.bas

```

Attribute VB_Name = "SMErr"
' FILE: SMErr.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains error code for
all the errors that are
' raised by StepMaster.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' A public enum containing the codes for all the
error
' messages that will be displayed by the project -
each
' of the codes has the prefix, err
Public Enum errErrorConstants
errParameterIdInvalid = 1000
errParameterNameMandatory
errParameterInsertFailed
errStepLabelOrTextOrFileRequired
errMandatoryNodeTextMissing
errParameterUpdateFailed
errDupConnDt1Name
errDummy14
errContCriteriaMandatory
errContCriteriaNullForGlobal
errContCriteriaInvalid = 1010
errParamSeparatorMissing
errStepTextOrTextFileMandatory
errStepTextOrFile
errEnabledFlagFalseForGlobal
errEnabledFlagLetFailed
errDegParallelismNullForGlobal
errInvalidDegParallelism
errExecutionMechanismInvalid
errExecutionMechanismLetFailed
errStepLevelNull = 1020
errStepLevelZeroForGlobal
errStepLevelLetFailed
errRowCountNumeric
errConnNameInvalid
errTimeoutNumeric
errResetConnPropertiesFailed
errFailureThresholdNumeric
errConnectionUpdateFailed
errGlobalRunMethodMandatory
errGlobalRunMethodNull = 1030
errGlobalRunMethodInvalid
errGlobalRunMethodLetFailed

```



errNoTrueOption  
errGetOptionFailed  
errSetEnabled  
errStepLabelTextAndFileNull  
errInvalidNodeType  
errSetOptionFailed  
errQueryParameterFailed  
errParamNotFound = 1040  
errQueryStepFailed  
errStepNotFound  
errReadFromScreenFailed  
errCopyPropertiesToFormFailed  
errMandatoryFieldNull  
errUnableToCheckNull  
errUpgradeFailed  
errFindStepSequenceFailed  
errFindParentStepIdFailed  
errCircularReference = 1050  
errAddStepFailed  
errModifyStepFailed  
errDeleteColumnFailed  
errFindPositionFailed  
errDeleteStepFailed  
errRunExistsForStepFailed  
errCreateNewParentFailed  
errInsertNewStepVersionFailed  
errCreateNewStepFailed  
errDuplicateParameterName = 1060  
errCheckDupParameterNameFailed  
errConstraintTypeInvalid  
errConstraintTypeLetFailed  
errAddConstraintFailed  
errWorkspaceIdMandatory  
errInvalidWorkspaceData  
errGetWorkspaceDetailsFailed  
errNoWorkspaceLoaded  
errWorkspaceAlreadyOpen  
errDuplicateWorkspaceName = 1070  
errWorkspaceNameMandatory  
errWorkspaceNameSetFailed  
errWorkspaceIdInvalid  
errWorkspaceIdSetFailed  
errWorkspaceInsertFailed  
errWorkspaceDeleteFailed  
errWorkspaceUpdateFailed  
errInvalidFile  
errCheckWorkspaceOpenFailed  
errWriteFailed = 1080  
errDeleteParameterRecordFailed  
errUnableToLogOutput  
errDeleteDBRecordFailed  
errRunExistsForWorkspaceFailed  
errClearHistoryFailed  
errCreateDBFailed  
errImportWspFailed  
errStepModifyFailed  
errStepDeleteFailed  
errDummy3 = 1090  
errUnableToGetWorkspace  
errInvalidNode  
errUnableToRemoveSubtree  
errSetFileNameFailed  
errStepTypeInvalid

errObjectMandatory  
errBuiltInUpdateOnly  
errInvalidStep  
errTypeOfStepFailed  
errGetParentKeyFailed = 1100  
errLabelTextAndFileCheckFailed  
errStepTextAndFileNull  
errTextOrFileCheckFailed  
errParentStepManager  
errDeleteSubStepsFailed  
errWorkspaceNameDuplicateFailed  
errNewConstraintVersionFailed  
errDeleteStepConstraintsFailed  
errOldVersionMandatory  
errLoadConstraintsInListFailed = 1110  
errLoadGlobalStepsFailed  
errDeleteConstraintFailed  
errUpdateConstraintFailed  
errConstraintIdInvalid  
errConstraintIdSetFailed  
errGlobalStepIdInvalid  
errGlobalStepIdSetFailed  
errUpdateVersionFailed  
errQueryAdjacentConsFailed  
errConstraintNotFound = 1120  
errQueryVersionFailed  
errSetDBBeforeLoad  
errLoadDataFailed  
errLoadRsInArrayFailed  
errConstraintsForStepFailed  
errPreConstraintsForStepFailed  
errPostConstraintsForStepFailed  
errExecuteConstraintMethodFailed  
errIdOrKeyMandatory  
errInListFailed = 1130  
errUnableToWriteChanges  
errQuickSortFailed  
errCheckParentValidFailed  
errLogErrorFailed  
errCopyListFailed  
errConnected  
errVersionMismatch  
errStepNodeFailed  
errWorkspaceSelectedFailed  
errIdentifierSelectedFailed = 1140  
errCheckForNullFieldFailed  
errInstanceInUse  
errSetVisiblePropertyFailed  
errExportWspFailed  
errMakeKeyValidFailed  
errDummy16  
errRunApplicationFailed  
errStepLabelUnique  
errDeleteSingleFile  
errMakeIdentifierValidFailed = 1150  
errTypeOfNodeFailed  
errConstraintCommandFailed  
errOpenDbFailed  
errInsertNewConstraintsFailed  
errLoadPostExecutionStepsFailed  
errLoadPreExecutionStepsFailed  
errCreateNewNodeFailed  
errDeleteNodeFailed

errDisplayPopupFailed  
errDisplayPropertiesFailed = 1160  
errUnableToCreateNewObject  
errDiffFailed  
errLoadWorkspaceFailed  
errTerminateProcessFailed  
errCompareFailed  
errCreateConnectionFailed  
errShowFormFailed  
errAbortFailed  
errDeleteParameterFailed  
errUpdateViewFailed = 1170  
errParameterNewFailed  
errCopyNodeFailed  
errCutNodeFailed  
errCheckObjectValidFailed  
errDeleteViewNodeFailed  
errMainFailed  
errNewStepFailed  
errProcessStepModifyFailed  
errCustomizeStepFormFailed  
errInitializeStepFormFailed = 1180  
errInsertStepFailed  
errIncVersionYFailed  
errIncVersionXFailed  
errShowCreateStepFormFailed  
errShowStepFormFailed  
errStepNewFailed  
errUnableToApplyChanges  
errUnableToCommitChanges  
errGetStepNodeTextFailed  
errSelectGlobalRunMethodFailed = 1190  
errConnectionNameMandatory  
errUpdateStepFailed  
errBrowseFailed  
errDummy4  
errDummy1  
errDummy2  
errDummy  
errUnableToPreviewFile  
errCopyWorkspaceFailed  
errCopyParameterFailed = 1200  
errGetStepTypeAndPositionFailed  
errCopyStepFailed  
errMandatoryParameterMissing  
errDeleteWorkspaceRecordsFailed  
errCreateDirectoryFailed  
errConfirmDeleteOrMoveFailed  
errCreateWorkspaceFailed  
errTypeOfObjectFailed  
errCreateNodeFailed  
errCreateParameterFailed = 1210  
errInsertParameterFailed  
errCreateStepFailed  
errNoConstraintsCreated  
errCopyFailed  
errCloneFailed  
errCloneGlobalFailed  
errCloneWorkerFailed  
errCloneManagerFailed  
errLetStepTypeFailed  
errUnableToCloseWorkspace = 1220  
errUnableToModifyWorkspace

errUnableToCreateWorkspace  
 errAddArrayElementFailed  
 errUpdateSequenceFailed  
 errCannotCopySubSteps  
 errSubStepsFailed  
 errModifyInArrayFailed  
 errUpdateParentVersionFailed  
 errGetNodeTextFailed  
 errAddToArrayFailed = 1230  
 errDeleteFromArrayFailed  
 errQueryIndexFailed  
 errCreateNewConstraintVersionFailed  
 errGetRootNodeFailed  
 errPopulateWspDetailsFailed  
 errLoadRsInTreeFailed  
 errAddNodeToTreeFailed  
 errMaxTempFiles  
 errMoveFailed  
 errRootNodeKeyInvalid = 1240  
 errNextNodeFailed  
 errBranchWillMove  
 errMoveBranchInvalid  
 errCreateIdRecordsetFailed  
 errIdentifierColumnFailed  
 errGetIdentifierFailed  
 errGetStepTypeFailed  
 errUpdateConstraintSeqFailed  
 errDelParamsInWspFailed  
 errDuplicateConnectionName = 1250  
 errOpenWorkspaceFailed  
 errShowWorkspaceNewFailed  
 errShowWorkspaceModifyFailed  
 errPopulateListFailed  
 errExploreNodeFailed  
 errInitializeListNodeFailed  
 errMakeListColumnsFailed  
 errRefreshViewFailed  
 errExploreFailed  
 errCollapseNodeFailed = 1260  
 errUnableToProcessListViewClick  
 errSetEnabledForStepFailed  
 errDisplayStepFormFailed  
 errSetEnabledPropertyFailed  
 errInvalidDB  
 errDeleteConnectionFailed  
 errInvalidOperation  
 errLetOperationFailed  
 errIdGetFailed  
 errCommitFailed = 1270  
 errSaveParametersInWspFailed  
 errDeleteArrayElementFailed  
 errSaveWorkspaceFailed  
 errInitializeFailed  
 errLoadInArrayFailed  
 errSaveStepsInWspFailed  
 errCommitStepFailed  
 errStepIdGetFailed  
 errUnloadFromArrayFailed  
 errValidateFailed = 1280  
 errTextEnteredFailed  
 errStepLabelMandatory  
 errTextAndFileNullForManager  
 errFailureDetailsNullForMgr

errSetTabOrderFailed  
 errSaveWspConstraintsFailed  
 errCommitConstraintFailed  
 errUnloadStepConstraintsFailed  
 errUnableToModifyMenu  
 errConfirmFailed = 1290  
 errInitSubItemsFailed  
 errUpdateListNodeFailed  
 errAddNodeFailed  
 errLoadListNodeFailed  
 errAddListNodeFailed  
 errExecutionFailed  
 errSetListViewStyleFailed  
 errSetCheckedFailed  
 errGetCheckedFailed  
 errUnableToProcessListViewDbClick = 1300  
 errDefaultPosition  
 errShellFailed  
 errOpenFileFailed  
 errSetBar97Failed  
 errConnectFailed  
 errApiFailed  
 errRegEntryInvalid  
 errParseStringFailed  
 errConstraintsForWspFailed  
 errPostConstraintsForWspFailed = 1310  
 errPreConstraintsForWspFailed  
 errLoadWspPostExecStepsFailed  
 errLoadWspPreExecStepsFailed  
 errLoadConstraintsOnFormFailed  
 errQueryFailed  
 errPasteNodeFailed  
 errShowAllWorkspacesFailed  
 errMakeFieldValidFailed  
 errInitializeTree  
 errRootNodeFailed = 1320  
 errDirectionInvalid  
 errUnableToDetListProperty  
 errUnableToGetListData  
 errItemNotFound  
 errItemDoesNotExist  
 errParamNameInvalid  
 errGetParamValueFailed  
 errSubValuesFailed  
 errStringOpFailed  
 errReadWorkspaceDataFailed = 1330  
 errUpdateRunDataFailed  
 errProgramError  
 errUnableToOpenFile  
 errLoadRunDataFailed  
 errExecuteODBCCommandFailed  
 errRunWorkspaceFailed  
 errExecuteStepFailed  
 errUnableToWriteError  
 errRunStepFailed  
 errSaveChanges = 1340  
 errDragDropFailed  
 errInvalidParameter  
 errAssignParametersFailed  
 errLoadLabelsInTreeFailed  
 errInstrRFailed  
 errInsertIteratorFailed  
 errDeleteIteratorFailed

errTypeInvalid  
 errLoadFailed  
 errDeleteFailed = 1350  
 errModifyFailed  
 errIteratorsFailed  
 errInsertFailed  
 errUpdateFailed  
 errDuplicateIterator  
 errSaveFailed  
 errReadDataFailed  
 errUnloadFailed  
 errAddFailed  
 errExecuteBranchFailed = 1360  
 errRangeNumeric  
 errRangeInvalid  
 errNextStepFailed  
 errUpdateDisplayFailed  
 errDateToStringFailed  
 errGetElapsedTimeFailed  
 errMaxProcessesExceeded  
 errInvalidProperty  
 errInvalidChild  
 errCreateInstanceFailed = 1370  
 errInvalidForWorker  
 errInstanceOpFailed  
 errNavInstancesFailed  
 errIterateFailed  
 errExecInstanceFailed  
 errDupIterator  
 End Enum

## SMRunOnly.vb

### W

Startup = 0, 0, 0, 0, C  
 Public = 0, 0, 0, 0, C  
 cAsyncShell = 0, 0, 0, 0, C  
 cFailedStep = 0, 0, 0, 0, C  
 cFailedSteps = 0, 0, 0, 0, C  
 cInstance = 0, 0, 0, 0, C  
 cStep = 0, 0, 0, 0, C  
 cArrConstraints = 0, 0, 0, 0, 0, C  
 cArrParameters = 0, 0, 0, 0, 0, C  
 cArrSteps = 0, 0, 0, 0, 0, C  
 cNodeCollections = 0, 0, 0, 0, 0, C  
 cParameter = 0, 0, 0, 0, 0, C  
 cSequence = 0, 0, 0, 0, 0, C  
 cStringSM = 0, 0, 0, 0, 0, C  
 cIterator = 0, 0, 0, 0, 0, C  
 cNode = 0, 0, 0, 0, 0, C  
 cConstraint = 0, 0, 0, 0, 0, C  
 cRunColIt = 0, 0, 0, 0, 0, C  
 cStack = 0, 0, 0, 0, 0, C  
 cVector = 0, 0, 0, 0, 0, C  
 cRunItNode = 0, 0, 0, 0, 0, C  
 cSubSteps = 0, 0, 0, 0, 0, C  
 cSubStep = 0, 0, 0, 0, 0, C  
 cRunItDetails = 0, 0, 0, 0, 0, C  
 cFileSM = 0, 0, 0, 0, 0, C  
 cVBErrorsSM = 0, 0, 0, 0, 0, C

```

SMErr = 0, 0, 0, 0, C
cTimerSM = 0, 0, 0, 0, C
DatabaseSM = 0, 0, 0, 0, C
DebugSM = 0, 0, 0, 0, C
MsgConfirm = 0, 0, 0, 0, C
cWorkspace = 0, 0, 0, 0, C
OpenFiles = 0, 0, 0, 0, C
cFileInfo = 0, 0, 0, 0, C
cVectorStr = 0, 0, 0, 0, C
SortSM = 0, 0, 0, 0, C
cRunWorkspace = 0, 0, 0, 0, C
cRunInst = 0, 0, 0, 0, C
cStepTree = 0, 0, 0, 0, C
cInstances = 0, 0, 0, 0, C
cVectorLng = 0, 0, 0, 0, C
cRunStep = 0, 0, 0, 0, C
cManager = 0, 0, 0, 0, C
cWorker = 0, 0, 0, 0, C
cGlobalStep = 0, 0, 0, 0, C
cRunOnly = 0, 0, 0, 0, C
ShellSM = 0, 0, 0, 0, C
TimerSM = 0, 0, 0, 0, C
frmSplash = 0, 0, 0, 0, C, 132, 174, 863, 764, C
WindowsApiCommon = 0, 0, 0, 0, C
StepCommon = 0, 0, 0, 0, C
FileCommon = 0, 0, 0, 0, C
WorkspaceCommon = 0, 0, 0, 0, C
IteratorCommon = 0, 0, 0, 0, C
ParameterCommon = 0, 0, 0, 0, C
Common = 0, 0, 0, 0, C
cTermSteps = 0, 0, 0, 0, C
cTermProcess = 0, 0, 0, 0, C
cTermStep = 0, 0, 0, 0, C
RunInstHelper = 0, 0, 0, 0, C
cConnections = 0, 0, 0, 0, C
cConnection = 0, 0, 0, 0, C
ToolsCommon = 0, 0, 0, 0, C
ConnectionCommon = 0, 0, 0, 0, C
cConnDt1 = 0, 0, 0, 0, C
cConnDtIs = 0, 0, 0, 0, C
ConnDt1Common = 0, 0, 0, 0, C
RunCommon = 0, 0, 0, 0, C
frmWorkspaceOpen = 0, 0, 0, 0, C, 176, 232, 907, 822, C

```

## SortSM.bas

```

Attribute VB_Name = "SortSM"
' FILE:      SortSM.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains an implementation
of QuickSort.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit
' Comment out for case-sensitive sorts

```

```

Option Compare Text

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String = "SortSM."

Private Function Compare(ByVal vntToCompare1 As
Variant, _
ByVal vntToCompare2 As Variant) As Integer

On Error GoTo CompareErr

Compare = 0

If vntToCompare1.SequenceNo <
vntToCompare2.SequenceNo Then
Compare = -1
ElseIf vntToCompare1.SequenceNo >
vntToCompare2.SequenceNo Then
Compare = 1
End If

Exit Function

CompareErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errCompareFailed, _
gstrSource, _
LoadResString(errCompareFailed)

End Function

Private Sub Swap(ByRef vntToSwap1 As Variant, _
ByRef vntToSwap2 As Variant)

Dim vntTemp As Variant

On Error GoTo SwapErr

If IsObject(vntToSwap1) And IsObject(vntToSwap2)
Then
Set vntTemp = vntToSwap1
Set vntToSwap1 = vntToSwap2
Set vntToSwap2 = vntTemp
Else
vntTemp = vntToSwap1
vntToSwap1 = vntToSwap2
vntToSwap2 = vntTemp
End If

Exit Sub

SwapErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errQuickSortFailed,
mstrModuleName & "Swap", _
LoadResString(errQuickSortFailed)

End Sub

```

```

Public Sub QuickSort(vntArray As Variant, _
Optional ByVal intLBound As Integer, _
Optional ByVal intUBound As Integer)
' Sorts a variant array using QuickSort

Dim i As Integer
Dim j As Integer
Dim vntMid As Variant

On Error GoTo QuickSortErr

If IsEmpty(vntArray) Or _
Not IsArray(vntArray) Then
Exit Sub
End If

' Set default boundary values for first time
through
If intLBound = 0 And intUBound = 0 Then
intLBound = LBound(vntArray)
intUBound = UBound(vntArray)
End If

' BugMessage "Sorting elements " & Str(intLBound)
& " and " & Str(intUBound)

If intLBound > intUBound Then
Exit Sub
End If

' Only two elements in this subdivision; exchange
if they
' are out of order and end recursive calls
If (intUBound - intLBound) = 1 Then
If Compare(vntArray(intLBound),
vntArray(intUBound)) > 0 Then
Call Swap(vntArray(intLBound),
vntArray(intUBound))
End If
Exit Sub
End If

' Set the pivot point
Set vntMid = vntArray(intUBound)
i = intLBound
j = intUBound

Do
' Move in from both sides towards pivot
element
Do While (i < j) And Compare(vntArray(i),
vntMid) <= 0
i = i + 1
Loop

Do While (j > i) And Compare(vntArray(j),
vntMid) >= 0
j = j - 1
Loop

If i < j Then
Call Swap(vntArray(i), vntArray(j))

```

```

        End If
    Loop While i < j

    ' Since i has been adjusted, swap element i with
    element,
    ' intUBound
    Call Swap(vntArray(i), vntArray(intUBound))

    ' Recursively call sort array - pass smaller
    subdivision
    ' first to conserve stack space
    If (i - intLBound) < (intUBound - 1) Then
        ' Recursively sort with adjusted values for
        upper and
        ' lower bounds
        Call QuickSort(vntArray, intLBound, i - 1)
        Call QuickSort(vntArray, i + 1, intUBound)
    Else
        Call QuickSort(vntArray, i + 1, intUBound)
        Call QuickSort(vntArray, intLBound, i - 1)
    End If
Exit Sub

QuickSortErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errQuickSortFailed,
    mstrModuleName & "QuickSort", _
        LoadResString(errQuickSortFailed)

End Sub

```

## **startup.bas**

```

Attribute VB_Name = "Startup"
' FILE:      Startup.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains startup and
' cleanup functions for the project.
' Contact:   Reshma Tharamal
' (reshmat@microsoft.com)
'
Option Explicit

Public Const LISTVIEW_BUTTON = 14

Public gstrProjectPath As String

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String = "Startup."

Private Sub Initialize()

    On Error GoTo InitializeErr

    ReDim gsContCriteria(gintOnFailureAbort To
    gintOnFailureAsk) As String

```

```

    gsContCriteria(gintOnFailureAbort) = "Abort"
    gsContCriteria(gintOnFailureContinue) =
    "Continue"
    gsContCriteria(gintOnFailureCompleteSiblings) =
    "Execute sibling steps and stop"
    gsContCriteria(gintOnFailureAbortSiblings) =
    "Abort sibling steps and execute next parent"
    gsContCriteria(gintOnFailureSkipSiblings) = "Skip
    sibling steps and execute next parent"
    gsContCriteria(gintOnFailureAsk) = "Ask"

    ReDim gsExecutionStatus(gintDisabled To
    gintAborted) As String
    gsExecutionStatus(gintDisabled) = "Disabled"
    gsExecutionStatus(gintPending) = "Pending"
    gsExecutionStatus(gintRunning) = "Running"
    gsExecutionStatus(gintComplete) = "Complete"
    gsExecutionStatus(gintFailed) = "Failed"
    gsExecutionStatus(gintAborted) = "Stopped"

    #If Not RUN_ONLY Then
        ' Call a procedure to change the style of the
        toolbar
        ' on the Step Properties form
        Call SetTBar97(frmSteps.tblConstraintCommands)
    #End If

    Call InitRunEngine

    Exit Sub

InitializeErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName & "Initialize"
    Call ShowError(errInitializeFailed)

End Sub
Sub Main()

    On Error GoTo MainErr

    ' Mousepointer should indicate busy
    Call ShowBusy

    ' Display the Splash screen while we carry out
    some initialization
    frmSplash.Show
    frmSplash.Refresh

    gstrProjectPath = App.Path

    ' Open the database
    If OpenDBFile() = False Then
        Unload frmSplash
        Exit Sub
    End If

    #If Not RUN_ONLY Then
        Load frmMain

```

```

    ' Enable the Stop Run menu options only when a
    workspace is
    ' actually running
    Call EnableStop(False)

    ' Clear all application extension menu items
    Call ClearToolsMenu
#End If

    Call Initialize

    ' Mousepointer - ready to accept user input
    Call ShowFree

    ' Unload the Splash screen and display the main
    form
    Unload frmSplash

    #If RUN_ONLY Then
        frmWorkspaceOpen.Caption = gsCaptionRunWsp

        Call ShowWorkspacesInDb(dbsAttTool)
    #Else
        frmMain.Show
    #End If

    Exit Sub

MainErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    Call ShowFree
    Call ShowError(errMainFailed)

End Sub
Private Function OpenDBFile() As Boolean
    Dim sDb As String

    On Error GoTo OpenDBFileErr

    #If RUN_ONLY Then
        ' Always use the registry setting for the
        run_only mode
        sDb = DefaultDBFile()
    #Else
        ' Check if the user has specified the workspace
        defn. file to open on the command line
        ' Else, use the registry setting
        sDb = IIf(StringEmpty(Command), DefaultDBFile(),
        Command)

        If Len(sDb) > 0 Then
            ' Trim off the enclosing double-quotes if any
            If Mid(sDb, 1, 1) = gstrDQ Then
                If Len(sDb) > 1 Then
                    sDb = Mid(sDb, 2)
                Else
                    sDb = gstrEmptyString
                End If
            End If
        End If

        If Len(sDb) > 0 Then

```

```

    If Mid(sDb, Len(sDb), 1) = gstrDQ Then
        If Len(sDb) > 1 Then
            sDb = Mid(sDb, 1, Len(sDb) - 1)
        Else
            sDb = gstrEmptyString
        End If
    End If
End If
#End If

' Open the database
OpenDBFile = SMOpenDatabase(sDb)

Exit Function

OpenDBFileErr:
    Call LogErrors(Errors)
    OpenDBFile = False

End Function
Public Sub Cleanup()

    On Error GoTo CleanupErr

    ' Set the mousepointer to indicate Busy
    Call ShowBusy

#If Not RUN_ONLY Then
    ' Close all open workspaces - will also prompt
    for unsaved
    ' changes
    Call CloseOpenWorkspaces
#End If

    ' Close all open files
    Call CloseOpenFiles

    ' Reset the mousepointer
    Call ShowFree

Exit Sub

CleanupErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    Resume Next

End Sub

```

## StepCommon.bas

```

Attribute VB_Name = "StepCommon"
' FILE:      StepCommon.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
'
'

```

```

' PURPOSE:   Contains functionality common across
StepMaster and
'           SMRunOnly, pertaining to steps
'           Specifically, functions to load
iterators records
'           in an array, determine the type of
step, etc.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"StepCommon."

' Step property constants
Private Const mintMinFailureThreshold As Integer = 1
Public Const gintMinSequenceNo As Integer = 1
Public Const gintMinLevel As Integer = 0
Public Function ValidateParallelism(sParallelism As
String, lWorkspace As Long, _
Optional ParamsInWsp As cArrParameters =
Nothing) As String
    ' Returns the degree of parallelism for the step
    if the user input is valid
    Dim sTemp As String

    On Error GoTo ValidateParallelismErr
    gstrSource = mstrModuleName &
"ValidateParallelism"

    sTemp = SubstituteParameters(Trim$(sParallelism),
lWorkspace, WspParameters:=ParamsInWsp)

    If Not IsNumeric(sTemp) Then
        ShowError errInvalidDegParallelism
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _
LoadResString(errInvalidDegParallelism)
    Else
        If (CInt(sTemp) < gintMinParallelism) Or
(CInt(sTemp) > gintMaxParallelism) Then
            ShowError errInvalidDegParallelism
            On Error GoTo 0
            Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _
LoadResString(errInvalidDegParallelism)
        Else
            ValidateParallelism = Trim$(sParallelism)
        End If
    End If

Exit Function

ValidateParallelismErr:
    ' Log the error code raised by Visual Basic
    gstrSource = mstrModuleName &
"ValidateParallelism"

```

```

    If Err.Number = vbObjectError +
errSubValuesFailed Then
        ShowError errInvalidDegParallelism
    End If

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _
        LoadResString(errInvalidDegParallelism)

End Function

Public Function IsGlobal( _
Optional ByVal StepClass As cStep = Nothing,
_
Optional ByVal StepRecord As Recordset =
Nothing, _
Optional ByVal StepKey As String =
gstrEmptyString, _
Optional ByVal StepId As Long = 0, _
Optional StepForm As Form = Nothing) As
Boolean

    ' This function contains all the possible checks
    for whether
    ' a step is global - The check that will be made
    depends on
    ' the parameter passed in

    Dim cStepRecord As cStep

    If Not StepClass Is Nothing Then
        IsGlobal = StepClass.GlobalFlag
        Exit Function
    End If

    If Not StepRecord Is Nothing Then
        IsGlobal = StepRecord![global_flag]
        Exit Function
    End If

    If Not StringEmpty(StepKey) Then
        IsGlobal = InStr(StepKey,
gstrGlobalStepPrefix) > 0
        Exit Function
    End If

    If StepId <> 0 Then
        Set cStepRecord = gcSteps.QueryStep(StepId)
        IsGlobal = cStepRecord.GlobalFlag
        Set cStepRecord = Nothing
        Exit Function
    End If

    If Not StepForm Is Nothing Then
        IsGlobal = (StepForm.lblStepType.Caption =
Str(gintGlobalStep))
        Exit Function
    End If

    ' Not a single object was passed in! - raise an
error

```

```

On Error GoTo 0
Err.Raise vbObjectError + errObjectMandatory, _
    mstrModuleName & "IsGlobal", _
    LoadResString(errObjectMandatory)

End Function

Public Function TypeOfStep(Optional ByVal StepClass As
cStep = Nothing, _
    Optional ByVal StepRecord As Recordset =
Nothing, _
    Optional ByVal StepKey As String =
gstrEmptyString, _
    Optional ByVal StepId As Long = 0, _
    Optional StepForm As Form = Nothing) As
Integer
    ' Calls functions to determine the type of step
    ' The check that will be made depends on the
parameter passed in

    On Error GoTo TypeOfStepErr

    ' Make the check whether a step is global first -
both
    ' worker and global steps have the step text or
file name
    ' not null - but only the global step will have
the global
    ' flag set
    If IsGlobal(StepClass, StepRecord, StepKey,
StepId, StepForm) Then
        TypeOfStep = gintGlobalStep
    ElseIf IsManager(StepClass, StepRecord, StepKey,
StepId, StepForm) Then
        TypeOfStep = gintManagerStep
    ElseIf IsWorker(StepClass, StepRecord, StepKey,
StepId, StepForm) Then
        TypeOfStep = gintWorkerStep
    Else
        On Error GoTo 0
        Err.Raise vbObjectError + errInvalidStep, _
            mstrModuleName & "TypeOfStep", _
            LoadResString(errInvalidStep)
    End If

    Exit Function

TypeOfStepErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errTypeOfStepFailed, _
        mstrModuleName & "TypeOfStep", _
        LoadResString(errTypeOfStepFailed)

End Function

Public Function IsStep(intNodeType As Integer) As
Boolean
    ' Returns true if the node type corresponds to a
global, manager
    ' or worker step
    IsStep = (intNodeType = gintGlobalStep) Or
(intNodeType = gintManagerStep) Or _

```

```

(intNodeType = gintWorkerStep)

End Function

Public Function IsManager(Optional ByVal StepClass As
cStep = Nothing, _
    Optional ByVal StepRecord As Recordset =
Nothing, _
    Optional ByVal StepKey As String =
gstrEmptyString, _
    Optional ByVal StepId As Long = 0, _
    Optional StepForm As Form = Nothing) As
Boolean
    ' This function contains all the possible checks
for whether
    ' a step is a manager step - The check that will
be made depends
    ' on the parameter passed in

    Dim cStepRecord As cStep

    If Not StepClass Is Nothing Then
        IsManager = (StepClass.StepType =
gintManagerStep)
        Exit Function
    End If

    If Not StepRecord Is Nothing Then
        IsManager = (IsNull(StepRecord![step_text])
And IsNull(StepRecord![step_file_name]))
        Exit Function
    End If

    If Not StringEmpty(StepKey) Then
        IsManager = (InStr(StepKey,
gstrManagerStepPrefix) > 0)
        Exit Function
    End If

    If StepId <> 0 Then
        Set cStepRecord = gcSteps.QueryStep(StepId)
        IsManager = (cStepRecord.StepType =
gintManagerStep)
        Set cStepRecord = Nothing
        Exit Function
    End If

    If Not StepForm Is Nothing Then
        IsManager = (StepForm.lblStepType.Caption =
Str(gintManagerStep))
        Exit Function
    End If

    ' Not a single object was passed in! - raise an
error
    On Error GoTo 0
    Err.Raise vbObjectError + errObjectMandatory, _
        "Step.IsManager", _
        LoadResString(errObjectMandatory)

End Function

Public Function IsWorker(_

```

```

Optional ByVal StepClass As cStep = Nothing,
_
    Optional ByVal StepRecord As Recordset =
Nothing, _
    Optional ByVal StepKey As String =
gstrEmptyString, _
    Optional ByVal StepId As Long = 0, _
    Optional StepForm As Form = Nothing) As
Boolean
    ' This function contains all the possible checks
for whether
    ' a step is a Worker step - The check that will
be made depends
    ' on the parameter passed in

    Dim cStepRecord As cStep

    If Not StepClass Is Nothing Then
        IsWorker = (StepClass.StepType =
gintWorkerStep)
        Exit Function
    End If

    If Not StepRecord Is Nothing Then
        IsWorker = (Not StepRecord![global_flag] And
_
            (Not IsNull(StepRecord![step_text])
Or Not IsNull(StepRecord![step_file_name])))
        Exit Function
    End If

    If Not StringEmpty(StepKey) Then
        IsWorker = InStr(StepKey,
gstrWorkerStepPrefix) > 0
        Exit Function
    End If

    If StepId <> 0 Then
        Set cStepRecord = gcSteps.QueryStep(StepId)
        IsWorker = (cStepRecord.StepType =
gintWorkerStep)
        Set cStepRecord = Nothing
        Exit Function
    End If

    If Not StepForm Is Nothing Then
        IsWorker = (StepForm.lblStepType.Caption =
Str(gintWorkerStep))
        Exit Function
    End If

    ' Not a single object was passed in! - raise an
error
    On Error GoTo 0
    Err.Raise vbObjectError + errObjectMandatory, _
        "Step.IsWorker", _
        LoadResString(errObjectMandatory)

End Function

Public Function GetStepNodeText(ByVal cStepNode As
cStep) As String

```

```

On Error GoTo GetStepNodeTextErr

' Returns the string that will be displayed as
the text
' in the tree view node to the user
If StringEmpty(cStepNode.StepLabel) Then

    If StringEmpty(cStepNode.StepTextFile) Then

        If StringEmpty(cStepNode.StepText) Then
            ' This should never happen
            On Error GoTo 0
            Err.Raise vbObjectError +
errStepLabelTextAndFileNull, _
                gstrSource, _

LoadResString(errStepLabelTextAndFileNull)
        Else
            GetStepNodeText = cStepNode.StepText
            End If
        Else
            GetStepNodeText = cStepNode.StepTextFile
            End If
    Else
        GetStepNodeText = cStepNode.StepLabel
        End If

Exit Function

GetStepNodeTextErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errGetStepNodeTextFailed, _
    gstrSource, _
    LoadResString(errGetStepNodeTextFailed)

End Function

Public Function LoadRecordsetInStepsArray(rstSteps As
Recordset, _
    cStepCol As cArrSteps) As Boolean

    Dim cNewStep As cStep
    Dim cNewGlobal As cGlobalStep
    Dim cNewManager As cManager
    Dim cNewWorker As cWorker

On Error GoTo LoadRecordsetInStepsArrayErr

If rstSteps.RecordCount = 0 Then
    Exit Function
End If

rstSteps.MoveFirst
While Not rstSteps.EOF
    ' For fields that should not be null, a
procedure is first
    ' called to raise an error if the field is
null

    Set cNewStep = New cStep

```

```

cNewStep.StepType =
TypeOfStep(StepRecord:=rstSteps)

If cNewStep.StepType = gintGlobalStep Then
    Set cNewGlobal = New cGlobalStep
    Set cNewStep = cNewGlobal
ElseIf cNewStep.StepType = gintManagerStep
Then
    Set cNewManager = New cManager
    Set cNewStep = cNewManager
Else
    Set cNewWorker = New cWorker
    Set cNewStep = cNewWorker
End If

' Initialize the global flag first, since
subsequent
' validations might depend on whether the
step is global
cNewStep.GlobalFlag =
CBool(ErrorOnNullField(rstSteps, "global_flag"))

' Initialize step values
cNewStep.StepId =
CLng(ErrorOnNullField(rstSteps, "step_id"))
cNewStep.VersionNo =
CStr(ErrorOnNullField(rstSteps, "version_no"))

cNewStep.StepLabel =
CheckForNullField(rstSteps, "step_label")
cNewStep.StepTextFile =
CheckForNullField(rstSteps, "step_file_name")
cNewStep.StepText =
CheckForNullField(rstSteps, "step_text")
cNewStep.StartDir =
CheckForNullField(rstSteps, "start_directory")

cNewStep.WorkspaceId =
CLng(ErrorOnNullField(rstSteps, FLD_ID_WORKSPACE))
cNewStep.ParentStepId =
CLng(ErrorOnNullField(rstSteps, "parent_step_id"))
cNewStep.ParentVersionNo =
CStr(ErrorOnNullField(rstSteps, "parent_version_no"))

cNewStep.SequenceNo =
CInt(ErrorOnNullField(rstSteps, "sequence_no"))
cNewStep.StepLevel =
CInt(ErrorOnNullField(rstSteps, "step_level"))
cNewStep.EnabledFlag =
CBool(ErrorOnNullField(rstSteps, "enabled_flag"))

' Initialize the execution details for the
step
cNewStep.DegreeParallelism =
CheckForNullField(rstSteps, "degree_parallelism")
cNewStep.ExecutionMechanism =
CInt(ErrorOnNullField(rstSteps,
"execution_mechanism"))
cNewStep.FailureDetails =
CheckForNullField(rstSteps, "failure_details")

```

```

cNewStep.ContinuationCriteria =
CInt(ErrorOnNullField(rstSteps,
"continuation_criteria"))

' Initialize the output file locations for
the step
cNewStep.OutputFile =
CheckForNullField(rstSteps, "output_file_name")
' cNewStep.LogFile =
CheckForNullField(rstSteps, "log_file_name")
cNewStep.ErrorFile =
CheckForNullField(rstSteps, "error_file_name")

' Initialize the iterator name for the step,
if any
cNewStep.IteratorName =
CheckForNullField(rstSteps, "iterator_name")

' Add this record to the array of steps
cStepCol.Load cNewStep

Set cNewStep = Nothing
rstSteps.MoveNext
Wend

Exit Function

LoadRecordsetInStepsArrayErr:

LogErrors Errors
gstrSource = mstrModuleName &
"LoadRecordsetInStepsArray"
On Error GoTo 0
Err.Raise vbObjectError + errLoadRsInArrayFailed,
gstrSource, _
    LoadResString(errLoadRsInArrayFailed)

End Function

```

---

## TimerSM.bas

---

```

Attribute VB_Name = "TimerSM"
' FILE:      TimerSM.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains wrapper functions
for Timer APIs.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private Declare Function SetTimer Lib "user32" (ByVal
hWnd As Long, _
    ByVal nIDEvent As Long, ByVal uElapse As Long,
ByVal lpTimerFunc As Long) _

```

```

As Long
Private Declare Function KillTimer Lib "user32"
(ByVal hWnd As Long, _
ByVal nIDEvent As Long) As Long
Private Declare Sub CopyMemory Lib "kernel32" Alias
"RtlMoveMemory" ( _
pDest As Any, pSource As Any, ByVal ByteLen As
Long)

Public gcTimerObjects As Collection

Private Sub TimerProc(ByVal lHwnd As Long, ByVal lMsg
As Long, _
ByVal lTimerID As Long, ByVal lTime As Long)

Dim nPtr As Long
Dim oTimerObject As cTimerSM

'Create a Timer object from the pointer
nPtr = gcTimerObjects.Item(Str$(lTimerID))
CopyMemory oTimerObject, nPtr, 4
'Call a method which will fire the Timer event
oTimerObject.Tick
'Get rid of the Timer object so that VB will not
try to release it
CopyMemory oTimerObject, 0&, 4
End Sub

Public Function StartTimer(lInterval As Long) As Long
StartTimer = SetTimer(0, 0, lInterval, AddressOf
TimerProc)
End Function

Public Sub StopTimer(lTimerID As Long)
KillTimer 0, lTimerID
End Sub

Public Sub SetInterval(lInterval As Long, lTimerID As
Long)
SetTimer 0, lTimerID, lInterval, AddressOf
TimerProc
End Sub

```

## **ToolsCommon. bas**

```

Attribute VB_Name = "ToolsCommon"
' FILE: ToolsCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains functions to remove run
history and initialize
' table creation scripts
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

```

```

Public sCreateTables() As String

Public Const gsExtSeparator As String = "."

Public Sub DeleteRunHistory(dbFile As DAO.Database)
' Delete all run history records from the
database, viz. the records in
' run_header, run_step_details and run_parameters

Dim sDelete As String

On Error GoTo DeleteRunHistoryErr

sDelete = "delete from run_header "
dbFile.Execute sDelete, dbFailOnError

sDelete = "delete from run_step_details "
dbFile.Execute sDelete, dbFailOnError

sDelete = "delete from run_parameters "
dbFile.Execute sDelete, dbFailOnError

sDelete = "update att_identifiers " & _
" set run_id = " & CStr(glMinId)
dbFile.Execute sDelete, dbFailOnError

Exit Sub

DeleteRunHistoryErr:
LogErrors Errors
Err.Raise vbObjectError +
errDeleteDBRecordFailed, "DeleteRunHistory", _
LoadResString(errDeleteDBRecordFailed)

End Sub

Public Function CreateConnectionsTableScript() As
String
' Returns the table creation script for the
workspace_connections table

Call InitCreateSQLArray
CreateConnectionsTableScript = sCreateTables(10)
ReDim sCreateTables(0)

End Function

Public Function CreateConnectionDtIsTableScript() As
String
' Returns the table creation script for the
connection_dtIs table

Call InitCreateSQLArray
CreateConnectionDtIsTableScript =
sCreateTables(11)
ReDim sCreateTables(0)

End Function

Public Sub InitCreateSQLArray()

ReDim sCreateTables(0 To 11)

```

```

sCreateTables(0) = "Create table att_identifiers (" &
_
"workspace_id Long, " & _
"parameter_id Long, " & _
"step_id Long, " & _
"constraint_id Long, " & _
"run_id Long, " & _
"connection_id Long " & _
", " & FLD_ID_CONN_NAME & gstrBlank &
DATA_TYPE_LONG & _
");"

sCreateTables(1) = "Create table att_steps (step_id
Long, " & _
"version_no Text(255), " & _
"step_label Text(255), " & _
"step_file_name Text(255), " & _
"step_text Memo, " & _
"start_directory Text(255), " & _
"workspace_id Long, " & _
"parent_step_id Long, " & _
"parent_version_no Text(255), " & _
"step_level Long, " & _
"sequence_no Integer, " & _
"enabled_flag Bit, " & _
"degree_parallelism Text(255), " & _
"execution_mechanism Text(50), " & _
"failure_details Text(255), " & _
"continuation_criteria Text(50), " & _
"global_flag Long, " & _
"archived_flag Bit, " & _
"output_file_name Text(255), " & _
"error_file_name Text(255), " & _
"iterator_name Text(255), " & _
"CONSTRAINT pk_steps PRIMARY KEY (step_id,
version_no) " & _
");"

' "log_file_name Text(255), " &
_

sCreateTables(2) = "Create table att_workspaces (" &
_
"workspace_id Long, " & _
"workspace_name Text(255), " & _
"archived_flag Bit, " & _
"CONSTRAINT pk_workspaces PRIMARY KEY
(workspace_id) " & _
");"

sCreateTables(3) = "Create table iterator_values (" &
_
"step_id Long, " & _
"version_no Text(255), " & _
"type Integer, " & _
"iterator_value Text(255), " & _
"sequence_no Integer " & _
");"

sCreateTables(4) = "Create table run_header (" &
_
"run_id Long, " & _
"workspace_id Long, " & _
"start_time Currency, " & _

```



```

        "end_time                Currency, " & _
        "CONSTRAINT pk_run_header PRIMARY KEY
(run_id) " & _
");"

sCreateTables(5) = "Create table run_parameters (" &
-
        "run_id                Long, " & _
        "parameter_name        Text(255), " & _
        "parameter_value        Text(255) " & _
");"

sCreateTables(6) = "Create table run_step_details ("
& _
        "run_id                Long, " & _
        "step_id                Long, " & _
        "version_no            Text(255), " & _
        "instance_id          Long, " & _
        "parent_instance_id    Long, " & _
        "command                Memo, " & _
        "iterator_value        Text(255), " & _
        "start_time            Currency, " & _
        "end_time              Currency, " & _
        "elapsed_time          Long " & _
");"

sCreateTables(7) = "Create table step_constraints ("
& _
        "constraint_id        Long, " & _
        "step_id              Long, " & _
        "version_no            Text(255), " & _
        "constraint_type        Integer, " & _
        "global_step_id        Long, " & _
        "global_version_no      Text(255), " & _
        "sequence_no           Integer " & _
");"

sCreateTables(8) = "Create table workspace_parameters
(" & _
        "workspace_id          Long, " & _
        "parameter_id          Long, " & _
        "parameter_name        Text(255), " & _
        "parameter_value        Text(255), " & _
        "description            Text(255), " & _
        "parameter_type        Integer, " & _
        "CONSTRAINT pk_parameters PRIMARY KEY
(parameter_id) " & _
");"

sCreateTables(9) = "Create table db_details (" & _
        "db_version            Text(50) " & _
");"

sCreateTables(10) = "Create table " &
TBL_CONNECTION_STRINGS & " (" & _
        "workspace_id          Long, " & _
        "connection_id          Long, " & _
        "connection_name        Text(255), " & _
        "connection_value        Text(255), " & _
        "description            Text(255), " & _
        "no_count_display        Bit, " & _
        "no_execute              Bit, " & _
        "parse_query_only        Bit, " & _

```

```

        "ANSI_quoted_identifiers Bit, " & _
        "ANSI_nulls              Bit, " & _
        "show_query_plan         Bit, " & _
        "show_stats_time         Bit, " & _
        "show_stats_io           Bit, " & _
        "parse_odbc_msg_prefixes Bit, " & _
        "row_count                long, " & _
        "tsql_batch_separator    Text(255), " & _
        "query_time_out          long, " & _
        "server_language         Text(255), " & _
        "character_translation    Bit, " & _
        "regional_settings        Bit, " & _
        "CONSTRAINT pk_connections PRIMARY KEY
(connection_id) " & _
");"

' This table has been added in order to satisfy the
TPC-H requirement that
' all the queries in a stream need to be executed on
a single connection.
' Specify a connection for each odbc step. If the
connection is of type,
' static, it should be kept open till the step
execution is complete.
sCreateTables(11) = "Create table " &
TBL_CONNECTION_DTLS & " (" & _
        FLD_ID_WORKSPACE & gstrBlank &
        DATA_TYPE_LONG & ", " & _
        FLD_ID_CONN_NAME & gstrBlank &
        DATA_TYPE_LONG & ", " & _
        FLD_CONN_DTL_CONNECTION_NAME & gstrBlank &
        DATA_TYPE_TEXT255 & ", " & _
        FLD_CONN_DTL_CONNECTION_STRING & gstrBlank &
        DATA_TYPE_TEXT255 & ", " & _
        FLD_CONN_DTL_CONNECTION_TYPE & gstrBlank &
        DATA_TYPE_INTEGER & ", " & _
        "CONSTRAINT pk_connection_name PRIMARY KEY
(" & FLD_ID_CONN_NAME & ") " & _
");"

End Sub

WindowsApiCommon.bas
Attribute VB_Name = "WindowsApiCommon"
' FILE:      WindowsApiCommon.bas
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This module contains functions that
are wrappers around the
'           Windows API and are used by both
StepMaster and SMRunOnly.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

```

```

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"WindowsApiCommon."

Public Type PROCESS_INFORMATION
        hProcess As Long
        hThread As Long
        dwProcessID As Long
        dwThreadId As Long
End Type

' Used by GetShortName to return the short file name
for a given file
Private Declare Function GetShortPathName Lib
"kernel32" _
        Alias "GetShortPathNameA" (ByVal lpszLongPath
As String, _
        ByVal lpszShortPath As String, ByVal cchBuffer
As Long) As Long

Public Declare Function GetExitCodeProcess Lib
"kernel32" (_
        ByVal hProcess As Long, lpExitCode As Long) As
Long
Public Declare Function TerminateProcess Lib
"kernel32" (_
        hProcess As Long, uExitCode As Long) As Long
Public Declare Function CloseHandle Lib "kernel32" (_
        ByVal hObject As Long) As Long

Public Const NORMAL_PRIORITY_CLASS As Long =
&H20&
Public Const INFINITE As Long = -1&

Public Const STATUS_WAIT_0 As Long = &H0
Public Const STATUS_ABANDONED_WAIT_0 As Long =
&H80
Public Const STATUS_USER_APC As Long =
&HC0
Public Const STATUS_TIMEOUT As Long =
&H102
Public Const STATUS_PENDING As Long =
&H103

Public Const WAIT_FAILED As Long =
&HFFFFFF
Public Const WAIT_OBJECT_0 As Long =
STATUS_WAIT_0
Public Const WAIT_TIMEOUT As Long =
STATUS_TIMEOUT

Public Const WAIT_ABANDONED As Long =
STATUS_ABANDONED_WAIT_0
Public Const WAIT_ABANDONED_0 As Long =
STATUS_ABANDONED_WAIT_0

Public Const WAIT_IO_COMPLETION As Long =
STATUS_USER_APC
Public Const STILL_ACTIVE As Long =
STATUS_PENDING

```

```

Public Const PROCESS_QUERY_INFORMATION As Long =
&H400
Public Const STANDARD_RIGHTS_REQUIRED As Long =
&HF0000

'-----
'Declarations for shelling:

Public Type STARTUPINFO
    cb As Long
    lpReserved As String
    lpDesktop As String
    lpTitle As String
    dwX As Long
    dwY As Long
    dwXSize As Long
    dwYSize As Long
    dwXCountChars As Long
    dwYCountChars As Long
    dwFillAttribute As Long
    dwFlags As Long
    wShowWindow As Integer
    cbReserved2 As Integer
    lpReserved2 As Long
    hStdInput As Long
    hStdOutput As Long
    hStdError As Long
End Type

Public Declare Function WaitForSingleObject Lib
"kernel32" ( _
    ByVal hProcess As Long, ByVal dwMilliseconds As
Long) As Long

Public Declare Function InputIdle Lib "user32" Alias
"WaitForInputIdle" ( _
    ByVal hProcess As Long, ByVal dwMilliseconds As
Long) As Long

Public Declare Function CreateProcessA Lib "kernel32"
( _
    ByVal lpApplicationName As Long, ByVal
lpCommandLine As String, _
    ByVal lpProcessAttributes As Long, ByVal
lpThreadAttributes As Long, _
    ByVal bInheritHandles As Long, ByVal
dwCreationFlags As Long, _
    ByVal lpEnvironment As Long, ByVal
lpCurrentDirectory As Long, _
    lpStartupInfo As STARTUPINFO,
lpProcessInformation As _
PROCESS_INFORMATION) As Long

Public Declare Function GetLastError Lib "kernel32"
() As Long

Private Type OPENFILENAME
    lStructSize As Long
    hwndOwner As Long
    hInstance As Long
    lpstrFilter As String

```

```

    lpstrCustomFilter As String
    nMaxCustFilter As Long
    nFilterIndex As Long
    lpstrFile As String
    nMaxFile As Long
    lpstrFileName As String
    nMaxFileName As Long
    lpstrInitialDir As String
    lpstrTitle As String
    Flags As Long
    nFileOffset As Integer
    nFileExtension As Integer
    lpstrDefExt As String
    lCustData As Long
    lpfnHook As Long
    lpTemplateName As Long
End Type

Private Declare Function GetOpenFileName Lib
"COMDLG32" _
    Alias "GetOpenFileNameA" (file As
OPENFILENAME) As Long

Private Declare Function lstrlen Lib "kernel32" (lpstr
As String) As Long

Public Const MAX_PATH = 255

' Used when creating a process
Public Const SW_SHOWMINNOACTIVE = 7
Public Const STARTF_USESHOWWINDOW = &H1

Public Const MB_YESNOCANCEL = &H3&
Public Const MB_ABORTRETRYIGNORE = &H2&
Public Const MB_OK = &H0&

Public Const MB_APPLMODAL = &H0&

Public Const MB_ICONQUESTION = &H20&
Public Const MB_ICONEXCLAMATION = &H30&

Public Const IDABORT = 3
Public Const IDRETRY = 4
Public Const IDIGNORE = 5
Public Const IDYES = 6
Public Const IDNO = 7
Public Const IDCANCEL = 2

Private Declare Function MessageBox Lib "user32"
Alias "MessageBoxA" ( _
    ByVal hWnd As Long, ByVal lpText As String, _
    ByVal lpCaption As String, ByVal wType As
Long) As Long

Private Type SYSTEMTIME
    wYear As Integer
    wMonth As Integer
    wDayOfWeek As Integer
    wDay As Integer
    wHour As Integer
    wMinute As Integer
    wSecond As Integer
    wMilliseconds As Integer

```

```

End Type

Private Declare Function Get64BitTime Lib
"smtime.dll" ( _
    ByVal lpInitTime As Any) As Currency

Public Function ShowMessageBox(hWnd As Long, strText
As String, _
    strTitle As String, wType As Integer) As Long
' Using the Windows MessageBox Api since the VB
Msgbox function suppresses
' all events
ShowMessageBox = MessageBox(hWnd, ByVal strText,
ByVal strTitle, wType)

If ShowMessageBox = 0 Then
    LogSystemError
    Err.Raise vbObjectError + errConfirmFailed,
App.EXEName, _
    LoadResString(errConfirmFailed)
End If

End Function

Public Function ShowFileOpenDialog(ByVal strFilter As
String, _
    ByVal strDialogTitle As String, ByVal
lngFlags As Long, _
    Optional ByVal strOldFile As String =
gstrEmptyString) As String
' Returns the file name selected by the user
Dim strInitDir As String
Dim intPos As Integer
Dim opfile As OPENFILENAME
Dim sFile As String

On Error GoTo ShowFileOpenDialogErr

If Not StringEmpty(strOldFile) Then
    intPos = InstrR(strOldFile,
gstrFileSeparator)
    If intPos > 0 Then
        strInitDir = Left$(strOldFile, intPos -
1)
    End If
End If

With opfile
    .lStructSize = Len(opfile)
    .Flags = lngFlags
    .lpstrInitialDir = strInitDir
    .lpstrTitle = strDialogTitle
    .lpstrFilter = MakeWindowsFilter(strFilter)
    sFile = strOldFile & String$(MAX_PATH -
Len(strOldFile), 0)
    .lpstrFile = sFile
    .nMaxFile = MAX_PATH
End With

If GetOpenFileName(opfile) Then
    ShowFileOpenDialog = Left$(opfile.lpstrFile,
InStr(opfile.lpstrFile, vbNullChar) - 1)
Else
    ShowFileOpenDialog = strOldFile

```

```

End If

Exit Function

ShowFileDialogErr:
Call LogErrors(Errors)
' Reset the selection to the passed in file, if
any
ShowFileDialog = strOldFile

End Function

Private Function MakeWindowsFilter(sFilter As String)
As String

Dim s As String, ch As String, iTemp As Integer

On Error GoTo MakeWindowsFilterErr

' To make Windows-style filter, replace | and :
with nulls
For iTemp = 1 To Len(sFilter)
ch = Mid$(sFilter, iTemp, 1)
If ch = "|" Then
s = s & vbNullChar
Else
s = s & ch
End If
Next iTemp

' Put double null at end
s = s & vbNullChar & vbNullChar
MakeWindowsFilter = s

Exit Function

MakeWindowsFilterErr:
Call LogErrors(Errors)
gstrSource = mstrModuleName & "MakeWindowsFilter"
On Error GoTo 0
Err.Raise vbObjectError + errApiFailed,
gstrSource, _
LoadResString(errApiFailed)

End Function

Public Function GetShortName(ByVal sLongFileName As
String) As String
' Returns the short name for the passed in file -
will only work
' if the passed in path/file exists

Dim lRetVal As Long, sShortPathName As String,
iLen As Integer
Dim sLongFile As String
Dim sDir As String
Dim sFile As String
Dim intPos As Integer

On Error GoTo GetShortNameErr

sFile = gstrEmptyString

```

```

sLongFile = MakePathValid(sLongFileName)
If StringEmpty(Dir$(sLongFile, vbNormal +
vbDirectory)) Then
' The passed in path is a file that does not
exist - since
' the GetShortPathName api does not work on
non-existent files
' on Win2K, use the directory as an argument
to the api and
' then append the file
intPos = InstrR(sLongFile, gstrFileSeparator)
sDir = Mid$(sLongFile, 1, intPos - 1)
sFile = Right(sLongFile, Len(sLongFile) -
intPos + 1)
sLongFile = sDir
End If

'Set up buffer area for API function call return
sShortPathName = Space(MAX_PATH)
iLen = Len(sShortPathName)

'Call the function
lRetVal = GetShortPathName(sLongFile,
sShortPathName, iLen)
If lRetVal = 0 Then
Call LogSystemError
End If

GetShortName = IIf(lRetVal = 0, sLongFile,
Left(sShortPathName, lRetVal))
If Not StringEmpty(sFile) Then
GetShortName = GetShortName & sFile
End If

Exit Function

GetShortNameErr:
Call LogErrors(Errors)
gstrSource = mstrModuleName & "GetShortName"
On Error GoTo 0
Err.Raise vbObjectError + errApiFailed,
gstrSource, _
LoadResString(errApiFailed)

End Function

Public Function Determine64BitTime() As Currency

Determine64BitTime = Get64BitTime(ByVal 0&)

End Function

Attribute VB_Name = "WorkspaceCommon"
' FILE: WorkspaceCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999

```

## WorkspaceCommon.bas

```

' All Rights Reserved
'
' PURPOSE: Contains functionality common across
StepMaster and
' SMRunOnly, pertaining to workspaces
' Specifically, functions to read
workspace records from
' the database and so on.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String =
"WorkspaceCommon."

Public Function GetWorkspaceDetails( _
Optional ByVal WorkspaceId As Long, _
Optional WorkspaceName As String =
gstrEmptyString _
) As Variant
' Depending on the passed in parameter, it
returns
' either the workspace name or the workspace
identifier
' in a variant. The calling function must convert
the
' return value to the appropriate type

Dim rstWorkspace As Recordset
Dim qyWsp As DAO.QueryDef
Dim strSql As String
Dim cTempStr As cStringSM

On Error GoTo GetWorkspaceDetailsErr
gstrSource = mstrModuleName &
"GetWorkspaceDetails"

If WorkspaceId = 0 And _
WorkspaceName = gstrEmptyString Then
On Error GoTo 0
Err.Raise vbObjectError +
errMandatoryParameterMissing, _
gstrSource, _

LoadResString(errMandatoryParameterMissing)
End If

Set cTempStr = New cStringSM

If WorkspaceId = 0 Then
strSql = " Select workspace_id from
att_workspaces " & _
" where workspace_name = [w_name] "
Set qyWsp =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qyWsp.Parameters("w_name").Value =
WorkspaceName
Else

```

```

        strSql = " Select workspace_name from
att_workspaces " & _
        " where workspace_id = [w_id] "
        Set qyWsp =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qyWsp.Parameters("w_id").Value = WorkspaceId
    End If

    Set cTempStr = Nothing

    Set rstWorkspace =
qyWsp.OpenRecordset(dbOpenForwardOnly)

    If rstWorkspace.RecordCount <> 0 Then
        GetWorkspaceDetails = rstWorkspace.Fields(0)
    Else
        rstWorkspace.Close
        qyWsp.Close
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidWorkspaceData, _
        gstrSource, _

LoadResString(errInvalidWorkspaceData)
    End If

    rstWorkspace.Close
    qyWsp.Close
    Exit Function

GetWorkspaceDetailsErr:
    Call LogErrors(Errors)
    gstrSource = mstrModuleName &
"GetWorkspaceDetails"
    On Error GoTo 0
    Err.Raise vbObjectError +
errGetWorkspaceDetailsFailed, _
    gstrSource, _

LoadResString(errGetWorkspaceDetailsFailed)

End Function

Public Sub ReadStepsInWorkspace(rstStepsInWorkSpace
As Recordset, _
qySteps As DAO.QueryDef, _
Optional lngWorkspaceId As Long =
glInvalidId, _
Optional dbLoad As DAO.Database = Nothing, _
Optional ByVal bSelectArchivedRecords As
Boolean = False)

    ' This function will populate the passed in
recordset with
    ' all the steps for a given workspace (if one is
passed in, else all workspaces)

    Dim strSql As String

    On Error GoTo ReadStepsInWorkspaceErr

    ' Create a recordset object to retrieve all steps
for

```

```

    ' the given workspace
    strSql = "Select step_id, step_label,
step_file_name, step_text, " & _
    " start_directory, version_no, workspace_id,
" & _
    " parent_step_id, parent_version_no, " & _
    " sequence_no, step_level, " & _
    " enabled_flag, degree_parallelism, " & _
    " execution_mechanism, " & _
    " failure_details, continuation_criteria, " &
_
    " global_flag, archived_flag, " & _
    " output_file_name, " & _
    " error_file_name, iterator_name " & _
    " from att_steps a " & _
    " where "

    ' log_file_name,

    If lngWorkspaceId <> glInvalidId Then
        strSql = strSql & " workspace_id = [w_id] AND
"

    End If

    If Not bSelectArchivedRecords Then
        strSql = strSql & " archived_flag =
[archived] AND "

    End If

    ' Find the highest X-component of the version
number
    strSql = strSql & " cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
    " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS d " & _
    " WHERE a.step_id = d.step_id ) "

    ' Find the highest Y-component of the version
number for the highest X-component
    strSql = strSql & " AND cint( mid( version_no,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) + 1 ) ) = " & _
    " ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) + 1 ) ) ) " & _
    " from att_steps AS b " & _
    " Where a.step_id = b.step_id " & _
    " AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator & gstrDQ &
" ) - 1 ) ) = " & _
    " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS c " & _
    " WHERE a.step_id = c.step_id ) ) "

    ' Append the order clause as follows
    ' First, separate all global/non-global steps
    ' Order the worker and manager steps by
step_level to

```

```

    ' ensure that the parent steps are populated
before
    ' any sub-steps within it
    ' Further ordering by parent_step_id and
sequence_no
    ' ensures that all the children within a parent
are
    ' selected in the necessary order
    strSql = strSql & " order by global_flag,
step_level, " & _
    " parent_step_id, sequence_no "

    If dbLoad Is Nothing Then Set dbLoad = dbsAttTool

    ' Create a temporary Querydef object
    Set qySteps =
dbLoad.CreateQueryDef(gstrEmptyString, strSql)

    ' Initialize the parameter values
    If lngWorkspaceId <> glInvalidId Then
        qySteps.Parameters("w_id").Value =
lngWorkspaceId
    End If

    If Not bSelectArchivedRecords Then
        qySteps.Parameters("archived").Value = False
    End If

    Set rstStepsInWorkSpace =
qySteps.OpenRecordset(dbOpenSnapshot)

    Exit Sub

ReadStepsInWorkspaceErr:

    LogErrors Errors
    gstrSource = mstrModuleName &
"ReadStepsInWorkspace"
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
    gstrSource, _
    LoadResString(errReadWorkspaceDataFailed)

End Sub

Public Sub ReadWorkspaces(dbLoad As Database, rstWsp
As Recordset, _
qyWsp As DAO.QueryDef, _
Optional ByVal bSelectArchivedRecords As
Boolean = False)

    ' This function will populate the passed in
recordset with all workspace records

    Dim strSql As String

    On Error GoTo ReadWorkspacesErr

    ' Create a recordset object containing all the
workspaces
    ' (that haven't been archived) in the database
    strSql = " Select workspace_id, workspace_name,
archived_flag " & _

```

```

        " from att_workspaces "

    If Not bSelectArchivedRecords Then
        strSql = strSql & " where archived_flag =
[archived]"
    End If
    strSql = strSql & " order by workspace_name"

    Set qyWsp =
dbLoad.CreateQueryDef(gstrEmptyString, strSql)
    If Not bSelectArchivedRecords Then
        qyWsp.Parameters("archived").Value = False
    End If

    Set rstWsp =
qyWsp.OpenRecordset(dbOpenForwardOnly)

    Exit Sub

ReadWorkspacesErr:

    LogErrors Errors
    gstrSource = mstrModuleName & "ReadWorkspaces"
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
        gstrSource, _
        LoadResString(errReadWorkspaceDataFailed)

End Sub
Public Sub ShowWorkspacesInDb(dbLoad As Database)

    Dim recWorkspaces As Recordset
    Dim qryAllWsp As QueryDef

    On Error GoTo ShowWorkspacesInDbErr

    ' Set the mousepointer to indicate Busy
    Call ShowBusy

    Load frmWorkspaceOpen

    Call ReadWorkspaces(dbLoad, recWorkspaces,
qryAllWsp)

    frmWorkspaceOpen.lstWorkspaces.Clear

    ' Load all the workspaces into the listbox
    If recWorkspaces.RecordCount <> 0 Then
        Do
            ' Add the workspace name to the list and
store
            ' the corresponding workspace id as the
ItemData
            ' property of the item.
            ' The workspace id will be used for all
further
            ' processing of the workspace
            frmWorkspaceOpen.lstWorkspaces.AddItem
recWorkspaces![workspace_name]

        frmWorkspaceOpen.lstWorkspaces.ItemData(frmWorkspaceO
pen.lstWorkspaces.NewIndex) = _

```

```

        recWorkspaces![workspace_id]
        recWorkspaces.MoveNext

        Loop Until recWorkspaces.EOF
    End If
    recWorkspaces.Close
    qryAllWsp.Close

    ' Reset the mousepointer
    ShowFree

    #If RUN_ONLY Then
        frmWorkspaceOpen.Show vbModal
    #Else
        frmWorkspaceOpen.Show vbModal, frmMain
    #End If

    Exit Sub

ShowWorkspacesInDbErr:
    LogErrors Errors
    Call ShowFree
    Err.Raise vbObjectError + errProgramError,
mstrModuleName & "ShowWorkspacesInDb", _
        LoadResString(errProgramError)

End Sub
Private Sub ReadWorkspaceParameters(lngWorkspaceId As
Long, _
    rstWorkSpaceParameters As Recordset, _
    qyWspParams As DAO.QueryDef)

    ' Will populate the recordset with all the
parameters for
    ' a given workspace

    Dim strSql As String

    On Error GoTo ReadWorkspaceParametersErr

    strSql = "Select parameter_id, parameter_name, "
& _
        " parameter_value, workspace_id,
parameter_type, description " & _
        " from workspace_parameters " & _
        " where workspace_id = [w_id] " & _
        " order by parameter_name,
parameter_value "

    ' Create a temporary Querydef object and
initialize
    ' it's parameter values
    Set qyWspParams =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
    qyWspParams.Parameters("w_id").Value =
lngWorkspaceId

    Set rstWorkSpaceParameters =
qyWspParams.OpenRecordset(dbOpenSnapshot)

    Exit Sub

ReadWorkspaceParametersErr:

```

```

    LogErrors Errors
    gstrSource = mstrModuleName &
"ReadWorkspaceParameters"
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
        gstrSource, _
        LoadResString(errReadWorkspaceDataFailed)

End Sub
Private Sub ReadConnections(lngWorkspaceId As Long,
rstConns As Recordset, _
    qyConns As DAO.QueryDef)

    ' Will populate the recordset with all the
parameters for
    ' a given workspace

    Dim strSql As String

    On Error GoTo ReadWorkspaceParametersErr

    strSql = "Select connection_id, " & _
        " connection_name, connection_value,
workspace_id, description, " & _
        " no_count_display, no_execute,
parse_query_only, ANSI_quoted_identifiers, " & _
        " ANSI_nulls, show_query_plan,
show_stats_time, show_stats_io, " & _
        " parse_odbc_msg_prefixes, row_count,
tsql_batch_separator, query_time_out, " & _
        " server_language, character_translation,
regional_settings " & _
        " from workspace_connections " & _
        " where workspace_id = [w_id] " & _
        " order by connection_name,
connection_value "

    ' Create a temporary Querydef object and
initialize
    ' it's parameter values
    Set qyConns =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
    qyConns.Parameters("w_id").Value = lngWorkspaceId

    Set rstConns =
qyConns.OpenRecordset(dbOpenSnapshot)

    Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
        mstrModuleName & "ReadConnections",
LoadResString(errReadWorkspaceDataFailed)

End Sub
Private Sub ReadConnectionDtIs(lngWorkspaceId As
Long, rstConns As Recordset, _

```

```

    qyConns As DAO.QueryDef)

    ' Will populate the recordset with all the
    connection_dtls records for
    ' a given workspace

    Dim strSql As String

    On Error GoTo ReadWorkspaceParametersErr

    strSql = "Select " & FLD_ID_CONN_NAME & ", " & _
        FLD_CONN_DTL_CONNECTION_NAME & ", " & _
        FLD_CONN_DTL_CONNECTION_STRING & ", " & _
        FLD_ID_WORKSPACE & ", " & _
        FLD_CONN_DTL_CONNECTION_TYPE & _
        " from " & TBL_CONNECTION_DTLS & _
        " where " & FLD_ID_WORKSPACE & " = [w_id]
    " & _
        " order by " &
        FLD_CONN_DTL_CONNECTION_NAME

    ' Create a temporary Querydef object and
    initialize
    ' it's parameter values
    Set qyConns =
    dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
    qyConns.Parameters("w_id").Value = lngWorkspaceId

    Set rstConns =
    qyConns.OpenRecordset(dbOpenSnapshot)

    Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
    errReadWorkspaceDataFailed, _
        mstrModuleName & "ReadConnectionDtls",
    LoadResString(errReadWorkspaceDataFailed)

End Sub

Public Sub ReadWorkspaceData(lngWorkspaceId As Long,
    -
    cStepsCol As cArrSteps, _
    cParamsCol As cArrParameters, _
    cConsCol As cArrConstraints, _
    cConns As cConnections, _
    cConnDetails As cConnDtls, _
    rstStepsInWsp As Recordset, _
    qyStepsInWsp As DAO.QueryDef, _
    rstParamsInWsp As Recordset, _
    qyParamsInWsp As DAO.QueryDef, _
    rstConns As Recordset, _
    qyConns As DAO.QueryDef, _
    rstConnDtls As Recordset, _
    qyConnDtls As DAO.QueryDef)
    ' Loads the passed in structures with all the
    data for
    ' the workspace. It also initializes the
    recordsets

```

```

    ' with the step and parameter records for the
    workspace.

    On Error GoTo ReadWorkspaceDataErr

    ShowBusy

    Call ReadStepsInWorkspace(rstStepsInWsp,
    qyStepsInWsp, lngWorkspaceId)

    ' Load all the steps in the array
    LoadRecordsetInStepsArray rstStepsInWsp,
    cStepsCol

    ' Initialize the steps with all the iterator
    ' records for each step
    Call LoadIteratorsForWsp(cStepsCol,
    lngWorkspaceId, rstStepsInWsp)

    ReadWorkspaceParameters lngWorkspaceId,
    rstParamsInWsp, qyParamsInWsp

    ' Load all the workspace parameters in the array
    LoadRecordsetInParameterArray rstParamsInWsp,
    cParamsCol

    ' Read and load connection strings
    ReadConnections lngWorkspaceId, rstConns, qyConns

    LoadRecordsetInConnectionArray rstConns, cConns

    ' Read and load connection information
    ReadConnectionDtls lngWorkspaceId, rstConnDtls,
    qyConnDtls

    LoadRSInConnDtlArray rstConnDtls, cConnDetails

    ' Finally, load the step constraints collection
    class with
    ' all the constraints for the steps in the
    workspace
    cConsCol.LoadConstraints lngWorkspaceId,
    rstStepsInWsp

    ShowFree
    Exit Sub

ReadWorkspaceDataErr:
    ' Log the error code raised by Visual Basic
    ShowFree
    Call LogErrors(Errors)
    On Error GoTo 0
    gstrSource = mstrModuleName & "ReadWorkspaceData"
    Err.Raise vbObjectError +
    errReadWorkspaceDataFailed, _
        gstrSource, _
        LoadResString(errReadWorkspaceDataFailed)

End Sub

```

# *Appendix G: Price Quotations*

April 16, 2007

Hewlett-Packard Company  
 Daniel Pol  
 20555 SH 249  
 Houston, TX 77070

Mr. Pol:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-H benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-04793	<b>SQL Server 2005 Enterprise x64 Edition</b> Server License with 25 CALs Discount Schedule: Open Program - No Level Unit Price reflects a 39% discount from the retail unit price of \$13,969.	\$8,487	1	\$8,487
359-01911	<b>SQL Server 2005 Client License</b> Discount Schedule: Open Program - No Level Unit Price reflects a 4% discount from the retail unit price of \$163.	\$156	45	\$7,020
P72-00274	<b>Windows Server 2003, Enterprise x64 Edition</b> Server License with 25 CALs Discount Schedule: Open Program - No Level Unit Price reflects a 41% discount from the retail unit price of \$3,999.	\$2,334	1	\$2,334
254-00170	<b>Visual C++ Standard Edition</b> No Discounts Applied	\$109	1	\$109
046-00856	<b>Visual Basic 2003 .Net Professional</b> No Discounts Applied	\$109	1	\$109
N/A	<b>Microsoft Problem Resolution Services</b> Professional Support (1 Incident)	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's authorized resellers can be found at:  
<http://www.microsoft.com/products/info/render.aspx?view=22&type=mpn&content=22/licensing>.