



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
ProLiant DL580-G2 32GB
using
Microsoft SQL Server 2000 Enterprise Edition
and
Windows .NET Enterprise Server Edition

**First Edition
August 2002**

First Edition –August 2002

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2002 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2002

HP, NonStop, ProLiant DL580-G2, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows .NET and SQL Server 2000 are registered trademarks of Microsoft Corporation.

Pentium Xeon processor MP is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	III
PREFACE	V
TPC BENCHMARK C OVERVIEW	V
ABSTRACT	VI
OVERVIEW	VI
TPC BENCHMARK C METRICS.....	VI
STANDARD AND EXECUTIVE SUMMARY STATEMENTS.....	VI
AUDITOR.....	VI
GENERAL ITEMS	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS.....	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS.....	12
PHYSICAL ORGANIZATION OF DATABASE.....	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	13
INSERT AND DELETE OPERATIONS	13
PARTITIONING.....	13
REPLICATION, DUPLICATION OR ADDITIONS	13
CLAUSE 2 RELATED ITEMS	14
RANDOM NUMBER GENERATION	14
INPUT/OUTPUT SCREEN LAYOUT.....	14
PRICED TERMINAL FEATURE VERIFICATION	14
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	14
TRANSACTION STATISTICS.....	14
QUEUEING MECHANISM.....	15
CLAUSE 3 RELATED ITEMS	16
TRANSACTION SYSTEM PROPERTIES (ACID).....	16
ATOMICITY	16
<i>Completed Transactions</i>	16
<i>Aborted Transactions</i>	16
CONSISTENCY	16
ISOLATION	16
DURABILITY.....	17
<i>Durable Media Failure</i>	17
<i>Instantaneous Interruption and Loss of Memory</i>	17
CLAUSE 4 RELATED ITEMS	19
INITIAL CARDINALITY OF TABLES	19
DATABASE LAYOUT.....	19
TYPE OF DATABASE.....	20
DATABASE MAPPING	20
60 DAY SPACE.....	20

CLAUSE 5 RELATED ITEMS	21
THROUGHPUT.....	21
KEYING AND THINK TIMES	21
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS.....	22
STEADY STATE DETERMINATION.....	27
WORK PERFORMED DURING STEADY STATE	27
MEASUREMENT PERIOD DURATION	27
REGULATION OF TRANSACTION MIX	28
TRANSACTION STATISTICS.....	28
CHECKPOINT COUNT AND LOCATION	29
CHECKPOINT DURATION	29
CLAUSE 6 RELATED ITEMS	30
RTE DESCRIPTIONS	30
EMULATED COMPONENTS.....	30
FUNCTIONAL DIAGRAMS	30
NETWORKS	30
OPERATOR INTERVENTION.....	30
CLAUSE 7 RELATED ITEMS	31
SYSTEM PRICING.....	31
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	31
COUNTRY SPECIFIC PRICING	31
USAGE PRICING	31
CLAUSE 9 RELATED ITEMS	32
AUDITOR'S REPORT	32
AVAILABILITY OF THE FULL DISCLOSURE REPORT	32

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.0, released March 7, 2001.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant DL580-G2. The operating system used for the benchmark was Windows .NET Enterprise Server Edition. The DBMS used was Microsoft SQL Server 2000 Enterprise Edition.

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

61,564.50 tpmC

\$6.13 per tpmC

The availability date is December 31, 2002.

Standard and Executive Summary Statements


The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company		ProLiant DL580-G2 32GB C/S with 4 ProLiant DL360R		TPC-C Rev. 5.0 Report Date: Aug 23, 2002	
Total System Cost		TPC-C Throughput		Price/Performance	
\$376,806		61,564.50		\$6.13	
				Dec 31, 2002	

Processors	Database Manager	Operating System	Other Software	Number of Users
4 Intel Xeon processor MP 1.6 GHz – Server 8 Pentium III 1.4GHz – Clients	Microsoft SQL Server 2000 Enterprise Edition	Windows .NET Enterprise Server Edition	Microsoft Visual C++ Microsoft COM+	49400

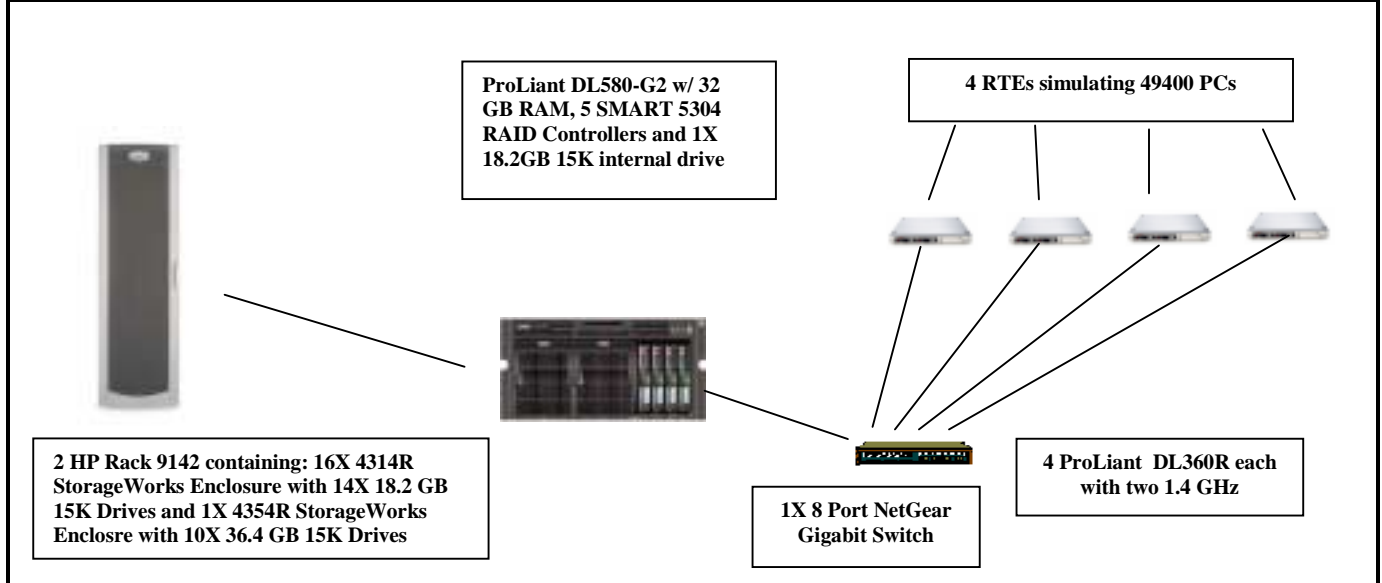

	Server		Each Client	
System Components	Quantity	Description	Quantity	Description
Processor	4	1.6 GHz Intel Xeon MP w/ 512K Cache	2	1 GHz Pentium III w/ 256K cache
Memory	4	8 GB DDR (4x2GB)	4	128 MB
Disk Controllers	1	Integrated Smart 5i Controller	1	Integrated SMART 5i Controller
	5	SMART 5304 Array Controller		
Disk Drives	225	18.2 GB SCSI Drive	1	18.2 GB SCSI Drive
	10	36.4 GB SCSI Drive		
Total Storage		4459 GB		18.2 GB
Tape Drives	1	12/24 GB DAT		

Hewlett-Packard	ProLiant DL580G2-4P 32GB			TPC-C Rev. 5.0		
Company	Client/Server			Report Date:	23-Aug-02	
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price
Server Hardware						
Brand Pricing						
ProLiant DL580 X1600 2P X2GB	201203-001	1	18,999	1	18,999	
1.6 GHz 1M processor	226776-B21	1	6,199	2	12,398	
8GB (4x2GB) DDR ECC 200MHz Memory	202173-B21	1	25,909	4	103,636	
StorageWorks Enclosure Model 4314R	190209-001	1	2,955	16	47,280	
StorageWorks Enclosure Model 4354	190211-001	1	3,523	1	3,523	
Smart Array 5304/128 Controller	158939-B21	1	2,099	5	10,495	
NC7770 PCI-X Gigabit Server Adapter	244948-B21	1	227	1	227	
S5500 15 carbon / silver monitor	261602-001	1	139	1	139	
HP Mouse	231947-B21	1	5	1	5	
HP Enhanced Keyboard	265977-001	1	12	1	12	
12/24-Gigabyte DAT Drive (Internal)	295513-B22	1	682	1	682	
HP Rack Model 9142 (42U - Opal) - Flat Pallet	120663-B21	1	1,352	2	2,704	
HP Rack Sidewall Kit	120670-B21	1	212	1	212	
UPS R3000 XR	192186-001	1	1,703	1	1,703	
36.4-GB Pluggable 1" Universal WideUltra3 15K HDD + 10% spares	232916-B22	1	832	12	9,984	
18.2-GB Pluggable 1" Universal WideUltra3 15K HDD	188122-B22	1	459	225	103,275	
18.2-GB Pluggable 1" Universal WideUltra3 15K HDD (10% spares)	188122-B22	1	459	22		10,098
FM-M1724-36 3YR 24X7 4HR 500 SERIES SVR	401782-002	1	1,795	1		1,795
FM-4E724-36 3YR 24X7/4HR EMPTY DISK ENCL	171242-002	1	157	17		2,669
Subtotal					315,274	14,562
Server Software						
Microsoft SQL Server 2000 Enterprise Edition(per processor)	810-00846	Microsoft	2	16,541	4	66,164 5,850
Microsoft Visual C++ 6.0	048-00317	Microsoft	2	549	1	549 Incl Above
Microsoft Windows .NET Server Enterprise Edition	N/A	Microsoft	2	2,599	1	2,599 Incl Above
Subtotal					69,312	5,850
Client Hardware						
ProLiant DL360R01 P1.4GHz 512KB 128MB	233271-001	1	2,229	4	8,916	
Dual Integrated Gigabit NIC, Integrated Smart Array Controller						
1.40GHz PIII Processor Option Kit (DL360 G2)	201099-B21	1	949	4	3,796	
128 MB 133 DIMM	128277-B21	1	122	12	1,464	
S5500 15 carbon / silver monitor	261602-001	1	139	4	556	
HP Mouse	231947-B21	1	5	4	20	
HP Enhanced Keyboard	265977-001	1	12	4	48	
18.2-GB Pluggable 1" Universal WideUltra3 15K HDD	188122-B22	1	459	4	1,836	
FM-EL724-36 3YR 24X7 4HR ENTRY 300 SVR	162675-002	1	750	4		3,000
Subtotal					16,636	3,000
Client Software						
Microsoft Windows 2000 Server	C11-00821	Microsoft	2	738	4	2,952 Incl. Above
Subtotal					2,952	0
User Connectivity						
GS508T 8 port Copper Gigabit Switch	1058966	NetGear	3	665	3	1,994
Subtotal					1,994	0
Large Purchase and Net 30 discount (See Note 1)	16.0%		1			
Total					\$355,724	\$21,082
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				Three-Year Cost of Ownership: \$376,806		
				tpmC Rating: 61564.50		
				\$ / tpmC: \$6.13		
Pricing: 1=HP Direct 2= Microsoft 3=Ecost.com						
Note 1 = Discount based on HP Direct guidance and large cash purchase level.						
Note: The benchmark results and test methodology were audited by Loma Livingtree of Performance Metrics, Inc.						

Numerical Quantities Summary

MQTH, Computed Maximum Qualified Throughput

61,564.50 tpmC

Response Times (in seconds)	Average	90%	Maximum
New-Order	0.30	0.53	5.72
Payment	0.23	0.44	5.98
Order-Status	0.24	0.45	4.94
Delivery (interactive portion)	0.10	0.11	0.89
Delivery (deferred portion)	0.15	0.21	0.53
Stock-Level	0.65	0.99	5.64
Menu	0.10	0.11	2.34

Transaction Mix, in percent of total transaction

New-Order	44.95%
Payment	43.01%
Order-Status	4.01%
Delivery	4.02%
Stock-Level	4.01%

Emulation Delay (in seconds)

	Resp. Time	Menu
New-Order	0.10	0.10
Payment	0.10	0.10
Order-Status	0.10	0.10
Delivery (interactive)	0.10	0.10
Stock-Level	0.10	0.10

Keying/Think Times (in seconds)

	Min.	Average	Max.
New-Order	18.00/0.00	18.02/12.29	18.04/122.91
Payment	3.00/0.00	3.02/12.28	3.04/122.91
Order-Status	2.00/0.00	2.02/10.23	2.03/102.50
Delivery (interactive)	2.00/0.00	2.02/5.15	2.03/51.50
Stock-Level	2.00/0.00	2.02/5.14	2.03/51.50

Test Duration

Ramp-up time	25 minutes
Measurement interval	120 minutes
Transactions (all types) completed during measurement interval	16,360,639
Ramp down time	5 minutes

Checkpointing

Number of checkpoints	4
Checkpoint interval	30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.


Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are the same and included on the following page.

Figure 1. Benchmarked and Priced Configuration

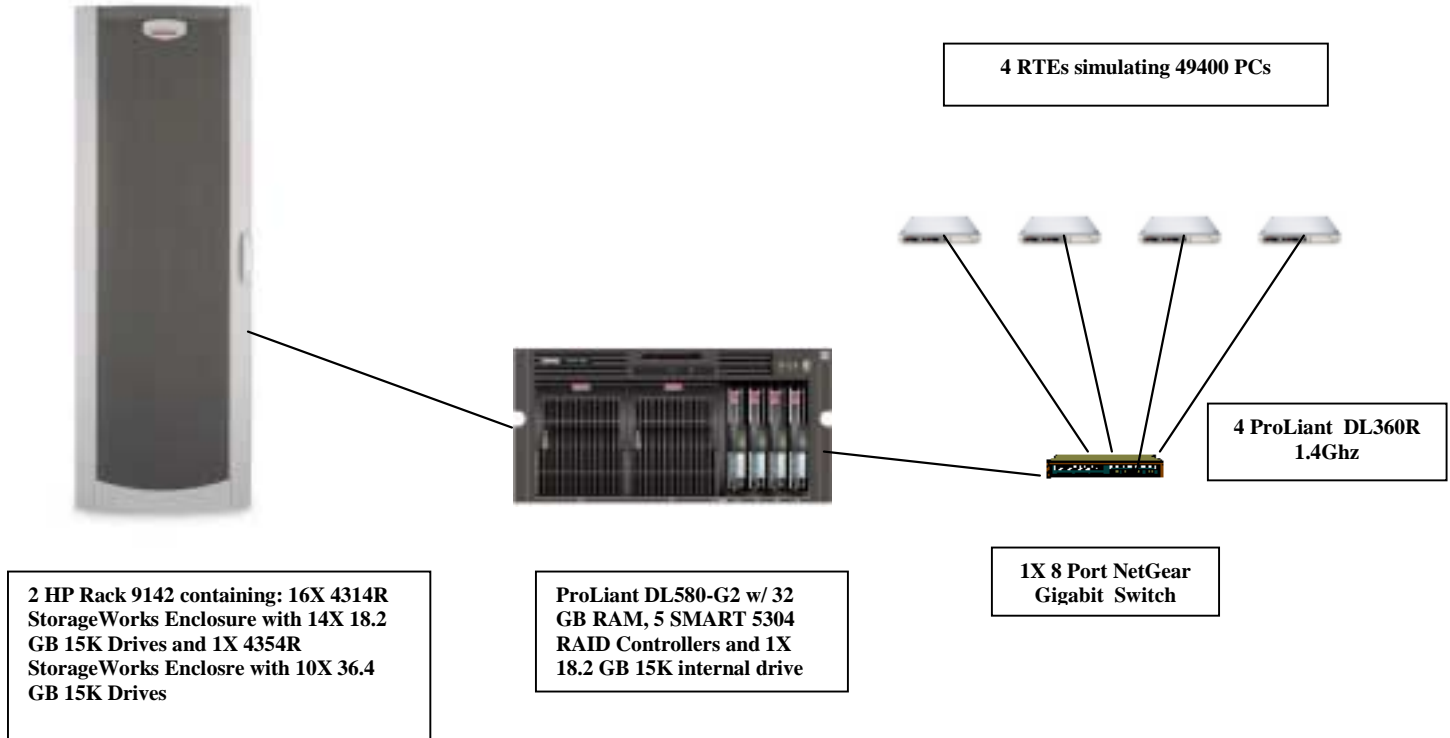

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of: 224 drives at 18.2 GB, 10 drives at 36.4 GB, and one 18.2 GB drive for the operating system. Fifty-six drives for four controllers, ten drives for the fifth controller, and one drive for the integrated Smart 5i controller.

Benchmarked Configuration:

U3 SCSI Integrated Controller, Array A

EISA UTILITIES PARTITION Total Capacity = 36 MB

HP System Configuration Utilities

LOGICAL DRIVE C: Total Capacity = 8.43 GB

Microsoft Windows 2000 Advanced Server

SMART-5302 Controller, Slot 6, Array A

LOGICAL DRIVE E: Total Capacity = 149 GB RAID 0+1

MSSQL70_tpcc_log

SMART-5302 Controller, Slot 2, Array A

LOGICAL DRIVE F: Total Capacity = 74.12 GB RAID 0

MSSQL70_cs1

SMART-5302 Controller, Slot 2, Array B

LOGICAL DRIVE L: Total Capacity = 40.04 GB RAID 0

MSSQL70_misc1

SMART-5302 Controller, Slot 2, Array C

LOGICAL DRIVE W: Total Capacity = 417.20 GB RAID 0+1

Tpcback1

SMART-5302 Controller, Slot 3, Array A

LOGICAL DRIVE G: Total Capacity = 74.12 GB RAID 0

MSSQL70_cs2

SMART-5302 Controller, Slot 3, Array B

LOGICAL DRIVE M: Total Capacity = 40.04 GB RAID 0

MSSQL70_misc2

SMART-5302 Controller, Slot 3, Array C

LOGICAL DRIVE X: Total Capacity = 417.20 GB RAID 0+1

Tpcback2

SMART-5302 Controller, Slot 4, Array A

LOGICAL DRIVE H: Total Capacity =74.12 GB RAID 0
MSSQL70_cs3

SMART-5302 Controller, Slot 4, Array B

LOGICAL DRIVE N: Total Capacity =40.04 GB RAID 0
MSSQL70_misc3

SMART-5302 Controller, Slot 4, Array C

LOGICAL DRIVE Y: Total Capacity = 417.20 GB RAID 0+1
Tpccback3

SMART-5302 Controller, Slot 5, Array A

LOGICAL DRIVE I: Total Capacity =74.12 GB RAID 0
MSSQL70_cs4

SMART-5302 Controller, Slot 5, Array B

LOGICAL DRIVE O: Total Capacity =40.04 GB RAID 0
MSSQL70_misc4

Priced Configuration vs. Measured Configuration:

The measured and priced configuration differ in that the measured configuration used disk drives for database backup and the priced configuration used a DAT drive for backup.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none were found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%

Statistic		Value
	Accessed by last name	59.99%
Order Status	Accessed by last name	60.12%
Transaction Mix	New Order	44.95%
	Payment	43.01%
	Order status	4.02%
	Delivery	4.01%
	Stock level	4.01%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed:

- A new database containing 10% of the warehouses of the full database was created and was backed up to extra disks.
- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 5000 users.
- The test was allowed to run for a minimum of 10 minutes.
- One log disk was removed from the drive cabinet.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the users status on the RTE.
- One of the data disks was removed from the drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down.
- A dump of the transaction log was taken and the Microsoft SQL Server was shutdown.
- A new log disk was inserted into the log drive cabinet. A new data disk was inserted into the data drive cabinet. After the RAID recovery process finished, the system was rebooted and Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 13 and 14 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 49400 warehouses under a full load of 49400 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 49400 users.
- The test was allowed to run for a minimum of 10 minutes.
- A checkpoint was performed.
- System crash and loss of memory were induced by switching the power off. The power cords were then physically removed from the SUT. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was shutdown.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.

- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 10 and 11 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	5100
District	51000
Customer	153000000
History	153000000
Orders	153000000
New Order	45900000
Order Line	1529997428
Stock	510000000
Item	100,000
Deleted Warehouses	160

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 5 SMART-5304 Array controllers with 4 SCSI channels. Each controller is capable of accessing up to 14 disk drives per channel, and supports RAID 0, RAID 0+1, and RAID 5 per each logical volume configured. The data tables were stored on 4 RAID arrays of (56) 18.2 GB 15K drives each. Each array was configured as RAID 0 and housed logical drives for database data. Some of these controllers also housed a RAID 0+1 volume used for backup of the database. The other SMART-5304 Array controller had one array consisting of (10) 36.4 GB 15K drives, and housed a RAID 0+1 logical volume for the database log. The operating system was housed internally on the integrated Smart 5i controller as one 18.2 GB 15K drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives of cs file group on those controllers. The controller for the transaction log had the cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the filegroups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- The data model implemented by DBMS used (e.g. relational, network, hierarchical).
- The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.

Microsoft SQL Server 2000 Enterprise Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

The details of both the 8-hour transaction log space requirement and the 60-day space requirement is shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 61,564.50 tpmC
Price per tpmC \$6.13 per tpmC

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.30	0.53	5.72
Payment	0.23	0.44	5.98
Order-Status	0.24	0.45	4.94
Interactive Delivery	0.10	0.11	0.89
Deferred Delivery	0.15	0.21	0.53
Stock-Level	0.65	0.99	5.64
Menu	0.10	0.11	2.34

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.00	18.02	18.04
Payment	3.00	3.02	3.04
Order-Status	2.00	2.02	2.03
Interactive Delivery	2.00	2.02	2.03
Stock-Level	2.00	2.02	2.03

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.29	122.91
Payment	0.00	12.28	122.91
Order-Status	0.00	10.23	102.50
Interactive Delivery	0.00	5.15	51.50
Stock-Level	0.00	5.14	51.50

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 2. New Order Response Time Distribution

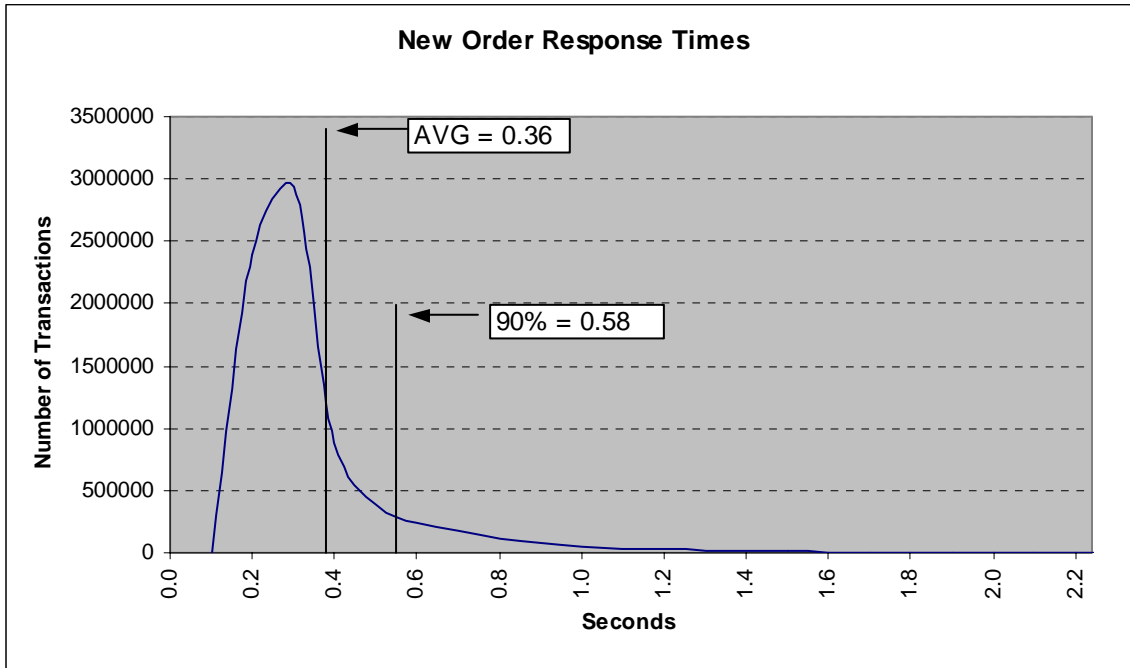


Figure 3. Payment Response Time Distribution

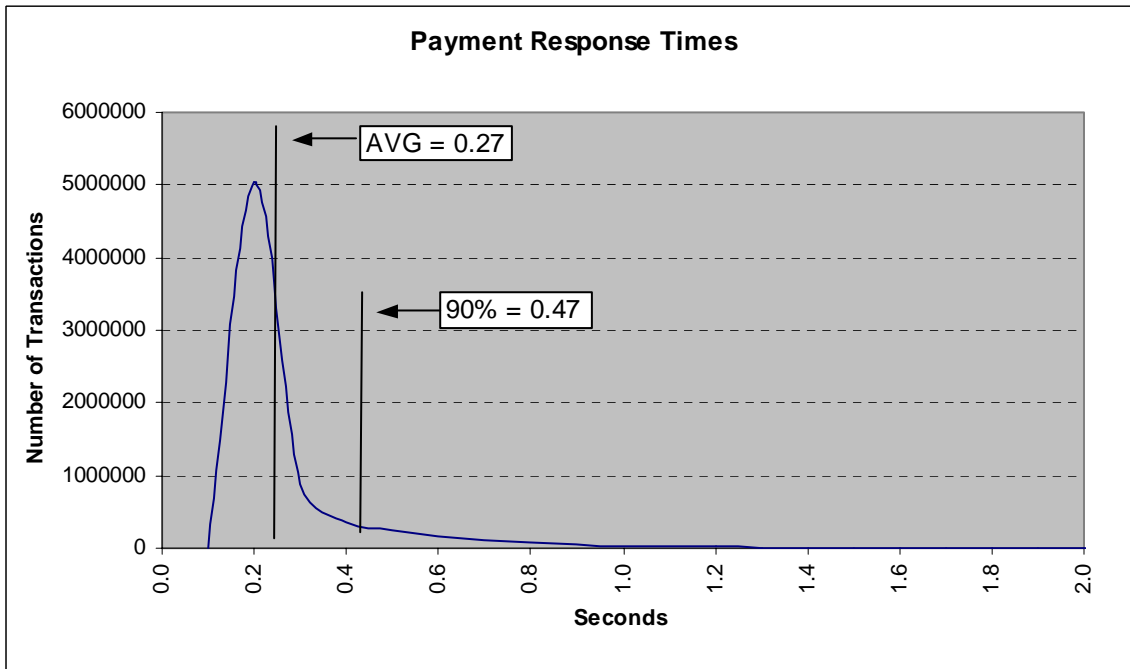


Figure 4. Order Status Response Time Distribution

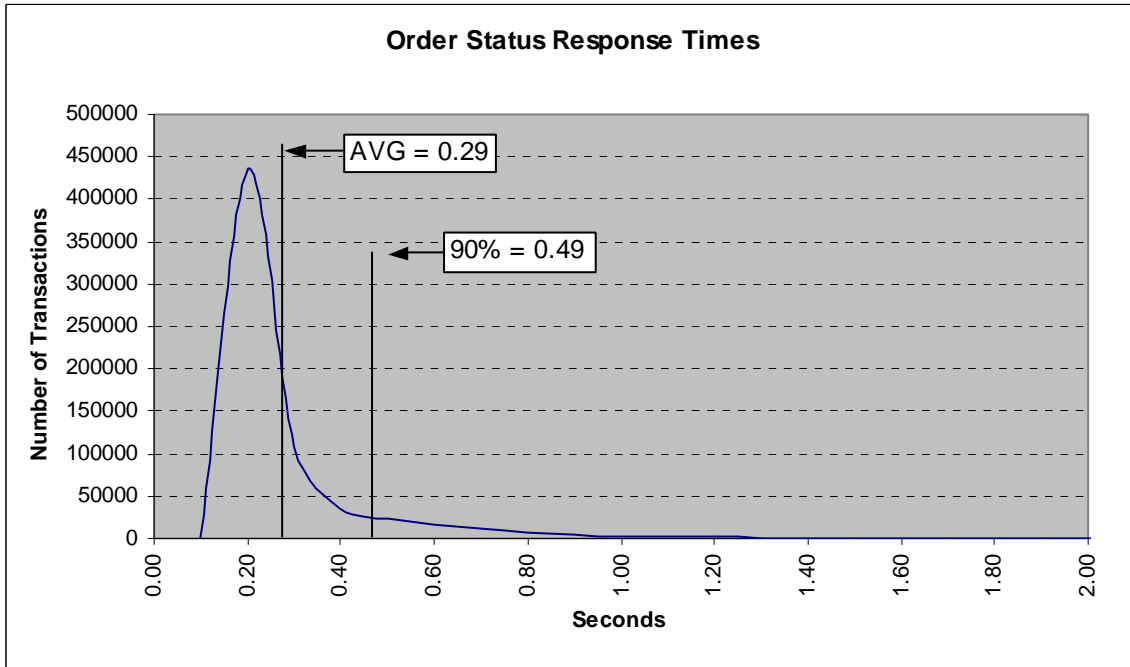


Figure 5. Delivery Response Time Distribution

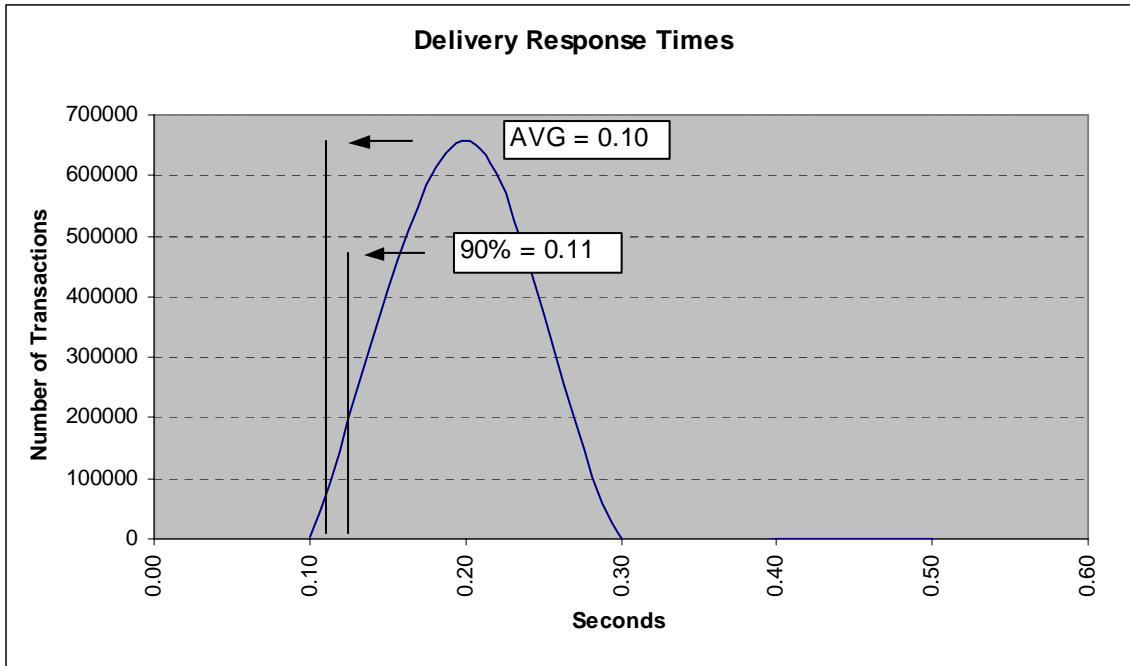


Figure 6. Stock Level Response Time Distribution

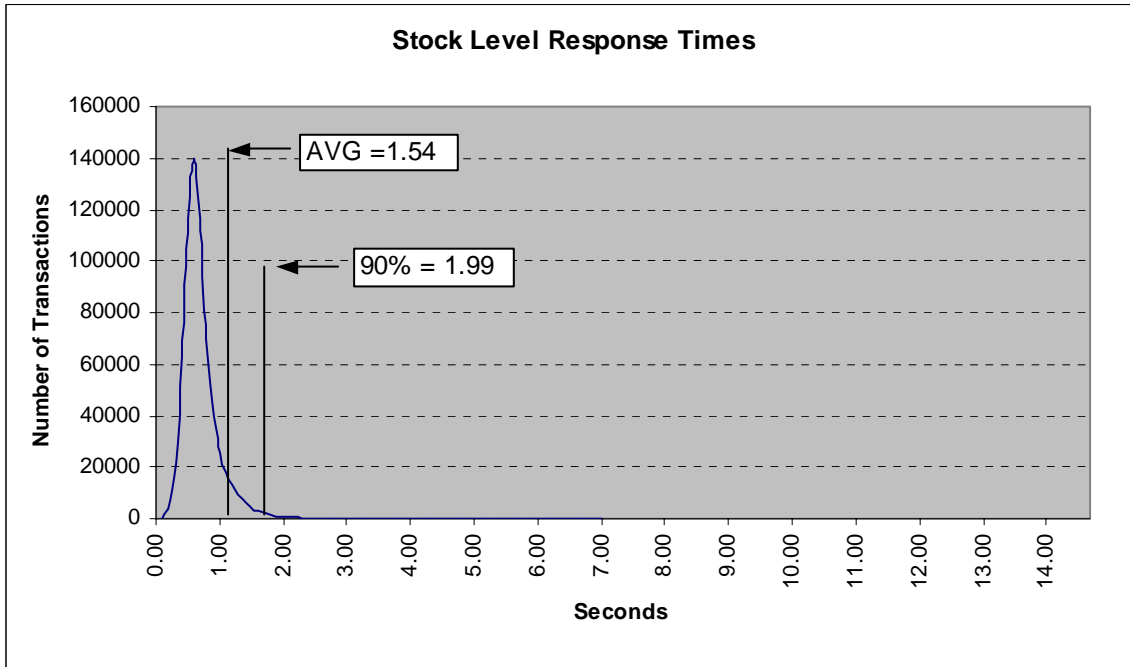


Figure 7. Response Time vs. Throughput

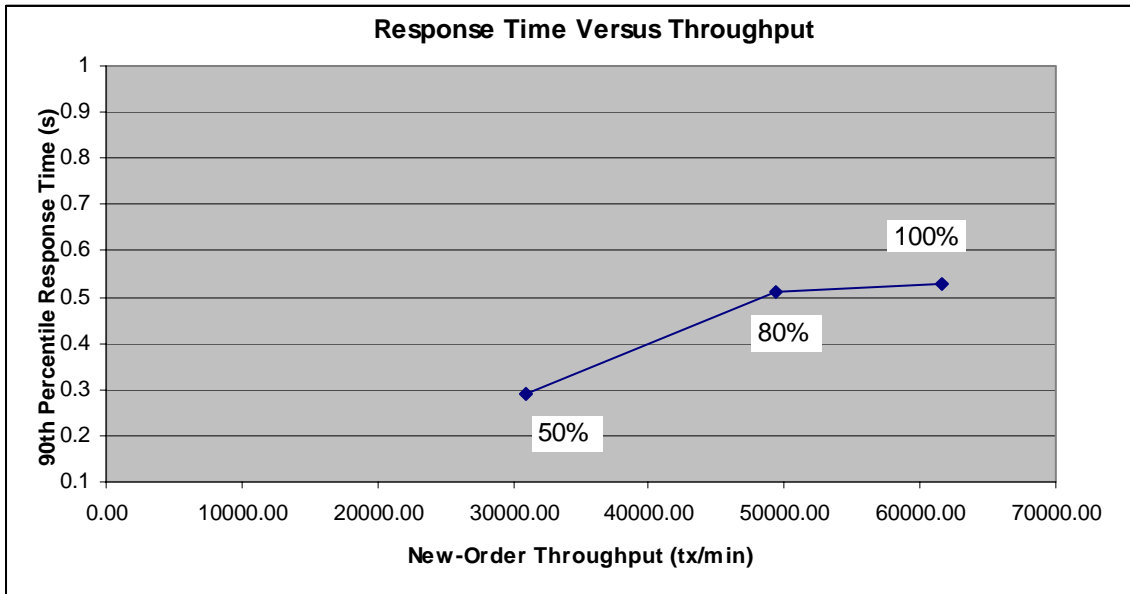


Figure 8. New Order Think Time Distribution


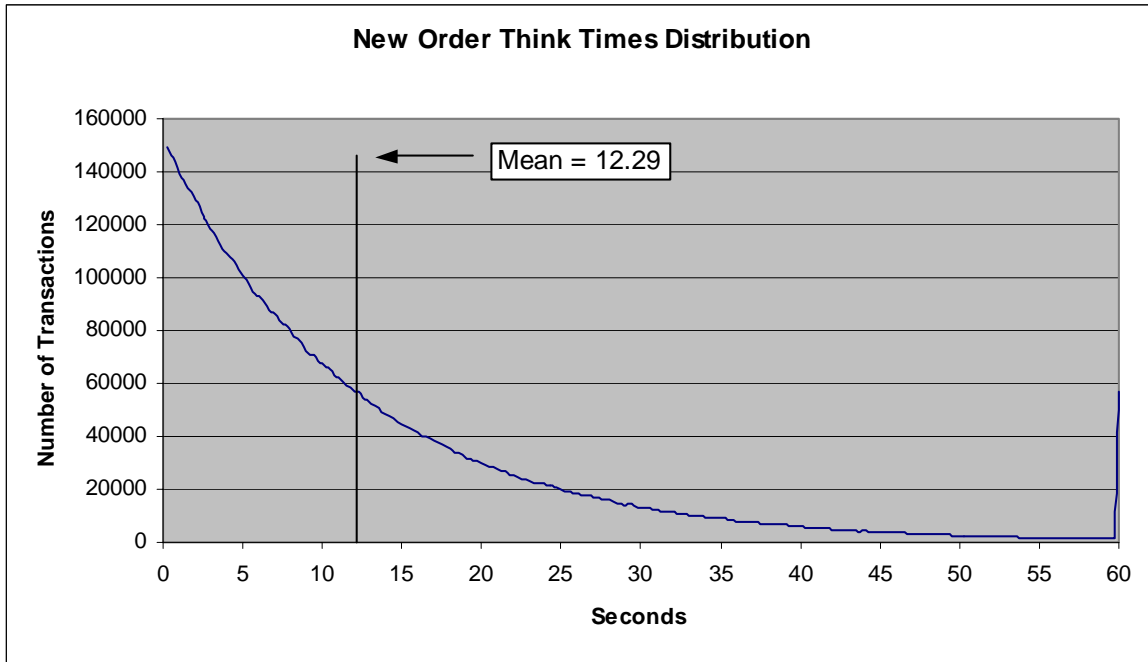


Figure 9. Throughput vs. Time Distribution

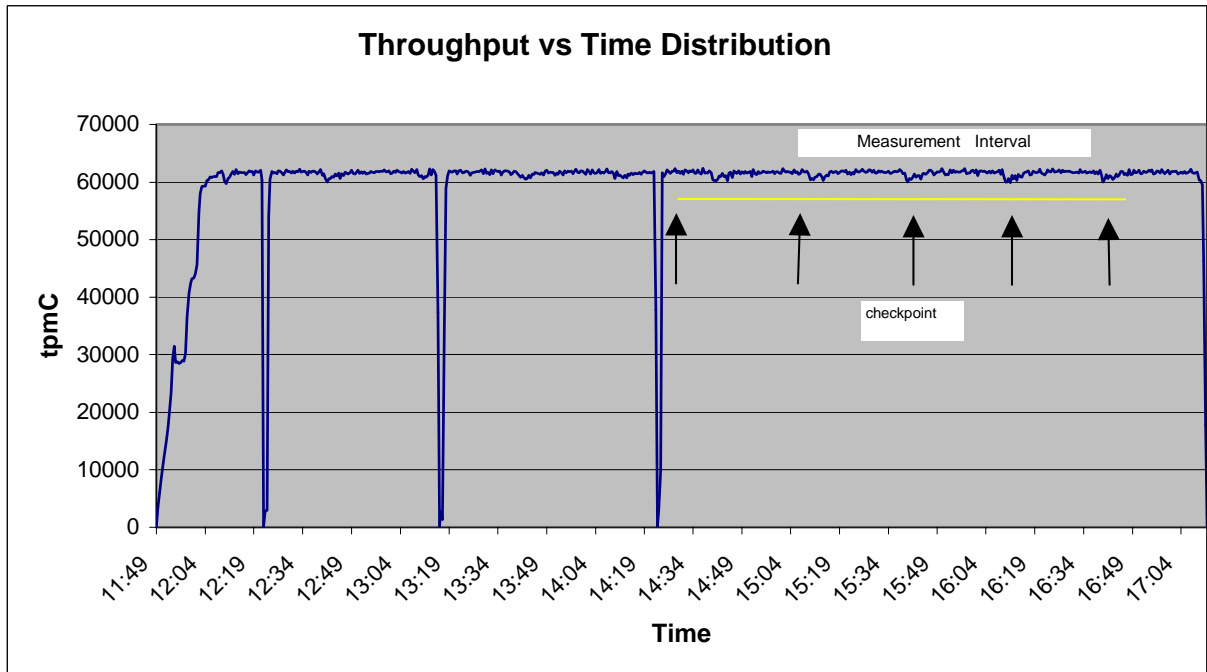

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over Ethernet LANs using DBLIB and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 56 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes so that the checkpoint interval was an integral multiple of the measurement interval, which was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 10.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	59.99%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.12%
Transaction Mix	New Order	44.95%
	Payment	43.01%
	Order status	4.01%
	Delivery	4.02%
	Stock level	4.01%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 40 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted approximately 14 minutes. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
02:58:35 p.m.	14 minutes, 1 seconds
03:28:33 p.m.	14 minutes, 1 seconds
03:58:31 p.m.	14 minutes, 1 seconds
04:28:29 p.m.	14 minutes, 1 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 4 HP ProLiant servers. These driver machines emulated the users web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 4 driver (RTE) machines were connected through a 10/100 switch to the client machines at 100 Mbs, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit switch on a separate 1000 Mbs LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- **Maximum Qualified Throughput** **61,564.50 tpmC**
- **Price per tpmC** **\$6.13 per tpmC**
- **Availability** **December 31, 2002**

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 4 Microsoft Windows 2000 Server
- 1 Microsoft Windows .NET Enterprise Server Edition
- 1 Microsoft SQL Server 2000 Enterprise Edition (per processor)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
137 Yankton St., Suite 101
Folsom, CA 95630
(phone) (916) 985-1131
(fax) (916) 985-1185
e-mail: lorna@perfmetrics.com

Availability of the Full Disclosure Report


The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

Transaction Processing Performance Council
c/o Shanley Public Relations
777 North First Street, Suite 600
San Jose, CA 95112-6311

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



PERFORMANCE METRICS INC.
TPC Certified Auditors

August 22, 2002

Mr. Paul Cao
Hewlett-Packard Company
20555 SH 249
Houston, TX 77070

I have verified on site and by remote the TPC Benchmark™ C client/server for the following configuration:

Platform: ProLiant DL580-G2 32GB
Database Manager: Microsoft SQL Server 2000 Enterprise Edition
Operating System: Microsoft Windows .Net Enterprise Server Edition
Transaction Monitor: Microsoft COM+

Servers: ProLiant DL580 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 Pentium Xeon processor MP @ 1.6Ghz	Main: 32 GB Cache: 1024 KB	225 @ 18GB 10 @ 36GB	0.52	61,564.50
4 Clients: DL360R each with:				
Pentium III Xeon @ 1.4 Ghz	Main: 512 MB Cache: 256K	1 @ 18GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized and populated.

2229 Benita Dr. Suite 101, Rancho Cordova, CA 95670
(916) 635-2822 fax: (916) 858-0109 email: Lorna@PerfMetrics.com

Page 1

PERFORMANCE METRICS INC.
TPC Certified Auditors

- The database was properly scaled with 5,100 warehouses of which only 4,940 were active during the performance run.
- The ACID properties were successfully demonstrated.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 day space calculation was verified.
- The controller cache was disabled on the log disk controllers.
- The steady state portion of the test was 120 minutes.
- One checkpoint was taken before the measured interval.
- Four checkpoints were taken during the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None.

Sincerely,



Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

Methods.h

```
/* FILE: METHODS.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
 * audited
 *
 * PURPOSE: Header file for COM components.
 *
 * Change history:
 * 4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR
Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CCOMPONENT_ERR(COMPONENT_ERROR
Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    };
};
```

```
        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };
};

~CCOMPONENT_ERR()
{
    if (m_szTextDetail !=
NULL)
        delete []
m_szTextDetail;
    if (m_szErrorText !=
NULL)
        delete []
m_szErrorText;
};

COMPONENT_ERROR m_Error;
char
*m_szTextDetail;
char
*m_szErrorText;
DWORD
m_SystemErr;

int ErrorType() {return
ERR_TYPE_COMPONENT};
int ErrorNum() {return m_Error};
char *ErrorText();

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectControl,
public IObjectConstruct,
public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IObjectControl)
    COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
};
```

```
    HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall CallSetComplete();

// IObjectControl
STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
STDMETHODIMP Activate() { return S_OK; }
// we don't support COM Services
transactions (no enlistment)
STDMETHODIMP_(void) Deactivate() { /*
nothing to do */ }

// IObjectConstruct
STDMETHODIMP Construct(IDispatch * pUnk);

private:
    BOOL m_bCanBePooled;
    CTPCC_BASE *m_pTxn;

    struct COM_DATA
    {
        int retval;
        int error;
        union
        {
            NEW_ORDER_DATA
NewOrder;
            PAYMENT_DATA
Payment;
            DELIVERY_DATA
Delivery;
            STOCK_LEVEL_DATA
StockLevel;
            ORDER_STATUS_DATA
OrderStatus;
        } u;
    };

};

////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};
```

```

};

////////////////////////////////////
////////////////////////////////////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
// HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// COrderStatus :
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

```

    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
// HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
&CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// CStockLevel :
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

```

    HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

ReadRegistry.c pp

```

/* FILE: READREGISTRY.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Implementation for TPC-C Tuxedo
class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. There parameters are
* under the TPCC key.
*
* RETURNS FALSE = no errors
* TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use; may
be either ODBC or DBLIB
    pReg->eDB_Protocol = Unspecified;

```

```

        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp,
szDBNames[ODBC]) )
                pReg->eDB_Protocol =
ODBC;
            else if ( !strcmp(szTmp,
szDBNames[DBLIB]) )
                pReg->eDB_Protocol =
DBLIB;
        }

        pReg->eTxnMon = None;
        // determine txn monitor to use; may be
either TUXEDO, or blank
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp,
szTxnMonNames[TUXEDO]) )
                pReg->eTxnMon = TUXEDO;
            else if ( !strcmp(szTmp,
szTxnMonNames[ENCINA]) )
                pReg->eTxnMon = ENCINA;
            else if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
                pReg->eTxnMon = COM;
        }

        pReg->bCOM_SinglePool = FALSE;
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp, "YES") )
                pReg->bCOM_SinglePool =
TRUE;
        }

        pReg->dwMaxConnections = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxConnections = dwTmp;

        pReg->dwMaxPendingDeliveries = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxPendingDeliveries =
dwTmp;

        pReg->dwNumberOfDeliveryThreads = 0;
        size = sizeof(dwTmp);

```

```

        if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwNumberOfDeliveryThreads =
dwTmp;

        size = sizeof( pReg->szPath );
        if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS )
            pReg->szPath[0] = 0;

        size = sizeof( pReg->szDbServer );
        if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )
            pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) !=
ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) !=
ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) !=
ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        RegCloseKey(hKey);

        return FALSE;
    }

```

ReadRegistry.h

```

/* FILE: ReadRegistry.h
* Microsoft
TPC-C Kit Ver. 4.20.000 Copyright
Microsoft, 1999
* All Rights Reserved
* not audited
* PURPOSE: Header for registry related code.
* Change history:
* 4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC",
"DBLIB" };

```

```

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO",
"ENCINA", "COM" };

```

```

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{

```

```

    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

```

```

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

WEBCLNT.DSP

```

# Microsoft Developer Studio Project File -
Name="webclnt" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 5.00
# ** DO NOT EDIT **

```

```

# TARGETTYPE "Win32 (x86) Application" 0x0101

```

```

CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak" CFG="webclnt - Win32
Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32
(x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32
(x86) Application")
!MESSAGE

```

```

# Begin Project
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe

```

```

MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "webclnt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG"
/D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib /nologo /subsystem:windows /machine:I386

!ELSEIF "$(CFG)" == "webclnt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D
"_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib

```

```

odbccp32.lib /nologo /subsystem:windows /debug
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib /nologo /subsystem:windows /debug
/machine:I386

!ENDIF

# Begin Target

# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project

```

Webclnt.dsw

```

Microsoft Developer Studio Workspace File, Format
Version 6.00
# WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!

#####

Project:
"db_dblib_dll"=".\\db_dblib_dll\\db_dblib_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}

Package=<4>
{{{
}}}

#####

Project: "db_odbc_dll"=".\\db_odbc_dll\\db_odbc_dll.dsp
- Package Owner=<4>

Package=<5>
{{{
}}

Package=<4>
{{{
}}}

#####

Project: "install"=".\\install\\install.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
Begin Project Dependency
Project_Dep_Name isapi_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tuxapp
End Project Dependency
Begin Project Dependency
Project_Dep_Name db_dblib_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name db_odbc_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_com_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_tuxedo_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tpcc_com_all
End Project Dependency
Begin Project Dependency
Project_Dep_Name tpcc_com_ps
End Project Dependency
}}}

#####

Project: "isapi_dll"=".\\isapi_dll\\isapi_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####

Project: "tm_com_dll"=".\\tm_com_dll\\tm_com_dll.dsp -
Package Owner=<4>

```

```

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_all
  End Project Dependency
}}}

#####
#####

Project:
"tm_encina_dll"=.\tm_encina_dll\tm_encina_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project:
"tm_tuxedo_dll"=.\tm_tuxedo_dll\tm_tuxedo_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project:
"tpcc_com_all"=.\tpcc_com_all\tpcc_com_all.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
}}}

```

```

#####
#####

Project: "tpcc_com_ps"=.\tpcc_com_ps\tpcc_com_ps.dsp
- Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project: "tuxapp"=.\tuxapp\tuxapp.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
}}}

#####
#####

Global:

Package=<5>
{{{
}}}

Package=<3>
{{{
}}}

#####
#####

db_dblib_dll.ds
p
# Microsoft Developer Studio Project File -
Name="db_dblib_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

```

```

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_dblib_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_dblib_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_dblib_dll.mak"
CFG="db_dblib_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_dblib_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_dblib_dll - Win32 Debug" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_dblib_dll - Win32 IceCAP" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "db_dblib_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe

```

```

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ntdbllib.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /machine:I386
/out:".bin\tpcc_dblib.dll"

!ELSEIF "$(CFG)" == "db_dblib_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".bin"
# PROP Intermediate_Dir ".obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdptype:sept
# ADD LINK32 ntdbllib.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc_dblib.dll" /pdptype:sept

!ELSEIF "$(CFG)" == "db_dblib_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_dblib"
# PROP BASE Intermediate_Dir "db_dblib"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".bin"
# PROP Intermediate_Dir ".obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /MDd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32"
/D "NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntdbllib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc_dblib.dll"
/pdptype:sept
# ADD LINK32 icap.lib ntdbllib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc_dblib.dll"
/pdptype:sept

!ENDIF

# Begin Target

# Name "db_dblib_dll - Win32 Release"
# Name "db_dblib_dll - Win32 Debug"
# Name "db_dblib_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\src\tpcc_dblib.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=..\common\src\error.h
# End Source File
# Begin Source File

SOURCE=.\src\tpcc_dblib.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target

```

```
# End Project
```

db_odbc_dll.ds

p

```

# Microsoft Developer Studio Project File -
Name="db_odbc_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_odbc_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak" CFG="db_odbc_dll
- Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_odbc_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 IceCAP" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "db_odbc_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".bin"
# PROP Intermediate_Dir ".obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```



```

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
/win32 "NUL"
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o /win32
"NUL"
# ADD BASE RSC /1 0x409 /d "NDEBUG"
# ADD RSC /1 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386 /out:".bin\tpcc_odbc.dll"

!ELSEIF "$(CFG) == "db_odbc_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /ZI /Od /D "WIN32" /D
"_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
/win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o /win32
"NUL"
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdptype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdptype:sept
# ADD LINK32 icap.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:windows
/dll /debug /machine:I386 /out:".bin\tpcc_odbc.dll"
/pdptype:sept

!ENDIF

# Begin Target

# Name "db_odbc_dll - Win32 Release"
# Name "db_odbc_dll - Win32 Debug"
# Name "db_odbc_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\src\tpcc_odbc.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=.\common\src\error.h

```

```

!ELSEIF "$(CFG) == "db_odbc_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_odbc_"
# PROP BASE Intermediate_Dir "db_odbc_"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32"
/D "NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
/win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o /win32
"NUL"
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc_odbc.dll"
/pdptype:sept
# ADD LINK32 icap.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:windows
/dll /debug /machine:I386 /out:".bin\tpcc_odbc.dll"
/pdptype:sept

!ENDIF

# Begin Target

# Name "db_odbc_dll - Win32 Release"
# Name "db_odbc_dll - Win32 Debug"
# Name "db_odbc_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\src\tpcc_odbc.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=.\common\src\error.h

```

```

# End Source File
# Begin Source File

SOURCE=.\src\tpcc_odbc.h
# End Source File
# Begin Source File

SOURCE=.\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=.\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

dlldata.c

```

/*****
****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file
compile.

To completely reconstruct this file, delete it and
rerun MIDL
on all the IDL files in this DLL, specifying this
file for the
/dlldata command line option

****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

```

error.h

```
/* FILE: ERROR.H Microsoft
 *
 * TPC-C Kit Ver. 4.20.000 Copyright
 *
 * Microsoft, 1999
 * All Rights Reserved
 *
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Header file for error exception
 * classes.
 *
 * Change history:
 * 4.20.000 - updated rev number to
 * match kit
 * 4.21.000 - fixed bug: ~CBaseErr
 * needed to be declared virtual
 */

#pragma once

#ifndef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError;
    char szMsg[256];
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL = 1,
    ERR_WARNING_LEVEL = 2,
    ERR_INFORMATION_LEVEL = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC -1
//logic error in program; internal error
#define ERR_SUCCESS 0
//success (a non-error error)
#define ERR_BAD_ITEM_ID 1
//expected abort record in txnRecord
```

```
#define ERR_TYPE_DELIVERY_POST 2
//expected delivery post failed
#define ERR_TYPE_WEBDDL 3
//tpcc web generated error
#define ERR_TYPE_SQL 4
//sql server generated error
#define ERR_TYPE_DBLIB 5
//dblib generated error
#define ERR_TYPE_ODBC 6
//odbc generated error
#define ERR_TYPE_SOCKET 7
//error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK 8
//dblib and odbc only deadlock condition
#define ERR_TYPE_COM 9
//error from COM call
#define ERR_TYPE_TUXEDO 10
//tuxedo error
#define ERR_TYPE_OS 11
//operating system error
#define ERR_TYPE_MEMORY 12
//memory allocation error
#define ERR_TYPE_TPCC_ODBC 13
//error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB 14
//error from tpcc dblib txn module
#define ERR_TYPE_DELISRV 15
//delivery server error
#define ERR_TYPE_TXNLOG 16
//txn log error
#define ERR_TYPE_BCONN 17
//Benchcraft connection class
#define ERR_TYPE_TPCC_CONN 18
//Benchcraft connection class
#define ERR_TYPE_ENCINA 19
//Encina error
#define ERR_TYPE_COMPONENT 20
//error from COM component
#define ERR_TYPE_RTE 21
//Benchcraft rte
```

```
#define ERR_TYPE_AUTOMATION 22
//Benchcraft automation errors
#define ERR_TYPE_DRIVER 23
//Driver engine errors
#define ERR_TYPE_RTE_BASE 24
//Framework errors

#define ERR_INS_MEMORY "Insufficient Memory to continue."
#define ERR_UNKNOWN "Unknown error."
#define ERR_MSG_BUF_SIZE 512
#define INV_ERROR_CODE -1

class CBaseErr
{
public:
    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg =
        INV_ERROR_CODE;
        if (szLoc)
        {
            m_szLoc = new
            char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new
        char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL),
        m_szApp, m_szApp_size);
    }
    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;
        if (szLoc)
        {
            m_szLoc = new
            char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new
        char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL),
        m_szApp, m_szApp_size);
    }
    virtual ~CBaseErr(void)
    {

```

```

        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int                j = 0;
        char                szTmp[512];

        if (szStr)
            j = wsprintf(szTmp,
"%s\n",szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());

        j += wsprintf(szTmp+j, "%s\n",
ErrorText());

        ::MessageBox(hwnd, szTmp,
m_szApp, MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }
    virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
    virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error

protected:
    char                *m_szApp;
    char                *m_szLoc; // code location where
the error occurred
    int                m_idMsg;
};

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
    };

    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);
    Action    m_eAction;

```

```

    int ErrorType() { return ERR_TYPE_SOCKET;};
    char *ErrorText(void);
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        eBeginThread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
    };

    CSystemErr(Action
eAction, LPCTSTR szLocation);
    int                ErrorType() { return
ERR_TYPE_OS};
    char                *ErrorText(void);
    void                Draw(HWND hwnd, LPCTSTR szStr =
NULL);

    Action    m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int ErrorType() {return ERR_TYPE_MEMORY;}
    char *ErrorText() {return ERR_INS_MEMORY;}
};

```

install.c

```

/*      FILE:                INSTALL.C
 *
 *      TPC-C Kit Ver. 4.20.000
 *
 *      Microsoft
 *
 *      Copyright
 *      Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not audited
 *
 *      PURPOSE: Automated installation
application for TPC-C Web Kit
 *      Contact: Charles Levine
(clevine@microsoft.com)
 *
 *      Change history:
 *
 *      4.20.000 - added COM installation
steps
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeLS;
DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllLS;

// TPC-C registry settings
TPC_REGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;

static int iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; //
last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);

```

```

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd,
char *szDllPath);
static void
ReadRegistrySettings(void);
static void
WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char
*szFileName);
static int
CopyFiles(HWND hDlg, char *szDllPath);
static BOOL GetInstallPath(char
*szDllPath);
static void GetVersionInfo(char
*szDLLPath, char *szExePath);
static BOOL
CheckWWWebService(void);
static BOOL
StartWWWebService(void);
static BOOL StopWWWebService(void);
static void UpdateDialog(HWND
hDlg);

BOOL install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE
hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)

```

```

{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0) );
            PostMessage(hwnd,
WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo );
            pSrc = (BYTE
*)LockResource(hRes);
            pDst = (unsigned char
*)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst,
pSrc, dwSize);
                pDst[dwSize]
= 0;

                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
                free(pDst);
            }
            else
            {
                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
                return TRUE;
            }
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
            {
                EndDialog(hwnd, TRUE);
                if ( wParam == IDCANCEL )
                {
                    EndDialog(hwnd, FALSE);
                    default:
                        break;
                }
            }
            return FALSE;
    }
}

```

```

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
            {
                EndDialog(hwnd, TRUE);
                break;
            }
            default:
                break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char
szDllPath[256];
    static char
szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP |
MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
    }
}

```

```

    Reg.dwNumberOfDeliveryThreads = 4;
    Reg.dwMaxConnections =
100;
    Reg.dwMaxPendingDeliveries = 100;
    Reg.eDB_Protocol =
DBLIB;
    Reg.eTxnMon = None;
    strcpy(Reg.szDbServer,
    "");
    strcpy(Reg.szDbName,
    "tpcc");
    strcpy(Reg.szDbUser,
    "sa");
    strcpy(Reg.szDbPassword,
    "");
    iPoolThreadLimit =
iMaxPhysicalMemory * 2;
    iThreadTimeout = 86400;
    iListenBackLog = 15;
    iAcceptExOutstanding =
40;

    ReadTPCCRRegistrySettings( &Reg );
    ReadRegistrySettings();

    GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
    GetVersionInfo(szDllPath, szExePath);
    wsprintf(szTmp,
"Version %d.%2d.%3d", versionExeMS, versionExeMM,
versionExeLS);
    SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
    SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
    SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
    SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
    SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
    SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
    SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
    SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
    SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
    SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);

```

```

    SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
    SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
    SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);
    CheckDlgButton(hwnd,
IDC_DBLIB, 0);
    CheckDlgButton(hwnd,
IDC_ODBC, 0);
    if ( Reg.eDB_Protocol
== DBLIB )
        CheckDlgButton(hwnd, IDC_DBLIB, 1);
    else
        CheckDlgButton(hwnd, IDC_ODBC, 1);
    // check OS version
    level for COM. Must be at least Windows 2000
    VI.dwOSVersionInfoSize
= sizeof(VI);
    GetVersionEx( &VI );
    if (VI.dwMajorVersion <
5)
    {
        HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
        EnableWindow(
hDlg, 0 ); // disable COM option
        if
(Reg.eTxnMon == COM)
            Reg.eTxnMon = None;
    }
    CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
    CheckDlgButton(hwnd,
IDC_TM_TUXEDO, 0);
    CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
    CheckDlgButton(hwnd,
IDC_TM_ENCINA, 0);
    switch (Reg.eTxnMon)
    {
    case None:
        CheckDlgButton(hwnd, IDC_TM_NONE, 1);
        break;
    case TUXEDO:
        CheckDlgButton(hwnd, IDC_TM_TUXEDO, 1);
        break;
    case ENCINA:
        CheckDlgButton(hwnd, IDC_TM_ENCINA, 1);
        break;
    case COM:
        CheckDlgButton(hwnd, IDC_TM_MTS, 1);

```

```

        break;
    }
    return TRUE;
case WM_PAINT:
    if ( IsIconic(hwnd) )
    {
        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
case WM_COMMAND:
    if ( HIWORD(wParam) ==
BN_CLICKED )
    {
        switch(
LOWORD(wParam) )
        {
        case IDC_DBLIB:
            return TRUE;
        case IDC_ODBC:
            return TRUE;
        case IDOK:
            ProcessOK(hwnd, szDllPath);
            return TRUE;
        case IDCANCEL:
            EndDialog(hwnd, FALSE);
            return TRUE;
        default:
            return FALSE;
        }
    }
    default:
        break;
}
return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath)
{
    int d;
    HWND hDlg;
    int rc;
    char szFullName[256];

```

```

char    szErrTxt[128];

// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);

GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));

if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
{
    Reg.eDB_Protocol = DBLIB;
    rc = 1;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_ODBC) )
{
    Reg.eDB_Protocol = ODBC;
    rc = 2;
}

if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE) )
    Reg.eTxnMon = None;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_TUXEDO) )
    Reg.eTxnMon = TUXEDO;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
    Reg.eTxnMon = COM;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_ENCINA) )
    Reg.eTxnMon = ENCINA;

iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);

// write binaries to inetpub\wwwroot
rc = CopyFiles(hDlg, szDllPath);

```

```

if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s)
occured when creating " );
    strcat( szErrTxt, szLastFileName
);
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occured
when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
}

// if using COM
if (Reg.eTxnMon == COM)
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    if (install_com(szDllPath))
    {
        ShowWindow(hwnd,
SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt,
"Error occured when configuring
COM settings." );
        MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP |
MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

Sleep(100);

```

```

ShowWindow(hwnd, SW_SHOWNA);
DestroyWindow(hDlg);

EndDialog(hwnd, rc);
return;
}

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD   size;
    DWORD   type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iPoolThreadLimit);
        if ( RegQueryValueEx(hKey,
"PoolThreadLimit", 0, &type, (char
*)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit
)
                iPoolThreadLimit = iMaxPhysicalMemory * 2;

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char
*)&iThreadTimeout, &size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char
*)&iListenBackLog, &size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size =
sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if (
!iAcceptExOutstanding )
                iAcceptExOutstanding = 40;

        RegCloseKey(hKey);
    }
}

```

```

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char
*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param

```

```

eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));
        RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 15));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);

        return TRUE;
    }

    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC   lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
    if (lpDllEntryPoint != NULL)

```

```

    {
        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL      hDLL;
    HRSRC        hResInfo;
    HANDLE        hFile;
    DWORD         dwSize;
    BYTE          *pSrc;
    DWORD         d;
    char          szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL        bSvcRunning;

    bSvcRunning = CheckWWWBService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
        StopWWWBService();
    }

```

```

        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if (!FileFromResource( "DBLIB_DLL",
IDR_DBLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tuxapp.exe
    strcpy( szLastFileName, "tuxapp.exe" );
    if (!FileFromResource( "TUXEDO_APP",
IDR_TUXEDO_APP, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_tuxedo.dll
    strcpy( szLastFileName, "tpcc_tuxedo.dll"
);
    if (!FileFromResource( "TUXEDO_DLL",
IDR_TUXEDO_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
        return 0;

```

```

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_ps.dll
        strcpy( szLastFileName, "tpcc_com_ps.dll"
);
        if (!FileFromResource( "COM_PS_DLL",
IDR_COMPS_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.dll
        strcpy( szLastFileName, "tpcc_com_all.dll"
);
        if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        //if we stopped service restart it.
        if ( bSvcRunning )
        {
            SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
            SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
            UpdateDialog(hDlg);
            StartWWWebService();
        }

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        return 1;
    }

    static BOOL GetInstallPath(char *szDllPath)
    {
        HKEY hKey;
        BYTE szData[256];
        DWORD sv;
        BOOL bRc;
        int len;
        char *ptr;
        int iRc;

        szDllPath[0] = 0;
        bRc = TRUE;
        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs\\Virtual Roots", 0, KEY_ALL_ACCESS, &hKey) ==
ERROR_SUCCESS )
        {
            sv = sizeof(szData);
            iRc = RegQueryValueEx( hKey,
"/,", NULL, NULL, szData, &sv ); // used by IIS 3.0
            if (iRc == ERROR_FILE_NOT_FOUND)

```

```

            iRc = RegQueryValueEx(
hKey, "/", NULL, NULL, szData, &sv ); // used by
IIS 4.0
            if (iRc == ERROR_SUCCESS)
            {
                bRc = FALSE;
                strcpy(szDllPath,
szData);
                if ( (ptr =
strchr(szDllPath, ',')) )
                    *ptr = 0;

                len =
strlen(szDllPath);
                if ( szDllPath[len-1]
!= '\\\' )
                {
                    szDllPath[len] = '\\';
                    szDllPath[len+1] = 0;
                }
                RegCloseKey(hKey);
            }
            return bRc;
        }

    static void GetVersionInfo(char *szDLLPath, char
*szExePath)
    {
        DWORD d;
        DWORD dwSize;
        DWORD dwBytes;
        char *ptr;
        VS_FIXEDFILEINFO *vs;

        versionDllMS = 0;
        versionDllLS = 0;
        if ( _access(szDLLPath, 00) == 0 )
        {
            dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
            if ( dwSize )
            {
                ptr = (char
*)malloc(dwSize);
                GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
                VerQueryValue(ptr,
"\\",&vs, &dwBytes);
                versionDllMS = vs-
>dwProductVersionMS;
                versionDllLS = vs-
>dwProductVersionLS;
                free(ptr);
            }
        }
    }

```



```

    }
    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs,
&dwBytes);

        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}

static BOOL CheckWWWWebService(void)
{
    SC_HANDLE      schSCManager;
    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;
}

ServiceNotRunning:

    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWWebService(void)
{
    SC_HANDLE      schSCManager;

```

```

    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;
    DWORD
    dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWWebErr;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWWebErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint) //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StartWWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;
}

StartWWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWWebService(void)
{
    SC_HANDLE      schSCManager;
    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;
    DWORD
    dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);

```

```

    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StopWWWWebErr;

    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWWebErr;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StopWWWWebErr;
    while( ssStatus.dwCurrentState ==
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint) //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StopWWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;
}

StopWWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

install.h

```
//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
```

install.rc

```
//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"
////////////////////////////////////
//
// English (U.S.) resources
//
#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT        ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT        ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT        ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    CONTROL        "None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
    WS_GROUP |
WS_TABSTOP,43,100,33,10
    CONTROL        "COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP,43,113,32,10
    CONTROL        "TUXEDO", IDC_TM_TUXEDO, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP,106,100,46,10
    CONTROL        "ENCINA", IDC_TM_ENCINA, "Button", BS_AUTORADIOBUTTON |
WS_DISABLED |
WS_TABSTOP,106,113,43,10
    EDITTEXT        ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT        ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT        ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    EDITTEXT        ED_DB_NAME,131,191,67,12,ES_AUTOHSCROLL
    CONTROL        "DBLIB", IDC_DBLIB, "Button", BS_AUTORADIOBUTTON |
WS_GROUP |
    WS_TABSTOP,45,219,39,12
    CONTROL        "ODBC", IDC_ODBC, "Button", BS_AUTORADIOBUTTON |
WS_TABSTOP,
    91,219,39,12
    EDITTEXT        ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT        ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RI
    GHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT        ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT        ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    DEFPUSHBUTTON  "OK",IDOK,53,331,50,14
    PUSHBUTTON    "Cancel",IDCANCEL,119,331,50,14
    EDITTEXT        IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY
    LTEXT        "Number of Delivery
Threads:", IDC_STATIC,35,45,115,12
    LTEXT        "Max Number of
Connections:", IDC_STATIC,35,73,115,12
    RTEXT        "Version
4.11", IDC_VERSION,120,4,89,9
    LTEXT        "IIS Max Thread Pool
Limit:", IDC_STATIC,36,263,115,12
    LTEXT        "Web Service Backlog Queue
Size:", IDC_STATIC,36,277,115,
12
    LTEXT        "IIS Thread Timeout
(seconds):", IDC_STATIC,36,291,115,12
    LTEXT        "IIS Listen
Backlog:", IDC_STATIC,36,307,115,10
    GROUPBOX    "Database
Interface", IDC_STATIC,35,208,163,27,WS_GROUP
    LTEXT        "Installation
directory:", IDC_STATIC,35,219,71,10
    GROUPBOX    "Transaction
Monitor", IDC_STATIC,33,90,165,37
    LTEXT        "Server
Name:", IDC_STATIC,35,155,56,8
    LTEXT        "User ID:", IDC_STATIC,35,168,60,8
    LTEXT        "User
Password:", IDC_STATIC,35,181,83,8
```

```

LTEXT "Database
Name:", IDC_STATIC, 35, 194, 54, 8
GROUPBOX "SQL Server Connection
Properties", IDC_STATIC, 22, 139, 187,
102
GROUPBOX "Web Client
Properties", IDC_STATIC, 22, 15, 187, 118
GROUPBOX "IIS
Settings", IDC_STATIC, 22, 247, 187, 79
LTEXT "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER |
WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
DEFPUSHBUTTON "OK", IDOK, 33, 45, 50, 9
CTEXT "HTML TPC-C Installation
Successful", IDC_RESULTS, 7, 22,
102, 18, 0, WS_EX_CLIENTEDGE
ICON
IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK |
DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
CONTROL
"Progress1", IDC_PROGRESS1, "mactls_progress32", WS_BORD
ER,
7, 20, 77, 13
CTEXT
"Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
EDITTEXT
IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
|
ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
DEFPUSHBUTTON "I &Agree", IDOK, 87, 181, 50, 14
PUSHBUTTON "&Cancel", IDCANCEL, 153, 181, 50, 14
END

////////////////////////////////////
//
// DESIGNINFO
//

```

```

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
IDD_DIALOG1, DIALOG
BEGIN
LEFTMARGIN, 22
RIGHTMARGIN, 209
VERTGUIDE, 35
VERTGUIDE, 198
TOPMARGIN, 4
BOTTOMMARGIN, 345
END

IDD_DIALOG2, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 109
TOPMARGIN, 7
BOTTOMMARGIN, 54
END

IDD_DIALOG3, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 84
TOPMARGIN, 7
BOTTOMMARGIN, 33
END

IDD_DIALOG4, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 278
TOPMARGIN, 7
BOTTOMMARGIN, 195
END
#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
"resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
#include "afxres.h"\r\n"
"\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
\r\n"
"\0"

```

```

END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Icon
//
// Icon with lowest ID value placed first to ensure
application icon
// remains consistent on all systems.
IDI_ICON1 ICON DISCARDABLE
"icon1.ico"
IDI_ICON2 ICON DISCARDABLE
"icon2.ico"

////////////////////////////////////
//
// TPCDDL
//
IDR_TPCCDLL TPCCDLL DISCARDABLE
"..\\..\\isapi_dll\\bin\\tpcc.dll"

#ifdef _MAC
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C Web Client
Installer\0"
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "install\0"
VALUE "FileVersion", "0, 4, 20, 0\0"
VALUE "InternalName", "install\0"
VALUE "LegalCopyright", "Copyright ©
1999\0"
VALUE "OriginalFilename", "install.exe\0"
VALUE "ProductName", "Microsoft
install\0"

```

```

        VALUE "ProductVersion", "0, 4, 20, 0\0"
    END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

////////////////////////////////////
//
// LICENSE
//

IDR_LICENSE1          LICENSE DISCARDABLE
"license.txt"

////////////////////////////////////
//
// DBLIB_DLL
//

IDR_DBLIB_DLL          DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_dll\\bin\\tpcc_dblib.dll"

////////////////////////////////////
//
// ODBC_DLL
//

IDR_ODBC_DLL          ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_dll\\bin\\tpcc_odbc.dll"

////////////////////////////////////
//
// TUXEDO_APP
//

IDR_TUXEDO_APP        TUXEDO_APP DISCARDABLE
"..\\..\\tuxapp\\bin\\tuxapp.exe"

////////////////////////////////////
//
// TUXEDO_DLL
//

IDR_TUXEDO_DLL        TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"

////////////////////////////////////
//
// COM_DLL
//

```

```

IDR_COM_DLL          COM_DLL DISCARDABLE
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

////////////////////////////////////
//
// COM_PS_DLL
//

IDR_COMPS_DLL        COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
//
// COM_ALL_DLL
//

IDR_COMALL_DLL        COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"
#endif // English (U.S.) resources

////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
//
//
// Generated from the TEXTINCLUDE 3 resource.
//

#endif // not APSTUDIO_INVOKED


```

install_com.cp

```

p
/*      FILE:          INSTALL_COM.CPP
 *      Microsoft
 *      TPC-C Kit Ver. 4.20.000
 *      Copyright
 *      Microsoft, 1999
 *      All Rights Reserved
 *
 *      not audited
 *
 *      PURPOSE:  installation code for COM
 *      application for TPC-C Web Kit
 *      Contact:  Charles Levine
 *      (clevine@microsoft.com)
 *
 *      Change history:
 *      4.20.000 - first version
 */

```

```

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog*  pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection*
pCatalogCollectionMethod = NULL;

    ICatalogObject*
pCatalogObjectApp = NULL;
    ICatalogObject*
pCatalogObjectCo = NULL;
    ICatalogObject*
pCatalogObjectItf = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
                NULL,
                CLSCTX_INPROC_SERVER,
                IID_ICOMAdminCatalog,
                (void**)
                &pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

```

```

        bstrTemp = "Applications";

        // Attempt to connect to "Applications" in
the Catalog
        hr = pCOMAdminCat->GetCollection(bstrTemp,
                                        (IDispatch**)
&pCatalogCollectionApp);
        if (!SUCCEEDED(hr)) goto Error;

        // Attempt to load the "Applications"
collection
        hr = pCatalogCollectionApp->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionApp-
>get_Count(&lCount);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through applications to delete
existing "TPC-C" application (if any)
        while (lCount > 0)
        {
            hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)
&pCatalogObjectApp);
            if (!SUCCEEDED(hr)) goto Error;

            hr = pCatalogObjectApp-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            if (wcsncmp(vTmp.bstrVal, L"TPC-
C"))
            {
                lCount--;
                continue;
            }
            else
            {
                hr =
pCatalogCollectionApp->Remove(lCount - 1);
                if (!SUCCEEDED(hr))
                    goto Error;

                break;
            }
        }

        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        // add the new application
        hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        // set properties
        bstrTemp = "Name";
        vTmp = "TPC-C";
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);

```

```

        if (!SUCCEEDED(hr)) goto Error;

        // set as a library (in process)
application
        bstrTemp = "Activation";
        lActProp = COMAdminActivationInproc;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // set security level to process
        bstrTemp = "AccessChecksLevel";
        lActProp =
COMAdminAccessChecksApplicationLevel;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the Components
collection later
        hr = pCatalogObjectApp->get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        // save changes (app creation) so component
installation will work
        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        pCatalogObjectApp->Release();
        pCatalogObjectApp = NULL;

        bstrTemp = "TPC-C";
        // app name
        bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
        bstrTemp3 = ""; // type

        library (TLB)
        bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll"; // proxy/stub dll

        hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
                    bstrTemp2,
                    bstrTemp3,
                    bstrTemp4);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionCo);
        if (!SUCCEEDED(hr)) goto Error;

```

```

        hr = pCatalogCollectionCo->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
application and set the properties
        while (lCountCo > 0)
        {
            hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)
&pCatalogObjectCo);
            if (!SUCCEEDED(hr)) goto Error;

            // used for debugging (view the
name)
            hr = pCatalogObjectCo-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructionEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructorString";
            bstrTemp2 = "dummy string (do not
remove)";
            vTmp = bstrTemp2;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"JustInTimeActivation";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "MaxPoolSize";
            vTmp.Clear(); // clear
variant so it isn't stored as a bool (_variant_t
feature)
            vTmp = (long)30;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"ObjectPoolingEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

```

```

// save key to get the
InterfacesForComponent collection
hr = pCatalogObjectCo-
>get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp =
"InterfacesForComponent";
hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionItf);
if (!SUCCEEDED(hr)) goto Error;

>Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
if (!SUCCEEDED(hr)) goto Error;

// iterate through interfaces in
component
while (lCountItf > 0)
{
hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**) &pCatalogObjectItf);
if (!SUCCEEDED(hr))
goto Error;

// save key to get the
MethodsForInterface collection
hr = pCatalogObjectItf-
>get_Key(&vKey);
if (!SUCCEEDED(hr))
goto Error;

bstrTemp =
"MethodsForInterface";
hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionMethod);
if (!SUCCEEDED(hr))
goto Error;

hr =
pCatalogCollectionMethod->Populate();
if (!SUCCEEDED(hr))
goto Error;

hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
if (!SUCCEEDED(hr))
goto Error;

// iterate through
methods of interface
while (lCountMethod >
0)
{

```

```

hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**) &pCatalogObjectMethod);
if
(!SUCCEEDED(hr)) goto Error;

bstrTemp =
"AutoComplete";
bTmp = TRUE;
vTmp = bTmp;
hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
if
(!SUCCEEDED(hr)) goto Error;

pCatalogObjectMethod->Release();
pCatalogObjectMethod = NULL;

lCountMethod-
-;
}
// save changes
hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
if (!SUCCEEDED(hr))
goto Error;

pCatalogObjectItf-
>Release();
pCatalogObjectItf =
NULL;

lCountItf--;
}

pCatalogObjectCo->Release();
pCatalogObjectCo = NULL;

lCountCo--;
}

// save changes
hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

```

```

Error:
CoUninitialize();

if (!SUCCEEDED(hr))
{
LPTSTR lpBuf;
DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
NULL,
hr,
MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
(LPTSTR)
&lpBuf,
0,
NULL);
//
_tprintf(_T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
return TRUE;
}
else
return FALSE;
}

```

isapi_dll.dsp

```

# Microsoft Developer Studio Project File -
Name="isapi_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=isapi_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak" CFG="isapi_dll -
Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "isapi_dll - Win32 Release" (based on "Win32
(x86) Dynamic-Link Library")

```

```

!MESSAGE "isapi_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE "isapi_dll - Win32 IceCAP" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "isapi_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "NDEBUG" /D
"WIN32" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /1 0x409 /d "NDEBUG"
# ADD RSC /1 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ..\common\txnlog\lib\release\rtetime.lib
..\common\txnlog\lib\release\spinlock.lib
..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\release\txnolog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbc32.lib /nologo
/subsystem:windows /dll /machine:I386
/nodefaultlib:"LIBCMT" /out:".bin\tpcc.dll"
# SUBTRACT LINK32 /nodefaultlib

!ELSEIF "$(CFG)" == "isapi_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"

```

```

# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /Zi /Od /D "_DEBUG" /D
"WIN32" /D "_WINDOWS" /FR /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdbtype:sept
# ADD LINK32 ..\common\txnlog\lib\debug\rtetime.lib
..\common\txnlog\lib\debug\spinlock.lib
..\common\txnlog\lib\debug\error.lib
..\common\txnlog\lib\debug\txnolog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbc32.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/nodefaultlib:"LIBCMTD" /out:".bin\tpcc.dll"
/pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /nodefaultlib

!ELSEIF "$(CFG)" == "isapi_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "isapi_dll"
# PROP BASE Intermediate_Dir "isapi_dll"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /GX /Zi /Od /D
"_DEBUG" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /GX /Zi /O2 /D "NDEBUG" /D
"ICECAP" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /1 0x409 /d "_DEBUG"
# ADD RSC /1 0x409 /d "_DEBUG"
BSC32=bscmake.exe

```

```

# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT BASE LINK32 /profile /pdb:none
# ADD LINK32 icap.lib
..\common\txnlog\lib\release\rtetime.lib
..\common\txnlog\lib\release\spinlock.lib
..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\release\txnolog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbc32.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /map

!ENDIF

# Begin Target

# Name "isapi_dll - Win32 Release"
# Name "isapi_dll - Win32 Debug"
# Name "isapi_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.def, *.rc"
# Begin Source File

SOURCE=.\src\tpcc.cpp
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.def
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.rc
# End Source File
# End Group
# Begin Group "Header Files"

# PROP Default_Filter "*.h, *.hpp"
# Begin Source File

SOURCE=.\common\src\error.h
# End Source File
# Begin Source File

SOURCE=.\common\src\ReadRegistry.h
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.h
# End Source File
# Begin Source File

SOURCE=.\db_dblib_dll\src\tpcc_dblib.h
# End Source File

```

```

# Begin Source File

SOURCE=..\db_odbc_dll\src\tpcc_odbc.h
# End Source File
# Begin Source File

SOURCE=..\tm_tuxedo_dll\src\tpcc_tux.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

rtetime.h

```

/* FILE: rtetime.h : header file
 * Copyright 1997 Microsoft Corp., All rights
reserved.
 *
 * Source code licensed to Tandem Computers for
Internal
 * use only. Redistribution of source or object
files or
 * any derivative works is prohibited. By agreement,
this
 * notice may not be removed.
 *
 * Authors: Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

//FILE: RTETIME.H

#define MAX_JULIAN_TIME
0x7FFFFFFFFFFFFFFF
#define JULIAN_TIME __int64
#define TC_TIME DWORD
extern "C"
{
    BOOL InitJulianTime(LPSYSTEMTIME
lpInitTime);
    JULIAN_TIME GetJulianTime(void);
    DWORD MyTickCount(void);
    void GetJulianAndTC(JULIAN_TIME
*pJulian, DWORD *pTC);
    JULIAN_TIME ConvertTo64BitTime(int iYear, int
iMonth, int iDay, int iHour, int iMinute, int
iSecond);
    JULIAN_TIME Get64BitTime(LPSYSTEMTIME
lpInitTime);
    int JulianDay( int yr, int
mm, int dd );

```

```

void JulianToTime(JULIAN_TIME
julianTS, int* yr, int* mm, int* dd, int *hh, int
*mi, int *ss );
void JulianToCalendar( int day, int*
yr, int* mm, int* dd );
}

```

spinlock.h

```

/* FILE: SPINLOCK.H
 *
 * Copyright 1997 Microsoft Corp., All rights
reserved.
 *
 * Source code licensed to Tandem Computers for
Internal
 * use only. Redistribution of source or object
files or
 * any derivative works is prohibited. By agreement,
this
 * notice may not be removed.
 *
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

#ifndef _INC_Spinlock

const LONG LockClosed = 1;
const LONG LockOpen = 0;

/*****
 *
 * Spinlock and Semaphore locking.
 *
 * This class provides a very
conservative locking scheme.
 * The assumption behind the code is that
locks will be
 * held for a very short time. When a
lock is taken a memory
 * location is exchanged. All other
threads that want this
 * lock wait by spinning and sometimes
sleeping on a semaphore
 * until it becomes free again. The only
other choice is not
 * to wait at all and move on to do
something else. This
 * module should normally be used in
conjunction with cache
 * aligned memory in minimize cache line
misses.
 *
 *****/

class Spinlock
{
    // Private data.

```

```

HANDLE
Semaphore;
volatile LONG
m_Spinlock;
volatile LONG
Waiting;

#ifdef _DEBUG
// Counters for
debugging builds.
volatile LONG
TotalLocks;
volatile LONG
TotalSleeps;
volatile LONG
TotalSpins;
volatile LONG
TotalWaits;
#endif

public:
// Public functions.
Spinlock( void );

inline BOOL ClaimLock(
ReleaseLock( void );
~Spinlock( void );
// Disabled operations.
Spinlock( const
void operator=( const
Spinlock & Copy );

private:
// Private functions.
inline BOOL
ClaimSpinlock( volatile LONG *sl );
void WaitForLock( void
);
void WakeAllSleepers(
void );
};

/*****
 *
 * A guaranteed atomic exchange.
 *
 * An attempt is made to claim the
Spinlock. This action is
 * guaranteed to be atomic.
 *
 *****/

inline BOOL Spinlock::ClaimSpinlock(
volatile LONG *Spinlock )
{
#ifdef _DEBUG

```



```

InterlockedIncrement(
(LPLONG) & TotalLocks );
#endif
return ( (*Spinlock) ==
LockOpen) && ( InterlockedExchange( (LPLONG)Spinlock,
LockClosed ) == LockOpen) );
}

/*****
*
* Claim the Spinlock.
*
* Claim the lock if available else wait
or exit.
*
*****/

inline BOOL Spinlock::ClaimLock( BOOL Wait
)
{
    if ( ! ClaimSpinlock( (volatile
LONG*) & m_Spinlock ) )
    {
        if ( Wait )
            WaitForLock();
        return Wait;
    }
    return TRUE;
}

/*****
*
* Release the Spinlock.
*
* Release the lock and if needed wakeup
any sleepers.
*
*****/

inline void Spinlock::ReleaseLock( void )
{
    m_Spinlock = LockOpen;
    if ( Waiting > 0 )
        WakeAllSleepers();
}

#define _INC_Spinlock

#endif

```

tm_com_dll.ds
p

```

# Microsoft Developer Studio Project File -
Name="tm_com_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tm_com_dll - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak" CFG="tm_com_dll -
Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tm_com_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "tm_com_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tm_com_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe

```

```

# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386 /out:".bin\tpcc_com.dll"

!ELSEIF "$(CFG)" == "tm_com_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdptype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc_com.dll" /pdptype:sept

!ENDIF

# Begin Target

# Name "tm_com_dll - Win32 Release"
# Name "tm_com_dll - Win32 Debug"
# Begin Source File

SOURCE=.\src\tpcc_com.cpp
# End Source File
# Begin Source File

```

```
SOURCE=.\src\tpcc_com.h
# End Source File
# End Target
# End Project
```

tpcc.cpp

```
/* FILE: TPCC.C Microsoft
 * TPC-C Kit Ver. 4.20.000 Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Main module for TPCC.DLL which is
 * an ISAPI service dll.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - reworked error
 * handling; added options for COM and Encina txn
 * monitors
 */

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
```

```
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"
// DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on

TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h"
// interface to Tuxedo libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h"
// interface to Encina libraries

#include "httpext.h"
//ISAPI DLL information header
#include "tpcc.h"
//this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.
// The RTE must be synchronized with the interface
level on login, otherwise the login
// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction
information
```

```
HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;

DWORD dwDelBuffSize = 100;
// size of circular buffer for delivery

txns
DWORD dwDelBuffFreeCount;
// number of buffers free

DWORD dwDelBuffBusyIndex = 0; //
index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0; //
index position of unused entry

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
 *
 * PURPOSE: This function is the entry point
 * for the DLL. This implementation is based on the
 * fact that
 * DLL_PROCESS_ATTACH is only called from the inet
 * service once.
 *
 * ARGUMENTS: HANDLE hModule
 * module handle
 *
 * ul_reason_for_call reason for call
 * LPVOID LPVOID
 *
 * lpReserved reserved for future use
 *
 * RETURNS: BOOL FALSE
 * errors occurred in
 * initialization
 *
 * TRUE DLL
 * successfully initialized
 */

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
```

```

DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

try
{
    switch( ul_reason_for_call )
    {
        case
DLL_PROCESS_ATTACH:
            {
                DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
                GetComputerName(szMyComputerName, &dwSize);
                szMyComputerName[dwSize] = 0;
            }

            DisableThreadLibraryCalls((HMODULE)hModule)
;
            InitializeCriticalSection(&TermCriticalSection);

            ReadTPCCRegistrySettings( &Reg )
                if (
                    throw new CWBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

                    dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

                    dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

                    TermInit();

for txn monitor
                    // load DLL
(Reg.eTxnMon == TUXEDO)
                    if
                    {
                        strcpy( szDllName, Reg.szPath );

                        strcat( szDllName, "tpcc_tuxedo.dll" );

                        hLibInstanceTm = LoadLibrary( szDllName );
                    if
                    (hLibInstanceTm == NULL)

                        throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

                    //
get function pointer to wrapper for class constructor

```

```

                pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
GetProcAddress(hLibInstanceTm, "CTPCC_TUXEDO_new");
                if
                (pCTPCC_TUXEDO_new == NULL)

                    throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

                else if
                (Reg.eTxnMon == ENCINA)
                {
                    strcpy( szDllName, Reg.szPath );

                    strcat( szDllName, "tpcc_encina.dll" );

                    hLibInstanceTm = LoadLibrary( szDllName );
                if
                (hLibInstanceTm == NULL)

                    throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

                //
get function pointer to wrapper for class constructor

                pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_new");

                pCTPCC_ENCINA_post_init =
(TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_post_init
");
                if
                (pCTPCC_ENCINA_new == NULL)

                    throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

                else if
                (Reg.eTxnMon == COM)
                {
                    strcpy( szDllName, Reg.szPath );

                    strcat( szDllName, "tpcc_com.dll" );

                    hLibInstanceTm = LoadLibrary( szDllName );
                if
                (hLibInstanceTm == NULL)

                    throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

                //
get function pointer to wrapper for class constructor

                pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
                if
                (pCTPCC_COM_new == NULL)

```

```

                    throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                }

                // load DLL
for database connection
                if
                ((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
                {
                    if
                    (Reg.eDB_Protocol == DBLIB)
                    {
                        strcpy( szDllName, Reg.szPath );

                        strcat( szDllName, "tpcc_dblib.dll" );

                        hLibInstanceDb = LoadLibrary( szDllName );
                        if (hLibInstanceDb == NULL)

                            throw new CWBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                        // get function pointer to wrapper for
class constructor

                        pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");

                        if (pCTPCC_DBLIB_new == NULL)

                            throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                        else if (Reg.eDB_Protocol == ODBC)
                        {
                            strcpy( szDllName, Reg.szPath );

                            strcat( szDllName, "tpcc_odbc.dll" );

                            hLibInstanceDb = LoadLibrary( szDllName );
                            if (hLibInstanceDb == NULL)

                                throw new CWBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                            // get function pointer to wrapper for
class constructor

                            pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");

                            if (pCTPCC_ODBC_new == NULL)

                                throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

```

```

    }
    }
    if
(dwNumDeliveryThreads)
    {
//
for deferred delivery txns:
    hDoneEvent = CreateEvent( NULL, TRUE /*
manual reset */, FALSE /* initially not signalled */,
NULL );
    InitializeCriticalSection(&DelBuffCriticalS
ection);
    hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
    dwDelBuffFreeCount = dwDelBuffSize;

    InitJulianTime(NULL);

//
create unique log file name based on delilog-yyymmdd-
hhmm.log
    SYSTEMTIME Time;
    GetLocalTime( &Time );
    wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d.log",
        Reg.szPath, Time.wYear % 100,
Time.wMonth, Time.wDay, Time.wHour, Time.wMinute );
    txnDelilog = new CTxnLog(szLogFile,
TXN_LOG_WRITE);

//write event into txn log for START
    txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName));

//
allocate structures for delivery buffers and thread
mgmt
    pDeliHandles = new
HANDLE[dwNumDeliveryThreads];

    pDelBuff = new
DELIVERY_TRANSACTION[dwDelBuffSize];

//
launch DeliveryWorkerThread to perform actual
delivery txns
    for(i=0; i<dwNumDeliveryThreads; i++)
    {

```

```

        pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );
        if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
            throw new CWEBCLNT_ERR(
ERR_DELIVERY_THREAD_FAILED );
        }
        break;
    case
DLL_PROCESS_DETACH:
        if
(dwNumDeliveryThreads)
        {
            if
(txnDelilog != NULL)
            {
                //write event into txn log for STOP
                txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));

                // This will do a clean shutdown of the
delivery log file
                CTxnLog *txnDelilogLocal = txnDelilog;
                txnDelilog= NULL;
                delete txnDelilogLocal;
            }

            delete [] pDeliHandles;
            delete [] pDelBuff;

            CloseHandle( hWorkerSemaphore );
            CloseHandle( hDoneEvent );
            DeleteCriticalSection(&DelBuffCriticalSecti
on);
            DeleteCriticalSection(&TermCriticalSection)
;
            if
(hLibInstanceTm != NULL)
                FreeLibrary( hLibInstanceTm );

```

```

        hLibInstanceTm = NULL;
        if
(hLibInstanceDb != NULL)
            FreeLibrary( hLibInstanceDb );
        hLibInstanceDb = NULL;
        Sleep(500);
        break;
        default:
            /* nothing
*/;
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog( e-
>ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load."));
        TerminateExtension(0);
        return FALSE;
    }
    return TRUE;

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
*
* RETURNS: TRUE inet service
expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
    pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead
of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)

```

```

        pCTPCC_ENCINA_post_init();

        return TRUE;
    }

/* FUNCTION: TerminateExtension
 *
 * PURPOSE:      This function is called by the
inet service when the DLL is about to be unloaded.
 *
 *              Release all resources
in anticipation of being unloaded.
 *
 * RETURNS:      TRUE      inet service
expected return value.
 */

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0;
i<dwNumDeliveryThreads; i++)
        WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
 *
 * PURPOSE:      This function is the main entry
point for the TPCC DLL. The internet service
 *
 *              calls this function
passing in the http string.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB      structure pointer to passed in
internet
 *
 *              service information.
 *
 * RETURNS:      DWORD
HSE_STATUS_SUCCESS
connection can be dropped if
error
 *
 *              HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
 *
 * COMMENTS:     None
 */

DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int          iCmd, FormId,
TermId, iSyncId;

```

```

char          szBuffer[4096];

int          lpbSize;
static char  szHeader[] = "200 Ok";
DWORD       dwSize = 6;
// initial value is strlen(szHeader)
char        szHeader1[4096];

#ifdef ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )
            {
                //
                debugging...
                char
                szTmp[128];

                wsprintf(
szTmp, "Invalid term ID; TermId = %d", TermId );

                WriteMessageToEventLog( szTmp );

                throw new
CWEBCLNT_ERR( ERR_INVALID_TERMID );
            }
            //must have a valid
syncid here since termid is valid
            if (iSyncId !=
Term.pClientData[TermId].iSyncId)
                throw new
CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );

            //set use time
            Term.pClientData[TermId].iTickCount =
GetTickCount();
        }

        switch(iCmd)
        {
        case 0:
            WelcomeForm(pECB,
szBuffer);
            break;
        case 1:
            switch( FormId )
            {
                case
WELCOME_FORM:

```

```

                case
MAIN_MENU_FORM:
                    break;
                case
NEW_ORDER_FORM:
                    ProcessNewOrderForm(pECB, TermId,
szBuffer);
                    break;
                case
PAYMENT_FORM:
                    ProcessPaymentForm(pECB, TermId, szBuffer);
                    break;
                case
DELIVERY_FORM:
                    ProcessDeliveryForm(pECB, TermId,
szBuffer);
                    break;
                case
ORDER_STATUS_FORM:
                    ProcessOrderStatusForm(pECB, TermId,
szBuffer);
                    break;
                case
STOCK_LEVEL_FORM:
                    ProcessStockLevelForm(pECB, TermId,
szBuffer);
                    break;
            }
            case 2:
                // new-order selected
from menu; display new-order input form
                MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
                break;
            case 3:
                // payment selected
from menu; display payment input form
                MakePaymentForm(TermId,
NULL, INPUT_FORM, szBuffer);
                break;
            case 4:
                // delivery selected
from menu; display delivery input form
                MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
                break;
            case 5:
                // order-status
selected from menu; display order-status input form

```

```

        MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
        break;
        case 6:
            // stock-level selected
from menu; display stock-level input form
        MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
        break;
        case 7:
            // ExitCmd
TermDelete(TermId);
WelcomeForm(pECB,
szBuffer);
        break;
        case 8:
            SubmitCmd(pECB,
szBuffer);
        break;
        case 9:
            // menu
        MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
        break;
        case 10:
            // CMD=Clear
            // resets all
connections; should only be used when no other
connections are active
            TermDeleteAll();
            TermInit();
            WelcomeForm(pECB,
szBuffer);
        break;
        case 11:
            // CMD=Stats
StatsCmd(pECB,
szBuffer);
        break;
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
        delete e;
    }
    catch (...)
    {
        ErrorForm( pECB, ERR_TYPE_WEBDLL,
0, TermId, iSyncId, "Error: Unhandled exception in
Web Client.", szBuffer );
    }
#endif ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);

```

```

        wsprintf(szHeader1,
                "Content-Type:
text/html\r\n"
                "Content-Length:
%d\r\n"
                "Connection: Keep-
Alive\r\n\r\n", lpbSize);
        strcat( szHeader1, szBuffer );

        (*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

        //finish up and keep connection
pECB->dwHttpStatusCode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
    }

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR    szMsg[256];
    HANDLE   hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));

    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                EVENTLOG_ERROR_TYPE, // event type
                0, // event category
                0, // event ID
                NULL, // current user's
SID
                2, // strings in
lpszStrings
                0, // no bytes of raw
data
                (LPCTSTR *)lpszStrings, // array of
error strings
                NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred
delivery txns. There are typically several
* threads running this
routine. The number of threads is determined by an
entry

```

```

* read from the registry.
The thread waits for work by waiting on semaphore.
* When a delivery txn is
posted, the semaphore is released. After processing
* the delivery txn,
information is logged to record the txn status and
execution
* time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE *pTxn = NULL;

    DELIVERY_TRANSACTION
delivery;
PDELIVERY_DATA
pDeliveryData;
TXN_RECORD_TPCC_DELIV_DEF txnDeliRec;

    DWORD index;
HANDLE handles[2];

    SYSTEMTIME trans_end;
//delivery transaction finished
time
    SYSTEMTIME trans_start;
//delivery transaction start time

    int
iRetryCnt = 0;
static int iMaxRetries =
10;

    assert(txnDeliLog != NULL);

Reconnect:
    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol ==
DBLIB)
            pTxn =
pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        pDeliveryData = pTxn-
>BuffAddr_Delivery();
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
                "%s.
Server=%s, User=%s, Password=%s, Database=%s",
                e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
    }
}

```

```

        delete e;

        // will retry connection up to
ten times      if (iRetryCnt++ < iMaxRetries)
                {
                Sleep(5000);      //
delay for 5 seconds      goto Reconnect;
                }

                wsprintf( szTmp, "Delivery Txn
thread terminating after %d retries.", iMaxRetries );
                WriteMessageToEventLog( szTmp );
                goto ErrorExit;
        }
        catch (...)
        {

                WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread. Delivery
Txn thread terminating."));
                goto ErrorExit;
        }

        while (TRUE)
        {
                try
                {
                        //while delivery thread
running, i.e. user has not requested termination
                        while (TRUE)
                        {
                                // need to
wait for multiple objects: program exit or worker
semaphore;
                                handles[0] =
hDoneEvent;
                                handles[1] =
hWorkerSemaphore;
                                index =
WaitForMultipleObjects( 2, &handles[0], FALSE,
INFINITE );
                                if (index ==
WAIT_OBJECT_0)
                                        goto ErrorExit;

                                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));

                                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;

                                // make a
local copy of current entry from delivery buffer and
increment buffer index
                                EnterCriticalSection(&DelBuffCriticalSectio
n);

```

```

        delivery =
*(pDelBuff+dwDelBuffBusyIndex);

        dwDelBuffFreeCount++;

        dwDelBuffBusyIndex++;

        if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer
                dwDelBuffBusyIndex = 0;

        LeaveCriticalSection(&DelBuffCriticalSectio
n);

        pDeliveryData->w_id = delivery.w_id;

        pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;

        txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;

        txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

        GetLocalTime(
&trans_start );

        pTxn-
>Delivery();

        GetLocalTime(
&trans_end );

        //log txn

        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
i<10; i++)
                txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];

        txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);

        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));

        if
(txnDeliLog != NULL)
                txnDeliLog->WriteToLog(&txnDeliRec);
        }
        catch (CBaseErr *e)
        {

```

```

        char szTmp[1024];
        wsprintf( szTmp, "Error
in Delivery Txn thread. %s", e->ErrorText() );
        WriteMessageToEventLog(
szTmp );

        // log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();

        if (txnDeliLog != NULL)
                txnDeliLog-
>WriteToLog(&txnDeliRec);

        delete e;
        }
        catch (...)
        {
                // unhandled exception;
shouldn't happen; not much we can do...

                WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
        }

        ErrorExit:
        delete pTxn;
        _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE:      This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS:      BOOL      FALSE
                delivery information posted successfully
                TRUE      error cannot post delivery info
*/

BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
        BOOL bError;

        EnterCriticalSection(&DelBuffCriticalSectio
n);

        if (dwDelBuffFreeCount > 0)
        {
                bError = FALSE;
                (pDelBuff+dwDelBuffFreeIndex)-
                = w_id;
                (pDelBuff+dwDelBuffFreeIndex)-
                = o_carrier_id;

                GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);

                dwDelBuffFreeCount--;
                dwDelBuffFreeIndex++;
                if (dwDelBuffFreeIndex ==
dwDelBuffSize)

```

```

        dwDelBuffFreeIndex = 0;
        // wrap-around if at end of
buffer
    }
    else
        // No free buffers. Return an
error, which indicates that the delivery buffer is
full.
        // Most likely, the number of
delivery worker threads needs to be increased to keep
up
        // with the txn rate.
        bError = TRUE;
        LeaveCriticalSection(&DelBuffCriticalSection);
    if (!bError)
        // increment worker semaphore to
wake up a worker thread
        ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );
    return bError;
}

/* FUNCTION: ProcessQueryString
 *
 * PURPOSE:      This function extracts the
relevent information out of the http command passed
in from
 *              the browser.
 *
 * COMMENTS:     If this is the initial connection
i.e. client is at welcome screen then
 *              there will
not be a terminal id or current form id. If this is
the case
 *              then the
pTermid and pFormid return values are undefined.
 */

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..",
        "..Payment..", "..Delivery..", "..Order-Status..",
        "..Stock-Level..",
        "..Exit..", "Submit", "Menu",
        "Clear", "Stats", ""
    };

    *pCmd      = 0;          // default is
the login screen
    *pTermId = 0;

```

```

        // if no params (i.e., empty query string),
then return login screen
        if (strlen(pECB->lpszQueryString) == 0)
            return;

        // parse FORMID, TERMID, and SYNCID
        *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
        *pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
        *pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

        // parse CMD
        GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

        // see which command it matches
        for(i=0; i++)
        {
            if (szCmds[i][0] == 0)
                // no more; no match;
            throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
            if ( !strcmp(szCmds[i], szBuffer) )
            {
                *pCmd = i+1;
                break;
            }
        }
    }

/* FUNCTION: void WelcomeForm
 *
 */
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szBuffer,
"HTML<HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"
" <B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"
" <font face=\\"Courier New\\"><PRE>"
"Compiled: " "__DATE__", "__TIME__" <BR>"
"Source: " "__FILE__" (" "__TIMESTAMP__" )
<BR>"
" </PRE></font>"
" <FORM ACTION=\\"tpcc.dll\\" METHOD=\\"GET\\">"

```

```

        " <INPUT TYPE=\\"hidden\\" NAME=\\"STATUSID\\"
VALUE=\\"0\\">"
        " <INPUT TYPE=\\"hidden\\" NAME=\\"ERROR\\"
VALUE=\\"0\\">"
        " <INPUT TYPE=\\"hidden\\" NAME=\\"FORMID\\"
VALUE=\\"1\\">"
        " <INPUT TYPE=\\"hidden\\" NAME=\\"TERMID\\"
VALUE=\\"0\\">"
        " <INPUT TYPE=\\"hidden\\" NAME=\\"SYNCID\\"
VALUE=\\"0\\">"
        " <INPUT TYPE=\\"hidden\\" NAME=\\"VERSION\\"
VALUE=\\" " WEBCLIENT_VERSION "\\">"
        );
        sprintf( szTmp, "Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\\"><PRE>"
"Txn Monitor          = <B>%s</B><BR>"
"Database protocol    = <B>%s</B><BR>"
"Max Connections      = <B>%d</B><BR>"
"of Delivery Threads  = <B>%d</B><BR>"
"Max Pending Deliveries = <B>%d</B><BR>"
szTxnMonNames[Reg.eTxnMon],
szDBNames[Reg.eDB_Protocol],
Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);
    if (Reg.eTxnMon == COM)
    {
        sprintf( szTmp, "COM Single
Pool          = <B>%s</B><BR>",
Reg.bCOM_SinglePool ?
"YES" : "NO" );
        strcat( szBuffer, szTmp);
    }
    strcat( szBuffer, "</PRE></font>");
    if (Reg.eTxnMon == None)
        // connection options may be
specified when not using a txn monitor
        sprintf( szTmp, "Please enter
your database options for this connection:<BR>"
" <font face=\\"Courier New\\"
color=\\"blue\\"><PRE>"
"DB Server      = <INPUT NAME=\\"db_server\\"
SIZE=20 VALUE=\\"%s\\"><BR>"

```



```

        "DB User ID = <INPUT NAME=\"db_user\"
SIZE=20 VALUE=\"%s\"><BR>"

        "DB Password = <INPUT NAME=\"db_passwd\"
SIZE=20 VALUE=\"%s\"><BR>"

        "DB Name = <INPUT NAME=\"db_name\"
SIZE=20 VALUE=\"%s\"><BR>"

        "</PRE></font>"

        ,
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
        else
            // if using a txn monitor,
            connection options are determined from registry;
            can't
            // set per user. show options
            fyi
            sprintf( szTmp, "Database
options which will be used by the transaction
monitor:<BR>"

        " <font face=\"Courier New\"
color=\"blue\"><PRE>"

        "DB Server = <B>%s</B><BR>"

        "DB User ID = <B>%s</B><BR>"

        "DB Password = <B>%s</B><BR>"

        "DB Name = <B>%s</B><BR>"

        "</PRE></font>"

        ,
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
        strcat( szBuffer, szTmp);

        sprintf( szTmp, "Please enter your
Warehouse and District for this session:<BR>"

        " <font face=\"Courier New\"
color=\"blue\"><PRE>" );
        strcat( szBuffer, szTmp);
        strcat( szBuffer, "Warehouse ID = <INPUT
NAME=\"w_id\" SIZE=4><BR>"

        "District ID = <INPUT NAME=\"d_id\"
SIZE=2><BR>"

        "</PRE></font><HR>"

        " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Submit\">"

        "</FORM></BODY></HTML>" );
    }

/* FUNCTION: SubmitCmd
*

```

```

* PURPOSE: This function allocated a new
terminal id in the Term structure array.
*
*/

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int iNewTerm;
    char *ptr = pECB->lpszQueryString;

    char szVersion[32] = { 0 };
    char szServer[32] = { 0 };
    char szUser[32] = "sa";
    char szPassword[32] = { 0 };
    char szDatabase[32] = "tpcc";

    // validate version field; the version
    field ensures that the RTE is synchronized with the
    web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION )
)
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);

        // parse warehouse ID
        int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
        if ( w_id < 1 )
            throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

        // parse district ID
        int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
        if ( d_id < 1 || d_id > 10 )
            throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

        iNewTerm = TermAdd();

        Term.pClientData[iNewTerm].w_id = w_id;
        Term.pClientData[iNewTerm].d_id = d_id;
    }
}

```

```

    try
    {
        if (Reg.eTxnMon == TUXEDO)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
        else if (Reg.eTxnMon == ENCINA)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
        else if (Reg.eTxnMon == COM)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
        else if (Reg.eDB_Protocol ==
ODBC)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName, szDatabase );
        else if (Reg.eDB_Protocol ==
DBLIB)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_DBLIB_new( szServer, szUser, szPassword,
szMyComputerName, szDatabase );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        throw; // pass
exception upward
    }

    MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the
browser the total number of active terminal ids.
* This routine is for
development/debugging purposes.
*
*/

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)

            iTTotal++;
    }
}

```

```

LeaveCriticalSection(&TermCriticalSection);
wsprintf( szBuffer,
"<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"
"<BODY><B><BIG> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>"
, iTotal );
}
char *CWEBCLNT_ERR::ErrorText()
{
static SERRORMSG errorMsgs[] =
{
{ ERR_COMMAND_UNDEFINED,
"Command undefined."
},
{ ERR_D_ID_INVALID,
"Invalid District ID Must be 1 to 10."
},
{ ERR_DELIVERY_CARRIER_ID_RANGE,
"Delivery Carrier ID out of range
must be 1 - 10."
},
{ ERR_DELIVERY_CARRIER_INVALID,
"Delivery Carrier ID invalid must be
numeric 1 - 10."
},
{ ERR_DELIVERY_MISSING_OCD_KEY,
"Delivery missing Carrier ID key \"OCD*\"."
},
{ ERR_DELIVERY_THREAD_FAILED,
"Could not start delivery worker
thread."
},
{ ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
},
{ ERR_HTML_ILL_FORMED,
"Required key field is missing from HTML
string."
},
{ ERR_INVALID_SYNC_CONNECTION,
"Invalid Terminal Sync ID."
},
{ ERR_INVALID_TERMID,
"Invalid Terminal ID."
}
},

```

```

{ ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
{ ERR_MAX_CONNECTIONS_EXCEEDED,
"No connections available. Max Connections
is probably too low."
},
{ ERR_MISSING_REGISTRY_ENTRIES,
"Required registry entries are missing.
Rerun INSTALL to correct."
},
{ ERR_NEWORDER_CUSTOMER_INVALID,
"New Order customer id invalid
data type, range = 1 to 3000."
},
{ ERR_NEWORDER_CUSTOMER_KEY,
"New Order missing Customer key
\"CID*\"."
},
{ ERR_NEWORDER_DISTRICT_INVALID,
"New Order District ID Invalid
range 1 - 10."
},
{ ERR_NEWORDER_FORM_MISSING_DID,
"New Order missing District key
\"DID*\"."
},
{ ERR_NEWORDER_ITEMID_INVALID,
"New Order Item Id is wrong data type, must
be numeric."
},
{ ERR_NEWORDER_ITEMID_RANGE,
"New Order Item Id is out of
range. Range = 1 to 999999."
},
{ ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
"New Order Item_Id field entered without a
corresponding Supp_W."
},
{ ERR_NEWORDER_MISSING_IID_KEY,
"New Order missing Item Id key \"IID*\"."
},
{ ERR_NEWORDER_MISSING_QTY_KEY,
"New Order Missing Qty key \"Qty##*\"."
},
{ ERR_NEWORDER_MISSING_SUPPW_KEY,
"New Order missing Supp_W key
\"SP##*\"."
},
{ ERR_NEWORDER_NOITEMS_ENTERED,
"New Order No order lines entered."
}
}

```

```

},
{ ERR_NEWORDER_QTY_INVALID,
"New Order Qty invalid must be
numeric range 1 - 99."
},
{ ERR_NEWORDER_QTY_RANGE,
"New Order Qty is out of range. Range = 1
to 99."
},
{ ERR_NEWORDER_QTY_WITHOUT_SUPPW,
"New Order Qty field entered
without a corresponding Supp_W."
},
{ ERR_NEWORDER_SUPPW_INVALID,
"New Order Supp_W invalid data
type must be numeric."
},
{ ERR_NO_SERVER_SPECIFIED,
"No Server name specified."
},
{ ERR_ORDERSTATUS_CID_AND_CLT,
"Order Status Only Customer ID or Last Name
may be entered, not both."
},
{ ERR_ORDERSTATUS_CID_INVALID,
"Order Status Customer ID invalid, range
must be numeric 1 - 3000."
},
{ ERR_ORDERSTATUS_CLT_RANGE,
"Order Status Customer last name
longer than 16 characters."
},
{ ERR_ORDERSTATUS_DID_INVALID,
"Order Status District invalid, value must
be numeric 1 - 10."
},
{ ERR_ORDERSTATUS_MISSING_CID_CLT,
"Order Status Either Customer ID or Last
Name must be entered."
},
{ ERR_ORDERSTATUS_MISSING_CID_KEY,
"Order Status missing Customer key
\"CID*\"."
},
{ ERR_ORDERSTATUS_MISSING_CLT_KEY,
"Order Status missing Customer Last Name
key \"CLT*\"."
},
{ ERR_ORDERSTATUS_MISSING_DID_KEY,
"Order Status missing District key
\"DID*\"."
},
{ ERR_PAYMENT_CDI_INVALID,
"Payment Customer district

```

```

invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last
Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must
be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse
invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1
- 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type
must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name
longer than 16 characters."
    },
    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key
\"CDI*\"."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name
must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
    },
    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key
\"CLT*\"."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key
\"CWI*\"."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
    },
    },

```

```

    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
        "Stock Level; missing Threshold key
\"TT*\"."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in
the range = 1 - 99."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_RANGE,
        "Stock Level Threshold out of
range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client
are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
    },
    {
        0,
        ""
    },
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );

```

```

return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE: This function parses a http
formatted string for specific key values.
*
* ARGUMENTS: char http string from client
browser *pQueryString char key
* *pKey char
value to look for *pValue char
* character array into which to place key's
value * int
* maximum length of key value array.
* WEBERROR
err error value to throw
*
* RETURNS: nothing.
*
* ERROR: if (the pKey value is not found)
then if
(err == 0)
*
return (empty string)
*
else
*
throw CWEBCLNT_ERR(err)
*
* COMMENTS: http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
* TPC-C input
fields in such a manner that the keys can be
extracted in the
* above manner.
*/

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
    null while( *ptr && *ptr != '&' && iMax)
    {

```

```

        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;
}
ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCLNT_ERR( err );
    *pValue = 0; // return empty result string
}
/* FUNCTION: GetIntKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for a specific key value.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char              key
value to look for
                WEBERROR
                NoKeyErr          error value to throw if
key not found
                WEBERROR
                NotIntErr        error value to throw if
value not numeric
 *
 * RETURNS:     integer
 *
 * ERROR:       if (the pKey value is not found)
then
                if
(NoKeyErr != NO_ERR)
                throw CWEBCLNT_ERR(err)
 *
                else
 *
                return 0
 *
                else if (non-
numeric char found) then
                if
(NotIntErr != NO_ERR) then
                throw CWEBCLNT_ERR(err)
 *
                else
 *
                return 0
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
 *
                TPC-C input
fields in such a manner that the keys can be
extracted in the
 *
                above manner.
 */

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember
starting point
    // scan string until a terminator (null or
&) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr)
)
        ptr++;

    // make sure we stopped scanning for the
right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCLNT_ERR(
NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);
}
ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr
);
    return 0;
}
/* FUNCTION: TermInit
 *
 * PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL
 *
                is first loaded by the
inet service.
 *
                */
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
}

```

```

    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}
/* FUNCTION: TermDeleteAll
 *
 * PURPOSE:      This function frees allocated
resources associated with the terminal structure.
 *
 * ARGUMENTS:    none
 *
 * RETURNS:      None
 *
 * COMMENTS:     This function is called only when
the inet service unloads the TPCC.DLL
 *
                */
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;
    }

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}
/* FUNCTION: TermAdd

```

```

*
* PURPOSE:      This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS:      int
                assigned terminal id
*/

int TermAdd(void)
{
    DWORD    i;
    int      iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requester.
        if ((GetTickCount() - iTickCount)
< 60000)
        {
            LeaveCriticalSection(&TermCriticalSection);
            throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
        }

        Term.pClientData[iNewTerm].iTickCount =
GetTickCount();
    }
}

```

```

Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
Term.pClientData[iNewTerm].pTxn = NULL;
LeaveCriticalSection(&TermCriticalSection);
return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE:      This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS:    int      id
                Terminal id of client exiting
*/

void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list

        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*/

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
"<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
"<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
" <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
" <BOLD>An Error
Occurred</BOLD><BR><BR>"

```

```

"&s"
"<BR><BR><HR>"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".NewOrder..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Payment..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Delivery..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Order-Status..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Stock-Level..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Exit..\">"
"</FORM></BODY></HTML>"
, iType, iErrorNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wsprintf(szForm,
"<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
"Select Desired
Transaction.<BR><HR>"
" <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
" <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
" <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
" <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
" <INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".NewOrder..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Payment..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Delivery..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Order-Status..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Stock-Level..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Exit..\">"
"</FORM></BODY></HTML>"
, MAIN_MENU_FORM, iTermId,
iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE:      This function constructs the
Stock Level HTML page.

```

```

*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int    c;

    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
Stock-Level<BR>"
                "Warehouse: %4.4d District:
%2.2d<BR> <BR>,"
                STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
                "Stock Level Threshold:
<INPUT NAME=\"TT*\" SIZE=2><BR> <BR>"
                "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
                "</FORM></HTML>" );
    }
    else
    {
        sprintf(szForm+c,
                "Stock Level Threshold:
%2.2d<BR> <BR>"
                "low stock:
<3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"
                "<BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR></PRE><HR>"

```

```

                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
                "</FORM></HTML>"
                , pStockLevelData-
>threshold, pStockLevelData->low_stock);
    }
}

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int    i, c;
    BOOL   bValid;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
New Order<BR>"

```

```

                , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

    if ( bInput )
    {
        c += sprintf(szForm+c,
                "Warehouse: %4.4d ", Term.pClientData[iTermId].w_id
);

        strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %Disc:<BR>"
                "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR>"
                "Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR>"
                "<INPUT
NAME=\"SP0*\" SIZE=4> <INPUT NAME=\"IID00*\"
SIZE=6> <INPUT
NAME=\"Qty0*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\"
SIZE=6> <INPUT
NAME=\"Qty01*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\"
SIZE=6> <INPUT
NAME=\"Qty02*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\"
SIZE=6> <INPUT
NAME=\"Qty03*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\"
SIZE=6> <INPUT
NAME=\"Qty04*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\"
SIZE=6> <INPUT
NAME=\"Qty05*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\"
SIZE=6> <INPUT
NAME=\"Qty06*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\"
SIZE=6> <INPUT
NAME=\"Qty07*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\"
SIZE=6> <INPUT
NAME=\"Qty08*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\"
SIZE=6> <INPUT
NAME=\"Qty09*\" SIZE=1><BR>"

```

```

        " <INPUT
NAME=\SP10*\ " SIZE=4> <INPUT NAME=\IID10*\ "
SIZE=6>
NAME=\Qty10*\ " SIZE=1><BR>"
        " <INPUT
NAME=\SP11*\ " SIZE=4> <INPUT NAME=\IID11*\ "
SIZE=6>
NAME=\Qty11*\ " SIZE=1><BR>"
        " <INPUT
NAME=\SP12*\ " SIZE=4> <INPUT NAME=\IID12*\ "
SIZE=6>
NAME=\Qty12*\ " SIZE=1><BR>"
        " <INPUT
NAME=\SP13*\ " SIZE=4> <INPUT NAME=\IID13*\ "
SIZE=6>
NAME=\Qty13*\ " SIZE=1><BR>"
        " <INPUT
NAME=\SP14*\ " SIZE=4> <INPUT NAME=\IID14*\ "
SIZE=6>
NAME=\Qty14*\ " SIZE=1><BR>"
"Execution Status:
Total:<BR>"
        "</font></PRE><HR>"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\Process\ ">"
NAME=\CMD\ " VALUE=\Menu\ ">"
        "</FORM></HTML>"
    );
}
else
{
    c += sprintf(szForm+c,
"Warehouse: %4.4d District: %2.2d
Date: ",
        pNewOrderData->w_id,
        pNewOrderData->d_id);
    if ( bValid )
    {
        c += sprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
        pNewOrderData->o_entry_d.day,
        pNewOrderData->o_entry_d.month,
        pNewOrderData->o_entry_d.year,
        pNewOrderData->o_entry_d.hour,
        pNewOrderData->o_entry_d.minute,
        pNewOrderData->o_entry_d.second);
    }
    c += sprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s
",
        pNewOrderData->c_id,
        pNewOrderData->c_last, pNewOrderData->c_credit);
    if ( bValid )

```

```

        {
            c += sprintf(szForm+c,
"%Disc: %5.2f <BR>"
"Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>"
" Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",
        100.0*pNewOrderData->c_discount,
        pNewOrderData->o_id,
        pNewOrderData->o_ol_cnt,
        100.0 *
        pNewOrderData->w_tax,
        100.0 *
        pNewOrderData->d_tax);
        for(i=0;
i<pNewOrderData->o_ol_cnt; i++)
        {
            c +=
sprintf(szForm+c, " %4.4d %6.6d %-24s %2.2d
%3.3d %1.1s %5.2f %5.2f <BR>",
        pNewOrderData->OL[i].ol_supply_w_id,
        pNewOrderData->OL[i].ol_i_id,
        pNewOrderData->OL[i].ol_i_name,
        pNewOrderData->OL[i].ol_quantity,
        pNewOrderData->OL[i].ol_stock,
        pNewOrderData->OL[i].ol_brand_generic,
        pNewOrderData->OL[i].ol_i_price,
        pNewOrderData->OL[i].ol_amount );
        }
    }
    else
    {
        c += sprintf(szForm+c,
"%Disc:<BR>"
"Order
W_tax:
D_tax:<BR> <BR>"
" Supp_W
Item_Id Item Name Qty Stock B/G
Price Amount<BR>"
        pNewOrderData->o_id);
        i = 0;
    }
    strncpy( szForm+c, szBR, (15-i)*5
);

```

```

        c += (15-i)*5;
        if ( bValid )
            c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: %5.2f ",
        pNewOrderData->total_amount);
        else
            c += sprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");
        strcpy(szForm+c,
"
<BR></font></PRE><HR>"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..NewOrder..\ ">"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..Payment..\ ">"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..Delivery..\ ">"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..Order-Status..\ ">"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..Stock-Level..\ ">"
        "<INPUT TYPE=\submit\"
NAME=\CMD\ " VALUE=\..Exit..\ ">"
        "</FORM></HTML>"
    );
}
/* FUNCTION: MakePaymentForm
 *
 * COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
 * be freed
except when the client terminal id is no longer
needed.
 */
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;
    c = sprintf(szForm,
"<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
" <FORM ACTION=\tpcc.dll\ "
METHOD=\GET\ ">"
" <INPUT TYPE=\hidden\"
NAME=\STATUSID\ " VALUE=\0\ ">"
" <INPUT TYPE=\hidden\"
NAME=\ERROR\ " VALUE=\0\ ">"
" <INPUT TYPE=\hidden\"
NAME=\FORMID\ " VALUE=\%d\ ">"
" <INPUT TYPE=\hidden\"
NAME=\TERMINID\ " VALUE=\%d\ ">"
" <INPUT TYPE=\hidden\"
NAME=\SYCID\ " VALUE=\%d\ ">"

```

```

Payment<BR>"
    "<PRE><font face=\"Courier\">
    "Date: "
    , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);
    if ( !bInput )
    {
        c += sprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
        pPaymentData-
>h_date.day,
        pPaymentData-
>h_date.month,
        pPaymentData-
>h_date.year,
        pPaymentData-
>h_date.hour,
        pPaymentData-
>h_date.minute,
        pPaymentData-
>h_date.second);
    }
    if ( bInput )
    {
        c += sprintf(szForm+c,
        "<BR> <BR>Warehouse:
%4.4d
District: <INPUT NAME=\"DID*\" SIZE=1><BR> <BR> <BR>
<BR> <BR>"
        "Customer: <INPUT
NAME=\"CID*\" SIZE=4>"
        "Cust-Warehouse: <INPUT
NAME=\"CWI*\" SIZE=4> "
        "Cust-District: <INPUT
NAME=\"CDI*\" SIZE=1><BR>"
        "Name:
<INPUT NAME=\"CLT*\" SIZE=16>
Since:<BR>"
        "
Credit:<BR>"
        "
Disc:<BR>"
        "
Phone:<BR> <BR>"
        "Amount Paid:
New Cust-
Balance:<BR>"
        "Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR>
<BR></font></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
        "</BODY></FORM></HTML>"
Term.pClientData[iTermId].w_id);
    }
    else
    {
        c += sprintf(szForm+c,

```

```

%4.4d
    "<BR> <BR>Warehouse:
District: %2.2d<BR>"
    "%-20s
    "%-20s
    "%-20s
    "%-20s %-2s %5.5s-%4.4s<BR> <BR>"
    "Customer: %4.4d Cust-
Warehouse: %4.4d Cust-District: %2.2d<BR>"
    "Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"
    " %-20s
Credit: %-2s<BR>"
Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_city,
pPaymentData->w_state, pPaymentData->w_zip,
pPaymentData->w_zip+5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+5
, pPaymentData->c_id,
pPaymentData->c_d_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);
    c += sprintf(szForm+c,
    " %-20s
%%Disc: %5.2f<BR>",
    pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);
    c += sprintf(szForm+c,
    " %-20s %-2s
%5.5s-%4.4s Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR>
<BR>",
    pPaymentData->c_city,
pPaymentData->c_state, pPaymentData->c_zip,
pPaymentData->c_zip+5,
pPaymentData->c_phone,
pPaymentData->c_phone+6, pPaymentData->c_phone+9,
pPaymentData->c_phone+12 );
    c += sprintf(szForm+c,
    "Amount Paid:
$%7.2f New Cust-Balance: $%14.2f<BR>"
    "Credit Limit:
$%13.2f<BR> <BR>"
    , pPaymentData-
>h_amount, pPaymentData->c_balance

```

```

, pPaymentData-
>c_credit_lim
);
    if ( pPaymentData->c_credit[0] ==
'B' && pPaymentData->c_credit[1] == 'C' )
    c += sprintf(szForm+c,
    "Cust-Data: %-50.50s<BR>
50.50s<BR>
50.50s<BR>",
    pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
    else
    strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");
    strcat(szForm,
    "<BR></font></PRE><HR>"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
    "</BODY></FORM></HTML>");
}
/* FUNCTION: MakeOrderStatusForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>";

```



```

        c = sprintf(szForm,
        "HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
Order-Status<BR>"
        "Warehouse: %4.4d ",
        ORDER_STATUS_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

        if ( bInput )
        {
                strcpy(szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1><BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
<INPUT NAME=\"CLT*\" SIZE=23><BR>"
                "Cust-Balance:<BR>
<BR>"
                "Order-Number:
Entry-Date:
Number:<BR>"
                "Carrier-
Supply-W Item-Id
Qty Amount Delivery-Date<BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> </font></PRE>"
                "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
                "</BODY></FORM></HTML>"
        );
        }
        else
        {
                c += sprintf(szForm+c,
                "District: %2.2d<BR>"
                "Customer: %4.4d
Name: %-16s %-2s %-16s<BR>",
                pOrderStatusData->d_id,
                pOrderStatusData->c_id,
                pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
                pOrderStatusData->c_last);
                c += sprintf(szForm+c, "Cust-
Balance: %9.2f<BR> <BR>",
                pOrderStatusData-
>c_balance);

```

```

        c += sprintf(szForm+c,
        "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>"
        "Supply-W Item-Id
Qty Amount Delivery-Date<BR>",
        pOrderStatusData->o_id,
        pOrderStatusData-
>o_entry_d.day,
        pOrderStatusData-
>o_entry_d.month,
        pOrderStatusData-
>o_entry_d.year,
        pOrderStatusData-
>o_entry_d.hour,
        pOrderStatusData-
>o_entry_d.minute,
        pOrderStatusData-
>o_entry_d.second,
        pOrderStatusData-
>o_carrier_id);
        for(i=0; i< pOrderStatusData-
>o_ol_cnt; i++)
        {
                c += sprintf(szForm+c,
                "%4.4d %6.6d %2.2d %8.2f %2.2d-
%2.2d-%4.4d<BR>",
                pOrderStatusData->OL[i].ol_supply_w_id,
                pOrderStatusData->OL[i].ol_i_id,
                pOrderStatusData->OL[i].ol_quantity,
                pOrderStatusData->OL[i].ol_amount,
                pOrderStatusData->OL[i].ol_delivery_d.day,
                pOrderStatusData-
>OL[i].ol_delivery_d.month,
                pOrderStatusData-
>OL[i].ol_delivery_d.year);
        }
        strcpy(szForm+c, szBR, (15-i)*5
        );
        c += (15-i)*5;
        strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".NewOrder.\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Payment.\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Delivery.\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Order-Status.\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Stock-Level.\">"

```

```

        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\".Exit.\">"
        "</BODY></FORM></HTML>"
        );
        }
        /* FUNCTION: MakeDeliveryForm
        *
        * COMMENTS: The internal client buffer is
        created when the terminal id is assigned and should
        not
        * be freed
        except when the client terminal id is no longer
        needed.
        */
        void MakeDeliveryForm(int iTermId, DELIVERY_DATA
        *pDeliveryData, BOOL bInput, char *szForm)
        {
                int c;
                c = sprintf(szForm,
                "HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
Delivery<BR>"
                "Warehouse: %4.4d<BR> <BR>",
                (bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
                0,
                DELIVERY_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId,
                Term.pClientData[iTermId].w_id);
                if ( bInput )
                {
                        strcpy( szForm+c,
                        "Carrier Number: <INPUT
NAME=\"OCD*\" SIZE=1><BR> <BR>"
                        "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>"
                        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
                        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
                        "</BODY></FORM></HTML>"
                );
                }

```

```

else
{
    wsprintf( szForm+c,
              "Carrier Number:
%2.2d<BR> <BR>"
              "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
" <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>"
              "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
              "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
              "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
              "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
              "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
              "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
              "</BODY></FORM></HTML>"
              , pDeliveryData-
>o_carrier_id,
              (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed
"
              );
}
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates
the input data from the new order form
*
* filling in the required
input variables. it then calls the SQLNewOrder
*
* transaction, constructs
the output form and writes it back to client
*
* browser.
*/

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();

    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
}

```

```

MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates
the input data from the payment form
*
* filling in the required
input variables. It then calls the SQLPayment
*
* transaction, constructs
the output form and writes it back to client
*
* browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB passed in structure pointer from
inetsrv.
*
* int
*
* iTermId client browser terminal id
*/

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA pPayment;

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates
the input data from the Order Status
*
* form filling in the
required input variables. It then calls the
*
* SQLOrderStatus
transaction, constructs the output form and writes it
*
* back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB passed in structure pointer from
inetsrv.
*
* int
*
* iTermId client browser terminal id
*/

```

```

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates
the input data from the delivery form
*
* filling in the required
input variables. It then calls the PostDeliveryInfo
*
* Api, The client is then
informed that the transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB passed in structure pointer from
inetsrv.
*
* int
*
* iTermId client browser terminal id
*/

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD**",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )

```

```

        throw new CWBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

        if (dwNumDeliveryThreads)
        {
            //post delivery info
            if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
                pDelivery-
>exec_status_code = eDeliveryFailed;
            else
                pDelivery-
>exec_status_code = eOK;
        }
        else // delivery is done synchronously if
no delivery threads configured
            Term.pClientData[iTermId].pTxn-
>Delivery();

        pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
        MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: ProcessStockLevelForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Stock Level
 *
 *               form filling in the
required input variables. It then calls the
 *               SQLStockLevel
transaction, constructs the output form and writes it
 *               back to client browser.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB      passed in structure pointer from
inetsrv.
 *
 *               int
 *
 *               iTermId  client browser terminal id
 */

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;

    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;

```

```

        pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
        if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
            throw new CWBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

        Term.pClientData[iTermId].pTxn-
>StockLevel();

        pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
        MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: GetNewOrderData
 *
 * PURPOSE:      This function extracts and
validates the new order form data from an http
command string.
 *
 * ARGUMENTS:    LPSTR          client
                lpszQueryString  browser http command string
 *
 *               NEW_ORDER_DATA *pNewOrderData
                pointer to new order data structure
 *
 */

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char szTmp[26];
    int i;
    short items;
    int ol_i_id, ol_quantity;
    char *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
=
    { "SP0*", "SP01*", "SP02*",
    "SP03*", "SP04*",
    "SP05*", "SP06*", "SP07*",
    "SP08*", "SP09*",
    "SP10*", "SP11*", "SP12*",
    "SP13*", "SP14*" };
    static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*",
    "IID03*", "IID04*",
    "IID05*", "IID06*", "IID07*",
    "IID08*", "IID09*",
    "IID10*", "IID11*", "IID12*",
    "IID13*", "IID14*" };
    static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*",
    "Qty03*", "Qty04*",

```

```

    "Qty05*", "Qty06*", "Qty07*",
    "Qty08*", "Qty09*",
    "Qty10*", "Qty11*", "Qty12*",
    "Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = (short)atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_ITEMID_RANGE );

            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99
|| ol_quantity < 1 )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_QTY_RANGE );

            items++;
        }
        else
        {
            // nothing entered for
supply warehouse, so item id and qty must also be
blank
                GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
                if ( szTmp[0] )
                    throw new
CWBCLNT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );

```

```

        GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
        if ( szTmp[0] )
            throw new
CWECLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
    }
    if ( items == 0 )
        throw new CWECLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );
    pNewOrderData->o_ol_cnt = items;
}

/* FUNCTION: GetPaymentData
 *
 * PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
 *
 * ARGUMENTS:    LPSTR          client
                 lpszQueryString
browser http command string
 *
                 PAYMENT_DATA
*pPaymentData      pointer to
payment data structure
 */

void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    BOOL    bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWECLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

```

```

        if ( bCustIdBlank )
        {
            // customer id is blank, so last
name must be entered
            GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] == 0 )
                throw new CWECLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );
            _strupr( szTmp );
            if ( strlen(pPaymentData->c_last)
> LAST_NAME_LEN )
                throw new CWECLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
            strcpy(pPaymentData->c_last,
szTmp);
        }
        else
        {
            // parse customer id and verify
that last name was NOT entered
            GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] != 0 )
                throw new CWECLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
        }

        GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
        if ( !IsDecimal(szTmp) )
            throw new CWECLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
        pPaymentData->h_amount = atof(szTmp);
        if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
            throw new CWECLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
    }

/* FUNCTION: GetOrderStatusData
 *
 * PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
 *
 */
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered

```

```

        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWECLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );
        _strupr( szTmp );
        if ( strlen(pOrderStatusData-
>c_last) > LAST_NAME_LEN )
            throw new CWECLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last,
szTmp);
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWECLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWECLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is numeric. It fails if any characters other
 *
 *
 * ARGUMENTS:    char
                 *ptr      pointer to string to check.
 *
 * RETURNS:      BOOL      FALSE      if
string is not all numeric
 *
                 TRUE      if string contains only numeric
characters i.e. '0' - '9'
 */
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is a non-negative decimal value.

```

```

*           It fails if any characters other than a
series of numbers followed by
*           a decimal point,
another series of numbers, and a null terminator are
present.
*
* ARGUMENTS:      char
                  *ptr           pointer to string to check.
*
* RETURNS:        BOOL          FALSE   if
string is not a valid non-negative decimal value
*
                  TRUE           if string is OK
*/

BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL  bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just
check for numeric        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotptr+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if (*(dotptr+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

```

LIBRARY TPCC.DLL

EXPORTS

    GetExtensionVersion @1
    HttpExtensionProc   @2
    TerminateExtension  @3

```

tpcc.h

```

/*           FILE:           TPCC.H
*
*           TPC-C Kit Ver. 4.20.000
*
*           Microsoft, 1999
*
*           All Rights Reserved
*
*           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*           PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE 101
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101

#define TP_MAX_RETRIES 50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM 1
//beginning form no term id assigned, form
id
#define MAIN_MENU_FORM 2
//term id assigned main menu form id
#define NEW_ORDER_FORM 3
//new order form id
#define PAYMENT_FORM 4
//payment form id
#define DELIVERY_FORM 5
//delivery form id
#define ORDER_STATUS_FORM 6 //order
status id
#define STOCK_LEVEL_FORM 7 //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter

```

```

#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree; //index of
next free element or -1 if this entry in use.
    int w_id; //warehouse
id assigned at welcome form
    int d_id; //district id
assigned at welcome form

    int iSyncId; //synchronization id
    int iTickCount; //time of
last access;

    CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries; //total allocated terminal array entries
    int iFreeList; //next available terminal array element or
-1 if none
    int iMasterSyncId; //synchronization id
    CLIENTDATA *pClientData; //pointer to
allocated client data
} TERM;

typedef TERM *PTERM; //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
}

```

```

ERR_INVALID_SYNC_CONNECTION,
ERR_INVALID_TERMID,
ERR_LOADDLL_FAILED,
ERR_MAX_CONNECTIONS_EXCEEDED,
ERR_MEM_ALLOC_FAILED,
ERR_MISSING_REGISTRY_ENTRIES,
ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,

ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
    }
};

```

```

        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char
    *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
        char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
        szTextDetail );
        m_SystemErr =
        dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CWEBCLNT_ERR()
    {
        if ( m_szTextDetail !=
        NULL)
            delete []
            m_szTextDetail;
        if ( m_szErrorText !=
        NULL)
            delete []
            m_szErrorText;
    };

    WEBERROR m_Error;
    char
    *m_szTextDetail; //
    char
    *m_szErrorText;
    DWORD m_SystemErr;

    int ErrorType() {return
    ERR_TYPE_WEBDLL;};

    int ErrorNum() {return m_Error;};
    char *ErrorText();

};

//These constants have already been defined in
engstat.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPCTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);

```

```

void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short
o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS

```

```

////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server
(DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL
Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200

```

```

END
END
#endif // !_MAC

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON "Cancel", IDCANCEL, 129, 24, 50, 14
END

////////////////////////////////////
////////////////////////////////////
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179

```

```

TOPMARGIN, 7
BOTTOMMARGIN, 88
END
#endif // APSTUDIO_INVOKED

#ifdef English (U.S.) resources
////////////////////////////////////
////////////////////////////////////

#endif APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
////////////////////////////////////
#endif // not APSTUDIO_INVOKED

-----
tpcc_com.cpp
-----
/* FILE: TPCC_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
 * audited
 *
 * PURPOSE: Source file for TPC-C COM+ class
 * implementation.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

// needed for CoinitializeEx
#define WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"

```

```

#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn                = NULL;
    m_pNewOrder           = NULL;
    m_pPayment            = NULL;
    m_pStockLevel        = NULL;
    m_pOrderStatus       = NULL;

    m_bSinglePool        = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData,0,ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
        component
            m_pPayment = m_pNewOrder;
            m_pStockLevel = m_pNewOrder;
            m_pOrderStatus = m_pNewOrder;
        }
    else
    {
        // use different components for
each txn

```

```

        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **) &m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **) &m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **) &m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each
component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    CTPCC_COM::~~CTPCC_COM()
    {
        if (m_pTxn)
            SafeArrayDestroy(m_vTxn.parray);

        ReleaseInterface(m_pNewOrder);
        if (!m_bSinglePool)
        {
            ReleaseInterface(m_pPayment);
            ReleaseInterface(m_pStockLevel);
            ReleaseInterface(m_pOrderStatus);
        }

        CoUninitialize();

```

```

    }

void CTPCC_COM::NewOrder()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);

```



```

        SafeArrayDestroy(vTxn_out.parray);

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

```

tpcc_com.h

```

/*      FILE:          TPCC_COM.H
 *
 *      TPC-C Kit Ver. 4.20.000
 *
 *      Microsoft
 *      Copyright
 *      Microsoft, 1999
 *      All Rights Reserved
 *
 *      not yet
 *      audited
 *
 *      PURPOSE:  Header file for TPC-C COM+ class
 *      implementation.
 *
 *      Change history:
 *      4.20.000 - first version
 */

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine
    COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    impersonate a non-COM error type
    CCOMERR( int iErrorType, int
iError )
    {
        m_iErrorType =
iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

```

```

    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can
    impersonate another
    class, which happens if the error
    // was not actually a COM
    Services error, but
    was simply transmitted back via
    COM.

    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
ERR_TYPE_COM;
        else
            return
m_iErrorType;
    }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
        else
            sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*
m_pNewOrder;
    ITPCC*
m_pPayment;
    ITPCC*
m_pStockLevel;
    ITPCC*
m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA      NewOrder;
            PAYMENT_DATA        Payment;
            DELIVERY_DATA       Delivery;
        }
    }

```

```

    STOCK_LEVEL_DATA      StockLevel;
    ORDER_STATUS_DATA     OrderStatus;
    } u;
    } *m_pTxn;

    VARIANT m_vTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void StockLevel    ();
    void OrderStatus   ();
    void Delivery      ();
    { throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

```

tpcc_com_all.c

pp

```

/*      FILE:          TPCC_COM_ALL.CPP
 *
 *      Microsoft
 *
 *      TPC-C Kit Ver. 4.20.000

```

```

*                                     Copyright
Microsoft, 1999
*                                     All Rights Reserved
*
*                                     Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*   PURPOSE: Implementation for TPC-C Tuxedo
class.
*   Contact: Charles Levine
(clevine@microsoft.com)
*
*   Change history:
*       4.20.000 - updated rev number to
match kit
*/

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcmm.h>
#include <initguid.h>
#include <transact.h>
#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
//tpckit transaction
header contains definations of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"
// DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)

```

```

OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

////////////////////////////////////
////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD
dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];

    try
    {
        if (dwReason ==
DLL_PROCESS_ATTACH)
        {
            _Module.Init(ObjectMap,
hInstance);

            DisableThreadLibraryCalls(hInstance);

            DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

            GetComputerName(szMyComputerName, &dwSize);

            szMyComputerName[dwSize] = 0;

            if (
ReadTPCCRegistrySettings( &Reg ))
                throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

            if (Reg.eDB_Protocol ==
DBLIB)
            {
                strcpy(
szDllName, Reg.szPath );

                strcat(
szDllName, "tpcc_dblib.dll");

                hLibInstanceDb = LoadLibrary( szDllName );
            }
        }
    }
}

```

```

if
(hLibInstanceDb == NULL)
    throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

// get
function pointer to wrapper for class constructor

    pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");
    if
(pCTPCC_DBLIB_new == NULL)
        throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
    else if
(Reg.eDB_Protocol == ODBC)
    {
        strcpy(
szDllName, Reg.szPath );

        strcat(
szDllName, "tpcc_odbc.dll");

        hLibInstanceDb = LoadLibrary( szDllName );
        if
(hLibInstanceDb == NULL)
            throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

        // get
function pointer to wrapper for class constructor

        pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
        if
(pCTPCC_ODBC_new == NULL)
            throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        else
            throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
        else if (dwReason ==
DLL_PROCESS_DETACH)
            _Module.Term();
    }
}
catch (CBaseErr *e)
{
    WriteMessageToEventLog(e-
>ErrorText());

    delete e;
    return FALSE;
}
catch (...)
{

```

```

        WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
        return FALSE;
    }
    return TRUE; // OK
}

////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.

```

```

//
hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));

_stprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;

if (hEventSource != NULL)
{
    ReportEvent(hEventSource, // handle of event
source
                EVENLOG_ERROR_TYPE, // event type
                0, // event category
                0, // event ID
                NULL, // current user's
SID
                2, // strings in
lpszStrings
                0, // no bytes of raw
data
                (LPCWSTR *)lpszStrings, // array of
error strings
                NULL); // no raw data

    (VOID) DeregisterEventSource(hEventSource);
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*
*/

char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
        },
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
        },
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
        },
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
        },
        { 0, ""
        }
    }
}

```

```

};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number.");
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn)
        delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//

```

```

STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    // if (!pUnk)
    //     return E_UNEXPECTED;
    // IObjectConstructString * pString
= NULL;
    // HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void
**) &pString);
    // pString->Release();

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            m_pTxn =
pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol ==
DBLIB)
            m_pTxn =
pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e-
>ErrorText());
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
        return E_FAIL;
    }

    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA    pNewOrder;
    COM_DATA            *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));

        do the actual txn

        VariantInit(txn_out);

```

```

        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector(VT_UI1,
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*) txn_out-
>parray->pvData;

        memcpy( &pData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));

        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA    pPayment;
    COM_DATA          *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        do the actual txn

```

```

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*) txn_out-
>parray->pvData;

        memcpy( &pData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));

        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA    pStockLevel;
    COM_DATA              *pData;

    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));

```

```

        m_pTxn->StockLevel();

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

>cElements,
        txn_in.parray->rgsabound-
>cElements);
        txn_in.parray->rgsabound-
>parray->pvData;
        pData = (COM_DATA*)txn_out-
        memcpy( &pData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

```

```

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));
        m_pTxn->OrderStatus();
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

>cElements,
        txn_in.parray->rgsabound-
>cElements);
        txn_in.parray->rgsabound-
>parray->pvData;
        pData = (COM_DATA*)txn_out-
        memcpy( &pData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

```

tpcc_com_all.d ef

```

; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS

```

```

DllCanUnloadNow      @1 PRIVATE
DllGetClassObject    @2 PRIVATE
DllRegisterServer    @3 PRIVATE
DllUnregisterServer  @4 PRIVATE

```

tpcc_com_all.d sp

```

# Microsoft Developer Studio Project File -
Name="tpcc_com_all" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak"
CFG="tpcc_com_all - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_all - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "tpcc_com_all - Win32 Debug" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dblib.lib
..\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbc32.lib /nologo
/subsystem:windows /dll /machine:I386

!ELSEIF "$(CFG) == "tpcc_com_all - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdbtype:sept
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dblib.lib
..\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbc32.lib /nologo

```

```

/subsystem:windows /dll /debug /machine:I386
/pdbtype:sept

!ENDIF

# Begin Target

# Name "tpcc_com_all - Win32 Release"
# Name "tpcc_com_all - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.c"
# Begin Source File

SOURCE=.\src\tpcc_com_all.cpp
# SUBTRACT CPP /YX
# End Source File
# Begin Source File

SOURCE=.\src\tpcc_com_all.def
# End Source File
# Begin Source File

SOURCE=.\src\tpcc_com_all.idl

!IF "$(CFG) == "tpcc_com_all - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid
    "tpcc_com_all.i.c" ".\src\tpcc_com_all.idl"
    /out ".\src"

".\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)

".\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)

".\src\tpcc_com_all.i.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG) == "tpcc_com_all - Win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid
    "tpcc_com_all.i.c" ".\src\tpcc_com_all.idl"
    /out ".\src"

".\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)

```

```

".\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)

".\src\tpcc_com_all.i.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
    $(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=.\src\Methods.h
# End Source File
# Begin Source File

SOURCE=.\src\resource.h
# End Source File
# End Group
# Begin Source File

SOURCE=.\src\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

tpcc_com_all.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
    Oicf (OptLev=i2), Wl, Zp8, env=Win32 (32b run),
ms_ext, c_ext
    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
        __declspec(novtable)
        DECLSPEC_UUID(), MIDL_INTERFACE()
*/
/**/@MIDL_FILE_HEADERING( )

/* verify that the <rpcndr.h> version is high enough
to compile this file*/

```

```

#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

```

```

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER
MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifdef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;

```

```

#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;
#endif
#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

tpcc_com_all.i
dl
/* FILE: TPCC.IDL Microsoft
*
* TPC-C Kit Ver. 4.20.000 Copyright
*
* Microsoft, 1999 All Rights Reserved
*
* not yet
audited
*
* PURPOSE: IDL source for TPCC.dll. This
file is processed by the MIDL tool to
* produce the
type library (TPCC.tlb) and marshalling code.
*

```

```

* Change history:
*           4.20.000 - first version
*/

interface TPCC;
interface NewOrder;
interface OrderStatus;
interface Payment;
interface StockLevel;

import "oidl.idl";
import "ocidl.idl";
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";

[
    uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),
    version(1.0),
    helpstring("TPC-C 1.0 Type Library")
]
library TPCCLib
{
    importlib("stdole32.tlb");
    importlib("stdole2.tlb");

    [
        uuid(122A3128-2520-11D3-BA71-
00C04FBFE08B),
        helpstring("All Txns Class")
    ]
    coclass TPCC
    {
        [default] interface ITPCC;
    };

    [
        uuid(975BAABF-84A7-11D2-BA47-
00C04FBFE08B),
        helpstring("NewOrder Class")
    ]
    coclass NewOrder
    {
        [default] interface ITPCC;
    };

    [
        uuid(266836AD-A50D-11D2-BA4E-
00C04FBFE08B),
        helpstring("OrderStatus Class")
    ]
    coclass OrderStatus
    {
        [default] interface ITPCC;
    };

    [
        uuid(CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B),
        helpstring("Payment Class")
    ]

```

```

coclass Payment
{
    [default] interface ITPCC;
};

[
    uuid(2668369E-A50D-11D2-BA4E-
00C04FBFE08B),
    helpstring("StockLevel Class")
]
coclass StockLevel
{
    [default] interface ITPCC;
};

```

tpcc_com_all.r

C

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "winres.h"

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

```

```

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"winres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "1 TYPELIB \"tpcc_com_all.tlb\"\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

#ifdef _MAC
////////////////////////////////////
////////////////////////////////////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904B0"
        BEGIN
            VALUE "CompanyName", "\0"
            VALUE "FileDescription", "tpcc_com_all
Module\0"
            VALUE "FileVersion", "1, 0, 0, 1\0"
            VALUE "InternalName", "TPCCNEWORDER\0"
            VALUE "LegalCopyright", "Copyright
1997\0"
            VALUE "OriginalFilename",
"tpcc_com_all.DLL\0"
            VALUE "ProductName", "tpcc_com_all
Module\0"
            VALUE "ProductVersion", "1, 0, 0, 1\0"
            VALUE "OLESelfRegister", "\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

#endif // !_MAC

```



```

////////////////////////////////////
////////////////////////////////////
//
// REGISTRY
//
IDR_TPCC                REGISTRY DISCARDABLE
"tpcc_com_all.rgs"
IDR_NEWORDER           REGISTRY DISCARDABLE
"tpcc_com_no.rgs"
IDR_ORDERSTATUS        REGISTRY DISCARDABLE
"tpcc_com_os.rgs"
IDR_PAYMENT            REGISTRY DISCARDABLE
"tpcc_com_pay.rgs"
IDR_STOCKLEVEL         REGISTRY DISCARDABLE
"tpcc_com_sl.rgs"

////////////////////////////////////
////////////////////////////////////
//
// String Table
//
STRINGTABLE DISCARDABLE
BEGIN
    IDS_PROJNAME        "tpcc_com_all"
END

#endif // English (U.S.) resources
////////////////////////////////////
////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//
1 TYPELIB "tpcc_com_all.tlb"

////////////////////////////////////
////////////////////////////////////
#endif // not APSTUDIO_INVOKED

```

tpcc_com_all.rgs

```

HKCR
{
    TPCC.AllTxns.1 = s 'All Txns Class'
    {
        CLSID = s '{122A3128-2520-11D3-
BA71-00C04FBFE08B}'
    }
    TPCC.AllTxns = s 'TPCC Class'
    {

```

```

        CurVer = s 'TPCC.AllTxns.1'
    }
    NoRemove CLSID
    {
        ForceRemove {122A3128-2520-11D3-
BA71-00C04FBFE08B} = s 'TPCC Class'
        {
            ProgID = s
'TPCC.AllTxns.1'
            VersionIndependentProgID = s 'TPCC.AllTxns'
            InprocServer32 = s
'%MODULE%'
            {
                val
ThreadingModel = s 'Both'
            }
        }
    }
}

```

tpcc_com_all.i.c

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run),
ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADER( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

```

```

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_Payment, 0xCD02F7EF, 0xA4FA, 0x11D2, 0xBA, 0x4E, 0x00,
, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel, 0x2668369E, 0xA50D, 0x11D2, 0xBA, 0x4E, 0x00,
x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
#undef MIDL_DEFINE_GUID
```

```
#ifdef __cplusplus
}
#endif
```

```
#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/
```

```
#pragma warning( disable: 4049 ) /* more than 64k
source lines */
```

```
/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */
```

```
/* link this file in with the server and any clients
*/
```

```
/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
```

```
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf (OptLev=i2), Wl, Zp8, env=Win64 (32b
run, appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
```

```
//@@MIDL_FILE_HEADING( )
```

```
#if defined(_M_IA64) || defined(_M_AXP64)
```

```
#ifdef __cplusplus
extern "C"{
#endif
```

```
#include <rpc.h>
#include <rpcndr.h>
```

```
#ifdef _MIDL_USE_GUIDDEF_
```

```
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
```

```
#undef INITGUID
#else
#include <guiddef.h>
#endif
```

```
#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)
```

```
#else // !_MIDL_USE_GUIDDEF_
```

```
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
```

```
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
```

```
#endif // __IID_DEFINED__
```

```
#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED
```

```
#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
```

```
#endif !_MIDL_USE_GUIDDEF_
```

```
MIDL_DEFINE_GUID(IID,
LIBID_TPCLLib, 0x122A3117, 0x2520, 0x11D3, 0xBA, 0x71, 0x00,
, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC, 0x122A3128, 0x2520, 0x11D3, 0xBA, 0x71, 0x00, 0x00,
C0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder, 0x975BAABF, 0x84A7, 0x11D2, 0xBA, 0x47, 0x00,
0, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus, 0x266836AD, 0xA50D, 0x11D2, 0xBA, 0x4E,
0x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_Payment, 0xCD02F7EF, 0xA4FA, 0x11D2, 0xBA, 0x4E, 0x00,
, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel, 0x2668369E, 0xA50D, 0x11D2, 0xBA, 0x4E, 0x00,
x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);
```

```
#undef MIDL_DEFINE_GUID
```

```
#ifdef __cplusplus
}
#endif
```

```
#endif /* defined(_M_IA64) || defined(_M_AXP64)*/
```

tpcc_com_no.r

gs

```
HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-BA47-00C04FBFE08B}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975BAABF-84A7-11D2-BA47-00C04FBFE08B} = s 'NewOrder Class'
        {
            ProgID = s
                'TPCC.NewOrder.1'
            VersionIndependentProgID = s
                'TPCC.NewOrder'
            InprocServer32 = s
                '%MODULE%'
            {
                val
                ThreadingModel = s 'Both'
            }
        }
    }
}
```

tpcc_com_os.r

gs

```
HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
```

```

        CLSID = s '{266836AD-A50D-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {
        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
        ForceRemove {266836AD-A50D-11D2-BA4E-00C04FBFE08B} = s 'OrderStatus Class'
    }
    ProgID = s
'TPCC.OrderStatus.1'
    VersionIndependentProgID = s
'TPCC.OrderStatus'
    InprocServer32 = s
'%MODULE%'
    {
        val
        ThreadingModel = s 'Both'
    }
}

```

tpcc_com_pay.rgs

```

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B} = s 'Payment Class'
    }
    ProgID = s
'TPCC.Payment.1'
    VersionIndependentProgID = s 'TPCC.Payment'
    InprocServer32 = s
'%MODULE%'
    {
        val
        ThreadingModel = s 'Both'
    }
}

```

tpcc_com_ps.def

```

LIBRARY      "tpcc_com_ps"

DESCRIPTION  'Proxy/Stub DLL'

EXPORTS
    DllGetClassObject      @1  PRIVATE
    DllCanUnloadNow        @2  PRIVATE
    GetProxyDllInfo        @3  PRIVATE
    DllRegisterServer      @4
    PRIVATE
    DllUnregisterServer    @5
    PRIVATE

```

tpcc_com_ps.sp

```

# Microsoft Developer Studio Project File -
Name="tpcc_com_ps" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Application" 0x0101

CFG=tpcc_com_ps - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak" CFG="tpcc_com_ps
- Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_ps - Win32 Release" (based on
"Win32 (x86) Application")
!MESSAGE "tpcc_com_ps - Win32 Debug" (based on "Win32
(x86) Application")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe

```

```

RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_ps - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG"
/D "_WIN32_WINNT=0x0400" /D "REGISTER_PROXY_DLL" /FD /c
# SUBTRACT CPP /YX
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib rpndr.lib rpcns4.lib
rpctr4.lib oleaut32.lib uuid.lib /nologo
/entry:"DllMain" /subsystem:windows /dll /pdb:none
/machine:I386 /def:".src\tpcc_com_ps.def"
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.bin\tpcc_com_ps.dll
SOURCE="$(InputPath)"

.. \tpcc_com_all\src\tpcc_com_ps.h : $(SOURCE)
"$(INTDIR)" "$(OUTDIR)"
copy .. \src\tpcc_com_ps.h
.. \tpcc_com_all\src\

# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /ZI /Od /D "WIN32" /D "_DEBUG" /D
_WIN32_WINNT=0x0400 /D "REGISTER_PROXY_DLL" /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktypelib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktypelib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /debug
/machine:I386 /pdbtype:sept
# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib
rpcrt4.lib oleaut32.lib uuid.lib /nologo
/entry:"DllMain" /dll /debug /machine:IX86
/def:".src\tpcc_com_ps.def" /pdbtype:sept
# SUBTRACT LINK32 /pdb:none
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.bin\tpcc_com_ps.dll
SOURCE="$(InputPath)"

..\tpcc_com_all\src\tpcc_com_ps.h" : $(SOURCE)
"$(INTDIR)" "$(OUTDIR)"
copy .\src\tpcc_com_ps.h
..\tpcc_com_all\src\

# End Custom Build

!ENDIF

# Begin Target

# Name "tpcc_com_ps - Win32 Release"
# Name "tpcc_com_ps - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter ""
# Begin Source File

SOURCE=.src\dlldata.c
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.def
# PROP Exclude_From_Build 1
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.idl

!IF "$(CFG)" == "tpcc_com_ps - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

```

```

BuildCmds= \
midl /Oicf /h "tpcc_com_ps.h" /iid
"tpcc_com_ps_i.c" ".src\tpcc_com_ps.idl" /out
.\src"

.\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)

.\src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)

.\src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

.\src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - Win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

BuildCmds= \
midl /Oicf /h "tpcc_com_ps.h" /iid
"tpcc_com_ps_i.c" ".src\tpcc_com_ps.idl" /out
.\src"

.\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)

.\src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)

.\src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

.\src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)"
"$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps_i.c
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps_p.c
# End Source File
# End Group
# End Target
# End Project

```

tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .src\tpcc_com_ps.idl:
Oicf (OptLev=i2), Wl, Zp8, env=Win32 (32b run),
ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus

```

```

extern "C"{
#endif

void __RPC_FAR * __RPC_USER
MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
    ITPCC : public IUnknown
    {
    public:
        virtual HRESULT STDMETHODCALLTYPE NewOrder(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

        virtual HRESULT STDMETHODCALLTYPE Payment(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

        virtual HRESULT STDMETHODCALLTYPE Delivery(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

        virtual HRESULT STDMETHODCALLTYPE StockLevel(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

        virtual HRESULT STDMETHODCALLTYPE OrderStatus(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

        virtual HRESULT STDMETHODCALLTYPE CallSetComplete(
void) = 0;

```

```

};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR
*QueryInterface )(
            ITPCC __RPC_FAR * This,
            /* [in] */ REFIID riid,
            /* [iid_is][out] */ void __RPC_FAR
*__RPC_FAR **ppvObject);

        ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef
)(
            ITPCC __RPC_FAR * This);

        ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release
)(
            ITPCC __RPC_FAR * This);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *NewOrder )(
            ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )(
            ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )(
            ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *StockLevel )(
            ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *OrderStatus )(
            ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR
*CallSetComplete )(
            ITPCC __RPC_FAR * This);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR
*lpVtbl;
};

```

```

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
(This)->lpVtbl -> QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
(This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
(This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
(This)->lpVtbl -> NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \
(This)->lpVtbl -> Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
(This)->lpVtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
(This)->lpVtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
(This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
(This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,

```

```

DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
unsigned long             __RPC_USER
VARIANT_UserSize(        unsigned long __RPC_FAR *,
unsigned long             , VARIANT __RPC_FAR * );

```

```

unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserMarshal(    unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserUnmarshal(unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER
VARIANT_UserFree(       unsigned long __RPC_FAR *,
VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif



---


tpcc_com_ps.i
idl


---


/* FILE: ITPCC.IDL Microsoft
 *
 * TPC-C Kit Ver. 4.20.000 Copyright
 *
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
 * audited
 *
 * PURPOSE: Defines the interface used by
 * TPCC. This interface can be implemented by C++
 * components.
 *
 * Change history:
 * 4.20.000 - first version
 */

// Forward declare all types defined
interface ITPCC;
import "oidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder
    (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
};

HRESULT __stdcall Payment
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
};

HRESULT __stdcall Delivery
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
};

HRESULT __stdcall StockLevel
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
};

HRESULT __stdcall OrderStatus
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
};

HRESULT __stdcall CallSetComplete
(
);
}; // interface ITPCC

```

tpcc_com_ps_i
.C

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), Wl, Zp8, env=Win32 (32b run),
ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADERING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;

```

```

    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEB6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), Wl, Zp8, env=Win64 (32b
run,appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADERING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{

```

```

#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEB6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

tpcc_com_ps_ p.c

```
#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), Wl, Zp8, env=Win32 (32b run),
ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 997
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;
```

```
typedef struct _MIDL_PROC_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEB6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
```

```
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_SERVER_INFO Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0, /* Reserved5 */
};

#pragma data_seg(".rdata")
```



```

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshall] or
[user_marshall] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */

        FC_AUTO_HANDLE */
        0x33,
        /*
        Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
NdrFcShort( 0x20 ), /*
MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /*
PPC Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x28 ), /*
Alpha Stack size/offset = 40 */
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 14 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
3 */ 0x3, /*
/* Parameter txn_in */
/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
PPC Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 20 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */
/* Parameter txn_out */
/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
NdrFcShort( 0x18 ), /*
MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
PPC Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
Alpha Stack size/offset = 24 */
#endif
/* 26 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */
/* Return value */
/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */

```

```

#else
NdrFcShort( 0x1c ), /*
MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*
PPC Stack size/offset = 28 */
#endif
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
Alpha Stack size/offset = 32 */
#endif
/* 32 */ 0x8, /* FC_LONG */
0x0, /*
0 */
/* Procedure Payment */
/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
NdrFcShort( 0x20 ), /*
MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /*
PPC Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x28 ), /*
Alpha Stack size/offset = 40 */
#endif
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */
/* Parameter txn_in */
/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifdef _ALPHA_
#ifdef _PPC_
#if !defined(_MIPS_)
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
PPC Stack size/offset = 8 */

```

```

#endif
#else
                NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /*
MIPS Stack size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /*
PPC Stack size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /*
Alpha Stack size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

        /* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /*
MIPS Stack size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /*
PPC Stack size/offset = 28 */
#endif
#else
                NdrFcShort( 0x20 ), /*
Alpha Stack size/offset = 32 */
#endif
/* 66 */ 0x8, /* FC_LONG */
0x0, /*
0 */

        /* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */

```

```

/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
                NdrFcShort( 0x20 ), /*
MIPS Stack size/offset = 32 */
#endif
#else
                NdrFcShort( 0x20 ), /*
PPC Stack size/offset = 32 */
#endif
#else
                NdrFcShort( 0x28 ), /*
Alpha Stack size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */

        /* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
                NdrFcShort( 0x8 ), /*
MIPS Stack size/offset = 8 */
#endif
#else
                NdrFcShort( 0x8 ), /*
PPC Stack size/offset = 8 */
#endif
#else
                NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /*
MIPS Stack size/offset = 24 */

```

```

#endif
#else
                NdrFcShort( 0x18 ), /*
PPC Stack size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /*
Alpha Stack size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

        /* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /*
MIPS Stack size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /*
PPC Stack size/offset = 28 */
#endif
#else
                NdrFcShort( 0x20 ), /*
Alpha Stack size/offset = 32 */
#endif
/* 100 */ 0x8, /* FC_LONG */
0x0, /*
0 */

        /* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
                NdrFcShort( 0x20 ), /*
MIPS Stack size/offset = 32 */
#endif
#else
                NdrFcShort( 0x20 ), /*
PPC Stack size/offset = 32 */
#endif
#else
                NdrFcShort( 0x28 ), /*
Alpha Stack size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 116 */ 0x7,          /* Oi2 Flags:  srv must
size, clt must size, has return, */
0x3,          /*
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags:  must size,
must free, in, by val, */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
PPC Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
NdrFcShort( 0x18 ), /*
MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
PPC Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
Alpha Stack size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags:  out, return,
base type, */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */

```

```

#else
NdrFcShort( 0x1c ), /*
MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*
PPC Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x20 ), /*
Alpha Stack size/offset = 32 */
#endif
/* 134 */ 0x8,          /* FC_LONG */
0x0,          /*
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33,          /* FC_AUTO_HANDLE */
0x6c,          /*
Old Flags:  object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
NdrFcShort( 0x20 ), /*
MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /*
PPC Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x28 ), /*
Alpha Stack size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7,          /* Oi2 Flags:  srv must
size, clt must size, has return, */
0x3,          /*
3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags:  must size,
must free, in, by val, */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*
PPC Stack size/offset = 8 */

```

```

#endif
NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 156 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
NdrFcShort( 0x18 ), /*
MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
PPC Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*
Alpha Stack size/offset = 24 */
#endif
/* 162 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags:  out, return,
base type, */
#ifdef _ALPHA_
#ifdef _PPC_
#ifndef _MIPS_
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
NdrFcShort( 0x1c ), /*
MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*
PPC Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x20 ), /*
Alpha Stack size/offset = 32 */
#endif
/* 168 */ 0x8,          /* FC_LONG */
0x0,          /*
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33,          /* FC_AUTO_HANDLE */
0x6c,          /*
Old Flags:  object, Oi2 */

```

```

/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
#ifdef _ALPHA_
/* 178 */ NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack
size/offset = 8 */
#else
NdrFcShort( 0x10 ), /*
Alpha Stack size/offset = 16 */
#endif
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /*
1 */
/* Return value */
/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifdef _ALPHA_
/* 188 */ NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 190 */ 0x8, /* FC_LONG */
0x0, /*
0 */
0x0
}
};
static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
0,
{
NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3b0 ), /* Offset=
944 (948) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2b ), /* 43 */
/* 18 */ NdrFcLong( 0x3 ), /* 3 */
/* 22 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 24 */ NdrFcLong( 0x11 ), /* 17 */
/* 28 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 30 */ NdrFcLong( 0x2 ), /* 2 */
/* 34 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 36 */ NdrFcLong( 0x4 ), /* 4 */
/* 40 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 42 */ NdrFcLong( 0x5 ), /* 5 */
/* 46 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 48 */ NdrFcLong( 0xb ), /* 11 */
/* 52 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 54 */ NdrFcLong( 0xa ), /* 10 */
/* 58 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 60 */ NdrFcLong( 0x6 ), /* 6 */
/* 64 */ NdrFcShort( 0xd6 ), /* Offset= 214 (278) */
/* 66 */ NdrFcLong( 0x7 ), /* 7 */
/* 70 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 72 */ NdrFcLong( 0x8 ), /* 8 */
/* 76 */ NdrFcShort( 0xd0 ), /* Offset= 208 (284) */
/* 78 */ NdrFcLong( 0xd ), /* 13 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0x9 ), /* 9 */
/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset=
776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset=
770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset=
768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset=
766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset=
764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset=
762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset=
742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset=
746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */

```

```

/* 160 */ NdrFcShort( 0x2e0 ), /* Offset=
736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset=
738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset=
736 (908) */
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset=
734 (912) */
/* 180 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset=
732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset=
730 (920) */
/* 192 */ NdrFcLong( 0x10 ), /* 16 */
/* 196 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 198 */ NdrFcLong( 0x12 ), /* 18 */
/* 202 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 204 */ NdrFcLong( 0x13 ), /* 19 */
/* 208 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 210 */ NdrFcLong( 0x16 ), /* 22 */
/* 214 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 216 */ NdrFcLong( 0x17 ), /* 23 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0xe ), /* 14 */
/* 226 */ NdrFcShort( 0x2be ), /* Offset=
702 (928) */
/* 228 */ NdrFcLong( 0x400e ), /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ), /* Offset=
708 (940) */
/* 234 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ), /* Offset=
706 (944) */
/* 240 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFcShort( 0x280 ), /* Offset=
640 (884) */
/* 246 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFcShort( 0x27e ), /* Offset=
638 (888) */
/* 252 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x278 ), /* Offset=
632 (888) */
/* 258 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFcShort( 0x272 ), /* Offset=
626 (888) */
/* 264 */ NdrFcLong( 0x0 ), /* 0 */
/* 268 */ NdrFcShort( 0x0 ), /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ), /* 1 */
/* 274 */ NdrFcShort( 0x0 ), /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(275) */
/* 278 */
0x15, /*
FC_STRUCT */

```

```

0x7, /*
7 */
/* 280 */ NdrFcShort( 0x8 ), /* 8 */
/* 282 */ 0xb, /* FC_HYPER */
FC_END /*
/* 284 */
0x12, 0x0, /*
FC_UP /*
/* 286 */ NdrFcShort( 0xc ), /* Offset= 12 (298) */
/* 288 */
0x1b, /*
FC_CARRAY /*
0x1, /*
1 */
/* 290 */ NdrFcShort( 0x2 ), /* 2 */
/* 292 */ 0x9, /* Corr desc: FC_ULONG */
*/
0x0, /*
/* 294 */ NdrFcShort( 0xffffc ), /* -4 */
/* 296 */ 0x6, /* FC_SHORT */
FC_END /*
/* 298 */
0x17, /*
FC_CSTRUCT /*
0x3, /*
3 */
/* 300 */ NdrFcShort( 0x8 ), /* 8 */
/* 302 */ NdrFcShort( 0xffffff2 ), /* Offset= -14 (288) */
/* 304 */ 0x8, /* FC_LONG */
FC_LONG /*
/* 306 */ 0x5c, /* FC_PAD */
FC_END /*
/* 308 */
0x2f, /*
FC_IP /*
0x5a, /*
FC_CONSTANT_IID /*
/* 310 */ NdrFcLong( 0x0 ), /* 0 */
/* 314 */ NdrFcShort( 0x0 ), /* 0 */
/* 316 */ NdrFcShort( 0x0 ), /* 0 */
/* 318 */ 0xc0, /* 192 */
0 */
/* 320 */ 0x0, /* 0 */
0 */
/* 322 */ 0x0, /* 0 */
0 */
/* 324 */ 0x0, /* 0 */
70 */
/* 326 */
0x2E, /*
FC_IP /*
0x5a, /*
FC_CONSTANT_IID */

```

```

/* 328 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 332 */ NdrFcShort( 0x0 ), /* 0 */
/* 334 */ NdrFcShort( 0x0 ), /* 0 */
/* 336 */ 0xc0, /* 192 */
0 */
/* 338 */ 0x0, /* 0 */
0 */
/* 340 */ 0x0, /* 0 */
0 */
/* 342 */ 0x0, /* 0 */
70 */
/* 344 */
0x12, 0x10, /*
FC_UP [pointer_deref] /*
/* 346 */ NdrFcShort( 0x2 ), /* Offset= 2 (348) */
/* 348 */
FC_UP /*
/* 350 */ NdrFcShort( 0x1fc ), /* Offset=508 (858) */
/* 352 */
FC_ENCAPSULATED_UNION /*
0x2a, /*
0x49, /*
73 */
/* 354 */ NdrFcShort( 0x18 ), /* 24 */
/* 356 */ NdrFcShort( 0xa ), /* 10 */
/* 358 */ NdrFcLong( 0x8 ), /* 8 */
/* 362 */ NdrFcShort( 0x58 ), /* Offset= 88 (450) */
/* 364 */ NdrFcLong( 0xd ), /* 13 */
/* 368 */ NdrFcShort( 0x78 ), /* Offset= 120 (488) */
/* 370 */ NdrFcLong( 0x9 ), /* 9 */
/* 374 */ NdrFcShort( 0x94 ), /* Offset= 148 (522) */
/* 376 */ NdrFcLong( 0xc ), /* 12 */
/* 380 */ NdrFcShort( 0xbc ), /* Offset= 188 (568) */
/* 382 */ NdrFcLong( 0x24 ), /* 36 */
/* 386 */ NdrFcShort( 0x114 ), /* Offset=276 (662) */
/* 388 */ NdrFcLong( 0x800d ), /* 32781 */
/* 392 */ NdrFcShort( 0x130 ), /* Offset=304 (696) */
/* 394 */ NdrFcLong( 0x10 ), /* 16 */
/* 398 */ NdrFcShort( 0x148 ), /* Offset=328 (726) */
/* 400 */ NdrFcLong( 0x2 ), /* 2 */
/* 404 */ NdrFcShort( 0x160 ), /* Offset=352 (756) */
/* 406 */ NdrFcLong( 0x3 ), /* 3 */
/* 410 */ NdrFcShort( 0x178 ), /* Offset=376 (786) */
/* 412 */ NdrFcLong( 0x14 ), /* 20 */
/* 416 */ NdrFcShort( 0x190 ), /* Offset=400 (816) */
/* 418 */ NdrFcShort( 0xffffffff ), /* Offset=-1(417) */
/* 420 */
0x1b, /*
FC_CARRAY */

```

```

0x3, /*
3 */
/* 422 */ NdrFcShort( 0x4 ), /* 4 */
/* 424 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /*
*/
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */
0x4b, /*
FC_PP /*
0x5c, /*
FC_PAD /*
/* 430 */
0x48, /*
FC_VARIABLE_REPEAT /*
0x49, /*
FC_FIXED_OFFSET /*
/* 432 */ NdrFcShort( 0x4 ), /* 4 */
/* 434 */ NdrFcShort( 0x0 ), /* 0 */
/* 436 */ NdrFcShort( 0x1 ), /* 1 */
/* 438 */ NdrFcShort( 0x0 ), /* 0 */
/* 440 */ NdrFcShort( 0x0 ), /* 0 */
/* 442 */ 0x12, 0x0, /* FC_UP */
/* 444 */ NdrFcShort( 0xffffffff6e ), /* Offset=-146 (298) */
/* 446 */
0x5b, /*
FC_END /*
0x8, /*
FC_LONG /*
/* 448 */ 0x5c, /* FC_PAD */
FC_END /*
/* 450 */
0x16, /*
FC_PSTRUCT /*
0x3, /*
3 */
/* 452 */ NdrFcShort( 0x8 ), /* 8 */
/* 454 */
0x4b, /*
FC_PP /*
0x5c, /*
FC_PAD /*
/* 456 */
0x46, /*
FC_NO_REPEAT /*
0x5c, /*
FC_PAD /*
/* 458 */ NdrFcShort( 0x4 ), /* 4 */
/* 460 */ NdrFcShort( 0x4 ), /* 4 */
/* 462 */ 0x11, 0x0, /* FC_RP */
/* 464 */ NdrFcShort( 0xffffffffd4 ), /* Offset=-44 (420) */
/* 466 */
0x5b, /*
FC_END /*
0x8, /*
FC_LONG /*
/* 468 */ 0x8, /* FC_LONG */

```

```

0x5b, /*
FC_END */
/* 470 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 482 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 484 */ NdrFcShort( 0xfffff50 ), /* Offset= -
176 (308) */
/* 486 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 488 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 498 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 500 */
0x11, 0x0, /*
FC_RP */
/* 502 */ NdrFcShort( 0xfffffe0 ), /* Offset= -
32 (470) */
/* 504 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 518 */ NdrFcShort( 0xfffff40 ), /* Offset= -
192 (326) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */

```

```

/* 522 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 524 */ NdrFcShort( 0x8 ), /* 8 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 532 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 534 */
0x11, 0x0, /*
FC_RP */
/* 536 */ NdrFcShort( 0xfffffe0 ), /* Offset= -
32 (504) */
/* 538 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 540 */ NdrFcShort( 0x4 ), /* 4 */
/* 542 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 548 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 550 */ NdrFcShort( 0x4 ), /* 4 */
/* 552 */ NdrFcShort( 0x0 ), /* 0 */
/* 554 */ NdrFcShort( 0x1 ), /* 1 */
/* 556 */ NdrFcShort( 0x0 ), /* 0 */
/* 558 */ NdrFcShort( 0x0 ), /* 0 */
/* 560 */ 0x12, 0x0, /* FC_UP */
/* 562 */ NdrFcShort( 0x182 ), /* Offset=
386 (948) */
/* 564 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 566 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 568 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 570 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 572 */ NdrFcShort( 0x0 ), /* 0 */
/* 574 */ NdrFcShort( 0x6 ), /* Offset= 6 (580) */
/* 576 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 578 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 580 */
0x11, 0x0, /*
FC_RP */
/* 582 */ NdrFcShort( 0xfffffd4 ), /* Offset= -
44 (538) */
/* 584 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 586 */ NdrFcLong( 0x2f ), /* 47 */
/* 590 */ NdrFcShort( 0x0 ), /* 0 */
/* 592 */ NdrFcShort( 0x0 ), /* 0 */
/* 594 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 596 */ 0x0, /* 0 */
0x0, /*
0 */
/* 598 */ 0x0, /* 0 */
0x0, /*
0 */
/* 600 */ 0x0, /* 0 */
0x46, /*
70 */
/* 602 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 604 */ NdrFcShort( 0x1 ), /* 1 */
/* 606 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 608 */ NdrFcShort( 0x4 ), /* 4 */
/* 610 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 612 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 614 */ NdrFcShort( 0x10 ), /* 16 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ NdrFcShort( 0xa ), /* Offset= 10 (628) */
/* 620 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 622 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */

```

```

/* 624 */ NdrFcShort( 0xffffffffd8 ), /* Offset= -
40 (584) */
/* 626 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 628 */
0x12, 0x0, /*
FC_UP */
/* 630 */ NdrFcShort( 0xffffffffe4 ), /* Offset= -
28 (602) */
/* 632 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 634 */ NdrFcShort( 0x4 ), /* 4 */
/* 636 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 638 */ NdrFcShort( 0x0 ), /* 0 */
/* 640 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 642 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ), /* 4 */
/* 646 */ NdrFcShort( 0x0 ), /* 0 */
/* 648 */ NdrFcShort( 0x1 ), /* 1 */
/* 650 */ NdrFcShort( 0x0 ), /* 0 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xffffffffd4 ), /* Offset= -
44 (612) */
/* 658 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 660 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 662 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 664 */ NdrFcShort( 0x8 ), /* 8 */
/* 666 */ NdrFcShort( 0x0 ), /* 0 */
/* 668 */ NdrFcShort( 0x6 ), /* Offset= 6 (674) */
/* 670 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 672 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 674 */

```

```

0x11, 0x0, /*
FC_RP */
/* 676 */ NdrFcShort( 0xffffffffd4 ), /* Offset= -
44 (632) */
/* 678 */
0x1d, /*
FC_SMPARRAY */
0x0, /*
0 */
/* 680 */ NdrFcShort( 0x8 ), /* 8 */
/* 682 */ 0x2, /* FC_CHAR */
0x5b, /*
FC_END */
/* 684 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 686 */ NdrFcShort( 0x10 ), /* 16 */
/* 688 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 690 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 692 */ 0x0, /* 0 */
NdrFcShort( 0xfffffffff1
), /* Offset= -15 (678) */
0x5b, /*
FC_END */
/* 696 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 698 */ NdrFcShort( 0x18 ), /* 24 */
/* 700 */ NdrFcShort( 0x0 ), /* 0 */
/* 702 */ NdrFcShort( 0xa ), /* Offset= 10 (712) */
/* 704 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 706 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /*
0 */
/* 708 */ NdrFcShort( 0xffffffffe8 ), /* Offset= -
24 (684) */
/* 710 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 712 */
0x11, 0x0, /*
FC_RP */
/* 714 */ NdrFcShort( 0xfffffffff0c ), /* Offset= -
244 (470) */
/* 716 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 718 */ NdrFcShort( 0x1 ), /* 1 */
/* 720 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */

```

```

0x0, /*
*/
/* 722 */ NdrFcShort( 0x0 ), /* 0 */
/* 724 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 726 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 728 */ NdrFcShort( 0x8 ), /* 8 */
/* 730 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 732 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 734 */ NdrFcShort( 0x4 ), /* 4 */
/* 736 */ NdrFcShort( 0x4 ), /* 4 */
/* 738 */ 0x12, 0x0, /* FC_UP */
/* 740 */ NdrFcShort( 0xffffffffe8 ), /* Offset= -
24 (716) */
/* 742 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 744 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 746 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 748 */ NdrFcShort( 0x2 ), /* 2 */
/* 750 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 752 */ NdrFcShort( 0x0 ), /* 0 */
/* 754 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 756 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 758 */ NdrFcShort( 0x8 ), /* 8 */
/* 760 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 762 */

```

```

0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 764 */ NdrFcShort( 0x4 ), /* 4 */
/* 766 */ NdrFcShort( 0x4 ), /* 4 */
/* 768 */ 0x12, 0x0, /* FC_UP */
/* 770 */ NdrFcShort( 0xffffffe8 ), /* Offset= -
24 (746) */
/* 772 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 774 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 776 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 778 */ NdrFcShort( 0x4 ), /* 4 */
/* 780 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 782 */ NdrFcShort( 0x0 ), /* 0 */
/* 784 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 786 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 788 */ NdrFcShort( 0x8 ), /* 8 */
/* 790 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 792 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 794 */ NdrFcShort( 0x4 ), /* 4 */
/* 796 */ NdrFcShort( 0x4 ), /* 4 */
/* 798 */ 0x12, 0x0, /* FC_UP */
/* 800 */ NdrFcShort( 0xffffffe8 ), /* Offset= -
24 (776) */
/* 802 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 804 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 806 */

```

```

0x1b, /*
FC_CARRAY */
0x7, /*
7 */
/* 808 */ NdrFcShort( 0x8 ), /* 8 */
/* 810 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 812 */ NdrFcShort( 0x0 ), /* 0 */
/* 814 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 816 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 822 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 824 */ NdrFcShort( 0x4 ), /* 4 */
/* 826 */ NdrFcShort( 0x4 ), /* 4 */
/* 828 */ 0x12, 0x0, /* FC_UP */
/* 830 */ NdrFcShort( 0xffffffe8 ), /* Offset= -
24 (806) */
/* 832 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 834 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 836 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 838 */ NdrFcShort( 0x8 ), /* 8 */
/* 840 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 842 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 844 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 846 */ NdrFcShort( 0x8 ), /* 8 */
/* 848 */ 0x7, /* Corr desc: FC_USHORT
*/

```

```

0x0, /*
*/
/* 850 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 852 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 854 */ NdrFcShort( 0xfffffee ), /* Offset= -
18 (836) */
/* 856 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 858 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 860 */ NdrFcShort( 0x28 ), /* 40 */
/* 862 */ NdrFcShort( 0xfffffee ), /* Offset= -
18 (844) */
/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 868 */ 0x38, /* FC_ALIGNM4 */
0x8, /*
FC_LONG */
/* 870 */ 0x8, /* FC_LONG */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 872 */ 0x0, /* 0 */
NdrFcShort( 0xfffffd7
), /* Offset= -521 (352) */
0x5b, /*
FC_END */
/* 876 */
0x12, 0x0, /*
FC_UP */
/* 878 */ NdrFcShort( 0xfffffef6 ), /* Offset= -
266 (612) */
/* 880 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 882 */ 0x1, /* FC_BYTE */
0x5c, /*
FC_PAD */
/* 884 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 886 */ 0x6, /* FC_SHORT */
0x5c, /*
FC_PAD */
/* 888 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 890 */ 0x8, /* FC_LONG */
0x5c, /*
FC_PAD */
/* 892 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 894 */ 0xa, /* FC_FLOAT */

```



```

0x5c, /*
FC_PAD */
/* 896 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 898 */ 0xc, /* FC_DOUBLE */
0x5c, /*
FC_PAD */
/* 900 */
0x12, 0x0, /*
FC_UP */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= -
624 (278) */
/* 904 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= -
622 (284) */
/* 908 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 910 */ NdrFcShort( 0xfffffda6 ), /* Offset= -
602 (308) */
/* 912 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfffffdb4 ), /* Offset= -
588 (326) */
/* 916 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfffffdc2 ), /* Offset= -
574 (344) */
/* 920 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
0x12, 0x0, /*
FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
0x15, /*
FC_STRUCT */
0x7, /*
7 */
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6, /* FC_SHORT */
0x1, /*
FC_BYTE */
/* 934 */ 0x1, /* FC_BYTE */
0x38, /*
FC_ALIGNM4 */
/* 936 */ 0x8, /* FC_LONG */
0x39, /*
FC_ALIGNM8 */
/* 938 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 940 */
0x12, 0x0, /*
FC_UP */

```

```

/* 942 */ NdrFcShort( 0xffffffff2 ), /* Offset= -
14 (928) */
/* 944 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 946 */ 0x2, /* FC_CHAR */
0x5c, /*
FC_PAD */
/* 948 */
0x1a, /*
FC_BOGUS_STRUCT */
0x7, /*
7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 958 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 960 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 962 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /*
0 */
/* 964 */ NdrFcShort( 0xfffffc42 ), /* Offset= -
958 (6) */
/* 966 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 968 */ 0xb4, /* FC_USER_MARSHAL */
0x83, /*
131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffc32 ), /* Offset= -
974 (2) */
/* 978 */
0x11, 0x4, /*
FC_RP [allocated_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
0x13, 0x0, /*
FC_OP */
/* 984 */ NdrFcShort( 0xfffffcdc ), /* Offset= -
36 (948) */
/* 986 */ 0xb4, /* FC_USER_MARSHAL */
0x83, /*
131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xfffffff4 ), /* Offset= -
12 (982) */
0x0
}
};

```

```

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
( CInterfaceProxyVtbl *) &ITPCCProxyVtbl,
0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
( CInterfaceStubVtbl *) &ITPCCStubVtbl,
0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
(PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
(const PCInterfaceName *) &
_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0, /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

```

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=12), Wl, Zp8, env=Win64 (32b
run, appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_XPP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifdef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifdef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;

```

```

extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEFE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

```

```

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x50002, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

```

```

    };

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifdef _ALPHA_
        /* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 16 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr check, */
        /* 18 */ NdrFcShort( 0x20 ), /* 32 */
        /* 20 */ NdrFcShort( 0x20 ), /* 32 */
        /* 22 */ NdrFcShort( 0x0 ), /* 0 */
        /* 24 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

        /* 26 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
        /* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
        /* 30 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

        /* Parameter txn_out */

        /* 32 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref, srv alloc size=24 */

```

```

#ifdef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
        /* 36 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Return value */

        /* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
        /* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
        /* 42 */ 0x8, /* FC_LONG */
        0x0, /* 0 */

        /* Procedure Payment */

        /* 44 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 46 */ NdrFcLong( 0x0 ), /* 0 */
        /* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifdef _ALPHA_
        /* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
        /* 54 */ NdrFcShort( 0x0 ), /* 0 */
        /* 56 */ NdrFcShort( 0x8 ), /* 8 */
        /* 58 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 60 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr check, */
        /* 62 */ NdrFcShort( 0x20 ), /* 32 */
        /* 64 */ NdrFcShort( 0x20 ), /* 32 */
        /* 66 */ NdrFcShort( 0x0 ), /* 0 */
        /* 68 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

        /* 70 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
        /* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else

```

```

        NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
        /* 74 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

        /* Parameter txn_out */

        /* 76 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref, srv alloc size=24 */
#ifdef _ALPHA_
        /* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
        /* 80 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Return value */

        /* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
        /* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
        /* 86 */ 0x8, /* FC_LONG */
        0x0, /* 0 */

        /* Procedure Delivery */

        /* 88 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 90 */ NdrFcLong( 0x0 ), /* 0 */
        /* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifdef _ALPHA_
        /* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
        /* 98 */ NdrFcShort( 0x0 ), /* 0 */
        /* 100 */ NdrFcShort( 0x8 ), /* 8 */
        /* 102 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 104 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr check, */
        /* 106 */ NdrFcShort( 0x20 ), /* 32 */
        /* 108 */ NdrFcShort( 0x20 ), /* 32 */
        /* 110 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 112 */ NdrFcShort( 0x0 ), /* 0 */
        /* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifdef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /*
axp64 Stack size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type
Offset=950 */

        /* Parameter txn_out */

/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifdef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /*
axp64 Stack size/offset = 32 */
#endif
/* 124 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifdef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /*
axp64 Stack size/offset = 40 */
#endif
/* 130 */ 0x8, /* FC_LONG */
        0x0, /*
0 */

        /* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /*

Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifdef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /*
axp64 Stack size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3, /*

3 */
/* 148 */ 0xa, /* 10 */
        0x7, /*

Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifdef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /*
axp64 Stack size/offset = 8 */
#endif
/* 162 */ NdrFcShort( 0x3b6 ), /* Type
Offset=950 */

        /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifdef _ALPHA_
/* 166 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /*
axp64 Stack size/offset = 32 */
#endif
/* 168 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifdef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /*
axp64 Stack size/offset = 40 */
#endif
/* 174 */ 0x8, /* FC_LONG */
        0x0, /*

0 */

        /* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /*

Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */

```

```

/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifdef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /*
axp64 Stack size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3, /*

3 */
/* 192 */ 0xa, /* 10 */
        0x7, /*

Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifdef _ALPHA_
/* 204 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /*
axp64 Stack size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type
Offset=950 */

        /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifdef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /*
axp64 Stack size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifdef _ALPHA_
/* 216 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /*
axp64 Stack size/offset = 40 */
#endif

```

```

/* 218 */ 0x8, /* FC_LONG */
0 */
/* Procedure CallSetComplete */
/* 220 */ 0x33, /* FC_AUTO_HANDLE */
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, axp64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
1 */
/* 236 */ 0xa, /* 10 */
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */
/* Return value */
/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, axp64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0 */
0x0
};
static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
0,
{
NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x39e ), /* Offset=
926 (930) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */

```

```

/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2b ), /* 43 */
/* 20 */ NdrFcLong( 0x3 ), /* 3 */
/* 24 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 26 */ NdrFcLong( 0x11 ), /* 17 */
/* 30 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 32 */ NdrFcLong( 0x2 ), /* 2 */
/* 36 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 38 */ NdrFcLong( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 44 */ NdrFcLong( 0x5 ), /* 5 */
/* 48 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 50 */ NdrFcLong( 0xb ), /* 11 */
/* 54 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 56 */ NdrFcLong( 0xa ), /* 10 */
/* 60 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 62 */ NdrFcLong( 0x6 ), /* 6 */
/* 66 */ NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */ NdrFcLong( 0x7 ), /* 7 */
/* 72 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 74 */ NdrFcLong( 0x8 ), /* 8 */
/* 78 */ NdrFcShort( 0xd0 ), /* Offset= 208 (286) */
/* 80 */ NdrFcLong( 0xd ), /* 13 */
/* 84 */ NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */ NdrFcLong( 0x9 ), /* 9 */
/* 90 */ NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */ NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */ NdrFcLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (858) */
/* 104 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */ NdrFcShort( 0x2ee ), /* Offset=
750 (858) */
/* 110 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x2ec ), /* Offset=
748 (862) */
/* 116 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* Offset=
746 (866) */
/* 122 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* Offset=
744 (870) */
/* 128 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* Offset=
742 (874) */
/* 134 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (878) */
/* 140 */ NdrFcLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* Offset=
722 (866) */

```

```

/* 146 */ NdrFcLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* Offset=
720 (870) */
/* 152 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (882) */
/* 158 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* Offset=
716 (878) */
/* 164 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* Offset=
718 (886) */
/* 170 */ NdrFcLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* Offset=
716 (890) */
/* 176 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* Offset=
714 (894) */
/* 182 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* Offset=
712 (898) */
/* 188 */ NdrFcLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* Offset=
710 (902) */
/* 194 */ NdrFcLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 200 */ NdrFcLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 206 */ NdrFcLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 212 */ NdrFcLong( 0x16 ), /* 22 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 218 */ NdrFcLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 224 */ NdrFcLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0x2aa ), /* Offset=
682 (910) */
/* 230 */ NdrFcLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* Offset=
688 (922) */
/* 236 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 240 */ NdrFcShort( 0x2ae ), /* Offset=
686 (926) */
/* 242 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 246 */ NdrFcShort( 0x26c ), /* Offset=
620 (866) */
/* 248 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* Offset=
618 (870) */
/* 254 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 258 */ NdrFcShort( 0x264 ), /* Offset=
612 (870) */
/* 260 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 264 */ NdrFcShort( 0x25e ), /* Offset=
606 (870) */
/* 266 */ NdrFcLong( 0x0 ), /* 0 */
/* 270 */ NdrFcShort( 0x0 ), /* Offset= 0 (270) */
/* 272 */ NdrFcLong( 0x1 ), /* 1 */

```

```

/* 276 */ NdrFcShort( 0x0 ), /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(277) */
/* 280 */
FC_STRUCT */
0x15, /*
7 */
0x7, /*
/* 282 */ NdrFcShort( 0x8 ), /* 8 */
/* 284 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 286 */
0x12, 0x0, /*
FC_UP */
/* 288 */ NdrFcShort( 0xe ), /* Offset= 14 (302) */
/* 290 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 292 */ NdrFcShort( 0x2 ), /* 2 */
/* 294 */ 0x9, /* Corr desc: FC_ULONG
*/
0x0, /*
*/
/* 296 */ NdrFcShort( 0xffff ), /* -4 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 300 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 302 */
0x17, /*
FC_CSTRUCT */
0x3, /*
3 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ NdrFcShort( 0xffffffff0 ), /* Offset= -
16 (290) */
/* 308 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 310 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 312 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 314 */ NdrFcLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 320 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 324 */ 0x0, /* 0 */
0x0, /*
0 */
/* 326 */ 0x0, /* 0 */
0x0, /*
0 */

```

```

/* 328 */ 0x0, /* 0 */
0x46, /*
70 */
/* 330 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 332 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 342 */ 0x0, /* 0 */
0x0, /*
0 */
/* 344 */ 0x0, /* 0 */
0x0, /*
0 */
/* 346 */ 0x0, /* 0 */
0x46, /*
70 */
/* 348 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ), /* Offset= 2 (352) */
/* 352 */
0x12, 0x0, /*
FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ), /* Offset=
486 (840) */
/* 356 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x89, /*
137 */
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFcLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* Offset=
260 (650) */
/* 392 */ NdrFcLong( 0x800d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* Offset=
288 (684) */
/* 398 */ NdrFcLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* Offset=
314 (716) */
/* 404 */ NdrFcLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* Offset=
336 (744) */
/* 410 */ NdrFcLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* Offset=
358 (772) */
/* 416 */ NdrFcLong( 0x14 ), /* 20 */

```

```

/* 420 */ NdrFcShort( 0x17c ), /* Offset=
380 (800) */
/* 422 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(421) */
/* 424 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 434 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 440 */
0x12, 0x0, /*
FC_UP */
/* 442 */ NdrFcShort( 0xffffffff74 ), /* Offset= -
140 (302) */
/* 444 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 446 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* Offset= 6 (458) */
/* 454 */ 0x8, /* FC_LONG */
0x39, /*
FC_ALIGNM8 */
/* 456 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 458 */
0x11, 0x0, /*
FC_RP */
/* 460 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (424) */
/* 462 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 472 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/

```

```

0x0, /*
0 */
/* 480 */ NdrFcShort( 0xffffffff58 ), /* Offset= -
168 (312) */
/* 482 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 484 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* Offset= 6 (496) */
/* 492 */ 0x8, /* FC_LONG */
0x39, /*
FC_ALIGNM8 */
/* 494 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 496 */
0x11, 0x0, /*
FC_RP */
/* 498 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (462) */
/* 500 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 502 */ NdrFcShort( 0x0 ), /* 0 */
/* 504 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 510 */ NdrFcLong( 0xfffffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 518 */ NdrFcShort( 0xffffffff44 ), /* Offset= -
188 (330) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 522 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 524 */ NdrFcShort( 0x10 ), /* 16 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x39, /*
FC_ALIGNM8 */
/* 532 */ 0x36, /* FC_POINTER */

```

```

0x5b, /*
FC_END */
/* 534 */
0x11, 0x0, /*
FC_RP */
/* 536 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (500) */
/* 538 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 540 */ NdrFcShort( 0x0 ), /* 0 */
/* 542 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 548 */ NdrFcLong( 0xfffffffff ), /* -1 */
/* 552 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 554 */
0x12, 0x0, /*
FC_UP */
/* 556 */ NdrFcShort( 0x176 ), /* Offset=
374 (930) */
/* 558 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 560 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 562 */ NdrFcShort( 0x10 ), /* 16 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ NdrFcShort( 0x6 ), /* Offset= 6 (572) */
/* 568 */ 0x8, /* FC_LONG */
0x39, /*
FC_ALIGNM8 */
/* 570 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 572 */
0x11, 0x0, /*
FC_RP */
/* 574 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (538) */
/* 576 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ), /* 47 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ NdrFcShort( 0x0 ), /* 0 */
/* 586 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 588 */ 0x0, /* 0 */
0x0, /*
0 */

```

```

/* 590 */ 0x0, /* 0 */
0x0, /*
0 */
/* 592 */ 0x0, /* 0 */
0x46, /*
70 */
/* 594 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 596 */ NdrFcShort( 0x1 ), /* 1 */
/* 598 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 600 */ NdrFcShort( 0x4 ), /* 4 */
/* 602 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 604 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 606 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 608 */ NdrFcShort( 0x18 ), /* 24 */
/* 610 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ NdrFcShort( 0xc ), /* Offset= 12 (624) */
/* 614 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 618 */ NdrFcShort( 0xffffffffd6 ), /* Offset= -
42 (576) */
/* 620 */ 0x39, /* FC_ALIGNM8 */
0x36, /*
FC_POINTER */
/* 622 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 624 */
0x12, 0x0, /*
FC_UP */
/* 626 */ NdrFcShort( 0xffffffffe0 ), /* Offset= -
32 (594) */
/* 628 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 630 */ NdrFcShort( 0x0 ), /* 0 */
/* 632 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/

```

```

/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
                                0x12, 0x0, /*
FC_UP */
/* 646 */ NdrFcShort( 0xffffffffd8 ), /* Offset= -
40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
                                0x5b, /*
FC_END */
/* 650 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
/* 658 */ 0x8, /* FC_LONG */
                                0x39, /*
FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 662 */
                                0x11, 0x0, /*
FC_RP */
/* 664 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (628) */
/* 666 */
                                0x1d, /*
FC_SMFARRAY */
                                0x0, /*
0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x2, /* FC_CHAR */
                                0x5b, /*
FC_END */
/* 672 */
                                0x15, /*
FC_STRUCT */
                                0x3, /*
3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8, /* FC_LONG */
                                0x6, /*
FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
                                0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0, /* 0 */
NdrFcShort( 0xfffffffff1
), /* Offset= -15 (666) */
                                0x5b, /*
FC_END */
/* 684 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */

```

```

/* 692 */ 0x8, /* FC_LONG */
                                0x39, /*
FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
                                0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0, /* 0 */
NdrFcShort( 0xfffffffffe7
), /* Offset= -25 (672) */
                                0x5b, /*
FC_END */
/* 700 */
                                0x11, 0x0, /*
FC_RP */
/* 702 */ NdrFcShort( 0xfffffffff10 ), /* Offset= -
240 (462) */
/* 704 */
                                0x1b, /*
FC_CARRAY */
                                0x0, /*
0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 714 */ 0x1, /* FC_BYTE */
                                0x5b, /*
FC_END */
/* 716 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
/* 724 */ 0x8, /* FC_LONG */
                                0x39, /*
FC_ALIGNM8 */
/* 726 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 728 */
                                0x12, 0x0, /*
FC_UP */
/* 730 */ NdrFcShort( 0xfffffffffe6 ), /* Offset= -
26 (704) */
/* 732 */
                                0x1b, /*
FC_CARRAY */
                                0x1, /*
1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 738 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 742 */ 0x6, /* FC_SHORT */
                                0x5b, /*
FC_END */
/* 744 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
/* 752 */ 0x8, /* FC_LONG */
                                0x39, /*
FC_ALIGNM8 */
/* 754 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 756 */
                                0x12, 0x0, /*
FC_UP */
/* 758 */ NdrFcShort( 0xfffffffffe6 ), /* Offset= -
26 (732) */
/* 760 */
                                0x1b, /*
FC_CARRAY */
                                0x3, /*
3 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 770 */ 0x8, /* FC_LONG */
                                0x5b, /*
FC_END */
/* 772 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
/* 780 */ 0x8, /* FC_LONG */
                                0x39, /*
FC_ALIGNM8 */
/* 782 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 784 */
                                0x12, 0x0, /*
FC_UP */
/* 786 */ NdrFcShort( 0xfffffffffe6 ), /* Offset= -
26 (760) */
/* 788 */
                                0x1b, /*
FC_CARRAY */

```



```

0x7, /*
7 */
/* 790 */ NdrFcShort( 0x8 ), /* 8 */
/* 792 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 794 */ NdrFcShort( 0x0 ), /* 0 */
/* 796 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 798 */ 0xb, /* FC_HYPER */
FC_END /*
/* 800 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 802 */ NdrFcShort( 0x10 ), /* 16 */
/* 804 */ NdrFcShort( 0x0 ), /* 0 */
/* 806 */ NdrFcShort( 0x6 ), /* Offset= 6 (812) */
/* 808 */ 0x8, /* FC_LONG */
FC_ALIGNM8 /*
/* 810 */ 0x36, /* FC_POINTER */
FC_END /*
/* 812 */
0x12, 0x0, /*
FC_UP */
/* 814 */ NdrFcShort( 0xffffffe6 ), /* Offset= -
26 (788) */
/* 816 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */ 0x8, /* FC_LONG */
FC_LONG /*
/* 822 */ 0x5c, /* FC_PAD */
FC_END /*
/* 824 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 826 */ NdrFcShort( 0x8 ), /* 8 */
/* 828 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 830 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 832 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 834 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 836 */ NdrFcShort( 0xfffffec ), /* Offset= -
20 (816) */

```

```

/* 838 */ 0x5c, /* FC_PAD */
FC_END /*
/* 840 */
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 842 */ NdrFcShort( 0x38 ), /* 56 */
/* 844 */ NdrFcShort( 0xfffffec ), /* Offset= -
20 (824) */
/* 846 */ NdrFcShort( 0x0 ), /* Offset= 0 (846) */
/* 848 */ 0x6, /* FC_SHORT */
FC_SHORT /*
/* 850 */ 0x38, /* FC_ALIGNM4 */
FC_LONG /*
/* 852 */ 0x8, /* FC_LONG */
FC_EMBEDDED_COMPLEX */
/* 854 */ 0x4, /* 4 */
), /* Offset= -499 (356) */
FC_END /*
/* 858 */
0x12, 0x0, /*
FC_UP */
/* 860 */ NdrFcShort( 0xfffff02 ), /* Offset= -
254 (606) */
/* 862 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 864 */ 0x1, /* FC_BYTE */
FC_PAD /*
/* 866 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 868 */ 0x6, /* FC_SHORT */
FC_PAD /*
/* 870 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 872 */ 0x8, /* FC_LONG */
FC_PAD /*
/* 874 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 876 */ 0xa, /* FC_FLOAT */
FC_PAD /*
/* 878 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 880 */ 0xc, /* FC_DOUBLE */
FC_PAD /*
/* 882 */

```

```

0x12, 0x0, /*
FC_UP */
/* 884 */ NdrFcShort( 0xffffda4 ), /* Offset= -
604 (280) */
/* 886 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 888 */ NdrFcShort( 0xffffda6 ), /* Offset= -
602 (286) */
/* 890 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 892 */ NdrFcShort( 0xffffdbc ), /* Offset= -
580 (312) */
/* 894 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 896 */ NdrFcShort( 0xffffdca ), /* Offset= -
566 (330) */
/* 898 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 900 */ NdrFcShort( 0xffffdd8 ), /* Offset= -
552 (348) */
/* 902 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 904 */ NdrFcShort( 0x2 ), /* Offset= 2 (906) */
/* 906 */
0x12, 0x0, /*
FC_UP */
/* 908 */ NdrFcShort( 0x16 ), /* Offset= 22 (930) */
/* 910 */
0x15, /*
FC_STRUCT */
0x7, /*
7 */
/* 912 */ NdrFcShort( 0x10 ), /* 16 */
/* 914 */ 0x6, /* FC_SHORT */
FC_BYTE /*
/* 916 */ 0x1, /* FC_BYTE */
FC_ALIGNM4 /*
/* 918 */ 0x8, /* FC_LONG */
FC_ALIGNM8 /*
/* 920 */ 0xb, /* FC_HYPER */
FC_END /*
/* 922 */
0x12, 0x0, /*
FC_UP */
/* 924 */ NdrFcShort( 0xfffffff2 ), /* Offset= -
14 (910) */
/* 926 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 928 */ 0x2, /* FC_CHAR */
FC_PAD /*
/* 930 */

```

```

FC_BOGUS_STRUCT */          0x1a,          /*
                                0x7,          /*
7 */
/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */ NdrFcShort( 0x0 ), /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */ 0x8,                /* FC_LONG */
                                0x8,          /*
FC_LONG */
/* 940 */ 0x6,                /* FC_SHORT */
                                0x6,          /*
FC_SHORT */
/* 942 */ 0x6,                /* FC_SHORT */
                                0x6,          /*
FC_SHORT */
/* 944 */ 0x4c,               /* FC_EMBEDDED_COMPLEX
*/
                                0x0,          /*
0 */
/* 946 */ NdrFcShort( 0xfffffc54 ), /* Offset= -
940 (6) */
/* 948 */ 0x5c,                /* FC_PAD */
                                0x5b,          /*
FC_END */
/* 950 */ 0xb4,               /* FC_USER_MARSHAL */
                                0x83,          /*
131 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x18 ), /* 24 */
/* 956 */ NdrFcShort( 0x0 ), /* 0 */
/* 958 */ NdrFcShort( 0xfffffc44 ), /* Offset= -
956 (2) */
/* 960 */
                                0x11, 0x4,      /*
FC_RP [allocated_on_stack] */
/* 962 */ NdrFcShort( 0x6 ), /* Offset= 6 (968) */
/* 964 */
                                0x13, 0x0,      /*
FC_OP */
/* 966 */ NdrFcShort( 0xfffffcdc ), /* Offset= -
36 (930) */
/* 968 */ 0xb4,               /* FC_USER_MARSHAL */
                                0x83,          /*
131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x18 ), /* 24 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffff4 ), /* Offset= -
12 (964) */
                                0x0
    }
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

```

```

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#ifdef _M_IA64 || defined(_M_AXP64)*/

```

tpcc_com_sl.rg

S

```

HKCR
{

```

```

TPCC.StockLevel.1 = s 'StockLevel Class'
{
    CLSID = s '{2668369E-A50D-11D2-
BA4E-00C04FBFE08B}'
}
TPCC.StockLevel = s 'StockLevel Class'
{
    CurVer = s 'TPCC.StockLevel.1'
}
NoRemove CLSID
{
    ForceRemove {2668369E-A50D-11D2-
BA4E-00C04FBFE08B} = s 'StockLevel Class'
{
    ProgID = s
'TPCC.StockLevel.1'
    VersionIndependentProgID = s
'TPCC.StockLevel'
    InprocServer32 = s
'%MODULE%'
    val
ThreadingModel = s 'Both'
}
}
}
}

```

tpcc_dblib.cpp

```

/* FILE: TPCC_DBLIB.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implements dblib calls for TPC-C
txns.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
match kit
* 4.10.001 - not deleting error
class in catch handler on deadlock retry;
* not a
functional bug, but a memory leak
* - had to
tweak some declarations to compile with latest SDK;
no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

```

```

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); //
            initialize dblib break;

        case DLL_PROCESS_DETACH:
            dbexit(); //
            close all dblib structures/connections break;

        default:
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);

```

```

        pConn =
        (CTPCC_DBLIB*)dbgetuserdata(dbproc);

        if (pConn != NULL)
        {
            pConn->SetDbLibError( severity,
            dberr, oserr, dberrstr, oserrstr );
        }
        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS *dbproc
DBPROCESS id pointer DBINT
msgno
message number
msgstate int
severity int
*msgtext char
printable
message description
*
* RETURNS: int
INT_CONTINUE continue if
error is SQLETIME else INT_CANCEL action
INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
    (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {

```

```

        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }
}

return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDest and places a
null character at the
end of the destination string.
*
* ARGUMENTS: char
destination string pointer
*pDest char
source string pointer
*pSrc int
n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
always null
terminated.
*/

inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
    },

```

```

        { 0, ""
    }
};

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, //
user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, //
workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase ) // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, //
user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, //
workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase ) // name of
database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

```

```

        m_MaxRetries = 10; // how many
retries on deadlock

        // increase max number of connections if
getting close
        if ( dbgetmaxprocs() < (iConnectionCount+5)
)
        {
            if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
                ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler
        if (dbprocerrhandle(login, err_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsghandle(login, msg_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
        DBSETLVERSION(login, DBVER60);
        // use dblib ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);

        // deallocate login structure before
checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that
the message and error handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

```

```

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        // set connection properties to match those
used by ODBC
        dbcmd(m_dbproc, "set ANSI_DEFAULTS ON ");
        dbcmd(m_dbproc, "set CURSOR_CLOSE_ON_COMMIT
OFF ");
        dbcmd(m_dbproc, "set IMPLICIT_TRANSACTIONS
OFF ");
        dbcmd(m_dbproc, "set NOCOUNT ON ");
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON ");
        // rollback transaction on abort

        // for coyote
        dbcmd(m_dbproc, "set ansi_warnings on ");
        //
        dbcmd(m_dbproc, "set ansi_nulls on ");
        //

        if (dbsqlxexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);

        // This value must match the number of
commands above.
        DiscardNextResults(2);
        DiscardNextResults(5); // coyote

        // verify that version of stored procs on
server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);
        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        char szSrvVersion[16];
        pData=dbdata(m_dbproc, 1);
        if (pData)
            UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
        else
            szSrvVersion[0]=0;
        if (strcmp(szSrvVersion,sVersion))
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

        DiscardNextRows(0);
        DiscardNextResults(0);
}

```

```

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate
resources
    dbcloses(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLEERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer

```

```

        DiscardNextRows(-1);
        DiscardNextResults(-1);

        // check for SQL Server error first; if
yes, throw it and ignore any DLib error.
        if (m_SqlErr != NULL)
        {
            CSQLEERR *pSqlErr;
            pSqlErr = m_SqlErr;
            m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
            throw pSqlErr;
        }

        CDBLIBERR *pDbLibErr;
        if (m_DbLibErr == NULL)
            // this case isn't expected to
happen, since it means that an error was returned
            // but the error handlers were
not called.
            pDbLibErr = new
CDBLIBERR(eAction);
        else
        {
            pDbLibErr = m_DbLibErr;
            pDbLibErr->m_eAction = eAction;
            m_DbLibErr = NULL; //
clear our pointer to instance; catch handler will
delete
        }

        throw pDbLibErr;
    }

    // Read and discard rows until no more. Throw an
exception if number of rows read doesn't
    // match number of rows expected. The row count will
be ignored if the expected count value
    // passed in is negative. A typical use of this
routine is to verify that there are no more
    // rows to be read.
    void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
    {
        int                iRowsRead = 0;
        RETCODE    rc;

        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >=
0)
                    ThrowError(CDBLIBERR::eDbNextRow);
                else
                    break;
            }
            iRowsRead++;
        }
    }

```

```

        if ((iExpectedCount >= 0) &&
(iExpectedCount != iRowsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    // Read and discard results until no more. Throw an
exception if number of result sets read doesn't
    // match number expected. The result set count will
be ignored if the expected count value
    // passed in is negative. A typical use of this
routine is to verify that there are no more
    // result sets to be read.
    void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
    {
        int                iResultsRead = 0;
        RETCODE    rc;

        while (TRUE)
        {
            rc = dbresults(m_dbproc);
            if (rc == NO_MORE_RESULTS)
                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >=
0)
                    ThrowError(CDBLIBERR::eDbResults);
                else
                    break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
(iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    void CTPCC_DBLIB::StockLevel()
    {
        int                iTryCount =
0;
        const BYTE    *pData;

        ResetError();

        while (TRUE)
        {
            try
            {
                dbrcpinit(m_dbproc,
"tpcc_stocklevel", 0);

                dbrcpparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id
                smallint

```

```

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
tinyint

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshold
smallint

        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if
(pData=dbdata(m_dbproc, 1))
        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

    //if (iTryCount)
    //    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);

```

```

}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT              commit_flag;
    DBDATETIME         datetime;
    DBDATEREC          daterec;

    int                iTryCount =
0;
    const BYTE         *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_ol_cnt);

            // check whether any
            order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
                    least one remote warehouse

                    break;
                }
            }

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);

            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {

```

```

            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
        }

        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order line

        results

        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
        {
            if
(dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if
(dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if
(dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));

            if(pData=dbdata(m_dbproc, 2))
                m_txn.NewOrder.OL[i].ol_stock =
                (*(DBSMALLINT *) pData);

            if(pData=dbdata(m_dbproc, 3))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge
neric, pData, dbdatlen(m_dbproc, 3));

            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);

```

```

        if(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5),
        SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

        m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

        DiscardNextRows(0);
    }

        // get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);

        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);

        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = (*(DBINT *) pData);

        if
(pData=dbdata(m_dbproc, 4))

```

```

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));

        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);

        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));

        if
(pData=dbdata(m_dbproc, 7))
        {
            datetime =
            *((DBDATETIME *) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);

            m_txn.NewOrder.o_entry_d.year =
daterec.year;

            m_txn.NewOrder.o_entry_d.month =
daterec.month;

            m_txn.NewOrder.o_entry_d.day =
daterec.day;

            m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

            m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

            m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }

        if
(pData=dbdata(m_dbproc, 8))

            commit_flag =
            (*(DBTINYINT *) pData);

            DiscardNextRows(0);
            DiscardNextResults(0);

            if (commit_flag == 1)
            {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                m_txn.NewOrder.exec_status_code = eOK;
            }
            else
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

```

```

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
        (e->m_msgno
        == iErrOleDbProvider &&
        strstr(e-
        >m_msgtext, sErrTimeoutExpired) != NULL)) &&
        (++iTryCount
        <= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
            iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME datetime;
    DBDATEREC daterec;

    int iTryCount =
0;

    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
            "tpcc_payment", 0);

            dbrpcparam(m_dbproc,
            NULL, 0, SQLINT2, -1, -1, (BYTE *)
            &m_txn.Payment.w_id);

            dbrpcparam(m_dbproc,
            NULL, 0, SQLINT2, -1, -1, (BYTE *)
            &m_txn.Payment.c_w_id);

            dbrpcparam(m_dbproc,
            NULL, 0, SQLFLT8, -1, -1, (BYTE *)
            &m_txn.Payment.h_amount);

            dbrpcparam(m_dbproc,
            NULL, 0, SQLINT1, -1, -1, (BYTE *)
            &m_txn.Payment.d_id);

```

```

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);

        // if customer id is
zero, then payment is by name
        if (m_txn.Payment.c_id
== 0)

            dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);

            if (dbrpcexec(m_dbproc)
== FAIL)

                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEED)

                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)

                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc)
!= 27)

                ThrowError(CDBLIBERR::eWrongNumCols);

            if
(pData=dbdata(m_dbproc, 1))

                m_txn.Payment.c_id = *((DBINT *) pData);

            if
(pData=dbdata(m_dbproc, 2))

                UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));

            if
(pData=dbdata(m_dbproc, 3))

                {
                    datetime =
*((DBDATETIME *) pData);

                    dbdatecrack(m_dbproc, &daterec, &datetime);

                    m_txn.Payment.h_date.year = daterec.year;

                    m_txn.Payment.h_date.month =
daterec.month;

                    m_txn.Payment.h_date.day = daterec.day;

                    m_txn.Payment.h_date.hour = daterec.hour;

```

```

        m_txn.Payment.h_date.minute =
daterec.minute;

        m_txn.Payment.h_date.second =
daterec.second;

        }
        if
(pData=dbdata(m_dbproc, 4))

            UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));

        if
(pData=dbdata(m_dbproc, 5))

            UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));

        if
(pData=dbdata(m_dbproc, 6))

            UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));

        if
(pData=dbdata(m_dbproc, 7))

            UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

        if
(pData=dbdata(m_dbproc, 8))

            UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));

        if
(pData=dbdata(m_dbproc, 9))

            UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));

        if
(pData=dbdata(m_dbproc, 10))

            UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));

        if
(pData=dbdata(m_dbproc, 11))

            UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));

        if
(pData=dbdata(m_dbproc, 12))

            UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));

        if
(pData=dbdata(m_dbproc, 13))

            UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));

        if
(pData=dbdata(m_dbproc, 14))

            UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));

```

```

        if
(pData=dbdata(m_dbproc, 15))

            UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));

        if
(pData=dbdata(m_dbproc, 16))

            UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));

        if
(pData=dbdata(m_dbproc, 17))

            UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));

        if
(pData=dbdata(m_dbproc, 18))

            UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));

        if
(pData=dbdata(m_dbproc, 19))

            UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));

        if
(pData=dbdata(m_dbproc, 20))

            UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));

        if
(pData=dbdata(m_dbproc, 21))

            UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));

        if
(pData=dbdata(m_dbproc, 22))

            {
                datetime =
*((DBDATETIME *) pData);

                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.Payment.c_since.year =
daterec.year;

                m_txn.Payment.c_since.month =
daterec.month;

                m_txn.Payment.c_since.day = daterec.day;

                m_txn.Payment.c_since.hour =
daterec.hour;

                m_txn.Payment.c_since.minute =
daterec.minute;

                m_txn.Payment.c_since.second =
daterec.second;

            }

        if(pData=dbdata(m_dbproc, 23))

```



```

        UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
        if(pData=dbdata(m_dbproc, 24))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
        if(pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
        if(pData=dbdata(m_dbproc, 26))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
        if(pData=dbdata(m_dbproc, 27))
            UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
        DiscardNextRows(0);
        DiscardNextResults(0);
        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.Payment.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
(e->m_msgno
strchr(e-
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

```

```

//      if (iTryCount)
//          throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int          i;
    DBDATETIME  datetime;
    DBDATEREC   daterec;

    int          iTryCount =
0;
    RETCODE     rc;
    const BYTE  *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

            // if customer id is
            zero, then order status is by name
            if
            (m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)&m_txn.OrderStatus.c_last);

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            // Get order lines
            if (dbresults(m_dbproc)
!= SUCCEED)
            {
                if
                ((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
                else

```

```

                ThrowError(CDBLIBERR::eDbResults);
            }
        }
        if (dbnumcols(m_dbproc)
!= 5)
            ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc =
dbnextrow(m_dbproc);
            if (rc ==
NO_MORE_ROWS)
                break;
            if (rc !=
REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 2))
                m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
*) pData);
            if(pData=dbdata(m_dbproc, 3))
                m_txn.OrderStatus.OL[i].ol_quantity =
(*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);
            if(pData=dbdata(m_dbproc, 5))
            {
                datetime = *((DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);
                m_txn.OrderStatus.OL[i].ol_delivery_d.year
= daterec.year;
                m_txn.OrderStatus.OL[i].ol_delivery_d.month
= daterec.month;
                m_txn.OrderStatus.OL[i].ol_delivery_d.day
= daterec.day;
            }
        }
    }
}

```

```

        m_txn.OrderStatus.OL[i].ol_delivery_d.hour
= daterec.hour;
        m_txn.OrderStatus.OL[i].ol_delivery_d.minut
e = daterec.minute;
        m_txn.OrderStatus.OL[i].ol_delivery_d.secon
d = daterec.second;
                }
                i++;
        }
        m_txn.OrderStatus.o_ol_cnt = i;

        if (dbresults(m_dbproc)
!= SUCCEEDED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))
            m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

        if(pData=dbdata(m_dbproc, 2))
            UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

        if(pData=dbdata(m_dbproc, 3))
            UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

        if(pData=dbdata(m_dbproc, 4))
            UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

        if(pData=dbdata(m_dbproc, 5))
        {
            datetime =
*((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);

            m_txn.OrderStatus.o_entry_d.year =
daterec.year;

```

```

        m_txn.OrderStatus.o_entry_d.month =
daterec.month;
        m_txn.OrderStatus.o_entry_d.day =
daterec.day;
        m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;
        m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;
        m_txn.OrderStatus.o_entry_d.second =
daterec.second;
        }
        if(pData=dbdata(m_dbproc, 6))
            m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

        if(pData=dbdata(m_dbproc, 7))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

        if(pData=dbdata(m_dbproc, 8))
            m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

            DiscardNextRows(0);
            DiscardNextResults(0);

            if
(m_txn.OrderStatus.o_ol_cnt == 0)
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
            else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST
);
            else
                m_txn.OrderStatus.exec_status_code = eOK;

                return;
            }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&

```

```

            (++iTryCount
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    } // while (TRUE)

    // if (iTryCount)
    // throw new
    CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    i;
    iTryCount =
0;
    const BYTE
    *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_delivery", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEEDED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc)
!= 10)
                ThrowError(CDBLIBERR::eWrongNumCols);

```

```

        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = *((DBINT *)pData);
        }

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.Delivery.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||
(e->m_msgno
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

```

tpcc_dblib.h

```

/* FILE: TPC_C_DBLIB.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class
 * implementation.
 *
 * Change history:
 * 4.20.000 - updated rev number to
 * match kit
 */
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless
// define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };

    ~CSQLERR()
    {
        delete [] m_msgtext;
    };

    int m_msgno;
    int m_msgstate;
    int m_severity;
    char *m_msgtext;

    int ErrorType() {return
ERR_TYPE_SQL;};

    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return
m_msgtext;};

};

class CDBLIBERR : public CBaseErr

```

```

{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin,
        // error from dblogin
        eDbOpen,
        // error from dbopen
        eDbUse,
        // error from dbuse
        eDbSqlExec,
        // error from dbsqlexec
        eDbSet,
        // error from one of the dbset*
        eDbNextRow,
        // error from dbnextrow
        eWrongRowCount,
        // more or less rows returned than expected
        eWrongNumCols,
        // more or less columns returned than
        expected
        eDbResults,
        // error from dbresults
        eDbRpcExec,
        // error from dbrpcexec
        eDbSetMaxProcs,
        // error from dbsetmaxprocs
        eDbProcHandler,
        // error from either dbprocerrhandle or
        dbprocmsghandle
    };

    CDBLIBERR(ACTION eAction, int
severity = 0, int dberror = 0, int oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    };

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    };

    ACTION m_eAction;
    int m_severity;
    int m_dberror;
    int m_oserr;
    char *m_dberrstr;
    char *m_oserrstr;

    int ErrorType() {return
ERR_TYPE_DBLIB;};
}

```

```

        int ErrorNum() {return
m_dberror;};
        char *ErrorText() {return
m_dberrstr;};
};

class CTPCC_DBLIB_ERR : public CBaseErr
{
    public:
        enum CTPCC_DBLIB_ERRS
        {
            ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
// "Invalid Customer id,name."
            ERR_NO_SUCH_ORDER,
// "No orders found for
customer."
            ERR_RETRIED_TRANS,
// "Retries before transaction
succeeded."
        };

        CTPCC_DBLIB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

        CTPCC_DBLIB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int                m_errno;
        int                m_iTryCount;

        int ErrorType() {return
ERR_TYPE_TPCC_DBLIB;};
        int ErrorNum() {return m_errno;};

        char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        PDBPROCESS        m_dbproc;
        CDBLIBERR *m_DbLibErr;
        // not allocated until needed (maybe never)
        CSQLEERR          *m_SqlErr;
        // not allocated until
needed (maybe never)
        int
        m_MaxRetries; // retry
count on deadlock

        void DiscardNextRows(int
iExpectedCount);
        void DiscardNextResults(int
iExpectedCount);
        void ThrowError(
CDBLIBERR::ACTION eAction );

```

```

void ResetError();

union
{
    NewOrder;           NEW_ORDER_DATA
    Payment;           PAYMENT_DATA
    Delivery;          DELIVERY_DATA
    StockLevel;        STOCK_LEVEL_DATA
    OrderStatus;       ORDER_STATUS_DATA
};

m_txn;

public:
    CTPCC_DBLIB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase );
    ~CTPCC_DBLIB(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder        ();
    void Payment         ();
    void Delivery        ();
    void StockLevel      ();
    void OrderStatus     ();

    // these are public because they
must be called from the dblib err_handler and
msg_hangler
    // outside of the class
    void SetDbLibError(int severity,
int dberr, int oserr, LPCSTR dberrstr, LPCSTR
oserrstr);
    void SetSqlError( int msgno, int
msgstate, int severity, LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );

```

```

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

```

tpcc_odbc.cpp

```

/* FILE: TPCC_ODBC.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Implements ODBC calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - updated rev number to
match kit
 * 4.10.001 - not deleting error
class in catch handler on deadlock retry;
not a
functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlxext.h>
#include <odbcss.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

```

```

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:

            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
                break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
                break;

        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*
*/

char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number. ";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {

```

```

        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
not used
LPCSTR szDatabase ) // name of
database to use
{
    return new CTPCC_ODBC( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_ODBC::CTPCC_ODBC (
LPCSTR szServer,
// name of SQL server
LPCSTR szUser,
// user name for login
LPCSTR szPassword,
// password for login
LPCSTR szHost,
// not used
LPCSTR szDatabase
// name of database to use
)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_hstmtNewOrder = SQL_NULL_HSTMT;
    m_hstmtPayment = SQL_NULL_HSTMT;
    m_hstmtDelivery = SQL_NULL_HSTMT;
    m_hstmtOrderStatus = SQL_NULL_HSTMT;
    m_hstmtStockLevel = SQL_NULL_HSTMT;

    m_descNewOrderCols1 = SQL_NULL_HDESC;
    m_descNewOrderCols2 = SQL_NULL_HDESC;
    m_descOrderStatusCols1 = SQL_NULL_HDESC;
    m_descOrderStatusCols2 = SQL_NULL_HDESC;

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);
}

```

```

        if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )
            ThrowError(CODBCERR::eConnOption);
    {
        char
szConnectStr[256];
        char
szOutStr[1024];
        SQLSMALLINT
iOutStrLen;

        sprintf( szConnectStr,
"DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );

        rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen,
SQL_DRIVER_NOPROMPT );

        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eConnect);
    }

    if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)
        ThrowError(CODBCERR::eAllocHandle);
    {
        char
buffer[128];

        // set some options affecting
connection behavior
strcpy(buffer, "set nocount on
");
        strcat(buffer, "set XACT_ABORT ON
");

        // for coyote
strcat(buffer, "set ansi_warnings
on ");
        strcat(buffer, "set ansi_nulls on
");

        rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        // verify that version of stored
procs on server is correct
char db_sp_version[10];

```

```

        strcpy(buffer, "{call
tpcc_version}");
        rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);
            if ( SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

                ThrowError(CODBCERR::eBindCol);
                if ( SQLFetch(m_hstmt) ==
SQL_ERROR )

                    ThrowError(CODBCERR::eFetch);
                    if
(strcmp(db_sp_version,sVersion))
                        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION
);

                SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
            }

            // Bind parameters for each of the
transactions
            InitNewOrderParams();
            InitPaymentParams();
            InitOrderStatusParams();
            InitDeliveryParams();
            InitStockLevelParams();
        }

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically
released when the connection is dropped
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction
)
{
    RETCODE          rc;
    SDWORD           lNativeError;
    char             szState[6];
    char             szMsg[SQL_MAX_MESSAGE_LENGTH];

```

```

    char
    szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    CODBCERR        *pODBCErr;
    // not allocated until needed (maybe never)

    pODBCErr = new CODBCERR();

    pODBCErr->m_NativeError = 0;
    pODBCErr->m_eAction = eAction;
    pODBCErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;
    while (TRUE)
    {
        rc = SQLError(henv, m_hdbc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
        if (rc == SQL_NO_DATA)
            break;

        // check for deadlock
        if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
strstr(szMsg,
sErrTimeoutExpired) != NULL))
            pODBCErr->m_bDeadLock =
TRUE;

        // capture the (first) database
error
        if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
            pODBCErr->m_NativeError
= lNativeError;

        // quit if there isn't enough
room to concatenate error text
        if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
            break;

        // include line break after first
error msg
        if (szTmp[0] != 0)
            strcat( szTmp, "\n");
            strcat( szTmp, szMsg );
    }

    if (pODBCErr->m_odbcerrstr != NULL)
    {
        delete [] pODBCErr->m_odbcerrstr;
        pODBCErr->m_odbcerrstr = NULL;
    }

    if (strlen(szTmp) > 0)
    {
        pODBCErr->m_odbcerrstr = new
char[ strlen(szTmp)+1 ];
        strcpy( pODBCErr->m_odbcerrstr,
szTmp );
    }

```

```

        SQLFreeStmt(m_hstmt, SQL_CLOSE);
        throw pODBCErr;
    }

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtStockLevel;

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_TINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);
    }

void CTPCC_ODBC::StockLevel()
{
    RETCODE          rc;
    int              iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)"L" {call
tpcc_stocklevel(?,?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

                if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                    ThrowError(CODBCERR::eFetch);

                    SQLFreeStmt(m_hstmt,
SQL_CLOSE);

                    m_txn.StockLevel.exec_status_code = eOK;
                    break;

```

```

    }
    catch (COBDCERR *e)
    {
        if (!e->m_bDeadLock)
        || (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
    iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
    m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
    ||
    SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
    &m_descNewOrderCols1) != SQL_SUCCESS
    ||
    SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
    &m_descNewOrderCols2) != SQL_SUCCESS
    )

        ThrowError(COBDCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

    if ( SQLSetStmtAttrW( m_hstmt,
    SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
    SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(COBDCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
    &m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
    &m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
    &m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
    &m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
    &m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(COBDCERR::eBindParam);

    for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
    j++)

```

```

    {
        if ( SQLBindParameter(m_hstmt,
    ++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
    &m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
    SQL_SUCCESS
        ||
        SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
    SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
    &m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
    SQL_SUCCESS
        ||
        SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
    SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
    &m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
    SQL_SUCCESS
        )
            ThrowError(COBDCERR::eBindParam);
    }

#ifdef new_order_strstr
    // set the bind offset pointer
    if ( SQLSetStmtAttrW( m_hstmt,
    SQL_ATTR_ROW_BIND_OFFSET_PTR, &BindOffset,
    SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(COBDCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
    &m_txn.NewOrder.OL[0].ol_i_name,
    sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
    NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
    sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
    != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
    NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
    NULL) != SQL_SUCCESS
    )
        ThrowError(COBDCERR::eBindCol);
#else
    // prototype to eliminate patindex in
    server: shift work to client
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
    &m_ol_i_name, sizeof(m_ol_i_name), NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_SSHORT, &m_ol_stock, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_i_data, sizeof(m_i_data), NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_s_data, sizeof(m_s_data), NULL) !=
    SQL_SUCCESS

```

```

    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_ol_i_price, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_ol_amount, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(COBDCERR::eBindCol);
#endif

    // associate the column bindings for the
    second result set
    if ( SQLSetStmtAttrW( m_hstmt,
    SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
    SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(COBDCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
    SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.NewOrder.c_last,
    sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
    != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.NewOrder.c_credit,
    sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
    NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
    SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
    SQL_SUCCESS
    )
        ThrowError(COBDCERR::eBindCol);
}

void CTPCC_ODBC::NewOrder()
{
    int
    i;
    RETCODE rc;
    int
    iTryCount = 0;

    0 1 2

    012345678901234567890123456789
    wchar_t
    szSqlTemplate[] = L"call
    tpcc_neworder(?,?,?,?,"

```

```

L"?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,"
L"?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,"
L"?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?}";
    m_hstmt = m_hstmtNewOrder;
    // associate the parameter and column
bindings for this transaction
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);
    // clip statement buffer based on number of
parameters
    // fixed part is 29 chars and variable part
is 6 chars per line item
    i = 29 + m_txn.NewOrder.o_ol_cnt*6;
    wcsncpy( &szSqlTemplate[i], L" }" );
    // check whether any order lines are for a
remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for ( i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
        {
            m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
            break;
        }
    }
    while (TRUE)
    {
        try
        {
            m_BindOffset = 0;
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)szSqlTemplate,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);
            // Get order line
            results
            m_txn.NewOrder.total_amount = 0;
            for ( i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)

```

```

    {
        #ifndef new_order_strstr
        // set the
bind offset value...
        m_BindOffset
        = i * sizeof(m_txn.NewOrder.OL[0]);
        if (
SQLFetch(m_hstmt) == SQL_ERROR)
            ThrowError(CODBCERR::eFetch);
        #else
        if (
SQLFetch(m_hstmt) == SQL_ERROR)
            ThrowError(CODBCERR::eFetch);
        strcpy(
m_txn.NewOrder.OL[i].ol_i_name, m_ol_i_name );
        if (
strstr(m_i_data, "ORIGINAL") != NULL &&
strstr(m_s_data, "ORIGINAL") != NULL )
            m_txn.NewOrder.OL[i].ol_brand_generic[0] =
'B';
        else
            m_txn.NewOrder.OL[i].ol_brand_generic[0] =
'G';
        m_txn.NewOrder.OL[i].ol_brand_generic[1] =
0;
        m_txn.NewOrder.OL[i].ol_stock
        = m_ol_stock;
        m_txn.NewOrder.OL[i].ol_i_price
        = m_ol_i_price;
        m_txn.NewOrder.OL[i].ol_amount
        = m_ol_amount;
        #endif
        // move to
the next resultset
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
            ThrowError(CODBCERR::eMoreResults);
        m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
    }
    // associate the column
bindings for the second result set
    if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

```

```

        ThrowError(CODBCERR::eSetStmtAttr);
        if ( SQLFetch(m_hstmt)
== SQL_ERROR)
            ThrowError(CODBCERR::eFetch);
        SQLFreeStmt(m_hstmt,
SQL_CLOSE);
        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));
            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;
        break;
    }
    catch (CODBCERR *e)
    {
        if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;
        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);
    m_hstmt = m_hstmtPayment;
    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS

```



```

        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindParam);

    i = 0;
    if (
SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) !=
SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,
sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
}

```

```

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_payment(?,?,?,?,?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt)
== SQL_ERROR)

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id
== 0)

                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else

                m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
            || (++iTryCount > iMaxRetries))

                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
        )
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) !=
SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS
    )

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::OrderStatus()
{
    int        iTryCount = 0;
    RETCODE
    rc;

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

```

```

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // configure block
            cursor
            if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)"L'{call
tpcc_orderstatus(?,?,?,?)}'", SQL_NTS);
            if ( (rc ==
SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0) ||
(rc == SQL_ERROR) )
                ThrowError(CODBCERR::eExecDirect);

            // configure block
            cursor
            if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) !=
SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
            if ( (rc ==
SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0) ||
(rc == SQL_ERROR) )
                ThrowError(CODBCERR::eFetchScroll);

            m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

            if
(m_txn.OrderStatus.o_ol_cnt != 0)
            {
                if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                    ThrowError(CODBCERR::eMoreResults);

                if ( (rc =
SQLFetch(m_hstmt)) == SQL_ERROR)

```

```

        ThrowError(CODBCERR::eFetch);
    }

    SQLFreeStmt(m_hstmt,
SQL_CLOSE);

    if
(m_txn.OrderStatus.o_ol_cnt == 0)
        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
    else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
    else
        m_txn.OrderStatus.exec_status_code = eOK;

        break;
    }
    catch (CODBCERR *e)
    {
        if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtDelivery;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    for (i=0;i<10;i++)
    {

```

```

        if ( SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS )

            ThrowError(CODBCERR::eBindCol);
    }
}

void CTPCC_ODBC::Delivery()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_delivery(?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
        throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_odbc.h
/* FILE: TPCC_ODBC.H

```

```

* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
        eConnOption,
        // error from SQLSetConnectOption
        eConnect,
        // error from SQLConnect
        eAllocStmt,
        // error from SQLAllocStmt
        eExecDirect,
        // error from SQLExecDirect
        eBindParam,
        // error from SQLBindParameter
        eBindCol,
        // error from SQLBindCol
        eFetch,
        // error from SQLFetch
        eFetchScroll,
        // error from SQLFetchScroll
        eMoreResults,
        // error from SQLMoreResults
        ePrepare,
        // error from SQLPrepare
        eExecute,
        // error from SQLExecute
        eSetEnvAttr,
        // error from SQLSetEnvAttr
        eSetStmtAttr,
        // error from SQLSetStmtAttr
    }
};

```

```

};
COBDCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
};
~COBDCERR()
{
    if (m_odbcerrstr !=
NULL)
        delete []
m_odbcerrstr;
};
ACTION    m_eAction;
int
m_NativeError;
BOOL      m_bDeadLock;
char      *m_odbcerrstr;

int ErrorType() {return
ERR_TYPE_ODBC;};
int ErrorNum() {return
m_NativeError;};
char *ErrorText() {return
m_odbcerrstr;};
};

class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
// "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
// "No orders found for
customer."
        ERR_RETRIED_TRANS,
// "Retries before transaction
succeeded."
    };

    CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

    CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

    int            m_errno;
    int            m_iTryCount;

    int ErrorType() {return
ERR_TYPE_TPCC_ODBC;};
};

```

```

int ErrorNum() {return m_errno;};
char *ErrorText();
};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
// declare variables and private
functions here...
    BOOL            m_bDeadlock;
// transaction was selected as
deadlock victim
    int
m_MaxRetries; // retry
count on deadlock

    SQLHENV         m_henv;
// ODBC environment
handle
    SQLHDBC         m_hdbc;
    SQLHSTMT        m_hstmt;
// the current hstmt

    SQLHSTMT        m_hstmtNewOrder;
    SQLHSTMT        m_hstmtPayment;
    SQLHSTMT        m_hstmtDelivery;
    SQLHSTMT        m_hstmtOrderStatus;
    SQLHSTMT        m_hstmtStockLevel;

    SQLHDESC        m_descNewOrderCols1;
    SQLHDESC        m_descNewOrderCols2;
    SQLHDESC        m_descOrderStatusCols1;
    SQLHDESC        m_descOrderStatusCols2;

// new-order specific fields
    SQLUIINTEGER    m_BindOffset;
    SQLUIINTEGER
m_RowsFetched;
    int
m_no_commit_flag;

#ifdef new_order_strstr
// for new-order txn;
// output params
char
m_ol_i_name[I_NAME_LEN+1];
double        m_ol_i_price;
double        m_ol_amount;
short         m_ol_stock;
// used locally, but not returned

to caller
char
m_i_data[I_DATA_LEN];
char
m_s_data[S_DATA_LEN];
#endif

    void ThrowError( COBDCERR::ACTION
eAction );

    void InitNewOrderParams();
    void InitPaymentParams();
};

```

```

void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

union
{
    NEW_ORDER_DATA
NewOrder;
    PAYMENT_DATA
Payment;
    DELIVERY_DATA
Delivery;
    STOCK_LEVEL_DATA
StockLevel;
    ORDER_STATUS_DATA
OrderStatus;
};
m_txn;

public:
    CTPCC_ODBC(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase);
    ~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder            ();
    void Payment            ();
    void Delivery           ();
    void StockLevel         ();
    void OrderStatus        ();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

trans.h
/* FILE: TRANS.H

```

```

*                               Microsoft
TPC-C Kit Ver. 4.20.000
*                               Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C structure
templates.
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN    20
#define I_DATA_LEN          50
#define I_NAME_LEN          24
#define BRAND_LEN           1
#define LAST_NAME_LEN       16
#define W_NAME_LEN          10
#define ADDRESS_LEN         20
#define STATE_LEN           2
#define ZIP_LEN             9
#define S_DIST_LEN          24
#define S_DATA_LEN          50
#define D_NAME_LEN          10
#define FIRST_NAME_LEN      16
#define MIDDLE_NAME_LEN     2
#define PHONE_LEN           16
#define DATETIME_LEN        30
#define CREDIT_LEN          2
#define C_DATA_LEN          250
#define H_DATA_LEN          24
#define DIST_INFO_LEN       24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN          25
#define OL_DIST_INFO_LEN    24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqltypes.h, but is not available
// when compiling with dllib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifdef __SQLTYPES
typedef struct
{
    short
    /* SQLSMALLINT */ year;
    unsigned short
    SQLUSMALLINT */ month;

```

```

    unsigned short /*
    SQLUSMALLINT */ day;
    unsigned short /*
    SQLUSMALLINT */ hour;
    unsigned short /*
    SQLUSMALLINT */ minute;
    unsigned short /*
    SQLUSMALLINT */ second;
    unsigned long /*
    SQLINTEGER */ fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction comitted.",
    einvaliditem, // 1 "Item number
    is not valid.",
    eDeliveryFailed // 2 "Delivery
    Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short
    ol_supply_w_id;
    long
    ol_i_id;
    short
    ol_quantity;

    // output params
    char
    ol_i_name[I_NAME_LEN+1];
    char
    ol_brand_generic[BRAND_LEN+1];
    double
    ol_i_price;
    double
    ol_amount;
    short
    ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short
    w_id;
    short
    d_id;
    long
    c_id;
    short
    o_ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char
    c_credit[CREDIT_LEN+1];

```

```

    double
    c_discount;
    double
    w_tax;
    double
    d_tax;
    long
    o_id;
    short
    o_commit_flag;
    TIMESTAMP_STRUCT
    o_entry_d;
    short
    o_all_local;
    double
    total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short
    w_id;
    short
    d_id;
    long
    c_id;
    short
    c_d_id;
    short
    c_w_id;
    double
    h_amount;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
    TIMESTAMP_STRUCT
    h_date;
    char
    w_street_1[ADDRESS_LEN+1];
    char
    w_street_2[ADDRESS_LEN+1];
    char
    w_city[ADDRESS_LEN+1];
    char
    w_state[STATE_LEN+1];
    char
    w_zip[ZIP_LEN+1];
    char
    d_street_1[ADDRESS_LEN+1];
    char
    d_street_2[ADDRESS_LEN+1];
    char
    d_city[ADDRESS_LEN+1];
    char
    d_state[STATE_LEN+1];
    char
    d_zip[ZIP_LEN+1];
    char
    c_first[FIRST_NAME_LEN+1];
    char
    c_middle[MIDDLE_NAME_LEN + 1];
    char
    c_street_1[ADDRESS_LEN+1];
    char
    c_street_2[ADDRESS_LEN+1];

```

```

        char
c_city[ADDRESS_LEN+1];
        char
c_state[STATE_LEN+1];
        char
c_zip[ZIP_LEN+1];
        char
c_phone[PHONE_LEN+1];
        TIMESTAMP_STRUCT    c_since;
        char
c_credit[CREDIT_LEN+1];
        double
c_credit_lim;
        double
c_discount;
        double
c_balance;
        char
c_data[200+1];
    } PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
        long
ol_i_id;
        short
ol_supply_w_id;
        short
ol_quantity;
        double
ol_amount;
        TIMESTAMP_STRUCT    ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
        // input params
        short
        short
        long
        char
c_last[LAST_NAME_LEN+1];

        // output params
        EXEC_STATUS
exec_status_code;
        char
c_first[FIRST_NAME_LEN+1];
        char
c_middle[MIDDLE_NAME_LEN+1];
        double
        long
        TIMESTAMP_STRUCT
        short
        OL_ORDER_STATUS_DATA
OL[MAX_OL_ORDER_STATUS_ITEMS];
        short
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
        // input params
        short
        short

```

```

        // output params
        EXEC_STATUS
exec_status_code;
        SYSTEMTIME
        long
        o_id[10]; // id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
        SYSTEMTIME
        //time delivery transaction queued
        short
        //delivery warehouse
        short
        //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
        // input params
        short
        short
        short
        short
        short
        threshold;

        // output params
        EXEC_STATUS
exec_status_code;
        long
        low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/* FILE: TXN_BASE.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C txn class
 * implementation.
 * Change history:
 * 4.20.000 - updated rev number to
 * match kit
 */
#pragma once

```

```

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
        public:
                CTPCC_BASE(void) {};
                virtual ~CTPCC_BASE(void) {};

                virtual PNEW_ORDER_DATA
                BuffAddr_NewOrder() = 0;
                virtual PPAYMENT_DATA
                BuffAddr_Payment() = 0;
                virtual PDELIVERY_DATA
                BuffAddr_Delivery() = 0;
                virtual PSTOCK_LEVEL_DATA
                BuffAddr_StockLevel() = 0;
                virtual PORDER_STATUS_DATA
                BuffAddr_OrderStatus() = 0;

                virtual void NewOrder
                () = 0;
                virtual void Payment
                () = 0;
                virtual void Delivery
                () = 0;
                virtual void StockLevel
                () = 0;
                virtual void OrderStatus
                () = 0;
};

```

txnlog.h

```

/* FILE: TXNLOG.H
 * Microsoft
 * TPC-C Kit Ver. 4.10.000
 * not yet
 * audited
 * PURPOSE: Header file for txn log class
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 */

#pragma once

typedef struct _TXN_NEWORDER
{
        BYTE
        OL_Count; //range 0 to
31
        BYTE
        OL_Remote_Count; //range 0 to
31
        WORD
        c_id;
        int
        o_id;
} TXN_NEWORDER;

```

```

typedef struct _TXN_PAYMENT
{
    BYTE    CustByName;
    BYTE    IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS
{
    BYTE    CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER    NewOrder;
    TXN_PAYMENT     Payment;
    TXN_ORDERSTATUS OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn
log. The TxnType field is
// a switch which identifies the particular
variant.
#define TXN_REC_TYPE_CONTROL    1
//
#define TXN_REC_TYPE_TPCC      2
// replaces TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF    3

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME    TxnStartT0;
    // start of txn
    BYTE    TxnType;
    // one of TXN_REC_TYPE_*
    BYTE    TxnSubType;
    // depends on TxnType
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly
match TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0;
    // start of txn
    BYTE    TxnType;
    // = TXN_REC_TYPE_CONTROL
    BYTE    TxnSubType;
    // depends on TxnType
    // end of common header

    DWORD    Len;
    // number of bytes after this
field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//

```

```

//'TxnStartT0' is a Julian timestamp
corresponding to the moment the
//txn is sent to the SUT, i.e., beginning of
response time. Deltas
//are in milliseconds. Note that if RTDelay > 0,
then the txn was
//delayed by this amount. The delay occurs at
the beginning of the
//response time. So if RTDelay > 0, then the txn
was actually sent
//at TxnStartT0 + RTDelay.
//
//Graphically:
//
// time -->
//
// |--- Menu ---|--- Keying ---|--- Response ---
|--- Think ---|
//
// <- DeltaT3 -> <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 ->
<- DeltaT3 ->
//
// ^
// TxnStartT0
//
//RTDelay is the amount of response time delay
included in DeltaT4.
//RTDelay is recorded per txn because this value
can be changed on
//the fly, and so may vary from txn to txn.
//
//TxnStatus is the txn completion code. It is
used to indicate errors.
//For example, in the New Order txn, 1% of txns
abort. TxnStatus will
//reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly
match TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0;
    // start of txn
    BYTE    TxnType;
    // = TXN_REC_TYPE_TPCC
    BYTE    TxnSubType;
    // depends on TxnType
    // end of common header

    int    DeltaT1;
    // menu time (ms)

    int    DeltaT2;
    // keying time (ms)

    int    DeltaT3;
    // think time (ms)

    int    DeltaT4;
    // response time (ms)

    int    RTDelay;
    // response time delay (ms)

    int    TxnError;
    // error code providing more detail for
TxnStatus

    WORD    w_id;
    // warehouse ID

```

```

    BYTE    d_id;
    // assigned district ID for this thread
    BYTE    d_id_ThisTxn;
    // district ID chosen for this particular
    BYTE    TxnStatus;
    // completion status for txn to indicate
errors
    BYTE    reserved;
    // for word alignment
    TXN_DETAILS    TxnDetails;
    //
    } TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;
//
// TPC-C Deferred Delivery Txn Record
Layout:
//
// Incorporating delivery transaction information
into the above
//structure would increase the size of
TXN_DETAILS from 8 to 42 bytes.
//Hence, we store delivery transaction details in
a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly
match TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0;
    // start of txn
    BYTE    TxnType;
    // = TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE    TxnSubType;
    // = 0
    // end of common header

    int    DeltaT4;
    // response time (ms)

    int    DeltaTxnExec;
    // execution time (ms)

    WORD    w_id;
    // warehouse ID

    BYTE    TxnStatus;
    // completion status for txn to indicate
errors
    BYTE    reserved;
    // for word alignment
    short    o_carrier_id;
    // carrier id

    long    o_id[10];
    // returned delivery transaction ids
    } TXN_RECORD_TPCC_DELIV_DEF,
*PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION    1
#define TXN_DATA_START    4096
// offset in log file where log
records start
#define TXN_LOG_EYE_CATCHER "BC"
// signature bytes at the start of log file

```

```

////////////////////////////////////
////////////////////////////////////
// The transaction log has a header as the
first 4K block.
//
typedef struct _TXN_LOG_HEADER
{
    char
    EyeCatcher[2];    // signature bytes;
should always be "BC"
    int
    LogVersion;      // set to
TXN_LOG_VERSION
    JULIAN_TIME
    BeginTxnTS;      // timestamp
of first (lowest) txn start
    JULIAN_TIME
    EndTxnTS;        // timestamp of last
(highest) txn completion time
    int
    iRecCount;       // number of
records in log file
    BOOL
    bLogSorted;      //
    int
    iFileSize;       // file size
in bytes

    // the record map provides a fast
way to get close to a particular timestamp in a
sorted log file.
//
    struct
    {
        JULIAN_TIME
        TS;          // timestamp
of record
    }
    int
    iPos;           // byte
position in file
}
RecMap[RecMapSize];
// #define
200
RecMapSize
} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

#define READ_BUFFER_SIZE 64*1024
#define WRITE_BUFFER_SIZE 8*1024

#define NUM_READ_BUFFERS 1
#define NUM_WRITE_BUFFERS 2
#define MAX_NUM_BUFFERS 2

// flags passed in to the constructor
#define TXN_LOG_WRITE 0x01
#define TXN_LOG_READ 0x02
#define TXN_LOG_SORTED 0x04

#define TXN_LOG_OS_ERROR 1
#define TXN_LOG_NOT_SORTED 2

```

```

#define SKIP_CTRL_RECS 1

class CTxnLog
{
private:
    DWORD iBufferSize; //buffer allocated size
    DWORD iBytesFreeInBuffer; //total bytes
available for use in buffer
    int iNumBuffers; //buffers in use
    int iActiveBuffer; //indicates which buffer is active: 0 or 1
    int iIoBuffer; //buffer for any pending IO operation
    int iFilePointer; //position in file.
    int iNextRec; //when reading, ordinal value of next
record

    // A "save point" is remembered
each time GetNextRecord is called with a start time
specified.
    // The next time it is called, if
start time is after the save point, we start scanning
from the
    // save point. This is
particularly useful in FindBestInterval, where the
log is scanned repeatedly.
    JULIAN_TIME
    SavePtTime;
    int
    iSavePtFilePointer;
    int
    iSavePtNextRec;

    JULIAN_TIME lastTS;
//when
writing sorted output, used to verify records are
sorted
    BOOL bWrite; //writing log
file

    BOOL
    bLogSorted; //
is log file sorted? applies to both input and output
    JULIAN_TIME
    BeginTxnTS; //
timestamp of first (lowest) txn start
    JULIAN_TIME
    EndTxnTS; // timestamp
of last (highest) txn completion time

```

```

    int
    iRecCount; //
number of records in log file
    BYTE *pCurrent; //ptr to
current buffer
    BYTE *pBuffer[MAX_NUM_BUFFERS];
    PTXN_RECORD_HEADER *TxnArray; //transaction record pointer
array for sort
    DWORD dwError;
    HANDLE hTxnFile;
    HANDLE //handle to log file
    HANDLE hMapFile; //map file used when
sorting the log
    HANDLE hIoComplete; //event to signify that
there are no pending IOs
    HANDLE hLogFileIo; //event to
signal the IO thread to write the inactive buffer

    Spinlock Spin; //spin lock to protect
the txn log file buffers

    int Write(BYTE *ptr, DWORD Size);
    static void LogFileIO(CTxnLog *);

public:
    CTxnLog:CTxnLog(LPCTSTR
szFileName, DWORD dwOpts);
    ~CTxnLog(void);

    int WriteToLog(PTXN_RECORD_TPCC
pTxnRcprd);
    int
    WriteToLog(PTXN_RECORD_TPCC_DELIV_DEF pTxnRcprd);
    int
    WriteToLog(PTXN_RECORD_CONTROL pCtrlRec);
    int WriteToLog(PTXN_RECORD_HEADER
pCtrlRec);

    int WriteCtrlRecToLog(BYTE
SubType, LPCTSTR lpStr, DWORD dwLen);

    void
    CloseTransactionLogFile(void);

    PTXN_RECORD_HEADER
    GetNextRecord(BOOL bSkipCtrlRecs = FALSE);
    PTXN_RECORD_HEADER
    GetNextRecord(JULIAN_TIME SeekTimeT0, BOOL
bSkipCtrlRecs = FALSE);

    int Sort(void);
    PTXN_RECORD_HEADER
    GetSortedRecord(int index);

```


Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

VerifyTpccLoad.sql

```
-- File:      VERIFYTPCCLOAD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Performs series of TPC database checks to verify
--           that database load completed correctly

print      " "
select    convert(char(30), getdate(),9)
print    " "

use tpcc
go

--
-- *****
--
-- Check rows per table from SYSINDEXES
--
-- *****

print    'WAREHOUSE TABLE'

select    rows
from      sysindexes
where     id      = object_id("warehouse")
go

print    'DISTRICT TABLE = (10 * No of warehouses)\'

select    rows
from      sysindexes
where     id      =object_id("district")
go

print    'ITEM TABLE = 100,000\'

select    rows
from      sysindexes
where     id      =object_id("item")
go

print    'CUSTOMER TABLE = (30,000 * No of warehouses)\'
```

```
select    rows
from      sysindexes
where     id      =object_id("customer")
go

print    'ORDERS TABLE = (30,000 * No of warehouses)\'

select    rows
from      sysindexes
where     id      =object_id("orders")
go

print    'HISTORY TABLE = (30,000 * No of warehouses)\'

select    rows
from      sysindexes
where     id      =object_id("history")
go

print    'STOCK TABLE = (100,000 * No of warehouses)\'

select    rows
from      sysindexes
where     id      =object_id("stock")
go

print    'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)\'

select    rows
from      sysindexes
where     id      =object_id("order_line")
go

print    'NEW_ORDER TABLE = (9000 * No of warehouses)\'

select    rows
from      sysindexes
where     id      =object_id("new_order")
go

--
-- *****
--
-- Check indices
--
-- *****

print    '*****Index Check*****'

use tpcc
go

sp_helpindex    customer
go

sp_helpindex    stock
go

sp_helpindex    district
go

sp_helpindex    item
go
```

```

sp_helpindex      new_order
go

sp_helpindex      orders
go

sp_helpindex      order_line
go

sp_helpindex      warehouse
go

```

backup.sql

```

-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates backup of tpcc database

exec sp_dboption 'tpcc', 'torn page detection', false
go

dump database tpcc to tpccback4, tpccback5, tpccback6 with init, stats = 1
go

```

backupdev.sql

```

-- File:      BACKUPDEVB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice 'disk', 'tpccback4', 'Y:\tpccback4.dmp'
go
exec sp_addumpdevice 'disk', 'tpccback5', 'X:\tpccback5.dmp'
go
exec sp_addumpdevice 'disk', 'tpccback6', 'W:\tpccback6.dmp'
go

```

createdb.sql

```

-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 1999, 2000
-- Purpose:   Creates tpcc database and backup files for 3120 warehouses

use master
go

--           Create temporary table for timing

```

```

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go

create table tpcc_timer
(
    start_date          char(30),
    end_date            char(30)
)

insert into tpcc_timer values (0,0)
go

--           Store starting time

update tpcc_timer
set start_date          = (select convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME              = MSSQL_tpcc_root,
    FILENAME          = "C:\MSSQL_tpcc_root.mdf",
    SIZE              = 8MB,
    FILEGROWTH        = 0),

FILEGROUP MSSQL_cs_fg
(
    NAME              = MSSQL_CS1,
    FILENAME          = "F:",
    SIZE              = 75900MB,
    FILEGROWTH        = 0),

(
    NAME              = MSSQL_CS2,
    FILENAME          = "G:",
    SIZE              = 75900MB,
    FILEGROWTH        = 0),

(
    NAME              = MSSQL_CS3,
    FILENAME          = "H:",
    SIZE              = 75900MB,
    FILEGROWTH        = 0),

(
    NAME              = MSSQL_CS4,
    FILENAME          = "I:",
    SIZE              = 75900MB,
    FILEGROWTH        = 0),

FILEGROUP MSSQL_misc_fg
(
    NAME              = MSSQL_Misc1,
    FILENAME          = "J:",
    SIZE              = 41000MB,
    FILEGROWTH        = 0),

(
    NAME              = MSSQL_Misc2,
    FILENAME          = "K:",
    SIZE              = 41000MB,
    FILEGROWTH        = 0),

(
    NAME              = MSSQL_Misc3,

```

```

        FILENAME = "L:",
        SIZE      = 41000MB,
        FILEGROWTH = 0),
(
    NAME      = MSSQL_Misc4,
    FILENAME = "M:",
    SIZE      = 41000MB,
    FILEGROWTH = 0)

LOG ON
(
    NAME      =MSSQL_tpcc_log,
    FILENAME = "E:",
    SIZE      = 149000MB,
    FILEGROWTH = 0)

COLLATE Latin1_General_Bin
go

-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30), getdate(),9))
go

select "Elapsed time (in seconds): ", datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go

```

config.sql

```

-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 1996
-- Purpose:   Collects SQL Server configuration parameters

print " "
select convert(char(30), getdate(),9)
print " "
go

sp_configure "show advanced",1
go
reconfigure with override
go
exec sp_configure "affinity mask",          255
exec sp_configure "cost threshold for parallelism",      5
exec sp_configure "index create memory",          0
exec sp_configure "lightweight pooling",          1
exec sp_configure "awe enabled",                 1
exec sp_configure "locks",                      9000
exec sp_configure "max degree of parallelism",      1
exec sp_configure "max server memory",            2147483647
exec sp_configure "max worker threads",          310
exec sp_configure "min memory per query",        1024
exec sp_configure "min server memory",           0
exec sp_configure "nested triggers",            1

```

```

exec sp_configure "network packet size",        4098
exec sp_configure "open objects",              0
exec sp_configure "priority boost",            1
exec sp_configure "recovery interval",         56
exec sp_configure "set working set size",      0
exec sp_configure "user connections",          0

```

```

go

reconfigure with override
go
sp_configure
go

```

dbopt1.sql

```

-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Sets database options for data load

```

```

use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go

use tpcc
go

checkpoint
go

```

dbopt2.sql

```

-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Resets database options after data load

```

```

sp_dboption tpcc,'select into/bulkcopy',FALSE
GO

sp_dboption tpcc,'trunc. log on chkpt.',FALSE
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1

```

```

GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg          varchar(50)

--
--      OPTIONS FOR SQL SERVER 8.0
-- Set option values for user-defined indexes
--
--
SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg

EXEC sp_indexoption 'customer',      'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'district',     'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'warehouse',    'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'stock',        'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'order_line',   'DisallowRowLocks',      TRUE
EXEC sp_indexoption 'orders',       'DisallowRowLocks',      TRUE
EXEC sp_indexoption 'new_order',    'DisallowRowLocks',      TRUE
EXEC sp_indexoption 'item',         'DisallowRowLocks',      TRUE
EXEC sp_indexoption 'item',         'DisallowPageLocks',      TRUE
GO

Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ' '

SELECT name,lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
      object_id('district') = id OR
      object_id('customer') = id OR
      object_id('stock') = id OR
      object_id('orders') = id OR
      object_id('order_line') = id OR
      object_id('history') = id OR
      object_id('new_order') = id OR
      object_id('item') = id

ORDER BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc,      'auto update statistics', FALSE
EXEC sp_dboption tpcc,      'auto create statistics', FALSE
GO

```

```

EXEC sp_tableoption 'district',      'pintable',true
EXEC sp_tableoption 'warehouse',    'pintable',true
EXEC sp_tableoption 'new_order',    'pintable',true
EXEC sp_tableoption 'item',         'pintable',true
GO

```

delivery.sql

```

-- File:      DELIVERY.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates delivery transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
drop procedure tpcc_delivery
go

create proc tpcc_delivery @w_id          smallint,
                        @o_carrier_id  smallint
as

declare @d_id          tinyint,
        @o_id          int,
        @c_id          int,
        @total         numeric(12,2),
        @oid1          int,
        @oid2          int,
        @oid3          int,
        @oid4          int,
        @oid5          int,
        @oid6          int,
        @oid7          int,
        @oid8          int,
        @oid9          int,
        @oid10         int

select @d_id = 0

begin tran d

        while (@d_id < 10)
begin

        select @d_id = @d_id + 1,
               @total = 0,
               @o_id = 0

        select top 1
               @o_id = no_o_id
        from new_order (serializable updlock)
        where no_w_id = @w_id and
              no_d_id = @d_id
        order by no_o_id asc

        if (@@rowcount <> 0)
begin

```

```

-- claim the order for this district

        delete    new_order
        where     no_w_id = @w_id and
                 no_d_id = @d_id and
                 no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

        update    orders
        set       o_carrier_id = @o_carrier_id,
                 @c_id       = o_c_id
        where     o_w_id = @w_id and
                 o_d_id = @d_id and
                 o_id       = @o_id

-- set date in all lineitems for this order (and sum amounts)

        update    order_line
        set       ol_delivery_d = getdate(),
                 @total       = @total + ol_amount
        where     ol_w_id = @w_id and
                 ol_d_id = @d_id and
                 ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer

        update    customer
        set       c_balance = c_balance + @total,
                 c_delivery_cnt = c_delivery_cnt + 1
        where     c_w_id = @w_id and
                 c_d_id = @d_id and
                 c_id = @c_id

    end

    select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
           @oid2 = case @d_id when 2 then @o_id else @oid2 end,
           @oid3 = case @d_id when 3 then @o_id else @oid3 end,
           @oid4 = case @d_id when 4 then @o_id else @oid4 end,
           @oid5 = case @d_id when 5 then @o_id else @oid5 end,
           @oid6 = case @d_id when 6 then @o_id else @oid6 end,
           @oid7 = case @d_id when 7 then @o_id else @oid7 end,
           @oid8 = case @d_id when 8 then @o_id else @oid8 end,
           @oid9 = case @d_id when 9 then @o_id else @oid9 end,
           @oid10 = case @d_id when 10 then @o_id else @oid10 end

    end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,

```

```

        @oid9,
        @oid10

go



---


getargs.c


---


//      File:                GETARGS.C
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
//      2000, 2001
//      Purpose:  Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCC_LDR_ARGS *pargs)
{
    int    i;
    char  *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user        = USER;
    pargs->password    = PASSWORD;
    pargs->database    = DATABASE;
    pargs->batch       = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all  = TRUE;
    pargs->table_item  = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->pack_size    = DEF_LDR_PACK_SIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index  = BUILD_INDEX;
    pargs->index_order  = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down   = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for ( i = 1; i < argc; ++i)
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
        }
    }
}

```

```

exit(1);
}

ptr = argv[i];

switch (ptr[1])
{
case 'h': /* Fall through */
case 'H':
        GetArgsLoaderUsage();
        break;

case 'D':
        pargs->database = ptr+2;
        break;

case 'P':
        pargs->password = ptr+2;
        break;

case 'S':
        pargs->server = ptr+2;
        break;

case 'U':
        pargs->user = ptr+2;
        break;

case 'b':
        pargs->batch = atol(ptr+2);
        break;

case 'W':
        pargs->num_warehouses = atol(ptr+2);
        break;

case 's':
        pargs->starting_warehouse = atol(ptr+2);
        break;

case 't':
        {
                pargs->tables_all = FALSE;
                if (strcmp(ptr+2,"item") == 0)
                        pargs->table_item =

TRUE;
== 0)
                pargs->table_warehouse =

TRUE;
== 0)
                pargs->table_customer =

TRUE;
0)
                pargs->table_orders =

TRUE;
                else
                {
                        printf("\nUnrecognized command");
                        GetArgsLoaderUsage();
                        exit(1);

```

```

                }
                break;
        }
        case 'f':
                pargs->loader_res_file = ptr+2;
                break;

        case 'p':
                pargs->pack_size = atol(ptr+2);
                break;

        case 'i':
                pargs->build_index = atol(ptr+2);
                break;

        case 'o':
                pargs->index_order = atol(ptr+2);
                break;

        case 'c':
                pargs->scale_down = atol(ptr+2);
                break;

        case 'd':
                pargs->index_script_path = ptr+2;
                break;

        default:
                GetArgsLoaderUsage();
                exit(-1);
                break;
        }
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
        printf("Number of Warehouses is required\n");
        exit(-2);
}

return;
}

//=====
//
// Function name: GetArgsLoaderUsage
//
//=====

void GetArgsLoaderUsage()
{
#ifdef DEBUG
        printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

        printf("TPCCLDR:\n\n");
        printf("Parameter                                Default\n");

```

```

\n");
    printf("-----\n");
    printf("-W Number of Warehouses to Load           Required \n");
    printf("-S Server                                     %s\n", SERVER);
    printf("-U Username                                       %s\n", USER);
    printf("-P Password                                       %s\n", PASSWORD);
    printf("-D Database                                       %s\n", DATABASE);
    printf("-b Batch Size                                     %ld\n",
(long) BATCH);
    printf("-p TDS packet size                               %ld\n",
(long) DEFLDPACKSIZE);
    printf("-f Loader Results Output Filename             %s\n",
LOADER_RES_FILE);
    printf("-s Starting Warehouse                           %ld\n",
(long) DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1) %ld\n",
(long) BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n",
(long) SCALE_DOWN);
    printf("-d Index Script Path                             %s\n",
INDEX_SCRIPT_PATH);
    printf("-t Table to Load                                 all tables\n");
\n");
    printf(" [item|warehouse|customer|orders]\n");
    printf(" Notes: \n");
    printf(" - the '-t' parameter may be included multiple times to \n");
    printf(" - specify multiple tables to be loaded \n");
    printf(" - 'item' loads ITEM table \n");
    printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
    printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

    printf("\nNote: Command line switches are case sensitive.\n");

    exit(0);
}

```

idxcuscl.sql

```

-- File:      IDXCUSCL.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.22
--            Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_c1' )
    drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id, c_id)
on MSSQL_cs_fg

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxcusnc.sql

```

-- File:      IDXCUSNC.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.22
--            Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id, c_last,
c_first, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxdiscl.sql

```

-- File:      IDXDISCL.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.22
--            Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on district table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
    drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
with fillfactor=100 on MSSQL_misc_fg

```



```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxitmcl.sql

```

-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxnodcl.sql

```

-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on new_order table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
    drop index new_order.new_order_c1

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id, no_o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)

```

```

select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxodlcl.sql

```

-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on order_line table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on order_line(ol_w_id, ol_d_id, ol_o_id,
ol_number)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxordcl.sql

```

-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

```

go

idxordnc.sql

```
-- File:      IDXORDNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_ncl' )
    drop index orders.orders_ncl

create index orders_ncl on orders(o_w_id, o_d_id, o_c_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxstkcl.sql

```
-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on stock table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxwarcl.sql

```
-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

neword.sql

```
-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates new order transaction stored procedure
--           Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder

go

create proc tpcc_neworder

    @w_id          smallint,
    @d_id          tinyint,
    @c_id          int,
    @o_ol_cnt      tinyint,
    @o_all_local  tinyint,
    @i_id1 int = 0, @s_w_id1

smallint = 0, @ol_qty1  smallint = 0,
    @i_id2 int = 0, @s_w_id2

smallint = 0, @ol_qty2  smallint = 0,
    @i_id3 int = 0, @s_w_id3

smallint = 0, @ol_qty3  smallint = 0,
```

```

smallint = 0, @ol_qty4 smallint = 0,
smallint = 0, @ol_qty5 smallint = 0,
smallint = 0, @ol_qty6 smallint = 0,
smallint = 0, @ol_qty7 smallint = 0,
smallint = 0, @ol_qty8 smallint = 0,
smallint = 0, @ol_qty9 smallint = 0,
smallint = 0, @ol_qty10 smallint = 0,
smallint = 0, @ol_qty11 smallint = 0,
smallint = 0, @ol_qty12 smallint = 0,
smallint = 0, @ol_qty13 smallint = 0,
smallint = 0, @ol_qty14 smallint = 0,
smallint = 0, @ol_qty15 smallint = 0

as
declare @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @i_data char(50),
        @o_entry_d datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data char(50),
        @s_dist char(24),
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_s_w_id smallint,
        @li_qty smallint,
        @ol_number int,
        @c_id_local int

begin
begin transaction n

-- get district tax and next available order id and update
-- plus initialize local variables

        update district
        set @d_tax = d_tax,
            @o_id = d_next_o_id,
            d_next_o_id = d_next_o_id + 1,
            @o_entry_d = getdate(),
            @li_no = 0,
            @commit_flag = 1

```

```

        @i_id4 int = 0, @s_w_id4
        @i_id5 int = 0, @s_w_id5
        @i_id6 int = 0, @s_w_id6
        @i_id7 int = 0, @s_w_id7
        @i_id8 int = 0, @s_w_id8
        @i_id9 int = 0, @s_w_id9
        @i_id10 int = 0, @s_w_id10
        @i_id11 int = 0, @s_w_id11
        @i_id12 int = 0, @s_w_id12
        @i_id13 int = 0, @s_w_id13
        @i_id14 int = 0, @s_w_id14
        @i_id15 int = 0, @s_w_id15

```

```

        where d_w_id = @w_id and
              d_id = @d_id

-- process orderlines

        while (@li_no < @o_ol_cnt)
        begin

                select @li_no = @li_no + 1

-- set i_id, s_w_id, and qty for this lineitem

                select @li_id = case @li_no
                        when 1 then @i_id1
                        when 2 then @i_id2
                        when 3 then @i_id3
                        when 4 then @i_id4
                        when 5 then @i_id5
                        when 6 then @i_id6
                        when 7 then @i_id7
                        when 8 then @i_id8
                        when 9 then @i_id9
                        when 10 then @i_id10
                        when 11 then @i_id11
                        when 12 then @i_id12
                        when 13 then @i_id13
                        when 14 then @i_id14
                        when 15 then @i_id15
                        end,

                @li_s_w_id = case @li_no
                        when 1 then @s_w_id1
                        when 2 then @s_w_id2
                        when 3 then @s_w_id3
                        when 4 then @s_w_id4
                        when 5 then @s_w_id5
                        when 6 then @s_w_id6
                        when 7 then @s_w_id7
                        when 8 then @s_w_id8
                        when 9 then @s_w_id9
                        when 10 then @s_w_id10
                        when 11 then @s_w_id11
                        when 12 then @s_w_id12
                        when 13 then @s_w_id13
                        when 14 then @s_w_id14
                        when 15 then @s_w_id15
                        end,

                @li_qty = case @li_no
                        when 1 then @ol_qty1
                        when 2 then @ol_qty2
                        when 3 then @ol_qty3
                        when 4 then @ol_qty4
                        when 5 then @ol_qty5
                        when 6 then @ol_qty6
                        when 7 then @ol_qty7
                        when 8 then @ol_qty8
                        when 9 then @ol_qty9
                        when 10 then @ol_qty10
                        when 11 then @ol_qty11
                        when 12 then @ol_qty12
                        when 13 then @ol_qty13
                        when 14 then @ol_qty14

```

```

                when 15 then @ol_qty15
            end

-- get item data (no one updates item)
        select  @i_price = i_price,
                @i_name  = i_name,
                @i_data  = i_data
        from    item (tablock repeatableread)
        where   i_id = @li_id

-- update stock values
        update  stock
        set     s_ytd          = s_ytd + @li_qty,
                @s_quantity   = s_quantity - @li_qty +
                                case when
(s_quantity - @li_qty < 10) then 91 else 0 end,
                s_order_cnt   = s_order_cnt + 1,
                s_remote_cnt  = s_remote_cnt + case when
(@li_s_w_id = @w_id) then 0 else 1 end,
                @s_data       = s_data,
                @s_dist       = case @d_id
                                when 1 then s_dist_01
                                when 2 then s_dist_02
                                when 3 then s_dist_03
                                when 4 then s_dist_04
                                when 5 then s_dist_05
                                when 6 then s_dist_06
                                when 7 then s_dist_07
                                when 8 then s_dist_08
                                when 9 then s_dist_09
                                when 10 then s_dist_10
                                end
        where   s_i_id        = @li_id and
                s_w_id        = @li_s_w_id

-- if there actually is a stock (and item) with these ids, go to work
        if (@@rowcount > 0)
        begin

-- insert order_line data (using data from item and stock)
                insert into order_line values(@o_id,
                                                @d_id,
                                                @w_id,
                                                @li_no,
                                                @li_id,
                                                @li_s_w_id,
                                                "dec 31, 1899",
                                                @li_qty,
                                                @i_price *
                                                @s_dist)

-- send line-item data to client
                select  @i_name,
                        @s_quantity,

```

```

                b_g = case when (
(patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
                then "B" else "G" end,
                @i_price,
                @i_price * @li_qty
        end
        else
        begin

-- no item (or stock) found - triggers rollback condition
                select "",0,"",0,0
                select @commit_flag = 0
        end
        end

-- get customer last name, discount, and credit rating
        select  @c_last      = c_last,
                @c_discount = c_discount,
                @c_credit   = c_credit,
                @c_id_local = c_id
        from    customer (repeatableread)
        where   c_id        = @c_id and
                c_w_id      = @w_id and
                c_d_id      = @d_id

-- insert fresh row into orders table
        insert into orders values ( @o_id,
                                    @d_id,
                                    @w_id,
                                    @c_id_local,
                                    @o_entry_d,
                                    0,
                                    @o_ol_cnt,
                                    @o_all_local)

-- insert corresponding row into new-order table
        insert into new_order values ( @o_id,
                                       @d_id,
                                       @w_id)

-- select warehouse tax
        select  @w_tax      = w_tax
        from    warehouse (repeatableread)
        where   w_id        = @w_id

        if (@commit_flag = 1)
            commit transaction n
        else
            rollback transaction n

-- all that work for nuthn!!!

-- return order data to client

```

```

select    @w_tax,
          @d_tax,
          @o_id,
          @c_last,
          @c_discount,
          @c_credit,
          @o_entry_d,
          @commit_flag

end

go

```

ordstat.sql

```

-- File:      ORDSTAT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates order status transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
    drop procedure    tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id    smallint,
                             @d_id    tinyint,
                             @c_id    int,
                             @c_last  char(16) = ""
as

declare @c_balance    numeric(12,2),
        @c_first      char(16),
        @c_middle     char(2),
        @o_id         int,
        @o_entry_d    datetime,
        @o_carrier_id smallint,
        @cnt          smallint

begin tran o

if (@c_id = 0)
    begin

-- get customer id and info using last name

        select    @cnt    = (count(*)+1)/2
        from      customer (repeatableread)
        where     c_last  = @c_last and
                  c_w_id  = @w_id and
                  c_d_id  = @d_id

        set       rowcount @cnt

        select    @c_id    = c_id,

```

```

        @c_balance    = c_balance,
        @c_first      = c_first,
        @c_last       = c_last,
        @c_middle     = c_middle
    from        customer (repeatableread)
    where       c_last  = @c_last and
                c_w_id  = @w_id and
                c_d_id  = @d_id
    order       by c_w_id, c_d_id, c_last, c_first

    set         rowcount 0

end

else

begin

-- get customer info if by id

        select    @c_balance    = c_balance,
        @c_first  = c_first,
        @c_middle = c_middle,
        @c_last   = c_last
    from        customer (repeatableread)
    where       c_id    = @c_id and
                c_d_id  = @d_id and
                c_w_id  = @w_id

        select    @cnt    = @@rowcount

    end

-- if no such customer

    if (@cnt = 0)
        begin
            raiserror("Customer not found",18,1)
            goto custnotfound
        end

-- get order info

        select    @o_id         = o_id,
        @o_entry_d = o_entry_d,
        @o_carrier_id = o_carrier_id
    from        orders (serializable)
    where       o_c_id  = @c_id and
                o_d_id  = @d_id and
                o_w_id  = @w_id
    order       by o_id asc

-- select order lines for the current order

        select    ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
    from        order_line (repeatableread)
    where       ol_o_id = @o_id and
                ol_d_id = @d_id and
                ol_w_id = @w_id

```

```

custnotfound:

commit tran o

-- return data to client

select  @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id

go

```

payment.sql

```

-- File:      PAYMENT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates payment transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_payment" )
    drop procedure tpcc_payment
go

create proc tpcc_payment      @w_id          smallint,
                             @c_w_id       smallint,
                             @h_amount     numeric(6,2),
                             @d_id        tinyint,
                             @c_d_id      tinyint,
                             @c_id        int,
                             @c_last      char(16) = ""

as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first    char(16),
        @c_middle   char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city     char(20),
        @c_state    char(2),
        @c_zip      char(9),

```

```

@c_phone      char(16),
@c_since      datetime,
@c_credit     char(2),
@c_credit_lim numeric(12,2),
@c_balance    numeric(12,2),
@c_discount   numeric(4,4),
@data        char(500),
@c_data      char(500),
@datetime    datetime,
@w_ytd       numeric(12,2),
@d_ytd       numeric(12,2),
@cnt         smallint,
@val         smallint,
@screen_data char(200),
@d_id_local  tinyint,
@w_id_local  smallint,
@c_id_local  int

```

```

select @screen_data = ""

begin tran p

-- get payment date

        select  @datetime = getdate()

        if (@c_id = 0)
            begin

-- get customer id and info using last name

                select  @cnt = count(*)
                    from  customer (repeatableread)
                    where c_last = @c_last and
                        c_w_id = @c_w_id and
                        c_d_id = @c_d_id

                select  @val = (@cnt + 1) / 2
                    set  rowcount @val

                select  @c_id = c_id
                    from  customer (repeatableread)
                    where c_last = @c_last and
                        c_w_id = @c_w_id and
                        c_d_id = @c_d_id

                order  by c_last, c_first

                set      rowcount 0

            end

-- get customer info and update balances

            update  customer
            set      @c_balance = c_balance
                    @c_payment_cnt = c_payment_cnt + 1,
                    c_ytd_payment = c_ytd_payment + @h_amount,
                    @c_first = c_first,
                    @c_middle = c_middle,
                    @c_last = c_last,
                    @c_street_1 = c_street_1,
                    @c_street_2 = c_street_2,
                    @c_city = c_city,
                    = c_balance - @h_amount,

```

```

        @c_state = c_state,
        @c_zip   = c_zip,
        @c_phone = c_phone,
        @c_credit = c_credit,
        @c_credit_lim = c_credit_lim,
        @c_discount = c_discount,
        @c_since = c_since,
        @data      = c_data,
        @c_id_local = c_id
    where
        c_id = @c_id and
        c_w_id = @c_w_id and
        c_d_id = @c_d_id

-- if customer has bad credit get some more info
    if (@c_credit = "BC")
    begin
-- compute new info
        select @c_data = convert(char(5),@c_id) +
            convert(char(4),@c_d_id) +
            convert(char(5),@c_w_id) +
            convert(char(4),@d_id) +
            convert(char(5),@w_id) +
            convert(char(19),@h_amount) +
            substring(@data, 1, 458)

-- update customer info
        update customer
        set c_data = @c_data
        where c_id = @c_id and
            c_w_id = @c_w_id and
            c_d_id = @c_d_id

        select @screen_data = substring (@c_data,1,200)
    end

-- get district data and update year-to-date
    update district
    set d_ytd = d_ytd + @h_amount,
        @d_street_1 = d_street_1,
        @d_street_2 = d_street_2,
        @d_city = d_city,
        @d_state = d_state,
        @d_zip = d_zip,
        @d_name = d_name,
        @d_id_local = d_id
    where d_w_id = @w_id and
        d_id = @d_id

-- get warehouse data and update year-to-date
    update warehouse
    set w_ytd = w_ytd + @h_amount,
        @w_street_1 = w_street_1,
        @w_street_2 = w_street_2,
        @w_city = w_city,
        @w_state = w_state,
        @w_zip = w_zip,
        @w_name = w_name,

```

```

        @w_id_local = w_id
    where w_id = @w_id

-- create history record
    insert into history values ( @c_id_local,
                                @c_d_id,
                                @c_w_id,
                                @d_id_local,
                                @w_id_local,
                                @datetime,
                                @h_amount,
                                @w_name + " " + @d_name)

commit tran p

-- return data to client
select @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data

go

```

random.c

```

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001
// Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807

```

```

#define M      2147483647
#define Q      127773    /* M div A */
#define R      2836     /* M mod A */
#define Thread __declspec(thread)

// Globals
long      Thread Seed = 0;    /* thread local seed */

/*****
 *
 * random -
 * Implements a GOOD pseudo random number generator. This generator
 * will/should? run the complete period before repeating.
 *
 * Copied from:
 * Random Numbers Generators: Good Ones Are Hard to Find.
 * Communications of the ACM - October 1988 Volume 31 Number 10
 *
 * Machine Dependencies:
 * long must be 2 ^ 31 - 1 or greater.
 *
 *****/

/*****
 * seed - load the Seed value used in irand and drand. Should be used before
 * first call to irand or drand.
 *****/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

/*****
 *
 * irand - returns a 32 bit integer pseudo random number with a period of
 * 1 to 2 ^ 32 - 1.
 *
 * parameters:
 * none.
 *
 * returns:
 * 32 bit integer - defined as long ( see above ).
 *
 * side effects:
 * seed get recomputed.
 *****/

long irand()
{
    register long  s;    /* copy of seed */
    register long  test; /* test flag */

```

```

    register long  hi;    /* tmp value for speed */
    register long  lo;    /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
 *
 * drand - returns a double pseudo random number between 0.0 and 1.0.
 * See irand.
 *****/

double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

#ifdef DEBUG

```



```

        printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
               (int) GetCurrentThreadId(), lower, upper,
               rand_num);
    #endif

    return rand_num;
}

#if 0
//Original code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif
}

```

```

#endif

    return rand_num;
}

```

removedb.sql

```

-- File:      REMOVEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Removes tpcc database and backup files

```

```

use master
go

-- remove any existing database and backup files

exec sp_dbremove tpcc, dropdev
go

exec sp_dropdevice 'tpccback1'
exec sp_dropdevice 'tpccback2'
exec sp_dropdevice 'tpccback3'
exec sp_dropdevice 'tpccback4'
go

```

restore.sql

```

-- File:      RESTORE.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Loads database backup from backup files

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

load database tpcc from tpccback1, tpccback2, tpccback3, tpccback4 with stats = 1,
replace

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

sp_dboption 'tpcc', 'torn page detection', FALSE
go

```

sqlshutdown.sql

```

use tpcc
go

```

```
checkpoint
go
shutdown
go
```

stocklev.sql

```
-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates stock level transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
    drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel @w_id smallint,
                           @d_id tinyint,
                           @threshold smallint
as

declare @o_id_low int,
        @o_id_high int

select @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
from district
where d_w_id = @w_id and
      d_id = @d_id

select count(distinct(s_i_id))
from stock, order_line
where ol_w_id = @w_id and
      ol_d_id = @d_id and
      ol_o_id between @o_id_low and
                @o_id_high and
      s_w_id = ol_w_id and
      s_i_id = ol_i_id and
      s_quantity < @threshold

go
```

strings.c

```
// File: STRINGS.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001
// Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>
```

```
//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
                (int) GetCurrentThreadId(), street_1, street_2, city,
                state, zip);
#endif

    return;
}

//=====
//
// Function name: LastName
//
//=====

void LastName(int num,
             char *name)
{
    static char *n[] =
    {
        "BAR", "OUGHT", "ABLE", "PRI", "PRES",
        "ESE", "ANTI", "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
```

```

                PaddString(LAST_NAME_LEN, name);
            }
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
        (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
name);
#endif

    return;
}

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//--CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNQRSTUvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
    {
        cc = chArray[RandomNumber(0, chArrayMax)];
        str[i] = cc;
    }
}

```

```

        if ( len < z )
            memset(str+len, ' ', z - len);
        str[len] = 0;

    }
    return len;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int x,
                            int y,
                            int z,
                            char *str,
                            int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
        (int) GetCurrentThreadId(), str);
#endif

    return strlen(str);
}

```

```

//=====
//
// Function name: MakeNumberString
//
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

```

```

//=====
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

tables.sql

```

-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates TPC-C tables

use tpcc
go

--
-- Remove all existing TPC-C tables
--

if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )

```

```

drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
drop table stock
go
--
-- Create new tables
--
create table warehouse
(
    w_id                smallint,
    w_name              char(10),
    w_street_1          char(20),
    w_street_2          char(20),
    w_city              char(20),
    w_state             char(2),
    w_zip              char(9),
    w_tax              numeric(4,4),
    w_ytd              numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id                tinyint,
    d_w_id              smallint,
    d_name              char(10),
    d_street_1          char(20),
    d_street_2          char(20),
    d_city              char(20),
    d_state             char(2),
    d_zip              char(9),
    d_tax              numeric(4,4),
    d_ytd              numeric(12,2),
    d_next_o_id        int
) on MSSQL_misc_fg
go

create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              smallint,

```

```

    c_first             char(16),
    c_middle            char(2),
    c_last             char(16),
    c_street_1          char(20),
    c_street_2          char(20),
    c_city             char(20),
    c_state            char(2),
    c_zip              char(9),
    c_phone            char(16),
    c_since            datetime,
    c_credit           char(2),
    c_credit_lim       numeric(12,2),
    c_discount         numeric(4,4),
    c_balance          numeric(12,2),
    c_ytd_payment      numeric(12,2),
    c_payment_cnt      smallint,
    c_delivery_cnt     smallint,
    c_data             char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id             int,
    h_c_d_id           tinyint,
    h_c_w_id           smallint,
    h_d_id             tinyint,
    h_w_id             smallint,
    h_date            datetime,
    h_amount          numeric(6,2),
    h_data            char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id            int,
    no_d_id            tinyint,
    no_w_id            smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id              int,
    o_d_id            tinyint,
    o_w_id            smallint,
    o_c_id            int,
    o_entry_d         datetime,
    o_carrier_id      tinyint,
    o_ol_cnt          tinyint,
    o_all_local       tinyint
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id           int,
    ol_d_id           tinyint,
    ol_w_id           smallint,
    ol_number         tinyint,
    ol_i_id           int,
    ol_supply_w_id    smallint,

```

```

        ol_delivery_d      datetime,
        ol_quantity        smallint,
        ol_amount          numeric(6,2),
        ol_dist_info       char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id          int,
    i_im_id       int,
    i_name        char(24),
    i_price       numeric(5,2),
    i_data        char(50)
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id        int,
    s_w_id        smallint,
    s_quantity    smallint,
    s_dist_01     char(24),
    s_dist_02     char(24),
    s_dist_03     char(24),
    s_dist_04     char(24),
    s_dist_05     char(24),
    s_dist_06     char(24),
    s_dist_07     char(24),
    s_dist_08     char(24),
    s_dist_09     char(24),
    s_dist_10     char(24),
    s_ytd         int,
    s_order_cnt   smallint,
    s_remote_cnt  smallint,
    s_data        char(50)
) on MSSQL_cs_fg
go

```

time.c

```

//      File:          TIME.C
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
//      Purpose:      Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====

long TimeNow()

```

```

{
    long          time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

//      File:          TPCC.H
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
//      Purpose:      Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.22"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI          1000
#define FALSE          0
#define TRUE           1
#define UNDEF          -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER          ""
#define DATABASE        "tpcc"
#define USER            "sa"
#define PASSWORD        ""

// Default loader arguments

```

```

#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "logs\\load.out"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1 // build both
data and indexes
#define INDEX_ORDER 1 // build
indexes before load
#define SCALE_DOWN 0 // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; //
set if loading CUSTOMER and HISTORY
    BOOL table_orders; //
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
    char *index_script_path;
} TPCCCLR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16

```

```

#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

```

```

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

```

```

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

```

```

// Functions in time.c
long TimeNow();

```

```

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

tpccldr.c

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 2000, 2001
// Purpose: Source file for TPC-C database loader

```

```

// Includes
#include "tpcc.h"
#include "search.h"

```

```

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3

```

```

#define MAX_MAIN_THREADS      4

// Functions declarations

void HandleErrorDBC (SQLHDBC hdbc1);

void CheckSQL();
void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures

typedef struct
{
    long          ol;
    long          ol_i_id;
    short        ol_supply_w_id;
    short        ol_quantity;
    double       ol_amount;
    char         ol_dist_info[DIST_INFO_LEN+1];
    char         ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long          o_id;
    short        o_d_id;
    short        o_w_id;
    long         o_c_id;
    short        o_carrier_id;
    short        o_ol_cnt;
    short        o_all_local;
    ORDER_LINE_STRUCT  o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long          c_id;

```

```

short          c_d_id;
short          c_w_id;
char           c_first[FIRST_NAME_LEN+1];
char           c_middle[MIDDLE_NAME_LEN+1];
char           c_last[LAST_NAME_LEN+1];
char           c_street_1[ADDRESS_LEN+1];
char           c_street_2[ADDRESS_LEN+1];
char           c_city[ADDRESS_LEN+1];
char           c_state[STATE_LEN+1];
char           c_zip[ZIP_LEN+1];
char           c_phone[PHONE_LEN+1];
char           c_credit[CREDIT_LEN+1];
double         c_credit_lim;
double         c_discount;
// fix to avoid ODBC float to numeric conversion problem.
// double      c_balance;
char           c_balance[6];

double         c_ytd_payment;
short         c_payment_cnt;
short         c_delivery_cnt;
char           c_data[C_DATA_LEN+1];
double         h_amount;
char           h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char         c_last[LAST_NAME_LEN+1];
    char         c_first[FIRST_NAME_LEN+1];
    long         c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long         time_start;
} LOADER_TIME_STRUCT;

// Global variables

char           szLastError[300];

HENV          henv;

HDBC          v_hdbc; // for SQL
Server version verification
HDBC          i_hdbc1; // for ITEM table
HDBC          w_hdbc1; // for WAREHOUSE,
DISTRICT, STOCK
HDBC          c_hdbc1; // for CUSTOMER
HDBC          c_hdbc2; // for HISTORY
HDBC          o_hdbc1; // for ORDERS
HDBC          o_hdbc2; // for NEW-ORDER

HDBC          o_hdbc3; // for ORDER-LINE

HSTMT         v_hstmt; // for SQL Server
version verification
HSTMT         i_hstmt1;
HSTMT         w_hstmt1;
HSTMT         c_hstmt1, c_hstmt2;
HSTMT         o_hstmt1, o_hstmt2, o_hstmt3;

```



```

ORDERS_STRUCT  orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long           orders_rows_loaded;
long           new_order_rows_loaded;
long           order_line_rows_loaded;
long           history_rows_loaded;
long           customer_rows_loaded;
long           stock_rows_loaded;
long           district_rows_loaded;
long           item_rows_loaded;
long           warehouse_rows_loaded;
long           main_time_start;
long           main_time_end;
long           max_items;
long           customers_per_district;
long           orders_per_district;
long           first_new_order;
long           last_new_order;

TPCCLDR_ARGS  *aptr, args;

//=====
//
// Function name: main
//
//=====

int main(int  argc, char **argv)
{
    DWORD          dwThreadId[MAX_MAIN_THREADS];
    HANDLE          hThread[MAX_MAIN_THREADS];
    FILE            *fLoader;
    char            buffer[255];
    int             i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*                               *");
    printf("\n*   Microsoft SQL Server         *");
    printf("\n*                               *");
    printf("\n*   TPC-C BENCHMARK KIT:  Database loader   *");
    printf("\n*   Version %s                *", TPCKIT_VER);
    printf("\n*                               *");
    printf("\n*****\n\n");

    // process command line arguments

    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify database and tables exist before attempting to load

    CheckSQL();
    CheckDataBase();

    printf("Build interface is ODBC.\n");

```

```

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk load.\n");
else
    printf("Clustered indexes will be created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("*** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server

OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data

sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);

printf("%s", buffer);
fprintf(fLoader, "%s", buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadItem,

```

```

NULL,
                                0,
&dwThreadID[0]);
    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread =
0.\n");
        exit(-1);
    }
    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for: warehouse\n");
        hThread[1] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
                                0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread =
1.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for: customer\n");
            hThread[2] = CreateThread(NULL,
                                    0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
                                    0,
&dwThreadID[2]);
            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating creating main thread
= 2.\n");
                exit(-1);
            }
        }
        if (aptr->tables_all || aptr->table_orders)
        {
            fprintf(fLoader, "Starting loader threads for: orders\n");
            hThread[3] = CreateThread(NULL,

```

```

                                0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
                                0,
&dwThreadID[3]);
    if (hThread[3] == NULL)
    {
        printf("Error, failed in creating creating main thread
= 3.\n");
        exit(-1);
    }
    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }
    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);
    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);
    fclose(fLoader);
    SQLFreeEnv(henv);
    exit(0);
    return 0;
}
//=====
//
// Function name: LoadItem
//=====
void LoadItem()
{
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;

```

```

char          bcphint[128];

// Seed with unique number
seed(1);

printf("Loading item table...\n");

// if build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxitmcl");

InitString(i_name, I_NAME_LEN+1);
InitString(i_data, I_DATA_LEN+1);

sprintf(name, "%s.%s", aptr->database, "item");

rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000*");
    rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 2);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 4);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

time_start = (TimeNow() / MILLI);

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaString(14, 24, I_NAME_LEN, i_name);

    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

```

```

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
//
// Function   : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//
//=====

void LoadWarehouse()
{
    short w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double w_tax;
    double w_ytd;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwarc1");

```

```

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s.%s", aptr->database, "warehouse");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, 2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

3);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

4);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

```

```

w_id++) for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
{
    MakeAlphaString(6,10, W_NAME_LEN, w_name);
    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);
    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;
    w_ytd = 300000.00;
    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();

}

//=====
//
// Function : District
//
//=====

void District()
{
    short d_id;
    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double d_tax;
    double d_ytd;
    char name[20];
    long d_next_o_id;
    long time_start;
    int w_id;
    RETCODE rc;

```

```

DBINT    rcint;
char     bcphint[128];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdiscl");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
sprintf(name, "%s.%s", aptr->database, "district");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

SQLINT2, 1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

SQLINT2, 2);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

4);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

5);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);

SQLFLT8, 9);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

SQLFLT8, 10);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

SQLINT4, 11);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;

d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaString(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load..
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");

return;
}

//=====
//

```

```

// Function   : Stock
//
//=====
void Stock()
{
    long   s_i_id;
    short  s_w_id;
    short  s_quantity;
    char   s_dist_01[S_DIST_LEN+1];
    char   s_dist_02[S_DIST_LEN+1];
    char   s_dist_03[S_DIST_LEN+1];
    char   s_dist_04[S_DIST_LEN+1];
    char   s_dist_05[S_DIST_LEN+1];
    char   s_dist_06[S_DIST_LEN+1];
    char   s_dist_07[S_DIST_LEN+1];
    char   s_dist_08[S_DIST_LEN+1];
    char   s_dist_09[S_DIST_LEN+1];
    char   s_dist_10[S_DIST_LEN+1];
    long   s_ytd;
    short  s_order_cnt;
    short  s_remote_cnt;
    char   s_data[S_DATA_LEN+1];
    short  len;
    char   name[20];
    long   time_start;
    RETCODE rc;
    DBINT  rcint;
    char   bcphint[128];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s.%s", aptr->database, "stock");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0, 4);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0, 5);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0, 6);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0, 7);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0, 8);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0, 9);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0, 10);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0, 11);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0, 12);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0, 13);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 14);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 15);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 16);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0, 17);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

```

```

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1, stock_rows_loaded,
"stock", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;

//=====
//
// Function   : LoadCustomer
//
//=====

```

```

void LoadCustomer()
{
    LOADER_TIME_STRUCT    customer_time_start;
    LOADER_TIME_STRUCT    history_time_start;
    short                  w_id;

    short                  d_id;
    DWORD                  dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE                  hThread[MAX_CUSTOMER_THREADS];
    char                    name[20];
    RETCODE                 rc;
    DBINT                   rcint;
    char                    bcphint[128];
    char                    cmd[256];
    char                    rc_l;
    // SQLRETURN             rcnum, MsgLen;
    // SQLSMALLINT           SqlState[6],
    // SQLCHAR
    Msg[SQL_MAX_MESSAGE_LENGTH];
    // SQLINTEGER
    NativeError;

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxcuscl");

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcphint, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    customer_rows_loaded    = 0;
    history_rows_loaded     = 0;

    CustomerBufInit();

    customer_time_start.time_start = (TimeNow() / MILLI);
    history_time_start.time_start = (TimeNow() / MILLI);
}

```

```

w_id++) for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...

        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

            0,

            (LPTHREAD_START_ROUTINE) LoadCustomerTable,

            &customer_time_start,

            0,

            &dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread
        printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,

            0,

            (LPTHREAD_START_ROUTINE) LoadHistoryTable,

            &history_time_start,

            0,

            &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)

```

```

        {
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
        }

    }

    // flush the bulk connection
    rcint = bcp_done(c_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(c_hdbc1);

    rcint = bcp_done(c_hdbc2);
    if (rcint < 0)
        HandleErrorDBC(c_hdbc2);

    printf("Finished loading customer table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxcuscl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxcusnc");

    // Output the NURAND used for the loader into C_FIRST for C_ID = 1,
    // C_W_ID = 1, and C_D_ID = 1
    sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\\nurand_load.log",

        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C);

    system(cmd);

    SQLFreeStmt(c_hstmt1, SQL_DROP);
    SQLDisconnect(c_hdbc1);
    SQLFreeConnect(c_hdbc1);

    SQLFreeStmt(c_hstmt2, SQL_DROP);
    SQLDisconnect(c_hdbc2);
    SQLFreeConnect(c_hdbc2);

    return;
}

//=====

```



```

//
// Function : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    int i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        // fix to avoid ODBC float to numeric conversion problem.
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, int w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)

```

```

{
    if (i < 1000)
        LastName(i, c[i].c_last);
    else
        LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

    MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);

    c[i].c_id = i+1;
}

printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);

for (i=0;i<customers_per_district;i++)
{
    customer_buf[i].c_d_id = d_id;
    customer_buf[i].c_w_id = w_id;
    customer_buf[i].h_amount = 10.0;

    customer_buf[i].c_ytd_payment = 10.0;

    customer_buf[i].c_payment_cnt = 1;
    customer_buf[i].c_delivery_cnt = 0;

    // Generate CUSTOMER and HISTORY data
    customer_buf[i].c_id = c[i].c_id;

    strcpy(customer_buf[i].c_first, c[i].c_first);
    strcpy(customer_buf[i].c_last, c[i].c_last);

    customer_buf[i].c_middle[0] = 'O';
    customer_buf[i].c_middle[1] = 'E';

    MakeAddress(customer_buf[i].c_street_1,
customer_buf[i].c_street_2,
customer_buf[i].c_city,
customer_buf[i].c_state,
customer_buf[i].c_zip);

    MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

    if (RandomNumber(1L, 100L) > 10)
        customer_buf[i].c_credit[0] = 'G';
    else
        customer_buf[i].c_credit[0] = 'B';
    customer_buf[i].c_credit[1] = 'C';

    customer_buf[i].c_credit_lim = 50000.0;
    customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;

    // fix to avoid ODBC float to numeric conversion problem.

    // customer_buf[i].c_balance = -10.0;
    strcpy(customer_buf[i].c_balance,"-10.0");

    MakeAlphaString(300, 500, C_DATA_LEN, customer_buf[i].c_data);

```

```

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN, customer_buf[i].h_data);
    }
}

//=====
//
// Function   : LoadCustomerTable
//
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int         i;
    long        c_id;
    short       c_d_id;
    short       c_w_id;
    char        c_first[FIRST_NAME_LEN+1];
    char        c_middle[MIDDLE_NAME_LEN+1];
    char        c_last[LAST_NAME_LEN+1];
    char        c_street_1[ADDRESS_LEN+1];
    char        c_street_2[ADDRESS_LEN+1];
    char        c_city[ADDRESS_LEN+1];
    char        c_state[STATE_LEN+1];
    char        c_zip[ZIP_LEN+1];
    char        c_phone[PHONE_LEN+1];
    char        c_credit[CREDIT_LEN+1];
    double      c_credit_lim;
    double      c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
    // double      c_balance;
    char        c_balance[6];

    double      c_ytd_payment;
    short       c_payment_cnt;
    short       c_delivery_cnt;
    char        c_data[C_DATA_LEN+1];
    char        c_since[C_SINCE_LEN+1];
    RETCODE     rc;

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0, 5);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, 12);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, 14);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 15);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 16);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    // fix to avoid ODBC float to numeric conversion problem.

    // rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 17);
    // if (rc != SUCCEED)
    //     HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, 17);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 18);

```

```

        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 19);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 20);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;

    // fix to avoid ODBC float to numeric conversion problem.

    // c_balance = customer_buf[i].c_balance;
    strcpy(c_balance, customer_buf[i].c_balance);

    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;

    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
    rc = bcp_sendrow(c_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    customer_rows_loaded++;
    CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}
}

```

```

//=====
//
// Function : LoadHistoryTable
//
//=====

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);
    }
}

```

```

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }
}

//=====
//
// Function   : LoadOrders
//
//=====

void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    short                 w_id;
    short                 d_id;
    DWORD                 dwThreadID[MAX_ORDER_THREADS];
    HANDLE                 hThread[MAX_ORDER_THREADS];
    char                   name[20];
    RETCODE                rc;
    char                   bcphint[128];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxmodcl");
        BuildIndex("idxodlcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }
}

```

```

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s..%s", aptr->database, "order_line");

    rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
    }

    orders_rows_loaded = 0;
    new_order_rows_loaded = 0;
    order_line_rows_loaded = 0;

    OrdersBufInit();

    orders_time_start.time_start = (TimeNow() / MILLI);
    new_order_time_start.time_start = (TimeNow() / MILLI);
    order_line_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            OrdersBufLoad(d_id, w_id);

            // start parallel loading threads here...

            // start Orders table thread

            printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

            hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,

```

```

0,
&dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating
thread = 0.\n");
        exit(-1);
    }

    // start NewOrder table thread
    printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);
    hThread[1] = CreateThread(NULL,

0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,

0,
&dwThreadID[1]);

    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating creating
thread = 1.\n");
        exit(-1);
    }

    // start Order-Line table thread
    printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);
    hThread[2] = CreateThread(NULL,

0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,

0,
&dwThreadID[2]);

    if (hThread[2] == NULL)
    {
        printf("Error, failed in creating creating
thread = 2.\n");
        exit(-1);
    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );
    WaitForSingleObject( hThread[2], INFINITE );

```

```

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }
    }

    printf("Finished loading orders.\n");

return;
}

//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====

void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info, "");
        }
    }
}

```

```

}

//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int    cust[ORDERS_PER_DISTRICT+1];
    long   o_id;
    short  ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
        {
            orders_buf[o_id].o_ol[ol].ol = ol+1;
            orders_buf[o_id].o_ol[ol].ol_i_id = RandomNumber(1L,
max_items);

            orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o_ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o_ol[ol].ol_amount = 0;

```

```

// Added to insure ol_delivery_d set
properly during load

        FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
properly during load

        // odbc datetime format

        strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}

//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int    i;
    long   o_id;
    short  o_d_id;
    short  o_w_id;
    long   o_c_id;
    short  o_carrier_id;
    short  o_ol_cnt;
    short  o_all_local;
    char   o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT   rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

```

```

        rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
7);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o_ol_cnt  = orders_buf[i].o_ol_cnt;
    o_all_local = orders_buf[i].o_all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

// rcint = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordc1");

    // build non-clustered index
    if (aptr->build_index == 1)

```

```

        BuildIndex("idxordnc");
    }
}

//=====
//
// Function   : LoadNewOrderTable
//
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int      i;
    long     o_id;
    short    o_d_id;
    short    o_w_id;

    RETCODE  rc;
    DBINT    rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
    }
}

```

```

        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxmodel");
    }
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int     i,j;
    long    o_id;
    short   o_d_id;
    short   o_w_id;

    long    ol;
    long    ol_i_id;
    short   ol_supply_w_id;
    short   ol_quantity;
    double  ol_amount;
    char    ol_dist_info[DIST_INFO_LEN+1];
    char    ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE rc;
    DBINT   rcint;

    // bind ORDER-LINE data
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

```

```

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id     = orders_buf[i].o_id;
        o_d_id   = orders_buf[i].o_d_id;
        o_w_id   = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o_ol_cnt; j++)
        {
            ol         = orders_buf[i].o_ol[j].ol;
            ol_i_id    = orders_buf[i].o_ol[j].ol_i_id;
            ol_supply_w_id = orders_buf[i].o_ol[j].ol_supply_w_id;
            ol_quantity = orders_buf[i].o_ol[j].ol_quantity;
            ol_amount  = orders_buf[i].o_ol[j].ol_amount;

            strcpy(ol_delivery_d, orders_buf[i].o_ol[j].ol_delivery_d);

            strcpy(ol_dist_info, orders_buf[i].o_ol[j].ol_dist_info);

            rc = bcp_sendrow(o_hdbc3);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc3);

            order_line_rows_loaded++;
            CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
        }
    }

    // rcint = bcp_batch(o_hdbc3);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc3);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
        SQLDisconnect(o_hdbc3);
        SQLFreeConnect(o_hdbc3);
    }

```



```

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxodlcl");
    }
}

//=====
//
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                   HSTMT hstmt,
                   int rows_loaded,
                   char *table_name,
                   long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("--> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
                aptr->batch,

```

```

        table_name,
        time_diff,
        rows_loaded,
        (float) aptr->batch / (time_diff ? time_diff
: 1L));
    }
    *time_start = time_end;
}
return;
}

//=====
//
// Function : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server

    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,

```

```

                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

// Connection 2

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

// Connection 3

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

```

```

rc = SQLDriverConnect ( c_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// Connection 4

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

// Connection 5

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,

```

```

                                SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

// Connection 6

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

// Connection 7

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),

```

```

                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
}

//=====
//
// Function name: BuildIndex
//
//=====

void BuildIndex(char          *index_script)
{
    char      cmd[256];

    printf("Starting index creation:  %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->index_script_path,
                                index_script,
                                index_script);

    system(cmd);

    printf("Finished index creation:  %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER      NativeError;
    SQLSMALLINT     i, MsgLen;
    SQLRETURN       rc2;
    char             timebuf[128];
    char             datebuf[128];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
                                &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);
        printf ( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err", "w");
        if (fp1 == NULL)
            printf("ERROR:  Unable to open errorlog file.\n");
    }
}

```

```

        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER       NativeError;
    SQLSMALLINT      i, MsgLen;
    SQLRETURN        rc2;
    char             timebuf[128];
    char             datebuf[128];
    FILE            *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
                                Msg, sizeof(Msg) , &MsgLen ) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

```

```

// odbc datetime format
strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000", &when );

return;
}

//=====
//
// Function   : CheckSQL
//
//=====

void CheckSQL()
{
    RETCODE          rc;

    char             szDriverString[300];
    char             szDriverStringOut[1024];
    int              SQLBuildFlag;
    char             resp;

    SQLSMALLINT      cbDriverStringOut;
    SQLCHAR          SQLVersion[19];
    SQLINTEGER       SQLVersionInd;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connection to SQL Server

    sprintf( szDriverString , "DRIVER={SQL Server};SERVER=%s;UID=%s;PWD=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password );

    if ( SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE, (SQLPOINTER)aptr-
>pack_size, SQL_IS_UINTEGER ) != SQL_SUCCESS )
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

    if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))

```

```

        HandleErrorDBC(v_hdbc);

    if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) != SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);

    rc = SQLBindCol(v_hstmt, 4, SQL_C_CHAR, &SQLVersion, sizeof(SQLVersion),
    &SQLVersionInd);

    // issue SQL Server extended stored procedure (xp_msver) to determine
    installed version
    rc = SQLExecDirect(v_hstmt, "EXECUTE xp_msver ProductVersion", SQL_NTS);

    if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
        HandleErrorSTMT(v_hstmt);

    rc = SQLFetch(v_hstmt);

    if (rc != SQL_SUCCESS)
        HandleErrorDBC(v_hdbc);

    // Check build number to ensure 8.00.194 or higher
    SQLBuildFlag = 1;

    // first check the Major version
    if ( SQLVersion[0] == '8' )
    {
        if (( SQLVersion[2] == '0') & ( SQLVersion[3] == '0' )
            {
                if ( SQLVersion[5] == '1' )
                {
                    if ( (SQLVersion[6] == '9') &
                        (SQLVersion[7] == '4') )
                    {
                        SQLBuildFlag = 0;
                        printf("You are using SQL Server
version = %9s\n\n", SQLVersion);
                    }
                    else
                    {
                        SQLBuildFlag = 1;
                    }
                }
                else
                {
                    if ( SQLVersion[5] == '3' )
                    {
                        if ( (SQLVersion[6] >= 53) &
                            (SQLVersion[7] >= 48) )
                        {
                            SQLBuildFlag = 0;
                            printf("You are using
SQL Server version = %9s\n\n", SQLVersion);
                        }
                        else
                        {
                            SQLBuildFlag = 1;
                        }
                    }
                }
            }
        }
    }
}

```

```

    else
    {
        SQLBuildFlag = 1;
    }

    if ( SQLBuildFlag == 1 )
    {
        printf("NOTE: The SQL Server version you are using is not
supported\n");
        printf("for TPC-C benchmarking. You currently have SQL Server
version %9s\n",SQLVersion);
        printf("installed. Please upgrade to Microsoft SQL Server 2000
(8.00.0194) or better.\n");
        printf("and re-run the SETUP program.\n\n");
        printf("Do you wish to continue with setup? (Y/N): ");
        resp = getchar();
        if ( ( resp == 'N' ) || (resp == '\n') )
        {
            printf("\nSetup Aborted!\n");
            exit(1);
        }
    }

    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    return;
}

//=====
//
// Function : CheckDataBase
//
//=====

void CheckDataBase()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] = {"000000000"};
    int i, ExitFlag;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR TabName[10];
    SQLINTEGER TabNameInd, TabCount, TabCountInd;

    ExitFlag = 0;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
}

```

```

// Open connection to SQL Server
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE, (SQLPOINTER)aptr-
>pack_size, SQL_IS_INTEGER );
if (rc != SQL_SUCCESS)
    HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC database probably does not exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to exist!\n");
    printf("\nCheck LOGS\\ directory for database creation
errors.\n");

    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    // since there is not a database, exit back to SETUP.CMD
    exit(1);
}

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) != SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);

if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0, &TabCountInd) !=
SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// count the number of user tables from sysobjects
rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects where xtype =
'\U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// if the number of tables is less than 9, select all the user tables in
TPCC
if (TabCount != 9)
{

```

```

SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);

SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt);

if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR, &TabName,
sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// select the list of user tables into a result set
rc = SQLExecDirect(v_hstmt, "select * from sysobjects where
xtype = '\U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

// go through the result set and set the bitmap for each found
table
// set the bitmap to '1' if the table name is found

while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
{
    switch( TabName[0] )
    {
        case 'w':
            TablesBitMap[0] = '1';
            break;
        case 'd':
            TablesBitMap[1] = '1';
            break;
        case 'c':
            TablesBitMap[2] = '1';
            break;
        case 'h':
            TablesBitMap[3] = '1';
            break;
        case 'n':
            TablesBitMap[4] = '1';
            break;
        case 'o':
            if (TabName[5] = 's')
                TablesBitMap[5] = '1';
            if (TabName[5] = '_')
                TablesBitMap[6] = '1';
            break;
        case 'i':
            TablesBitMap[7] = '1';
            break;
        case 's':
            TablesBitMap[8] = '1';
            break;
    }
}

// a '0' ExitFlag means do NOT exit the loader early, a '1'
means exit the loader early
ExitFlag = 0;

// iterate through the bitmap to display which table(s) is
actually missing
for (i = 0; i <= 8; i++)
{
    switch(i)
    {
        case 0:

```

```

missing or damaged.\n");
        if (TablesBitMap[i] == '0')
        {
            printf("The Warehouse table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 1:
        if (TablesBitMap[i] == '0')
        {
            printf("The District table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 2:
        if (TablesBitMap[i] == '0')
        {
            printf("The Customer table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 3:
        if (TablesBitMap[i] == '0')
        {
            printf("The History table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 4:
        if (TablesBitMap[i] == '0')
        {
            printf("The New_Order table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 5:
        if (TablesBitMap[i] == '0')
        {
            printf("The Orders table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 6:
        if (TablesBitMap[i] == '0')
        {
            printf("The Order_Line table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
case 7:
        if (TablesBitMap[i] == '0')
        {
            printf("The Item table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;

```

```

case 8:
        if (TablesBitMap[i] == '0')
        {
            printf("The Stock table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    }
}

// if one or more tables are missing, display message and exit
the loader
if (ExitFlag = 1)
{
    printf("\nExiting TPC-C Loader!\n");
    printf("\nCheck LOGS\\ directory for database\n");
    printf("or table creation errors.\n");

    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    exit(1);
}

// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

return;
}

```

version.sql

```

-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Returns SQL Server version string

```

```

print " "
select convert(char(30), getdate(),9)
print " "
go

select @@version
go

```

Appendix C: Tunable Parameters

Microsoft SQL Server 2000 Startup Parameters

C:\Program Files\Microsoft SQL
Server\MSSQL\BINN\sqlservr.exe
-eC:\Program Files\Microsoft SQL
Server\MSSQL\LOG\ERRORLOG -x -c -t3502

Where:

-c Start SQL Server independently of the
Windows NT Service Control Manager
-x Disables the keeping of CPU time and
cache-hit ratio statistics
-t3502 Prints a message to the SQL Server log
at the start and end of each checkpoint

Boot.ini Parameters

```
[boot loader]
timeout=30
default=multi(0)disk(0)rdisk(0)partition(2)\WINNT
[operating systems]
multi(0)disk(0)rdisk(0)partition(2)\WINNT="Microsoft
Windows .NET Enterprise Server /PAE" /pae /fastdetect
```

Microsoft SQL Server 2000 Configuration Parameters

name	config_value	run_value	minimum
affinity mask	2147483647	255	-2147483648
allow updates	1	0	0
awe enabled	1	1	0
c2 audit mode	1	0	0
cost threshold for parallelism	32767	5	0
cursor threshold	2147483647	-1	-1
default full-text language	2147483647	1033	0
default language	9999	0	0
fill factor (%)	100	0	0
index create memory (KB)	2147483647	704	704
lightweight pooling	1	1	0
locks	2147483647	9000	5000
max degree of parallelism	32	1	0
max server memory (MB)	2147483647	2147483647	4
max text repl size (B)	2147483647	65536	0
max worker threads	32767	310	32
media retention	365	0	0
min memory per query (KB)	2147483647	512	512
min server memory (MB)	2147483647	0	0

nested triggers	1	1	0
network packet size (B)	65536	512	512
open objects	2147483647	0	0
priority boost	1	1	0
query governor cost limit	2147483647	0	0
query wait (s)	2147483647	-1	-1
recovery interval (min)	32767	56	0
remote access	1	1	0
remote login timeout (s)	2147483647	20	0
remote proc trans	1	0	0
remote query timeout (s)	2147483647	600	0
scan for startup procs	1	0	0
set working set size	1	0	0
show advanced options	1	1	0
two digit year cutoff	9999	2049	1753
user connections	32767	0	0
user options	32767	0	0

1> 2> 3>

Benchcraft Profile

Profile: quark-4940wh-rte
File Path: C:\benchcraft\quark-4940wh-
rte.pro

Version: 3

Number of Engines: 4

Name: CL02
 Description:
 Directory: c:\temp\pc1.log
 Machine: N1
 Parameter Set: 3.2
 Index: 50000000
 Seed: 18546
 Configured Users: 12350
 Pipe Name: DRIVER286005718
 Connect Rate: 11
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 233
 CPU: 0

Name: CL03
 Description:
 Directory: c:\temp\pc2.log
 Machine: N12
 Parameter Set: 3.2
 Index: 100000000
 Seed: 18546
 Configured Users: 12350
 Pipe Name: DRIVER486111687
 Connect Rate: 11
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 233
 CPU: 1

Name: CL04
 Description:
 Directory: c:\temp\pc3.log
 Machine: N13
 Parameter Set: 3.2
 Index: 150000000
 Seed: 18546
 Configured Users: 12350
 Pipe Name: DRIVER61351046
 Connect Rate: 11
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 233
 CPU: 0

Name: CL05
 Description:
 Directory: c:\temp\pc4.log
 Machine: N14
 Parameter Set: 3.2
 Index: 200000000
 Seed: 18546
 Configured Users: 12350
 Pipe Name: DRIVER51445656
 Connect Rate: 11
 Start Rate: 0

Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 233
 CPU: 1

Number of User groups: 4

Driver Engine: CL02
 IIS Server: pc1c
 SQL Server: quark
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 1 - 1235
 w_id Min Warehouse: 1
 w_id Max Warehouse: 4940
 Scale: Normal
 User Count: 12350
 District id: 1
 Scale Down: No

Driver Engine: CL03
 IIS Server: pc2c
 SQL Server: quark
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 1236 - 2470
 w_id Min Warehouse: 1
 w_id Max Warehouse: 4940
 Scale: Normal
 User Count: 12350
 District id: 1
 Scale Down: No

Driver Engine: CL04
 IIS Server: pc3c
 SQL Server: quark
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 2471 - 3705
 w_id Min Warehouse: 1
 w_id Max Warehouse: 4940
 Scale: Normal
 User Count: 12350
 District id: 1
 Scale Down: No

Driver Engine: CL05
 IIS Server: pc4c
 SQL Server: quark
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 3706 - 4940
 w_id Min Warehouse: 1
 w_id Max Warehouse: 4940
 Scale: Normal
 User Count: 12350
 District id: 1
 Scale Down: No

Number of Parameter Sets: 66

-Default
Default Parameter Set

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
12.05		18.01	0.10	5.00	0.10
			Payment	10.00	
12.05		3.01	0.10	5.00	0.10
			Delivery	1.00	
5.05		2.01	0.10	5.00	0.10
			Stock Level	1.00	
5.05		2.01	0.10	20.00	0.10
			Order Status	1.00	
10.05		2.01	0.10	5.00	0.10

Tuned Distribution

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
12.05		18.01	0.10	5.00	0.10
			Payment	43.10	
12.05		3.01	0.10	5.00	0.10
			Delivery	4.05	
5.05		2.01	0.10	5.00	0.10
			Stock Level	4.05	
5.05		2.01	0.10	20.00	0.10
			Order Status	4.05	
10.05		2.01	0.10	5.00	0.10

No Think

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
0.00		0.00	0.00	5.00	0.00
			Payment	10.00	
0.00		0.00	0.00	5.00	0.00
			Delivery	1.00	
0.00		0.00	0.00	5.00	0.00
			Stock Level	1.00	
0.00		0.00	0.00	20.00	0.00
			Order Status	1.00	
0.00		0.00	0.00	5.00	0.00

95%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
13.00		18.01	0.10	5.00	0.10

13.00	3.01		Payment	43.10		
			0.10	5.00	0.10	
6.00	2.01		Delivery	4.05		
			0.10	5.00	0.10	
6.00	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.00	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			90%			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
16.00	18.01		New Order	44.83		
			0.10	5.00	0.10	
16.00	3.01		Payment	43.05		
			0.10	5.00	0.10	
9.00	2.01		Delivery	4.04		
			0.10	5.00	0.10	
9.00	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
14.00	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			3.0			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
36.15	0.00		New Order	44.75		
			0.10	5.00	0.10	
36.15	0.00		Payment	43.10		
			0.10	5.00	0.10	
15.15	0.00		Delivery	4.05		
			0.10	5.00	0.10	
15.15	0.00		Stock Level	4.05		
			0.10	20.00	0.10	
30.15	0.00		Order Status	4.05		
			0.10	5.00	0.10	
			4.0			
			4.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
48.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
48.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
20.20	2.01		Delivery	4.05		
			0.10	5.00	0.10	
20.20	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
40.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.8			
			3.8 tt			

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
45.70	18.01		New Order	44.75		
			0.10	5.00	0.10	
45.70	3.01		Payment	43.10		
			0.10	5.00	0.10	
19.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
19.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
38.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.6			
			3.6 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
43.30	18.01		New Order	44.75		
			0.10	5.00	0.10	
43.30	3.01		Payment	43.10		
			0.10	5.00	0.10	
18.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
18.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
36.18	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.4			
			3.4 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
40.90	18.01		New Order	44.75		
			0.10	5.00	0.10	
40.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
17.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.2			
			3.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
38.50	18.01		New Order	44.75		
			0.10	5.00	0.10	
38.50	3.01		Payment	43.10		
			0.10	5.00	0.10	
16.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
16.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	

32.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.8			
			2.8 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
33.74	18.01		New Order	44.75		
			0.10	5.00	0.10	
33.74	3.01		Payment	43.10		
			0.10	5.00	0.10	
14.14	2.01		Delivery	4.05		
			0.10	5.00	0.10	
14.14	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
28.14	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.6			
			2.6 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
31.30	18.01		New Order	44.75		
			0.10	5.00	0.10	
31.30	3.01		Payment	43.10		
			0.10	5.00	0.10	
13.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
13.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
26.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.4			
			2.4 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
28.90	18.01		New Order	44.75		
			0.10	5.00	0.10	
28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.2			
			2.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
28.90	18.01		New Order	44.75		
			0.10	5.00	0.10	

28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.12	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.0			
			2.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
24.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
24.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
10.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
10.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
20.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			5.0			
			5.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
60.25	18.01		New Order	44.75		
			0.10	5.00	0.10	
60.25	3.01		Payment	43.10		
			0.10	5.00	0.10	
25.25	2.01		Delivery	4.05		
			0.10	5.00	0.10	
25.25	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
50.25	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			4.5			
			4.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.8			
			1.8 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
21.60	18.01		New Order	44.75		
			0.10	5.00	0.10	
21.60	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.09	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.09	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
18.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			4.2			
			4.2 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.6			
			1.6 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
19.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
19.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
8.08	2.01		Delivery	4.05		
			0.10	5.00	0.10	
8.08	2.01		Stock Level	4.05		
			0.10	20.00	0.10	

16.08	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.4			
			1.4 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
16.87	18.01		New Order	44.75		
			0.10	5.00	0.10	
16.87	3.01		Payment	43.10		
			0.10	5.00	0.10	
7.07	2.01		Delivery	4.05		
			0.10	5.00	0.10	
7.07	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
14.07	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.2			
			1.2 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.46	18.01		New Order	44.83		
			0.10	5.00	0.10	
14.46	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.06	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.06	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.9			
			1.9 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
22.89	18.01		New Order	44.75		
			0.10	5.00	0.10	

22.89	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.59	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.59	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
19.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.1			
			1.1 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.25	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.25	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.55	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.55	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
11.05	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.05			
			1.05 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.65	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.65	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.30	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.30	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.55	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.09			
			1.09 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.13	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.13	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.50	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.50	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.95	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.08			
			1.08 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.01	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.01	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.45	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.45	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.85	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.07			
			1.07 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.89	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.89	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.40	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.40	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.75	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.06			
			1.06 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.77	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.77	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.35	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.35	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.65	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.15			
			1.15 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.85	18.01		New Order	44.75		
			0.10	5.00	0.10	
13.85	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.80	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.80	2.01		Stock Level	4.05		
			0.10	20.00	0.10	

11.55	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.25			
			1.25 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.06	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.06	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.31	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.31	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.56	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.3			
			1.3 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.66	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.66	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.56	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.56	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
13.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.12			
			1.12 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.49	18.01		New Order	44.75		
			0.10	5.00	0.10	
13.49	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.65	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.65	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.25	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.18			
			1.18 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.21	18.01		New Order	44.75		
			0.10	5.00	0.10	

14.21	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.95	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.95	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.85	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.22			
			1.22 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.70	18.01		New Order	44.75		
			0.10	5.00	0.10	
14.70	3.01		Payment	43.10		
			0.10	5.00	0.10	
6.16	2.01		Delivery	4.05		
			0.10	5.00	0.10	
6.16	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
12.26	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.28			
			1.28 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.42	18.01		New Order	44.75		
			0.10	5.00	0.10	
15.42	3.01		Payment	43.10		
			0.10	5.00	0.10	
6.46	2.01		Delivery	4.05		
			0.10	5.00	0.10	
6.46	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
12.86	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.04			
			1.04 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.53	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.53	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.25	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.25	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.45	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.03			
			1.03 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.41	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.41	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.20	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.20	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.35	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.02			
			1.02 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.29	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.29	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.15	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.15	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.25	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.01			
			1.01 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.17	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.17	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.10	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.10	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.15	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.005 best			
			1.005 tt best			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.11	18.01		New Order	44.96		
			0.10	5.00	0.10	
12.11	3.01		Payment	43.00		
			0.10	5.00	0.10	
5.07	2.01		Delivery	4.00		
			0.10	5.00	0.10	
5.07	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
5.07	2.01		Order Status	4.03		
			0.10	20.00	0.10	

10.10	2.01		Order Status	4.01		
			0.10	5.00	0.10	
			1.001 best			
			1.001 tt best			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.06	18.01		New Order	44.96		
			0.10	5.00	0.10	
12.06	3.01		Payment	43.00		
			0.10	5.00	0.10	
5.06	2.01		Delivery	4.00		
			0.10	5.00	0.10	
5.06	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.06	2.01		Order Status	4.01		
			0.10	5.00	0.10	
			1.03 better			
			1.03 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.41	18.01		New Order	44.91		
			0.10	5.00	0.10	
12.41	3.01		Payment	43.03		
			0.10	5.00	0.10	
5.20	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.20	2.01		Stock Level	4.02		
			0.10	20.00	0.10	
10.35	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.005 better			
			1.005 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.11	18.01		New Order	44.91		
			0.10	5.00	0.10	
12.11	3.01		Payment	43.03		
			0.10	5.00	0.10	
5.07	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.07	2.01		Stock Level	4.02		
			0.10	20.00	0.10	
10.10	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.02 better			
			1.02 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.29	18.01		New Order	44.91		
			0.10	5.00	0.10	

12.29	3.01		Payment	43.03		
			0.10	5.00	0.10	
5.15	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.15	2.01		Stock Level	4.02		
			0.10	20.00	0.10	
10.25	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.01 best			
			1.01 tt best			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.17	18.01		New Order	44.96		
			0.10	5.00	0.10	
12.17	3.01		Payment	43.00		
			0.10	5.00	0.10	
5.10	2.01		Delivery	4.00		
			0.10	5.00	0.10	
5.10	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.15	2.01		Order Status	4.01		
			0.10	5.00	0.10	
			1.02 best			
			1.02 tt best			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.29	18.01		New Order	44.96		
			0.10	5.00	0.10	
12.29	3.01		Payment	43.00		
			0.10	5.00	0.10	
5.15	2.01		Delivery	4.00		
			0.10	5.00	0.10	
5.15	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.25	2.01		Order Status	4.01		
			0.10	5.00	0.10	
			1.03 best			
			1.03 tt best			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.41	18.01		New Order	44.96		
			0.10	5.00	0.10	
12.41	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.20	2.01		Delivery	4.01		
			0.10	5.00	0.10	
5.20	2.01		Stock Level	4.01		
			0.10	20.00	0.10	
10.35	2.01		Order Status	4.01		
			0.10	5.00	0.10	
			5.5			
			5.5 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
66.28	18.01		New Order	44.83		
			0.10	5.00	0.10	
66.28	3.01		Payment	43.05		
			0.10	5.00	0.10	
27.77	2.01		Delivery	4.04		
			0.10	5.00	0.10	
27.77	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
55.27	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			6.0			
			6.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
72.30	18.01		New Order	44.83		
			0.10	5.00	0.10	
72.30	3.01		Payment	43.05		
			0.10	5.00	0.10	
30.30	2.01		Delivery	4.04		
			0.10	5.00	0.10	
30.30	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
60.30	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			6.5			
			6.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
79.53	18.01		New Order	44.83		
			0.10	5.00	0.10	
79.53	3.01		Payment	43.05		
			0.10	5.00	0.10	
33.33	2.01		Delivery	4.04		
			0.10	5.00	0.10	
33.33	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
66.33	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			7.0			
			7.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
84.35	18.01		New Order	44.83		
			0.10	5.00	0.10	
84.35	3.01		Payment	43.05		
			0.10	5.00	0.10	
35.35	2.01		Delivery	4.04		
			0.10	5.00	0.10	
35.35	2.01		Stock Level	4.04		
			0.10	20.00	0.10	

70.35	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			7.5			
			7.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
90.38	18.01		New Order	44.83		
			0.10	5.00	0.10	
90.38	3.01		Payment	43.05		
			0.10	5.00	0.10	
37.88	2.01		Delivery	4.04		
			0.10	5.00	0.10	
37.88	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
75.38	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			8.0			
			8.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
96.40	18.01		New Order	44.83		
			0.10	5.00	0.10	
96.40	3.01		Payment	43.05		
			0.10	5.00	0.10	
40.40	2.01		Delivery	4.04		
			0.10	5.00	0.10	
40.40	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
80.40	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			8.5			
			8.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
102.43	18.01		New Order	44.83		
			0.10	5.00	0.10	
192.43	3.01		Payment	43.05		
			0.10	5.00	0.10	
42.92	2.01		Delivery	4.04		
			0.10	5.00	0.10	
42.92	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
85.42	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			9.0			
			9.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
108.45	18.01		New Order	44.83		
			0.10	5.00	0.10	

108.45	3.01		Payment	43.05		
			0.10	5.00	0.10	
45.45	2.01		Delivery	4.04		
			0.10	5.00	0.10	
45.45	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
90.45	2.01		Order Status	4.04		
			0.10	5.00	0.10	

9.5
9.5 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
114.47	18.01		New Order	44.83	
			0.10	5.00	0.10
114.47	3.01		Payment	43.05	
			0.10	5.00	0.10
47.98	2.01		Delivery	4.04	
			0.10	5.00	0.10
47.98	2.01		Stock Level	4.04	
			0.10	20.00	0.10
95.47	2.01		Order Status	4.04	
			0.10	5.00	0.10

10
10 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
120.50	18.01		New Order	44.83	
			0.10	5.00	0.10
120.50	3.01		Payment	43.05	
			0.10	5.00	0.10
50.50	2.01		Delivery	4.04	
			0.10	5.00	0.10
50.50	2.01		Stock Level	4.04	
			0.10	20.00	0.10
100.50	2.01		Order Status	4.04	
			0.10	5.00	0.10

1.02 better
1.02 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.05	18.01		New Order	44.91	
			0.10	5.00	0.10
12.05	3.01		Payment	43.03	
			0.10	5.00	0.10
5.05	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.05	2.01		Stock Level	4.02	
			0.10	20.00	0.10
10.05	2.01		Order Status	4.02	
			0.10	5.00	0.10

1.01 better
1.01 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.17	18.01		New Order	44.91	
			0.10	5.00	0.10
12.17	3.01		Payment	43.03	
			0.10	5.00	0.10
5.10	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.10	2.01		Stock Level	4.02	
			0.10	20.00	0.10
10.15	2.01		Order Status	4.02	
			0.10	5.00	0.10

1.005 better
1.005 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.11	18.01		New Order	44.91	
			0.10	5.00	0.10
12.11	3.01		Payment	43.03	
			0.10	5.00	0.10
5.07	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.07	2.01		Stock Level	4.02	
			0.10	20.00	0.10
10.10	2.01		Order Status	4.02	
			0.10	5.00	0.10

1.001 better
1.001 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.06	18.01		New Order	44.91	
			0.10	5.00	0.10
12.06	3.01		Payment	43.03	
			0.10	5.00	0.10
5.06	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.06	2.01		Stock Level	4.02	
			0.10	20.00	0.10
10.06	2.01		Order Status	4.02	
			0.10	5.00	0.10

1.05 better
1.05 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.65	18.01		New Order	44.91	
			0.10	5.00	0.10
12.65	3.01		Payment	43.03	
			0.10	5.00	0.10
5.30	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.30	2.01		Stock Level	4.02	
			0.10	20.00	0.10

10.55	2.01		Order Status	4.02	
			0.10	5.00	0.10

Internet Information Server Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]
"ListenBackLog"=dword:00002710
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,00,00,00,00
"PoolThreadLimit"=dword:00000258
"ThreadTimeout"=dword:00015180
"MaxConnections"=dword:00002af8
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance]
"Library"="infcotrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:00000842
"Last Help"=dword:00000843
"First Counter"=dword:00000802
"First Help"=dword:00000803
"Library Validation Code"=hex:78,d4,04,90,33,e8,bf,01,10,25,00,00,00,00,00
"WbemAdapFileTime"=hex:00,33,eb,ce,35,f3,bf,01
"WbemAdapFileSize"=dword:00002510
"WbemAdapStatus"=dword:00000000
```

World Wide Web Service Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]
"Type"=dword:00000020
```

```

"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,0
0,4e,00,54,00,5c,00,53,00,\
79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00
,6e,00,65,00,74,00,73,\
00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e
,00,66,00,6f,00,2e,00,\
65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,0
0,4d,00,49,00,4e,00,00,00,\
00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and
administration through the Internet Information
Services snap-in."

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\ASP]
"NOTE"="This is for backward compatibility only."

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\ASP\Parameters]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\WINNT\System32\inet_srv"
"CertMapList"="C:\WINNT\System32\inet_srv\iisrmap
.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\WINNT\System32\LogFiles"
"AcceptExOutstanding"=dword:00000028

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters\ADCLaunch]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters\Script Map]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Parameters\Virtual Roots]
"/"="c:\inetpub\wwwroot,,207"
"/Scripts"="c:\inetpub\scripts,,204"
"/IISHelp"="c:\winnt\help\iishelp,,201"
"/IISAdmin"="C:\WINNT\System32\inet_srv\iisadmin,,
201"
"/IISSamples"="c:\inetpub\iissamples,,201"
"/MSADC"="c:\program files\common
files\system\msadc,,205"
"/Printers"="C:\WINNT\web\printers,,201"

```

```

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Performance]
"Library"="w3ctrs.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation
Code"=hex:8c,fa,76,93,33,e8,bf,01,10,3d,00,00,00,00,0
0,00
"WbemAdapFileTime"=hex:00,4e,d8,65,ab,1e,c1,01
"WbemAdapFileSize"=dword:00001d10
"WbemAdapStatus"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Security]
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14
,00,00,00,30,00,00,00,02,\
00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,00,01,00,00,\
00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00
,01,01,00,00,00,00,00,\
05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01
,02,00,00,00,00,00,05,\
20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01
,02,00,01,01,00,00,00,\
00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02
,00,01,02,00,00,00,00,\
00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00
,00,00,00,05,12,00,00,\
00,01,01,00,00,00,00,00,05,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Enum]
"0"="Root\LEGACY_W3SVC\00000"
"Count"=dword:00000001
"NextInstance"=dword:00000001

```

Server Registry Parameters

Windows Registry Editor Version 5.00

```

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\
Session Manager\I/O System]
"LargeIrpStackLocations"=dword:00000007
"CountOperations"=dword:00000000

```

TPCC Application Registry Parameters

Windows Registry Editor Version 5.00

```

[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="c:\inetpub\wwwroot\"
"NumberOfDeliveryThreads"=dword:00000008
"MaxConnections"=dword:00002710
"MaxPendingDeliveries"=dword:000003e8
"DB_Protocol"="dblib"
"TxnMonitor"="COM"
"DbServer"="quark"
"DbName"="tpcc"
"DbUser"="sa"
"DbPassword"=""
"COM_SinglePool"="YES"

```

Server Bus Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpgcissb
Class Name: <NO CLASS>
Last Write Time: 8/21/2002 - 1:50 PM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start
Type: REG_DWORD
Data: 0

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

```


Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpgcissb.sys

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-Miniport Bus Driver

Value 6
Name: Group
Type: REG_SZ
Data: port

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissb\Parameters
Class Name: <NO CLASS>
Last Write Time: 7/29/2002 - 10:48 AM

Value 0
Name: CompletionMode
Type: REG_DWORD
Data: 0x2

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissb\Parameters\Controller0
Class Name: <NO CLASS>
Last Write Time: 7/26/2002 - 4:20 PM

Value 0
Name: CompletionMode
Type: REG_DWORD
Data: 0x1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissb\Security
Class Name: <NO CLASS>
Last Write Time: 7/15/2002 - 4:02 PM

Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 90 00 00 00 - 9c 00 00 00 14
00 00 00
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 y.....
00000030 02 00 60 00 04 00 00 00 - 00 00 14 00 fd
01 02 00 ..`.....y...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 y.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00

00000070 00 00 00 05 0b 00 00 00 - 00 00 18 00 fd
01 02 00y...
00000080 01 02 00 00 00 00 05 - 20 00 00 00 23
02 00 00#...
00000090 01 01 00 00 00 00 05 - 12 00 00 00 01
01 00 00
00 00 00 05 12 00 00 00 -
.....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissb\Enum
Class Name: <NO CLASS>
Last Write Time: 8/21/2002 - 1:50 PM

Value 0
Name: 0
Type: REG_SZ
Data:
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&107002
0&0&08

Value 1
Name: Count
Type: REG_DWORD
Data: 0x5

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x5

Value 3
Name: 1
Type: REG_SZ
Data:
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&107002
0&0&10

Value 4
Name: 2
Type: REG_SZ
Data:
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&29e819
82&0&08

Value 5
Name: 3
Type: REG_SZ
Data:
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&29e819
82&0&10

Value 6
Name: 4
Type: REG_SZ
Data:
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&172e68
dd&0&10

Server Disk Device Performance Driver Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissd
Class Name: <NO CLASS>
Last Write Time: 8/21/2002 - 1:50 PM

Value 0
Name: Type
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start
Type: REG_DWORD
Data: 0

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpgcissd.sys

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-Miniport Disk Driver

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpgcissd\Security
Class Name: <NO CLASS>
Last Write Time: 7/15/2002 - 4:09 PM

Value 0
Name: Security

```

Type:          REG_BINARY
Data:
00000000  01 00 14 80 90 00 00 00 - 9c 00 00 00 14
00 00 00  .....
00000010  30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00  0.....
00000020  ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00  Ÿ.....
00000030  02 00 60 00 04 00 00 00 - 00 00 14 00 fd
01 02 00  ..`.....Ÿ...
00000040  01 01 00 00 00 00 00 05 - 12 00 00 00 00
00 18 00  .....
00000050  ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00  Ÿ.....
00000060  20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00  .....
00000070  00 00 00 05 0b 00 00 00 - 00 00 18 00 fd
01 02 00  .....Ÿ...
00000080  01 02 00 00 00 00 00 05 - 20 00 00 00 23
02 00 00  .....#...
00000090  01 01 00 00 00 00 00 05 - 12 00 00 00 01
01 00 00  .....
00 00 00 05 12 00 00 00 -
.....

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissd\Enum
Class Name:      <NO CLASS>
Last Write Time: 8/21/2002 - 1:50 PM
Value 0
Name:           0
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&33332ab
6&0&0000004000000000

```

```

Value 1
Name:          Count
Type:         REG_DWORD
Data:         0xc

```

```

Value 2
Name:          NextInstance
Type:         REG_DWORD
Data:         0xc

```

```

Value 3
Name:          1
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636
0&0&0000004000000000

```

```

Value 4
Name:          2
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636
0&0&0100004000000000

```

```
Value 5
```

```

Name:          3
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636
0&0&0200004000000000

```

```

Value 6
Name:          4
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&38eb484
0&0&0000004000000000

```

```

Value 7
Name:          5
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&38eb484
0&0&0100004000000000

```

```

Value 8
Name:          6
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e
a&0&0000004000000000

```

```

Value 9
Name:          7
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e
a&0&0100004000000000

```

```

Value 10
Name:          8
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e
a&0&0200004000000000

```

```

Value 11
Name:          9
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67
&0&0000004000000000

```

```

Value 12
Name:          10
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67
&0&0100004000000000

```

```

Value 13
Name:          11
Type:         REG_SZ
Data:
HPQCISS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67
&0&0200004000000000

```

System Summary

System Information report written at: 08/21/02
10:00:12
System Name: QUARK
[System Summary]

Item	Value
OS Name	Microsoft® Windows® .NET Enterprise Server

Version	5.2.3663	Build 3663
OS Manufacturer	Microsoft Corporation	
Activation Status	Activation Pending (32 days remaining)	
System Name	QUARK	
System Manufacturer	Compaq	
System Model	ProLiant DL580 G2	
System Type	X86-based PC	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
Processor x86 Family	15	Model 1 Stepping 1
GenuineIntel	~1599 Mhz	
BIOS Version/Date	Compaq P27, 6/21/2002	
SMBIOS Version	2.3	
Windows Directory	C:\WINDOWS	
System Directory	C:\WINDOWS\system32	
Boot Device	\Device\HarddiskVolume13	
Locale	United States	
Hardware Abstraction Layer	Version = "5.2.3663.0 (main.020715-1506)"	
User Name	QUARK\Administrator	
Time Zone	Central Daylight Time	
Total Physical Memory	32,768.00 MB	
Available Physical Memory	31.53 GB	
Total Virtual Memory	65.64 GB	
Available Virtual Memory	65.07 GB	
Page File Space	33.64 GB	
Page File	C:\pagefile.sys	

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device
I/O Port	0x00000000-0x000000CF PCI bus

I/O Port 0x00000000-0x000000CF	PCI bus	0x000003C0-0x000003DF	RAGE XL PCI (Microsoft Corporation)	OK	0x00000376-0x00000376	Secondary IDE Channel
I/O Port 0x00000000-0x000000CF access controller	Direct memory access controller	0x00001800-0x000018FF	Base System Device	OK	0x00003000-0x000030FF	PCI bus OK
I/O Port 0x000003C0-0x000003DF	PCI bus	0x00002400-0x000024FF	Base System Device	OK	0x00003000-0x000030FF	Compaq Smart Array 5i Controller
I/O Port 0x000003C0-0x000003DF (Microsoft Corporation)	RAGE XL PCI	0x00002800-0x000028FF	RAGE XL PCI (Microsoft Corporation)	OK	0x00004000-0x000044FF	PCI bus OK
Memory Address 0xF7E00000-0xF7FFFFFF	PCI bus	0x00000A79-0x00000A79	ISAPNP Read Data Port	OK	0x00004000-0x000044FF	Smart Array 5300 Controller (Non-Miniport)
Memory Address 0xF7E00000-0xF7FFFFFF 5300 Controller (Non-Miniport)	Smart Array	0x00000279-0x00000279	ISAPNP Read Data Port	OK	0x00004400-0x000044FF	Smart Array 5300 Controller (Non-Miniport)
IRQ 5 Base System Device		0x00000274-0x00000277	ISAPNP Read Data Port	OK	0x00005000-0x000054FF	PCI bus OK
IRQ 5 Compaq PCI Hotplug Controller		0x00000F50-0x00000F58	Motherboard resources	OK	0x00005000-0x000054FF	Smart Array 5300 Controller (Non-Miniport)
I/O Port 0x00006000-0x000060FF	PCI bus	0x00000020-0x00000021	Programmable interrupt controller	OK	0x00005400-0x000054FF	Smart Array 5300 Controller (Non-Miniport)
I/O Port 0x00006000-0x000060FF 5300 Controller (Non-Miniport)	Smart Array	0x000000A0-0x000000A1	Programmable interrupt controller	OK	0x00006000-0x000060FF	PCI bus OK
I/O Port 0x00003000-0x000030FF	PCI bus	0x00000C00-0x00000C01	Programmable interrupt controller	OK	0x00006000-0x000060FF	Smart Array 5300 Controller (Non-Miniport)
I/O Port 0x00003000-0x000030FF Array 5i Controller	Compaq Smart Array 5i Controller	0x00000040-0x00000043	System timer	OK		
I/O Port 0x00005000-0x000054FF	PCI bus	0x00000080-0x0000008F	Direct memory access controller	OK	[IRQs]	
I/O Port 0x00005000-0x000054FF 5300 Controller (Non-Miniport)	Smart Array	0x000000C0-0x000000DF	Direct memory access controller	OK	Resource Device Status	
Memory Address 0xA0000-0xBFFFF	PCI bus	0x0000040B-0x0000040B	Direct memory access controller	OK	IRQ 9 Microsoft ACPI-Compliant System	OK
Memory Address 0xA0000-0xBFFFF (Microsoft Corporation)	RAGE XL PCI	0x000004D6-0x000004D6	Direct memory access controller	OK	IRQ 3 Base System Device	OK
I/O Port 0x000003B0-0x000003BB	PCI bus	0x00000061-0x00000061	System speaker	OK	IRQ 5 Base System Device	OK
I/O Port 0x000003B0-0x000003BB (Microsoft Corporation)	RAGE XL PCI	0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 5 Compaq PCI Hotplug Controller	OK
I/O Port 0x00004000-0x000044FF	PCI bus	0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 0 System timer	OK
I/O Port 0x00004000-0x000044FF 5300 Controller (Non-Miniport)	Smart Array	0x0000002E-0x0000002F	Extended IO Bus	OK	IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
[DMA]		0x00000220-0x00000223	Extended IO Bus	OK	IRQ 12 PS/2 Compatible Mouse	OK
Resource Device Status		0x00000230-0x00000233	Extended IO Bus	OK	IRQ 4 Communications Port (COM1)	OK
Channel 7 Direct memory access controller	OK	0x00000240-0x0000025F	Extended IO Bus	OK	IRQ 6 Standard floppy disk controller	OK
Channel 2 Standard floppy disk controller	OK	0x00000260-0x00000267	Extended IO Bus	OK	IRQ 14 Primary IDE Channel	OK
[Forced Hardware]		0x000003F8-0x000003FF	Communications Port (COM1)	OK	IRQ 7 ServerWorks (RCC) PCI to USB Open Host Controller	OK
Device PNP Device ID		0x000003F2-0x000003F5	Standard floppy disk controller	OK	IRQ 31 Compaq Smart Array 5i Controller	OK
[I/O]		0x000003F7-0x000003F7	Standard floppy disk controller	OK	IRQ 18 Smart Array 5300 Controller (Non-Miniport)	OK
Resource Device Status		0x00002000-0x0000200F	Standard Dual Channel PCI IDE Controller	OK	IRQ 16 Smart Array 5300 Controller (Non-Miniport)	OK
0x00000000-0x000000CF	PCI bus OK	0x000001F0-0x000001F7	Primary IDE Channel	OK	IRQ 10 Compaq PCI Hotplug Controller	OK
0x00000000-0x000000CF	PCI bus OK	0x000003F6-0x000003F6	Primary IDE Channel	OK	IRQ 22 Smart Array 5300 Controller (Non-Miniport)	OK
0x00000000-0x000000CF controller	Direct memory access controller	0x00000170-0x00000177	Secondary IDE Channel	OK	IRQ 20 Smart Array 5300 Controller (Non-Miniport)	OK
0x000003B0-0x000003BB	PCI bus OK				IRQ 26 BCM5701 Gigabit Ethernet	OK
0x000003B0-0x000003BB	RAGE XL PCI (Microsoft Corporation)				IRQ 24 Smart Array 5300 Controller (Non-Miniport)	OK
0x000003C0-0x000003DF	PCI bus OK					
					[Memory]	
					Resource Device Status	
					0xA0000-0xBFFFF	PCI bus OK
					0xA0000-0xBFFFF	RAGE XL PCI (Microsoft Corporation)
					0xF5F00000-0xF71FFFFFF	OK
					0xF71F0000-0xF71F01FF	PCI bus OK
					0xF71E0000-0xF71E07FF	Base System Device
						OK

```

0xF71D0000-0xF71D1FFF Base System Device OK
0xF7100000-0xF717FFFF Base System Device OK
0xF6000000-0xF6FFFFFF RAGE XL PCI (Microsoft Corporation) OK
0xF5FF0000-0xF5FF0FFF RAGE XL PCI (Microsoft Corporation) OK
0xF5FE0000-0xF5FE0FFF ServerWorks (RCC) PCI to USB Open Host Controller
0xF7200000-0xF73FFFFF PCI bus OK
0xF73C0000-0xF73FFFFF Compaq Smart Array 5i Controller OK
0xF72F0000-0xF72F3FFF Compaq Smart Array 5i Controller OK
0xF7400000-0xF78FFFFF PCI bus OK
0xF78C0000-0xF78FFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7700000-0xF77FFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF76C0000-0xF76FFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7500000-0xF75FFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF74F0000-0xF74F0FFF Compaq PCI Hotplug Controller OK
0xF7900000-0xF7DFFFFF PCI bus OK
0xF7DC0000-0xF7DFFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7C00000-0xF7CFFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7BC0000-0xF7BFFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7A00000-0xF7AFFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF79F0000-0xF79F0FFF Compaq PCI Hotplug Controller OK
0xF7E00000-0xF7FFFFFF PCI bus OK
0xF7E00000-0xF7FFFFFF Smart Array 5300 Controller (Non-Miniport) OK
0xF7FF0000-0xF7FFFFFF BCM5701 Gigabit Ethernet OK
0xF7F80000-0xF7FBFFFF Smart Array 5300 Controller (Non-Miniport) OK

```

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\sl_anet.acm	Sipro Lab Telecom Inc.	Sipro Lab Telecom Audio Codec	OK	SL_ANET.ACM	3.02	84.00 KB (86,016 bytes)	7/16/2002 7:00 AM

```

c:\windows\system32\msg723.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSG723.ACM 4.4.4000 116.00 KB (118,784 bytes) 7/26/2002 4:28 PM
c:\windows\system32\l3codeca.acm Fraunhofer Institut Integrierte Schaltungen IIS Fraunhofer IIS MPEG Layer-3 Codec OK
C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msg711.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSG711.ACM 5.2.3663.0 (main.020715-1506) 10.00 KB (10,240 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msgsm32.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM 5.2.3663.0 (main.020715-1506) 20.00 KB (20,480 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msadp32.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSADP32.ACM 5.2.3663.0 (main.020715-1506) 14.50 KB (14,848 bytes) 7/16/2002 7:00 AM
c:\windows\system32\tssoft32.acm DSP GROUP, INC. OK
C:\WINDOWS\system32\TSSOFT32.ACM 1.01 9.50 KB (9,728 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msaud32.acm Microsoft Corporation Windows Media Audio Codec OK
C:\WINDOWS\system32\MSAUD32.ACM 8.00.00.4477 288.00 KB (294,912 bytes) 7/16/2002 7:00 AM
c:\windows\system32\imaadp32.acm Microsoft Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM 5.2.3663.0 (main.020715-1506) 15.50 KB (15,872 bytes) 7/16/2002 7:00 AM

```

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\msvidc32.dll	Microsoft Corporation	Microsoft Video Codec	OK	MSVIDC32.DLL	5.2.3663.0 (main.020715-1506)	26.50 KB (27,136 bytes)	7/16/2002 7:00 AM
c:\windows\system32\msh261.drv	Microsoft Corporation	Microsoft Video Codec	OK	MSH261.DRV	4.4.4000	180.00 KB (184,320 bytes)	7/26/2002 4:28 PM
c:\windows\system32\tsbyuv.dll	Microsoft Corporation	Microsoft Video Codec	OK	TSEBYUV.DLL	5.2.3663.0 (main.020715-1506)	8.00 KB (8,192 bytes)	7/16/2002 8:48 AM

```

c:\windows\system32\iccvld.dll Radius Inc. OK
C:\WINDOWS\system32\ICCVLD.DLL 1.10.0.6 108.00 KB (110,592 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msh263.drv Microsoft Corporation OK
C:\WINDOWS\system32\MSH263.DRV 4.4.4000 280.00 KB (286,720 bytes) 7/16/2002 8:46 AM
c:\windows\system32\mrslr32.dll Microsoft Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL 5.2.3663.0 (main.020715-1506) 10.50 KB (10,752 bytes) 7/16/2002 7:00 AM
c:\windows\system32\ir32_32.dll Not Available OK
C:\WINDOWS\system32\IR32_32.DLL Not Available 194.50 KB (199,168 bytes) 7/16/2002 7:00 AM
c:\windows\system32\msyuv.dll Microsoft Corporation OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3663.0 (main.020715-1506) 16.50 KB (16,896 bytes) 7/16/2002 8:47 AM
c:\windows\system32\iyuv_32.dll Microsoft Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL 5.2.3663.0 (main.020715-1506) 45.00 KB (46,080 bytes) 7/16/2002 8:47 AM

```

[CD-ROM]

Item	Value
Drive D:	CD-ROM Drive
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	COMPAQ CRN-8245B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMCOMPAQ_CRN-8245B
Driver	c:\windows\system32\drivers\cdrom.sys (5.2.3663.0 (main.020715-1506), 47.75 KB (48,896 bytes), 7/16/2002 7:00 AM)

[Sound Device]

Item	Value
Item	Value

[Display]

Item	Value
Name	RAGE XL PCI (Microsoft Corporation)
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_27\3&267A616A&0&18
Adapter Type	ATI RAGE XL PCI (B41), ATI Technologies Inc. compatible

```

Adapter Description RAGE XL PCI (Microsoft
Corporation)
Adapter RAM      8.00 MB (8,388,608 bytes)
Installed Drivers ati2drad.dll
Driver Version   5.10.2600.6009
INF File         atiixpad.inf (ati2mpad section)
Color Planes    1
Color Table Entries 4294967296
Resolution      800 x 600 x 85 hertz
Bits/Pixel      32
Memory Address  0xF6000000-0xF6FFFFFF
I/O Port        0x00002800-0x000028FF
Memory Address  0xF5FF0000-0xF5FF0FFF
I/O Port        0x000003B0-0x000003BB
I/O Port        0x000003C0-0x000003DF
Memory Address  0xA0000-0xBFFFF
Driver          c:\windows\system32\drivers\ati2mpad.sys
(5.10.2600.6009 built by: jlu, 296.13 KB (303,232
bytes), 7/11/2002 11:38 AM)

[Infrared]

Item      Value

[Input]

[Keyboard]

Item      Value
Description  Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name        Enhanced (101- or 102-key)
Layout      00000409
PNP Device ID  ACPI\PNP0303\4&35118DFF&0
Number of Function Keys  12
I/O Port    0x00000060-0x00000060
I/O Port    0x00000064-0x00000064
IRQ Channel IRQ 1
Driver      c:\windows\system32\drivers\i804prt.sys
(5.2.3663.0 (main.020715-1506), 50.50 KB (51,712
bytes), 7/16/2002 7:00 AM)

[Pointing Device]

Item      Value
Hardware Type  PS/2 Compatible Mouse
Number of Buttons  3
Status        OK
PNP Device ID  ACPI\PNP0F13\4&35118DFF&0
Power Management Supported  No
Double Click Threshold  6
Handedness    Right Handed Operation
IRQ Channel   IRQ 12
Driver        c:\windows\system32\drivers\i804prt.sys
(5.2.3663.0 (main.020715-1506), 50.50 KB (51,712
bytes), 7/16/2002 7:00 AM)

[Modem]

Item      Value

```

```

[Network]

[Adapter]

Item      Value
Name      [00000001] BCM5701 Gigabit Ethernet
Adapter Type Ethernet 802.3
Product Type BCM5701 Gigabit Ethernet
Installed Yes
PNP Device ID
PCI\VEN_14E4&DEV_1645&SUBSYS_007C0E11&REV_1
5\3&172E68DD&0&08
Last Reset 8/8/2002 2:39 PM
Index      1
Service Name b57w2k
IP Address 130.168.11.8, 129.167.11.1
IP Subnet 255.255.0.0, 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:02:A5:E7:23:3A
Memory Address 0xF7FF0000-0xF7FFFFFF
IRQ Channel IRQ 26
Driver      c:\windows\system32\drivers\b57xp32.sys
(2.67.0.0 built by: WinDDK, 131.63 KB (134,784
bytes), 7/11/2002 11:37 AM)

Name      [00000002] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 8/8/2002 2:39 PM
Index      2
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name      [00000003] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPORT\0000
Last Reset 8/8/2002 2:39 PM
Index      3
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available

```

```

MAC Address Not Available
Driver      c:\windows\system32\drivers\rasl2tp.sys
(5.2.3663.0 (main.020715-1506), 61.63 KB (63,104
bytes), 7/16/2002 7:00 AM)

Name      [00000004] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset 8/8/2002 2:39 PM
Index      4
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Driver      c:\windows\system32\drivers\rasppptp.sys
(5.2.3663.0 (main.020715-1506), 56.00 KB (57,344
bytes), 7/16/2002 7:00 AM)

Name      [00000005] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
Last Reset 8/8/2002 2:39 PM
Index      5
Service Name Raspppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30
Driver      c:\windows\system32\drivers\raspppoe.sys
(5.2.3663.0 (main.020715-1506), 36.88 KB (37,760
bytes), 7/16/2002 7:00 AM)

Name      [00000006] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTMINIPORT\0000
Last Reset 8/8/2002 2:39 PM
Index      6
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

```

Driver c:\windows\system32\drivers\raspti.sys
(5.2.3663.0 (main.020715-1506), 16.38 KB (16,768 bytes), 7/16/2002 7:00 AM)

Name [00000007] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 8/8/2002 2:39 PM
Index 7
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Driver c:\windows\system32\drivers\ndiswan.sys
(5.2.3663.0 (main.020715-1506), 87.13 KB (89,216 bytes), 7/16/2002 7:00 AM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{91EB37D4-A2D5-4C7E-986F-E8D69F3BE03A}]	SEQPACKET 0
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{91EB37D4-A2D5-4C7E-986F-E8D69F3BE03A}]	DATAGRAM 0
Connectionless Service	Yes

Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{0BD8FCD0-D5CD-4C0D-A07C-2AFB36A4A45C}]	SEQPACKET 1
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{0BD8FCD0-D5CD-4C0D-A07C-2AFB36A4A45C}]	DATAGRAM 1
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{51F84283-E411-4CDD-818F-EF0DAFAD320B}]	SEQPACKET 2
Connectionless Service	No

```

Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS
[Device\NetBT_Tcpip_{51F84283-E411-4CDD-818F-
EF0DAFAD320B}] DATAGRAM 2
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item Value
File c:\windows\system32\winsock.dll
Size 2.80 KB (2,864 bytes)
Version 3.10

File c:\windows\system32\wsock32.dll
Size 22.00 KB (22,528 bytes)
Version 5.2.3663.0 (main.020715-1506)

[Ports]

[Serial]

Item Value
Name Communications Port (COM1)
Status OK
PNP Device ID ACPI\PNP0501\0
Maximum Input Buffer Size 0
Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes

```

```

Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue XMit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0
IRQ Channel IRQ 4
I/O Port 0x000003F8-0x000003FF
Driver c:\windows\system32\drivers\serial.sys
(5.2.3663.0 (main.020715-1506), 61.63 KB (63,104
bytes), 7/16/2002 7:00 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value
Drive A:
Description 3 1/2 Inch Floppy Drive

Drive C:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 16.95 GB (18,198,999,040 bytes)
Free Space 13.00 GB (13,956,407,296 bytes)

Volume Name
Volume Serial Number E40F04B8

```

```

Drive D:
Description CD-ROM Disc

Drive E:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive F:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive G:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive H:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive I:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive J:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive K:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available

```

Volume Name Not Available
Volume Serial Number Not Available

Drive L:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive M:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive W:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 244.14 GB (262,139,637,760 bytes)
Free Space 63.26 GB (67,926,151,168 bytes)

Volume Name backup1
Volume Serial Number ECD4D755

Drive X:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 244.14 GB (262,139,637,760 bytes)
Free Space 63.29 GB (67,962,044,416 bytes)

Volume Name backup2
Volume Serial Number 6C214D7A

Drive Y:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 244.14 GB (262,139,637,760 bytes)
Free Space 63.15 GB (67,801,587,712 bytes)

Volume Name backup3
Volume Serial Number B48ECE0

[Disks]

Item	Value
Description	\\.\PHYSICALDRIVE1
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available

SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 65.23 GB (70,038,259,200 bytes)
Total Cylinders 8,515
Total Sectors 136,793,475
Total Tracks 2,171,325
Tracks/Cylinder 255
Partition Disk #1, Partition #0
Partition Size 65.23 GB (70,038,226,944 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE2
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 34.17 GB (36,692,974,080 bytes)
Total Cylinders 4,461
Total Sectors 71,665,965
Total Tracks 1,137,555
Tracks/Cylinder 255
Partition Disk #2, Partition #0
Partition Size 34.17 GB (36,692,941,824 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 244.14 GB (262,139,673,600 bytes)
Total Cylinders 31,870
Total Sectors 511,991,550
Total Tracks 8,126,850
Tracks/Cylinder 255
Partition Disk #3, Partition #0
Partition Size 244.14 GB (262,139,641,344 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE6
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 65.23 GB (70,038,259,200 bytes)
Total Cylinders 8,515
Total Sectors 136,793,475
Total Tracks 2,171,325
Tracks/Cylinder 255
Partition Disk #6, Partition #0
Partition Size 65.23 GB (70,038,226,944 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE7
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 34.17 GB (36,692,974,080 bytes)
Total Cylinders 4,461
Total Sectors 71,665,965
Total Tracks 1,137,555
Tracks/Cylinder 255
Partition Disk #7, Partition #0
Partition Size 34.17 GB (36,692,941,824 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE8
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 244.14 GB (262,139,673,600 bytes)
Total Cylinders 31,870
Total Sectors 511,991,550
Total Tracks 8,126,850
Tracks/Cylinder 255
Partition Disk #8, Partition #0
Partition Size 244.14 GB (262,139,641,344 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE9
Manufacturer Not Available
Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 65.23 GB (70,038,259,200 bytes)
 Total Cylinders 8,515
 Total Sectors 136,793,475
 Total Tracks 2,171,325
 Tracks/Cylinder 255
 Partition Disk #9, Partition #0
 Partition Size 65.23 GB (70,038,226,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE10
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 34.17 GB (36,692,974,080 bytes)
 Total Cylinders 4,461
 Total Sectors 71,665,965
 Total Tracks 1,137,555
 Tracks/Cylinder 255
 Partition Disk #10, Partition #0
 Partition Size 34.17 GB (36,692,941,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE11
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 244.14 GB (262,139,673,600 bytes)
 Total Cylinders 31,870
 Total Sectors 511,991,550
 Total Tracks 8,126,850
 Tracks/Cylinder 255
 Partition Disk #11, Partition #0
 Partition Size 244.14 GB (262,139,641,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 126.95 GB (136,309,340,160 bytes)
 Total Cylinders 16,572
 Total Sectors 266,229,180
 Total Tracks 4,225,860
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 126.95 GB (136,309,307,904 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE4
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 65.23 GB (70,038,259,200 bytes)
 Total Cylinders 8,515
 Total Sectors 136,793,475
 Total Tracks 2,171,325
 Tracks/Cylinder 255
 Partition Disk #4, Partition #0
 Partition Size 65.23 GB (70,038,226,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 34.17 GB (36,692,974,080 bytes)
 Total Cylinders 4,461
 Total Sectors 71,665,965
 Total Tracks 1,137,555
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0

Partition Size 34.17 GB (36,692,941,824 bytes)
 Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model COMPAQ LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 4
 SCSI Logical Unit 0
 SCSI Port 2
 SCSI Target ID 0
 Sectors/Track 32
 Size 16.95 GB (18,203,197,440 bytes)
 Total Cylinders 4,357
 Total Sectors 35,553,120
 Total Tracks 1,111,035
 Tracks/Cylinder 255
 Partition Disk #12, Partition #0
 Partition Size 16.95 GB (18,199,003,136 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item	Value
Name	Compaq Smart Array 5i Controller
Manufacturer	Compaq
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_01\3&13C0B0C5&0&08
Memory Address	0xF73C0000-0xF73FFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF72F0000-0xF72F3FFF
IRQ Channel	IRQ 31
Driver	c:\windows\system32\drivers\cpqciissm.sys (5.2.3631.0 (main.020508-2335), 11.50 KB (11,776 bytes), 7/16/2002 7:00 AM)

Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&1070020&0&08
Memory Address	0xF78C0000-0xF78FFFFF
Memory Address	0xF7700000-0xF77FFFFF
I/O Port	0x00004000-0x000044FF
IRQ Channel	IRQ 18
Driver	c:\windows\system32\drivers\hpqciissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 6/17/2002 1:46 PM)
Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK

```

PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&10
Memory Address    0xF76C0000-0xF76FFFFF
Memory Address    0xF7500000-0xF75FFFFF
I/O Port          0x00004400-0x000044FF
IRQ Channel       IRQ 16
Driver            c:\windows\system32\drivers\hpcqissb.sys
(5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes),
6/17/2002 1:46 PM)

Name            Smart Array 5300 Controller (Non-Miniport)

Manufacturer     HP
Status           OK
PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&08
Memory Address    0xF7DC0000-0xF7DFFFFF
Memory Address    0xF7C00000-0xF7CFFFFF
I/O Port          0x00005000-0x000054FF
IRQ Channel       IRQ 22
Driver            c:\windows\system32\drivers\hpcqissb.sys
(5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes),
6/17/2002 1:46 PM)

Name            Smart Array 5300 Controller (Non-Miniport)

Manufacturer     HP
Status           OK
PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&10
Memory Address    0xF7BC0000-0xF7BFFFFF
Memory Address    0xF7A00000-0xF7AFFFFF
I/O Port          0x00005400-0x000054FF
IRQ Channel       IRQ 20
Driver            c:\windows\system32\drivers\hpcqissb.sys
(5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes),
6/17/2002 1:46 PM)

Name            Smart Array 5300 Controller (Non-Miniport)

Manufacturer     HP
Status           OK
PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&172E68DD&0&10
Memory Address    0xF7F80000-0xF7FBFFFF
Memory Address    0xF7E00000-0xF7FFFFFF
I/O Port          0x00006000-0x000060FF
IRQ Channel       IRQ 24
Driver            c:\windows\system32\drivers\hpcqissb.sys
(5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes),
6/17/2002 1:46 PM)

[IDE]

Item            Value
Name            Standard Dual Channel PCI IDE Controller

Manufacturer     (Standard IDE ATA/ATAPI
controllers)

```

```

Status          OK
PNP Device ID
    PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9
3\3&267A616A&0&79
I/O Port          0x00002000-0x0000200F
Driver            c:\windows\system32\drivers\pciide.sys
(5.2.3663.0 (main.020715-1506), 3.50 KB (3,584
bytes), 7/16/2002 7:00 AM)

Name            Primary IDE Channel
Manufacturer     (Standard IDE ATA/ATAPI
controllers)
Status           OK
PNP Device ID
    PCIIDE\IDECHANNEL\4&1024D5C6&0&0

I/O Port          0x000001F0-0x000001F7
I/O Port          0x000003F6-0x000003F6
IRQ Channel       IRQ 14
Driver            c:\windows\system32\drivers\atapi.sys
(5.2.3663.0 (main.020715-1506), 90.38 KB (92,544
bytes), 7/16/2002 7:00 AM)

Name            Secondary IDE Channel
Manufacturer     (Standard IDE ATA/ATAPI
controllers)
Status           OK
PNP Device ID
    PCIIDE\IDECHANNEL\4&1024D5C6&0&1

I/O Port          0x00000170-0x00000177
I/O Port          0x00000376-0x00000376
Driver            c:\windows\system32\drivers\atapi.sys
(5.2.3663.0 (main.020715-1506), 90.38 KB (92,544
bytes), 7/16/2002 7:00 AM)

[Printing]

Name            Driver            Port Name Server Name

[Problem Devices]

Device          PNP Device ID      Error Code
Base System Device
    PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
1\3&267A616A&0&10 The drivers for this device are
not installed.
Base System Device
    PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
1\3&267A616A&0&12 The drivers for this device are
not installed.

[USB]

Device          PNP Device ID
ServerWorks (RCC) PCI to USB Open Host Controller
    PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0
5\3&267A616A&0&7A
USB Root Hub    USB\ROOT_HUB\4&AF5358C&0

[Software Environment]

[System Drivers]

```

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	
acpi	Microsoft ACPI Driver		
	c:\windows\system32\drivers\acpi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC		
	c:\windows\system32\drivers\acpiec.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
afcmt	afcmt	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
afd	AFD Networking Support Environment		
	c:\windows\system32\drivers\afd.sys		
	Kernel Driver	Yes	Auto
	Running	OK	Normal No Yes
ahal54x	Ahal54x	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
aic78xx	aic78xx	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
aliide	AliIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
asynctac	RAS Asynchronous Media Driver		
	c:\windows\system32\drivers\asynctac.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
atapi	Standard IDE/ESDI Hard Disk Controller		
	c:\windows\system32\drivers\atapi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	
ati2mpad	ati2mpad		
	c:\windows\system32\drivers\ati2mpad.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes

atmarpc	ATM ARP Client Protocol c:\windows\system32\drivers\atmarpc.sys Kernel Driver No Manual Stopped OK Normal No No
audstub	Audio Stub Driver c:\windows\system32\drivers\audstub.sys Kernel Driver Yes Manual Running OK Normal No Yes
b57w2k	BCM5701 Gigabit Ethernet c:\windows\system32\drivers\b57xp32.sys Kernel Driver Yes Manual Running OK Normal No Yes
beep	Beep c:\windows\system32\drivers\beep.sys Kernel Driver Yes System Running OK Normal No Yes
cbidf2k	cbidf2k c:\windows\system32\drivers\cbidf2k.sys Kernel Driver No Disabled Stopped OK Normal No No
cd20xrnt	cd20xrnt Not Available Kernel Driver No Disabled Stopped OK Normal No No
cdfs	Cdfs c:\windows\system32\drivers\cdfs.sys File System Driver Yes Disabled Running OK Normal No Yes
cdrom	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys Kernel Driver Yes System Running OK Normal No Yes
changer	Changer Not Available Kernel Driver No System Stopped OK Ignore No No
clusdisk	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys Kernel Driver No Disabled Stopped OK Normal No No
cmdide	CmdIde Not Available Kernel Driver No Disabled Stopped OK Normal No No
cpqarray	Cpqarray Not Available Kernel Driver No Disabled Stopped OK Normal No No
cpqarray2	Cpqarray2 Not Available Kernel Driver No Disabled Stopped OK Normal No No
cpqcissm	cpqcissm c:\windows\system32\drivers\cpqcissm.sys Kernel Driver Yes Boot Running OK Normal No Yes
cpqfcalm	cpqfcalm Not Available Kernel Driver No Disabled Stopped OK Normal No No

crccdisk	CRC Disk Filter Driver c:\windows\system32\drivers\crccdisk.sys Kernel Driver Yes Boot Running OK Normal No Yes
dac960nt	dac960nt Not Available Kernel Driver No Disabled Stopped OK Normal No No
dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys File System Driver Yes Boot Running OK Normal No Yes
disk	Disk Driver c:\windows\system32\drivers\disk.sys Kernel Driver Yes Boot Running OK Normal No Yes
dmboot	dmboot c:\windows\system32\drivers\dmboot.sys Kernel Driver No Disabled Stopped OK Normal No No
dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys Kernel Driver Yes Boot Running OK Normal No Yes
dmload	dmload c:\windows\system32\drivers\dmload.sys Kernel Driver Yes Boot Running OK Normal No Yes
dpti2o	dpti2o Not Available Kernel Driver No Disabled Stopped OK Normal No No
fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys File System Driver No Disabled Stopped OK Normal No No
fdc	Floppy Disk Controller Driver c:\windows\system32\drivers\fdc.sys Kernel Driver Yes Manual Running OK Normal No Yes
fips	Fips c:\windows\system32\drivers\fips.sys Kernel Driver Yes System Running OK Normal No Yes
flpydisk	Floppy Disk Driver c:\windows\system32\drivers\flpydisk.sys Kernel Driver Yes Manual Running OK Normal No Yes
ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys Kernel Driver Yes Boot Running OK Normal No Yes
gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys

	Kernel Driver Yes Manual Running OK Normal No Yes
hpn	hpn Not Available Kernel Driver No Disabled Stopped OK Normal No No
hpqcissb	Smart Array Controllers Non-Miniport Bus Driver c:\windows\system32\drivers\hpqcissb.sys Kernel Driver Yes Boot Running OK Normal No Yes
hpqcissd	Smart Array Controllers Non-Miniport Disk Driver c:\windows\system32\drivers\hpqcissd.sys Kernel Driver Yes Boot Running OK Normal No Yes
hpt3xx	hpt3xx Not Available Kernel Driver No Disabled Stopped OK Normal No No
http	HTTP c:\windows\system32\drivers\http.sys Kernel Driver No Manual Stopped OK Normal No No
i2omgmt	i2omgmt Not Available Kernel Driver No System Stopped OK Normal No No
i2omp	i2omp Not Available Kernel Driver No Disabled Stopped OK Normal No No
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys Kernel Driver Yes System Running OK Normal No Yes
imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys Kernel Driver No System Stopped OK Normal No No
intelide	IntelIde Not Available Kernel Driver No Disabled Stopped OK Normal No No
ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys Kernel Driver No Manual Stopped OK Normal No No
ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys Kernel Driver No Manual Stopped OK Normal No No
ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys Kernel Driver No Manual Stopped OK Normal No No
ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys Kernel Driver Yes System Running OK Normal No Yes

ql12160	ql12160	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
ql1240	ql1240	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
ql1280	ql1280	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
ql2100	ql2100	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
ql2200	ql2200	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
ql2300	ql2300	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
rasacd	Remote Access Auto Connection Driver		
	c:\windows\system32\drivers\rasacd.sys		
	Kernel Driver	Yes System	
	Running	OK Normal No	Yes
rasl2tp	WAN Miniport (L2TP)		
	c:\windows\system32\drivers\rasl2tp.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
raspppoe	Remote Access PPPOE Driver		
	c:\windows\system32\drivers\raspppoe.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
raspti	Direct Parallel		
	c:\windows\system32\drivers\raspti.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
rdbss	Rdbss		
	c:\windows\system32\drivers\rdbss.sys		
	File System Driver	Yes System	
	Running	OK Normal No	Yes
rdpcdd	RDPCDD		
	c:\windows\system32\drivers\rdpcdd.sys		
	Kernel Driver	Yes System	
	Running	OK Ignore No	Yes
rdpdr	Terminal Server Device Redirector Driver		
	c:\windows\system32\drivers\rdpdr.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
rdpwd	RDPWD		
	c:\windows\system32\drivers\rdpwd.sys		
	Kernel Driver	No Manual	
	Stopped	OK Ignore No	No
redbook	Digital CD Audio Playback Filter Driver		
	c:\windows\system32\drivers\redbook.sys		
	Kernel Driver	Yes System	
	Running	OK Normal No	Yes

secdrv	Secdrv		
	c:\windows\system32\drivers\secdrv.sys		
	Kernel Driver	No Manual	
	Stopped	OK Normal No	No
serenum	Serenum Filter Driver		
	c:\windows\system32\drivers\serenum.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
serial	Serial port driver		
	c:\windows\system32\drivers\serial.sys		
	Kernel Driver	Yes System	
	Running	OK Ignore No	Yes
sfloppy	Sfloppy		
	c:\windows\system32\drivers\sfloppy.sys		
	Kernel Driver	No System	
	Stopped	OK Ignore No	No
simbad	Simbad	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
sparrow	Sparrow	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
srv	Srv		
	c:\windows\system32\drivers\srv.sys		
	File System Driver	Yes Manual	
	Running	OK Normal No	Yes
swenum	Software Bus Driver		
	c:\windows\system32\drivers\swenum.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
symc810	symc810	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
symc8xx	symc8xx	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
symmpi	symmpi	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
sym_hi	sym_hi	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
sym_u3	sym_u3	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
tcpip	TCP/IP Protocol Driver		
	c:\windows\system32\drivers\tcpip.sys		
	Kernel Driver	Yes System	
	Running	OK Normal No	Yes
tdpipe	TDPIPE		
	c:\windows\system32\drivers\tdpipe.sys		
	Kernel Driver	No Manual	
	Stopped	OK Ignore No	No
tdtcp	TDTCP		
	c:\windows\system32\drivers\tdtcp.sys		

	Kernel Driver	No Manual	
	Stopped	OK Ignore No	No
termdd	Terminal Device Driver		
	c:\windows\system32\drivers\termdd.sys		
	Kernel Driver	Yes System	
	Running	OK Normal No	Yes
toside	TosIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
udfs	Udfs		
	c:\windows\system32\drivers\udfs.sys		
	File System Driver	No Disabled	
	Stopped	OK Normal No	No
ultra	ultra	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
update	Microcode Update Driver		
	c:\windows\system32\drivers\update.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
usbhub	USB2 Enabled Hub		
	c:\windows\system32\drivers\usbhub.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
usbohci	Microsoft USB Open Host Controller Miniport Driver		
	c:\windows\system32\drivers\usbohci.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
vgasave	VGA Display Controller.		
	c:\windows\system32\drivers\vga.sys		
	Kernel Driver	Yes System	
	Running	OK Ignore No	Yes
viaide	ViaIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No No	
volsnap	VolSnap		
	c:\windows\system32\drivers\volsnap.sys		
	Kernel Driver	Yes Boot	
	Running	OK Normal No	Yes
wanarp	Remote Access IP ARP Driver		
	c:\windows\system32\drivers\wanarp.sys		
	Kernel Driver	Yes Manual	
	Running	OK Normal No	Yes
wdica	WDICA	Not Available	Kernel Driver
	No	Manual Stopped	OK
	Ignore	No No	
wlbs	Network Load Balancing		
	c:\windows\system32\drivers\wlbs.sys		
	Kernel Driver	No Manual	
	Stopped	OK Normal No	No
	[Signed Drivers]		

Device Name	Signed	Device Class	Driver Version	Driver Date	Manufacturer	INF Name	Driver Name
Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
ACPI Multiprocessor	PC	Not Available	COMPUTER	Not Available	(Standard computers)	Not Available	Not Available
Microsoft	ACPI-Compliant System	Yes	SYSTEM	5.2.3663.0	7/15/2002	Microsoft acpi.inf	Not Available
Processor	Yes	PROCESSOR	5.2.3663.0	7/15/2002	(Standard processor types)	cpu.inf	Not Available
_X86_FAMILY_15_MODEL_1\0							
Processor	Yes	PROCESSOR	5.2.3663.0	7/15/2002	(Standard processor types)	cpu.inf	Not Available
_X86_FAMILY_15_MODEL_1\1							
Processor	Yes	PROCESSOR	5.2.3663.0	7/15/2002	(Standard processor types)	cpu.inf	Not Available
_X86_FAMILY_15_MODEL_1\2							
Processor	Yes	PROCESSOR	5.2.3663.0	7/15/2002	(Standard processor types)	cpu.inf	Not Available
_X86_FAMILY_15_MODEL_1\3							
PCI bus	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ServerWorks	Grand Champion - NorthBridge	High End	Yes	SYSTEM	5.2.3663.0	7/15/2002	ServerWorks (RCC) machine.inf
Available	PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_2	2\3&267A616A&0&00	ServerWorks	Grand Champion - NorthBridge	High End	Yes	SYSTEM 5.2.3663.0 7/15/2002
Available	ServerWorks (RCC)	machine.inf	Not Available				
Available	PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0	0\3&267A616A&0&01	ServerWorks	Grand Champion - NorthBridge	High End	Yes	SYSTEM 5.2.3663.0 7/15/2002
Available	ServerWorks (RCC)	machine.inf	Not Available				
Available	PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0	0\3&267A616A&0&02	ServerWorks	Grand Champion - NorthBridge	High End	Yes	SYSTEM 5.2.3663.0 7/15/2002
Available	ServerWorks (RCC)	machine.inf	Not Available				

PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0							
0\3&267A616A&0&03							
Base System Device	Not Available	UNKNOWN	Not Available	Not Available	Not Available	Not Available	Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0							
1\3&267A616A&0&10							
Base System Device	Not Available	UNKNOWN	Not Available	Not Available	Not Available	Not Available	Not Available
PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0							
1\3&267A616A&0&12							
RAGE XL PCI (Microsoft Corporation)	Yes	DISPLAY	5.10.2600.6009	7/2/2001	ATI Technologies Inc.	atiixpad.inf	Not Available
PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2							
7\3&267A616A&0&18							
Default Monitor	Yes	MONITOR	5.1.2001.0	6/6/2001	(Standard monitor types)	monitor.inf	Not Available
DISPLAY\DEFAULT_MONITOR\4&89B5141&0&80000000							
0&00&03							
PCI standard ISA bridge	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
PCI\VEN_1166&DEV_0201&SUBSYS_00000000&REV_9							
3\3&267A616A&0&78							
ISAPNP Read Data Port	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ISAPNP\READDATAPORT\0							
Motherboard resources	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0C02\0							
Programmable interrupt controller	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0000\4&35118DFF&0							
System timer	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0100\4&35118DFF&0							
Direct memory access controller	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0200\4&35118DFF&0							
System speaker	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0800\4&35118DFF&0							
Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	Yes	KEYBOARD	5.2.3663.0	7/15/2002	(Standard keyboards)	keyboard.inf	Not Available
ACPI\PNP0303\4&35118DFF&0							
PS/2 Compatible Mouse	Yes	MOUSE	5.2.3663.0	7/15/2002	Microsoft	msmouse.inf	Not Available
ACPI\PNP0F13\4&35118DFF&0							

Extended IO Bus	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
ACPI\PNP0A06\4&35118DFF&0							
Communications Port	Yes	PORTS	5.2.3663.0	7/15/2002	(Standard port types)	msports.inf	Not Available
ACPI\PNP0501\0							
Standard floppy disk controller	Yes	FDC	5.2.3663.0	7/15/2002	(Standard floppy disk controllers)	fdc.inf	Not Available
ACPI\PNP0700\5&13237358&0							
Floppy disk drive	Yes	FLOPPYDISK	5.2.3663.0	7/15/2002	(Standard floppy disk drives)	flpydisk.inf	Not Available
FDC\GENERIC_FLOPPY_DRIVE\6&1C650E5D&0&0							
Standard Dual Channel PCI IDE Controller	Yes	HDC	5.2.3663.0	7/15/2002	(Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available
PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9							
3\3&267A616A&0&79							
Primary IDE Channel	Yes	HDC	5.2.3663.0	7/15/2002	(Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available
PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9							
3\3&267A616A&0&79							
CD-ROM Drive	Yes	CDROM	5.2.3663.0	7/15/2002	(Standard CD-ROM drives)	cdrom.inf	Not Available
IDE\CDROMCOMPAQ_CRN-8245B_____2.18_____5\FB0C83D&0&0.0							
Secondary IDE Channel	Yes	HDC	5.2.3663.0	7/15/2002	(Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available
PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0							
5\3&267A616A&0&7A							
USB Root Hub	Yes	USB	5.2.3663.0	7/15/2002	(Standard USB Host Controller)	usbport.inf	Not Available
USB\ROOT_HUB\4&AF5358C&0							
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
PCI\VEN_1166&DEV_0225&SUBSYS_00000000&REV_0							
0\3&267A616A&0&7B							
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0							
3\3&267A616A&0&80							
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0							
3\3&267A616A&0&82							
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3663.0	7/15/2002	(Standard system devices)	machine.inf	Not Available

```

system devices) machine.inf Not Available
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0
3\3&267A616A&0&88
PCI standard host CPU bridge Yes SYSTEM
5.2.3663.0 7/15/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0
3\3&267A616A&0&8A
PCI bus Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\1
Compaq Smart Array 5i Controller Yes
SCSIADAPTER 5.2.3663.0
7/15/2002 Compaq pnpscsi.inf Not
Available
PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&13C0B0C5&0&08
Compaq Virtual LUN Yes SYSTEM 5.2.3663.0
7/15/2002 Compaq scsudev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CISS\4&3349E2F1&0&000
Disk drive Yes DISKDRIVE 5.2.3663.0
7/15/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME&RE
V_1.86\4&3349E2F1&0&400
PCI bus Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/17/2002 HP
oem0.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&08
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&33332AB6&0&0000004000000000
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/17/2002 HP
oem0.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&10
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&16A16360&0&0000004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&16A16360&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&16A16360&0&0200004000000000

```

```

Compaq PCI Hotplug Controller Yes SYSTEM
5.2.3663.0 7/15/2002 Compaq
machine.inf Not Available
PCI\VEN_0E11&DEV_A0F7&SUBSYS_A2FE0E11&REV_1
4\3&1070020&0&F0
PCI bus Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\3
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/17/2002 HP
oem0.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&08
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&38EB4840&0&0000004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&38EB4840&0&0100004000000000
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/17/2002 HP
oem0.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&10
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&1C5980EA&0&0000004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&1C5980EA&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&1C5980EA&0&0200004000000000
Compaq PCI Hotplug Controller Yes SYSTEM
5.2.3663.0 7/15/2002 Compaq
machine.inf Not Available
PCI\VEN_0E11&DEV_A0F7&SUBSYS_A2FE0E11&REV_1
4\3&29E81982&0&F0
PCI bus Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\4
BCM5701 Gigabit Ethernet Yes NET
2.67.0.0 7/15/2002 netb57xp.inf
Not Available
PCI\VEN_14E4&DEV_1645&SUBSYS_007C0E11&REV_1
5\3&172E68DD&0&08
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/17/2002 HP
oem0.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&172E68DD&0&10

```

```

Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0000004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/17/2002 HP oem1.inf Not
Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0200004000000000
ACPI Thermal Zone Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ACPI\THERMALZONE\THM0
ACPI Fixed Feature Button Yes SYSTEM
5.2.3663.0 7/15/2002 (Standard
system devices) machine.inf Not Available
ACPI\FIXEDBUTTON\2&DABA3FF&0
Logical Disk Manager Yes SYSTEM
5.2.3663.0 7/15/2002 (Standard
system devices) machine.inf Not Available
ROOT\DMIO\0000
Volume Manager Yes SYSTEM 5.2.3663.0
7/15/2002 (Standard system devices)
machine.inf Not Available
ROOT\FTDISK\0000
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE3220DE
75OFFSET7E00LENGTH1FBCAFA00
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01
5COFFSET7E00LENGTH104E9A8800
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01
5DOFFSET7E00LENGTH88B11DC00
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01
5EOFFSET7E00LENGTH3D08BD7E00
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01
5FOFFSET7E00LENGTH104E9A8800
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01
4O0FFSET7E00LENGTH88B11DC00
Generic volume Yes VOLUME 5.2.3663.0
7/15/2002 Microsoft volume.inf Not

```

Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01			
42OFFSET7E00LENGTH104E9A8800			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01			
42OFFSET7E00LENGTH88B11DC00			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURE86AD01			
43OFFSET7E00LENGTH3D08BD7E00			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATUREFDC0EF			
DDOFFSET7E00LENGTH104E9A8800			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATUREFDC0EF			
DCOFFSET7E00LENGTH88B11DC00			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATUREFDC0EF			
C3OFFSET7E00LENGTH3D08BD7E00			
Generic volume	Yes	VOLUME	5.2.3663.0
7/15/2002 Microsoft volume.inf			Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2BA9B6			
E8OFFSET400LENGTH43CBEC000			
AFD Networking Support Environment			Not Available
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_AFD\0000		
Beep	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_BEEP\0000	
CRC Disk Filter Driver	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_CRCDISK\0000		
dmbboot	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMLoad\0000	
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_FIPS\0000	
Generic Packet Classifier	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_GPC\0000		
IPSEC driver	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not Available	Not

Available	Not Available	Not Available	
ROOT\LEGACY_IPSEC\0000			
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_KSECDD\0000	
mnmdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_MNMDD\0000	
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available		
ROOT\LEGACY_MOUNTMGR\0000			
NDIS System Driver	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	
ROOT\LEGACY_NDIS\0000			
Remote Access NDIS TAPI Driver		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS Usermode I/O Protocol		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISUIO\0000		
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available		
ROOT\LEGACY_NDPROXY\0000			
NetBios over Tcpip	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	
Available	Not Available	ROOT\LEGACY_NETBT\0000	
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NULL\0000	
Partition Manager	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	
ROOT\LEGACY_PARTMGR\0000			
ParVdm	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_PARVDM\0000	
Remote Access Auto Connection Driver		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_RASACD\0000		
RDPCDD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPCDD\0000	
TCP/IP Protocol Driver		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_TCPIP\0000		
VGA Display Controller.		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_VGASAVE\0000		

volsnap	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available		
ROOT\LEGACY_VOLSNAP\0000			
Remote Access IP ARP Driver		Not Available	
LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_WANARP\0000		
Audio Codecs	Yes	MEDIA	5.2.3663.0
7/15/2002 (Standard system devices)			
wave.inf	Not Available		
ROOT\MEDIA\MS_MMACH			
Legacy Audio Drivers	Yes	MEDIA	
5.2.3663.0			7/15/2002 (Standard
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMDRV			
Media Control Devices	Yes	MEDIA	
5.2.3663.0			7/15/2002 (Standard
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMMCI			
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3663.0			7/15/2002 (Standard
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMVCD			
Video Codecs	Yes	MEDIA	5.2.3663.0
7/15/2002 (Standard system devices)			
wave.inf	Not Available		
ROOT\MEDIA\MS_MMVID			
WAN Miniport (L2TP)	Yes	NET	5.2.3663.0
7/15/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_L2TPMINIPORT\0000		
WAN Miniport (IP)	Yes	NET	5.2.3663.0
7/15/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_NDISWANIP\0000		
WAN Miniport (PPPOE)	Yes	NET	
5.2.3663.0			7/15/2002 Microsoft
netrasa.inf			Not Available
ROOT\MS_PPPOEMINIPORT\0000			
WAN Miniport (PPTP)	Yes	NET	5.2.3663.0
7/15/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_PPTPMINIPORT\0000		
Direct Parallel	Yes	NET	5.2.3663.0
7/15/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_PTMINIPORT\0000		
Terminal Server Device Redirector		Yes	
SYSTEM	5.2.3663.0		7/15/2002
(Standard system devices)			machine.inf
Not Available	ROOT\RDPDR\0000		
Terminal Server Keyboard Driver		Yes	
SYSTEM	5.2.3663.0		7/15/2002
(Standard system devices)			machine.inf
Not Available	ROOT\RDP_KBD\0000		
Terminal Server Mouse Driver	Yes	SYSTEM	
5.2.3663.0			7/15/2002 (Standard
system devices)	machine.inf	Not Available	
ROOT\RDP_MOU\0000			
Plug and Play Software Device Enumerator		Yes	
SYSTEM	5.2.3663.0		7/15/2002
(Standard system devices)			machine.inf
Not Available	ROOT\SYSTEM\0000		
Microcode Update Device	Yes	SYSTEM	
5.2.3663.0			7/15/2002 (Standard

system devices) machine.inf Not Available
ROOT\SYSTEM\0001

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path %SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\system32\WBEM;C:\Program Files\Microsoft SQL
Server\80\Tools\BINN <SYSTEM>
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 15 Model 1
Stepping 1, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0101 <SYSTEM>
NUMBER_OF_PROCESSORS 8 <SYSTEM>
ClusterLog C:\WINDOWS\cluster\cluster.log
<SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
<SYSTEM>
.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
QUARK\Administrator
TMP %USERPROFILE%\Local Settings\Temp
QUARK\Administrator

[Print Jobs]

Document	Size	Owner	Notify	Status
	Time Submitted		Start Time	
	Until Time		Elapsed Time	
	Pages Printed	Job ID	Priority	
	Parameters	Driver	Print	
Processor	Host	Print Queue	Data Type	Name

[Network Connections]

Local Name	Remote Name	Type
Status	User Name	

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time		
	Version	Size	File Date	

system idle process Not Available 0 0
Not Available Not Available Not
Available Not Available Not Available Not
Available
system Not Available 4 8 0
1413120 Not Available Not Available
Not Available Not Available
smss.exe c:\windows\system32\smss.exe 448 11
204800 1413120 8/8/2002 2:41 PM
5.2.3663.0 (main.020715-1506) 46.00 KB
(47,104 bytes) 7/16/2002 7:00 AM
csrss.exe Not Available 504 13 Not
Available Not Available 8/8/2002 2:42 PM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
528 13 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 512.00 KB (524,288 bytes)
7/16/2002 7:00 AM
services.exe c:\windows\system32\services.exe
572 9 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 99.00 KB (101,376 bytes)
7/16/2002 7:00 AM
lsass.exe c:\windows\system32\lsass.exe 584 9
204800 1413120 8/8/2002 2:42 PM
5.2.3663.0 (main.020715-1506) 13.00 KB
(13,312 bytes) 7/16/2002 7:00 AM
svchost.exe c:\windows\system32\svchost.exe
740 8 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
7/16/2002 7:00 AM
svchost.exe c:\windows\system32\svchost.exe
804 8 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
7/16/2002 7:00 AM
svchost.exe Not Available 940 8
Not Available Not Available
8/8/2002 2:42 PM Not Available Not
Available Not Available
svchost.exe Not Available 988 8
Not Available Not Available
8/8/2002 2:42 PM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1000 8 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
7/16/2002 7:00 AM
spoolsv.exe c:\windows\system32\spoolsv.exe
1168 8 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 51.00 KB (52,224 bytes)
7/16/2002 7:00 AM
msdtc.exe Not Available 1196 8 Not
Available Not Available 8/8/2002 2:42 PM Not
Available Not Available Not Available
llsrv.exe Not Available 1432 8
Not Available Not Available
8/8/2002 2:42 PM Not Available Not
Available Not Available

svchost.exe Not Available 1512 8
Not Available Not Available
8/8/2002 2:42 PM Not Available Not
Available Not Available
mssearch.exe c:\program files\common
files\system\mssearch\bin\mssearch.exe 1568 8
204800 1413120 8/8/2002 2:42 PM
9.107.5512.0 72.00 KB (73,728 bytes)
7/12/2000 6:44 PM
dfssvc.exe c:\windows\system32\dfssvc.exe
1736 8 204800 1413120
8/8/2002 2:42 PM 5.2.3663.0
(main.020715-1506) 120.00 KB (122,880 bytes)
7/16/2002 7:00 AM
wmiprvse.exe Not Available 2004 8
Not Available Not Available
8/8/2002 2:45 PM Not Available Not
Available Not Available
explorer.exe c:\windows\explorer.exe 408
8 204800 1413120 8/8/2002 2:47
PM 6.00.3663.0 (main.020715-1506)
989.50 KB (1,013,248 bytes) 7/16/2002
7:00 AM
sqlmangr.exe c:\program files\microsoft sql
server\80\tools\bin\sqlmangr.exe 492 8
204800 1413120 8/8/2002 2:47 PM
2000.080.0194.00 68.00 KB (69,632 bytes)
8/7/2002 10:02 AM
helpctr.exe c:\windows\pchealth\helpctr\binaries\helpct
r.exe 1008 8 204800 1413120
8/8/2002 2:47 PM 5.2.3663.0
(main.020715-1506) 670.00 KB (686,080 bytes)
7/26/2002 4:28 PM
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 1396 8 204800 1413120
8/8/2002 2:47 PM 5.2.3663.0
(main.020715-1506) 683.50 KB (699,904 bytes)
7/26/2002 4:28 PM
wmiprvse.exe Not Available 1416 8
Not Available Not Available
8/8/2002 2:47 PM Not Available Not
Available Not Available
wpabaln.exe c:\windows\system32\wpabaln.exe
2276 8 204800 1413120
8/8/2002 2:49 PM 5.2.3663.0
(main.020715-1506) 31.00 KB (31,744 bytes)
7/16/2002 7:00 AM

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer
Path				
smss	5.2.3663.0 (main.020715-1506)	46.00 KB (47,104 bytes)	7/16/2002 7:00 AM	Microsoft Corporation
ntdll	5.2.3663.0 (main.020715-1506)	697.50 KB (714,240 bytes)	7/16/2002 7:00 AM	Microsoft Corporation
winlogon	5.2.3663.0 (main.020715-1506)	512.00 KB (524,288 bytes)	7/16/2002 7:00 AM	Microsoft

Corporation c:\windows\system32\winlogon.exe

kernel32 5.2.3663.0 (main.020715-1506) 934.50 KB
(956,928 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\kernel32.dll

msvcrt 7.0.3663.0 (main.020715-1506) 319.50 KB
(327,168 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msvcrt.dll

advapi32 5.2.3663.0 (main.020715-1506) 526.00 KB
(538,624 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\advapi32.dll

rpcrt4 5.2.3663.0 (main.020715-1506) 544.50 KB
(557,568 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rpcrt4.dll

user32 5.2.3663.0 (main.020715-1506) 547.50 KB
(560,640 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\user32.dll

gdi32 5.2.3663.0 (main.020715-1506) 246.00 KB
(251,904 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\gdi32.dll

userenv 5.2.3663.0 (main.020715-1506) 710.00 KB
(727,040 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\userenv.dll

nddeapi 5.2.3663.0 (main.020715-1506) 15.00 KB
(15,360 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\nddeapi.dll

crypt32 5.131.3663.0 (main.020715-1506)
545.00 KB (558,080 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\crypt32.dll

msasn1 5.2.3663.0 (main.020715-1506) 51.00 KB
(52,224 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msasn1.dll

secur32 5.2.3663.0 (main.020715-1506) 57.00 KB
(58,368 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\secur32.dll

winsta 5.2.3663.0 (main.020715-1506) 48.00 KB
(49,152 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winsta.dll

netapi32 5.2.3663.0 (main.020715-1506) 309.50 KB
(316,928 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netapi32.dll

profmap 5.2.3663.0 (main.020715-1506) 21.00 KB
(21,504 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\profmap.dll

regapi 5.2.3663.0 (main.020715-1506) 47.00 KB
(48,128 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\regapi.dll

ws2_32 5.2.3663.0 (main.020715-1506) 77.00 KB
(78,848 bytes) 7/16/2002 7:00 AM Microsoft

Corporation c:\windows\system32\ws2_32.dll

ws2help 5.2.3663.0 (main.020715-1506) 19.00 KB
(19,456 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ws2help.dll

authz 5.2.3663.0 (main.020715-1506) 56.50 KB
(57,856 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\authz.dll

psapi 5.2.3663.0 (main.020715-1506) 21.00 KB
(21,504 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\psapi.dll

version 5.2.3663.0 (main.020715-1506) 16.50 KB
(16,896 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\version.dll

setupapi 5.2.3663.0 (main.020715-1506) 917.50 KB
(939,520 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\setupapi.dll

msgina 5.2.3663.0 (main.020715-1506) 1.19 MB
(1,252,864 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msgina.dll

shsvcs 6.00.3663.0 (main.020715-1506)
122.50 KB (125,440 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shsvcs.dll

shlwapi 6.00.3663.0 (main.020715-1506)
269.00 KB (275,456 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shlwapi.dll

sfc 5.2.3663.0 (main.020715-1506) 4.50 KB
(4,608 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sfc.dll

sfc_os 5.2.3663.0 (main.020715-1506) 130.00 KB
(133,120 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sfc_os.dll

wintrust 5.131.3663.0 (main.020715-1506)
155.00 KB (158,720 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\wintrust.dll

ole32 5.2.3663.0 (main.020715-1506) 1.08 MB
(1,134,592 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ole32.dll

imagehlp 5.2.3663.0 (main.020715-1506) 123.00 KB
(125,952 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\imagehlp.dll

comctl32 6.0 (main.020715-1506) 905.00 KB
(926,720 bytes) 7/26/2002 4:19 PM Microsoft
Corporation
c:\windows\winsxs\x86_microsoft.windows.com
mon-controls_6595b64144ccf1df_6.0.100.0_x-
ww_8417450b\comctl32.dll

winscard 5.2.3663.0 (main.020715-1506) 93.50 KB
(95,744 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wincard.dll

wtsapi32 5.2.3663.0 (main.020715-1506) 17.00 KB
(17,408 bytes) 7/16/2002 7:00 AM Microsoft

Corporation c:\windows\system32\wtsapi32.dll

sxs 5.2.3663.0 (main.020715-1506) 685.50 KB
(701,952 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sxs.dll

winmm 5.2.3663.0 (main.020715-1506) 163.00 KB
(166,912 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winmm.dll

shell32 6.00.3663.0 (main.020715-1506)
7.69 MB (8,067,072 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shell32.dll

rsaenh 5.2.3663.0 (main.020715-1506) 174.07 KB
(178,248 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rsaenh.dll

wldap32 5.2.3663.0 (main.020715-1506) 167.00 KB
(171,008 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wldap32.dll

cscdll 5.2.3663.0 (main.020715-1506) 92.50 KB
(94,720 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\cscdll.dll

wlnotify 5.2.3663.0 (main.020715-1506) 84.50 KB
(86,528 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wlnotify.dll

winspool 5.2.3663.0 (main.020715-1506) 131.50 KB
(134,656 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winspool.dr

mpr 5.2.3663.0 (main.020715-1506) 55.00 KB
(56,320 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\mpr.dll

comctl32 5.82 (main.020715-1506) 559.50 KB
(572,928 bytes) 7/26/2002 4:19 PM Microsoft
Corporation
c:\windows\winsxs\x86_microsoft.windows.com
mon-controls_6595b64144ccf1df_5.82.0.0_x-
ww_8a69ba05\comctl32.dll

uxtheme 6.00.3663.0 (main.020715-1506)
190.50 KB (195,072 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\uxtheme.dll

mprapi 5.2.3663.0 (main.020715-1506) 78.00 KB
(79,872 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\mprapi.dll

activeds 5.2.3663.0 (main.020715-1506) 184.50 KB
(188,928 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\activeds.dll

adslrpc 5.2.3663.0 (main.020715-1506) 139.50 KB
(142,848 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\adslrpc.dll

credui 5.2.3663.0 (main.020715-1506) 161.00 KB
(164,864 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\credui.dll

at1 3.05.2144 82.00 KB (83,968 bytes)
7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\at1.dll

oleaut32 5.2.3663.0 483.50 KB (495,104
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\oleaut32.dll

rtutils 5.2.3663.0 (main.020715-1506) 31.00 KB
(31,744 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rtutils.dll

samlib 5.2.3663.0 (main.020715-1506) 40.50 KB
(41,472 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\samlib.dll

cscui 5.2.3663.0 (main.020715-1506) 299.00 KB
(306,176 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\cscui.dll

clbcatq 2001.12.4593.0 (main.020715-1506)
465.50 KB (476,672 bytes) 7/26/2002
4:26 PM Microsoft Corporation
c:\windows\system32\clbcatq.dll

comres 2001.12.4593.0 (main.020715-1506)
778.00 KB (796,672 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\comres.dll

ntmarta 5.2.3663.0 (main.020715-1506) 110.50 KB
(113,152 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ntmarta.dll

services 5.2.3663.0 (main.020715-1506) 99.00 KB
(101,376 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\services.exe

scesrv 5.2.3663.0 (main.020715-1506) 301.00 KB
(308,224 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\scesrv.dll

umpnpgmr 5.2.3663.0 (main.020715-1506) 115.00 KB
(117,760 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\umpnpgmr.dll

ncobjapi 5.2.3663.0 (main.020715-1506) 33.00 KB
(33,792 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ncobjapi.dll

msvcpx60 6.05.2144.0 388.00 KB (397,312
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msvcpx60.dll

eventlog 5.2.3663.0 (main.020715-1506) 58.50 KB
(59,904 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\eventlog.dll

lsass 5.2.3663.0 (main.020715-1506) 13.00 KB
(13,312 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\lsass.exe

lsasrv 5.2.3663.0 (main.020715-1506) 711.00 KB
(728,064 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\lsasrv.dll

samsrv 5.2.3663.0 (main.020715-1506) 408.00 KB
(417,792 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\samsrv.dll

cryptdll 5.2.3663.0 (main.020715-1506) 30.00 KB
(30,720 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\cryptdll.dll

dnsapi 5.2.3663.0 (main.020715-1506) 141.50 KB
(144,896 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\dnsapi.dll

ntdsapi 5.2.3663.0 (main.020715-1506) 67.00 KB
(68,608 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ntdsapi.dll

msprvs 5.2.3663.0 (main.020715-1506) 44.00 KB
(45,056 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msprvs.dll

kerberos 5.2.3663.0 (main.020715-1506) 299.00 KB
(306,176 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\kerberos.dll

msvl_0 5.2.3663.0 (main.020715-1506) 114.50 KB
(117,248 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msvl_0.dll

netlogon 5.2.3663.0 (main.020715-1506) 401.50 KB
(411,136 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netlogon.dll

w32time 5.2.3663.0 (main.020715-1506) 205.50 KB
(210,432 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\w32time.dll

iphlpapi 5.2.3663.0 (main.020715-1506) 80.50 KB
(82,432 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\iphlpapi.dll

schannel 5.2.3663.0 (main.020715-1506) 138.50 KB
(141,824 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\schannel.dll

wdigest 5.2.3663.0 (main.020715-1506) 59.50 KB
(60,928 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wdigest.dll

rassfm 5.2.3663.0 (main.020715-1506) 20.50 KB
(20,992 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rassfm.dll

kdcsvc 5.2.3663.0 (main.020715-1506) 190.50 KB
(195,072 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\kdcsvc.dll

ntdsa 5.2.3663.0 (main.020715-1506) 1.40 MB
(1,465,344 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ntdsa.dll

ntdsatq 5.2.3663.0 (main.020715-1506) 27.50 KB
(28,160 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ntdsatq.dll

mswsock 5.2.3663.0 (main.020715-1506) 243.50 KB
(249,344 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\mswsock.dll

esent 5.2.3663.0 (main.020715-1506) 925.50 KB
(947,712 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\esent.dll

certcli 5.2.3663.0 (main.020715-1506) 215.00 KB
(220,160 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\certcli.dll

cryptui 5.131.3663.0 (main.020715-1506)
463.50 KB (474,624 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\cryptui.dll

scecli 5.2.3663.0 (main.020715-1506) 174.00 KB
(178,176 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\scecli.dll

ipsecsvc 5.2.3663.0 (main.020715-1506) 158.00 KB
(161,792 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ipsecsvc.dll

oakley 5.2.3663.0 (main.020715-1506) 251.00 KB
(257,024 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\oakley.dll

winipsec 5.2.3663.0 (main.020715-1506) 29.00 KB
(29,696 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winipsec.dll

ptorsvc 5.2.3663.0 (main.020715-1506) 24.00 KB
(24,576 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ptorsvc.dll

psbase 5.2.3663.0 (main.020715-1506) 81.00 KB
(82,944 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\psbase.dll

wshtccip 5.2.3663.0 (main.020715-1506) 17.00 KB
(17,408 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wshtccip.dll

dssenh 5.2.3663.0 (main.020715-1506) 129.07 KB
(132,168 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\dssenh.dll

wlbcctl 5.2.3663.0 (main.020715-1506) 75.50 KB
(77,312 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wlbcctl.dll

svchost 5.2.3663.0 (main.020715-1506) 12.00 KB
(12,288 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\svchost.exe

rpcss 5.2.3663.0 (main.020715-1506) 266.00 KB
(272,384 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rpcss.dll

termsrv 5.2.3663.0 (main.020715-1506) 215.00 KB
(220,160 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\termsrv.dll

icaapi 5.2.3663.0 (main.020715-1506) 10.00 KB
(10,240 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\icaapi.dll

```

mstlsapi 5.2.3663.0 (main.020715-1506) 103.00 KB
(105,472 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\mstlsapi.dll

wzcsvc 5.2.3663.0 (main.020715-1506) 271.00 KB
(277,504 bytes) 7/16/2002 8:48 AM Microsoft
Corporation c:\windows\system32\wzcsvc.dll

wmi 5.2.3663.0 (main.020715-1506) 6.50 KB
(6,656 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wmi.dll
dhcpcsvc 5.2.3663.0 (main.020715-1506) 101.00 KB
(103,424 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\dhcpcsvc.dll

rastls 5.2.3663.0 (main.020715-1506) 147.50 KB
(151,040 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rastls.dll

rasapi32 5.2.3663.0 (main.020715-1506) 217.00 KB
(222,208 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rasapi32.dll

rasman 5.2.3663.0 (main.020715-1506) 55.00 KB
(56,320 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rasman.dll

tapi32 5.2.3663.0 (main.020715-1506) 169.50 KB
(173,568 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\tapi32.dll

raschap 5.2.3663.0 (main.020715-1506) 105.00 KB
(107,520 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\raschap.dll

schedsvc 5.2.3663.0 (main.020715-1506) 164.00 KB
(167,936 bytes) 7/26/2002 4:28 PM Microsoft
Corporation c:\windows\system32\schedsvc.dll

msidle 6.00.3663.0 (main.020715-1506)
5.50 KB (5,632 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\msidle.dll

wkssvc 5.2.3663.0 (main.020715-1506) 122.00 KB
(124,928 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wkssvc.dll

wiarpc 5.2.3663.0 (main.020715-1506) 29.50 KB
(30,208 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wiarpc.dll

cryptsvc 5.2.3663.0 (main.020715-1506) 49.00 KB
(50,176 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\cryptsvc.dll

vssapi 5.2.3663.0 (main.020715-1506) 471.00 KB
(482,304 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\vssapi.dll

dmserver 5.2.3663.0 (main.020715-1506) 22.00 KB
(22,528 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\dmserver.dll

```

```

ersvc 5.2.3663.0 (main.020715-1506) 21.00 KB
(21,504 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ersvc.dll
es 2001.12.4593.0 (main.020715-1506)
218.00 KB (223,232 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\es.dll
pchsvc 5.2.3663.0 (main.020715-1506) 30.00 KB
(30,720 bytes) 7/26/2002 4:28 PM Microsoft
Corporation c:\windows\pchealth\helpctr\binaries\pchsvc
.dll
srvsvc 5.2.3663.0 (main.020715-1506) 87.50 KB
(89,600 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\srvsvc.dll

seclogon 5.2.3663.0 (main.020715-1506) 15.50 KB
(15,872 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\seclogon.dll

sens 5.2.3663.0 (main.020715-1506) 35.00 KB
(35,840 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sens.dll
trkwns 5.2.3663.0 (main.020715-1506) 80.50 KB
(82,432 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\trkwns.dll

wmisvc 5.2.3663.0 (main.020715-1506) 113.50 KB
(116,224 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wmisvc.dll
wbemcomn 5.2.3663.0 (main.020715-1506) 205.00 KB
(209,920 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wbemcomn.dll
wuauserv 5.4.3663.0 (main.020715-1506) 9.00 KB
(9,216 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wuauserv.dll

wuauieng 5.4.3663.0 (main.020715-1506) 183.00 KB
(187,392 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wuauieng.dll

advpack 6.00.3663.0 (main.020715-1506)
93.00 KB (95,232 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\advpack.dll
wininet 6.00.3663.0 (main.020715-1506)
581.00 KB (594,944 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\wininet.dll
winrnr 5.2.3663.0 (main.020715-1506) 14.50 KB
(14,848 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winrnr.dll

browser 5.2.3663.0 (main.020715-1506) 49.50 KB
(50,688 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\browser.dll

rasadhlp 5.2.3663.0 (main.020715-1506) 6.00 KB
(6,144 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rasadhlp.dll

```

```

netrap 5.2.3663.0 (main.020715-1506) 11.50 KB
(11,776 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netrap.dll

winhttp 5.2.3663.0 (main.020715-1506) 322.50 KB
(330,240 bytes) 7/26/2002 4:19 PM Microsoft
Corporation c:\windows\winsxs\x86_microsoft.windows.win
http_6595b64144ccf1df_5.1.0.0_x-
ww_e0651936\winhttp.dll
wbemcore 5.2.3663.0 (main.020715-1506) 448.50 KB
(459,264 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wbemcore.dll
esscli 5.2.3663.0 (main.020715-1506) 232.00 KB
(237,568 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\esscli.dll
fastprox 5.2.3663.0 (main.020715-1506) 434.50 KB
(444,928 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\fastprox.dll
wmiutils 5.2.3663.0 (main.020715-1506) 88.50 KB
(90,624 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wmiutils.dll
repdrvfs 5.2.3663.0 (main.020715-1506) 140.00 KB
(143,360 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd 5.2.3663.0 (main.020715-1506) 403.50 KB
(413,184 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wmiprvsd.dll
wbemess 5.2.3663.0 (main.020715-1506) 253.00 KB
(259,072 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wbemess.dll
ncprov 5.2.3663.0 (main.020715-1506) 42.50 KB
(43,520 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\ncprov.dll
wbemcons 5.2.3663.0 (main.020715-1506) 69.00 KB
(70,656 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wbemcons.dll
sensapi 5.2.3663.0 (main.020715-1506) 6.00 KB
(6,144 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sensapi.dll

wbemsvc 5.2.3663.0 (main.020715-1506) 42.50 KB
(43,520 bytes) 7/26/2002 4:26 PM Microsoft
Corporation c:\windows\system32\wbem\wbemsvc.dll
actxprxy 6.00.3663.0 (main.020715-1506)
95.00 KB (97,280 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\actxprxy.dll
netman 5.2.3663.0 (main.020715-1506) 147.00 KB
(150,528 bytes) 7/16/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netman.dll

```

wzcsapi 5.2.3663.0 (main.020715-1506) 24.00 KB (24,576 bytes) 7/16/2002 8:48 AM Microsoft Corporation c:\windows\system32\wzcsapi.dll

netshell 5.2.3663.0 (main.020715-1506) 1.57 MB (1,648,128 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\netshell.dll

clusapi 5.2.3663.0 (main.020715-1506) 54.50 KB (55,808 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\clusapi.dll

netcfgx 5.2.3663.0 (main.020715-1506) 616.00 KB (630,784 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\netcfgx.dll

hnetcfg 5.2.3663.0 (main.020715-1506) 241.50 KB (247,296 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\hnetcfg.dll

wbemprox 5.2.3663.0 (main.020715-1506) 16.00 KB (16,384 bytes) 7/26/2002 4:26 PM Microsoft Corporation c:\windows\system32\wbem\wbemprox.dll

rasdlg 5.2.3663.0 (main.020715-1506) 637.00 KB (652,288 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\rasdlg.dll

spoolsv 5.2.3663.0 (main.020715-1506) 51.00 KB (52,224 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\spoolsv.exe

spoolss 5.2.3663.0 (main.020715-1506) 75.50 KB (77,312 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\spoolss.dll

localspl 5.2.3663.0 (main.020715-1506) 284.00 KB (290,816 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\localspl.dll

cnbjmon 5.2.3631.0 (Lab03_dev(skatar).020509-1043) 45.50 KB (46,592 bytes) 7/16/2002 8:46 AM Microsoft Corporation c:\windows\system32\cnbjmon.dll

pjlmon 5.2.3663.0 (main.020715-1506) 14.00 KB (14,336 bytes) 7/16/2002 8:47 AM Microsoft Corporation c:\windows\system32\pjlmon.dll

tcpmon 5.2.3663.0 (main.020715-1506) 41.50 KB (42,496 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\tcpmon.dll

usbmon 5.2.3663.0 (main.020715-1506) 16.00 KB (16,384 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\usbmon.dll

win32spl 5.2.3663.0 (main.020715-1506) 120.00 KB (122,880 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\win32spl.dll

inetpp 5.2.3663.0 (main.020715-1506) 68.50 KB (70,144 bytes) 7/16/2002 7:00 AM Microsoft Corporation

Corporation c:\windows\system32\inetpp.dll

icmp 5.2.3663.0 (main.020715-1506) 4.00 KB (4,096 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\icmp.dll

mssearch 9.107.5512.0 72.00 KB (73,728 bytes) 7/12/2000 6:44 PM Microsoft Corporation c:\program files\common files\system\mssearch\bin\mssearch.exe

mssws 9.107.5512.0 18.94 KB (19,392 bytes) 7/12/2000 6:44 PM Microsoft Corporation c:\program files\common files\system\mssearch\bin\mssws.dll

mssrch 9.107.5512.0 1.49 MB (1,566,976 bytes) 7/12/2000 6:44 PM Microsoft Corporation c:\progra-1\common-1\system\mssearch\bin\ms srch.dll

security 5.2.3663.0 (main.020715-1506) 5.00 KB (5,120 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\security.dll

tquery 9.107.5512.0 1.61 MB (1,690,112 bytes) 7/12/2000 6:48 PM Microsoft Corporation c:\program files\common files\system\mssearch\bin\tquery.dll

propdefs 9.107.5512.0 164.00 KB (167,936 bytes) 7/12/2000 6:44 PM Microsoft Corporation c:\progra-1\common-1\system\mssearch\bin\pr opdefs.dll

srchidx 9.107.5512.0 433.50 KB (443,904 bytes) 7/12/2000 6:44 PM Microsoft Corporation c:\progra-1\common-1\system\mssearch\bin\sr chidx.dll

iprop 5.2.3663.0 (main.020715-1506) 3.50 KB (3,584 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\iprop.dll

dfssvc 5.2.3663.0 (main.020715-1506) 120.00 KB (122,880 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\dfssvc.exe

resutils 5.2.3663.0 (main.020715-1506) 56.00 KB (57,344 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\resutils.dll

mfc42u 6.05.2178.0 960.00 KB (983,040 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\mfc42u.dll

wsock32 5.2.3663.0 (main.020715-1506) 22.00 KB (22,528 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\wsock32.dll

explorer 6.00.3663.0 (main.020715-1506) 989.50 KB (1,013,248 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\explorer.exe

browseui 6.00.3663.0 (main.020715-1506) 999.50 KB (1,023,488 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\browseui.dll

shdocvw 6.00.3663.0 (main.020715-1506) 1.28 MB (1,341,952 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\shdocvw.dll

apphelp 5.2.3663.0 (main.020715-1506) 117.00 KB (119,808 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\apphelp.dll

themeui 6.00.3663.0 (main.020715-1506) 360.00 KB (368,640 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\themeui.dll

msimg32 5.2.3663.0 (main.020715-1506) 4.50 KB (4,608 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\msimg32.dll

linkinfo 5.2.3663.0 (main.020715-1506) 15.50 KB (15,872 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\linkinfo.dll

ntshrui 6.00.3663.0 (main.020715-1506) 134.50 KB (137,728 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntshrui.dll

urlmon 6.00.3663.0 (main.020715-1506) 442.00 KB (452,608 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\urlmon.dll

webcheck 6.00.3663.0 (main.020715-1506) 253.50 KB (259,584 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\webcheck.dll

stobject 5.2.3663.0 (main.020715-1506) 116.50 KB (119,296 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\stobject.dll

batmeter 6.00.3663.0 (main.020715-1506) 28.00 KB (28,672 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\batmeter.dll

powrprof 6.00.3663.0 (main.020715-1506) 14.00 KB (14,336 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\powrprof.dll

printui 5.2.3663.0 (main.020715-1506) 522.00 KB (534,528 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\printui.dll

cfgmgr32 5.2.3663.0 (main.020715-1506) 17.00 KB (17,408 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\cfgmgr32.dll

drprov 5.2.3663.0 (main.020715-1506) 12.00 KB (12,288 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\drprov.dll

ntlanman 5.2.3663.0 (main.020715-1506) 39.50 KB (40,448 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntlanman.dll

netui0 5.2.3663.0 (main.020715-1506) 73.00 KB (74,752 bytes) 7/16/2002 7:00 AM Microsoft Corporation c:\windows\system32\netui0.dll

netui1 5.2.3663.0 (main.020715-1506) 176.50 KB (180,736 bytes) 7/16/2002 7:00 AM Microsoft Corporation

```

Corporation      c:\windows\system32\netui1.dll
davclnt 5.2.3663.0 (main.020715-1506) 23.00 KB
(23,552 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\davclnt.dll
browsec 6.00.3663.0 (main.020715-1506)
61.50 KB (62,976 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\browsec.dll
shdoclc 6.00.3663.0 (main.020715-1506)
521.00 KB (533,504 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll
sqlmangr 2000.080.0194.00 68.00 KB (69,632 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\sqlmangr.exe
w95scm 2000.080.0194.00 48.06 KB (49,216 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\w95scm.dll
odbc32 3.520.8713.0 212.00 KB (217,088
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbc32.dll
comdlg32 6.00.3663.0 (main.020715-1506)
255.00 KB (261,120 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
sqlunirl 2000.080.0708.00 176.56 KB (180,800
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\sqlunirl.dll
sqlsvc 2000.080.0194.00 92.06 KB (94,272 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\sqlsvc.dll
odbcbc 2000.081.9028.00 24.00 KB (24,576 bytes)
7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbcbc.dll
sqlresld 2000.080.0194.00 28.06 KB (28,738 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\sqlresld.dll
odbcint 3.520.8713.0 92.00 KB (94,208 bytes)
7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbcint.dll
sqlsvc 2000.080.0194.00 24.00 KB (24,576 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\resources\1033\sqlsvc.rll
sqlmangr 2000.080.0194.00 96.00 KB (98,304 bytes)
8/7/2002 10:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\80\tools\bin\resources\1033\sqlmangr.rll
helpctr 5.2.3663.0 (main.020715-1506) 670.00 KB
(686,080 bytes) 7/26/2002 4:28 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\helpct
r.exe
hcappres 5.2.3663.0 (main.020715-1506) 6.50 KB
(6,656 bytes) 7/26/2002 4:28 PM Microsoft
Corporation

```

```

es.dll          c:\windows\pchealth\helpctr\binaries\hcappre
itss 5.2.3663.0 (main.020715-1506) 118.50 KB
(121,344 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\itss.dll
msxml3 8.40.8806.0 1.06 MB (1,107,968
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msxml3.dll
pchshell 5.2.3663.0 (main.020715-1506) 94.00 KB
(96,256 bytes) 7/26/2002 4:28 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\pchshe
ll.dll
mlang 6.00.3663.0 (main.020715-1506)
564.50 KB (578,048 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mlang.dll
mshtml 6.00.3663.0 (main.020715-1506)
2.57 MB (2,690,560 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
msimtf 5.2.3663.0 (main.020715-1506) 141.00 KB
(144,384 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\msimtf.dll
msctf 5.2.3663.0 (main.020715-1506) 273.00 KB
(279,552 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\msctf.dll
jscrip 5.6.0.7727 412.00 KB (421,888
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\jscrip.dll
msls31 3.10.349.0 137.00 KB (140,288
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll
imm32 5.2.3663.0 (main.020715-1506) 104.00 KB
(106,496 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\imm32.dll
mshtml 6.00.3663.0 (main.020715-1506)
424.00 KB (434,176 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
vbscript 5.6.0.7727 388.00 KB (397,312
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
mfc42 6.05.2178.0 960.00 KB (983,040
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\mfc42.dll
msinfo 5.2.3663.0 (main.020715-1506) 352.00 KB
(360,448 bytes) 7/26/2002 4:28 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\msinfo
.dll
riched32 5.2.3663.0 (main.020715-1506) 3.50 KB
(3,584 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\riched32.dll
riched20 5.31.23.1217 394.50 KB (403,968
bytes) 7/16/2002 7:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
mydocs 6.00.3663.0 (main.020715-1506)
87.00 KB (89,088 bytes) 7/16/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mydocs.dll

```

```

helpsvc 5.2.3663.0 (main.020715-1506) 683.50 KB
(699,904 bytes) 7/26/2002 4:28 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
wpabaln 5.2.3663.0 (main.020715-1506) 31.00 KB
(31,744 bytes) 7/16/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\wpabaln.exe

[Services]

Display Name      Name      State      Start Mode
Service Type      Path      Error Control
Start Name      Tag ID
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Audio AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CsiSvc Stopped Manual
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-9600-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed File System Dfs Running
Auto Own Process
c:\windows\system32\dfsvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto
Share Process
c:\windows\system32\svchost.exe -k

```

```

networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
  dmadmin Stopped Manual Share Process
  c:\windows\system32\dmadmin.exe /com
  Normal LocalSystem 0
Logical Disk Manager dmserver Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
DNS Client Dnscache Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
  c:\windows\system32\services.exe
  Normal LocalSystem 0
COM+ Event System EventSystem Running
  Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Help and Support helpsvc Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
  Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
  Stopped Disabled Own Process
  "c:\windows\system32\imapi.exe"
  Normal LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process
  c:\windows\system32\ismserv.exe
  Normal LocalSystem 0
Kerberos Key Distribution Center kdc
  Stopped Disabled Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Server lanmanserver Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Workstation lanmanworkstation Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
License Logging LicenseService Running
  Auto Own Process
  c:\windows\system32\llsrrv.exe
  Normal NT AUTHORITY\NetworkService 0

```

```

TCP/IP NetBIOS Helper LmHosts Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mmsrvc
  Stopped Manual Own Process
  c:\windows\system32\mmsrvc.exe
  Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
  Running Auto Own Process
  c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 1
Windows Installer MSIInstaller Stopped Manual
  Share Process
  c:\windows\system32\msiexec.exe /v
  Normal LocalSystem 0
Microsoft Search MSSEARCH Running Auto
  Share Process "c:\program
files\common files\system\mssearch\bin\mssearch.exe"
  Normal LocalSystem 0
MSSQLSERVER MSSQLSERVER Stopped
  Manual Own Process
  c:\sql2k\mssql\bin\sqlservr.exe
  Normal LocalSystem 0
MSSQLServerADHelper MSSQLServerADHelper Stopped
  Manual Own Process c:\program
files\microsoft sql server\80\tools\bin\sqladhlp.exe
  Normal LocalSystem 0
Network DDE NetDDE Stopped Disabled
  Share Process
  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
  Disabled Share Process
  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Net Logon NetLogon Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Network Connections Netman Running Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Network Location Awareness (NLA) Nla
  Running Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process
  c:\windows\system32\ntfrs.exe Ignore
  LocalSystem 0
NT LM Security Support Provider NtLmSsp
  Running Manual Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0

```

```

Plug and Play PlugPlay Running Auto
  Share Process
  c:\windows\system32\services.exe
  Normal LocalSystem 0
IPSEC Services PolicyAgent Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Protected Storage ProtectedStorage Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Remote Access Auto Connection Manager RasAuto
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Access Connection Manager RasMan
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
  Stopped Manual Own Process
  c:\windows\system32\sessmgr.exe
  Normal LocalSystem 0
Routing and Remote Access RemoteAccess
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Registry RemoteRegistry Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k regsvc
  Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped Manual Own Process
  c:\windows\system32\locator.exe
  Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
  Auto Share Process
  c:\windows\system32\svchost -k rpcss
  Normal LocalSystem 0
Resultant Set of Policy Provider RSOPProv
  Stopped Manual Share Process
  c:\windows\system32\rsopprov.exe
  Normal LocalSystem 0
Special Administration Console Helper sacsvr
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Security Accounts Manager SamSs Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Smart Card SCardSvr Stopped Manual
  Share Process
  c:\windows\system32\scardsvr.exe
  Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0

```

```

Secondary Logon      seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Internet Connection Firewall (ICF) / Internet
Connection Sharing (ICS) SharedAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
SQLSERVERAGENT SQLSERVERAGENT Stopped
Manual Own Process
c:\sql2k\mssql\bin\sqlagent.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0

Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0

Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termsvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LOCAL SERVICE 0

Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process

```

```

c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Upload Manager uploadmgr Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W2Time Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number WmdmPmSp Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiapsrv.exe
Normal LocalSystem 0
Automatic Updates wuauclt Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User

```

```

Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
Microsoft SQL Server All Users:Microsoft SQL
Server All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories QUARK\Administrator:Accessories
QUARK\Administrator
Accessories\Accessibility
QUARK\Administrator:Accessories\Accessibili
ty
QUARK\Administrator
Accessories\Entertainment
QUARK\Administrator:Accessories\Entertainme
nt
QUARK\Administrator
Administrative Tools
QUARK\Administrator:Administrative Tools
QUARK\Administrator
Startup QUARK\Administrator:Startup
QUARK\Administrator

[Startup Programs]
Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini QUARK\Administrator
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup
IDW Logging Tool c:\windows\system32\idwlog.exe -3
All Users Common Startup
Service Manager
c:\progra-1\microso-1\80\tools\bin\sqlmangr
.exe /n All Users Common Startup

```


[OLE Registration]

Object	Local Server	
Sound (OLE2)	sndrec32.exe	
Media Clip	mplay32.exe	
Video Clip	mplay32.exe /avi	
MIDI Sequence	mplay32.exe /mid	
Sound	Not Available	
Media Clip	Not Available	
Windows Media Player	7	Not Available
WordPad Document	"%programfiles%\windows nt\accessories\wordpad.exe"	
Windows Media Services DRM Storage object		Not Available
Bitmap Image	mspaint.exe	

[Windows Error Reporting]

Time	Type	Details
------	------	---------

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]
 [Summary]

Item	Value
Version	6.0.3663.0
Build	63663
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available

Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path
actxprxy.dll	6.0.3663.0	95 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3663.0	93 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3663.0	89 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseic.dll	6.0.3663.0	62 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation

browseui.dll	6.0.3663.0	1,000 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3663.0	141 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3663.0	560 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3663.0	188 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3663.0	332 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3663.0	292 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iepeers.dll	6.0.3663.0	229 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3663.0	59 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf	Not Available	19 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Not Available
ieexplore.exe	6.0.3663.0	90 KB	7/16/2002 7:00:00 AM	C:\Program Files\Internet Explorer Microsoft Corporation
imgutil.dll	6.0.3663.0	30 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl	6.0.3663.0	296 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll	6.0.3663.0	108 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3663.0	71 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation

mlang.dll	6.0.3663.0	565 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	2000.7.25.0	92 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Not Available
mshta.exe	6.0.3663.0	27 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3663.0	2,628 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3663.0	1,319 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmlmled.dll	6.0.3663.0	424 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmlmer.dll	6.0.3663.0	55 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3663.0	47 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msidentld.dll	6.0.3663.0	15 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msieftp.dll	6.0.3663.0	232 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3663.0	132 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3663.0	490 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
occache.dll	6.0.3663.0	88 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx	6.3.3663.0	78 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Intel Corporation
sendmail.dll	6.0.3663.0	54 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll	6.0.3663.0	521 KB	7/16/2002 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll	6.0.3663.0	1,311 KB	7/16/2002 7:00:00 AM	

```

C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll      6.0.3663.0      23 KB
7/16/2002 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll      6.0.3663.0      269 KB
7/16/2002 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx          1.3.0.3130      57 KB 7/16/2002
7:00:00 AM      C:\WINDOWS\system32 Microsoft
Corporation
url.dll          6.0.3663.0      40 KB 7/16/2002
7:00:00 AM      C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll       6.0.3663.0      442 KB
7/16/2002 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll    6.0.3663.0      254 KB
7/16/2002 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
wininet.dll     6.0.3663.0      581 KB
7/16/2002 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

```

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

```

AutoConfigProxy      Not Available
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy                Disabled
ProxyServer
ProxyOverride

```

[Cache]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File	Status	CodeBase
--------------	--------	----------

No cached object information available

[Content]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature Algorithm
No personal certificate information available			

[Other People Certificates]

Issued To	Issued By	Validity	Signature Algorithm
No other people certificate information available			

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Low
Internet Medium	
Restricted sites	High

Client System Configuration

System Information report written at: 08/21/2002 09:59:07 AM
[System Information]

[Following are sub-categories of this main category]

[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2195 Service Pack 2 Build 2195
OS Manufacturer	Microsoft Corporation
System Name	PCI
System Manufacturer	Compaq
System Model	ProLiant DL360 G2
System Type	X86-based PC
Processor	x86 Family 6 Model 11 Stepping 1
GenuineIntel	~1396 Mhz

```

Processor x86 Family 6 Model 11 Stepping 1
GenuineIntel ~1396 Mhz
BIOS Version 03/19/02
Windows Directory C:\WINNT
System Directory C:\WINNT\System32
Boot Device \Device\Harddisk0\Partition1
Locale United States
User Name PCI\Administrator
Time Zone Central Daylight Time
Total Physical Memory 523,800 KB
Available Physical Memory 445,020 KB
Total Virtual Memory 1,802,240 KB
Available Virtual Memory 1,673,952 KB
Page File Space 1,278,440 KB
Page File C:\pagefile.sys

```

[Hardware Resources]

[Following are sub-categories of this main category]

[Conflicts/Sharing]

Resource	Device
IRQ 7	Standard OpenHCD USB Host Controller
IRQ 7	PCI standard host CPU bridge

[DMA]

Channel	Device	Status
7	Direct memory access controller	OK
2	Standard floppy disk controller	OK

[Forced Hardware]

Device	PNP Device ID
No Forced Hardware	

[I/O]

Address Range	Device	Status
0x0000-0x0CFF	PCI bus	OK
0x0000-0x0CFF	PCI bus	OK
0x0000-0x0CFF	Direct memory access controller	OK
0x03B0-0x03DF	PCI bus	OK
0x03B0-0x03DF	ATI Technologies Inc. RAGE XL PCI	OK
0x2400-0x24FF	ATI Technologies Inc. RAGE XL PCI	OK
0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI	OK
0x1800-0x18FF	Base System Device	OK
0x2800-0x28FF	Base System Device	OK
0x0A79-0x0A79	ISAPNP Read Data Port	OK
0x0279-0x0279	ISAPNP Read Data Port	OK
0x02F4-0x02F7	ISAPNP Read Data Port	OK
0x0F50-0x0F58	Motherboard resources	OK
0x0020-0x0021	Programmable interrupt controller	OK
0x00A0-0x00A1	Programmable interrupt controller	OK

```

0x0C00-0x0C01 Programmable interrupt controller
OK
0x0040-0x0043 System timer OK
0x0080-0x008F Direct memory access controller
OK
0x00C0-0x00DF Direct memory access controller
OK
0x040B-0x040B Direct memory access controller
OK
0x04D6-0x04D6 Direct memory access controller
OK
0x0061-0x0061 System speaker OK
0x0060-0x0060 Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard OK
0x0064-0x0064 Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard OK
0x002E-0x002F Extended IO Bus OK
0x0220-0x0223 Extended IO Bus OK
0x0230-0x0231 Extended IO Bus OK
0x0240-0x025F Extended IO Bus OK
0x03F8-0x03FF Communications Port (COM1) OK
0x03F2-0x03F5 Standard floppy disk controller
OK
0x03F7-0x03F7 Standard floppy disk controller
OK
0x2000-0x200F Standard Dual Channel PCI IDE
Controller OK
0x27FC-0x27FF Standard Dual Channel PCI IDE
Controller OK
0x01F0-0x01F7 Primary IDE Channel OK
0x03F6-0x03F6 Primary IDE Channel OK
0x0170-0x0177 Secondary IDE Channel OK
0x0376-0x0376 Secondary IDE Channel OK
0x3000-0x30FF PCI bus OK
0x3000-0x30FF Compaq Smart Array 5i OK

```

[IRQs]

IRQ Number	Device
9	Microsoft ACPI-Compliant System
24	ATI Technologies Inc. RAGE XL PCI
3	Base System Device
15	Base System Device
1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
12	PS/2 Compatible Mouse
4	Communications Port (COM1)
6	Standard floppy disk controller
14	Primary IDE Channel
7	Standard OpenHCD USB Host Controller
7	PCI standard host CPU bridge
31	Compaq Smart Array 5i
30	Compaq NC7780 Gigabit Server Adapter
29	Compaq NC7780 Gigabit Server Adapter #2

[Memory]

Range	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI Technologies Inc. RAGE XL PCI	OK
0xF5E00000-0xF6FFFFFF	PCI bus	OK

```

0xF6000000-0xF6FFFFFF ATI Technologies Inc.
RAGE XL PCI OK
0xF5FF0000-0xF5FF0FFF ATI Technologies Inc.
RAGE XL PCI OK
0xF5FE0000-0xF5FE01FF Base System Device OK
0xF5FD0000-0xF5FD07FF Base System Device OK
0xF5FC0000-0xF5FC1FFF Base System Device OK
0xF5F00000-0xF5F7FFFF Base System Device OK
0xF5EF0000-0xF5EF0FFF Standard OpenHCD USB
Host Controller OK
0xF7E00000-0xF7FFFFFF PCI bus OK
0xF7FC0000-0xF7FFFFFF Compaq Smart Array 5i
OK
0xF7EF0000-0xF7EF3FFF Compaq Smart Array 5i
OK
0xF7FB0000-0xF7FBFFFF Compaq NC7780 Gigabit
Server Adapter OK
0xF7FA0000-0xF7FAFFFF Compaq NC7780 Gigabit
Server Adapter #2 OK

```

[Components]

[Following are sub-categories of this main category]

[Multimedia]

[Following are sub-categories of this main category]

[Audio Codecs]

Codec	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\winnt\system32\msg711.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSG711.ACM	5.00.2134.1	10.27 KB (10,512 bytes)	12/7/1999
6:00:00 AM							
c:\winnt\system32\msadp32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSADP32.ACM	5.00.2134.1	14.77 KB (15,120 bytes)	12/7/1999
6:00:00 AM							
c:\winnt\system32\lhacm.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\LHACM.ACM	4.4.3385	33.27 KB (34,064 bytes)	4/3/2002
11:41:41 AM							
c:\winnt\system32\msg723.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSG723.ACM	4.4.3385	106.77 KB (109,328 bytes)	4/3/2002
11:41:40 AM							
c:\winnt\system32\tsssoft32.acm	DSP GROUP, INC.	DSP GROUP, INC.	OK	C:\WINNT\System32\TSSOFT32.ACM	1.01	9.27 KB (9,488 bytes)	12/7/1999 6:00:00 AM
c:\winnt\system32\iac25_32.ax	Intel Corporation	Indeo® audio software	OK	C:\WINNT\System32\IAC25_32.AX	2.05.53		

```

195.00 KB (199,680 bytes) 12/7/1999
6:00:00 AM
c:\winnt\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINNT\System32\IMAADP32.ACM
5.00.2134.1 16.27 KB (16,656 bytes)
12/7/1999 6:00:00 AM
c:\winnt\system32\msgsm32.acm Microsoft Corporation
OK
C:\WINNT\System32\MSGSM32.ACM 5.00.2134.1
22.27 KB (22,800 bytes) 12/7/1999
6:00:00 AM

```

[Video Codecs]

Codec	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\winnt\system32\ir50_32.dll	Intel Corporation	Indeo® video 5.10	OK	C:\WINNT\System32\IR50_32.DLL	R.5.10.15.2.55	737.50 KB (755,200 bytes)	12/7/1999 6:00:00 AM
c:\winnt\system32\msh261.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSH261.DRV	4.4.3385	163.77 KB (167,696 bytes)	4/3/2002
11:41:40 AM							
c:\winnt\system32\msh263.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSH263.DRV	4.4.3385	252.27 KB (258,320 bytes)	4/3/2002
11:41:14 AM							
c:\winnt\system32\msrle32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSRLE32.DLL	5.00.2134.1	10.77 KB (11,024 bytes)	12/7/1999
6:00:00 AM							
c:\winnt\system32\ir32_32.dll	Intel(R) Corporation	Intel(R) Corporation	OK	C:\WINNT\System32\IR32_32.DLL	Not Available	194.50 KB (199,168 bytes)	12/7/1999
6:00:00 AM							
c:\winnt\system32\msvidc32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINNT\System32\MSVIDC32.DLL	5.00.2134.1	27.27 KB (27,920 bytes)	12/7/1999 6:00:00 AM
c:\winnt\system32\iccvid.dll	Radius Inc.	Radius Inc.	OK	C:\WINNT\System32\ICCVID.DLL	1.10.0.6	108.00 KB (110,592 bytes)	12/7/1999 6:00:00 AM

[CD-ROM]

Item	Value
Drive D:	CD-ROM Drive
Description	CD-ROM Drive
Media Loaded	False
Media Type	CD-ROM
Name	COMPAQ CD-224E
Manufacturer	(Standard CD-ROM drives)
Status	OK

Transfer Rate Not Available
 SCSI Target ID 0
 PNP Device ID IDE\CDROMCOMPAQ_CD-224E_____A.8D____\5&23A72C42&0&0.0

[Sound Device]

Item Value
 No sound devices

[Display]

Item Value
 Name ATI Technologies Inc. RAGE XL PCI
 PNP Device ID PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_27\3&267A616A&0&18
 Adapter Type ATI RAGE XL PCI, ATI Technologies Inc. compatible
 Adapter Description ATI Technologies Inc. RAGE XL PCI
 Adapter RAM 8.00 MB (8,388,608 bytes)
 Installed Drivers atidrab.dll
 Driver Version 5.00.2179.1
 INF File display.inf (atirage3 section)
 Color Planes 1
 Color Table Entries 256
 Resolution 640 x 480 x 60 hertz
 Bits/Pixel 8

[Infrared]

Item Value
 No infrared devices

[Input]

[Following are sub-categories of this main category]

[Keyboard]

Item Value
 Description Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
 Name Enhanced (101- or 102-key)
 Layout 00000409
 PNP Device ID ACPI\PNP0303\4&32BA4B66&0
 NumberOfFunctionKeys 12

[Pointing Device]

Item Value
 Hardware Type PS/2 Compatible Mouse
 Number of Buttons 3
 Status OK
 PNP Device ID ACPI\PNP0F13\4&32BA4B66&0
 Power Management Supported False
 Double Click Threshold 6
 Handedness Right Handed Operation

[Modem]

Item Value
 No modems

[Network]

[Following are sub-categories of this main category]

[Adapter]

Item Value
 Name [00000001] RAS Async Adapter
 Adapter Type Not Available
 Product Name RAS Async Adapter
 Installed True
 PNP Device ID Not Available
 Last Reset 5/9/2002 12:06:13 PM
 Index 1
 Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Not Available

Name [00000002] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Name WAN Miniport (L2TP)
 Installed True
 PNP Device ID ROOT\MS_L2TPMINIPOINT\0000
 Last Reset 5/9/2002 12:06:13 PM
 Index 2
 Service Name Rasl2tp
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Rasl2tp
 Driver c:\winnt\system32\drivers\rasl2tp.sys (50800, 5.00.2179.1)

Name [00000003] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Name WAN Miniport (PPTP)
 Installed True
 PNP Device ID ROOT\MS_PPTPMINIPOINT\0000
 Last Reset 5/9/2002 12:06:13 PM
 Index 3
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available

Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Service Name PptpMiniport
 Driver c:\winnt\system32\drivers\raspptp.sys (47856, 5.00.2160.1)

Name [00000004] Direct Parallel
 Adapter Type Not Available
 Product Name Direct Parallel
 Installed True
 PNP Device ID ROOT\MS_PTMINIPOINT\0000
 Last Reset 5/9/2002 12:06:13 PM
 Index 4
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Raspti
 Driver c:\winnt\system32\drivers\raspti.sys (16880, 5.00.2146.1)

Name [00000005] WAN Miniport (IP)
 Adapter Type Not Available
 Product Name WAN Miniport (IP)
 Installed True
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 5/9/2002 12:06:13 PM
 Index 5
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name NdisWan
 Driver c:\winnt\system32\drivers\ndiswan.sys (90096, 5.00.2195.2779)

Name [00000006] Compaq NC7780 Gigabit Server
 Adapter Ethernet 802.3
 Product Name Compaq NC7780 Gigabit Server
 Adapter
 Installed True
 PNP Device ID PCI\VEN_14E4&DEV_1645&SUBSYS_00850E11&REV_15\3&13C0B0C5&0&28
 Last Reset 5/9/2002 12:06:13 PM
 Index 6
 Service Name q57w2k
 IP Address 130.168.11.1

IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:02:A5:EC:07:F9
 Service Name q57w2k
 IRQ Number 30
 Driver c:\winnt\system32\drivers\q57w2k.sys
 (77438, 2.67.0.0)

Name [00000007] Compaq NC7780 Gigabit Server
 Adapter
 Adapter Type Ethernet 802.3
 Product Name Compaq NC7780 Gigabit Server
 Adapter
 Installed True
 PNP Device ID
 PCI\VEN_14E4&DEV_1645&SUBSYS_00850E11&REV_1
 5\3&13C0B0C5&0&30
 Last Reset 5/9/2002 12:06:13 PM
 Index 7
 Service Name q57w2k
 IP Address 130.172.11.1
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:02:A5:EC:07:FA
 Service Name q57w2k
 IRQ Number 29
 Driver c:\winnt\system32\drivers\q57w2k.sys
 (77438, 2.67.0.0)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD Tcpip [UDP/IP]
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False

MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True

Name	RSVP UDP Service Provider
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True

Name	RSVP TCP Service Provider
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{855DD36B-8E49-4C0B-9116-AF1F650426AF}] SEQPACKET 4	
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False

SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{855DD36B-8E49-4C0B-9116-AF1F650426AF}] DATAGRAM 4	
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{52416FB6-7BA3-4670-B0F2-6EC471BE2D79}] SEQPACKET 3	
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{52416FB6-7BA3-4670-B0F2-6EC471BE2D79}] DATAGRAM 3	
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False

```

SupportsGracefulClosing      False
SupportsGuaranteedBandwidth  False
SupportsMulticasting         False

Name      MSAFD NetBIOS
[\Device\NetBT_Tcpip_{062B0E39-EFD3-4340-A9B7-13171B5F2386}] SEQPACKE
T 1
ConnectionlessService       False
GuaranteesDelivery          True
GuaranteesSequencing        True
MaximumAddressSize          20 bytes
MaximumMessageSize          64000 bytes
MessageOriented              True
MinimumAddressSize          20 bytes
PseudoStreamOriented        False
SupportsBroadcasting        False
SupportsConnectData         False
SupportsDisconnectData      False
SupportsEncryption          False
SupportsExpeditedData       False
SupportsGracefulClosing     False
SupportsGuaranteedBandwidth False
SupportsMulticasting        False

```

```

Name      MSAFD NetBIOS
[\Device\NetBT_Tcpip_{062B0E39-EFD3-4340-A9B7-13171B5F2386}] DATAGRAM 1
ConnectionlessService       True
GuaranteesDelivery          False
GuaranteesSequencing        False
MaximumAddressSize          20 bytes
MaximumMessageSize          64000 bytes
MessageOriented              True
MinimumAddressSize          20 bytes
PseudoStreamOriented        False
SupportsBroadcasting        True
SupportsConnectData         False
SupportsDisconnectData      False
SupportsEncryption          False
SupportsExpeditedData       False
SupportsGracefulClosing     False
SupportsGuaranteedBandwidth False
SupportsMulticasting        False

```

```

Name      MSAFD NetBIOS
[\Device\NetBT_Tcpip_{7EF367B1-3400-4351-A2E1-FD2322FBD119}] SEQPACKE
T 2
ConnectionlessService       False
GuaranteesDelivery          True
GuaranteesSequencing        True
MaximumAddressSize          20 bytes
MaximumMessageSize          64000 bytes
MessageOriented              True
MinimumAddressSize          20 bytes
PseudoStreamOriented        False
SupportsBroadcasting        False
SupportsConnectData         False
SupportsDisconnectData      False
SupportsEncryption          False
SupportsExpeditedData       False
SupportsGracefulClosing     False
SupportsGuaranteedBandwidth False
SupportsMulticasting        False

```

```

Name      MSAFD NetBIOS
[\Device\NetBT_Tcpip_{7EF367B1-3400-4351-A2E1-FD2322FBD119}] DATAGRAM 2
ConnectionlessService       True
GuaranteesDelivery          False
GuaranteesSequencing        False
MaximumAddressSize          20 bytes
MaximumMessageSize          64000 bytes
MessageOriented              True
MinimumAddressSize          20 bytes
PseudoStreamOriented        False
SupportsBroadcasting        True
SupportsConnectData         False
SupportsDisconnectData      False
SupportsEncryption          False
SupportsExpeditedData       False
SupportsGracefulClosing     False
SupportsGuaranteedBandwidth False
SupportsMulticasting        False

```

[WinSock]

```

Item      Value
File      c:\winnt\system32\winsock.dll
Version   3.10
Size      2.80 KB (2,864 bytes)

```

```

File      c:\winnt\system32\wsock32.dll
Version   5.00.2195.2871
Size      21.27 KB (21,776 bytes)

```

[Ports]

[Following are sub-categories of this main category]

[Serial]

```

Item      Value
Name      COM1
Status    OK
PNP Device ID      ACPI\PNP0501\0
Maximum Input Buffer Size      0
Maximum Output Buffer Size     False
Settable Baud Rate      True
Settable Data Bits      True
Settable Flow Control    True
Settable Parity          True
Settable Parity Check    True
Settable Stop Bits      True
Settable RLSD           True
Supports RLSD           True
Supports 16 Bit Mode     False
Supports Special Characters  False
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy 0
Abort Read/Write on Error 0

```

```

Binary Mode Enabled -1
Continue XMit on Xoff 0
CTS Outflow Control 0
Discard NULL Bytes 0
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled 0
Event Character 0
Parity Check Enabled 0
RTS Flow Control Type Enable
XOff Character 19
XOffXmit Threshold 512
XOn Character 17
XOnXmit Threshold 2048
XOnXoff InFlow Control 0
XOnXoff OutFlow Control 0
IRQ Number 4
I/O Port 0x03F8-0x03FF
Driver c:\winnt\system32\drivers\serial.sys
(62416, 5.00.2195.2780)

```

[Parallel]

```

Item      Value
No parallel port information

```

[Storage]

[Following are sub-categories of this main category]

[Drives]

```

Item      Value
Drive     A:
Description      3 1/2 Inch Floppy Drive

Drive     C:
Description      Local Fixed Disk
Compressed      False
File System      NTFS
Size            8.46 GB (9,086,955,520 bytes)
Free Space      6.67 GB (7,161,319,424 bytes)
Volume Name
Volume Serial Number      F408F5A4
Partition Disk #0, Partition #0
Partition Size      8.46 GB (9,086,959,616 bytes)
Starting Offset      16384 bytes
Drive Description    Disk drive
Drive Manufacturer   (Standard disk drives)
Drive Model          COMPAQ LOGICAL VOLUME SCSI Disk
Device
Drive BytesPerSector 512
Drive MediaLoaded    True
Drive MediaType      Fixed hard disk media
Drive Partitions     1
Drive SCSIbus        0
Drive SCSILogicalUnit 0
Drive SCSIPort       2

```

```

Drive SCSI TargetId 4
Drive SectorsPerTrack 32
Drive Size 9091153920 bytes
Drive TotalCylinders 2176
Drive TotalSectors 17756160
Drive TotalTracks 554880
Drive TracksPerCylinder 255

```

[SCSI]

```

Item Value
Name Compaq Smart Array 5i
Caption Compaq Smart Array 5i
Driver cpqcissm
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&13C0B0C5&0&20
Device ID
PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&13C0B0C5&0&20
Device Map Not Available
Index Not Available
Max Number Controlled Not Available
IRQ Number 31
I/O Port 0x3000-0x30FF
Driver c:\winnt\system32\drivers\cpqcissm.sys
(14032, 5.16.0.0)

```

[Printing]

```

Name Port Name Server Name
No printing information

```

[Problem Devices]

```

Device PNP Device ID Error Code
Monitor DISPLAY\DEFAULT_MONITOR\4&89B5141&0&8000000
1&00&03 28
Base System Device
PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
1\3&267A616A&0&28 28
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
1\3&267A616A&0&2A 28

```

[USB]

```

Device PNP Device ID
Standard OpenHCD USB Host Controller
PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0
5\3&267A616A&0&7A
USB Root Hub USB\ROOT_HUB\4&AF5358C&0

```

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type
	Started Start Mode		State
	Status Error Control		Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk Not Available		Kernel Driver
	False Disabled Stopped		OK
	Ignore False False		
abp480n5	abp480n5 Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
acpi	Microsoft ACPI Driver		
	c:\winnt\system32\drivers\acpi.sys		
	Kernel Driver True		Boot
	Running OK Normal		False
	True		
acpiec	ACPIEC		
	c:\winnt\system32\drivers\acpiec.sys		
	Kernel Driver False		Disabled
	Stopped OK Normal		False
	False		
adpu160m	adpu160m Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
afd	AFD Networking Support Environment		
	c:\winnt\system32\drivers\afd.sys		
	Kernel Driver True		Auto
	Running OK Normal		False
	True		
ahal54x	Ahal54x Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
aicl16x	aicl16x Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
aic78u2	aic78u2 Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
aic78xx	aic78xx Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
ami0nt	ami0nt Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
amsint	amsint Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
asc	asc Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
asc3350p	asc3350p Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
asc3550	asc3550 Not Available		Kernel Driver
	False Disabled Stopped		OK
	Normal False False		
asynccmac	RAS Asynchronous Media Driver		
	c:\winnt\system32\drivers\asynccmac.sys		
	Kernel Driver False		Manual
	Stopped OK Normal		False
	False		
atapi	Standard IDE/ESDI Hard Disk Controller		
	c:\winnt\system32\drivers\atapi.sys		

Kernel Driver	True	Boot
Running OK	Normal	False
True		
atdisk	Atdisk Not Available	Kernel Driver
	False Disabled Stopped	OK
	Ignore False False	
atirage3	atirage3	
	c:\winnt\system32\drivers\atimpab.sys	
	Kernel Driver True	Manual
	Running OK Ignore	False
	True	
atmarpc	ATM ARP Client Protocol	
	c:\winnt\system32\drivers\atmarpc.sys	
	Kernel Driver False	Manual
	Stopped OK Normal	False
	False	
audstub	Audio Stub Driver	
	c:\winnt\system32\drivers\audstub.sys	
	Kernel Driver True	Manual
	Running OK Normal	False
	True	
beep	Beep	
	c:\winnt\system32\drivers\beep.sys	
	Kernel Driver True	System
	Running OK Normal	False
	True	
buslogic	BusLogic Not Available	Kernel Driver
	False Disabled Stopped	OK
	Normal False False	
cd20xrnt	cd20xrnt Not Available	Kernel Driver
	False Disabled Stopped	OK
	Normal False False	
cdaudio	Cdaudio	
	c:\winnt\system32\drivers\cdaudio.sys	
	Kernel Driver False	System
	Stopped OK Ignore	False
	False	
cdfs	Cdfs	
	c:\winnt\system32\drivers\cdfs.sys	
	File System Driver True	Disabled
	Running OK Normal	False
	True	
cdrom	CD-ROM Driver	
	c:\winnt\system32\drivers\cdrom.sys	
	Kernel Driver True	System
	Running OK Normal	False
	True	
changer	Changer Not Available	Kernel Driver
	False System Stopped	OK
	Ignore False False	
cpgarray	Cpgarray Not Available	Kernel Driver
	False Disabled Stopped	OK
	Normal False False	
cpgarray2	cpgarray2 Not Available	Kernel Driver
	False Disabled Stopped	OK
	Normal False False	
cpqcissm	cpqcissm	
	c:\winnt\system32\drivers\cpqcissm.sys	
	Kernel Driver True	Boot
	Running OK Normal	False
	True	

cpqfcalm	cpqfcalm	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
cpqfws2e	cpqfws2e	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
cpqteam	Compaq Network Teaming and Configuration		
	c:\winnt\system32\drivers\cpqteam.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False		False
dac960nt	dac960nt	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
deckzpsx	deckzpsx	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
dfsdriver	DfsDriver c:\winnt\system32\drivers\dfs.sys		
	File System Driver	True	Boot
	Running	OK	Normal
	True		False
disk	Disk Driver		
	c:\winnt\system32\drivers\disk.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True		False
diskperf	Diskperf		
	c:\winnt\system32\drivers\diskperf.sys		
	Kernel Driver	False	Disabled
	Stopped	OK	Normal
	False		False
dmboot	dmboot		
	c:\winnt\system32\drivers\dmboot.sys		
	Kernel Driver	False	Disabled
	Stopped	OK	Normal
	False		False
dmio	Logical Disk Manager Driver		
	c:\winnt\system32\drivers\dmio.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True		False
dmload	dmload		
	c:\winnt\system32\drivers\dmload.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True		False
efs	EFS c:\winnt\system32\drivers\efs.sys		
	File System Driver	True	Disabled
	Running	OK	Normal
	True		False
fastfat	Fastfat		
	c:\winnt\system32\drivers\fastfat.sys		
	File System Driver	True	Disabled
	Running	OK	Normal
	True		False
fd16_700	Fd16_700	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
fdc	Floppy Disk Controller Driver		
	c:\winnt\system32\drivers\fdc.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True		False

fips	Fips		
	c:\winnt\system32\drivers\fips.sys		
	Kernel Driver	True	Auto
	Running	OK	Normal
	True		False
fireport	fireport	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
flashpnt	flashpnt	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
flpydisk	Floppy Disk Driver		
	c:\winnt\system32\drivers\flpydisk.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True		False
ftdisk	Volume Manager Driver		
	c:\winnt\system32\drivers\ftdisk.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True		False
gpc	Generic Packet Classifier		
	c:\winnt\system32\drivers\msgpc.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True		False
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver		
	c:\winnt\system32\drivers\i8042prt.sys		
	Kernel Driver	True	System
	Running	OK	Normal
	True		False
ini910u	ini910u	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
intelide	IntelIde	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
ipfilterdriver	IP Traffic Filter Driver		
	c:\winnt\system32\drivers\ipfltdrv.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False		False
ipinip	IP in IP Tunnel Driver		
	c:\winnt\system32\drivers\ipinip.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False		False
ipnat	IP Network Address Translator		
	c:\winnt\system32\drivers\ipnat.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False		False
ipsec	IPSEC driver		
	c:\winnt\system32\drivers\ipsec.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False		False
ipsraidn	ipsraidn	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
isapnp	PnP ISA/EISA Bus Driver		
	c:\winnt\system32\drivers\isapnp.sys		
	Kernel Driver	True	Boot

	Running	OK	Critical	False
kbdclass	Keyboard Class Driver			
	c:\winnt\system32\drivers\kbdclass.sys			
	Kernel Driver	True	System	
	Running	OK	Normal	False
	True			
ksecdd	KSecDD			
	c:\winnt\system32\drivers\ksecdd.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
lbrtfdc	lbrtfdc	Not Available	Kernel Driver	
	False	System	Stopped	OK
	Ignore	False	False	
lp6nds35	lp6nds35	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
mmdd	mmdd			
	c:\winnt\system32\drivers\mmdd.sys			
	Kernel Driver	True	System	
	Running	OK	Ignore	False
	True			
modem	Modem			
	c:\winnt\system32\drivers\modem.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Ignore	False
	False			
mouclass	Mouse Class Driver			
	c:\winnt\system32\drivers\mouclass.sys			
	Kernel Driver	True	System	
	Running	OK	Normal	False
	True			
mountmgr	MountMgr			
	c:\winnt\system32\drivers\mountmgr.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
mraid35x	mraid35x	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
mrxsmb	MRXSMB			
	c:\winnt\system32\drivers\mrxsmb.sys			
	File System Driver	True	System	
	Running	OK	Normal	False
	True			
msfs	Msfs			
	c:\winnt\system32\drivers\msfs.sys			
	File System Driver	True	System	
	Running	OK	Normal	False
	True			
mskssrv	Microsoft Streaming Service Proxy			
	c:\winnt\system32\drivers\mskssrv.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
mspclock	Microsoft Streaming Clock Proxy			
	c:\winnt\system32\drivers\mspclock.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
mspqm	Microsoft Streaming Quality Manager Proxy			
	c:\winnt\system32\drivers\mspqm.sys			

	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False	False	False
mup	Mup	c:\winnt\system32\drivers\mup.sys	
	File System Driver	True	Boot
	Running	OK	Normal
	True	False	False
n100	Compaq Ethernet or Fast Ethernet NIC NT		
Driver	c:\winnt\system32\drivers\n100nt5.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False	False	False
ncrc710	Ncrc710	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	False
ndis	NDIS System Driver		
	c:\winnt\system32\drivers\ndis.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
ndistapi	Remote Access NDIS TAPI Driver		
	c:\winnt\system32\drivers\ndistapi.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
ndiswan	Remote Access NDIS WAN Driver		
	c:\winnt\system32\drivers\ndiswan.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
ndproxy	NDIS Proxy		
	c:\winnt\system32\drivers\ndproxy.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
netbios	NetBIOS Interface		
	c:\winnt\system32\drivers\netbios.sys		
	File System Driver	True	System
	Running	OK	Normal
	True	False	False
netbt	NetBios over Tcpip		
	c:\winnt\system32\drivers\netbt.sys		
	Kernel Driver	True	System
	Running	OK	Normal
	True	False	False
netdetect	NetDetect		
	c:\winnt\system32\drivers\netdetect.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	False	False	False
npfs	Npfs		
	c:\winnt\system32\drivers\npfs.sys		
	File System Driver	True	System
	Running	OK	Normal
	True	False	False
ntfs	Ntfs		
	c:\winnt\system32\drivers\ntfs.sys		
	File System Driver	True	Disabled
	Running	OK	Normal
	True	False	False
null	Null		
	c:\winnt\system32\drivers\null.sys		
	Kernel Driver	True	System

	Running	OK	Normal	False
	True			
nwlkflt	IPX Traffic Filter Driver			
	c:\winnt\system32\drivers\nwlkflt.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
nwlkfwd	IPX Traffic Forwarder Driver			
	c:\winnt\system32\drivers\nwlkfwd.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
openhci	Microsoft USB Open Host Controller Driver			
	c:\winnt\system32\drivers\openhci.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
parallel	Parallel			
	c:\winnt\system32\drivers\parallel.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
parport	Parport			
	c:\winnt\system32\drivers\parport.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
partmgr	PartMgr			
	c:\winnt\system32\drivers\partmgr.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
parvdm	ParVdm			
	c:\winnt\system32\drivers\parvdm.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
pci	PCI Bus Driver			
	c:\winnt\system32\drivers\pci.sys			
	Kernel Driver	True	Boot	
	Running	OK	Critical	False
	True			
pcidump	PCIDump			
	Not Available			Kernel Driver
	False	System	Stopped	OK
	Ignore	False	False	
pciide	PCIIde			
	c:\winnt\system32\drivers\pciide.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
pcmcia	Pcmcia			
	c:\winnt\system32\drivers\pcmcia.sys			
	Kernel Driver	False	Disabled	
	Stopped	OK	Normal	False
	False			
pdcomp	PDCOMP			
	Not Available			Kernel Driver
	False	Manual	Stopped	OK
	Ignore	False	False	
pdframe	PDRFRAME			
	Not Available			Kernel Driver
	False	Manual	Stopped	OK
	Ignore	False	False	

pdreli	PDRELI				
	Not Available			Kernel Driver	
	False	Manual	Stopped	OK	
	Ignore	False	False		
pdrframe	PDRFRAME				
	Not Available			Kernel Driver	
	False	Manual	Stopped	OK	
	Ignore	False	False		
pptpminiport	WAN Miniport (PPTP)				
	c:\winnt\system32\drivers\rasppptp.sys				
	Kernel Driver	True	Manual		
	Running	OK	Normal	False	
	True				
ptilink	Direct Parallel Link Driver				
	c:\winnt\system32\drivers\ptilink.sys				
	Kernel Driver	True	Manual		
	Running	OK	Normal	False	
	True				
q57w2k	Compaq NC7780 Gigabit Server Adapter				
	c:\winnt\system32\drivers\q57w2k.sys				
	Kernel Driver	True	Manual		
	Running	OK	Normal	False	
	True				
ql1080	ql1080				
	Not Available			Kernel Driver	
	False	Disabled	Stopped	OK	
	Normal	False	False		
ql10wnt	ql10wnt				
	Not Available			Kernel Driver	
	False	Disabled	Stopped	OK	
	Normal	False	False		
ql1240	ql1240				
	Not Available			Kernel Driver	
	False	Disabled	Stopped	OK	
	Normal	False	False		
ql2100	ql2100				
	Not Available			Kernel Driver	
	False	Disabled	Stopped	OK	
	Normal	False	False		
rasacd	Remote Access Auto Connection Driver				
	c:\winnt\system32\drivers\rasacd.sys				
	Kernel Driver	True	System		
	Running	OK	Normal	False	
	True				
rasl2tp	WAN Miniport (L2TP)				
	c:\winnt\system32\drivers\rasl2tp.sys				
	Kernel Driver	True	Manual		
	Running	OK	Normal	False	
	True				
raspti	Direct Parallel				
	c:\winnt\system32\drivers\raspti.sys				
	Kernel Driver	True	Manual		
	Running	OK	Normal	False	
	True				
rca	Microsoft Streaming Network Raw Channel				
Access	c:\winnt\system32\drivers\rca.sys				
	Kernel Driver	False	Manual		
	Stopped	OK	Normal	False	
	False				
rdbss	Rdbss				
	c:\winnt\system32\drivers\rdbss.sys				
	File System Driver	True	System		
	Running	OK	Normal	False	
	True				
rdpwd	RDPWD				
	c:\winnt\system32\drivers\rdpwd.sys				
	Kernel Driver	False	Manual		
	Stopped	OK	Ignore	False	
	False				

```

redbook Digital CD Audio Playback Filter Driver
c:\winnt\system32\drivers\redbook.sys
Kernel Driver False System
Stopped OK Normal False
False

serenum Serenum Filter Driver
c:\winnt\system32\drivers\serenum.sys
Kernel Driver True Manual
Running OK Normal False
True

serial Serial port driver
c:\winnt\system32\drivers\serial.sys
Kernel Driver True System
Running OK Ignore False
True

sfloppy Sfloppy
c:\winnt\system32\drivers\sfloppy.sys
Kernel Driver False System
Stopped OK Ignore False
False

sglfb sglfb Not Available Kernel Driver
False System Stopped OK
Normal False False

simbad Simbad Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

sparrow Sparrow Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

spud Special Purpose Utility Driver
c:\winnt\system32\drivers\spud.sys
Kernel Driver True Manual
Running OK Normal False
True

srv Srv c:\winnt\system32\drivers\srv.sys
File System Driver True Manual
Running OK Normal False
True

swenum Software Bus Driver
c:\winnt\system32\drivers\swenum.sys
Kernel Driver True Manual
Running OK Normal False
True

symc810 symc810 Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

symc8xx symc8xx Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

sym_hi sym_hi Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

tcpip TCP/IP Protocol Driver
c:\winnt\system32\drivers\tcpip.sys
Kernel Driver True System
Running OK Normal False
True

tdasync TDASYNC
c:\winnt\system32\drivers\tdasync.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

```

```

tdipx TDIPX
c:\winnt\system32\drivers\tdipx.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

tdnetb TDNETB
c:\winnt\system32\drivers\tdnetb.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

tdpipe TDPIPE
c:\winnt\system32\drivers\tdpipe.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

tdspix TDSPX
c:\winnt\system32\drivers\tdspix.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

tdtcp TDTCP
c:\winnt\system32\drivers\tdtcp.sys
Kernel Driver False Manual
Stopped OK Ignore False
False

termdd Terminal Device Driver
c:\winnt\system32\drivers\termdd.sys
Kernel Driver False Disabled
Stopped OK Normal False
False

tga tga Not Available Kernel Driver
False System Stopped OK
Ignore False False

udfs Udfs
c:\winnt\system32\drivers\udfs.sys
File System Driver False Disabled
Stopped OK Normal False
False

ultra66 ultra66 Not Available Kernel Driver
False Disabled Stopped OK
Normal False False

update Microcode Update Driver
c:\winnt\system32\drivers\update.sys
Kernel Driver True Manual
Running OK Normal False
True

usbhub Microsoft USB Standard Hub Driver
c:\winnt\system32\drivers\usbhub.sys
Kernel Driver True Manual
Running OK Normal False
True

vgasave VgaSave c:\winnt\system32\drivers\vga.sys
Kernel Driver True System
Running OK Ignore False
True

wanarp Remote Access IP ARP Driver
c:\winnt\system32\drivers\wanarp.sys
Kernel Driver True Manual
Running OK Normal False
True

wdica WDICA Not Available Kernel Driver
False Manual Stopped OK
Ignore False False

```

```

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Os2LibPath %SystemRoot%\system32\os2\dll1;
Path <SYSTEM>
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem;C:\Program Files\Microsoft SQL
Server\80\Tools\BINN <SYSTEM>
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 6 Model 11
Stepping 1, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0b01 <SYSTEM>
NUMBER_OF_PROCESSORS 2 <SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp
TMP %USERPROFILE%\Local Settings\Temp
PCL\Administrator
PCL\Administrator

[Jobs]

[ Following are sub-categories of this main category
]

[Print]

Document Size Owner Notify Status
Time Submitted Start Time
Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Name
Print Processor Host Print Queue
Data Type Name

Unknown Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown Unknown

[Network Connections]

Local Name Remote Name Type
Status User Name
No network connections information

[Running Tasks]

Name Path Process ID Priority Min
Working Set Max Working Set Start Time
Version Size File Date

```

```

system idle process Not Available      0      0
Not Available      Not Available      Not
Available Unknown Unknown
system Not Available      8      0
1413120 Not Available      Unknown
Unknown Unknown
smss.exe c:\winnt\system32\smss.exe 168      11
204800 1413120 5/9/2002 5:06:24 PM
5.00.2195.2901 44.27 KB (45,328 bytes)
12/7/1999 6:00:00 AM
csrss.exe Not Available      192      13      Not
Available Not Available      5/9/2002 5:06:28 PM
Unknown Unknown Unknown
winlogon.exe c:\winnt\system32\winlogon.exe
188      13      204800 1413120
5/9/2002 5:06:30 PM 5.00.2195.2953
173.77 KB (177,936 bytes) 12/7/1999
6:00:00 AM
services.exe c:\winnt\system32\services.exe
240      9      204800 1413120
5/9/2002 5:06:31 PM 5.00.2195.2780
86.77 KB (88,848 bytes) 12/7/1999
6:00:00 AM
lsass.exe c:\winnt\system32\lsass.exe 252      9
204800 1413120 5/9/2002 5:06:31 PM
5.00.2195.2964 32.77 KB (33,552 bytes)
12/7/1999 6:00:00 AM
svchost.exe c:\winnt\system32\svchost.exe 412
8      204800 1413120 5/9/2002
5:06:34 PM 5.00.2134.1 7.77 KB
(7,952 bytes) 12/7/1999 6:00:00 AM
svchost.exe c:\winnt\system32\svchost.exe 472
8      204800 1413120 5/9/2002
5:06:35 PM 5.00.2134.1 7.77 KB
(7,952 bytes) 12/7/1999 6:00:00 AM
winmgmt.exe c:\winnt\system32\wbem\winmgmt.exe 492
8      204800 1413120 5/9/2002
5:06:35 PM 1.50.1085.0029 192.08 KB
(196,685 bytes) 4/3/2002 1:45:21 PM
inetinfo.exe c:\winnt\system32\inetrv\inetinfo.exe 532
8      204800 1413120 5/9/2002
5:06:36 PM 5.00.0984 14.27 KB (14,608 bytes)
4/3/2002 1:46:24 PM
explorer.exe c:\winnt\explorer.exe 644
8      204800 1413120 5/13/2002
1:51:02 PM 5.00.3315.2846 237.27 KB
(242,960 bytes) 4/3/2002 1:45:14 PM
cpqteam.exe c:\winnt\system32\cpqteam.exe 716
8      204800 1413120 5/13/2002
1:51:03 PM 7.0.700.29 52.00 KB
(53,248 bytes) 11/13/2001 5:53:20 AM
mmc.exe c:\winnt\system32\mmc.exe 664      8
204800 1413120 5/13/2002 1:51:11 PM
5.00.2195.2301 589.27 KB (603,408
bytes) 4/3/2002 1:44:49 PM
rsrvp.exe c:\winnt\system32\rsrvp.exe 896      8
204800 1413120 5/13/2002 1:51:45 PM
5.00.2167.1 172.77 KB (176,912
bytes) 12/7/1999 6:00:00 AM

[Loaded Modules]

```

```

Name Version Size File Date Manufacturer
Path
traffic.dll 5.00.2139.1 30.77 KB
(31,504 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\traffic.dll
rsrvp.exe 5.00.2167.1 172.77 KB (176,912
bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\rsrvp.exe
wbemprox.dll 1.50.1085.0045 40.08 KB
(41,040 bytes) 4/3/2002 1:45:21 PM
Microsoft Corporation
c:\winnt\system32\wbem\wbemprox.dll
mlang.dll 5.00.3103.1000 510.77 KB (523,024
bytes) 4/3/2002 1:44:49 PM
Microsoft Corporation
c:\winnt\system32\mlang.dll
rassapi.dll 5.00.2188.1 14.27 KB
(14,608 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\rassapi.dll
adsnt.dll 5.00.2195.2778 195.27 KB (199,952
bytes) 4/3/2002 1:44:33 PM
Microsoft Corporation
c:\winnt\system32\adsnt.dll
dbghelp.dll 5.00.2195.2104 159.27 KB
(163,088 bytes) 5/4/2001 1:05:02 PM
Microsoft Corporation
c:\winnt\system32\dbghelp.dll
localsec.dll 5.00.2195.2130 230.27 KB
(235,792 bytes) 4/3/2002 1:44:48 PM
Microsoft Corporation
c:\winnt\system32\localsec.dll
devmgr.dll 5.00.2166.1 215.77 KB
(220,944 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\devmgr.dll
filemgmt.dll 5.00.2195.2165 287.27 KB
(294,160 bytes) 4/3/2002 1:44:43 PM
Microsoft Corporation
c:\winnt\system32\filemgmt.dll
pdh.dll 5.00.2195.2739 147.77 KB (151,312
bytes) 4/3/2002 1:45:05 PM
Microsoft Corporation
c:\winnt\system32\pdh.dll
smlogcfg.dll 5.00.2195.2485 273.27 KB
(279,824 bytes) 4/3/2002 1:45:09 PM
Microsoft Corporation
c:\winnt\system32\smlogcfg.dll
cabinet.dll 5.00.2147.1 54.77 KB
(56,080 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\cabinet.dll
msinfo32.dll 5.00.2177.1 312.27 KB
(319,760 bytes) 4/3/2002 11:41:37 AM
Microsoft Corporation
c:\program
files\common files\microsoft
shared\msinfo\msinfo32.dll
riched20.dll 5.30.23.1205 421.27 KB
(431,376 bytes) 4/3/2002 1:45:06 PM
Microsoft Corporation
c:\winnt\system32\riched20.dll
riched32.dll 5.00.2134.1 3.77 KB
(3,856 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\riched32.dll
els.dll 5.00.2175.1 151.27 KB (154,896
bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\els.dll

```

```

ntmsmgr.dll 1.0.0.1 427.77 KB (438,032
bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation and HighGround Systems, Inc.
c:\winnt\system32\ntmsmgr.dll
mmfutil.dll 1.50.1085.0000 32.06 KB
(32,829 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mmfutil.dll
logdrive.dll 1.50.1085.0000 200.06 KB
(204,863 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\logdrive.dll
dfrgres.dll 5.00.2150.1 27.50 KB
(28,160 bytes) 12/7/1999 6:00:00 AM
Executive Software International, Inc.
c:\winnt\system32\dfrgres.dll
dfrgsnap.dll 5.00.2195.2104 41.77 KB
(42,768 bytes) 4/3/2002 1:44:39 PM
Executive Software International, Inc.
c:\winnt\system32\dfrgsnap.dll
dmdskres.dll 2195.2104.297.3 119.50 KB
(122,368 bytes) 4/3/2002 1:44:40 PM
Microsoft Corp., VERITAS Software
c:\winnt\system32\dmdskres.dll
dmutil.dll 2195.2104.297.3 42.27 KB
(43,280 bytes) 4/3/2002 1:44:40 PM
VERITAS Software Corp.
c:\winnt\system32\dmutil.dll
ntmsapi.dll 5.00.1948.1 51.77 KB
(53,008 bytes) 4/3/2002 1:45:01 PM
Microsoft Corporation
c:\winnt\system32\ntmsapi.dll
dmskmgm.dll 2215.2215.297.3 160.27 KB
(164,112 bytes) 4/3/2002 1:44:40 PM
Microsoft Corp., VERITAS Software
c:\winnt\system32\dmskmgm.dll
mycomput.dll 5.00.2134.1 107.77 KB
(110,352 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mycomput.dll
comdlg32.dll 5.00.3103.1000 236.77 KB
(242,448 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\comdlg32.dll
mmcmdmgr.dll 5.00.2178.1 815.27 KB
(834,832 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mmcmdmgr.dll
msvc50.dll 5.00.7051 552.50 KB (565,760
bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msvc50.dll
mfc42u.dll 6.00.8665.0 972.05 KB
(995,384 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mfc42u.dll
mmc.exe 5.00.2195.2301 589.27 KB (603,408
bytes) 4/3/2002 1:44:49 PM
Microsoft Corporation
c:\winnt\system32\mmc.exe
cpqteam.exe 7.0.700.29 52.00 KB
(53,248 bytes) 11/13/2001 5:53:20 AM
Compaq Computer Corporation
c:\winnt\system32\cpqteam.exe
shdoclc.dll 5.00.3315.2879 324.50 KB
(332,288 bytes) 4/3/2002 1:45:08 PM
Microsoft Corporation
c:\winnt\system32\shdoclc.dll

```

wininet.dll 5.00.3315.1000 456.77 KB
(467,728 bytes) 4/3/2002 1:45:13 PM Microsoft Corporation
c:\winnt\system32\wininet.dll
linkinfo.dll 5.00.2134.1 15.77 KB
(16,144 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\linkinfo.dll
powrprof.dll 5.00.3103.1000 13.27 KB
(13,584 bytes) 4/3/2002 1:45:05 PM Microsoft Corporation
c:\winnt\system32\powrprof.dll
batmeter.dll 5.00.3103.1000 20.27 KB
(20,752 bytes) 4/3/2002 1:44:35 PM Microsoft Corporation
c:\winnt\system32\batmeter.dll
stobject.dll 5.00.2195.2780 79.27 KB
(81,168 bytes) 4/3/2002 1:45:10 PM Microsoft Corporation
c:\winnt\system32\stobject.dll
webcheck.dll 5.00.3315.1000 251.77 KB
(257,808 bytes) 4/3/2002 1:45:13 PM Microsoft Corporation
c:\winnt\system32\webcheck.dll
msi.dll 1.11.2405.0 1.69 MB (1,767,184 bytes) 4/3/2002 1:44:53 PM Microsoft Corporation
c:\winnt\system32\msi.dll
ntshrui.dll 5.00.2134.1 46.77 KB
(47,888 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntshrui.dll
mydocs.dll 5.00.2920.0000 55.77 KB
(57,104 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mydocs.dll
browseui.dll 5.00.3315.2846 788.77 KB
(807,696 bytes) 4/3/2002 1:44:35 PM Microsoft Corporation
c:\winnt\system32\browseui.dll
shdocvw.dll 5.00.3315.2879 1.05 MB
(1,104,144 bytes) 4/3/2002 1:45:08 PM Microsoft Corporation
c:\winnt\system32\shdocvw.dll
explorer.exe 5.00.3315.2846 237.27 KB
(242,960 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\explorer.exe
ntlsapi.dll 5.00.2134.1 6.77 KB
(6,928 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntlsapi.dll
httpext.dll 0.9.3940.21 435.27 KB
(445,712 bytes) 4/3/2002 1:46:23 PM Microsoft Corporation
c:\winnt\system32\inetrv\httpext.dll
md5filt.dll 5.00.0984 32.77 KB (33,552 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\md5filt.dll
gzip.dll 5.00.0984 30.27 KB (30,992 bytes) 4/3/2002 1:46:23 PM Microsoft Corporation
c:\winnt\system32\inetrv\gzip.dll
compfilt.dll 5.00.0984 22.77 KB (23,312 bytes) 4/3/2002 1:46:23 PM Microsoft Corporation
c:\winnt\system32\inetrv\compfilt.dll
sspfilt.dll 5.00.0984 43.27 KB (44,304 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\sspfilt.dll
iscomlog.dll 5.00.0984 24.77 KB (25,360 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\iscomlog.dll

lonsint.dll 5.00.0984 11.77 KB (12,048 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\lonsint.dll
inetsloc.dll 5.00.0984 20.27 KB (20,752 bytes) 4/3/2002 1:44:45 PM Microsoft Corporation
c:\winnt\system32\inetsloc.dll
iisfecnv.dll 5.00.0984 7.27 KB (7,440 bytes) 3/18/2002 7:37:59 PM Microsoft Corporation
c:\winnt\system32\inetrv\iisfecnv.dll
isatq.dll 5.00.0984 60.27 KB (61,712 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\isatq.dll
infocomm.dll 5.00.0984 238.27 KB (243,984 bytes) 4/3/2002 1:46:24 PM Microsoft Corporation
c:\winnt\system32\inetrv\infocomm.dll
w3svc.dll 5.00.0984 343.27 KB (351,504 bytes) 4/3/2002 1:46:26 PM Microsoft Corporation
c:\winnt\system32\inetrv\w3svc.dll
security.dll 5.00.2154.1 5.77 KB (5,904 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\security.dll
svcext.dll 5.00.0984 39.77 KB (40,720 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\svcext.dll
admexs.dll 5.00.0984 27.77 KB (28,432 bytes) 4/3/2002 1:46:22 PM Microsoft Corporation
c:\winnt\system32\inetrv\admexs.dll
wamreg.dll 5.00.0984 45.77 KB (46,864 bytes) 4/3/2002 1:46:26 PM Microsoft Corporation
c:\winnt\system32\inetrv\wamreg.dll
metadata.dll 5.00.0984 68.77 KB (70,416 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\metadata.dll
iismap.dll 5.00.0984 55.77 KB (57,104 bytes) 4/3/2002 1:44:45 PM Microsoft Corporation
c:\winnt\system32\iismap.dll
nsepm.dll 5.00.0984 43.27 KB (44,304 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\nsepm.dll
admwprox.dll 5.00.0984 31.77 KB (32,528 bytes) 3/18/2002 7:38:00 PM Microsoft Corporation
c:\winnt\system32\admwprox.dll
coadmin.dll 5.00.0984 39.27 KB (40,208 bytes) 4/3/2002 1:46:23 PM Microsoft Corporation
c:\winnt\system32\inetrv\coadmin.dll
iisadmin.dll 5.00.0984 15.27 KB (15,632 bytes) 4/3/2002 1:46:24 PM Microsoft Corporation
c:\winnt\system32\inetrv\iisadmin.dll
rpcref.dll 5.00.0984 4.27 KB (4,368 bytes) 4/3/2002 1:46:25 PM Microsoft Corporation
c:\winnt\system32\inetrv\rpcref.dll
iisrtl.dll 5.00.0984 119.77 KB (122,640 bytes) 4/3/2002 1:44:45 PM Microsoft Corporation
c:\winnt\system32\iisrtl.dll
inetinfo.exe 5.00.0984 14.27 KB (14,608 bytes) 4/3/2002 1:46:24 PM Microsoft Corporation
c:\winnt\system32\inetrv\inetinfo.exe
netui1.dll 5.00.2134.1 210.27 KB (215,312 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\netui1.dll

netui0.dll 5.00.2134.1 70.27 KB (71,952 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\netui0.dll
ntlanman.dll 5.00.2157.1 35.27 KB (36,112 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntlanman.dll
wshnetbs.dll 5.00.2134.1 7.77 KB (7,952 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\wshnetbs.dll
ntmarta.dll 5.00.2195.2862 98.77 KB (101,136 bytes) 4/3/2002 1:45:01 PM Microsoft Corporation
c:\winnt\system32\ntmarta.dll
provthrd.dll 1.50.1085.0000 68.07 KB (69,708 bytes) 4/3/2002 11:41:29 AM
Microsoft Corporation
c:\winnt\system32\wbem\provthrd.dll
ntevt.dll 1.50.1085.0000 192.06 KB (196,669 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\wbem\ntevt.dll
perfos.dll 5.00.2155.1 21.27 KB (21,776 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\perfos.dll
cfgmgr32.dll 5.00.2134.1 16.77 KB (17,168 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\cfgmgr32.dll
psapi.dll 5.00.2134.1 28.27 KB (28,944 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\psapi.dll
framedyn.dll 1.50.1085.0000 164.05 KB (167,992 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\wbem\framedyn.dll
cimwin32.dll 1.50.1085.0038 1.02 MB (1,073,232 bytes) 4/3/2002 1:45:19 PM Microsoft Corporation
c:\winnt\system32\wbem\cimwin32.dll
wbemsvc.dll 1.50.1085.0007 40.07 KB (41,036 bytes) 4/3/2002 1:45:21 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemsvc.dll
wbemess.dll 1.50.1085.0039 364.07 KB (372,804 bytes) 4/3/2002 1:45:21 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemess.dll
fastprox.dll 1.50.1085.0037 144.08 KB (147,536 bytes) 4/3/2002 1:45:20 PM Microsoft Corporation
c:\winnt\system32\wbem\fastprox.dll
wbemcore.dll 1.50.1085.0036 628.07 KB (643,140 bytes) 4/3/2002 1:45:21 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemcore.dll
wbemcomm.dll 1.50.1085.0021 692.07 KB (708,675 bytes) 4/3/2002 1:45:20 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemcomm.dll
winmgmt.exe 1.50.1085.0029 192.08 KB (196,685 bytes) 4/3/2002 1:45:21 PM Microsoft

Corporation
 c:\winnt\system32\wbem\winmgmt.exe
 wmi.dll 5.00.2191.1 6.27 KB (6,416 bytes)
 12/7/1999 6:00:00 AM Microsoft
 Corporation
 c:\winnt\system32\wmi.dll
 netshell.dll 5.00.2195.2779 457.27 KB
 (468,240 bytes) 4/3/2002 1:45:00 PM Microsoft
 Corporation
 c:\winnt\system32\netshell.dll
 netman.dll 5.00.2195.2779 89.27 KB
 (91,408 bytes) 4/3/2002 1:44:59 PM Microsoft
 Corporation
 c:\winnt\system32\netman.dll
 sens.dll 5.00.2163.1 36.77 KB (37,648 bytes)
 12/7/1999 6:00:00 AM Microsoft
 Corporation
 c:\winnt\system32\sens.dll
 txfaux.dll 2000.2.3471.1 374.27 KB
 (383,248 bytes) 4/3/2002 1:45:12 PM Microsoft
 Corporation
 c:\winnt\system32\txfaux.dll
 es.dll 2000.2.3471.1 222.27 KB (227,600
 bytes) 4/3/2002 1:44:42 PM Microsoft Corporation
 c:\winnt\system32\es.dll
 winrnr.dll 5.00.2160.1 18.77 KB
 (19,216 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\winrnr.dll
 rpcss.dll 5.00.2195.2815 231.27 KB (236,816
 bytes) 4/3/2002 1:45:07 PM Microsoft Corporation
 c:\winnt\system32\rpcss.dll
 svchost.exe 5.00.2134.1 7.77 KB
 (7,952 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\svchost.exe
 scecli.dll 5.00.2195.2780 105.27 KB
 (107,792 bytes) 4/3/2002 1:45:07 PM Microsoft
 Corporation
 c:\winnt\system32\scecli.dll
 atl.dll 3.00.8449 57.56 KB (58,938 bytes)
 12/7/1999 6:00:00 AM Microsoft
 Corporation
 c:\winnt\system32\atl.dll
 certcli.dll 5.00.2195.2778 130.77 KB
 (133,904 bytes) 4/3/2002 1:44:36 PM Microsoft
 Corporation
 c:\winnt\system32\certcli.dll
 esent.dll 6.0.3940.13 1.08 MB (1,135,376
 bytes) 4/3/2002 1:44:42 PM Microsoft Corporation
 c:\winnt\system32\esent.dll
 mswsock.dll 5.00.2195.2871 62.77 KB
 (64,272 bytes) 4/3/2002 1:44:58 PM Microsoft
 Corporation
 c:\winnt\system32\mswsock.dll
 ntdsatq.dll 5.00.2195.2878 31.27 KB
 (32,016 bytes) 4/3/2002 1:45:00 PM Microsoft
 Corporation
 c:\winnt\system32\ntdsatq.dll
 ntdsa.dll 5.00.2195.2899 990.77 KB (1,014,544
 bytes) 4/3/2002 1:45:00 PM Microsoft Corporation
 c:\winnt\system32\ntdsa.dll
 kdcsvc.dll 5.00.2195.2878 137.77 KB
 (141,072 bytes) 4/3/2002 1:44:48 PM Microsoft
 Corporation
 c:\winnt\system32\kdcsvc.dll
 sfmapi.dll 5.00.2134.1 38.77 KB
 (39,696 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\sfmapi.dll
 rassfm.dll 5.00.2195.2671 21.27 KB
 (21,776 bytes) 4/3/2002 1:45:06 PM Microsoft
 Corporation
 c:\winnt\system32\rassfm.dll

mpr.dll 5.00.2195.2779 53.27 KB (54,544 bytes)
 4/3/2002 1:44:49 PM Microsoft Corporation
 c:\winnt\system32\mpr.dll
 rsabase.dll 5.00.2195.2228 128.27 KB
 (131,344 bytes) 5/4/2001 1:05:02 PM Microsoft
 Corporation
 c:\winnt\system32\rsabase.dll
 schannel.dll 5.00.2195.2922 138.27 KB
 (141,584 bytes) 5/4/2001 1:05:02 PM Microsoft
 Corporation
 c:\winnt\system32\schannel.dll
 netlogon.dll 5.00.2195.2865 357.77 KB
 (366,352 bytes) 4/3/2002 1:44:59 PM Microsoft
 Corporation
 c:\winnt\system32\netlogon.dll
 msvl_0.dll 5.00.2195.2900 111.77 KB
 (114,448 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\msvl_0.dll
 kerberos.dll 5.00.2195.2913 198.77 KB
 (203,536 bytes) 4/3/2002 1:44:48 PM Microsoft
 Corporation
 c:\winnt\system32\kerberos.dll
 msprivs.dll 5.00.2154.1 41.50 KB
 (42,496 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\msprivs.dll
 samsvr.dll 5.00.2195.2918 369.77 KB
 (378,640 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\samsrv.dll
 lsasrv.dll 5.00.2195.2964 492.77 KB
 (504,592 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\lsasrv.dll
 lsass.exe 5.00.2195.2964 32.77 KB (33,552 bytes)
 12/7/1999 6:00:00 AM Microsoft
 Corporation
 c:\winnt\system32\lsass.exe
 rasadhlp.dll 5.00.2168.1 7.27 KB
 (7,440 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\rasadhlp.dll
 wshtcpip.dll 5.00.2195.2104 17.27 KB
 (17,680 bytes) 4/3/2002 1:45:14 PM Microsoft
 Corporation
 c:\winnt\system32\wshtcpip.dll
 msafd.dll 5.00.2195.2779 106.77 KB (109,328
 bytes) 4/3/2002 1:44:50 PM Microsoft Corporation
 c:\winnt\system32\msafd.dll
 dhcpcsvc.dll 5.00.2195.2778 88.77 KB
 (90,896 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\dhcpcsvc.dll
 tapi32.dll 5.00.2182.1 123.27 KB
 (126,224 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\tapi32.dll
 rasman.dll 5.00.2195.2780 54.77 KB
 (56,080 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\rasman.dll
 rasapi32.dll 5.00.2195.2671 189.77 KB
 (194,320 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\rasapi32.dll
 rtutils.dll 5.00.2168.1 43.77 KB
 (44,816 bytes) 12/7/1999 6:00:00 AM

Microsoft Corporation
 c:\winnt\system32\rtutils.dll
 adslidpc.dll 5.00.2195.2842 127.27 KB
 (130,320 bytes) 4/3/2002 1:44:33 PM Microsoft
 Corporation
 c:\winnt\system32\adslidpc.dll
 activeds.dll 5.00.2195.2778 174.77 KB
 (178,960 bytes) 4/3/2002 1:44:27 PM Microsoft
 Corporation
 c:\winnt\system32\activeds.dll
 mprapi.dll 5.00.2181.1 79.27 KB
 (81,168 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\mprapi.dll
 iphlpapi.dll 5.00.2173.2 67.77 KB
 (69,392 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\iphlpapi.dll
 rnr20.dll 5.00.2195.2871 35.77 KB (36,624 bytes)
 4/3/2002 1:45:07 PM Microsoft Corporation
 c:\winnt\system32\rnr20.dll
 browser.dll 5.00.2195.2778 48.27 KB
 (49,424 bytes) 4/3/2002 1:44:35 PM Microsoft
 Corporation
 c:\winnt\system32\browser.dll
 psbase.dll 5.00.2195.2779 111.77 KB
 (114,448 bytes) 4/3/2002 1:45:05 PM Microsoft
 Corporation
 c:\winnt\system32\psbase.dll
 cryptsvc.dll 5.00.2181.1 61.77 KB
 (63,248 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\cryptsvc.dll
 wmicore.dll 5.00.2195.2842 72.27 KB
 (74,000 bytes) 4/3/2002 1:45:14 PM Microsoft
 Corporation
 c:\winnt\system32\wmicore.dll
 cryptdll.dll 5.00.2135.1 41.27 KB
 (42,256 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\cryptdll.dll
 wkssvc.dll 5.00.2195.2780 95.27 KB
 (97,552 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\wkssvc.dll
 srvsvc.dll 5.00.2195.2904 79.27 KB
 (81,168 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\srvsvc.dll
 winsta.dll 5.00.2195.2386 36.77 KB
 (37,648 bytes) 4/3/2002 1:45:14 PM Microsoft
 Corporation
 c:\winnt\system32\winsta.dll
 icmp.dll 5.00.2134.1 7.27 KB (7,440 bytes)
 12/7/1999 6:00:00 AM Microsoft
 Corporation
 c:\winnt\system32\icmp.dll
 lmhsvc.dll 5.00.2195.2778 9.77 KB
 (10,000 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\lmhsvc.dll
 eventlog.dll 5.00.2178.1 43.77 KB
 (44,816 bytes) 12/7/1999 6:00:00 AM
 Microsoft Corporation
 c:\winnt\system32\eventlog.dll
 ntdsapi.dll 5.00.2195.2661 55.77 KB
 (57,104 bytes) 4/3/2002 1:45:00 PM Microsoft
 Corporation
 c:\winnt\system32\ntdsapi.dll

scesrv.dll 5.00.2195.2780 226.27 KB
(231,696 bytes) 4/3/2002 1:45:07 PM Microsoft Corporation
c:\winnt\system32\scesrv.dll
umpnpgmgr.dll 5.00.2182.1 86.27 KB
(88,336 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\umpnpgmgr.dll
services.exe 5.00.2195.2780 86.77 KB
(88,848 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\services.exe
clbcatq.dll 2000.2.3471.1 496.77 KB
(508,688 bytes) 4/3/2002 1:44:36 PM Microsoft Corporation
c:\winnt\system32\clbcatq.dll
oleaut32.dll 2.40.4517 612.27 KB (626,960 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\oleaut32.dll
cscui.dll 5.00.2195.2959 228.27 KB (233,744 bytes) 4/3/2002 1:44:38 PM Microsoft Corporation
c:\winnt\system32\cscui.dll
winspool.drv 5.00.2195.2780 109.77 KB
(112,400 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\winspool.drv
wincard.dll 5.00.2134.1 77.27 KB
(79,120 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\wincard.dll
wlnotify.dll 5.00.2195.2780 53.77 KB
(55,056 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\system32\wlnotify.dll
csddl.dll 5.00.2195.2401 98.27 KB
(100,624 bytes) 4/3/2002 1:44:38 PM Microsoft Corporation
c:\winnt\system32\csddl.dll
lz32.dll 5.00.2134.1 9.77 KB (10,000 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\lz32.dll
version.dll 5.00.2134.1 15.77 KB
(16,144 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\version.dll
rsaenh.dll 5.00.2195.2228 130.77 KB
(133,904 bytes) 4/3/2002 1:46:17 PM Microsoft Corporation
c:\winnt\system32\rsaenh.dll
mscat32.dll 5.131.2134.1 7.77 KB
(7,952 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mscat32.dll
ole32.dll 5.00.2195.2887 969.77 KB (993,040 bytes) 4/3/2002 1:45:04 PM Microsoft Corporation
c:\winnt\system32\ole32.dll
imagehlp.dll 5.00.2195.2778 125.77 KB
(128,784 bytes) 5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\imagehlp.dll
msasn1.dll 5.00.2134.1 51.27 KB
(52,496 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msasn1.dll
crypt32.dll 5.131.2195.2833 451.27 KB
(462,096 bytes) 4/3/2002 1:44:38 PM Microsoft Corporation
c:\winnt\system32\crypt32.dll

wintrust.dll 5.131.2195.2779 162.27 KB
(166,160 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\system32\wintrust.dll
setupapi.dll 5.00.2195.2663 555.77 KB
(569,104 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\setupapi.dll
winmm.dll 5.00.2161.1 184.77 KB (189,200 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\winmm.dll
comctl32.dll 5.81 537.77 KB (550,672 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\comctl32.dll
shlwapi.dll 5.00.3315.1000 282.77 KB (289,552 bytes) 4/3/2002 1:45:09 PM Microsoft Corporation
c:\winnt\system32\shlwapi.dll
shell32.dll 5.00.3315.2902 2.25 MB (2,359,056 bytes) 4/3/2002 1:45:09 PM Microsoft Corporation
c:\winnt\system32\shell32.dll
msgina.dll 5.00.2195.2779 324.27 KB (332,048 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msgina.dll
wsock32.dll 5.00.2195.2871 21.27 KB (21,776 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\system32\wsock32.dll
dnsapi.dll 5.00.2195.2785 130.77 KB (133,904 bytes) 4/3/2002 1:44:40 PM Microsoft Corporation
c:\winnt\system32\dnsapi.dll
wldap32.dll 5.00.2195.2797 125.27 KB (128,272 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\system32\wldap32.dll
ws2help.dll 5.00.2134.1 17.77 KB (18,192 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\ws2help.dll
ws2_32.dll 5.00.2195.2780 67.77 KB (69,392 bytes) 4/3/2002 1:45:14 PM Microsoft Corporation
c:\winnt\system32\ws2_32.dll
samlib.dll 5.00.2195.2780 49.77 KB (50,960 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\samlib.dll
netrap.dll 5.00.2134.1 11.27 KB (11,536 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\netrap.dll
netapi32.dll 5.00.2195.2808 303.77 KB (311,056 bytes) 4/3/2002 1:44:59 PM Microsoft Corporation
c:\winnt\system32\netapi32.dll
profmap.dll 5.00.2181.1 29.27 KB (29,968 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\profmap.dll
secur32.dll 5.00.2195.2862 46.77 KB (47,888 bytes) 4/3/2002 1:45:08 PM Microsoft Corporation
c:\winnt\system32\secur32.dll
sfc.dll 5.00.2195.2896 92.11 KB (94,320 bytes) 4/3/2002 1:45:08 PM Microsoft Corporation
c:\winnt\system32\sfc.dll
nddeapi.dll 5.00.2137.1 15.27 KB (15,632 bytes) 12/7/1999 6:00:00 AM

Microsoft Corporation
c:\winnt\system32\nddeapi.dll
userenv.dll 5.00.2195.2780 361.77 KB
(370,448 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\userenv.dll
user32.dll 5.00.2195.2821 392.77 KB
(402,192 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\user32.dll
gdi32.dll 5.00.2195.2778 228.77 KB (234,256 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\gdi32.dll
rpcrt4.dll 5.00.2195.2832 437.27 KB (447,760 bytes) 4/3/2002 1:45:07 PM Microsoft Corporation
c:\winnt\system32\rpcrt4.dll
advapi32.dll 5.00.2195.2867 351.77 KB (360,208 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\advapi32.dll
kernel32.dll 5.00.2195.2778 714.77 KB (731,920 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\kernel32.dll
msvcrt.dll 6.10.8924.0 284.05 KB (290,869 bytes) 5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\msvcrt.dll
winlogon.exe 5.00.2195.2953 173.77 KB (177,936 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\winlogon.exe
sfcfiles.dll 5.00.2195.2967 948.27 KB (971,024 bytes) 4/3/2002 1:45:08 PM Microsoft Corporation
c:\winnt\system32\sfcfiles.dll
ntdll.dll 5.00.2195.2779 478.77 KB (490,256 bytes) 5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\ntdll.dll
smss.exe 5.00.2195.2901 44.27 KB (45,328 bytes) 12/7/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\smss.exe

[Services]

Display Name	Name	State	Start Mode
	Service Type	Path	Error Control
	Start Name	Tag ID	
Alerter	Alerter	Stopped	Manual Share Process
	c:\winnt\system32\services.exe		
	Normal	LocalSystem	0
Application Management	AppMgmt	Stopped	
	Manual	Share Process	
	c:\winnt\system32\services.exe		
	Normal	LocalSystem	0
Computer Browser	Browser	Running	Auto
	Share Process		
	c:\winnt\system32\services.exe		
	Normal	LocalSystem	0
Indexing Service	cisvc	Stopped	Manual
	Share Process		
	c:\winnt\system32\cisvc.exe		
	Normal	LocalSystem	0

ClipBook	ClipSrv	Stopped	Manual	Own Process
	c:\winnt\system32\clipsrv.exe	Normal	LocalSystem	0
Distributed File System	Dfs	Stopped	Manual	Own Process
	c:\winnt\system32\dfsrv.exe	Normal	LocalSystem	0
DHCP Client	Dhcp	Stopped	Disabled	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
Logical Disk Manager Administrative Service	dmdadmin	Stopped	Manual	Share Process
	c:\winnt\system32\dmdadmin.exe	Normal	LocalSystem	0
Logical Disk Manager	dmsrvr	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
DNS Client	Dnscache	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
Event Log	Eventlog	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
COM+ Event System	EventSystem	Running	Manual	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Fax Service	Fax	Stopped	Manual	Own Process
	c:\winnt\system32\faxsvc.exe	Normal	LocalSystem	0
IIS Admin Service	IISADMIN	Running	Auto	Share Process
	c:\winnt\system32\inetrv\inetinfo.exe	Normal	LocalSystem	0
Intersite Messaging	IsmServ	Stopped	Disabled	Own Process
	c:\winnt\system32\ismssrv.exe	Normal	LocalSystem	0
Kerberos Key Distribution Center	kdc	Stopped	Disabled	Share Process
	c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Server	lanmanserver	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
Workstation	lanmanworkstation	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
License Logging Service	LicenseService	Stopped	Manual	Own Process
	c:\winnt\system32\llssrv.exe	Normal	LocalSystem	0
TCP/IP NetBIOS Helper Service	LmHosts	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
Messenger	Messenger	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0

NetMeeting Remote Desktop Sharing	nmmsrvc	Stopped	Manual	Own Process
	c:\winnt\system32\nmmsrvc.exe	Normal	LocalSystem	0
Distributed Transaction Coordinator	MSDTC	Stopped	Manual	Own Process
	c:\winnt\system32\msdtc.exe	Normal	LocalSystem	0
Windows Installer	MSIExec	Stopped	Manual	Share Process
	c:\winnt\system32\msiexec.exe	Normal	LocalSystem	0
Network DDE	NetDDE	Stopped	Manual	Share Process
	c:\winnt\system32\netdde.exe	Normal	LocalSystem	0
Network DDE DSDM	NetDDEdsdm	Stopped	Manual	Share Process
	c:\winnt\system32\netdde.exe	Normal	LocalSystem	0
Net Logon	Netlogon	Stopped	Manual	Share Process
	c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Network Connections	Netman	Running	Manual	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
File Replication	NtFrs	Stopped	Manual	Own Process
	c:\winnt\system32\ntfrs.exe	Normal	LocalSystem	0
NT LM Security Support Provider	NtLmSsp	Stopped	Manual	Share Process
	c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Removable Storage	NtmsSvc	Stopped	Disabled	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Plug and Play	PlugPlay	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
IPSEC Policy Agent	PolicyAgent	Stopped	Manual	Share Process
	c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Protected Storage	ProtectedStorage	Running	Auto	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
Remote Access Auto Connection Manager	RasAuto	Stopped	Manual	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Remote Access Connection Manager	RasMan	Stopped	Manual	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Routing and Remote Access	RemoteAccess	Stopped	Disabled	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0

Remote Registry Service	RemoteRegistry	Stopped	Manual	Own Process
	c:\winnt\system32\regsvcs.exe	Normal	LocalSystem	0
Remote Procedure Call (RPC) Locator	RpcLocator	Stopped	Manual	Own Process
	c:\winnt\system32\locator.exe	Normal	LocalSystem	0
Remote Procedure Call (RPC)	RpcSs	Running	Auto	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
QoS RSVP	RSVP	Running	Manual	Own Process
	c:\winnt\system32\rsvp.exe	Normal	LocalSystem	0
Security Accounts Manager	SamSs	Stopped	Manual	Share Process
	c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Smart Card Helper	SCardDrv	Stopped	Manual	Share Process
	c:\winnt\system32\scardsvr.exe	Normal	LocalSystem	0
Smart Card	SCardSrv	Stopped	Manual	Share Process
	c:\winnt\system32\scardsvr.exe	Normal	LocalSystem	0
Task Scheduler	Schedule	Stopped	Manual	Share Process
	c:\winnt\system32\mstask.exe	Normal	LocalSystem	0
RunAs Service	seclogon	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe	Normal	LocalSystem	0
System Event Notification	SENS	Running	Auto	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Internet Connection Sharing	SharedAccess	Stopped	Manual	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Print Spooler	Spooler	Stopped	Manual	Own Process
	c:\winnt\system32\spoolsv.exe	Normal	LocalSystem	0
Performance Logs and Alerts	SysmonLog	Stopped	Manual	Own Process
	c:\winnt\system32\smlogsvc.exe	Normal	LocalSystem	0
Telephony	TapiSrv	Stopped	Disabled	Share Process
	c:\winnt\system32\svchost.exe	Normal	LocalSystem	0
Terminal Services	TermService	Stopped	Disabled	Own Process
	c:\winnt\system32\termsrv.exe	Normal	LocalSystem	0
Telnet	TlntSvr	Stopped	Manual	Own Process
	c:\winnt\system32\tlntsvr.exe	Normal	LocalSystem	0
Distributed Link Tracking Server	TrkSrv	Stopped	Manual	Share Process

```

c:\winnt\system32\services.exe
Normal LocalSystem 0
Distributed Link Tracking Client TrkWrks
Stopped Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\winnt\system32\ups.exe Normal
LocalSystem 0
Utility Manager UtilMan Stopped Manual Own
Process c:\winnt\system32\utilman.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Manual
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
World Wide Web Publishing Service W3SVC
Running Auto Share Process
c:\winnt\system32\inetrv\inetinfo.exe
Normal LocalSystem 0
Windows Management Instrumentation WinMgmt
Running Auto Own Process
c:\winnt\system32\wbem\winmgmt.exe
Ignore LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Running Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Accessories\System Tools Default
User:Accessories\System Tools Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
Microsoft SQL Server All Users:Microsoft SQL
Server All Users
Startup All Users:Startup All Users
Tardis All Users:Tardis All Users
Accessories PC1\Administrator:Accessories
PC1\Administrator
Accessories\Accessibility
PC1\Administrator:Accessories\Accessibility
PC1\Administrator

```

```

Accessories\Entertainment
PC1\Administrator:Accessories\Entertainment
PC1\Administrator
Accessories\System Tools
PC1\Administrator:Accessories\System Tools
PC1\Administrator
Administrative Tools
PC1\Administrator:Administrative Tools
PC1\Administrator
Startup PC1\Administrator:Startup
PC1\Administrator

[Startup Programs]

Program Command User Name Location
CPQTEAM cpqteam.exe All Users
HKLMSOFTWARE\Microsoft\Windows\CurrentVers
ion\Run

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
Image Document "C:\Program Files\Windows
NT\Accessories\ImageVue\KodakImg.exe"
WordPad Document "%ProgramFiles%\Windows
NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object Not
Available
Bitmap Image mspaint.exe

[Internet Explorer 5]

[ Following are sub-categories of this main category
]

[Summary]

Item Value
Version 5.00.3315.1000
Build 53315.1000
Product ID 51876-OEM-0000007-00000
Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 168-bit
Content Advisor Disabled
IEAK Install No

[File Versions]

File Version Size Date Path
advapi32.dll 5.0.2195.2867 352 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation

```

```

advpack.dll 5.0.3103.1000 87 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
browselc.dll 5.0.3315.2846 35 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
browseui.dll 5.0.3315.2846 789 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
ckcnv.exe 5.0.2189.1 9 KB 12/7/1999
7:00:00 AM C:\WINNT\system32 Microsoft
Corporation
comctl32.dll 5.81.3103.1000 538 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
crypt32.dll 5.131.2195.2833 451 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
ehnsig.dll <File Missing> Not Available
Not Available Not Available Not
Available
iemigrat.dll <File Missing> Not Available
Not Available Not Available Not
Available
iesetup.dll 5.0.3103.1000 57 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
iexplore.exe 5.0.2920.0 59 KB
12/7/1999 7:00:00 AM C:\Program
Files\Internet Explorer Microsoft Corporation
imagehlp.dll 5.0.2195.2778 126 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
imghelp.dll <File Missing> Not Available
Not Available Not Available Not
Available
inseng.dll 5.0.3103.1000 72 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
jobexec.dll 5.0.0.1 47 KB 12/7/1999
7:00:00 AM C:\WINNT\system32 Microsoft
Corporation
jscript.dll 5.1.0.5907 476 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
jsproxy.dll 5.0.2920.0 13 KB
12/7/1999 7:00:00 AM
C:\WINNT\system32 Microsoft Corporation
msahtml.dll <File Missing> Not Available
Not Available Not Available Not
Available
mshtml.dll 5.0.3315.2870 2290 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
msjava.dll 5.0.3802.0 923 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
msoss.dll <File Missing> Not Available
Available Not Available Not Available
msxml.dll 8.0.5718.1 493 KB 5/4/2001
1:05:02 PM C:\WINNT\system32 Microsoft
Corporation

```



```

occache.dll      5.0.3103.1000      86 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
ole32.dll 5.0.2195.2887 970 KB 5/4/2001
1:05:02 PM C:\WINNT\system32 Microsoft
Corporation
oleaut32.dll 2.40.4517.0 612 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
olepro32.dll 5.0.4517.0 160 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
rsabase.dll 5.0.2195.2228 128 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
rsaenh.dll 5.0.2195.2228 131 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
rsapi32.dll <File Missing> Not Available
Not Available Not Available Not
Available
rsasig.dll <File Missing> Not Available
Not Available Not Available Not
Available
schannel.dll 5.1.2195.0 138 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
shdoc401.dll <File Missing> Not Available
Not Available Not Available Not
Available
shdocvw.dll 5.0.3315.2879 1078 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
shell32.dll 5.0.3315.2902 2304 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
shlwapi.dll 5.0.3315.1000 283 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
url.dll 5.0.2920.0 82 KB 12/7/1999
7:00:00 AM C:\WINNT\system32 Microsoft
Corporation
urlmon.dll 5.0.3315.1000 441 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
vbscript.dll 5.1.0.5907 428 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
webcheck.dll 5.0.3315.1000 252 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
win.com 5.0.2134.1 24 KB 12/7/1999
7:00:00 AM C:\WINNT\system32 Microsoft
Corporation
wininet.dll 5.0.3315.1000 457 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
winsock.dll 3.10.0.103 3 KB
12/7/1999 7:00:00 AM
C:\WINNT\system32 Microsoft Corporation
wintrust.dll 5.131.2195.2779 162 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation

```

```

wsock.vxd <File Missing> Not Available Not
Available Not Available Not Available
wsock32.dll 5.0.2195.2871 21 KB
5/4/2001 1:05:02 PM C:\WINNT\system32
Microsoft Corporation
wsock32n.dll <File Missing> Not Available
Not Available Not Available Not
Available

[Connectivity]

Item Value
Connection Preference Never dial
EnableHttp1.1 1
ProxyHttp1.1 0

LAN Settings

AutoConfigProxy wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]

[Summary]

Item Value
Page Refresh Type Automatic
Temporary Internet Files Folder C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space 8665 MB
Available Disk Space 6829 MB
Maximum Cache Size 270 MB
Available Cache Size 271 MB

[List of Objects]

Program File Status CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]

[Summary]

Item Value
Content Advisor Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
Administrator Administrator 4/3/2002 to
3/10/2102 sha1RSA

```

```

Administrator Administrator 4/11/2002 to
3/18/2102 sha1RSA

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

```

```

[Publishers]

Name
No publisher information available

[Security]

Zone Security Level
Local intranet Medium-low
Trusted sites Low
Internet Medium
Restricted sites High

```

Microsoft SQL Server 2000 Installation Procedures

Microsoft SQL Server 2000 Installation Procedures
 Type of installation: custom
 During the custom installation, use the default settings for all except the following two areas:
 Services accounts:
 SQL Server - local system account
 SQL Server Agent - local system account
 Set the sort order/collation as binary sort order/Latin_1_General

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2000 was used to change the queue settings for the TPCC COM+ single queue component. The single queue component was set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The min and max pool size for the

single queue component on each client was 67.
Delivery threads were set under the TPCC key
in the registry. The construction string was Dummy
String

Appendix D: 60-Day Space

Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	5,100	552	40	30		622
District	51,000	5,672	56	286		6014
Customer	153,000,000	111,272,728	6,635,240	5,895,398		123803366
History	153,000,000	8,500,008	128		1,662,582	8500136
NewOrder	45,900,000	725,696	1,672	36,368		763736
Orders	153,000,000	4,689,656	2,132,656		7,207,512	6822312
OrderLine	1,529,997,428	95,624,840	202,408		20,427,108	95827248
Item	100,000	9,528	56	479		10063
Stock	510,000,000	163,200,008	305,064	8,175,254		171680326
Total		384,028,688	9,277,320	14,107,816	29,297,202	407,413,824

Misc_fg	CS_fg
622	
6014	
0	123803366
10162718	
763736	
14029824	
116254356	
10063	171680326
0	
141,227,334	295,483,692
files= 4	4
size= 5,245,000	9,715,200
Total= 20,992,000	38,860,800
167,936,000	310,886,400
OK	OK
8K blocks	

files= 4
size= 5,245,000
Total= 20,992,000
8K blocks 167,936,000 310,886,400
OK OK

MB	
Dynamic Space	106,264
Static Space	291,601
Free Space	na
Daily Growth	20.524
Daily Spread	-
Sum of Data for Order, Orderline and History	
Sum of Data+Index+5%-Dynamic Space	
Total Allocated Space - (Dynamic + Static Space)	
(Dynamic Space/(W*62.5))*tprmc	
(Free Space -1.5*Daily Growth) Zero Assumed	

Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size
60 Day Space DB	1,487.36	224	3785.60	18GB	16.900
			0.00	9GB	8.473
			0.00	4GB	3.999
Total DB		224.00	3785.60	9GB	
8-hr log + mirror	335.3068	10	351.56	36GB	35.156
OS, Swap	3	1	8.473	9GB	
Total Storage	1,825.67	GB	4,145.64	GB	

Appendix E: *Third Party Letters*

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

August 22, 2002

Hewlett-Packard
Company
Paul Cao
MS150402
20555 SH 249
Houston, TX 77070

Mr. Cao:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00846	SQL Server 2000 Enterprise Edition <i>Per processor licensing</i> <i>Discount schedule: Open Program Level C</i>	\$16,541	4	\$66,164
C11-00821	Windows 2000 Server <i>Server license only - No CALs</i> <i>Discount schedule: Open Program - No Level</i>	\$738	4	\$2,952
N/A	.Net Enterprise Server 32-bit <i>Server license only - No CALs</i> <i>Discount schedule: Open Program - No Level</i>	\$2,599	1	\$2,599
048-00317	Visual C++ Professional 6.0 Win32	\$ 549	1	\$ 549
PRO-PRORS-16U-01	Database Server Support Package	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by December 31, 2002.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.



Deal of the Day! Pavilion 750C Mini-Tower

* Intel Pentium 4 1.9GHz, 512MB RAM, 80GB HD, DVD / CD-RW
• NIC, 56K Modem, Windows XP Home, Mfr. Refurbished



Only **\$699** **FREE SH**
Buy Now **ON ORDERS**

Welcome Computers Electronics Digital Imaging Clearance Countdown

Search over 70,000 products we sell. **SEARCH**

Shopping Cart Order Status Help Desk

Shop By Brand | Catalog | eZpay Financing | HotSheet | Warranties | eZaffiliate

Do Business with a company You can Count on!



Order Now!

1-877-868-2676



Site Categories

Systems

- Desktops & Towers
- Notebooks
- Servers
- Handhelds / PDAs
- Server Appliances

Hardware

- Accessories
- Books & Video
- Cables & Wiring
- CD & DVD Drives
- Controller Cards
- CPU Products
- Digital Cameras
- Input Devices
- Memory
- Modems
- Monitors
- Multimedia
- Networking
- Power
- Printers
- Projectors
- Scanners
- Storage
- Supplies
- Video Cards

Software

- Business

GS508T 8 port Copper Gigabit Switch

Eight, 10/100/1000 auto-negotiating ports automatically sense the proper speed and operate at the optimum rate. Self-configuring and easy to install.

We Guarantee Secure Shopping

Usually Ships Same Day

Units in Stock 42

Platform Universal

Part No. 1058966


Mfg. Part No GS508T

Your Price: \$664.61



- Enhanced Products
- Comparable Products
- Printable Specs
- E-mail this to a friend

GOING!



- Product Detail**
- Tech Specs**

Eight, 10/100/1000 auto-negotiating ports

- Auto-detects optimum network speed
- Delivers up to 11.8 million packets per second
- Supports 8,000 network users or devices
- Conveniently rack-mountable

Copper Gigabit ports in this Ethernet switch give you high-speed connectivity without the cost and hassle of fiber cables. Providing backbone for power workgroups, data centers, and server farms—with convenient Plug and Play installation—Netgear's high-performance GS508T Copper Gigabit Switch delivers the power of Copper Gigabit Ethernet to optimize your small to medium-sized business network.

Eight, 10/100/1000 auto-negotiating ports automatically sense the proper speed and operate at the optimum rate. Self-configuring and easy to install. Copper Gigabit ports provide high-performance backbone connectivity between workgroups, data centers, and server farms at a low cost per port. Multiple users can simultaneously access the backbone and servers without network congestion.

NETGEAR



Protect Your Invest
Get an extended warrant this product... Click here

Suggested Add-

NetGear
GA622T 100/10/32/64BIT PCI S/c Card
\$114.50 [buy now](#)

NetGear
GA302T Copper PCI Adapter
\$70.35 [buy now](#)

NetGear
NETGEAR FS726 10/100/1000 Modular Switch
\$478.37 [buy now](#)

NetGear
FS750 48 port Network Switch
\$791.19 [buy now](#)

NetGear
FSM726S 24 10/100 + 2 G Managed Stackable Switch
\$755.82 [buy now!](#)

NetGear
HE102 802.11a Wireless Access Point
\$314.04 [buy now!](#)

NetGear
HA501 802.11a Wireless Card

<http://www.ecost.com/ecost/shop/detail.asp?dpno=996778>

5/13/2002