IBM System p5 595
Model 9119-595
Using
AIX 5L Version 5.3
and
DB2 9 Enterprise Edition

TPC Benchmark™ C
Full Disclosure Report

First Edition

August 8, 2006

Special Notices

The following terms used in this publication are trademarks of **International Business Machines** Corporation in the United States and/or other countries:

IBM System p

IBM System x

AIX

IBM

DB2, DB2 9 Enterprise Edition

The following terms used in this publication are trademarks of other companies as follows:

TPC Benchmark, TPC-C, and tpmC are trademarks of the Transaction Processing Performance Council

Microsoft Windows 2000 server and COM+ are registered trademarks of Microsoft Corporation

First Edition: August 8, 2006

The information contained in this document is distributed on an AS IS basis without any warranty either expressed or implied. The use of this information or the implementation of any of these techniques is a customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

In this document, any references made to an IBM licensed program are not intended to state or imply that only IBM's licensed program may be used; any functionally equivalent program may be used.

It is possible that this material may contain references to, or information about, IBM products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that IBM intends to announce such products, programming, or services in your country.

All performance data contained in this publication was obtained in a controlled environment, and therefore the results which may be obtained in other operating environments may vary significantly. Users of this document should verify the applicable data in their specific environment.

Request for additional copies of this document should be sent to the following address:

TPC Benchmark Administrator
IBM Commercial Performance
Mail Stop 9571
11501 Burnet Road
Austin, TX 78758
FAX Number (512) 838-1852

© Copyright International Business Machines Corporation, 2006. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

NOTE: US. Government Users - Documentation related to restricted rights: Use, duplication, or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract with IBM Corp.

IBM	**IBM System p5 595 Model 9119-595**	**TPC-C Rev. 5.7** **Report Date: August 8, 2006**

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
$11,967,178 USD	**4,033,378**	$2.97 USD	**December 20, 2006**

Database Server Processor Chip/Core/Thread	Database Manager	Operating System	Other Software	No. Users
32/64/128 POWER5+ 2.3GHz	DB2 9	AIX 5L V5.3	Microsoft Visual C++ Microsoft COM+	3,200,000

SUT

160 Clients
IBM xSeries 226
2x 3.2GHz Intel® Xeon™
2MB L2 Cache
2GB Memory
1 36GB Internal Drive
2 Integrated 10/100/1000 Ethernet

IBM® System p5 595
32 Processor Chips with
64x 2.3GHz POWER5+™ Cores
36MB L3 Cache per chip
2048GB Memory
8 36GB Internal SCSI Drives
86 2Gb Fibre Channel Adapters
8 10/100/1000 Ethernet Adapters

Storage
43 IBM System Storage DS4800
504 IBM System Storage DS4000 EXP810
6400 36.4GB 15K RPM 2Gbps Drives
360 36.4GB 15K RPM 4Gbps Drives

System Components	Each of the 160 Clients		Server	
	Quantity	Description	Quantity	Description
Processors Chips /Cores/Threads	2/2/4	3.2GHz 1MB L3 Xeon Processor	32/64/128	2.3GHz POWER5+™
Memory	2	1024 MB	64	32 GB
Disk Controllers	1	Ultra320 SCSI	2 86 43	Integrated dual Ultra3SCSI 2Gb FC Adapters IBM System Storage DS4800
Disk Drives	1	36GB	6400 360 8	36.4GB 15K RPM 2Gb FC 36.4GB 15K RPM 4Gb FC 36.4GB 15K RPM SCSI
Total Storage		5,760 GB		220.4TB
Terminals	1	System Console	1	System Console

IBM System p5 595 Model 9119-595

TPC-C Rev. 5.7

Report Date: August 8, 2006

Description	Part No.	Source	Unit Price	Qty	Ext Price	Maint Price
Server Hardware						
Server 1:9119 Model 595	9119-595	1	93,372	1	93,372	63,000
SCSI Cable, B&C TO Media Drawer, 1.5M, Mini-68P TO 68F	2137	1	275	1	275	
RIO-2 (Remote I/O-2) Cable, 3.5M	3147	1	728	8	5,824	
RIO-2(Remote I/O-2)Cbl, 8.0M	3170	1	800	24	19,200	
36.4 GB 15,000 RPM Ultra320 SCSI Disk Drive Assembly	3277	1	599	8	4,792	
IBM 10/100/1000 Base-TX Ethernet PCI-X Adapter	5701	1	699	8	5,592	
2 Gigabit Fibre Channel PCI-X Adapter	5716	1	1,999	90	179,910	
PCI-X Dual Channel Ultra320 SCSI Adapter	5736	1	777	1	777	
4.7 GB SCSI DVD-RAM Drive	5752	1	660	1	660	
Expansion Rack, Powered	5792	1	60,000	1	60,000	3,960
I/O Drawer, 20 Slots, 8 Disk Bays	5794	1	30,000	8	240,000	32,640
Media Drawer, Rack Mounted	5795	1	1,700	1	1,700	
I/O Drw.Cbl.Grp, Prim.Rck/5U	6122	1	400	1	400	
I/O Drw.Cbl.Grp, Prim.Rck/1U	6123	1	400	1	400	
Power Cable, I/O Drawer to Media Drawer	6179	1	300	1	300	
Bulk Power Regulator	6186	1	4,000	10	40,000	
Slim Line Doors	6251	1	6,000	2	12,000	
Ethernet Cable, 15M, Hardware Management	7802	1	34	2	68	
Bulk Power Controller Assembly	7803	1	4,000	4	16,000	
Cooling Group, 2-4 Processor Books	7807	1	4,000	1	4,000	
DC Power Converter, Processor Book	7809	1	6,000	12	72,000	
Processor Clock Card, Programmable	7810	1	575	2	1,150	
System Service Processor	7811	1	3,500	2	7,000	
Multiplexer Card	7812	1	2,200	4	8,800	
Processor Activation, #7668 2.3 Turbo	7668	1	31,800	64	2,035,200	506,880
Remote I/O-2 (RIO-2) Loop Adapter, Two Port	7818	1	3,400	16	54,400	
Pwr.Cbl.Grp, CEC Primary Fans	7821	1	650	1	650	
Pwr.Cbl.Grp, 1st CEC Book	7822	1	650	1	650	
Pwr.Cbl.Grp, 2nd CEC Book	7823	1	650	1	650	
Pwr.Cbl.Grp, 3rd CEC Book	7824	1	650	1	650	
Pwr.Cbl.Grp, 4th CEC Book	7825	1	650	1	650	
Pwr.Cbl.Grp, 7807 Cooling Grp.	7826	1	650	1	650	
Bulk Power Distribution Assembly	7837	1	2,500	6	15,000	
Power Cables, 4x, 01U	7853	1	650	1	650	
Power Cables, 4x, 05U	7854	1	650	1	650	
Power Cables, 4x, 09U	7855	1	650	1	650	
Power Cables, 4x, 19U	7857	1	400	1	400	
Power Cables, 4x, 23U	7858	1	400	1	400	
Power Cables, 4x, 27U	7859	1	400	1	400	
512GB DDR2 Memory (16 X 32GB Cards)	8200	1	172,462	4	689,848	
256GB Bundle DDR2 Activations	8493	1	480,000	8	3,840,000	
Line Cord, 6AWG/Type W, 14ft, IEC309 60A Plug	8688	1	2,000	4	8,000	
16-Way POWER5 Turbo CUoD Processor Book, 0-Way Act	8968	1	127,200	4	508,800	68,640
HMC 1:7310-C04 Desktop Hardw.Mgmt.Console	7310-C04	1	1,830	1	1,830	1,344
IBM T541H /L150p 15 inch TFT Color Monitor	3637	1	508	1	508	
Power Cord (6-foot), To Wall (125V, 15A), Plug Type #4	6470	1	18	2	36	
Ethernet Cable, 6M, Hardware Management	7801	1	15	1	15	
Quiet Touch Keyboard - USB, Business Black,	8800	1	104	1	104	
Mouse - Business Black with Keyboard Attachment	8841	1	78	1	78	
				Subtotal	**7,935,089**	**676,464**
Storage						
DS4800 Disk System Model 82 (4 GB Cache)	1815-82A	1	53,995	43	2,321,785	
DS4800 8-Storage Partitions	8870	1	10,000	43	430,000	
(22R4255) DS4800 AIX Host Kit	7711	1	7,000	43	301,000	
DS4000 EXP810 Enclosure	1812-81A	1	6,000	126	756,000	
36.4GB/15K Drive FC disks	5412	1	1,115	360	401,400	

36.4GB/15K Drive FC disks	5231	1	1,115	352	392,480	
Fiber Cable 25m	5625	1	189	86	16,254	
Fiber Cable 1m	5601	1	79	252	19,908	
DS4000 EXP810 Storage Pack -- Enclosures with 1008 36GB 15K RPM disks	1812-36T	1	868,461	6	5,210,766	
3 Year Warranty Service Upgrade 1812-81A 24x7x4		1	960	504		483,840
3 Year Warranty Service Upgrade 1815-82A 24x7x4		1	3,200	43		137,600
				Subtotal	**9,849,593**	**621,440**
Server Software						
AIX 5.3 (media only)	5692-A5L	1	50	1	50	
AIX Software per Processor	5765-G03	1	2,495	64	159,680	
AIX Software Maintanance (3Y)	5773-SM3-474	1	2,836	64		181,504
AIX Software Maintanance 24x7 Upgrade (3Y)	5773-SM3-476	1	732	64		46,848
PLM Software Maintanance 24x7 upgrade (3Y)	5773-PL3-779	1	35	64		2,240
PLM Software Maintanance (3Y)	5773-PL3-780	1	14	64		896
VIO Software Maintanance (3Y)	5773-VI3-781	1	155	64		9,920
VIO Software Maintanance 24x7 upgrade (3Y)	5773-VI3-782	1	64	64		4,096
HMC Software SUB (3Y)	5773-0570	1	236	1		236
HMC Software Support (3Y)	5773-0569	1	675	1		675
C for AIX user Lic+SW maint 12 MO	D5A1DLL	1	515	1	515	
C for AIX user annual SW maint renewal	E1A1FLL	1	103	2		206
DB2 9 Enterprise Edition Proc Lic/1 yr Maint.		1	26,265	64	1,680,960	
DB2 9 Enterprise Edition Proc Maint Renew		1	1,251	128		160,128
				Subtotal	**1,841,205**	**406,749**
Client Hardware and Software						
xSeries 226	86485AU	1	1,299	160	207,840	93,760
3.2 GHz 800 MHz 2MB L2 Cache	40K2516	1	549	160	87,840	
1GB (2x512MB Kit) PC2-3200	39M5818	1	275	160	44,000	
512MB (1x512MB DIMM) PC2-3200	39M5858	1	135	160	21,600	
36GB (Gen 3) Hot-Swap 3.5" 15K RPM Ultra 320	40K1026	1	249	160	39,840	
NetBay42 Standard Rack	93074RX	1	1,489	43	64,027	
Optical 3-Button Mouse - USB	90P0744	1	15	1	15	
Preferred Pro Full Size PS/2 Keyboard	25R6968	1	29	1	29	
IBM C117 17" CRT Monitor	49387NU	1	149	1	149	
				Subtotal	**465,340**	**93,760**
Third Party Hardware/Software						
Visual C++ Standard Edition	254-00170	2	109	1	109	
Microsoft Windows 2000 Server	C11-00821	2	738	160	118,080	
Microsoft Problem Resolution Services		2	245	1	245	245
Cisco Catalyst 2970 24 10/100/1000 BASE-T ports	511987	3	2,809	10	28,094	
				Subtotal	**146,528**	**245**
				Total	**20,237,755**	**1,798,658**
				Total IBM Discounts*		**-10,069,234**

Three-Year Cost of Ownership	**11,967,178**
tpmC	**4,033,378**
$/tpmC	**2.97**

Notes:

For pricing details and contact information please see appendix E

Pricing Sources: 1) IBM 2) Microsoft 3) CDW

*Discounts are based on US list prices for similar quantities & configurations including pre-payment for maintenance. The discount applies to the totality of all items with price source of "1".

Audited by: Francois Raab, Info Sizing (www.infosizing.com)

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you

Numerical Quantities Summary for the IBM System p5 595 Model 9119-595

MQTH, computed Maximum Qualified Throughput: 4,033,378 tpmC

Response Times (in seconds)	90th %	Average	Maximum
New Order	0.42	0.26	27.24
Payment	0.44	0.26	26.77
Order-Status	0.44	0.26	25.69
Delivery (interactive)	0.15	0.15	27.27
Delivery (deferred)	0.16	0.12	0.53
Stock-Level	0.50	0.30	25.82
Menu	0.15	0.13	27.02

Response time delay added for emulated components was 0.1 seconds

Transaction Mix, in percent of total transactions	Percent
New Order	44.90%
Payment	43.02%
Order-Status	4.02%
Delivery	4.02%
Stock-Level	4.01%

Keying/Think Times (in seconds)	Min.	Average	Max.
New Order	18.00/0.01	18.01/12.02	18.04/120.21
Payment	3.00/0.01	3.01/12.02	3.04/120.21
Order-Status	2.00/0.01	2.01/10.01	2.04/100.11
Delivery	2.00/0.01	2.01/5.02	2.04/50.20
Stock-Level	2.00/0.01	2.01/5.02	2.04/50.20

Test Duration	
Ramp-up Time	34 minutes
Measurement interval	2 hours 30 minutes
Transactions during measurement interval (all types)	1,347,169,118
Ramp-down time	20 minutes

Checkpoints	
Number of checkpoints	N/A
Checkpoint interval	N/A

Table of Content

Preface 10
0 General Items 11
0.1. Application Code Disclosure 11
0.2. Benchmark Sponsor 11
0.3. Parameter Settings 11
0.4. Configuration Diagrams 11
1 Clause 1: Logical Data Base Design Related Items 13
1.1. Table Definitions 13
1.2. Database Organization 13
1.3. Insert and/or Delete Operations 13
1.4. Horizontal or Vertical Partitioning 13
2 Clause 2: Transaction & Terminal Profiles Related Items 14
2.1. Verification for the Random Number Generator 14
2.2. Input/Output Screens 14
2.3. Priced Terminal Features 14
2.4. Presentation Managers 14
2.5. Home and Remote Order-lines 14
2.6. New-Order Rollback Transactions 14
2.7. Number of Items per Order 15
2.8. Home and Remote Payment Transactions 15
2.9. Non-Primary Key Transactions 15
2.10. Skipped Delivery Transactions 15
2.11. Mix of Transaction Types 16
2.12. Queuing Mechanism of Delivery 16
3 Clause 3: Transaction and System Properties 17
3.1. Atomicity Requirements 17
3.2. Consistency Requirements 17
3.3. Isolation Requirements 18
3.4. Durability Requirements 18
4 Clause 4: Scaling and Data Base Population Related Items 20
4.1. Cardinality of Tables 20
4.2. Distribution of Tables and Logs 20
4.3. Data Base Model Implemented 20
4.4. Partitions/Replications Mapping 21
4.5. 60-Day Space Calculations 30
5 Clause 5: Performance Metrics and Response Time Related Items 31
5.1. Response Times 31
5.2. Keying and Think Times 31
5.3. Response Time Frequency Distribution 32
5.4. Performance Curve for Response Time versus Throughput 34
5.5. Think Time Frequency Distribution 35
5.6. Throughput versus Elapsed Time 36
5.7. Steady State Determination 36
5.8. Work Performed During Steady State 36
5.9. Measurement Interval 38
6 Clause 6: SUT, Driver, and Communication Definition Related Items 39
6.1. RTE Availability 39
6.2. Functionality and Performance of Emulated Components 39
6.3. Network Bandwidth 39
6.4. Operator Intervention 39
7 Clause 7: Pricing Related Items 40
7.1. Hardware and Programs Used 40
7.2. Three Year Cost of System Configuration 40
7.3. Availability Dates 40
7.4. Statement of tpmC and Price/Performance 40

7.5. Country-specific pricing 40
7.6. Orderability Date 40
8 Clause 9: Audit Related Items 42
Appendix - A: Client Server Code 45
A.1 Client/Terminal Handler Code 45
A.2 Client Transaction Code 54
Appendix - B: Tunable Parameters 83
B.1 Database Parameters. 83
B.2 Transaction Monitor Parameters 84
B.3 AIX Parameters 87
Appendix - C: Database Setup Code 89
C.1 Database Creation Scripts 89
C.2 Data Generation Code 547
Appendix - D: Pricing Information 557
Appendix - E: Orderability Information 562

Abstract

This report documents the full disclosure information required by the TPC Benchmark™ C Standard Specification Revision 5.7 dated April, 2006, for measurements on the IBM System p5 595 Model 9119-595. The software used on the IBM System p5 595 Model 9119-595 includes AIX 5L Version 5.3 operating system, DB2 9 database manager. Microsoft COM+ is used as transaction manager.

IBM System p5 595 Model 9119-595

Company Name	System Name	Data Base Software	Operating System Software
IBM Corporation	IBM System p5 595 Model 9119-595	DB2 9	AIX 5L Version 5.3

Total System Cost	TPC-C Throughput	Price/Performance
• Hardware • Software • 3 Years Maintenance	Sustained maximum throughput of system running TPC-C expressed in transactions per minute	Total system cost/tpmC
$11,967,178 USD	4,033,378	$2.97 USD

Preface

TPC Benchmark™ C Standard Specification was developed by the Transaction Processing Performance Council (TPC). It was released on August 13, 1992 and updated with revision 5.7 in April 2006.

This is the full disclosure report for benchmark testing of the IBM System p5 595 Model 9119-595 and DB2 9 according to the TPC Benchmark™ C Standard Specification.

TPC Benchmark™ C exercises the system components necessary to perform tasks associated with that class of on-line transaction processing (OLTP) environments emphasizing a mixture of read-only and update intensive transactions. This is a complex OLTP application environment exercising a breadth of system components associated by such environments characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Data bases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

This benchmark defines four on-line transactions and one deferred transaction, intended to emulate functions that are common to many OLTP applications. However, this benchmark does not reflect the entire range of OLTP requirements. The extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarks when critical capacity planning and/or product evaluation decisions are contemplated.

The performance metric reported by TPC-C is a “business throughput” measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

0 General Items

0.1. Application Code Disclosure

The application program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.

Appendix A contains the IBM application code for the five TPC Benchmark™ C transactions. Appendix D contains the terminal functions and layouts.

0.2. Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by **International Business Machines Corporation.**

0.3. Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:

- *Data Base tuning options*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and application configuration parameters.*

Appendix B contains the system, data base, and application parameters changed from their default values used in these TPC Benchmark™ C tests.

0.4. Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Number and type of processors*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test*
- *Number and type of disk units (and controllers, if applicable)*
- *Number of channels or bus connections to disk units, including the protocol type*
- *Number of LAN (e.g. Ethernet) connections, including routers, work stations, terminals, etc, that were physically used in the test or are incorporated into the pricing structure (see Clause 8.1.8)*
- *Type and run-time execution location of software components (e.g. DBMS, client processes, transaction monitors, software drivers, etc)*

IBM System p5 595 Model 9119-595 Benchmark Configuration

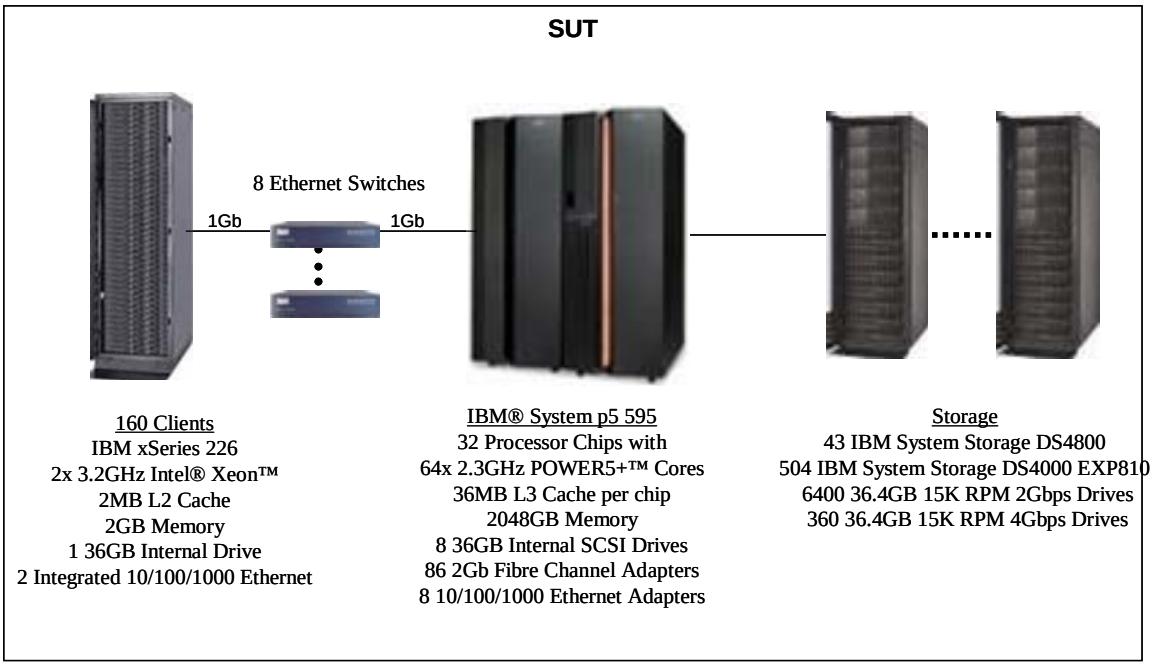

IBM System p5 595 Model 9119-595 Priced Configuration

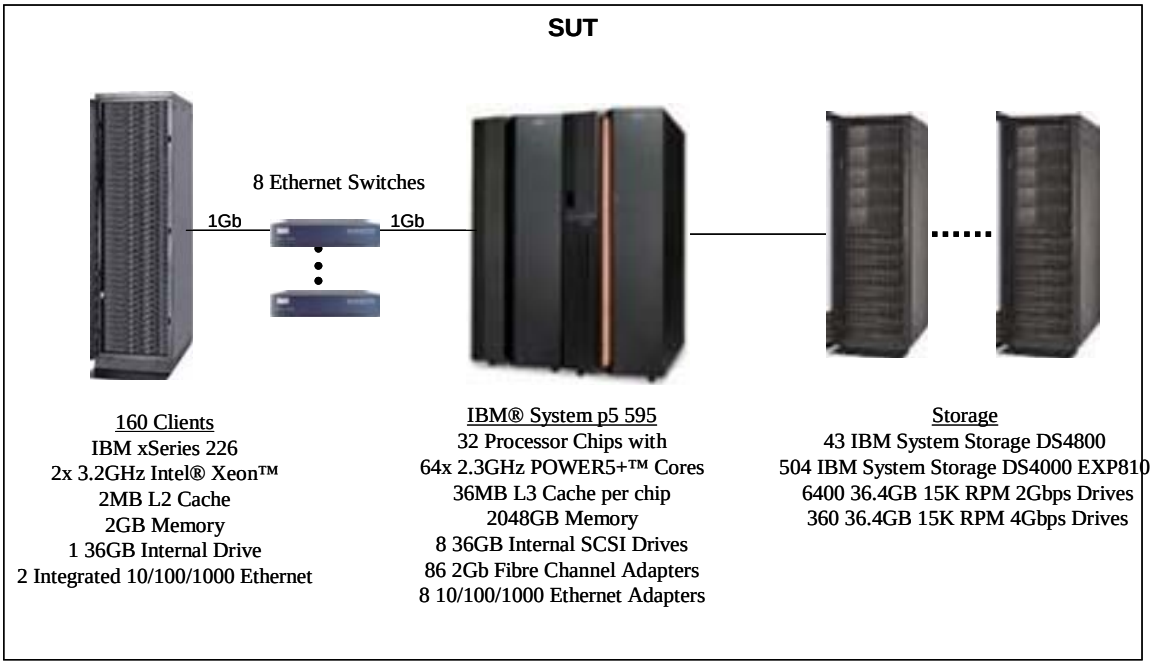

1 Clause 1: Logical Data Base Design Related Items

1.1. Table Definitions

Listings must be provided for all table definition statements and all other statements used to setup the data base.

Appendix C contains the table definitions and the database load programs used to build the data base.

1.2. Database Organization

The physical organization of tables and indices, within the data base, must be disclosed.

Physical space was allocated to DB2 9 on the server disks according to the details provided in Appendix C.

1.3. Insert and/or Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT data base implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows.

There were no restrictions on insert and/or delete operations to any of the tables. The space required for an additional five percent of the initial table cardinality was allocated to DB2 9 and priced as static space.

The insert and delete functions were verified by the auditor. In addition, the auditor verified that the primary key for each database table could be updated outside the range of its initial partition.

1.4. Horizontal or Vertical Partitioning

While there are few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

All tables but ITEM were horizontally partitioned into multiple tables.

Each table partition for STOCK, CUSTOMER, ORDERS and ORDERLINE contains data associated with a range of 1,600 warehouses.

Each table partition for WAREHOUSE, DISTRICT, NEWORDER and HISTORY contains data associated with a range of 8,000 warehouses.

For each partitioned table, a view was created over all table partitions to provide full transparency of data manipulation.

No tables were replicated.

2 Clause 2: Transaction & Terminal Profiles Related Items

2.1. Verification for the Random Number Generator

The method of verification for the random number generation must be disclosed.

The srandom(), getpid() and gettimeofday() functions are used to produce unique random seeds for each driver. The drivers use these seeds to seed the srand(), srandom() and srand48() functions. Random numbers are produced using wrappers around the standard system random number generators.

The negative exponential distribution uses the following function to generate the distribution. This function has the property of producing a negative exponential curve with a specified average and a maximum value 4 times the average.

```
const double RANDOM_4_Z = 0.89837799236185
const double RANDOM_4_K = 0.97249842407114
double neg_exp_4(double average {
     return – average * (1/RANDOM_4_Z * log (1 – RANDOM_4_K * drand48()))};
}
```

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none were found.

2.2. Input/Output Screens

The actual layouts of the terminal input/output screens must be disclosed.

The screen layouts are now presented in HTML 1.0 web pages. Clauses 2.4.3, 2.5.3, 2.6.3, 2.7.3, and 2.8.3 of the TPC-C specifications were used as guidelines for html character placement.

2.3. Priced Terminal Features

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The emulated workstations, IBM xSeries 336 systems, are commercially available and support all of the requirements in Clause 2.2.2.4.

2.4. Presentation Managers

Any usage of presentation managers or intelligent terminals must be explained.

The workstations did not involve screen presentations, message bundling or local storage of TPC-C rows. All screen processing was handled by the client system. All data manipulation was handled by the server system.

2.5. Home and Remote Order-lines

The percentage of home and remote order-lines in the New-Order transactions must be disclosed.

Table 2-1 shows the percentage of home and remote transactions that occurred during the measurement period for the New-Order transactions.

2.6. New-Order Rollback Transactions

The percentage of New-Order transactions that were rolled back as a result of an illegal item number must be disclosed.

Table 2-1 shows the percentage of New-Order transactions that were rolled back due to an illegal item being entered.

2.7. Number of Items per Order

The number of items per order entered by New-Order transactions must be disclosed.

Table 2-1 show the average number of items ordered per New-Order transaction.

2.8. Home and Remote Payment Transactions

The percentage of home and remote Payment transactions must be disclosed.

Table 2-1 shows the percentage of home and remote transactions that occurred during the measurement period for the Payment transactions.

2.9. Non-Primary Key Transactions

The percentage of Payment and Order-Status transactions that used non-primary key (C_LAST) access to the data base must be disclosed.

Table 2-1 shows the percentage of non-primary key accesses to the data base by the Payment and Order-Status transactions.

2.10. Skipped Delivery Transactions

The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.

Table 2-1 shows the percentage of Delivery transactions missed due to a shortage of supply of rows in the NEW-ORDER table.

2.11. Mix of Transaction Types

The mix (i.e. percentages) of transaction types seen by the SUT must be disclosed.

Table 2-1 shows the mix percentage for each of the transaction types executed by the SUT.

New Order	**IBM System p5 595 Model 9119-595**
Percentage of Home order lines	99.01%
Percentage of Remote order lines	0.99%
Percentage of Rolled Back Transactions	1.00%
Average Number of Items per order	10.00
Payment	
Percentage of Home transactions	85.00%
Percentage of Remote transactions	15.00%
Non-Primary Key Access	
Percentage of Payment using C_LAST	60.00%
Percentage of Order-Status using C_LAST	59.99%
Delivery	
Delivery transactions skipped	0
Transaction Mix	
New-Order	44.90%
Payment	43.02%
Order-Status	4.02%
Delivery	4.02%
Stock-Level	4.01%

Table 2-1: Numerical Quantities for Transaction and Terminal Profiles

2.12. Queuing Mechanism of Delivery

The queuing mechanism used to defer execution of the Delivery transaction must be disclosed.

The Delivery transaction was submitted to an ISAPI queue that is separate from the COM+ queue that the other transactions used. This queue is serviced by a variable amount of threads that are separate from the worker threads inside the web server. Web server threads are able to complete the on-line part of the Delivery transaction and immediately return successful queuing responses to the drivers. The threads servicing the queue are responsible for completing the deferred part of the transaction asynchronously.

3 Clause 3: Transaction and System Properties

The results of the ACID test must be disclosed along with a description of how the ACID requirements were met.

All ACID tests were conducted according to specification.

3.1. Atomicity Requirements

The system under test must guarantee that data base transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially-completed operations leave any effects on the data.

3.1.1. Atomicity of Completed Transaction

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have been changed appropriately.

The following steps were performed to verify the Atomicity of completed transactions.

1. The balance, BALANCE_1, was retrieved from the CUSTOMER table for a random Customer, District and Warehouse combination.
2. The Payment transaction was executed and committed for the Customer, District, and Warehouse combination used in step 1.
3. The balance, BALANCE_2, was retrieved again for the Customer, District, and Warehouse combination used in step 1 and step 2. It was verified that BALANCE_1 was greater than BALANCE_2 by the amount of the Payment transaction.

3.1.2. Atomicity of Aborted Transactions

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have NOT been changed.

The following steps were performed to verify the Atomicity of the aborted Payment transaction:

1. The Payment application code was implemented with a Perl script that allowed the transaction to be rolled back rather than committed.
2. The balance, BALANCE_3, was retrieved from the Customer table for the same Customer, District, and Warehouse combination used in the completed Payment transaction Atomicity test.
3. The Payment transaction was executed for the Customer, District and Warehouse used in step 2. Rather than commit the transaction, the transaction was rolled back.
4. The balance, BALANCE_4 was retrieved again for the Customer, District, and Warehouse combination used in step 2. It was verified that BALANCE_4 was equal to BALANCE_3, demonstrating that there were no remaining effects of the rolled back Payment transaction.

3.2. Consistency Requirements

Consistency is the property of the application that requires any execution of a data base transaction to take the data base from one consistent state to another, assuming that the data base is initially in a consistent state.

Verify that the data base is initially consistent by verifying that it meets the consistency conditions defined in Clauses 3.3.2.1 to 3.3.2.4. Describe the steps used to do this in sufficient detail so that the steps are independently repeatable.

The specification defines 12 consistency conditions of which the following four are required to be explicitly demonstrated:

1. The sum of balances (d_ytd) for all Districts within a specific Warehouse is equal to the balance (w_ytd) of that Warehouse.
2. For each District within a Warehouse, the next available Order ID (d_next_o_id) minus one is equal to the most recent Order ID [max(o_id)] for the Order table associated with the preceeding District and Warehouse.

Additionally, that same relationship exists for the most recent Order ID [max(o_id)] for the New Order table associated with the same District and Warehouse. Those relationships can be illustrated as follows:

d_next_o_id – 1 = max(o_id) = max(no_o_id)

where (d_w_id = o_w_id = no_w_id) and (d_id = o_d_id = no_d_id)

3. For each District within a Warehouse, the value of the most recent Order ID [max(no_o_id)] minus the first Order ID [min(no_o_id)] plus one, for the New Order table associated with the District and Warehouse equals the number of rows in that New Order table. That relationship can be illustrated as follows:

   max(no_o_id) – min(no_o_id) + 1 = number of rows in New Order for the Warehouse/District

4. For each District within a Warehouse, the sum of Order Line counts [sum(o_ol_cnt)] for the Order table associated with the District equals the number of rows in the Order Line table associated with the same District. That relationship can be illustrated as follows:

   sum(o_ol_cnt) = number of rows in the Order Line table for the Warehouse/District

An RTE driven run was executed against a freshly loaded database. After the run the 4 consistency conditions defined above were tested using a script to issue queries to the database. All queries showed that the database was still in a consistent state.

3.3. Isolation Requirements

Operations of concurrent data base transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.

The benchmark specification defines nine tests to demonstrate the property of transaction isolation. The tests, described in Clauses 3.4.2.1 – 3.4.2.9 were all successfully executed using a series of scripts. Case A was observed during the execution of Isolation Tests 7-9.

3.4. Durability Requirements

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure data base consistency after recovery from any one of the failures listed in Clause 3.5.3

3.4.1. Permanent Unrecoverable Failure of any Single Durable Medium

Permanent irrecoverable failure of any single durable medium containing TPC-C data base tables or recovery log data.

Failure of Log Disk and Log Cache:

This test was conducted on a fully scaled database. The following steps were performed successfully.

1. The current count of the total number of orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving SUM_1.
2. A full load test was started and continued to run for several minutes at a throughput well above the 90% of the reported tpmC.
3. One of the disks containing the transaction log was removed. Since the disk was RAID-5, the SUT continued to process the transactions successfully.
4. The test continued for at least another 5 minutes.
5. Since write cache mirroring was enabled for the log device, one of the RAID controllers, which holds one copy of the mirrored cache, was removed. There was a brief pause in I/O while the failover to the remaining log controller occurred. The controller detected a mirror-out-of-sync condition and deactivated write-back cache.
6. The run continued to completion without write-back cache.
7. The disk from step 3 was replaced after the completion of the run

8. Step 1 was performed returning the value for SUM_2. It was verified that SUM_2 was greater than or equal to SUM_1 plus the completed New_Order transactions recorded by the RTE..

Failure of Durable Medium Containing TPC-C Database Tables:

The following steps were successfully performed to demonstrate Durability against the failure of a disk unit with database tables:

1. The contents of the database were backed up in full.
2. The current count of the total number of orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving SUM_1.
3. A scaled-down test was started with about 12.5% of the full load . The test continued to run at about 12.5% of the reported tpmC for 6 minutes.
4. A disk containing the TPCC table was removed causing the SUT to report numerous errors when attempting to access that device
5. The removed disk was replaced and logical volumes were restored to functional state. The full database was restored from the backup copy in step 1.
6. The database was restarted and the transactions in the log were applied to the database.
7. Step 2 was performed returning SUM_2. It was verified that SUM_2 was greater than or equal to SUM_1 plus the completed New_Order transactions recorded by the RTE.
8. Consistency condition 3 was verified.

Instantaneous Interruption and Memory Failure:

The following steps were conducted on a fully scaled database:

1. The current count of the total number of orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving SUM_1.
2. A full load test was started and continued to run for several minutes at a throughput level well above 90% of the reported tpmC.
3. The system was powered off, which removed power from all system components, including memory.
4. The system was powered back on and the database completed the recovery process.
5. Step 1 was performed returning SUM_2. It was verified that SUM_2 was greater than or equal to SUM_1 plus the completed New_Order transactions recorded by the RTE.
6. Consistency condition 3 was verified.

4 Clause 4: Scaling and Data Base Population Related Items

4.1. Cardinality of Tables

The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed.

Table 4-1 portrays the TPC Benchmark™ C defined tables and the number of rows for each table as they were built initially.

All tables are based on 320,000 warehouses, the number of active warehouses during the benchmark.

Table Name	Number of Rows
Warehouse	320,000
District	3,200,000
Customer	9,600,000,000
History	9,600,000,000
Order	9,600,000,000
New Order	2,880,000,000
Order Line	95,999,444,818
Stock	32,000,000,000
Item	100,000

Table 4-1: Initial Cardinality of Tables

4.2. Distribution of Tables and Logs

The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems.

Three pairs of FC adapters connected to three DS4800 storage controllers used for the log. The storage controllers each contained four RAID5 arrays each with 30 disk drives. The log logical volume was striped across the four arrays (hdisks). Each of the disks used for the log had 36GB of storage capacity and the RAID5 LUN was 968.64GB.in size.

There are 40 pairs of FC adapters connected to 40 storage controllers. Each of the storage controllers contained 160 disks for a total of 6400 disks. All storage controllers were used evenly.

All database data was evenly distributed on 200 storage volume groups. Each volume group is created using 32 disks. Each one of the 200 volume groups corresponds with a range of 1600 warehouses. Each group contains 12 logical volumes and each volume corresponds to one DB2 container.

RAID0 was used to create the disk arrays used for the volume groups.

4.3. Data Base Model Implemented

A statement must be provided that describes the data base model implemented by the DBMS used.

The database manager used for this testing was DB2 9. DB2 9 is a relational DBMS. DB2 remote stored procedures and embedded SQL statements were used. The DB2 stored procedures were invoked via SQL CALL statements. Both the client application and stored procedures were written in embedded C code.

4.4. Partitions/Replications Mapping

The mapping of data base partitions/replications must be explicitly described.

The Warehouse, District, Customer, Order, Order-Line, New Order, History and Stock tables were horizontally partitioned into multiple tables. The specifics of the distribution of partitioned and non-partitioned tables across the physical media can be found in following table:

DATA DISTRIBUTION		
VOLUME GROUP NAME	DATABASE PARTITION	Logical Volumes
F01V1	1	D1F01V1ITEM, D1F01V1WARE, D1F01V1DIST, D1F01V1CSTI, D1F01V1NORA, D1F01V1ORL, D1F01V1STK, D1F01V1CST, D1F01V1ORDI, D1F01V1ORD, D1F01V1HIST, D1F01V1NORB
F01V2	2	D1F01V2ITEM, D1F01V2WARE, D1F01V2DIST, D1F01V2CSTI, D1F01V2NORA, D1F01V2ORL, D1F01V2STK, D1F01V2CST, D1F01V2ORDI, D1F01V2ORD, D1F01V2HIST, D1F01V2NORB
F01V3	3	D1F01V3ITEM, D1F01V3WARE, D1F01V3DIST, D1F01V3CSTI, D1F01V3NORA, D1F01V3ORL, D1F01V3STK, D1F01V3CST, D1F01V3ORDI, D1F01V3ORD, D1F01V3HIST, D1F01V3NORB
F01V4	4	D1F01V4ITEM, D1F01V4WARE, D1F01V4DIST, D1F01V4CSTI, D1F01V4NORA, D1F01V4ORL, D1F01V4STK, D1F01V4CST, D1F01V4ORDI, D1F01V4ORD, D1F01V4HIST, D1F01V4NORB
F01V5	5	D1F01V5ITEM, D1F01V5WARE, D1F01V5DIST, D1F01V5CSTI, D1F01V5NORA, D1F01V5ORL, D1F01V5STK, D1F01V5CST, D1F01V5ORDI, D1F01V5ORD, D1F01V5HIST, D1F01V5NORB
F02V1	6	D1F02V1ITEM, D1F02V1WARE, D1F02V1DIST, D1F02V1CSTI, D1F02V1NORA, D1F02V1ORL, D1F02V1STK, D1F02V1CST, D1F02V1ORDI, D1F02V1ORD, D1F02V1HIST, D1F02V1NORB
F02V2	7	D1F02V2ITEM, D1F02V2WARE, D1F02V2DIST, D1F02V2CSTI, D1F02V2NORA, D1F02V2ORL, D1F02V2STK, D1F02V2CST, D1F02V2ORDI, D1F02V2ORD, D1F02V2HIST, D1F02V2NORB
F02V3	8	D1F02V3ITEM, D1F02V3WARE, D1F02V3DIST, D1F02V3CSTI, D1F02V3NORA, D1F02V3ORL, D1F02V3STK, D1F02V3CST, D1F02V3ORDI, D1F02V3ORD, D1F02V3HIST, D1F02V3NORB
F02V4	9	D1F02V4ITEM, D1F02V4WARE, D1F02V4DIST, D1F02V4CSTI, D1F02V4NORA, D1F02V4ORL, D1F02V4STK, D1F02V4CST, D1F02V4ORDI, D1F02V4ORD, D1F02V4HIST, D1F02V4NORB
F02V5	10	D1F02V5ITEM, D1F02V5WARE, D1F02V5DIST, D1F02V5CSTI, D1F02V5NORA, D1F02V5ORL, D1F02V5STK, D1F02V5CST, D1F02V5ORDI, D1F02V5ORD, D1F02V5HIST, D1F02V5NORB
F03V1	11	D1F03V1ITEM, D1F03V1WARE, D1F03V1DIST, D1F03V1CSTI, D1F03V1NORA, D1F03V1ORL, D1F03V1STK, D1F03V1CST, D1F03V1ORDI, D1F03V1ORD, D1F03V1HIST, D1F03V1NORB
F03V2	12	D1F03V2ITEM, D1F03V2WARE, D1F03V2DIST, D1F03V2CSTI, D1F03V2NORA, D1F03V2ORL, D1F03V2STK, D1F03V2CST, D1F03V2ORDI, D1F03V2ORD, D1F03V2HIST, D1F03V2NORB
F03V3	13	D1F03V3ITEM, D1F03V3WARE, D1F03V3DIST, D1F03V3CSTI, D1F03V3NORA, D1F03V3ORL, D1F03V3STK, D1F03V3CST, D1F03V3ORDI, D1F03V3ORD, D1F03V3HIST, D1F03V3NORB
F03V4	14	D1F03V4ITEM, D1F03V4WARE, D1F03V4DIST, D1F03V4CSTI, D1F03V4NORA, D1F03V4ORL, D1F03V4STK, D1F03V4CST, D1F03V4ORDI, D1F03V4ORD, D1F03V4HIST, D1F03V4NORB
F03V5	15	D1F03V5ITEM, D1F03V5WARE, D1F03V5DIST, D1F03V5CSTI, D1F03V5NORA, D1F03V5ORL, D1F03V5STK, D1F03V5CST, D1F03V5ORDI, D1F03V5ORD, D1F03V5HIST, D1F03V5NORB
F04V1	16	D1F04V1ITEM, D1F04V1WARE, D1F04V1DIST, D1F04V1CSTI, D1F04V1NORA, D1F04V1ORL, D1F04V1STK, D1F04V1CST, D1F04V1ORDI, D1F04V1ORD, D1F04V1HIST, D1F04V1NORB
F04V2	17	D1F04V2ITEM, D1F04V2WARE, D1F04V2DIST, D1F04V2CSTI, D1F04V2NORA, D1F04V2ORL, D1F04V2STK, D1F04V2CST, D1F04V2ORDI, D1F04V2ORD, D1F04V2HIST, D1F04V2NORB
F04V3	18	D1F04V3ITEM, D1F04V3WARE, D1F04V3DIST, D1F04V3CSTI, D1F04V3NORA, D1F04V3ORL, D1F04V3STK, D1F04V3CST, D1F04V3ORDI, D1F04V3ORD, D1F04V3HIST, D1F04V3NORB

F04V4	19	D1F04V4ITEM, D1F04V4WARE, D1F04V4DIST, D1F04V4CSTI, D1F04V4NORA, D1F04V4ORL, D1F04V4STK, D1F04V4CST, D1F04V4ORDI, D1F04V4ORD, D1F04V4HIST, D1F04V4NORB
F04V5	20	D1F04V5ITEM, D1F04V5WARE, D1F04V5DIST, D1F04V5CSTI, D1F04V5NORA, D1F04V5ORL, D1F04V5STK, D1F04V5CST, D1F04V5ORDI, D1F04V5ORD, D1F04V5HIST, D1F04V5NORB
F05V1	21	D1F05V1ITEM, D1F05V1WARE, D1F05V1DIST, D1F05V1CSTI, D1F05V1NORA, D1F05V1ORL, D1F05V1STK, D1F05V1CST, D1F05V1ORDI, D1F05V1ORD, D1F05V1HIST, D1F05V1NORB
F05V2	22	D1F05V2ITEM, D1F05V2WARE, D1F05V2DIST, D1F05V2CSTI, D1F05V2NORA, D1F05V2ORL, D1F05V2STK, D1F05V2CST, D1F05V2ORDI, D1F05V2ORD, D1F05V2HIST, D1F05V2NORB
F05V3	23	D1F05V3ITEM, D1F05V3WARE, D1F05V3DIST, D1F05V3CSTI, D1F05V3NORA, D1F05V3ORL, D1F05V3STK, D1F05V3CST,tcan D1F05V3ORDI, D1F05V3ORD, D1F05V3HIST, D1F05V3NORB
F05V4	24	D1F05V4ITEM, D1F05V4WARE, D1F05V4DIST, D1F05V4CSTI, D1F05V4NORA, D1F05V4ORL, D1F05V4STK, D1F05V4CST, D1F05V4ORDI, D1F05V4ORD, D1F05V4HIST, D1F05V4NORB
F05V5	25	D1F05V5ITEM, D1F05V5WARE, D1F05V5DIST, D1F05V5CSTI, D1F05V5NORA, D1F05V5ORL, D1F05V5STK, D1F05V5CST, D1F05V5ORDI, D1F05V5ORD, D1F05V5HIST, D1F05V5NORB
F06V1	26	D1F06V1ITEM, D1F06V1WARE, D1F06V1DIST, D1F06V1CSTI, D1F06V1NORA, D1F06V1ORL, D1F06V1STK, D1F06V1CST, D1F06V1ORDI, D1F06V1ORD, D1F06V1HIST, D1F06V1NORB
F06V2	27	D1F06V2ITEM, D1F06V2WARE, D1F06V2DIST, D1F06V2CSTI, D1F06V2NORA, D1F06V2ORL, D1F06V2STK, D1F06V2CST, D1F06V2ORDI, D1F06V2ORD, D1F06V2HIST, D1F06V2NORB
F06V3	28	D1F06V3ITEM, D1F06V3WARE, D1F06V3DIST, D1F06V3CSTI, D1F06V3NORA, D1F06V3ORL, D1F06V3STK, D1F06V3CST, D1F06V3ORDI, D1F06V3ORD, D1F06V3HIST, D1F06V3NORB
F06V4	29	D1F06V4ITEM, D1F06V4WARE, D1F06V4DIST, D1F06V4CSTI, D1F06V4NORA, D1F06V4ORL, D1F06V4STK, D1F06V4CST, D1F06V4ORDI, D1F06V4ORD, D1F06V4HIST, D1F06V4NORB
F06V5	30	D1F06V5ITEM, D1F06V5WARE, D1F06V5DIST, D1F06V5CSTI, D1F06V5NORA, D1F06V5ORL, D1F06V5STK, D1F06V5CST, D1F06V5ORDI, D1F06V5ORD, D1F06V5HIST, D1F06V5NORB
F07V1	31	D1F07V1ITEM, D1F07V1WARE, D1F07V1DIST, D1F07V1CSTI, D1F07V1NORA, D1F07V1ORL, D1F07V1STK, D1F07V1CST, D1F07V1ORDI, D1F07V1ORD, D1F07V1HIST, D1F07V1NORB
F07V2	32	D1F07V2ITEM, D1F07V2WARE, D1F07V2DIST, D1F07V2CSTI, D1F07V2NORA, D1F07V2ORL, D1F07V2STK, D1F07V2CST, D1F07V2ORDI, D1F07V2ORD, D1F07V2HIST, D1F07V2NORB
F07V3	33	D1F07V3ITEM, D1F07V3WARE, D1F07V3DIST, D1F07V3CSTI, D1F07V3NORA, D1F07V3ORL, D1F07V3STK, D1F07V3CST, D1F07V3ORDI, D1F07V3ORD, D1F07V3HIST, D1F07V3NORB
F07V4	34	D1F07V4ITEM, D1F07V4WARE, D1F07V4DIST, D1F07V4CSTI, D1F07V4NORA, D1F07V4ORL, D1F07V4STK, D1F07V4CST, D1F07V4ORDI, D1F07V4ORD, D1F07V4HIST, D1F07V4NORB
F07V5	35	D1F07V5ITEM, D1F07V5WARE, D1F07V5DIST, D1F07V5CSTI, D1F07V5NORA, D1F07V5ORL, D1F07V5STK, D1F07V5CST, D1F07V5ORDI, D1F07V5ORD, D1F07V5HIST, D1F07V5NORB
F08V1	36	D1F08V1ITEM, D1F08V1WARE, D1F08V1DIST, D1F08V1CSTI, D1F08V1NORA, D1F08V1ORL, D1F08V1STK, D1F08V1CST, D1F08V1ORDI, D1F08V1ORD, D1F08V1HIST, D1F08V1NORB
F08V2	37	D1F08V2ITEM, D1F08V2WARE, D1F08V2DIST, D1F08V2CSTI, D1F08V2NORA, D1F08V2ORL, D1F08V2STK, D1F08V2CST, D1F08V2ORDI, D1F08V2ORD, D1F08V2HIST, D1F08V2NORB
F08V3	38	D1F08V3ITEM, D1F08V3WARE, D1F08V3DIST, D1F08V3CSTI, D1F08V3NORA, D1F08V3ORL, D1F08V3STK, D1F08V3CST, D1F08V3ORDI, D1F08V3ORD, D1F08V3HIST, D1F08V3NORB
F08V4	39	D1F08V4ITEM, D1F08V4WARE, D1F08V4DIST, D1F08V4CSTI, D1F08V4NORA, D1F08V4ORL, D1F08V4STK, D1F08V4CST, D1F08V4ORDI, D1F08V4ORD, D1F08V4HIST, D1F08V4NORB
F08V5	40	D1F08V5ITEM, D1F08V5WARE, D1F08V5DIST, D1F08V5CSTI, D1F08V5NORA, D1F08V5ORL, D1F08V5STK, D1F08V5CST, D1F08V5ORDI, D1F08V5ORD, D1F08V5HIST, D1F08V5NORB
F09V1	41	D1F09V1ITEM, D1F09V1WARE, D1F09V1DIST, D1F09V1CSTI, D1F09V1NORA, D1F09V1ORL, D1F09V1STK, D1F09V1CST, D1F09V1ORDI, D1F09V1ORD, D1F09V1HIST, D1F09V1NORB

F09V2	42	D1F09V2ITEM, D1F09V2WARE, D1F09V2DIST, D1F09V2CSTI, D1F09V2NORA, D1F09V2ORL, D1F09V2STK, D1F09V2CST, D1F09V2ORDI, D1F09V2ORD, D1F09V2HIST, D1F09V2NORB
F09V3	43	D1F09V3ITEM, D1F09V3WARE, D1F09V3DIST, D1F09V3CSTI, D1F09V3NORA, D1F09V3ORL, D1F09V3STK, D1F09V3CST, D1F09V3ORDI, D1F09V3ORD, D1F09V3HIST, D1F09V3NORB
F09V4	44	D1F09V4ITEM, D1F09V4WARE, D1F09V4DIST, D1F09V4CSTI, D1F09V4NORA, D1F09V4ORL, D1F09V4STK, D1F09V4CST, D1F09V4ORDI, D1F09V4ORD, D1F09V4HIST, D1F09V4NORB
F09V5	45	D1F09V5ITEM, D1F09V5WARE, D1F09V5DIST, D1F09V5CSTI, D1F09V5NORA, D1F09V5ORL, D1F09V5STK, D1F09V5CST, D1F09V5ORDI, D1F09V5ORD, D1F09V5HIST, D1F09V5NORB
F10V1	46	D1F10V1ITEM, D1F10V1WARE, D1F10V1DIST, D1F10V1CSTI, D1F10V1NORA, D1F10V1ORL, D1F10V1STK, D1F10V1CST, D1F10V1ORDI, D1F10V1ORD, D1F10V1HIST, D1F10V1NORB
F10V2	47	D1F10V2ITEM, D1F10V2WARE, D1F10V2DIST, D1F10V2CSTI, D1F10V2NORA, D1F10V2ORL, D1F10V2STK, D1F10V2CST, D1F10V2ORDI, D1F10V2ORD, D1F10V2HIST, D1F10V2NORB
F10V3	48	D1F10V3ITEM, D1F10V3WARE, D1F10V3DIST, D1F10V3CSTI, D1F10V3NORA, D1F10V3ORL, D1F10V3STK, D1F10V3CST, D1F10V3ORDI, D1F10V3ORD, D1F10V3HIST, D1F10V3NORB
F10V4	49	D1F10V4ITEM, D1F10V4WARE, D1F10V4DIST, D1F10V4CSTI, D1F10V4NORA, D1F10V4ORL, D1F10V4STK, D1F10V4CST, D1F10V4ORDI, D1F10V4ORD, D1F10V4HIST, D1F10V4NORB
F10V5	50	D1F10V5ITEM, D1F10V5WARE, D1F10V5DIST, D1F10V5CSTI, D1F10V5NORA, D1F10V5ORL, D1F10V5STK, D1F10V5CST, D1F10V5ORDI, D1F10V5ORD, D1F10V5HIST, D1F10V5NORB
F11V1	51	D1F11V1ITEM, D1F11V1WARE, D1F11V1DIST, D1F11V1CSTI, D1F11V1NORA, D1F11V1ORL, D1F11V1STK, D1F11V1CST, D1F11V1ORDI, D1F11V1ORD, D1F11V1HIST, D1F11V1NORB
F11V2	52	D1F11V2ITEM, D1F11V2WARE, D1F11V2DIST, D1F11V2CSTI, D1F11V2NORA, D1F11V2ORL, D1F11V2STK, D1F11V2CST, D1F11V2ORDI, D1F11V2ORD, D1F11V2HIST, D1F11V2NORB
F11V3	53	D1F11V3ITEM, D1F11V3WARE, D1F11V3DIST, D1F11V3CSTI, D1F11V3NORA, D1F11V3ORL, D1F11V3STK, D1F11V3CST, D1F11V3ORDI, D1F11V3ORD, D1F11V3HIST, D1F11V3NORB
F11V4	54	D1F11V4ITEM, D1F11V4WARE, D1F11V4DIST, D1F11V4CSTI, D1F11V4NORA, D1F11V4ORL, D1F11V4STK, D1F11V4CST, D1F11V4ORDI, D1F11V4ORD, D1F11V4HIST, D1F11V4NORB
F11V5	55	D1F11V5ITEM, D1F11V5WARE, D1F11V5DIST, D1F11V5CSTI, D1F11V5NORA, D1F11V5ORL, D1F11V5STK, D1F11V5CST, D1F11V5ORDI, D1F11V5ORD, D1F11V5HIST, D1F11V5NORB
F12V1	56	D1F12V1ITEM, D1F12V1WARE, D1F12V1DIST, D1F12V1CSTI, D1F12V1NORA, D1F12V1ORL, D1F12V1STK, D1F12V1CST, D1F12V1ORDI, D1F12V1ORD, D1F12V1HIST, D1F12V1NORB
F12V2	57	D1F12V2ITEM, D1F12V2WARE, D1F12V2DIST, D1F12V2CSTI, D1F12V2NORA, D1F12V2ORL, D1F12V2STK, D1F12V2CST, D1F12V2ORDI, D1F12V2ORD, D1F12V2HIST, D1F12V2NORB
F12V3	58	D1F12V3ITEM, D1F12V3WARE, D1F12V3DIST, D1F12V3CSTI, D1F12V3NORA, D1F12V3ORL, D1F12V3STK, D1F12V3CST, D1F12V3ORDI, D1F12V3ORD, D1F12V3HIST, D1F12V3NORB
F12V4	59	D1F12V4ITEM, D1F12V4WARE, D1F12V4DIST, D1F12V4CSTI, D1F12V4NORA, D1F12V4ORL, D1F12V4STK, D1F12V4CST, D1F12V4ORDI, D1F12V4ORD, D1F12V4HIST, D1F12V4NORB
F12V5	60	D1F12V5ITEM, D1F12V5WARE, D1F12V5DIST, D1F12V5CSTI, D1F12V5NORA, D1F12V5ORL, D1F12V5STK, D1F12V5CST, D1F12V5ORDI, D1F12V5ORD, D1F12V5HIST, D1F12V5NORB
F13V1	61	D1F13V1ITEM, D1F13V1WARE, D1F13V1DIST, D1F13V1CSTI, D1F13V1NORA, D1F13V1ORL, D1F13V1STK, D1F13V1CST, D1F13V1ORDI, D1F13V1ORD, D1F13V1HIST, D1F13V1NORB
F13V2	62	D1F13V2ITEM, D1F13V2WARE, D1F13V2DIST, D1F13V2CSTI, D1F13V2NORA, D1F13V2ORL, D1F13V2STK, D1F13V2CST, D1F13V2ORDI, D1F13V2ORD, D1F13V2HIST, D1F13V2NORB
F13V3	63	D1F13V3ITEM, D1F13V3WARE, D1F13V3DIST, D1F13V3CSTI, D1F13V3NORA, D1F13V3ORL, D1F13V3STK, D1F13V3CST, D1F13V3ORDI, D1F13V3ORD, D1F13V3HIST, D1F13V3NORB
F13V4	64	D1F13V4ITEM, D1F13V4WARE, D1F13V4DIST, D1F13V4CSTI, D1F13V4NORA, D1F13V4ORL, D1F13V4STK, D1F13V4CST, D1F13V4ORDI, D1F13V4ORD, D1F13V4HIST, D1F13V4NORB

F13V5	65	D1F13V5ITEM, D1F13V5WARE, D1F13V5DIST, D1F13V5CSTI, D1F13V5NORA, D1F13V5ORL, D1F13V5STK, D1F13V5CST, D1F13V5ORDI, D1F13V5ORD, D1F13V5HIST, D1F13V5NORB
F14V1	66	D1F14V1ITEM, D1F14V1WARE, D1F14V1DIST, D1F14V1CSTI, D1F14V1NORA, D1F14V1ORL, D1F14V1STK, D1F14V1CST, D1F14V1ORDI, D1F14V1ORD, D1F14V1HIST, D1F14V1NORB
F14V2	67	D1F14V2ITEM, D1F14V2WARE, D1F14V2DIST, D1F14V2CSTI, D1F14V2NORA, D1F14V2ORL, D1F14V2STK, D1F14V2CST, D1F14V2ORDI, D1F14V2ORD, D1F14V2HIST, D1F14V2NORB
F14V3	68	D1F14V3ITEM, D1F14V3WARE, D1F14V3DIST, D1F14V3CSTI, D1F14V3NORA, D1F14V3ORL, D1F14V3STK, D1F14V3CST, D1F14V3ORDI, D1F14V3ORD, D1F14V3HIST, D1F14V3NORB
F14V4	69	D1F14V4ITEM, D1F14V4WARE, D1F14V4DIST, D1F14V4CSTI, D1F14V4NORA, D1F14V4ORL, D1F14V4STK, D1F14V4CST, D1F14V4ORDI, D1F14V4ORD, D1F14V4HIST, D1F14V4NORB
F14V5	70	D1F14V5ITEM, D1F14V5WARE, D1F14V5DIST, D1F14V5CSTI, D1F14V5NORA, D1F14V5ORL, D1F14V5STK, D1F14V5CST, D1F14V5ORDI, D1F14V5ORD, D1F14V5HIST, D1F14V5NORB
F15V1	71	D1F15V1ITEM, D1F15V1WARE, D1F15V1DIST, D1F15V1CSTI, D1F15V1NORA, D1F15V1ORL, D1F15V1STK, D1F15V1CST, D1F15V1ORDI, D1F15V1ORD, D1F15V1HIST, D1F15V1NORB
F15V2	72	D1F15V2ITEM, D1F15V2WARE, D1F15V2DIST, D1F15V2CSTI, D1F15V2NORA, D1F15V2ORL, D1F15V2STK, D1F15V2CST, D1F15V2ORDI, D1F15V2ORD, D1F15V2HIST, D1F15V2NORB
F15V3	73	D1F15V3ITEM, D1F15V3WARE, D1F15V3DIST, D1F15V3CSTI, D1F15V3NORA, D1F15V3ORL, D1F15V3STK, D1F15V3CST, D1F15V3ORDI, D1F15V3ORD, D1F15V3HIST, D1F15V3NORB
F15V4	74	D1F15V4ITEM, D1F15V4WARE, D1F15V4DIST, D1F15V4CSTI, D1F15V4NORA, D1F15V4ORL, D1F15V4STK, D1F15V4CST, D1F15V4ORDI, D1F15V4ORD, D1F15V4HIST, D1F15V4NORB
F15V5	75	D1F15V5ITEM, D1F15V5WARE, D1F15V5DIST, D1F15V5CSTI, D1F15V5NORA, D1F15V5ORL, D1F15V5STK, D1F15V5CST, D1F15V5ORDI, D1F15V5ORD, D1F15V5HIST, D1F15V5NORB
F16V1	76	D1F16V1ITEM, D1F16V1WARE, D1F16V1DIST, D1F16V1CSTI, D1F16V1NORA, D1F16V1ORL, D1F16V1STK, D1F16V1CST, D1F16V1ORDI, D1F16V1ORD, D1F16V1HIST, D1F16V1NORB
F16V2	77	D1F16V2ITEM, D1F16V2WARE, D1F16V2DIST, D1F16V2CSTI, D1F16V2NORA, D1F16V2ORL, D1F16V2STK, D1F16V2CST, D1F16V2ORDI, D1F16V2ORD, D1F16V2HIST, D1F16V2NORB
F16V3	78	D1F16V3ITEM, D1F16V3WARE, D1F16V3DIST, D1F16V3CSTI, D1F16V3NORA, D1F16V3ORL, D1F16V3STK, D1F16V3CST, D1F16V3ORDI, D1F16V3ORD, D1F16V3HIST, D1F16V3NORB
F16V4	79	D1F16V4ITEM, D1F16V4WARE, D1F16V4DIST, D1F16V4CSTI, D1F16V4NORA, D1F16V4ORL, D1F16V4STK, D1F16V4CST, D1F16V4ORDI, D1F16V4ORD, D1F16V4HIST, D1F16V4NORB
F16V5	80	D1F16V5ITEM, D1F16V5WARE, D1F16V5DIST, D1F16V5CSTI, D1F16V5NORA, D1F16V5ORL, D1F16V5STK, D1F16V5CST, D1F16V5ORDI, D1F16V5ORD, D1F16V5HIST, D1F16V5NORB
F17V1	81	D1F17V1ITEM, D1F17V1WARE, D1F17V1DIST, D1F17V1CSTI, D1F17V1NORA, D1F17V1ORL, D1F17V1STK, D1F17V1CST, D1F17V1ORDI, D1F17V1ORD, D1F17V1HIST, D1F17V1NORB
F17V2	82	D1F17V2ITEM, D1F17V2WARE, D1F17V2DIST, D1F17V2CSTI, D1F17V2NORA, D1F17V2ORL, D1F17V2STK, D1F17V2CST, D1F17V2ORDI, D1F17V2ORD, D1F17V2HIST, D1F17V2NORB
F17V3	83	D1F17V3ITEM, D1F17V3WARE, D1F17V3DIST, D1F17V3CSTI, D1F17V3NORA, D1F17V3ORL, D1F17V3STK, D1F17V3CST, D1F17V3ORDI, D1F17V3ORD, D1F17V3HIST, D1F17V3NORB
F17V4	84	D1F17V4ITEM, D1F17V4WARE, D1F17V4DIST, D1F17V4CSTI, D1F17V4NORA, D1F17V4ORL, D1F17V4STK, D1F17V4CST, D1F17V4ORDI, D1F17V4ORD, D1F17V4HIST, D1F17V4NORB
F17V5	85	D1F17V5ITEM, D1F17V5WARE, D1F17V5DIST, D1F17V5CSTI, D1F17V5NORA, D1F17V5ORL, D1F17V5STK, D1F17V5CST, D1F17V5ORDI, D1F17V5ORD, D1F17V5HIST, D1F17V5NORB
F18V1	86	D1F18V1ITEM, D1F18V1WARE, D1F18V1DIST, D1F18V1CSTI, D1F18V1NORA, D1F18V1ORL, D1F18V1STK, D1F18V1CST, D1F18V1ORDI, D1F18V1ORD, D1F18V1HIST, D1F18V1NORB
F18V2	87	D1F18V2ITEM, D1F18V2WARE, D1F18V2DIST, D1F18V2CSTI, D1F18V2NORA, D1F18V2ORL, D1F18V2STK, D1F18V2CST, D1F18V2ORDI, D1F18V2ORD, D1F18V2HIST, D1F18V2NORB

F18V3	88	D1F18V3ITEM, D1F18V3WARE, D1F18V3DIST, D1F18V3CSTI, D1F18V3NORA, D1F18V3ORL, D1F18V3STK, D1F18V3CST, D1F18V3ORDI, D1F18V3ORD, D1F18V3HIST, D1F18V3NORB
F18V4	89	D1F18V4ITEM, D1F18V4WARE, D1F18V4DIST, D1F18V4CSTI, D1F18V4NORA, D1F18V4ORL, D1F18V4STK, D1F18V4CST, D1F18V4ORDI, D1F18V4ORD, D1F18V4HIST, D1F18V4NORB
F18V5	90	D1F18V5ITEM, D1F18V5WARE, D1F18V5DIST, D1F18V5CSTI, D1F18V5NORA, D1F18V5ORL, D1F18V5STK, D1F18V5CST, D1F18V5ORDI, D1F18V5ORD, D1F18V5HIST, D1F18V5NORB
F19V1	91	D1F19V1ITEM, D1F19V1WARE, D1F19V1DIST, D1F19V1CSTI, D1F19V1NORA, D1F19V1ORL, D1F19V1STK, D1F19V1CST, D1F19V1ORDI, D1F19V1ORD, D1F19V1HIST, D1F19V1NORB
F19V2	92	D1F19V2ITEM, D1F19V2WARE, D1F19V2DIST, D1F19V2CSTI, D1F19V2NORA, D1F19V2ORL, D1F19V2STK, D1F19V2CST, D1F19V2ORDI, D1F19V2ORD, D1F19V2HIST, D1F19V2NORB
F19V3	93	D1F19V3ITEM, D1F19V3WARE, D1F19V3DIST, D1F19V3CSTI, D1F19V3NORA, D1F19V3ORL, D1F19V3STK, D1F19V3CST, D1F19V3ORDI, D1F19V3ORD, D1F19V3HIST, D1F19V3NORB
F19V4	94	D1F19V4ITEM, D1F19V4WARE, D1F19V4DIST, D1F19V4CSTI, D1F19V4NORA, D1F19V4ORL, D1F19V4STK, D1F19V4CST, D1F19V4ORDI, D1F19V4ORD, D1F19V4HIST, D1F19V4NORB
F19V5	95	D1F19V5ITEM, D1F19V5WARE, D1F19V5DIST, D1F19V5CSTI, D1F19V5NORA, D1F19V5ORL, D1F19V5STK, D1F19V5CST, D1F19V5ORDI, D1F19V5ORD, D1F19V5HIST, D1F19V5NORB
F20V1	96	D1F20V1ITEM, D1F20V1WARE, D1F20V1DIST, D1F20V1CSTI, D1F20V1NORA, D1F20V1ORL, D1F20V1STK, D1F20V1CST, D1F20V1ORDI, D1F20V1ORD, D1F20V1HIST, D1F20V1NORB
F20V2	97	D1F20V2ITEM, D1F20V2WARE, D1F20V2DIST, D1F20V2CSTI, D1F20V2NORA, D1F20V2ORL, D1F20V2STK, D1F20V2CST, D1F20V2ORDI, D1F20V2ORD, D1F20V2HIST, D1F20V2NORB
F20V3	98	D1F20V3ITEM, D1F20V3WARE, D1F20V3DIST, D1F20V3CSTI, D1F20V3NORA, D1F20V3ORL, D1F20V3STK, D1F20V3CST, D1F20V3ORDI, D1F20V3ORD, D1F20V3HIST, D1F20V3NORB
F20V4	99	D1F20V4ITEM, D1F20V4WARE, D1F20V4DIST, D1F20V4CSTI, D1F20V4NORA, D1F20V4ORL, D1F20V4STK, D1F20V4CST, D1F20V4ORDI, D1F20V4ORD, D1F20V4HIST, D1F20V4NORB
F20V5	100	D1F20V5ITEM, D1F20V5WARE, D1F20V5DIST, D1F20V5CSTI, D1F20V5NORA, D1F20V5ORL, D1F20V5STK, D1F20V5CST, D1F20V5ORDI, D1F20V5ORD, D1F20V5HIST, D1F20V5NORB
F21V1	101	D1F21V1ITEM, D1F21V1WARE, D1F21V1DIST, D1F21V1CSTI, D1F21V1NORA, D1F21V1ORL, D1F21V1STK, D1F21V1CST, D1F21V1ORDI, D1F21V1ORD, D1F21V1HIST, D1F21V1NORB
F21V2	102	D1F21V2ITEM, D1F21V2WARE, D1F21V2DIST, D1F21V2CSTI, D1F21V2NORA, D1F21V2ORL, D1F21V2STK, D1F21V2CST, D1F21V2ORDI, D1F21V2ORD, D1F21V2HIST, D1F21V2NORB
F21V3	103	D1F21V3ITEM, D1F21V3WARE, D1F21V3DIST, D1F21V3CSTI, D1F21V3NORA, D1F21V3ORL, D1F21V3STK, D1F21V3CST, D1F21V3ORDI, D1F21V3ORD, D1F21V3HIST, D1F21V3NORB
F21V4	104	D1F21V4ITEM, D1F21V4WARE, D1F21V4DIST, D1F21V4CSTI, D1F21V4NORA, D1F21V4ORL, D1F21V4STK, D1F21V4CST, D1F21V4ORDI, D1F21V4ORD, D1F21V4HIST, D1F21V4NORB
F21V5	105	D1F21V5ITEM, D1F21V5WARE, D1F21V5DIST, D1F21V5CSTI, D1F21V5NORA, D1F21V5ORL, D1F21V5STK, D1F21V5CST, D1F21V5ORDI, D1F21V5ORD, D1F21V5HIST, D1F21V5NORB
F22V1	106	D1F22V1ITEM, D1F22V1WARE, D1F22V1DIST, D1F22V1CSTI, D1F22V1NORA, D1F22V1ORL, D1F22V1STK, D1F22V1CST, D1F22V1ORDI, D1F22V1ORD, D1F22V1HIST, D1F22V1NORB
F22V2	107	D1F22V2ITEM, D1F22V2WARE, D1F22V2DIST, D1F22V2CSTI, D1F22V2NORA, D1F22V2ORL, D1F22V2STK, D1F22V2CST, D1F22V2ORDI, D1F22V2ORD, D1F22V2HIST, D1F22V2NORB
F22V3	108	D1F22V3ITEM, D1F22V3WARE, D1F22V3DIST, D1F22V3CSTI, D1F22V3NORA, D1F22V3ORL, D1F22V3STK, D1F22V3CST, D1F22V3ORDI, D1F22V3ORD, D1F22V3HIST, D1F22V3NORB
F22V4	109	D1F22V4ITEM, D1F22V4WARE, D1F22V4DIST, D1F22V4CSTI, D1F22V4NORA, D1F22V4ORL, D1F22V4STK, D1F22V4CST, D1F22V4ORDI, D1F22V4ORD, D1F22V4HIST, D1F22V4NORB
F22V5	110	D1F22V5ITEM, D1F22V5WARE, D1F22V5DIST, D1F22V5CSTI, D1F22V5NORA, D1F22V5ORL, D1F22V5STK, D1F22V5CST, D1F22V5ORDI, D1F22V5ORD, D1F22V5HIST, D1F22V5NORB

F23V1	111	D1F23V1ITEM, D1F23V1WARE, D1F23V1DIST, D1F23V1CSTI, D1F23V1NORA, D1F23V1ORL, D1F23V1STK, D1F23V1CST, D1F23V1ORDI, D1F23V1ORD, D1F23V1HIST, D1F23V1NORB
F23V2	112	D1F23V2ITEM, D1F23V2WARE, D1F23V2DIST, D1F23V2CSTI, D1F23V2NORA, D1F23V2ORL, D1F23V2STK, D1F23V2CST, D1F23V2ORDI, D1F23V2ORD, D1F23V2HIST, D1F23V2NORB
F23V3	113	D1F23V3ITEM, D1F23V3WARE, D1F23V3DIST, D1F23V3CSTI, D1F23V3NORA, D1F23V3ORL, D1F23V3STK, D1F23V3CST, D1F23V3ORDI, D1F23V3ORD, D1F23V3HIST, D1F23V3NORB
F23V4	114	D1F23V4ITEM, D1F23V4WARE, D1F23V4DIST, D1F23V4CSTI, D1F23V4NORA, D1F23V4ORL, D1F23V4STK, D1F23V4CST, D1F23V4ORDI, D1F23V4ORD, D1F23V4HIST, D1F23V4NORB
F23V5	115	D1F23V5ITEM, D1F23V5WARE, D1F23V5DIST, D1F23V5CSTI, D1F23V5NORA, D1F23V5ORL, D1F23V5STK, D1F23V5CST, D1F23V5ORDI, D1F23V5ORD, D1F23V5HIST, D1F23V5NORB
F24V1	116	D1F24V1ITEM, D1F24V1WARE, D1F24V1DIST, D1F24V1CSTI, D1F24V1NORA, D1F24V1ORL, D1F24V1STK, D1F24V1CST, D1F24V1ORDI, D1F24V1ORD, D1F24V1HIST, D1F24V1NORB
F24V2	117	D1F24V2ITEM, D1F24V2WARE, D1F24V2DIST, D1F24V2CSTI, D1F24V2NORA, D1F24V2ORL, D1F24V2STK, D1F24V2CST, D1F24V2ORDI, D1F24V2ORD, D1F24V2HIST, D1F24V2NORB
F24V3	118	D1F24V3ITEM, D1F24V3WARE, D1F24V3DIST, D1F24V3CSTI, D1F24V3NORA, D1F24V3ORL, D1F24V3STK, D1F24V3CST, D1F24V3ORDI, D1F24V3ORD, D1F24V3HIST, D1F24V3NORB
F24V4	119	D1F24V4ITEM, D1F24V4WARE, D1F24V4DIST, D1F24V4CSTI, D1F24V4NORA, D1F24V4ORL, D1F24V4STK, D1F24V4CST, D1F24V4ORDI, D1F24V4ORD, D1F24V4HIST, D1F24V4NORB
F24V5	120	D1F24V5ITEM, D1F24V5WARE, D1F24V5DIST, D1F24V5CSTI, D1F24V5NORA, D1F24V5ORL, D1F24V5STK, D1F24V5CST, D1F24V5ORDI, D1F24V5ORD, D1F24V5HIST, D1F24V5NORB
F25V1	121	D1F25V1ITEM, D1F25V1WARE, D1F25V1DIST, D1F25V1CSTI, D1F25V1NORA, D1F25V1ORL, D1F25V1STK, D1F25V1CST, D1F25V1ORDI, D1F25V1ORD, D1F25V1HIST, D1F25V1NORB
F25V2	122	D1F25V2ITEM, D1F25V2WARE, D1F25V2DIST, D1F25V2CSTI, D1F25V2NORA, D1F25V2ORL, D1F25V2STK, D1F25V2CST, D1F25V2ORDI, D1F25V2ORD, D1F25V2HIST, D1F25V2NORB
F25V3	123	D1F25V3ITEM, D1F25V3WARE, D1F25V3DIST, D1F25V3CSTI, D1F25V3NORA, D1F25V3ORL, D1F25V3STK, D1F25V3CST, D1F25V3ORDI, D1F25V3ORD, D1F25V3HIST, D1F25V3NORB
F25V4	124	D1F25V4ITEM, D1F25V4WARE, D1F25V4DIST, D1F25V4CSTI, D1F25V4NORA, D1F25V4ORL, D1F25V4STK, D1F25V4CST, D1F25V4ORDI, D1F25V4ORD, D1F25V4HIST, D1F25V4NORB
F25V5	125	D1F25V5ITEM, D1F25V5WARE, D1F25V5DIST, D1F25V5CSTI, D1F25V5NORA, D1F25V5ORL, D1F25V5STK, D1F25V5CST, D1F25V5ORDI, D1F25V5ORD, D1F25V5HIST, D1F25V5NORB
F26V1	126	D1F26V1ITEM, D1F26V1WARE, D1F26V1DIST, D1F26V1CSTI, D1F26V1NORA, D1F26V1ORL, D1F26V1STK, D1F26V1CST, D1F26V1ORDI, D1F26V1ORD, D1F26V1HIST, D1F26V1NORB
F26V2	127	D1F26V2ITEM, D1F26V2WARE, D1F26V2DIST, D1F26V2CSTI, D1F26V2NORA, D1F26V2ORL, D1F26V2STK, D1F26V2CST, D1F26V2ORDI, D1F26V2ORD, D1F26V2HIST, D1F26V2NORB
F26V3	128	D1F26V3ITEM, D1F26V3WARE, D1F26V3DIST, D1F26V3CSTI, D1F26V3NORA, D1F26V3ORL, D1F26V3STK, D1F26V3CST, D1F26V3ORDI, D1F26V3ORD, D1F26V3HIST, D1F26V3NORB
F26V4	129	D1F26V4ITEM, D1F26V4WARE, D1F26V4DIST, D1F26V4CSTI, D1F26V4NORA, D1F26V4ORL, D1F26V4STK, D1F26V4CST, D1F26V4ORDI, D1F26V4ORD, D1F26V4HIST, D1F26V4NORB
F26V5	130	D1F26V5ITEM, D1F26V5WARE, D1F26V5DIST, D1F26V5CSTI, D1F26V5NORA, D1F26V5ORL, D1F26V5STK, D1F26V5CST, D1F26V5ORDI, D1F26V5ORD, D1F26V5HIST, D1F26V5NORB
F27V1	131	D1F27V1ITEM, D1F27V1WARE, D1F27V1DIST, D1F27V1CSTI, D1F27V1NORA, D1F27V1ORL, D1F27V1STK, D1F27V1CST, D1F27V1ORDI, D1F27V1ORD, D1F27V1HIST, D1F27V1NORB
F27V2	132	D1F27V2ITEM, D1F27V2WARE, D1F27V2DIST, D1F27V2CSTI, D1F27V2NORA, D1F27V2ORL, D1F27V2STK, D1F27V2CST, D1F27V2ORDI, D1F27V2ORD, D1F27V2HIST, D1F27V2NORB
F27V3	133	D1F27V3ITEM, D1F27V3WARE, D1F27V3DIST, D1F27V3CSTI, D1F27V3NORA, D1F27V3ORL, D1F27V3STK, D1F27V3CST, D1F27V3ORDI, D1F27V3ORD, D1F27V3HIST, D1F27V3NORB

F27V4	134	D1F27V4ITEM, D1F27V4WARE, D1F27V4DIST, D1F27V4CSTI, D1F27V4NORA, D1F27V4ORL, D1F27V4STK, D1F27V4CST, D1F27V4ORDI, D1F27V4ORD, D1F27V4HIST, D1F27V4NORB
F27V5	135	D1F27V5ITEM, D1F27V5WARE, D1F27V5DIST, D1F27V5CSTI, D1F27V5NORA, D1F27V5ORL, D1F27V5STK, D1F27V5CST, D1F27V5ORDI, D1F27V5ORD, D1F27V5HIST, D1F27V5NORB
F28V1	136	D1F28V1ITEM, D1F28V1WARE, D1F28V1DIST, D1F28V1CSTI, D1F28V1NORA, D1F28V1ORL, D1F28V1STK, D1F28V1CST, D1F28V1ORDI, D1F28V1ORD, D1F28V1HIST, D1F28V1NORB
F28V2	137	D1F28V2ITEM, D1F28V2WARE, D1F28V2DIST, D1F28V2CSTI, D1F28V2NORA, D1F28V2ORL, D1F28V2STK, D1F28V2CST, D1F28V2ORDI, D1F28V2ORD, D1F28V2HIST, D1F28V2NORB
F28V3	138	D1F28V3ITEM, D1F28V3WARE, D1F28V3DIST, D1F28V3CSTI, D1F28V3NORA, D1F28V3ORL, D1F28V3STK, D1F28V3CST, D1F28V3ORDI, D1F28V3ORD, D1F28V3HIST, D1F28V3NORB
F28V4	139	D1F28V4ITEM, D1F28V4WARE, D1F28V4DIST, D1F28V4CSTI, D1F28V4NORA, D1F28V4ORL, D1F28V4STK, D1F28V4CST, D1F28V4ORDI, D1F28V4ORD, D1F28V4HIST, D1F28V4NORB
F28V5	140	D1F28V5ITEM, D1F28V5WARE, D1F28V5DIST, D1F28V5CSTI, D1F28V5NORA, D1F28V5ORL, D1F28V5STK, D1F28V5CST, D1F28V5ORDI, D1F28V5ORD, D1F28V5HIST, D1F28V5NORB
F29V1	141	D1F29V1ITEM, D1F29V1WARE, D1F29V1DIST, D1F29V1CSTI, D1F29V1NORA, D1F29V1ORL, D1F29V1STK, D1F29V1CST, D1F29V1ORDI, D1F29V1ORD, D1F29V1HIST, D1F29V1NORB
F29V2	142	D1F29V2ITEM, D1F29V2WARE, D1F29V2DIST, D1F29V2CSTI, D1F29V2NORA, D1F29V2ORL, D1F29V2STK, D1F29V2CST, D1F29V2ORDI, D1F29V2ORD, D1F29V2HIST, D1F29V2NORB
F29V3	143	D1F29V3ITEM, D1F29V3WARE, D1F29V3DIST, D1F29V3CSTI, D1F29V3NORA, D1F29V3ORL, D1F29V3STK, D1F29V3CST, D1F29V3ORDI, D1F29V3ORD, D1F29V3HIST, D1F29V3NORB
F29V4	144	D1F29V4ITEM, D1F29V4WARE, D1F29V4DIST, D1F29V4CSTI, D1F29V4NORA, D1F29V4ORL, D1F29V4STK, D1F29V4CST, D1F29V4ORDI, D1F29V4ORD, D1F29V4HIST, D1F29V4NORB
F29V5	145	D1F29V5ITEM, D1F29V5WARE, D1F29V5DIST, D1F29V5CSTI, D1F29V5NORA, D1F29V5ORL, D1F29V5STK, D1F29V5CST, D1F29V5ORDI, D1F29V5ORD, D1F29V5HIST, D1F29V5NORB
F30V1	146	D1F30V1ITEM, D1F30V1WARE, D1F30V1DIST, D1F30V1CSTI, D1F30V1NORA, D1F30V1ORL, D1F30V1STK, D1F30V1CST, D1F30V1ORDI, D1F30V1ORD, D1F30V1HIST, D1F30V1NORB
F30V2	147	D1F30V2ITEM, D1F30V2WARE, D1F30V2DIST, D1F30V2CSTI, D1F30V2NORA, D1F30V2ORL, D1F30V2STK, D1F30V2CST, D1F30V2ORDI, D1F30V2ORD, D1F30V2HIST, D1F30V2NORB
F30V3	148	D1F30V3ITEM, D1F30V3WARE, D1F30V3DIST, D1F30V3CSTI, D1F30V3NORA, D1F30V3ORL, D1F30V3STK, D1F30V3CST, D1F30V3ORDI, D1F30V3ORD, D1F30V3HIST, D1F30V3NORB
F30V4	149	D1F30V4ITEM, D1F30V4WARE, D1F30V4DIST, D1F30V4CSTI, D1F30V4NORA, D1F30V4ORL, D1F30V4STK, D1F30V4CST, D1F30V4ORDI, D1F30V4ORD, D1F30V4HIST, D1F30V4NORB
F30V5	150	D1F30V5ITEM, D1F30V5WARE, D1F30V5DIST, D1F30V5CSTI, D1F30V5NORA, D1F30V5ORL, D1F30V5STK, D1F30V5CST, D1F30V5ORDI, D1F30V5ORD, D1F30V5HIST, D1F30V5NORB
F31V1	151	D1F31V1ITEM, D1F31V1WARE, D1F31V1DIST, D1F31V1CSTI, D1F31V1NORA, D1F31V1ORL, D1F31V1STK, D1F31V1CST, D1F31V1ORDI, D1F31V1ORD, D1F31V1HIST, D1F31V1NORB
F31V2	152	D1F31V2ITEM, D1F31V2WARE, D1F31V2DIST, D1F31V2CSTI, D1F31V2NORA, D1F31V2ORL, D1F31V2STK, D1F31V2CST, D1F31V2ORDI, D1F31V2ORD, D1F31V2HIST, D1F31V2NORB
F31V3	153	D1F31V3ITEM, D1F31V3WARE, D1F31V3DIST, D1F31V3CSTI, D1F31V3NORA, D1F31V3ORL, D1F31V3STK, D1F31V3CST, D1F31V3ORDI, D1F31V3ORD, D1F31V3HIST, D1F31V3NORB
F31V4	154	D1F31V4ITEM, D1F31V4WARE, D1F31V4DIST, D1F31V4CSTI, D1F31V4NORA, D1F31V4ORL, D1F31V4STK, D1F31V4CST, D1F31V4ORDI, D1F31V4ORD, D1F31V4HIST, D1F31V4NORB
F31V5	155	D1F31V5ITEM, D1F31V5WARE, D1F31V5DIST, D1F31V5CSTI, D1F31V5NORA, D1F31V5ORL, D1F31V5STK, D1F31V5CST, D1F31V5ORDI, D1F31V5ORD, D1F31V5HIST, D1F31V5NORB
F32V1	156	D1F32V1ITEM, D1F32V1WARE, D1F32V1DIST, D1F32V1CSTI, D1F32V1NORA, D1F32V1ORL, D1F32V1STK, D1F32V1CST, D1F32V1ORDI, D1F32V1ORD, D1F32V1HIST, D1F32V1NORB

F32V2	157	D1F32V2ITEM, D1F32V2WARE, D1F32V2DIST, D1F32V2CSTI, D1F32V2NORA, D1F32V2ORL, D1F32V2STK, D1F32V2CST, D1F32V2ORDI, D1F32V2ORD, D1F32V2HIST, D1F32V2NORB
F32V3	158	D1F32V3ITEM, D1F32V3WARE, D1F32V3DIST, D1F32V3CSTI, D1F32V3NORA, D1F32V3ORL, D1F32V3STK, D1F32V3CST, D1F32V3ORDI, D1F32V3ORD, D1F32V3HIST, D1F32V3NORB
F32V4	159	D1F32V4ITEM, D1F32V4WARE, D1F32V4DIST, D1F32V4CSTI, D1F32V4NORA, D1F32V4ORL, D1F32V4STK, D1F32V4CST, D1F32V4ORDI, D1F32V4ORD, D1F32V4HIST, D1F32V4NORB
F32V5	160	D1F32V5ITEM, D1F32V5WARE, D1F32V5DIST, D1F32V5CSTI, D1F32V5NORA, D1F32V5ORL, D1F32V5STK, D1F32V5CST, D1F32V5ORDI, D1F32V5ORD, D1F32V5HIST, D1F32V5NORB
F33V1	161	D1F33V1ITEM, D1F33V1WARE, D1F33V1DIST, D1F33V1CSTI, D1F33V1NORA, D1F33V1ORL, D1F33V1STK, D1F33V1CST, D1F33V1ORDI, D1F33V1ORD, D1F33V1HIST, D1F33V1NORB
F33V2	162	D1F33V2ITEM, D1F33V2WARE, D1F33V2DIST, D1F33V2CSTI, D1F33V2NORA, D1F33V2ORL, D1F33V2STK, D1F33V2CST, D1F33V2ORDI, D1F33V2ORD, D1F33V2HIST, D1F33V2NORB
F33V3	163	D1F33V3ITEM, D1F33V3WARE, D1F33V3DIST, D1F33V3CSTI, D1F33V3NORA, D1F33V3ORL, D1F33V3STK, D1F33V3CST, D1F33V3ORDI, D1F33V3ORD, D1F33V3HIST, D1F33V3NORB
F33V4	164	D1F33V4ITEM, D1F33V4WARE, D1F33V4DIST, D1F33V4CSTI, D1F33V4NORA, D1F33V4ORL, D1F33V4STK, D1F33V4CST, D1F33V4ORDI, D1F33V4ORD, D1F33V4HIST, D1F33V4NORB
F33V5	165	D1F33V5ITEM, D1F33V5WARE, D1F33V5DIST, D1F33V5CSTI, D1F33V5NORA, D1F33V5ORL, D1F33V5STK, D1F33V5CST, D1F33V5ORDI, D1F33V5ORD, D1F33V5HIST, D1F33V5NORB
F34V1	166	D1F34V1ITEM, D1F34V1WARE, D1F34V1DIST, D1F34V1CSTI, D1F34V1NORA, D1F34V1ORL, D1F34V1STK, D1F34V1CST, D1F34V1ORDI, D1F34V1ORD, D1F34V1HIST, D1F34V1NORB
F34V2	167	D1F34V2ITEM, D1F34V2WARE, D1F34V2DIST, D1F34V2CSTI, D1F34V2NORA, D1F34V2ORL, D1F34V2STK, D1F34V2CST, D1F34V2ORDI, D1F34V2ORD, D1F34V2HIST, D1F34V2NORB
F34V3	168	D1F34V3ITEM, D1F34V3WARE, D1F34V3DIST, D1F34V3CSTI, D1F34V3NORA, D1F34V3ORL, D1F34V3STK, D1F34V3CST, D1F34V3ORDI, D1F34V3ORD, D1F34V3HIST, D1F34V3NORB
F34V4	169	D1F34V4ITEM, D1F34V4WARE, D1F34V4DIST, D1F34V4CSTI, D1F34V4NORA, D1F34V4ORL, D1F34V4STK, D1F34V4CST, D1F34V4ORDI, D1F34V4ORD, D1F34V4HIST, D1F34V4NORB
F34V5	170	D1F34V5ITEM, D1F34V5WARE, D1F34V5DIST, D1F34V5CSTI, D1F34V5NORA, D1F34V5ORL, D1F34V5STK, D1F34V5CST, D1F34V5ORDI, D1F34V5ORD, D1F34V5HIST, D1F34V5NORB
F35V1	171	D1F35V1ITEM, D1F35V1WARE, D1F35V1DIST, D1F35V1CSTI, D1F35V1NORA, D1F35V1ORL, D1F35V1STK, D1F35V1CST, D1F35V1ORDI, D1F35V1ORD, D1F35V1HIST, D1F35V1NORB
F35V2	172	D1F35V2ITEM, D1F35V2WARE, D1F35V2DIST, D1F35V2CSTI, D1F35V2NORA, D1F35V2ORL, D1F35V2STK, D1F35V2CST, D1F35V2ORDI, D1F35V2ORD, D1F35V2HIST, D1F35V2NORB
F35V3	173	D1F35V3ITEM, D1F35V3WARE, D1F35V3DIST, D1F35V3CSTI, D1F35V3NORA, D1F35V3ORL, D1F35V3STK, D1F35V3CST, D1F35V3ORDI, D1F35V3ORD, D1F35V3HIST, D1F35V3NORB
F35V4	174	D1F35V4ITEM, D1F35V4WARE, D1F35V4DIST, D1F35V4CSTI, D1F35V4NORA, D1F35V4ORL, D1F35V4STK, D1F35V4CST, D1F35V4ORDI, D1F35V4ORD, D1F35V4HIST, D1F35V4NORB
F35V5	175	D1F35V5ITEM, D1F35V5WARE, D1F35V5DIST, D1F35V5CSTI, D1F35V5NORA, D1F35V5ORL, D1F35V5STK, D1F35V5CST, D1F35V5ORDI, D1F35V5ORD, D1F35V5HIST, D1F35V5NORB
F36V1	176	D1F36V1ITEM, D1F36V1WARE, D1F36V1DIST, D1F36V1CSTI, D1F36V1NORA, D1F36V1ORL, D1F36V1STK, D1F36V1CST, D1F36V1ORDI, D1F36V1ORD, D1F36V1HIST, D1F36V1NORB
F36V2	177	D1F36V2ITEM, D1F36V2WARE, D1F36V2DIST, D1F36V2CSTI, D1F36V2NORA, D1F36V2ORL, D1F36V2STK, D1F36V2CST, D1F36V2ORDI, D1F36V2ORD, D1F36V2HIST, D1F36V2NORB
F36V3	178	D1F36V3ITEM, D1F36V3WARE, D1F36V3DIST, D1F36V3CSTI, D1F36V3NORA, D1F36V3ORL, D1F36V3STK, D1F36V3CST, D1F36V3ORDI, D1F36V3ORD, D1F36V3HIST, D1F36V3NORB
F36V4	179	D1F36V4ITEM, D1F36V4WARE, D1F36V4DIST, D1F36V4CSTI, D1F36V4NORA, D1F36V4ORL, D1F36V4STK, D1F36V4CST, D1F36V4ORDI, D1F36V4ORD, D1F36V4HIST, D1F36V4NORB

F36V5	180	D1F36V5ITEM, D1F36V5WARE, D1F36V5DIST, D1F36V5CSTI, D1F36V5NORA, D1F36V5ORL, D1F36V5STK, D1F36V5CST, D1F36V5ORDI, D1F36V5ORD, D1F36V5HIST, D1F36V5NORB
F37V1	181	D1F37V1ITEM, D1F37V1WARE, D1F37V1DIST, D1F37V1CSTI, D1F37V1NORA, D1F37V1ORL, D1F37V1STK, D1F37V1CST, D1F37V1ORDI, D1F37V1ORD, D1F37V1HIST, D1F37V1NORB
F37V2	182	D1F37V2ITEM, D1F37V2WARE, D1F37V2DIST, D1F37V2CSTI, D1F37V2NORA, D1F37V2ORL, D1F37V2STK, D1F37V2CST, D1F37V2ORDI, D1F37V2ORD, D1F37V2HIST, D1F37V2NORB
F37V3	183	D1F37V3ITEM, D1F37V3WARE, D1F37V3DIST, D1F37V3CSTI, D1F37V3NORA, D1F37V3ORL, D1F37V3STK, D1F37V3CST, D1F37V3ORDI, D1F37V3ORD, D1F37V3HIST, D1F37V3NORB
F37V4	184	D1F37V4ITEM, D1F37V4WARE, D1F37V4DIST, D1F37V4CSTI, D1F37V4NORA, D1F37V4ORL, D1F37V4STK, D1F37V4CST, D1F37V4ORDI, D1F37V4ORD, D1F37V4HIST, D1F37V4NORB
F37V5	185	D1F37V5ITEM, D1F37V5WARE, D1F37V5DIST, D1F37V5CSTI, D1F37V5NORA, D1F37V5ORL, D1F37V5STK, D1F37V5CST, D1F37V5ORDI, D1F37V5ORD, D1F37V5HIST, D1F37V5NORB
F38V1	186	D1F38V1ITEM, D1F38V1WARE, D1F38V1DIST, D1F38V1CSTI, D1F38V1NORA, D1F38V1ORL, D1F38V1STK, D1F38V1CST, D1F38V1ORDI, D1F38V1ORD, D1F38V1HIST, D1F38V1NORB
F38V2	187	D1F38V2ITEM, D1F38V2WARE, D1F38V2DIST, D1F38V2CSTI, D1F38V2NORA, D1F38V2ORL, D1F38V2STK, D1F38V2CST, D1F38V2ORDI, D1F38V2ORD, D1F38V2HIST, D1F38V2NORB
F38V3	188	D1F38V3ITEM, D1F38V3WARE, D1F38V3DIST, D1F38V3CSTI, D1F38V3NORA, D1F38V3ORL, D1F38V3STK, D1F38V3CST, D1F38V3ORDI, D1F38V3ORD, D1F38V3HIST, D1F38V3NORB
F38V4	189	D1F38V4ITEM, D1F38V4WARE, D1F38V4DIST, D1F38V4CSTI, D1F38V4NORA, D1F38V4ORL, D1F38V4STK, D1F38V4CST, D1F38V4ORDI, D1F38V4ORD, D1F38V4HIST, D1F38V4NORB
F38V5	190	D1F38V5ITEM, D1F38V5WARE, D1F38V5DIST, D1F38V5CSTI, D1F38V5NORA, D1F38V5ORL, D1F38V5STK, D1F38V5CST, D1F38V5ORDI, D1F38V5ORD, D1F38V5HIST, D1F38V5NORB
F39V1	191	D1F39V1ITEM, D1F39V1WARE, D1F39V1DIST, D1F39V1CSTI, D1F39V1NORA, D1F39V1ORL, D1F39V1STK, D1F39V1CST, D1F39V1ORDI, D1F39V1ORD, D1F39V1HIST, D1F39V1NORB
F39V2	192	D1F39V2ITEM, D1F39V2WARE, D1F39V2DIST, D1F39V2CSTI, D1F39V2NORA, D1F39V2ORL, D1F39V2STK, D1F39V2CST, D1F39V2ORDI, D1F39V2ORD, D1F39V2HIST, D1F39V2NORB
F39V3	193	D1F39V3ITEM, D1F39V3WARE, D1F39V3DIST, D1F39V3CSTI, D1F39V3NORA, D1F39V3ORL, D1F39V3STK, D1F39V3CST, D1F39V3ORDI, D1F39V3ORD, D1F39V3HIST, D1F39V3NORB
F39V4	194	D1F39V4ITEM, D1F39V4WARE, D1F39V4DIST, D1F39V4CSTI, D1F39V4NORA, D1F39V4ORL, D1F39V4STK, D1F39V4CST, D1F39V4ORDI, D1F39V4ORD, D1F39V4HIST, D1F39V4NORB
F39V5	195	D1F39V5ITEM, D1F39V5WARE, D1F39V5DIST, D1F39V5CSTI, D1F39V5NORA, D1F39V5ORL, D1F39V5STK, D1F39V5CST, D1F39V5ORDI, D1F39V5ORD, D1F39V5HIST, D1F39V5NORB
F40V1	196	D1F40V1ITEM, D1F40V1WARE, D1F40V1DIST, D1F40V1CSTI, D1F40V1NORA, D1F40V1ORL, D1F40V1STK, D1F40V1CST, D1F40V1ORDI, D1F40V1ORD, D1F40V1HIST, D1F40V1NORB
F40V2	197	D1F40V2ITEM, D1F40V2WARE, D1F40V2DIST, D1F40V2CSTI, D1F40V2NORA, D1F40V2ORL, D1F40V2STK, D1F40V2CST, D1F40V2ORDI, D1F40V2ORD, D1F40V2HIST, D1F40V2NORB
F40V3	198	D1F40V3ITEM, D1F40V3WARE, D1F40V3DIST, D1F40V3CSTI, D1F40V3NORA, D1F40V3ORL, D1F40V3STK, D1F40V3CST, D1F40V3ORDI, D1F40V3ORD, D1F40V3HIST, D1F40V3NORB
F40V4	199	D1F40V4ITEM, D1F40V4WARE, D1F40V4DIST, D1F40V4CSTI, D1F40V4NORA, D1F40V4ORL, D1F40V4STK, D1F40V4CST, D1F40V4ORDI, D1F40V4ORD, D1F40V4HIST, D1F40V4NORB
F40V5	200	D1F40V5ITEM, D1F40V5WARE, D1F40V5DIST, D1F40V5CSTI, D1F40V5NORA, D1F40V5ORL, D1F40V5STK, D1F40V5CST, D1F40V5ORDI, D1F40V5ORD, D1F40V5HIST, D1F40V5NORB

Table 4-2: IBM System p5 595 Model 9119-595 Data Distribution Benchmark Configuration

4.5. 60-Day Space Calculations

Details of the 60 day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

60-Day Space Computation

All data sizes in MB unless otherwise stated

Warehouses	320,000
Measured TpmC	4,033,379

Table	**Rows**	**Table**	**Index**	**5% Space**	**Total Space**
Warehouse	320,000	55	0	3	58
District	3,200,000	520	0	26	546
Item	100,000	10	0	1	11
Stock	32,000,000,000	10,417,600	0	520,880	10,938,480
Customer	9,600,000,000	7,501,000	462,100	398,155	8,361,255
New-Order	2,880,000,000	221,280	0	11,064	232,344
Orders	9,600,000,000	370,939	268,500	0	639,439
Order-Line	96,000,000,000	6,466,395	0	0	6,466,395
History	9,600,000,000	591,360	0	0	591,360
Additional Overhead		5,499,067			5,499,067

Free Space	927,697		
Dynamic Space	7,428,693	30 Minute log Computations	
Static Space	25,300,260	Log Written (KB)	286,773,242
Daily Growth	1,498,137	New-Order Txns	121,001,368
Daily Spread	0	Log Written per New-Order (KB	2.37

Data Storage Requirement

60 Days (MB)	115,188,466
60 Days (GB)	112,489

Log Storage Requirement

8 Hours (GB)	4,375.81

Disk Sizing

	Formatted	**SUT**		**Priced**	
Disk Type	**Capacity (GB)**	**# of Disks**	**Capacity (GB)**	**# of Disks**	**Capacity (GB)**
DB FastT 36.4GB	33.40	6,400	213,760	6,400	213,760
LOG FastT RAID10	968.64	12	11,624	12	11,624
OS SCSI 36GB	33.90	8	271	8	271

Total Capacity	225,655

5 Clause 5: Performance Metrics and Response Time Related Items

5.1. Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.

Table 5-1 lists the response times and the ninetieth percentiles for each of the transaction types for the measured system.

5.2. Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5-1 lists the TPC-C keying and think times for the measured system.

Response Times	New Order	Payment	Order Status	Delivery (int./def.)	Stock Level	Menus
90 %	0.42	0.44	0.44	0.15/0.16	0.50	0.15
Average	0.26	0.26	0.26	0.15/0.12	0.30	0.13
Maximum	27.24	26.77	25.69	27.27/0.53	25.82	27.02
Think Times						
Minimum	0.01	0.01	0.01	0.01	0.01	N/A
Average	12.02	12.02	10.01	5.02	5.02	N/A
Maximum	120.21	120.21	100.11	50.20	50.20	N/A
Keying Times						
Minimum	18.00	3.00	2.00	2.00	2.00	N/A
Average	18.01	3.01	2.01	2.01	2.01	N/A
Maximum	18.04	3.04	2.04	2.04	2.04	N/A

Table 5-1: Think and Keying Times

5.3. Response Time Frequency Distribution

Response time frequency distribution curves must be reported for each transaction type.

Figure 5-1: New-Order Response Time Distribution

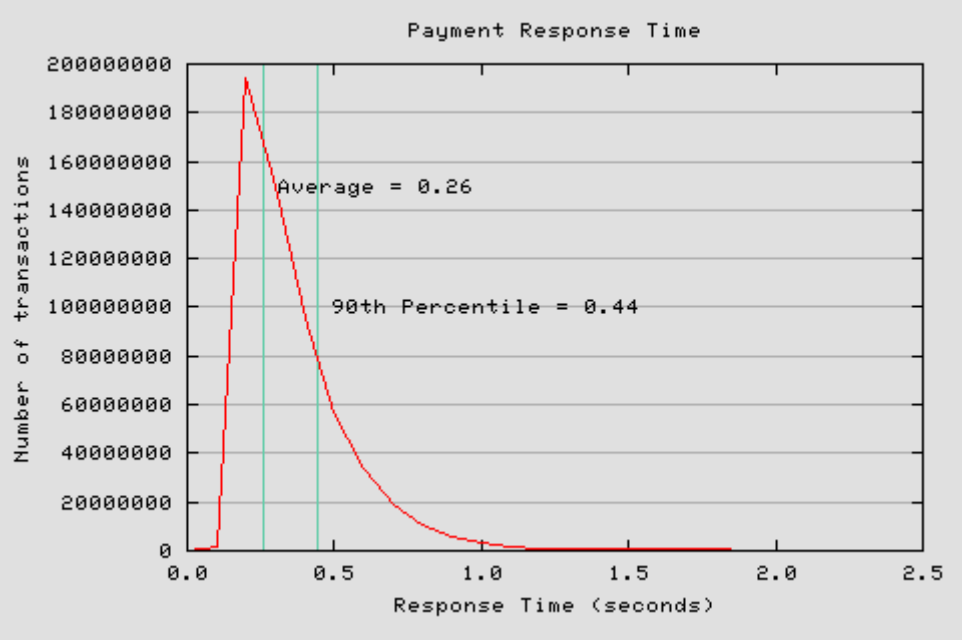

Figure 5-2: Payment Response Time Distribution

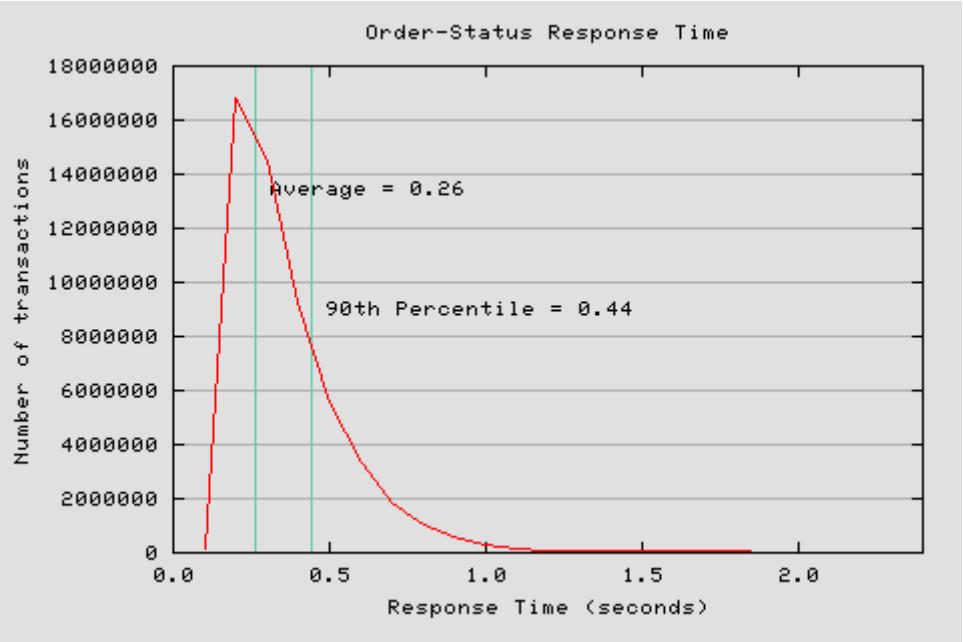

Figure 5-3: Order-Status Response Time Distribution

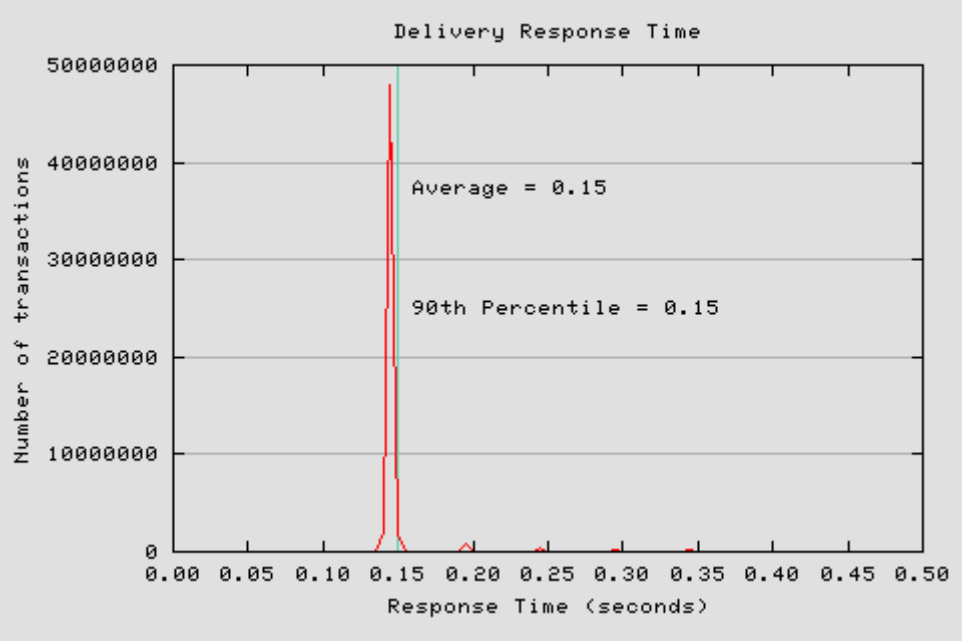

Figure 5-4: Delivery (Interactive) Response Time Distribution

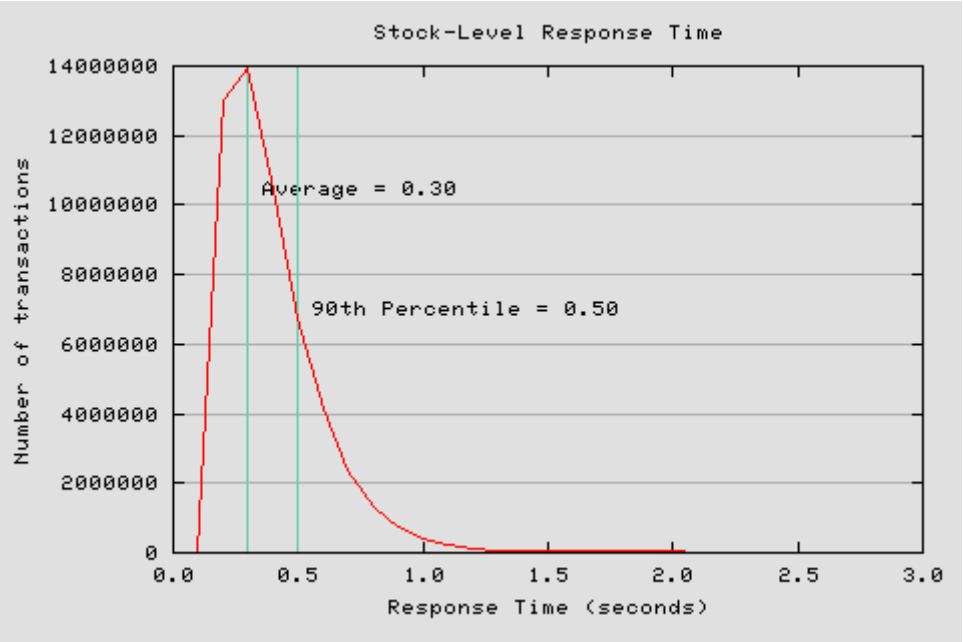

Figure 5-5: Stock Level Response Time Distribution

5.4. Performance Curve for Response Time versus Throughput

The performance curve for response times versus throughput must be reported for the New-Order transaction.

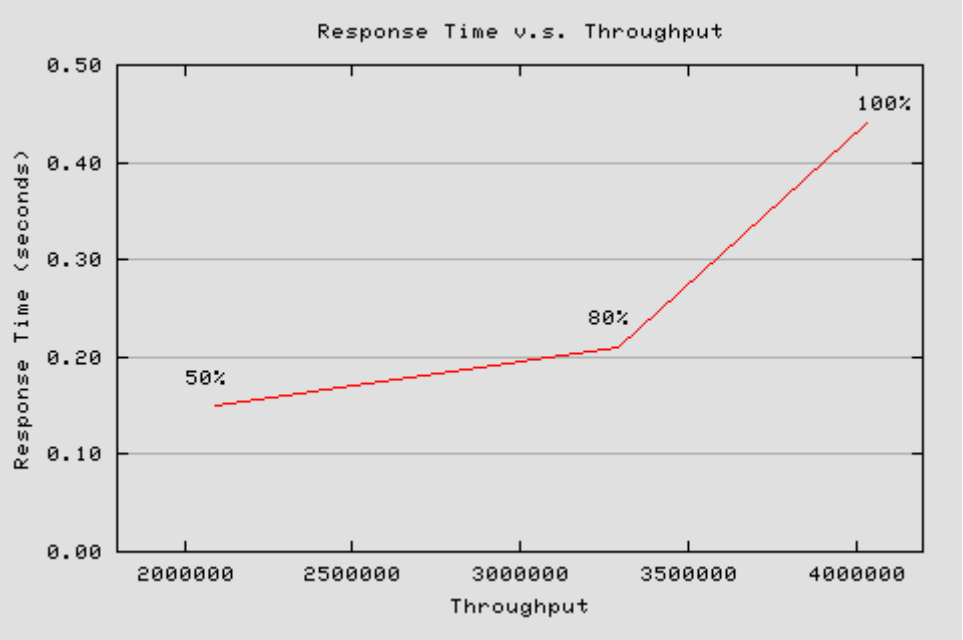

Figure 5-6: New-Order Response Time vs. Throughput

5.5. Think Time Frequency Distribution

A graph of the think time frequency distribution must be reported for the New-Order transaction.

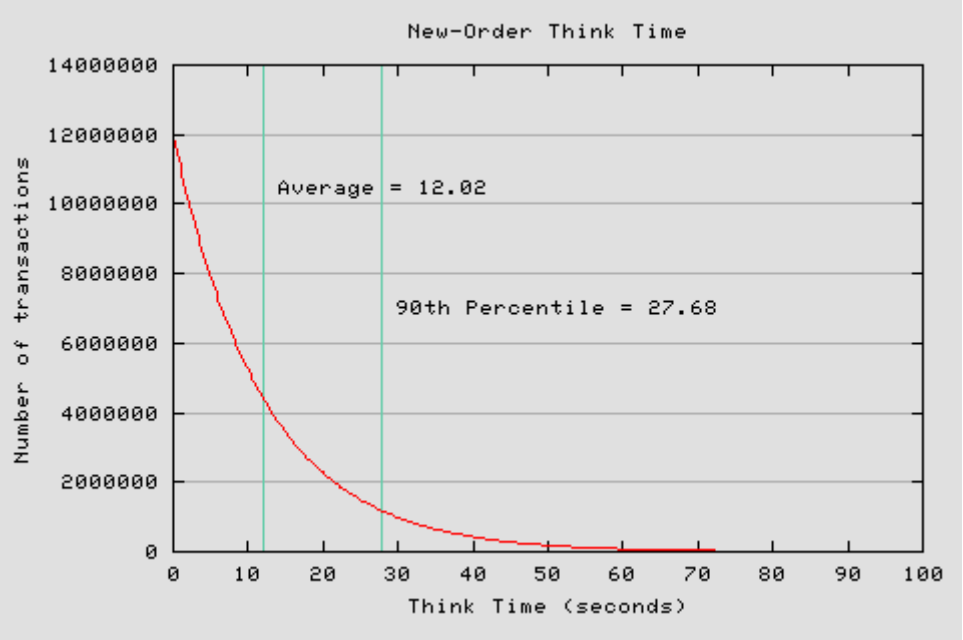

Figure 5-7: New-Order Think Time Distribution

5.6. Throughput versus Elapsed Time

A graph of throughput versus elapsed time must be reported for the New-Order transaction.

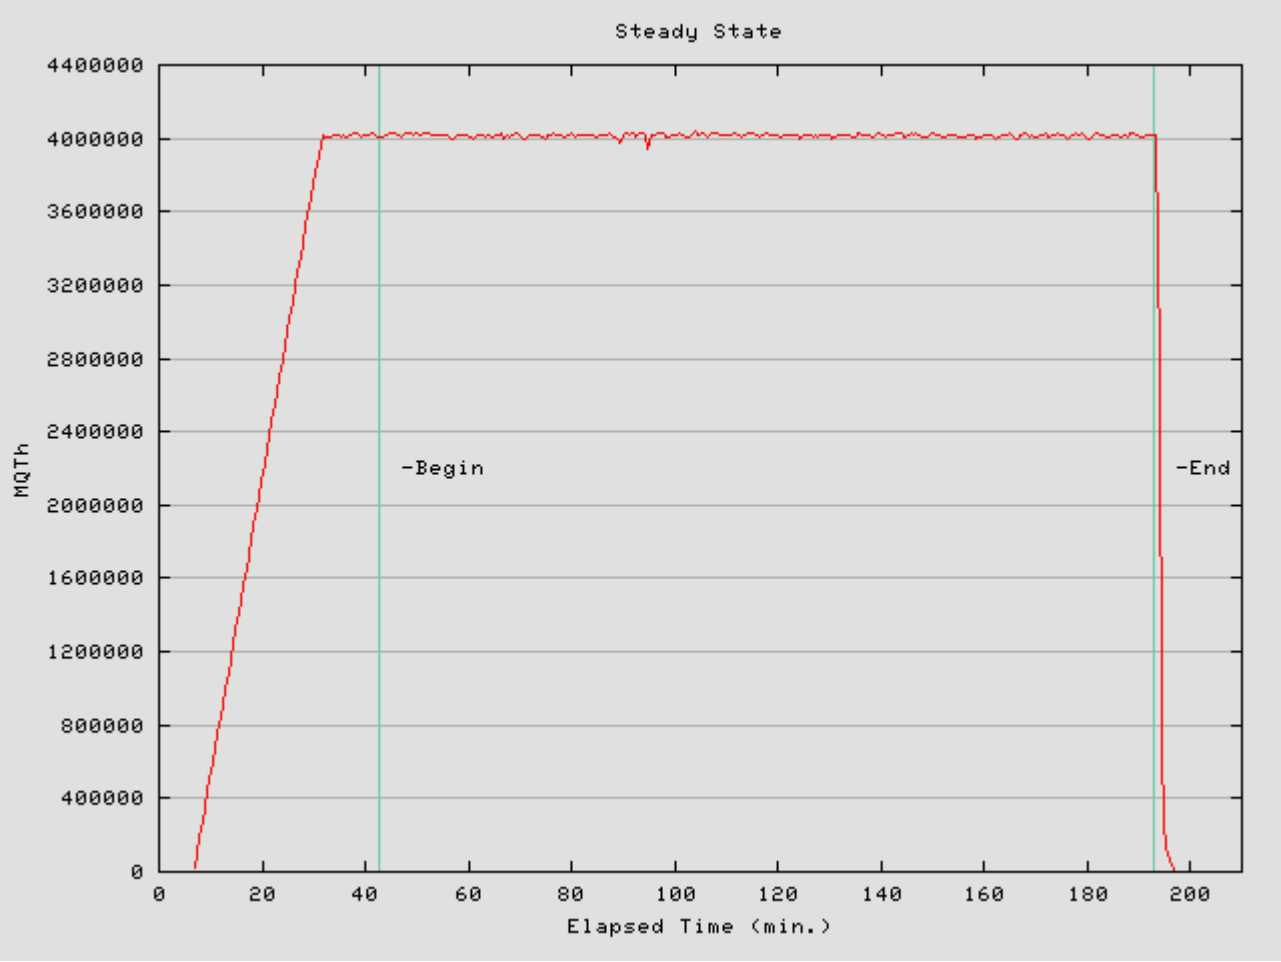

Figure 5-8: New-Order Throughput vs. Elapsed Time

5.7. Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be described.

All the emulated users were allowed to logon and do transactions. The user ramp-up phase is clearly visible on the graph above. Refer to the Numerical Quantities Summary pages for the rampup time. Figure 5-8 New-Order throughput versus Elapsed Time graph shows that the system maintained a steady state during the measurement interval

5.8. Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example check pointing, writing redo/undo log records, etc), actually occurred during the measurement interval must be reported.

A 2-hour 30-minute measurement interval was used to guaranty that all work normally performed during an 8-hour sustained test are included in the reported throughput.

5.8.1. Transaction Flow

Each of the 4 (non-delivery) transactions is serviced by 2 individual programs, Internet Information System 5.1 (IIS) and a Microsoft COM+ 1.0 Queued Component Server, used as the transaction manager (COM+). Both programs are running on the client system:

- The initial HTML 1.0 request is serviced by an ISAPI custom-written handler running on Internet Information System 5.1(IIS). IIS is responsible for handling all HTML requests. The web server communicates to the COM+ server through a Microsoft COM+ api interface.
- COM+ communicates with the Server system over Ethernet and handles all database operations**,** using DB2 embedded SQL calls.
  When the COM+ server boots up, it creates a configurable amount of connections to the Server (listed in application settings).
  COM+ routes the transaction and balances the load according to the options defined in the Component Services GUI for the COM+ server application and settings in the Windows 2000 Registry. The configuration file and registry variables are listed in Appendix B.2.
  At the beginning, each TPC-C user sends a pair of HTML 1.0 requests submitting the its unique warehouse and district to the IIS ISAPI handler. Upon successful validation of user's login, IIS the displays an HTML form which encapsulates the TPC-C transaction menu.
  The transaction flow is described below:
  - The TPC-C user requests the transaction type's HTML form and proceeds to generate (fill in) a GET request with the required files for the transaction.
  - IIS accepts the filled in GET request , parses, and validates all values entered by the user.
  - It then proceeds to transmit those values to the COM+ server through an transaction type specific COM+ api interface.
  - The COM+ Pool Manager receives the request and first decides if there is a connection object in the pool available to service it.
    If so, the connection is used to send the transaction request to the Server.
    If no connection is available, the request will enter a COM+ internal queue and will be serviced by the next available connection.
  - Once the connection is available to be used, a COM+ pool thread receives the transaction and calls a TPC-C back end DB2 client api to execute all database operations related to the transaction type. (All the transaction information entered on the HTML form is available in a data structure provided by the ISAPI caller).
  - The transaction is committed and the DB2 back end client returns control back to the COM pool thread.
  - COM pool thread returns control to the ISAPI caller.
    (All transaction results are inside the data structure that the ISAPI caller provided to the COM+ api in the parameter list).
  - ISAPI caller returns control to the "screen application" by doing a PUT request.

5.8.2. Database Transaction

All database operations are performed by the TPC-C back-end programs. The process is described below:

Using embedded SQL calls, the TPC-C back-end program interacts with DB2 9 to perform SQL data manipulations such as update, select, delete and insert, as required by the transaction. After all database operations are performed for a transaction, the transaction is committed.

DB2 9 proceeds to update the database as follows:

When DB2 9 changes a database table with an update, insert, or delete operation, the change is initially made in memory, not on disk. When there is not enough space in the memory buffer to read in or write additional data pages, DB2 9 will make space by flushing some modified pages to disk. Modified pages are also written to disk as part of the “Soft” checkpoint to ensure that no updates remain unflushed for longer than the allowed time. Before a change is made to the database, it is first recorded in the transaction log. This ensures that the database can be recovered completely in the event of a failure. Using the transaction log, transactions that started but did not complete prior to a failure can be undone, and transactions recorded as complete in the transaction log but not yet written to disk can be redone.

5.8.3. Checkpoints

DB2 9 uses a write-ahead-logging protocol to guarantee recovery. This protocol uses “Soft” checkpoint to write least-recently-used database pages to disk independent of transaction commit. However, enough log information to redo/undo the change to a database pages is committed to disk before the database page itself is written. This protocol therefore renders checkpoint unnecessary for DB2 9. For a more detailed description of the general principles of the write-ahead-logging protocol, see the IBM research paper, “ARIES: A Transaction Recovery Method Supporting Fine Granularity Locking and Partial Rollbacks Using Write-Ahead Logging,” by C. Mohan, Database Technology Institute, IBM Almaden Research Center.
(http:// portal.acm.org/citation.cfm?id=128770&coll=portal&dl=ACM&CFID=10343790&CFTOKEN=42047146)

5.9. Measurement Interval

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

A 2-hour 30-minute measurement interval was used. No connections were lost during the run.

6 Clause 6: SUT, Driver, and Communication Definition Related Items

6.1. RTE Availability

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs to the RTE had been used.

IBM used an internally developed RTE for these tests. Appendix D contains the scripts used in the testing.

6.2. Functionality and Performance of Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system.

No components were emulated.

6.3. Network Bandwidth

The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.

The database system was connected to 8 Ethernet Gigabit switches each with a rate of 1000Mbits full-duplex. Each group of 20 clients were connected to one of the Gigabit Ethernet switchs at 1000Mbits full-duplex rate.

6.4. Operator Intervention

If the configuration requires operator intervention, the mechanism and the frequency of this intervention must be disclosed.

No operator intervention is required to sustain the reported throughput during the eight-hour period.

7 Clause 7: Pricing Related Items

7.1. Hardware and Programs Used

A detailed list of the hardware and software used in the priced system must be reported. Each item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) must also be reported.

The detailed list of all hardware and software for the priced configuration is listed in the pricing sheets as part of the executive summary. Third Party Pricing Information is provided inAppendix - D:.

7.2. Three Year Cost of System Configuration

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The pricing details for this disclosure is contained in the executive summary pages. All 3rd party quotations are included at the end of this report in Appendix - D:. All prices are based on IBM US list prices.

A 46% discount was based on the overall value of the specific components from IBM in the quotation provided in Appendix - D:. Discounts for similarly sized configurations with similar quantities and configurations will be similar to those quoted here.

7.3. Availability Dates

The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

All components of the SUT will be available on: December 20, 2006.

7.4. Statement of tpmC and Price/Performance

A statement of the measured tpmC, as well as the respective calculations for 3-year pricing, price/performance (price/tpmC), and the availability date must be disclosed.

.System	tpmC	3-year System Cost	$/tpmC	Availability Date
IBM System p5 595 Model 9119-595	4,033,378	$11,967,178 USD	$2.97 USD	December 20, 2006

Please refer to the price list on the Executive Summary page for details.

7.5. Country-specific pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration.Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America. All prices are based on IBM US list prices.

7.6. Orderability Date

For each of the components that are not orderable on the report date of the FDR, the following information must be included in the FDR:

- *Name and part number of the item that is not orderable*
- *The date when the component can be ordered (on or before the Availability Date)*
- *The method to be used to order the component (at or below the quoted price) when that date arrives*

- *The method for verifying the price*

Some line item components used in this benchmark are not orderable at the time of this publication. These items will be orderable on or before the system Availability Date indicated as part of this submission.

For details on the components that are not orderable at publication date please see Appendix - E:.

Prices for all items used in this benchmark can be verified through the contact information provided in the pricing quote for the appropriate vendor. Price quotes are included in Appendix - D:

8 Clause 9: Audit Related Items

If the benchmark has been independently audited, then the auditor's name, address, phone number, and a brief audit summary report indicating compliance must be included in the Full Disclosure Report. A statement should be included, specifying when the complete audit report will become available and who to contact in order to obtain a copy.

The auditor's attestation letter is included in this section of this report:

INFO SIZING

TPC TRANSACTION PROCESSING PERFORMANCE COUNCIL CERTIFIED AUDITOR

Benchmark Sponsor: John J. Makis
IBM eServer Performance
11501 Burnet Road
Austin, TX 78758

August 6, 2006

I verified the TPC Benchmark™ C performance of the following Client Server configuration:

Platform: IBM System p5 595 Model 9119-595 c/s
Operating system: AIX 5L V5.3
Database Manager: DB2 9
Transaction Manager: Microsoft COM+

The results were:

CPU's Speed	Memory	Disks	NewOrder 90% Response Time	tpmC
Server: System p5 595 Model 9119-595				
32 x Dual-Core POWER5+ (2.3 GHz)	2048 GB (36 MB L3/chip)	6400 x 36.4 GB 2Gbps 360x 36.4 GB 4Gbps 8 x 36.4 GB int.	0.58 Seconds	4,033,378.93
160 Clients: IBM eServer x226 (each with)				
2 x Xeon (3.2 GHz)	2.0 GB (2 MB L2 cache)	1 x 36 GB int.	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

125 West Monroe Street • Colorado Springs, CO 80907 • 719-473-7555 • www.sizing.com

The following verification items were given special attention:

- The transactions were correctly implemented
- The database records were the proper size
- The database was properly scaled and populated
- The ACID properties were met
- Input data was generated according to the specified percentages
- The transaction cycle times included the required keying and think times
- The reported response times were correctly measured.
- At least 90% of all delivery transactions met the 80 Second completion time limit
- All 90% response times were under the specified maximums
- The measurement interval was representative of steady state conditions
- The reported measurement interval was 150 minutes
- Write-ahead-logging was active during the measurement interval
- The 60 day storage requirement was correctly computed
- The system pricing was verified for major components and maintenance

Additional Audit Notes:

None.

Respectfully Yours,

François Raab, President

125 West Monroe Street • Colorado Springs, CO 80907 • 719-473-7555 • www.sizing.com

Appendix - A: Client Server Code

```
################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
################################################################################
#
# Makefile.config - NT/Win2000 Makefile Configuration
#
# Make Configuration (MSVC)
MAKE=nmake.exe
# Compiler Configuration (MSVC).
# CFLAGS_DEBUG may be set to "-Zi -Od", "-DDEBUGIT" "-Zi -Od -DDEBUGIT" or left blank
CC=cl.exe
CFLAGS_OS=-DSQLWINT -MT -DWIN32 -J -Zp8 -DREG_KIT_METHOD
CFLAGS_OUT=/Fo
CFLAGS_DEBUG=
# Linker Configuration (MSVC)
LD_EXEC=link.exe
LD_STORP=link.exe
LDFLAGS_EXEC=
LDFLAGS_SHLIB=/DLL
LDFLAGS_STORP=$(LDFLAGS_SHLIB) /DEF:rpctpcc.def
LDFLAGS_LIB=/LIBPATH:$(TPCC_SQLLIB)\lib /LIBPATH:"C:\Program Files\Microsoft Visual
Studio\VC98\Lib" db2api.lib winmm.lib
LDFLAGS_OUT=/OUT:
# Library Configuration
AR=lib.exe
ARFLAGS=
ARFLAGS_LIB=
ARFLAGS_OUT=/OUT:
# OS Commands
ERASE=del /F
ERASEDIR=rmdir /S
MOVE=MOVE
COPY=COPY
# OS File Extensions & Path Separator
OBJEXT=.obj
LIBEXT=.lib
SHLIBEXT=.dll
BINEXT=.exe
SLASH=\\
CMDSEP=&
```

Src.Cli/Makefile

```
################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
# ====== =========== === ============================================
```

A.1 Client/Terminal Handler Code

```
#
# Makefile - Makefile for Src.Cli (RTE/Driver Interface)
#
!include $(TPCC_ROOT)/Makefile.config
# ############################################################################
# Preprocessor Compiler and Linker Flags
# ############################################################################
BND_OPTS =    GRANT PUBLIC \
              MESSAGES $*.bnd.msg
PRP_OPTS =    BINDFILE \
              ISOLATION RR \
              EXPLAIN ALL \
              MESSAGES $*.prep.msg \
              LEVEL $(TPCC_VERSION) \
              NOLINEMACRO
INCLUDES =    -I$(TPCC_SQLLIB)/include -I$(TPCC_ROOT)/include
CFLAGS =      $(CFLAGS_OS) $(INCLUDES) $(CFLAGS_DEBUG) \
              $(UOPTS) -D$(DB2EDITION) -D$(DB2VERSION) -D$(TPCC_SPTYPE)
OBJS =        $(TPCC_ROOT)/Src.Common/tpccdbg$(OBJEXT) \
              $(TPCC_ROOT)/Src.Common/tpccctx$(OBJEXT) \
              tpcccli$(OBJEXT)
LIBS =        tpcccli$(LIBEXT)
# ############################################################################
# User Targets
# ############################################################################
all:    connect $(OBJS) plan $(LIBS) disconnect
        $(AR) $(ARFLAGS) $(ARFLAGS_OUT)tpcccli$(LIBEXT) $(OBJS) $(ARFLAGS_LIB)
        @echo "----------------------------------------------------------"
        @echo "Please copy lval.h, db2tpcc.h, and tpcccli$(LIBEXT) to"
        @echo "a place where they can be #included and linked with the"
        @echo "RTE/driver code."
        @echo "----------------------------------------------------------"
clean:
        - $(ERASE) *.msg *.bnd *.plan *$(OBJEXT) *$(LIBEXT) tpcccli.c
# ############################################################################
# Helper Targets
# ############################################################################
connect:
        - db2 connect to $(TPCC_DBNAME)
disconnect:
        - db2 connect reset
        - db2 terminate
plan:
        - db2exfmt -d $(TPCC_DBNAME) -e $(TPCC_SCHEMA) -s $(TPCC_SCHEMA) -w -1 -n TPCCCLI
-g -# 0 -o TPCCCLI.exfmt.plan
        - db2expln -d $(TPCC_DBNAME) -c $(TPCC_SCHEMA) -p TPCCCLI -s 0 -g -o
TPCCCLI.expln.plan
rebind:  connect
        db2 bind tpcccli.bnd $(BND_OPTS) QUERYOPT 7
# ############################################################################
# Build Rules
# ############################################################################
.SUFFIXES:
.SUFFIXES: $(OBJEXT) .c .sqc
tpcccli.c:
        @echo "Prepping $*.sqc"
        -db2 prep $*.sqc $(PRP_OPTS) ISOLATION RR
        @echo "Binding $*.bnd"
        db2 bind $*.bnd $(BND_OPTS) QUERYOPT 7
# ############################################################################
# Dependencies
# ############################################################################
# Client Library:
tpcccli$(LIBEXT):       $(OBJS)
# Source
tpcccli$(OBJEXT):       tpcccli.c
# Headers
tpcccli.c:              $(TPCC_ROOT)/include/db2tpcc.h $(TPCC_ROOT)/include/lval.h
```

Src.Cli/tpcccli.sqc

```
/**************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
**************************************************************************/

/*
 * tpcccli.sqc - Client/Server code for TPCC
 */

#include <stdlib.h>
#include <errno.h>
#include "db2tpcc.h"
#include "tpccapp.h"
#include "tpccdbg.h"

#include "sqlca.h"
#include "sql.h"

// -------------------------------------------------------------
// New Order CLIENT
// -------------------------------------------------------------

static int itemComparison ( const void * a , const void * b )
{
  struct in_items_struct * one = (struct in_items_struct *) a ;
  struct in_items_struct * two = (struct in_items_struct *) b ;


  if ( one->s_OL_I_ID != two->s_OL_I_ID )
  {
    return (  one->s_OL_I_ID - two->s_OL_I_ID  ) ;
  }
  else
  {
    return (  one->s_OL_SUPPLY_W_ID - two->s_OL_SUPPLY_W_ID  ) ;
  }
}

int neword_sql (  struct in_neword_struct  * in_neword
                , struct out_neword_struct * neword     )
{
  struct sqlca sqlca ;

  EXEC SQL BEGIN DECLARE SECTION;

    struct vc_new_in
    {
      short len;
      char data[ 262 ] ;
    } * pHostvarInput ;
```

```
    struct vc_new_out
    {
      short len;
      char data[ 682 ] ;
    } * pHostvarOutput ;

  EXEC SQL END DECLARE SECTION;

  int clientRc = TRAN_OK ;

  int itemIndex = 0 ;

  in_neword->s_all_local  = 1 ;

  for ( itemIndex = 0 ;
       itemIndex < 15 && in_neword->in_item[ itemIndex ].s_OL_I_ID != UNUSED_ITEM_ID ;
       itemIndex++
     )
  {
    if ( in_neword->in_item[ itemIndex ].s_OL_SUPPLY_W_ID != in_neword->s_W_ID )
    {
      in_neword->s_all_local = 0 ;
    }
  }

  in_neword->s_O_OL_CNT = itemIndex ;

  qsort( in_neword->in_item, in_neword->s_O_OL_CNT
       ,  sizeof ( in_neword->in_item[ 0 ] )
       , itemComparison
     ) ;

  pHostvarInput      = (struct vc_new_in *) in_neword ;
  pHostvarInput->len = sizeof(struct in_neword_struct) - SPGENERAL_ADJUST ;

  pHostvarOutput     = (struct vc_new_out *) neword;
  pHostvarOutput->len = sizeof(struct out_neword_struct) - SPGENERAL_ADJUST ;

#ifdef DEBUGIT
  new_debug(neword, in_neword, "Client before SP call");
#endif /* DEBUGIT */

#ifdef SWAP_ENDIAN
  for (itemIndex=0; itemIndex<in_neword->s_O_OL_CNT; itemIndex++)
  {
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_I_ID);
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_SUPPLY_W_ID);
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_QUANTITY);
  }
  SWAP_BYTE(in_neword->s_C_ID);
  SWAP_BYTE(in_neword->s_W_ID);
  SWAP_BYTE(in_neword->s_D_ID);
  SWAP_BYTE(in_neword->s_O_OL_CNT);
  SWAP_BYTE(in_neword->s_all_local);
  SWAP_BYTE(in_neword->duplicate_items);
#endif  //SWAP_ENDIAN

  EXEC SQL CALL news ( :*pHostvarInput, :*pHostvarOutput );

#ifdef SWAP_ENDIAN
  SWAP_BYTE(in_neword->s_C_ID);
  SWAP_BYTE(in_neword->s_W_ID);
  SWAP_BYTE(in_neword->s_D_ID);
  SWAP_BYTE(in_neword->s_O_OL_CNT);
  SWAP_BYTE(in_neword->s_all_local);
  SWAP_BYTE(in_neword->duplicate_items);
  for (itemIndex=0; itemIndex<in_neword->s_O_OL_CNT; itemIndex++)
  {
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_I_ID);
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_SUPPLY_W_ID);
    SWAP_BYTE(in_neword->in_item[ itemIndex ].s_OL_QUANTITY);
  }
  SWAP_BYTE(neword->s_W_TAX);
  SWAP_BYTE(neword->s_D_TAX);
  SWAP_BYTE(neword->s_C_DISCOUNT);
  SWAP_BYTE(neword->s_total_amount);
  SWAP_BYTE(neword->s_O_ID);
  SWAP_BYTE(neword->s_O_OL_CNT);
  SWAP_BYTE(neword->s_transtatus);
  SWAP_BYTE(neword->deadlocks);
  for (itemIndex=0; itemIndex<in_neword->s_O_OL_CNT; itemIndex++)
  {
    SWAP_BYTE(neword->item[ itemIndex ].s_I_PRICE);
    SWAP_BYTE(neword->item[ itemIndex ].s_OL_AMOUNT);
    SWAP_BYTE(neword->item[ itemIndex ].s_S_QUANTITY);
  }
#endif  //SWAP_ENDIAN

  if ( sqlca.sqlcode == 0 )
  {
    float wtax = neword->s_W_TAX ;
    float dtax = neword->s_D_TAX ;
    float cdisc = neword->s_C_DISCOUNT ;
    float factor = (1.0 - cdisc) * (1.0 + wtax + dtax) ;

    // Compute order total

    neword->s_total_amount = 0 ;

    for ( itemIndex = 0 ;
         itemIndex < in_neword->s_O_OL_CNT ; // from input , not output
         itemIndex++
       )
    {
      if ( neword->item[ itemIndex ].s_I_PRICE > 0 )  // A zero price signifies a bad item
      {
        neword->item[ itemIndex ].s_OL_AMOUNT =  neword->item[ itemIndex ].s_I_PRICE *
                                                 in_neword->in_item[ itemIndex ].s_OL_QUANTITY ;  // reference input
value

        neword->s_total_amount += neword->item[ itemIndex ].s_OL_AMOUNT ;

      }
    }

    neword->s_total_amount *= factor;
  }
  else
  {
    sqlerror( NEWORD_SQL, "NEW", __FILE__, __LINE__, &sqlca) ;
    neword->s_transtatus = FATAL_SQLERROR ;
    clientRc = FATAL_SQLERROR ;
  }

#ifdef DEBUGIT
  new_debug(neword, in_neword, "Client after SP call");
#endif /* DEBUGIT */

  if (neword->s_transtatus <= FATAL_SQLERROR)
  {
    new_debug(neword, in_neword, "NEW failed");
    clientRc = FATAL_SQLERROR ;
  }

  if (neword->s_transtatus == INVALID_ITEM)
  {
    clientRc = INVALID_ITEM ;
  }

  return ( clientRc ) ;
}

// ---------------------------------------------------------------------
// Payment CLIENT

// ---------------------------------------------------------------------

int payment_sql  (   struct in_payment_struct * in_payment
                   , struct out_payment_struct * payment    )
{
  struct sqlca sqlca ;

  int clientRc = TRAN_OK ;

  EXEC SQL BEGIN DECLARE SECTION;

    // Inputs

    float h_amount ;
    sqlint32 in_c_id ;

    struct s_data_type { short len ; char data[ 16 ] ; } c_last_input ;

    sqlint32 w_id ;
    sqlint32 c_w_id ;
    short    d_id ;
    short    c_d_id ;

    // Outputs

    sqlint32 c_id ;

    double  c_credit_lim ;
    float   c_discount ;
    double  c_balance ;

    char    w_street_1 [ 20 ] , w_street_2 [ 20 ] ;
    char    w_city [ 20 ] ,     w_state [ 2 ] ,      w_zip [ 9 ] ;

    char    d_street_1 [ 20 ] , d_street_2 [ 20 ] ,  d_city [ 20 ] ;
    char    d_state [ 2 ] ,     d_zip [ 9 ] ,        c_first [ 16 ] ;

    char    c_last [ 16 ] ;

    char    c_middle [ 2 ]    , c_street_1 [ 20 ] ;
    char    c_street_2 [ 20 ] , c_city [ 20 ] ,      c_state [ 2 ] ;
    char    c_zip [ 9 ] ,       c_phone [ 16 ] ;

    char    c_credit [ 2 ] ;

    char    c_since [27];

    char    c_data [ 200 ] ;
    short   c_data_indicator = 0 ;

    char    h_date [27];

    struct c_data_prefix_c_last_type { short len ; char data[ 28 ] ; } c_data_prefix_c_last ;
    struct c_data_prefix_c_id_type   { short len ; char data[ 34 ] ; } c_data_prefix_c_id ;


  EXEC SQL END DECLARE SECTION;


  // Input redirects

  #define h_amount          in_payment->s_H_AMOUNT
  #define in_c_id           in_payment->s_C_ID

  #define w_id              in_payment->s_W_ID
  #define d_id              in_payment->s_D_ID

  #define c_d_id            in_payment->s_C_D_ID
  #define c_w_id            in_payment->s_C_W_ID

  // Output redirects

  #define c_credit_lim      payment->s_C_CREDIT_LIM
```

```
  #define c_discount        payment->s_C_DISCOUNT
  #define c_balance         payment->s_C_BALANCE

  #define c_id              payment->s_C_ID
  #define c_last            payment->s_C_LAST

  #define c_first           payment->s_C_FIRST
  #define c_middle          payment->s_C_MIDDLE
  #define c_street_1        payment->s_C_STREET_1
  #define c_street_2        payment->s_C_STREET_2
  #define c_city            payment->s_C_CITY
  #define c_state           payment->s_C_STATE
  #define c_zip             payment->s_C_ZIP
  #define c_phone           payment->s_C_PHONE
  #define c_credit          payment->s_C_CREDIT
  #define c_since           payment->s_C_SINCE_time
  #define c_data            payment->s_C_DATA

  #define w_street_1        payment->s_W_STREET_1
  #define w_street_2        payment->s_W_STREET_2
  #define w_city            payment->s_W_CITY
  #define w_state           payment->s_W_STATE
  #define w_zip             payment->s_W_ZIP

  #define d_street_1        payment->s_D_STREET_1
  #define d_street_2        payment->s_D_STREET_2
  #define d_city            payment->s_D_CITY
  #define d_state           payment->s_D_STATE
  #define d_zip             payment->s_D_ZIP

  #define h_date            payment->s_H_DATE_time

  payment->deadlocks = -1 ;
  payment->s_transtatus = TRAN_OK ;

  if (c_w_id == 0) { c_w_id = w_id; }
  if (c_d_id == 0) { c_d_id = d_id; }

#ifdef DEBUGIT
  pay_debug(payment, in_payment, "Client before SQL call");
#endif /* DEBUGIT */

  // Create c_data_prefix strings and copy some elements from
  // in -> out struct outside of retry_tran loop

  if ( in_c_id == 0 )
  {

    c_data_prefix_c_last.len = sprintf( c_data_prefix_c_last.data, " %2.2d %6.6d %2.2d %6.6d %06.2f",
c_d_id , c_w_id , d_id , w_id , h_amount ) ;

    // Setup the input c_last varchar
    c_last_input.len = strlen( in_payment->s_C_LAST ) ;
    memcpy( c_last_input.data , in_payment->s_C_LAST , c_last_input.len ) ;

    // Copy to the output structure
    memcpy( payment->s_C_LAST , in_payment->s_C_LAST, sizeof( payment->s_C_LAST ) ) ;

  } else {

    // Copy c_id to the output structure
    c_id = in_c_id ;


    c_data_prefix_c_id.len = sprintf( c_data_prefix_c_id.data, " %5.5d %2.2d %6.6d %2.2d %6.6d %06.2f",
c_id , c_d_id , c_w_id , d_id , w_id , h_amount) ;

  }

retry_tran:

  payment->deadlocks ++ ;

if ( in_c_id == 0 )
{
    EXEC SQL BEGIN COMPOUND NOT ATOMIC STATIC

      SELECT   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
          , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
          , C_ID, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
          , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
          , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE

        INTO   :w_street_1 , :w_street_2 , :w_city , :w_state , :w_zip
          , :d_street_1 , :d_street_2 , :d_city , :d_state , :d_zip
          , :c_id , :c_first , :c_middle ,   :c_street_1 , :c_street_2 , :c_city , :c_state
          , :c_zip , :c_phone , :c_since , :c_credit , :c_credit_lim
          , :c_discount , :c_balance, :c_data :c_data_indicator, :h_date
        FROM TABLE ( PAY_C_LAST(   :w_id
                                 , :d_id
                                 , :c_w_id
                                 , :c_d_id
                                 , :c_last_input
                                 , CAST(:h_amount AS DECIMAL(6,2))
                                 , :c_data_prefix_c_last
                               )

             ) AS T (   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
                      , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
                      , C_ID, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
                      , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
                      , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE
                    )
        ;

        COMMIT ;

    END COMPOUND ;

}
else
{
    EXEC SQL BEGIN COMPOUND NOT ATOMIC STATIC

      SELECT   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
          , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
          , C_LAST, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
          , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
          , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE

        INTO   :w_street_1 , :w_street_2 , :w_city , :w_state , :w_zip
          , :d_street_1 , :d_street_2 , :d_city , :d_state , :d_zip
          , :c_last, :c_first , :c_middle , :c_street_1 , :c_street_2 , :c_city , :c_state
          , :c_zip , :c_phone , :c_since , :c_credit , :c_credit_lim
          , :c_discount , :c_balance, :c_data :c_data_indicator, :h_date
        FROM TABLE ( PAY_C_ID(   :w_id
                               , :d_id
                               , :c_w_id
                               , :c_d_id
                               , :in_c_id
                               , CAST(:h_amount AS DECIMAL(6,2))
                               , :c_data_prefix_c_id
                             )

             ) AS T(   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
                     , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
                     , C_LAST, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
                     , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
                     , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE
                   )
        ;

        COMMIT ;

    END COMPOUND ;

  }

#ifdef DEBUGIT
  pay_debug(payment, in_payment, "Client after SQL call");
#endif /* DEBUGIT */

  if ( sqlca.sqlcode != 0 )
  {
    DLCHK( retry_tran ) ;

    sqlerror( PAYMENT_SQL , "PAY" , __FILE__, __LINE__ , &sqlca) ;
    payment->s_transtatus = FATAL_SQLERROR ;
    clientRc = FATAL_SQLERROR ;

    pay_debug( payment, in_payment, "PAY failed" ) ;

    EXEC SQL ROLLBACK WORK ;

    if ( sqlca.sqlcode != 0 )
    {
      sqlerror( PAYMENT_SQL, "ROLLBACK FAILED", __FILE__, __LINE__, &sqlca ) ;
    }
  }

  return ( clientRc ) ;
}

// ---------------------------------------------------------------
// Order Status CLIENT
// ---------------------------------------------------------------

int ordstat_sql  (  struct in_ordstat_struct * in_ordstat
                  , struct out_ordstat_struct * ordstat)
{
  struct sqlca sqlca ;

  EXEC SQL BEGIN DECLARE SECTION;

    struct vc_ord_in
    {
      short len ;
      char data[ 42 ] ;
    } * in_ord ;

    struct vc_ord_out
    {
      short len ;
      char data[ 822 ] ;
    } * out_ord ;

  EXEC SQL END DECLARE SECTION;

  int clientRc = TRAN_OK ;
  int itemIndex = 0 ;

  in_ord      = (struct vc_ord_in *) in_ordstat ;
  in_ord->len = sizeof(struct in_ordstat_struct) - SPGENERAL_ADJUST ;

  out_ord     = (struct vc_ord_out *) ordstat ;
  out_ord->len = sizeof(struct out_ordstat_struct) - SPGENERAL_ADJUST ;

#ifdef DEBUGIT
  ord_debug(ordstat, in_ordstat, "Client before SP call");
#endif /* DEBUGIT */

#ifdef SWAP_ENDIAN
  SWAP_BYTE(in_ordstat->s_C_ID);
  SWAP_BYTE(in_ordstat->s_W_ID);
  SWAP_BYTE(in_ordstat->s_D_ID);
#endif  //SWAP_ENDIAN

  EXEC SQL CALL ords ( :*in_ord, :*out_ord ) ;
```

```
#ifdef SWAP_ENDIAN
  SWAP_BYTE(in_ordstat->s_C_ID);
  SWAP_BYTE(in_ordstat->s_W_ID);
  SWAP_BYTE(in_ordstat->s_D_ID);

  SWAP_BYTE(ordstat->s_C_BALANCE);
  SWAP_BYTE(ordstat->s_C_ID);
  SWAP_BYTE(ordstat->s_O_ID);
  SWAP_BYTE(ordstat->s_O_CARRIER_ID);
  SWAP_BYTE(ordstat->s_ol_cnt);
  SWAP_BYTE(ordstat->s_transtatus);
  SWAP_BYTE(ordstat->deadlocks);
  for (itemIndex=0; itemIndex<ordstat->s_ol_cnt; itemIndex++)
  {
    SWAP_BYTE(ordstat->item[ itemIndex ].s_OL_AMOUNT);
    SWAP_BYTE(ordstat->item[ itemIndex ].s_OL_I_ID);
    SWAP_BYTE(ordstat->item[ itemIndex ].s_OL_SUPPLY_W_ID);
    SWAP_BYTE(ordstat->item[ itemIndex ].s_OL_QUANTITY);
  }
#endif  //SWAP_ENDIAN

  if ( sqlca.sqlcode == 0 )
  {
    // Propogate the field we already knew into the output structure
    // 60% of the time, we already new c_last (input c_id is 0)

    if ( in_ordstat->s_C_ID == 0 )
    {
      memcpy( ordstat->s_C_LAST , in_ordstat->s_C_LAST, sizeof( ordstat->s_C_LAST ) ) ;
    }
    else
    {
      ordstat->s_C_ID = in_ordstat->s_C_ID ;
    }
  }
  else
  {
    sqlerror( ORDSTAT_SQL, "ORD", __FILE__, __LINE__, &sqlca) ;
    ordstat->s_transtatus = FATAL_SQLERROR ;
    clientRc = FATAL_SQLERROR ;
  }

#ifdef DEBUGIT
  ord_debug(ordstat, in_ordstat, "Client after SP call");
#endif /* DEBUGIT */

  if ( ordstat->s_transtatus <= FATAL_SQLERROR )
  {
    ord_debug(ordstat, in_ordstat, "ORD failed");
    clientRc = FATAL_SQLERROR ;
  }

  return ( clientRc ) ;
}

// ---------------------------------------------------------------
// Delivery CLIENT
// ---------------------------------------------------------------

int delivery_sql (   struct in_delivery_struct  * in_delivery
                   , struct out_delivery_struct * delivery      )
{
  struct sqlca sqlca ;

  EXEC SQL BEGIN DECLARE SECTION;

    struct vc_del_in
    {
      short len ;
      char data[ 14 ] ;
    } * in_del ;

    struct vc_del_out
    {
      short len;
      char data[ 50 ] ;
    } * out_del ;

  EXEC SQL END DECLARE SECTION;

  int clientRc = TRAN_OK ;
  int orderIndex = 0 ;

  in_del      = (struct vc_del_in *) in_delivery ;
  in_del->len = sizeof(struct in_delivery_struct) - SPGENERAL_ADJUST;

  out_del     = (struct vc_del_out *) delivery ;
  out_del->len = sizeof(struct out_delivery_struct) - SPGENERAL_ADJUST;

#ifdef DEBUGIT
  del_debug(delivery, in_delivery, "Client before SP call");
#endif /* DEBUGIT */

#ifdef SWAP_ENDIAN
  SWAP_BYTE(in_delivery->s_W_ID);
  SWAP_BYTE(in_delivery->s_O_CARRIER_ID);
#endif  //SWAP_ENDIAN

  EXEC SQL CALL dels ( :*in_del, :*out_del ) ;

#ifdef SWAP_ENDIAN
  SWAP_BYTE(in_delivery->s_W_ID);
  SWAP_BYTE(in_delivery->s_O_CARRIER_ID);

  for (orderIndex=0; orderIndex<10; orderIndex++) {
    SWAP_BYTE(delivery->s_O_ID[ orderIndex ]);
  }
  SWAP_BYTE(delivery->s_transtatus);
  SWAP_BYTE(delivery->deadlocks);
#endif  //SWAP_ENDIAN

#ifdef DEBUGIT
  del_debug(delivery, in_delivery, "Client after SP call");
#endif /* DEBUGIT */

  if ( sqlca.sqlcode != 0 )
  {
    sqlerror( DELIVERY_SQL, "DEL", __FILE__, __LINE__, &sqlca) ;
    delivery->s_transtatus = FATAL_SQLERROR ;
    clientRc = FATAL_SQLERROR ;
  }

  if ( delivery->s_transtatus <= FATAL_SQLERROR )
  {
    del_debug(delivery, in_delivery, "DEL failed");
    clientRc = FATAL_SQLERROR ;
  }

  return ( clientRc ) ;
}

// ---------------------------------------------------------------
// Stock CLIENT
// ---------------------------------------------------------------

#undef w_id
#undef d_id

int stocklev_sql  (   struct in_stocklev_struct  * in_stocklev
                    , struct out_stocklev_struct * stocklev     )
{
  struct sqlca sqlca ;

  int clientRc = TRAN_OK ;

  EXEC SQL BEGIN DECLARE SECTION;

    // input

    sqlint32      threshold ;

    // output

    sqlint32    low_stock ;

  EXEC SQL END DECLARE SECTION;

  #define w_id      in_stocklev->s_W_ID
  #define d_id      in_stocklev->s_D_ID
  #define threshold in_stocklev->s_threshold
  #define low_stock stocklev->s_low_stock

  stocklev->deadlocks = -1 ;
  stocklev->s_transtatus = TRAN_OK ;

#ifdef DEBUGIT
  stk_debug(stocklev, in_stocklev, "Client before SQL call");
#endif /* DEBUGIT */

retry_tran:

  stocklev->deadlocks ++ ;

  EXEC SQL BEGIN COMPOUND NOT ATOMIC STATIC

    SELECT COUNT( S_I_ID ) INTO :low_stock

      FROM ( SELECT DISTINCT S_I_ID

               FROM ORDER_LINE , STOCK , DISTRICT

              WHERE D_W_ID = :w_id
                AND D_ID = :d_id
                AND OL_O_ID < d_next_o_id
                AND OL_O_ID >= ( d_next_o_id - 20 )
                AND OL_W_ID = D_W_ID
                AND OL_D_ID = D_ID
                AND S_I_ID = OL_I_ID
                AND S_W_ID = OL_W_ID
                AND S_QUANTITY < :threshold

           ) OLS

      WITH CS
    ;

    COMMIT ;

  END COMPOUND ;

#ifdef DEBUGIT
  stk_debug(stocklev, in_stocklev, "Client after SQL call");
#endif /* DEBUGIT */

  if ( sqlca.sqlcode != 0 )
  {
    DLCHK( retry_tran ) ;

    sqlerror( STOCKLEV_SQL , "STK" , __FILE__, __LINE__ , &sqlca);
    stocklev->s_transtatus = FATAL_SQLERROR ;
    clientRc = FATAL_SQLERROR ;

    stk_debug( stocklev, in_stocklev, "STK failed" ) ;

    EXEC SQL ROLLBACK WORK ;

    if ( sqlca.sqlcode != 0 )
    {
      sqlerror( STOCKLEV_SQL, "ROLLBACK FAILED", __FILE__, __LINE__, &sqlca ) ;
```

```
    }
  }

  return ( clientRc ) ;
}
}
```

Src.Common/Makefile

```
#################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
#################################################################################
#
# Makefile - Makefile for Src.Common
#
!include $(TPCC_ROOT)/Makefile.config
# ###############################################################################
# Preprocessor, Compiler and LInker Flags
# ###############################################################################
BND_OPTS =    GRANT PUBLIC \
              MESSAGES $*.bnd.msg
PRP_OPTS =    BINDFILE \
              OPTLEVEL 1 \
              ISOLATION RR \
              MESSAGES $*.prep.msg \
              LEVEL $(TPCC_VERSION) \
              NOLINEMACRO
INCLUDES =    -I$(TPCC_SQLLIB)$(SLASH)include -I$(TPCC_ROOT)$(SLASH)include
CFLAGS =      $(CFLAGS_OS) $(CFLAGS_DEBUG) $(INCLUDES) \
              -DSQLA_NOLINES -D$(DB2EDITION) -D$(DB2VERSION) \
              -D$(TPCC_SPTYPE)
UTIL_OBJ =    tpccmisc$(OBJEXT) tpccdbg$(OBJEXT)
UTIL_OBJ_DB2 =        tpccctx$(OBJEXT)
# ###############################################################################
# User Targets
# ###############################################################################
all:      dbgen connect $(UTIL_OBJ_DB2) disconnect
dbgen:  $(UTIL_OBJ)
clean:
        - $(ERASE) *$(OBJEXT) *.bnd *.msg tpccctx.c
# ###############################################################################
# Helper Targets
# ###############################################################################
connect:
        - db2 connect to $(TPCC_DBNAME)
disconnect:
        - db2 connect reset
        - db2 terminate
rebind:  connect
        db2 bind tpccctx.bnd $(BND_OPTS)
# ###############################################################################
# Build Rules
# ###############################################################################
.SUFFIXES:
.SUFFIXES: $(OBJEXT) .c .sqc
.sqc.c:
        @echo "Prepping $*.sqc"
        -db2 prep $*.sqc $(PRP_OPTS)
        @echo "Binding $*.bnd"
        db2 bind $*.bnd $(BND_OPTS)
# ###############################################################################
# Dependencies
# ###############################################################################
# Source
tpccdbg$(OBJEXT):       tpccdbg.c
tpccctx$(OBJEXT):       tpccctx.c
tpccmisc$(OBJEXT):      tpccmisc.c
# Headers
tpccdbg.c:      $(TPCC_ROOT)/include/db2tpcc.h
```

Src.Common/tpccctx.sqc

```
/************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
************************************************************************/
/*
 *
 * tpccctx.sqc - TPCC context code
 *
 */
#include <string.h>
#include <sqlutil.h>
#include "db2tpcc.h"
#include "tpccdbg.h"
int connect_to_TM(char *in_dbname);
int connect_to_TM_auth(char *in_dbname, char *in_username, char *in_password);
int disconnect_from_TM(void);
int connect_to_TM(char *in_dbname)
{
  return connect_to_TM_auth(in_dbname, "", "");
}
int connect_to_TM_auth(char *in_dbname, char *in_username, char *in_password)
{
  SQL_STRUCTURE sqlca  sqlca;
  int ConnectSQLCODE = 0;
  EXEC SQL BEGIN DECLARE SECTION;
  char dbname[9];
  char username[129];
  char password[15];
  EXEC SQL END DECLARE SECTION;
  /* Copy 9 characters - 8 for dbname, 1 for NULL */
  strncpy(dbname,in_dbname,9);
  if (strcmp(in_username,"") == 0)
  {
    EXEC SQL CONNECT TO :dbname IN SHARE MODE;
  } else {
    strncpy(username,in_username,128);
    strncpy(password,in_password,14);
    EXEC SQL CONNECT TO :dbname IN SHARE MODE USER :username USING :password;
  }
  ConnectSQLCODE = SQLCODE;
  if (ConnectSQLCODE != 0)
  {
    sqlerror( CLIENT_SQL, "CONNECT", __FILE__, __LINE__, &sqlca);
    return ConnectSQLCODE;
  }
  return 0;
}
int disconnect_from_TM(void)
{
  SQL_STRUCTURE sqlca  sqlca;
  int DisconnectSQLCODE = 0;
  EXEC SQL CONNECT RESET;
  DisconnectSQLCODE = SQLCODE;
  if (DisconnectSQLCODE != 0) {
    sqlerror( CLIENT_SQL, "DISCONNECT", __FILE__, __LINE__, &sqlca);
  }
  if (DisconnectSQLCODE) {
    return DisconnectSQLCODE;
  }
  return 0;
}
```

Src.Common/tpccdbg.c

```
/************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
************************************************************************/
/*
 * tccdbg.c - Debugging Routines
 *
 */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
#include <time.h>
#include "sqlca.h"
#include "sql.h"
#include "db2tpcc.h"
#include "tpccdbg.h"
#define DEBUG_FILENAME_SZ 128
#define DEBUG_PATH_SIZE 128
void      del_print();
void      new_print();
void      ord_print();
void      pay_print();
void      stk_print();
void current_tmstmp(char *buf);
static int debugInit = 0;
static char debugPath[DEBUG_PATH_SIZE] = "";
/*--------------------------------------------------------------*/
/*       InitializeDebug                                        */
/*--------------------------------------------------------------*/
__inline void InitializeDebug(void) {
  if (debugInit == 0) {
    char *p = getenv("TPCC_DEBUGDIR");
    if (p) {
      strncpy(debugPath, p, DEBUG_PATH_SIZE);
    } else {
      strcpy(debugPath, "C:\\temp");
    }
    strcat(debugPath, "\\");
  }
  debugInit = 1;
}
/*--------------------------------------------------------------*/
/*       sqlerror                                               */
/*--------------------------------------------------------------*/
void sqlerror(int tranType, char *msg, char *file, int line, SQL_STRUCTURE sqlca *psqlca)
{
  FILE *err_fp = NULL;
```

```
char  err_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];
char  tranName[16];
int j,k;
char  timeStamp[27];
char  errStr[512] = "";
InitializeDebug();
strncpy(err_fn, debugPath, DEBUG_PATH_SIZE);
current_tmstmp(&timeStamp[0]);
timeStamp[19] = (char)NULL;
switch(tranType)
{
   case NEWORD_SQL:
      // sprintf(err_fn, "%d.err.out", getpid());
      strcat(err_fn, "new.err.out");
      strcpy(tranName, "NEW_ORDER");
      break;
   case DELIVERY_SQL:
      // sprintf(err_fn, "%d.err.out", getpid());
      strcat(err_fn, "del.err.out");
      strcpy(tranName, "DELIVERY");
      break;
   case PAYMENT_SQL:
      // sprintf(err_fn, "%d.err.out", getpid());
      strcat(err_fn, "pay.err.out");
      strcpy(tranName, "PAYMENT");
      break;
   case ORDSTAT_SQL:
      // sprintf(err_fn, "%d.err.out", getpid());
      strcat(err_fn, "ord.err.out");
      strcpy(tranName, "ORDER_STAT");
      break;
   case STOCKLEV_SQL:
      //sprintf(err_fn, "%d.err.out", getpid());
      strcat(err_fn, "stk.err.out");
      strcpy(tranName, "STOCK_LVL");
      break;
   case 0:
      strcat(err_fn, "cli.err.out");
      strcpy(tranName, "CLIENT");
      break;
   default:
      return;
}
/* Generate Formatted Error Message */
sqlaintp(errStr, 512, 78, psqlca);
if ((err_fp = fopen(err_fn, "a+")) == NULL)
{
   return;
}
fprintf(err_fp, "---------------------------------------------\n");
fprintf(err_fp, "Transaction: %s (%s)\n", tranName, msg);
fprintf(err_fp, "FILE %s (%u)\n", file, line);
fprintf(err_fp, "SQLCODE %d ", psqlca->sqlcode);
fprintf(err_fp, "PID %d ", getpid());
fprintf(err_fp, "TIME %s\n", timeStamp);
fprintf(err_fp, "---------------------------------------------\n");
fprintf(err_fp, "%s", errStr);
fprintf(err_fp, "---------------------------------------------\n");
if (psqlca->sqlerrmc[0] != ' ' || psqlca->sqlerrmc[1] != ' ')
{
   fprintf(err_fp, "slerrmc:  ");
   for(j = 0; j < 5; j++)
   {
      for(k = 0; k < 16; k++) {
         int pos = j * 16 + k;
         if (pos < 70) fprintf(err_fp, "%02x ", psqlca->sqlerrmc[pos]);
         else fprintf(err_fp, "   ");
      }
      fprintf(err_fp,"   |");
      for(k = 0; k < 16; k++) {
         int pos = j * 16 + k;
         char c = ' ';
         if (pos < 70) {
            c = psqlca->sqlerrmc[pos];
            if (!isprint(c)) c = ' ';
         }
         fprintf(err_fp,"%c", c);
      }
      fprintf(err_fp,"|\n");
      if (j < 4) fprintf(err_fp,"          ");
   }
}
fprintf(err_fp, "sqlerrp:  ");
for(j = 0; j < 8; j++)
   fprintf(err_fp, "%c", psqlca->sqlerrp[j]);
fprintf(err_fp,"\n");
fprintf(err_fp, "sqlerrd: ");
for(j = 0; j < 6; j++)
   fprintf(err_fp, " %d", psqlca->sqlerrd[j]);
fprintf(err_fp,"\n");
if (psqlca->sqlwarn[0] != ' ')
{
   fprintf(err_fp, "sqlwarn: ");
   for(j = 0; j < 8; j++)
      fprintf(err_fp, "%c ", psqlca->sqlwarn[j]);
   fprintf(err_fp,"\n");
}
fprintf(err_fp, "\n");
fclose(err_fp);
}

/*---------------------------------------------------------------*/
/* del_debug                                                     */
/*---------------------------------------------------------------*/
void del_debug (struct out_delivery_struct *delivery_ptr,
                struct in_delivery_struct  *in_delivery,
                char *msg)
{
   char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

   InitializeDebug();
   strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
   strcat(debug_fn, "del.debug.out");
   del_print(delivery_ptr, in_delivery, debug_fn, msg);
}
/*---------------------------------------------------------------*/
/* del_print                                                     */
/*---------------------------------------------------------------*/
void del_print (struct out_delivery_struct *delivery_ptr,
                struct in_delivery_struct  *in_delivery,
                char *filename,
                char *msg)
{
   FILE *debug_fp;
   char  timeStamp[27];
   int   j;
   current_tmstmp(&timeStamp[0]);
   timeStamp[19] = (char)NULL;
   if ((debug_fp = fopen(filename, "a+")) == NULL)
   {
      return;
   }
   fprintf(debug_fp,"Delivery debug information follows %s (%s)\n", timeStamp, msg);
   fprintf(debug_fp, " PID %d ", getpid());
   fprintf(debug_fp,"\n================================================\n");
   fprintf(debug_fp,"in_delivery_struct {\n");
   fprintf(debug_fp,"\ts_W_ID         = %d (%X)\n",
           in_delivery->s_W_ID, in_delivery->s_W_ID);
   fprintf(debug_fp,"\ts_O_CARRIER_ID = %d (%X)\n",
           in_delivery->s_O_CARRIER_ID, in_delivery->s_O_CARRIER_ID);
   fprintf(debug_fp,"}\n\n");
   fprintf(debug_fp,"out_delivery_struct {\n");
   fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
           delivery_ptr->s_transtatus,delivery_ptr->s_transtatus);
   fprintf(debug_fp,"\tdeadlocks      = %d (%X)\n",
           delivery_ptr->deadlocks,delivery_ptr->deadlocks);
   for (j = 0; j < 10; j++) {
      fprintf(debug_fp,"\t\ts_O_ID[%d]         = %d\n",
              j, delivery_ptr->s_O_ID[j]);
   }
   fprintf(debug_fp,"\t}\n}\n\n");
   fclose(debug_fp);
}

/*---------------------------------------------------------------*/
/* new_debug                                                     */
/*---------------------------------------------------------------*/
void new_debug (struct out_neword_struct *neword_ptr,
                struct in_neword_struct *in_neword,
                char *msg)
{
   char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

   InitializeDebug();
   strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
   strcat(debug_fn, "new.debug.out");
   new_print(neword_ptr, in_neword, debug_fn, msg);
}
/*---------------------------------------------------------------*/
/* new_print                                                     */
/*---------------------------------------------------------------*/
void new_print (struct out_neword_struct *neword_ptr,
                struct in_neword_struct *in_neword,
                char *filename,
                char *msg)
{
   FILE *debug_fp;
   char  timeStamp[27];
   int   j, items;
   current_tmstmp(&timeStamp[0]);
   timeStamp[19] = (char)NULL;
   if ((debug_fp = fopen(filename, "a+")) == NULL)
   {
      return;
   }
   fprintf(debug_fp,"New order debug information follows %s (%s)\n", timeStamp, msg);
   fprintf(debug_fp, " PID %d ", getpid());
   fprintf(debug_fp,"\n================================================\n");
   fprintf(debug_fp,"in_neword_struct {\n");
   fprintf(debug_fp,"\ts_C_ID         = %d (%X)\n",
           in_neword->s_C_ID, in_neword->s_C_ID);
   fprintf(debug_fp,"\ts_W_ID         = %d (%X)\n",
           in_neword->s_W_ID, in_neword->s_W_ID);
   fprintf(debug_fp,"\ts_D_ID         = %d (%X)\n",
           in_neword->s_D_ID, in_neword->s_D_ID);
   fprintf(debug_fp,"\ts_O_OL_CNT     = %d (%X)\n",
           in_neword->s_O_OL_CNT, in_neword->s_O_OL_CNT);
   fprintf(debug_fp,"\ts_all_local    = %d (%X)\n",
           in_neword->s_all_local, in_neword->s_all_local);
// fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
//         in_neword->s_transtatus, in_neword->s_transtatus);
// fprintf(debug_fp,"\tduplicate_items= %d (%X)\n",
//         in_neword->duplicate_items, in_neword->duplicate_items);
   fprintf(debug_fp,"\titems {\n");
   items = in_neword->s_O_OL_CNT;
   for (j=0; j<items; j++) {
     if(j != 0)
       fprintf(debug_fp,"\n");
     fprintf(debug_fp,"\t\ts_OL_I_ID[%d]       = %d (%X)\n",
             j, in_neword->in_item[j].s_OL_I_ID, in_neword->in_item[j].s_OL_I_ID);
     fprintf(debug_fp,"\t\ts_OL_SUPPLY_W_ID[%d] = %d (%X)\n",
             j, in_neword->in_item[j].s_OL_SUPPLY_W_ID, in_neword->in_item[j].s_OL_SUPPLY_W_ID);
     fprintf(debug_fp,"\t\ts_OL_QUANTITY[%d]    = %d (%X)\n",
             j, in_neword->in_item[j].s_OL_QUANTITY, in_neword->in_item[j].s_OL_QUANTITY);
   }
   fprintf(debug_fp,"\t}\n}\n\n");
   fprintf(debug_fp,"out_neword_struct {\n");
   fprintf(debug_fp,"\ts_C_LAST       = %s\n",
           neword_ptr->s_C_LAST);
```

```
    fprintf(debug_fp,"\ts_C_CREDIT     = %s\n",
            neword_ptr->s_C_CREDIT);
    fprintf(debug_fp,"\ts_W_TAX        = %04.4f \n",
            neword_ptr->s_W_TAX);
    fprintf(debug_fp,"\ts_D_TAX        = %04.4f \n",
            neword_ptr->s_D_TAX);
    fprintf(debug_fp,"\ts_C_DISCOUNT   = %04.4f \n",
            neword_ptr->s_C_DISCOUNT);
    fprintf(debug_fp,"\ts_O_ID         = %d (%X)\n",
            neword_ptr->s_O_ID, neword_ptr->s_O_ID);
    fprintf(debug_fp,"\ts_O_OL_CNT     = %d (%X)\n",
            neword_ptr->s_O_OL_CNT, neword_ptr->s_O_OL_CNT);
    fprintf(debug_fp,"\ts_O_ENTRY_D    = %s \n",
            neword_ptr->s_O_ENTRY_D_time);
    fprintf(debug_fp,"\ts_total_amount = %.2f \n",
            neword_ptr->s_total_amount);
    fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
            neword_ptr->s_transtatus, neword_ptr->s_transtatus);
    fprintf(debug_fp,"\tdeadlocks      = %d (%X)\n",
            neword_ptr->deadlocks, neword_ptr->deadlocks);
// fprintf(debug_fp,"\ts_W_ID         = %d (%X)\n",
//         neword_ptr->s_W_ID, neword_ptr->s_W_ID);
// fprintf(debug_fp,"\ts_D_ID         = %d (%X)\n",
//         neword_ptr->s_D_ID, neword_ptr->s_D_ID);
// fprintf(debug_fp,"\ts_all_local    = %d (%X)\n",
//         neword_ptr->s_all_local, neword_ptr->s_all_local);
// fprintf(debug_fp,"\tduplicate_items= %d (%X)\n",
//         neword_ptr->duplicate_items, neword_ptr->duplicate_items);
    fprintf(debug_fp,"\titems {\n");
    items = neword_ptr->s_O_OL_CNT;
    for (j=0; j<items; j++) {
      if(j != 0)
        fprintf(debug_fp,"\n");
      fprintf(debug_fp,"\t\ts_I_NAME[%d]        = %s\n",
              j, neword_ptr->item[j].s_I_NAME);
      fprintf(debug_fp,"\t\ts_I_PRICE[%d]       = %.2f \n",
              j, neword_ptr->item[j].s_I_PRICE);
      fprintf(debug_fp,"\t\ts_OL_AMOUNT[%d]     = %.2f \n",
              j, neword_ptr->item[j].s_OL_AMOUNT);
      fprintf(debug_fp,"\t\ts_S_QUANTITY[%d]    = %d (%X)\n",
              j, neword_ptr->item[j].s_S_QUANTITY, neword_ptr->item[j].s_S_QUANTITY);
      fprintf(debug_fp,"\t\ts_brand_generic[%d]  = %c\n",
              j, neword_ptr->item[j].s_brand_generic);
    }
    fprintf(debug_fp,"\t}\n}\n\n");
    fclose(debug_fp);
}


/*---------------------------------------------------------------------*/
/* ord_debug                                                           */
/*---------------------------------------------------------------------*/
void ord_debug (struct out_ordstat_struct *ordstat_ptr,
                struct in_ordstat_struct  *in_ordstat,
                char *msg)
{
    char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

    InitializeDebug();
    strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
    strcat(debug_fn, "ord.debug.out");
    ord_print(ordstat_ptr, in_ordstat, debug_fn, msg);
}
/*---------------------------------------------------------------------*/
/* ord_print                                                           */
/*---------------------------------------------------------------------*/
void ord_print (struct out_ordstat_struct *ordstat_ptr,
                struct in_ordstat_struct  *in_ordstat,
                char *filename,
                char *msg)
{
    FILE *debug_fp;
    char  timeStamp[27];
    int   j, items;
    current_tmstmp(&timeStamp[0]);
    timeStamp[19] = (char)NULL;
    if ((debug_fp = fopen(filename, "a+")) == NULL)
    {
      return;
    }
    fprintf(debug_fp,"Order status debug information follows %s (%s)\n", timeStamp, msg);
    fprintf(debug_fp, " PID %d ", getpid());
    fprintf(debug_fp,"\n=================================================\n");
    fprintf(debug_fp,"in_ordstat_struct {\n");
    fprintf(debug_fp,"\ts_W_ID         = %d (%X)\n",
            in_ordstat->s_W_ID, in_ordstat->s_W_ID);
    fprintf(debug_fp,"\ts_D_ID         = %d (%X)\n",
            in_ordstat->s_D_ID, in_ordstat->s_D_ID);
    fprintf(debug_fp,"\ts_C_ID         = %d (%X)\n",
            in_ordstat->s_C_ID, in_ordstat->s_C_ID);
    fprintf(debug_fp,"\ts_C_LAST       = %s\n",
            in_ordstat->s_C_LAST);
    fprintf(debug_fp,"}\n\n");
    fprintf(debug_fp,"out_ordstat_struct {\n");
    fprintf(debug_fp,"\ts_C_ID         = %d (%X)\n",
            ordstat_ptr->s_C_ID, ordstat_ptr->s_C_ID);
    fprintf(debug_fp,"\ts_C_FIRST      = %s\n",
            ordstat_ptr->s_C_FIRST);
    fprintf(debug_fp,"\ts_C_MIDDLE     = %s\n",
            ordstat_ptr->s_C_MIDDLE);
    fprintf(debug_fp,"\ts_C_LAST       = %s\n",
            ordstat_ptr->s_C_LAST);
    fprintf(debug_fp,"\ts_C_BALANCE    = %.2f\n",
            ordstat_ptr->s_C_BALANCE);
    fprintf(debug_fp,"\ts_O_ID         = %d (%X)\n",
            ordstat_ptr->s_O_ID, ordstat_ptr->s_O_ID);
    fprintf(debug_fp,"\ts_O_ENTRY_D    = %s \n",
            ordstat_ptr->s_O_ENTRY_D_time);
    fprintf(debug_fp,"\ts_O_CARRIER_ID = %d (%X)\n",
            ordstat_ptr->s_O_CARRIER_ID, ordstat_ptr->s_O_CARRIER_ID);
    fprintf(debug_fp,"\ts_ol_cnt       = %d (%X)\n",
            ordstat_ptr->s_ol_cnt, ordstat_ptr->s_ol_cnt);
    fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
            ordstat_ptr->s_transtatus, ordstat_ptr->s_transtatus);
    fprintf(debug_fp,"\tdeadlocks      = %d (%X)\n",
            ordstat_ptr->deadlocks, ordstat_ptr->deadlocks);
    fprintf(debug_fp,"\titems {\n");
    items = ordstat_ptr->s_ol_cnt;
    for (j = 0; j < items; j++) {
      if(j != 0)
        fprintf(debug_fp,"\n");
      fprintf(debug_fp,"\t\ts_OL_SUPPLY_W_ID[%d] = %d (%X)\n",
              j, ordstat_ptr->item[j].s_OL_SUPPLY_W_ID, ordstat_ptr->item[j].s_OL_SUPPLY_W_ID);
      fprintf(debug_fp,"\t\ts_OL_I_ID[%d]       = %d (%X)\n",
              j, ordstat_ptr->item[j].s_OL_I_ID, ordstat_ptr->item[j].s_OL_I_ID);
      fprintf(debug_fp,"\t\ts_OL_QUANTITY[%d]   = %d (%X)\n",
              j, ordstat_ptr->item[j].s_OL_QUANTITY, ordstat_ptr->item[j].s_OL_QUANTITY);
      fprintf(debug_fp,"\t\ts_OL_AMOUNT[%d]     = %.2f\n",
              j, ordstat_ptr->item[j].s_OL_AMOUNT);
      fprintf(debug_fp,"\t\ts_OL_DELIVERY_D[%d]  = %s \n",
              j,ordstat_ptr->item[j].s_OL_DELIVERY_D_time);
    }
    fprintf(debug_fp,"\t}\n}\n\n");
    fclose(debug_fp);
}

/*---------------------------------------------------------------------*/
/* pay_debug                                                           */
/*---------------------------------------------------------------------*/
void pay_debug (struct out_payment_struct *payment_ptr,
                struct in_payment_struct  *in_payment,
                char *msg)
{
    char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

    InitializeDebug();
    strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
    strcat(debug_fn, "pay.debug.out");
    pay_print(payment_ptr, in_payment, debug_fn, msg);
}
/*---------------------------------------------------------------------*/
/* pay_print                                                           */
/*---------------------------------------------------------------------*/
void pay_print (struct out_payment_struct *payment_ptr,
                struct in_payment_struct  *in_payment,
                char *filename,
                char *msg)
{
    FILE *debug_fp;
    char  timeStamp[27];
    current_tmstmp(&timeStamp[0]);
    timeStamp[19] = (char)NULL;
    if ((debug_fp = fopen(filename, "a+")) == NULL)
    {
      return;
    }
    fprintf(debug_fp,"Payment debug information follows %s (%s)\n", timeStamp, msg);
    fprintf(debug_fp, " PID %d ", getpid());
    fprintf(debug_fp,"\n=================================================\n");
    fprintf(debug_fp,"in_payment_struct {\n");
    fprintf(debug_fp,"\ts_H_AMOUNT     = %.2f \n",
            in_payment->s_H_AMOUNT);
    fprintf(debug_fp,"\ts_C_ID         = %d (%X)\n",
            in_payment->s_C_ID, in_payment->s_C_ID);
    fprintf(debug_fp,"\ts_W_ID         = %d (%X)\n",
            in_payment->s_W_ID, in_payment->s_W_ID);
    fprintf(debug_fp,"\ts_D_ID         = %d (%X)\n",
            in_payment->s_D_ID, in_payment->s_D_ID);
    fprintf(debug_fp,"\ts_C_D_ID       = %d (%X)\n",
            in_payment->s_C_D_ID, in_payment->s_C_D_ID);
    fprintf(debug_fp,"\ts_C_W_ID       = %d (%X)\n",
            in_payment->s_C_W_ID, in_payment->s_C_W_ID);
    fprintf(debug_fp,"\ts_C_LAST       = %s\n",
            in_payment->s_C_LAST);
    fprintf(debug_fp,"\n}\n\n");
    fprintf(debug_fp,"out_payment_struct {\n");
    fprintf(debug_fp,"\ts_C_CREDIT_LIM = %.2f\n",
            payment_ptr->s_C_CREDIT_LIM);
    fprintf(debug_fp,"\ts_C_DISCOUNT   = %04.4f\n",
            payment_ptr->s_C_DISCOUNT);
    fprintf(debug_fp,"\ts_C_BALANCE    = %.2f\n",
            payment_ptr->s_C_BALANCE);
    fprintf(debug_fp,"\ts_C_ID         = %d (%X)\n",
            payment_ptr->s_C_ID, payment_ptr->s_C_ID);
    fprintf(debug_fp,"\ts_W_STREET_1   = %s\n",
            payment_ptr->s_W_STREET_1);
    fprintf(debug_fp,"\ts_W_STREET_2   = %s\n",
            payment_ptr->s_W_STREET_2);
    fprintf(debug_fp,"\ts_W_CITY       = %s\n",
            payment_ptr->s_W_CITY);
    fprintf(debug_fp,"\ts_W_STATE      = %s\n",
            payment_ptr->s_W_STATE);
    fprintf(debug_fp,"\ts_W_ZIP        = %s\n",
            payment_ptr->s_W_ZIP);
    fprintf(debug_fp,"\ts_D_STREET_1   = %s\n",
            payment_ptr->s_D_STREET_1);
    fprintf(debug_fp,"\ts_D_STREET_2   = %s\n",
            payment_ptr->s_D_STREET_2);
    fprintf(debug_fp,"\ts_D_CITY       = %s\n",
            payment_ptr->s_D_CITY);
    fprintf(debug_fp,"\ts_D_STATE      = %s\n",
            payment_ptr->s_D_STATE);
    fprintf(debug_fp,"\ts_D_ZIP        = %s\n",
            payment_ptr->s_D_ZIP);
    fprintf(debug_fp,"\ts_C_FIRST      = %s\n",
            payment_ptr->s_C_FIRST);
    fprintf(debug_fp,"\ts_C_MIDDLE     = %s\n",
            payment_ptr->s_C_MIDDLE);
    fprintf(debug_fp,"\ts_C_LAST       = %s\n",
```

```
        payment_ptr->s_C_LAST);
  fprintf(debug_fp,"\ts_C_STREET_1   = %s\n",
        payment_ptr->s_C_STREET_1);
  fprintf(debug_fp,"\ts_C_STREET_2   = %s\n",
        payment_ptr->s_C_STREET_2);
  fprintf(debug_fp,"\ts_C_CITY      = %s\n",
        payment_ptr->s_C_CITY);
  fprintf(debug_fp,"\ts_C_STATE     = %s\n",
        payment_ptr->s_C_STATE);
  fprintf(debug_fp,"\ts_C_ZIP       = %s\n",
        payment_ptr->s_C_ZIP);
  fprintf(debug_fp,"\ts_C_PHONE     = %s\n",
        payment_ptr->s_C_PHONE);
  fprintf(debug_fp,"\ts_C_SINCE     = %s \n",
        payment_ptr->s_C_SINCE_time);
  fprintf(debug_fp,"\ts_C_CREDIT    = %s\n",
        payment_ptr->s_C_CREDIT);
  fprintf(debug_fp,"\ts_C_DATA      = %s\n",
        payment_ptr->s_C_DATA);
  fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
        payment_ptr->s_transtatus,payment_ptr->s_transtatus);
  fprintf(debug_fp,"\tdeadlocks     = %d (%X)\n",
        payment_ptr->deadlocks,payment_ptr->deadlocks);
  fprintf(debug_fp,"\n}\n\n");
  fclose(debug_fp);
}

/*-------------------------------------------------------------*/
/* stk_debug                                                   */
/*-------------------------------------------------------------*/
void stk_debug (struct out_stocklev_struct *stocklev,
              struct in_stocklev_struct  *in_stocklev,
              char *msg)
{
  char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

  InitializeDebug();
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "stk.debug.out");
  stk_print(stocklev, in_stocklev, debug_fn, msg);
}
/*-------------------------------------------------------------*/
/* stk_print                                                   */
/*-------------------------------------------------------------*/
void stk_print (struct out_stocklev_struct *stocklev,
              struct in_stocklev_struct  *in_stocklev,
              char *filename,
              char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"Stock level debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n==========================================================\n");
  fprintf(debug_fp,"in_stocklev_struct {\n");
  fprintf(debug_fp,"\ts_W_ID        = %d (%X)\n",
        in_stocklev->s_W_ID, in_stocklev->s_W_ID);
  fprintf(debug_fp,"\ts_D_ID        = %d (%X)\n",
        in_stocklev->s_D_ID, in_stocklev->s_D_ID);
  fprintf(debug_fp,"\ts_threshold   = %d (%X)\n",
        in_stocklev->s_threshold, in_stocklev->s_threshold);
  fprintf(debug_fp,"}\n\n");
  fprintf(debug_fp,"out_stocklev_struct {\n");
  fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
        stocklev->s_transtatus, stocklev->s_transtatus);
  fprintf(debug_fp,"\tdeadlocks     = %d (%X)\n",
        stocklev->deadlocks, stocklev->deadlocks);
  fprintf(debug_fp,"\ts_low_stock    = %d (%X)\n",
        stocklev->s_low_stock, stocklev->s_low_stock);
  fprintf(debug_fp,"}\n\n");
  fclose(debug_fp);
}
void current_tmstmp(char *buf)
{
  time_t t = time(NULL);
  strncpy(buf,ctime(&t),19);
}
```

include/db2tpcc.h

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * db2tpcc.h - Macros and Miscellany
 *
 */
#ifndef __DB2TPCC_H
#define __DB2TPCC_H
#include <sys/types.h>
#include "lval.h"
/* ************************************************************************ */
/* Transaction Return Codes (s_transtatus)                                  */
/* ************************************************************************ */
#define INVALID_ITEM          100
#define TRAN_OK               0
#define FATAL_SQLERROR        -1
/* ************************************************************************ */
/* Definition of Unused and Bad Items                                       */
/* ************************************************************************ */
/* Define unused item ID to be 0. This allows the SUT to determine the    */
/* number of items in the order as required by 2.4.1.3 and 2.4.2.2 since  */
/* the assumption that any item with OL_I_ID = 0 is unused will be true.  */
/* This in turn requires that the value used for an invalid item is       */
/* equal to ITEMS + 1.                                                    */
/* ************************************************************************ */
#define INVALID_ITEM_ID (2 * ITEMS) + 1
#define UNUSED_ITEM_ID 0
#define MIN_WAREHOUSE 1
#define MAX_WAREHOUSE WAREHOUSES
/*****************************************************************************/
/* NURand Constants                                                         */
/* C_C_LAST_RUN and C_C_LAST_LOAD must adhere to clause 2.1.6.            */
/* Analysis indicates that a C_LAST delta of 85 is optimal.               */
/*****************************************************************************/
#define C_C_LAST_RUN          88
#define C_C_LAST_LOAD         173
#define C_C_ID            319
#define C_OL_I_ID         3849
#define A_C_LAST          255
#define A_C_ID            1023
#define A_OL_I_ID         8191
/*****************************************************************************/
/* Transaction Type Identifiers                                             */
/*****************************************************************************/
#define CLIENT_SQL   0
#define NEWORD_SQL   1
#define PAYMENT_SQL  2
#define ORDSTAT_SQL  3
#define DELIVERY_SQL 4
#define STOCKLEV_SQL 5
#define SPGENERAL_PAD 3
#define SPGENERAL_ADJUST sizeof(int16_t)
struct in_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   in_items_struct {
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad1[3];
  } in_item[15];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  s_O_OL_CNT;              /* init by SUT */
  int16_t  s_all_local;
  int16_t  duplicate_items;
};
struct out_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   items_struct {
    float  s_I_PRICE;
    float  s_OL_AMOUNT;
    int16_t  s_S_QUANTITY;
    int16_t  pad2;
    char     s_I_NAME[25];
    char     s_brand_generic;
  } item[15];
  float  s_W_TAX;
  float  s_D_TAX;
  float  s_C_DISCOUNT;
  float  s_total_amount;
  int32_t  s_O_ID;
  int16_t  s_O_OL_CNT;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_C_LAST[17];
  char     s_C_CREDIT[3];
  char     s_O_ENTRY_D_time[27];

};
struct in_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  float  s_H_AMOUNT;
  int32_t  s_W_ID;
  int32_t  s_C_W_ID;
  int32_t  s_C_ID;
  int16_t  s_C_D_ID;
  int16_t  s_D_ID;
  char     s_C_LAST[17];
};
struct out_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_CREDIT_LIM;
  double  s_C_BALANCE;
  float  s_C_DISCOUNT;
  int32_t  s_C_ID;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_W_STREET_1[21];
  char     s_W_STREET_2[21];
  char     s_W_CITY[21];
  char     s_W_STATE[3];
  char     s_W_ZIP[10];
  char     s_D_STREET_1[21];
  char     s_D_STREET_2[21];
  char     s_D_CITY[21];
```

```
  char    s_D_STATE[3];
  char    s_D_ZIP[10];
  char    s_C_FIRST[17];
  char    s_C_MIDDLE[3];
  char    s_C_LAST[17];
  char    s_C_STREET_1[21];
  char    s_C_STREET_2[21];
  char    s_C_CITY[21];
  char    s_C_STATE[3];
  char    s_C_ZIP[10];
  char    s_C_PHONE[17];
  char    s_C_CREDIT[3];
  char    s_C_DATA[201];
  char    s_H_DATE_time[27];
  char    s_C_SINCE_time[27];
};
struct in_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  pad1[3];
  char    s_C_LAST[17];
};
struct out_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_BALANCE;
  int32_t  s_C_ID;
  int32_t  s_O_ID;
  int16_t  s_O_CARRIER_ID;
  int16_t  s_ol_cnt;
  int16_t  pad1[2];
  struct   oitems_struct {
    double  s_OL_AMOUNT;
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad2;
    char     s_OL_DELIVERY_D_time[27];
  } item[15];
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char    s_C_FIRST[17];
  char    s_C_MIDDLE[3];
  char    s_C_LAST[17];
  char    s_O_ENTRY_D_time[27];
  int16_t  pad3[2];
};
struct in_delivery_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_W_ID;
  int16_t  s_O_CARRIER_ID;
};
struct out_delivery_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_O_ID[10];
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
struct in_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_threshold;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
};
struct out_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_low_stock;
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
/* ********************************************************************** */
/* Transaction Prototypes                                                 */
/* ********************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int neword_sql(struct in_neword_struct*, struct out_neword_struct*);
extern int payment_sql(struct in_payment_struct*, struct out_payment_struct*);
extern int ordstat_sql(struct in_ordstat_struct*, struct out_ordstat_struct*);
extern int delivery_sql(struct in_delivery_struct*, struct out_delivery_struct*);
extern int stocklev_sql(struct in_stocklev_struct*, struct out_stocklev_struct*);
#ifdef __cplusplus
}
#endif
/* ********************************************************************** */
/* DB2 Connect/Disconnect & Thread Context Wrappers                       */
/* ********************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int connect_to_TM(char*);
extern int connect_to_TM_auth(char*, char*, char*);
extern int disconnect_from_TM(void);

#ifdef __cplusplus
}
#endif
#endif // __DB2TPCC_H
```

include/lval.h

```
/* lval.h - generated automatically at 20060614.2208 */
#ifndef __LVAL_H
#define __LVAL_H
#define WAREHOUSES 320000
#define DISTRICTS_PER_WAREHOUSE 10
#define CUSTOMERS_PER_DISTRICT 3000
#define ITEMS 100000
#define STOCK_PER_WAREHOUSE 100000
#define MIN_OL_PER_ORDER 5
#define MAX_OL_PER_ORDER 15
#define NU_ORDERS_PER_DISTRICT 900
#endif // __LVAL_H
```

include/tpccapp.h

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * tpccapp.h - Application Macros
 */
#ifndef __TPCCAPP_H
#define __TPCCAPP_H
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include "sqlenv.h"
#define daricall __stdcall
#include "sqlca.h"
#include "sqlcodes.h"
#ifdef SWAP_ENDIAN
#define SWAP_BYTE(Var)  SwapEndian((void*)&Var, sizeof(Var))
/*****************************************************************************
  FUNCTION: SwapEndian
  PURPOSE: Swap the byte order of a structure
  EXAMPLE: int I=0x12345678; SWAP_BYTE(I); I => 0x78563412;
  IMPLEMENTATION: Fold Addr in half, swap header & tail by XOR op
          e.g.: *a = 0x12 [ Addr + 0];
                *b = 0x78 [ Add + 4 - 0 - 1 = Addr+3];
                *a ^= *b;         // sets *a to 0x6A
                *b ^= *a;         // sets *b to 0x12
                *a ^= *b;         // sets *a to 0x78
           Now *a => 0x78 && *b => 0x12
*****************************************************************************/
void SwapEndian(void *Addr, int nb)
{
  int i;
  for (i=0; i<nb/2; i++)
  {
    char *a = (char*)Addr+i;
    char *b = (char*)Addr+(nb-i-1);
    *a ^= *b;
    *b ^= *a;
    *a ^= *b;
  }
}
#endif   //SWAP_ENDIAN

/*****************************************************************************/
/* SQLCODE Macros                                                            */
/*****************************************************************************/
#define DLCHK(a) \
  if (sqlca.sqlcode == SQL_RC_E911) { goto a; }
/* ********************************************************************** */
/* In NOT ATOMIC COMPOUND SQL, all statements will be executed, but not    */
/* all will neccessarily complete successfully.  We can use sqlerrd(4) to  */
/* determine how many statements succeeded, but this won't tell us what    */
/* statements failed.  In order to determine this, we need to look at      */
/* sqlerrmc, which has the following structure:  HHHXNNNSSSSSXNNNSSSSS... */
/* (See the docs for more details.)  Since we're interested in the first   */
/* failing statement, we can look at elements 5 and 6, which will contain  */
/* the first two digits of NNN (which is right-padded with spaces).  We    */
/* need to look at the first two digits since some of our compound blocks  */
/* have > 9 statements.  We convert these digits from ASCII to an int and  */
/* set 'last' to this value.                                               */
/* ********************************************************************** */
#define NACOMPCHK(last) \
  if (sqlca.sqlcode != SQL_RC_E1339) { last = -1; } \
  else { int a = ((sqlca.sqlerrmc[4] == 0x20) ? 0 : sqlca.sqlerrmc[4]-0x30); \
         int b = ((sqlca.sqlerrmc[5] == 0x20) ? 0 : sqlca.sqlerrmc[5]-0x30); \
         if (b == 0) { last = a; } else { last = a * 10 + b; } \
       }
#endif // __TPCCAPP_H
```

tpccenv.bat

```
@REM ***************************************************************************
@REM  Licensed Materials - Property of IBM
@REM
@REM  Governed under the terms of the International
@REM  License Agreement for Non-Warranted Sample Code.
@REM
@REM  (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
```

```
@REM  All Rights Reserved.
@REM
@REM  US Government Users Restricted Rights - Use, duplication or
@REM  disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
@REM ************************************************************************
@REM
@REM tpccenv.bat - Windows Environment Setup
@REM
@REM The Kit Version
set TPCC_VERSION=CK060601
@REM The DB2 Instance Name (for DB2)
set DB2INSTANCE=%USERNAME%
@REM The OS being used (i.e. "WINDOWS")
set PLATFORM=WINDOWS
@REM The type of make command and slash used by the OS
@REM (i.e. UNIX - "/", WINDOWS - "\")
@REM These are referenced all over the kit.
set SLASH=\
set MAKE=nmake
@REM Specifies whether or not to use dari stored proc's for the TPC-C driver.  Set to either
DARIVERSION or NONDARI;
@REM set TPCC_SPTYPE=NOSP
@REM set TPCC_SPTYPE=SPGENERAL2
set TPCC_SPTYPE=SPGENERAL
@REM set TPCC_SPTYPE=DARI2SQLDA
set DB2VERSION=v8
@REM The schema name is typically the SQL autorization ID (or username).
@REM This is required for runstats and EEE.
set TPCC_SCHEMA=%USERNAME%
@REM DB2 EE/EEE Configuration
set DB2EDITION=EE
@REM set DB2EDITION=EEE
set DB2NODE=0
@REM set to the number of nodes you have.  Set to 1 for EE.
set DB2NODES=1
@REM TPCC General Configuration
@REM ** IMPORTANT NOTE **
@REM The kit is not guaranteed to work properly if TPCC_ROOT or TPCC_SQLLIB
@REM have spaces in them.  If you absolutely must use paths with spaces,
@REM then the entire path must be surrounded by double quotes.
@REM For example:  HOME="C:\Program Files\IBM"
set HOME=C:\home\tpcc
set TPCC_DBNAME=TPCC
set TPCC_ROOT=%HOME%\tpc-c.ibm
set TPCC_SQLLIB=C:\Progra~1\IBM\sqllib
set TPCC_RUNDATA=%HOME%\tpc-c.ibm\tpccdata
@REM TPCC Debug Configuration
@REM This is the path where all error and debug logs are placed.
@REM To get debugging from within the stored procedures, you must
@REM set DB2ENVLIST="TPCC_DEBUGDIR" in tpcc.config.
set TPCC_DEBUGDIR=c:\temp
@REM Specifies where stored procedures should be placed and if they should
@REM be fenced.
set TPCC_SPDIR=%TPCC_SQLLIB%\function
set TPCC_FENCED=NO
```

A.2 Client Transaction Code

Makefile.config

```
##############################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
##############################################################################
#
# Makefile.config - AIX 64-bit
#
#
# Make Configuration
MAKE=make
# Compiler Configuration.
# CFLAGS_DEBUG may be set to "-g", "-DDEBUGIT" "-g -DDEBUGIT" or left blank
CC=xlc
CFLAGS_OS=-qflag=i:i -qlanglvl=ansi -qcpluscmt -DSQLUNIX -DSQLAIX -q64 -O3 -D_LARGE_FILES
CFLAGS_OUT=-o
CFLAGS_DEBUG=
# Linker Configuration
LD_EXEC=xlc
LD_STORP=xlc
LDFLAGS_EXEC=-lm -q64
LDFLAGS_SHLIB=-qmkshrobj
LDFLAGS_STORP=$(LDFLAGS_SHLIB) -bE:$@.exp -lc -b64
LDFLAGS_LIB=-L$(TPCC_SQLLIB)/lib -ldb2
LDFLAGS_OUT=-o
# Library Configuration
AR=ar
ARFLAGS=-r -v -X64
ARFLAGS_LIB=
ARFLAGS_OUT=
# OS Commands
ERASE=rm -f
ERASEDIR=$(ERASE) -R
MOVE=mv
COPY=cp
# OS File Extensions & Path Separators
OBJEXT=.o
LIBEXT=.a
SHLIBEXT=.a
BINEXT=
SLASH=/
CMDSEP=;
```

Src.Common/Makefile

```
##############################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
##############################################################################
#
# Makefile - Makefile for Src.Common
#
include $(TPCC_ROOT)/Makefile.config
# ############################################################################
# Preprocessor, Compiler and LInker Flags
# ############################################################################
BND_OPTS =    GRANT PUBLIC \
              MESSAGES $*.bnd.msg
PRP_OPTS =    BINDFILE \
              OPTLEVEL 1 \
              ISOLATION RR \
              MESSAGES $*.prep.msg \
              LEVEL $(TPCC_VERSION) \
              NOLINEMACRO
INCLUDE =     -I$(TPCC_SQLLIB)/include -I$(TPCC_ROOT)/include
CFLAGS =      $(CFLAGS_OS) $(CFLAGS_DEBUG) $(INCLUDE) \
              -DSQLA_NOLINES -D$(DB2EDITION) -D$(DB2VERSION) \
              -D$(TPCC_SPTYPE)
UTIL_OBJ =    tpccmisc$(OBJEXT) tpccdbg$(OBJEXT) tpccctx$(OBJEXT)
# ############################################################################
# User Targets
# ############################################################################
all:      connect $(UTIL_OBJ) disconnect
clean:
        - $(ERASE) *$(OBJEXT) *.bnd *.msg tpccctx.c
# ############################################################################
# Helper Targets
# ############################################################################
connect:
        - db2 connect to $(TPCC_DBNAME)
disconnect:
        - db2 connect reset
        - db2 terminate
rebind:  connect
        db2 bind tpccctx.bnd $(BND_OPTS)
# ############################################################################
# Build Rules
# ############################################################################
.SUFFIXES:
.SUFFIXES: $(OBJEXT) .c .sqc
.sqc.c:
        @echo "Prepping $*.sqc"
        -db2 prep $*.sqc $(PRP_OPTS)
        @echo "Binding $*.bnd"
        db2 bind $*.bnd $(BND_OPTS)
# ############################################################################
# Dependencies
# ############################################################################
# Source
tpccdbg$(OBJEXT):      tpccdbg.c
tpccctx$(OBJEXT):      tpccctx.c
tpccmisc$(OBJEXT):     tpccmisc.c
# Headers
tpccdbg.c:      $(TPCC_ROOT)/include/db2tpcc.h
```

Src.Common/tpccctx.sqc

```
/************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
************************************************************************/
/*
 *
 * tpccctx.sqc - TPCC context code
 *
 */
#include <string.h>
#include <sqlutil.h>
#include "db2tpcc.h"
#include "tpccdbg.h"
int connect_to_TM(char *in_dbname);
int connect_to_TM_auth(char *in_dbname, char *in_username, char *in_password);
```

```
int disconnect_from_TM(void);
int connect_to_TM(char *in_dbname)
{
  return connect_to_TM_auth(in_dbname, "", "");
}
int connect_to_TM_auth(char *in_dbname, char *in_username, char *in_password)
{
   SQL_STRUCTURE sqlca  sqlca;
   int ConnectSQLCODE = 0;
   EXEC SQL BEGIN DECLARE SECTION;
   char dbname[9];
   char username[129];
   char password[15];
   EXEC SQL END DECLARE SECTION;
   /* Copy 9 characters - 8 for dbname, 1 for NULL */
   strncpy(dbname,in_dbname,9);
   if (strcmp(in_username,"") == 0)
   {
      EXEC SQL CONNECT TO :dbname IN SHARE MODE;
   } else {
      strncpy(username,in_username,128);
      strncpy(password,in_password,14);
      EXEC SQL CONNECT TO :dbname IN SHARE MODE USER :username USING :password;
   }
   ConnectSQLCODE = SQLCODE;
   if (ConnectSQLCODE != 0)
   {
      sqlerror( CLIENT_SQL, "CONNECT", __FILE__, __LINE__, &sqlca);
      return ConnectSQLCODE;
   }
   return 0;
}
int disconnect_from_TM(void)
{
   SQL_STRUCTURE sqlca  sqlca;
   int DisconnectSQLCODE = 0;
   EXEC SQL CONNECT RESET;
   DisconnectSQLCODE = SQLCODE;
   if (DisconnectSQLCODE != 0) {
      sqlerror( CLIENT_SQL, "DISCONNECT", __FILE__, __LINE__, &sqlca);
   }
   if (DisconnectSQLCODE) {
      return DisconnectSQLCODE;
   }
   return 0;
}
```

Src.Common/tpccdbg.c

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * tccdbg.c - Debugging Routines
 */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
#include <time.h>
#include "sqlca.h"
#include "sql.h"
#include "db2tpcc.h"
#include "tpccdbg.h"
#define DEBUG_FILENAME_SZ 128
#define DEBUG_PATH_SIZE 128
void      del_print();
void      new_print();
void      ord_print();
void      pay_print();
void      stk_print();
void current_tmstmp(char *buf);
static int debugInit = 0;
static char debugPath[DEBUG_PATH_SIZE] = "";
/*-------------------------------------------------------------------*/
/*       InitializeDebug                                             */
/*-------------------------------------------------------------------*/
__inline void InitializeDebug(void) {
   if (debugInit == 0) {
      char *p = getenv("TPCC_DEBUGDIR");
      if (p) {
         strncpy(debugPath, p, DEBUG_PATH_SIZE);
      } else {
         strcpy(debugPath, "/tmp");
      }
      strcat(debugPath, "/");
   }
   debugInit = 1;
}
/*-------------------------------------------------------------------*/
/*       sqlerror                                                    */
/*-------------------------------------------------------------------*/
void sqlerror(int tranType, char *msg, char *file, int line, SQL_STRUCTURE sqlca *psqlca)
{
   FILE *err_fp = NULL;
   char  err_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];
   char  tranName[16];
   int j,k;
   char  timeStamp[27];
   char  errStr[512] = "";
   InitializeDebug();
   strncpy(err_fn, debugPath, DEBUG_PATH_SIZE);
   current_tmstmp(&timeStamp[0]);
   timeStamp[19] = (char)NULL;
   switch(tranType)
   {
      case NEWORD_SQL:
         // sprintf(err_fn, "%d.err.out", getpid());
         strcat(err_fn, "new.err.out");
         strcpy(tranName, "NEW_ORDER");
         break;
      case DELIVERY_SQL:
         // sprintf(err_fn, "%d.err.out", getpid());
         strcat(err_fn, "del.err.out");
         strcpy(tranName, "DELIVERY");
         break;
      case PAYMENT_SQL:
         // sprintf(err_fn, "%d.err.out", getpid());
         strcat(err_fn, "pay.err.out");
         strcpy(tranName, "PAYMENT");
         break;
      case ORDSTAT_SQL:
         // sprintf(err_fn, "%d.err.out", getpid());
         strcat(err_fn, "ord.err.out");
         strcpy(tranName, "ORDER_STAT");
         break;
      case STOCKLEV_SQL:
         //sprintf(err_fn, "%d.err.out", getpid());
         strcat(err_fn, "stk.err.out");
         strcpy(tranName, "STOCK_LVL");
         break;
      case 0:
         strcat(err_fn, "cli.err.out");
         strcpy(tranName, "CLIENT");
         break;
      default:
         return;
   }
   /* Generate Formatted Error Message */
   sqlaintp(errStr, 512, 78, psqlca);
   if ((err_fp = fopen(err_fn, "a+")) == NULL)
   {
      return;
   }
   fprintf(err_fp, "---------------------------------------------\n");
   fprintf(err_fp, "Transaction: %s (%s)\n", tranName, msg);
   fprintf(err_fp, "FILE %s (%u)\n", file, line);
   fprintf(err_fp, "SQLCODE %d ", psqlca->sqlcode);
   fprintf(err_fp, "PID %d ", getpid());
   fprintf(err_fp, "TIME %s\n", timeStamp);
   fprintf(err_fp, "---------------------------------------------\n");
   fprintf(err_fp, "%s", errStr);
   fprintf(err_fp, "---------------------------------------------\n");
   if (psqlca->sqlerrmc[0] != ' ' || psqlca->sqlerrmc[1] != ' ')
   {
      fprintf(err_fp, "slerrmc:  ");
      for(j = 0; j < 5; j++)
      {
         for(k = 0; k < 16; k++) {
            int pos = j * 16 + k;
            if (pos < 70) fprintf(err_fp, "%02x ", psqlca->sqlerrmc[pos]);
            else fprintf(err_fp, "   ");
         }
         fprintf(err_fp,"   |");
         for(k = 0; k < 16; k++) {
            int pos = j * 16 + k;
            char c = ' ';
            if (pos < 70) {
               c = psqlca->sqlerrmc[pos];
               if (!isprint(c)) c = ' ';
            }
            fprintf(err_fp,"%c", c);
         }
         fprintf(err_fp,"|\n");
         if (j < 4) fprintf(err_fp,"          ");
      }
   }
   fprintf(err_fp, "sqlerrp:  ");
   for(j = 0; j < 8; j++)
      fprintf(err_fp, "%c", psqlca->sqlerrp[j]);
   fprintf(err_fp,"\n");
   fprintf(err_fp, "sqlerrd: ");
   for(j = 0; j < 6; j++)
      fprintf(err_fp, " %d", psqlca->sqlerrd[j]);
   fprintf(err_fp,"\n");
   if (psqlca->sqlwarn[0] != ' ')
   {
      fprintf(err_fp, "sqlwarn: ");
      for(j = 0; j < 8; j++)
         fprintf(err_fp, "%c ", psqlca->sqlwarn[j]);
      fprintf(err_fp,"\n");
   }
   fprintf(err_fp, "\n");
   fclose(err_fp);
}

/*-------------------------------------------------------------------*/
/* del_debug                                                         */
/*-------------------------------------------------------------------*/
void del_debug (struct out_delivery_struct *delivery_ptr,
                struct in_delivery_struct  *in_delivery,
                char *msg)
{
   char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

   InitializeDebug();
```

```
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "del.debug.out");
  del_print(delivery_ptr, in_delivery, debug_fn, msg);
}
/*----------------------------------------------------------------*/
/* del_print                                                      */
/*----------------------------------------------------------------*/
void del_print (struct out_delivery_struct *delivery_ptr,
                struct in_delivery_struct  *in_delivery,
                char *filename,
                char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  int   j;
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"Delivery debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n================================================\n");
  fprintf(debug_fp,"in_delivery_struct {\n");
  fprintf(debug_fp,"ts_W_ID        = %d (%X)\n",
          in_delivery->s_W_ID, in_delivery->s_W_ID);
  fprintf(debug_fp,"ts_O_CARRIER_ID = %d (%X)\n",
          in_delivery->s_O_CARRIER_ID, in_delivery->s_O_CARRIER_ID);
  fprintf(debug_fp,"}\n\n");
  fprintf(debug_fp,"out_delivery_struct {\n");
  fprintf(debug_fp,"ts_transtatus   = %d (%X)\n",
          delivery_ptr->s_transtatus,delivery_ptr->s_transtatus);
  fprintf(debug_fp,"tdeadlocks      = %d (%X)\n",
          delivery_ptr->deadlocks,delivery_ptr->deadlocks);
  for (j = 0; j < 10; j++) {
    fprintf(debug_fp,"t\ts_O_ID[%d]        = %d\n",
            j, delivery_ptr->s_O_ID[j]);
  }
  fprintf(debug_fp,"t}\n}\n\n");
  fclose(debug_fp);
}

/*----------------------------------------------------------------*/
/* new_debug                                                      */
/*----------------------------------------------------------------*/
void new_debug (struct out_neword_struct *neword_ptr,
                struct in_neword_struct *in_neword,
                char *msg)
{
  char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

  InitializeDebug();
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "new.debug.out");
  new_print(neword_ptr, in_neword, debug_fn, msg);
}
/*----------------------------------------------------------------*/
/* new_print                                                      */
/*----------------------------------------------------------------*/
void new_print (struct out_neword_struct *neword_ptr,
                struct in_neword_struct *in_neword,
                char *filename,
                char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  int   j, items;
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"New order debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n================================================\n");
  fprintf(debug_fp,"in_neword_struct {\n");
  fprintf(debug_fp,"ts_C_ID        = %d (%X)\n",
          in_neword->s_C_ID, in_neword->s_C_ID);
  fprintf(debug_fp,"ts_W_ID        = %d (%X)\n",
          in_neword->s_W_ID, in_neword->s_W_ID);
  fprintf(debug_fp,"ts_D_ID        = %d (%X)\n",
          in_neword->s_D_ID, in_neword->s_D_ID);
  fprintf(debug_fp,"ts_O_OL_CNT    = %d (%X)\n",
          in_neword->s_O_OL_CNT, in_neword->s_O_OL_CNT);
  fprintf(debug_fp,"ts_all_local   = %d (%X)\n",
          in_neword->s_all_local, in_neword->s_all_local);
// fprintf(debug_fp,"ts_transtatus  = %d (%X)\n",
//         in_neword->s_transtatus, in_neword->s_transtatus);
// fprintf(debug_fp,"tduplicate_items= %d (%X)\n",
//         in_neword->duplicate_items, in_neword->duplicate_items);
  fprintf(debug_fp,"titems {\n");
  items = in_neword->s_O_OL_CNT;
  for (j=0; j<items; j++) {
    if(j != 0)
      fprintf(debug_fp,"\n");
    fprintf(debug_fp,"t\ts_OL_I_ID[%d]       = %d (%X)\n",
            j, in_neword->in_item[j].s_OL_I_ID, in_neword->in_item[j].s_OL_I_ID);
    fprintf(debug_fp,"t\ts_OL_SUPPLY_W_ID[%d] = %d (%X)\n",
            j, in_neword->in_item[j].s_OL_SUPPLY_W_ID, in_neword->in_item[j].s_OL_SUPPLY_W_ID);
    fprintf(debug_fp,"t\ts_OL_QUANTITY[%d]   = %d (%X)\n",
            j, in_neword->in_item[j].s_OL_QUANTITY, in_neword->in_item[j].s_OL_QUANTITY);
  }
  fprintf(debug_fp,"t}\n}\n\n");
  fprintf(debug_fp,"out_neword_struct {\n");
  fprintf(debug_fp,"ts_C_LAST      = %s\n",
          neword_ptr->s_C_LAST);
  fprintf(debug_fp,"ts_C_CREDIT    = %s\n",
          neword_ptr->s_C_CREDIT);
  fprintf(debug_fp,"ts_W_TAX       = %04.4f \n",
          neword_ptr->s_W_TAX);
  fprintf(debug_fp,"ts_D_TAX       = %04.4f \n",
          neword_ptr->s_D_TAX);
  fprintf(debug_fp,"ts_C_DISCOUNT  = %04.4f \n",
          neword_ptr->s_C_DISCOUNT);
  fprintf(debug_fp,"ts_O_ID        = %d (%X)\n",
          neword_ptr->s_O_ID, neword_ptr->s_O_ID);
  fprintf(debug_fp,"ts_O_OL_CNT    = %d (%X)\n",
          neword_ptr->s_O_OL_CNT, neword_ptr->s_O_OL_CNT);
  fprintf(debug_fp,"ts_O_ENTRY_D   = %s \n",
          neword_ptr->s_O_ENTRY_D_time);
  fprintf(debug_fp,"ts_total_amount = %.2f \n",
          neword_ptr->s_total_amount);
  fprintf(debug_fp,"ts_transtatus  = %d (%X)\n",
          neword_ptr->s_transtatus, neword_ptr->s_transtatus);
  fprintf(debug_fp,"tdeadlocks     = %d (%X)\n",
          neword_ptr->deadlocks, neword_ptr->deadlocks);
// fprintf(debug_fp,"ts_W_ID        = %d (%X)\n",
//         neword_ptr->s_W_ID, neword_ptr->s_W_ID);
// fprintf(debug_fp,"ts_D_ID        = %d (%X)\n",
//         neword_ptr->s_D_ID, neword_ptr->s_D_ID);
// fprintf(debug_fp,"ts_all_local   = %d (%X)\n",
//         neword_ptr->s_all_local, neword_ptr->s_all_local);
// fprintf(debug_fp,"tduplicate_items= %d (%X)\n",
//         neword_ptr->duplicate_items, neword_ptr->duplicate_items);
  fprintf(debug_fp,"titems {\n");
  items = neword_ptr->s_O_OL_CNT;
  for (j=0; j<items; j++) {
    if(j != 0)
      fprintf(debug_fp,"\n");
    fprintf(debug_fp,"t\ts_I_NAME[%d]        = %s\n",
            j, neword_ptr->item[j].s_I_NAME);
    fprintf(debug_fp,"t\ts_I_PRICE[%d]       = %.2f \n",
            j, neword_ptr->item[j].s_I_PRICE);
    fprintf(debug_fp,"t\ts_OL_AMOUNT[%d]     = %.2f \n",
            j, neword_ptr->item[j].s_OL_AMOUNT);
    fprintf(debug_fp,"t\ts_S_QUANTITY[%d]    = %d (%X)\n",
            j, neword_ptr->item[j].s_S_QUANTITY, neword_ptr->item[j].s_S_QUANTITY);
    fprintf(debug_fp,"t\ts_brand_generic[%d]  = %c\n",
            j, neword_ptr->item[j].s_brand_generic);
  }
  fprintf(debug_fp,"t}\n}\n\n");
  fclose(debug_fp);
}


/*----------------------------------------------------------------*/
/* ord_debug                                                      */
/*----------------------------------------------------------------*/
void ord_debug (struct out_ordstat_struct *ordstat_ptr,
                struct in_ordstat_struct  *in_ordstat,
                char *msg)
{
  char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

  InitializeDebug();
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "ord.debug.out");
  ord_print(ordstat_ptr, in_ordstat, debug_fn, msg);
}
/*----------------------------------------------------------------*/
/* ord_print                                                      */
/*----------------------------------------------------------------*/
void ord_print (struct out_ordstat_struct *ordstat_ptr,
                struct in_ordstat_struct  *in_ordstat,
                char *filename,
                char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  int   j, items;
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"Order status debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n================================================\n");
  fprintf(debug_fp,"in_ordstat_struct {\n");
  fprintf(debug_fp,"ts_W_ID        = %d (%X)\n",
          in_ordstat->s_W_ID, in_ordstat->s_W_ID);
  fprintf(debug_fp,"ts_D_ID        = %d (%X)\n",
          in_ordstat->s_D_ID, in_ordstat->s_D_ID);
  fprintf(debug_fp,"ts_C_ID        = %d (%X)\n",
          in_ordstat->s_C_ID, in_ordstat->s_C_ID);
  fprintf(debug_fp,"ts_C_LAST      = %s\n",
          in_ordstat->s_C_LAST);
  fprintf(debug_fp,"}\n\n");
  fprintf(debug_fp,"out_ordstat_struct {\n");
  fprintf(debug_fp,"ts_C_ID        = %d (%X)\n",
          ordstat_ptr->s_C_ID, ordstat_ptr->s_C_ID);
  fprintf(debug_fp,"ts_C_FIRST     = %s\n",
          ordstat_ptr->s_C_FIRST);
  fprintf(debug_fp,"ts_C_MIDDLE    = %s\n",
          ordstat_ptr->s_C_MIDDLE);
  fprintf(debug_fp,"ts_C_LAST      = %s\n",
          ordstat_ptr->s_C_LAST);
  fprintf(debug_fp,"ts_C_BALANCE   = %.2f\n",
          ordstat_ptr->s_C_BALANCE);
  fprintf(debug_fp,"ts_O_ID        = %d (%X)\n",
          ordstat_ptr->s_O_ID, ordstat_ptr->s_O_ID);
  fprintf(debug_fp,"ts_O_ENTRY_D   = %s \n",
          ordstat_ptr->s_O_ENTRY_D_time);
  fprintf(debug_fp,"ts_O_CARRIER_ID = %d (%X)\n",
          ordstat_ptr->s_O_CARRIER_ID, ordstat_ptr->s_O_CARRIER_ID);
  fprintf(debug_fp,"ts_ol_cnt      = %d (%X)\n",
```

```
        ordstat_ptr->s_ol_cnt, ordstat_ptr->s_ol_cnt);
  fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
        ordstat_ptr->s_transtatus, ordstat_ptr->s_transtatus);
  fprintf(debug_fp,"\tdeadlocks     = %d (%X)\n",
        ordstat_ptr->deadlocks, ordstat_ptr->deadlocks);
  fprintf(debug_fp,"\titems {\n");
  items = ordstat_ptr->s_ol_cnt;
  for (j = 0; j < items; j++) {
    if(j != 0)
      fprintf(debug_fp,"\n");
    fprintf(debug_fp,"\t\ts_OL_SUPPLY_W_ID[%d] = %d (%X)\n",
        j, ordstat_ptr->item[j].s_OL_SUPPLY_W_ID, ordstat_ptr->item[j].s_OL_SUPPLY_W_ID);
    fprintf(debug_fp,"\t\ts_OL_I_ID[%d]       = %d (%X)\n",
        j, ordstat_ptr->item[j].s_OL_I_ID, ordstat_ptr->item[j].s_OL_I_ID);
    fprintf(debug_fp,"\t\ts_OL_QUANTITY[%d]    = %d (%X)\n",
        j, ordstat_ptr->item[j].s_OL_QUANTITY, ordstat_ptr->item[j].s_OL_QUANTITY);
    fprintf(debug_fp,"\t\ts_OL_AMOUNT[%d]     = %.2f\n",
        j, ordstat_ptr->item[j].s_OL_AMOUNT);
    fprintf(debug_fp,"\t\ts_OL_DELIVERY_D[%d]  = %s \n",
        j,ordstat_ptr->item[j].s_OL_DELIVERY_D_time);
  }
  fprintf(debug_fp,"\t}\n}\n\n");
  fclose(debug_fp);
}

/*---------------------------------------------------------------*/
/* pay_debug                                                     */
/*---------------------------------------------------------------*/
void pay_debug (struct out_payment_struct *payment_ptr,
            struct in_payment_struct  *in_payment,
            char *msg)
{
  char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

  InitializeDebug();
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "pay.debug.out");
  pay_print(payment_ptr, in_payment, debug_fn, msg);
}
/*---------------------------------------------------------------*/
/* pay_print                                                     */
/*---------------------------------------------------------------*/
void pay_print (struct out_payment_struct *payment_ptr,
            struct in_payment_struct  *in_payment,
            char *filename,
            char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"Payment debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n=================================================\n");
  fprintf(debug_fp,"in_payment_struct {\n");
  fprintf(debug_fp,"\ts_H_AMOUNT     = %.2f \n",
        in_payment->s_H_AMOUNT);
  fprintf(debug_fp,"\ts_C_ID        = %d (%X)\n",
        in_payment->s_C_ID, in_payment->s_C_ID);
  fprintf(debug_fp,"\ts_W_ID        = %d (%X)\n",
        in_payment->s_W_ID, in_payment->s_W_ID);
  fprintf(debug_fp,"\ts_D_ID        = %d (%X)\n",
        in_payment->s_D_ID, in_payment->s_D_ID);
  fprintf(debug_fp,"\ts_C_D_ID      = %d (%X)\n",
        in_payment->s_C_D_ID, in_payment->s_C_D_ID);
  fprintf(debug_fp,"\ts_C_W_ID      = %d (%X)\n",
        in_payment->s_C_W_ID, in_payment->s_C_W_ID);
  fprintf(debug_fp,"\ts_C_LAST      = %s\n",
        in_payment->s_C_LAST);
  fprintf(debug_fp,"\n}\n\n");
  fprintf(debug_fp,"out_payment_struct {\n");
  fprintf(debug_fp,"\ts_C_CREDIT_LIM = %.2f\n",
        payment_ptr->s_C_CREDIT_LIM);
  fprintf(debug_fp,"\ts_C_DISCOUNT   = %04.4f\n",
        payment_ptr->s_C_DISCOUNT);
  fprintf(debug_fp,"\ts_C_BALANCE    = %.2f\n",
        payment_ptr->s_C_BALANCE);
  fprintf(debug_fp,"\ts_C_ID        = %d (%X)\n",
        payment_ptr->s_C_ID, payment_ptr->s_C_ID);
  fprintf(debug_fp,"\ts_W_STREET_1   = %s\n",
        payment_ptr->s_W_STREET_1);
  fprintf(debug_fp,"\ts_W_STREET_2   = %s\n",
        payment_ptr->s_W_STREET_2);
  fprintf(debug_fp,"\ts_W_CITY      = %s\n",
        payment_ptr->s_W_CITY);
  fprintf(debug_fp,"\ts_W_STATE     = %s\n",
        payment_ptr->s_W_STATE);
  fprintf(debug_fp,"\ts_W_ZIP       = %s\n",
        payment_ptr->s_W_ZIP);
  fprintf(debug_fp,"\ts_D_STREET_1   = %s\n",
        payment_ptr->s_D_STREET_1);
  fprintf(debug_fp,"\ts_D_STREET_2   = %s\n",
        payment_ptr->s_D_STREET_2);
  fprintf(debug_fp,"\ts_D_CITY      = %s\n",
        payment_ptr->s_D_CITY);
  fprintf(debug_fp,"\ts_D_STATE     = %s\n",
        payment_ptr->s_D_STATE);
  fprintf(debug_fp,"\ts_D_ZIP       = %s\n",
        payment_ptr->s_D_ZIP);
  fprintf(debug_fp,"\ts_C_FIRST     = %s\n",
        payment_ptr->s_C_FIRST);
  fprintf(debug_fp,"\ts_C_MIDDLE    = %s\n",
        payment_ptr->s_C_MIDDLE);
  fprintf(debug_fp,"\ts_C_LAST      = %s\n",
        payment_ptr->s_C_LAST);
  fprintf(debug_fp,"\ts_C_STREET_1   = %s\n",
        payment_ptr->s_C_STREET_1);
  fprintf(debug_fp,"\ts_C_STREET_2   = %s\n",
        payment_ptr->s_C_STREET_2);
  fprintf(debug_fp,"\ts_C_CITY      = %s\n",
        payment_ptr->s_C_CITY);
  fprintf(debug_fp,"\ts_C_STATE     = %s\n",
        payment_ptr->s_C_STATE);
  fprintf(debug_fp,"\ts_C_ZIP       = %s\n",
        payment_ptr->s_C_ZIP);
  fprintf(debug_fp,"\ts_C_PHONE     = %s\n",
        payment_ptr->s_C_PHONE);
  fprintf(debug_fp,"\ts_C_SINCE     = %s \n",
        payment_ptr->s_C_SINCE_time);
  fprintf(debug_fp,"\ts_C_CREDIT    = %s\n",
        payment_ptr->s_C_CREDIT);
  fprintf(debug_fp,"\ts_C_DATA      = %s\n",
        payment_ptr->s_C_DATA);
  fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
        payment_ptr->s_transtatus,payment_ptr->s_transtatus);
  fprintf(debug_fp,"\tdeadlocks     = %d (%X)\n",
        payment_ptr->deadlocks,payment_ptr->deadlocks);
  fprintf(debug_fp,"\n}\n\n");
  fclose(debug_fp);
}

/*---------------------------------------------------------------*/
/* stk_debug                                                     */
/*---------------------------------------------------------------*/
void stk_debug (struct out_stocklev_struct *stocklev,
            struct in_stocklev_struct  *in_stocklev,
            char *msg)
{
  char debug_fn[DEBUG_PATH_SIZE + DEBUG_FILENAME_SZ];

  InitializeDebug();
  strncpy(debug_fn, debugPath, DEBUG_PATH_SIZE);
  strcat(debug_fn, "stk.debug.out");
  stk_print(stocklev, in_stocklev, debug_fn, msg);
}
/*---------------------------------------------------------------*/
/* stk_print                                                     */
/*---------------------------------------------------------------*/
void stk_print (struct out_stocklev_struct *stocklev,
            struct in_stocklev_struct  *in_stocklev,
            char *filename,
            char *msg)
{
  FILE *debug_fp;
  char  timeStamp[27];
  current_tmstmp(&timeStamp[0]);
  timeStamp[19] = (char)NULL;
  if ((debug_fp = fopen(filename, "a+")) == NULL)
  {
    return;
  }
  fprintf(debug_fp,"Stock level debug information follows %s (%s)\n", timeStamp, msg);
  fprintf(debug_fp, " PID %d ", getpid());
  fprintf(debug_fp,"\n=================================================\n");
  fprintf(debug_fp,"in_stocklev_struct {\n");
  fprintf(debug_fp,"\ts_W_ID        = %d (%X)\n",
        in_stocklev->s_W_ID, in_stocklev->s_W_ID);
  fprintf(debug_fp,"\ts_D_ID        = %d (%X)\n",
        in_stocklev->s_D_ID, in_stocklev->s_D_ID);
  fprintf(debug_fp,"\ts_threshold   = %d (%X)\n",
        in_stocklev->s_threshold, in_stocklev->s_threshold);
  fprintf(debug_fp,"}\n\n");
  fprintf(debug_fp,"out_stocklev_struct {\n");
  fprintf(debug_fp,"\ts_transtatus   = %d (%X)\n",
        stocklev->s_transtatus, stocklev->s_transtatus);
  fprintf(debug_fp,"\tdeadlocks     = %d (%X)\n",
        stocklev->deadlocks, stocklev->deadlocks);
  fprintf(debug_fp,"\ts_low_stock    = %d (%X)\n",
        stocklev->s_low_stock, stocklev->s_low_stock);
  fprintf(debug_fp,"}\n\n");
  fclose(debug_fp);
}
void current_tmstmp(char *buf)
{
  time_t t = time(NULL);
  strncpy(buf,ctime(&t),19);
}
```

Src.Common/tpccmisc.c

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * tpccmisc.c - Miscellaneous routines
 */
#include <stdlib.h>
#include <sys/types.h>
#include <sys/time.h>
double current_time_ms(void);
double current_time(void);

/* Current time in SECONDS, precision SECONDS */
```

```
double current_time(void)
{
  /* use time() to get seconds */
  return(time(NULL));
}
/* Current time in SECONDS, precision MILLISECONDS */
double current_time_ms(void)
{
   /* gettimeofday() returns seconds and microseconds */
   /* convert to fractional seconds */
  struct timeval t;
  gettimeofday(&t,NULL);
  return (t.tv_sec + (double)t.tv_usec/(1000*1000));
}
```

Src.Srv/Makefile

```
#################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
#################################################################################
#
# Makefile - Makefile for Src.Srv
#
#
include $(TPCC_ROOT)/Makefile.config
# ###############################################################################
# Preprocessor, Compiler and Linker Flags
# ###############################################################################
BND_OPTS =    GRANT PUBLIC \
              MESSAGES $*.bnd.msg
PRP_OPTS =    BINDFILE \
              EXPLAIN ALL \
              MESSAGES $*.prep.msg
INCLUDE =     -I$(TPCC_SQLLIB)/include -I$(TPCC_ROOT)/include
CFLAGS =      $(CFLAGS_OS) $(INCLUDE) $(CFLAGS_DEBUG) \
              -D$(DB2EDITION) -D$(DB2VERSION) \
              -DSQLA_NOLINES -DLINT_ARGS
LDFLAGS =     $(LDFLAGS_STORP) $(LDFLAGS_LIB)
# ###############################################################################
# File Collections
# ###############################################################################
STORED_PROCS =  new ord del
UTIL_OBJ =    $(TPCC_ROOT)/Src.Common/tpccmisc$(OBJEXT) \
              $(TPCC_ROOT)/Src.Common/tpccdbg$(OBJEXT)
EXE =         news ords dels
# ###############################################################################
# User Targets
# ###############################################################################
all:      connect explain catalog $(EXE) install plan disconnect
clean:    connect uncatalog unexplain disconnect
          - $(ERASE) $(TPCC_SPDIR)$(SLASH)news
          - $(ERASE) $(TPCC_SPDIR)$(SLASH)ords
          - $(ERASE) $(TPCC_SPDIR)$(SLASH)dels
          - $(ERASE) *.bnd *.msg *.out *$(OBJEXT) $(EXE) tpcc_all_sql.c
          - $(ERASE) TPCC_ALL.*.plan
# ###############################################################################
# Helper Targets
# ###############################################################################
catalog: uncatalog
          - perl $(TPCC_ROOT)$(SLASH)utils$(SLASH)genproc.pl $(STORED_PROCS)
          - db2 -tvf cat-proc.ddl +o -z cat-proc.out
          - db2 -td% -vf cat-func.ddl +o -z cat-func.out
uncatalog:
          - perl $(TPCC_ROOT)$(SLASH)utils$(SLASH)genproc.pl $(STORED_PROCS)
          - db2 -td% -vf uncat-func.ddl +o -z uncat-func.out
          - db2 -tvf uncat-proc.ddl +o -z uncat-proc.out
explain:
          - perl $(TPCC_ROOT)$(SLASH)utils$(SLASH)fixup_explain.pl
          - db2 -tvf $(TPCC_ROOT)$(SLASH)utils$(SLASH)EXPLAIN.DDL +o -z EXPLAIN.out
unexplain:
          - db2 -tvf $(TPCC_ROOT)$(SLASH)utils$(SLASH)UNEXPLAIN.DDL +o -z UNEXPLAIN.out
connect:
          - db2 connect to $(TPCC_DBNAME)
disconnect:
          - db2 connect reset
          - db2 terminate
plan:
          - db2exfmt -d $(TPCC_DBNAME) -e $(TPCC_SCHEMA) -s $(TPCC_SCHEMA) -w -1 -n
TPCC_ALL -g -# 0 -o TPCC_ALL.exfmt.plan
          - (export DB2EXPLN_BUFFER=3000000; db2expln -d $(TPCC_DBNAME) -c $(TPCC_SCHEMA)
-p TPCC_ALL -s 0 -g -o TPCC_ALL.expln.plan )
rebind:  connect catalog
          db2 bind tpcc_all_sql.bnd $(BND_OPTS) QUERYOPT 7
# ###############################################################################
# Install Targets
# ###############################################################################
install:   $(EXE)
          - mkdir $(TPCC_SPDIR)
          $(COPY) ords $(TPCC_SPDIR)
          $(COPY) news $(TPCC_SPDIR)
          $(COPY) dels $(TPCC_SPDIR)
# ###############################################################################
# Build Rules
# ###############################################################################
.SUFFIXES: $(OBJEXT) .c .sqc
# d230437mte: QUERYOPT 7 required for UNION ALL
# Only stock needs CS , and that can be specified on the SELECT statement
tpcc_all_sql.c:
          @echo "Prepping $*.sqc"
          -db2 prep $*.sqc $(PRP_OPTS) ISOLATION RR
          @echo "Binding $*.bnd"
          db2 bind $*.bnd $(BND_OPTS) QUERYOPT 7
# Stored procedures are built in a special way
tpcc_all_sql$(OBJEXT):
          $(CC) -c tpcc_all_sql.c $(CFLAGS) -D$(TPCC_SPTYPE) $(CFLAGS_OUT)$@
$(EXE): $(UTIL_OBJ) tpcc_all_sql.o
          $(LD_STORP) $(LDFLAGS) $(UTIL_OBJ) tpcc_all_sql.o $(LDFLAGS_OUT)$@
# ###############################################################################
# Dependencies
# ###############################################################################
# Executables (Stored Procedures)
$(EXE): $(UTIL_OBJ) tpcc_all_sql.o
# Source
tpcc_all_sql$(OBJEXT): tpcc_all_sql.c
# Headers
tpcc_all_sql.c:   $(TPCC_ROOT)/include/db2tpcc.h
```

Src.Srv/cat-func.ddl

```
------------------------------------------------------------------------
-- Licensed Materials - Property of IBM
--
-- Governed under the terms of the International
-- License Agreement for Non-Warranted Sample Code.
--
-- (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
-- All Rights Reserved.
--
-- US Government Users Restricted Rights - Use, duplication or
-- disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
------------------------------------------------------------------------
--
-- cat-func.ddl - Create table functions
--
--

--
-- DELIVERY
--

CREATE FUNCTION DEL(   W_ID          INTEGER
                     , D_ID          SMALLINT
                     , CARRIER_ID    SMALLINT
                   )

RETURNS TABLE ( O_ID INTEGER )

SPECIFIC DELIVERY

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

  DECLARE O_ID   INTEGER ;
  DECLARE C_ID   INTEGER ;
  DECLARE AMOUNT DECIMAL(12,2) ;

  /* Delete the order from new order table */

  SET VAR.O_ID = ( SELECT NO_O_ID

                     FROM OLD TABLE ( DELETE

                                        FROM ( SELECT NO_O_ID

                                                 FROM NEW_ORDER

                                                WHERE NO_W_ID = DEL.W_ID
                                                  AND NO_D_ID = DEL.D_ID

                                                ORDER BY NO_O_ID ASC

                                                FETCH FIRST 1 ROW ONLY
                                              ) AS NEW_ORDER
                                      ) AS D
                   )
  ;

  /* Update the order as delivered and retrieve the customer id */

  SET VAR.C_ID = ( SELECT O_C_ID

                     FROM OLD TABLE ( UPDATE ORDERS

                                        SET O_CARRIER_ID = DEL.CARRIER_ID

                                      WHERE O_W_ID = DEL.W_ID
                                        AND O_D_ID = DEL.D_ID
                                        AND O_ID   = VAR.O_ID
                                      ) AS U
                   )
  ;

  SET VAR.AMOUNT = ( SELECT SUM( OL_AMOUNT )

                       FROM OLD TABLE ( UPDATE ORDER_LINE

                                          SET OL_DELIVERY_D = CURRENT TIMESTAMP

                                        WHERE OL_W_ID = DEL.W_ID
                                          AND OL_D_ID = DEL.D_ID
                                          AND OL_O_ID = VAR.O_ID
                                        ) AS U
                     )
```

```
 ;

 /* Charge the customer */

 UPDATE CUSTOMER

    SET   C_BALANCE      = C_BALANCE + VAR.AMOUNT
        , C_DELIVERY_CNT = C_DELIVERY_CNT + SMALLINT( 1 )

  WHERE C_W_ID = DEL.W_ID
    AND C_D_ID = DEL.D_ID
    AND C_ID   = VAR.C_ID
 ;

 /* Return the order id to the caller (or NULL) */

 RETURN VALUES VAR.O_ID ;

END
%


--
-- ORDER STATUS
--

CREATE FUNCTION ORD_C_LAST(   W_ID INTEGER
                            , D_ID SMALLINT
                            , C_LAST VARCHAR(16)
                          )

RETURNS TABLE(   O_ID        INTEGER
               , O_CARRIER_ID SMALLINT
               , O_ENTRY_D    TIMESTAMP
               , C_BALANCE    DECIMAL(12,2)
               , C_FIRST      VARCHAR(16)
               , C_MIDDLE     CHAR(2)
               , C_ID         INTEGER
             )

SPECIFIC ORD_C_LAST

READS SQL DATA NO EXTERNAL ACTION DETERMINISTIC LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE C_BALANCE    DECIMAL(12,2) ;
 DECLARE C_FIRST      VARCHAR(16) ;
 DECLARE C_MIDDLE     CHAR(2) ;
 DECLARE C_ID         INTEGER ;
 DECLARE O_ID         INTEGER;
 DECLARE O_CARRIER_ID SMALLINT;
 DECLARE O_ENTRY_D    TIMESTAMP;

 /* Retrieve the Customer information */

 SET ( C_BALANCE, C_FIRST, C_MIDDLE, C_ID )

   = ( SELECT  C_BALANCE, C_FIRST, C_MIDDLE , C_ID

       FROM ( SELECT   C_ID
                     , C_BALANCE
                     , C_FIRST
                     , C_MIDDLE
                     , COUNT(*) OVER() AS COUNT
                     , ROWNUMBER() OVER (ORDER BY C_FIRST) AS NUM

              FROM CUSTOMER
              WHERE C_W_ID = ORD_C_LAST.W_ID
                AND C_D_ID = ORD_C_LAST.D_ID
                AND C_LAST = ORD_C_LAST.C_LAST

            ) AS V1

       WHERE NUM = (COUNT + BIGINT( 1 ) ) / BIGINT( 2 )
     )
 ;

 SET ( O_ID , O_CARRIER_ID , O_ENTRY_D )
  =   ( SELECT   O_ID
               , O_CARRIER_ID
               , O_ENTRY_D

         FROM ORDERS

         WHERE O_W_ID = ORD_C_LAST.W_ID
           AND O_D_ID = ORD_C_LAST.D_ID
           AND O_C_ID = VAR.C_ID

         ORDER BY O_ID DESC
         FETCH FIRST 1 ROW ONLY

      )
 ;


 RETURN VALUES (   VAR.O_ID
                 , VAR.O_CARRIER_ID
                 , VAR.O_ENTRY_D
                 , VAR.C_BALANCE
                 , VAR.C_FIRST
                 , VAR.C_MIDDLE
                 , VAR.C_ID
               )
 ;


END
%

CREATE FUNCTION ORD_C_ID(   W_ID INTEGER
                          , D_ID SMALLINT
                          , C_ID INTEGER
                        )

RETURNS TABLE(   O_ID        INTEGER
               , O_CARRIER_ID SMALLINT
               , O_ENTRY_D    TIMESTAMP
               , C_BALANCE    DECIMAL(12,2)
               , C_FIRST      VARCHAR(16)
               , C_MIDDLE     CHAR(2)
               , C_LAST       VARCHAR(16)
             )

SPECIFIC ORD_C_ID

READS SQL DATA NO EXTERNAL ACTION DETERMINISTIC LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE C_BALANCE    DECIMAL(12,2) ;
 DECLARE C_FIRST      VARCHAR(16) ;
 DECLARE C_MIDDLE     CHAR(2) ;
 DECLARE C_LAST       VARCHAR(16) ;
 DECLARE O_ID         INTEGER;
 DECLARE O_CARRIER_ID SMALLINT;
 DECLARE O_ENTRY_D    TIMESTAMP;

 /* Retrieve the Customer information */

 SET ( C_BALANCE, C_FIRST, C_MIDDLE, C_LAST )

   = ( SELECT  C_BALANCE, C_FIRST, C_MIDDLE, C_LAST

       FROM CUSTOMER
       WHERE C_ID   = ORD_C_ID.C_ID
         AND C_W_ID = ORD_C_ID.W_ID
         AND C_D_ID = ORD_C_ID.D_ID
     )
 ;

 SET (O_ID, O_CARRIER_ID, O_ENTRY_D)

   = ( SELECT   O_ID
             , O_CARRIER_ID
             , O_ENTRY_D

         FROM ORDERS

             WHERE O_W_ID = ORD_C_ID.W_ID
               AND O_D_ID = ORD_C_ID.D_ID
               AND O_C_ID = ORD_C_ID.C_ID

         ORDER BY O_ID DESC
         FETCH FIRST 1 ROW ONLY
       )
 ;

 RETURN VALUES (   VAR.O_ID
                 , VAR.O_CARRIER_ID
                 , VAR.O_ENTRY_D
                 , VAR.C_BALANCE
                 , VAR.C_FIRST
                 , VAR.C_MIDDLE
                 , VAR.C_LAST
               ) ;

END
%



--
-- PAYMENT
--

CREATE FUNCTION PAY_C_LAST(  W_ID INTEGER
                           , D_ID SMALLINT
                           , C_W_ID INTEGER
                           , C_D_ID SMALLINT
                           , C_LAST VARCHAR(16)
                           , H_AMOUNT DECIMAL(6,2)
                           , BAD_CREDIT_PREFIX VARCHAR(28)
                          )

RETURNS TABLE(   W_STREET_1 CHAR(20)
               , W_STREET_2 CHAR(20)
               , W_CITY CHAR(20)
               , W_STATE CHAR(2)
               , W_ZIP CHAR(9)
               , D_STREET_1 CHAR(20)
               , D_STREET_2 CHAR(20)
               , D_CITY CHAR(20)
               , D_STATE CHAR(2)
               , D_ZIP CHAR(9)
               , C_ID INTEGER
               , C_FIRST VARCHAR(16)
               , C_MIDDLE CHAR(2)
               , C_STREET_1 VARCHAR(20)
               , C_STREET_2 VARCHAR(20)
               , C_CITY VARCHAR(20)
               , C_STATE CHAR(2)
               , C_ZIP CHAR(9)
               , C_PHONE CHAR(16)
               , C_SINCE TIMESTAMP
               , C_CREDIT CHAR(2)
               , C_CREDIT_LIM DECIMAL(12,2)
               , C_DISCOUNT INTEGER
```

```
          , C_BALANCE DECIMAL(12,2)
          , C_DATA CHAR(200)
          , H_DATE TIMESTAMP
         )

SPECIFIC PAY_C_LAST

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE  W_NAME CHAR(10) ;
 DECLARE  D_NAME CHAR(10) ;

 DECLARE  W_STREET_1 CHAR(20) ;
 DECLARE  W_STREET_2 CHAR(20) ;
 DECLARE  W_CITY CHAR(20) ;
 DECLARE  W_STATE CHAR(2) ;
 DECLARE  W_ZIP CHAR(9) ;

 DECLARE  D_STREET_1 CHAR(20) ;
 DECLARE  D_STREET_2 CHAR(20) ;
 DECLARE  D_CITY CHAR(20) ;
 DECLARE  D_STATE CHAR(2) ;
 DECLARE  D_ZIP CHAR(9) ;

 DECLARE  C_ID INTEGER ;

 DECLARE  C_FIRST VARCHAR(16) ;
 DECLARE  C_MIDDLE CHAR(2) ;
 DECLARE  C_STREET_1 VARCHAR(20) ;
 DECLARE  C_STREET_2 VARCHAR(20) ;
 DECLARE  C_CITY VARCHAR(20) ;
 DECLARE  C_STATE CHAR(2) ;
 DECLARE  C_ZIP CHAR(9) ;
 DECLARE  C_PHONE CHAR(16) ;
 DECLARE  C_SINCE TIMESTAMP ;
 DECLARE  C_CREDIT CHAR(2) ;
 DECLARE  C_CREDIT_LIM DECIMAL(12,2) ;
 DECLARE  C_DISCOUNT INTEGER ;
 DECLARE  C_BALANCE DECIMAL(12,2) ;
 DECLARE  C_DATA CHAR(200) ;

 DECLARE  H_DATE TIMESTAMP ;

 /* Generate the current date and time for the payment date */
 SET H_DATE = CURRENT TIMESTAMP ;

 /* Update District and retieve its data */

 SET ( D_NAME, D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP)

  =  ( SELECT   D_NAME, D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP

       FROM OLD TABLE ( UPDATE DISTRICT

                   SET D_YTD = D_YTD + PAY_C_LAST.H_AMOUNT

                  WHERE D_W_ID = PAY_C_LAST.W_ID
                    AND D_ID   = PAY_C_LAST.D_ID
                ) AS U
    )
;

 /* Determine the C_ID */

 SET ( C_ID )

  = ( SELECT C_ID
      FROM ( SELECT   C_ID
                , COUNT(*) OVER() AS COUNT
                , ROWNUMBER() OVER (ORDER BY C_FIRST) AS NUM
             FROM CUSTOMER
             WHERE C_LAST = PAY_C_LAST.C_LAST
               AND C_W_ID = PAY_C_LAST.C_W_ID
               AND C_D_ID = PAY_C_LAST.C_D_ID
           ) AS T

     WHERE NUM = (COUNT + BIGINT( 1 ) ) / BIGINT( 2 )
   )
 ;


 /* Update the middle customer */

 SET (   C_ID, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
     , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
     , C_DISCOUNT, C_BALANCE, C_DATA )

  = ( SELECT   C_ID, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
          , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
          , C_DISCOUNT, C_BALANCE
          , CASE WHEN C_CREDIT = 'BC' THEN SUBSTR(C_DATA, 1, 200) ELSE NULL END AS
C_DATA

       FROM NEW TABLE ( UPDATE CUSTOMER

                   SET   C_BALANCE     = C_BALANCE - PAY_C_LAST.H_AMOUNT
                     , C_YTD_PAYMENT = C_YTD_PAYMENT + PAY_C_LAST.H_AMOUNT
                     , C_PAYMENT_CNT = C_PAYMENT_CNT + SMALLINT( 1 )

                     , C_DATA = CASE WHEN C_CREDIT = 'BC'
                                 THEN    CHAR( C_ID )           -- 11 bytes long
                                    || BAD_CREDIT_PREFIX       -- 28 bytes long
                                    || SUBSTR( C_DATA, 1, 461 ) -- 461 + 39 = 500
                                 ELSE C_DATA
                               END

                  WHERE C_W_ID = PAY_C_LAST.C_W_ID
                    AND C_D_ID = PAY_C_LAST.C_D_ID
                    AND C_ID   = VAR.C_ID
                ) AS U
   )
 ;

 /* Update the warehouse */

 SET ( W_NAME, W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP )

  = ( SELECT W_NAME, W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP

      FROM OLD TABLE ( UPDATE WAREHOUSE

                   SET W_YTD = W_YTD + PAY_C_LAST.H_AMOUNT

                  WHERE W_ID = PAY_C_LAST.W_ID
                ) AS U
   )
 ;

 /* Finally insert into the warehouse */

 INSERT

   INTO HISTORY ( H_C_ID, H_C_D_ID, H_C_W_ID, H_D_ID, H_W_ID, H_DATA, H_DATE,
H_AMOUNT )

   VALUES (   VAR.C_ID
         , PAY_C_LAST.C_D_ID
         , PAY_C_LAST.C_W_ID
         , PAY_C_LAST.D_ID
         , PAY_C_LAST.W_ID
         , VAR.W_NAME || CHAR( '    ', 4 )  || VAR.D_NAME
         , VAR.H_DATE
         , PAY_C_LAST.H_AMOUNT
        )
 ;

 /* Done - return the collected data */

 RETURN VALUES (   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
             , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
             , C_ID, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
             , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
             , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE
            )
 ;

END
%

CREATE FUNCTION PAY_C_ID(  W_ID INTEGER
              , D_ID SMALLINT
              , C_W_ID INTEGER
              , C_D_ID SMALLINT
              , C_ID INTEGER
              , H_AMOUNT DECIMAL(6,2)
              , BAD_CREDIT_PREFIX VARCHAR(34)
              )

RETURNS TABLE(   W_STREET_1 CHAR(20)
           , W_STREET_2 CHAR(20)
           , W_CITY CHAR(20)
           , W_STATE CHAR(2)
           , W_ZIP CHAR(9)
           , D_STREET_1 CHAR(20)
           , D_STREET_2 CHAR(20)
           , D_CITY CHAR(20)
           , D_STATE CHAR(2)
           , D_ZIP CHAR(9)
           , C_LAST VARCHAR(16)
           , C_FIRST VARCHAR(16)
           , C_MIDDLE CHAR(2)
           , C_STREET_1 VARCHAR(20)
           , C_STREET_2 VARCHAR(20)
           , C_CITY VARCHAR(20)
           , C_STATE CHAR(2)
           , C_ZIP CHAR(9)
           , C_PHONE CHAR(16)
           , C_SINCE TIMESTAMP
           , C_CREDIT CHAR(2)
           , C_CREDIT_LIM DECIMAL(12,2)
           , C_DISCOUNT REAL
           , C_BALANCE DECIMAL(12,2)
           , C_DATA CHAR(200)
           , H_DATE TIMESTAMP
         )
SPECIFIC PAY_C_ID

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE  W_NAME CHAR(10) ;
 DECLARE  D_NAME CHAR(10) ;

 DECLARE  W_STREET_1 CHAR(20) ;
 DECLARE  W_STREET_2 CHAR(20) ;
 DECLARE  W_CITY CHAR(20) ;
 DECLARE  W_STATE CHAR(2) ;
 DECLARE  W_ZIP CHAR(9) ;

 DECLARE  D_STREET_1 CHAR(20) ;
 DECLARE  D_STREET_2 CHAR(20) ;
 DECLARE  D_CITY CHAR(20) ;
 DECLARE  D_STATE CHAR(2) ;
 DECLARE  D_ZIP CHAR(9) ;
```

```
 DECLARE  C_LAST VARCHAR(16) ;

 DECLARE  C_FIRST VARCHAR(16) ;
 DECLARE  C_MIDDLE CHAR(2) ;
 DECLARE  C_STREET_1 VARCHAR(20) ;
 DECLARE  C_STREET_2 VARCHAR(20) ;
 DECLARE  C_CITY VARCHAR(20) ;
 DECLARE  C_STATE CHAR(2) ;
 DECLARE  C_ZIP CHAR(9) ;
 DECLARE  C_PHONE CHAR(16) ;
 DECLARE  C_SINCE TIMESTAMP ;
 DECLARE  C_CREDIT CHAR(2) ;
 DECLARE  C_CREDIT_LIM DECIMAL(12,2) ;
 DECLARE  C_DISCOUNT REAL ;
 DECLARE  C_BALANCE DECIMAL(12,2) ;
 DECLARE  C_DATA CHAR(200) ;
 DECLARE  H_DATE TIMESTAMP;

 /* Generate the current date and time for the payment date */
 SET H_DATE = CURRENT TIMESTAMP;

 /* Update District and retieve its data */

 SET ( D_NAME, D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP )

   =  ( SELECT   D_NAME, D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP

         FROM OLD TABLE ( UPDATE DISTRICT

                          SET D_YTD = D_YTD + PAY_C_ID.H_AMOUNT

                        WHERE D_W_ID = PAY_C_ID.W_ID
                          AND D_ID   = PAY_C_ID.D_ID
                       ) AS U
     )
 ;

 /* Update the middle customer */

 SET (   C_LAST, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
      , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
      , C_DISCOUNT, C_BALANCE, C_DATA )

   = ( SELECT   C_LAST, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
           , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
           , C_DISCOUNT, C_BALANCE
           , CASE WHEN C_CREDIT = 'BC' THEN SUBSTR(C_DATA, 1, 200) ELSE NULL END AS
C_DATA

         FROM NEW TABLE ( UPDATE CUSTOMER

                      SET   C_BALANCE     = C_BALANCE - PAY_C_ID.H_AMOUNT
                         , C_YTD_PAYMENT = C_YTD_PAYMENT + PAY_C_ID.H_AMOUNT
                         , C_PAYMENT_CNT = C_PAYMENT_CNT + SMALLINT( 1 )

                         , C_DATA = CASE WHEN C_CREDIT = 'BC'
                                     THEN   BAD_CREDIT_PREFIX       -- 34 bytes long
                                        || SUBSTR( C_DATA, 1, 466 ) -- 466 + 34 = 500 bytes
                                     ELSE C_DATA
                                END

                    WHERE C_W_ID = PAY_C_ID.C_W_ID
                      AND C_D_ID = PAY_C_ID.C_D_ID
                      AND C_ID   = PAY_C_ID.C_ID
                   ) AS U
     )
 ;

 /* Update the warehouse */

 SET ( W_NAME, W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP )

  = ( SELECT W_NAME, W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP

         FROM OLD TABLE ( UPDATE WAREHOUSE

                          SET W_YTD = W_YTD + PAY_C_ID.H_AMOUNT

                        WHERE W_ID = PAY_C_ID.W_ID
                       ) AS U
   )
 ;

 /* Finally insert into the warehouse */

 INSERT

    INTO HISTORY ( H_C_ID, H_C_D_ID, H_C_W_ID, H_D_ID, H_W_ID, H_DATA, H_DATE,
H_AMOUNT )

   VALUES (   PAY_C_ID.C_ID
          , PAY_C_ID.C_D_ID
          , PAY_C_ID.C_W_ID
          , PAY_C_ID.D_ID
          , PAY_C_ID.W_ID
          , VAR.W_NAME || CHAR( '    ', 4 ) || VAR.D_NAME
          , VAR.H_DATE
          , PAY_C_ID.H_AMOUNT
        )
 ;

 /* Done - return the collected data */

 RETURN VALUES (   W_STREET_1, W_STREET_2, W_CITY, W_STATE,  W_ZIP
             , D_STREET_1, D_STREET_2, D_CITY, D_STATE, D_ZIP
             , C_LAST, C_FIRST, C_MIDDLE, C_STREET_1, C_STREET_2
             , C_CITY, C_STATE, C_ZIP, C_PHONE, C_SINCE, C_CREDIT, C_CREDIT_LIM
             , C_DISCOUNT, C_BALANCE, C_DATA, H_DATE
           )
 ;

END
%

--
-- NEW ORDER
--

CREATE FUNCTION NEW_OL_ALL(   I_ID     INT
                    , I_QTY    SMALLINT
                    , W_ID     INT
                    , SUPP_W_ID INT
                    , O_ID     INT
                    , D_ID     SMALLINT
                   )

RETURNS TABLE(   I_PRICE      DECIMAL(5,2)
           , I_NAME       CHAR(24)
           , I_DATA       VARCHAR(50)
           , OL_DIST_INFO  CHAR(24)
           , S_DATA       VARCHAR(50)
           , S_QUANTITY    SMALLINT
          )

SPECIFIC NEW_OL_ALL

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

  DECLARE I_PRICE      DECIMAL(5,2) ;
  DECLARE I_NAME       CHAR(24)  ;
  DECLARE I_DATA       VARCHAR(50)  ;
  DECLARE OL_DIST_INFO  CHAR(24)  ;
  DECLARE S_DATA       VARCHAR(50)  ;
  DECLARE S_QUANTITY    SMALLINT  ;

 SET   ( I_PRICE , I_NAME , I_DATA )

  =  ( SELECT
           I_PRICE
         , I_NAME
         , I_DATA

       FROM ITEM

      WHERE ITEM.I_ID = NEW_OL_ALL.I_ID
    ) ;

  SET ( OL_DIST_INFO , S_DATA , S_QUANTITY )

    = ( SELECT   OL_DIST_INFO
          , S_DATA
          , S_QUANTITY

        FROM NEW TABLE (    UPDATE STOCK

                    INCLUDE (  OL_DIST_INFO CHAR( 24 ) )

                      SET S_QUANTITY = CASE WHEN S_QUANTITY - NEW_OL_ALL.I_QTY >= 10
                                  THEN S_QUANTITY - NEW_OL_ALL.I_QTY
                                  ELSE S_QUANTITY - NEW_OL_ALL.I_QTY + 91
                             END

                          , S_ORDER_CNT = S_ORDER_CNT + SMALLINT( 1 )

                          , S_YTD = S_YTD + NEW_OL_ALL.I_QTY

                          , S_REMOTE_CNT = CASE WHEN NEW_OL_ALL.SUPP_W_ID =
NEW_OL_ALL.W_ID
                                       THEN S_REMOTE_CNT
                                       ELSE S_REMOTE_CNT + SMALLINT( 1 )
                                  END

                          , OL_DIST_INFO = CASE D_ID WHEN SMALLINT(  1 )  THEN
S_DIST_01
                                            WHEN SMALLINT(  2 )  THEN S_DIST_02
                                            WHEN SMALLINT(  3 )  THEN S_DIST_03
                                            WHEN SMALLINT(  4 )  THEN S_DIST_04
                                            WHEN SMALLINT(  5 )  THEN S_DIST_05
                                            WHEN SMALLINT(  6 )  THEN S_DIST_06
                                            WHEN SMALLINT(  7 )  THEN S_DIST_07
                                            WHEN SMALLINT(  8 )  THEN S_DIST_08
                                            WHEN SMALLINT(  9 )  THEN S_DIST_09
                                            WHEN SMALLINT( 10 )  THEN S_DIST_10
                                       END
                    WHERE S_I_ID = NEW_OL_ALL.I_ID
                      AND S_W_ID = NEW_OL_ALL.SUPP_W_ID
                   ) AS U
     )
  ;

   RETURN VALUES(   VAR.I_PRICE
             , VAR.I_NAME
             , VAR.I_DATA
             , VAR.OL_DIST_INFO
             , VAR.S_DATA
             , VAR.S_QUANTITY
           )
   ;

END
%

CREATE FUNCTION NEW_OL_LOCAL(   I_ID     INT
                    , I_QTY    SMALLINT
                    , W_ID     INT
                    , O_ID     INT
```

```
                    , D_ID     SMALLINT
                   )

RETURNS TABLE(   I_PRICE      DECIMAL(5,2)
             , I_NAME       CHAR(24)
             , I_DATA       VARCHAR(50)
             , OL_DIST_INFO  CHAR(24)
             , S_DATA       VARCHAR(50)
             , S_QUANTITY    SMALLINT
            )

SPECIFIC NEW_OL_LOCAL

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE I_PRICE      DECIMAL(5,2)  ;
 DECLARE I_NAME       CHAR(24)  ;
 DECLARE I_DATA       VARCHAR(50)  ;
 DECLARE OL_DIST_INFO  CHAR(24)  ;
 DECLARE S_DATA       VARCHAR(50)  ;
 DECLARE S_QUANTITY    SMALLINT  ;


 SET   ( I_PRICE , I_NAME , I_DATA )

  =  ( SELECT
             I_PRICE
           , I_NAME
           , I_DATA

       FROM ITEM

      WHERE ITEM.I_ID = NEW_OL_LOCAL.I_ID
    ) ;

  SET ( OL_DIST_INFO , S_DATA , S_QUANTITY )

   = ( SELECT   OL_DIST_INFO
           , S_DATA
           , S_QUANTITY

       FROM NEW TABLE (    UPDATE STOCK

                    INCLUDE (  OL_DIST_INFO CHAR( 24 )  )

                      SET S_QUANTITY = CASE WHEN S_QUANTITY - NEW_OL_LOCAL.I_QTY >= 10
                                  THEN S_QUANTITY - NEW_OL_LOCAL.I_QTY
                                  ELSE S_QUANTITY - NEW_OL_LOCAL.I_QTY + 91
                             END

                             , S_ORDER_CNT = S_ORDER_CNT + SMALLINT( 1 )

                             , S_YTD = S_YTD + NEW_OL_LOCAL.I_QTY

                             , OL_DIST_INFO = CASE D_ID WHEN SMALLINT(  1 )  THEN
S_DIST_01
                                                 WHEN SMALLINT(  2 )  THEN S_DIST_02
                                                 WHEN SMALLINT(  3 )  THEN S_DIST_03
                                                 WHEN SMALLINT(  4 )  THEN S_DIST_04
                                                 WHEN SMALLINT(  5 )  THEN S_DIST_05
                                                 WHEN SMALLINT(  6 )  THEN S_DIST_06
                                                 WHEN SMALLINT(  7 )  THEN S_DIST_07
                                                 WHEN SMALLINT(  8 )  THEN S_DIST_08
                                                 WHEN SMALLINT(  9 )  THEN S_DIST_09
                                                 WHEN SMALLINT( 10 )  THEN S_DIST_10
                                           END
                       WHERE S_I_ID = NEW_OL_LOCAL.I_ID
                         AND S_W_ID = NEW_OL_LOCAL.W_ID
                     ) AS U
    )
  ;

  RETURN VALUES(   VAR.I_PRICE
             , VAR.I_NAME
             , VAR.I_DATA
             , VAR.OL_DIST_INFO
             , VAR.S_DATA
             , VAR.S_QUANTITY
            )
  ;

END
%

CREATE FUNCTION NEW_WH (   O_ID       INTEGER
                  , W_ID       INTEGER
                  , D_ID       SMALLINT
                  , C_ID       INTEGER
                  , O_OL_CNT    SMALLINT
                  , O_ALL_LOCAL SMALLINT
                 )

RETURNS TABLE (   W_TAX      REAL
            , C_DISCOUNT  REAL
            , C_LAST     VARCHAR(16)
            , C_CREDIT    CHAR(2)
            , O_ENTRY_D   TIMESTAMP
           )

SPECIFIC NEW_WH

MODIFIES SQL DATA DETERMINISTIC NO EXTERNAL ACTION LANGUAGE SQL

VAR: BEGIN ATOMIC

 DECLARE C_DISCOUNT  REAL ;
 DECLARE C_LAST     VARCHAR(16) ;
 DECLARE C_CREDIT    CHAR(2) ;
 DECLARE W_TAX      REAL ;
 DECLARE O_ENTRY_D   TIMESTAMP;

 SET O_ENTRY_D = CURRENT TIMESTAMP;

 INSERT

  INTO NEW_ORDER ( NO_O_ID, NO_D_ID, NO_W_ID )

       VALUES (   O_ID
             , D_ID
             , W_ID
            )
;


 INSERT

  INTO ORDERS ( O_C_ID, O_ENTRY_D, O_CARRIER_ID, O_OL_CNT, O_ALL_LOCAL, O_ID,
O_W_ID, O_D_ID )

      VALUES (   C_ID
            , O_ENTRY_D
            , 0
            , O_OL_CNT
            , O_ALL_LOCAL
            , O_ID
            , W_ID
            , D_ID
           )
;

 SET ( C_DISCOUNT, C_LAST, C_CREDIT )

  =  ( SELECT  C_DISCOUNT, C_LAST, C_CREDIT

       FROM  CUSTOMER

      WHERE  C_ID = NEW_WH.C_ID
       AND  C_W_ID = W_ID
       AND  C_D_ID = D_ID
    )
 ;


 SET W_TAX
  =   ( SELECT W_TAX

        FROM WAREHOUSE

       WHERE W_ID = NEW_WH.W_ID
      )
 ;

 RETURN VALUES ( W_TAX , C_DISCOUNT , C_LAST , C_CREDIT, O_ENTRY_D ) ;

END
%
```

Src.Srv/dels.exp

```
#! Export file
dels
```

Src.Srv/news.exp

```
#! Export file
news
```

Src.Srv/ords.exp

```
#! Export file
ords
```

Src.Srv/tpcc_all_sql.sqc

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/

/*
 * tpcc_all_sql.sqc - Client/Server code for TPCC
 *
 */

#include <stdlib.h>
#include <errno.h>
#include "db2tpcc.h"
#include "tpccapp.h"
#include "tpccdbg.h"
```

```
#include "sqlca.h"
#include "sql.h"

// ------------------------------------------------------------------
// New Order  SERVER
// ------------------------------------------------------------------

int  static is_ORIGINAL( char *string, short length ) ;

SQL_API_RC new_order_internal( char *pin, char *pout )
{

  struct out_neword_struct *neword;

  struct in_neword_struct  *in_neword;

  struct sqlca sqlca ;

  int    fbadItemDetected = 0 ;

  EXEC SQL BEGIN DECLARE SECTION;

    char   c_last [ 16 ] ;
    char   c_credit [ 2 ] ;
    float  c_discount ;
    float  dist_tax ;
    float  ware_tax ;

    sqlint32  w_id ;
    short     d_id ;
    sqlint32  c_id ;

    sqlint32  next_o_id ;

    short     s_quantity ;

    sqlint32  supply_w_id ;

    short   inputItemCount ;

    char    stockDistrictInformation [ 24 ];
    char    item_name[ 24 ] ;

    char    o_entry_d [27];

    short   allLocal ;

    float   item_price ;

    struct i_data_type { short len ; char data[ 50 ] ; } i_data ;
    struct s_data_type { short len ; char data[ 50 ] ; } s_data ;

    sqlint32   id0, id1, id2,  id3,  id4,  id5,  id6,  id7;
    sqlint32   id8, id9, id10, id11, id12, id13, id14;

    sqlint32  supply_w_id0,  supply_w_id1, supply_w_id2,  supply_w_id3;
    sqlint32  supply_w_id4,  supply_w_id5, supply_w_id6,  supply_w_id7;
    sqlint32  supply_w_id8,  supply_w_id9, supply_w_id10,  supply_w_id11;
    sqlint32  supply_w_id12,  supply_w_id13, supply_w_id14;

    short  ol_quantity0,  ol_quantity1, ol_quantity2,  ol_quantity3;
    short  ol_quantity4,  ol_quantity5, ol_quantity6,  ol_quantity7;
    short  ol_quantity8,  ol_quantity9, ol_quantity10,  ol_quantity11;
    short  ol_quantity12,  ol_quantity13, ol_quantity14;


  EXEC SQL END DECLARE SECTION;

  int     storedProcRc ;
  int     inputItemArrayIndex ;

  char    stockDistrictInformationArray [15][25];

#define stockDistrictInformation  stockDistrictInformationArray[ inputItemArrayIndex ]

// Redirected input fields

#define w_id in_neword->s_W_ID
#define d_id in_neword->s_D_ID
#define c_id in_neword->s_C_ID

#define inputItemCount in_neword->s_O_OL_CNT

#define allLocal in_neword->s_all_local

// Redirected output fields

#define  c_last       neword->s_C_LAST
#define  c_credit     neword->s_C_CREDIT
#define  c_discount   neword->s_C_DISCOUNT
#define  ware_tax     neword->s_W_TAX
#define  dist_tax     neword->s_D_TAX
#define  s_quantity   neword->item[ inputItemArrayIndex ].s_S_QUANTITY
#define o_entry_d     neword->s_O_ENTRY_D_time

// This output field becomes an input field to order_line

#define next_o_id neword->s_O_ID

// item price/name

#define  item_name    neword->item[ inputItemArrayIndex ].s_I_NAME

float    i_priceArray[ 15 ] ;

#define  item_price   i_priceArray[ inputItemArrayIndex ]

// Handle the generic/brand distinction

struct  i_data_type i_dataArray[ 15 ] ;
struct  s_data_type s_dataArray[ 15 ] ;

#define  i_data       i_dataArray[ inputItemArrayIndex ]
#define  s_data       s_dataArray[ inputItemArrayIndex ]

// Redirect hostvars to input structure

#define  id0  in_neword->in_item[0].s_OL_I_ID
#define  id1  in_neword->in_item[1].s_OL_I_ID
#define  id2  in_neword->in_item[2].s_OL_I_ID
#define  id3  in_neword->in_item[3].s_OL_I_ID
#define  id4  in_neword->in_item[4].s_OL_I_ID
#define  id5  in_neword->in_item[5].s_OL_I_ID
#define  id6  in_neword->in_item[6].s_OL_I_ID
#define  id7  in_neword->in_item[7].s_OL_I_ID
#define  id8  in_neword->in_item[8].s_OL_I_ID
#define  id9  in_neword->in_item[9].s_OL_I_ID
#define  id10 in_neword->in_item[10].s_OL_I_ID
#define  id11 in_neword->in_item[11].s_OL_I_ID
#define  id12 in_neword->in_item[12].s_OL_I_ID
#define  id13 in_neword->in_item[13].s_OL_I_ID
#define  id14 in_neword->in_item[14].s_OL_I_ID

#define ol_quantity0  in_neword->in_item[  0 ].s_OL_QUANTITY
#define ol_quantity1  in_neword->in_item[  1 ].s_OL_QUANTITY
#define ol_quantity2  in_neword->in_item[  2 ].s_OL_QUANTITY
#define ol_quantity3  in_neword->in_item[  3 ].s_OL_QUANTITY
#define ol_quantity4  in_neword->in_item[  4 ].s_OL_QUANTITY
#define ol_quantity5  in_neword->in_item[  5 ].s_OL_QUANTITY
#define ol_quantity6  in_neword->in_item[  6 ].s_OL_QUANTITY
#define ol_quantity7  in_neword->in_item[  7 ].s_OL_QUANTITY
#define ol_quantity8  in_neword->in_item[  8 ].s_OL_QUANTITY
#define ol_quantity9  in_neword->in_item[  9 ].s_OL_QUANTITY
#define ol_quantity10 in_neword->in_item[ 10 ].s_OL_QUANTITY
#define ol_quantity11 in_neword->in_item[ 11 ].s_OL_QUANTITY
#define ol_quantity12 in_neword->in_item[ 12 ].s_OL_QUANTITY
#define ol_quantity13 in_neword->in_item[ 13 ].s_OL_QUANTITY
#define ol_quantity14 in_neword->in_item[ 14 ].s_OL_QUANTITY

#define supply_w_id0  in_neword->in_item[  0 ].s_OL_SUPPLY_W_ID
#define supply_w_id1  in_neword->in_item[  1 ].s_OL_SUPPLY_W_ID
#define supply_w_id2  in_neword->in_item[  2 ].s_OL_SUPPLY_W_ID
#define supply_w_id3  in_neword->in_item[  3 ].s_OL_SUPPLY_W_ID
#define supply_w_id4  in_neword->in_item[  4 ].s_OL_SUPPLY_W_ID
#define supply_w_id5  in_neword->in_item[  5 ].s_OL_SUPPLY_W_ID
#define supply_w_id6  in_neword->in_item[  6 ].s_OL_SUPPLY_W_ID
#define supply_w_id7  in_neword->in_item[  7 ].s_OL_SUPPLY_W_ID
#define supply_w_id8  in_neword->in_item[  8 ].s_OL_SUPPLY_W_ID
#define supply_w_id9  in_neword->in_item[  9 ].s_OL_SUPPLY_W_ID
#define supply_w_id10 in_neword->in_item[ 10 ].s_OL_SUPPLY_W_ID
#define supply_w_id11 in_neword->in_item[ 11 ].s_OL_SUPPLY_W_ID
#define supply_w_id12 in_neword->in_item[ 12 ].s_OL_SUPPLY_W_ID
#define supply_w_id13 in_neword->in_item[ 13 ].s_OL_SUPPLY_W_ID
#define supply_w_id14 in_neword->in_item[ 14 ].s_OL_SUPPLY_W_ID

EXEC SQL DECLARE ISOL_Remote_1 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_SUPPLY_W_ID
                                  , I_QTY

                              FROM  Table( VALUES

                                    (  SMALLINT( 1 )        , :id0  , :ol_quantity0  , :supply_w_id0  )

                                   ) AS X ( OL_NUMBER , I_ID  , I_QTY          , I_SUPPLY_W_ID  )
                            ) AS ITEMLIST

                          , TABLE( NEW_OL_ALL(   I_ID
                                        , I_QTY
                                        , W_ID
                                        , I_SUPPLY_W_ID
                                        , O_ID
                                        , D_ID
                                        )
                              ) AS NEW_OL_ALL

                        WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
              )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

                (   OL_O_ID
                  , OL_D_ID
                  , OL_W_ID
                  , OL_NUMBER
                  , OL_I_ID
                  , OL_SUPPLY_W_ID
                  , OL_DELIVERY_D
                  , OL_QUANTITY
```

```
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_2 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_SUPPLY_W_ID
                              , I_QTY

                         FROM  Table( VALUES

                                 (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                               , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )

                               ) AS X ( OL_NUMBER , I_ID  , I_QTY         , I_SUPPLY_W_ID  )
                       ) AS ITEMLIST

                     , TABLE( NEW_OL_ALL(   I_ID
                                          , I_QTY
                                          , W_ID
                                          , I_SUPPLY_W_ID
                                          , O_ID
                                          , D_ID
                                        )
                       ) AS NEW_OL_ALL

                  WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (  OL_O_ID
               , OL_D_ID
               , OL_W_ID
               , OL_NUMBER
               , OL_I_ID
               , OL_SUPPLY_W_ID
               , OL_DELIVERY_D
               , OL_QUANTITY
               , OL_AMOUNT
               , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_3 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_SUPPLY_W_ID
                              , I_QTY

                         FROM  Table( VALUES

                                 (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                               , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                               , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )

                               ) AS X ( OL_NUMBER , I_ID  , I_QTY         , I_SUPPLY_W_ID  )
                       ) AS ITEMLIST

                     , TABLE( NEW_OL_ALL(   I_ID
                                          , I_QTY
                                          , W_ID
                                          , I_SUPPLY_W_ID
                                          , O_ID
                                          , D_ID
                                        )
                       ) AS NEW_OL_ALL

                  WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (  OL_O_ID
               , OL_D_ID
               , OL_W_ID
               , OL_NUMBER
               , OL_I_ID
               , OL_SUPPLY_W_ID
               , OL_DELIVERY_D
               , OL_QUANTITY
               , OL_AMOUNT
               , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_4 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_SUPPLY_W_ID
                              , I_QTY

                         FROM  Table( VALUES

                                 (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                               , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                               , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
```

```
                                , (  SMALLINT( 4 )        , :id3  , :ol_quantity3  , :supply_w_id3  )

                              ) AS X ( OL_NUMBER , I_ID  , I_QTY         , I_SUPPLY_W_ID  )
                        ) AS ITEMLIST

                        , TABLE( NEW_OL_ALL(   I_ID
                                             , I_QTY
                                             , W_ID
                                             , I_SUPPLY_W_ID
                                             , O_ID
                                             , D_ID
                                           )
                          ) AS NEW_OL_ALL

                      WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
            )


    SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

      FROM NEW TABLE ( INSERT INTO ORDER_LINE

                 (   OL_O_ID
                   , OL_D_ID
                   , OL_W_ID
                   , OL_NUMBER
                   , OL_I_ID
                   , OL_SUPPLY_W_ID
                   , OL_DELIVERY_D
                   , OL_QUANTITY
                   , OL_AMOUNT
                   , OL_DIST_INFO
                 )

                 INCLUDE (   I_PRICE    DECIMAL(5,2)
                           , I_NAME     CHAR(24)
                           , I_DATA     VARCHAR(50)
                           , S_DATA     VARCHAR(50)
                           , S_QUANTITY SMALLINT )

                       SELECT   O_ID
                            , D_ID
                            , W_ID
                            , OL_NUMBER
                            , I_ID
                            , I_SUPPLY_W_ID
                            , OL_DELIVERY_D
                            , I_QTY
                            , TOTAL_PRICE
                            , OL_DIST_INFO
                            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                       FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_5 CURSOR FOR

    WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                      FROM ( SELECT   :next_o_id as O_ID
                                    , :w_id AS W_ID
                                    , :d_id as D_ID
                                    , OL_NUMBER
                                    , I_ID
                                    , I_SUPPLY_W_ID
                                    , I_QTY

                               FROM  Table( VALUES

                                      (  SMALLINT( 1 )        , :id0  , :ol_quantity0  , :supply_w_id0  )
                                    , (  SMALLINT( 2 )        , :id1  , :ol_quantity1  , :supply_w_id1  )
                                    , (  SMALLINT( 3 )        , :id2  , :ol_quantity2  , :supply_w_id2  )
                                    , (  SMALLINT( 4 )        , :id3  , :ol_quantity3  , :supply_w_id3  )
                                    , (  SMALLINT( 5 )        , :id4  , :ol_quantity4  , :supply_w_id4  )

                                  ) AS X ( OL_NUMBER , I_ID  , I_QTY         , I_SUPPLY_W_ID  )
                            ) AS ITEMLIST

                          , TABLE( NEW_OL_ALL(   I_ID
                                               , I_QTY
                                               , W_ID
                                               , I_SUPPLY_W_ID
                                               , O_ID
                                               , D_ID
                                             )
                            ) AS NEW_OL_ALL

                        WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
              )


      SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

        FROM NEW TABLE ( INSERT INTO ORDER_LINE

                   (   OL_O_ID
                     , OL_D_ID
                     , OL_W_ID
                     , OL_NUMBER
                     , OL_I_ID
                     , OL_SUPPLY_W_ID
                     , OL_DELIVERY_D
                     , OL_QUANTITY
                     , OL_AMOUNT
                     , OL_DIST_INFO
                   )

                   INCLUDE (   I_PRICE    DECIMAL(5,2)
                             , I_NAME     CHAR(24)
                             , I_DATA     VARCHAR(50)
                             , S_DATA     VARCHAR(50)
                             , S_QUANTITY SMALLINT )

                         SELECT   O_ID
                              , D_ID
                              , W_ID
                              , OL_NUMBER
                              , I_ID
                              , I_SUPPLY_W_ID
                              , OL_DELIVERY_D
                              , I_QTY
                              , TOTAL_PRICE
                              , OL_DIST_INFO
                              , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                         FROM DATA

                  ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_6 CURSOR FOR

    WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                      FROM ( SELECT   :next_o_id as O_ID
                                    , :w_id AS W_ID
                                    , :d_id as D_ID
                                    , OL_NUMBER
                                    , I_ID
                                    , I_SUPPLY_W_ID
                                    , I_QTY

                               FROM  Table( VALUES

                                      (  SMALLINT( 1 )        , :id0  , :ol_quantity0  , :supply_w_id0  )
                                    , (  SMALLINT( 2 )        , :id1  , :ol_quantity1  , :supply_w_id1  )
                                    , (  SMALLINT( 3 )        , :id2  , :ol_quantity2  , :supply_w_id2  )
                                    , (  SMALLINT( 4 )        , :id3  , :ol_quantity3  , :supply_w_id3  )
                                    , (  SMALLINT( 5 )        , :id4  , :ol_quantity4  , :supply_w_id4  )
                                    , (  SMALLINT( 6 )        , :id5  , :ol_quantity5  , :supply_w_id5  )

                                  ) AS X ( OL_NUMBER , I_ID  , I_QTY         , I_SUPPLY_W_ID  )
                            ) AS ITEMLIST

                          , TABLE( NEW_OL_ALL(   I_ID
                                               , I_QTY
                                               , W_ID
                                               , I_SUPPLY_W_ID
                                               , O_ID
                                               , D_ID
                                             )
                            ) AS NEW_OL_ALL

                        WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
              )


    SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

      FROM NEW TABLE ( INSERT INTO ORDER_LINE

                 (   OL_O_ID
                   , OL_D_ID
                   , OL_W_ID
                   , OL_NUMBER
                   , OL_I_ID
                   , OL_SUPPLY_W_ID
                   , OL_DELIVERY_D
                   , OL_QUANTITY
                   , OL_AMOUNT
                   , OL_DIST_INFO
                 )

                 INCLUDE (   I_PRICE    DECIMAL(5,2)
                           , I_NAME     CHAR(24)
                           , I_DATA     VARCHAR(50)
                           , S_DATA     VARCHAR(50)
                           , S_QUANTITY SMALLINT )

                       SELECT   O_ID
                            , D_ID
                            , W_ID
                            , OL_NUMBER
                            , I_ID
                            , I_SUPPLY_W_ID
                            , OL_DELIVERY_D
                            , I_QTY
```

```
                    , TOTAL_PRICE
                    , OL_DIST_INFO
                    , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_7 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , I_QTY

                    FROM  Table( VALUES

                            (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                          , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                          , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                          , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                          , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                          , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                          , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )

                        ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                ) AS ITEMLIST

                , TABLE( NEW_OL_ALL(  I_ID
                            , I_QTY
                            , W_ID
                            , I_SUPPLY_W_ID
                            , O_ID
                            , D_ID
                           )
                ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


   SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

            (  OL_O_ID
              , OL_D_ID
              , OL_W_ID
              , OL_NUMBER
              , OL_I_ID
              , OL_SUPPLY_W_ID
              , OL_DELIVERY_D
              , OL_QUANTITY
              , OL_AMOUNT
              , OL_DIST_INFO
            )

            INCLUDE (  I_PRICE   DECIMAL(5,2)
                    , I_NAME    CHAR(24)
                    , I_DATA    VARCHAR(50)
                    , S_DATA    VARCHAR(50)
                    , S_QUANTITY SMALLINT )

                SELECT  O_ID
                    , D_ID
                    , W_ID
                    , OL_NUMBER
                    , I_ID
                    , I_SUPPLY_W_ID
                    , OL_DELIVERY_D
                    , I_QTY
                    , TOTAL_PRICE
                    , OL_DIST_INFO
                    , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_8 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , I_QTY

                    FROM  Table( VALUES

                            (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                          , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                          , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                          , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                          , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                          , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                          , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                          , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )

                        ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                ) AS ITEMLIST

                , TABLE( NEW_OL_ALL(  I_ID
                            , I_QTY
                            , W_ID
                            , I_SUPPLY_W_ID
                            , O_ID
                            , D_ID
                           )
                ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


   SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

            (  OL_O_ID
              , OL_D_ID
              , OL_W_ID
              , OL_NUMBER
              , OL_I_ID
              , OL_SUPPLY_W_ID
              , OL_DELIVERY_D
              , OL_QUANTITY
              , OL_AMOUNT
              , OL_DIST_INFO
            )

            INCLUDE (  I_PRICE   DECIMAL(5,2)
                    , I_NAME    CHAR(24)
                    , I_DATA    VARCHAR(50)
                    , S_DATA    VARCHAR(50)
                    , S_QUANTITY SMALLINT )

                SELECT  O_ID
                    , D_ID
                    , W_ID
                    , OL_NUMBER
                    , I_ID
                    , I_SUPPLY_W_ID
                    , OL_DELIVERY_D
                    , I_QTY
                    , TOTAL_PRICE
                    , OL_DIST_INFO
                    , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_9 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , I_QTY

                    FROM  Table( VALUES

                            (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                          , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                          , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                          , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                          , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                          , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                          , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                          , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )
                          , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8  )

                        ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
```

```
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_ALL(   I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                               )
                    ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

 FROM NEW TABLE ( INSERT INTO ORDER_LINE

            (   OL_O_ID
              , OL_D_ID
              , OL_W_ID
              , OL_NUMBER
              , OL_I_ID
              , OL_SUPPLY_W_ID
              , OL_DELIVERY_D
              , OL_QUANTITY
              , OL_AMOUNT
              , OL_DIST_INFO
            )

            INCLUDE (   I_PRICE    DECIMAL(5,2)
                  , I_NAME     CHAR(24)
                  , I_DATA     VARCHAR(50)
                  , S_DATA     VARCHAR(50)
                  , S_QUANTITY SMALLINT )

                SELECT   O_ID
                     , D_ID
                     , W_ID
                     , OL_NUMBER
                     , I_ID
                     , I_SUPPLY_W_ID
                     , OL_DELIVERY_D
                     , I_QTY
                     , TOTAL_PRICE
                     , OL_DIST_INFO
                     , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_10 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
          , D_ID
          , W_ID
          , OL_NUMBER
          , I_ID
          , I_SUPPLY_W_ID
          , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
          , I_QTY
          , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
          , OL_DIST_INFO
          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                          , :w_id AS W_ID
                          , :d_id as D_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , I_QTY

                       FROM  Table( VALUES

                              (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0 )
                            , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1 )
                            , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2 )
                            , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3 )
                            , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4 )
                            , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5 )
                            , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6 )
                            , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7 )
                            , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8 )
                            , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )

                           ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_ALL(   I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                               )
                    ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

 FROM NEW TABLE ( INSERT INTO ORDER_LINE

            (   OL_O_ID
              , OL_D_ID
              , OL_W_ID
              , OL_NUMBER
              , OL_I_ID
              , OL_SUPPLY_W_ID
              , OL_DELIVERY_D
              , OL_QUANTITY
              , OL_AMOUNT
              , OL_DIST_INFO
            )

            INCLUDE (   I_PRICE    DECIMAL(5,2)
                  , I_NAME     CHAR(24)
                  , I_DATA     VARCHAR(50)
                  , S_DATA     VARCHAR(50)
                  , S_QUANTITY SMALLINT )

                SELECT   O_ID
                     , D_ID
                     , W_ID
                     , OL_NUMBER
                     , I_ID
                     , I_SUPPLY_W_ID
                     , OL_DELIVERY_D
                     , I_QTY
                     , TOTAL_PRICE
                     , OL_DIST_INFO
                     , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_11 CURSOR FOR

WITH DATA AS (  SELECT  O_ID
          , D_ID
          , W_ID
          , OL_NUMBER
          , I_ID
          , I_SUPPLY_W_ID
          , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
          , I_QTY
          , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
          , OL_DIST_INFO
          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                          , :w_id AS W_ID
                          , :d_id as D_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , I_QTY

                       FROM  Table( VALUES

                              (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0 )
                            , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1 )
                            , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2 )
                            , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3 )
                            , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4 )
                            , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5 )
                            , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6 )
                            , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7 )
                            , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8 )
                            , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )
                            , (  SMALLINT( 11 )      , :id10 , :ol_quantity10 , :supply_w_id10  )

                           ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_ALL(   I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                               )
                    ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

 FROM NEW TABLE ( INSERT INTO ORDER_LINE

            (   OL_O_ID
              , OL_D_ID
              , OL_W_ID
              , OL_NUMBER
              , OL_I_ID
              , OL_SUPPLY_W_ID
              , OL_DELIVERY_D
              , OL_QUANTITY
              , OL_AMOUNT
              , OL_DIST_INFO
            )

            INCLUDE (   I_PRICE    DECIMAL(5,2)
                  , I_NAME     CHAR(24)
                  , I_DATA     VARCHAR(50)
                  , S_DATA     VARCHAR(50)
                  , S_QUANTITY SMALLINT )

                SELECT   O_ID
```

```
                    , D_ID
                    , W_ID
                    , OL_NUMBER
                    , I_ID
                    , I_SUPPLY_W_ID
                    , OL_DELIVERY_D
                    , I_QTY
                    , TOTAL_PRICE
                    , OL_DIST_INFO
                    , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_12 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
          , D_ID
          , W_ID
          , OL_NUMBER
          , I_ID
          , I_SUPPLY_W_ID
          , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
          , I_QTY
          , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
          , OL_DIST_INFO
          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , I_QTY

                    FROM  Table( VALUES

                            (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                          , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                          , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                          , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                          , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                          , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                          , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                          , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )
                          , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8  )
                          , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )
                          , (  SMALLINT( 11 )      , :id10 , :ol_quantity10 , :supply_w_id10 )
                          , (  SMALLINT( 12 )      , :id11 , :ol_quantity11 , :supply_w_id11 )

                        ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                ) AS ITEMLIST

                , TABLE( NEW_OL_ALL(   I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                                )
                        ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

                (  OL_O_ID
                  , OL_D_ID
                  , OL_W_ID
                  , OL_NUMBER
                  , OL_I_ID
                  , OL_SUPPLY_W_ID
                  , OL_DELIVERY_D
                  , OL_QUANTITY
                  , OL_AMOUNT
                  , OL_DIST_INFO
                )

                INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                    SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                    FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_13 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
          , D_ID
          , W_ID
          , OL_NUMBER
          , I_ID
          , I_SUPPLY_W_ID
          , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
          , I_QTY
          , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
          , OL_DIST_INFO
          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , I_QTY

                    FROM  Table( VALUES

                            (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                          , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                          , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                          , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                          , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                          , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                          , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                          , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )
                          , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8  )
                          , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )
                          , (  SMALLINT( 11 )      , :id10 , :ol_quantity10 , :supply_w_id10 )
                          , (  SMALLINT( 12 )      , :id11 , :ol_quantity11 , :supply_w_id11 )
                          , (  SMALLINT( 13 )      , :id12 , :ol_quantity12 , :supply_w_id12 )

                        ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                ) AS ITEMLIST

                , TABLE( NEW_OL_ALL(   I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                                )
                        ) AS NEW_OL_ALL

                WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
        )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

                (  OL_O_ID
                  , OL_D_ID
                  , OL_W_ID
                  , OL_NUMBER
                  , OL_I_ID
                  , OL_SUPPLY_W_ID
                  , OL_DELIVERY_D
                  , OL_QUANTITY
                  , OL_AMOUNT
                  , OL_DIST_INFO
                )

                INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                    SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                    FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_14 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
          , D_ID
          , W_ID
          , OL_NUMBER
          , I_ID
          , I_SUPPLY_W_ID
          , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
          , I_QTY
          , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
          , OL_DIST_INFO
          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                FROM ( SELECT   :next_o_id as O_ID
                        , :w_id AS W_ID
                        , :d_id as D_ID
                        , OL_NUMBER
```

```
                    , I_ID
                    , I_SUPPLY_W_ID
                    , I_QTY

                FROM  Table( VALUES

                        (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                      , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                      , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                      , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                      , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                      , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                      , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                      , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )
                      , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8  )
                      , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )
                      , (  SMALLINT( 11 )      , :id10 , :ol_quantity10 , :supply_w_id10 )
                      , (  SMALLINT( 12 )      , :id11 , :ol_quantity11 , :supply_w_id11 )
                      , (  SMALLINT( 13 )      , :id12 , :ol_quantity12 , :supply_w_id12 )
                      , (  SMALLINT( 14 )      , :id13 , :ol_quantity13 , :supply_w_id13 )

                    ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
              ) AS ITEMLIST

            , TABLE( NEW_OL_ALL(  I_ID
                                , I_QTY
                                , W_ID
                                , I_SUPPLY_W_ID
                                , O_ID
                                , D_ID
                                )
              ) AS NEW_OL_ALL

            WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
    )


SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

  FROM NEW TABLE ( INSERT INTO ORDER_LINE

        (  OL_O_ID
         , OL_D_ID
         , OL_W_ID
         , OL_NUMBER
         , OL_I_ID
         , OL_SUPPLY_W_ID
         , OL_DELIVERY_D
         , OL_QUANTITY
         , OL_AMOUNT
         , OL_DIST_INFO
        )

        INCLUDE (  I_PRICE   DECIMAL(5,2)
                 , I_NAME    CHAR(24)
                 , I_DATA    VARCHAR(50)
                 , S_DATA    VARCHAR(50)
                 , S_QUANTITY SMALLINT )

            SELECT  O_ID
                  , D_ID
                  , W_ID
                  , OL_NUMBER
                  , I_ID
                  , I_SUPPLY_W_ID
                  , OL_DELIVERY_D
                  , I_QTY
                  , TOTAL_PRICE
                  , OL_DIST_INFO
                  , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

            FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Remote_15 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                    FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_SUPPLY_W_ID
                                  , I_QTY

                             FROM  Table( VALUES

                                    (  SMALLINT( 1 )       , :id0  , :ol_quantity0  , :supply_w_id0  )
                                  , (  SMALLINT( 2 )       , :id1  , :ol_quantity1  , :supply_w_id1  )
                                  , (  SMALLINT( 3 )       , :id2  , :ol_quantity2  , :supply_w_id2  )
                                  , (  SMALLINT( 4 )       , :id3  , :ol_quantity3  , :supply_w_id3  )
                                  , (  SMALLINT( 5 )       , :id4  , :ol_quantity4  , :supply_w_id4  )
                                  , (  SMALLINT( 6 )       , :id5  , :ol_quantity5  , :supply_w_id5  )
                                  , (  SMALLINT( 7 )       , :id6  , :ol_quantity6  , :supply_w_id6  )
                                  , (  SMALLINT( 8 )       , :id7  , :ol_quantity7  , :supply_w_id7  )
                                  , (  SMALLINT( 9 )       , :id8  , :ol_quantity8  , :supply_w_id8  )
                                  , (  SMALLINT( 10 )      , :id9  , :ol_quantity9  , :supply_w_id9  )
                                  , (  SMALLINT( 11 )      , :id10 , :ol_quantity10 , :supply_w_id10 )
                                  , (  SMALLINT( 12 )      , :id11 , :ol_quantity11 , :supply_w_id11 )
                                  , (  SMALLINT( 13 )      , :id12 , :ol_quantity12 , :supply_w_id12 )
                                  , (  SMALLINT( 14 )      , :id13 , :ol_quantity13 , :supply_w_id13 )
                                  , (  SMALLINT( 15 )      , :id14 , :ol_quantity14 , :supply_w_id14 )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY        , I_SUPPLY_W_ID  )
                      ) AS ITEMLIST

                    , TABLE( NEW_OL_ALL(  I_ID
                                        , I_QTY
                                        , W_ID
                                        , I_SUPPLY_W_ID
                                        , O_ID
                                        , D_ID
                                        )
                      ) AS NEW_OL_ALL

                    WHERE NEW_OL_ALL.I_PRICE IS NOT NULL
            )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

          (  OL_O_ID
           , OL_D_ID
           , OL_W_ID
           , OL_NUMBER
           , OL_I_ID
           , OL_SUPPLY_W_ID
           , OL_DELIVERY_D
           , OL_QUANTITY
           , OL_AMOUNT
           , OL_DIST_INFO
          )

          INCLUDE (  I_PRICE   DECIMAL(5,2)
                   , I_NAME    CHAR(24)
                   , I_DATA    VARCHAR(50)
                   , S_DATA    VARCHAR(50)
                   , S_QUANTITY SMALLINT )

              SELECT  O_ID
                    , D_ID
                    , W_ID
                    , OL_NUMBER
                    , I_ID
                    , I_SUPPLY_W_ID
                    , OL_DELIVERY_D
                    , I_QTY
                    , TOTAL_PRICE
                    , OL_DIST_INFO
                    , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

              FROM DATA

                  ) AS INS
;

EXEC SQL DECLARE ISOL_Local_1 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , W_ID AS I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                    FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_QTY

                             FROM  Table( VALUES

                                    (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )

                                  ) AS X ( OL_NUMBER , I_ID  , I_QTY         )
                      ) AS ITEMLIST

                    , TABLE( NEW_OL_LOCAL(  I_ID
                                          , I_QTY
                                          , W_ID
                                          , O_ID
                                          , D_ID
                                          )
                      ) AS NEW_OL_LOCAL

                    WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
            )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

          (  OL_O_ID
           , OL_D_ID
           , OL_W_ID
           , OL_NUMBER
```

```
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
               )

               INCLUDE (   I_PRICE    DECIMAL(5,2)
                     , I_NAME     CHAR(24)
                     , I_DATA     VARCHAR(50)
                     , S_DATA     VARCHAR(50)
                     , S_QUANTITY SMALLINT )

                    SELECT   O_ID
                         , D_ID
                         , W_ID
                         , OL_NUMBER
                         , I_ID
                         , I_SUPPLY_W_ID
                         , OL_DELIVERY_D
                         , I_QTY
                         , TOTAL_PRICE
                         , OL_DIST_INFO
                         , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                    FROM DATA

             ) AS INS
;

EXEC SQL DECLARE ISOL_Local_2 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
           , D_ID
           , W_ID
           , OL_NUMBER
           , I_ID
           , W_ID AS I_SUPPLY_W_ID
           , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
           , I_QTY
           , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
           , OL_DIST_INFO
           , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                 FROM ( SELECT   :next_o_id as O_ID
                           , :w_id AS W_ID
                           , :d_id as D_ID
                           , OL_NUMBER
                           , I_ID
                           , I_QTY

                      FROM  Table( VALUES

                                ( SMALLINT( 1 ) , :id0  , :ol_quantity0  )
                               , ( SMALLINT( 2 ) , :id1  , :ol_quantity1  )

                              ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                     ) AS ITEMLIST

                   , TABLE( NEW_OL_LOCAL(   I_ID
                                , I_QTY
                                , W_ID
                                , O_ID
                                , D_ID
                               )
                     ) AS NEW_OL_LOCAL

                 WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
         )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

                (  OL_O_ID
                 , OL_D_ID
                 , OL_W_ID
                 , OL_NUMBER
                 , OL_I_ID
                 , OL_SUPPLY_W_ID
                 , OL_DELIVERY_D
                 , OL_QUANTITY
                 , OL_AMOUNT
                 , OL_DIST_INFO
                )

                INCLUDE (   I_PRICE    DECIMAL(5,2)
                      , I_NAME     CHAR(24)
                      , I_DATA     VARCHAR(50)
                      , S_DATA     VARCHAR(50)
                      , S_QUANTITY SMALLINT )

                     SELECT   O_ID
                          , D_ID
                          , W_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , OL_DELIVERY_D
                          , I_QTY
                          , TOTAL_PRICE
                          , OL_DIST_INFO
                          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

              ) AS INS
;

EXEC SQL DECLARE ISOL_Local_3 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
           , D_ID
           , W_ID
           , OL_NUMBER
           , I_ID
           , W_ID AS I_SUPPLY_W_ID
           , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
           , I_QTY
           , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
           , OL_DIST_INFO
           , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                 FROM ( SELECT   :next_o_id as O_ID
                           , :w_id AS W_ID
                           , :d_id as D_ID
                           , OL_NUMBER
                           , I_ID
                           , I_QTY

                      FROM  Table( VALUES

                                ( SMALLINT( 1 ) , :id0  , :ol_quantity0  )
                               , ( SMALLINT( 2 ) , :id1  , :ol_quantity1  )
                               , ( SMALLINT( 3 ) , :id2  , :ol_quantity2  )

                              ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                     ) AS ITEMLIST

                   , TABLE( NEW_OL_LOCAL(   I_ID
                                , I_QTY
                                , W_ID
                                , O_ID
                                , D_ID
                               )
                     ) AS NEW_OL_LOCAL

                 WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
         )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

                (  OL_O_ID
                 , OL_D_ID
                 , OL_W_ID
                 , OL_NUMBER
                 , OL_I_ID
                 , OL_SUPPLY_W_ID
                 , OL_DELIVERY_D
                 , OL_QUANTITY
                 , OL_AMOUNT
                 , OL_DIST_INFO
                )

                INCLUDE (   I_PRICE    DECIMAL(5,2)
                      , I_NAME     CHAR(24)
                      , I_DATA     VARCHAR(50)
                      , S_DATA     VARCHAR(50)
                      , S_QUANTITY SMALLINT )

                     SELECT   O_ID
                          , D_ID
                          , W_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , OL_DELIVERY_D
                          , I_QTY
                          , TOTAL_PRICE
                          , OL_DIST_INFO
                          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

              ) AS INS
;

EXEC SQL DECLARE ISOL_Local_4 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
           , D_ID
           , W_ID
           , OL_NUMBER
           , I_ID
           , W_ID AS I_SUPPLY_W_ID
           , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
           , I_QTY
           , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
           , OL_DIST_INFO
           , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                 FROM ( SELECT   :next_o_id as O_ID
                           , :w_id AS W_ID
                           , :d_id as D_ID
                           , OL_NUMBER
                           , I_ID
                           , I_QTY

                      FROM  Table( VALUES

                                ( SMALLINT( 1 ) , :id0  , :ol_quantity0  )
                               , ( SMALLINT( 2 ) , :id1  , :ol_quantity1  )
                               , ( SMALLINT( 3 ) , :id2  , :ol_quantity2  )
                               , ( SMALLINT( 4 ) , :id3  , :ol_quantity3  )
```

```
                        ) AS X ( OL_NUMBER , I_ID  , I_QTY         )
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_LOCAL(   I_ID
                                         , I_QTY
                                         , W_ID
                                         , O_ID
                                         , D_ID
                                         )
                    ) AS NEW_OL_LOCAL

                WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (   OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                          , D_ID
                          , W_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , OL_DELIVERY_D
                          , I_QTY
                          , TOTAL_PRICE
                          , OL_DIST_INFO
                          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Local_5 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , W_ID AS I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                                , :w_id AS W_ID
                                , :d_id as D_ID
                                , OL_NUMBER
                                , I_ID
                                , I_QTY

                           FROM  Table( VALUES

                                  (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY         )
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_LOCAL(   I_ID
                                         , I_QTY
                                         , W_ID
                                         , O_ID
                                         , D_ID
                                         )
                    ) AS NEW_OL_LOCAL

                WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (   OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                          , D_ID
                          , W_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , OL_DELIVERY_D
                          , I_QTY
                          , TOTAL_PRICE
                          , OL_DIST_INFO
                          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

            ) AS INS
;

EXEC SQL DECLARE ISOL_Local_6 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , W_ID AS I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                                , :w_id AS W_ID
                                , :d_id as D_ID
                                , OL_NUMBER
                                , I_ID
                                , I_QTY

                           FROM  Table( VALUES

                                  (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY         )
                    ) AS ITEMLIST

                  , TABLE( NEW_OL_LOCAL(   I_ID
                                         , I_QTY
                                         , W_ID
                                         , O_ID
                                         , D_ID
                                         )
                    ) AS NEW_OL_LOCAL

                WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (   OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                          , D_ID
                          , W_ID
                          , OL_NUMBER
                          , I_ID
                          , I_SUPPLY_W_ID
                          , OL_DELIVERY_D
                          , I_QTY
                          , TOTAL_PRICE
                          , OL_DIST_INFO
                          , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA
```

```
            ) AS INS
;

EXEC SQL DECLARE ISOL_Local_7 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , W_ID AS I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_QTY

                         FROM  Table( VALUES

                                    (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                  , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                  , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                  , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                  , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                  , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                  , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                       ) AS ITEMLIST

                     , TABLE( NEW_OL_LOCAL(   I_ID
                                            , I_QTY
                                            , W_ID
                                            , O_ID
                                            , D_ID
                                            )
                       ) AS NEW_OL_LOCAL

                  WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


   SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (   OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Local_8 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , W_ID AS I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_QTY

                         FROM  Table( VALUES

                                    (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                  , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                  , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                  , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                  , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                  , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                  , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                  , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                       ) AS ITEMLIST

                     , TABLE( NEW_OL_LOCAL(   I_ID
                                            , I_QTY
                                            , W_ID
                                            , O_ID
                                            , D_ID
                                            )
                       ) AS NEW_OL_LOCAL

                  WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


   SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

    FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (   OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                     FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Local_9 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
            , D_ID
            , W_ID
            , OL_NUMBER
            , I_ID
            , W_ID AS I_SUPPLY_W_ID
            , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
            , I_QTY
            , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
            , OL_DIST_INFO
            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                  FROM ( SELECT   :next_o_id as O_ID
                              , :w_id AS W_ID
                              , :d_id as D_ID
                              , OL_NUMBER
                              , I_ID
                              , I_QTY

                         FROM  Table( VALUES

                                    (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                  , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                  , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                  , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                  , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                  , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                  , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                  , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                                  , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                       ) AS ITEMLIST

                     , TABLE( NEW_OL_LOCAL(   I_ID
                                            , I_QTY
                                            , W_ID
                                            , O_ID
                                            , D_ID
                                            )
                       ) AS NEW_OL_LOCAL

                  WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
```

```
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (  OL_O_ID
               , OL_D_ID
               , OL_W_ID
               , OL_NUMBER
               , OL_I_ID
               , OL_SUPPLY_W_ID
               , OL_DELIVERY_D
               , OL_QUANTITY
               , OL_AMOUNT
               , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

             ) AS INS
;

EXEC SQL DECLARE ISOL_Local_10 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
           , D_ID
           , W_ID
           , OL_NUMBER
           , I_ID
           , W_ID AS I_SUPPLY_W_ID
           , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
           , I_QTY
           , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
           , OL_DIST_INFO
           , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                 FROM ( SELECT   :next_o_id as O_ID
                           , :w_id AS W_ID
                           , :d_id as D_ID
                           , OL_NUMBER
                           , I_ID
                           , I_QTY

                      FROM  Table( VALUES

                              (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                            , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                            , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                            , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                            , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                            , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                            , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                            , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                            , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                            , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )

                           ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                      ) AS ITEMLIST

                    , TABLE( NEW_OL_LOCAL(   I_ID
                                 , I_QTY
                                 , W_ID
                                 , O_ID
                                 , D_ID
                                )
                           ) AS NEW_OL_LOCAL

                 WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (  OL_O_ID
               , OL_D_ID
               , OL_W_ID
               , OL_NUMBER
               , OL_I_ID
               , OL_SUPPLY_W_ID
               , OL_DELIVERY_D
               , OL_QUANTITY
               , OL_AMOUNT
               , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

             ) AS INS
;

EXEC SQL DECLARE ISOL_Local_11 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
           , D_ID
           , W_ID
           , OL_NUMBER
           , I_ID
           , W_ID AS I_SUPPLY_W_ID
           , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
           , I_QTY
           , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
           , OL_DIST_INFO
           , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                 FROM ( SELECT   :next_o_id as O_ID
                           , :w_id AS W_ID
                           , :d_id as D_ID
                           , OL_NUMBER
                           , I_ID
                           , I_QTY

                      FROM  Table( VALUES

                              (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                            , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                            , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                            , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                            , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                            , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                            , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                            , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                            , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                            , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )
                            , (  SMALLINT( 11 ) , :id10 , :ol_quantity10 )

                           ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                      ) AS ITEMLIST

                    , TABLE( NEW_OL_LOCAL(   I_ID
                                 , I_QTY
                                 , W_ID
                                 , O_ID
                                 , D_ID
                                )
                           ) AS NEW_OL_LOCAL

                 WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

              (  OL_O_ID
               , OL_D_ID
               , OL_W_ID
               , OL_NUMBER
               , OL_I_ID
               , OL_SUPPLY_W_ID
               , OL_DELIVERY_D
               , OL_QUANTITY
               , OL_AMOUNT
               , OL_DIST_INFO
              )

              INCLUDE (   I_PRICE    DECIMAL(5,2)
                        , I_NAME     CHAR(24)
                        , I_DATA     VARCHAR(50)
                        , S_DATA     VARCHAR(50)
                        , S_QUANTITY SMALLINT )

                   SELECT   O_ID
                        , D_ID
                        , W_ID
                        , OL_NUMBER
                        , I_ID
                        , I_SUPPLY_W_ID
                        , OL_DELIVERY_D
                        , I_QTY
                        , TOTAL_PRICE
                        , OL_DIST_INFO
                        , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                   FROM DATA

             ) AS INS
;
```

```
EXEC SQL DECLARE ISOL_Local_12 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , W_ID AS I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                      FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_QTY

                               FROM  Table( VALUES

                                      (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                    , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                    , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                    , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                    , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                    , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                    , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                    , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                                    , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                                    , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )
                                    , (  SMALLINT( 11 ) , :id10 , :ol_quantity10 )
                                    , (  SMALLINT( 12 ) , :id11 , :ol_quantity11 )

                                   ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                             ) AS ITEMLIST

                           , TABLE( NEW_OL_LOCAL(   I_ID
                                                  , I_QTY
                                                  , W_ID
                                                  , O_ID
                                                  , D_ID
                                                 )
                                  ) AS NEW_OL_LOCAL

                      WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

                ( OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
                )

                INCLUDE (  I_PRICE   DECIMAL(5,2)
                         , I_NAME    CHAR(24)
                         , I_DATA    VARCHAR(50)
                         , S_DATA    VARCHAR(50)
                         , S_QUANTITY SMALLINT )

                      SELECT  O_ID
                            , D_ID
                            , W_ID
                            , OL_NUMBER
                            , I_ID
                            , I_SUPPLY_W_ID
                            , OL_DELIVERY_D
                            , I_QTY
                            , TOTAL_PRICE
                            , OL_DIST_INFO
                            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Local_13 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , W_ID AS I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                      FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_QTY

                               FROM  Table( VALUES

                                      (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                    , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                    , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                    , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                    , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                    , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                    , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                    , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                                    , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                                    , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )
                                    , (  SMALLINT( 11 ) , :id10 , :ol_quantity10 )
                                    , (  SMALLINT( 12 ) , :id11 , :ol_quantity11 )
                                    , (  SMALLINT( 13 ) , :id12 , :ol_quantity12 )

                                   ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                             ) AS ITEMLIST

                           , TABLE( NEW_OL_LOCAL(   I_ID
                                                  , I_QTY
                                                  , W_ID
                                                  , O_ID
                                                  , D_ID
                                                 )
                                  ) AS NEW_OL_LOCAL

                      WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
          )


  SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

   FROM NEW TABLE ( INSERT INTO ORDER_LINE

                ( OL_O_ID
                , OL_D_ID
                , OL_W_ID
                , OL_NUMBER
                , OL_I_ID
                , OL_SUPPLY_W_ID
                , OL_DELIVERY_D
                , OL_QUANTITY
                , OL_AMOUNT
                , OL_DIST_INFO
                )

                INCLUDE (  I_PRICE   DECIMAL(5,2)
                         , I_NAME    CHAR(24)
                         , I_DATA    VARCHAR(50)
                         , S_DATA    VARCHAR(50)
                         , S_QUANTITY SMALLINT )

                      SELECT  O_ID
                            , D_ID
                            , W_ID
                            , OL_NUMBER
                            , I_ID
                            , I_SUPPLY_W_ID
                            , OL_DELIVERY_D
                            , I_QTY
                            , TOTAL_PRICE
                            , OL_DIST_INFO
                            , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM DATA

                ) AS INS
;

EXEC SQL DECLARE ISOL_Local_14 CURSOR FOR

  WITH DATA AS (  SELECT  O_ID
                , D_ID
                , W_ID
                , OL_NUMBER
                , I_ID
                , W_ID AS I_SUPPLY_W_ID
                , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                , I_QTY
                , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                , OL_DIST_INFO
                , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                      FROM ( SELECT   :next_o_id as O_ID
                                  , :w_id AS W_ID
                                  , :d_id as D_ID
                                  , OL_NUMBER
                                  , I_ID
                                  , I_QTY

                               FROM  Table( VALUES

                                      (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                    , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                    , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                    , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                    , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                    , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                    , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                    , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                                    , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                                    , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )
                                    , (  SMALLINT( 11 ) , :id10 , :ol_quantity10 )
                                    , (  SMALLINT( 12 ) , :id11 , :ol_quantity11 )
                                    , (  SMALLINT( 13 ) , :id12 , :ol_quantity12 )
                                    , (  SMALLINT( 14 ) , :id13 , :ol_quantity13 )
```

```
                                ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                            ) AS ITEMLIST

                          , TABLE( NEW_OL_LOCAL(   I_ID
                                                 , I_QTY
                                                 , W_ID
                                                 , O_ID
                                                 , D_ID
                                                 )
                             ) AS NEW_OL_LOCAL

                        WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
                )


    SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

     FROM NEW TABLE ( INSERT INTO ORDER_LINE

                    (   OL_O_ID
                      , OL_D_ID
                      , OL_W_ID
                      , OL_NUMBER
                      , OL_I_ID
                      , OL_SUPPLY_W_ID
                      , OL_DELIVERY_D
                      , OL_QUANTITY
                      , OL_AMOUNT
                      , OL_DIST_INFO
                    )

                    INCLUDE (   I_PRICE    DECIMAL(5,2)
                              , I_NAME     CHAR(24)
                              , I_DATA     VARCHAR(50)
                              , S_DATA     VARCHAR(50)
                              , S_QUANTITY SMALLINT )

                        SELECT   O_ID
                               , D_ID
                               , W_ID
                               , OL_NUMBER
                               , I_ID
                               , I_SUPPLY_W_ID
                               , OL_DELIVERY_D
                               , I_QTY
                               , TOTAL_PRICE
                               , OL_DIST_INFO
                               , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM DATA

                    ) AS INS
;

  EXEC SQL DECLARE ISOL_Local_15 CURSOR FOR

    WITH DATA AS (  SELECT  O_ID
                  , D_ID
                  , W_ID
                  , OL_NUMBER
                  , I_ID
                  , W_ID AS I_SUPPLY_W_ID
                  , (TIMESTAMP('0001-01-01 00:00:00')) AS OL_DELIVERY_D
                  , I_QTY
                  , ( I_PRICE * I_QTY ) AS TOTAL_PRICE
                  , OL_DIST_INFO
                  , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM ( SELECT   :next_o_id as O_ID
                                      , :w_id AS W_ID
                                      , :d_id as D_ID
                                      , OL_NUMBER
                                      , I_ID
                                      , I_QTY

                                FROM  Table( VALUES

                                        (  SMALLINT( 1 )  , :id0  , :ol_quantity0  )
                                      , (  SMALLINT( 2 )  , :id1  , :ol_quantity1  )
                                      , (  SMALLINT( 3 )  , :id2  , :ol_quantity2  )
                                      , (  SMALLINT( 4 )  , :id3  , :ol_quantity3  )
                                      , (  SMALLINT( 5 )  , :id4  , :ol_quantity4  )
                                      , (  SMALLINT( 6 )  , :id5  , :ol_quantity5  )
                                      , (  SMALLINT( 7 )  , :id6  , :ol_quantity6  )
                                      , (  SMALLINT( 8 )  , :id7  , :ol_quantity7  )
                                      , (  SMALLINT( 9 )  , :id8  , :ol_quantity8  )
                                      , (  SMALLINT( 10 ) , :id9  , :ol_quantity9  )
                                      , (  SMALLINT( 11 ) , :id10 , :ol_quantity10 )
                                      , (  SMALLINT( 12 ) , :id11 , :ol_quantity11 )
                                      , (  SMALLINT( 13 ) , :id12 , :ol_quantity12 )
                                      , (  SMALLINT( 14 ) , :id13 , :ol_quantity13 )
                                      , (  SMALLINT( 15 ) , :id14 , :ol_quantity14 )

                                ) AS X ( OL_NUMBER , I_ID  , I_QTY          )
                            ) AS ITEMLIST

                          , TABLE( NEW_OL_LOCAL(   I_ID
                                                 , I_QTY
                                                 , W_ID
                                                 , O_ID
                                                 , D_ID
                                                 )
                             ) AS NEW_OL_LOCAL

                        WHERE NEW_OL_LOCAL.I_PRICE IS NOT NULL
                )


    SELECT I_PRICE , I_NAME , I_DATA , OL_DIST_INFO , S_DATA , S_QUANTITY

     FROM NEW TABLE ( INSERT INTO ORDER_LINE

                    (   OL_O_ID
                      , OL_D_ID
                      , OL_W_ID
                      , OL_NUMBER
                      , OL_I_ID
                      , OL_SUPPLY_W_ID
                      , OL_DELIVERY_D
                      , OL_QUANTITY
                      , OL_AMOUNT
                      , OL_DIST_INFO
                    )

                    INCLUDE (   I_PRICE    DECIMAL(5,2)
                              , I_NAME     CHAR(24)
                              , I_DATA     VARCHAR(50)
                              , S_DATA     VARCHAR(50)
                              , S_QUANTITY SMALLINT )

                        SELECT   O_ID
                               , D_ID
                               , W_ID
                               , OL_NUMBER
                               , I_ID
                               , I_SUPPLY_W_ID
                               , OL_DELIVERY_D
                               , I_QTY
                               , TOTAL_PRICE
                               , OL_DIST_INFO
                               , I_PRICE, I_NAME, I_DATA, S_DATA, S_QUANTITY

                        FROM DATA

                    ) AS INS
;
```

```
  // Start processing

  in_neword = (struct in_neword_struct *)  pin ;
  neword    = (struct out_neword_struct *) pout ;

#ifdef DEBUGIT
  new_debug( neword, in_neword, "SP upon entry");
#endif

  // Using I_PRICE == 0 as a flag to the client that the ITEM was not fetched (hence bad).

  for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < in_neword->s_O_OL_CNT ;
inputItemArrayIndex++ )
  {
    i_priceArray[ inputItemArrayIndex ] = 0 ;
  }

  neword->deadlocks = -1 ;

 retry_tran:

  neword->deadlocks++ ;

  EXEC SQL

    SELECT D_TAX, D_NEXT_O_ID  INTO :dist_tax , :next_o_id

      FROM OLD TABLE ( UPDATE DISTRICT

                          SET  D_NEXT_O_ID = D_NEXT_O_ID + 1

                        WHERE D_W_ID = :w_id
                          AND D_ID = :d_id
                  ) AS OT
  ;

  if ( sqlca.sqlcode != 0 )
  {
    DLCHK( retry_tran );
    sqlerror( NEWORD_SQL, "DISTRICT", __FILE__, __LINE__, &sqlca ) ;
    goto ferror;
  }

  #define NEW_CURSOR_OPEN_ERROR                                          \
  {                                                                 \
    if( sqlca.sqlcode != 0    )                                        \
    {                                                               \
      goto sql_error ;                                              \
    }                                                               \
  }

  #define NEW_CURSOR_ERROR                                               \
  {                                                                 \
    if( sqlca.sqlcode == 0    )                                        \
    {                                                               \
      neword->s_O_OL_CNT ++ ;                                       \
    }                                                               \
    else                                                            \
    if( sqlca.sqlcode == +100 )                                     \
    {                                                               \
      break ;                                                       \
    }                                                               \
    else                                                            \
      goto sql_error ;                                              \
  }

  if ( allLocal )
  {
    switch( inputItemCount )
    {
      case 1:
        EXEC SQL OPEN ISOL_Local_1 ;
```

```
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_1
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 2:
        EXEC SQL OPEN ISOL_Local_2 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_2
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 3:
        EXEC SQL OPEN ISOL_Local_3 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_3
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 4:
        EXEC SQL OPEN ISOL_Local_4 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_4
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 5:
        EXEC SQL OPEN ISOL_Local_5 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_5
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 6:
        EXEC SQL OPEN ISOL_Local_6 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_6
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 7:
        EXEC SQL OPEN ISOL_Local_7 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_7
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 8:
        EXEC SQL OPEN ISOL_Local_8 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_8
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 9:
        EXEC SQL OPEN ISOL_Local_9 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_9
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 10:
        EXEC SQL OPEN ISOL_Local_10 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_10
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 11:
        EXEC SQL OPEN ISOL_Local_11 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_11
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 12:
        EXEC SQL OPEN ISOL_Local_12 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_12
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 13:
        EXEC SQL OPEN ISOL_Local_13 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_13
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 14:
        EXEC SQL OPEN ISOL_Local_14 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_14
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 15:
        EXEC SQL OPEN ISOL_Local_15 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Local_15
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;

      default:
        sqlerror(NEWORD_SQL, "Default switch on local  orderline/stock/index", __FILE__, __LINE__,
&sqlca );
        goto ferror;
    }
  }
  else
  {
    switch( inputItemCount )
    {
      case 1:
        EXEC SQL OPEN ISOL_Remote_1 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_1
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 2:
        EXEC SQL OPEN ISOL_Remote_2 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_2
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 3:
        EXEC SQL OPEN ISOL_Remote_3 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_3
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 4:
        EXEC SQL OPEN ISOL_Remote_4 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_4
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 5:
        EXEC SQL OPEN ISOL_Remote_5 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_5
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
      case 6:
        EXEC SQL OPEN ISOL_Remote_6 ;
        NEW_CURSOR_OPEN_ERROR
        for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
        {
          EXEC SQL FETCH ISOL_Remote_6
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
          NEW_CURSOR_ERROR
        }
        break ;
```

```
        case 7:
          EXEC SQL OPEN ISOL_Remote_7 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_7
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 8:
          EXEC SQL OPEN ISOL_Remote_8 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_8
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 9:
          EXEC SQL OPEN ISOL_Remote_9 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_9
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 10:
          EXEC SQL OPEN ISOL_Remote_10 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_10
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 11:
          EXEC SQL OPEN ISOL_Remote_11 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_11
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 12:
          EXEC SQL OPEN ISOL_Remote_12 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_12
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 13:
          EXEC SQL OPEN ISOL_Remote_13 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_13
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 14:
          EXEC SQL OPEN ISOL_Remote_14 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_14
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;
        case 15:
          EXEC SQL OPEN ISOL_Remote_15 ;
          NEW_CURSOR_OPEN_ERROR
          for ( inputItemArrayIndex = 0 ; inputItemArrayIndex < inputItemCount ; inputItemArrayIndex++ )
          {
            EXEC SQL FETCH ISOL_Remote_15
INTO :item_price, :item_name, :i_data, :stockDistrictInformation , :s_data , :s_quantity ;
            NEW_CURSOR_ERROR
          }
          break ;

        default:
          sqlerror(NEWORD_SQL, "Default switch on remote orderline/stock/index", __FILE__, __LINE__,
&sqlca);
          goto ferror;
      }
    }

    for ( inputItemArrayIndex = 0 ;
          inputItemArrayIndex < in_neword->s_O_OL_CNT  // from input
        && i_priceArray[ inputItemArrayIndex ] != 0 ;
        inputItemArrayIndex++ )
    {
      // s_I_NAME, and s_S_QUANTITY already set as output host variables

      neword->item[ inputItemArrayIndex ].s_I_PRICE = i_priceArray[ inputItemArrayIndex ] ;

      if (    is_ORIGINAL( s_dataArray[ inputItemArrayIndex ].data, s_dataArray[ inputItemArrayIndex ].len )
           && is_ORIGINAL( i_dataArray[ inputItemArrayIndex ].data,
i_dataArray[ inputItemArrayIndex ].len )    )
      {
        neword->item[ inputItemArrayIndex ].s_brand_generic = 'B';
      }
      else
      {
        neword->item[ inputItemArrayIndex ].s_brand_generic = 'G';
      }
    }

    EXEC SQL

      SELECT W_TAX, C_DISCOUNT, C_LAST, C_CREDIT, O_ENTRY_D

        INTO :ware_tax, :c_discount, :c_last, :c_credit, :o_entry_d

        FROM TABLE ( NEW_WH (   :next_o_id
                              , :w_id
                              , :d_id
                              , :c_id
                              , :inputItemCount
                              , :allLocal
                            )
                   ) AS NEW_WH_TABLE
    ;

    if ( sqlca.sqlcode == 0 )
    {
      if ( neword->s_O_OL_CNT == in_neword->s_O_OL_CNT  )
      {
        neword->s_transtatus = TRAN_OK ;

        EXEC SQL COMMIT;

        if( sqlca.sqlcode != 0 )
        {
          sqlerror(NEWORD_SQL, "COMMIT", __FILE__, __LINE__ , &sqlca ) ;
          goto ferror;
        }
      }
      else
      {
        neword->s_transtatus = INVALID_ITEM ;

        EXEC SQL ROLLBACK WORK ;

        if ( sqlca.sqlcode != 0 )
        {
          neword->s_transtatus = FATAL_SQLERROR;

          sqlerror(NEWORD_SQL, "ROLLBACK FAILED (INVALID ITEM)", __FILE__, __LINE__ , &sqlca);
          // no point in ferror
        }
      }
    }
    else
    {
      DLCHK( retry_tran );

      sqlerror( NEWORD_SQL, "NEW_WH", __FILE__, __LINE__ , &sqlca);
      goto ferror;
    }

    /*-----------------------------------------------*/
    /*  Return to client                             */
    /*-----------------------------------------------*/

mexit:

    if ( sqlca.sqlcode >= 0 )
    {
      storedProcRc = SQLZ_HOLD_PROC ;
    }
    else
    {
      storedProcRc = SQLZ_DISCONNECT_PROC ;
    }

#ifdef DEBUGIT
    new_debug( neword, in_neword, "SP prior to return");
#endif

    return ( storedProcRc ) ;

sql_error:

    {
      char tempstr[ 4096 ] ;

      DLCHK( retry_tran ) ;

      sprintf( tempstr, "inputItemCount=%d, :next_o_id=%d, :d_id=%d, :w_id=%d", inputItemCount,
next_o_id, d_id, w_id ) ;
      sqlerror( NEWORD_SQL, tempstr , __FILE__, __LINE__, &sqlca ) ;
    }

ferror:

    neword->s_transtatus = FATAL_SQLERROR;

    EXEC SQL ROLLBACK WORK;

    if ( sqlca.sqlcode != 0 )
    {
      sqlerror( NEWORD_SQL, "ROLLBACK FAILED", __FILE__, __LINE__ , &sqlca ) ;
    }


    goto mexit ;
}
```

```
/*
** A little function to search for the string "ORIGINAL" given a string and
** it's length
*/
static unsigned char  skip[256] = {8,8,8,8,8,8,8,8,8,8,  /*0-9*/
                        8,8,8,8,8,8,8,8,8,8,  /*10-19*/
                        8,8,8,8,8,8,8,8,8,8,  /*20-29*/
                        8,8,8,8,8,8,8,8,8,8,  /*30-39*/
                        8,8,8,8,8,8,8,8,8,8,  /*40-49*/
                        8,8,8,8,8,8,8,8,8,8,  /*50-59*/
                        8,8,8,8,8,1,8,8,8,8,  /*60-69*/
                        8,4,8,3,8,8,0,8,2,7,  /*70-79*/
                        8,8,6,8,8,8,8,8,8,8,  /*80-89*/
                        8,8,8,8,8,8,8,8,8,8,  /*90-99*/
                        8,8,8,8,8,8,8,8,8,8,  /*100-109*/
                        8,8,8,8,8,8,8,8,8,8,  /*110-119*/
                        8,8,8,8,8,8,8,8,8,8,  /*120-129*/
                        8,8,8,8,8,8,8,8,8,8,  /*130-139*/
                        8,8,8,8,8,8,8,8,8,8,  /*140-149*/
                        8,8,8,8,8,8,8,8,8,8,  /*150-159*/
                        8,8,8,8,8,8,8,8,8,8,  /*160-169*/
                        8,8,8,8,8,8,8,8,8,8,  /*170-179*/
                        8,8,8,8,8,8,8,8,8,8,  /*180-189*/
                        8,8,8,8,8,8,8,8,8,8,  /*190-199*/
                        8,8,8,8,8,8,8,8,8,8,  /*200-209*/
                        8,8,8,8,8,8,8,8,8,8,  /*210-219*/
                        8,8,8,8,8,8,8,8,8,8,  /*220-229*/
                        8,8,8,8,8,8,8,8,8,8,  /*230-239*/
                        8,8,8,8,8,8,8,8,8,8,  /*240-249*/
                        8,8,8,8,8};           /*250-254*/

static int is_ORIGINAL( char *string, short length )
{
  char           *cur_string;
  char           *end_string;
  unsigned char   *skips;
  int             skip_dist;
  int             result = 0;

  cur_string = string+7;
  end_string = string + length;
  skips = skip;

  while (cur_string < end_string)
    {
      skip_dist = skips[*cur_string];
      while ( (skip_dist > 0) && (cur_string < end_string) )
        {
          skip_dist = skips[*(cur_string += skip_dist)];
        }

      if (cur_string >= end_string)
        goto exit;

      if ( cur_string[-4] != 'G' )
        goto noMatch;

      if ( memcmp( cur_string-7, "ORIGINAL", 8 ) == 0 )
        {
          result = 1;
          goto exit;
        }
noMatch:
      cur_string += 8;
    } /* end while */

exit:
  return ( result ) ;
}

// ---------------------------------------------------------------------
// Order Status SERVER
// ---------------------------------------------------------------------

#undef w_id
#undef d_id
#undef c_id_input
#undef o_id
#undef o_entry_d
#undef o_carrier_d
#undef c_id
#undef c_first
#undef c_middle
#undef c_last
#undef c_balance

SQL_API_RC order_status_internal( char *pin, char *pout )
{
  struct in_ordstat_struct  * in_ordstat = (struct in_ordstat_struct *) pin ;
  struct out_ordstat_struct * ordstat = (struct out_ordstat_struct *) pout ;

  struct sqlca sqlca ;

  EXEC SQL BEGIN DECLARE SECTION;

    // From input values

    //##sqlint32   w_id ;
    //##short      d_id;
    sqlint32   c_id_input ;

    struct s_data_type { short len ; char data[ 16 ] ; } c_last_input ;

    // From queries

    // From initial query

    sqlint32   o_id ;
    //##sqlint32   c_id ;
    short      o_carrier_id ;
    //##sqlint64   o_entry_d ;

    char   c_first[ 16 ] ;
    char   c_middle[ 2 ] ;
    //##char   c_last[ 16 ] ;
    double c_balance ;

    // From cursor

    sqlint32   ol_i_id ;
    sqlint32   ol_supply_w_id ;
    short      ol_quantity ;
    float   ol_amount ;
    char    ol_delivery_d [27] ;
    //##char    o_entry_d[ 27 ] ;

  EXEC SQL END DECLARE SECTION;

  //##struct s_data_type { short len ; char data[ 16 ] ; } c_last_input ;

  int     storedProcRc ;
  int     itemArrayIndex = 0 ;

  #define w_id               in_ordstat->s_W_ID ;
  #define d_id               in_ordstat->s_D_ID ;
  #define c_id_input           in_ordstat->s_C_ID
  #define o_id              ordstat->s_O_ID
  #define o_entry_d            ordstat->s_O_ENTRY_D_time
  #define o_carrier_id         ordstat->s_O_CARRIER_ID
  #define c_id              ordstat->s_C_ID
  #define c_first           ordstat->s_C_FIRST
  #define c_middle             ordstat->s_C_MIDDLE
  #define c_last            ordstat->s_C_LAST
  #define c_balance            ordstat->s_C_BALANCE

  EXEC SQL DECLARE read_orderline_cur CURSOR FOR

    SELECT OL_I_ID, OL_SUPPLY_W_ID, OL_QUANTITY, OL_AMOUNT, OL_DELIVERY_D

      FROM ORDER_LINE

      WHERE OL_W_ID = :w_id
        AND OL_D_ID = :d_id
        AND OL_O_ID = :o_id

      FOR FETCH ONLY ;

  ordstat->deadlocks = -1 ;

#ifdef DEBUGIT
  ord_debug(ordstat, in_ordstat, "SP upon entry");
#endif

retry_tran:

  ordstat->deadlocks ++ ;

  if ( c_id_input == 0 )
  {
    c_last_input.len = strlen( in_ordstat->s_C_LAST ) ;
    memcpy( c_last_input.data , in_ordstat->s_C_LAST , c_last_input.len ) ;

    EXEC SQL

      SELECT O_ID, O_CARRIER_ID, O_ENTRY_D, C_BALANCE, C_FIRST, C_MIDDLE, C_ID

        INTO :o_id, :o_carrier_id , :o_entry_d , :c_balance, :c_first, :c_middle, :c_id

        FROM TABLE ( ORD_C_LAST(   :w_id
                                 , :d_id
                                 , :c_last_input
                                 )
                   ) AS ORD_C_LAST
    ;
  }
  else
  {
    EXEC SQL

      SELECT O_ID, O_CARRIER_ID, O_ENTRY_D , C_BALANCE, C_FIRST, C_MIDDLE ,C_LAST

        INTO :o_id, :o_carrier_id , :o_entry_d , :c_balance, :c_first, :c_middle, :c_last

        FROM TABLE ( ORD_C_ID(   :w_id
                               , :d_id
                               , :c_id_input
                               )
                   ) AS ORD_C_ID
    ;
  }

  if ( sqlca.sqlcode != 0 )
  {
    DLCHK( retry_tran );
    sqlerror( ORDSTAT_SQL, "READ CUST and ORDERS", __FILE__, __LINE__ ,  &sqlca ) ;
    goto ferror;
  }

  /*---------------------------------------------*/
  /*  Read ORDER_LINEs                           */
  /*---------------------------------------------*/

  EXEC SQL OPEN read_orderline_cur ;

  if ( sqlca.sqlcode != 0 )
  {
    DLCHK( retry_tran );
    sqlerror(ORDSTAT_SQL, "OPEN CURSOR read_orderline_cur", __FILE__, __LINE__ , &sqlca ) ;
```

```
    goto ferror;
  }

  itemArrayIndex = 0 ;
  {
    do
    {
      EXEC SQL FETCH read_orderline_cur

            INTO :ol_i_id , :ol_supply_w_id , :ol_quantity , :ol_amount , :ol_delivery_d ;

      if ( sqlca.sqlcode == 0 )
      {
        ordstat->item[ itemArrayIndex ].s_OL_I_ID           = ol_i_id ;
        ordstat->item[ itemArrayIndex ].s_OL_SUPPLY_W_ID    = ol_supply_w_id ;
        ordstat->item[ itemArrayIndex ].s_OL_QUANTITY       = ol_quantity ;
        ordstat->item[ itemArrayIndex ].s_OL_AMOUNT         = ol_amount ;
        strcpy(ordstat->item[ itemArrayIndex ].s_OL_DELIVERY_D_time, ol_delivery_d) ;

        itemArrayIndex++;
      }
      else
      if (sqlca.sqlcode < 0 )
      {
        DLCHK( retry_tran ) ;
        sqlerror( ORDSTAT_SQL, "FETCH CURSOR read_orderline_cur" , __FILE__, __LINE__ ,
&sqlca ) ;
        goto ferror ;
      }
    }
    while ( sqlca.sqlcode == 0 ) ;
  }

  ordstat->s_ol_cnt = itemArrayIndex ;

  EXEC SQL COMMIT ;

  if ( sqlca.sqlcode == 0 )
  {
    ordstat->s_transtatus = TRAN_OK ;
  }
  else
  {
    DLCHK( retry_tran );
    sqlerror(ORDSTAT_SQL, "COMMIT", __FILE__, __LINE__ , &sqlca);
    goto ferror ;
  }

mexit:

  if ( sqlca.sqlcode >= 0 )
  {
    storedProcRc = SQLZ_HOLD_PROC ;
  }
  else
  {
    storedProcRc = SQLZ_DISCONNECT_PROC ;
  }

#ifdef DEBUGIT
  ord_debug(ordstat, in_ordstat, "SP prior to return");
#endif

  return ( storedProcRc ) ;

ferror:

  ordstat->s_transtatus = FATAL_SQLERROR ;

  EXEC SQL ROLLBACK WORK ;

  if ( sqlca.sqlcode != 0 )
  {
    sqlerror(ORDSTAT_SQL, "ROLLBACK FAILED", __FILE__, __LINE__, &sqlca);
  }

  goto mexit;
}

// --------------------------------------------------------------------
// Delivery SERVER
// --------------------------------------------------------------------

#undef d_id
#undef c_id
#undef w_id
#undef o_carrier_id
#undef ol_delivery_d

SQL_API_RC delivery_internal ( char * pin, char * pout )
{
  struct in_delivery_struct * in_delivery = (struct in_delivery_struct *)  pin ;
  struct out_delivery_struct * delivery   = (struct out_delivery_struct *) pout ;

  struct sqlca sqlca ;

  int storedProcRc ;

  short district_id ;
  sqlint32  customer_id ;

  EXEC SQL BEGIN DECLARE SECTION;

    // input

    //##sqlint32   w_id ;
    //##short      d_id ;
    //##sqlint32   c_id ;
    //##short      o_carrier_id ;
    //##sqlint64   ol_delivery_d ;

    // output

    short      no_o_id_indicator = 0 ;
    sqlint32   no_o_id ;

  EXEC SQL END DECLARE SECTION;

  #define d_id         district_id
  #define c_id         customer_id

  #define w_id         in_delivery->s_W_ID
  #define o_carrier_id  in_delivery->s_O_CARRIER_ID
  #define ol_delivery_d in_delivery->s_O_DELIVERY_D_time

  delivery->deadlocks = -1 ;

#ifdef DEBUGIT
  del_debug( delivery, in_delivery, "SP upon entry");
#endif

  // Deadlock Handling
  // -----------------
  // Since we COMMIT inside the for() loop, we must take special
  // care while handling deadlocks.  This is best explained by
  // an example.
  //
  // Assume we deadlock on d_id=6.  This means that an order from the
  // first 5 districts have already been delivered.  We will then
  // restart the loop (retry_tran).  However, the loop will restart
  // at d_id = 1!  This means that the second (and all subsequent)
  // time through the loop, we will deliver orders for districts that
  // have already been delivered, with the net result being more than
  // 10 orders being delivered.
  //
  // The solution to this problem is to initialize the starting point
  // of the loop *before* the retry_tran label.  This will ensure that
  // if we deadlock, we will restart the loop with the same district
  // that we deadlocked on, and we won't deliver any extra orders.
  //
  // NOTE: If we ever change this back to one COMMIT per transaction
  // (instead of one COMMIT per iteration), then the initialization
  // of d_id must be moved back into the for loop.  (A rollback due
  // to deadlock in this case would rollback all delivered orders so
  // far, so we'd need to re-deliver them all on the next iteration.)

  d_id = 1;

retry_tran:

  delivery->deadlocks++;

  for ( ;  d_id <= DISTRICTS_PER_WAREHOUSE ; d_id++ )
  {
    no_o_id = 0 ;
    no_o_id_indicator = 0 ;

      EXEC SQL BEGIN COMPOUND NOT ATOMIC STATIC

        SELECT O_ID

            INTO :no_o_id :no_o_id_indicator

         FROM TABLE (  DEL( :w_id , :d_id , :o_carrier_id ) ) AS T ;

        COMMIT ;

      END COMPOUND ;

    if ( sqlca.sqlcode == 0 )
    {
      delivery->s_O_ID[ d_id - 1 ] = no_o_id ;
    }
    else
    {
      DLCHK( retry_tran );

      sqlerror( DELIVERY_SQL , "DELIVERY", __FILE__, __LINE__ , &sqlca);
      goto ferror ;
    }
  }

  delivery->s_transtatus = TRAN_OK ;

mexit:

  if ( sqlca.sqlcode >= 0 )
  {
    storedProcRc = SQLZ_HOLD_PROC ;
  }
  else
  {
    storedProcRc = SQLZ_DISCONNECT_PROC ;
  }

#ifdef DEBUGIT
  del_debug( delivery, in_delivery, "SP prior to return");
#endif

  return ( storedProcRc ) ;

ferror:

  delivery->s_transtatus = FATAL_SQLERROR ;

  EXEC SQL ROLLBACK WORK ;

  if ( sqlca.sqlcode != 0 )
  {
```

```
    sqlerror( DELIVERY_SQL, "ROLLBACK FAILED", __FILE__, __LINE__ , &sqlca ) ;
  }


  goto mexit ;
}

// --------------------------------------------------------------------
// Stored Procedure Stubs
// --------------------------------------------------------------------

SQL_API_RC SQL_API_FN news( char *pin, char *pout )
{
  return new_order_internal( pin, pout ) ;
}

SQL_API_RC SQL_API_FN ords( char *pin, char *pout )
{
  return order_status_internal( pin, pout ) ;
}

SQL_API_RC SQL_API_FN dels ( char * pin, char * pout )
{
  return delivery_internal( pin, pout ) ;
}
```

include/db2tpcc.h

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * db2tpcc.h - Macros and Miscellany
 *
 */
#ifndef __DB2TPCC_H
#define __DB2TPCC_H
#include <sys/types.h>
#include "lval.h"
/* ************************************************************************** */
/* Transaction Return Codes (s_transtatus)                                    */
/* ************************************************************************** */
#define INVALID_ITEM            100
#define TRAN_OK                 0
#define FATAL_SQLERROR          -1
/* ************************************************************************** */
/* Definition of Unused and Bad Items                                         */
/* ************************************************************************** */
/* Define unused item ID to be 0. This allows the SUT to determine the    */
/* number of items in the order as required by 2.4.1.3 and 2.4.2.2 since  */
/* the assumption that any item with OL_I_ID = 0 is unused will be true.  */
/* This in turn requires that the value used for an invalid item is       */
/* equal to ITEMS + 1.                                                    */
/* ************************************************************************** */
#define INVALID_ITEM_ID (2 * ITEMS) + 1
#define UNUSED_ITEM_ID 0
#define MIN_WAREHOUSE 1
#define MAX_WAREHOUSE WAREHOUSES
/*****************************************************************************/
/* NURand Constants                                                           */
/* C_C_LAST_RUN and C_C_LAST_LOAD must adhere to clause 2.1.6.            */
/* Analysis indicates that a C_LAST delta of 85 is optimal.               */
/*****************************************************************************/
#define C_C_LAST_RUN          88
#define C_C_LAST_LOAD         173
#define C_C_ID                319
#define C_OL_I_ID             3849
#define A_C_LAST              255
#define A_C_ID                1023
#define A_OL_I_ID             8191
/*****************************************************************************/
/* Transaction Type Identifiers                                               */
/*****************************************************************************/
#define CLIENT_SQL   0
#define NEWORD_SQL   1
#define PAYMENT_SQL  2
#define ORDSTAT_SQL  3
#define DELIVERY_SQL 4
#define STOCKLEV_SQL 5
#define SPGENERAL_PAD 3
#define SPGENERAL_ADJUST sizeof(int16_t)
struct in_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   in_items_struct {
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad1[3];
  } in_item[15];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  s_O_OL_CNT;              /* init by SUT */
  int16_t  s_all_local;
  int16_t  duplicate_items;
};
struct out_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   items_struct {
    float  s_I_PRICE;
    float  s_OL_AMOUNT;
    int16_t  s_S_QUANTITY;
    int16_t  pad2;
    char     s_I_NAME[25];
    char     s_brand_generic;
  } item[15];
  float  s_W_TAX;
  float  s_D_TAX;
  float  s_C_DISCOUNT;
  float  s_total_amount;
  int32_t  s_O_ID;
  int16_t  s_O_OL_CNT;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_C_LAST[17];
  char     s_C_CREDIT[3];
  char     s_O_ENTRY_D_time[27];

};
struct in_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  float  s_H_AMOUNT;
  int32_t  s_W_ID;
  int32_t  s_C_W_ID;
  int32_t  s_C_ID;
  int16_t  s_C_D_ID;
  int16_t  s_D_ID;
  char     s_C_LAST[17];
};
struct out_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_CREDIT_LIM;
  double  s_C_BALANCE;
  float  s_C_DISCOUNT;
  int32_t  s_C_ID;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_W_STREET_1[21];
  char     s_W_STREET_2[21];
  char     s_W_CITY[21];
  char     s_W_STATE[3];
  char     s_W_ZIP[10];
  char     s_D_STREET_1[21];
  char     s_D_STREET_2[21];
  char     s_D_CITY[21];
  char     s_D_STATE[3];
  char     s_D_ZIP[10];
  char     s_C_FIRST[17];
  char     s_C_MIDDLE[3];
  char     s_C_LAST[17];
  char     s_C_STREET_1[21];
  char     s_C_STREET_2[21];
  char     s_C_CITY[21];
  char     s_C_STATE[3];
  char     s_C_ZIP[10];
  char     s_C_PHONE[17];
  char     s_C_CREDIT[3];
  char     s_C_DATA[201];
  char     s_H_DATE_time[27];
  char     s_C_SINCE_time[27];
};
struct in_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  pad1[3];
  char     s_C_LAST[17];
};
struct out_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_BALANCE;
  int32_t  s_C_ID;
  int32_t  s_O_ID;
  int16_t  s_O_CARRIER_ID;
  int16_t  s_ol_cnt;
  int16_t  pad1[2];
  struct   oitems_struct {
    double  s_OL_AMOUNT;
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad2;
    char     s_OL_DELIVERY_D_time[27];
  } item[15];
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_C_FIRST[17];
  char     s_C_MIDDLE[3];
  char     s_C_LAST[17];
  char     s_O_ENTRY_D_time[27];
  int16_t  pad3[2];
};
struct in_delivery_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_W_ID;
  int16_t  s_O_CARRIER_ID;
};
struct out_delivery_struct {
  int16_t  len;
```

```
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_O_ID[10];
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
struct in_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_threshold;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
};
struct out_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_low_stock;
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
/* ******************************************************************************** */
/* Transaction Prototypes                                                           */
/* ******************************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int neword_sql(struct in_neword_struct*, struct out_neword_struct*);
extern int payment_sql(struct in_payment_struct*, struct out_payment_struct*);
extern int ordstat_sql(struct in_ordstat_struct*, struct out_ordstat_struct*);
extern int delivery_sql(struct in_delivery_struct*, struct out_delivery_struct*);
extern int stocklev_sql(struct in_stocklev_struct*, struct out_stocklev_struct*);
#ifdef __cplusplus
}
#endif
/* ******************************************************************************** */
/* DB2 Connect/Disconnect & Thread Context Wrappers                                 */
/* ******************************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int connect_to_TM(char*);
extern int connect_to_TM_auth(char*, char*, char*);
extern int disconnect_from_TM(void);

#ifdef __cplusplus
}
#endif
#endif // __DB2TPCC_H
```

include/lval.h

```
/* lval.h - generated automatically at 20060614.2208 */
#ifndef __LVAL_H
#define __LVAL_H
#define WAREHOUSES 320000
#define DISTRICTS_PER_WAREHOUSE 10
#define CUSTOMERS_PER_DISTRICT 3000
#define ITEMS 100000
#define STOCK_PER_WAREHOUSE 100000
#define MIN_OL_PER_ORDER 5
#define MAX_OL_PER_ORDER 15
#define NU_ORDERS_PER_DISTRICT 900
#endif // __LVAL_H
```

include/tpccapp.h

```
/*********************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*********************************************************************************/
/*
 * tpccapp.h - Application Macros
 */
#ifndef __TPCCAPP_H
#define __TPCCAPP_H
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <string.h>
#include <time.h>
#define daricall
#include "sqlca.h"
#include "sqlcodes.h"
#ifdef SWAP_ENDIAN
#define SWAP_BYTE(Var)  SwapEndian((void*)&Var, sizeof(Var))
/*********************************************************************************
  FUNCTION: SwapEndian
  PURPOSE: Swap the byte order of a structure
  EXAMPLE: int I=0x12345678; SWAP_BYTE(I); I => 0x78563412;
  IMPLEMENTATION: Fold Addr in half, swap header & tail by XOR op
          e.g.: *a = 0x12 [ Addr + 0];
                *b = 0x78 [ Add + 4 - 0 - 1 = Addr+3];
                *a ^= *b;         // sets *a to 0x6A
                *b ^= *a;         // sets *b to 0x12
                *a ^= *b;         // sets *a to 0x78
           Now *a => 0x78 && *b => 0x12
*********************************************************************************/
void SwapEndian(void *Addr, int nb)
{
  int i;
  for (i=0; i<nb/2; i++)
  {
    char *a = (char*)Addr+i;
    char *b = (char*)Addr+(nb-i-1);
    *a ^= *b;
    *b ^= *a;
    *a ^= *b;
  }
}
#endif   //SWAP_ENDIAN

/*********************************************************************************/
/* SQLCODE Macros                                                                */
/*********************************************************************************/
#define DLCHK(a) \
  if (sqlca.sqlcode == SQL_RC_E911) { goto a; }
#define NACOMPCHK(last) \
  if (sqlca.sqlcode != SQL_RC_E1339) { last = -1; } \
  else { int a = ((sqlca.sqlerrmc[4] == 0x20) ? 0 : sqlca.sqlerrmc[4]-0x30); \
         int b = ((sqlca.sqlerrmc[5] == 0x20) ? 0 : sqlca.sqlerrmc[5]-0x30); \
         if (b == 0) { last = a; } else { last = a * 10 + b; } \
       }
#endif // __TPCCAPP_H
```

include/tpccdbg.h

```
/*********************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*********************************************************************************/
/*
 * tpccdbg.h - Debugging Macros
 *
 */
#ifndef __TPCCDBG_H
#define __TPCCDBG_H
#ifdef __cplusplus
extern "C" {
#endif
extern void sqlerror (int tranType, char *msg, char *file, int line,
                      SQL_STRUCTURE sqlca *psqlca);
extern void new_debug (struct out_neword_struct *neword_ptr,
                       struct in_neword_struct *in_neword_ptr,
                       char *msg);
extern void pay_debug (struct out_payment_struct *payment_ptr,
                       struct in_payment_struct *in_payment_ptr,
                       char *msg);
extern void ord_debug (struct out_ordstat_struct *ordstat_ptr,
                       struct in_ordstat_struct *in_ordstat_ptr,
                       char *msg);
extern void del_debug (struct out_delivery_struct *delivery_ptr,
                       struct in_delivery_struct *in_delivery_ptr,
                       char *msg);
extern void stk_debug (struct out_stocklev_struct *stocklev_ptr,
                       struct in_stocklev_struct *in_stocklev_ptr,
                       char *msg);
extern void new_print (struct out_neword_struct *neword_ptr,
                       struct in_neword_struct *in_neword_ptr,
                       char *filename,
                       char *msg);
extern void pay_print (struct out_payment_struct *payment_ptr,
                       struct in_payment_struct *in_payment_ptr,
                       char *filename,
                       char *msg);
extern void ord_print (struct out_ordstat_struct *ordstat_ptr,
                       struct in_ordstat_struct *in_ordstat_ptr,
                       char *filename,
                       char *msg);
extern void del_print (struct out_delivery_struct *delivery_ptr,
                       struct in_delivery_struct *in_delivery_ptr,
                       char *filename,
                       char *msg);
extern void stk_print (struct out_stocklev_struct *stocklev_ptr,
                       struct in_stocklev_struct *in_stocklev_ptr,
                       char *filename,
                       char *msg);
#ifdef __cplusplus
}
#endif
#endif // __TPCCDBG_H
```

tpccenv.sh

```
################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
```

```
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
################################################################################
#
# tpccenv.sh - UNIX Environment Setup
#
# The Kit Version
export TPCC_VERSION=CK060601
# The DB2 Instance Name (for DB2)
export DB2INSTANCE=${USER}
# The OS being used (i.e. "UNIX", "LINUX", "WINDOWS","AIX")
export PLATFORM=AIX
# The type of make command and slash used by the OS.
# (i.e. UNIX - "/", WINDOWS - "\").
# These are referenced all over the kit.
export SLASH="/";
export MAKE=make
# Specifies whether or not to use dari stored proc's for the TPC-C driver.  Set to either DARIVERSION or
NONDARI;
#export TPCC_SPTYPE=NOSP
#export TPCC_SPTYPE=SPGENERAL2
export TPCC_SPTYPE=SPGENERAL
#export TPCC_SPTYPE=DARI2SQLDA
export DB2VERSION=v8
# The schema name is typically the SQL autorization ID (or username).
# This is required for runstats and EEE.
export TPCC_SCHEMA=${USER}
# DB2 EE/EEE Configuration
export DB2EDITION=EE
#export DB2EDITION=EEE
export DB2NODE=0
export DB2NODES=1;              # set to the number of nodes you have.  Set to 1 for EE.
# TPCC General Configuration
export TPCC_DBNAME=TPCC
export TPCC_ROOT=${HOME}/tpc-c.ibm
export TPCC_SQLLIB=${HOME}/sqllib
export TPCC_RUNDATA=${HOME}/tpccdata
# TPCC Debug Configuration
# This is the path where all error and debug logs are placed.
# To get debugging from within the stored procedures, you must
# set DB2ENVLIST="TPCC_DEBUGDIR" in tpcc.config.
export TPCC_DEBUGDIR=/tmp
# Specifies where stored procedures should be placed and if they should
# be fenced.
export TPCC_SPDIR=${TPCC_SQLLIB}/function
export TPCC_FENCED=NO
```

Appendix - B: Tunable Parameters

B.1 Database Parameters.

db.cfg.out

```
     Database Configuration for Database TPCC
Database configuration release level                = 0x0b00
Database release level                              = 0x0b00
Database territory                                  = US
Database code page                                  = 819
Database code set                                   = ISO8859-1
Database country/region code                        = 1
Database collating sequence                         = IDENTITY
Alternate collating sequence            (ALT_COLLATE) =
Database page size                                  = 4096
Dynamic SQL Query management          (DYN_QUERY_MGMT) = DISABLE
Discovery support for this database      (DISCOVER_DB) = ENABLE
Restrict access                                     = NO
Default query optimization class        (DFT_QUERYOPT) = 5
Degree of parallelism                   (DFT_DEGREE) = 1
Continue upon arithmetic exceptions   (DFT_SQLMATHWARN) = NO
Default refresh age                  (DFT_REFRESH_AGE) = 0
Default maintained table types for opt (DFT_MTTB_TYPES) = SYSTEM
Number of frequent values retained     (NUM_FREQVALUES) = 10
Number of quantiles retained           (NUM_QUANTILES) = 20
Backup pending                                      = NO
Database is consistent                              = YES
Rollforward pending                                 = NO
Restore pending                                     = NO
Multi-page file allocation enabled                  = YES
Log retain for recovery status                      = NO
User exit for logging status                        = NO
Self tuning memory                (SELF_TUNING_MEM) = OFF
Size of database shared memory (4KB)  (DATABASE_MEMORY) = 518113032
Database memory threshold              (DB_MEM_THRESH) = 10
Max storage for lock list (4KB)            (LOCKLIST) = 40000
Percent. of lock lists per application      (MAXLOCKS) = 20
Package cache size (4KB)                 (PCKCACHESZ) = 50000
Sort heap thres for shared sorts (4KB) (SHEAPTHRES_SHR) = 5000
Sort list heap (4KB)                       (SORTHEAP) = 16
Database heap (4KB)                          (DBHEAP) = 524288
Catalog cache size (4KB)             (CATALOGCACHE_SZ) = (MAXAPPLS*4)
Log buffer size (4KB)                      (LOGBUFSZ) = 25000
Utilities heap size (4KB)               (UTIL_HEAP_SZ) = 5000
Buffer pool size (pages)                    (BUFFPAGE) = 1000
Max size of appl. group mem set (4KB) (APPGROUP_MEM_SZ) = 20000
Percent of mem for appl. group heap   (GROUPHEAP_RATIO) = 70
Max appl. control heap size (4KB)     (APP_CTL_HEAP_SZ) = 128
SQL statement heap (4KB)                   (STMTHEAP) = 65000
Default application heap (4KB)           (APPLHEAPSZ) = 2500
Statistics heap size (4KB)             (STAT_HEAP_SZ) = 4384
Interval for checking deadlock (ms)        (DLCHKTIME) = 3000
Lock timeout (sec)                      (LOCKTIMEOUT) = -1
Changed pages threshold                (CHNGPGS_THRESH) = 99
Number of asynchronous page cleaners   (NUM_IOCLEANERS) = 1
Number of I/O servers                   (NUM_IOSERVERS) = 1
Index sort flag                            (INDEXSORT) = YES
Sequential detect flag                     (SEQDETECT) = NO
Default prefetch size (pages)        (DFT_PREFETCH_SZ) = AUTOMATIC
Track modified pages                      (TRACKMOD) = OFF
Default number of containers                        = 1
Default tablespace extentsize (pages)   (DFT_EXTENT_SZ) = 32
Max number of active applications          (MAXAPPLS) = 5100
Average number of active applications       (AVG_APPLS) = AUTOMATIC
Max DB files open per application          (MAXFILOP) = 800
Log file size (4KB)                     (LOGFILSIZ) = 524286
Number of primary log files               (LOGPRIMARY) = 180
Number of secondary log files             (LOGSECOND) = 0
Changed path to log files                 (NEWLOGPATH) =
Path to log files                                   = /dev/rdbloglv
Overflow log path                    (OVERFLOWLOGPATH) =
Mirror log path                      (MIRRORLOGPATH) =
First active log file                               =
Block log on disk full                (BLK_LOG_DSK_FUL) = NO
Percent max primary log space by transaction  (MAX_LOG) = 0
Num. of active log files for 1 active UOW(NUM_LOG_SPAN) = 0
Group commit count                         (MINCOMMIT) = 3
Percent log file reclaimed before soft chckpt (SOFTMAX) = 13275
Log retain for recovery enabled             (LOGRETAIN) = OFF
User exit for logging enabled               (USEREXIT) = OFF
HADR database role                                  = STANDARD
HADR local host name                 (HADR_LOCAL_HOST) =
HADR local service name               (HADR_LOCAL_SVC) =
HADR remote host name                (HADR_REMOTE_HOST) =
HADR remote service name              (HADR_REMOTE_SVC) =
HADR instance name of remote server  (HADR_REMOTE_INST) =
HADR timeout value                     (HADR_TIMEOUT) = 120
HADR log write synchronization mode     (HADR_SYNCMODE) = NEARSYNC
First log archive method               (LOGARCHMETH1) = OFF
Options for logarchmeth1                 (LOGARCHOPT1) =
Second log archive method              (LOGARCHMETH2) = OFF
Options for logarchmeth2                 (LOGARCHOPT2) =
Failover log archive path               (FAILARCHPATH) =
Number of log archive retries on error   (NUMARCHRETRY) = 5
Log archive retry Delay (secs)          (ARCHRETRYDELAY) = 20
Vendor options                           (VENDOROPT) =
Auto restart enabled                     (AUTORESTART) = ON
Index re-creation time and redo index build  (INDEXREC) = SYSTEM (RESTART)
Log pages during index build            (LOGINDEXBUILD) = OFF
Default number of loadrec sessions    (DFT_LOADREC_SES) = 1
Number of database backups to retain   (NUM_DB_BACKUPS) = 12
Recovery history retention (days)     (REC_HIS_RETENTN) = 366
TSM management class                    (TSM_MGMTCLASS) =
TSM node name                           (TSM_NODENAME) =
TSM owner                               (TSM_OWNER) =
TSM password                            (TSM_PASSWORD) =
Automatic maintenance                     (AUTO_MAINT) = OFF
  Automatic database backup               (AUTO_DB_BACKUP) = OFF
  Automatic table maintenance             (AUTO_TBL_MAINT) = OFF
    Automatic runstats                    (AUTO_RUNSTATS) = OFF
    Automatic statistics profiling        (AUTO_STATS_PROF) = OFF
      Automatic profile updates           (AUTO_PROF_UPD) = OFF
    Automatic reorganization              (AUTO_REORG) = OFF
```

dbm.cfg.out

```
        Database Manager Configuration
   Node type = Database Server with local clients
Database manager configuration release level            = 0x0b00
CPU speed (millisec/instruction)             (CPUSPEED) = 3.306409e-07
Max number of concurrently active databases     (NUMDB) = 1
Federated Database System Support           (FEDERATED) = NO
Transaction processor monitor name        (TP_MON_NAME) =
Default charge-back account           (DFT_ACCOUNT_STR) =
Java Development Kit installation path       (JDK_PATH) = /home/tpcc/sqllib/java/jdk64
Diagnostic error capture level               (DIAGLEVEL) = 1
Notify Level                              (NOTIFYLEVEL) = 3
Diagnostic data directory path               (DIAGPATH) =
Default database monitor switches
  Buffer pool                        (DFT_MON_BUFPOOL) = OFF
  Lock                               (DFT_MON_LOCK) = OFF
  Sort                               (DFT_MON_SORT) = OFF
  Statement                          (DFT_MON_STMT) = OFF
  Table                              (DFT_MON_TABLE) = OFF
  Timestamp                          (DFT_MON_TIMESTAMP) = OFF
  Unit of work                       (DFT_MON_UOW) = OFF
Monitor health of instance and databases   (HEALTH_MON) = OFF
SYSADM group name                       (SYSADM_GROUP) = STAFF
SYSCTRL group name                      (SYSCTRL_GROUP) =
SYSMAINT group name                     (SYSMAINT_GROUP) =
SYSMON group name                       (SYSMON_GROUP) =
Client Userid-Password Plugin           (CLNT_PW_PLUGIN) =
Client Kerberos Plugin                  (CLNT_KRB_PLUGIN) =
Group Plugin                            (GROUP_PLUGIN) =
GSS Plugin for Local Authorization      (LOCAL_GSSPLUGIN) =
Server Plugin Mode                      (SRV_PLUGIN_MODE) = UNFENCED
Server List of GSS Plugins         (SRVCON_GSSPLUGIN_LIST) =
Server Userid-Password Plugin           (SRVCON_PW_PLUGIN) =
Server Connection Authentication           (SRVCON_AUTH) = NOT_SPECIFIED
Database manager authentication         (AUTHENTICATION) = CLIENT
Cataloging allowed without authority    (CATALOG_NOAUTH) = YES
Trust all clients                       (TRUST_ALLCLNTS) = YES
Trusted client authentication           (TRUST_CLNTAUTH) = CLIENT
Bypass federated authentication             (FED_NOAUTH) = NO
Default database path                   (DFTDBPATH) = /home/tpcc
Database monitor heap size (4KB)            (MON_HEAP_SZ) = 4096
Java Virtual Machine heap size (4KB)        (JAVA_HEAP_SZ) = 1024
Audit buffer size (4KB)                     (AUDIT_BUF_SZ) = 0
Size of instance shared memory (4KB)  (INSTANCE_MEMORY) = AUTOMATIC
Backup buffer default size (4KB)            (BACKBUFSZ) = 1024
Restore buffer default size (4KB)           (RESTBUFSZ) = 1024
Sort heap threshold (4KB)                   (SHEAPTHRES) = 0
Directory cache support                     (DIR_CACHE) = YES
Application support layer heap size (4KB)   (ASLHEAPSZ) = 15
Max requester I/O block size (bytes)        (RQRIOBLK) = 4096
Query heap size (4KB)                       (QUERY_HEAP_SZ) = 1000
Workload impact by throttled utilities(UTIL_IMPACT_LIM) = 10
Priority of agents                          (AGENTPRI) = 60
Max number of existing agents               (MAXAGENTS) = 5100
Agent pool size                         (NUM_POOLAGENTS) = 0
Initial number of agents in pool        (NUM_INITAGENTS) = 0
Max number of coordinating agents       (MAX_COORDAGENTS) = MAXAGENTS
Max no. of concurrent coordinating agents  (MAXCAGENTS) = MAX_COORDAGENTS
Max number of client connections        (MAX_CONNECTIONS) = MAX_COORDAGENTS
Keep fenced process                         (KEEPFENCED) = YES
Number of pooled fenced processes           (FENCED_POOL) = MAX_COORDAGENTS
Initial number of fenced processes      (NUM_INITFENCED) = 0
Index re-creation time and redo index build  (INDEXREC) = RESTART
Transaction manager database name           (TM_DATABASE) = 1ST_CONN
Transaction resync interval (sec)       (RESYNC_INTERVAL) = 180
SPM name                                    (SPM_NAME) =
SPM log size                            (SPM_LOG_FILE_SZ) = 256
SPM resync agent limit                  (SPM_MAX_RESYNC) = 20
SPM log path                            (SPM_LOG_PATH) =
TCP/IP Service name                           (SVCENAME) =
Discovery mode                              (DISCOVER) = SEARCH
Discover server instance                (DISCOVER_INST) = ENABLE
Maximum query degree of parallelism     (MAX_QUERYDEGREE) = ANY
Enable intra-partition parallelism      (INTRA_PARALLEL) = NO
No. of int. communication buffers(4KB)(FCM_NUM_BUFFERS) = AUTOMATIC
No. of int. communication channels    (FCM_NUM_CHANNELS) = AUTOMATIC
db2start/db2stop timeout (min)          (START_STOP_TIME) = 10
```

db2set.cfg.out

```
[i] DB2_LARGE_PAGE_MEM=DB:16GB
[i] DB2_RESOURCE_POLICY=/home/tpcc/tpc-c.ibm/cfg/affinity.cfg
[i] DB2_SELUDI_COMM_BUFFER=Y
[i] DB2_USE_ALTERNATE_PAGE_CLEANING=YES
[i] DB2_MAX_NON_TABLE_LOCKS=1000
[i] DB2_TRUSTED_BINDIN=ON
```

```
[i] DB2_KEEPTABLELOCK=ON
[i] DB2_NO_FORK_CHECK=ON
[i] DB2_ALLOCATION_SIZE=16777216
[i] DB2_APM_PERFORMANCE=ALL
[i] DB2_ENABLE_BUFPD=OFF
[i] DB2_PINNED_BP=YES
[i] DB2_SELECTIVITY=ON
[i] DB2ASSUMEUPDATE=ON
[i] DB2CHECKCLIENTINTERVAL=0
[i] DB2_HASH_JOIN=OFF
[i] DB2CHKSQLDA=OFF
[i] DB2ENVLIST=MEMORY_AFFINITY DATA_SEG_SPECIAL
[i] DB2_COLLECT_TS_REC_INFO=false
[i] DB2COMM=tcpip
[i] DB2CHKPTR=OFF
```

affinity.cfg

```
<RESOURCE_POLICY>
<DATABASE_RESOURCE_POLICY>
<DBNAME>TPCC</DBNAME>
<METHOD>RSET</METHOD>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00000</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc0</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>55</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>63</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>39</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>47</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>15</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>79</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>71</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>23</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>31</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>87</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00001</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc1</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>56</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>64</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>40</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>48</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>16</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>80</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>72</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>24</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>32</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>88</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00002</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc2</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>57</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>65</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>41</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>49</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>17</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>81</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>73</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>25</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>33</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>89</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00003</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc3</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>58</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>66</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>42</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>50</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>18</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>82</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>74</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>26</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>34</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>90</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00004</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc4</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>59</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>67</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>43</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>51</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>19</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>83</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>75</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>27</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>35</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>91</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00005</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc5</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>60</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>68</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>44</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>52</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>20</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>84</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>76</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>28</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>36</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>92</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00006</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc6</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>61</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>69</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>45</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>53</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>21</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>85</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>77</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>29</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>37</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>93</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
<RESOURCE_BINDING>
 <RESOURCE>sys/node.03.00007</RESOURCE>
 <DBMEM_PERCENTAGE>0</DBMEM_PERCENTAGE>
  <SERVICE_NAME>xtpcc7</SERVICE_NAME>
  <BUFFERPOOL_BINDING>
    <NUM_CLEANERS>8</NUM_CLEANERS>
    <BUFFERPOOL_ID>62</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>70</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>46</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>54</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>22</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>86</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>78</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>30</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>38</BUFFERPOOL_ID>
    <BUFFERPOOL_ID>94</BUFFERPOOL_ID>
  </BUFFERPOOL_BINDING>
</RESOURCE_BINDING>
</DATABASE_RESOURCE_POLICY>
</RESOURCE_POLICY>
```

B.2 Transaction Monitor Parameters

tpccCom.tpcc_com_settings.txt

Transactions not supported
Enable object pooling
Minimum pool size 27
Maximum pool size 27
Creation timeout 100,000
Enable Object Construction
Enable Just in time activation
Concurrency Required

InetInfo_registry.reg

```
Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]
"ListenBackLog"=dword:000000fa
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,00,00,00,00
"MaxConnections"=dword:000061a8
"PoolThreadLimit"=dword:00000190
"ThreadTimeout"=dword:00015180
"MaxConcurrency"=dword:ffffffff
```

tcpip_parameters_registry.reg

```
Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters]
"NV Hostname"="client32"
"DataBasePath"=hex(2):25,00,53,00,79,00,73,00,74,00,65,00,6d,00,52,00,6f,00,6f,\
  00,74,00,25,00,5c,00,53,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,\
  64,00,72,00,69,00,76,00,65,00,72,00,73,00,5c,00,65,00,74,00,63,00,00,00
"NameServer"=""
"ForwardBroadcasts"=dword:00000000
"IPEnableRouter"=dword:00000000
```

"Domain"=""
"Hostname"="client32"
"SearchList"=""
"UseDomainNameDevolution"=dword:00000001
"EnableICMPRedirect"=dword:00000001
"DeadGWDetectDefault"=dword:00000001
"DontAddDefaultGatewayDefault"=dword:00000000
"EnableSecurityFilters"=dword:00000000
"AllowUnqualifiedQuery"=dword:00000000
"PrioritizeRecordData"=dword:00000001
"GlobalTcpWindowSize"=dword:00008000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\NdisWanIp]
"LLInterface"="WANARP"
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,36,00,31,00,44,00,33,00,33,00,39,00,\
  37,00,37,00,2d,00,37,00,31,00,30,00,46,00,2d,00,34,00,41,00,37,00,45,00,2d,\
  00,38,00,44,00,34,00,37,00,2d,00,34,00,42,00,34,00,38,00,32,00,42,00,43,00,\
  35,00,32,00,33,00,46,00,38,00,7d,00,00,00,54,00,63,00,70,00,69,00,70,00,5c,\
  00,50,00,61,00,72,00,61,00,6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,\
  6e,00,74,00,65,00,72,00,66,00,61,00,63,00,65,00,73,00,5c,00,7b,00,39,00,41,\
  00,33,00,41,00,41,00,36,00,41,00,43,00,2d,00,35,00,38,00,34,00,36,00,2d,00,\
  34,00,30,00,37,00,45,00,2d,00,38,00,32,00,35,00,30,00,2d,00,46,00,30,00,33,\
  00,42,00,36,00,30,00,34,00,39,00,36,00,36,00,44,00,43,00,7d,00,00,00,00,00
"NumInterfaces"=dword:00000002
"IpInterfaces"=hex:77,39,d3,61,0f,71,7e,4a,8d,47,4b,48,2b,c5,23,f8,ac,a6,3a,9a,\
  46,58,7e,40,82,50,f0,3b,60,49,66,dc
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{0435C97F-9186-473F-B181-5449A2CF0042}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,30,00,34,00,33,00,35,00,43,00,39,00,\
  37,00,46,00,2d,00,39,00,31,00,38,00,36,00,2d,00,34,00,37,00,33,00,46,00,2d,\
  00,42,00,31,00,38,00,31,00,2d,00,35,00,34,00,34,00,39,00,41,00,32,00,43,00,\
  46,00,30,00,30,00,34,00,32,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{1E07A95A-92A0-4836-BF73-7AE38F8ACA07}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,31,00,45,00,30,00,37,00,41,00,39,00,\
  35,00,41,00,2d,00,39,00,32,00,41,00,30,00,2d,00,34,00,38,00,33,00,36,00,2d,\
  00,42,00,46,00,37,00,33,00,2d,00,37,00,41,00,45,00,33,00,38,00,46,00,38,00,\
  41,00,43,00,41,00,30,00,37,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{2EA04AA5-93A6-437F-9153-2F6834D3B795}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,32,00,45,00,41,00,30,00,34,00,41,00,\
  41,00,35,00,2d,00,39,00,33,00,41,00,36,00,2d,00,34,00,33,00,37,00,46,00,2d,\
  00,39,00,31,00,35,00,33,00,2d,00,32,00,46,00,36,00,38,00,33,00,34,00,44,00,\
  33,00,42,00,37,00,39,00,35,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{37430121-7BE3-4B55-8AAB-D8AD09B2029C}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,33,00,37,00,34,00,33,00,30,00,31,00,\
  32,00,31,00,2d,00,37,00,42,00,45,00,33,00,2d,00,34,00,42,00,35,00,35,00,2d,\
  00,38,00,41,00,41,00,42,00,2d,00,44,00,38,00,41,00,44,00,30,00,39,00,42,00,\
  32,00,30,00,32,00,39,00,43,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{6FE29D81-59D5-4401-A77E-BE3BC929B6E0}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,36,00,46,00,45,00,32,00,39,00,44,00,\
  38,00,31,00,2d,00,35,00,39,00,44,00,35,00,2d,00,34,00,34,00,30,00,31,00,2d,\
  00,41,00,37,00,37,00,45,00,2d,00,42,00,45,00,33,00,42,00,43,00,39,00,32,00,\
  39,00,42,00,36,00,45,00,30,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{7B215199-A3F3-4836-89A6-390C5E70E801}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,37,00,42,00,32,00,31,00,35,00,31,00,\
  39,00,39,00,2d,00,41,00,33,00,46,00,33,00,2d,00,34,00,38,00,33,00,36,00,2d,\
  00,38,00,39,00,41,00,36,00,2d,00,33,00,39,00,30,00,43,00,35,00,45,00,37,00,\
  30,00,45,00,38,00,30,00,31,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{A32BB4A3-C9B2-4ADB-A65D-18BB314BF7F0}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,41,00,33,00,32,00,42,00,42,00,34,00,\
  41,00,33,00,2d,00,43,00,39,00,42,00,32,00,2d,00,34,00,41,00,44,00,42,00,2d,\
  00,41,00,36,00,35,00,44,00,2d,00,31,00,38,00,42,00,42,00,33,00,31,00,34,00,\
  42,00,46,00,37,00,46,00,30,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{A71EB7B5-37C6-42DB-BE8F-BB231FD1BE00}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,41,00,37,00,31,00,45,00,42,00,37,00,\
  42,00,35,00,2d,00,33,00,37,00,43,00,36,00,2d,00,34,00,32,00,44,00,42,00,2d,\
  00,42,00,45,00,38,00,46,00,2d,00,42,00,42,00,32,00,33,00,31,00,46,00,44,00,\
  31,00,42,00,45,00,30,00,30,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{BEABCC14-9C0A-4BE9-9817-14C4092418D3}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,42,00,45,00,41,00,42,00,43,00,43,00,\
  31,00,34,00,2d,00,39,00,43,00,30,00,41,00,2d,00,34,00,42,00,45,00,39,00,2d,\
  00,39,00,38,00,31,00,37,00,2d,00,31,00,34,00,43,00,34,00,30,00,39,00,32,00,\
  34,00,31,00,38,00,44,00,33,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{CD3F7746-9E60-4E22-9A40-7BC6CC6B2E2E}]
"LLInterface"=""
"IpConfig"=hex(7):54,00,63,00,70,00,69,00,70,00,5c,00,50,00,61,00,72,00,61,00,\
  6d,00,65,00,74,00,65,00,72,00,73,00,5c,00,49,00,6e,00,74,00,65,00,72,00,66,\
  00,61,00,63,00,65,00,73,00,5c,00,7b,00,43,00,44,00,33,00,46,00,37,00,37,00,\
  34,00,36,00,2d,00,39,00,45,00,36,00,30,00,2d,00,34,00,45,00,32,00,32,00,2d,\
  00,39,00,41,00,34,00,30,00,2d,00,37,00,42,00,43,00,36,00,43,00,43,00,36,00,\
  42,00,32,00,45,00,32,00,45,00,7d,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\DNSRegisteredAdapters]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{0435C97F-9186-473F-B181-5449A2CF0042}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):31,00,33,00,35,00,2e,00,31,00,2e,00,31,00,2e,00,31,00,00,00,\
  00,00
"SubnetMask"=hex(7):32,00,35,00,35,00,2e,00,32,00,35,00,35,00,2e,00,32,00,35,\
  00,35,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00,00
"NTEContextList"=hex(7):00,00
"TcpWindowSize"=dword:00008000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{1E07A95A-92A0-4836-BF73-7AE38F8ACA07}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000001
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00,00
"NTEContextList"=hex(7):00,00
"DhcpIPAddress"="0.0.0.0"
"DhcpSubnetMask"="255.0.0.0"
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{2EA04AA5-93A6-437F-9153-2F6834D3B795}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):31,00,39,00,32,00,2e,00,31,00,36,00,38,00,2e,00,31,00,31,00,\
  2e,00,35,00,31,00,00,00,00,00
"SubnetMask"=hex(7):32,00,35,00,35,00,2e,00,32,00,35,00,35,00,2e,00,32,00,35,\
  00,35,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00,00
"NTEContextList"=hex(7):30,00,78,00,30,00,30,00,30,00,30,00,30,00,30,00,30,00,\
  33,00,00,00,00,00
"DhcpServer"="255.255.255.255"
"Lease"=dword:00000e10
"LeaseObtainedTime"=dword:40b39c06
"T1"=dword:40b3a30e
"T2"=dword:40b3a854
"LeaseTerminatesTime"=dword:40b3aa16
"IPAutoconfigurationAddress"="0.0.0.0"
"IPAutoconfigurationMask"="255.255.0.0"
"IPAutoconfigurationSeed"=dword:00000000
"AddressType"=dword:00000000
"DhcpClassIdBin"=hex:
"TcpWindowSize"=dword:00008000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{37430121-7BE3-4B55-8AAB-D8AD09B2029C}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000001
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00,00
"NTEContextList"=hex(7):00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{61D33977-710F-4A7E-8D47-4B482BC523F8}]
"UseZeroBroadcast"=dword:00000000
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00,00,00

"DefaultGateway"=hex(7):00,00
"EnableDeadGWDetect"=dword:00000001
"DontAddDefaultGateway"=dword:00000000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{6FE29D81-59D5-4401-A77E-BE3BC929B6E0}]
"UseZeroBroadcast"=dword:00000000

"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000001
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{7B215199-A3F3-4836-89A6-390C5E70E801}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000001
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{9A3AA6AC-5846-407E-8250-F03B604966DC}]
"UseZeroBroadcast"=dword:00000000
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"EnableDeadGWDetect"=dword:00000001
"DontAddDefaultGateway"=dword:00000000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{A32BB4A3-C9B2-4ADB-A65D-18BB314BF7F0}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):31,00,30,00,2e,00,33,00,2e,00,31,00,2e,00,31,00,00,00,00,00
"SubnetMask"=hex(7):32,00,35,00,35,00,2e,00,32,00,35,00,35,00,2e,00,32,00,35,\
  00,35,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):00,00
"TcpWindowSize"=dword:00008000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{A71EB7B5-37C6-42DB-BE8F-BB231FD1BE00}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):31,00,30,00,2e,00,33,00,32,00,2e,00,31,00,2e,00,32,00,00,00,\
  00,00
"SubnetMask"=hex(7):32,00,35,00,35,00,2e,00,32,00,35,00,35,00,2e,00,32,00,35,\
  00,35,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):30,00,78,00,30,00,30,00,30,00,30,00,30,00,30,00,30,00,\
  32,00,00,00,00,00
"DhcpServer"="255.255.255.255"
"Lease"=dword:00000e10
"LeaseObtainedTime"=dword:40be0640
"T1"=dword:40be0d48
"T2"=dword:40be128e
"LeaseTerminatesTime"=dword:40be1450
"IPAutoconfigurationAddress"="0.0.0.0"
"IPAutoconfigurationMask"="255.255.0.0"
"IPAutoconfigurationSeed"=dword:00000000
"AddressType"=dword:00000000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{BEABCC14-9C0A-4BE9-9817-14C4092418D3}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000000
"IPAddress"=hex(7):31,00,30,00,2e,00,31,00,2e,00,32,00,2e,00,31,00,00,00,00,00
"SubnetMask"=hex(7):32,00,35,00,35,00,2e,00,32,00,35,00,35,00,2e,00,32,00,35,\
  00,35,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):00,00
"TcpWindowSize"=dword:00008000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{CD3F7746-9E60-4E22-9A40-7BC6CC6B2E2E}]
"UseZeroBroadcast"=dword:00000000
"EnableDeadGWDetect"=dword:00000001
"EnableDHCP"=dword:00000001
"IPAddress"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"SubnetMask"=hex(7):30,00,2e,00,30,00,2e,00,30,00,2e,00,30,00,00,00,00,00
"DefaultGateway"=hex(7):00,00
"DefaultGatewayMetric"=hex(7):00,00
"NameServer"=""
"Domain"=""
"DisableDynamicUpdate"=dword:00000000
"EnableAdapterDomainNameRegistration"=dword:00000000
"InterfaceMetric"=dword:00000001
"TCPAllowedPorts"=hex(7):30,00,00,00,00,00
"UDPAllowedPorts"=hex(7):30,00,00,00,00,00
"RawIPAllowedProtocols"=hex(7):30,00,00,00,00,00
"NTEContextList"=hex(7):00,00
"TcpWindowSize"=dword:00008000
"DhcpIPAddress"="0.0.0.0"
"DhcpSubnetMask"="255.0.0.0"
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\PersistentRoutes]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Winsock]
"UseDelayedAcceptance"=dword:00000000
"HelperDllName"=hex(2):25,00,53,00,79,00,73,00,74,00,65,00,6d,00,52,00,6f,00,\
  6f,00,74,00,25,00,5c,00,53,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,\
  00,77,00,73,00,68,00,74,00,63,00,70,00,69,00,70,00,2e,00,64,00,6c,00,6c,00,\
  00,00
"MaxSockAddrLength"=dword:00000010
"MinSockAddrLength"=dword:00000010
"Mapping"=hex:0b,00,00,00,03,00,00,00,02,00,00,00,01,00,00,00,06,00,00,00,02,\
  00,00,00,01,00,00,00,00,00,00,00,02,00,00,00,00,00,00,00,06,00,00,00,00,00,\
  00,00,00,00,00,00,06,00,00,00,00,00,00,00,01,00,00,00,06,00,00,00,02,00,00,\
  00,02,00,00,00,11,00,00,00,02,00,00,00,02,00,00,00,00,00,00,00,02,00,00,00,\
  00,00,00,00,11,00,00,00,00,00,00,00,00,00,00,00,11,00,00,00,00,00,00,00,02,\
  00,00,00,11,00,00,00,02,00,00,00,03,00,00,00,00,00,00,00

Tpcc_software_registry.reg

HKEY_LOCAL_MACHINE\Software\TPCC
  dlvyLogPath REG_SZ C:\inetpub\wwwroot\tpcc\dlvy
  dlvyQueueLen REG_DWORD 0x4e20
  nullDB REG_DWORD 0x0
  htmlTrace REG_DWORD 0x0
  dbName REG_SZ tpcc
  errorLogFile REG_SZ c:\inetpub\wwwroot\tpcc\isapi_err.log
  htmlTraceLogFile REG_SZ c:\inetpub\wwwroot\tpcc\isapi.log
  numUsers REG_DWORD 0x5208
  dbType REG_SZ DB2
  dbUserName REG_SZ tpcc
  dbPassword REG_SZ tpcc
  dbInterfacePath REG_SZ C:\inetpub\wwwroot\tpcc\tpccdb2glue.dll
  dlvyQueueThreshold REG_DWORD 0xa
  dlvyThreads REG_DWORD 0x5
  dynamicDlvy REG_DWORD 0x0
  isapi_trace REG_DWORD 0x0
  numWarehouse REG_DWORD 0x7d0
  numPools REG_DWORD 0x1
  numServers REG_DWORD 0x1

W3SVC_registry.reg

Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]
"Type"=dword:00000020
"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,00,4e,00,54,00,5c,00,53,00,\
  79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00,6e,00,65,00,74,00,73,\
  00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e,00,66,00,6f,00,2e,00,\
  65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,00,4d,00,49,00,4e,00,00,00,\
  00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and administration through the Internet Information Services snap-in."
"FailureActions"=hex:ff,ff,ff,ff,00,00,00,00,00,00,00,00,03,00,00,00,38,c3,0f,\
  00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP]
"NOTE"="This is for backward compatibility only."
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\\WINNT\\System32\\inetsrv"
"CertMapList"="C:\\WINNT\\System32\\inetsrv\\iiscrmap.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\\WINNT\\System32\\LogFiles"
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch]

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\Advan
cedDataFactory]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSS
erver.DataFactory]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots]
"/"="c:\\inetpub\\wwwroot,,201"
"/Scripts"="c:\\inetpub\\scripts,,204"
"/IISHelp"="c:\\winnt\\help\\iishelp,,201"
"/IISAdmin"="C:\\WINNT\\System32\\inetsrv\\iisadmin,,201"
"/IISSamples"="c:\\inetpub\\iissamples,,201"
"/MSADC"="c:\\program files\\common files\\system\\msadc,,205"
"/_vti_bin"="C:\\Program Files\\Common Files\\Microsoft Shared\\Web Server Extensions\\40\\isapi,,205"
"/Printers"="C:\\WINNT\\web\\printers,,201"
"/tpcc"="C:\\Inetpub\\wwwroot\\tpcc,,207"
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]
"Library"="w3ctrs.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation Code"=hex:4a,82,e5,79,9f,41,c4,01,10,3d,00,00,00,00,00,00
"WbemAdapFileTime"=hex:00,9a,a9,c0,5f,3f,c4,01
"WbemAdapFileSize"=dword:00003d10
"WbemAdapStatus"=dword:00000000
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security]
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14,00,00,00,30,00,00,00,02,\
  00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00,00,00,00,00,01,00,00,\
  00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00,01,01,00,00,00,00,00,\
  05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01,02,00,00,00,00,00,05,\
  20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01,02,00,01,01,00,00,00,\
  00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02,00,01,02,00,00,00,00,\
  00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00,00,00,00,00,05,12,00,00,\

  00,01,01,00,00,00,00,00,05,12,00,00,00
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum]
"0"="Root\\LEGACY_W3SVC\\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001
```

B.3 AIX Parameters

IBM System p5 595

```
lsattr -El sys0
SW_dist_intr    false          Enable SW distribution of interrupts            True
autorestart     true           Automatically REBOOT OS after a crash           True
boottype        disk           N/A                                             False
capacity_inc    1.00           Processor capacity increment                    False
capped          true           Partition is capped                             False
conslogin       enable         System Console Login                            False
cpuguard        enable         CPU Guard                                       True
dedicated       true           Partition is dedicated                          False
ent_capacity    64.00          Entitled processor capacity                     False
frequency       528000000      System Bus Frequency                            False
fullcore        false          Enable full CORE dump                           True
fwversion       IBM,SF250_027  Firmware version and revision levels            False
id_to_partition 0X80000D71EE800002 Partition ID                                False
id_to_system    0X80000D71EE800000 System ID                                   False
iostat          false          Continuously maintain DISK I/O history          True
keylock         normal         State of system keylock at boot time            False
max_capacity    64.00          Maximum potential processor capacity            False
max_logname     9              Maximum login name length at boot time          True
maxbuf          20             Maximum number of pages in block I/O BUFFER CACHE True
maxmbuf         0              Maximum Kbytes of real memory allowed for MBUFS True
maxpout         192            HIGH water mark for pending write I/Os per file True
maxuproc        20000          Maximum number of PROCESSES allowed per user    True
min_capacity    1.00           Minimum potential processor capacity            False
minpout         164            LOW water mark for pending write I/Os per file  True
modelname       IBM,9119-595   Machine name                                    False
ncargs          6              ARG/ENV list size in 4K byte blocks             True
nfs4_acl_compat secure         NFS4 ACL Compatibility Mode                     True
pre430core      false          Use pre-430 style CORE dump                     True
pre520tune      disable        Pre-520 tuning compatibility mode               True
realmem         2143813632     Amount of usable physical memory in Kbytes      False
rtasversion     1              Open Firmware RTAS version                      False
sed_config      select         Stack Execution Disable (SED) Mode              True
systemid        IBM,02028E67C  Hardware system identifier                      False
variable_weight 0              Variable processor capacity weight              False
vmo –L
NAME                  CUR    DEF    BOOT   MIN    MAX    UNIT          TYPE
   DEPENDENCIES
------------------------------------------------------------------------------
cpu_scale_memp          8      8      8      1      64                   B
------------------------------------------------------------------------------
data_stagger_interval   161    161    161    0      4K-1   4KB pages     D
   lgpg_regions
------------------------------------------------------------------------------
defps                   1      1      1      0      1      boolean       D
------------------------------------------------------------------------------
force_relalias_lite     0      0      0      0      1      boolean       D
------------------------------------------------------------------------------
framesets               2      2      2      1      10                   B
------------------------------------------------------------------------------
htabscale               n/a    -1     -1     -4     0                    B
------------------------------------------------------------------------------
kernel_heap_psize       64K    4K     64K    4K     16M    bytes         B
------------------------------------------------------------------------------
kernel_psize            4K     0      0      0      16M    bytes         B
------------------------------------------------------------------------------
large_page_heap_size    0      0      0      0      8E-1   bytes         B
   lgpg_regions
------------------------------------------------------------------------------
lgpg_regions            11856  0      11952  0                           D
   lgpg_size
------------------------------------------------------------------------------
lgpg_size               16M    0      16M    0      16M    bytes         D
   lgpg_regions
------------------------------------------------------------------------------
low_ps_handling         1      1      1      1      2                    D
------------------------------------------------------------------------------
lru_file_repage         1      1      1      0      1      boolean       D
------------------------------------------------------------------------------
lru_poll_interval       10     10     10     0      60000  milliseconds  D
------------------------------------------------------------------------------
lrubucket               128K   128K   128K   64K           4KB pages     D
------------------------------------------------------------------------------
maxclient%              80     80     80     1      100    % memory      D
   maxperm%
   minperm%
------------------------------------------------------------------------------
maxfree                 1088   1088   1088   8      200K   4KB pages     D
   minfree
   memory_frames
------------------------------------------------------------------------------
maxperm                 12345K         12345K                            S
------------------------------------------------------------------------------
maxperm%                80     80     80     1      100    % memory      D
   minperm%
   maxclient%
------------------------------------------------------------------------------
maxpin                  523081K        523081K                           S
------------------------------------------------------------------------------
maxpin%                 98     80     98     1      99     % memory      D
   pinnable_frames
   memory_frames
------------------------------------------------------------------------------
mbuf_heap_psize         64K    0      0      0      16M    bytes         B
------------------------------------------------------------------------------
memory_affinity         1      1      1      0      1      boolean       B
------------------------------------------------------------------------------
memory_frames           511M           511M                4KB pages     S
------------------------------------------------------------------------------
memplace_data           2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_mapped_file    2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_shm_anonymous  2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_shm_named      2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_stack          2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_text           2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
memplace_unmapped_file  2      2      2      1      2                    D
   memory_affinity
------------------------------------------------------------------------------
mempools                16             16                          d
   cpu_scale_memp
------------------------------------------------------------------------------
minfree                 960    960    960    8      200K   4KB pages     D
   maxfree
   memory_frames
------------------------------------------------------------------------------
minperm                 158011         158011                            S
------------------------------------------------------------------------------
minperm%                1      20     20     1      100    % memory      D
   maxperm%
   maxclient%
------------------------------------------------------------------------------
nokilluid               0      0      0      0      4G-1   uid           D
------------------------------------------------------------------------------
npskill                 119040 119040 119040 1      14M-1  4KB pages     D
------------------------------------------------------------------------------
npsrpgmax               930K   930K   930K   0      14M-1  4KB pages     D
   npsrpgmin
------------------------------------------------------------------------------
npsrpgmin               714240 714240 714240 0      14M-1  4KB pages     D
   npsrpgmax
------------------------------------------------------------------------------
npsscrubmax             930K   930K   930K   0      14M-1  4KB pages     D
   npsscrubmin
------------------------------------------------------------------------------
npsscrubmin             714240 714240 714240 0      14M-1  4KB pages     D
   npsscrubmax
------------------------------------------------------------------------------
npswarn                 465K   465K   465K   0      14M-1  4KB pages     D
------------------------------------------------------------------------------
num_spec_dataseg        0      0      0      0                           B
------------------------------------------------------------------------------
numpsblks               14880K         14880K              4KB blocks    S
------------------------------------------------------------------------------
page_steal_method       0      0      0      0      1      boolean       B
------------------------------------------------------------------------------
pagecoloring            n/a    0      0      0      1      boolean       B
------------------------------------------------------------------------------
pinnable_frames         13163K         13163K              4KB pages     S
------------------------------------------------------------------------------
pta_balance_threshold   n/a    1      1      0      99     % pta segment D
------------------------------------------------------------------------------
relalias_percentage     0      0      0      0      32K-1                D
------------------------------------------------------------------------------
rpgclean                0      0      0      0      1      boolean       D
```

```
-------------------------------------------------------------------------------
rpgcontrol              2    2    2    0    3                    D
-------------------------------------------------------------------------------
scrub                   0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
scrubclean              0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
soft_min_lgpgs_vmpool   0    0    0    0    90   %               D
    lgpg_regions
-------------------------------------------------------------------------------
spec_dataseg_int        512  512  512  0                         B
-------------------------------------------------------------------------------
strict_maxclient        1    1    1    0    1    boolean         D
    strict_maxperm
-------------------------------------------------------------------------------
strict_maxperm          0    0    0    0    1    boolean         D
    strict_maxclient
-------------------------------------------------------------------------------
v_pinshm                1    0    1    0    1    boolean         D
-------------------------------------------------------------------------------
vm_modlist_threshold    -1   -1   -1   -2   2G-1                 D
-------------------------------------------------------------------------------
vmm_fork_policy         1    1    1    0    1    boolean         D
-------------------------------------------------------------------------------
vmm_mpsize_support      1    1    1    0    1    boolean         B
-------------------------------------------------------------------------------
ioo –L
NAME                    CUR   DEF   BOOT  MIN   MAX   UNIT        TYPE
    DEPENDENCIES
-------------------------------------------------------------------------------
j2_atimeUpdateSymlink   0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
j2_dynamicBufferPreallocation
                        16   16   16   0    256  16K slabs       D
-------------------------------------------------------------------------------
j2_inodeCacheSize       400  400  400  1    1000                 D
-------------------------------------------------------------------------------
j2_maxPageReadAhead     128  128  128  0    64K  4KB pages       D
-------------------------------------------------------------------------------
j2_maxRandomWrite       0    0    0    0    64K  4KB pages       D
-------------------------------------------------------------------------------
j2_maxUsableMaxTransfer 512  512  512  1    4K   pages           M
-------------------------------------------------------------------------------
j2_metadataCacheSize    400  400  400  1    1000                 D
-------------------------------------------------------------------------------
j2_minPageReadAhead     2    2    2    0    64K  4KB pages       D
-------------------------------------------------------------------------------
j2_nBufferPerPagerDevice 512  512  512  512  256K                 M
-------------------------------------------------------------------------------
j2_nPagesPerWriteBehindCluster
                        32   32   32   0    64K                  D
-------------------------------------------------------------------------------
j2_nRandomCluster       0    0    0    0    64K  16KB clusters   D
-------------------------------------------------------------------------------
j2_nonFatalCrashesSystem 0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
j2_syncModifiedMapped   1    1    1    0    1    boolean         D
-------------------------------------------------------------------------------
j2_syncdLogSyncInterval 1    1    1    0    4K   iterations      D
-------------------------------------------------------------------------------
jfs_clread_enabled      0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
jfs_use_read_lock       1    1    1    0    1    boolean         D
-------------------------------------------------------------------------------
lvm_bufcnt              9    9    9    1    64   128KB/buffer    D
-------------------------------------------------------------------------------
maxpgahead              8    8    8    0    4K   4KB pages       D
    minpgahead
-------------------------------------------------------------------------------
maxrandwrt              0    0    0    0    512K 4KB pages       D
-------------------------------------------------------------------------------
memory_frames           511M       511M              4KB pages       S
-------------------------------------------------------------------------------
minpgahead              2    2    2    0    4K   4KB pages       D
    maxpgahead
-------------------------------------------------------------------------------
numclust                32   1    32   0    2G-1 16KB/cluster    D
-------------------------------------------------------------------------------
numfsbufs               4K   196  4K   1    2G-1                 M
-------------------------------------------------------------------------------
pd_npages               64K  64K  64K  1    512K 4KB pages       D
-------------------------------------------------------------------------------
pgahd_scale_thresh      0    0    0    0    418713K 4KB pages       D
-------------------------------------------------------------------------------
pv_min_pbuf             512  512  512  512  2G-1                 D
-------------------------------------------------------------------------------
sync_release_ilock      0    0    0    0    1    boolean         D
-------------------------------------------------------------------------------
```

Appendix - C: Database Setup Code

C.1 Database Creation Scripts

DDL/ALTTBSP_PF_0.ddl

```
connect to TPCC;
alter tablespace is_customer_001 prefetchsize 0;
alter tablespace is_customer_002 prefetchsize 0;
alter tablespace is_customer_003 prefetchsize 0;
alter tablespace is_customer_004 prefetchsize 0;
alter tablespace is_customer_005 prefetchsize 0;
alter tablespace is_customer_006 prefetchsize 0;
alter tablespace is_customer_007 prefetchsize 0;
alter tablespace is_customer_008 prefetchsize 0;
alter tablespace is_customer_009 prefetchsize 0;
alter tablespace is_customer_010 prefetchsize 0;
alter tablespace is_customer_011 prefetchsize 0;
alter tablespace is_customer_012 prefetchsize 0;
alter tablespace is_customer_013 prefetchsize 0;
alter tablespace is_customer_014 prefetchsize 0;
alter tablespace is_customer_015 prefetchsize 0;
alter tablespace is_customer_016 prefetchsize 0;
alter tablespace is_customer_017 prefetchsize 0;
alter tablespace is_customer_018 prefetchsize 0;
alter tablespace is_customer_019 prefetchsize 0;
alter tablespace is_customer_020 prefetchsize 0;
alter tablespace is_customer_021 prefetchsize 0;
alter tablespace is_customer_022 prefetchsize 0;
alter tablespace is_customer_023 prefetchsize 0;
alter tablespace is_customer_024 prefetchsize 0;
alter tablespace is_customer_025 prefetchsize 0;
alter tablespace is_customer_026 prefetchsize 0;
alter tablespace is_customer_027 prefetchsize 0;
alter tablespace is_customer_028 prefetchsize 0;
alter tablespace is_customer_029 prefetchsize 0;
alter tablespace is_customer_030 prefetchsize 0;
alter tablespace is_customer_031 prefetchsize 0;
alter tablespace is_customer_032 prefetchsize 0;
alter tablespace is_customer_033 prefetchsize 0;
alter tablespace is_customer_034 prefetchsize 0;
alter tablespace is_customer_035 prefetchsize 0;
alter tablespace is_customer_036 prefetchsize 0;
alter tablespace is_customer_037 prefetchsize 0;
alter tablespace is_customer_038 prefetchsize 0;
alter tablespace is_customer_039 prefetchsize 0;
alter tablespace is_customer_040 prefetchsize 0;
alter tablespace is_customer_041 prefetchsize 0;
alter tablespace is_customer_042 prefetchsize 0;
alter tablespace is_customer_043 prefetchsize 0;
alter tablespace is_customer_044 prefetchsize 0;
alter tablespace is_customer_045 prefetchsize 0;
alter tablespace is_customer_046 prefetchsize 0;
alter tablespace is_customer_047 prefetchsize 0;
alter tablespace is_customer_048 prefetchsize 0;
alter tablespace is_customer_049 prefetchsize 0;
alter tablespace is_customer_050 prefetchsize 0;
alter tablespace is_customer_051 prefetchsize 0;
alter tablespace is_customer_052 prefetchsize 0;
alter tablespace is_customer_053 prefetchsize 0;
alter tablespace is_customer_054 prefetchsize 0;
alter tablespace is_customer_055 prefetchsize 0;
alter tablespace is_customer_056 prefetchsize 0;
alter tablespace is_customer_057 prefetchsize 0;
alter tablespace is_customer_058 prefetchsize 0;
alter tablespace is_customer_059 prefetchsize 0;
alter tablespace is_customer_060 prefetchsize 0;
alter tablespace is_customer_061 prefetchsize 0;
alter tablespace is_customer_062 prefetchsize 0;
alter tablespace is_customer_063 prefetchsize 0;
alter tablespace is_customer_064 prefetchsize 0;
alter tablespace is_customer_065 prefetchsize 0;
alter tablespace is_customer_066 prefetchsize 0;
alter tablespace is_customer_067 prefetchsize 0;
alter tablespace is_customer_068 prefetchsize 0;
alter tablespace is_customer_069 prefetchsize 0;
alter tablespace is_customer_070 prefetchsize 0;
alter tablespace is_customer_071 prefetchsize 0;
alter tablespace is_customer_072 prefetchsize 0;
alter tablespace is_customer_073 prefetchsize 0;
alter tablespace is_customer_074 prefetchsize 0;
alter tablespace is_customer_075 prefetchsize 0;
alter tablespace is_customer_076 prefetchsize 0;
alter tablespace is_customer_077 prefetchsize 0;
alter tablespace is_customer_078 prefetchsize 0;
alter tablespace is_customer_079 prefetchsize 0;
alter tablespace is_customer_080 prefetchsize 0;
alter tablespace is_customer_081 prefetchsize 0;
alter tablespace is_customer_082 prefetchsize 0;
alter tablespace is_customer_083 prefetchsize 0;
alter tablespace is_customer_084 prefetchsize 0;
alter tablespace is_customer_085 prefetchsize 0;
alter tablespace is_customer_086 prefetchsize 0;
alter tablespace is_customer_087 prefetchsize 0;
alter tablespace is_customer_088 prefetchsize 0;
alter tablespace is_customer_089 prefetchsize 0;
alter tablespace is_customer_090 prefetchsize 0;
alter tablespace is_customer_091 prefetchsize 0;
alter tablespace is_customer_092 prefetchsize 0;
alter tablespace is_customer_093 prefetchsize 0;
alter tablespace is_customer_094 prefetchsize 0;
alter tablespace is_customer_095 prefetchsize 0;
alter tablespace is_customer_096 prefetchsize 0;
alter tablespace is_customer_097 prefetchsize 0;
alter tablespace is_customer_098 prefetchsize 0;
alter tablespace is_customer_099 prefetchsize 0;
alter tablespace is_customer_100 prefetchsize 0;
alter tablespace is_customer_101 prefetchsize 0;
alter tablespace is_customer_102 prefetchsize 0;
alter tablespace is_customer_103 prefetchsize 0;
alter tablespace is_customer_104 prefetchsize 0;
alter tablespace is_customer_105 prefetchsize 0;
alter tablespace is_customer_106 prefetchsize 0;
alter tablespace is_customer_107 prefetchsize 0;
alter tablespace is_customer_108 prefetchsize 0;
alter tablespace is_customer_109 prefetchsize 0;
alter tablespace is_customer_110 prefetchsize 0;
alter tablespace is_customer_111 prefetchsize 0;
alter tablespace is_customer_112 prefetchsize 0;
alter tablespace is_customer_113 prefetchsize 0;
alter tablespace is_customer_114 prefetchsize 0;
alter tablespace is_customer_115 prefetchsize 0;
alter tablespace is_customer_116 prefetchsize 0;
alter tablespace is_customer_117 prefetchsize 0;
alter tablespace is_customer_118 prefetchsize 0;
alter tablespace is_customer_119 prefetchsize 0;
alter tablespace is_customer_120 prefetchsize 0;
alter tablespace is_customer_121 prefetchsize 0;
alter tablespace is_customer_122 prefetchsize 0;
alter tablespace is_customer_123 prefetchsize 0;
alter tablespace is_customer_124 prefetchsize 0;
alter tablespace is_customer_125 prefetchsize 0;
alter tablespace is_customer_126 prefetchsize 0;
alter tablespace is_customer_127 prefetchsize 0;
alter tablespace is_customer_128 prefetchsize 0;
alter tablespace is_customer_129 prefetchsize 0;
alter tablespace is_customer_130 prefetchsize 0;
alter tablespace is_customer_131 prefetchsize 0;
alter tablespace is_customer_132 prefetchsize 0;
alter tablespace is_customer_133 prefetchsize 0;
alter tablespace is_customer_134 prefetchsize 0;
alter tablespace is_customer_135 prefetchsize 0;
alter tablespace is_customer_136 prefetchsize 0;
alter tablespace is_customer_137 prefetchsize 0;
alter tablespace is_customer_138 prefetchsize 0;
alter tablespace is_customer_139 prefetchsize 0;
alter tablespace is_customer_140 prefetchsize 0;
alter tablespace is_customer_141 prefetchsize 0;
alter tablespace is_customer_142 prefetchsize 0;
alter tablespace is_customer_143 prefetchsize 0;
alter tablespace is_customer_144 prefetchsize 0;
alter tablespace is_customer_145 prefetchsize 0;
alter tablespace is_customer_146 prefetchsize 0;
alter tablespace is_customer_147 prefetchsize 0;
alter tablespace is_customer_148 prefetchsize 0;
alter tablespace is_customer_149 prefetchsize 0;
alter tablespace is_customer_150 prefetchsize 0;
alter tablespace is_customer_151 prefetchsize 0;
alter tablespace is_customer_152 prefetchsize 0;
alter tablespace is_customer_153 prefetchsize 0;
alter tablespace is_customer_154 prefetchsize 0;
alter tablespace is_customer_155 prefetchsize 0;
alter tablespace is_customer_156 prefetchsize 0;
alter tablespace is_customer_157 prefetchsize 0;
alter tablespace is_customer_158 prefetchsize 0;
alter tablespace is_customer_159 prefetchsize 0;
alter tablespace is_customer_160 prefetchsize 0;
alter tablespace is_customer_161 prefetchsize 0;
alter tablespace is_customer_162 prefetchsize 0;
alter tablespace is_customer_163 prefetchsize 0;
alter tablespace is_customer_164 prefetchsize 0;
alter tablespace is_customer_165 prefetchsize 0;
alter tablespace is_customer_166 prefetchsize 0;
alter tablespace is_customer_167 prefetchsize 0;
alter tablespace is_customer_168 prefetchsize 0;
alter tablespace is_customer_169 prefetchsize 0;
alter tablespace is_customer_170 prefetchsize 0;
alter tablespace is_customer_171 prefetchsize 0;
alter tablespace is_customer_172 prefetchsize 0;
alter tablespace is_customer_173 prefetchsize 0;
alter tablespace is_customer_174 prefetchsize 0;
alter tablespace is_customer_175 prefetchsize 0;
alter tablespace is_customer_176 prefetchsize 0;
alter tablespace is_customer_177 prefetchsize 0;
alter tablespace is_customer_178 prefetchsize 0;
alter tablespace is_customer_179 prefetchsize 0;
alter tablespace is_customer_180 prefetchsize 0;
alter tablespace is_customer_181 prefetchsize 0;
alter tablespace is_customer_182 prefetchsize 0;
alter tablespace is_customer_183 prefetchsize 0;
alter tablespace is_customer_184 prefetchsize 0;
alter tablespace is_customer_185 prefetchsize 0;
alter tablespace is_customer_186 prefetchsize 0;
alter tablespace is_customer_187 prefetchsize 0;
alter tablespace is_customer_188 prefetchsize 0;
alter tablespace is_customer_189 prefetchsize 0;
alter tablespace is_customer_190 prefetchsize 0;
alter tablespace is_customer_191 prefetchsize 0;
alter tablespace is_customer_192 prefetchsize 0;
alter tablespace is_customer_193 prefetchsize 0;
alter tablespace is_customer_194 prefetchsize 0;
alter tablespace is_customer_195 prefetchsize 0;
alter tablespace is_customer_196 prefetchsize 0;
alter tablespace is_customer_197 prefetchsize 0;
alter tablespace is_customer_198 prefetchsize 0;
alter tablespace is_customer_199 prefetchsize 0;
alter tablespace is_customer_200 prefetchsize 0;
```

```
alter tablespace is_order_001 prefetchsize 0;
alter tablespace is_order_002 prefetchsize 0;
alter tablespace is_order_003 prefetchsize 0;
alter tablespace is_order_004 prefetchsize 0;
alter tablespace is_order_005 prefetchsize 0;
alter tablespace is_order_006 prefetchsize 0;
alter tablespace is_order_007 prefetchsize 0;
alter tablespace is_order_008 prefetchsize 0;
alter tablespace is_order_009 prefetchsize 0;
alter tablespace is_order_010 prefetchsize 0;
alter tablespace is_order_011 prefetchsize 0;
alter tablespace is_order_012 prefetchsize 0;
alter tablespace is_order_013 prefetchsize 0;
alter tablespace is_order_014 prefetchsize 0;
alter tablespace is_order_015 prefetchsize 0;
alter tablespace is_order_016 prefetchsize 0;
alter tablespace is_order_017 prefetchsize 0;
alter tablespace is_order_018 prefetchsize 0;
alter tablespace is_order_019 prefetchsize 0;
alter tablespace is_order_020 prefetchsize 0;
alter tablespace is_order_021 prefetchsize 0;
alter tablespace is_order_022 prefetchsize 0;
alter tablespace is_order_023 prefetchsize 0;
alter tablespace is_order_024 prefetchsize 0;
alter tablespace is_order_025 prefetchsize 0;
alter tablespace is_order_026 prefetchsize 0;
alter tablespace is_order_027 prefetchsize 0;
alter tablespace is_order_028 prefetchsize 0;
alter tablespace is_order_029 prefetchsize 0;
alter tablespace is_order_030 prefetchsize 0;
alter tablespace is_order_031 prefetchsize 0;
alter tablespace is_order_032 prefetchsize 0;
alter tablespace is_order_033 prefetchsize 0;
alter tablespace is_order_034 prefetchsize 0;
alter tablespace is_order_035 prefetchsize 0;
alter tablespace is_order_036 prefetchsize 0;
alter tablespace is_order_037 prefetchsize 0;
alter tablespace is_order_038 prefetchsize 0;
alter tablespace is_order_039 prefetchsize 0;
alter tablespace is_order_040 prefetchsize 0;
alter tablespace is_order_041 prefetchsize 0;
alter tablespace is_order_042 prefetchsize 0;
alter tablespace is_order_043 prefetchsize 0;
alter tablespace is_order_044 prefetchsize 0;
alter tablespace is_order_045 prefetchsize 0;
alter tablespace is_order_046 prefetchsize 0;
alter tablespace is_order_047 prefetchsize 0;
alter tablespace is_order_048 prefetchsize 0;
alter tablespace is_order_049 prefetchsize 0;
alter tablespace is_order_050 prefetchsize 0;
alter tablespace is_order_051 prefetchsize 0;
alter tablespace is_order_052 prefetchsize 0;
alter tablespace is_order_053 prefetchsize 0;
alter tablespace is_order_054 prefetchsize 0;
alter tablespace is_order_055 prefetchsize 0;
alter tablespace is_order_056 prefetchsize 0;
alter tablespace is_order_057 prefetchsize 0;
alter tablespace is_order_058 prefetchsize 0;
alter tablespace is_order_059 prefetchsize 0;
alter tablespace is_order_060 prefetchsize 0;
alter tablespace is_order_061 prefetchsize 0;
alter tablespace is_order_062 prefetchsize 0;
alter tablespace is_order_063 prefetchsize 0;
alter tablespace is_order_064 prefetchsize 0;
alter tablespace is_order_065 prefetchsize 0;
alter tablespace is_order_066 prefetchsize 0;
alter tablespace is_order_067 prefetchsize 0;
alter tablespace is_order_068 prefetchsize 0;
alter tablespace is_order_069 prefetchsize 0;
alter tablespace is_order_070 prefetchsize 0;
alter tablespace is_order_071 prefetchsize 0;
alter tablespace is_order_072 prefetchsize 0;
alter tablespace is_order_073 prefetchsize 0;
alter tablespace is_order_074 prefetchsize 0;
alter tablespace is_order_075 prefetchsize 0;
alter tablespace is_order_076 prefetchsize 0;
alter tablespace is_order_077 prefetchsize 0;
alter tablespace is_order_078 prefetchsize 0;
alter tablespace is_order_079 prefetchsize 0;
alter tablespace is_order_080 prefetchsize 0;
alter tablespace is_order_081 prefetchsize 0;
alter tablespace is_order_082 prefetchsize 0;
alter tablespace is_order_083 prefetchsize 0;
alter tablespace is_order_084 prefetchsize 0;
alter tablespace is_order_085 prefetchsize 0;
alter tablespace is_order_086 prefetchsize 0;
alter tablespace is_order_087 prefetchsize 0;
alter tablespace is_order_088 prefetchsize 0;
alter tablespace is_order_089 prefetchsize 0;
alter tablespace is_order_090 prefetchsize 0;
alter tablespace is_order_091 prefetchsize 0;
alter tablespace is_order_092 prefetchsize 0;
alter tablespace is_order_093 prefetchsize 0;
alter tablespace is_order_094 prefetchsize 0;
alter tablespace is_order_095 prefetchsize 0;
alter tablespace is_order_096 prefetchsize 0;
alter tablespace is_order_097 prefetchsize 0;
alter tablespace is_order_098 prefetchsize 0;
alter tablespace is_order_099 prefetchsize 0;
alter tablespace is_order_100 prefetchsize 0;
alter tablespace is_order_101 prefetchsize 0;
alter tablespace is_order_102 prefetchsize 0;
alter tablespace is_order_103 prefetchsize 0;
alter tablespace is_order_104 prefetchsize 0;
alter tablespace is_order_105 prefetchsize 0;
alter tablespace is_order_106 prefetchsize 0;
alter tablespace is_order_107 prefetchsize 0;
alter tablespace is_order_108 prefetchsize 0;
alter tablespace is_order_109 prefetchsize 0;
alter tablespace is_order_110 prefetchsize 0;
alter tablespace is_order_111 prefetchsize 0;
alter tablespace is_order_112 prefetchsize 0;
alter tablespace is_order_113 prefetchsize 0;
alter tablespace is_order_114 prefetchsize 0;
alter tablespace is_order_115 prefetchsize 0;
alter tablespace is_order_116 prefetchsize 0;
alter tablespace is_order_117 prefetchsize 0;
alter tablespace is_order_118 prefetchsize 0;
alter tablespace is_order_119 prefetchsize 0;
alter tablespace is_order_120 prefetchsize 0;
alter tablespace is_order_121 prefetchsize 0;
alter tablespace is_order_122 prefetchsize 0;
alter tablespace is_order_123 prefetchsize 0;
alter tablespace is_order_124 prefetchsize 0;
alter tablespace is_order_125 prefetchsize 0;
alter tablespace is_order_126 prefetchsize 0;
alter tablespace is_order_127 prefetchsize 0;
alter tablespace is_order_128 prefetchsize 0;
alter tablespace is_order_129 prefetchsize 0;
alter tablespace is_order_130 prefetchsize 0;
alter tablespace is_order_131 prefetchsize 0;
alter tablespace is_order_132 prefetchsize 0;
alter tablespace is_order_133 prefetchsize 0;
alter tablespace is_order_134 prefetchsize 0;
alter tablespace is_order_135 prefetchsize 0;
alter tablespace is_order_136 prefetchsize 0;
alter tablespace is_order_137 prefetchsize 0;
alter tablespace is_order_138 prefetchsize 0;
alter tablespace is_order_139 prefetchsize 0;
alter tablespace is_order_140 prefetchsize 0;
alter tablespace is_order_141 prefetchsize 0;
alter tablespace is_order_142 prefetchsize 0;
alter tablespace is_order_143 prefetchsize 0;
alter tablespace is_order_144 prefetchsize 0;
alter tablespace is_order_145 prefetchsize 0;
alter tablespace is_order_146 prefetchsize 0;
alter tablespace is_order_147 prefetchsize 0;
alter tablespace is_order_148 prefetchsize 0;
alter tablespace is_order_149 prefetchsize 0;
alter tablespace is_order_150 prefetchsize 0;
alter tablespace is_order_151 prefetchsize 0;
alter tablespace is_order_152 prefetchsize 0;
alter tablespace is_order_153 prefetchsize 0;
alter tablespace is_order_154 prefetchsize 0;
alter tablespace is_order_155 prefetchsize 0;
alter tablespace is_order_156 prefetchsize 0;
alter tablespace is_order_157 prefetchsize 0;
alter tablespace is_order_158 prefetchsize 0;
alter tablespace is_order_159 prefetchsize 0;
alter tablespace is_order_160 prefetchsize 0;
alter tablespace is_order_161 prefetchsize 0;
alter tablespace is_order_162 prefetchsize 0;
alter tablespace is_order_163 prefetchsize 0;
alter tablespace is_order_164 prefetchsize 0;
alter tablespace is_order_165 prefetchsize 0;
alter tablespace is_order_166 prefetchsize 0;
alter tablespace is_order_167 prefetchsize 0;
alter tablespace is_order_168 prefetchsize 0;
alter tablespace is_order_169 prefetchsize 0;
alter tablespace is_order_170 prefetchsize 0;
alter tablespace is_order_171 prefetchsize 0;
alter tablespace is_order_172 prefetchsize 0;
alter tablespace is_order_173 prefetchsize 0;
alter tablespace is_order_174 prefetchsize 0;
alter tablespace is_order_175 prefetchsize 0;
alter tablespace is_order_176 prefetchsize 0;
alter tablespace is_order_177 prefetchsize 0;
alter tablespace is_order_178 prefetchsize 0;
alter tablespace is_order_179 prefetchsize 0;
alter tablespace is_order_180 prefetchsize 0;
alter tablespace is_order_181 prefetchsize 0;
alter tablespace is_order_182 prefetchsize 0;
alter tablespace is_order_183 prefetchsize 0;
alter tablespace is_order_184 prefetchsize 0;
alter tablespace is_order_185 prefetchsize 0;
alter tablespace is_order_186 prefetchsize 0;
alter tablespace is_order_187 prefetchsize 0;
alter tablespace is_order_188 prefetchsize 0;
alter tablespace is_order_189 prefetchsize 0;
alter tablespace is_order_190 prefetchsize 0;
alter tablespace is_order_191 prefetchsize 0;
alter tablespace is_order_192 prefetchsize 0;
alter tablespace is_order_193 prefetchsize 0;
alter tablespace is_order_194 prefetchsize 0;
alter tablespace is_order_195 prefetchsize 0;
alter tablespace is_order_196 prefetchsize 0;
alter tablespace is_order_197 prefetchsize 0;
alter tablespace is_order_198 prefetchsize 0;
alter tablespace is_order_199 prefetchsize 0;
alter tablespace is_order_200 prefetchsize 0;
alter tablespace ts_customer_001 prefetchsize 0;
alter tablespace ts_customer_002 prefetchsize 0;
alter tablespace ts_customer_003 prefetchsize 0;
alter tablespace ts_customer_004 prefetchsize 0;
alter tablespace ts_customer_005 prefetchsize 0;
alter tablespace ts_customer_006 prefetchsize 0;
alter tablespace ts_customer_007 prefetchsize 0;
alter tablespace ts_customer_008 prefetchsize 0;
alter tablespace ts_customer_009 prefetchsize 0;
alter tablespace ts_customer_010 prefetchsize 0;
alter tablespace ts_customer_011 prefetchsize 0;
alter tablespace ts_customer_012 prefetchsize 0;
alter tablespace ts_customer_013 prefetchsize 0;
alter tablespace ts_customer_014 prefetchsize 0;
alter tablespace ts_customer_015 prefetchsize 0;
alter tablespace ts_customer_016 prefetchsize 0;
alter tablespace ts_customer_017 prefetchsize 0;
alter tablespace ts_customer_018 prefetchsize 0;
alter tablespace ts_customer_019 prefetchsize 0;
```

```
alter tablespace ts_customer_020 prefetchsize 0;
alter tablespace ts_customer_021 prefetchsize 0;
alter tablespace ts_customer_022 prefetchsize 0;
alter tablespace ts_customer_023 prefetchsize 0;
alter tablespace ts_customer_024 prefetchsize 0;
alter tablespace ts_customer_025 prefetchsize 0;
alter tablespace ts_customer_026 prefetchsize 0;
alter tablespace ts_customer_027 prefetchsize 0;
alter tablespace ts_customer_028 prefetchsize 0;
alter tablespace ts_customer_029 prefetchsize 0;
alter tablespace ts_customer_030 prefetchsize 0;
alter tablespace ts_customer_031 prefetchsize 0;
alter tablespace ts_customer_032 prefetchsize 0;
alter tablespace ts_customer_033 prefetchsize 0;
alter tablespace ts_customer_034 prefetchsize 0;
alter tablespace ts_customer_035 prefetchsize 0;
alter tablespace ts_customer_036 prefetchsize 0;
alter tablespace ts_customer_037 prefetchsize 0;
alter tablespace ts_customer_038 prefetchsize 0;
alter tablespace ts_customer_039 prefetchsize 0;
alter tablespace ts_customer_040 prefetchsize 0;
alter tablespace ts_customer_041 prefetchsize 0;
alter tablespace ts_customer_042 prefetchsize 0;
alter tablespace ts_customer_043 prefetchsize 0;
alter tablespace ts_customer_044 prefetchsize 0;
alter tablespace ts_customer_045 prefetchsize 0;
alter tablespace ts_customer_046 prefetchsize 0;
alter tablespace ts_customer_047 prefetchsize 0;
alter tablespace ts_customer_048 prefetchsize 0;
alter tablespace ts_customer_049 prefetchsize 0;
alter tablespace ts_customer_050 prefetchsize 0;
alter tablespace ts_customer_051 prefetchsize 0;
alter tablespace ts_customer_052 prefetchsize 0;
alter tablespace ts_customer_053 prefetchsize 0;
alter tablespace ts_customer_054 prefetchsize 0;
alter tablespace ts_customer_055 prefetchsize 0;
alter tablespace ts_customer_056 prefetchsize 0;
alter tablespace ts_customer_057 prefetchsize 0;
alter tablespace ts_customer_058 prefetchsize 0;
alter tablespace ts_customer_059 prefetchsize 0;
alter tablespace ts_customer_060 prefetchsize 0;
alter tablespace ts_customer_061 prefetchsize 0;
alter tablespace ts_customer_062 prefetchsize 0;
alter tablespace ts_customer_063 prefetchsize 0;
alter tablespace ts_customer_064 prefetchsize 0;
alter tablespace ts_customer_065 prefetchsize 0;
alter tablespace ts_customer_066 prefetchsize 0;
alter tablespace ts_customer_067 prefetchsize 0;
alter tablespace ts_customer_068 prefetchsize 0;
alter tablespace ts_customer_069 prefetchsize 0;
alter tablespace ts_customer_070 prefetchsize 0;
alter tablespace ts_customer_071 prefetchsize 0;
alter tablespace ts_customer_072 prefetchsize 0;
alter tablespace ts_customer_073 prefetchsize 0;
alter tablespace ts_customer_074 prefetchsize 0;
alter tablespace ts_customer_075 prefetchsize 0;
alter tablespace ts_customer_076 prefetchsize 0;
alter tablespace ts_customer_077 prefetchsize 0;
alter tablespace ts_customer_078 prefetchsize 0;
alter tablespace ts_customer_079 prefetchsize 0;
alter tablespace ts_customer_080 prefetchsize 0;
alter tablespace ts_customer_081 prefetchsize 0;
alter tablespace ts_customer_082 prefetchsize 0;
alter tablespace ts_customer_083 prefetchsize 0;
alter tablespace ts_customer_084 prefetchsize 0;
alter tablespace ts_customer_085 prefetchsize 0;
alter tablespace ts_customer_086 prefetchsize 0;
alter tablespace ts_customer_087 prefetchsize 0;
alter tablespace ts_customer_088 prefetchsize 0;
alter tablespace ts_customer_089 prefetchsize 0;
alter tablespace ts_customer_090 prefetchsize 0;
alter tablespace ts_customer_091 prefetchsize 0;
alter tablespace ts_customer_092 prefetchsize 0;
alter tablespace ts_customer_093 prefetchsize 0;
alter tablespace ts_customer_094 prefetchsize 0;
alter tablespace ts_customer_095 prefetchsize 0;
alter tablespace ts_customer_096 prefetchsize 0;
alter tablespace ts_customer_097 prefetchsize 0;
alter tablespace ts_customer_098 prefetchsize 0;
alter tablespace ts_customer_099 prefetchsize 0;
alter tablespace ts_customer_100 prefetchsize 0;
alter tablespace ts_customer_101 prefetchsize 0;
alter tablespace ts_customer_102 prefetchsize 0;
alter tablespace ts_customer_103 prefetchsize 0;
alter tablespace ts_customer_104 prefetchsize 0;
alter tablespace ts_customer_105 prefetchsize 0;
alter tablespace ts_customer_106 prefetchsize 0;
alter tablespace ts_customer_107 prefetchsize 0;
alter tablespace ts_customer_108 prefetchsize 0;
alter tablespace ts_customer_109 prefetchsize 0;
alter tablespace ts_customer_110 prefetchsize 0;
alter tablespace ts_customer_111 prefetchsize 0;
alter tablespace ts_customer_112 prefetchsize 0;
alter tablespace ts_customer_113 prefetchsize 0;
alter tablespace ts_customer_114 prefetchsize 0;
alter tablespace ts_customer_115 prefetchsize 0;
alter tablespace ts_customer_116 prefetchsize 0;
alter tablespace ts_customer_117 prefetchsize 0;
alter tablespace ts_customer_118 prefetchsize 0;
alter tablespace ts_customer_119 prefetchsize 0;
alter tablespace ts_customer_120 prefetchsize 0;
alter tablespace ts_customer_121 prefetchsize 0;
alter tablespace ts_customer_122 prefetchsize 0;
alter tablespace ts_customer_123 prefetchsize 0;
alter tablespace ts_customer_124 prefetchsize 0;
alter tablespace ts_customer_125 prefetchsize 0;
alter tablespace ts_customer_126 prefetchsize 0;
alter tablespace ts_customer_127 prefetchsize 0;
alter tablespace ts_customer_128 prefetchsize 0;
alter tablespace ts_customer_129 prefetchsize 0;
alter tablespace ts_customer_130 prefetchsize 0;
alter tablespace ts_customer_131 prefetchsize 0;
alter tablespace ts_customer_132 prefetchsize 0;
alter tablespace ts_customer_133 prefetchsize 0;
alter tablespace ts_customer_134 prefetchsize 0;
alter tablespace ts_customer_135 prefetchsize 0;
alter tablespace ts_customer_136 prefetchsize 0;
alter tablespace ts_customer_137 prefetchsize 0;
alter tablespace ts_customer_138 prefetchsize 0;
alter tablespace ts_customer_139 prefetchsize 0;
alter tablespace ts_customer_140 prefetchsize 0;
alter tablespace ts_customer_141 prefetchsize 0;
alter tablespace ts_customer_142 prefetchsize 0;
alter tablespace ts_customer_143 prefetchsize 0;
alter tablespace ts_customer_144 prefetchsize 0;
alter tablespace ts_customer_145 prefetchsize 0;
alter tablespace ts_customer_146 prefetchsize 0;
alter tablespace ts_customer_147 prefetchsize 0;
alter tablespace ts_customer_148 prefetchsize 0;
alter tablespace ts_customer_149 prefetchsize 0;
alter tablespace ts_customer_150 prefetchsize 0;
alter tablespace ts_customer_151 prefetchsize 0;
alter tablespace ts_customer_152 prefetchsize 0;
alter tablespace ts_customer_153 prefetchsize 0;
alter tablespace ts_customer_154 prefetchsize 0;
alter tablespace ts_customer_155 prefetchsize 0;
alter tablespace ts_customer_156 prefetchsize 0;
alter tablespace ts_customer_157 prefetchsize 0;
alter tablespace ts_customer_158 prefetchsize 0;
alter tablespace ts_customer_159 prefetchsize 0;
alter tablespace ts_customer_160 prefetchsize 0;
alter tablespace ts_customer_161 prefetchsize 0;
alter tablespace ts_customer_162 prefetchsize 0;
alter tablespace ts_customer_163 prefetchsize 0;
alter tablespace ts_customer_164 prefetchsize 0;
alter tablespace ts_customer_165 prefetchsize 0;
alter tablespace ts_customer_166 prefetchsize 0;
alter tablespace ts_customer_167 prefetchsize 0;
alter tablespace ts_customer_168 prefetchsize 0;
alter tablespace ts_customer_169 prefetchsize 0;
alter tablespace ts_customer_170 prefetchsize 0;
alter tablespace ts_customer_171 prefetchsize 0;
alter tablespace ts_customer_172 prefetchsize 0;
alter tablespace ts_customer_173 prefetchsize 0;
alter tablespace ts_customer_174 prefetchsize 0;
alter tablespace ts_customer_175 prefetchsize 0;
alter tablespace ts_customer_176 prefetchsize 0;
alter tablespace ts_customer_177 prefetchsize 0;
alter tablespace ts_customer_178 prefetchsize 0;
alter tablespace ts_customer_179 prefetchsize 0;
alter tablespace ts_customer_180 prefetchsize 0;
alter tablespace ts_customer_181 prefetchsize 0;
alter tablespace ts_customer_182 prefetchsize 0;
alter tablespace ts_customer_183 prefetchsize 0;
alter tablespace ts_customer_184 prefetchsize 0;
alter tablespace ts_customer_185 prefetchsize 0;
alter tablespace ts_customer_186 prefetchsize 0;
alter tablespace ts_customer_187 prefetchsize 0;
alter tablespace ts_customer_188 prefetchsize 0;
alter tablespace ts_customer_189 prefetchsize 0;
alter tablespace ts_customer_190 prefetchsize 0;
alter tablespace ts_customer_191 prefetchsize 0;
alter tablespace ts_customer_192 prefetchsize 0;
alter tablespace ts_customer_193 prefetchsize 0;
alter tablespace ts_customer_194 prefetchsize 0;
alter tablespace ts_customer_195 prefetchsize 0;
alter tablespace ts_customer_196 prefetchsize 0;
alter tablespace ts_customer_197 prefetchsize 0;
alter tablespace ts_customer_198 prefetchsize 0;
alter tablespace ts_customer_199 prefetchsize 0;
alter tablespace ts_customer_200 prefetchsize 0;
alter tablespace ts_dist_001 prefetchsize 0;
alter tablespace ts_dist_002 prefetchsize 0;
alter tablespace ts_dist_003 prefetchsize 0;
alter tablespace ts_dist_004 prefetchsize 0;
alter tablespace ts_dist_005 prefetchsize 0;
alter tablespace ts_dist_006 prefetchsize 0;
alter tablespace ts_dist_007 prefetchsize 0;
alter tablespace ts_dist_008 prefetchsize 0;
alter tablespace ts_dist_009 prefetchsize 0;
alter tablespace ts_dist_010 prefetchsize 0;
alter tablespace ts_dist_011 prefetchsize 0;
alter tablespace ts_dist_012 prefetchsize 0;
alter tablespace ts_dist_013 prefetchsize 0;
alter tablespace ts_dist_014 prefetchsize 0;
alter tablespace ts_dist_015 prefetchsize 0;
alter tablespace ts_dist_016 prefetchsize 0;
alter tablespace ts_dist_017 prefetchsize 0;
alter tablespace ts_dist_018 prefetchsize 0;
alter tablespace ts_dist_019 prefetchsize 0;
alter tablespace ts_dist_020 prefetchsize 0;
alter tablespace ts_dist_021 prefetchsize 0;
alter tablespace ts_dist_022 prefetchsize 0;
alter tablespace ts_dist_023 prefetchsize 0;
alter tablespace ts_dist_024 prefetchsize 0;
alter tablespace ts_dist_025 prefetchsize 0;
alter tablespace ts_dist_026 prefetchsize 0;
alter tablespace ts_dist_027 prefetchsize 0;
alter tablespace ts_dist_028 prefetchsize 0;
alter tablespace ts_dist_029 prefetchsize 0;
alter tablespace ts_dist_030 prefetchsize 0;
alter tablespace ts_dist_031 prefetchsize 0;
alter tablespace ts_dist_032 prefetchsize 0;
alter tablespace ts_dist_033 prefetchsize 0;
alter tablespace ts_dist_034 prefetchsize 0;
alter tablespace ts_dist_035 prefetchsize 0;
alter tablespace ts_dist_036 prefetchsize 0;
alter tablespace ts_dist_037 prefetchsize 0;
alter tablespace ts_dist_038 prefetchsize 0;
```

```
alter tablespace ts_dist_039 prefetchsize 0;
alter tablespace ts_dist_040 prefetchsize 0;
alter tablespace ts_history_001 prefetchsize 0;
alter tablespace ts_history_002 prefetchsize 0;
alter tablespace ts_history_003 prefetchsize 0;
alter tablespace ts_history_004 prefetchsize 0;
alter tablespace ts_history_005 prefetchsize 0;
alter tablespace ts_history_006 prefetchsize 0;
alter tablespace ts_history_007 prefetchsize 0;
alter tablespace ts_history_008 prefetchsize 0;
alter tablespace ts_history_009 prefetchsize 0;
alter tablespace ts_history_010 prefetchsize 0;
alter tablespace ts_history_011 prefetchsize 0;
alter tablespace ts_history_012 prefetchsize 0;
alter tablespace ts_history_013 prefetchsize 0;
alter tablespace ts_history_014 prefetchsize 0;
alter tablespace ts_history_015 prefetchsize 0;
alter tablespace ts_history_016 prefetchsize 0;
alter tablespace ts_history_017 prefetchsize 0;
alter tablespace ts_history_018 prefetchsize 0;
alter tablespace ts_history_019 prefetchsize 0;
alter tablespace ts_history_020 prefetchsize 0;
alter tablespace ts_history_021 prefetchsize 0;
alter tablespace ts_history_022 prefetchsize 0;
alter tablespace ts_history_023 prefetchsize 0;
alter tablespace ts_history_024 prefetchsize 0;
alter tablespace ts_history_025 prefetchsize 0;
alter tablespace ts_history_026 prefetchsize 0;
alter tablespace ts_history_027 prefetchsize 0;
alter tablespace ts_history_028 prefetchsize 0;
alter tablespace ts_history_029 prefetchsize 0;
alter tablespace ts_history_030 prefetchsize 0;
alter tablespace ts_history_031 prefetchsize 0;
alter tablespace ts_history_032 prefetchsize 0;
alter tablespace ts_history_033 prefetchsize 0;
alter tablespace ts_history_034 prefetchsize 0;
alter tablespace ts_history_035 prefetchsize 0;
alter tablespace ts_history_036 prefetchsize 0;
alter tablespace ts_history_037 prefetchsize 0;
alter tablespace ts_history_038 prefetchsize 0;
alter tablespace ts_history_039 prefetchsize 0;
alter tablespace ts_history_040 prefetchsize 0;
alter tablespace ts_item_001 prefetchsize 0;
alter tablespace ts_neworda_001 prefetchsize 0;
alter tablespace ts_neworda_002 prefetchsize 0;
alter tablespace ts_neworda_003 prefetchsize 0;
alter tablespace ts_neworda_004 prefetchsize 0;
alter tablespace ts_neworda_005 prefetchsize 0;
alter tablespace ts_neworda_006 prefetchsize 0;
alter tablespace ts_neworda_007 prefetchsize 0;
alter tablespace ts_neworda_008 prefetchsize 0;
alter tablespace ts_neworda_009 prefetchsize 0;
alter tablespace ts_neworda_010 prefetchsize 0;
alter tablespace ts_neworda_011 prefetchsize 0;
alter tablespace ts_neworda_012 prefetchsize 0;
alter tablespace ts_neworda_013 prefetchsize 0;
alter tablespace ts_neworda_014 prefetchsize 0;
alter tablespace ts_neworda_015 prefetchsize 0;
alter tablespace ts_neworda_016 prefetchsize 0;
alter tablespace ts_neworda_017 prefetchsize 0;
alter tablespace ts_neworda_018 prefetchsize 0;
alter tablespace ts_neworda_019 prefetchsize 0;
alter tablespace ts_neworda_020 prefetchsize 0;
alter tablespace ts_neworda_021 prefetchsize 0;
alter tablespace ts_neworda_022 prefetchsize 0;
alter tablespace ts_neworda_023 prefetchsize 0;
alter tablespace ts_neworda_024 prefetchsize 0;
alter tablespace ts_neworda_025 prefetchsize 0;
alter tablespace ts_neworda_026 prefetchsize 0;
alter tablespace ts_neworda_027 prefetchsize 0;
alter tablespace ts_neworda_028 prefetchsize 0;
alter tablespace ts_neworda_029 prefetchsize 0;
alter tablespace ts_neworda_030 prefetchsize 0;
alter tablespace ts_neworda_031 prefetchsize 0;
alter tablespace ts_neworda_032 prefetchsize 0;
alter tablespace ts_neworda_033 prefetchsize 0;
alter tablespace ts_neworda_034 prefetchsize 0;
alter tablespace ts_neworda_035 prefetchsize 0;
alter tablespace ts_neworda_036 prefetchsize 0;
alter tablespace ts_neworda_037 prefetchsize 0;
alter tablespace ts_neworda_038 prefetchsize 0;
alter tablespace ts_neworda_039 prefetchsize 0;
alter tablespace ts_neworda_040 prefetchsize 0;
alter tablespace ts_newordb_001 prefetchsize 0;
alter tablespace ts_newordb_002 prefetchsize 0;
alter tablespace ts_newordb_003 prefetchsize 0;
alter tablespace ts_newordb_004 prefetchsize 0;
alter tablespace ts_newordb_005 prefetchsize 0;
alter tablespace ts_newordb_006 prefetchsize 0;
alter tablespace ts_newordb_007 prefetchsize 0;
alter tablespace ts_newordb_008 prefetchsize 0;
alter tablespace ts_newordb_009 prefetchsize 0;
alter tablespace ts_newordb_010 prefetchsize 0;
alter tablespace ts_newordb_011 prefetchsize 0;
alter tablespace ts_newordb_012 prefetchsize 0;
alter tablespace ts_newordb_013 prefetchsize 0;
alter tablespace ts_newordb_014 prefetchsize 0;
alter tablespace ts_newordb_015 prefetchsize 0;
alter tablespace ts_newordb_016 prefetchsize 0;
alter tablespace ts_newordb_017 prefetchsize 0;
alter tablespace ts_newordb_018 prefetchsize 0;
alter tablespace ts_newordb_019 prefetchsize 0;
alter tablespace ts_newordb_020 prefetchsize 0;
alter tablespace ts_newordb_021 prefetchsize 0;
alter tablespace ts_newordb_022 prefetchsize 0;
alter tablespace ts_newordb_023 prefetchsize 0;
alter tablespace ts_newordb_024 prefetchsize 0;
alter tablespace ts_newordb_025 prefetchsize 0;
alter tablespace ts_newordb_026 prefetchsize 0;
alter tablespace ts_newordb_027 prefetchsize 0;
alter tablespace ts_newordb_028 prefetchsize 0;
alter tablespace ts_newordb_029 prefetchsize 0;
alter tablespace ts_newordb_030 prefetchsize 0;
alter tablespace ts_newordb_031 prefetchsize 0;
alter tablespace ts_newordb_032 prefetchsize 0;
alter tablespace ts_newordb_033 prefetchsize 0;
alter tablespace ts_newordb_034 prefetchsize 0;
alter tablespace ts_newordb_035 prefetchsize 0;
alter tablespace ts_newordb_036 prefetchsize 0;
alter tablespace ts_newordb_037 prefetchsize 0;
alter tablespace ts_newordb_038 prefetchsize 0;
alter tablespace ts_newordb_039 prefetchsize 0;
alter tablespace ts_newordb_040 prefetchsize 0;
alter tablespace ts_order_001 prefetchsize 0;
alter tablespace ts_order_002 prefetchsize 0;
alter tablespace ts_order_003 prefetchsize 0;
alter tablespace ts_order_004 prefetchsize 0;
alter tablespace ts_order_005 prefetchsize 0;
alter tablespace ts_order_006 prefetchsize 0;
alter tablespace ts_order_007 prefetchsize 0;
alter tablespace ts_order_008 prefetchsize 0;
alter tablespace ts_order_009 prefetchsize 0;
alter tablespace ts_order_010 prefetchsize 0;
alter tablespace ts_order_011 prefetchsize 0;
alter tablespace ts_order_012 prefetchsize 0;
alter tablespace ts_order_013 prefetchsize 0;
alter tablespace ts_order_014 prefetchsize 0;
alter tablespace ts_order_015 prefetchsize 0;
alter tablespace ts_order_016 prefetchsize 0;
alter tablespace ts_order_017 prefetchsize 0;
alter tablespace ts_order_018 prefetchsize 0;
alter tablespace ts_order_019 prefetchsize 0;
alter tablespace ts_order_020 prefetchsize 0;
alter tablespace ts_order_021 prefetchsize 0;
alter tablespace ts_order_022 prefetchsize 0;
alter tablespace ts_order_023 prefetchsize 0;
alter tablespace ts_order_024 prefetchsize 0;
alter tablespace ts_order_025 prefetchsize 0;
alter tablespace ts_order_026 prefetchsize 0;
alter tablespace ts_order_027 prefetchsize 0;
alter tablespace ts_order_028 prefetchsize 0;
alter tablespace ts_order_029 prefetchsize 0;
alter tablespace ts_order_030 prefetchsize 0;
alter tablespace ts_order_031 prefetchsize 0;
alter tablespace ts_order_032 prefetchsize 0;
alter tablespace ts_order_033 prefetchsize 0;
alter tablespace ts_order_034 prefetchsize 0;
alter tablespace ts_order_035 prefetchsize 0;
alter tablespace ts_order_036 prefetchsize 0;
alter tablespace ts_order_037 prefetchsize 0;
alter tablespace ts_order_038 prefetchsize 0;
alter tablespace ts_order_039 prefetchsize 0;
alter tablespace ts_order_040 prefetchsize 0;
alter tablespace ts_order_041 prefetchsize 0;
alter tablespace ts_order_042 prefetchsize 0;
alter tablespace ts_order_043 prefetchsize 0;
alter tablespace ts_order_044 prefetchsize 0;
alter tablespace ts_order_045 prefetchsize 0;
alter tablespace ts_order_046 prefetchsize 0;
alter tablespace ts_order_047 prefetchsize 0;
alter tablespace ts_order_048 prefetchsize 0;
alter tablespace ts_order_049 prefetchsize 0;
alter tablespace ts_order_050 prefetchsize 0;
alter tablespace ts_order_051 prefetchsize 0;
alter tablespace ts_order_052 prefetchsize 0;
alter tablespace ts_order_053 prefetchsize 0;
alter tablespace ts_order_054 prefetchsize 0;
alter tablespace ts_order_055 prefetchsize 0;
alter tablespace ts_order_056 prefetchsize 0;
alter tablespace ts_order_057 prefetchsize 0;
alter tablespace ts_order_058 prefetchsize 0;
alter tablespace ts_order_059 prefetchsize 0;
alter tablespace ts_order_060 prefetchsize 0;
alter tablespace ts_order_061 prefetchsize 0;
alter tablespace ts_order_062 prefetchsize 0;
alter tablespace ts_order_063 prefetchsize 0;
alter tablespace ts_order_064 prefetchsize 0;
alter tablespace ts_order_065 prefetchsize 0;
alter tablespace ts_order_066 prefetchsize 0;
alter tablespace ts_order_067 prefetchsize 0;
alter tablespace ts_order_068 prefetchsize 0;
alter tablespace ts_order_069 prefetchsize 0;
alter tablespace ts_order_070 prefetchsize 0;
alter tablespace ts_order_071 prefetchsize 0;
alter tablespace ts_order_072 prefetchsize 0;
alter tablespace ts_order_073 prefetchsize 0;
alter tablespace ts_order_074 prefetchsize 0;
alter tablespace ts_order_075 prefetchsize 0;
alter tablespace ts_order_076 prefetchsize 0;
alter tablespace ts_order_077 prefetchsize 0;
alter tablespace ts_order_078 prefetchsize 0;
alter tablespace ts_order_079 prefetchsize 0;
alter tablespace ts_order_080 prefetchsize 0;
alter tablespace ts_order_081 prefetchsize 0;
alter tablespace ts_order_082 prefetchsize 0;
alter tablespace ts_order_083 prefetchsize 0;
alter tablespace ts_order_084 prefetchsize 0;
alter tablespace ts_order_085 prefetchsize 0;
alter tablespace ts_order_086 prefetchsize 0;
alter tablespace ts_order_087 prefetchsize 0;
alter tablespace ts_order_088 prefetchsize 0;
alter tablespace ts_order_089 prefetchsize 0;
alter tablespace ts_order_090 prefetchsize 0;
alter tablespace ts_order_091 prefetchsize 0;
alter tablespace ts_order_092 prefetchsize 0;
alter tablespace ts_order_093 prefetchsize 0;
alter tablespace ts_order_094 prefetchsize 0;
alter tablespace ts_order_095 prefetchsize 0;
alter tablespace ts_order_096 prefetchsize 0;
```

```
alter tablespace ts_order_097 prefetchsize 0;
alter tablespace ts_order_098 prefetchsize 0;
alter tablespace ts_order_099 prefetchsize 0;
alter tablespace ts_order_100 prefetchsize 0;
alter tablespace ts_order_101 prefetchsize 0;
alter tablespace ts_order_102 prefetchsize 0;
alter tablespace ts_order_103 prefetchsize 0;
alter tablespace ts_order_104 prefetchsize 0;
alter tablespace ts_order_105 prefetchsize 0;
alter tablespace ts_order_106 prefetchsize 0;
alter tablespace ts_order_107 prefetchsize 0;
alter tablespace ts_order_108 prefetchsize 0;
alter tablespace ts_order_109 prefetchsize 0;
alter tablespace ts_order_110 prefetchsize 0;
alter tablespace ts_order_111 prefetchsize 0;
alter tablespace ts_order_112 prefetchsize 0;
alter tablespace ts_order_113 prefetchsize 0;
alter tablespace ts_order_114 prefetchsize 0;
alter tablespace ts_order_115 prefetchsize 0;
alter tablespace ts_order_116 prefetchsize 0;
alter tablespace ts_order_117 prefetchsize 0;
alter tablespace ts_order_118 prefetchsize 0;
alter tablespace ts_order_119 prefetchsize 0;
alter tablespace ts_order_120 prefetchsize 0;
alter tablespace ts_order_121 prefetchsize 0;
alter tablespace ts_order_122 prefetchsize 0;
alter tablespace ts_order_123 prefetchsize 0;
alter tablespace ts_order_124 prefetchsize 0;
alter tablespace ts_order_125 prefetchsize 0;
alter tablespace ts_order_126 prefetchsize 0;
alter tablespace ts_order_127 prefetchsize 0;
alter tablespace ts_order_128 prefetchsize 0;
alter tablespace ts_order_129 prefetchsize 0;
alter tablespace ts_order_130 prefetchsize 0;
alter tablespace ts_order_131 prefetchsize 0;
alter tablespace ts_order_132 prefetchsize 0;
alter tablespace ts_order_133 prefetchsize 0;
alter tablespace ts_order_134 prefetchsize 0;
alter tablespace ts_order_135 prefetchsize 0;
alter tablespace ts_order_136 prefetchsize 0;
alter tablespace ts_order_137 prefetchsize 0;
alter tablespace ts_order_138 prefetchsize 0;
alter tablespace ts_order_139 prefetchsize 0;
alter tablespace ts_order_140 prefetchsize 0;
alter tablespace ts_order_141 prefetchsize 0;
alter tablespace ts_order_142 prefetchsize 0;
alter tablespace ts_order_143 prefetchsize 0;
alter tablespace ts_order_144 prefetchsize 0;
alter tablespace ts_order_145 prefetchsize 0;
alter tablespace ts_order_146 prefetchsize 0;
alter tablespace ts_order_147 prefetchsize 0;
alter tablespace ts_order_148 prefetchsize 0;
alter tablespace ts_order_149 prefetchsize 0;
alter tablespace ts_order_150 prefetchsize 0;
alter tablespace ts_order_151 prefetchsize 0;
alter tablespace ts_order_152 prefetchsize 0;
alter tablespace ts_order_153 prefetchsize 0;
alter tablespace ts_order_154 prefetchsize 0;
alter tablespace ts_order_155 prefetchsize 0;
alter tablespace ts_order_156 prefetchsize 0;
alter tablespace ts_order_157 prefetchsize 0;
alter tablespace ts_order_158 prefetchsize 0;
alter tablespace ts_order_159 prefetchsize 0;
alter tablespace ts_order_160 prefetchsize 0;
alter tablespace ts_order_161 prefetchsize 0;
alter tablespace ts_order_162 prefetchsize 0;
alter tablespace ts_order_163 prefetchsize 0;
alter tablespace ts_order_164 prefetchsize 0;
alter tablespace ts_order_165 prefetchsize 0;
alter tablespace ts_order_166 prefetchsize 0;
alter tablespace ts_order_167 prefetchsize 0;
alter tablespace ts_order_168 prefetchsize 0;
alter tablespace ts_order_169 prefetchsize 0;
alter tablespace ts_order_170 prefetchsize 0;
alter tablespace ts_order_171 prefetchsize 0;
alter tablespace ts_order_172 prefetchsize 0;
alter tablespace ts_order_173 prefetchsize 0;
alter tablespace ts_order_174 prefetchsize 0;
alter tablespace ts_order_175 prefetchsize 0;
alter tablespace ts_order_176 prefetchsize 0;
alter tablespace ts_order_177 prefetchsize 0;
alter tablespace ts_order_178 prefetchsize 0;
alter tablespace ts_order_179 prefetchsize 0;
alter tablespace ts_order_180 prefetchsize 0;
alter tablespace ts_order_181 prefetchsize 0;
alter tablespace ts_order_182 prefetchsize 0;
alter tablespace ts_order_183 prefetchsize 0;
alter tablespace ts_order_184 prefetchsize 0;
alter tablespace ts_order_185 prefetchsize 0;
alter tablespace ts_order_186 prefetchsize 0;
alter tablespace ts_order_187 prefetchsize 0;
alter tablespace ts_order_188 prefetchsize 0;
alter tablespace ts_order_189 prefetchsize 0;
alter tablespace ts_order_190 prefetchsize 0;
alter tablespace ts_order_191 prefetchsize 0;
alter tablespace ts_order_192 prefetchsize 0;
alter tablespace ts_order_193 prefetchsize 0;
alter tablespace ts_order_194 prefetchsize 0;
alter tablespace ts_order_195 prefetchsize 0;
alter tablespace ts_order_196 prefetchsize 0;
alter tablespace ts_order_197 prefetchsize 0;
alter tablespace ts_order_198 prefetchsize 0;
alter tablespace ts_order_199 prefetchsize 0;
alter tablespace ts_order_200 prefetchsize 0;
alter tablespace ts_orderline_001 prefetchsize 0;
alter tablespace ts_orderline_002 prefetchsize 0;
alter tablespace ts_orderline_003 prefetchsize 0;
alter tablespace ts_orderline_004 prefetchsize 0;
alter tablespace ts_orderline_005 prefetchsize 0;
alter tablespace ts_orderline_006 prefetchsize 0;
alter tablespace ts_orderline_007 prefetchsize 0;
alter tablespace ts_orderline_008 prefetchsize 0;
alter tablespace ts_orderline_009 prefetchsize 0;
alter tablespace ts_orderline_010 prefetchsize 0;
alter tablespace ts_orderline_011 prefetchsize 0;
alter tablespace ts_orderline_012 prefetchsize 0;
alter tablespace ts_orderline_013 prefetchsize 0;
alter tablespace ts_orderline_014 prefetchsize 0;
alter tablespace ts_orderline_015 prefetchsize 0;
alter tablespace ts_orderline_016 prefetchsize 0;
alter tablespace ts_orderline_017 prefetchsize 0;
alter tablespace ts_orderline_018 prefetchsize 0;
alter tablespace ts_orderline_019 prefetchsize 0;
alter tablespace ts_orderline_020 prefetchsize 0;
alter tablespace ts_orderline_021 prefetchsize 0;
alter tablespace ts_orderline_022 prefetchsize 0;
alter tablespace ts_orderline_023 prefetchsize 0;
alter tablespace ts_orderline_024 prefetchsize 0;
alter tablespace ts_orderline_025 prefetchsize 0;
alter tablespace ts_orderline_026 prefetchsize 0;
alter tablespace ts_orderline_027 prefetchsize 0;
alter tablespace ts_orderline_028 prefetchsize 0;
alter tablespace ts_orderline_029 prefetchsize 0;
alter tablespace ts_orderline_030 prefetchsize 0;
alter tablespace ts_orderline_031 prefetchsize 0;
alter tablespace ts_orderline_032 prefetchsize 0;
alter tablespace ts_orderline_033 prefetchsize 0;
alter tablespace ts_orderline_034 prefetchsize 0;
alter tablespace ts_orderline_035 prefetchsize 0;
alter tablespace ts_orderline_036 prefetchsize 0;
alter tablespace ts_orderline_037 prefetchsize 0;
alter tablespace ts_orderline_038 prefetchsize 0;
alter tablespace ts_orderline_039 prefetchsize 0;
alter tablespace ts_orderline_040 prefetchsize 0;
alter tablespace ts_orderline_041 prefetchsize 0;
alter tablespace ts_orderline_042 prefetchsize 0;
alter tablespace ts_orderline_043 prefetchsize 0;
alter tablespace ts_orderline_044 prefetchsize 0;
alter tablespace ts_orderline_045 prefetchsize 0;
alter tablespace ts_orderline_046 prefetchsize 0;
alter tablespace ts_orderline_047 prefetchsize 0;
alter tablespace ts_orderline_048 prefetchsize 0;
alter tablespace ts_orderline_049 prefetchsize 0;
alter tablespace ts_orderline_050 prefetchsize 0;
alter tablespace ts_orderline_051 prefetchsize 0;
alter tablespace ts_orderline_052 prefetchsize 0;
alter tablespace ts_orderline_053 prefetchsize 0;
alter tablespace ts_orderline_054 prefetchsize 0;
alter tablespace ts_orderline_055 prefetchsize 0;
alter tablespace ts_orderline_056 prefetchsize 0;
alter tablespace ts_orderline_057 prefetchsize 0;
alter tablespace ts_orderline_058 prefetchsize 0;
alter tablespace ts_orderline_059 prefetchsize 0;
alter tablespace ts_orderline_060 prefetchsize 0;
alter tablespace ts_orderline_061 prefetchsize 0;
alter tablespace ts_orderline_062 prefetchsize 0;
alter tablespace ts_orderline_063 prefetchsize 0;
alter tablespace ts_orderline_064 prefetchsize 0;
alter tablespace ts_orderline_065 prefetchsize 0;
alter tablespace ts_orderline_066 prefetchsize 0;
alter tablespace ts_orderline_067 prefetchsize 0;
alter tablespace ts_orderline_068 prefetchsize 0;
alter tablespace ts_orderline_069 prefetchsize 0;
alter tablespace ts_orderline_070 prefetchsize 0;
alter tablespace ts_orderline_071 prefetchsize 0;
alter tablespace ts_orderline_072 prefetchsize 0;
alter tablespace ts_orderline_073 prefetchsize 0;
alter tablespace ts_orderline_074 prefetchsize 0;
alter tablespace ts_orderline_075 prefetchsize 0;
alter tablespace ts_orderline_076 prefetchsize 0;
alter tablespace ts_orderline_077 prefetchsize 0;
alter tablespace ts_orderline_078 prefetchsize 0;
alter tablespace ts_orderline_079 prefetchsize 0;
alter tablespace ts_orderline_080 prefetchsize 0;
alter tablespace ts_orderline_081 prefetchsize 0;
alter tablespace ts_orderline_082 prefetchsize 0;
alter tablespace ts_orderline_083 prefetchsize 0;
alter tablespace ts_orderline_084 prefetchsize 0;
alter tablespace ts_orderline_085 prefetchsize 0;
alter tablespace ts_orderline_086 prefetchsize 0;
alter tablespace ts_orderline_087 prefetchsize 0;
alter tablespace ts_orderline_088 prefetchsize 0;
alter tablespace ts_orderline_089 prefetchsize 0;
alter tablespace ts_orderline_090 prefetchsize 0;
alter tablespace ts_orderline_091 prefetchsize 0;
alter tablespace ts_orderline_092 prefetchsize 0;
alter tablespace ts_orderline_093 prefetchsize 0;
alter tablespace ts_orderline_094 prefetchsize 0;
alter tablespace ts_orderline_095 prefetchsize 0;
alter tablespace ts_orderline_096 prefetchsize 0;
alter tablespace ts_orderline_097 prefetchsize 0;
alter tablespace ts_orderline_098 prefetchsize 0;
alter tablespace ts_orderline_099 prefetchsize 0;
alter tablespace ts_orderline_100 prefetchsize 0;
alter tablespace ts_orderline_101 prefetchsize 0;
alter tablespace ts_orderline_102 prefetchsize 0;
alter tablespace ts_orderline_103 prefetchsize 0;
alter tablespace ts_orderline_104 prefetchsize 0;
alter tablespace ts_orderline_105 prefetchsize 0;
alter tablespace ts_orderline_106 prefetchsize 0;
alter tablespace ts_orderline_107 prefetchsize 0;
alter tablespace ts_orderline_108 prefetchsize 0;
alter tablespace ts_orderline_109 prefetchsize 0;
alter tablespace ts_orderline_110 prefetchsize 0;
alter tablespace ts_orderline_111 prefetchsize 0;
alter tablespace ts_orderline_112 prefetchsize 0;
alter tablespace ts_orderline_113 prefetchsize 0;
alter tablespace ts_orderline_114 prefetchsize 0;
alter tablespace ts_orderline_115 prefetchsize 0;
```

```
alter tablespace ts_orderline_116 prefetchsize 0;
alter tablespace ts_orderline_117 prefetchsize 0;
alter tablespace ts_orderline_118 prefetchsize 0;
alter tablespace ts_orderline_119 prefetchsize 0;
alter tablespace ts_orderline_120 prefetchsize 0;
alter tablespace ts_orderline_121 prefetchsize 0;
alter tablespace ts_orderline_122 prefetchsize 0;
alter tablespace ts_orderline_123 prefetchsize 0;
alter tablespace ts_orderline_124 prefetchsize 0;
alter tablespace ts_orderline_125 prefetchsize 0;
alter tablespace ts_orderline_126 prefetchsize 0;
alter tablespace ts_orderline_127 prefetchsize 0;
alter tablespace ts_orderline_128 prefetchsize 0;
alter tablespace ts_orderline_129 prefetchsize 0;
alter tablespace ts_orderline_130 prefetchsize 0;
alter tablespace ts_orderline_131 prefetchsize 0;
alter tablespace ts_orderline_132 prefetchsize 0;
alter tablespace ts_orderline_133 prefetchsize 0;
alter tablespace ts_orderline_134 prefetchsize 0;
alter tablespace ts_orderline_135 prefetchsize 0;
alter tablespace ts_orderline_136 prefetchsize 0;
alter tablespace ts_orderline_137 prefetchsize 0;
alter tablespace ts_orderline_138 prefetchsize 0;
alter tablespace ts_orderline_139 prefetchsize 0;
alter tablespace ts_orderline_140 prefetchsize 0;
alter tablespace ts_orderline_141 prefetchsize 0;
alter tablespace ts_orderline_142 prefetchsize 0;
alter tablespace ts_orderline_143 prefetchsize 0;
alter tablespace ts_orderline_144 prefetchsize 0;
alter tablespace ts_orderline_145 prefetchsize 0;
alter tablespace ts_orderline_146 prefetchsize 0;
alter tablespace ts_orderline_147 prefetchsize 0;
alter tablespace ts_orderline_148 prefetchsize 0;
alter tablespace ts_orderline_149 prefetchsize 0;
alter tablespace ts_orderline_150 prefetchsize 0;
alter tablespace ts_orderline_151 prefetchsize 0;
alter tablespace ts_orderline_152 prefetchsize 0;
alter tablespace ts_orderline_153 prefetchsize 0;
alter tablespace ts_orderline_154 prefetchsize 0;
alter tablespace ts_orderline_155 prefetchsize 0;
alter tablespace ts_orderline_156 prefetchsize 0;
alter tablespace ts_orderline_157 prefetchsize 0;
alter tablespace ts_orderline_158 prefetchsize 0;
alter tablespace ts_orderline_159 prefetchsize 0;
alter tablespace ts_orderline_160 prefetchsize 0;
alter tablespace ts_orderline_161 prefetchsize 0;
alter tablespace ts_orderline_162 prefetchsize 0;
alter tablespace ts_orderline_163 prefetchsize 0;
alter tablespace ts_orderline_164 prefetchsize 0;
alter tablespace ts_orderline_165 prefetchsize 0;
alter tablespace ts_orderline_166 prefetchsize 0;
alter tablespace ts_orderline_167 prefetchsize 0;
alter tablespace ts_orderline_168 prefetchsize 0;
alter tablespace ts_orderline_169 prefetchsize 0;
alter tablespace ts_orderline_170 prefetchsize 0;
alter tablespace ts_orderline_171 prefetchsize 0;
alter tablespace ts_orderline_172 prefetchsize 0;
alter tablespace ts_orderline_173 prefetchsize 0;
alter tablespace ts_orderline_174 prefetchsize 0;
alter tablespace ts_orderline_175 prefetchsize 0;
alter tablespace ts_orderline_176 prefetchsize 0;
alter tablespace ts_orderline_177 prefetchsize 0;
alter tablespace ts_orderline_178 prefetchsize 0;
alter tablespace ts_orderline_179 prefetchsize 0;
alter tablespace ts_orderline_180 prefetchsize 0;
alter tablespace ts_orderline_181 prefetchsize 0;
alter tablespace ts_orderline_182 prefetchsize 0;
alter tablespace ts_orderline_183 prefetchsize 0;
alter tablespace ts_orderline_184 prefetchsize 0;
alter tablespace ts_orderline_185 prefetchsize 0;
alter tablespace ts_orderline_186 prefetchsize 0;
alter tablespace ts_orderline_187 prefetchsize 0;
alter tablespace ts_orderline_188 prefetchsize 0;
alter tablespace ts_orderline_189 prefetchsize 0;
alter tablespace ts_orderline_190 prefetchsize 0;
alter tablespace ts_orderline_191 prefetchsize 0;
alter tablespace ts_orderline_192 prefetchsize 0;
alter tablespace ts_orderline_193 prefetchsize 0;
alter tablespace ts_orderline_194 prefetchsize 0;
alter tablespace ts_orderline_195 prefetchsize 0;
alter tablespace ts_orderline_196 prefetchsize 0;
alter tablespace ts_orderline_197 prefetchsize 0;
alter tablespace ts_orderline_198 prefetchsize 0;
alter tablespace ts_orderline_199 prefetchsize 0;
alter tablespace ts_orderline_200 prefetchsize 0;
alter tablespace ts_stock_001 prefetchsize 0;
alter tablespace ts_stock_002 prefetchsize 0;
alter tablespace ts_stock_003 prefetchsize 0;
alter tablespace ts_stock_004 prefetchsize 0;
alter tablespace ts_stock_005 prefetchsize 0;
alter tablespace ts_stock_006 prefetchsize 0;
alter tablespace ts_stock_007 prefetchsize 0;
alter tablespace ts_stock_008 prefetchsize 0;
alter tablespace ts_stock_009 prefetchsize 0;
alter tablespace ts_stock_010 prefetchsize 0;
alter tablespace ts_stock_011 prefetchsize 0;
alter tablespace ts_stock_012 prefetchsize 0;
alter tablespace ts_stock_013 prefetchsize 0;
alter tablespace ts_stock_014 prefetchsize 0;
alter tablespace ts_stock_015 prefetchsize 0;
alter tablespace ts_stock_016 prefetchsize 0;
alter tablespace ts_stock_017 prefetchsize 0;
alter tablespace ts_stock_018 prefetchsize 0;
alter tablespace ts_stock_019 prefetchsize 0;
alter tablespace ts_stock_020 prefetchsize 0;
alter tablespace ts_stock_021 prefetchsize 0;
alter tablespace ts_stock_022 prefetchsize 0;
alter tablespace ts_stock_023 prefetchsize 0;
alter tablespace ts_stock_024 prefetchsize 0;
alter tablespace ts_stock_025 prefetchsize 0;
alter tablespace ts_stock_026 prefetchsize 0;
alter tablespace ts_stock_027 prefetchsize 0;
alter tablespace ts_stock_028 prefetchsize 0;
alter tablespace ts_stock_029 prefetchsize 0;
alter tablespace ts_stock_030 prefetchsize 0;
alter tablespace ts_stock_031 prefetchsize 0;
alter tablespace ts_stock_032 prefetchsize 0;
alter tablespace ts_stock_033 prefetchsize 0;
alter tablespace ts_stock_034 prefetchsize 0;
alter tablespace ts_stock_035 prefetchsize 0;
alter tablespace ts_stock_036 prefetchsize 0;
alter tablespace ts_stock_037 prefetchsize 0;
alter tablespace ts_stock_038 prefetchsize 0;
alter tablespace ts_stock_039 prefetchsize 0;
alter tablespace ts_stock_040 prefetchsize 0;
alter tablespace ts_stock_041 prefetchsize 0;
alter tablespace ts_stock_042 prefetchsize 0;
alter tablespace ts_stock_043 prefetchsize 0;
alter tablespace ts_stock_044 prefetchsize 0;
alter tablespace ts_stock_045 prefetchsize 0;
alter tablespace ts_stock_046 prefetchsize 0;
alter tablespace ts_stock_047 prefetchsize 0;
alter tablespace ts_stock_048 prefetchsize 0;
alter tablespace ts_stock_049 prefetchsize 0;
alter tablespace ts_stock_050 prefetchsize 0;
alter tablespace ts_stock_051 prefetchsize 0;
alter tablespace ts_stock_052 prefetchsize 0;
alter tablespace ts_stock_053 prefetchsize 0;
alter tablespace ts_stock_054 prefetchsize 0;
alter tablespace ts_stock_055 prefetchsize 0;
alter tablespace ts_stock_056 prefetchsize 0;
alter tablespace ts_stock_057 prefetchsize 0;
alter tablespace ts_stock_058 prefetchsize 0;
alter tablespace ts_stock_059 prefetchsize 0;
alter tablespace ts_stock_060 prefetchsize 0;
alter tablespace ts_stock_061 prefetchsize 0;
alter tablespace ts_stock_062 prefetchsize 0;
alter tablespace ts_stock_063 prefetchsize 0;
alter tablespace ts_stock_064 prefetchsize 0;
alter tablespace ts_stock_065 prefetchsize 0;
alter tablespace ts_stock_066 prefetchsize 0;
alter tablespace ts_stock_067 prefetchsize 0;
alter tablespace ts_stock_068 prefetchsize 0;
alter tablespace ts_stock_069 prefetchsize 0;
alter tablespace ts_stock_070 prefetchsize 0;
alter tablespace ts_stock_071 prefetchsize 0;
alter tablespace ts_stock_072 prefetchsize 0;
alter tablespace ts_stock_073 prefetchsize 0;
alter tablespace ts_stock_074 prefetchsize 0;
alter tablespace ts_stock_075 prefetchsize 0;
alter tablespace ts_stock_076 prefetchsize 0;
alter tablespace ts_stock_077 prefetchsize 0;
alter tablespace ts_stock_078 prefetchsize 0;
alter tablespace ts_stock_079 prefetchsize 0;
alter tablespace ts_stock_080 prefetchsize 0;
alter tablespace ts_stock_081 prefetchsize 0;
alter tablespace ts_stock_082 prefetchsize 0;
alter tablespace ts_stock_083 prefetchsize 0;
alter tablespace ts_stock_084 prefetchsize 0;
alter tablespace ts_stock_085 prefetchsize 0;
alter tablespace ts_stock_086 prefetchsize 0;
alter tablespace ts_stock_087 prefetchsize 0;
alter tablespace ts_stock_088 prefetchsize 0;
alter tablespace ts_stock_089 prefetchsize 0;
alter tablespace ts_stock_090 prefetchsize 0;
alter tablespace ts_stock_091 prefetchsize 0;
alter tablespace ts_stock_092 prefetchsize 0;
alter tablespace ts_stock_093 prefetchsize 0;
alter tablespace ts_stock_094 prefetchsize 0;
alter tablespace ts_stock_095 prefetchsize 0;
alter tablespace ts_stock_096 prefetchsize 0;
alter tablespace ts_stock_097 prefetchsize 0;
alter tablespace ts_stock_098 prefetchsize 0;
alter tablespace ts_stock_099 prefetchsize 0;
alter tablespace ts_stock_100 prefetchsize 0;
alter tablespace ts_stock_101 prefetchsize 0;
alter tablespace ts_stock_102 prefetchsize 0;
alter tablespace ts_stock_103 prefetchsize 0;
alter tablespace ts_stock_104 prefetchsize 0;
alter tablespace ts_stock_105 prefetchsize 0;
alter tablespace ts_stock_106 prefetchsize 0;
alter tablespace ts_stock_107 prefetchsize 0;
alter tablespace ts_stock_108 prefetchsize 0;
alter tablespace ts_stock_109 prefetchsize 0;
alter tablespace ts_stock_110 prefetchsize 0;
alter tablespace ts_stock_111 prefetchsize 0;
alter tablespace ts_stock_112 prefetchsize 0;
alter tablespace ts_stock_113 prefetchsize 0;
alter tablespace ts_stock_114 prefetchsize 0;
alter tablespace ts_stock_115 prefetchsize 0;
alter tablespace ts_stock_116 prefetchsize 0;
alter tablespace ts_stock_117 prefetchsize 0;
alter tablespace ts_stock_118 prefetchsize 0;
alter tablespace ts_stock_119 prefetchsize 0;
alter tablespace ts_stock_120 prefetchsize 0;
alter tablespace ts_stock_121 prefetchsize 0;
alter tablespace ts_stock_122 prefetchsize 0;
alter tablespace ts_stock_123 prefetchsize 0;
alter tablespace ts_stock_124 prefetchsize 0;
alter tablespace ts_stock_125 prefetchsize 0;
alter tablespace ts_stock_126 prefetchsize 0;
alter tablespace ts_stock_127 prefetchsize 0;
alter tablespace ts_stock_128 prefetchsize 0;
alter tablespace ts_stock_129 prefetchsize 0;
alter tablespace ts_stock_130 prefetchsize 0;
alter tablespace ts_stock_131 prefetchsize 0;
alter tablespace ts_stock_132 prefetchsize 0;
alter tablespace ts_stock_133 prefetchsize 0;
alter tablespace ts_stock_134 prefetchsize 0;
```

```
alter tablespace ts_stock_135 prefetchsize 0;
alter tablespace ts_stock_136 prefetchsize 0;
alter tablespace ts_stock_137 prefetchsize 0;
alter tablespace ts_stock_138 prefetchsize 0;
alter tablespace ts_stock_139 prefetchsize 0;
alter tablespace ts_stock_140 prefetchsize 0;
alter tablespace ts_stock_141 prefetchsize 0;
alter tablespace ts_stock_142 prefetchsize 0;
alter tablespace ts_stock_143 prefetchsize 0;
alter tablespace ts_stock_144 prefetchsize 0;
alter tablespace ts_stock_145 prefetchsize 0;
alter tablespace ts_stock_146 prefetchsize 0;
alter tablespace ts_stock_147 prefetchsize 0;
alter tablespace ts_stock_148 prefetchsize 0;
alter tablespace ts_stock_149 prefetchsize 0;
alter tablespace ts_stock_150 prefetchsize 0;
alter tablespace ts_stock_151 prefetchsize 0;
alter tablespace ts_stock_152 prefetchsize 0;
alter tablespace ts_stock_153 prefetchsize 0;
alter tablespace ts_stock_154 prefetchsize 0;
alter tablespace ts_stock_155 prefetchsize 0;
alter tablespace ts_stock_156 prefetchsize 0;
alter tablespace ts_stock_157 prefetchsize 0;
alter tablespace ts_stock_158 prefetchsize 0;
alter tablespace ts_stock_159 prefetchsize 0;
alter tablespace ts_stock_160 prefetchsize 0;
alter tablespace ts_stock_161 prefetchsize 0;
alter tablespace ts_stock_162 prefetchsize 0;
alter tablespace ts_stock_163 prefetchsize 0;
alter tablespace ts_stock_164 prefetchsize 0;
alter tablespace ts_stock_165 prefetchsize 0;
alter tablespace ts_stock_166 prefetchsize 0;
alter tablespace ts_stock_167 prefetchsize 0;
alter tablespace ts_stock_168 prefetchsize 0;
alter tablespace ts_stock_169 prefetchsize 0;
alter tablespace ts_stock_170 prefetchsize 0;
alter tablespace ts_stock_171 prefetchsize 0;
alter tablespace ts_stock_172 prefetchsize 0;
alter tablespace ts_stock_173 prefetchsize 0;
alter tablespace ts_stock_174 prefetchsize 0;
alter tablespace ts_stock_175 prefetchsize 0;
alter tablespace ts_stock_176 prefetchsize 0;
alter tablespace ts_stock_177 prefetchsize 0;
alter tablespace ts_stock_178 prefetchsize 0;
alter tablespace ts_stock_179 prefetchsize 0;
alter tablespace ts_stock_180 prefetchsize 0;
alter tablespace ts_stock_181 prefetchsize 0;
alter tablespace ts_stock_182 prefetchsize 0;
alter tablespace ts_stock_183 prefetchsize 0;
alter tablespace ts_stock_184 prefetchsize 0;
alter tablespace ts_stock_185 prefetchsize 0;
alter tablespace ts_stock_186 prefetchsize 0;
alter tablespace ts_stock_187 prefetchsize 0;
alter tablespace ts_stock_188 prefetchsize 0;
alter tablespace ts_stock_189 prefetchsize 0;
alter tablespace ts_stock_190 prefetchsize 0;
alter tablespace ts_stock_191 prefetchsize 0;
alter tablespace ts_stock_192 prefetchsize 0;
alter tablespace ts_stock_193 prefetchsize 0;
alter tablespace ts_stock_194 prefetchsize 0;
alter tablespace ts_stock_195 prefetchsize 0;
alter tablespace ts_stock_196 prefetchsize 0;
alter tablespace ts_stock_197 prefetchsize 0;
alter tablespace ts_stock_198 prefetchsize 0;
alter tablespace ts_stock_199 prefetchsize 0;
alter tablespace ts_stock_200 prefetchsize 0;
alter tablespace ts_ware_001 prefetchsize 0;
alter tablespace ts_ware_002 prefetchsize 0;
alter tablespace ts_ware_003 prefetchsize 0;
alter tablespace ts_ware_004 prefetchsize 0;
alter tablespace ts_ware_005 prefetchsize 0;
alter tablespace ts_ware_006 prefetchsize 0;
alter tablespace ts_ware_007 prefetchsize 0;
alter tablespace ts_ware_008 prefetchsize 0;
alter tablespace ts_ware_009 prefetchsize 0;
alter tablespace ts_ware_010 prefetchsize 0;
alter tablespace ts_ware_011 prefetchsize 0;
alter tablespace ts_ware_012 prefetchsize 0;
alter tablespace ts_ware_013 prefetchsize 0;
alter tablespace ts_ware_014 prefetchsize 0;
alter tablespace ts_ware_015 prefetchsize 0;
alter tablespace ts_ware_016 prefetchsize 0;
alter tablespace ts_ware_017 prefetchsize 0;
alter tablespace ts_ware_018 prefetchsize 0;
alter tablespace ts_ware_019 prefetchsize 0;
alter tablespace ts_ware_020 prefetchsize 0;
alter tablespace ts_ware_021 prefetchsize 0;
alter tablespace ts_ware_022 prefetchsize 0;
alter tablespace ts_ware_023 prefetchsize 0;
alter tablespace ts_ware_024 prefetchsize 0;
alter tablespace ts_ware_025 prefetchsize 0;
alter tablespace ts_ware_026 prefetchsize 0;
alter tablespace ts_ware_027 prefetchsize 0;
alter tablespace ts_ware_028 prefetchsize 0;
alter tablespace ts_ware_029 prefetchsize 0;
alter tablespace ts_ware_030 prefetchsize 0;
alter tablespace ts_ware_031 prefetchsize 0;
alter tablespace ts_ware_032 prefetchsize 0;
alter tablespace ts_ware_033 prefetchsize 0;
alter tablespace ts_ware_034 prefetchsize 0;
alter tablespace ts_ware_035 prefetchsize 0;
alter tablespace ts_ware_036 prefetchsize 0;
alter tablespace ts_ware_037 prefetchsize 0;
alter tablespace ts_ware_038 prefetchsize 0;
alter tablespace ts_ware_039 prefetchsize 0;
alter tablespace ts_ware_040 prefetchsize 0;
connect reset;
```

DDL/ALTTBSP_PF_4096.ddl

```
connect to TPCC;
alter tablespace is_customer_001 prefetchsize 4096;
alter tablespace is_customer_002 prefetchsize 4096;
alter tablespace is_customer_003 prefetchsize 4096;
alter tablespace is_customer_004 prefetchsize 4096;
alter tablespace is_customer_005 prefetchsize 4096;
alter tablespace is_customer_006 prefetchsize 4096;
alter tablespace is_customer_007 prefetchsize 4096;
alter tablespace is_customer_008 prefetchsize 4096;
alter tablespace is_customer_009 prefetchsize 4096;
alter tablespace is_customer_010 prefetchsize 4096;
alter tablespace is_customer_011 prefetchsize 4096;
alter tablespace is_customer_012 prefetchsize 4096;
alter tablespace is_customer_013 prefetchsize 4096;
alter tablespace is_customer_014 prefetchsize 4096;
alter tablespace is_customer_015 prefetchsize 4096;
alter tablespace is_customer_016 prefetchsize 4096;
alter tablespace is_customer_017 prefetchsize 4096;
alter tablespace is_customer_018 prefetchsize 4096;
alter tablespace is_customer_019 prefetchsize 4096;
alter tablespace is_customer_020 prefetchsize 4096;
alter tablespace is_customer_021 prefetchsize 4096;
alter tablespace is_customer_022 prefetchsize 4096;
alter tablespace is_customer_023 prefetchsize 4096;
alter tablespace is_customer_024 prefetchsize 4096;
alter tablespace is_customer_025 prefetchsize 4096;
alter tablespace is_customer_026 prefetchsize 4096;
alter tablespace is_customer_027 prefetchsize 4096;
alter tablespace is_customer_028 prefetchsize 4096;
alter tablespace is_customer_029 prefetchsize 4096;
alter tablespace is_customer_030 prefetchsize 4096;
alter tablespace is_customer_031 prefetchsize 4096;
alter tablespace is_customer_032 prefetchsize 4096;
alter tablespace is_customer_033 prefetchsize 4096;
alter tablespace is_customer_034 prefetchsize 4096;
alter tablespace is_customer_035 prefetchsize 4096;
alter tablespace is_customer_036 prefetchsize 4096;
alter tablespace is_customer_037 prefetchsize 4096;
alter tablespace is_customer_038 prefetchsize 4096;
alter tablespace is_customer_039 prefetchsize 4096;
alter tablespace is_customer_040 prefetchsize 4096;
alter tablespace is_customer_041 prefetchsize 4096;
alter tablespace is_customer_042 prefetchsize 4096;
alter tablespace is_customer_043 prefetchsize 4096;
alter tablespace is_customer_044 prefetchsize 4096;
alter tablespace is_customer_045 prefetchsize 4096;
alter tablespace is_customer_046 prefetchsize 4096;
alter tablespace is_customer_047 prefetchsize 4096;
alter tablespace is_customer_048 prefetchsize 4096;
alter tablespace is_customer_049 prefetchsize 4096;
alter tablespace is_customer_050 prefetchsize 4096;
alter tablespace is_customer_051 prefetchsize 4096;
alter tablespace is_customer_052 prefetchsize 4096;
alter tablespace is_customer_053 prefetchsize 4096;
alter tablespace is_customer_054 prefetchsize 4096;
alter tablespace is_customer_055 prefetchsize 4096;
alter tablespace is_customer_056 prefetchsize 4096;
alter tablespace is_customer_057 prefetchsize 4096;
alter tablespace is_customer_058 prefetchsize 4096;
alter tablespace is_customer_059 prefetchsize 4096;
alter tablespace is_customer_060 prefetchsize 4096;
alter tablespace is_customer_061 prefetchsize 4096;
alter tablespace is_customer_062 prefetchsize 4096;
alter tablespace is_customer_063 prefetchsize 4096;
alter tablespace is_customer_064 prefetchsize 4096;
alter tablespace is_customer_065 prefetchsize 4096;
alter tablespace is_customer_066 prefetchsize 4096;
alter tablespace is_customer_067 prefetchsize 4096;
alter tablespace is_customer_068 prefetchsize 4096;
alter tablespace is_customer_069 prefetchsize 4096;
alter tablespace is_customer_070 prefetchsize 4096;
alter tablespace is_customer_071 prefetchsize 4096;
alter tablespace is_customer_072 prefetchsize 4096;
alter tablespace is_customer_073 prefetchsize 4096;
alter tablespace is_customer_074 prefetchsize 4096;
alter tablespace is_customer_075 prefetchsize 4096;
alter tablespace is_customer_076 prefetchsize 4096;
alter tablespace is_customer_077 prefetchsize 4096;
alter tablespace is_customer_078 prefetchsize 4096;
alter tablespace is_customer_079 prefetchsize 4096;
alter tablespace is_customer_080 prefetchsize 4096;
alter tablespace is_customer_081 prefetchsize 4096;
alter tablespace is_customer_082 prefetchsize 4096;
alter tablespace is_customer_083 prefetchsize 4096;
alter tablespace is_customer_084 prefetchsize 4096;
alter tablespace is_customer_085 prefetchsize 4096;
alter tablespace is_customer_086 prefetchsize 4096;
alter tablespace is_customer_087 prefetchsize 4096;
alter tablespace is_customer_088 prefetchsize 4096;
alter tablespace is_customer_089 prefetchsize 4096;
alter tablespace is_customer_090 prefetchsize 4096;
alter tablespace is_customer_091 prefetchsize 4096;
alter tablespace is_customer_092 prefetchsize 4096;
alter tablespace is_customer_093 prefetchsize 4096;
alter tablespace is_customer_094 prefetchsize 4096;
alter tablespace is_customer_095 prefetchsize 4096;
alter tablespace is_customer_096 prefetchsize 4096;
alter tablespace is_customer_097 prefetchsize 4096;
alter tablespace is_customer_098 prefetchsize 4096;
alter tablespace is_customer_099 prefetchsize 4096;
alter tablespace is_customer_100 prefetchsize 4096;
alter tablespace is_customer_101 prefetchsize 4096;
alter tablespace is_customer_102 prefetchsize 4096;
alter tablespace is_customer_103 prefetchsize 4096;
alter tablespace is_customer_104 prefetchsize 4096;
alter tablespace is_customer_105 prefetchsize 4096;
```

```
alter tablespace is_customer_106 prefetchsize 4096;
alter tablespace is_customer_107 prefetchsize 4096;
alter tablespace is_customer_108 prefetchsize 4096;
alter tablespace is_customer_109 prefetchsize 4096;
alter tablespace is_customer_110 prefetchsize 4096;
alter tablespace is_customer_111 prefetchsize 4096;
alter tablespace is_customer_112 prefetchsize 4096;
alter tablespace is_customer_113 prefetchsize 4096;
alter tablespace is_customer_114 prefetchsize 4096;
alter tablespace is_customer_115 prefetchsize 4096;
alter tablespace is_customer_116 prefetchsize 4096;
alter tablespace is_customer_117 prefetchsize 4096;
alter tablespace is_customer_118 prefetchsize 4096;
alter tablespace is_customer_119 prefetchsize 4096;
alter tablespace is_customer_120 prefetchsize 4096;
alter tablespace is_customer_121 prefetchsize 4096;
alter tablespace is_customer_122 prefetchsize 4096;
alter tablespace is_customer_123 prefetchsize 4096;
alter tablespace is_customer_124 prefetchsize 4096;
alter tablespace is_customer_125 prefetchsize 4096;
alter tablespace is_customer_126 prefetchsize 4096;
alter tablespace is_customer_127 prefetchsize 4096;
alter tablespace is_customer_128 prefetchsize 4096;
alter tablespace is_customer_129 prefetchsize 4096;
alter tablespace is_customer_130 prefetchsize 4096;
alter tablespace is_customer_131 prefetchsize 4096;
alter tablespace is_customer_132 prefetchsize 4096;
alter tablespace is_customer_133 prefetchsize 4096;
alter tablespace is_customer_134 prefetchsize 4096;
alter tablespace is_customer_135 prefetchsize 4096;
alter tablespace is_customer_136 prefetchsize 4096;
alter tablespace is_customer_137 prefetchsize 4096;
alter tablespace is_customer_138 prefetchsize 4096;
alter tablespace is_customer_139 prefetchsize 4096;
alter tablespace is_customer_140 prefetchsize 4096;
alter tablespace is_customer_141 prefetchsize 4096;
alter tablespace is_customer_142 prefetchsize 4096;
alter tablespace is_customer_143 prefetchsize 4096;
alter tablespace is_customer_144 prefetchsize 4096;
alter tablespace is_customer_145 prefetchsize 4096;
alter tablespace is_customer_146 prefetchsize 4096;
alter tablespace is_customer_147 prefetchsize 4096;
alter tablespace is_customer_148 prefetchsize 4096;
alter tablespace is_customer_149 prefetchsize 4096;
alter tablespace is_customer_150 prefetchsize 4096;
alter tablespace is_customer_151 prefetchsize 4096;
alter tablespace is_customer_152 prefetchsize 4096;
alter tablespace is_customer_153 prefetchsize 4096;
alter tablespace is_customer_154 prefetchsize 4096;
alter tablespace is_customer_155 prefetchsize 4096;
alter tablespace is_customer_156 prefetchsize 4096;
alter tablespace is_customer_157 prefetchsize 4096;
alter tablespace is_customer_158 prefetchsize 4096;
alter tablespace is_customer_159 prefetchsize 4096;
alter tablespace is_customer_160 prefetchsize 4096;
alter tablespace is_customer_161 prefetchsize 4096;
alter tablespace is_customer_162 prefetchsize 4096;
alter tablespace is_customer_163 prefetchsize 4096;
alter tablespace is_customer_164 prefetchsize 4096;
alter tablespace is_customer_165 prefetchsize 4096;
alter tablespace is_customer_166 prefetchsize 4096;
alter tablespace is_customer_167 prefetchsize 4096;
alter tablespace is_customer_168 prefetchsize 4096;
alter tablespace is_customer_169 prefetchsize 4096;
alter tablespace is_customer_170 prefetchsize 4096;
alter tablespace is_customer_171 prefetchsize 4096;
alter tablespace is_customer_172 prefetchsize 4096;
alter tablespace is_customer_173 prefetchsize 4096;
alter tablespace is_customer_174 prefetchsize 4096;
alter tablespace is_customer_175 prefetchsize 4096;
alter tablespace is_customer_176 prefetchsize 4096;
alter tablespace is_customer_177 prefetchsize 4096;
alter tablespace is_customer_178 prefetchsize 4096;
alter tablespace is_customer_179 prefetchsize 4096;
alter tablespace is_customer_180 prefetchsize 4096;
alter tablespace is_customer_181 prefetchsize 4096;
alter tablespace is_customer_182 prefetchsize 4096;
alter tablespace is_customer_183 prefetchsize 4096;
alter tablespace is_customer_184 prefetchsize 4096;
alter tablespace is_customer_185 prefetchsize 4096;
alter tablespace is_customer_186 prefetchsize 4096;
alter tablespace is_customer_187 prefetchsize 4096;
alter tablespace is_customer_188 prefetchsize 4096;
alter tablespace is_customer_189 prefetchsize 4096;
alter tablespace is_customer_190 prefetchsize 4096;
alter tablespace is_customer_191 prefetchsize 4096;
alter tablespace is_customer_192 prefetchsize 4096;
alter tablespace is_customer_193 prefetchsize 4096;
alter tablespace is_customer_194 prefetchsize 4096;
alter tablespace is_customer_195 prefetchsize 4096;
alter tablespace is_customer_196 prefetchsize 4096;
alter tablespace is_customer_197 prefetchsize 4096;
alter tablespace is_customer_198 prefetchsize 4096;
alter tablespace is_customer_199 prefetchsize 4096;
alter tablespace is_customer_200 prefetchsize 4096;
alter tablespace is_order_001 prefetchsize 4096;
alter tablespace is_order_002 prefetchsize 4096;
alter tablespace is_order_003 prefetchsize 4096;
alter tablespace is_order_004 prefetchsize 4096;
alter tablespace is_order_005 prefetchsize 4096;
alter tablespace is_order_006 prefetchsize 4096;
alter tablespace is_order_007 prefetchsize 4096;
alter tablespace is_order_008 prefetchsize 4096;
alter tablespace is_order_009 prefetchsize 4096;
alter tablespace is_order_010 prefetchsize 4096;
alter tablespace is_order_011 prefetchsize 4096;
alter tablespace is_order_012 prefetchsize 4096;
alter tablespace is_order_013 prefetchsize 4096;
alter tablespace is_order_014 prefetchsize 4096;
alter tablespace is_order_015 prefetchsize 4096;
alter tablespace is_order_016 prefetchsize 4096;
alter tablespace is_order_017 prefetchsize 4096;
alter tablespace is_order_018 prefetchsize 4096;
alter tablespace is_order_019 prefetchsize 4096;
alter tablespace is_order_020 prefetchsize 4096;
alter tablespace is_order_021 prefetchsize 4096;
alter tablespace is_order_022 prefetchsize 4096;
alter tablespace is_order_023 prefetchsize 4096;
alter tablespace is_order_024 prefetchsize 4096;
alter tablespace is_order_025 prefetchsize 4096;
alter tablespace is_order_026 prefetchsize 4096;
alter tablespace is_order_027 prefetchsize 4096;
alter tablespace is_order_028 prefetchsize 4096;
alter tablespace is_order_029 prefetchsize 4096;
alter tablespace is_order_030 prefetchsize 4096;
alter tablespace is_order_031 prefetchsize 4096;
alter tablespace is_order_032 prefetchsize 4096;
alter tablespace is_order_033 prefetchsize 4096;
alter tablespace is_order_034 prefetchsize 4096;
alter tablespace is_order_035 prefetchsize 4096;
alter tablespace is_order_036 prefetchsize 4096;
alter tablespace is_order_037 prefetchsize 4096;
alter tablespace is_order_038 prefetchsize 4096;
alter tablespace is_order_039 prefetchsize 4096;
alter tablespace is_order_040 prefetchsize 4096;
alter tablespace is_order_041 prefetchsize 4096;
alter tablespace is_order_042 prefetchsize 4096;
alter tablespace is_order_043 prefetchsize 4096;
alter tablespace is_order_044 prefetchsize 4096;
alter tablespace is_order_045 prefetchsize 4096;
alter tablespace is_order_046 prefetchsize 4096;
alter tablespace is_order_047 prefetchsize 4096;
alter tablespace is_order_048 prefetchsize 4096;
alter tablespace is_order_049 prefetchsize 4096;
alter tablespace is_order_050 prefetchsize 4096;
alter tablespace is_order_051 prefetchsize 4096;
alter tablespace is_order_052 prefetchsize 4096;
alter tablespace is_order_053 prefetchsize 4096;
alter tablespace is_order_054 prefetchsize 4096;
alter tablespace is_order_055 prefetchsize 4096;
alter tablespace is_order_056 prefetchsize 4096;
alter tablespace is_order_057 prefetchsize 4096;
alter tablespace is_order_058 prefetchsize 4096;
alter tablespace is_order_059 prefetchsize 4096;
alter tablespace is_order_060 prefetchsize 4096;
alter tablespace is_order_061 prefetchsize 4096;
alter tablespace is_order_062 prefetchsize 4096;
alter tablespace is_order_063 prefetchsize 4096;
alter tablespace is_order_064 prefetchsize 4096;
alter tablespace is_order_065 prefetchsize 4096;
alter tablespace is_order_066 prefetchsize 4096;
alter tablespace is_order_067 prefetchsize 4096;
alter tablespace is_order_068 prefetchsize 4096;
alter tablespace is_order_069 prefetchsize 4096;
alter tablespace is_order_070 prefetchsize 4096;
alter tablespace is_order_071 prefetchsize 4096;
alter tablespace is_order_072 prefetchsize 4096;
alter tablespace is_order_073 prefetchsize 4096;
alter tablespace is_order_074 prefetchsize 4096;
alter tablespace is_order_075 prefetchsize 4096;
alter tablespace is_order_076 prefetchsize 4096;
alter tablespace is_order_077 prefetchsize 4096;
alter tablespace is_order_078 prefetchsize 4096;
alter tablespace is_order_079 prefetchsize 4096;
alter tablespace is_order_080 prefetchsize 4096;
alter tablespace is_order_081 prefetchsize 4096;
alter tablespace is_order_082 prefetchsize 4096;
alter tablespace is_order_083 prefetchsize 4096;
alter tablespace is_order_084 prefetchsize 4096;
alter tablespace is_order_085 prefetchsize 4096;
alter tablespace is_order_086 prefetchsize 4096;
alter tablespace is_order_087 prefetchsize 4096;
alter tablespace is_order_088 prefetchsize 4096;
alter tablespace is_order_089 prefetchsize 4096;
alter tablespace is_order_090 prefetchsize 4096;
alter tablespace is_order_091 prefetchsize 4096;
alter tablespace is_order_092 prefetchsize 4096;
alter tablespace is_order_093 prefetchsize 4096;
alter tablespace is_order_094 prefetchsize 4096;
alter tablespace is_order_095 prefetchsize 4096;
alter tablespace is_order_096 prefetchsize 4096;
alter tablespace is_order_097 prefetchsize 4096;
alter tablespace is_order_098 prefetchsize 4096;
alter tablespace is_order_099 prefetchsize 4096;
alter tablespace is_order_100 prefetchsize 4096;
alter tablespace is_order_101 prefetchsize 4096;
alter tablespace is_order_102 prefetchsize 4096;
alter tablespace is_order_103 prefetchsize 4096;
alter tablespace is_order_104 prefetchsize 4096;
alter tablespace is_order_105 prefetchsize 4096;
alter tablespace is_order_106 prefetchsize 4096;
alter tablespace is_order_107 prefetchsize 4096;
alter tablespace is_order_108 prefetchsize 4096;
alter tablespace is_order_109 prefetchsize 4096;
alter tablespace is_order_110 prefetchsize 4096;
alter tablespace is_order_111 prefetchsize 4096;
alter tablespace is_order_112 prefetchsize 4096;
alter tablespace is_order_113 prefetchsize 4096;
alter tablespace is_order_114 prefetchsize 4096;
alter tablespace is_order_115 prefetchsize 4096;
alter tablespace is_order_116 prefetchsize 4096;
alter tablespace is_order_117 prefetchsize 4096;
alter tablespace is_order_118 prefetchsize 4096;
alter tablespace is_order_119 prefetchsize 4096;
alter tablespace is_order_120 prefetchsize 4096;
alter tablespace is_order_121 prefetchsize 4096;
alter tablespace is_order_122 prefetchsize 4096;
alter tablespace is_order_123 prefetchsize 4096;
alter tablespace is_order_124 prefetchsize 4096;
```

```
alter tablespace is_order_125 prefetchsize 4096;
alter tablespace is_order_126 prefetchsize 4096;
alter tablespace is_order_127 prefetchsize 4096;
alter tablespace is_order_128 prefetchsize 4096;
alter tablespace is_order_129 prefetchsize 4096;
alter tablespace is_order_130 prefetchsize 4096;
alter tablespace is_order_131 prefetchsize 4096;
alter tablespace is_order_132 prefetchsize 4096;
alter tablespace is_order_133 prefetchsize 4096;
alter tablespace is_order_134 prefetchsize 4096;
alter tablespace is_order_135 prefetchsize 4096;
alter tablespace is_order_136 prefetchsize 4096;
alter tablespace is_order_137 prefetchsize 4096;
alter tablespace is_order_138 prefetchsize 4096;
alter tablespace is_order_139 prefetchsize 4096;
alter tablespace is_order_140 prefetchsize 4096;
alter tablespace is_order_141 prefetchsize 4096;
alter tablespace is_order_142 prefetchsize 4096;
alter tablespace is_order_143 prefetchsize 4096;
alter tablespace is_order_144 prefetchsize 4096;
alter tablespace is_order_145 prefetchsize 4096;
alter tablespace is_order_146 prefetchsize 4096;
alter tablespace is_order_147 prefetchsize 4096;
alter tablespace is_order_148 prefetchsize 4096;
alter tablespace is_order_149 prefetchsize 4096;
alter tablespace is_order_150 prefetchsize 4096;
alter tablespace is_order_151 prefetchsize 4096;
alter tablespace is_order_152 prefetchsize 4096;
alter tablespace is_order_153 prefetchsize 4096;
alter tablespace is_order_154 prefetchsize 4096;
alter tablespace is_order_155 prefetchsize 4096;
alter tablespace is_order_156 prefetchsize 4096;
alter tablespace is_order_157 prefetchsize 4096;
alter tablespace is_order_158 prefetchsize 4096;
alter tablespace is_order_159 prefetchsize 4096;
alter tablespace is_order_160 prefetchsize 4096;
alter tablespace is_order_161 prefetchsize 4096;
alter tablespace is_order_162 prefetchsize 4096;
alter tablespace is_order_163 prefetchsize 4096;
alter tablespace is_order_164 prefetchsize 4096;
alter tablespace is_order_165 prefetchsize 4096;
alter tablespace is_order_166 prefetchsize 4096;
alter tablespace is_order_167 prefetchsize 4096;
alter tablespace is_order_168 prefetchsize 4096;
alter tablespace is_order_169 prefetchsize 4096;
alter tablespace is_order_170 prefetchsize 4096;
alter tablespace is_order_171 prefetchsize 4096;
alter tablespace is_order_172 prefetchsize 4096;
alter tablespace is_order_173 prefetchsize 4096;
alter tablespace is_order_174 prefetchsize 4096;
alter tablespace is_order_175 prefetchsize 4096;
alter tablespace is_order_176 prefetchsize 4096;
alter tablespace is_order_177 prefetchsize 4096;
alter tablespace is_order_178 prefetchsize 4096;
alter tablespace is_order_179 prefetchsize 4096;
alter tablespace is_order_180 prefetchsize 4096;
alter tablespace is_order_181 prefetchsize 4096;
alter tablespace is_order_182 prefetchsize 4096;
alter tablespace is_order_183 prefetchsize 4096;
alter tablespace is_order_184 prefetchsize 4096;
alter tablespace is_order_185 prefetchsize 4096;
alter tablespace is_order_186 prefetchsize 4096;
alter tablespace is_order_187 prefetchsize 4096;
alter tablespace is_order_188 prefetchsize 4096;
alter tablespace is_order_189 prefetchsize 4096;
alter tablespace is_order_190 prefetchsize 4096;
alter tablespace is_order_191 prefetchsize 4096;
alter tablespace is_order_192 prefetchsize 4096;
alter tablespace is_order_193 prefetchsize 4096;
alter tablespace is_order_194 prefetchsize 4096;
alter tablespace is_order_195 prefetchsize 4096;
alter tablespace is_order_196 prefetchsize 4096;
alter tablespace is_order_197 prefetchsize 4096;
alter tablespace is_order_198 prefetchsize 4096;
alter tablespace is_order_199 prefetchsize 4096;
alter tablespace is_order_200 prefetchsize 4096;
alter tablespace ts_customer_001 prefetchsize 4096;
alter tablespace ts_customer_002 prefetchsize 4096;
alter tablespace ts_customer_003 prefetchsize 4096;
alter tablespace ts_customer_004 prefetchsize 4096;
alter tablespace ts_customer_005 prefetchsize 4096;
alter tablespace ts_customer_006 prefetchsize 4096;
alter tablespace ts_customer_007 prefetchsize 4096;
alter tablespace ts_customer_008 prefetchsize 4096;
alter tablespace ts_customer_009 prefetchsize 4096;
alter tablespace ts_customer_010 prefetchsize 4096;
alter tablespace ts_customer_011 prefetchsize 4096;
alter tablespace ts_customer_012 prefetchsize 4096;
alter tablespace ts_customer_013 prefetchsize 4096;
alter tablespace ts_customer_014 prefetchsize 4096;
alter tablespace ts_customer_015 prefetchsize 4096;
alter tablespace ts_customer_016 prefetchsize 4096;
alter tablespace ts_customer_017 prefetchsize 4096;
alter tablespace ts_customer_018 prefetchsize 4096;
alter tablespace ts_customer_019 prefetchsize 4096;
alter tablespace ts_customer_020 prefetchsize 4096;
alter tablespace ts_customer_021 prefetchsize 4096;
alter tablespace ts_customer_022 prefetchsize 4096;
alter tablespace ts_customer_023 prefetchsize 4096;
alter tablespace ts_customer_024 prefetchsize 4096;
alter tablespace ts_customer_025 prefetchsize 4096;
alter tablespace ts_customer_026 prefetchsize 4096;
alter tablespace ts_customer_027 prefetchsize 4096;
alter tablespace ts_customer_028 prefetchsize 4096;
alter tablespace ts_customer_029 prefetchsize 4096;
alter tablespace ts_customer_030 prefetchsize 4096;
alter tablespace ts_customer_031 prefetchsize 4096;
alter tablespace ts_customer_032 prefetchsize 4096;
alter tablespace ts_customer_033 prefetchsize 4096;
alter tablespace ts_customer_034 prefetchsize 4096;
alter tablespace ts_customer_035 prefetchsize 4096;
alter tablespace ts_customer_036 prefetchsize 4096;
alter tablespace ts_customer_037 prefetchsize 4096;
alter tablespace ts_customer_038 prefetchsize 4096;
alter tablespace ts_customer_039 prefetchsize 4096;
alter tablespace ts_customer_040 prefetchsize 4096;
alter tablespace ts_customer_041 prefetchsize 4096;
alter tablespace ts_customer_042 prefetchsize 4096;
alter tablespace ts_customer_043 prefetchsize 4096;
alter tablespace ts_customer_044 prefetchsize 4096;
alter tablespace ts_customer_045 prefetchsize 4096;
alter tablespace ts_customer_046 prefetchsize 4096;
alter tablespace ts_customer_047 prefetchsize 4096;
alter tablespace ts_customer_048 prefetchsize 4096;
alter tablespace ts_customer_049 prefetchsize 4096;
alter tablespace ts_customer_050 prefetchsize 4096;
alter tablespace ts_customer_051 prefetchsize 4096;
alter tablespace ts_customer_052 prefetchsize 4096;
alter tablespace ts_customer_053 prefetchsize 4096;
alter tablespace ts_customer_054 prefetchsize 4096;
alter tablespace ts_customer_055 prefetchsize 4096;
alter tablespace ts_customer_056 prefetchsize 4096;
alter tablespace ts_customer_057 prefetchsize 4096;
alter tablespace ts_customer_058 prefetchsize 4096;
alter tablespace ts_customer_059 prefetchsize 4096;
alter tablespace ts_customer_060 prefetchsize 4096;
alter tablespace ts_customer_061 prefetchsize 4096;
alter tablespace ts_customer_062 prefetchsize 4096;
alter tablespace ts_customer_063 prefetchsize 4096;
alter tablespace ts_customer_064 prefetchsize 4096;
alter tablespace ts_customer_065 prefetchsize 4096;
alter tablespace ts_customer_066 prefetchsize 4096;
alter tablespace ts_customer_067 prefetchsize 4096;
alter tablespace ts_customer_068 prefetchsize 4096;
alter tablespace ts_customer_069 prefetchsize 4096;
alter tablespace ts_customer_070 prefetchsize 4096;
alter tablespace ts_customer_071 prefetchsize 4096;
alter tablespace ts_customer_072 prefetchsize 4096;
alter tablespace ts_customer_073 prefetchsize 4096;
alter tablespace ts_customer_074 prefetchsize 4096;
alter tablespace ts_customer_075 prefetchsize 4096;
alter tablespace ts_customer_076 prefetchsize 4096;
alter tablespace ts_customer_077 prefetchsize 4096;
alter tablespace ts_customer_078 prefetchsize 4096;
alter tablespace ts_customer_079 prefetchsize 4096;
alter tablespace ts_customer_080 prefetchsize 4096;
alter tablespace ts_customer_081 prefetchsize 4096;
alter tablespace ts_customer_082 prefetchsize 4096;
alter tablespace ts_customer_083 prefetchsize 4096;
alter tablespace ts_customer_084 prefetchsize 4096;
alter tablespace ts_customer_085 prefetchsize 4096;
alter tablespace ts_customer_086 prefetchsize 4096;
alter tablespace ts_customer_087 prefetchsize 4096;
alter tablespace ts_customer_088 prefetchsize 4096;
alter tablespace ts_customer_089 prefetchsize 4096;
alter tablespace ts_customer_090 prefetchsize 4096;
alter tablespace ts_customer_091 prefetchsize 4096;
alter tablespace ts_customer_092 prefetchsize 4096;
alter tablespace ts_customer_093 prefetchsize 4096;
alter tablespace ts_customer_094 prefetchsize 4096;
alter tablespace ts_customer_095 prefetchsize 4096;
alter tablespace ts_customer_096 prefetchsize 4096;
alter tablespace ts_customer_097 prefetchsize 4096;
alter tablespace ts_customer_098 prefetchsize 4096;
alter tablespace ts_customer_099 prefetchsize 4096;
alter tablespace ts_customer_100 prefetchsize 4096;
alter tablespace ts_customer_101 prefetchsize 4096;
alter tablespace ts_customer_102 prefetchsize 4096;
alter tablespace ts_customer_103 prefetchsize 4096;
alter tablespace ts_customer_104 prefetchsize 4096;
alter tablespace ts_customer_105 prefetchsize 4096;
alter tablespace ts_customer_106 prefetchsize 4096;
alter tablespace ts_customer_107 prefetchsize 4096;
alter tablespace ts_customer_108 prefetchsize 4096;
alter tablespace ts_customer_109 prefetchsize 4096;
alter tablespace ts_customer_110 prefetchsize 4096;
alter tablespace ts_customer_111 prefetchsize 4096;
alter tablespace ts_customer_112 prefetchsize 4096;
alter tablespace ts_customer_113 prefetchsize 4096;
alter tablespace ts_customer_114 prefetchsize 4096;
alter tablespace ts_customer_115 prefetchsize 4096;
alter tablespace ts_customer_116 prefetchsize 4096;
alter tablespace ts_customer_117 prefetchsize 4096;
alter tablespace ts_customer_118 prefetchsize 4096;
alter tablespace ts_customer_119 prefetchsize 4096;
alter tablespace ts_customer_120 prefetchsize 4096;
alter tablespace ts_customer_121 prefetchsize 4096;
alter tablespace ts_customer_122 prefetchsize 4096;
alter tablespace ts_customer_123 prefetchsize 4096;
alter tablespace ts_customer_124 prefetchsize 4096;
alter tablespace ts_customer_125 prefetchsize 4096;
alter tablespace ts_customer_126 prefetchsize 4096;
alter tablespace ts_customer_127 prefetchsize 4096;
alter tablespace ts_customer_128 prefetchsize 4096;
alter tablespace ts_customer_129 prefetchsize 4096;
alter tablespace ts_customer_130 prefetchsize 4096;
alter tablespace ts_customer_131 prefetchsize 4096;
alter tablespace ts_customer_132 prefetchsize 4096;
alter tablespace ts_customer_133 prefetchsize 4096;
alter tablespace ts_customer_134 prefetchsize 4096;
alter tablespace ts_customer_135 prefetchsize 4096;
alter tablespace ts_customer_136 prefetchsize 4096;
alter tablespace ts_customer_137 prefetchsize 4096;
alter tablespace ts_customer_138 prefetchsize 4096;
alter tablespace ts_customer_139 prefetchsize 4096;
alter tablespace ts_customer_140 prefetchsize 4096;
alter tablespace ts_customer_141 prefetchsize 4096;
alter tablespace ts_customer_142 prefetchsize 4096;
alter tablespace ts_customer_143 prefetchsize 4096;
```

```
alter tablespace ts_customer_144 prefetchsize 4096;
alter tablespace ts_customer_145 prefetchsize 4096;
alter tablespace ts_customer_146 prefetchsize 4096;
alter tablespace ts_customer_147 prefetchsize 4096;
alter tablespace ts_customer_148 prefetchsize 4096;
alter tablespace ts_customer_149 prefetchsize 4096;
alter tablespace ts_customer_150 prefetchsize 4096;
alter tablespace ts_customer_151 prefetchsize 4096;
alter tablespace ts_customer_152 prefetchsize 4096;
alter tablespace ts_customer_153 prefetchsize 4096;
alter tablespace ts_customer_154 prefetchsize 4096;
alter tablespace ts_customer_155 prefetchsize 4096;
alter tablespace ts_customer_156 prefetchsize 4096;
alter tablespace ts_customer_157 prefetchsize 4096;
alter tablespace ts_customer_158 prefetchsize 4096;
alter tablespace ts_customer_159 prefetchsize 4096;
alter tablespace ts_customer_160 prefetchsize 4096;
alter tablespace ts_customer_161 prefetchsize 4096;
alter tablespace ts_customer_162 prefetchsize 4096;
alter tablespace ts_customer_163 prefetchsize 4096;
alter tablespace ts_customer_164 prefetchsize 4096;
alter tablespace ts_customer_165 prefetchsize 4096;
alter tablespace ts_customer_166 prefetchsize 4096;
alter tablespace ts_customer_167 prefetchsize 4096;
alter tablespace ts_customer_168 prefetchsize 4096;
alter tablespace ts_customer_169 prefetchsize 4096;
alter tablespace ts_customer_170 prefetchsize 4096;
alter tablespace ts_customer_171 prefetchsize 4096;
alter tablespace ts_customer_172 prefetchsize 4096;
alter tablespace ts_customer_173 prefetchsize 4096;
alter tablespace ts_customer_174 prefetchsize 4096;
alter tablespace ts_customer_175 prefetchsize 4096;
alter tablespace ts_customer_176 prefetchsize 4096;
alter tablespace ts_customer_177 prefetchsize 4096;
alter tablespace ts_customer_178 prefetchsize 4096;
alter tablespace ts_customer_179 prefetchsize 4096;
alter tablespace ts_customer_180 prefetchsize 4096;
alter tablespace ts_customer_181 prefetchsize 4096;
alter tablespace ts_customer_182 prefetchsize 4096;
alter tablespace ts_customer_183 prefetchsize 4096;
alter tablespace ts_customer_184 prefetchsize 4096;
alter tablespace ts_customer_185 prefetchsize 4096;
alter tablespace ts_customer_186 prefetchsize 4096;
alter tablespace ts_customer_187 prefetchsize 4096;
alter tablespace ts_customer_188 prefetchsize 4096;
alter tablespace ts_customer_189 prefetchsize 4096;
alter tablespace ts_customer_190 prefetchsize 4096;
alter tablespace ts_customer_191 prefetchsize 4096;
alter tablespace ts_customer_192 prefetchsize 4096;
alter tablespace ts_customer_193 prefetchsize 4096;
alter tablespace ts_customer_194 prefetchsize 4096;
alter tablespace ts_customer_195 prefetchsize 4096;
alter tablespace ts_customer_196 prefetchsize 4096;
alter tablespace ts_customer_197 prefetchsize 4096;
alter tablespace ts_customer_198 prefetchsize 4096;
alter tablespace ts_customer_199 prefetchsize 4096;
alter tablespace ts_customer_200 prefetchsize 4096;
alter tablespace ts_dist_001 prefetchsize 4096;
alter tablespace ts_dist_002 prefetchsize 4096;
alter tablespace ts_dist_003 prefetchsize 4096;
alter tablespace ts_dist_004 prefetchsize 4096;
alter tablespace ts_dist_005 prefetchsize 4096;
alter tablespace ts_dist_006 prefetchsize 4096;
alter tablespace ts_dist_007 prefetchsize 4096;
alter tablespace ts_dist_008 prefetchsize 4096;
alter tablespace ts_dist_009 prefetchsize 4096;
alter tablespace ts_dist_010 prefetchsize 4096;
alter tablespace ts_dist_011 prefetchsize 4096;
alter tablespace ts_dist_012 prefetchsize 4096;
alter tablespace ts_dist_013 prefetchsize 4096;
alter tablespace ts_dist_014 prefetchsize 4096;
alter tablespace ts_dist_015 prefetchsize 4096;
alter tablespace ts_dist_016 prefetchsize 4096;
alter tablespace ts_dist_017 prefetchsize 4096;
alter tablespace ts_dist_018 prefetchsize 4096;
alter tablespace ts_dist_019 prefetchsize 4096;
alter tablespace ts_dist_020 prefetchsize 4096;
alter tablespace ts_dist_021 prefetchsize 4096;
alter tablespace ts_dist_022 prefetchsize 4096;
alter tablespace ts_dist_023 prefetchsize 4096;
alter tablespace ts_dist_024 prefetchsize 4096;
alter tablespace ts_dist_025 prefetchsize 4096;
alter tablespace ts_dist_026 prefetchsize 4096;
alter tablespace ts_dist_027 prefetchsize 4096;
alter tablespace ts_dist_028 prefetchsize 4096;
alter tablespace ts_dist_029 prefetchsize 4096;
alter tablespace ts_dist_030 prefetchsize 4096;
alter tablespace ts_dist_031 prefetchsize 4096;
alter tablespace ts_dist_032 prefetchsize 4096;
alter tablespace ts_dist_033 prefetchsize 4096;
alter tablespace ts_dist_034 prefetchsize 4096;
alter tablespace ts_dist_035 prefetchsize 4096;
alter tablespace ts_dist_036 prefetchsize 4096;
alter tablespace ts_dist_037 prefetchsize 4096;
alter tablespace ts_dist_038 prefetchsize 4096;
alter tablespace ts_dist_039 prefetchsize 4096;
alter tablespace ts_dist_040 prefetchsize 4096;
alter tablespace ts_history_001 prefetchsize 4096;
alter tablespace ts_history_002 prefetchsize 4096;
alter tablespace ts_history_003 prefetchsize 4096;
alter tablespace ts_history_004 prefetchsize 4096;
alter tablespace ts_history_005 prefetchsize 4096;
alter tablespace ts_history_006 prefetchsize 4096;
alter tablespace ts_history_007 prefetchsize 4096;
alter tablespace ts_history_008 prefetchsize 4096;
alter tablespace ts_history_009 prefetchsize 4096;
alter tablespace ts_history_010 prefetchsize 4096;
alter tablespace ts_history_011 prefetchsize 4096;
alter tablespace ts_history_012 prefetchsize 4096;
alter tablespace ts_history_013 prefetchsize 4096;
alter tablespace ts_history_014 prefetchsize 4096;
alter tablespace ts_history_015 prefetchsize 4096;
alter tablespace ts_history_016 prefetchsize 4096;
alter tablespace ts_history_017 prefetchsize 4096;
alter tablespace ts_history_018 prefetchsize 4096;
alter tablespace ts_history_019 prefetchsize 4096;
alter tablespace ts_history_020 prefetchsize 4096;
alter tablespace ts_history_021 prefetchsize 4096;
alter tablespace ts_history_022 prefetchsize 4096;
alter tablespace ts_history_023 prefetchsize 4096;
alter tablespace ts_history_024 prefetchsize 4096;
alter tablespace ts_history_025 prefetchsize 4096;
alter tablespace ts_history_026 prefetchsize 4096;
alter tablespace ts_history_027 prefetchsize 4096;
alter tablespace ts_history_028 prefetchsize 4096;
alter tablespace ts_history_029 prefetchsize 4096;
alter tablespace ts_history_030 prefetchsize 4096;
alter tablespace ts_history_031 prefetchsize 4096;
alter tablespace ts_history_032 prefetchsize 4096;
alter tablespace ts_history_033 prefetchsize 4096;
alter tablespace ts_history_034 prefetchsize 4096;
alter tablespace ts_history_035 prefetchsize 4096;
alter tablespace ts_history_036 prefetchsize 4096;
alter tablespace ts_history_037 prefetchsize 4096;
alter tablespace ts_history_038 prefetchsize 4096;
alter tablespace ts_history_039 prefetchsize 4096;
alter tablespace ts_history_040 prefetchsize 4096;
alter tablespace ts_item_001 prefetchsize 4096;
alter tablespace ts_neworda_001 prefetchsize 4096;
alter tablespace ts_neworda_002 prefetchsize 4096;
alter tablespace ts_neworda_003 prefetchsize 4096;
alter tablespace ts_neworda_004 prefetchsize 4096;
alter tablespace ts_neworda_005 prefetchsize 4096;
alter tablespace ts_neworda_006 prefetchsize 4096;
alter tablespace ts_neworda_007 prefetchsize 4096;
alter tablespace ts_neworda_008 prefetchsize 4096;
alter tablespace ts_neworda_009 prefetchsize 4096;
alter tablespace ts_neworda_010 prefetchsize 4096;
alter tablespace ts_neworda_011 prefetchsize 4096;
alter tablespace ts_neworda_012 prefetchsize 4096;
alter tablespace ts_neworda_013 prefetchsize 4096;
alter tablespace ts_neworda_014 prefetchsize 4096;
alter tablespace ts_neworda_015 prefetchsize 4096;
alter tablespace ts_neworda_016 prefetchsize 4096;
alter tablespace ts_neworda_017 prefetchsize 4096;
alter tablespace ts_neworda_018 prefetchsize 4096;
alter tablespace ts_neworda_019 prefetchsize 4096;
alter tablespace ts_neworda_020 prefetchsize 4096;
alter tablespace ts_neworda_021 prefetchsize 4096;
alter tablespace ts_neworda_022 prefetchsize 4096;
alter tablespace ts_neworda_023 prefetchsize 4096;
alter tablespace ts_neworda_024 prefetchsize 4096;
alter tablespace ts_neworda_025 prefetchsize 4096;
alter tablespace ts_neworda_026 prefetchsize 4096;
alter tablespace ts_neworda_027 prefetchsize 4096;
alter tablespace ts_neworda_028 prefetchsize 4096;
alter tablespace ts_neworda_029 prefetchsize 4096;
alter tablespace ts_neworda_030 prefetchsize 4096;
alter tablespace ts_neworda_031 prefetchsize 4096;
alter tablespace ts_neworda_032 prefetchsize 4096;
alter tablespace ts_neworda_033 prefetchsize 4096;
alter tablespace ts_neworda_034 prefetchsize 4096;
alter tablespace ts_neworda_035 prefetchsize 4096;
alter tablespace ts_neworda_036 prefetchsize 4096;
alter tablespace ts_neworda_037 prefetchsize 4096;
alter tablespace ts_neworda_038 prefetchsize 4096;
alter tablespace ts_neworda_039 prefetchsize 4096;
alter tablespace ts_neworda_040 prefetchsize 4096;
alter tablespace ts_newordb_001 prefetchsize 4096;
alter tablespace ts_neworb_002 prefetchsize 4096;
alter tablespace ts_neworb_003 prefetchsize 4096;
alter tablespace ts_neworb_004 prefetchsize 4096;
alter tablespace ts_neworb_005 prefetchsize 4096;
alter tablespace ts_neworb_006 prefetchsize 4096;
alter tablespace ts_neworb_007 prefetchsize 4096;
alter tablespace ts_neworb_008 prefetchsize 4096;
alter tablespace ts_neworb_009 prefetchsize 4096;
alter tablespace ts_neworb_010 prefetchsize 4096;
alter tablespace ts_neworb_011 prefetchsize 4096;
alter tablespace ts_neworb_012 prefetchsize 4096;
alter tablespace ts_neworb_013 prefetchsize 4096;
alter tablespace ts_neworb_014 prefetchsize 4096;
alter tablespace ts_neworb_015 prefetchsize 4096;
alter tablespace ts_neworb_016 prefetchsize 4096;
alter tablespace ts_neworb_017 prefetchsize 4096;
alter tablespace ts_neworb_018 prefetchsize 4096;
alter tablespace ts_neworb_019 prefetchsize 4096;
alter tablespace ts_neworb_020 prefetchsize 4096;
alter tablespace ts_neworb_021 prefetchsize 4096;
alter tablespace ts_neworb_022 prefetchsize 4096;
alter tablespace ts_neworb_023 prefetchsize 4096;
alter tablespace ts_neworb_024 prefetchsize 4096;
alter tablespace ts_neworb_025 prefetchsize 4096;
alter tablespace ts_neworb_026 prefetchsize 4096;
alter tablespace ts_neworb_027 prefetchsize 4096;
alter tablespace ts_neworb_028 prefetchsize 4096;
alter tablespace ts_neworb_029 prefetchsize 4096;
alter tablespace ts_neworb_030 prefetchsize 4096;
alter tablespace ts_neworb_031 prefetchsize 4096;
alter tablespace ts_neworb_032 prefetchsize 4096;
alter tablespace ts_neworb_033 prefetchsize 4096;
alter tablespace ts_neworb_034 prefetchsize 4096;
alter tablespace ts_neworb_035 prefetchsize 4096;
alter tablespace ts_neworb_036 prefetchsize 4096;
alter tablespace ts_neworb_037 prefetchsize 4096;
alter tablespace ts_neworb_038 prefetchsize 4096;
alter tablespace ts_neworb_039 prefetchsize 4096;
alter tablespace ts_neworb_040 prefetchsize 4096;
alter tablespace ts_order_001 prefetchsize 4096;
```

```
alter tablespace ts_order_002 prefetchsize 4096;
alter tablespace ts_order_003 prefetchsize 4096;
alter tablespace ts_order_004 prefetchsize 4096;
alter tablespace ts_order_005 prefetchsize 4096;
alter tablespace ts_order_006 prefetchsize 4096;
alter tablespace ts_order_007 prefetchsize 4096;
alter tablespace ts_order_008 prefetchsize 4096;
alter tablespace ts_order_009 prefetchsize 4096;
alter tablespace ts_order_010 prefetchsize 4096;
alter tablespace ts_order_011 prefetchsize 4096;
alter tablespace ts_order_012 prefetchsize 4096;
alter tablespace ts_order_013 prefetchsize 4096;
alter tablespace ts_order_014 prefetchsize 4096;
alter tablespace ts_order_015 prefetchsize 4096;
alter tablespace ts_order_016 prefetchsize 4096;
alter tablespace ts_order_017 prefetchsize 4096;
alter tablespace ts_order_018 prefetchsize 4096;
alter tablespace ts_order_019 prefetchsize 4096;
alter tablespace ts_order_020 prefetchsize 4096;
alter tablespace ts_order_021 prefetchsize 4096;
alter tablespace ts_order_022 prefetchsize 4096;
alter tablespace ts_order_023 prefetchsize 4096;
alter tablespace ts_order_024 prefetchsize 4096;
alter tablespace ts_order_025 prefetchsize 4096;
alter tablespace ts_order_026 prefetchsize 4096;
alter tablespace ts_order_027 prefetchsize 4096;
alter tablespace ts_order_028 prefetchsize 4096;
alter tablespace ts_order_029 prefetchsize 4096;
alter tablespace ts_order_030 prefetchsize 4096;
alter tablespace ts_order_031 prefetchsize 4096;
alter tablespace ts_order_032 prefetchsize 4096;
alter tablespace ts_order_033 prefetchsize 4096;
alter tablespace ts_order_034 prefetchsize 4096;
alter tablespace ts_order_035 prefetchsize 4096;
alter tablespace ts_order_036 prefetchsize 4096;
alter tablespace ts_order_037 prefetchsize 4096;
alter tablespace ts_order_038 prefetchsize 4096;
alter tablespace ts_order_039 prefetchsize 4096;
alter tablespace ts_order_040 prefetchsize 4096;
alter tablespace ts_order_041 prefetchsize 4096;
alter tablespace ts_order_042 prefetchsize 4096;
alter tablespace ts_order_043 prefetchsize 4096;
alter tablespace ts_order_044 prefetchsize 4096;
alter tablespace ts_order_045 prefetchsize 4096;
alter tablespace ts_order_046 prefetchsize 4096;
alter tablespace ts_order_047 prefetchsize 4096;
alter tablespace ts_order_048 prefetchsize 4096;
alter tablespace ts_order_049 prefetchsize 4096;
alter tablespace ts_order_050 prefetchsize 4096;
alter tablespace ts_order_051 prefetchsize 4096;
alter tablespace ts_order_052 prefetchsize 4096;
alter tablespace ts_order_053 prefetchsize 4096;
alter tablespace ts_order_054 prefetchsize 4096;
alter tablespace ts_order_055 prefetchsize 4096;
alter tablespace ts_order_056 prefetchsize 4096;
alter tablespace ts_order_057 prefetchsize 4096;
alter tablespace ts_order_058 prefetchsize 4096;
alter tablespace ts_order_059 prefetchsize 4096;
alter tablespace ts_order_060 prefetchsize 4096;
alter tablespace ts_order_061 prefetchsize 4096;
alter tablespace ts_order_062 prefetchsize 4096;
alter tablespace ts_order_063 prefetchsize 4096;
alter tablespace ts_order_064 prefetchsize 4096;
alter tablespace ts_order_065 prefetchsize 4096;
alter tablespace ts_order_066 prefetchsize 4096;
alter tablespace ts_order_067 prefetchsize 4096;
alter tablespace ts_order_068 prefetchsize 4096;
alter tablespace ts_order_069 prefetchsize 4096;
alter tablespace ts_order_070 prefetchsize 4096;
alter tablespace ts_order_071 prefetchsize 4096;
alter tablespace ts_order_072 prefetchsize 4096;
alter tablespace ts_order_073 prefetchsize 4096;
alter tablespace ts_order_074 prefetchsize 4096;
alter tablespace ts_order_075 prefetchsize 4096;
alter tablespace ts_order_076 prefetchsize 4096;
alter tablespace ts_order_077 prefetchsize 4096;
alter tablespace ts_order_078 prefetchsize 4096;
alter tablespace ts_order_079 prefetchsize 4096;
alter tablespace ts_order_080 prefetchsize 4096;
alter tablespace ts_order_081 prefetchsize 4096;
alter tablespace ts_order_082 prefetchsize 4096;
alter tablespace ts_order_083 prefetchsize 4096;
alter tablespace ts_order_084 prefetchsize 4096;
alter tablespace ts_order_085 prefetchsize 4096;
alter tablespace ts_order_086 prefetchsize 4096;
alter tablespace ts_order_087 prefetchsize 4096;
alter tablespace ts_order_088 prefetchsize 4096;
alter tablespace ts_order_089 prefetchsize 4096;
alter tablespace ts_order_090 prefetchsize 4096;
alter tablespace ts_order_091 prefetchsize 4096;
alter tablespace ts_order_092 prefetchsize 4096;
alter tablespace ts_order_093 prefetchsize 4096;
alter tablespace ts_order_094 prefetchsize 4096;
alter tablespace ts_order_095 prefetchsize 4096;
alter tablespace ts_order_096 prefetchsize 4096;
alter tablespace ts_order_097 prefetchsize 4096;
alter tablespace ts_order_098 prefetchsize 4096;
alter tablespace ts_order_099 prefetchsize 4096;
alter tablespace ts_order_100 prefetchsize 4096;
alter tablespace ts_order_101 prefetchsize 4096;
alter tablespace ts_order_102 prefetchsize 4096;
alter tablespace ts_order_103 prefetchsize 4096;
alter tablespace ts_order_104 prefetchsize 4096;
alter tablespace ts_order_105 prefetchsize 4096;
alter tablespace ts_order_106 prefetchsize 4096;
alter tablespace ts_order_107 prefetchsize 4096;
alter tablespace ts_order_108 prefetchsize 4096;
alter tablespace ts_order_109 prefetchsize 4096;
alter tablespace ts_order_110 prefetchsize 4096;
alter tablespace ts_order_111 prefetchsize 4096;
alter tablespace ts_order_112 prefetchsize 4096;
alter tablespace ts_order_113 prefetchsize 4096;
alter tablespace ts_order_114 prefetchsize 4096;
alter tablespace ts_order_115 prefetchsize 4096;
alter tablespace ts_order_116 prefetchsize 4096;
alter tablespace ts_order_117 prefetchsize 4096;
alter tablespace ts_order_118 prefetchsize 4096;
alter tablespace ts_order_119 prefetchsize 4096;
alter tablespace ts_order_120 prefetchsize 4096;
alter tablespace ts_order_121 prefetchsize 4096;
alter tablespace ts_order_122 prefetchsize 4096;
alter tablespace ts_order_123 prefetchsize 4096;
alter tablespace ts_order_124 prefetchsize 4096;
alter tablespace ts_order_125 prefetchsize 4096;
alter tablespace ts_order_126 prefetchsize 4096;
alter tablespace ts_order_127 prefetchsize 4096;
alter tablespace ts_order_128 prefetchsize 4096;
alter tablespace ts_order_129 prefetchsize 4096;
alter tablespace ts_order_130 prefetchsize 4096;
alter tablespace ts_order_131 prefetchsize 4096;
alter tablespace ts_order_132 prefetchsize 4096;
alter tablespace ts_order_133 prefetchsize 4096;
alter tablespace ts_order_134 prefetchsize 4096;
alter tablespace ts_order_135 prefetchsize 4096;
alter tablespace ts_order_136 prefetchsize 4096;
alter tablespace ts_order_137 prefetchsize 4096;
alter tablespace ts_order_138 prefetchsize 4096;
alter tablespace ts_order_139 prefetchsize 4096;
alter tablespace ts_order_140 prefetchsize 4096;
alter tablespace ts_order_141 prefetchsize 4096;
alter tablespace ts_order_142 prefetchsize 4096;
alter tablespace ts_order_143 prefetchsize 4096;
alter tablespace ts_order_144 prefetchsize 4096;
alter tablespace ts_order_145 prefetchsize 4096;
alter tablespace ts_order_146 prefetchsize 4096;
alter tablespace ts_order_147 prefetchsize 4096;
alter tablespace ts_order_148 prefetchsize 4096;
alter tablespace ts_order_149 prefetchsize 4096;
alter tablespace ts_order_150 prefetchsize 4096;
alter tablespace ts_order_151 prefetchsize 4096;
alter tablespace ts_order_152 prefetchsize 4096;
alter tablespace ts_order_153 prefetchsize 4096;
alter tablespace ts_order_154 prefetchsize 4096;
alter tablespace ts_order_155 prefetchsize 4096;
alter tablespace ts_order_156 prefetchsize 4096;
alter tablespace ts_order_157 prefetchsize 4096;
alter tablespace ts_order_158 prefetchsize 4096;
alter tablespace ts_order_159 prefetchsize 4096;
alter tablespace ts_order_160 prefetchsize 4096;
alter tablespace ts_order_161 prefetchsize 4096;
alter tablespace ts_order_162 prefetchsize 4096;
alter tablespace ts_order_163 prefetchsize 4096;
alter tablespace ts_order_164 prefetchsize 4096;
alter tablespace ts_order_165 prefetchsize 4096;
alter tablespace ts_order_166 prefetchsize 4096;
alter tablespace ts_order_167 prefetchsize 4096;
alter tablespace ts_order_168 prefetchsize 4096;
alter tablespace ts_order_169 prefetchsize 4096;
alter tablespace ts_order_170 prefetchsize 4096;
alter tablespace ts_order_171 prefetchsize 4096;
alter tablespace ts_order_172 prefetchsize 4096;
alter tablespace ts_order_173 prefetchsize 4096;
alter tablespace ts_order_174 prefetchsize 4096;
alter tablespace ts_order_175 prefetchsize 4096;
alter tablespace ts_order_176 prefetchsize 4096;
alter tablespace ts_order_177 prefetchsize 4096;
alter tablespace ts_order_178 prefetchsize 4096;
alter tablespace ts_order_179 prefetchsize 4096;
alter tablespace ts_order_180 prefetchsize 4096;
alter tablespace ts_order_181 prefetchsize 4096;
alter tablespace ts_order_182 prefetchsize 4096;
alter tablespace ts_order_183 prefetchsize 4096;
alter tablespace ts_order_184 prefetchsize 4096;
alter tablespace ts_order_185 prefetchsize 4096;
alter tablespace ts_order_186 prefetchsize 4096;
alter tablespace ts_order_187 prefetchsize 4096;
alter tablespace ts_order_188 prefetchsize 4096;
alter tablespace ts_order_189 prefetchsize 4096;
alter tablespace ts_order_190 prefetchsize 4096;
alter tablespace ts_order_191 prefetchsize 4096;
alter tablespace ts_order_192 prefetchsize 4096;
alter tablespace ts_order_193 prefetchsize 4096;
alter tablespace ts_order_194 prefetchsize 4096;
alter tablespace ts_order_195 prefetchsize 4096;
alter tablespace ts_order_196 prefetchsize 4096;
alter tablespace ts_order_197 prefetchsize 4096;
alter tablespace ts_order_198 prefetchsize 4096;
alter tablespace ts_order_199 prefetchsize 4096;
alter tablespace ts_order_200 prefetchsize 4096;
alter tablespace ts_orderline_001 prefetchsize 4096;
alter tablespace ts_orderline_002 prefetchsize 4096;
alter tablespace ts_orderline_003 prefetchsize 4096;
alter tablespace ts_orderline_004 prefetchsize 4096;
alter tablespace ts_orderline_005 prefetchsize 4096;
alter tablespace ts_orderline_006 prefetchsize 4096;
alter tablespace ts_orderline_007 prefetchsize 4096;
alter tablespace ts_orderline_008 prefetchsize 4096;
alter tablespace ts_orderline_009 prefetchsize 4096;
alter tablespace ts_orderline_010 prefetchsize 4096;
alter tablespace ts_orderline_011 prefetchsize 4096;
alter tablespace ts_orderline_012 prefetchsize 4096;
alter tablespace ts_orderline_013 prefetchsize 4096;
alter tablespace ts_orderline_014 prefetchsize 4096;
alter tablespace ts_orderline_015 prefetchsize 4096;
alter tablespace ts_orderline_016 prefetchsize 4096;
alter tablespace ts_orderline_017 prefetchsize 4096;
alter tablespace ts_orderline_018 prefetchsize 4096;
alter tablespace ts_orderline_019 prefetchsize 4096;
alter tablespace ts_orderline_020 prefetchsize 4096;
```

```
alter tablespace ts_orderline_021 prefetchsize 4096;
alter tablespace ts_orderline_022 prefetchsize 4096;
alter tablespace ts_orderline_023 prefetchsize 4096;
alter tablespace ts_orderline_024 prefetchsize 4096;
alter tablespace ts_orderline_025 prefetchsize 4096;
alter tablespace ts_orderline_026 prefetchsize 4096;
alter tablespace ts_orderline_027 prefetchsize 4096;
alter tablespace ts_orderline_028 prefetchsize 4096;
alter tablespace ts_orderline_029 prefetchsize 4096;
alter tablespace ts_orderline_030 prefetchsize 4096;
alter tablespace ts_orderline_031 prefetchsize 4096;
alter tablespace ts_orderline_032 prefetchsize 4096;
alter tablespace ts_orderline_033 prefetchsize 4096;
alter tablespace ts_orderline_034 prefetchsize 4096;
alter tablespace ts_orderline_035 prefetchsize 4096;
alter tablespace ts_orderline_036 prefetchsize 4096;
alter tablespace ts_orderline_037 prefetchsize 4096;
alter tablespace ts_orderline_038 prefetchsize 4096;
alter tablespace ts_orderline_039 prefetchsize 4096;
alter tablespace ts_orderline_040 prefetchsize 4096;
alter tablespace ts_orderline_041 prefetchsize 4096;
alter tablespace ts_orderline_042 prefetchsize 4096;
alter tablespace ts_orderline_043 prefetchsize 4096;
alter tablespace ts_orderline_044 prefetchsize 4096;
alter tablespace ts_orderline_045 prefetchsize 4096;
alter tablespace ts_orderline_046 prefetchsize 4096;
alter tablespace ts_orderline_047 prefetchsize 4096;
alter tablespace ts_orderline_048 prefetchsize 4096;
alter tablespace ts_orderline_049 prefetchsize 4096;
alter tablespace ts_orderline_050 prefetchsize 4096;
alter tablespace ts_orderline_051 prefetchsize 4096;
alter tablespace ts_orderline_052 prefetchsize 4096;
alter tablespace ts_orderline_053 prefetchsize 4096;
alter tablespace ts_orderline_054 prefetchsize 4096;
alter tablespace ts_orderline_055 prefetchsize 4096;
alter tablespace ts_orderline_056 prefetchsize 4096;
alter tablespace ts_orderline_057 prefetchsize 4096;
alter tablespace ts_orderline_058 prefetchsize 4096;
alter tablespace ts_orderline_059 prefetchsize 4096;
alter tablespace ts_orderline_060 prefetchsize 4096;
alter tablespace ts_orderline_061 prefetchsize 4096;
alter tablespace ts_orderline_062 prefetchsize 4096;
alter tablespace ts_orderline_063 prefetchsize 4096;
alter tablespace ts_orderline_064 prefetchsize 4096;
alter tablespace ts_orderline_065 prefetchsize 4096;
alter tablespace ts_orderline_066 prefetchsize 4096;
alter tablespace ts_orderline_067 prefetchsize 4096;
alter tablespace ts_orderline_068 prefetchsize 4096;
alter tablespace ts_orderline_069 prefetchsize 4096;
alter tablespace ts_orderline_070 prefetchsize 4096;
alter tablespace ts_orderline_071 prefetchsize 4096;
alter tablespace ts_orderline_072 prefetchsize 4096;
alter tablespace ts_orderline_073 prefetchsize 4096;
alter tablespace ts_orderline_074 prefetchsize 4096;
alter tablespace ts_orderline_075 prefetchsize 4096;
alter tablespace ts_orderline_076 prefetchsize 4096;
alter tablespace ts_orderline_077 prefetchsize 4096;
alter tablespace ts_orderline_078 prefetchsize 4096;
alter tablespace ts_orderline_079 prefetchsize 4096;
alter tablespace ts_orderline_080 prefetchsize 4096;
alter tablespace ts_orderline_081 prefetchsize 4096;
alter tablespace ts_orderline_082 prefetchsize 4096;
alter tablespace ts_orderline_083 prefetchsize 4096;
alter tablespace ts_orderline_084 prefetchsize 4096;
alter tablespace ts_orderline_085 prefetchsize 4096;
alter tablespace ts_orderline_086 prefetchsize 4096;
alter tablespace ts_orderline_087 prefetchsize 4096;
alter tablespace ts_orderline_088 prefetchsize 4096;
alter tablespace ts_orderline_089 prefetchsize 4096;
alter tablespace ts_orderline_090 prefetchsize 4096;
alter tablespace ts_orderline_091 prefetchsize 4096;
alter tablespace ts_orderline_092 prefetchsize 4096;
alter tablespace ts_orderline_093 prefetchsize 4096;
alter tablespace ts_orderline_094 prefetchsize 4096;
alter tablespace ts_orderline_095 prefetchsize 4096;
alter tablespace ts_orderline_096 prefetchsize 4096;
alter tablespace ts_orderline_097 prefetchsize 4096;
alter tablespace ts_orderline_098 prefetchsize 4096;
alter tablespace ts_orderline_099 prefetchsize 4096;
alter tablespace ts_orderline_100 prefetchsize 4096;
alter tablespace ts_orderline_101 prefetchsize 4096;
alter tablespace ts_orderline_102 prefetchsize 4096;
alter tablespace ts_orderline_103 prefetchsize 4096;
alter tablespace ts_orderline_104 prefetchsize 4096;
alter tablespace ts_orderline_105 prefetchsize 4096;
alter tablespace ts_orderline_106 prefetchsize 4096;
alter tablespace ts_orderline_107 prefetchsize 4096;
alter tablespace ts_orderline_108 prefetchsize 4096;
alter tablespace ts_orderline_109 prefetchsize 4096;
alter tablespace ts_orderline_110 prefetchsize 4096;
alter tablespace ts_orderline_111 prefetchsize 4096;
alter tablespace ts_orderline_112 prefetchsize 4096;
alter tablespace ts_orderline_113 prefetchsize 4096;
alter tablespace ts_orderline_114 prefetchsize 4096;
alter tablespace ts_orderline_115 prefetchsize 4096;
alter tablespace ts_orderline_116 prefetchsize 4096;
alter tablespace ts_orderline_117 prefetchsize 4096;
alter tablespace ts_orderline_118 prefetchsize 4096;
alter tablespace ts_orderline_119 prefetchsize 4096;
alter tablespace ts_orderline_120 prefetchsize 4096;
alter tablespace ts_orderline_121 prefetchsize 4096;
alter tablespace ts_orderline_122 prefetchsize 4096;
alter tablespace ts_orderline_123 prefetchsize 4096;
alter tablespace ts_orderline_124 prefetchsize 4096;
alter tablespace ts_orderline_125 prefetchsize 4096;
alter tablespace ts_orderline_126 prefetchsize 4096;
alter tablespace ts_orderline_127 prefetchsize 4096;
alter tablespace ts_orderline_128 prefetchsize 4096;
alter tablespace ts_orderline_129 prefetchsize 4096;
alter tablespace ts_orderline_130 prefetchsize 4096;
alter tablespace ts_orderline_131 prefetchsize 4096;
alter tablespace ts_orderline_132 prefetchsize 4096;
alter tablespace ts_orderline_133 prefetchsize 4096;
alter tablespace ts_orderline_134 prefetchsize 4096;
alter tablespace ts_orderline_135 prefetchsize 4096;
alter tablespace ts_orderline_136 prefetchsize 4096;
alter tablespace ts_orderline_137 prefetchsize 4096;
alter tablespace ts_orderline_138 prefetchsize 4096;
alter tablespace ts_orderline_139 prefetchsize 4096;
alter tablespace ts_orderline_140 prefetchsize 4096;
alter tablespace ts_orderline_141 prefetchsize 4096;
alter tablespace ts_orderline_142 prefetchsize 4096;
alter tablespace ts_orderline_143 prefetchsize 4096;
alter tablespace ts_orderline_144 prefetchsize 4096;
alter tablespace ts_orderline_145 prefetchsize 4096;
alter tablespace ts_orderline_146 prefetchsize 4096;
alter tablespace ts_orderline_147 prefetchsize 4096;
alter tablespace ts_orderline_148 prefetchsize 4096;
alter tablespace ts_orderline_149 prefetchsize 4096;
alter tablespace ts_orderline_150 prefetchsize 4096;
alter tablespace ts_orderline_151 prefetchsize 4096;
alter tablespace ts_orderline_152 prefetchsize 4096;
alter tablespace ts_orderline_153 prefetchsize 4096;
alter tablespace ts_orderline_154 prefetchsize 4096;
alter tablespace ts_orderline_155 prefetchsize 4096;
alter tablespace ts_orderline_156 prefetchsize 4096;
alter tablespace ts_orderline_157 prefetchsize 4096;
alter tablespace ts_orderline_158 prefetchsize 4096;
alter tablespace ts_orderline_159 prefetchsize 4096;
alter tablespace ts_orderline_160 prefetchsize 4096;
alter tablespace ts_orderline_161 prefetchsize 4096;
alter tablespace ts_orderline_162 prefetchsize 4096;
alter tablespace ts_orderline_163 prefetchsize 4096;
alter tablespace ts_orderline_164 prefetchsize 4096;
alter tablespace ts_orderline_165 prefetchsize 4096;
alter tablespace ts_orderline_166 prefetchsize 4096;
alter tablespace ts_orderline_167 prefetchsize 4096;
alter tablespace ts_orderline_168 prefetchsize 4096;
alter tablespace ts_orderline_169 prefetchsize 4096;
alter tablespace ts_orderline_170 prefetchsize 4096;
alter tablespace ts_orderline_171 prefetchsize 4096;
alter tablespace ts_orderline_172 prefetchsize 4096;
alter tablespace ts_orderline_173 prefetchsize 4096;
alter tablespace ts_orderline_174 prefetchsize 4096;
alter tablespace ts_orderline_175 prefetchsize 4096;
alter tablespace ts_orderline_176 prefetchsize 4096;
alter tablespace ts_orderline_177 prefetchsize 4096;
alter tablespace ts_orderline_178 prefetchsize 4096;
alter tablespace ts_orderline_179 prefetchsize 4096;
alter tablespace ts_orderline_180 prefetchsize 4096;
alter tablespace ts_orderline_181 prefetchsize 4096;
alter tablespace ts_orderline_182 prefetchsize 4096;
alter tablespace ts_orderline_183 prefetchsize 4096;
alter tablespace ts_orderline_184 prefetchsize 4096;
alter tablespace ts_orderline_185 prefetchsize 4096;
alter tablespace ts_orderline_186 prefetchsize 4096;
alter tablespace ts_orderline_187 prefetchsize 4096;
alter tablespace ts_orderline_188 prefetchsize 4096;
alter tablespace ts_orderline_189 prefetchsize 4096;
alter tablespace ts_orderline_190 prefetchsize 4096;
alter tablespace ts_orderline_191 prefetchsize 4096;
alter tablespace ts_orderline_192 prefetchsize 4096;
alter tablespace ts_orderline_193 prefetchsize 4096;
alter tablespace ts_orderline_194 prefetchsize 4096;
alter tablespace ts_orderline_195 prefetchsize 4096;
alter tablespace ts_orderline_196 prefetchsize 4096;
alter tablespace ts_orderline_197 prefetchsize 4096;
alter tablespace ts_orderline_198 prefetchsize 4096;
alter tablespace ts_orderline_199 prefetchsize 4096;
alter tablespace ts_orderline_200 prefetchsize 4096;
alter tablespace ts_stock_001 prefetchsize 4096;
alter tablespace ts_stock_002 prefetchsize 4096;
alter tablespace ts_stock_003 prefetchsize 4096;
alter tablespace ts_stock_004 prefetchsize 4096;
alter tablespace ts_stock_005 prefetchsize 4096;
alter tablespace ts_stock_006 prefetchsize 4096;
alter tablespace ts_stock_007 prefetchsize 4096;
alter tablespace ts_stock_008 prefetchsize 4096;
alter tablespace ts_stock_009 prefetchsize 4096;
alter tablespace ts_stock_010 prefetchsize 4096;
alter tablespace ts_stock_011 prefetchsize 4096;
alter tablespace ts_stock_012 prefetchsize 4096;
alter tablespace ts_stock_013 prefetchsize 4096;
alter tablespace ts_stock_014 prefetchsize 4096;
alter tablespace ts_stock_015 prefetchsize 4096;
alter tablespace ts_stock_016 prefetchsize 4096;
alter tablespace ts_stock_017 prefetchsize 4096;
alter tablespace ts_stock_018 prefetchsize 4096;
alter tablespace ts_stock_019 prefetchsize 4096;
alter tablespace ts_stock_020 prefetchsize 4096;
alter tablespace ts_stock_021 prefetchsize 4096;
alter tablespace ts_stock_022 prefetchsize 4096;
alter tablespace ts_stock_023 prefetchsize 4096;
alter tablespace ts_stock_024 prefetchsize 4096;
alter tablespace ts_stock_025 prefetchsize 4096;
alter tablespace ts_stock_026 prefetchsize 4096;
alter tablespace ts_stock_027 prefetchsize 4096;
alter tablespace ts_stock_028 prefetchsize 4096;
alter tablespace ts_stock_029 prefetchsize 4096;
alter tablespace ts_stock_030 prefetchsize 4096;
alter tablespace ts_stock_031 prefetchsize 4096;
alter tablespace ts_stock_032 prefetchsize 4096;
alter tablespace ts_stock_033 prefetchsize 4096;
alter tablespace ts_stock_034 prefetchsize 4096;
alter tablespace ts_stock_035 prefetchsize 4096;
alter tablespace ts_stock_036 prefetchsize 4096;
alter tablespace ts_stock_037 prefetchsize 4096;
alter tablespace ts_stock_038 prefetchsize 4096;
alter tablespace ts_stock_039 prefetchsize 4096;
```

```
alter tablespace ts_stock_040 prefetchsize 4096;
alter tablespace ts_stock_041 prefetchsize 4096;
alter tablespace ts_stock_042 prefetchsize 4096;
alter tablespace ts_stock_043 prefetchsize 4096;
alter tablespace ts_stock_044 prefetchsize 4096;
alter tablespace ts_stock_045 prefetchsize 4096;
alter tablespace ts_stock_046 prefetchsize 4096;
alter tablespace ts_stock_047 prefetchsize 4096;
alter tablespace ts_stock_048 prefetchsize 4096;
alter tablespace ts_stock_049 prefetchsize 4096;
alter tablespace ts_stock_050 prefetchsize 4096;
alter tablespace ts_stock_051 prefetchsize 4096;
alter tablespace ts_stock_052 prefetchsize 4096;
alter tablespace ts_stock_053 prefetchsize 4096;
alter tablespace ts_stock_054 prefetchsize 4096;
alter tablespace ts_stock_055 prefetchsize 4096;
alter tablespace ts_stock_056 prefetchsize 4096;
alter tablespace ts_stock_057 prefetchsize 4096;
alter tablespace ts_stock_058 prefetchsize 4096;
alter tablespace ts_stock_059 prefetchsize 4096;
alter tablespace ts_stock_060 prefetchsize 4096;
alter tablespace ts_stock_061 prefetchsize 4096;
alter tablespace ts_stock_062 prefetchsize 4096;
alter tablespace ts_stock_063 prefetchsize 4096;
alter tablespace ts_stock_064 prefetchsize 4096;
alter tablespace ts_stock_065 prefetchsize 4096;
alter tablespace ts_stock_066 prefetchsize 4096;
alter tablespace ts_stock_067 prefetchsize 4096;
alter tablespace ts_stock_068 prefetchsize 4096;
alter tablespace ts_stock_069 prefetchsize 4096;
alter tablespace ts_stock_070 prefetchsize 4096;
alter tablespace ts_stock_071 prefetchsize 4096;
alter tablespace ts_stock_072 prefetchsize 4096;
alter tablespace ts_stock_073 prefetchsize 4096;
alter tablespace ts_stock_074 prefetchsize 4096;
alter tablespace ts_stock_075 prefetchsize 4096;
alter tablespace ts_stock_076 prefetchsize 4096;
alter tablespace ts_stock_077 prefetchsize 4096;
alter tablespace ts_stock_078 prefetchsize 4096;
alter tablespace ts_stock_079 prefetchsize 4096;
alter tablespace ts_stock_080 prefetchsize 4096;
alter tablespace ts_stock_081 prefetchsize 4096;
alter tablespace ts_stock_082 prefetchsize 4096;
alter tablespace ts_stock_083 prefetchsize 4096;
alter tablespace ts_stock_084 prefetchsize 4096;
alter tablespace ts_stock_085 prefetchsize 4096;
alter tablespace ts_stock_086 prefetchsize 4096;
alter tablespace ts_stock_087 prefetchsize 4096;
alter tablespace ts_stock_088 prefetchsize 4096;
alter tablespace ts_stock_089 prefetchsize 4096;
alter tablespace ts_stock_090 prefetchsize 4096;
alter tablespace ts_stock_091 prefetchsize 4096;
alter tablespace ts_stock_092 prefetchsize 4096;
alter tablespace ts_stock_093 prefetchsize 4096;
alter tablespace ts_stock_094 prefetchsize 4096;
alter tablespace ts_stock_095 prefetchsize 4096;
alter tablespace ts_stock_096 prefetchsize 4096;
alter tablespace ts_stock_097 prefetchsize 4096;
alter tablespace ts_stock_098 prefetchsize 4096;
alter tablespace ts_stock_099 prefetchsize 4096;
alter tablespace ts_stock_100 prefetchsize 4096;
alter tablespace ts_stock_101 prefetchsize 4096;
alter tablespace ts_stock_102 prefetchsize 4096;
alter tablespace ts_stock_103 prefetchsize 4096;
alter tablespace ts_stock_104 prefetchsize 4096;
alter tablespace ts_stock_105 prefetchsize 4096;
alter tablespace ts_stock_106 prefetchsize 4096;
alter tablespace ts_stock_107 prefetchsize 4096;
alter tablespace ts_stock_108 prefetchsize 4096;
alter tablespace ts_stock_109 prefetchsize 4096;
alter tablespace ts_stock_110 prefetchsize 4096;
alter tablespace ts_stock_111 prefetchsize 4096;
alter tablespace ts_stock_112 prefetchsize 4096;
alter tablespace ts_stock_113 prefetchsize 4096;
alter tablespace ts_stock_114 prefetchsize 4096;
alter tablespace ts_stock_115 prefetchsize 4096;
alter tablespace ts_stock_116 prefetchsize 4096;
alter tablespace ts_stock_117 prefetchsize 4096;
alter tablespace ts_stock_118 prefetchsize 4096;
alter tablespace ts_stock_119 prefetchsize 4096;
alter tablespace ts_stock_120 prefetchsize 4096;
alter tablespace ts_stock_121 prefetchsize 4096;
alter tablespace ts_stock_122 prefetchsize 4096;
alter tablespace ts_stock_123 prefetchsize 4096;
alter tablespace ts_stock_124 prefetchsize 4096;
alter tablespace ts_stock_125 prefetchsize 4096;
alter tablespace ts_stock_126 prefetchsize 4096;
alter tablespace ts_stock_127 prefetchsize 4096;
alter tablespace ts_stock_128 prefetchsize 4096;
alter tablespace ts_stock_129 prefetchsize 4096;
alter tablespace ts_stock_130 prefetchsize 4096;
alter tablespace ts_stock_131 prefetchsize 4096;
alter tablespace ts_stock_132 prefetchsize 4096;
alter tablespace ts_stock_133 prefetchsize 4096;
alter tablespace ts_stock_134 prefetchsize 4096;
alter tablespace ts_stock_135 prefetchsize 4096;
alter tablespace ts_stock_136 prefetchsize 4096;
alter tablespace ts_stock_137 prefetchsize 4096;
alter tablespace ts_stock_138 prefetchsize 4096;
alter tablespace ts_stock_139 prefetchsize 4096;
alter tablespace ts_stock_140 prefetchsize 4096;
alter tablespace ts_stock_141 prefetchsize 4096;
alter tablespace ts_stock_142 prefetchsize 4096;
alter tablespace ts_stock_143 prefetchsize 4096;
alter tablespace ts_stock_144 prefetchsize 4096;
alter tablespace ts_stock_145 prefetchsize 4096;
alter tablespace ts_stock_146 prefetchsize 4096;
alter tablespace ts_stock_147 prefetchsize 4096;
alter tablespace ts_stock_148 prefetchsize 4096;
alter tablespace ts_stock_149 prefetchsize 4096;
alter tablespace ts_stock_150 prefetchsize 4096;
alter tablespace ts_stock_151 prefetchsize 4096;
alter tablespace ts_stock_152 prefetchsize 4096;
alter tablespace ts_stock_153 prefetchsize 4096;
alter tablespace ts_stock_154 prefetchsize 4096;
alter tablespace ts_stock_155 prefetchsize 4096;
alter tablespace ts_stock_156 prefetchsize 4096;
alter tablespace ts_stock_157 prefetchsize 4096;
alter tablespace ts_stock_158 prefetchsize 4096;
alter tablespace ts_stock_159 prefetchsize 4096;
alter tablespace ts_stock_160 prefetchsize 4096;
alter tablespace ts_stock_161 prefetchsize 4096;
alter tablespace ts_stock_162 prefetchsize 4096;
alter tablespace ts_stock_163 prefetchsize 4096;
alter tablespace ts_stock_164 prefetchsize 4096;
alter tablespace ts_stock_165 prefetchsize 4096;
alter tablespace ts_stock_166 prefetchsize 4096;
alter tablespace ts_stock_167 prefetchsize 4096;
alter tablespace ts_stock_168 prefetchsize 4096;
alter tablespace ts_stock_169 prefetchsize 4096;
alter tablespace ts_stock_170 prefetchsize 4096;
alter tablespace ts_stock_171 prefetchsize 4096;
alter tablespace ts_stock_172 prefetchsize 4096;
alter tablespace ts_stock_173 prefetchsize 4096;
alter tablespace ts_stock_174 prefetchsize 4096;
alter tablespace ts_stock_175 prefetchsize 4096;
alter tablespace ts_stock_176 prefetchsize 4096;
alter tablespace ts_stock_177 prefetchsize 4096;
alter tablespace ts_stock_178 prefetchsize 4096;
alter tablespace ts_stock_179 prefetchsize 4096;
alter tablespace ts_stock_180 prefetchsize 4096;
alter tablespace ts_stock_181 prefetchsize 4096;
alter tablespace ts_stock_182 prefetchsize 4096;
alter tablespace ts_stock_183 prefetchsize 4096;
alter tablespace ts_stock_184 prefetchsize 4096;
alter tablespace ts_stock_185 prefetchsize 4096;
alter tablespace ts_stock_186 prefetchsize 4096;
alter tablespace ts_stock_187 prefetchsize 4096;
alter tablespace ts_stock_188 prefetchsize 4096;
alter tablespace ts_stock_189 prefetchsize 4096;
alter tablespace ts_stock_190 prefetchsize 4096;
alter tablespace ts_stock_191 prefetchsize 4096;
alter tablespace ts_stock_192 prefetchsize 4096;
alter tablespace ts_stock_193 prefetchsize 4096;
alter tablespace ts_stock_194 prefetchsize 4096;
alter tablespace ts_stock_195 prefetchsize 4096;
alter tablespace ts_stock_196 prefetchsize 4096;
alter tablespace ts_stock_197 prefetchsize 4096;
alter tablespace ts_stock_198 prefetchsize 4096;
alter tablespace ts_stock_199 prefetchsize 4096;
alter tablespace ts_stock_200 prefetchsize 4096;
alter tablespace ts_ware_001 prefetchsize 4096;
alter tablespace ts_ware_002 prefetchsize 4096;
alter tablespace ts_ware_003 prefetchsize 4096;
alter tablespace ts_ware_004 prefetchsize 4096;
alter tablespace ts_ware_005 prefetchsize 4096;
alter tablespace ts_ware_006 prefetchsize 4096;
alter tablespace ts_ware_007 prefetchsize 4096;
alter tablespace ts_ware_008 prefetchsize 4096;
alter tablespace ts_ware_009 prefetchsize 4096;
alter tablespace ts_ware_010 prefetchsize 4096;
alter tablespace ts_ware_011 prefetchsize 4096;
alter tablespace ts_ware_012 prefetchsize 4096;
alter tablespace ts_ware_013 prefetchsize 4096;
alter tablespace ts_ware_014 prefetchsize 4096;
alter tablespace ts_ware_015 prefetchsize 4096;
alter tablespace ts_ware_016 prefetchsize 4096;
alter tablespace ts_ware_017 prefetchsize 4096;
alter tablespace ts_ware_018 prefetchsize 4096;
alter tablespace ts_ware_019 prefetchsize 4096;
alter tablespace ts_ware_020 prefetchsize 4096;
alter tablespace ts_ware_021 prefetchsize 4096;
alter tablespace ts_ware_022 prefetchsize 4096;
alter tablespace ts_ware_023 prefetchsize 4096;
alter tablespace ts_ware_024 prefetchsize 4096;
alter tablespace ts_ware_025 prefetchsize 4096;
alter tablespace ts_ware_026 prefetchsize 4096;
alter tablespace ts_ware_027 prefetchsize 4096;
alter tablespace ts_ware_028 prefetchsize 4096;
alter tablespace ts_ware_029 prefetchsize 4096;
alter tablespace ts_ware_030 prefetchsize 4096;
alter tablespace ts_ware_031 prefetchsize 4096;
alter tablespace ts_ware_032 prefetchsize 4096;
alter tablespace ts_ware_033 prefetchsize 4096;
alter tablespace ts_ware_034 prefetchsize 4096;
alter tablespace ts_ware_035 prefetchsize 4096;
alter tablespace ts_ware_036 prefetchsize 4096;
alter tablespace ts_ware_037 prefetchsize 4096;
alter tablespace ts_ware_038 prefetchsize 4096;
alter tablespace ts_ware_039 prefetchsize 4096;
alter tablespace ts_ware_040 prefetchsize 4096;
connect reset;
```

DDL/CRCONST_CUSTOMER.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER1 OFF;
ALTER TABLE CUSTOMER1 DROP CONSTRAINT CUSTOMER1CKC;
ALTER TABLE CUSTOMER1 ADD CONSTRAINT CUSTOMER1CKC CHECK (C_W_ID BETWEEN 1
AND 1600);
SET INTEGRITY FOR CUSTOMER1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER2 OFF;
ALTER TABLE CUSTOMER2 DROP CONSTRAINT CUSTOMER2CKC;
```

```
ALTER TABLE CUSTOMER2 ADD CONSTRAINT CUSTOMER2CKC CHECK (C_W_ID BETWEEN 1601
AND 3200);
SET INTEGRITY FOR CUSTOMER2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER3 OFF;
ALTER TABLE CUSTOMER3 DROP CONSTRAINT CUSTOMER3CKC;
ALTER TABLE CUSTOMER3 ADD CONSTRAINT CUSTOMER3CKC CHECK (C_W_ID BETWEEN 3201
AND 4800);
SET INTEGRITY FOR CUSTOMER3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER4 OFF;
ALTER TABLE CUSTOMER4 DROP CONSTRAINT CUSTOMER4CKC;
ALTER TABLE CUSTOMER4 ADD CONSTRAINT CUSTOMER4CKC CHECK (C_W_ID BETWEEN 4801
AND 6400);
SET INTEGRITY FOR CUSTOMER4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER5 OFF;
ALTER TABLE CUSTOMER5 DROP CONSTRAINT CUSTOMER5CKC;
ALTER TABLE CUSTOMER5 ADD CONSTRAINT CUSTOMER5CKC CHECK (C_W_ID BETWEEN 6401
AND 8000);
SET INTEGRITY FOR CUSTOMER5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER6 OFF;
ALTER TABLE CUSTOMER6 DROP CONSTRAINT CUSTOMER6CKC;
ALTER TABLE CUSTOMER6 ADD CONSTRAINT CUSTOMER6CKC CHECK (C_W_ID BETWEEN 8001
AND 9600);
SET INTEGRITY FOR CUSTOMER6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER7 OFF;
ALTER TABLE CUSTOMER7 DROP CONSTRAINT CUSTOMER7CKC;
ALTER TABLE CUSTOMER7 ADD CONSTRAINT CUSTOMER7CKC CHECK (C_W_ID BETWEEN 9601
AND 11200);
SET INTEGRITY FOR CUSTOMER7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER8 OFF;
ALTER TABLE CUSTOMER8 DROP CONSTRAINT CUSTOMER8CKC;
ALTER TABLE CUSTOMER8 ADD CONSTRAINT CUSTOMER8CKC CHECK (C_W_ID BETWEEN
11201 AND 12800);
SET INTEGRITY FOR CUSTOMER8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER9 OFF;
ALTER TABLE CUSTOMER9 DROP CONSTRAINT CUSTOMER9CKC;
ALTER TABLE CUSTOMER9 ADD CONSTRAINT CUSTOMER9CKC CHECK (C_W_ID BETWEEN
12801 AND 14400);
SET INTEGRITY FOR CUSTOMER9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER10 OFF;
ALTER TABLE CUSTOMER10 DROP CONSTRAINT CUSTOMER10CKC;
ALTER TABLE CUSTOMER10 ADD CONSTRAINT CUSTOMER10CKC CHECK (C_W_ID BETWEEN
14401 AND 16000);
SET INTEGRITY FOR CUSTOMER10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER11 OFF;
ALTER TABLE CUSTOMER11 DROP CONSTRAINT CUSTOMER11CKC;
ALTER TABLE CUSTOMER11 ADD CONSTRAINT CUSTOMER11CKC CHECK (C_W_ID BETWEEN
16001 AND 17600);
SET INTEGRITY FOR CUSTOMER11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER12 OFF;
ALTER TABLE CUSTOMER12 DROP CONSTRAINT CUSTOMER12CKC;
ALTER TABLE CUSTOMER12 ADD CONSTRAINT CUSTOMER12CKC CHECK (C_W_ID BETWEEN
17601 AND 19200);
SET INTEGRITY FOR CUSTOMER12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER13 OFF;
ALTER TABLE CUSTOMER13 DROP CONSTRAINT CUSTOMER13CKC;
ALTER TABLE CUSTOMER13 ADD CONSTRAINT CUSTOMER13CKC CHECK (C_W_ID BETWEEN
19201 AND 20800);
SET INTEGRITY FOR CUSTOMER13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER14 OFF;
ALTER TABLE CUSTOMER14 DROP CONSTRAINT CUSTOMER14CKC;
ALTER TABLE CUSTOMER14 ADD CONSTRAINT CUSTOMER14CKC CHECK (C_W_ID BETWEEN
20801 AND 22400);
SET INTEGRITY FOR CUSTOMER14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER15 OFF;
ALTER TABLE CUSTOMER15 DROP CONSTRAINT CUSTOMER15CKC;
ALTER TABLE CUSTOMER15 ADD CONSTRAINT CUSTOMER15CKC CHECK (C_W_ID BETWEEN
22401 AND 24000);
SET INTEGRITY FOR CUSTOMER15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER16 OFF;
ALTER TABLE CUSTOMER16 DROP CONSTRAINT CUSTOMER16CKC;
ALTER TABLE CUSTOMER16 ADD CONSTRAINT CUSTOMER16CKC CHECK (C_W_ID BETWEEN
24001 AND 25600);
SET INTEGRITY FOR CUSTOMER16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER17 OFF;
ALTER TABLE CUSTOMER17 DROP CONSTRAINT CUSTOMER17CKC;
ALTER TABLE CUSTOMER17 ADD CONSTRAINT CUSTOMER17CKC CHECK (C_W_ID BETWEEN
25601 AND 27200);
SET INTEGRITY FOR CUSTOMER17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER18 OFF;
ALTER TABLE CUSTOMER18 DROP CONSTRAINT CUSTOMER18CKC;
ALTER TABLE CUSTOMER18 ADD CONSTRAINT CUSTOMER18CKC CHECK (C_W_ID BETWEEN
27201 AND 28800);
SET INTEGRITY FOR CUSTOMER18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER19 OFF;
ALTER TABLE CUSTOMER19 DROP CONSTRAINT CUSTOMER19CKC;
ALTER TABLE CUSTOMER19 ADD CONSTRAINT CUSTOMER19CKC CHECK (C_W_ID BETWEEN
28801 AND 30400);
SET INTEGRITY FOR CUSTOMER19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER20 OFF;
ALTER TABLE CUSTOMER20 DROP CONSTRAINT CUSTOMER20CKC;
ALTER TABLE CUSTOMER20 ADD CONSTRAINT CUSTOMER20CKC CHECK (C_W_ID BETWEEN
30401 AND 32000);
SET INTEGRITY FOR CUSTOMER20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER21 OFF;
ALTER TABLE CUSTOMER21 DROP CONSTRAINT CUSTOMER21CKC;
ALTER TABLE CUSTOMER21 ADD CONSTRAINT CUSTOMER21CKC CHECK (C_W_ID BETWEEN
32001 AND 33600);
SET INTEGRITY FOR CUSTOMER21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER22 OFF;
ALTER TABLE CUSTOMER22 DROP CONSTRAINT CUSTOMER22CKC;
ALTER TABLE CUSTOMER22 ADD CONSTRAINT CUSTOMER22CKC CHECK (C_W_ID BETWEEN
33601 AND 35200);
SET INTEGRITY FOR CUSTOMER22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER23 OFF;
ALTER TABLE CUSTOMER23 DROP CONSTRAINT CUSTOMER23CKC;
ALTER TABLE CUSTOMER23 ADD CONSTRAINT CUSTOMER23CKC CHECK (C_W_ID BETWEEN
35201 AND 36800);
SET INTEGRITY FOR CUSTOMER23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER24 OFF;
ALTER TABLE CUSTOMER24 DROP CONSTRAINT CUSTOMER24CKC;
ALTER TABLE CUSTOMER24 ADD CONSTRAINT CUSTOMER24CKC CHECK (C_W_ID BETWEEN
36801 AND 38400);
SET INTEGRITY FOR CUSTOMER24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER25 OFF;
ALTER TABLE CUSTOMER25 DROP CONSTRAINT CUSTOMER25CKC;
ALTER TABLE CUSTOMER25 ADD CONSTRAINT CUSTOMER25CKC CHECK (C_W_ID BETWEEN
38401 AND 40000);
SET INTEGRITY FOR CUSTOMER25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER26 OFF;
ALTER TABLE CUSTOMER26 DROP CONSTRAINT CUSTOMER26CKC;
ALTER TABLE CUSTOMER26 ADD CONSTRAINT CUSTOMER26CKC CHECK (C_W_ID BETWEEN
40001 AND 41600);
SET INTEGRITY FOR CUSTOMER26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER27 OFF;
ALTER TABLE CUSTOMER27 DROP CONSTRAINT CUSTOMER27CKC;
ALTER TABLE CUSTOMER27 ADD CONSTRAINT CUSTOMER27CKC CHECK (C_W_ID BETWEEN
41601 AND 43200);
SET INTEGRITY FOR CUSTOMER27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER28 OFF;
ALTER TABLE CUSTOMER28 DROP CONSTRAINT CUSTOMER28CKC;
ALTER TABLE CUSTOMER28 ADD CONSTRAINT CUSTOMER28CKC CHECK (C_W_ID BETWEEN
43201 AND 44800);
SET INTEGRITY FOR CUSTOMER28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER29 OFF;
ALTER TABLE CUSTOMER29 DROP CONSTRAINT CUSTOMER29CKC;
ALTER TABLE CUSTOMER29 ADD CONSTRAINT CUSTOMER29CKC CHECK (C_W_ID BETWEEN
44801 AND 46400);
SET INTEGRITY FOR CUSTOMER29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER30 OFF;
ALTER TABLE CUSTOMER30 DROP CONSTRAINT CUSTOMER30CKC;
ALTER TABLE CUSTOMER30 ADD CONSTRAINT CUSTOMER30CKC CHECK (C_W_ID BETWEEN
46401 AND 48000);
SET INTEGRITY FOR CUSTOMER30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER31 OFF;
ALTER TABLE CUSTOMER31 DROP CONSTRAINT CUSTOMER31CKC;
ALTER TABLE CUSTOMER31 ADD CONSTRAINT CUSTOMER31CKC CHECK (C_W_ID BETWEEN
48001 AND 49600);
SET INTEGRITY FOR CUSTOMER31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER32 OFF;
ALTER TABLE CUSTOMER32 DROP CONSTRAINT CUSTOMER32CKC;
ALTER TABLE CUSTOMER32 ADD CONSTRAINT CUSTOMER32CKC CHECK (C_W_ID BETWEEN
49601 AND 51200);
SET INTEGRITY FOR CUSTOMER32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER33 OFF;
ALTER TABLE CUSTOMER33 DROP CONSTRAINT CUSTOMER33CKC;
ALTER TABLE CUSTOMER33 ADD CONSTRAINT CUSTOMER33CKC CHECK (C_W_ID BETWEEN
51201 AND 52800);
```

```
SET INTEGRITY FOR CUSTOMER33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER34 OFF;
ALTER TABLE CUSTOMER34 DROP CONSTRAINT CUSTOMER34CKC;
ALTER TABLE CUSTOMER34 ADD CONSTRAINT CUSTOMER34CKC CHECK (C_W_ID BETWEEN
52801 AND 54400);
SET INTEGRITY FOR CUSTOMER34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER35 OFF;
ALTER TABLE CUSTOMER35 DROP CONSTRAINT CUSTOMER35CKC;
ALTER TABLE CUSTOMER35 ADD CONSTRAINT CUSTOMER35CKC CHECK (C_W_ID BETWEEN
54401 AND 56000);
SET INTEGRITY FOR CUSTOMER35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER36 OFF;
ALTER TABLE CUSTOMER36 DROP CONSTRAINT CUSTOMER36CKC;
ALTER TABLE CUSTOMER36 ADD CONSTRAINT CUSTOMER36CKC CHECK (C_W_ID BETWEEN
56001 AND 57600);
SET INTEGRITY FOR CUSTOMER36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER37 OFF;
ALTER TABLE CUSTOMER37 DROP CONSTRAINT CUSTOMER37CKC;
ALTER TABLE CUSTOMER37 ADD CONSTRAINT CUSTOMER37CKC CHECK (C_W_ID BETWEEN
57601 AND 59200);
SET INTEGRITY FOR CUSTOMER37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER38 OFF;
ALTER TABLE CUSTOMER38 DROP CONSTRAINT CUSTOMER38CKC;
ALTER TABLE CUSTOMER38 ADD CONSTRAINT CUSTOMER38CKC CHECK (C_W_ID BETWEEN
59201 AND 60800);
SET INTEGRITY FOR CUSTOMER38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER39 OFF;
ALTER TABLE CUSTOMER39 DROP CONSTRAINT CUSTOMER39CKC;
ALTER TABLE CUSTOMER39 ADD CONSTRAINT CUSTOMER39CKC CHECK (C_W_ID BETWEEN
60801 AND 62400);
SET INTEGRITY FOR CUSTOMER39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER40 OFF;
ALTER TABLE CUSTOMER40 DROP CONSTRAINT CUSTOMER40CKC;
ALTER TABLE CUSTOMER40 ADD CONSTRAINT CUSTOMER40CKC CHECK (C_W_ID BETWEEN
62401 AND 64000);
SET INTEGRITY FOR CUSTOMER40 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER41 OFF;
ALTER TABLE CUSTOMER41 DROP CONSTRAINT CUSTOMER41CKC;
ALTER TABLE CUSTOMER41 ADD CONSTRAINT CUSTOMER41CKC CHECK (C_W_ID BETWEEN
64001 AND 65600);
SET INTEGRITY FOR CUSTOMER41 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER42 OFF;
ALTER TABLE CUSTOMER42 DROP CONSTRAINT CUSTOMER42CKC;
ALTER TABLE CUSTOMER42 ADD CONSTRAINT CUSTOMER42CKC CHECK (C_W_ID BETWEEN
65601 AND 67200);
SET INTEGRITY FOR CUSTOMER42 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER43 OFF;
ALTER TABLE CUSTOMER43 DROP CONSTRAINT CUSTOMER43CKC;
ALTER TABLE CUSTOMER43 ADD CONSTRAINT CUSTOMER43CKC CHECK (C_W_ID BETWEEN
67201 AND 68800);
SET INTEGRITY FOR CUSTOMER43 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER44 OFF;
ALTER TABLE CUSTOMER44 DROP CONSTRAINT CUSTOMER44CKC;
ALTER TABLE CUSTOMER44 ADD CONSTRAINT CUSTOMER44CKC CHECK (C_W_ID BETWEEN
68801 AND 70400);
SET INTEGRITY FOR CUSTOMER44 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER45 OFF;
ALTER TABLE CUSTOMER45 DROP CONSTRAINT CUSTOMER45CKC;
ALTER TABLE CUSTOMER45 ADD CONSTRAINT CUSTOMER45CKC CHECK (C_W_ID BETWEEN
70401 AND 72000);
SET INTEGRITY FOR CUSTOMER45 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER46 OFF;
ALTER TABLE CUSTOMER46 DROP CONSTRAINT CUSTOMER46CKC;
ALTER TABLE CUSTOMER46 ADD CONSTRAINT CUSTOMER46CKC CHECK (C_W_ID BETWEEN
72001 AND 73600);
SET INTEGRITY FOR CUSTOMER46 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER47 OFF;
ALTER TABLE CUSTOMER47 DROP CONSTRAINT CUSTOMER47CKC;
ALTER TABLE CUSTOMER47 ADD CONSTRAINT CUSTOMER47CKC CHECK (C_W_ID BETWEEN
73601 AND 75200);
SET INTEGRITY FOR CUSTOMER47 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER48 OFF;
ALTER TABLE CUSTOMER48 DROP CONSTRAINT CUSTOMER48CKC;
ALTER TABLE CUSTOMER48 ADD CONSTRAINT CUSTOMER48CKC CHECK (C_W_ID BETWEEN
75201 AND 76800);
SET INTEGRITY FOR CUSTOMER48 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER49 OFF;
ALTER TABLE CUSTOMER49 DROP CONSTRAINT CUSTOMER49CKC;
ALTER TABLE CUSTOMER49 ADD CONSTRAINT CUSTOMER49CKC CHECK (C_W_ID BETWEEN
76801 AND 78400);
SET INTEGRITY FOR CUSTOMER49 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER50 OFF;
ALTER TABLE CUSTOMER50 DROP CONSTRAINT CUSTOMER50CKC;
ALTER TABLE CUSTOMER50 ADD CONSTRAINT CUSTOMER50CKC CHECK (C_W_ID BETWEEN
78401 AND 80000);
SET INTEGRITY FOR CUSTOMER50 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER51 OFF;
ALTER TABLE CUSTOMER51 DROP CONSTRAINT CUSTOMER51CKC;
ALTER TABLE CUSTOMER51 ADD CONSTRAINT CUSTOMER51CKC CHECK (C_W_ID BETWEEN
80001 AND 81600);
SET INTEGRITY FOR CUSTOMER51 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER52 OFF;
ALTER TABLE CUSTOMER52 DROP CONSTRAINT CUSTOMER52CKC;
ALTER TABLE CUSTOMER52 ADD CONSTRAINT CUSTOMER52CKC CHECK (C_W_ID BETWEEN
81601 AND 83200);
SET INTEGRITY FOR CUSTOMER52 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER53 OFF;
ALTER TABLE CUSTOMER53 DROP CONSTRAINT CUSTOMER53CKC;
ALTER TABLE CUSTOMER53 ADD CONSTRAINT CUSTOMER53CKC CHECK (C_W_ID BETWEEN
83201 AND 84800);
SET INTEGRITY FOR CUSTOMER53 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER54 OFF;
ALTER TABLE CUSTOMER54 DROP CONSTRAINT CUSTOMER54CKC;
ALTER TABLE CUSTOMER54 ADD CONSTRAINT CUSTOMER54CKC CHECK (C_W_ID BETWEEN
84801 AND 86400);
SET INTEGRITY FOR CUSTOMER54 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER55 OFF;
ALTER TABLE CUSTOMER55 DROP CONSTRAINT CUSTOMER55CKC;
ALTER TABLE CUSTOMER55 ADD CONSTRAINT CUSTOMER55CKC CHECK (C_W_ID BETWEEN
86401 AND 88000);
SET INTEGRITY FOR CUSTOMER55 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER56 OFF;
ALTER TABLE CUSTOMER56 DROP CONSTRAINT CUSTOMER56CKC;
ALTER TABLE CUSTOMER56 ADD CONSTRAINT CUSTOMER56CKC CHECK (C_W_ID BETWEEN
88001 AND 89600);
SET INTEGRITY FOR CUSTOMER56 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER57 OFF;
ALTER TABLE CUSTOMER57 DROP CONSTRAINT CUSTOMER57CKC;
ALTER TABLE CUSTOMER57 ADD CONSTRAINT CUSTOMER57CKC CHECK (C_W_ID BETWEEN
89601 AND 91200);
SET INTEGRITY FOR CUSTOMER57 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER58 OFF;
ALTER TABLE CUSTOMER58 DROP CONSTRAINT CUSTOMER58CKC;
ALTER TABLE CUSTOMER58 ADD CONSTRAINT CUSTOMER58CKC CHECK (C_W_ID BETWEEN
91201 AND 92800);
SET INTEGRITY FOR CUSTOMER58 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER59 OFF;
ALTER TABLE CUSTOMER59 DROP CONSTRAINT CUSTOMER59CKC;
ALTER TABLE CUSTOMER59 ADD CONSTRAINT CUSTOMER59CKC CHECK (C_W_ID BETWEEN
92801 AND 94400);
SET INTEGRITY FOR CUSTOMER59 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER60 OFF;
ALTER TABLE CUSTOMER60 DROP CONSTRAINT CUSTOMER60CKC;
ALTER TABLE CUSTOMER60 ADD CONSTRAINT CUSTOMER60CKC CHECK (C_W_ID BETWEEN
94401 AND 96000);
SET INTEGRITY FOR CUSTOMER60 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER61 OFF;
ALTER TABLE CUSTOMER61 DROP CONSTRAINT CUSTOMER61CKC;
ALTER TABLE CUSTOMER61 ADD CONSTRAINT CUSTOMER61CKC CHECK (C_W_ID BETWEEN
96001 AND 97600);
SET INTEGRITY FOR CUSTOMER61 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER62 OFF;
ALTER TABLE CUSTOMER62 DROP CONSTRAINT CUSTOMER62CKC;
ALTER TABLE CUSTOMER62 ADD CONSTRAINT CUSTOMER62CKC CHECK (C_W_ID BETWEEN
97601 AND 99200);
SET INTEGRITY FOR CUSTOMER62 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER63 OFF;
ALTER TABLE CUSTOMER63 DROP CONSTRAINT CUSTOMER63CKC;
ALTER TABLE CUSTOMER63 ADD CONSTRAINT CUSTOMER63CKC CHECK (C_W_ID BETWEEN
99201 AND 100800);
SET INTEGRITY FOR CUSTOMER63 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER64 OFF;
ALTER TABLE CUSTOMER64 DROP CONSTRAINT CUSTOMER64CKC;
ALTER TABLE CUSTOMER64 ADD CONSTRAINT CUSTOMER64CKC CHECK (C_W_ID BETWEEN
100801 AND 102400);
SET INTEGRITY FOR CUSTOMER64 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER65 OFF;
ALTER TABLE CUSTOMER65 DROP CONSTRAINT CUSTOMER65CKC;
ALTER TABLE CUSTOMER65 ADD CONSTRAINT CUSTOMER65CKC CHECK (C_W_ID BETWEEN
102401 AND 104000);
SET INTEGRITY FOR CUSTOMER65 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER66 OFF;
ALTER TABLE CUSTOMER66 DROP CONSTRAINT CUSTOMER66CKC;
ALTER TABLE CUSTOMER66 ADD CONSTRAINT CUSTOMER66CKC CHECK (C_W_ID BETWEEN
104001 AND 105600);
SET INTEGRITY FOR CUSTOMER66 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER67 OFF;
ALTER TABLE CUSTOMER67 DROP CONSTRAINT CUSTOMER67CKC;
ALTER TABLE CUSTOMER67 ADD CONSTRAINT CUSTOMER67CKC CHECK (C_W_ID BETWEEN
105601 AND 107200);
SET INTEGRITY FOR CUSTOMER67 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER68 OFF;
ALTER TABLE CUSTOMER68 DROP CONSTRAINT CUSTOMER68CKC;
ALTER TABLE CUSTOMER68 ADD CONSTRAINT CUSTOMER68CKC CHECK (C_W_ID BETWEEN
107201 AND 108800);
SET INTEGRITY FOR CUSTOMER68 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER69 OFF;
ALTER TABLE CUSTOMER69 DROP CONSTRAINT CUSTOMER69CKC;
ALTER TABLE CUSTOMER69 ADD CONSTRAINT CUSTOMER69CKC CHECK (C_W_ID BETWEEN
108801 AND 110400);
SET INTEGRITY FOR CUSTOMER69 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER70 OFF;
ALTER TABLE CUSTOMER70 DROP CONSTRAINT CUSTOMER70CKC;
ALTER TABLE CUSTOMER70 ADD CONSTRAINT CUSTOMER70CKC CHECK (C_W_ID BETWEEN
110401 AND 112000);
SET INTEGRITY FOR CUSTOMER70 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER71 OFF;
ALTER TABLE CUSTOMER71 DROP CONSTRAINT CUSTOMER71CKC;
ALTER TABLE CUSTOMER71 ADD CONSTRAINT CUSTOMER71CKC CHECK (C_W_ID BETWEEN
112001 AND 113600);
SET INTEGRITY FOR CUSTOMER71 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER72 OFF;
ALTER TABLE CUSTOMER72 DROP CONSTRAINT CUSTOMER72CKC;
ALTER TABLE CUSTOMER72 ADD CONSTRAINT CUSTOMER72CKC CHECK (C_W_ID BETWEEN
113601 AND 115200);
SET INTEGRITY FOR CUSTOMER72 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER73 OFF;
ALTER TABLE CUSTOMER73 DROP CONSTRAINT CUSTOMER73CKC;
ALTER TABLE CUSTOMER73 ADD CONSTRAINT CUSTOMER73CKC CHECK (C_W_ID BETWEEN
115201 AND 116800);
SET INTEGRITY FOR CUSTOMER73 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER74 OFF;
ALTER TABLE CUSTOMER74 DROP CONSTRAINT CUSTOMER74CKC;
ALTER TABLE CUSTOMER74 ADD CONSTRAINT CUSTOMER74CKC CHECK (C_W_ID BETWEEN
116801 AND 118400);
SET INTEGRITY FOR CUSTOMER74 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER75 OFF;
ALTER TABLE CUSTOMER75 DROP CONSTRAINT CUSTOMER75CKC;
ALTER TABLE CUSTOMER75 ADD CONSTRAINT CUSTOMER75CKC CHECK (C_W_ID BETWEEN
118401 AND 120000);
SET INTEGRITY FOR CUSTOMER75 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER76 OFF;
ALTER TABLE CUSTOMER76 DROP CONSTRAINT CUSTOMER76CKC;
ALTER TABLE CUSTOMER76 ADD CONSTRAINT CUSTOMER76CKC CHECK (C_W_ID BETWEEN
120001 AND 121600);
SET INTEGRITY FOR CUSTOMER76 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER77 OFF;
ALTER TABLE CUSTOMER77 DROP CONSTRAINT CUSTOMER77CKC;
ALTER TABLE CUSTOMER77 ADD CONSTRAINT CUSTOMER77CKC CHECK (C_W_ID BETWEEN
121601 AND 123200);
SET INTEGRITY FOR CUSTOMER77 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER78 OFF;
ALTER TABLE CUSTOMER78 DROP CONSTRAINT CUSTOMER78CKC;
ALTER TABLE CUSTOMER78 ADD CONSTRAINT CUSTOMER78CKC CHECK (C_W_ID BETWEEN
123201 AND 124800);
SET INTEGRITY FOR CUSTOMER78 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER79 OFF;
ALTER TABLE CUSTOMER79 DROP CONSTRAINT CUSTOMER79CKC;
ALTER TABLE CUSTOMER79 ADD CONSTRAINT CUSTOMER79CKC CHECK (C_W_ID BETWEEN
124801 AND 126400);
SET INTEGRITY FOR CUSTOMER79 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER80 OFF;
ALTER TABLE CUSTOMER80 DROP CONSTRAINT CUSTOMER80CKC;
ALTER TABLE CUSTOMER80 ADD CONSTRAINT CUSTOMER80CKC CHECK (C_W_ID BETWEEN
126401 AND 128000);
SET INTEGRITY FOR CUSTOMER80 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER81 OFF;
ALTER TABLE CUSTOMER81 DROP CONSTRAINT CUSTOMER81CKC;
ALTER TABLE CUSTOMER81 ADD CONSTRAINT CUSTOMER81CKC CHECK (C_W_ID BETWEEN
128001 AND 129600);
SET INTEGRITY FOR CUSTOMER81 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER82 OFF;
ALTER TABLE CUSTOMER82 DROP CONSTRAINT CUSTOMER82CKC;
ALTER TABLE CUSTOMER82 ADD CONSTRAINT CUSTOMER82CKC CHECK (C_W_ID BETWEEN
129601 AND 131200);
SET INTEGRITY FOR CUSTOMER82 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER83 OFF;
ALTER TABLE CUSTOMER83 DROP CONSTRAINT CUSTOMER83CKC;
ALTER TABLE CUSTOMER83 ADD CONSTRAINT CUSTOMER83CKC CHECK (C_W_ID BETWEEN
131201 AND 132800);
SET INTEGRITY FOR CUSTOMER83 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER84 OFF;
ALTER TABLE CUSTOMER84 DROP CONSTRAINT CUSTOMER84CKC;
ALTER TABLE CUSTOMER84 ADD CONSTRAINT CUSTOMER84CKC CHECK (C_W_ID BETWEEN
132801 AND 134400);
SET INTEGRITY FOR CUSTOMER84 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER85 OFF;
ALTER TABLE CUSTOMER85 DROP CONSTRAINT CUSTOMER85CKC;
ALTER TABLE CUSTOMER85 ADD CONSTRAINT CUSTOMER85CKC CHECK (C_W_ID BETWEEN
134401 AND 136000);
SET INTEGRITY FOR CUSTOMER85 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER86 OFF;
ALTER TABLE CUSTOMER86 DROP CONSTRAINT CUSTOMER86CKC;
ALTER TABLE CUSTOMER86 ADD CONSTRAINT CUSTOMER86CKC CHECK (C_W_ID BETWEEN
136001 AND 137600);
SET INTEGRITY FOR CUSTOMER86 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER87 OFF;
ALTER TABLE CUSTOMER87 DROP CONSTRAINT CUSTOMER87CKC;
ALTER TABLE CUSTOMER87 ADD CONSTRAINT CUSTOMER87CKC CHECK (C_W_ID BETWEEN
137601 AND 139200);
SET INTEGRITY FOR CUSTOMER87 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER88 OFF;
ALTER TABLE CUSTOMER88 DROP CONSTRAINT CUSTOMER88CKC;
ALTER TABLE CUSTOMER88 ADD CONSTRAINT CUSTOMER88CKC CHECK (C_W_ID BETWEEN
139201 AND 140800);
SET INTEGRITY FOR CUSTOMER88 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER89 OFF;
ALTER TABLE CUSTOMER89 DROP CONSTRAINT CUSTOMER89CKC;
ALTER TABLE CUSTOMER89 ADD CONSTRAINT CUSTOMER89CKC CHECK (C_W_ID BETWEEN
140801 AND 142400);
SET INTEGRITY FOR CUSTOMER89 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER90 OFF;
ALTER TABLE CUSTOMER90 DROP CONSTRAINT CUSTOMER90CKC;
ALTER TABLE CUSTOMER90 ADD CONSTRAINT CUSTOMER90CKC CHECK (C_W_ID BETWEEN
142401 AND 144000);
SET INTEGRITY FOR CUSTOMER90 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER91 OFF;
ALTER TABLE CUSTOMER91 DROP CONSTRAINT CUSTOMER91CKC;
ALTER TABLE CUSTOMER91 ADD CONSTRAINT CUSTOMER91CKC CHECK (C_W_ID BETWEEN
144001 AND 145600);
SET INTEGRITY FOR CUSTOMER91 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER92 OFF;
ALTER TABLE CUSTOMER92 DROP CONSTRAINT CUSTOMER92CKC;
ALTER TABLE CUSTOMER92 ADD CONSTRAINT CUSTOMER92CKC CHECK (C_W_ID BETWEEN
145601 AND 147200);
SET INTEGRITY FOR CUSTOMER92 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER93 OFF;
ALTER TABLE CUSTOMER93 DROP CONSTRAINT CUSTOMER93CKC;
ALTER TABLE CUSTOMER93 ADD CONSTRAINT CUSTOMER93CKC CHECK (C_W_ID BETWEEN
147201 AND 148800);
SET INTEGRITY FOR CUSTOMER93 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER94 OFF;
ALTER TABLE CUSTOMER94 DROP CONSTRAINT CUSTOMER94CKC;
ALTER TABLE CUSTOMER94 ADD CONSTRAINT CUSTOMER94CKC CHECK (C_W_ID BETWEEN
148801 AND 150400);
SET INTEGRITY FOR CUSTOMER94 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER95 OFF;
ALTER TABLE CUSTOMER95 DROP CONSTRAINT CUSTOMER95CKC;
ALTER TABLE CUSTOMER95 ADD CONSTRAINT CUSTOMER95CKC CHECK (C_W_ID BETWEEN
150401 AND 152000);
SET INTEGRITY FOR CUSTOMER95 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
```

```
SET INTEGRITY FOR CUSTOMER96 OFF;
ALTER TABLE CUSTOMER96 DROP CONSTRAINT CUSTOMER96CKC;
ALTER TABLE CUSTOMER96 ADD CONSTRAINT CUSTOMER96CKC CHECK (C_W_ID BETWEEN
152001 AND 153600);
SET INTEGRITY FOR CUSTOMER96 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER97 OFF;
ALTER TABLE CUSTOMER97 DROP CONSTRAINT CUSTOMER97CKC;
ALTER TABLE CUSTOMER97 ADD CONSTRAINT CUSTOMER97CKC CHECK (C_W_ID BETWEEN
153601 AND 155200);
SET INTEGRITY FOR CUSTOMER97 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER98 OFF;
ALTER TABLE CUSTOMER98 DROP CONSTRAINT CUSTOMER98CKC;
ALTER TABLE CUSTOMER98 ADD CONSTRAINT CUSTOMER98CKC CHECK (C_W_ID BETWEEN
155201 AND 156800);
SET INTEGRITY FOR CUSTOMER98 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER99 OFF;
ALTER TABLE CUSTOMER99 DROP CONSTRAINT CUSTOMER99CKC;
ALTER TABLE CUSTOMER99 ADD CONSTRAINT CUSTOMER99CKC CHECK (C_W_ID BETWEEN
156801 AND 158400);
SET INTEGRITY FOR CUSTOMER99 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER100 OFF;
ALTER TABLE CUSTOMER100 DROP CONSTRAINT CUSTOMER100CKC;
ALTER TABLE CUSTOMER100 ADD CONSTRAINT CUSTOMER100CKC CHECK (C_W_ID BETWEEN
158401 AND 160000);
SET INTEGRITY FOR CUSTOMER100 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER101 OFF;
ALTER TABLE CUSTOMER101 DROP CONSTRAINT CUSTOMER101CKC;
ALTER TABLE CUSTOMER101 ADD CONSTRAINT CUSTOMER101CKC CHECK (C_W_ID BETWEEN
160001 AND 161600);
SET INTEGRITY FOR CUSTOMER101 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER102 OFF;
ALTER TABLE CUSTOMER102 DROP CONSTRAINT CUSTOMER102CKC;
ALTER TABLE CUSTOMER102 ADD CONSTRAINT CUSTOMER102CKC CHECK (C_W_ID BETWEEN
161601 AND 163200);
SET INTEGRITY FOR CUSTOMER102 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER103 OFF;
ALTER TABLE CUSTOMER103 DROP CONSTRAINT CUSTOMER103CKC;
ALTER TABLE CUSTOMER103 ADD CONSTRAINT CUSTOMER103CKC CHECK (C_W_ID BETWEEN
163201 AND 164800);
SET INTEGRITY FOR CUSTOMER103 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER104 OFF;
ALTER TABLE CUSTOMER104 DROP CONSTRAINT CUSTOMER104CKC;
ALTER TABLE CUSTOMER104 ADD CONSTRAINT CUSTOMER104CKC CHECK (C_W_ID BETWEEN
164801 AND 166400);
SET INTEGRITY FOR CUSTOMER104 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER105 OFF;
ALTER TABLE CUSTOMER105 DROP CONSTRAINT CUSTOMER105CKC;
ALTER TABLE CUSTOMER105 ADD CONSTRAINT CUSTOMER105CKC CHECK (C_W_ID BETWEEN
166401 AND 168000);
SET INTEGRITY FOR CUSTOMER105 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER106 OFF;
ALTER TABLE CUSTOMER106 DROP CONSTRAINT CUSTOMER106CKC;
ALTER TABLE CUSTOMER106 ADD CONSTRAINT CUSTOMER106CKC CHECK (C_W_ID BETWEEN
168001 AND 169600);
SET INTEGRITY FOR CUSTOMER106 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER107 OFF;
ALTER TABLE CUSTOMER107 DROP CONSTRAINT CUSTOMER107CKC;
ALTER TABLE CUSTOMER107 ADD CONSTRAINT CUSTOMER107CKC CHECK (C_W_ID BETWEEN
169601 AND 171200);
SET INTEGRITY FOR CUSTOMER107 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER108 OFF;
ALTER TABLE CUSTOMER108 DROP CONSTRAINT CUSTOMER108CKC;
ALTER TABLE CUSTOMER108 ADD CONSTRAINT CUSTOMER108CKC CHECK (C_W_ID BETWEEN
171201 AND 172800);
SET INTEGRITY FOR CUSTOMER108 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER109 OFF;
ALTER TABLE CUSTOMER109 DROP CONSTRAINT CUSTOMER109CKC;
ALTER TABLE CUSTOMER109 ADD CONSTRAINT CUSTOMER109CKC CHECK (C_W_ID BETWEEN
172801 AND 174400);
SET INTEGRITY FOR CUSTOMER109 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER110 OFF;
ALTER TABLE CUSTOMER110 DROP CONSTRAINT CUSTOMER110CKC;
ALTER TABLE CUSTOMER110 ADD CONSTRAINT CUSTOMER110CKC CHECK (C_W_ID BETWEEN
174401 AND 176000);
SET INTEGRITY FOR CUSTOMER110 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER111 OFF;
ALTER TABLE CUSTOMER111 DROP CONSTRAINT CUSTOMER111CKC;
ALTER TABLE CUSTOMER111 ADD CONSTRAINT CUSTOMER111CKC CHECK (C_W_ID BETWEEN
176001 AND 177600);
SET INTEGRITY FOR CUSTOMER111 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER112 OFF;
ALTER TABLE CUSTOMER112 DROP CONSTRAINT CUSTOMER112CKC;
ALTER TABLE CUSTOMER112 ADD CONSTRAINT CUSTOMER112CKC CHECK (C_W_ID BETWEEN
177601 AND 179200);
SET INTEGRITY FOR CUSTOMER112 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER113 OFF;
ALTER TABLE CUSTOMER113 DROP CONSTRAINT CUSTOMER113CKC;
ALTER TABLE CUSTOMER113 ADD CONSTRAINT CUSTOMER113CKC CHECK (C_W_ID BETWEEN
179201 AND 180800);
SET INTEGRITY FOR CUSTOMER113 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER114 OFF;
ALTER TABLE CUSTOMER114 DROP CONSTRAINT CUSTOMER114CKC;
ALTER TABLE CUSTOMER114 ADD CONSTRAINT CUSTOMER114CKC CHECK (C_W_ID BETWEEN
180801 AND 182400);
SET INTEGRITY FOR CUSTOMER114 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER115 OFF;
ALTER TABLE CUSTOMER115 DROP CONSTRAINT CUSTOMER115CKC;
ALTER TABLE CUSTOMER115 ADD CONSTRAINT CUSTOMER115CKC CHECK (C_W_ID BETWEEN
182401 AND 184000);
SET INTEGRITY FOR CUSTOMER115 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER116 OFF;
ALTER TABLE CUSTOMER116 DROP CONSTRAINT CUSTOMER116CKC;
ALTER TABLE CUSTOMER116 ADD CONSTRAINT CUSTOMER116CKC CHECK (C_W_ID BETWEEN
184001 AND 185600);
SET INTEGRITY FOR CUSTOMER116 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER117 OFF;
ALTER TABLE CUSTOMER117 DROP CONSTRAINT CUSTOMER117CKC;
ALTER TABLE CUSTOMER117 ADD CONSTRAINT CUSTOMER117CKC CHECK (C_W_ID BETWEEN
185601 AND 187200);
SET INTEGRITY FOR CUSTOMER117 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER118 OFF;
ALTER TABLE CUSTOMER118 DROP CONSTRAINT CUSTOMER118CKC;
ALTER TABLE CUSTOMER118 ADD CONSTRAINT CUSTOMER118CKC CHECK (C_W_ID BETWEEN
187201 AND 188800);
SET INTEGRITY FOR CUSTOMER118 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER119 OFF;
ALTER TABLE CUSTOMER119 DROP CONSTRAINT CUSTOMER119CKC;
ALTER TABLE CUSTOMER119 ADD CONSTRAINT CUSTOMER119CKC CHECK (C_W_ID BETWEEN
188801 AND 190400);
SET INTEGRITY FOR CUSTOMER119 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER120 OFF;
ALTER TABLE CUSTOMER120 DROP CONSTRAINT CUSTOMER120CKC;
ALTER TABLE CUSTOMER120 ADD CONSTRAINT CUSTOMER120CKC CHECK (C_W_ID BETWEEN
190401 AND 192000);
SET INTEGRITY FOR CUSTOMER120 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER121 OFF;
ALTER TABLE CUSTOMER121 DROP CONSTRAINT CUSTOMER121CKC;
ALTER TABLE CUSTOMER121 ADD CONSTRAINT CUSTOMER121CKC CHECK (C_W_ID BETWEEN
192001 AND 193600);
SET INTEGRITY FOR CUSTOMER121 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER122 OFF;
ALTER TABLE CUSTOMER122 DROP CONSTRAINT CUSTOMER122CKC;
ALTER TABLE CUSTOMER122 ADD CONSTRAINT CUSTOMER122CKC CHECK (C_W_ID BETWEEN
193601 AND 195200);
SET INTEGRITY FOR CUSTOMER122 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER123 OFF;
ALTER TABLE CUSTOMER123 DROP CONSTRAINT CUSTOMER123CKC;
ALTER TABLE CUSTOMER123 ADD CONSTRAINT CUSTOMER123CKC CHECK (C_W_ID BETWEEN
195201 AND 196800);
SET INTEGRITY FOR CUSTOMER123 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER124 OFF;
ALTER TABLE CUSTOMER124 DROP CONSTRAINT CUSTOMER124CKC;
ALTER TABLE CUSTOMER124 ADD CONSTRAINT CUSTOMER124CKC CHECK (C_W_ID BETWEEN
196801 AND 198400);
SET INTEGRITY FOR CUSTOMER124 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER125 OFF;
ALTER TABLE CUSTOMER125 DROP CONSTRAINT CUSTOMER125CKC;
ALTER TABLE CUSTOMER125 ADD CONSTRAINT CUSTOMER125CKC CHECK (C_W_ID BETWEEN
198401 AND 200000);
SET INTEGRITY FOR CUSTOMER125 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER126 OFF;
ALTER TABLE CUSTOMER126 DROP CONSTRAINT CUSTOMER126CKC;
ALTER TABLE CUSTOMER126 ADD CONSTRAINT CUSTOMER126CKC CHECK (C_W_ID BETWEEN
200001 AND 201600);
SET INTEGRITY FOR CUSTOMER126 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER127 OFF;
```

```
ALTER TABLE CUSTOMER127 DROP CONSTRAINT CUSTOMER127CKC;
ALTER TABLE CUSTOMER127 ADD CONSTRAINT CUSTOMER127CKC CHECK (C_W_ID BETWEEN 201601 AND 203200);
SET INTEGRITY FOR CUSTOMER127 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER128 OFF;
ALTER TABLE CUSTOMER128 DROP CONSTRAINT CUSTOMER128CKC;
ALTER TABLE CUSTOMER128 ADD CONSTRAINT CUSTOMER128CKC CHECK (C_W_ID BETWEEN 203201 AND 204800);
SET INTEGRITY FOR CUSTOMER128 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER129 OFF;
ALTER TABLE CUSTOMER129 DROP CONSTRAINT CUSTOMER129CKC;
ALTER TABLE CUSTOMER129 ADD CONSTRAINT CUSTOMER129CKC CHECK (C_W_ID BETWEEN 204801 AND 206400);
SET INTEGRITY FOR CUSTOMER129 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER130 OFF;
ALTER TABLE CUSTOMER130 DROP CONSTRAINT CUSTOMER130CKC;
ALTER TABLE CUSTOMER130 ADD CONSTRAINT CUSTOMER130CKC CHECK (C_W_ID BETWEEN 206401 AND 208000);
SET INTEGRITY FOR CUSTOMER130 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER131 OFF;
ALTER TABLE CUSTOMER131 DROP CONSTRAINT CUSTOMER131CKC;
ALTER TABLE CUSTOMER131 ADD CONSTRAINT CUSTOMER131CKC CHECK (C_W_ID BETWEEN 208001 AND 209600);
SET INTEGRITY FOR CUSTOMER131 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER132 OFF;
ALTER TABLE CUSTOMER132 DROP CONSTRAINT CUSTOMER132CKC;
ALTER TABLE CUSTOMER132 ADD CONSTRAINT CUSTOMER132CKC CHECK (C_W_ID BETWEEN 209601 AND 211200);
SET INTEGRITY FOR CUSTOMER132 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER133 OFF;
ALTER TABLE CUSTOMER133 DROP CONSTRAINT CUSTOMER133CKC;
ALTER TABLE CUSTOMER133 ADD CONSTRAINT CUSTOMER133CKC CHECK (C_W_ID BETWEEN 211201 AND 212800);
SET INTEGRITY FOR CUSTOMER133 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER134 OFF;
ALTER TABLE CUSTOMER134 DROP CONSTRAINT CUSTOMER134CKC;
ALTER TABLE CUSTOMER134 ADD CONSTRAINT CUSTOMER134CKC CHECK (C_W_ID BETWEEN 212801 AND 214400);
SET INTEGRITY FOR CUSTOMER134 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER135 OFF;
ALTER TABLE CUSTOMER135 DROP CONSTRAINT CUSTOMER135CKC;
ALTER TABLE CUSTOMER135 ADD CONSTRAINT CUSTOMER135CKC CHECK (C_W_ID BETWEEN 214401 AND 216000);
SET INTEGRITY FOR CUSTOMER135 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER136 OFF;
ALTER TABLE CUSTOMER136 DROP CONSTRAINT CUSTOMER136CKC;
ALTER TABLE CUSTOMER136 ADD CONSTRAINT CUSTOMER136CKC CHECK (C_W_ID BETWEEN 216001 AND 217600);
SET INTEGRITY FOR CUSTOMER136 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER137 OFF;
ALTER TABLE CUSTOMER137 DROP CONSTRAINT CUSTOMER137CKC;
ALTER TABLE CUSTOMER137 ADD CONSTRAINT CUSTOMER137CKC CHECK (C_W_ID BETWEEN 217601 AND 219200);
SET INTEGRITY FOR CUSTOMER137 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER138 OFF;
ALTER TABLE CUSTOMER138 DROP CONSTRAINT CUSTOMER138CKC;
ALTER TABLE CUSTOMER138 ADD CONSTRAINT CUSTOMER138CKC CHECK (C_W_ID BETWEEN 219201 AND 220800);
SET INTEGRITY FOR CUSTOMER138 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER139 OFF;
ALTER TABLE CUSTOMER139 DROP CONSTRAINT CUSTOMER139CKC;
ALTER TABLE CUSTOMER139 ADD CONSTRAINT CUSTOMER139CKC CHECK (C_W_ID BETWEEN 220801 AND 222400);
SET INTEGRITY FOR CUSTOMER139 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER140 OFF;
ALTER TABLE CUSTOMER140 DROP CONSTRAINT CUSTOMER140CKC;
ALTER TABLE CUSTOMER140 ADD CONSTRAINT CUSTOMER140CKC CHECK (C_W_ID BETWEEN 222401 AND 224000);
SET INTEGRITY FOR CUSTOMER140 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER141 OFF;
ALTER TABLE CUSTOMER141 DROP CONSTRAINT CUSTOMER141CKC;
ALTER TABLE CUSTOMER141 ADD CONSTRAINT CUSTOMER141CKC CHECK (C_W_ID BETWEEN 224001 AND 225600);
SET INTEGRITY FOR CUSTOMER141 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER142 OFF;
ALTER TABLE CUSTOMER142 DROP CONSTRAINT CUSTOMER142CKC;
ALTER TABLE CUSTOMER142 ADD CONSTRAINT CUSTOMER142CKC CHECK (C_W_ID BETWEEN 225601 AND 227200);
SET INTEGRITY FOR CUSTOMER142 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER143 OFF;
ALTER TABLE CUSTOMER143 DROP CONSTRAINT CUSTOMER143CKC;
ALTER TABLE CUSTOMER143 ADD CONSTRAINT CUSTOMER143CKC CHECK (C_W_ID BETWEEN 227201 AND 228800);
SET INTEGRITY FOR CUSTOMER143 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER144 OFF;
ALTER TABLE CUSTOMER144 DROP CONSTRAINT CUSTOMER144CKC;
ALTER TABLE CUSTOMER144 ADD CONSTRAINT CUSTOMER144CKC CHECK (C_W_ID BETWEEN 228801 AND 230400);
SET INTEGRITY FOR CUSTOMER144 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER145 OFF;
ALTER TABLE CUSTOMER145 DROP CONSTRAINT CUSTOMER145CKC;
ALTER TABLE CUSTOMER145 ADD CONSTRAINT CUSTOMER145CKC CHECK (C_W_ID BETWEEN 230401 AND 232000);
SET INTEGRITY FOR CUSTOMER145 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER146 OFF;
ALTER TABLE CUSTOMER146 DROP CONSTRAINT CUSTOMER146CKC;
ALTER TABLE CUSTOMER146 ADD CONSTRAINT CUSTOMER146CKC CHECK (C_W_ID BETWEEN 232001 AND 233600);
SET INTEGRITY FOR CUSTOMER146 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER147 OFF;
ALTER TABLE CUSTOMER147 DROP CONSTRAINT CUSTOMER147CKC;
ALTER TABLE CUSTOMER147 ADD CONSTRAINT CUSTOMER147CKC CHECK (C_W_ID BETWEEN 233601 AND 235200);
SET INTEGRITY FOR CUSTOMER147 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER148 OFF;
ALTER TABLE CUSTOMER148 DROP CONSTRAINT CUSTOMER148CKC;
ALTER TABLE CUSTOMER148 ADD CONSTRAINT CUSTOMER148CKC CHECK (C_W_ID BETWEEN 235201 AND 236800);
SET INTEGRITY FOR CUSTOMER148 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER149 OFF;
ALTER TABLE CUSTOMER149 DROP CONSTRAINT CUSTOMER149CKC;
ALTER TABLE CUSTOMER149 ADD CONSTRAINT CUSTOMER149CKC CHECK (C_W_ID BETWEEN 236801 AND 238400);
SET INTEGRITY FOR CUSTOMER149 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER150 OFF;
ALTER TABLE CUSTOMER150 DROP CONSTRAINT CUSTOMER150CKC;
ALTER TABLE CUSTOMER150 ADD CONSTRAINT CUSTOMER150CKC CHECK (C_W_ID BETWEEN 238401 AND 240000);
SET INTEGRITY FOR CUSTOMER150 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER151 OFF;
ALTER TABLE CUSTOMER151 DROP CONSTRAINT CUSTOMER151CKC;
ALTER TABLE CUSTOMER151 ADD CONSTRAINT CUSTOMER151CKC CHECK (C_W_ID BETWEEN 240001 AND 241600);
SET INTEGRITY FOR CUSTOMER151 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER152 OFF;
ALTER TABLE CUSTOMER152 DROP CONSTRAINT CUSTOMER152CKC;
ALTER TABLE CUSTOMER152 ADD CONSTRAINT CUSTOMER152CKC CHECK (C_W_ID BETWEEN 241601 AND 243200);
SET INTEGRITY FOR CUSTOMER152 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER153 OFF;
ALTER TABLE CUSTOMER153 DROP CONSTRAINT CUSTOMER153CKC;
ALTER TABLE CUSTOMER153 ADD CONSTRAINT CUSTOMER153CKC CHECK (C_W_ID BETWEEN 243201 AND 244800);
SET INTEGRITY FOR CUSTOMER153 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER154 OFF;
ALTER TABLE CUSTOMER154 DROP CONSTRAINT CUSTOMER154CKC;
ALTER TABLE CUSTOMER154 ADD CONSTRAINT CUSTOMER154CKC CHECK (C_W_ID BETWEEN 244801 AND 246400);
SET INTEGRITY FOR CUSTOMER154 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER155 OFF;
ALTER TABLE CUSTOMER155 DROP CONSTRAINT CUSTOMER155CKC;
ALTER TABLE CUSTOMER155 ADD CONSTRAINT CUSTOMER155CKC CHECK (C_W_ID BETWEEN 246401 AND 248000);
SET INTEGRITY FOR CUSTOMER155 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER156 OFF;
ALTER TABLE CUSTOMER156 DROP CONSTRAINT CUSTOMER156CKC;
ALTER TABLE CUSTOMER156 ADD CONSTRAINT CUSTOMER156CKC CHECK (C_W_ID BETWEEN 248001 AND 249600);
SET INTEGRITY FOR CUSTOMER156 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER157 OFF;
ALTER TABLE CUSTOMER157 DROP CONSTRAINT CUSTOMER157CKC;
ALTER TABLE CUSTOMER157 ADD CONSTRAINT CUSTOMER157CKC CHECK (C_W_ID BETWEEN 249601 AND 251200);
SET INTEGRITY FOR CUSTOMER157 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER158 OFF;
ALTER TABLE CUSTOMER158 DROP CONSTRAINT CUSTOMER158CKC;
```

```
ALTER TABLE CUSTOMER158 ADD CONSTRAINT CUSTOMER158CKC CHECK (C_W_ID BETWEEN 251201 AND 252800);
SET INTEGRITY FOR CUSTOMER158 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER159 OFF;
ALTER TABLE CUSTOMER159 DROP CONSTRAINT CUSTOMER159CKC;
ALTER TABLE CUSTOMER159 ADD CONSTRAINT CUSTOMER159CKC CHECK (C_W_ID BETWEEN 252801 AND 254400);
SET INTEGRITY FOR CUSTOMER159 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER160 OFF;
ALTER TABLE CUSTOMER160 DROP CONSTRAINT CUSTOMER160CKC;
ALTER TABLE CUSTOMER160 ADD CONSTRAINT CUSTOMER160CKC CHECK (C_W_ID BETWEEN 254401 AND 256000);
SET INTEGRITY FOR CUSTOMER160 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER161 OFF;
ALTER TABLE CUSTOMER161 DROP CONSTRAINT CUSTOMER161CKC;
ALTER TABLE CUSTOMER161 ADD CONSTRAINT CUSTOMER161CKC CHECK (C_W_ID BETWEEN 256001 AND 257600);
SET INTEGRITY FOR CUSTOMER161 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER162 OFF;
ALTER TABLE CUSTOMER162 DROP CONSTRAINT CUSTOMER162CKC;
ALTER TABLE CUSTOMER162 ADD CONSTRAINT CUSTOMER162CKC CHECK (C_W_ID BETWEEN 257601 AND 259200);
SET INTEGRITY FOR CUSTOMER162 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER163 OFF;
ALTER TABLE CUSTOMER163 DROP CONSTRAINT CUSTOMER163CKC;
ALTER TABLE CUSTOMER163 ADD CONSTRAINT CUSTOMER163CKC CHECK (C_W_ID BETWEEN 259201 AND 260800);
SET INTEGRITY FOR CUSTOMER163 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER164 OFF;
ALTER TABLE CUSTOMER164 DROP CONSTRAINT CUSTOMER164CKC;
ALTER TABLE CUSTOMER164 ADD CONSTRAINT CUSTOMER164CKC CHECK (C_W_ID BETWEEN 260801 AND 262400);
SET INTEGRITY FOR CUSTOMER164 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER165 OFF;
ALTER TABLE CUSTOMER165 DROP CONSTRAINT CUSTOMER165CKC;
ALTER TABLE CUSTOMER165 ADD CONSTRAINT CUSTOMER165CKC CHECK (C_W_ID BETWEEN 262401 AND 264000);
SET INTEGRITY FOR CUSTOMER165 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER166 OFF;
ALTER TABLE CUSTOMER166 DROP CONSTRAINT CUSTOMER166CKC;
ALTER TABLE CUSTOMER166 ADD CONSTRAINT CUSTOMER166CKC CHECK (C_W_ID BETWEEN 264001 AND 265600);
SET INTEGRITY FOR CUSTOMER166 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER167 OFF;
ALTER TABLE CUSTOMER167 DROP CONSTRAINT CUSTOMER167CKC;
ALTER TABLE CUSTOMER167 ADD CONSTRAINT CUSTOMER167CKC CHECK (C_W_ID BETWEEN 265601 AND 267200);
SET INTEGRITY FOR CUSTOMER167 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER168 OFF;
ALTER TABLE CUSTOMER168 DROP CONSTRAINT CUSTOMER168CKC;
ALTER TABLE CUSTOMER168 ADD CONSTRAINT CUSTOMER168CKC CHECK (C_W_ID BETWEEN 267201 AND 268800);
SET INTEGRITY FOR CUSTOMER168 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER169 OFF;
ALTER TABLE CUSTOMER169 DROP CONSTRAINT CUSTOMER169CKC;
ALTER TABLE CUSTOMER169 ADD CONSTRAINT CUSTOMER169CKC CHECK (C_W_ID BETWEEN 268801 AND 270400);
SET INTEGRITY FOR CUSTOMER169 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER170 OFF;
ALTER TABLE CUSTOMER170 DROP CONSTRAINT CUSTOMER170CKC;
ALTER TABLE CUSTOMER170 ADD CONSTRAINT CUSTOMER170CKC CHECK (C_W_ID BETWEEN 270401 AND 272000);
SET INTEGRITY FOR CUSTOMER170 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER171 OFF;
ALTER TABLE CUSTOMER171 DROP CONSTRAINT CUSTOMER171CKC;
ALTER TABLE CUSTOMER171 ADD CONSTRAINT CUSTOMER171CKC CHECK (C_W_ID BETWEEN 272001 AND 273600);
SET INTEGRITY FOR CUSTOMER171 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER172 OFF;
ALTER TABLE CUSTOMER172 DROP CONSTRAINT CUSTOMER172CKC;
ALTER TABLE CUSTOMER172 ADD CONSTRAINT CUSTOMER172CKC CHECK (C_W_ID BETWEEN 273601 AND 275200);
SET INTEGRITY FOR CUSTOMER172 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER173 OFF;
ALTER TABLE CUSTOMER173 DROP CONSTRAINT CUSTOMER173CKC;
ALTER TABLE CUSTOMER173 ADD CONSTRAINT CUSTOMER173CKC CHECK (C_W_ID BETWEEN 275201 AND 276800);
SET INTEGRITY FOR CUSTOMER173 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER174 OFF;
ALTER TABLE CUSTOMER174 DROP CONSTRAINT CUSTOMER174CKC;
ALTER TABLE CUSTOMER174 ADD CONSTRAINT CUSTOMER174CKC CHECK (C_W_ID BETWEEN 276801 AND 278400);
SET INTEGRITY FOR CUSTOMER174 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER175 OFF;
ALTER TABLE CUSTOMER175 DROP CONSTRAINT CUSTOMER175CKC;
ALTER TABLE CUSTOMER175 ADD CONSTRAINT CUSTOMER175CKC CHECK (C_W_ID BETWEEN 278401 AND 280000);
SET INTEGRITY FOR CUSTOMER175 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER176 OFF;
ALTER TABLE CUSTOMER176 DROP CONSTRAINT CUSTOMER176CKC;
ALTER TABLE CUSTOMER176 ADD CONSTRAINT CUSTOMER176CKC CHECK (C_W_ID BETWEEN 280001 AND 281600);
SET INTEGRITY FOR CUSTOMER176 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER177 OFF;
ALTER TABLE CUSTOMER177 DROP CONSTRAINT CUSTOMER177CKC;
ALTER TABLE CUSTOMER177 ADD CONSTRAINT CUSTOMER177CKC CHECK (C_W_ID BETWEEN 281601 AND 283200);
SET INTEGRITY FOR CUSTOMER177 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER178 OFF;
ALTER TABLE CUSTOMER178 DROP CONSTRAINT CUSTOMER178CKC;
ALTER TABLE CUSTOMER178 ADD CONSTRAINT CUSTOMER178CKC CHECK (C_W_ID BETWEEN 283201 AND 284800);
SET INTEGRITY FOR CUSTOMER178 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER179 OFF;
ALTER TABLE CUSTOMER179 DROP CONSTRAINT CUSTOMER179CKC;
ALTER TABLE CUSTOMER179 ADD CONSTRAINT CUSTOMER179CKC CHECK (C_W_ID BETWEEN 284801 AND 286400);
SET INTEGRITY FOR CUSTOMER179 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER180 OFF;
ALTER TABLE CUSTOMER180 DROP CONSTRAINT CUSTOMER180CKC;
ALTER TABLE CUSTOMER180 ADD CONSTRAINT CUSTOMER180CKC CHECK (C_W_ID BETWEEN 286401 AND 288000);
SET INTEGRITY FOR CUSTOMER180 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER181 OFF;
ALTER TABLE CUSTOMER181 DROP CONSTRAINT CUSTOMER181CKC;
ALTER TABLE CUSTOMER181 ADD CONSTRAINT CUSTOMER181CKC CHECK (C_W_ID BETWEEN 288001 AND 289600);
SET INTEGRITY FOR CUSTOMER181 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER182 OFF;
ALTER TABLE CUSTOMER182 DROP CONSTRAINT CUSTOMER182CKC;
ALTER TABLE CUSTOMER182 ADD CONSTRAINT CUSTOMER182CKC CHECK (C_W_ID BETWEEN 289601 AND 291200);
SET INTEGRITY FOR CUSTOMER182 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER183 OFF;
ALTER TABLE CUSTOMER183 DROP CONSTRAINT CUSTOMER183CKC;
ALTER TABLE CUSTOMER183 ADD CONSTRAINT CUSTOMER183CKC CHECK (C_W_ID BETWEEN 291201 AND 292800);
SET INTEGRITY FOR CUSTOMER183 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER184 OFF;
ALTER TABLE CUSTOMER184 DROP CONSTRAINT CUSTOMER184CKC;
ALTER TABLE CUSTOMER184 ADD CONSTRAINT CUSTOMER184CKC CHECK (C_W_ID BETWEEN 292801 AND 294400);
SET INTEGRITY FOR CUSTOMER184 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER185 OFF;
ALTER TABLE CUSTOMER185 DROP CONSTRAINT CUSTOMER185CKC;
ALTER TABLE CUSTOMER185 ADD CONSTRAINT CUSTOMER185CKC CHECK (C_W_ID BETWEEN 294401 AND 296000);
SET INTEGRITY FOR CUSTOMER185 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER186 OFF;
ALTER TABLE CUSTOMER186 DROP CONSTRAINT CUSTOMER186CKC;
ALTER TABLE CUSTOMER186 ADD CONSTRAINT CUSTOMER186CKC CHECK (C_W_ID BETWEEN 296001 AND 297600);
SET INTEGRITY FOR CUSTOMER186 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER187 OFF;
ALTER TABLE CUSTOMER187 DROP CONSTRAINT CUSTOMER187CKC;
ALTER TABLE CUSTOMER187 ADD CONSTRAINT CUSTOMER187CKC CHECK (C_W_ID BETWEEN 297601 AND 299200);
SET INTEGRITY FOR CUSTOMER187 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER188 OFF;
ALTER TABLE CUSTOMER188 DROP CONSTRAINT CUSTOMER188CKC;
ALTER TABLE CUSTOMER188 ADD CONSTRAINT CUSTOMER188CKC CHECK (C_W_ID BETWEEN 299201 AND 300800);
SET INTEGRITY FOR CUSTOMER188 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER189 OFF;
ALTER TABLE CUSTOMER189 DROP CONSTRAINT CUSTOMER189CKC;
ALTER TABLE CUSTOMER189 ADD CONSTRAINT CUSTOMER189CKC CHECK (C_W_ID BETWEEN 300801 AND 302400);
```

```
SET INTEGRITY FOR CUSTOMER189 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER190 OFF;
ALTER TABLE CUSTOMER190 DROP CONSTRAINT CUSTOMER190CKC;
ALTER TABLE CUSTOMER190 ADD CONSTRAINT CUSTOMER190CKC CHECK (C_W_ID BETWEEN
302401 AND 304000);
SET INTEGRITY FOR CUSTOMER190 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER191 OFF;
ALTER TABLE CUSTOMER191 DROP CONSTRAINT CUSTOMER191CKC;
ALTER TABLE CUSTOMER191 ADD CONSTRAINT CUSTOMER191CKC CHECK (C_W_ID BETWEEN
304001 AND 305600);
SET INTEGRITY FOR CUSTOMER191 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER192 OFF;
ALTER TABLE CUSTOMER192 DROP CONSTRAINT CUSTOMER192CKC;
ALTER TABLE CUSTOMER192 ADD CONSTRAINT CUSTOMER192CKC CHECK (C_W_ID BETWEEN
305601 AND 307200);
SET INTEGRITY FOR CUSTOMER192 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER193 OFF;
ALTER TABLE CUSTOMER193 DROP CONSTRAINT CUSTOMER193CKC;
ALTER TABLE CUSTOMER193 ADD CONSTRAINT CUSTOMER193CKC CHECK (C_W_ID BETWEEN
307201 AND 308800);
SET INTEGRITY FOR CUSTOMER193 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER194 OFF;
ALTER TABLE CUSTOMER194 DROP CONSTRAINT CUSTOMER194CKC;
ALTER TABLE CUSTOMER194 ADD CONSTRAINT CUSTOMER194CKC CHECK (C_W_ID BETWEEN
308801 AND 310400);
SET INTEGRITY FOR CUSTOMER194 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER195 OFF;
ALTER TABLE CUSTOMER195 DROP CONSTRAINT CUSTOMER195CKC;
ALTER TABLE CUSTOMER195 ADD CONSTRAINT CUSTOMER195CKC CHECK (C_W_ID BETWEEN
310401 AND 312000);
SET INTEGRITY FOR CUSTOMER195 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER196 OFF;
ALTER TABLE CUSTOMER196 DROP CONSTRAINT CUSTOMER196CKC;
ALTER TABLE CUSTOMER196 ADD CONSTRAINT CUSTOMER196CKC CHECK (C_W_ID BETWEEN
312001 AND 313600);
SET INTEGRITY FOR CUSTOMER196 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER197 OFF;
ALTER TABLE CUSTOMER197 DROP CONSTRAINT CUSTOMER197CKC;
ALTER TABLE CUSTOMER197 ADD CONSTRAINT CUSTOMER197CKC CHECK (C_W_ID BETWEEN
313601 AND 315200);
SET INTEGRITY FOR CUSTOMER197 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER198 OFF;
ALTER TABLE CUSTOMER198 DROP CONSTRAINT CUSTOMER198CKC;
ALTER TABLE CUSTOMER198 ADD CONSTRAINT CUSTOMER198CKC CHECK (C_W_ID BETWEEN
315201 AND 316800);
SET INTEGRITY FOR CUSTOMER198 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER199 OFF;
ALTER TABLE CUSTOMER199 DROP CONSTRAINT CUSTOMER199CKC;
ALTER TABLE CUSTOMER199 ADD CONSTRAINT CUSTOMER199CKC CHECK (C_W_ID BETWEEN
316801 AND 318400);
SET INTEGRITY FOR CUSTOMER199 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR CUSTOMER200 OFF;
ALTER TABLE CUSTOMER200 DROP CONSTRAINT CUSTOMER200CKC;
ALTER TABLE CUSTOMER200 ADD CONSTRAINT CUSTOMER200CKC CHECK (C_W_ID >= 318401);
SET INTEGRITY FOR CUSTOMER200 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_DISTRICT.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT1 OFF;
ALTER TABLE DISTRICT1 DROP CONSTRAINT DISTRICT1CKC;
ALTER TABLE DISTRICT1 ADD CONSTRAINT DISTRICT1CKC CHECK (D_W_ID BETWEEN 1 AND
8000);
SET INTEGRITY FOR DISTRICT1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT2 OFF;
ALTER TABLE DISTRICT2 DROP CONSTRAINT DISTRICT2CKC;
ALTER TABLE DISTRICT2 ADD CONSTRAINT DISTRICT2CKC CHECK (D_W_ID BETWEEN 8001 AND
16000);
SET INTEGRITY FOR DISTRICT2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT3 OFF;
ALTER TABLE DISTRICT3 DROP CONSTRAINT DISTRICT3CKC;
ALTER TABLE DISTRICT3 ADD CONSTRAINT DISTRICT3CKC CHECK (D_W_ID BETWEEN 16001
AND 24000);
SET INTEGRITY FOR DISTRICT3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT4 OFF;
ALTER TABLE DISTRICT4 DROP CONSTRAINT DISTRICT4CKC;
ALTER TABLE DISTRICT4 ADD CONSTRAINT DISTRICT4CKC CHECK (D_W_ID BETWEEN 24001
AND 32000);
SET INTEGRITY FOR DISTRICT4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT5 OFF;
ALTER TABLE DISTRICT5 DROP CONSTRAINT DISTRICT5CKC;
ALTER TABLE DISTRICT5 ADD CONSTRAINT DISTRICT5CKC CHECK (D_W_ID BETWEEN 32001
AND 40000);
SET INTEGRITY FOR DISTRICT5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT6 OFF;
ALTER TABLE DISTRICT6 DROP CONSTRAINT DISTRICT6CKC;
ALTER TABLE DISTRICT6 ADD CONSTRAINT DISTRICT6CKC CHECK (D_W_ID BETWEEN 40001
AND 48000);
SET INTEGRITY FOR DISTRICT6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT7 OFF;
ALTER TABLE DISTRICT7 DROP CONSTRAINT DISTRICT7CKC;
ALTER TABLE DISTRICT7 ADD CONSTRAINT DISTRICT7CKC CHECK (D_W_ID BETWEEN 48001
AND 56000);
SET INTEGRITY FOR DISTRICT7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT8 OFF;
ALTER TABLE DISTRICT8 DROP CONSTRAINT DISTRICT8CKC;
ALTER TABLE DISTRICT8 ADD CONSTRAINT DISTRICT8CKC CHECK (D_W_ID BETWEEN 56001
AND 64000);
SET INTEGRITY FOR DISTRICT8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT9 OFF;
ALTER TABLE DISTRICT9 DROP CONSTRAINT DISTRICT9CKC;
ALTER TABLE DISTRICT9 ADD CONSTRAINT DISTRICT9CKC CHECK (D_W_ID BETWEEN 64001
AND 72000);
SET INTEGRITY FOR DISTRICT9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT10 OFF;
ALTER TABLE DISTRICT10 DROP CONSTRAINT DISTRICT10CKC;
ALTER TABLE DISTRICT10 ADD CONSTRAINT DISTRICT10CKC CHECK (D_W_ID BETWEEN 72001
AND 80000);
SET INTEGRITY FOR DISTRICT10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT11 OFF;
ALTER TABLE DISTRICT11 DROP CONSTRAINT DISTRICT11CKC;
ALTER TABLE DISTRICT11 ADD CONSTRAINT DISTRICT11CKC CHECK (D_W_ID BETWEEN 80001
AND 88000);
SET INTEGRITY FOR DISTRICT11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT12 OFF;
ALTER TABLE DISTRICT12 DROP CONSTRAINT DISTRICT12CKC;
ALTER TABLE DISTRICT12 ADD CONSTRAINT DISTRICT12CKC CHECK (D_W_ID BETWEEN 88001
AND 96000);
SET INTEGRITY FOR DISTRICT12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT13 OFF;
ALTER TABLE DISTRICT13 DROP CONSTRAINT DISTRICT13CKC;
ALTER TABLE DISTRICT13 ADD CONSTRAINT DISTRICT13CKC CHECK (D_W_ID BETWEEN 96001
AND 104000);
SET INTEGRITY FOR DISTRICT13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT14 OFF;
ALTER TABLE DISTRICT14 DROP CONSTRAINT DISTRICT14CKC;
ALTER TABLE DISTRICT14 ADD CONSTRAINT DISTRICT14CKC CHECK (D_W_ID BETWEEN 104001
AND 112000);
SET INTEGRITY FOR DISTRICT14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT15 OFF;
ALTER TABLE DISTRICT15 DROP CONSTRAINT DISTRICT15CKC;
ALTER TABLE DISTRICT15 ADD CONSTRAINT DISTRICT15CKC CHECK (D_W_ID BETWEEN 112001
AND 120000);
SET INTEGRITY FOR DISTRICT15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT16 OFF;
ALTER TABLE DISTRICT16 DROP CONSTRAINT DISTRICT16CKC;
ALTER TABLE DISTRICT16 ADD CONSTRAINT DISTRICT16CKC CHECK (D_W_ID BETWEEN 120001
AND 128000);
SET INTEGRITY FOR DISTRICT16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT17 OFF;
ALTER TABLE DISTRICT17 DROP CONSTRAINT DISTRICT17CKC;
ALTER TABLE DISTRICT17 ADD CONSTRAINT DISTRICT17CKC CHECK (D_W_ID BETWEEN 128001
AND 136000);
SET INTEGRITY FOR DISTRICT17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT18 OFF;
ALTER TABLE DISTRICT18 DROP CONSTRAINT DISTRICT18CKC;
ALTER TABLE DISTRICT18 ADD CONSTRAINT DISTRICT18CKC CHECK (D_W_ID BETWEEN 136001
AND 144000);
SET INTEGRITY FOR DISTRICT18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT19 OFF;
ALTER TABLE DISTRICT19 DROP CONSTRAINT DISTRICT19CKC;
ALTER TABLE DISTRICT19 ADD CONSTRAINT DISTRICT19CKC CHECK (D_W_ID BETWEEN 144001
AND 152000);
SET INTEGRITY FOR DISTRICT19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT20 OFF;
```

```
ALTER TABLE DISTRICT20 DROP CONSTRAINT DISTRICT20CKC;
ALTER TABLE DISTRICT20 ADD CONSTRAINT DISTRICT20CKC CHECK (D_W_ID BETWEEN 152001
AND 160000);
SET INTEGRITY FOR DISTRICT20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT21 OFF;
ALTER TABLE DISTRICT21 DROP CONSTRAINT DISTRICT21CKC;
ALTER TABLE DISTRICT21 ADD CONSTRAINT DISTRICT21CKC CHECK (D_W_ID BETWEEN 160001
AND 168000);
SET INTEGRITY FOR DISTRICT21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT22 OFF;
ALTER TABLE DISTRICT22 DROP CONSTRAINT DISTRICT22CKC;
ALTER TABLE DISTRICT22 ADD CONSTRAINT DISTRICT22CKC CHECK (D_W_ID BETWEEN 168001
AND 176000);
SET INTEGRITY FOR DISTRICT22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT23 OFF;
ALTER TABLE DISTRICT23 DROP CONSTRAINT DISTRICT23CKC;
ALTER TABLE DISTRICT23 ADD CONSTRAINT DISTRICT23CKC CHECK (D_W_ID BETWEEN 176001
AND 184000);
SET INTEGRITY FOR DISTRICT23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT24 OFF;
ALTER TABLE DISTRICT24 DROP CONSTRAINT DISTRICT24CKC;
ALTER TABLE DISTRICT24 ADD CONSTRAINT DISTRICT24CKC CHECK (D_W_ID BETWEEN 184001
AND 192000);
SET INTEGRITY FOR DISTRICT24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT25 OFF;
ALTER TABLE DISTRICT25 DROP CONSTRAINT DISTRICT25CKC;
ALTER TABLE DISTRICT25 ADD CONSTRAINT DISTRICT25CKC CHECK (D_W_ID BETWEEN 192001
AND 200000);
SET INTEGRITY FOR DISTRICT25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT26 OFF;
ALTER TABLE DISTRICT26 DROP CONSTRAINT DISTRICT26CKC;
ALTER TABLE DISTRICT26 ADD CONSTRAINT DISTRICT26CKC CHECK (D_W_ID BETWEEN 200001
AND 208000);
SET INTEGRITY FOR DISTRICT26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT27 OFF;
ALTER TABLE DISTRICT27 DROP CONSTRAINT DISTRICT27CKC;
ALTER TABLE DISTRICT27 ADD CONSTRAINT DISTRICT27CKC CHECK (D_W_ID BETWEEN 208001
AND 216000);
SET INTEGRITY FOR DISTRICT27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT28 OFF;
ALTER TABLE DISTRICT28 DROP CONSTRAINT DISTRICT28CKC;
ALTER TABLE DISTRICT28 ADD CONSTRAINT DISTRICT28CKC CHECK (D_W_ID BETWEEN 216001
AND 224000);
SET INTEGRITY FOR DISTRICT28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT29 OFF;
ALTER TABLE DISTRICT29 DROP CONSTRAINT DISTRICT29CKC;
ALTER TABLE DISTRICT29 ADD CONSTRAINT DISTRICT29CKC CHECK (D_W_ID BETWEEN 224001
AND 232000);
SET INTEGRITY FOR DISTRICT29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT30 OFF;
ALTER TABLE DISTRICT30 DROP CONSTRAINT DISTRICT30CKC;
ALTER TABLE DISTRICT30 ADD CONSTRAINT DISTRICT30CKC CHECK (D_W_ID BETWEEN 232001
AND 240000);
SET INTEGRITY FOR DISTRICT30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT31 OFF;
ALTER TABLE DISTRICT31 DROP CONSTRAINT DISTRICT31CKC;
ALTER TABLE DISTRICT31 ADD CONSTRAINT DISTRICT31CKC CHECK (D_W_ID BETWEEN 240001
AND 248000);
SET INTEGRITY FOR DISTRICT31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT32 OFF;
ALTER TABLE DISTRICT32 DROP CONSTRAINT DISTRICT32CKC;
ALTER TABLE DISTRICT32 ADD CONSTRAINT DISTRICT32CKC CHECK (D_W_ID BETWEEN 248001
AND 256000);
SET INTEGRITY FOR DISTRICT32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT33 OFF;
ALTER TABLE DISTRICT33 DROP CONSTRAINT DISTRICT33CKC;
ALTER TABLE DISTRICT33 ADD CONSTRAINT DISTRICT33CKC CHECK (D_W_ID BETWEEN 256001
AND 264000);
SET INTEGRITY FOR DISTRICT33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT34 OFF;
ALTER TABLE DISTRICT34 DROP CONSTRAINT DISTRICT34CKC;
ALTER TABLE DISTRICT34 ADD CONSTRAINT DISTRICT34CKC CHECK (D_W_ID BETWEEN 264001
AND 272000);
SET INTEGRITY FOR DISTRICT34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT35 OFF;
ALTER TABLE DISTRICT35 DROP CONSTRAINT DISTRICT35CKC;
ALTER TABLE DISTRICT35 ADD CONSTRAINT DISTRICT35CKC CHECK (D_W_ID BETWEEN 272001
AND 280000);
SET INTEGRITY FOR DISTRICT35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT36 OFF;
ALTER TABLE DISTRICT36 DROP CONSTRAINT DISTRICT36CKC;
ALTER TABLE DISTRICT36 ADD CONSTRAINT DISTRICT36CKC CHECK (D_W_ID BETWEEN 280001
AND 288000);
SET INTEGRITY FOR DISTRICT36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT37 OFF;
ALTER TABLE DISTRICT37 DROP CONSTRAINT DISTRICT37CKC;
ALTER TABLE DISTRICT37 ADD CONSTRAINT DISTRICT37CKC CHECK (D_W_ID BETWEEN 288001
AND 296000);
SET INTEGRITY FOR DISTRICT37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT38 OFF;
ALTER TABLE DISTRICT38 DROP CONSTRAINT DISTRICT38CKC;
ALTER TABLE DISTRICT38 ADD CONSTRAINT DISTRICT38CKC CHECK (D_W_ID BETWEEN 296001
AND 304000);
SET INTEGRITY FOR DISTRICT38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT39 OFF;
ALTER TABLE DISTRICT39 DROP CONSTRAINT DISTRICT39CKC;
ALTER TABLE DISTRICT39 ADD CONSTRAINT DISTRICT39CKC CHECK (D_W_ID BETWEEN 304001
AND 312000);
SET INTEGRITY FOR DISTRICT39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR DISTRICT40 OFF;
ALTER TABLE DISTRICT40 DROP CONSTRAINT DISTRICT40CKC;
ALTER TABLE DISTRICT40 ADD CONSTRAINT DISTRICT40CKC CHECK (D_W_ID >= 312001);
SET INTEGRITY FOR DISTRICT40 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_HISTORY.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY1 OFF;
ALTER TABLE HISTORY1 DROP CONSTRAINT HISTORY1CKC;
ALTER TABLE HISTORY1 ADD CONSTRAINT HISTORY1CKC CHECK (H_W_ID BETWEEN 1 AND
8000);
SET INTEGRITY FOR HISTORY1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY2 OFF;
ALTER TABLE HISTORY2 DROP CONSTRAINT HISTORY2CKC;
ALTER TABLE HISTORY2 ADD CONSTRAINT HISTORY2CKC CHECK (H_W_ID BETWEEN 8001 AND
16000);
SET INTEGRITY FOR HISTORY2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY3 OFF;
ALTER TABLE HISTORY3 DROP CONSTRAINT HISTORY3CKC;
ALTER TABLE HISTORY3 ADD CONSTRAINT HISTORY3CKC CHECK (H_W_ID BETWEEN 16001
AND 24000);
SET INTEGRITY FOR HISTORY3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY4 OFF;
ALTER TABLE HISTORY4 DROP CONSTRAINT HISTORY4CKC;
ALTER TABLE HISTORY4 ADD CONSTRAINT HISTORY4CKC CHECK (H_W_ID BETWEEN 24001
AND 32000);
SET INTEGRITY FOR HISTORY4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY5 OFF;
ALTER TABLE HISTORY5 DROP CONSTRAINT HISTORY5CKC;
ALTER TABLE HISTORY5 ADD CONSTRAINT HISTORY5CKC CHECK (H_W_ID BETWEEN 32001
AND 40000);
SET INTEGRITY FOR HISTORY5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY6 OFF;
ALTER TABLE HISTORY6 DROP CONSTRAINT HISTORY6CKC;
ALTER TABLE HISTORY6 ADD CONSTRAINT HISTORY6CKC CHECK (H_W_ID BETWEEN 40001
AND 48000);
SET INTEGRITY FOR HISTORY6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY7 OFF;
ALTER TABLE HISTORY7 DROP CONSTRAINT HISTORY7CKC;
ALTER TABLE HISTORY7 ADD CONSTRAINT HISTORY7CKC CHECK (H_W_ID BETWEEN 48001
AND 56000);
SET INTEGRITY FOR HISTORY7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY8 OFF;
ALTER TABLE HISTORY8 DROP CONSTRAINT HISTORY8CKC;
ALTER TABLE HISTORY8 ADD CONSTRAINT HISTORY8CKC CHECK (H_W_ID BETWEEN 56001
AND 64000);
SET INTEGRITY FOR HISTORY8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY9 OFF;
ALTER TABLE HISTORY9 DROP CONSTRAINT HISTORY9CKC;
ALTER TABLE HISTORY9 ADD CONSTRAINT HISTORY9CKC CHECK (H_W_ID BETWEEN 64001
AND 72000);
SET INTEGRITY FOR HISTORY9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY10 OFF;
ALTER TABLE HISTORY10 DROP CONSTRAINT HISTORY10CKC;
ALTER TABLE HISTORY10 ADD CONSTRAINT HISTORY10CKC CHECK (H_W_ID BETWEEN 72001
AND 80000);
SET INTEGRITY FOR HISTORY10 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY11 OFF;
ALTER TABLE HISTORY11 DROP CONSTRAINT HISTORY11CKC;
ALTER TABLE HISTORY11 ADD CONSTRAINT HISTORY11CKC CHECK (H_W_ID BETWEEN 80001
AND 88000);
SET INTEGRITY FOR HISTORY11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY12 OFF;
ALTER TABLE HISTORY12 DROP CONSTRAINT HISTORY12CKC;
ALTER TABLE HISTORY12 ADD CONSTRAINT HISTORY12CKC CHECK (H_W_ID BETWEEN 88001
AND 96000);
SET INTEGRITY FOR HISTORY12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY13 OFF;
ALTER TABLE HISTORY13 DROP CONSTRAINT HISTORY13CKC;
ALTER TABLE HISTORY13 ADD CONSTRAINT HISTORY13CKC CHECK (H_W_ID BETWEEN 96001
AND 104000);
SET INTEGRITY FOR HISTORY13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY14 OFF;
ALTER TABLE HISTORY14 DROP CONSTRAINT HISTORY14CKC;
ALTER TABLE HISTORY14 ADD CONSTRAINT HISTORY14CKC CHECK (H_W_ID BETWEEN 104001
AND 112000);
SET INTEGRITY FOR HISTORY14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY15 OFF;
ALTER TABLE HISTORY15 DROP CONSTRAINT HISTORY15CKC;
ALTER TABLE HISTORY15 ADD CONSTRAINT HISTORY15CKC CHECK (H_W_ID BETWEEN 112001
AND 120000);
SET INTEGRITY FOR HISTORY15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY16 OFF;
ALTER TABLE HISTORY16 DROP CONSTRAINT HISTORY16CKC;
ALTER TABLE HISTORY16 ADD CONSTRAINT HISTORY16CKC CHECK (H_W_ID BETWEEN 120001
AND 128000);
SET INTEGRITY FOR HISTORY16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY17 OFF;
ALTER TABLE HISTORY17 DROP CONSTRAINT HISTORY17CKC;
ALTER TABLE HISTORY17 ADD CONSTRAINT HISTORY17CKC CHECK (H_W_ID BETWEEN 128001
AND 136000);
SET INTEGRITY FOR HISTORY17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY18 OFF;
ALTER TABLE HISTORY18 DROP CONSTRAINT HISTORY18CKC;
ALTER TABLE HISTORY18 ADD CONSTRAINT HISTORY18CKC CHECK (H_W_ID BETWEEN 136001
AND 144000);
SET INTEGRITY FOR HISTORY18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY19 OFF;
ALTER TABLE HISTORY19 DROP CONSTRAINT HISTORY19CKC;
ALTER TABLE HISTORY19 ADD CONSTRAINT HISTORY19CKC CHECK (H_W_ID BETWEEN 144001
AND 152000);
SET INTEGRITY FOR HISTORY19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY20 OFF;
ALTER TABLE HISTORY20 DROP CONSTRAINT HISTORY20CKC;
ALTER TABLE HISTORY20 ADD CONSTRAINT HISTORY20CKC CHECK (H_W_ID BETWEEN 152001
AND 160000);
SET INTEGRITY FOR HISTORY20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY21 OFF;
ALTER TABLE HISTORY21 DROP CONSTRAINT HISTORY21CKC;
ALTER TABLE HISTORY21 ADD CONSTRAINT HISTORY21CKC CHECK (H_W_ID BETWEEN 160001
AND 168000);
SET INTEGRITY FOR HISTORY21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY22 OFF;
ALTER TABLE HISTORY22 DROP CONSTRAINT HISTORY22CKC;
ALTER TABLE HISTORY22 ADD CONSTRAINT HISTORY22CKC CHECK (H_W_ID BETWEEN 168001
AND 176000);
SET INTEGRITY FOR HISTORY22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY23 OFF;
ALTER TABLE HISTORY23 DROP CONSTRAINT HISTORY23CKC;
ALTER TABLE HISTORY23 ADD CONSTRAINT HISTORY23CKC CHECK (H_W_ID BETWEEN 176001
AND 184000);
SET INTEGRITY FOR HISTORY23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY24 OFF;
ALTER TABLE HISTORY24 DROP CONSTRAINT HISTORY24CKC;
ALTER TABLE HISTORY24 ADD CONSTRAINT HISTORY24CKC CHECK (H_W_ID BETWEEN 184001
AND 192000);
SET INTEGRITY FOR HISTORY24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY25 OFF;
ALTER TABLE HISTORY25 DROP CONSTRAINT HISTORY25CKC;
ALTER TABLE HISTORY25 ADD CONSTRAINT HISTORY25CKC CHECK (H_W_ID BETWEEN 192001
AND 200000);
SET INTEGRITY FOR HISTORY25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY26 OFF;
ALTER TABLE HISTORY26 DROP CONSTRAINT HISTORY26CKC;
ALTER TABLE HISTORY26 ADD CONSTRAINT HISTORY26CKC CHECK (H_W_ID BETWEEN 200001
AND 208000);
SET INTEGRITY FOR HISTORY26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY27 OFF;
ALTER TABLE HISTORY27 DROP CONSTRAINT HISTORY27CKC;
ALTER TABLE HISTORY27 ADD CONSTRAINT HISTORY27CKC CHECK (H_W_ID BETWEEN 208001
AND 216000);
SET INTEGRITY FOR HISTORY27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY28 OFF;
ALTER TABLE HISTORY28 DROP CONSTRAINT HISTORY28CKC;
ALTER TABLE HISTORY28 ADD CONSTRAINT HISTORY28CKC CHECK (H_W_ID BETWEEN 216001
AND 224000);
SET INTEGRITY FOR HISTORY28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY29 OFF;
ALTER TABLE HISTORY29 DROP CONSTRAINT HISTORY29CKC;
ALTER TABLE HISTORY29 ADD CONSTRAINT HISTORY29CKC CHECK (H_W_ID BETWEEN 224001
AND 232000);
SET INTEGRITY FOR HISTORY29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY30 OFF;
ALTER TABLE HISTORY30 DROP CONSTRAINT HISTORY30CKC;
ALTER TABLE HISTORY30 ADD CONSTRAINT HISTORY30CKC CHECK (H_W_ID BETWEEN 232001
AND 240000);
SET INTEGRITY FOR HISTORY30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY31 OFF;
ALTER TABLE HISTORY31 DROP CONSTRAINT HISTORY31CKC;
ALTER TABLE HISTORY31 ADD CONSTRAINT HISTORY31CKC CHECK (H_W_ID BETWEEN 240001
AND 248000);
SET INTEGRITY FOR HISTORY31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY32 OFF;
ALTER TABLE HISTORY32 DROP CONSTRAINT HISTORY32CKC;
ALTER TABLE HISTORY32 ADD CONSTRAINT HISTORY32CKC CHECK (H_W_ID BETWEEN 248001
AND 256000);
SET INTEGRITY FOR HISTORY32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY33 OFF;
ALTER TABLE HISTORY33 DROP CONSTRAINT HISTORY33CKC;
ALTER TABLE HISTORY33 ADD CONSTRAINT HISTORY33CKC CHECK (H_W_ID BETWEEN 256001
AND 264000);
SET INTEGRITY FOR HISTORY33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY34 OFF;
ALTER TABLE HISTORY34 DROP CONSTRAINT HISTORY34CKC;
ALTER TABLE HISTORY34 ADD CONSTRAINT HISTORY34CKC CHECK (H_W_ID BETWEEN 264001
AND 272000);
SET INTEGRITY FOR HISTORY34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY35 OFF;
ALTER TABLE HISTORY35 DROP CONSTRAINT HISTORY35CKC;
ALTER TABLE HISTORY35 ADD CONSTRAINT HISTORY35CKC CHECK (H_W_ID BETWEEN 272001
AND 280000);
SET INTEGRITY FOR HISTORY35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY36 OFF;
ALTER TABLE HISTORY36 DROP CONSTRAINT HISTORY36CKC;
ALTER TABLE HISTORY36 ADD CONSTRAINT HISTORY36CKC CHECK (H_W_ID BETWEEN 280001
AND 288000);
SET INTEGRITY FOR HISTORY36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY37 OFF;
ALTER TABLE HISTORY37 DROP CONSTRAINT HISTORY37CKC;
ALTER TABLE HISTORY37 ADD CONSTRAINT HISTORY37CKC CHECK (H_W_ID BETWEEN 288001
AND 296000);
SET INTEGRITY FOR HISTORY37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY38 OFF;
ALTER TABLE HISTORY38 DROP CONSTRAINT HISTORY38CKC;
ALTER TABLE HISTORY38 ADD CONSTRAINT HISTORY38CKC CHECK (H_W_ID BETWEEN 296001
AND 304000);
SET INTEGRITY FOR HISTORY38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY39 OFF;
ALTER TABLE HISTORY39 DROP CONSTRAINT HISTORY39CKC;
ALTER TABLE HISTORY39 ADD CONSTRAINT HISTORY39CKC CHECK (H_W_ID BETWEEN 304001
AND 312000);
SET INTEGRITY FOR HISTORY39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR HISTORY40 OFF;
ALTER TABLE HISTORY40 DROP CONSTRAINT HISTORY40CKC;
ALTER TABLE HISTORY40 ADD CONSTRAINT HISTORY40CKC CHECK (H_W_ID >= 312001);
SET INTEGRITY FOR HISTORY40 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_NEW_ORDERA.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA1 OFF;
ALTER TABLE NEW_ORDERA1 DROP CONSTRAINT NEW_ORDERA1CKC;
```

```
ALTER TABLE NEW_ORDERA1 ADD CONSTRAINT NEW_ORDERA1CKC CHECK ((NO_W_ID
BETWEEN 1 AND 8000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA2 OFF;
ALTER TABLE NEW_ORDERA2 DROP CONSTRAINT NEW_ORDERA2CKC;
ALTER TABLE NEW_ORDERA2 ADD CONSTRAINT NEW_ORDERA2CKC CHECK ((NO_W_ID
BETWEEN 8001 AND 16000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA3 OFF;
ALTER TABLE NEW_ORDERA3 DROP CONSTRAINT NEW_ORDERA3CKC;
ALTER TABLE NEW_ORDERA3 ADD CONSTRAINT NEW_ORDERA3CKC CHECK ((NO_W_ID
BETWEEN 16001 AND 24000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA4 OFF;
ALTER TABLE NEW_ORDERA4 DROP CONSTRAINT NEW_ORDERA4CKC;
ALTER TABLE NEW_ORDERA4 ADD CONSTRAINT NEW_ORDERA4CKC CHECK ((NO_W_ID
BETWEEN 24001 AND 32000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA5 OFF;
ALTER TABLE NEW_ORDERA5 DROP CONSTRAINT NEW_ORDERA5CKC;
ALTER TABLE NEW_ORDERA5 ADD CONSTRAINT NEW_ORDERA5CKC CHECK ((NO_W_ID
BETWEEN 32001 AND 40000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA6 OFF;
ALTER TABLE NEW_ORDERA6 DROP CONSTRAINT NEW_ORDERA6CKC;
ALTER TABLE NEW_ORDERA6 ADD CONSTRAINT NEW_ORDERA6CKC CHECK ((NO_W_ID
BETWEEN 40001 AND 48000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA7 OFF;
ALTER TABLE NEW_ORDERA7 DROP CONSTRAINT NEW_ORDERA7CKC;
ALTER TABLE NEW_ORDERA7 ADD CONSTRAINT NEW_ORDERA7CKC CHECK ((NO_W_ID
BETWEEN 48001 AND 56000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA8 OFF;
ALTER TABLE NEW_ORDERA8 DROP CONSTRAINT NEW_ORDERA8CKC;
ALTER TABLE NEW_ORDERA8 ADD CONSTRAINT NEW_ORDERA8CKC CHECK ((NO_W_ID
BETWEEN 56001 AND 64000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA9 OFF;
ALTER TABLE NEW_ORDERA9 DROP CONSTRAINT NEW_ORDERA9CKC;
ALTER TABLE NEW_ORDERA9 ADD CONSTRAINT NEW_ORDERA9CKC CHECK ((NO_W_ID
BETWEEN 64001 AND 72000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA10 OFF;
ALTER TABLE NEW_ORDERA10 DROP CONSTRAINT NEW_ORDERA10CKC;
ALTER TABLE NEW_ORDERA10 ADD CONSTRAINT NEW_ORDERA10CKC CHECK ((NO_W_ID
BETWEEN 72001 AND 80000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA11 OFF;
ALTER TABLE NEW_ORDERA11 DROP CONSTRAINT NEW_ORDERA11CKC;
ALTER TABLE NEW_ORDERA11 ADD CONSTRAINT NEW_ORDERA11CKC CHECK ((NO_W_ID
BETWEEN 80001 AND 88000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA12 OFF;
ALTER TABLE NEW_ORDERA12 DROP CONSTRAINT NEW_ORDERA12CKC;
ALTER TABLE NEW_ORDERA12 ADD CONSTRAINT NEW_ORDERA12CKC CHECK ((NO_W_ID
BETWEEN 88001 AND 96000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA13 OFF;
ALTER TABLE NEW_ORDERA13 DROP CONSTRAINT NEW_ORDERA13CKC;
ALTER TABLE NEW_ORDERA13 ADD CONSTRAINT NEW_ORDERA13CKC CHECK ((NO_W_ID
BETWEEN 96001 AND 104000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA14 OFF;
ALTER TABLE NEW_ORDERA14 DROP CONSTRAINT NEW_ORDERA14CKC;
ALTER TABLE NEW_ORDERA14 ADD CONSTRAINT NEW_ORDERA14CKC CHECK ((NO_W_ID
BETWEEN 104001 AND 112000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA15 OFF;
ALTER TABLE NEW_ORDERA15 DROP CONSTRAINT NEW_ORDERA15CKC;
ALTER TABLE NEW_ORDERA15 ADD CONSTRAINT NEW_ORDERA15CKC CHECK ((NO_W_ID
BETWEEN 112001 AND 120000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA16 OFF;
ALTER TABLE NEW_ORDERA16 DROP CONSTRAINT NEW_ORDERA16CKC;
ALTER TABLE NEW_ORDERA16 ADD CONSTRAINT NEW_ORDERA16CKC CHECK ((NO_W_ID
BETWEEN 120001 AND 128000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA17 OFF;
ALTER TABLE NEW_ORDERA17 DROP CONSTRAINT NEW_ORDERA17CKC;
ALTER TABLE NEW_ORDERA17 ADD CONSTRAINT NEW_ORDERA17CKC CHECK ((NO_W_ID
BETWEEN 128001 AND 136000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA18 OFF;
ALTER TABLE NEW_ORDERA18 DROP CONSTRAINT NEW_ORDERA18CKC;
ALTER TABLE NEW_ORDERA18 ADD CONSTRAINT NEW_ORDERA18CKC CHECK ((NO_W_ID
BETWEEN 136001 AND 144000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA19 OFF;
ALTER TABLE NEW_ORDERA19 DROP CONSTRAINT NEW_ORDERA19CKC;
ALTER TABLE NEW_ORDERA19 ADD CONSTRAINT NEW_ORDERA19CKC CHECK ((NO_W_ID
BETWEEN 144001 AND 152000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA20 OFF;
ALTER TABLE NEW_ORDERA20 DROP CONSTRAINT NEW_ORDERA20CKC;
ALTER TABLE NEW_ORDERA20 ADD CONSTRAINT NEW_ORDERA20CKC CHECK ((NO_W_ID
BETWEEN 152001 AND 160000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA21 OFF;
ALTER TABLE NEW_ORDERA21 DROP CONSTRAINT NEW_ORDERA21CKC;
ALTER TABLE NEW_ORDERA21 ADD CONSTRAINT NEW_ORDERA21CKC CHECK ((NO_W_ID
BETWEEN 160001 AND 168000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA22 OFF;
ALTER TABLE NEW_ORDERA22 DROP CONSTRAINT NEW_ORDERA22CKC;
ALTER TABLE NEW_ORDERA22 ADD CONSTRAINT NEW_ORDERA22CKC CHECK ((NO_W_ID
BETWEEN 168001 AND 176000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA23 OFF;
ALTER TABLE NEW_ORDERA23 DROP CONSTRAINT NEW_ORDERA23CKC;
ALTER TABLE NEW_ORDERA23 ADD CONSTRAINT NEW_ORDERA23CKC CHECK ((NO_W_ID
BETWEEN 176001 AND 184000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA24 OFF;
ALTER TABLE NEW_ORDERA24 DROP CONSTRAINT NEW_ORDERA24CKC;
ALTER TABLE NEW_ORDERA24 ADD CONSTRAINT NEW_ORDERA24CKC CHECK ((NO_W_ID
BETWEEN 184001 AND 192000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA25 OFF;
ALTER TABLE NEW_ORDERA25 DROP CONSTRAINT NEW_ORDERA25CKC;
ALTER TABLE NEW_ORDERA25 ADD CONSTRAINT NEW_ORDERA25CKC CHECK ((NO_W_ID
BETWEEN 192001 AND 200000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA26 OFF;
ALTER TABLE NEW_ORDERA26 DROP CONSTRAINT NEW_ORDERA26CKC;
ALTER TABLE NEW_ORDERA26 ADD CONSTRAINT NEW_ORDERA26CKC CHECK ((NO_W_ID
BETWEEN 200001 AND 208000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA27 OFF;
ALTER TABLE NEW_ORDERA27 DROP CONSTRAINT NEW_ORDERA27CKC;
ALTER TABLE NEW_ORDERA27 ADD CONSTRAINT NEW_ORDERA27CKC CHECK ((NO_W_ID
BETWEEN 208001 AND 216000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA28 OFF;
ALTER TABLE NEW_ORDERA28 DROP CONSTRAINT NEW_ORDERA28CKC;
ALTER TABLE NEW_ORDERA28 ADD CONSTRAINT NEW_ORDERA28CKC CHECK ((NO_W_ID
BETWEEN 216001 AND 224000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA29 OFF;
ALTER TABLE NEW_ORDERA29 DROP CONSTRAINT NEW_ORDERA29CKC;
ALTER TABLE NEW_ORDERA29 ADD CONSTRAINT NEW_ORDERA29CKC CHECK ((NO_W_ID
BETWEEN 224001 AND 232000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA30 OFF;
ALTER TABLE NEW_ORDERA30 DROP CONSTRAINT NEW_ORDERA30CKC;
ALTER TABLE NEW_ORDERA30 ADD CONSTRAINT NEW_ORDERA30CKC CHECK ((NO_W_ID
BETWEEN 232001 AND 240000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA31 OFF;
ALTER TABLE NEW_ORDERA31 DROP CONSTRAINT NEW_ORDERA31CKC;
ALTER TABLE NEW_ORDERA31 ADD CONSTRAINT NEW_ORDERA31CKC CHECK ((NO_W_ID
BETWEEN 240001 AND 248000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA32 OFF;
ALTER TABLE NEW_ORDERA32 DROP CONSTRAINT NEW_ORDERA32CKC;
ALTER TABLE NEW_ORDERA32 ADD CONSTRAINT NEW_ORDERA32CKC CHECK ((NO_W_ID
BETWEEN 248001 AND 256000) AND (NO_O_ID <= 3675));
```

```
SET INTEGRITY FOR NEW_ORDERA32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA33 OFF;
ALTER TABLE NEW_ORDERA33 DROP CONSTRAINT NEW_ORDERA33CKC;
ALTER TABLE NEW_ORDERA33 ADD CONSTRAINT NEW_ORDERA33CKC CHECK ((NO_W_ID
BETWEEN 256001 AND 264000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA34 OFF;
ALTER TABLE NEW_ORDERA34 DROP CONSTRAINT NEW_ORDERA34CKC;
ALTER TABLE NEW_ORDERA34 ADD CONSTRAINT NEW_ORDERA34CKC CHECK ((NO_W_ID
BETWEEN 264001 AND 272000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA35 OFF;
ALTER TABLE NEW_ORDERA35 DROP CONSTRAINT NEW_ORDERA35CKC;
ALTER TABLE NEW_ORDERA35 ADD CONSTRAINT NEW_ORDERA35CKC CHECK ((NO_W_ID
BETWEEN 272001 AND 280000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA36 OFF;
ALTER TABLE NEW_ORDERA36 DROP CONSTRAINT NEW_ORDERA36CKC;
ALTER TABLE NEW_ORDERA36 ADD CONSTRAINT NEW_ORDERA36CKC CHECK ((NO_W_ID
BETWEEN 280001 AND 288000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA37 OFF;
ALTER TABLE NEW_ORDERA37 DROP CONSTRAINT NEW_ORDERA37CKC;
ALTER TABLE NEW_ORDERA37 ADD CONSTRAINT NEW_ORDERA37CKC CHECK ((NO_W_ID
BETWEEN 288001 AND 296000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA38 OFF;
ALTER TABLE NEW_ORDERA38 DROP CONSTRAINT NEW_ORDERA38CKC;
ALTER TABLE NEW_ORDERA38 ADD CONSTRAINT NEW_ORDERA38CKC CHECK ((NO_W_ID
BETWEEN 296001 AND 304000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA39 OFF;
ALTER TABLE NEW_ORDERA39 DROP CONSTRAINT NEW_ORDERA39CKC;
ALTER TABLE NEW_ORDERA39 ADD CONSTRAINT NEW_ORDERA39CKC CHECK ((NO_W_ID
BETWEEN 304001 AND 312000) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERA40 OFF;
ALTER TABLE NEW_ORDERA40 DROP CONSTRAINT NEW_ORDERA40CKC;
ALTER TABLE NEW_ORDERA40 ADD CONSTRAINT NEW_ORDERA40CKC CHECK ((NO_W_ID >=
312001) AND (NO_O_ID <= 3675));
SET INTEGRITY FOR NEW_ORDERA40 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_NEW_ORDERB.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB1 OFF;
ALTER TABLE NEW_ORDERB1 DROP CONSTRAINT NEW_ORDERB1CKC;
ALTER TABLE NEW_ORDERB1 ADD CONSTRAINT NEW_ORDERB1CKC CHECK ((NO_W_ID
BETWEEN 1 AND 8000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB2 OFF;
ALTER TABLE NEW_ORDERB2 DROP CONSTRAINT NEW_ORDERB2CKC;
ALTER TABLE NEW_ORDERB2 ADD CONSTRAINT NEW_ORDERB2CKC CHECK ((NO_W_ID
BETWEEN 8001 AND 16000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB3 OFF;
ALTER TABLE NEW_ORDERB3 DROP CONSTRAINT NEW_ORDERB3CKC;
ALTER TABLE NEW_ORDERB3 ADD CONSTRAINT NEW_ORDERB3CKC CHECK ((NO_W_ID
BETWEEN 16001 AND 24000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB4 OFF;
ALTER TABLE NEW_ORDERB4 DROP CONSTRAINT NEW_ORDERB4CKC;
ALTER TABLE NEW_ORDERB4 ADD CONSTRAINT NEW_ORDERB4CKC CHECK ((NO_W_ID
BETWEEN 24001 AND 32000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB5 OFF;
ALTER TABLE NEW_ORDERB5 DROP CONSTRAINT NEW_ORDERB5CKC;
ALTER TABLE NEW_ORDERB5 ADD CONSTRAINT NEW_ORDERB5CKC CHECK ((NO_W_ID
BETWEEN 32001 AND 40000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB6 OFF;
ALTER TABLE NEW_ORDERB6 DROP CONSTRAINT NEW_ORDERB6CKC;
ALTER TABLE NEW_ORDERB6 ADD CONSTRAINT NEW_ORDERB6CKC CHECK ((NO_W_ID
BETWEEN 40001 AND 48000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB7 OFF;
ALTER TABLE NEW_ORDERB7 DROP CONSTRAINT NEW_ORDERB7CKC;
ALTER TABLE NEW_ORDERB7 ADD CONSTRAINT NEW_ORDERB7CKC CHECK ((NO_W_ID
BETWEEN 48001 AND 56000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB8 OFF;
ALTER TABLE NEW_ORDERB8 DROP CONSTRAINT NEW_ORDERB8CKC;
ALTER TABLE NEW_ORDERB8 ADD CONSTRAINT NEW_ORDERB8CKC CHECK ((NO_W_ID
BETWEEN 56001 AND 64000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB9 OFF;
ALTER TABLE NEW_ORDERB9 DROP CONSTRAINT NEW_ORDERB9CKC;
ALTER TABLE NEW_ORDERB9 ADD CONSTRAINT NEW_ORDERB9CKC CHECK ((NO_W_ID
BETWEEN 64001 AND 72000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB10 OFF;
ALTER TABLE NEW_ORDERB10 DROP CONSTRAINT NEW_ORDERB10CKC;
ALTER TABLE NEW_ORDERB10 ADD CONSTRAINT NEW_ORDERB10CKC CHECK ((NO_W_ID
BETWEEN 72001 AND 80000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB11 OFF;
ALTER TABLE NEW_ORDERB11 DROP CONSTRAINT NEW_ORDERB11CKC;
ALTER TABLE NEW_ORDERB11 ADD CONSTRAINT NEW_ORDERB11CKC CHECK ((NO_W_ID
BETWEEN 80001 AND 88000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB12 OFF;
ALTER TABLE NEW_ORDERB12 DROP CONSTRAINT NEW_ORDERB12CKC;
ALTER TABLE NEW_ORDERB12 ADD CONSTRAINT NEW_ORDERB12CKC CHECK ((NO_W_ID
BETWEEN 88001 AND 96000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB13 OFF;
ALTER TABLE NEW_ORDERB13 DROP CONSTRAINT NEW_ORDERB13CKC;
ALTER TABLE NEW_ORDERB13 ADD CONSTRAINT NEW_ORDERB13CKC CHECK ((NO_W_ID
BETWEEN 96001 AND 104000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB14 OFF;
ALTER TABLE NEW_ORDERB14 DROP CONSTRAINT NEW_ORDERB14CKC;
ALTER TABLE NEW_ORDERB14 ADD CONSTRAINT NEW_ORDERB14CKC CHECK ((NO_W_ID
BETWEEN 104001 AND 112000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB15 OFF;
ALTER TABLE NEW_ORDERB15 DROP CONSTRAINT NEW_ORDERB15CKC;
ALTER TABLE NEW_ORDERB15 ADD CONSTRAINT NEW_ORDERB15CKC CHECK ((NO_W_ID
BETWEEN 112001 AND 120000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB16 OFF;
ALTER TABLE NEW_ORDERB16 DROP CONSTRAINT NEW_ORDERB16CKC;
ALTER TABLE NEW_ORDERB16 ADD CONSTRAINT NEW_ORDERB16CKC CHECK ((NO_W_ID
BETWEEN 120001 AND 128000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB17 OFF;
ALTER TABLE NEW_ORDERB17 DROP CONSTRAINT NEW_ORDERB17CKC;
ALTER TABLE NEW_ORDERB17 ADD CONSTRAINT NEW_ORDERB17CKC CHECK ((NO_W_ID
BETWEEN 128001 AND 136000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB18 OFF;
ALTER TABLE NEW_ORDERB18 DROP CONSTRAINT NEW_ORDERB18CKC;
ALTER TABLE NEW_ORDERB18 ADD CONSTRAINT NEW_ORDERB18CKC CHECK ((NO_W_ID
BETWEEN 136001 AND 144000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB19 OFF;
ALTER TABLE NEW_ORDERB19 DROP CONSTRAINT NEW_ORDERB19CKC;
ALTER TABLE NEW_ORDERB19 ADD CONSTRAINT NEW_ORDERB19CKC CHECK ((NO_W_ID
BETWEEN 144001 AND 152000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB20 OFF;
ALTER TABLE NEW_ORDERB20 DROP CONSTRAINT NEW_ORDERB20CKC;
ALTER TABLE NEW_ORDERB20 ADD CONSTRAINT NEW_ORDERB20CKC CHECK ((NO_W_ID
BETWEEN 152001 AND 160000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB21 OFF;
ALTER TABLE NEW_ORDERB21 DROP CONSTRAINT NEW_ORDERB21CKC;
ALTER TABLE NEW_ORDERB21 ADD CONSTRAINT NEW_ORDERB21CKC CHECK ((NO_W_ID
BETWEEN 160001 AND 168000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB22 OFF;
ALTER TABLE NEW_ORDERB22 DROP CONSTRAINT NEW_ORDERB22CKC;
ALTER TABLE NEW_ORDERB22 ADD CONSTRAINT NEW_ORDERB22CKC CHECK ((NO_W_ID
BETWEEN 168001 AND 176000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
```

```
SET INTEGRITY FOR NEW_ORDERB23 OFF;
ALTER TABLE NEW_ORDERB23 DROP CONSTRAINT NEW_ORDERB23CKC;
ALTER TABLE NEW_ORDERB23 ADD CONSTRAINT NEW_ORDERB23CKC CHECK ((NO_W_ID
BETWEEN 176001 AND 184000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB24 OFF;
ALTER TABLE NEW_ORDERB24 DROP CONSTRAINT NEW_ORDERB24CKC;
ALTER TABLE NEW_ORDERB24 ADD CONSTRAINT NEW_ORDERB24CKC CHECK ((NO_W_ID
BETWEEN 184001 AND 192000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB25 OFF;
ALTER TABLE NEW_ORDERB25 DROP CONSTRAINT NEW_ORDERB25CKC;
ALTER TABLE NEW_ORDERB25 ADD CONSTRAINT NEW_ORDERB25CKC CHECK ((NO_W_ID
BETWEEN 192001 AND 200000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB26 OFF;
ALTER TABLE NEW_ORDERB26 DROP CONSTRAINT NEW_ORDERB26CKC;
ALTER TABLE NEW_ORDERB26 ADD CONSTRAINT NEW_ORDERB26CKC CHECK ((NO_W_ID
BETWEEN 200001 AND 208000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB27 OFF;
ALTER TABLE NEW_ORDERB27 DROP CONSTRAINT NEW_ORDERB27CKC;
ALTER TABLE NEW_ORDERB27 ADD CONSTRAINT NEW_ORDERB27CKC CHECK ((NO_W_ID
BETWEEN 208001 AND 216000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB28 OFF;
ALTER TABLE NEW_ORDERB28 DROP CONSTRAINT NEW_ORDERB28CKC;
ALTER TABLE NEW_ORDERB28 ADD CONSTRAINT NEW_ORDERB28CKC CHECK ((NO_W_ID
BETWEEN 216001 AND 224000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB29 OFF;
ALTER TABLE NEW_ORDERB29 DROP CONSTRAINT NEW_ORDERB29CKC;
ALTER TABLE NEW_ORDERB29 ADD CONSTRAINT NEW_ORDERB29CKC CHECK ((NO_W_ID
BETWEEN 224001 AND 232000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB30 OFF;
ALTER TABLE NEW_ORDERB30 DROP CONSTRAINT NEW_ORDERB30CKC;
ALTER TABLE NEW_ORDERB30 ADD CONSTRAINT NEW_ORDERB30CKC CHECK ((NO_W_ID
BETWEEN 232001 AND 240000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB31 OFF;
ALTER TABLE NEW_ORDERB31 DROP CONSTRAINT NEW_ORDERB31CKC;
ALTER TABLE NEW_ORDERB31 ADD CONSTRAINT NEW_ORDERB31CKC CHECK ((NO_W_ID
BETWEEN 240001 AND 248000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB32 OFF;
ALTER TABLE NEW_ORDERB32 DROP CONSTRAINT NEW_ORDERB32CKC;
ALTER TABLE NEW_ORDERB32 ADD CONSTRAINT NEW_ORDERB32CKC CHECK ((NO_W_ID
BETWEEN 248001 AND 256000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB33 OFF;
ALTER TABLE NEW_ORDERB33 DROP CONSTRAINT NEW_ORDERB33CKC;
ALTER TABLE NEW_ORDERB33 ADD CONSTRAINT NEW_ORDERB33CKC CHECK ((NO_W_ID
BETWEEN 256001 AND 264000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB34 OFF;
ALTER TABLE NEW_ORDERB34 DROP CONSTRAINT NEW_ORDERB34CKC;
ALTER TABLE NEW_ORDERB34 ADD CONSTRAINT NEW_ORDERB34CKC CHECK ((NO_W_ID
BETWEEN 264001 AND 272000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB35 OFF;
ALTER TABLE NEW_ORDERB35 DROP CONSTRAINT NEW_ORDERB35CKC;
ALTER TABLE NEW_ORDERB35 ADD CONSTRAINT NEW_ORDERB35CKC CHECK ((NO_W_ID
BETWEEN 272001 AND 280000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB36 OFF;
ALTER TABLE NEW_ORDERB36 DROP CONSTRAINT NEW_ORDERB36CKC;
ALTER TABLE NEW_ORDERB36 ADD CONSTRAINT NEW_ORDERB36CKC CHECK ((NO_W_ID
BETWEEN 280001 AND 288000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB37 OFF;
ALTER TABLE NEW_ORDERB37 DROP CONSTRAINT NEW_ORDERB37CKC;
ALTER TABLE NEW_ORDERB37 ADD CONSTRAINT NEW_ORDERB37CKC CHECK ((NO_W_ID
BETWEEN 288001 AND 296000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB38 OFF;
ALTER TABLE NEW_ORDERB38 DROP CONSTRAINT NEW_ORDERB38CKC;
ALTER TABLE NEW_ORDERB38 ADD CONSTRAINT NEW_ORDERB38CKC CHECK ((NO_W_ID
BETWEEN 296001 AND 304000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB39 OFF;
ALTER TABLE NEW_ORDERB39 DROP CONSTRAINT NEW_ORDERB39CKC;
ALTER TABLE NEW_ORDERB39 ADD CONSTRAINT NEW_ORDERB39CKC CHECK ((NO_W_ID
BETWEEN 304001 AND 312000) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR NEW_ORDERB40 OFF;
ALTER TABLE NEW_ORDERB40 DROP CONSTRAINT NEW_ORDERB40CKC;
ALTER TABLE NEW_ORDERB40 ADD CONSTRAINT NEW_ORDERB40CKC CHECK ((NO_W_ID >=
312001) AND (NO_O_ID >= 3676));
SET INTEGRITY FOR NEW_ORDERB40 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_ORDERS.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS1 OFF;
ALTER TABLE ORDERS1 DROP CONSTRAINT ORDERS1CKC;
ALTER TABLE ORDERS1 ADD CONSTRAINT ORDERS1CKC CHECK (O_W_ID BETWEEN 1 AND
1600);
SET INTEGRITY FOR ORDERS1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS2 OFF;
ALTER TABLE ORDERS2 DROP CONSTRAINT ORDERS2CKC;
ALTER TABLE ORDERS2 ADD CONSTRAINT ORDERS2CKC CHECK (O_W_ID BETWEEN 1601 AND
3200);
SET INTEGRITY FOR ORDERS2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS3 OFF;
ALTER TABLE ORDERS3 DROP CONSTRAINT ORDERS3CKC;
ALTER TABLE ORDERS3 ADD CONSTRAINT ORDERS3CKC CHECK (O_W_ID BETWEEN 3201 AND
4800);
SET INTEGRITY FOR ORDERS3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS4 OFF;
ALTER TABLE ORDERS4 DROP CONSTRAINT ORDERS4CKC;
ALTER TABLE ORDERS4 ADD CONSTRAINT ORDERS4CKC CHECK (O_W_ID BETWEEN 4801 AND
6400);
SET INTEGRITY FOR ORDERS4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS5 OFF;
ALTER TABLE ORDERS5 DROP CONSTRAINT ORDERS5CKC;
ALTER TABLE ORDERS5 ADD CONSTRAINT ORDERS5CKC CHECK (O_W_ID BETWEEN 6401 AND
8000);
SET INTEGRITY FOR ORDERS5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS6 OFF;
ALTER TABLE ORDERS6 DROP CONSTRAINT ORDERS6CKC;
ALTER TABLE ORDERS6 ADD CONSTRAINT ORDERS6CKC CHECK (O_W_ID BETWEEN 8001 AND
9600);
SET INTEGRITY FOR ORDERS6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS7 OFF;
ALTER TABLE ORDERS7 DROP CONSTRAINT ORDERS7CKC;
ALTER TABLE ORDERS7 ADD CONSTRAINT ORDERS7CKC CHECK (O_W_ID BETWEEN 9601 AND
11200);
SET INTEGRITY FOR ORDERS7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS8 OFF;
ALTER TABLE ORDERS8 DROP CONSTRAINT ORDERS8CKC;
ALTER TABLE ORDERS8 ADD CONSTRAINT ORDERS8CKC CHECK (O_W_ID BETWEEN 11201 AND
12800);
SET INTEGRITY FOR ORDERS8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS9 OFF;
ALTER TABLE ORDERS9 DROP CONSTRAINT ORDERS9CKC;
ALTER TABLE ORDERS9 ADD CONSTRAINT ORDERS9CKC CHECK (O_W_ID BETWEEN 12801 AND
14400);
SET INTEGRITY FOR ORDERS9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS10 OFF;
ALTER TABLE ORDERS10 DROP CONSTRAINT ORDERS10CKC;
ALTER TABLE ORDERS10 ADD CONSTRAINT ORDERS10CKC CHECK (O_W_ID BETWEEN 14401
AND 16000);
SET INTEGRITY FOR ORDERS10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS11 OFF;
ALTER TABLE ORDERS11 DROP CONSTRAINT ORDERS11CKC;
ALTER TABLE ORDERS11 ADD CONSTRAINT ORDERS11CKC CHECK (O_W_ID BETWEEN 16001
AND 17600);
SET INTEGRITY FOR ORDERS11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS12 OFF;
ALTER TABLE ORDERS12 DROP CONSTRAINT ORDERS12CKC;
ALTER TABLE ORDERS12 ADD CONSTRAINT ORDERS12CKC CHECK (O_W_ID BETWEEN 17601
AND 19200);
SET INTEGRITY FOR ORDERS12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS13 OFF;
ALTER TABLE ORDERS13 DROP CONSTRAINT ORDERS13CKC;
```

```
ALTER TABLE ORDERS13 ADD CONSTRAINT ORDERS13CKC CHECK (O_W_ID BETWEEN 19201
AND 20800);
SET INTEGRITY FOR ORDERS13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS14 OFF;
ALTER TABLE ORDERS14 DROP CONSTRAINT ORDERS14CKC;
ALTER TABLE ORDERS14 ADD CONSTRAINT ORDERS14CKC CHECK (O_W_ID BETWEEN 20801
AND 22400);
SET INTEGRITY FOR ORDERS14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS15 OFF;
ALTER TABLE ORDERS15 DROP CONSTRAINT ORDERS15CKC;
ALTER TABLE ORDERS15 ADD CONSTRAINT ORDERS15CKC CHECK (O_W_ID BETWEEN 22401
AND 24000);
SET INTEGRITY FOR ORDERS15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS16 OFF;
ALTER TABLE ORDERS16 DROP CONSTRAINT ORDERS16CKC;
ALTER TABLE ORDERS16 ADD CONSTRAINT ORDERS16CKC CHECK (O_W_ID BETWEEN 24001
AND 25600);
SET INTEGRITY FOR ORDERS16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS17 OFF;
ALTER TABLE ORDERS17 DROP CONSTRAINT ORDERS17CKC;
ALTER TABLE ORDERS17 ADD CONSTRAINT ORDERS17CKC CHECK (O_W_ID BETWEEN 25601
AND 27200);
SET INTEGRITY FOR ORDERS17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS18 OFF;
ALTER TABLE ORDERS18 DROP CONSTRAINT ORDERS18CKC;
ALTER TABLE ORDERS18 ADD CONSTRAINT ORDERS18CKC CHECK (O_W_ID BETWEEN 27201
AND 28800);
SET INTEGRITY FOR ORDERS18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS19 OFF;
ALTER TABLE ORDERS19 DROP CONSTRAINT ORDERS19CKC;
ALTER TABLE ORDERS19 ADD CONSTRAINT ORDERS19CKC CHECK (O_W_ID BETWEEN 28801
AND 30400);
SET INTEGRITY FOR ORDERS19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS20 OFF;
ALTER TABLE ORDERS20 DROP CONSTRAINT ORDERS20CKC;
ALTER TABLE ORDERS20 ADD CONSTRAINT ORDERS20CKC CHECK (O_W_ID BETWEEN 30401
AND 32000);
SET INTEGRITY FOR ORDERS20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS21 OFF;
ALTER TABLE ORDERS21 DROP CONSTRAINT ORDERS21CKC;
ALTER TABLE ORDERS21 ADD CONSTRAINT ORDERS21CKC CHECK (O_W_ID BETWEEN 32001
AND 33600);
SET INTEGRITY FOR ORDERS21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS22 OFF;
ALTER TABLE ORDERS22 DROP CONSTRAINT ORDERS22CKC;
ALTER TABLE ORDERS22 ADD CONSTRAINT ORDERS22CKC CHECK (O_W_ID BETWEEN 33601
AND 35200);
SET INTEGRITY FOR ORDERS22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS23 OFF;
ALTER TABLE ORDERS23 DROP CONSTRAINT ORDERS23CKC;
ALTER TABLE ORDERS23 ADD CONSTRAINT ORDERS23CKC CHECK (O_W_ID BETWEEN 35201
AND 36800);
SET INTEGRITY FOR ORDERS23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS24 OFF;
ALTER TABLE ORDERS24 DROP CONSTRAINT ORDERS24CKC;
ALTER TABLE ORDERS24 ADD CONSTRAINT ORDERS24CKC CHECK (O_W_ID BETWEEN 36801
AND 38400);
SET INTEGRITY FOR ORDERS24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS25 OFF;
ALTER TABLE ORDERS25 DROP CONSTRAINT ORDERS25CKC;
ALTER TABLE ORDERS25 ADD CONSTRAINT ORDERS25CKC CHECK (O_W_ID BETWEEN 38401
AND 40000);
SET INTEGRITY FOR ORDERS25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS26 OFF;
ALTER TABLE ORDERS26 DROP CONSTRAINT ORDERS26CKC;
ALTER TABLE ORDERS26 ADD CONSTRAINT ORDERS26CKC CHECK (O_W_ID BETWEEN 40001
AND 41600);
SET INTEGRITY FOR ORDERS26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS27 OFF;
ALTER TABLE ORDERS27 DROP CONSTRAINT ORDERS27CKC;
ALTER TABLE ORDERS27 ADD CONSTRAINT ORDERS27CKC CHECK (O_W_ID BETWEEN 41601
AND 43200);
SET INTEGRITY FOR ORDERS27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS28 OFF;
ALTER TABLE ORDERS28 DROP CONSTRAINT ORDERS28CKC;
ALTER TABLE ORDERS28 ADD CONSTRAINT ORDERS28CKC CHECK (O_W_ID BETWEEN 43201
AND 44800);
SET INTEGRITY FOR ORDERS28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS29 OFF;
ALTER TABLE ORDERS29 DROP CONSTRAINT ORDERS29CKC;
ALTER TABLE ORDERS29 ADD CONSTRAINT ORDERS29CKC CHECK (O_W_ID BETWEEN 44801
AND 46400);
SET INTEGRITY FOR ORDERS29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS30 OFF;
ALTER TABLE ORDERS30 DROP CONSTRAINT ORDERS30CKC;
ALTER TABLE ORDERS30 ADD CONSTRAINT ORDERS30CKC CHECK (O_W_ID BETWEEN 46401
AND 48000);
SET INTEGRITY FOR ORDERS30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS31 OFF;
ALTER TABLE ORDERS31 DROP CONSTRAINT ORDERS31CKC;
ALTER TABLE ORDERS31 ADD CONSTRAINT ORDERS31CKC CHECK (O_W_ID BETWEEN 48001
AND 49600);
SET INTEGRITY FOR ORDERS31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS32 OFF;
ALTER TABLE ORDERS32 DROP CONSTRAINT ORDERS32CKC;
ALTER TABLE ORDERS32 ADD CONSTRAINT ORDERS32CKC CHECK (O_W_ID BETWEEN 49601
AND 51200);
SET INTEGRITY FOR ORDERS32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS33 OFF;
ALTER TABLE ORDERS33 DROP CONSTRAINT ORDERS33CKC;
ALTER TABLE ORDERS33 ADD CONSTRAINT ORDERS33CKC CHECK (O_W_ID BETWEEN 51201
AND 52800);
SET INTEGRITY FOR ORDERS33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS34 OFF;
ALTER TABLE ORDERS34 DROP CONSTRAINT ORDERS34CKC;
ALTER TABLE ORDERS34 ADD CONSTRAINT ORDERS34CKC CHECK (O_W_ID BETWEEN 52801
AND 54400);
SET INTEGRITY FOR ORDERS34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS35 OFF;
ALTER TABLE ORDERS35 DROP CONSTRAINT ORDERS35CKC;
ALTER TABLE ORDERS35 ADD CONSTRAINT ORDERS35CKC CHECK (O_W_ID BETWEEN 54401
AND 56000);
SET INTEGRITY FOR ORDERS35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS36 OFF;
ALTER TABLE ORDERS36 DROP CONSTRAINT ORDERS36CKC;
ALTER TABLE ORDERS36 ADD CONSTRAINT ORDERS36CKC CHECK (O_W_ID BETWEEN 56001
AND 57600);
SET INTEGRITY FOR ORDERS36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS37 OFF;
ALTER TABLE ORDERS37 DROP CONSTRAINT ORDERS37CKC;
ALTER TABLE ORDERS37 ADD CONSTRAINT ORDERS37CKC CHECK (O_W_ID BETWEEN 57601
AND 59200);
SET INTEGRITY FOR ORDERS37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS38 OFF;
ALTER TABLE ORDERS38 DROP CONSTRAINT ORDERS38CKC;
ALTER TABLE ORDERS38 ADD CONSTRAINT ORDERS38CKC CHECK (O_W_ID BETWEEN 59201
AND 60800);
SET INTEGRITY FOR ORDERS38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS39 OFF;
ALTER TABLE ORDERS39 DROP CONSTRAINT ORDERS39CKC;
ALTER TABLE ORDERS39 ADD CONSTRAINT ORDERS39CKC CHECK (O_W_ID BETWEEN 60801
AND 62400);
SET INTEGRITY FOR ORDERS39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS40 OFF;
ALTER TABLE ORDERS40 DROP CONSTRAINT ORDERS40CKC;
ALTER TABLE ORDERS40 ADD CONSTRAINT ORDERS40CKC CHECK (O_W_ID BETWEEN 62401
AND 64000);
SET INTEGRITY FOR ORDERS40 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS41 OFF;
ALTER TABLE ORDERS41 DROP CONSTRAINT ORDERS41CKC;
ALTER TABLE ORDERS41 ADD CONSTRAINT ORDERS41CKC CHECK (O_W_ID BETWEEN 64001
AND 65600);
SET INTEGRITY FOR ORDERS41 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS42 OFF;
ALTER TABLE ORDERS42 DROP CONSTRAINT ORDERS42CKC;
ALTER TABLE ORDERS42 ADD CONSTRAINT ORDERS42CKC CHECK (O_W_ID BETWEEN 65601
AND 67200);
SET INTEGRITY FOR ORDERS42 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS43 OFF;
ALTER TABLE ORDERS43 DROP CONSTRAINT ORDERS43CKC;
ALTER TABLE ORDERS43 ADD CONSTRAINT ORDERS43CKC CHECK (O_W_ID BETWEEN 67201
AND 68800);
SET INTEGRITY FOR ORDERS43 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS44 OFF;
ALTER TABLE ORDERS44 DROP CONSTRAINT ORDERS44CKC;
ALTER TABLE ORDERS44 ADD CONSTRAINT ORDERS44CKC CHECK (O_W_ID BETWEEN 68801
AND 70400);
```

```
SET INTEGRITY FOR ORDERS44 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS45 OFF;
ALTER TABLE ORDERS45 DROP CONSTRAINT ORDERS45CKC;
ALTER TABLE ORDERS45 ADD CONSTRAINT ORDERS45CKC CHECK (O_W_ID BETWEEN 70401
AND 72000);
SET INTEGRITY FOR ORDERS45 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS46 OFF;
ALTER TABLE ORDERS46 DROP CONSTRAINT ORDERS46CKC;
ALTER TABLE ORDERS46 ADD CONSTRAINT ORDERS46CKC CHECK (O_W_ID BETWEEN 72001
AND 73600);
SET INTEGRITY FOR ORDERS46 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS47 OFF;
ALTER TABLE ORDERS47 DROP CONSTRAINT ORDERS47CKC;
ALTER TABLE ORDERS47 ADD CONSTRAINT ORDERS47CKC CHECK (O_W_ID BETWEEN 73601
AND 75200);
SET INTEGRITY FOR ORDERS47 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS48 OFF;
ALTER TABLE ORDERS48 DROP CONSTRAINT ORDERS48CKC;
ALTER TABLE ORDERS48 ADD CONSTRAINT ORDERS48CKC CHECK (O_W_ID BETWEEN 75201
AND 76800);
SET INTEGRITY FOR ORDERS48 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS49 OFF;
ALTER TABLE ORDERS49 DROP CONSTRAINT ORDERS49CKC;
ALTER TABLE ORDERS49 ADD CONSTRAINT ORDERS49CKC CHECK (O_W_ID BETWEEN 76801
AND 78400);
SET INTEGRITY FOR ORDERS49 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS50 OFF;
ALTER TABLE ORDERS50 DROP CONSTRAINT ORDERS50CKC;
ALTER TABLE ORDERS50 ADD CONSTRAINT ORDERS50CKC CHECK (O_W_ID BETWEEN 78401
AND 80000);
SET INTEGRITY FOR ORDERS50 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS51 OFF;
ALTER TABLE ORDERS51 DROP CONSTRAINT ORDERS51CKC;
ALTER TABLE ORDERS51 ADD CONSTRAINT ORDERS51CKC CHECK (O_W_ID BETWEEN 80001
AND 81600);
SET INTEGRITY FOR ORDERS51 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS52 OFF;
ALTER TABLE ORDERS52 DROP CONSTRAINT ORDERS52CKC;
ALTER TABLE ORDERS52 ADD CONSTRAINT ORDERS52CKC CHECK (O_W_ID BETWEEN 81601
AND 83200);
SET INTEGRITY FOR ORDERS52 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS53 OFF;
ALTER TABLE ORDERS53 DROP CONSTRAINT ORDERS53CKC;
ALTER TABLE ORDERS53 ADD CONSTRAINT ORDERS53CKC CHECK (O_W_ID BETWEEN 83201
AND 84800);
SET INTEGRITY FOR ORDERS53 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS54 OFF;
ALTER TABLE ORDERS54 DROP CONSTRAINT ORDERS54CKC;
ALTER TABLE ORDERS54 ADD CONSTRAINT ORDERS54CKC CHECK (O_W_ID BETWEEN 84801
AND 86400);
SET INTEGRITY FOR ORDERS54 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS55 OFF;
ALTER TABLE ORDERS55 DROP CONSTRAINT ORDERS55CKC;
ALTER TABLE ORDERS55 ADD CONSTRAINT ORDERS55CKC CHECK (O_W_ID BETWEEN 86401
AND 88000);
SET INTEGRITY FOR ORDERS55 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS56 OFF;
ALTER TABLE ORDERS56 DROP CONSTRAINT ORDERS56CKC;
ALTER TABLE ORDERS56 ADD CONSTRAINT ORDERS56CKC CHECK (O_W_ID BETWEEN 88001
AND 89600);
SET INTEGRITY FOR ORDERS56 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS57 OFF;
ALTER TABLE ORDERS57 DROP CONSTRAINT ORDERS57CKC;
ALTER TABLE ORDERS57 ADD CONSTRAINT ORDERS57CKC CHECK (O_W_ID BETWEEN 89601
AND 91200);
SET INTEGRITY FOR ORDERS57 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS58 OFF;
ALTER TABLE ORDERS58 DROP CONSTRAINT ORDERS58CKC;
ALTER TABLE ORDERS58 ADD CONSTRAINT ORDERS58CKC CHECK (O_W_ID BETWEEN 91201
AND 92800);
SET INTEGRITY FOR ORDERS58 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS59 OFF;
ALTER TABLE ORDERS59 DROP CONSTRAINT ORDERS59CKC;
ALTER TABLE ORDERS59 ADD CONSTRAINT ORDERS59CKC CHECK (O_W_ID BETWEEN 92801
AND 94400);
SET INTEGRITY FOR ORDERS59 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS60 OFF;
ALTER TABLE ORDERS60 DROP CONSTRAINT ORDERS60CKC;
ALTER TABLE ORDERS60 ADD CONSTRAINT ORDERS60CKC CHECK (O_W_ID BETWEEN 94401
AND 96000);
SET INTEGRITY FOR ORDERS60 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS61 OFF;
ALTER TABLE ORDERS61 DROP CONSTRAINT ORDERS61CKC;
ALTER TABLE ORDERS61 ADD CONSTRAINT ORDERS61CKC CHECK (O_W_ID BETWEEN 96001
AND 97600);
SET INTEGRITY FOR ORDERS61 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS62 OFF;
ALTER TABLE ORDERS62 DROP CONSTRAINT ORDERS62CKC;
ALTER TABLE ORDERS62 ADD CONSTRAINT ORDERS62CKC CHECK (O_W_ID BETWEEN 97601
AND 99200);
SET INTEGRITY FOR ORDERS62 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS63 OFF;
ALTER TABLE ORDERS63 DROP CONSTRAINT ORDERS63CKC;
ALTER TABLE ORDERS63 ADD CONSTRAINT ORDERS63CKC CHECK (O_W_ID BETWEEN 99201
AND 100800);
SET INTEGRITY FOR ORDERS63 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS64 OFF;
ALTER TABLE ORDERS64 DROP CONSTRAINT ORDERS64CKC;
ALTER TABLE ORDERS64 ADD CONSTRAINT ORDERS64CKC CHECK (O_W_ID BETWEEN 100801
AND 102400);
SET INTEGRITY FOR ORDERS64 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS65 OFF;
ALTER TABLE ORDERS65 DROP CONSTRAINT ORDERS65CKC;
ALTER TABLE ORDERS65 ADD CONSTRAINT ORDERS65CKC CHECK (O_W_ID BETWEEN 102401
AND 104000);
SET INTEGRITY FOR ORDERS65 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS66 OFF;
ALTER TABLE ORDERS66 DROP CONSTRAINT ORDERS66CKC;
ALTER TABLE ORDERS66 ADD CONSTRAINT ORDERS66CKC CHECK (O_W_ID BETWEEN 104001
AND 105600);
SET INTEGRITY FOR ORDERS66 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS67 OFF;
ALTER TABLE ORDERS67 DROP CONSTRAINT ORDERS67CKC;
ALTER TABLE ORDERS67 ADD CONSTRAINT ORDERS67CKC CHECK (O_W_ID BETWEEN 105601
AND 107200);
SET INTEGRITY FOR ORDERS67 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS68 OFF;
ALTER TABLE ORDERS68 DROP CONSTRAINT ORDERS68CKC;
ALTER TABLE ORDERS68 ADD CONSTRAINT ORDERS68CKC CHECK (O_W_ID BETWEEN 107201
AND 108800);
SET INTEGRITY FOR ORDERS68 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS69 OFF;
ALTER TABLE ORDERS69 DROP CONSTRAINT ORDERS69CKC;
ALTER TABLE ORDERS69 ADD CONSTRAINT ORDERS69CKC CHECK (O_W_ID BETWEEN 108801
AND 110400);
SET INTEGRITY FOR ORDERS69 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS70 OFF;
ALTER TABLE ORDERS70 DROP CONSTRAINT ORDERS70CKC;
ALTER TABLE ORDERS70 ADD CONSTRAINT ORDERS70CKC CHECK (O_W_ID BETWEEN 110401
AND 112000);
SET INTEGRITY FOR ORDERS70 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS71 OFF;
ALTER TABLE ORDERS71 DROP CONSTRAINT ORDERS71CKC;
ALTER TABLE ORDERS71 ADD CONSTRAINT ORDERS71CKC CHECK (O_W_ID BETWEEN 112001
AND 113600);
SET INTEGRITY FOR ORDERS71 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS72 OFF;
ALTER TABLE ORDERS72 DROP CONSTRAINT ORDERS72CKC;
ALTER TABLE ORDERS72 ADD CONSTRAINT ORDERS72CKC CHECK (O_W_ID BETWEEN 113601
AND 115200);
SET INTEGRITY FOR ORDERS72 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS73 OFF;
ALTER TABLE ORDERS73 DROP CONSTRAINT ORDERS73CKC;
ALTER TABLE ORDERS73 ADD CONSTRAINT ORDERS73CKC CHECK (O_W_ID BETWEEN 115201
AND 116800);
SET INTEGRITY FOR ORDERS73 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS74 OFF;
ALTER TABLE ORDERS74 DROP CONSTRAINT ORDERS74CKC;
ALTER TABLE ORDERS74 ADD CONSTRAINT ORDERS74CKC CHECK (O_W_ID BETWEEN 116801
AND 118400);
SET INTEGRITY FOR ORDERS74 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS75 OFF;
ALTER TABLE ORDERS75 DROP CONSTRAINT ORDERS75CKC;
ALTER TABLE ORDERS75 ADD CONSTRAINT ORDERS75CKC CHECK (O_W_ID BETWEEN 118401
AND 120000);
SET INTEGRITY FOR ORDERS75 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS76 OFF;
ALTER TABLE ORDERS76 DROP CONSTRAINT ORDERS76CKC;
ALTER TABLE ORDERS76 ADD CONSTRAINT ORDERS76CKC CHECK (O_W_ID BETWEEN 120001
AND 121600);
SET INTEGRITY FOR ORDERS76 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS77 OFF;
ALTER TABLE ORDERS77 DROP CONSTRAINT ORDERS77CKC;
ALTER TABLE ORDERS77 ADD CONSTRAINT ORDERS77CKC CHECK (O_W_ID BETWEEN 121601
AND 123200);
SET INTEGRITY FOR ORDERS77 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS78 OFF;
ALTER TABLE ORDERS78 DROP CONSTRAINT ORDERS78CKC;
ALTER TABLE ORDERS78 ADD CONSTRAINT ORDERS78CKC CHECK (O_W_ID BETWEEN 123201
AND 124800);
SET INTEGRITY FOR ORDERS78 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS79 OFF;
ALTER TABLE ORDERS79 DROP CONSTRAINT ORDERS79CKC;
ALTER TABLE ORDERS79 ADD CONSTRAINT ORDERS79CKC CHECK (O_W_ID BETWEEN 124801
AND 126400);
SET INTEGRITY FOR ORDERS79 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS80 OFF;
ALTER TABLE ORDERS80 DROP CONSTRAINT ORDERS80CKC;
ALTER TABLE ORDERS80 ADD CONSTRAINT ORDERS80CKC CHECK (O_W_ID BETWEEN 126401
AND 128000);
SET INTEGRITY FOR ORDERS80 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS81 OFF;
ALTER TABLE ORDERS81 DROP CONSTRAINT ORDERS81CKC;
ALTER TABLE ORDERS81 ADD CONSTRAINT ORDERS81CKC CHECK (O_W_ID BETWEEN 128001
AND 129600);
SET INTEGRITY FOR ORDERS81 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS82 OFF;
ALTER TABLE ORDERS82 DROP CONSTRAINT ORDERS82CKC;
ALTER TABLE ORDERS82 ADD CONSTRAINT ORDERS82CKC CHECK (O_W_ID BETWEEN 129601
AND 131200);
SET INTEGRITY FOR ORDERS82 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS83 OFF;
ALTER TABLE ORDERS83 DROP CONSTRAINT ORDERS83CKC;
ALTER TABLE ORDERS83 ADD CONSTRAINT ORDERS83CKC CHECK (O_W_ID BETWEEN 131201
AND 132800);
SET INTEGRITY FOR ORDERS83 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS84 OFF;
ALTER TABLE ORDERS84 DROP CONSTRAINT ORDERS84CKC;
ALTER TABLE ORDERS84 ADD CONSTRAINT ORDERS84CKC CHECK (O_W_ID BETWEEN 132801
AND 134400);
SET INTEGRITY FOR ORDERS84 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS85 OFF;
ALTER TABLE ORDERS85 DROP CONSTRAINT ORDERS85CKC;
ALTER TABLE ORDERS85 ADD CONSTRAINT ORDERS85CKC CHECK (O_W_ID BETWEEN 134401
AND 136000);
SET INTEGRITY FOR ORDERS85 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS86 OFF;
ALTER TABLE ORDERS86 DROP CONSTRAINT ORDERS86CKC;
ALTER TABLE ORDERS86 ADD CONSTRAINT ORDERS86CKC CHECK (O_W_ID BETWEEN 136001
AND 137600);
SET INTEGRITY FOR ORDERS86 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS87 OFF;
ALTER TABLE ORDERS87 DROP CONSTRAINT ORDERS87CKC;
ALTER TABLE ORDERS87 ADD CONSTRAINT ORDERS87CKC CHECK (O_W_ID BETWEEN 137601
AND 139200);
SET INTEGRITY FOR ORDERS87 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS88 OFF;
ALTER TABLE ORDERS88 DROP CONSTRAINT ORDERS88CKC;
ALTER TABLE ORDERS88 ADD CONSTRAINT ORDERS88CKC CHECK (O_W_ID BETWEEN 139201
AND 140800);
SET INTEGRITY FOR ORDERS88 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS89 OFF;
ALTER TABLE ORDERS89 DROP CONSTRAINT ORDERS89CKC;
ALTER TABLE ORDERS89 ADD CONSTRAINT ORDERS89CKC CHECK (O_W_ID BETWEEN 140801
AND 142400);
SET INTEGRITY FOR ORDERS89 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS90 OFF;
ALTER TABLE ORDERS90 DROP CONSTRAINT ORDERS90CKC;
ALTER TABLE ORDERS90 ADD CONSTRAINT ORDERS90CKC CHECK (O_W_ID BETWEEN 142401
AND 144000);
SET INTEGRITY FOR ORDERS90 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS91 OFF;
ALTER TABLE ORDERS91 DROP CONSTRAINT ORDERS91CKC;
ALTER TABLE ORDERS91 ADD CONSTRAINT ORDERS91CKC CHECK (O_W_ID BETWEEN 144001
AND 145600);
SET INTEGRITY FOR ORDERS91 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS92 OFF;
ALTER TABLE ORDERS92 DROP CONSTRAINT ORDERS92CKC;
ALTER TABLE ORDERS92 ADD CONSTRAINT ORDERS92CKC CHECK (O_W_ID BETWEEN 145601
AND 147200);
SET INTEGRITY FOR ORDERS92 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS93 OFF;
ALTER TABLE ORDERS93 DROP CONSTRAINT ORDERS93CKC;
ALTER TABLE ORDERS93 ADD CONSTRAINT ORDERS93CKC CHECK (O_W_ID BETWEEN 147201
AND 148800);
SET INTEGRITY FOR ORDERS93 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS94 OFF;
ALTER TABLE ORDERS94 DROP CONSTRAINT ORDERS94CKC;
ALTER TABLE ORDERS94 ADD CONSTRAINT ORDERS94CKC CHECK (O_W_ID BETWEEN 148801
AND 150400);
SET INTEGRITY FOR ORDERS94 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS95 OFF;
ALTER TABLE ORDERS95 DROP CONSTRAINT ORDERS95CKC;
ALTER TABLE ORDERS95 ADD CONSTRAINT ORDERS95CKC CHECK (O_W_ID BETWEEN 150401
AND 152000);
SET INTEGRITY FOR ORDERS95 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS96 OFF;
ALTER TABLE ORDERS96 DROP CONSTRAINT ORDERS96CKC;
ALTER TABLE ORDERS96 ADD CONSTRAINT ORDERS96CKC CHECK (O_W_ID BETWEEN 152001
AND 153600);
SET INTEGRITY FOR ORDERS96 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS97 OFF;
ALTER TABLE ORDERS97 DROP CONSTRAINT ORDERS97CKC;
ALTER TABLE ORDERS97 ADD CONSTRAINT ORDERS97CKC CHECK (O_W_ID BETWEEN 153601
AND 155200);
SET INTEGRITY FOR ORDERS97 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS98 OFF;
ALTER TABLE ORDERS98 DROP CONSTRAINT ORDERS98CKC;
ALTER TABLE ORDERS98 ADD CONSTRAINT ORDERS98CKC CHECK (O_W_ID BETWEEN 155201
AND 156800);
SET INTEGRITY FOR ORDERS98 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS99 OFF;
ALTER TABLE ORDERS99 DROP CONSTRAINT ORDERS99CKC;
ALTER TABLE ORDERS99 ADD CONSTRAINT ORDERS99CKC CHECK (O_W_ID BETWEEN 156801
AND 158400);
SET INTEGRITY FOR ORDERS99 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS100 OFF;
ALTER TABLE ORDERS100 DROP CONSTRAINT ORDERS100CKC;
ALTER TABLE ORDERS100 ADD CONSTRAINT ORDERS100CKC CHECK (O_W_ID BETWEEN
158401 AND 160000);
SET INTEGRITY FOR ORDERS100 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS101 OFF;
ALTER TABLE ORDERS101 DROP CONSTRAINT ORDERS101CKC;
ALTER TABLE ORDERS101 ADD CONSTRAINT ORDERS101CKC CHECK (O_W_ID BETWEEN
160001 AND 161600);
SET INTEGRITY FOR ORDERS101 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS102 OFF;
ALTER TABLE ORDERS102 DROP CONSTRAINT ORDERS102CKC;
ALTER TABLE ORDERS102 ADD CONSTRAINT ORDERS102CKC CHECK (O_W_ID BETWEEN
161601 AND 163200);
SET INTEGRITY FOR ORDERS102 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS103 OFF;
ALTER TABLE ORDERS103 DROP CONSTRAINT ORDERS103CKC;
ALTER TABLE ORDERS103 ADD CONSTRAINT ORDERS103CKC CHECK (O_W_ID BETWEEN
163201 AND 164800);
SET INTEGRITY FOR ORDERS103 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS104 OFF;
ALTER TABLE ORDERS104 DROP CONSTRAINT ORDERS104CKC;
ALTER TABLE ORDERS104 ADD CONSTRAINT ORDERS104CKC CHECK (O_W_ID BETWEEN
164801 AND 166400);
SET INTEGRITY FOR ORDERS104 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS105 OFF;
ALTER TABLE ORDERS105 DROP CONSTRAINT ORDERS105CKC;
ALTER TABLE ORDERS105 ADD CONSTRAINT ORDERS105CKC CHECK (O_W_ID BETWEEN
166401 AND 168000);
SET INTEGRITY FOR ORDERS105 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS106 OFF;
ALTER TABLE ORDERS106 DROP CONSTRAINT ORDERS106CKC;
ALTER TABLE ORDERS106 ADD CONSTRAINT ORDERS106CKC CHECK (O_W_ID BETWEEN
168001 AND 169600);
SET INTEGRITY FOR ORDERS106 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
```

```
SET INTEGRITY FOR ORDERS107 OFF;
ALTER TABLE ORDERS107 DROP CONSTRAINT ORDERS107CKC;
ALTER TABLE ORDERS107 ADD CONSTRAINT ORDERS107CKC CHECK (O_W_ID BETWEEN
169601 AND 171200);
SET INTEGRITY FOR ORDERS107 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS108 OFF;
ALTER TABLE ORDERS108 DROP CONSTRAINT ORDERS108CKC;
ALTER TABLE ORDERS108 ADD CONSTRAINT ORDERS108CKC CHECK (O_W_ID BETWEEN
171201 AND 172800);
SET INTEGRITY FOR ORDERS108 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS109 OFF;
ALTER TABLE ORDERS109 DROP CONSTRAINT ORDERS109CKC;
ALTER TABLE ORDERS109 ADD CONSTRAINT ORDERS109CKC CHECK (O_W_ID BETWEEN
172801 AND 174400);
SET INTEGRITY FOR ORDERS109 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS110 OFF;
ALTER TABLE ORDERS110 DROP CONSTRAINT ORDERS110CKC;
ALTER TABLE ORDERS110 ADD CONSTRAINT ORDERS110CKC CHECK (O_W_ID BETWEEN
174401 AND 176000);
SET INTEGRITY FOR ORDERS110 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS111 OFF;
ALTER TABLE ORDERS111 DROP CONSTRAINT ORDERS111CKC;
ALTER TABLE ORDERS111 ADD CONSTRAINT ORDERS111CKC CHECK (O_W_ID BETWEEN
176001 AND 177600);
SET INTEGRITY FOR ORDERS111 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS112 OFF;
ALTER TABLE ORDERS112 DROP CONSTRAINT ORDERS112CKC;
ALTER TABLE ORDERS112 ADD CONSTRAINT ORDERS112CKC CHECK (O_W_ID BETWEEN
177601 AND 179200);
SET INTEGRITY FOR ORDERS112 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS113 OFF;
ALTER TABLE ORDERS113 DROP CONSTRAINT ORDERS113CKC;
ALTER TABLE ORDERS113 ADD CONSTRAINT ORDERS113CKC CHECK (O_W_ID BETWEEN
179201 AND 180800);
SET INTEGRITY FOR ORDERS113 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS114 OFF;
ALTER TABLE ORDERS114 DROP CONSTRAINT ORDERS114CKC;
ALTER TABLE ORDERS114 ADD CONSTRAINT ORDERS114CKC CHECK (O_W_ID BETWEEN
180801 AND 182400);
SET INTEGRITY FOR ORDERS114 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS115 OFF;
ALTER TABLE ORDERS115 DROP CONSTRAINT ORDERS115CKC;
ALTER TABLE ORDERS115 ADD CONSTRAINT ORDERS115CKC CHECK (O_W_ID BETWEEN
182401 AND 184000);
SET INTEGRITY FOR ORDERS115 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS116 OFF;
ALTER TABLE ORDERS116 DROP CONSTRAINT ORDERS116CKC;
ALTER TABLE ORDERS116 ADD CONSTRAINT ORDERS116CKC CHECK (O_W_ID BETWEEN
184001 AND 185600);
SET INTEGRITY FOR ORDERS116 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS117 OFF;
ALTER TABLE ORDERS117 DROP CONSTRAINT ORDERS117CKC;
ALTER TABLE ORDERS117 ADD CONSTRAINT ORDERS117CKC CHECK (O_W_ID BETWEEN
185601 AND 187200);
SET INTEGRITY FOR ORDERS117 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS118 OFF;
ALTER TABLE ORDERS118 DROP CONSTRAINT ORDERS118CKC;
ALTER TABLE ORDERS118 ADD CONSTRAINT ORDERS118CKC CHECK (O_W_ID BETWEEN
187201 AND 188800);
SET INTEGRITY FOR ORDERS118 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS119 OFF;
ALTER TABLE ORDERS119 DROP CONSTRAINT ORDERS119CKC;
ALTER TABLE ORDERS119 ADD CONSTRAINT ORDERS119CKC CHECK (O_W_ID BETWEEN
188801 AND 190400);
SET INTEGRITY FOR ORDERS119 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS120 OFF;
ALTER TABLE ORDERS120 DROP CONSTRAINT ORDERS120CKC;
ALTER TABLE ORDERS120 ADD CONSTRAINT ORDERS120CKC CHECK (O_W_ID BETWEEN
190401 AND 192000);
SET INTEGRITY FOR ORDERS120 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS121 OFF;
ALTER TABLE ORDERS121 DROP CONSTRAINT ORDERS121CKC;
ALTER TABLE ORDERS121 ADD CONSTRAINT ORDERS121CKC CHECK (O_W_ID BETWEEN
192001 AND 193600);
SET INTEGRITY FOR ORDERS121 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS122 OFF;
ALTER TABLE ORDERS122 DROP CONSTRAINT ORDERS122CKC;
ALTER TABLE ORDERS122 ADD CONSTRAINT ORDERS122CKC CHECK (O_W_ID BETWEEN
193601 AND 195200);
SET INTEGRITY FOR ORDERS122 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS123 OFF;
ALTER TABLE ORDERS123 DROP CONSTRAINT ORDERS123CKC;
ALTER TABLE ORDERS123 ADD CONSTRAINT ORDERS123CKC CHECK (O_W_ID BETWEEN
195201 AND 196800);
SET INTEGRITY FOR ORDERS123 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS124 OFF;
ALTER TABLE ORDERS124 DROP CONSTRAINT ORDERS124CKC;
ALTER TABLE ORDERS124 ADD CONSTRAINT ORDERS124CKC CHECK (O_W_ID BETWEEN
196801 AND 198400);
SET INTEGRITY FOR ORDERS124 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS125 OFF;
ALTER TABLE ORDERS125 DROP CONSTRAINT ORDERS125CKC;
ALTER TABLE ORDERS125 ADD CONSTRAINT ORDERS125CKC CHECK (O_W_ID BETWEEN
198401 AND 200000);
SET INTEGRITY FOR ORDERS125 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS126 OFF;
ALTER TABLE ORDERS126 DROP CONSTRAINT ORDERS126CKC;
ALTER TABLE ORDERS126 ADD CONSTRAINT ORDERS126CKC CHECK (O_W_ID BETWEEN
200001 AND 201600);
SET INTEGRITY FOR ORDERS126 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS127 OFF;
ALTER TABLE ORDERS127 DROP CONSTRAINT ORDERS127CKC;
ALTER TABLE ORDERS127 ADD CONSTRAINT ORDERS127CKC CHECK (O_W_ID BETWEEN
201601 AND 203200);
SET INTEGRITY FOR ORDERS127 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS128 OFF;
ALTER TABLE ORDERS128 DROP CONSTRAINT ORDERS128CKC;
ALTER TABLE ORDERS128 ADD CONSTRAINT ORDERS128CKC CHECK (O_W_ID BETWEEN
203201 AND 204800);
SET INTEGRITY FOR ORDERS128 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS129 OFF;
ALTER TABLE ORDERS129 DROP CONSTRAINT ORDERS129CKC;
ALTER TABLE ORDERS129 ADD CONSTRAINT ORDERS129CKC CHECK (O_W_ID BETWEEN
204801 AND 206400);
SET INTEGRITY FOR ORDERS129 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS130 OFF;
ALTER TABLE ORDERS130 DROP CONSTRAINT ORDERS130CKC;
ALTER TABLE ORDERS130 ADD CONSTRAINT ORDERS130CKC CHECK (O_W_ID BETWEEN
206401 AND 208000);
SET INTEGRITY FOR ORDERS130 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS131 OFF;
ALTER TABLE ORDERS131 DROP CONSTRAINT ORDERS131CKC;
ALTER TABLE ORDERS131 ADD CONSTRAINT ORDERS131CKC CHECK (O_W_ID BETWEEN
208001 AND 209600);
SET INTEGRITY FOR ORDERS131 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS132 OFF;
ALTER TABLE ORDERS132 DROP CONSTRAINT ORDERS132CKC;
ALTER TABLE ORDERS132 ADD CONSTRAINT ORDERS132CKC CHECK (O_W_ID BETWEEN
209601 AND 211200);
SET INTEGRITY FOR ORDERS132 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS133 OFF;
ALTER TABLE ORDERS133 DROP CONSTRAINT ORDERS133CKC;
ALTER TABLE ORDERS133 ADD CONSTRAINT ORDERS133CKC CHECK (O_W_ID BETWEEN
211201 AND 212800);
SET INTEGRITY FOR ORDERS133 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS134 OFF;
ALTER TABLE ORDERS134 DROP CONSTRAINT ORDERS134CKC;
ALTER TABLE ORDERS134 ADD CONSTRAINT ORDERS134CKC CHECK (O_W_ID BETWEEN
212801 AND 214400);
SET INTEGRITY FOR ORDERS134 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS135 OFF;
ALTER TABLE ORDERS135 DROP CONSTRAINT ORDERS135CKC;
ALTER TABLE ORDERS135 ADD CONSTRAINT ORDERS135CKC CHECK (O_W_ID BETWEEN
214401 AND 216000);
SET INTEGRITY FOR ORDERS135 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS136 OFF;
ALTER TABLE ORDERS136 DROP CONSTRAINT ORDERS136CKC;
ALTER TABLE ORDERS136 ADD CONSTRAINT ORDERS136CKC CHECK (O_W_ID BETWEEN
216001 AND 217600);
SET INTEGRITY FOR ORDERS136 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS137 OFF;
ALTER TABLE ORDERS137 DROP CONSTRAINT ORDERS137CKC;
ALTER TABLE ORDERS137 ADD CONSTRAINT ORDERS137CKC CHECK (O_W_ID BETWEEN
217601 AND 219200);
SET INTEGRITY FOR ORDERS137 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS138 OFF;
```

```
ALTER TABLE ORDERS138 DROP CONSTRAINT ORDERS138CKC;
ALTER TABLE ORDERS138 ADD CONSTRAINT ORDERS138CKC CHECK (O_W_ID BETWEEN
219201 AND 220800);
SET INTEGRITY FOR ORDERS138 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS139 OFF;
ALTER TABLE ORDERS139 DROP CONSTRAINT ORDERS139CKC;
ALTER TABLE ORDERS139 ADD CONSTRAINT ORDERS139CKC CHECK (O_W_ID BETWEEN
220801 AND 222400);
SET INTEGRITY FOR ORDERS139 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS140 OFF;
ALTER TABLE ORDERS140 DROP CONSTRAINT ORDERS140CKC;
ALTER TABLE ORDERS140 ADD CONSTRAINT ORDERS140CKC CHECK (O_W_ID BETWEEN
222401 AND 224000);
SET INTEGRITY FOR ORDERS140 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS141 OFF;
ALTER TABLE ORDERS141 DROP CONSTRAINT ORDERS141CKC;
ALTER TABLE ORDERS141 ADD CONSTRAINT ORDERS141CKC CHECK (O_W_ID BETWEEN
224001 AND 225600);
SET INTEGRITY FOR ORDERS141 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS142 OFF;
ALTER TABLE ORDERS142 DROP CONSTRAINT ORDERS142CKC;
ALTER TABLE ORDERS142 ADD CONSTRAINT ORDERS142CKC CHECK (O_W_ID BETWEEN
225601 AND 227200);
SET INTEGRITY FOR ORDERS142 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS143 OFF;
ALTER TABLE ORDERS143 DROP CONSTRAINT ORDERS143CKC;
ALTER TABLE ORDERS143 ADD CONSTRAINT ORDERS143CKC CHECK (O_W_ID BETWEEN
227201 AND 228800);
SET INTEGRITY FOR ORDERS143 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS144 OFF;
ALTER TABLE ORDERS144 DROP CONSTRAINT ORDERS144CKC;
ALTER TABLE ORDERS144 ADD CONSTRAINT ORDERS144CKC CHECK (O_W_ID BETWEEN
228801 AND 230400);
SET INTEGRITY FOR ORDERS144 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS145 OFF;
ALTER TABLE ORDERS145 DROP CONSTRAINT ORDERS145CKC;
ALTER TABLE ORDERS145 ADD CONSTRAINT ORDERS145CKC CHECK (O_W_ID BETWEEN
230401 AND 232000);
SET INTEGRITY FOR ORDERS145 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS146 OFF;
ALTER TABLE ORDERS146 DROP CONSTRAINT ORDERS146CKC;
ALTER TABLE ORDERS146 ADD CONSTRAINT ORDERS146CKC CHECK (O_W_ID BETWEEN
232001 AND 233600);
SET INTEGRITY FOR ORDERS146 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS147 OFF;
ALTER TABLE ORDERS147 DROP CONSTRAINT ORDERS147CKC;
ALTER TABLE ORDERS147 ADD CONSTRAINT ORDERS147CKC CHECK (O_W_ID BETWEEN
233601 AND 235200);
SET INTEGRITY FOR ORDERS147 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS148 OFF;
ALTER TABLE ORDERS148 DROP CONSTRAINT ORDERS148CKC;
ALTER TABLE ORDERS148 ADD CONSTRAINT ORDERS148CKC CHECK (O_W_ID BETWEEN
235201 AND 236800);
SET INTEGRITY FOR ORDERS148 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS149 OFF;
ALTER TABLE ORDERS149 DROP CONSTRAINT ORDERS149CKC;
ALTER TABLE ORDERS149 ADD CONSTRAINT ORDERS149CKC CHECK (O_W_ID BETWEEN
236801 AND 238400);
SET INTEGRITY FOR ORDERS149 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS150 OFF;
ALTER TABLE ORDERS150 DROP CONSTRAINT ORDERS150CKC;
ALTER TABLE ORDERS150 ADD CONSTRAINT ORDERS150CKC CHECK (O_W_ID BETWEEN
238401 AND 240000);
SET INTEGRITY FOR ORDERS150 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS151 OFF;
ALTER TABLE ORDERS151 DROP CONSTRAINT ORDERS151CKC;
ALTER TABLE ORDERS151 ADD CONSTRAINT ORDERS151CKC CHECK (O_W_ID BETWEEN
240001 AND 241600);
SET INTEGRITY FOR ORDERS151 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS152 OFF;
ALTER TABLE ORDERS152 DROP CONSTRAINT ORDERS152CKC;
ALTER TABLE ORDERS152 ADD CONSTRAINT ORDERS152CKC CHECK (O_W_ID BETWEEN
241601 AND 243200);
SET INTEGRITY FOR ORDERS152 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS153 OFF;
ALTER TABLE ORDERS153 DROP CONSTRAINT ORDERS153CKC;
ALTER TABLE ORDERS153 ADD CONSTRAINT ORDERS153CKC CHECK (O_W_ID BETWEEN
243201 AND 244800);
SET INTEGRITY FOR ORDERS153 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS154 OFF;
ALTER TABLE ORDERS154 DROP CONSTRAINT ORDERS154CKC;
ALTER TABLE ORDERS154 ADD CONSTRAINT ORDERS154CKC CHECK (O_W_ID BETWEEN
244801 AND 246400);
SET INTEGRITY FOR ORDERS154 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS155 OFF;
ALTER TABLE ORDERS155 DROP CONSTRAINT ORDERS155CKC;
ALTER TABLE ORDERS155 ADD CONSTRAINT ORDERS155CKC CHECK (O_W_ID BETWEEN
246401 AND 248000);
SET INTEGRITY FOR ORDERS155 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS156 OFF;
ALTER TABLE ORDERS156 DROP CONSTRAINT ORDERS156CKC;
ALTER TABLE ORDERS156 ADD CONSTRAINT ORDERS156CKC CHECK (O_W_ID BETWEEN
248001 AND 249600);
SET INTEGRITY FOR ORDERS156 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS157 OFF;
ALTER TABLE ORDERS157 DROP CONSTRAINT ORDERS157CKC;
ALTER TABLE ORDERS157 ADD CONSTRAINT ORDERS157CKC CHECK (O_W_ID BETWEEN
249601 AND 251200);
SET INTEGRITY FOR ORDERS157 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS158 OFF;
ALTER TABLE ORDERS158 DROP CONSTRAINT ORDERS158CKC;
ALTER TABLE ORDERS158 ADD CONSTRAINT ORDERS158CKC CHECK (O_W_ID BETWEEN
251201 AND 252800);
SET INTEGRITY FOR ORDERS158 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS159 OFF;
ALTER TABLE ORDERS159 DROP CONSTRAINT ORDERS159CKC;
ALTER TABLE ORDERS159 ADD CONSTRAINT ORDERS159CKC CHECK (O_W_ID BETWEEN
252801 AND 254400);
SET INTEGRITY FOR ORDERS159 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS160 OFF;
ALTER TABLE ORDERS160 DROP CONSTRAINT ORDERS160CKC;
ALTER TABLE ORDERS160 ADD CONSTRAINT ORDERS160CKC CHECK (O_W_ID BETWEEN
254401 AND 256000);
SET INTEGRITY FOR ORDERS160 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS161 OFF;
ALTER TABLE ORDERS161 DROP CONSTRAINT ORDERS161CKC;
ALTER TABLE ORDERS161 ADD CONSTRAINT ORDERS161CKC CHECK (O_W_ID BETWEEN
256001 AND 257600);
SET INTEGRITY FOR ORDERS161 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS162 OFF;
ALTER TABLE ORDERS162 DROP CONSTRAINT ORDERS162CKC;
ALTER TABLE ORDERS162 ADD CONSTRAINT ORDERS162CKC CHECK (O_W_ID BETWEEN
257601 AND 259200);
SET INTEGRITY FOR ORDERS162 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS163 OFF;
ALTER TABLE ORDERS163 DROP CONSTRAINT ORDERS163CKC;
ALTER TABLE ORDERS163 ADD CONSTRAINT ORDERS163CKC CHECK (O_W_ID BETWEEN
259201 AND 260800);
SET INTEGRITY FOR ORDERS163 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS164 OFF;
ALTER TABLE ORDERS164 DROP CONSTRAINT ORDERS164CKC;
ALTER TABLE ORDERS164 ADD CONSTRAINT ORDERS164CKC CHECK (O_W_ID BETWEEN
260801 AND 262400);
SET INTEGRITY FOR ORDERS164 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS165 OFF;
ALTER TABLE ORDERS165 DROP CONSTRAINT ORDERS165CKC;
ALTER TABLE ORDERS165 ADD CONSTRAINT ORDERS165CKC CHECK (O_W_ID BETWEEN
262401 AND 264000);
SET INTEGRITY FOR ORDERS165 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS166 OFF;
ALTER TABLE ORDERS166 DROP CONSTRAINT ORDERS166CKC;
ALTER TABLE ORDERS166 ADD CONSTRAINT ORDERS166CKC CHECK (O_W_ID BETWEEN
264001 AND 265600);
SET INTEGRITY FOR ORDERS166 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS167 OFF;
ALTER TABLE ORDERS167 DROP CONSTRAINT ORDERS167CKC;
ALTER TABLE ORDERS167 ADD CONSTRAINT ORDERS167CKC CHECK (O_W_ID BETWEEN
265601 AND 267200);
SET INTEGRITY FOR ORDERS167 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS168 OFF;
ALTER TABLE ORDERS168 DROP CONSTRAINT ORDERS168CKC;
ALTER TABLE ORDERS168 ADD CONSTRAINT ORDERS168CKC CHECK (O_W_ID BETWEEN
267201 AND 268800);
SET INTEGRITY FOR ORDERS168 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS169 OFF;
ALTER TABLE ORDERS169 DROP CONSTRAINT ORDERS169CKC;
```

```
ALTER TABLE ORDERS169 ADD CONSTRAINT ORDERS169CKC CHECK (O_W_ID BETWEEN
268801 AND 270400);
SET INTEGRITY FOR ORDERS169 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS170 OFF;
ALTER TABLE ORDERS170 DROP CONSTRAINT ORDERS170CKC;
ALTER TABLE ORDERS170 ADD CONSTRAINT ORDERS170CKC CHECK (O_W_ID BETWEEN
270401 AND 272000);
SET INTEGRITY FOR ORDERS170 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS171 OFF;
ALTER TABLE ORDERS171 DROP CONSTRAINT ORDERS171CKC;
ALTER TABLE ORDERS171 ADD CONSTRAINT ORDERS171CKC CHECK (O_W_ID BETWEEN
272001 AND 273600);
SET INTEGRITY FOR ORDERS171 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS172 OFF;
ALTER TABLE ORDERS172 DROP CONSTRAINT ORDERS172CKC;
ALTER TABLE ORDERS172 ADD CONSTRAINT ORDERS172CKC CHECK (O_W_ID BETWEEN
273601 AND 275200);
SET INTEGRITY FOR ORDERS172 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS173 OFF;
ALTER TABLE ORDERS173 DROP CONSTRAINT ORDERS173CKC;
ALTER TABLE ORDERS173 ADD CONSTRAINT ORDERS173CKC CHECK (O_W_ID BETWEEN
275201 AND 276800);
SET INTEGRITY FOR ORDERS173 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS174 OFF;
ALTER TABLE ORDERS174 DROP CONSTRAINT ORDERS174CKC;
ALTER TABLE ORDERS174 ADD CONSTRAINT ORDERS174CKC CHECK (O_W_ID BETWEEN
276801 AND 278400);
SET INTEGRITY FOR ORDERS174 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS175 OFF;
ALTER TABLE ORDERS175 DROP CONSTRAINT ORDERS175CKC;
ALTER TABLE ORDERS175 ADD CONSTRAINT ORDERS175CKC CHECK (O_W_ID BETWEEN
278401 AND 280000);
SET INTEGRITY FOR ORDERS175 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS176 OFF;
ALTER TABLE ORDERS176 DROP CONSTRAINT ORDERS176CKC;
ALTER TABLE ORDERS176 ADD CONSTRAINT ORDERS176CKC CHECK (O_W_ID BETWEEN
280001 AND 281600);
SET INTEGRITY FOR ORDERS176 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS177 OFF;
ALTER TABLE ORDERS177 DROP CONSTRAINT ORDERS177CKC;
ALTER TABLE ORDERS177 ADD CONSTRAINT ORDERS177CKC CHECK (O_W_ID BETWEEN
281601 AND 283200);
SET INTEGRITY FOR ORDERS177 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS178 OFF;
ALTER TABLE ORDERS178 DROP CONSTRAINT ORDERS178CKC;
ALTER TABLE ORDERS178 ADD CONSTRAINT ORDERS178CKC CHECK (O_W_ID BETWEEN
283201 AND 284800);
SET INTEGRITY FOR ORDERS178 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS179 OFF;
ALTER TABLE ORDERS179 DROP CONSTRAINT ORDERS179CKC;
ALTER TABLE ORDERS179 ADD CONSTRAINT ORDERS179CKC CHECK (O_W_ID BETWEEN
284801 AND 286400);
SET INTEGRITY FOR ORDERS179 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS180 OFF;
ALTER TABLE ORDERS180 DROP CONSTRAINT ORDERS180CKC;
ALTER TABLE ORDERS180 ADD CONSTRAINT ORDERS180CKC CHECK (O_W_ID BETWEEN
286401 AND 288000);
SET INTEGRITY FOR ORDERS180 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS181 OFF;
ALTER TABLE ORDERS181 DROP CONSTRAINT ORDERS181CKC;
ALTER TABLE ORDERS181 ADD CONSTRAINT ORDERS181CKC CHECK (O_W_ID BETWEEN
288001 AND 289600);
SET INTEGRITY FOR ORDERS181 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS182 OFF;
ALTER TABLE ORDERS182 DROP CONSTRAINT ORDERS182CKC;
ALTER TABLE ORDERS182 ADD CONSTRAINT ORDERS182CKC CHECK (O_W_ID BETWEEN
289601 AND 291200);
SET INTEGRITY FOR ORDERS182 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS183 OFF;
ALTER TABLE ORDERS183 DROP CONSTRAINT ORDERS183CKC;
ALTER TABLE ORDERS183 ADD CONSTRAINT ORDERS183CKC CHECK (O_W_ID BETWEEN
291201 AND 292800);
SET INTEGRITY FOR ORDERS183 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS184 OFF;
ALTER TABLE ORDERS184 DROP CONSTRAINT ORDERS184CKC;
ALTER TABLE ORDERS184 ADD CONSTRAINT ORDERS184CKC CHECK (O_W_ID BETWEEN
292801 AND 294400);
SET INTEGRITY FOR ORDERS184 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS185 OFF;
ALTER TABLE ORDERS185 DROP CONSTRAINT ORDERS185CKC;
ALTER TABLE ORDERS185 ADD CONSTRAINT ORDERS185CKC CHECK (O_W_ID BETWEEN
294401 AND 296000);
SET INTEGRITY FOR ORDERS185 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS186 OFF;
ALTER TABLE ORDERS186 DROP CONSTRAINT ORDERS186CKC;
ALTER TABLE ORDERS186 ADD CONSTRAINT ORDERS186CKC CHECK (O_W_ID BETWEEN
296001 AND 297600);
SET INTEGRITY FOR ORDERS186 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS187 OFF;
ALTER TABLE ORDERS187 DROP CONSTRAINT ORDERS187CKC;
ALTER TABLE ORDERS187 ADD CONSTRAINT ORDERS187CKC CHECK (O_W_ID BETWEEN
297601 AND 299200);
SET INTEGRITY FOR ORDERS187 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS188 OFF;
ALTER TABLE ORDERS188 DROP CONSTRAINT ORDERS188CKC;
ALTER TABLE ORDERS188 ADD CONSTRAINT ORDERS188CKC CHECK (O_W_ID BETWEEN
299201 AND 300800);
SET INTEGRITY FOR ORDERS188 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS189 OFF;
ALTER TABLE ORDERS189 DROP CONSTRAINT ORDERS189CKC;
ALTER TABLE ORDERS189 ADD CONSTRAINT ORDERS189CKC CHECK (O_W_ID BETWEEN
300801 AND 302400);
SET INTEGRITY FOR ORDERS189 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS190 OFF;
ALTER TABLE ORDERS190 DROP CONSTRAINT ORDERS190CKC;
ALTER TABLE ORDERS190 ADD CONSTRAINT ORDERS190CKC CHECK (O_W_ID BETWEEN
302401 AND 304000);
SET INTEGRITY FOR ORDERS190 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS191 OFF;
ALTER TABLE ORDERS191 DROP CONSTRAINT ORDERS191CKC;
ALTER TABLE ORDERS191 ADD CONSTRAINT ORDERS191CKC CHECK (O_W_ID BETWEEN
304001 AND 305600);
SET INTEGRITY FOR ORDERS191 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS192 OFF;
ALTER TABLE ORDERS192 DROP CONSTRAINT ORDERS192CKC;
ALTER TABLE ORDERS192 ADD CONSTRAINT ORDERS192CKC CHECK (O_W_ID BETWEEN
305601 AND 307200);
SET INTEGRITY FOR ORDERS192 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS193 OFF;
ALTER TABLE ORDERS193 DROP CONSTRAINT ORDERS193CKC;
ALTER TABLE ORDERS193 ADD CONSTRAINT ORDERS193CKC CHECK (O_W_ID BETWEEN
307201 AND 308800);
SET INTEGRITY FOR ORDERS193 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS194 OFF;
ALTER TABLE ORDERS194 DROP CONSTRAINT ORDERS194CKC;
ALTER TABLE ORDERS194 ADD CONSTRAINT ORDERS194CKC CHECK (O_W_ID BETWEEN
308801 AND 310400);
SET INTEGRITY FOR ORDERS194 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS195 OFF;
ALTER TABLE ORDERS195 DROP CONSTRAINT ORDERS195CKC;
ALTER TABLE ORDERS195 ADD CONSTRAINT ORDERS195CKC CHECK (O_W_ID BETWEEN
310401 AND 312000);
SET INTEGRITY FOR ORDERS195 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS196 OFF;
ALTER TABLE ORDERS196 DROP CONSTRAINT ORDERS196CKC;
ALTER TABLE ORDERS196 ADD CONSTRAINT ORDERS196CKC CHECK (O_W_ID BETWEEN
312001 AND 313600);
SET INTEGRITY FOR ORDERS196 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS197 OFF;
ALTER TABLE ORDERS197 DROP CONSTRAINT ORDERS197CKC;
ALTER TABLE ORDERS197 ADD CONSTRAINT ORDERS197CKC CHECK (O_W_ID BETWEEN
313601 AND 315200);
SET INTEGRITY FOR ORDERS197 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS198 OFF;
ALTER TABLE ORDERS198 DROP CONSTRAINT ORDERS198CKC;
ALTER TABLE ORDERS198 ADD CONSTRAINT ORDERS198CKC CHECK (O_W_ID BETWEEN
315201 AND 316800);
SET INTEGRITY FOR ORDERS198 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS199 OFF;
ALTER TABLE ORDERS199 DROP CONSTRAINT ORDERS199CKC;
ALTER TABLE ORDERS199 ADD CONSTRAINT ORDERS199CKC CHECK (O_W_ID BETWEEN
316801 AND 318400);
SET INTEGRITY FOR ORDERS199 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDERS200 OFF;
ALTER TABLE ORDERS200 DROP CONSTRAINT ORDERS200CKC;
ALTER TABLE ORDERS200 ADD CONSTRAINT ORDERS200CKC CHECK (O_W_ID >= 318401);
SET INTEGRITY FOR ORDERS200 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
```

DDL/CRCONST_ORDER_LINE.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE1 OFF;
ALTER TABLE ORDER_LINE1 DROP CONSTRAINT ORDER_LINE1CKC;
ALTER TABLE ORDER_LINE1 ADD CONSTRAINT ORDER_LINE1CKC CHECK (OL_W_ID BETWEEN 1
AND 1600);
SET INTEGRITY FOR ORDER_LINE1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE2 OFF;
ALTER TABLE ORDER_LINE2 DROP CONSTRAINT ORDER_LINE2CKC;
ALTER TABLE ORDER_LINE2 ADD CONSTRAINT ORDER_LINE2CKC CHECK (OL_W_ID BETWEEN
1601 AND 3200);
SET INTEGRITY FOR ORDER_LINE2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE3 OFF;
ALTER TABLE ORDER_LINE3 DROP CONSTRAINT ORDER_LINE3CKC;
ALTER TABLE ORDER_LINE3 ADD CONSTRAINT ORDER_LINE3CKC CHECK (OL_W_ID BETWEEN
3201 AND 4800);
SET INTEGRITY FOR ORDER_LINE3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE4 OFF;
ALTER TABLE ORDER_LINE4 DROP CONSTRAINT ORDER_LINE4CKC;
ALTER TABLE ORDER_LINE4 ADD CONSTRAINT ORDER_LINE4CKC CHECK (OL_W_ID BETWEEN
4801 AND 6400);
SET INTEGRITY FOR ORDER_LINE4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE5 OFF;
ALTER TABLE ORDER_LINE5 DROP CONSTRAINT ORDER_LINE5CKC;
ALTER TABLE ORDER_LINE5 ADD CONSTRAINT ORDER_LINE5CKC CHECK (OL_W_ID BETWEEN
6401 AND 8000);
SET INTEGRITY FOR ORDER_LINE5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE6 OFF;
ALTER TABLE ORDER_LINE6 DROP CONSTRAINT ORDER_LINE6CKC;
ALTER TABLE ORDER_LINE6 ADD CONSTRAINT ORDER_LINE6CKC CHECK (OL_W_ID BETWEEN
8001 AND 9600);
SET INTEGRITY FOR ORDER_LINE6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE7 OFF;
ALTER TABLE ORDER_LINE7 DROP CONSTRAINT ORDER_LINE7CKC;
ALTER TABLE ORDER_LINE7 ADD CONSTRAINT ORDER_LINE7CKC CHECK (OL_W_ID BETWEEN
9601 AND 11200);
SET INTEGRITY FOR ORDER_LINE7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE8 OFF;
ALTER TABLE ORDER_LINE8 DROP CONSTRAINT ORDER_LINE8CKC;
ALTER TABLE ORDER_LINE8 ADD CONSTRAINT ORDER_LINE8CKC CHECK (OL_W_ID BETWEEN
11201 AND 12800);
SET INTEGRITY FOR ORDER_LINE8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE9 OFF;
ALTER TABLE ORDER_LINE9 DROP CONSTRAINT ORDER_LINE9CKC;
ALTER TABLE ORDER_LINE9 ADD CONSTRAINT ORDER_LINE9CKC CHECK (OL_W_ID BETWEEN
12801 AND 14400);
SET INTEGRITY FOR ORDER_LINE9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE10 OFF;
ALTER TABLE ORDER_LINE10 DROP CONSTRAINT ORDER_LINE10CKC;
ALTER TABLE ORDER_LINE10 ADD CONSTRAINT ORDER_LINE10CKC CHECK (OL_W_ID
BETWEEN 14401 AND 16000);
SET INTEGRITY FOR ORDER_LINE10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE11 OFF;
ALTER TABLE ORDER_LINE11 DROP CONSTRAINT ORDER_LINE11CKC;
ALTER TABLE ORDER_LINE11 ADD CONSTRAINT ORDER_LINE11CKC CHECK (OL_W_ID
BETWEEN 16001 AND 17600);
SET INTEGRITY FOR ORDER_LINE11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE12 OFF;
ALTER TABLE ORDER_LINE12 DROP CONSTRAINT ORDER_LINE12CKC;
ALTER TABLE ORDER_LINE12 ADD CONSTRAINT ORDER_LINE12CKC CHECK (OL_W_ID
BETWEEN 17601 AND 19200);
SET INTEGRITY FOR ORDER_LINE12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE13 OFF;
ALTER TABLE ORDER_LINE13 DROP CONSTRAINT ORDER_LINE13CKC;
ALTER TABLE ORDER_LINE13 ADD CONSTRAINT ORDER_LINE13CKC CHECK (OL_W_ID
BETWEEN 19201 AND 20800);
SET INTEGRITY FOR ORDER_LINE13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE14 OFF;
ALTER TABLE ORDER_LINE14 DROP CONSTRAINT ORDER_LINE14CKC;
ALTER TABLE ORDER_LINE14 ADD CONSTRAINT ORDER_LINE14CKC CHECK (OL_W_ID
BETWEEN 20801 AND 22400);
SET INTEGRITY FOR ORDER_LINE14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE15 OFF;
ALTER TABLE ORDER_LINE15 DROP CONSTRAINT ORDER_LINE15CKC;
ALTER TABLE ORDER_LINE15 ADD CONSTRAINT ORDER_LINE15CKC CHECK (OL_W_ID
BETWEEN 22401 AND 24000);
SET INTEGRITY FOR ORDER_LINE15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE16 OFF;
ALTER TABLE ORDER_LINE16 DROP CONSTRAINT ORDER_LINE16CKC;
ALTER TABLE ORDER_LINE16 ADD CONSTRAINT ORDER_LINE16CKC CHECK (OL_W_ID
BETWEEN 24001 AND 25600);
SET INTEGRITY FOR ORDER_LINE16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE17 OFF;
ALTER TABLE ORDER_LINE17 DROP CONSTRAINT ORDER_LINE17CKC;
ALTER TABLE ORDER_LINE17 ADD CONSTRAINT ORDER_LINE17CKC CHECK (OL_W_ID
BETWEEN 25601 AND 27200);
SET INTEGRITY FOR ORDER_LINE17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE18 OFF;
ALTER TABLE ORDER_LINE18 DROP CONSTRAINT ORDER_LINE18CKC;
ALTER TABLE ORDER_LINE18 ADD CONSTRAINT ORDER_LINE18CKC CHECK (OL_W_ID
BETWEEN 27201 AND 28800);
SET INTEGRITY FOR ORDER_LINE18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE19 OFF;
ALTER TABLE ORDER_LINE19 DROP CONSTRAINT ORDER_LINE19CKC;
ALTER TABLE ORDER_LINE19 ADD CONSTRAINT ORDER_LINE19CKC CHECK (OL_W_ID
BETWEEN 28801 AND 30400);
SET INTEGRITY FOR ORDER_LINE19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE20 OFF;
ALTER TABLE ORDER_LINE20 DROP CONSTRAINT ORDER_LINE20CKC;
ALTER TABLE ORDER_LINE20 ADD CONSTRAINT ORDER_LINE20CKC CHECK (OL_W_ID
BETWEEN 30401 AND 32000);
SET INTEGRITY FOR ORDER_LINE20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE21 OFF;
ALTER TABLE ORDER_LINE21 DROP CONSTRAINT ORDER_LINE21CKC;
ALTER TABLE ORDER_LINE21 ADD CONSTRAINT ORDER_LINE21CKC CHECK (OL_W_ID
BETWEEN 32001 AND 33600);
SET INTEGRITY FOR ORDER_LINE21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE22 OFF;
ALTER TABLE ORDER_LINE22 DROP CONSTRAINT ORDER_LINE22CKC;
ALTER TABLE ORDER_LINE22 ADD CONSTRAINT ORDER_LINE22CKC CHECK (OL_W_ID
BETWEEN 33601 AND 35200);
SET INTEGRITY FOR ORDER_LINE22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE23 OFF;
ALTER TABLE ORDER_LINE23 DROP CONSTRAINT ORDER_LINE23CKC;
ALTER TABLE ORDER_LINE23 ADD CONSTRAINT ORDER_LINE23CKC CHECK (OL_W_ID
BETWEEN 35201 AND 36800);
SET INTEGRITY FOR ORDER_LINE23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE24 OFF;
ALTER TABLE ORDER_LINE24 DROP CONSTRAINT ORDER_LINE24CKC;
ALTER TABLE ORDER_LINE24 ADD CONSTRAINT ORDER_LINE24CKC CHECK (OL_W_ID
BETWEEN 36801 AND 38400);
SET INTEGRITY FOR ORDER_LINE24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE25 OFF;
ALTER TABLE ORDER_LINE25 DROP CONSTRAINT ORDER_LINE25CKC;
ALTER TABLE ORDER_LINE25 ADD CONSTRAINT ORDER_LINE25CKC CHECK (OL_W_ID
BETWEEN 38401 AND 40000);
SET INTEGRITY FOR ORDER_LINE25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE26 OFF;
ALTER TABLE ORDER_LINE26 DROP CONSTRAINT ORDER_LINE26CKC;
ALTER TABLE ORDER_LINE26 ADD CONSTRAINT ORDER_LINE26CKC CHECK (OL_W_ID
BETWEEN 40001 AND 41600);
SET INTEGRITY FOR ORDER_LINE26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE27 OFF;
ALTER TABLE ORDER_LINE27 DROP CONSTRAINT ORDER_LINE27CKC;
ALTER TABLE ORDER_LINE27 ADD CONSTRAINT ORDER_LINE27CKC CHECK (OL_W_ID
BETWEEN 41601 AND 43200);
SET INTEGRITY FOR ORDER_LINE27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE28 OFF;
ALTER TABLE ORDER_LINE28 DROP CONSTRAINT ORDER_LINE28CKC;
ALTER TABLE ORDER_LINE28 ADD CONSTRAINT ORDER_LINE28CKC CHECK (OL_W_ID
BETWEEN 43201 AND 44800);
SET INTEGRITY FOR ORDER_LINE28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE29 OFF;
ALTER TABLE ORDER_LINE29 DROP CONSTRAINT ORDER_LINE29CKC;
ALTER TABLE ORDER_LINE29 ADD CONSTRAINT ORDER_LINE29CKC CHECK (OL_W_ID
BETWEEN 44801 AND 46400);
SET INTEGRITY FOR ORDER_LINE29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE30 OFF;
ALTER TABLE ORDER_LINE30 DROP CONSTRAINT ORDER_LINE30CKC;
ALTER TABLE ORDER_LINE30 ADD CONSTRAINT ORDER_LINE30CKC CHECK (OL_W_ID
BETWEEN 46401 AND 48000);
SET INTEGRITY FOR ORDER_LINE30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE31 OFF;
```

```
ALTER TABLE ORDER_LINE31 DROP CONSTRAINT ORDER_LINE31CKC;
ALTER TABLE ORDER_LINE31 ADD CONSTRAINT ORDER_LINE31CKC CHECK (OL_W_ID
BETWEEN 48001 AND 49600);
SET INTEGRITY FOR ORDER_LINE31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE32 OFF;
ALTER TABLE ORDER_LINE32 DROP CONSTRAINT ORDER_LINE32CKC;
ALTER TABLE ORDER_LINE32 ADD CONSTRAINT ORDER_LINE32CKC CHECK (OL_W_ID
BETWEEN 49601 AND 51200);
SET INTEGRITY FOR ORDER_LINE32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE33 OFF;
ALTER TABLE ORDER_LINE33 DROP CONSTRAINT ORDER_LINE33CKC;
ALTER TABLE ORDER_LINE33 ADD CONSTRAINT ORDER_LINE33CKC CHECK (OL_W_ID
BETWEEN 51201 AND 52800);
SET INTEGRITY FOR ORDER_LINE33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE34 OFF;
ALTER TABLE ORDER_LINE34 DROP CONSTRAINT ORDER_LINE34CKC;
ALTER TABLE ORDER_LINE34 ADD CONSTRAINT ORDER_LINE34CKC CHECK (OL_W_ID
BETWEEN 52801 AND 54400);
SET INTEGRITY FOR ORDER_LINE34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE35 OFF;
ALTER TABLE ORDER_LINE35 DROP CONSTRAINT ORDER_LINE35CKC;
ALTER TABLE ORDER_LINE35 ADD CONSTRAINT ORDER_LINE35CKC CHECK (OL_W_ID
BETWEEN 54401 AND 56000);
SET INTEGRITY FOR ORDER_LINE35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE36 OFF;
ALTER TABLE ORDER_LINE36 DROP CONSTRAINT ORDER_LINE36CKC;
ALTER TABLE ORDER_LINE36 ADD CONSTRAINT ORDER_LINE36CKC CHECK (OL_W_ID
BETWEEN 56001 AND 57600);
SET INTEGRITY FOR ORDER_LINE36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE37 OFF;
ALTER TABLE ORDER_LINE37 DROP CONSTRAINT ORDER_LINE37CKC;
ALTER TABLE ORDER_LINE37 ADD CONSTRAINT ORDER_LINE37CKC CHECK (OL_W_ID
BETWEEN 57601 AND 59200);
SET INTEGRITY FOR ORDER_LINE37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE38 OFF;
ALTER TABLE ORDER_LINE38 DROP CONSTRAINT ORDER_LINE38CKC;
ALTER TABLE ORDER_LINE38 ADD CONSTRAINT ORDER_LINE38CKC CHECK (OL_W_ID
BETWEEN 59201 AND 60800);
SET INTEGRITY FOR ORDER_LINE38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE39 OFF;
ALTER TABLE ORDER_LINE39 DROP CONSTRAINT ORDER_LINE39CKC;
ALTER TABLE ORDER_LINE39 ADD CONSTRAINT ORDER_LINE39CKC CHECK (OL_W_ID
BETWEEN 60801 AND 62400);
SET INTEGRITY FOR ORDER_LINE39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE40 OFF;
ALTER TABLE ORDER_LINE40 DROP CONSTRAINT ORDER_LINE40CKC;
ALTER TABLE ORDER_LINE40 ADD CONSTRAINT ORDER_LINE40CKC CHECK (OL_W_ID
BETWEEN 62401 AND 64000);
SET INTEGRITY FOR ORDER_LINE40 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE41 OFF;
ALTER TABLE ORDER_LINE41 DROP CONSTRAINT ORDER_LINE41CKC;
ALTER TABLE ORDER_LINE41 ADD CONSTRAINT ORDER_LINE41CKC CHECK (OL_W_ID
BETWEEN 64001 AND 65600);
SET INTEGRITY FOR ORDER_LINE41 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE42 OFF;
ALTER TABLE ORDER_LINE42 DROP CONSTRAINT ORDER_LINE42CKC;
ALTER TABLE ORDER_LINE42 ADD CONSTRAINT ORDER_LINE42CKC CHECK (OL_W_ID
BETWEEN 65601 AND 67200);
SET INTEGRITY FOR ORDER_LINE42 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE43 OFF;
ALTER TABLE ORDER_LINE43 DROP CONSTRAINT ORDER_LINE43CKC;
ALTER TABLE ORDER_LINE43 ADD CONSTRAINT ORDER_LINE43CKC CHECK (OL_W_ID
BETWEEN 67201 AND 68800);
SET INTEGRITY FOR ORDER_LINE43 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE44 OFF;
ALTER TABLE ORDER_LINE44 DROP CONSTRAINT ORDER_LINE44CKC;
ALTER TABLE ORDER_LINE44 ADD CONSTRAINT ORDER_LINE44CKC CHECK (OL_W_ID
BETWEEN 68801 AND 70400);
SET INTEGRITY FOR ORDER_LINE44 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE45 OFF;
ALTER TABLE ORDER_LINE45 DROP CONSTRAINT ORDER_LINE45CKC;
ALTER TABLE ORDER_LINE45 ADD CONSTRAINT ORDER_LINE45CKC CHECK (OL_W_ID
BETWEEN 70401 AND 72000);
SET INTEGRITY FOR ORDER_LINE45 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE46 OFF;
ALTER TABLE ORDER_LINE46 DROP CONSTRAINT ORDER_LINE46CKC;
ALTER TABLE ORDER_LINE46 ADD CONSTRAINT ORDER_LINE46CKC CHECK (OL_W_ID
BETWEEN 72001 AND 73600);
SET INTEGRITY FOR ORDER_LINE46 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE47 OFF;
ALTER TABLE ORDER_LINE47 DROP CONSTRAINT ORDER_LINE47CKC;
ALTER TABLE ORDER_LINE47 ADD CONSTRAINT ORDER_LINE47CKC CHECK (OL_W_ID
BETWEEN 73601 AND 75200);
SET INTEGRITY FOR ORDER_LINE47 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE48 OFF;
ALTER TABLE ORDER_LINE48 DROP CONSTRAINT ORDER_LINE48CKC;
ALTER TABLE ORDER_LINE48 ADD CONSTRAINT ORDER_LINE48CKC CHECK (OL_W_ID
BETWEEN 75201 AND 76800);
SET INTEGRITY FOR ORDER_LINE48 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE49 OFF;
ALTER TABLE ORDER_LINE49 DROP CONSTRAINT ORDER_LINE49CKC;
ALTER TABLE ORDER_LINE49 ADD CONSTRAINT ORDER_LINE49CKC CHECK (OL_W_ID
BETWEEN 76801 AND 78400);
SET INTEGRITY FOR ORDER_LINE49 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE50 OFF;
ALTER TABLE ORDER_LINE50 DROP CONSTRAINT ORDER_LINE50CKC;
ALTER TABLE ORDER_LINE50 ADD CONSTRAINT ORDER_LINE50CKC CHECK (OL_W_ID
BETWEEN 78401 AND 80000);
SET INTEGRITY FOR ORDER_LINE50 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE51 OFF;
ALTER TABLE ORDER_LINE51 DROP CONSTRAINT ORDER_LINE51CKC;
ALTER TABLE ORDER_LINE51 ADD CONSTRAINT ORDER_LINE51CKC CHECK (OL_W_ID
BETWEEN 80001 AND 81600);
SET INTEGRITY FOR ORDER_LINE51 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE52 OFF;
ALTER TABLE ORDER_LINE52 DROP CONSTRAINT ORDER_LINE52CKC;
ALTER TABLE ORDER_LINE52 ADD CONSTRAINT ORDER_LINE52CKC CHECK (OL_W_ID
BETWEEN 81601 AND 83200);
SET INTEGRITY FOR ORDER_LINE52 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE53 OFF;
ALTER TABLE ORDER_LINE53 DROP CONSTRAINT ORDER_LINE53CKC;
ALTER TABLE ORDER_LINE53 ADD CONSTRAINT ORDER_LINE53CKC CHECK (OL_W_ID
BETWEEN 83201 AND 84800);
SET INTEGRITY FOR ORDER_LINE53 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE54 OFF;
ALTER TABLE ORDER_LINE54 DROP CONSTRAINT ORDER_LINE54CKC;
ALTER TABLE ORDER_LINE54 ADD CONSTRAINT ORDER_LINE54CKC CHECK (OL_W_ID
BETWEEN 84801 AND 86400);
SET INTEGRITY FOR ORDER_LINE54 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE55 OFF;
ALTER TABLE ORDER_LINE55 DROP CONSTRAINT ORDER_LINE55CKC;
ALTER TABLE ORDER_LINE55 ADD CONSTRAINT ORDER_LINE55CKC CHECK (OL_W_ID
BETWEEN 86401 AND 88000);
SET INTEGRITY FOR ORDER_LINE55 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE56 OFF;
ALTER TABLE ORDER_LINE56 DROP CONSTRAINT ORDER_LINE56CKC;
ALTER TABLE ORDER_LINE56 ADD CONSTRAINT ORDER_LINE56CKC CHECK (OL_W_ID
BETWEEN 88001 AND 89600);
SET INTEGRITY FOR ORDER_LINE56 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE57 OFF;
ALTER TABLE ORDER_LINE57 DROP CONSTRAINT ORDER_LINE57CKC;
ALTER TABLE ORDER_LINE57 ADD CONSTRAINT ORDER_LINE57CKC CHECK (OL_W_ID
BETWEEN 89601 AND 91200);
SET INTEGRITY FOR ORDER_LINE57 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE58 OFF;
ALTER TABLE ORDER_LINE58 DROP CONSTRAINT ORDER_LINE58CKC;
ALTER TABLE ORDER_LINE58 ADD CONSTRAINT ORDER_LINE58CKC CHECK (OL_W_ID
BETWEEN 91201 AND 92800);
SET INTEGRITY FOR ORDER_LINE58 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE59 OFF;
ALTER TABLE ORDER_LINE59 DROP CONSTRAINT ORDER_LINE59CKC;
ALTER TABLE ORDER_LINE59 ADD CONSTRAINT ORDER_LINE59CKC CHECK (OL_W_ID
BETWEEN 92801 AND 94400);
SET INTEGRITY FOR ORDER_LINE59 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE60 OFF;
ALTER TABLE ORDER_LINE60 DROP CONSTRAINT ORDER_LINE60CKC;
ALTER TABLE ORDER_LINE60 ADD CONSTRAINT ORDER_LINE60CKC CHECK (OL_W_ID
BETWEEN 94401 AND 96000);
SET INTEGRITY FOR ORDER_LINE60 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE61 OFF;
ALTER TABLE ORDER_LINE61 DROP CONSTRAINT ORDER_LINE61CKC;
ALTER TABLE ORDER_LINE61 ADD CONSTRAINT ORDER_LINE61CKC CHECK (OL_W_ID
BETWEEN 96001 AND 97600);
SET INTEGRITY FOR ORDER_LINE61 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE62 OFF;
ALTER TABLE ORDER_LINE62 DROP CONSTRAINT ORDER_LINE62CKC;
```

```
ALTER TABLE ORDER_LINE62 ADD CONSTRAINT ORDER_LINE62CKC CHECK (OL_W_ID
BETWEEN 97601 AND 99200);
SET INTEGRITY FOR ORDER_LINE62 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE63 OFF;
ALTER TABLE ORDER_LINE63 DROP CONSTRAINT ORDER_LINE63CKC;
ALTER TABLE ORDER_LINE63 ADD CONSTRAINT ORDER_LINE63CKC CHECK (OL_W_ID
BETWEEN 99201 AND 100800);
SET INTEGRITY FOR ORDER_LINE63 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE64 OFF;
ALTER TABLE ORDER_LINE64 DROP CONSTRAINT ORDER_LINE64CKC;
ALTER TABLE ORDER_LINE64 ADD CONSTRAINT ORDER_LINE64CKC CHECK (OL_W_ID
BETWEEN 100801 AND 102400);
SET INTEGRITY FOR ORDER_LINE64 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE65 OFF;
ALTER TABLE ORDER_LINE65 DROP CONSTRAINT ORDER_LINE65CKC;
ALTER TABLE ORDER_LINE65 ADD CONSTRAINT ORDER_LINE65CKC CHECK (OL_W_ID
BETWEEN 102401 AND 104000);
SET INTEGRITY FOR ORDER_LINE65 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE66 OFF;
ALTER TABLE ORDER_LINE66 DROP CONSTRAINT ORDER_LINE66CKC;
ALTER TABLE ORDER_LINE66 ADD CONSTRAINT ORDER_LINE66CKC CHECK (OL_W_ID
BETWEEN 104001 AND 105600);
SET INTEGRITY FOR ORDER_LINE66 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE67 OFF;
ALTER TABLE ORDER_LINE67 DROP CONSTRAINT ORDER_LINE67CKC;
ALTER TABLE ORDER_LINE67 ADD CONSTRAINT ORDER_LINE67CKC CHECK (OL_W_ID
BETWEEN 105601 AND 107200);
SET INTEGRITY FOR ORDER_LINE67 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE68 OFF;
ALTER TABLE ORDER_LINE68 DROP CONSTRAINT ORDER_LINE68CKC;
ALTER TABLE ORDER_LINE68 ADD CONSTRAINT ORDER_LINE68CKC CHECK (OL_W_ID
BETWEEN 107201 AND 108800);
SET INTEGRITY FOR ORDER_LINE68 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE69 OFF;
ALTER TABLE ORDER_LINE69 DROP CONSTRAINT ORDER_LINE69CKC;
ALTER TABLE ORDER_LINE69 ADD CONSTRAINT ORDER_LINE69CKC CHECK (OL_W_ID
BETWEEN 108801 AND 110400);
SET INTEGRITY FOR ORDER_LINE69 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE70 OFF;
ALTER TABLE ORDER_LINE70 DROP CONSTRAINT ORDER_LINE70CKC;
ALTER TABLE ORDER_LINE70 ADD CONSTRAINT ORDER_LINE70CKC CHECK (OL_W_ID
BETWEEN 110401 AND 112000);
SET INTEGRITY FOR ORDER_LINE70 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE71 OFF;
ALTER TABLE ORDER_LINE71 DROP CONSTRAINT ORDER_LINE71CKC;
ALTER TABLE ORDER_LINE71 ADD CONSTRAINT ORDER_LINE71CKC CHECK (OL_W_ID
BETWEEN 112001 AND 113600);
SET INTEGRITY FOR ORDER_LINE71 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE72 OFF;
ALTER TABLE ORDER_LINE72 DROP CONSTRAINT ORDER_LINE72CKC;
ALTER TABLE ORDER_LINE72 ADD CONSTRAINT ORDER_LINE72CKC CHECK (OL_W_ID
BETWEEN 113601 AND 115200);
SET INTEGRITY FOR ORDER_LINE72 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE73 OFF;
ALTER TABLE ORDER_LINE73 DROP CONSTRAINT ORDER_LINE73CKC;
ALTER TABLE ORDER_LINE73 ADD CONSTRAINT ORDER_LINE73CKC CHECK (OL_W_ID
BETWEEN 115201 AND 116800);
SET INTEGRITY FOR ORDER_LINE73 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE74 OFF;
ALTER TABLE ORDER_LINE74 DROP CONSTRAINT ORDER_LINE74CKC;
ALTER TABLE ORDER_LINE74 ADD CONSTRAINT ORDER_LINE74CKC CHECK (OL_W_ID
BETWEEN 116801 AND 118400);
SET INTEGRITY FOR ORDER_LINE74 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE75 OFF;
ALTER TABLE ORDER_LINE75 DROP CONSTRAINT ORDER_LINE75CKC;
ALTER TABLE ORDER_LINE75 ADD CONSTRAINT ORDER_LINE75CKC CHECK (OL_W_ID
BETWEEN 118401 AND 120000);
SET INTEGRITY FOR ORDER_LINE75 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE76 OFF;
ALTER TABLE ORDER_LINE76 DROP CONSTRAINT ORDER_LINE76CKC;
ALTER TABLE ORDER_LINE76 ADD CONSTRAINT ORDER_LINE76CKC CHECK (OL_W_ID
BETWEEN 120001 AND 121600);
SET INTEGRITY FOR ORDER_LINE76 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE77 OFF;
ALTER TABLE ORDER_LINE77 DROP CONSTRAINT ORDER_LINE77CKC;
ALTER TABLE ORDER_LINE77 ADD CONSTRAINT ORDER_LINE77CKC CHECK (OL_W_ID
BETWEEN 121601 AND 123200);
SET INTEGRITY FOR ORDER_LINE77 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE78 OFF;
ALTER TABLE ORDER_LINE78 DROP CONSTRAINT ORDER_LINE78CKC;
ALTER TABLE ORDER_LINE78 ADD CONSTRAINT ORDER_LINE78CKC CHECK (OL_W_ID
BETWEEN 123201 AND 124800);
SET INTEGRITY FOR ORDER_LINE78 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE79 OFF;
ALTER TABLE ORDER_LINE79 DROP CONSTRAINT ORDER_LINE79CKC;
ALTER TABLE ORDER_LINE79 ADD CONSTRAINT ORDER_LINE79CKC CHECK (OL_W_ID
BETWEEN 124801 AND 126400);
SET INTEGRITY FOR ORDER_LINE79 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE80 OFF;
ALTER TABLE ORDER_LINE80 DROP CONSTRAINT ORDER_LINE80CKC;
ALTER TABLE ORDER_LINE80 ADD CONSTRAINT ORDER_LINE80CKC CHECK (OL_W_ID
BETWEEN 126401 AND 128000);
SET INTEGRITY FOR ORDER_LINE80 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE81 OFF;
ALTER TABLE ORDER_LINE81 DROP CONSTRAINT ORDER_LINE81CKC;
ALTER TABLE ORDER_LINE81 ADD CONSTRAINT ORDER_LINE81CKC CHECK (OL_W_ID
BETWEEN 128001 AND 129600);
SET INTEGRITY FOR ORDER_LINE81 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE82 OFF;
ALTER TABLE ORDER_LINE82 DROP CONSTRAINT ORDER_LINE82CKC;
ALTER TABLE ORDER_LINE82 ADD CONSTRAINT ORDER_LINE82CKC CHECK (OL_W_ID
BETWEEN 129601 AND 131200);
SET INTEGRITY FOR ORDER_LINE82 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE83 OFF;
ALTER TABLE ORDER_LINE83 DROP CONSTRAINT ORDER_LINE83CKC;
ALTER TABLE ORDER_LINE83 ADD CONSTRAINT ORDER_LINE83CKC CHECK (OL_W_ID
BETWEEN 131201 AND 132800);
SET INTEGRITY FOR ORDER_LINE83 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE84 OFF;
ALTER TABLE ORDER_LINE84 DROP CONSTRAINT ORDER_LINE84CKC;
ALTER TABLE ORDER_LINE84 ADD CONSTRAINT ORDER_LINE84CKC CHECK (OL_W_ID
BETWEEN 132801 AND 134400);
SET INTEGRITY FOR ORDER_LINE84 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE85 OFF;
ALTER TABLE ORDER_LINE85 DROP CONSTRAINT ORDER_LINE85CKC;
ALTER TABLE ORDER_LINE85 ADD CONSTRAINT ORDER_LINE85CKC CHECK (OL_W_ID
BETWEEN 134401 AND 136000);
SET INTEGRITY FOR ORDER_LINE85 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE86 OFF;
ALTER TABLE ORDER_LINE86 DROP CONSTRAINT ORDER_LINE86CKC;
ALTER TABLE ORDER_LINE86 ADD CONSTRAINT ORDER_LINE86CKC CHECK (OL_W_ID
BETWEEN 136001 AND 137600);
SET INTEGRITY FOR ORDER_LINE86 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE87 OFF;
ALTER TABLE ORDER_LINE87 DROP CONSTRAINT ORDER_LINE87CKC;
ALTER TABLE ORDER_LINE87 ADD CONSTRAINT ORDER_LINE87CKC CHECK (OL_W_ID
BETWEEN 137601 AND 139200);
SET INTEGRITY FOR ORDER_LINE87 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE88 OFF;
ALTER TABLE ORDER_LINE88 DROP CONSTRAINT ORDER_LINE88CKC;
ALTER TABLE ORDER_LINE88 ADD CONSTRAINT ORDER_LINE88CKC CHECK (OL_W_ID
BETWEEN 139201 AND 140800);
SET INTEGRITY FOR ORDER_LINE88 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE89 OFF;
ALTER TABLE ORDER_LINE89 DROP CONSTRAINT ORDER_LINE89CKC;
ALTER TABLE ORDER_LINE89 ADD CONSTRAINT ORDER_LINE89CKC CHECK (OL_W_ID
BETWEEN 140801 AND 142400);
SET INTEGRITY FOR ORDER_LINE89 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE90 OFF;
ALTER TABLE ORDER_LINE90 DROP CONSTRAINT ORDER_LINE90CKC;
ALTER TABLE ORDER_LINE90 ADD CONSTRAINT ORDER_LINE90CKC CHECK (OL_W_ID
BETWEEN 142401 AND 144000);
SET INTEGRITY FOR ORDER_LINE90 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE91 OFF;
ALTER TABLE ORDER_LINE91 DROP CONSTRAINT ORDER_LINE91CKC;
ALTER TABLE ORDER_LINE91 ADD CONSTRAINT ORDER_LINE91CKC CHECK (OL_W_ID
BETWEEN 144001 AND 145600);
SET INTEGRITY FOR ORDER_LINE91 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE92 OFF;
ALTER TABLE ORDER_LINE92 DROP CONSTRAINT ORDER_LINE92CKC;
ALTER TABLE ORDER_LINE92 ADD CONSTRAINT ORDER_LINE92CKC CHECK (OL_W_ID
BETWEEN 145601 AND 147200);
SET INTEGRITY FOR ORDER_LINE92 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE93 OFF;
ALTER TABLE ORDER_LINE93 DROP CONSTRAINT ORDER_LINE93CKC;
ALTER TABLE ORDER_LINE93 ADD CONSTRAINT ORDER_LINE93CKC CHECK (OL_W_ID
BETWEEN 147201 AND 148800);
```

```
SET INTEGRITY FOR ORDER_LINE93 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE94 OFF;
ALTER TABLE ORDER_LINE94 DROP CONSTRAINT ORDER_LINE94CKC;
ALTER TABLE ORDER_LINE94 ADD CONSTRAINT ORDER_LINE94CKC CHECK (OL_W_ID
BETWEEN 148801 AND 150400);
SET INTEGRITY FOR ORDER_LINE94 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE95 OFF;
ALTER TABLE ORDER_LINE95 DROP CONSTRAINT ORDER_LINE95CKC;
ALTER TABLE ORDER_LINE95 ADD CONSTRAINT ORDER_LINE95CKC CHECK (OL_W_ID
BETWEEN 150401 AND 152000);
SET INTEGRITY FOR ORDER_LINE95 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE96 OFF;
ALTER TABLE ORDER_LINE96 DROP CONSTRAINT ORDER_LINE96CKC;
ALTER TABLE ORDER_LINE96 ADD CONSTRAINT ORDER_LINE96CKC CHECK (OL_W_ID
BETWEEN 152001 AND 153600);
SET INTEGRITY FOR ORDER_LINE96 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE97 OFF;
ALTER TABLE ORDER_LINE97 DROP CONSTRAINT ORDER_LINE97CKC;
ALTER TABLE ORDER_LINE97 ADD CONSTRAINT ORDER_LINE97CKC CHECK (OL_W_ID
BETWEEN 153601 AND 155200);
SET INTEGRITY FOR ORDER_LINE97 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE98 OFF;
ALTER TABLE ORDER_LINE98 DROP CONSTRAINT ORDER_LINE98CKC;
ALTER TABLE ORDER_LINE98 ADD CONSTRAINT ORDER_LINE98CKC CHECK (OL_W_ID
BETWEEN 155201 AND 156800);
SET INTEGRITY FOR ORDER_LINE98 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE99 OFF;
ALTER TABLE ORDER_LINE99 DROP CONSTRAINT ORDER_LINE99CKC;
ALTER TABLE ORDER_LINE99 ADD CONSTRAINT ORDER_LINE99CKC CHECK (OL_W_ID
BETWEEN 156801 AND 158400);
SET INTEGRITY FOR ORDER_LINE99 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE100 OFF;
ALTER TABLE ORDER_LINE100 DROP CONSTRAINT ORDER_LINE100CKC;
ALTER TABLE ORDER_LINE100 ADD CONSTRAINT ORDER_LINE100CKC CHECK (OL_W_ID
BETWEEN 158401 AND 160000);
SET INTEGRITY FOR ORDER_LINE100 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE101 OFF;
ALTER TABLE ORDER_LINE101 DROP CONSTRAINT ORDER_LINE101CKC;
ALTER TABLE ORDER_LINE101 ADD CONSTRAINT ORDER_LINE101CKC CHECK (OL_W_ID
BETWEEN 160001 AND 161600);
SET INTEGRITY FOR ORDER_LINE101 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE102 OFF;
ALTER TABLE ORDER_LINE102 DROP CONSTRAINT ORDER_LINE102CKC;
ALTER TABLE ORDER_LINE102 ADD CONSTRAINT ORDER_LINE102CKC CHECK (OL_W_ID
BETWEEN 161601 AND 163200);
SET INTEGRITY FOR ORDER_LINE102 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE103 OFF;
ALTER TABLE ORDER_LINE103 DROP CONSTRAINT ORDER_LINE103CKC;
ALTER TABLE ORDER_LINE103 ADD CONSTRAINT ORDER_LINE103CKC CHECK (OL_W_ID
BETWEEN 163201 AND 164800);
SET INTEGRITY FOR ORDER_LINE103 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE104 OFF;
ALTER TABLE ORDER_LINE104 DROP CONSTRAINT ORDER_LINE104CKC;
ALTER TABLE ORDER_LINE104 ADD CONSTRAINT ORDER_LINE104CKC CHECK (OL_W_ID
BETWEEN 164801 AND 166400);
SET INTEGRITY FOR ORDER_LINE104 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE105 OFF;
ALTER TABLE ORDER_LINE105 DROP CONSTRAINT ORDER_LINE105CKC;
ALTER TABLE ORDER_LINE105 ADD CONSTRAINT ORDER_LINE105CKC CHECK (OL_W_ID
BETWEEN 166401 AND 168000);
SET INTEGRITY FOR ORDER_LINE105 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE106 OFF;
ALTER TABLE ORDER_LINE106 DROP CONSTRAINT ORDER_LINE106CKC;
ALTER TABLE ORDER_LINE106 ADD CONSTRAINT ORDER_LINE106CKC CHECK (OL_W_ID
BETWEEN 168001 AND 169600);
SET INTEGRITY FOR ORDER_LINE106 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE107 OFF;
ALTER TABLE ORDER_LINE107 DROP CONSTRAINT ORDER_LINE107CKC;
ALTER TABLE ORDER_LINE107 ADD CONSTRAINT ORDER_LINE107CKC CHECK (OL_W_ID
BETWEEN 169601 AND 171200);
SET INTEGRITY FOR ORDER_LINE107 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE108 OFF;
ALTER TABLE ORDER_LINE108 DROP CONSTRAINT ORDER_LINE108CKC;
ALTER TABLE ORDER_LINE108 ADD CONSTRAINT ORDER_LINE108CKC CHECK (OL_W_ID
BETWEEN 171201 AND 172800);
SET INTEGRITY FOR ORDER_LINE108 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE109 OFF;
ALTER TABLE ORDER_LINE109 DROP CONSTRAINT ORDER_LINE109CKC;
ALTER TABLE ORDER_LINE109 ADD CONSTRAINT ORDER_LINE109CKC CHECK (OL_W_ID
BETWEEN 172801 AND 174400);
SET INTEGRITY FOR ORDER_LINE109 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE110 OFF;
ALTER TABLE ORDER_LINE110 DROP CONSTRAINT ORDER_LINE110CKC;
ALTER TABLE ORDER_LINE110 ADD CONSTRAINT ORDER_LINE110CKC CHECK (OL_W_ID
BETWEEN 174401 AND 176000);
SET INTEGRITY FOR ORDER_LINE110 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE111 OFF;
ALTER TABLE ORDER_LINE111 DROP CONSTRAINT ORDER_LINE111CKC;
ALTER TABLE ORDER_LINE111 ADD CONSTRAINT ORDER_LINE111CKC CHECK (OL_W_ID
BETWEEN 176001 AND 177600);
SET INTEGRITY FOR ORDER_LINE111 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE112 OFF;
ALTER TABLE ORDER_LINE112 DROP CONSTRAINT ORDER_LINE112CKC;
ALTER TABLE ORDER_LINE112 ADD CONSTRAINT ORDER_LINE112CKC CHECK (OL_W_ID
BETWEEN 177601 AND 179200);
SET INTEGRITY FOR ORDER_LINE112 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE113 OFF;
ALTER TABLE ORDER_LINE113 DROP CONSTRAINT ORDER_LINE113CKC;
ALTER TABLE ORDER_LINE113 ADD CONSTRAINT ORDER_LINE113CKC CHECK (OL_W_ID
BETWEEN 179201 AND 180800);
SET INTEGRITY FOR ORDER_LINE113 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE114 OFF;
ALTER TABLE ORDER_LINE114 DROP CONSTRAINT ORDER_LINE114CKC;
ALTER TABLE ORDER_LINE114 ADD CONSTRAINT ORDER_LINE114CKC CHECK (OL_W_ID
BETWEEN 180801 AND 182400);
SET INTEGRITY FOR ORDER_LINE114 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE115 OFF;
ALTER TABLE ORDER_LINE115 DROP CONSTRAINT ORDER_LINE115CKC;
ALTER TABLE ORDER_LINE115 ADD CONSTRAINT ORDER_LINE115CKC CHECK (OL_W_ID
BETWEEN 182401 AND 184000);
SET INTEGRITY FOR ORDER_LINE115 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE116 OFF;
ALTER TABLE ORDER_LINE116 DROP CONSTRAINT ORDER_LINE116CKC;
ALTER TABLE ORDER_LINE116 ADD CONSTRAINT ORDER_LINE116CKC CHECK (OL_W_ID
BETWEEN 184001 AND 185600);
SET INTEGRITY FOR ORDER_LINE116 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE117 OFF;
ALTER TABLE ORDER_LINE117 DROP CONSTRAINT ORDER_LINE117CKC;
ALTER TABLE ORDER_LINE117 ADD CONSTRAINT ORDER_LINE117CKC CHECK (OL_W_ID
BETWEEN 185601 AND 187200);
SET INTEGRITY FOR ORDER_LINE117 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE118 OFF;
ALTER TABLE ORDER_LINE118 DROP CONSTRAINT ORDER_LINE118CKC;
ALTER TABLE ORDER_LINE118 ADD CONSTRAINT ORDER_LINE118CKC CHECK (OL_W_ID
BETWEEN 187201 AND 188800);
SET INTEGRITY FOR ORDER_LINE118 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE119 OFF;
ALTER TABLE ORDER_LINE119 DROP CONSTRAINT ORDER_LINE119CKC;
ALTER TABLE ORDER_LINE119 ADD CONSTRAINT ORDER_LINE119CKC CHECK (OL_W_ID
BETWEEN 188801 AND 190400);
SET INTEGRITY FOR ORDER_LINE119 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE120 OFF;
ALTER TABLE ORDER_LINE120 DROP CONSTRAINT ORDER_LINE120CKC;
ALTER TABLE ORDER_LINE120 ADD CONSTRAINT ORDER_LINE120CKC CHECK (OL_W_ID
BETWEEN 190401 AND 192000);
SET INTEGRITY FOR ORDER_LINE120 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE121 OFF;
ALTER TABLE ORDER_LINE121 DROP CONSTRAINT ORDER_LINE121CKC;
ALTER TABLE ORDER_LINE121 ADD CONSTRAINT ORDER_LINE121CKC CHECK (OL_W_ID
BETWEEN 192001 AND 193600);
SET INTEGRITY FOR ORDER_LINE121 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE122 OFF;
ALTER TABLE ORDER_LINE122 DROP CONSTRAINT ORDER_LINE122CKC;
ALTER TABLE ORDER_LINE122 ADD CONSTRAINT ORDER_LINE122CKC CHECK (OL_W_ID
BETWEEN 193601 AND 195200);
SET INTEGRITY FOR ORDER_LINE122 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE123 OFF;
ALTER TABLE ORDER_LINE123 DROP CONSTRAINT ORDER_LINE123CKC;
ALTER TABLE ORDER_LINE123 ADD CONSTRAINT ORDER_LINE123CKC CHECK (OL_W_ID
BETWEEN 195201 AND 196800);
SET INTEGRITY FOR ORDER_LINE123 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE124 OFF;
ALTER TABLE ORDER_LINE124 DROP CONSTRAINT ORDER_LINE124CKC;
ALTER TABLE ORDER_LINE124 ADD CONSTRAINT ORDER_LINE124CKC CHECK (OL_W_ID
BETWEEN 196801 AND 198400);
SET INTEGRITY FOR ORDER_LINE124 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE125 OFF;
ALTER TABLE ORDER_LINE125 DROP CONSTRAINT ORDER_LINE125CKC;
ALTER TABLE ORDER_LINE125 ADD CONSTRAINT ORDER_LINE125CKC CHECK (OL_W_ID
BETWEEN 198401 AND 200000);
SET INTEGRITY FOR ORDER_LINE125 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE126 OFF;
ALTER TABLE ORDER_LINE126 DROP CONSTRAINT ORDER_LINE126CKC;
ALTER TABLE ORDER_LINE126 ADD CONSTRAINT ORDER_LINE126CKC CHECK (OL_W_ID
BETWEEN 200001 AND 201600);
SET INTEGRITY FOR ORDER_LINE126 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE127 OFF;
ALTER TABLE ORDER_LINE127 DROP CONSTRAINT ORDER_LINE127CKC;
ALTER TABLE ORDER_LINE127 ADD CONSTRAINT ORDER_LINE127CKC CHECK (OL_W_ID
BETWEEN 201601 AND 203200);
SET INTEGRITY FOR ORDER_LINE127 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE128 OFF;
ALTER TABLE ORDER_LINE128 DROP CONSTRAINT ORDER_LINE128CKC;
ALTER TABLE ORDER_LINE128 ADD CONSTRAINT ORDER_LINE128CKC CHECK (OL_W_ID
BETWEEN 203201 AND 204800);
SET INTEGRITY FOR ORDER_LINE128 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE129 OFF;
ALTER TABLE ORDER_LINE129 DROP CONSTRAINT ORDER_LINE129CKC;
ALTER TABLE ORDER_LINE129 ADD CONSTRAINT ORDER_LINE129CKC CHECK (OL_W_ID
BETWEEN 204801 AND 206400);
SET INTEGRITY FOR ORDER_LINE129 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE130 OFF;
ALTER TABLE ORDER_LINE130 DROP CONSTRAINT ORDER_LINE130CKC;
ALTER TABLE ORDER_LINE130 ADD CONSTRAINT ORDER_LINE130CKC CHECK (OL_W_ID
BETWEEN 206401 AND 208000);
SET INTEGRITY FOR ORDER_LINE130 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE131 OFF;
ALTER TABLE ORDER_LINE131 DROP CONSTRAINT ORDER_LINE131CKC;
ALTER TABLE ORDER_LINE131 ADD CONSTRAINT ORDER_LINE131CKC CHECK (OL_W_ID
BETWEEN 208001 AND 209600);
SET INTEGRITY FOR ORDER_LINE131 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE132 OFF;
ALTER TABLE ORDER_LINE132 DROP CONSTRAINT ORDER_LINE132CKC;
ALTER TABLE ORDER_LINE132 ADD CONSTRAINT ORDER_LINE132CKC CHECK (OL_W_ID
BETWEEN 209601 AND 211200);
SET INTEGRITY FOR ORDER_LINE132 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE133 OFF;
ALTER TABLE ORDER_LINE133 DROP CONSTRAINT ORDER_LINE133CKC;
ALTER TABLE ORDER_LINE133 ADD CONSTRAINT ORDER_LINE133CKC CHECK (OL_W_ID
BETWEEN 211201 AND 212800);
SET INTEGRITY FOR ORDER_LINE133 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE134 OFF;
ALTER TABLE ORDER_LINE134 DROP CONSTRAINT ORDER_LINE134CKC;
ALTER TABLE ORDER_LINE134 ADD CONSTRAINT ORDER_LINE134CKC CHECK (OL_W_ID
BETWEEN 212801 AND 214400);
SET INTEGRITY FOR ORDER_LINE134 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE135 OFF;
ALTER TABLE ORDER_LINE135 DROP CONSTRAINT ORDER_LINE135CKC;
ALTER TABLE ORDER_LINE135 ADD CONSTRAINT ORDER_LINE135CKC CHECK (OL_W_ID
BETWEEN 214401 AND 216000);
SET INTEGRITY FOR ORDER_LINE135 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE136 OFF;
ALTER TABLE ORDER_LINE136 DROP CONSTRAINT ORDER_LINE136CKC;
ALTER TABLE ORDER_LINE136 ADD CONSTRAINT ORDER_LINE136CKC CHECK (OL_W_ID
BETWEEN 216001 AND 217600);
SET INTEGRITY FOR ORDER_LINE136 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE137 OFF;
ALTER TABLE ORDER_LINE137 DROP CONSTRAINT ORDER_LINE137CKC;
ALTER TABLE ORDER_LINE137 ADD CONSTRAINT ORDER_LINE137CKC CHECK (OL_W_ID
BETWEEN 217601 AND 219200);
SET INTEGRITY FOR ORDER_LINE137 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE138 OFF;
ALTER TABLE ORDER_LINE138 DROP CONSTRAINT ORDER_LINE138CKC;
ALTER TABLE ORDER_LINE138 ADD CONSTRAINT ORDER_LINE138CKC CHECK (OL_W_ID
BETWEEN 219201 AND 220800);
SET INTEGRITY FOR ORDER_LINE138 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE139 OFF;
ALTER TABLE ORDER_LINE139 DROP CONSTRAINT ORDER_LINE139CKC;
ALTER TABLE ORDER_LINE139 ADD CONSTRAINT ORDER_LINE139CKC CHECK (OL_W_ID
BETWEEN 220801 AND 222400);
SET INTEGRITY FOR ORDER_LINE139 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE140 OFF;
ALTER TABLE ORDER_LINE140 DROP CONSTRAINT ORDER_LINE140CKC;
ALTER TABLE ORDER_LINE140 ADD CONSTRAINT ORDER_LINE140CKC CHECK (OL_W_ID
BETWEEN 222401 AND 224000);
SET INTEGRITY FOR ORDER_LINE140 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE141 OFF;
ALTER TABLE ORDER_LINE141 DROP CONSTRAINT ORDER_LINE141CKC;
ALTER TABLE ORDER_LINE141 ADD CONSTRAINT ORDER_LINE141CKC CHECK (OL_W_ID
BETWEEN 224001 AND 225600);
SET INTEGRITY FOR ORDER_LINE141 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE142 OFF;
ALTER TABLE ORDER_LINE142 DROP CONSTRAINT ORDER_LINE142CKC;
ALTER TABLE ORDER_LINE142 ADD CONSTRAINT ORDER_LINE142CKC CHECK (OL_W_ID
BETWEEN 225601 AND 227200);
SET INTEGRITY FOR ORDER_LINE142 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE143 OFF;
ALTER TABLE ORDER_LINE143 DROP CONSTRAINT ORDER_LINE143CKC;
ALTER TABLE ORDER_LINE143 ADD CONSTRAINT ORDER_LINE143CKC CHECK (OL_W_ID
BETWEEN 227201 AND 228800);
SET INTEGRITY FOR ORDER_LINE143 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE144 OFF;
ALTER TABLE ORDER_LINE144 DROP CONSTRAINT ORDER_LINE144CKC;
ALTER TABLE ORDER_LINE144 ADD CONSTRAINT ORDER_LINE144CKC CHECK (OL_W_ID
BETWEEN 228801 AND 230400);
SET INTEGRITY FOR ORDER_LINE144 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE145 OFF;
ALTER TABLE ORDER_LINE145 DROP CONSTRAINT ORDER_LINE145CKC;
ALTER TABLE ORDER_LINE145 ADD CONSTRAINT ORDER_LINE145CKC CHECK (OL_W_ID
BETWEEN 230401 AND 232000);
SET INTEGRITY FOR ORDER_LINE145 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE146 OFF;
ALTER TABLE ORDER_LINE146 DROP CONSTRAINT ORDER_LINE146CKC;
ALTER TABLE ORDER_LINE146 ADD CONSTRAINT ORDER_LINE146CKC CHECK (OL_W_ID
BETWEEN 232001 AND 233600);
SET INTEGRITY FOR ORDER_LINE146 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE147 OFF;
ALTER TABLE ORDER_LINE147 DROP CONSTRAINT ORDER_LINE147CKC;
ALTER TABLE ORDER_LINE147 ADD CONSTRAINT ORDER_LINE147CKC CHECK (OL_W_ID
BETWEEN 233601 AND 235200);
SET INTEGRITY FOR ORDER_LINE147 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE148 OFF;
ALTER TABLE ORDER_LINE148 DROP CONSTRAINT ORDER_LINE148CKC;
ALTER TABLE ORDER_LINE148 ADD CONSTRAINT ORDER_LINE148CKC CHECK (OL_W_ID
BETWEEN 235201 AND 236800);
SET INTEGRITY FOR ORDER_LINE148 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE149 OFF;
ALTER TABLE ORDER_LINE149 DROP CONSTRAINT ORDER_LINE149CKC;
ALTER TABLE ORDER_LINE149 ADD CONSTRAINT ORDER_LINE149CKC CHECK (OL_W_ID
BETWEEN 236801 AND 238400);
SET INTEGRITY FOR ORDER_LINE149 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE150 OFF;
ALTER TABLE ORDER_LINE150 DROP CONSTRAINT ORDER_LINE150CKC;
ALTER TABLE ORDER_LINE150 ADD CONSTRAINT ORDER_LINE150CKC CHECK (OL_W_ID
BETWEEN 238401 AND 240000);
SET INTEGRITY FOR ORDER_LINE150 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE151 OFF;
ALTER TABLE ORDER_LINE151 DROP CONSTRAINT ORDER_LINE151CKC;
ALTER TABLE ORDER_LINE151 ADD CONSTRAINT ORDER_LINE151CKC CHECK (OL_W_ID
BETWEEN 240001 AND 241600);
SET INTEGRITY FOR ORDER_LINE151 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE152 OFF;
ALTER TABLE ORDER_LINE152 DROP CONSTRAINT ORDER_LINE152CKC;
ALTER TABLE ORDER_LINE152 ADD CONSTRAINT ORDER_LINE152CKC CHECK (OL_W_ID
BETWEEN 241601 AND 243200);
SET INTEGRITY FOR ORDER_LINE152 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE153 OFF;
ALTER TABLE ORDER_LINE153 DROP CONSTRAINT ORDER_LINE153CKC;
ALTER TABLE ORDER_LINE153 ADD CONSTRAINT ORDER_LINE153CKC CHECK (OL_W_ID
BETWEEN 243201 AND 244800);
SET INTEGRITY FOR ORDER_LINE153 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE154 OFF;
ALTER TABLE ORDER_LINE154 DROP CONSTRAINT ORDER_LINE154CKC;
ALTER TABLE ORDER_LINE154 ADD CONSTRAINT ORDER_LINE154CKC CHECK (OL_W_ID
BETWEEN 244801 AND 246400);
SET INTEGRITY FOR ORDER_LINE154 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE155 OFF;
ALTER TABLE ORDER_LINE155 DROP CONSTRAINT ORDER_LINE155CKC;
ALTER TABLE ORDER_LINE155 ADD CONSTRAINT ORDER_LINE155CKC CHECK (OL_W_ID
BETWEEN 246401 AND 248000);
SET INTEGRITY FOR ORDER_LINE155 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
```

```
SET INTEGRITY FOR ORDER_LINE156 OFF;
ALTER TABLE ORDER_LINE156 DROP CONSTRAINT ORDER_LINE156CKC;
ALTER TABLE ORDER_LINE156 ADD CONSTRAINT ORDER_LINE156CKC CHECK (OL_W_ID
BETWEEN 248001 AND 249600);
SET INTEGRITY FOR ORDER_LINE156 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE157 OFF;
ALTER TABLE ORDER_LINE157 DROP CONSTRAINT ORDER_LINE157CKC;
ALTER TABLE ORDER_LINE157 ADD CONSTRAINT ORDER_LINE157CKC CHECK (OL_W_ID
BETWEEN 249601 AND 251200);
SET INTEGRITY FOR ORDER_LINE157 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE158 OFF;
ALTER TABLE ORDER_LINE158 DROP CONSTRAINT ORDER_LINE158CKC;
ALTER TABLE ORDER_LINE158 ADD CONSTRAINT ORDER_LINE158CKC CHECK (OL_W_ID
BETWEEN 251201 AND 252800);
SET INTEGRITY FOR ORDER_LINE158 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE159 OFF;
ALTER TABLE ORDER_LINE159 DROP CONSTRAINT ORDER_LINE159CKC;
ALTER TABLE ORDER_LINE159 ADD CONSTRAINT ORDER_LINE159CKC CHECK (OL_W_ID
BETWEEN 252801 AND 254400);
SET INTEGRITY FOR ORDER_LINE159 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE160 OFF;
ALTER TABLE ORDER_LINE160 DROP CONSTRAINT ORDER_LINE160CKC;
ALTER TABLE ORDER_LINE160 ADD CONSTRAINT ORDER_LINE160CKC CHECK (OL_W_ID
BETWEEN 254401 AND 256000);
SET INTEGRITY FOR ORDER_LINE160 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE161 OFF;
ALTER TABLE ORDER_LINE161 DROP CONSTRAINT ORDER_LINE161CKC;
ALTER TABLE ORDER_LINE161 ADD CONSTRAINT ORDER_LINE161CKC CHECK (OL_W_ID
BETWEEN 256001 AND 257600);
SET INTEGRITY FOR ORDER_LINE161 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE162 OFF;
ALTER TABLE ORDER_LINE162 DROP CONSTRAINT ORDER_LINE162CKC;
ALTER TABLE ORDER_LINE162 ADD CONSTRAINT ORDER_LINE162CKC CHECK (OL_W_ID
BETWEEN 257601 AND 259200);
SET INTEGRITY FOR ORDER_LINE162 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE163 OFF;
ALTER TABLE ORDER_LINE163 DROP CONSTRAINT ORDER_LINE163CKC;
ALTER TABLE ORDER_LINE163 ADD CONSTRAINT ORDER_LINE163CKC CHECK (OL_W_ID
BETWEEN 259201 AND 260800);
SET INTEGRITY FOR ORDER_LINE163 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE164 OFF;
ALTER TABLE ORDER_LINE164 DROP CONSTRAINT ORDER_LINE164CKC;
ALTER TABLE ORDER_LINE164 ADD CONSTRAINT ORDER_LINE164CKC CHECK (OL_W_ID
BETWEEN 260801 AND 262400);
SET INTEGRITY FOR ORDER_LINE164 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE165 OFF;
ALTER TABLE ORDER_LINE165 DROP CONSTRAINT ORDER_LINE165CKC;
ALTER TABLE ORDER_LINE165 ADD CONSTRAINT ORDER_LINE165CKC CHECK (OL_W_ID
BETWEEN 262401 AND 264000);
SET INTEGRITY FOR ORDER_LINE165 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE166 OFF;
ALTER TABLE ORDER_LINE166 DROP CONSTRAINT ORDER_LINE166CKC;
ALTER TABLE ORDER_LINE166 ADD CONSTRAINT ORDER_LINE166CKC CHECK (OL_W_ID
BETWEEN 264001 AND 265600);
SET INTEGRITY FOR ORDER_LINE166 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE167 OFF;
ALTER TABLE ORDER_LINE167 DROP CONSTRAINT ORDER_LINE167CKC;
ALTER TABLE ORDER_LINE167 ADD CONSTRAINT ORDER_LINE167CKC CHECK (OL_W_ID
BETWEEN 265601 AND 267200);
SET INTEGRITY FOR ORDER_LINE167 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE168 OFF;
ALTER TABLE ORDER_LINE168 DROP CONSTRAINT ORDER_LINE168CKC;
ALTER TABLE ORDER_LINE168 ADD CONSTRAINT ORDER_LINE168CKC CHECK (OL_W_ID
BETWEEN 267201 AND 268800);
SET INTEGRITY FOR ORDER_LINE168 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE169 OFF;
ALTER TABLE ORDER_LINE169 DROP CONSTRAINT ORDER_LINE169CKC;
ALTER TABLE ORDER_LINE169 ADD CONSTRAINT ORDER_LINE169CKC CHECK (OL_W_ID
BETWEEN 268801 AND 270400);
SET INTEGRITY FOR ORDER_LINE169 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE170 OFF;
ALTER TABLE ORDER_LINE170 DROP CONSTRAINT ORDER_LINE170CKC;
ALTER TABLE ORDER_LINE170 ADD CONSTRAINT ORDER_LINE170CKC CHECK (OL_W_ID
BETWEEN 270401 AND 272000);
SET INTEGRITY FOR ORDER_LINE170 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE171 OFF;
ALTER TABLE ORDER_LINE171 DROP CONSTRAINT ORDER_LINE171CKC;
ALTER TABLE ORDER_LINE171 ADD CONSTRAINT ORDER_LINE171CKC CHECK (OL_W_ID
BETWEEN 272001 AND 273600);
SET INTEGRITY FOR ORDER_LINE171 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE172 OFF;
ALTER TABLE ORDER_LINE172 DROP CONSTRAINT ORDER_LINE172CKC;
ALTER TABLE ORDER_LINE172 ADD CONSTRAINT ORDER_LINE172CKC CHECK (OL_W_ID
BETWEEN 273601 AND 275200);
SET INTEGRITY FOR ORDER_LINE172 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE173 OFF;
ALTER TABLE ORDER_LINE173 DROP CONSTRAINT ORDER_LINE173CKC;
ALTER TABLE ORDER_LINE173 ADD CONSTRAINT ORDER_LINE173CKC CHECK (OL_W_ID
BETWEEN 275201 AND 276800);
SET INTEGRITY FOR ORDER_LINE173 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE174 OFF;
ALTER TABLE ORDER_LINE174 DROP CONSTRAINT ORDER_LINE174CKC;
ALTER TABLE ORDER_LINE174 ADD CONSTRAINT ORDER_LINE174CKC CHECK (OL_W_ID
BETWEEN 276801 AND 278400);
SET INTEGRITY FOR ORDER_LINE174 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE175 OFF;
ALTER TABLE ORDER_LINE175 DROP CONSTRAINT ORDER_LINE175CKC;
ALTER TABLE ORDER_LINE175 ADD CONSTRAINT ORDER_LINE175CKC CHECK (OL_W_ID
BETWEEN 278401 AND 280000);
SET INTEGRITY FOR ORDER_LINE175 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE176 OFF;
ALTER TABLE ORDER_LINE176 DROP CONSTRAINT ORDER_LINE176CKC;
ALTER TABLE ORDER_LINE176 ADD CONSTRAINT ORDER_LINE176CKC CHECK (OL_W_ID
BETWEEN 280001 AND 281600);
SET INTEGRITY FOR ORDER_LINE176 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE177 OFF;
ALTER TABLE ORDER_LINE177 DROP CONSTRAINT ORDER_LINE177CKC;
ALTER TABLE ORDER_LINE177 ADD CONSTRAINT ORDER_LINE177CKC CHECK (OL_W_ID
BETWEEN 281601 AND 283200);
SET INTEGRITY FOR ORDER_LINE177 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE178 OFF;
ALTER TABLE ORDER_LINE178 DROP CONSTRAINT ORDER_LINE178CKC;
ALTER TABLE ORDER_LINE178 ADD CONSTRAINT ORDER_LINE178CKC CHECK (OL_W_ID
BETWEEN 283201 AND 284800);
SET INTEGRITY FOR ORDER_LINE178 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE179 OFF;
ALTER TABLE ORDER_LINE179 DROP CONSTRAINT ORDER_LINE179CKC;
ALTER TABLE ORDER_LINE179 ADD CONSTRAINT ORDER_LINE179CKC CHECK (OL_W_ID
BETWEEN 284801 AND 286400);
SET INTEGRITY FOR ORDER_LINE179 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE180 OFF;
ALTER TABLE ORDER_LINE180 DROP CONSTRAINT ORDER_LINE180CKC;
ALTER TABLE ORDER_LINE180 ADD CONSTRAINT ORDER_LINE180CKC CHECK (OL_W_ID
BETWEEN 286401 AND 288000);
SET INTEGRITY FOR ORDER_LINE180 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE181 OFF;
ALTER TABLE ORDER_LINE181 DROP CONSTRAINT ORDER_LINE181CKC;
ALTER TABLE ORDER_LINE181 ADD CONSTRAINT ORDER_LINE181CKC CHECK (OL_W_ID
BETWEEN 288001 AND 289600);
SET INTEGRITY FOR ORDER_LINE181 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE182 OFF;
ALTER TABLE ORDER_LINE182 DROP CONSTRAINT ORDER_LINE182CKC;
ALTER TABLE ORDER_LINE182 ADD CONSTRAINT ORDER_LINE182CKC CHECK (OL_W_ID
BETWEEN 289601 AND 291200);
SET INTEGRITY FOR ORDER_LINE182 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE183 OFF;
ALTER TABLE ORDER_LINE183 DROP CONSTRAINT ORDER_LINE183CKC;
ALTER TABLE ORDER_LINE183 ADD CONSTRAINT ORDER_LINE183CKC CHECK (OL_W_ID
BETWEEN 291201 AND 292800);
SET INTEGRITY FOR ORDER_LINE183 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE184 OFF;
ALTER TABLE ORDER_LINE184 DROP CONSTRAINT ORDER_LINE184CKC;
ALTER TABLE ORDER_LINE184 ADD CONSTRAINT ORDER_LINE184CKC CHECK (OL_W_ID
BETWEEN 292801 AND 294400);
SET INTEGRITY FOR ORDER_LINE184 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE185 OFF;
ALTER TABLE ORDER_LINE185 DROP CONSTRAINT ORDER_LINE185CKC;
ALTER TABLE ORDER_LINE185 ADD CONSTRAINT ORDER_LINE185CKC CHECK (OL_W_ID
BETWEEN 294401 AND 296000);
SET INTEGRITY FOR ORDER_LINE185 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE186 OFF;
ALTER TABLE ORDER_LINE186 DROP CONSTRAINT ORDER_LINE186CKC;
ALTER TABLE ORDER_LINE186 ADD CONSTRAINT ORDER_LINE186CKC CHECK (OL_W_ID
BETWEEN 296001 AND 297600);
SET INTEGRITY FOR ORDER_LINE186 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE187 OFF;
```

```
ALTER TABLE ORDER_LINE187 DROP CONSTRAINT ORDER_LINE187CKC;
ALTER TABLE ORDER_LINE187 ADD CONSTRAINT ORDER_LINE187CKC CHECK (OL_W_ID
BETWEEN 297601 AND 299200);
SET INTEGRITY FOR ORDER_LINE187 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE188 OFF;
ALTER TABLE ORDER_LINE188 DROP CONSTRAINT ORDER_LINE188CKC;
ALTER TABLE ORDER_LINE188 ADD CONSTRAINT ORDER_LINE188CKC CHECK (OL_W_ID
BETWEEN 299201 AND 300800);
SET INTEGRITY FOR ORDER_LINE188 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE189 OFF;
ALTER TABLE ORDER_LINE189 DROP CONSTRAINT ORDER_LINE189CKC;
ALTER TABLE ORDER_LINE189 ADD CONSTRAINT ORDER_LINE189CKC CHECK (OL_W_ID
BETWEEN 300801 AND 302400);
SET INTEGRITY FOR ORDER_LINE189 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE190 OFF;
ALTER TABLE ORDER_LINE190 DROP CONSTRAINT ORDER_LINE190CKC;
ALTER TABLE ORDER_LINE190 ADD CONSTRAINT ORDER_LINE190CKC CHECK (OL_W_ID
BETWEEN 302401 AND 304000);
SET INTEGRITY FOR ORDER_LINE190 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE191 OFF;
ALTER TABLE ORDER_LINE191 DROP CONSTRAINT ORDER_LINE191CKC;
ALTER TABLE ORDER_LINE191 ADD CONSTRAINT ORDER_LINE191CKC CHECK (OL_W_ID
BETWEEN 304001 AND 305600);
SET INTEGRITY FOR ORDER_LINE191 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE192 OFF;
ALTER TABLE ORDER_LINE192 DROP CONSTRAINT ORDER_LINE192CKC;
ALTER TABLE ORDER_LINE192 ADD CONSTRAINT ORDER_LINE192CKC CHECK (OL_W_ID
BETWEEN 305601 AND 307200);
SET INTEGRITY FOR ORDER_LINE192 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE193 OFF;
ALTER TABLE ORDER_LINE193 DROP CONSTRAINT ORDER_LINE193CKC;
ALTER TABLE ORDER_LINE193 ADD CONSTRAINT ORDER_LINE193CKC CHECK (OL_W_ID
BETWEEN 307201 AND 308800);
SET INTEGRITY FOR ORDER_LINE193 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE194 OFF;
ALTER TABLE ORDER_LINE194 DROP CONSTRAINT ORDER_LINE194CKC;
ALTER TABLE ORDER_LINE194 ADD CONSTRAINT ORDER_LINE194CKC CHECK (OL_W_ID
BETWEEN 308801 AND 310400);
SET INTEGRITY FOR ORDER_LINE194 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE195 OFF;
ALTER TABLE ORDER_LINE195 DROP CONSTRAINT ORDER_LINE195CKC;
ALTER TABLE ORDER_LINE195 ADD CONSTRAINT ORDER_LINE195CKC CHECK (OL_W_ID
BETWEEN 310401 AND 312000);
SET INTEGRITY FOR ORDER_LINE195 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE196 OFF;
ALTER TABLE ORDER_LINE196 DROP CONSTRAINT ORDER_LINE196CKC;
ALTER TABLE ORDER_LINE196 ADD CONSTRAINT ORDER_LINE196CKC CHECK (OL_W_ID
BETWEEN 312001 AND 313600);
SET INTEGRITY FOR ORDER_LINE196 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE197 OFF;
ALTER TABLE ORDER_LINE197 DROP CONSTRAINT ORDER_LINE197CKC;
ALTER TABLE ORDER_LINE197 ADD CONSTRAINT ORDER_LINE197CKC CHECK (OL_W_ID
BETWEEN 313601 AND 315200);
SET INTEGRITY FOR ORDER_LINE197 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE198 OFF;
ALTER TABLE ORDER_LINE198 DROP CONSTRAINT ORDER_LINE198CKC;
ALTER TABLE ORDER_LINE198 ADD CONSTRAINT ORDER_LINE198CKC CHECK (OL_W_ID
BETWEEN 315201 AND 316800);
SET INTEGRITY FOR ORDER_LINE198 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE199 OFF;
ALTER TABLE ORDER_LINE199 DROP CONSTRAINT ORDER_LINE199CKC;
ALTER TABLE ORDER_LINE199 ADD CONSTRAINT ORDER_LINE199CKC CHECK (OL_W_ID
BETWEEN 316801 AND 318400);
SET INTEGRITY FOR ORDER_LINE199 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR ORDER_LINE200 OFF;
ALTER TABLE ORDER_LINE200 DROP CONSTRAINT ORDER_LINE200CKC;
ALTER TABLE ORDER_LINE200 ADD CONSTRAINT ORDER_LINE200CKC CHECK (OL_W_ID >=
318401);
SET INTEGRITY FOR ORDER_LINE200 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_STOCK.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK1 OFF;
ALTER TABLE STOCK1 DROP CONSTRAINT STOCK1CKC;
ALTER TABLE STOCK1 ADD CONSTRAINT STOCK1CKC CHECK (S_W_ID BETWEEN 1 AND 1600);
SET INTEGRITY FOR STOCK1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK2 OFF;
ALTER TABLE STOCK2 DROP CONSTRAINT STOCK2CKC;
ALTER TABLE STOCK2 ADD CONSTRAINT STOCK2CKC CHECK (S_W_ID BETWEEN 1601 AND
3200);
SET INTEGRITY FOR STOCK2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK3 OFF;
ALTER TABLE STOCK3 DROP CONSTRAINT STOCK3CKC;
ALTER TABLE STOCK3 ADD CONSTRAINT STOCK3CKC CHECK (S_W_ID BETWEEN 3201 AND
4800);
SET INTEGRITY FOR STOCK3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK4 OFF;
ALTER TABLE STOCK4 DROP CONSTRAINT STOCK4CKC;
ALTER TABLE STOCK4 ADD CONSTRAINT STOCK4CKC CHECK (S_W_ID BETWEEN 4801 AND
6400);
SET INTEGRITY FOR STOCK4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK5 OFF;
ALTER TABLE STOCK5 DROP CONSTRAINT STOCK5CKC;
ALTER TABLE STOCK5 ADD CONSTRAINT STOCK5CKC CHECK (S_W_ID BETWEEN 6401 AND
8000);
SET INTEGRITY FOR STOCK5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK6 OFF;
ALTER TABLE STOCK6 DROP CONSTRAINT STOCK6CKC;
ALTER TABLE STOCK6 ADD CONSTRAINT STOCK6CKC CHECK (S_W_ID BETWEEN 8001 AND
9600);
SET INTEGRITY FOR STOCK6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK7 OFF;
ALTER TABLE STOCK7 DROP CONSTRAINT STOCK7CKC;
ALTER TABLE STOCK7 ADD CONSTRAINT STOCK7CKC CHECK (S_W_ID BETWEEN 9601 AND
11200);
SET INTEGRITY FOR STOCK7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK8 OFF;
ALTER TABLE STOCK8 DROP CONSTRAINT STOCK8CKC;
ALTER TABLE STOCK8 ADD CONSTRAINT STOCK8CKC CHECK (S_W_ID BETWEEN 11201 AND
12800);
SET INTEGRITY FOR STOCK8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK9 OFF;
ALTER TABLE STOCK9 DROP CONSTRAINT STOCK9CKC;
ALTER TABLE STOCK9 ADD CONSTRAINT STOCK9CKC CHECK (S_W_ID BETWEEN 12801 AND
14400);
SET INTEGRITY FOR STOCK9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK10 OFF;
ALTER TABLE STOCK10 DROP CONSTRAINT STOCK10CKC;
ALTER TABLE STOCK10 ADD CONSTRAINT STOCK10CKC CHECK (S_W_ID BETWEEN 14401 AND
16000);
SET INTEGRITY FOR STOCK10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK11 OFF;
ALTER TABLE STOCK11 DROP CONSTRAINT STOCK11CKC;
ALTER TABLE STOCK11 ADD CONSTRAINT STOCK11CKC CHECK (S_W_ID BETWEEN 16001 AND
17600);
SET INTEGRITY FOR STOCK11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK12 OFF;
ALTER TABLE STOCK12 DROP CONSTRAINT STOCK12CKC;
ALTER TABLE STOCK12 ADD CONSTRAINT STOCK12CKC CHECK (S_W_ID BETWEEN 17601 AND
19200);
SET INTEGRITY FOR STOCK12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK13 OFF;
ALTER TABLE STOCK13 DROP CONSTRAINT STOCK13CKC;
ALTER TABLE STOCK13 ADD CONSTRAINT STOCK13CKC CHECK (S_W_ID BETWEEN 19201 AND
20800);
SET INTEGRITY FOR STOCK13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK14 OFF;
ALTER TABLE STOCK14 DROP CONSTRAINT STOCK14CKC;
ALTER TABLE STOCK14 ADD CONSTRAINT STOCK14CKC CHECK (S_W_ID BETWEEN 20801 AND
22400);
SET INTEGRITY FOR STOCK14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK15 OFF;
ALTER TABLE STOCK15 DROP CONSTRAINT STOCK15CKC;
ALTER TABLE STOCK15 ADD CONSTRAINT STOCK15CKC CHECK (S_W_ID BETWEEN 22401 AND
24000);
SET INTEGRITY FOR STOCK15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK16 OFF;
ALTER TABLE STOCK16 DROP CONSTRAINT STOCK16CKC;
ALTER TABLE STOCK16 ADD CONSTRAINT STOCK16CKC CHECK (S_W_ID BETWEEN 24001 AND
25600);
SET INTEGRITY FOR STOCK16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK17 OFF;
ALTER TABLE STOCK17 DROP CONSTRAINT STOCK17CKC;
ALTER TABLE STOCK17 ADD CONSTRAINT STOCK17CKC CHECK (S_W_ID BETWEEN 25601 AND
27200);
SET INTEGRITY FOR STOCK17 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK18 OFF;
ALTER TABLE STOCK18 DROP CONSTRAINT STOCK18CKC;
ALTER TABLE STOCK18 ADD CONSTRAINT STOCK18CKC CHECK (S_W_ID BETWEEN 27201 AND
28800);
SET INTEGRITY FOR STOCK18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK19 OFF;
ALTER TABLE STOCK19 DROP CONSTRAINT STOCK19CKC;
ALTER TABLE STOCK19 ADD CONSTRAINT STOCK19CKC CHECK (S_W_ID BETWEEN 28801 AND
30400);
SET INTEGRITY FOR STOCK19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK20 OFF;
ALTER TABLE STOCK20 DROP CONSTRAINT STOCK20CKC;
ALTER TABLE STOCK20 ADD CONSTRAINT STOCK20CKC CHECK (S_W_ID BETWEEN 30401 AND
32000);
SET INTEGRITY FOR STOCK20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK21 OFF;
ALTER TABLE STOCK21 DROP CONSTRAINT STOCK21CKC;
ALTER TABLE STOCK21 ADD CONSTRAINT STOCK21CKC CHECK (S_W_ID BETWEEN 32001 AND
33600);
SET INTEGRITY FOR STOCK21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK22 OFF;
ALTER TABLE STOCK22 DROP CONSTRAINT STOCK22CKC;
ALTER TABLE STOCK22 ADD CONSTRAINT STOCK22CKC CHECK (S_W_ID BETWEEN 33601 AND
35200);
SET INTEGRITY FOR STOCK22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK23 OFF;
ALTER TABLE STOCK23 DROP CONSTRAINT STOCK23CKC;
ALTER TABLE STOCK23 ADD CONSTRAINT STOCK23CKC CHECK (S_W_ID BETWEEN 35201 AND
36800);
SET INTEGRITY FOR STOCK23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK24 OFF;
ALTER TABLE STOCK24 DROP CONSTRAINT STOCK24CKC;
ALTER TABLE STOCK24 ADD CONSTRAINT STOCK24CKC CHECK (S_W_ID BETWEEN 36801 AND
38400);
SET INTEGRITY FOR STOCK24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK25 OFF;
ALTER TABLE STOCK25 DROP CONSTRAINT STOCK25CKC;
ALTER TABLE STOCK25 ADD CONSTRAINT STOCK25CKC CHECK (S_W_ID BETWEEN 38401 AND
40000);
SET INTEGRITY FOR STOCK25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK26 OFF;
ALTER TABLE STOCK26 DROP CONSTRAINT STOCK26CKC;
ALTER TABLE STOCK26 ADD CONSTRAINT STOCK26CKC CHECK (S_W_ID BETWEEN 40001 AND
41600);
SET INTEGRITY FOR STOCK26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK27 OFF;
ALTER TABLE STOCK27 DROP CONSTRAINT STOCK27CKC;
ALTER TABLE STOCK27 ADD CONSTRAINT STOCK27CKC CHECK (S_W_ID BETWEEN 41601 AND
43200);
SET INTEGRITY FOR STOCK27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK28 OFF;
ALTER TABLE STOCK28 DROP CONSTRAINT STOCK28CKC;
ALTER TABLE STOCK28 ADD CONSTRAINT STOCK28CKC CHECK (S_W_ID BETWEEN 43201 AND
44800);
SET INTEGRITY FOR STOCK28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK29 OFF;
ALTER TABLE STOCK29 DROP CONSTRAINT STOCK29CKC;
ALTER TABLE STOCK29 ADD CONSTRAINT STOCK29CKC CHECK (S_W_ID BETWEEN 44801 AND
46400);
SET INTEGRITY FOR STOCK29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK30 OFF;
ALTER TABLE STOCK30 DROP CONSTRAINT STOCK30CKC;
ALTER TABLE STOCK30 ADD CONSTRAINT STOCK30CKC CHECK (S_W_ID BETWEEN 46401 AND
48000);
SET INTEGRITY FOR STOCK30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK31 OFF;
ALTER TABLE STOCK31 DROP CONSTRAINT STOCK31CKC;
ALTER TABLE STOCK31 ADD CONSTRAINT STOCK31CKC CHECK (S_W_ID BETWEEN 48001 AND
49600);
SET INTEGRITY FOR STOCK31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK32 OFF;
ALTER TABLE STOCK32 DROP CONSTRAINT STOCK32CKC;
ALTER TABLE STOCK32 ADD CONSTRAINT STOCK32CKC CHECK (S_W_ID BETWEEN 49601 AND
51200);
SET INTEGRITY FOR STOCK32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK33 OFF;
ALTER TABLE STOCK33 DROP CONSTRAINT STOCK33CKC;
ALTER TABLE STOCK33 ADD CONSTRAINT STOCK33CKC CHECK (S_W_ID BETWEEN 51201 AND
52800);
SET INTEGRITY FOR STOCK33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK34 OFF;
ALTER TABLE STOCK34 DROP CONSTRAINT STOCK34CKC;
ALTER TABLE STOCK34 ADD CONSTRAINT STOCK34CKC CHECK (S_W_ID BETWEEN 52801 AND
54400);
SET INTEGRITY FOR STOCK34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK35 OFF;
ALTER TABLE STOCK35 DROP CONSTRAINT STOCK35CKC;
ALTER TABLE STOCK35 ADD CONSTRAINT STOCK35CKC CHECK (S_W_ID BETWEEN 54401 AND
56000);
SET INTEGRITY FOR STOCK35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK36 OFF;
ALTER TABLE STOCK36 DROP CONSTRAINT STOCK36CKC;
ALTER TABLE STOCK36 ADD CONSTRAINT STOCK36CKC CHECK (S_W_ID BETWEEN 56001 AND
57600);
SET INTEGRITY FOR STOCK36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK37 OFF;
ALTER TABLE STOCK37 DROP CONSTRAINT STOCK37CKC;
ALTER TABLE STOCK37 ADD CONSTRAINT STOCK37CKC CHECK (S_W_ID BETWEEN 57601 AND
59200);
SET INTEGRITY FOR STOCK37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK38 OFF;
ALTER TABLE STOCK38 DROP CONSTRAINT STOCK38CKC;
ALTER TABLE STOCK38 ADD CONSTRAINT STOCK38CKC CHECK (S_W_ID BETWEEN 59201 AND
60800);
SET INTEGRITY FOR STOCK38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK39 OFF;
ALTER TABLE STOCK39 DROP CONSTRAINT STOCK39CKC;
ALTER TABLE STOCK39 ADD CONSTRAINT STOCK39CKC CHECK (S_W_ID BETWEEN 60801 AND
62400);
SET INTEGRITY FOR STOCK39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK40 OFF;
ALTER TABLE STOCK40 DROP CONSTRAINT STOCK40CKC;
ALTER TABLE STOCK40 ADD CONSTRAINT STOCK40CKC CHECK (S_W_ID BETWEEN 62401 AND
64000);
SET INTEGRITY FOR STOCK40 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK41 OFF;
ALTER TABLE STOCK41 DROP CONSTRAINT STOCK41CKC;
ALTER TABLE STOCK41 ADD CONSTRAINT STOCK41CKC CHECK (S_W_ID BETWEEN 64001 AND
65600);
SET INTEGRITY FOR STOCK41 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK42 OFF;
ALTER TABLE STOCK42 DROP CONSTRAINT STOCK42CKC;
ALTER TABLE STOCK42 ADD CONSTRAINT STOCK42CKC CHECK (S_W_ID BETWEEN 65601 AND
67200);
SET INTEGRITY FOR STOCK42 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK43 OFF;
ALTER TABLE STOCK43 DROP CONSTRAINT STOCK43CKC;
ALTER TABLE STOCK43 ADD CONSTRAINT STOCK43CKC CHECK (S_W_ID BETWEEN 67201 AND
68800);
SET INTEGRITY FOR STOCK43 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK44 OFF;
ALTER TABLE STOCK44 DROP CONSTRAINT STOCK44CKC;
ALTER TABLE STOCK44 ADD CONSTRAINT STOCK44CKC CHECK (S_W_ID BETWEEN 68801 AND
70400);
SET INTEGRITY FOR STOCK44 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK45 OFF;
ALTER TABLE STOCK45 DROP CONSTRAINT STOCK45CKC;
ALTER TABLE STOCK45 ADD CONSTRAINT STOCK45CKC CHECK (S_W_ID BETWEEN 70401 AND
72000);
SET INTEGRITY FOR STOCK45 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK46 OFF;
ALTER TABLE STOCK46 DROP CONSTRAINT STOCK46CKC;
ALTER TABLE STOCK46 ADD CONSTRAINT STOCK46CKC CHECK (S_W_ID BETWEEN 72001 AND
73600);
SET INTEGRITY FOR STOCK46 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK47 OFF;
ALTER TABLE STOCK47 DROP CONSTRAINT STOCK47CKC;
ALTER TABLE STOCK47 ADD CONSTRAINT STOCK47CKC CHECK (S_W_ID BETWEEN 73601 AND
75200);
SET INTEGRITY FOR STOCK47 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK48 OFF;
ALTER TABLE STOCK48 DROP CONSTRAINT STOCK48CKC;
ALTER TABLE STOCK48 ADD CONSTRAINT STOCK48CKC CHECK (S_W_ID BETWEEN 75201 AND
76800);
SET INTEGRITY FOR STOCK48 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
```

```
SET INTEGRITY FOR STOCK49 OFF;
ALTER TABLE STOCK49 DROP CONSTRAINT STOCK49CKC;
ALTER TABLE STOCK49 ADD CONSTRAINT STOCK49CKC CHECK (S_W_ID BETWEEN 76801 AND 78400);
SET INTEGRITY FOR STOCK49 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK50 OFF;
ALTER TABLE STOCK50 DROP CONSTRAINT STOCK50CKC;
ALTER TABLE STOCK50 ADD CONSTRAINT STOCK50CKC CHECK (S_W_ID BETWEEN 78401 AND 80000);
SET INTEGRITY FOR STOCK50 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK51 OFF;
ALTER TABLE STOCK51 DROP CONSTRAINT STOCK51CKC;
ALTER TABLE STOCK51 ADD CONSTRAINT STOCK51CKC CHECK (S_W_ID BETWEEN 80001 AND 81600);
SET INTEGRITY FOR STOCK51 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK52 OFF;
ALTER TABLE STOCK52 DROP CONSTRAINT STOCK52CKC;
ALTER TABLE STOCK52 ADD CONSTRAINT STOCK52CKC CHECK (S_W_ID BETWEEN 81601 AND 83200);
SET INTEGRITY FOR STOCK52 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK53 OFF;
ALTER TABLE STOCK53 DROP CONSTRAINT STOCK53CKC;
ALTER TABLE STOCK53 ADD CONSTRAINT STOCK53CKC CHECK (S_W_ID BETWEEN 83201 AND 84800);
SET INTEGRITY FOR STOCK53 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK54 OFF;
ALTER TABLE STOCK54 DROP CONSTRAINT STOCK54CKC;
ALTER TABLE STOCK54 ADD CONSTRAINT STOCK54CKC CHECK (S_W_ID BETWEEN 84801 AND 86400);
SET INTEGRITY FOR STOCK54 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK55 OFF;
ALTER TABLE STOCK55 DROP CONSTRAINT STOCK55CKC;
ALTER TABLE STOCK55 ADD CONSTRAINT STOCK55CKC CHECK (S_W_ID BETWEEN 86401 AND 88000);
SET INTEGRITY FOR STOCK55 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK56 OFF;
ALTER TABLE STOCK56 DROP CONSTRAINT STOCK56CKC;
ALTER TABLE STOCK56 ADD CONSTRAINT STOCK56CKC CHECK (S_W_ID BETWEEN 88001 AND 89600);
SET INTEGRITY FOR STOCK56 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK57 OFF;
ALTER TABLE STOCK57 DROP CONSTRAINT STOCK57CKC;
ALTER TABLE STOCK57 ADD CONSTRAINT STOCK57CKC CHECK (S_W_ID BETWEEN 89601 AND 91200);
SET INTEGRITY FOR STOCK57 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK58 OFF;
ALTER TABLE STOCK58 DROP CONSTRAINT STOCK58CKC;
ALTER TABLE STOCK58 ADD CONSTRAINT STOCK58CKC CHECK (S_W_ID BETWEEN 91201 AND 92800);
SET INTEGRITY FOR STOCK58 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK59 OFF;
ALTER TABLE STOCK59 DROP CONSTRAINT STOCK59CKC;
ALTER TABLE STOCK59 ADD CONSTRAINT STOCK59CKC CHECK (S_W_ID BETWEEN 92801 AND 94400);
SET INTEGRITY FOR STOCK59 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK60 OFF;
ALTER TABLE STOCK60 DROP CONSTRAINT STOCK60CKC;
ALTER TABLE STOCK60 ADD CONSTRAINT STOCK60CKC CHECK (S_W_ID BETWEEN 94401 AND 96000);
SET INTEGRITY FOR STOCK60 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK61 OFF;
ALTER TABLE STOCK61 DROP CONSTRAINT STOCK61CKC;
ALTER TABLE STOCK61 ADD CONSTRAINT STOCK61CKC CHECK (S_W_ID BETWEEN 96001 AND 97600);
SET INTEGRITY FOR STOCK61 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK62 OFF;
ALTER TABLE STOCK62 DROP CONSTRAINT STOCK62CKC;
ALTER TABLE STOCK62 ADD CONSTRAINT STOCK62CKC CHECK (S_W_ID BETWEEN 97601 AND 99200);
SET INTEGRITY FOR STOCK62 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK63 OFF;
ALTER TABLE STOCK63 DROP CONSTRAINT STOCK63CKC;
ALTER TABLE STOCK63 ADD CONSTRAINT STOCK63CKC CHECK (S_W_ID BETWEEN 99201 AND 100800);
SET INTEGRITY FOR STOCK63 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK64 OFF;
ALTER TABLE STOCK64 DROP CONSTRAINT STOCK64CKC;
ALTER TABLE STOCK64 ADD CONSTRAINT STOCK64CKC CHECK (S_W_ID BETWEEN 100801 AND 102400);
SET INTEGRITY FOR STOCK64 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK65 OFF;
ALTER TABLE STOCK65 DROP CONSTRAINT STOCK65CKC;
ALTER TABLE STOCK65 ADD CONSTRAINT STOCK65CKC CHECK (S_W_ID BETWEEN 102401 AND 104000);
SET INTEGRITY FOR STOCK65 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK66 OFF;
ALTER TABLE STOCK66 DROP CONSTRAINT STOCK66CKC;
ALTER TABLE STOCK66 ADD CONSTRAINT STOCK66CKC CHECK (S_W_ID BETWEEN 104001 AND 105600);
SET INTEGRITY FOR STOCK66 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK67 OFF;
ALTER TABLE STOCK67 DROP CONSTRAINT STOCK67CKC;
ALTER TABLE STOCK67 ADD CONSTRAINT STOCK67CKC CHECK (S_W_ID BETWEEN 105601 AND 107200);
SET INTEGRITY FOR STOCK67 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK68 OFF;
ALTER TABLE STOCK68 DROP CONSTRAINT STOCK68CKC;
ALTER TABLE STOCK68 ADD CONSTRAINT STOCK68CKC CHECK (S_W_ID BETWEEN 107201 AND 108800);
SET INTEGRITY FOR STOCK68 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK69 OFF;
ALTER TABLE STOCK69 DROP CONSTRAINT STOCK69CKC;
ALTER TABLE STOCK69 ADD CONSTRAINT STOCK69CKC CHECK (S_W_ID BETWEEN 108801 AND 110400);
SET INTEGRITY FOR STOCK69 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK70 OFF;
ALTER TABLE STOCK70 DROP CONSTRAINT STOCK70CKC;
ALTER TABLE STOCK70 ADD CONSTRAINT STOCK70CKC CHECK (S_W_ID BETWEEN 110401 AND 112000);
SET INTEGRITY FOR STOCK70 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK71 OFF;
ALTER TABLE STOCK71 DROP CONSTRAINT STOCK71CKC;
ALTER TABLE STOCK71 ADD CONSTRAINT STOCK71CKC CHECK (S_W_ID BETWEEN 112001 AND 113600);
SET INTEGRITY FOR STOCK71 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK72 OFF;
ALTER TABLE STOCK72 DROP CONSTRAINT STOCK72CKC;
ALTER TABLE STOCK72 ADD CONSTRAINT STOCK72CKC CHECK (S_W_ID BETWEEN 113601 AND 115200);
SET INTEGRITY FOR STOCK72 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK73 OFF;
ALTER TABLE STOCK73 DROP CONSTRAINT STOCK73CKC;
ALTER TABLE STOCK73 ADD CONSTRAINT STOCK73CKC CHECK (S_W_ID BETWEEN 115201 AND 116800);
SET INTEGRITY FOR STOCK73 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK74 OFF;
ALTER TABLE STOCK74 DROP CONSTRAINT STOCK74CKC;
ALTER TABLE STOCK74 ADD CONSTRAINT STOCK74CKC CHECK (S_W_ID BETWEEN 116801 AND 118400);
SET INTEGRITY FOR STOCK74 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK75 OFF;
ALTER TABLE STOCK75 DROP CONSTRAINT STOCK75CKC;
ALTER TABLE STOCK75 ADD CONSTRAINT STOCK75CKC CHECK (S_W_ID BETWEEN 118401 AND 120000);
SET INTEGRITY FOR STOCK75 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK76 OFF;
ALTER TABLE STOCK76 DROP CONSTRAINT STOCK76CKC;
ALTER TABLE STOCK76 ADD CONSTRAINT STOCK76CKC CHECK (S_W_ID BETWEEN 120001 AND 121600);
SET INTEGRITY FOR STOCK76 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK77 OFF;
ALTER TABLE STOCK77 DROP CONSTRAINT STOCK77CKC;
ALTER TABLE STOCK77 ADD CONSTRAINT STOCK77CKC CHECK (S_W_ID BETWEEN 121601 AND 123200);
SET INTEGRITY FOR STOCK77 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK78 OFF;
ALTER TABLE STOCK78 DROP CONSTRAINT STOCK78CKC;
ALTER TABLE STOCK78 ADD CONSTRAINT STOCK78CKC CHECK (S_W_ID BETWEEN 123201 AND 124800);
SET INTEGRITY FOR STOCK78 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK79 OFF;
ALTER TABLE STOCK79 DROP CONSTRAINT STOCK79CKC;
ALTER TABLE STOCK79 ADD CONSTRAINT STOCK79CKC CHECK (S_W_ID BETWEEN 124801 AND 126400);
SET INTEGRITY FOR STOCK79 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK80 OFF;
```

```
ALTER TABLE STOCK80 DROP CONSTRAINT STOCK80CKC;
ALTER TABLE STOCK80 ADD CONSTRAINT STOCK80CKC CHECK (S_W_ID BETWEEN 126401 AND 128000);
SET INTEGRITY FOR STOCK80 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK81 OFF;
ALTER TABLE STOCK81 DROP CONSTRAINT STOCK81CKC;
ALTER TABLE STOCK81 ADD CONSTRAINT STOCK81CKC CHECK (S_W_ID BETWEEN 128001 AND 129600);
SET INTEGRITY FOR STOCK81 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK82 OFF;
ALTER TABLE STOCK82 DROP CONSTRAINT STOCK82CKC;
ALTER TABLE STOCK82 ADD CONSTRAINT STOCK82CKC CHECK (S_W_ID BETWEEN 129601 AND 131200);
SET INTEGRITY FOR STOCK82 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK83 OFF;
ALTER TABLE STOCK83 DROP CONSTRAINT STOCK83CKC;
ALTER TABLE STOCK83 ADD CONSTRAINT STOCK83CKC CHECK (S_W_ID BETWEEN 131201 AND 132800);
SET INTEGRITY FOR STOCK83 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK84 OFF;
ALTER TABLE STOCK84 DROP CONSTRAINT STOCK84CKC;
ALTER TABLE STOCK84 ADD CONSTRAINT STOCK84CKC CHECK (S_W_ID BETWEEN 132801 AND 134400);
SET INTEGRITY FOR STOCK84 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK85 OFF;
ALTER TABLE STOCK85 DROP CONSTRAINT STOCK85CKC;
ALTER TABLE STOCK85 ADD CONSTRAINT STOCK85CKC CHECK (S_W_ID BETWEEN 134401 AND 136000);
SET INTEGRITY FOR STOCK85 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK86 OFF;
ALTER TABLE STOCK86 DROP CONSTRAINT STOCK86CKC;
ALTER TABLE STOCK86 ADD CONSTRAINT STOCK86CKC CHECK (S_W_ID BETWEEN 136001 AND 137600);
SET INTEGRITY FOR STOCK86 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK87 OFF;
ALTER TABLE STOCK87 DROP CONSTRAINT STOCK87CKC;
ALTER TABLE STOCK87 ADD CONSTRAINT STOCK87CKC CHECK (S_W_ID BETWEEN 137601 AND 139200);
SET INTEGRITY FOR STOCK87 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK88 OFF;
ALTER TABLE STOCK88 DROP CONSTRAINT STOCK88CKC;
ALTER TABLE STOCK88 ADD CONSTRAINT STOCK88CKC CHECK (S_W_ID BETWEEN 139201 AND 140800);
SET INTEGRITY FOR STOCK88 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK89 OFF;
ALTER TABLE STOCK89 DROP CONSTRAINT STOCK89CKC;
ALTER TABLE STOCK89 ADD CONSTRAINT STOCK89CKC CHECK (S_W_ID BETWEEN 140801 AND 142400);
SET INTEGRITY FOR STOCK89 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK90 OFF;
ALTER TABLE STOCK90 DROP CONSTRAINT STOCK90CKC;
ALTER TABLE STOCK90 ADD CONSTRAINT STOCK90CKC CHECK (S_W_ID BETWEEN 142401 AND 144000);
SET INTEGRITY FOR STOCK90 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK91 OFF;
ALTER TABLE STOCK91 DROP CONSTRAINT STOCK91CKC;
ALTER TABLE STOCK91 ADD CONSTRAINT STOCK91CKC CHECK (S_W_ID BETWEEN 144001 AND 145600);
SET INTEGRITY FOR STOCK91 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK92 OFF;
ALTER TABLE STOCK92 DROP CONSTRAINT STOCK92CKC;
ALTER TABLE STOCK92 ADD CONSTRAINT STOCK92CKC CHECK (S_W_ID BETWEEN 145601 AND 147200);
SET INTEGRITY FOR STOCK92 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK93 OFF;
ALTER TABLE STOCK93 DROP CONSTRAINT STOCK93CKC;
ALTER TABLE STOCK93 ADD CONSTRAINT STOCK93CKC CHECK (S_W_ID BETWEEN 147201 AND 148800);
SET INTEGRITY FOR STOCK93 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK94 OFF;
ALTER TABLE STOCK94 DROP CONSTRAINT STOCK94CKC;
ALTER TABLE STOCK94 ADD CONSTRAINT STOCK94CKC CHECK (S_W_ID BETWEEN 148801 AND 150400);
SET INTEGRITY FOR STOCK94 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK95 OFF;
ALTER TABLE STOCK95 DROP CONSTRAINT STOCK95CKC;
ALTER TABLE STOCK95 ADD CONSTRAINT STOCK95CKC CHECK (S_W_ID BETWEEN 150401 AND 152000);
SET INTEGRITY FOR STOCK95 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK96 OFF;
ALTER TABLE STOCK96 DROP CONSTRAINT STOCK96CKC;
ALTER TABLE STOCK96 ADD CONSTRAINT STOCK96CKC CHECK (S_W_ID BETWEEN 152001 AND 153600);
SET INTEGRITY FOR STOCK96 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK97 OFF;
ALTER TABLE STOCK97 DROP CONSTRAINT STOCK97CKC;
ALTER TABLE STOCK97 ADD CONSTRAINT STOCK97CKC CHECK (S_W_ID BETWEEN 153601 AND 155200);
SET INTEGRITY FOR STOCK97 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK98 OFF;
ALTER TABLE STOCK98 DROP CONSTRAINT STOCK98CKC;
ALTER TABLE STOCK98 ADD CONSTRAINT STOCK98CKC CHECK (S_W_ID BETWEEN 155201 AND 156800);
SET INTEGRITY FOR STOCK98 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK99 OFF;
ALTER TABLE STOCK99 DROP CONSTRAINT STOCK99CKC;
ALTER TABLE STOCK99 ADD CONSTRAINT STOCK99CKC CHECK (S_W_ID BETWEEN 156801 AND 158400);
SET INTEGRITY FOR STOCK99 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK100 OFF;
ALTER TABLE STOCK100 DROP CONSTRAINT STOCK100CKC;
ALTER TABLE STOCK100 ADD CONSTRAINT STOCK100CKC CHECK (S_W_ID BETWEEN 158401 AND 160000);
SET INTEGRITY FOR STOCK100 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK101 OFF;
ALTER TABLE STOCK101 DROP CONSTRAINT STOCK101CKC;
ALTER TABLE STOCK101 ADD CONSTRAINT STOCK101CKC CHECK (S_W_ID BETWEEN 160001 AND 161600);
SET INTEGRITY FOR STOCK101 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK102 OFF;
ALTER TABLE STOCK102 DROP CONSTRAINT STOCK102CKC;
ALTER TABLE STOCK102 ADD CONSTRAINT STOCK102CKC CHECK (S_W_ID BETWEEN 161601 AND 163200);
SET INTEGRITY FOR STOCK102 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK103 OFF;
ALTER TABLE STOCK103 DROP CONSTRAINT STOCK103CKC;
ALTER TABLE STOCK103 ADD CONSTRAINT STOCK103CKC CHECK (S_W_ID BETWEEN 163201 AND 164800);
SET INTEGRITY FOR STOCK103 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK104 OFF;
ALTER TABLE STOCK104 DROP CONSTRAINT STOCK104CKC;
ALTER TABLE STOCK104 ADD CONSTRAINT STOCK104CKC CHECK (S_W_ID BETWEEN 164801 AND 166400);
SET INTEGRITY FOR STOCK104 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK105 OFF;
ALTER TABLE STOCK105 DROP CONSTRAINT STOCK105CKC;
ALTER TABLE STOCK105 ADD CONSTRAINT STOCK105CKC CHECK (S_W_ID BETWEEN 166401 AND 168000);
SET INTEGRITY FOR STOCK105 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK106 OFF;
ALTER TABLE STOCK106 DROP CONSTRAINT STOCK106CKC;
ALTER TABLE STOCK106 ADD CONSTRAINT STOCK106CKC CHECK (S_W_ID BETWEEN 168001 AND 169600);
SET INTEGRITY FOR STOCK106 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK107 OFF;
ALTER TABLE STOCK107 DROP CONSTRAINT STOCK107CKC;
ALTER TABLE STOCK107 ADD CONSTRAINT STOCK107CKC CHECK (S_W_ID BETWEEN 169601 AND 171200);
SET INTEGRITY FOR STOCK107 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK108 OFF;
ALTER TABLE STOCK108 DROP CONSTRAINT STOCK108CKC;
ALTER TABLE STOCK108 ADD CONSTRAINT STOCK108CKC CHECK (S_W_ID BETWEEN 171201 AND 172800);
SET INTEGRITY FOR STOCK108 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK109 OFF;
ALTER TABLE STOCK109 DROP CONSTRAINT STOCK109CKC;
ALTER TABLE STOCK109 ADD CONSTRAINT STOCK109CKC CHECK (S_W_ID BETWEEN 172801 AND 174400);
SET INTEGRITY FOR STOCK109 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK110 OFF;
ALTER TABLE STOCK110 DROP CONSTRAINT STOCK110CKC;
ALTER TABLE STOCK110 ADD CONSTRAINT STOCK110CKC CHECK (S_W_ID BETWEEN 174401 AND 176000);
SET INTEGRITY FOR STOCK110 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK111 OFF;
ALTER TABLE STOCK111 DROP CONSTRAINT STOCK111CKC;
```

```
ALTER TABLE STOCK111 ADD CONSTRAINT STOCK111CKC CHECK (S_W_ID BETWEEN 176001
AND 177600);
SET INTEGRITY FOR STOCK111 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK112 OFF;
ALTER TABLE STOCK112 DROP CONSTRAINT STOCK112CKC;
ALTER TABLE STOCK112 ADD CONSTRAINT STOCK112CKC CHECK (S_W_ID BETWEEN 177601
AND 179200);
SET INTEGRITY FOR STOCK112 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK113 OFF;
ALTER TABLE STOCK113 DROP CONSTRAINT STOCK113CKC;
ALTER TABLE STOCK113 ADD CONSTRAINT STOCK113CKC CHECK (S_W_ID BETWEEN 179201
AND 180800);
SET INTEGRITY FOR STOCK113 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK114 OFF;
ALTER TABLE STOCK114 DROP CONSTRAINT STOCK114CKC;
ALTER TABLE STOCK114 ADD CONSTRAINT STOCK114CKC CHECK (S_W_ID BETWEEN 180801
AND 182400);
SET INTEGRITY FOR STOCK114 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK115 OFF;
ALTER TABLE STOCK115 DROP CONSTRAINT STOCK115CKC;
ALTER TABLE STOCK115 ADD CONSTRAINT STOCK115CKC CHECK (S_W_ID BETWEEN 182401
AND 184000);
SET INTEGRITY FOR STOCK115 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK116 OFF;
ALTER TABLE STOCK116 DROP CONSTRAINT STOCK116CKC;
ALTER TABLE STOCK116 ADD CONSTRAINT STOCK116CKC CHECK (S_W_ID BETWEEN 184001
AND 185600);
SET INTEGRITY FOR STOCK116 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK117 OFF;
ALTER TABLE STOCK117 DROP CONSTRAINT STOCK117CKC;
ALTER TABLE STOCK117 ADD CONSTRAINT STOCK117CKC CHECK (S_W_ID BETWEEN 185601
AND 187200);
SET INTEGRITY FOR STOCK117 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK118 OFF;
ALTER TABLE STOCK118 DROP CONSTRAINT STOCK118CKC;
ALTER TABLE STOCK118 ADD CONSTRAINT STOCK118CKC CHECK (S_W_ID BETWEEN 187201
AND 188800);
SET INTEGRITY FOR STOCK118 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK119 OFF;
ALTER TABLE STOCK119 DROP CONSTRAINT STOCK119CKC;
ALTER TABLE STOCK119 ADD CONSTRAINT STOCK119CKC CHECK (S_W_ID BETWEEN 188801
AND 190400);
SET INTEGRITY FOR STOCK119 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK120 OFF;
ALTER TABLE STOCK120 DROP CONSTRAINT STOCK120CKC;
ALTER TABLE STOCK120 ADD CONSTRAINT STOCK120CKC CHECK (S_W_ID BETWEEN 190401
AND 192000);
SET INTEGRITY FOR STOCK120 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK121 OFF;
ALTER TABLE STOCK121 DROP CONSTRAINT STOCK121CKC;
ALTER TABLE STOCK121 ADD CONSTRAINT STOCK121CKC CHECK (S_W_ID BETWEEN 192001
AND 193600);
SET INTEGRITY FOR STOCK121 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK122 OFF;
ALTER TABLE STOCK122 DROP CONSTRAINT STOCK122CKC;
ALTER TABLE STOCK122 ADD CONSTRAINT STOCK122CKC CHECK (S_W_ID BETWEEN 193601
AND 195200);
SET INTEGRITY FOR STOCK122 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK123 OFF;
ALTER TABLE STOCK123 DROP CONSTRAINT STOCK123CKC;
ALTER TABLE STOCK123 ADD CONSTRAINT STOCK123CKC CHECK (S_W_ID BETWEEN 195201
AND 196800);
SET INTEGRITY FOR STOCK123 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK124 OFF;
ALTER TABLE STOCK124 DROP CONSTRAINT STOCK124CKC;
ALTER TABLE STOCK124 ADD CONSTRAINT STOCK124CKC CHECK (S_W_ID BETWEEN 196801
AND 198400);
SET INTEGRITY FOR STOCK124 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK125 OFF;
ALTER TABLE STOCK125 DROP CONSTRAINT STOCK125CKC;
ALTER TABLE STOCK125 ADD CONSTRAINT STOCK125CKC CHECK (S_W_ID BETWEEN 198401
AND 200000);
SET INTEGRITY FOR STOCK125 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK126 OFF;
ALTER TABLE STOCK126 DROP CONSTRAINT STOCK126CKC;
ALTER TABLE STOCK126 ADD CONSTRAINT STOCK126CKC CHECK (S_W_ID BETWEEN 200001
AND 201600);
SET INTEGRITY FOR STOCK126 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK127 OFF;
ALTER TABLE STOCK127 DROP CONSTRAINT STOCK127CKC;
ALTER TABLE STOCK127 ADD CONSTRAINT STOCK127CKC CHECK (S_W_ID BETWEEN 201601
AND 203200);
SET INTEGRITY FOR STOCK127 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK128 OFF;
ALTER TABLE STOCK128 DROP CONSTRAINT STOCK128CKC;
ALTER TABLE STOCK128 ADD CONSTRAINT STOCK128CKC CHECK (S_W_ID BETWEEN 203201
AND 204800);
SET INTEGRITY FOR STOCK128 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK129 OFF;
ALTER TABLE STOCK129 DROP CONSTRAINT STOCK129CKC;
ALTER TABLE STOCK129 ADD CONSTRAINT STOCK129CKC CHECK (S_W_ID BETWEEN 204801
AND 206400);
SET INTEGRITY FOR STOCK129 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK130 OFF;
ALTER TABLE STOCK130 DROP CONSTRAINT STOCK130CKC;
ALTER TABLE STOCK130 ADD CONSTRAINT STOCK130CKC CHECK (S_W_ID BETWEEN 206401
AND 208000);
SET INTEGRITY FOR STOCK130 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK131 OFF;
ALTER TABLE STOCK131 DROP CONSTRAINT STOCK131CKC;
ALTER TABLE STOCK131 ADD CONSTRAINT STOCK131CKC CHECK (S_W_ID BETWEEN 208001
AND 209600);
SET INTEGRITY FOR STOCK131 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK132 OFF;
ALTER TABLE STOCK132 DROP CONSTRAINT STOCK132CKC;
ALTER TABLE STOCK132 ADD CONSTRAINT STOCK132CKC CHECK (S_W_ID BETWEEN 209601
AND 211200);
SET INTEGRITY FOR STOCK132 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK133 OFF;
ALTER TABLE STOCK133 DROP CONSTRAINT STOCK133CKC;
ALTER TABLE STOCK133 ADD CONSTRAINT STOCK133CKC CHECK (S_W_ID BETWEEN 211201
AND 212800);
SET INTEGRITY FOR STOCK133 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK134 OFF;
ALTER TABLE STOCK134 DROP CONSTRAINT STOCK134CKC;
ALTER TABLE STOCK134 ADD CONSTRAINT STOCK134CKC CHECK (S_W_ID BETWEEN 212801
AND 214400);
SET INTEGRITY FOR STOCK134 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK135 OFF;
ALTER TABLE STOCK135 DROP CONSTRAINT STOCK135CKC;
ALTER TABLE STOCK135 ADD CONSTRAINT STOCK135CKC CHECK (S_W_ID BETWEEN 214401
AND 216000);
SET INTEGRITY FOR STOCK135 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK136 OFF;
ALTER TABLE STOCK136 DROP CONSTRAINT STOCK136CKC;
ALTER TABLE STOCK136 ADD CONSTRAINT STOCK136CKC CHECK (S_W_ID BETWEEN 216001
AND 217600);
SET INTEGRITY FOR STOCK136 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK137 OFF;
ALTER TABLE STOCK137 DROP CONSTRAINT STOCK137CKC;
ALTER TABLE STOCK137 ADD CONSTRAINT STOCK137CKC CHECK (S_W_ID BETWEEN 217601
AND 219200);
SET INTEGRITY FOR STOCK137 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK138 OFF;
ALTER TABLE STOCK138 DROP CONSTRAINT STOCK138CKC;
ALTER TABLE STOCK138 ADD CONSTRAINT STOCK138CKC CHECK (S_W_ID BETWEEN 219201
AND 220800);
SET INTEGRITY FOR STOCK138 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK139 OFF;
ALTER TABLE STOCK139 DROP CONSTRAINT STOCK139CKC;
ALTER TABLE STOCK139 ADD CONSTRAINT STOCK139CKC CHECK (S_W_ID BETWEEN 220801
AND 222400);
SET INTEGRITY FOR STOCK139 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK140 OFF;
ALTER TABLE STOCK140 DROP CONSTRAINT STOCK140CKC;
ALTER TABLE STOCK140 ADD CONSTRAINT STOCK140CKC CHECK (S_W_ID BETWEEN 222401
AND 224000);
SET INTEGRITY FOR STOCK140 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK141 OFF;
ALTER TABLE STOCK141 DROP CONSTRAINT STOCK141CKC;
ALTER TABLE STOCK141 ADD CONSTRAINT STOCK141CKC CHECK (S_W_ID BETWEEN 224001
AND 225600);
SET INTEGRITY FOR STOCK141 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK142 OFF;
ALTER TABLE STOCK142 DROP CONSTRAINT STOCK142CKC;
ALTER TABLE STOCK142 ADD CONSTRAINT STOCK142CKC CHECK (S_W_ID BETWEEN 225601
AND 227200);
```

```
SET INTEGRITY FOR STOCK142 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK143 OFF;
ALTER TABLE STOCK143 DROP CONSTRAINT STOCK143CKC;
ALTER TABLE STOCK143 ADD CONSTRAINT STOCK143CKC CHECK (S_W_ID BETWEEN 227201
AND 228800);
SET INTEGRITY FOR STOCK143 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK144 OFF;
ALTER TABLE STOCK144 DROP CONSTRAINT STOCK144CKC;
ALTER TABLE STOCK144 ADD CONSTRAINT STOCK144CKC CHECK (S_W_ID BETWEEN 228801
AND 230400);
SET INTEGRITY FOR STOCK144 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK145 OFF;
ALTER TABLE STOCK145 DROP CONSTRAINT STOCK145CKC;
ALTER TABLE STOCK145 ADD CONSTRAINT STOCK145CKC CHECK (S_W_ID BETWEEN 230401
AND 232000);
SET INTEGRITY FOR STOCK145 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK146 OFF;
ALTER TABLE STOCK146 DROP CONSTRAINT STOCK146CKC;
ALTER TABLE STOCK146 ADD CONSTRAINT STOCK146CKC CHECK (S_W_ID BETWEEN 232001
AND 233600);
SET INTEGRITY FOR STOCK146 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK147 OFF;
ALTER TABLE STOCK147 DROP CONSTRAINT STOCK147CKC;
ALTER TABLE STOCK147 ADD CONSTRAINT STOCK147CKC CHECK (S_W_ID BETWEEN 233601
AND 235200);
SET INTEGRITY FOR STOCK147 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK148 OFF;
ALTER TABLE STOCK148 DROP CONSTRAINT STOCK148CKC;
ALTER TABLE STOCK148 ADD CONSTRAINT STOCK148CKC CHECK (S_W_ID BETWEEN 235201
AND 236800);
SET INTEGRITY FOR STOCK148 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK149 OFF;
ALTER TABLE STOCK149 DROP CONSTRAINT STOCK149CKC;
ALTER TABLE STOCK149 ADD CONSTRAINT STOCK149CKC CHECK (S_W_ID BETWEEN 236801
AND 238400);
SET INTEGRITY FOR STOCK149 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK150 OFF;
ALTER TABLE STOCK150 DROP CONSTRAINT STOCK150CKC;
ALTER TABLE STOCK150 ADD CONSTRAINT STOCK150CKC CHECK (S_W_ID BETWEEN 238401
AND 240000);
SET INTEGRITY FOR STOCK150 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK151 OFF;
ALTER TABLE STOCK151 DROP CONSTRAINT STOCK151CKC;
ALTER TABLE STOCK151 ADD CONSTRAINT STOCK151CKC CHECK (S_W_ID BETWEEN 240001
AND 241600);
SET INTEGRITY FOR STOCK151 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK152 OFF;
ALTER TABLE STOCK152 DROP CONSTRAINT STOCK152CKC;
ALTER TABLE STOCK152 ADD CONSTRAINT STOCK152CKC CHECK (S_W_ID BETWEEN 241601
AND 243200);
SET INTEGRITY FOR STOCK152 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK153 OFF;
ALTER TABLE STOCK153 DROP CONSTRAINT STOCK153CKC;
ALTER TABLE STOCK153 ADD CONSTRAINT STOCK153CKC CHECK (S_W_ID BETWEEN 243201
AND 244800);
SET INTEGRITY FOR STOCK153 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK154 OFF;
ALTER TABLE STOCK154 DROP CONSTRAINT STOCK154CKC;
ALTER TABLE STOCK154 ADD CONSTRAINT STOCK154CKC CHECK (S_W_ID BETWEEN 244801
AND 246400);
SET INTEGRITY FOR STOCK154 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK155 OFF;
ALTER TABLE STOCK155 DROP CONSTRAINT STOCK155CKC;
ALTER TABLE STOCK155 ADD CONSTRAINT STOCK155CKC CHECK (S_W_ID BETWEEN 246401
AND 248000);
SET INTEGRITY FOR STOCK155 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK156 OFF;
ALTER TABLE STOCK156 DROP CONSTRAINT STOCK156CKC;
ALTER TABLE STOCK156 ADD CONSTRAINT STOCK156CKC CHECK (S_W_ID BETWEEN 248001
AND 249600);
SET INTEGRITY FOR STOCK156 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK157 OFF;
ALTER TABLE STOCK157 DROP CONSTRAINT STOCK157CKC;
ALTER TABLE STOCK157 ADD CONSTRAINT STOCK157CKC CHECK (S_W_ID BETWEEN 249601
AND 251200);
SET INTEGRITY FOR STOCK157 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK158 OFF;
ALTER TABLE STOCK158 DROP CONSTRAINT STOCK158CKC;
ALTER TABLE STOCK158 ADD CONSTRAINT STOCK158CKC CHECK (S_W_ID BETWEEN 251201
AND 252800);
SET INTEGRITY FOR STOCK158 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK159 OFF;
ALTER TABLE STOCK159 DROP CONSTRAINT STOCK159CKC;
ALTER TABLE STOCK159 ADD CONSTRAINT STOCK159CKC CHECK (S_W_ID BETWEEN 252801
AND 254400);
SET INTEGRITY FOR STOCK159 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK160 OFF;
ALTER TABLE STOCK160 DROP CONSTRAINT STOCK160CKC;
ALTER TABLE STOCK160 ADD CONSTRAINT STOCK160CKC CHECK (S_W_ID BETWEEN 254401
AND 256000);
SET INTEGRITY FOR STOCK160 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK161 OFF;
ALTER TABLE STOCK161 DROP CONSTRAINT STOCK161CKC;
ALTER TABLE STOCK161 ADD CONSTRAINT STOCK161CKC CHECK (S_W_ID BETWEEN 256001
AND 257600);
SET INTEGRITY FOR STOCK161 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK162 OFF;
ALTER TABLE STOCK162 DROP CONSTRAINT STOCK162CKC;
ALTER TABLE STOCK162 ADD CONSTRAINT STOCK162CKC CHECK (S_W_ID BETWEEN 257601
AND 259200);
SET INTEGRITY FOR STOCK162 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK163 OFF;
ALTER TABLE STOCK163 DROP CONSTRAINT STOCK163CKC;
ALTER TABLE STOCK163 ADD CONSTRAINT STOCK163CKC CHECK (S_W_ID BETWEEN 259201
AND 260800);
SET INTEGRITY FOR STOCK163 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK164 OFF;
ALTER TABLE STOCK164 DROP CONSTRAINT STOCK164CKC;
ALTER TABLE STOCK164 ADD CONSTRAINT STOCK164CKC CHECK (S_W_ID BETWEEN 260801
AND 262400);
SET INTEGRITY FOR STOCK164 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK165 OFF;
ALTER TABLE STOCK165 DROP CONSTRAINT STOCK165CKC;
ALTER TABLE STOCK165 ADD CONSTRAINT STOCK165CKC CHECK (S_W_ID BETWEEN 262401
AND 264000);
SET INTEGRITY FOR STOCK165 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK166 OFF;
ALTER TABLE STOCK166 DROP CONSTRAINT STOCK166CKC;
ALTER TABLE STOCK166 ADD CONSTRAINT STOCK166CKC CHECK (S_W_ID BETWEEN 264001
AND 265600);
SET INTEGRITY FOR STOCK166 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK167 OFF;
ALTER TABLE STOCK167 DROP CONSTRAINT STOCK167CKC;
ALTER TABLE STOCK167 ADD CONSTRAINT STOCK167CKC CHECK (S_W_ID BETWEEN 265601
AND 267200);
SET INTEGRITY FOR STOCK167 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK168 OFF;
ALTER TABLE STOCK168 DROP CONSTRAINT STOCK168CKC;
ALTER TABLE STOCK168 ADD CONSTRAINT STOCK168CKC CHECK (S_W_ID BETWEEN 267201
AND 268800);
SET INTEGRITY FOR STOCK168 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK169 OFF;
ALTER TABLE STOCK169 DROP CONSTRAINT STOCK169CKC;
ALTER TABLE STOCK169 ADD CONSTRAINT STOCK169CKC CHECK (S_W_ID BETWEEN 268801
AND 270400);
SET INTEGRITY FOR STOCK169 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK170 OFF;
ALTER TABLE STOCK170 DROP CONSTRAINT STOCK170CKC;
ALTER TABLE STOCK170 ADD CONSTRAINT STOCK170CKC CHECK (S_W_ID BETWEEN 270401
AND 272000);
SET INTEGRITY FOR STOCK170 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK171 OFF;
ALTER TABLE STOCK171 DROP CONSTRAINT STOCK171CKC;
ALTER TABLE STOCK171 ADD CONSTRAINT STOCK171CKC CHECK (S_W_ID BETWEEN 272001
AND 273600);
SET INTEGRITY FOR STOCK171 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK172 OFF;
ALTER TABLE STOCK172 DROP CONSTRAINT STOCK172CKC;
ALTER TABLE STOCK172 ADD CONSTRAINT STOCK172CKC CHECK (S_W_ID BETWEEN 273601
AND 275200);
SET INTEGRITY FOR STOCK172 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK173 OFF;
ALTER TABLE STOCK173 DROP CONSTRAINT STOCK173CKC;
ALTER TABLE STOCK173 ADD CONSTRAINT STOCK173CKC CHECK (S_W_ID BETWEEN 275201
AND 276800);
SET INTEGRITY FOR STOCK173 ALL IMMEDIATE UNCHECKED;
```

```
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK174 OFF;
ALTER TABLE STOCK174 DROP CONSTRAINT STOCK174CKC;
ALTER TABLE STOCK174 ADD CONSTRAINT STOCK174CKC CHECK (S_W_ID BETWEEN 276801
AND 278400);
SET INTEGRITY FOR STOCK174 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK175 OFF;
ALTER TABLE STOCK175 DROP CONSTRAINT STOCK175CKC;
ALTER TABLE STOCK175 ADD CONSTRAINT STOCK175CKC CHECK (S_W_ID BETWEEN 278401
AND 280000);
SET INTEGRITY FOR STOCK175 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK176 OFF;
ALTER TABLE STOCK176 DROP CONSTRAINT STOCK176CKC;
ALTER TABLE STOCK176 ADD CONSTRAINT STOCK176CKC CHECK (S_W_ID BETWEEN 280001
AND 281600);
SET INTEGRITY FOR STOCK176 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK177 OFF;
ALTER TABLE STOCK177 DROP CONSTRAINT STOCK177CKC;
ALTER TABLE STOCK177 ADD CONSTRAINT STOCK177CKC CHECK (S_W_ID BETWEEN 281601
AND 283200);
SET INTEGRITY FOR STOCK177 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK178 OFF;
ALTER TABLE STOCK178 DROP CONSTRAINT STOCK178CKC;
ALTER TABLE STOCK178 ADD CONSTRAINT STOCK178CKC CHECK (S_W_ID BETWEEN 283201
AND 284800);
SET INTEGRITY FOR STOCK178 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK179 OFF;
ALTER TABLE STOCK179 DROP CONSTRAINT STOCK179CKC;
ALTER TABLE STOCK179 ADD CONSTRAINT STOCK179CKC CHECK (S_W_ID BETWEEN 284801
AND 286400);
SET INTEGRITY FOR STOCK179 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK180 OFF;
ALTER TABLE STOCK180 DROP CONSTRAINT STOCK180CKC;
ALTER TABLE STOCK180 ADD CONSTRAINT STOCK180CKC CHECK (S_W_ID BETWEEN 286401
AND 288000);
SET INTEGRITY FOR STOCK180 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK181 OFF;
ALTER TABLE STOCK181 DROP CONSTRAINT STOCK181CKC;
ALTER TABLE STOCK181 ADD CONSTRAINT STOCK181CKC CHECK (S_W_ID BETWEEN 288001
AND 289600);
SET INTEGRITY FOR STOCK181 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK182 OFF;
ALTER TABLE STOCK182 DROP CONSTRAINT STOCK182CKC;
ALTER TABLE STOCK182 ADD CONSTRAINT STOCK182CKC CHECK (S_W_ID BETWEEN 289601
AND 291200);
SET INTEGRITY FOR STOCK182 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK183 OFF;
ALTER TABLE STOCK183 DROP CONSTRAINT STOCK183CKC;
ALTER TABLE STOCK183 ADD CONSTRAINT STOCK183CKC CHECK (S_W_ID BETWEEN 291201
AND 292800);
SET INTEGRITY FOR STOCK183 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK184 OFF;
ALTER TABLE STOCK184 DROP CONSTRAINT STOCK184CKC;
ALTER TABLE STOCK184 ADD CONSTRAINT STOCK184CKC CHECK (S_W_ID BETWEEN 292801
AND 294400);
SET INTEGRITY FOR STOCK184 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK185 OFF;
ALTER TABLE STOCK185 DROP CONSTRAINT STOCK185CKC;
ALTER TABLE STOCK185 ADD CONSTRAINT STOCK185CKC CHECK (S_W_ID BETWEEN 294401
AND 296000);
SET INTEGRITY FOR STOCK185 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK186 OFF;
ALTER TABLE STOCK186 DROP CONSTRAINT STOCK186CKC;
ALTER TABLE STOCK186 ADD CONSTRAINT STOCK186CKC CHECK (S_W_ID BETWEEN 296001
AND 297600);
SET INTEGRITY FOR STOCK186 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK187 OFF;
ALTER TABLE STOCK187 DROP CONSTRAINT STOCK187CKC;
ALTER TABLE STOCK187 ADD CONSTRAINT STOCK187CKC CHECK (S_W_ID BETWEEN 297601
AND 299200);
SET INTEGRITY FOR STOCK187 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK188 OFF;
ALTER TABLE STOCK188 DROP CONSTRAINT STOCK188CKC;
ALTER TABLE STOCK188 ADD CONSTRAINT STOCK188CKC CHECK (S_W_ID BETWEEN 299201
AND 300800);
SET INTEGRITY FOR STOCK188 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK189 OFF;
ALTER TABLE STOCK189 DROP CONSTRAINT STOCK189CKC;
ALTER TABLE STOCK189 ADD CONSTRAINT STOCK189CKC CHECK (S_W_ID BETWEEN 300801
AND 302400);
SET INTEGRITY FOR STOCK189 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK190 OFF;
ALTER TABLE STOCK190 DROP CONSTRAINT STOCK190CKC;
ALTER TABLE STOCK190 ADD CONSTRAINT STOCK190CKC CHECK (S_W_ID BETWEEN 302401
AND 304000);
SET INTEGRITY FOR STOCK190 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK191 OFF;
ALTER TABLE STOCK191 DROP CONSTRAINT STOCK191CKC;
ALTER TABLE STOCK191 ADD CONSTRAINT STOCK191CKC CHECK (S_W_ID BETWEEN 304001
AND 305600);
SET INTEGRITY FOR STOCK191 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK192 OFF;
ALTER TABLE STOCK192 DROP CONSTRAINT STOCK192CKC;
ALTER TABLE STOCK192 ADD CONSTRAINT STOCK192CKC CHECK (S_W_ID BETWEEN 305601
AND 307200);
SET INTEGRITY FOR STOCK192 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK193 OFF;
ALTER TABLE STOCK193 DROP CONSTRAINT STOCK193CKC;
ALTER TABLE STOCK193 ADD CONSTRAINT STOCK193CKC CHECK (S_W_ID BETWEEN 307201
AND 308800);
SET INTEGRITY FOR STOCK193 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK194 OFF;
ALTER TABLE STOCK194 DROP CONSTRAINT STOCK194CKC;
ALTER TABLE STOCK194 ADD CONSTRAINT STOCK194CKC CHECK (S_W_ID BETWEEN 308801
AND 310400);
SET INTEGRITY FOR STOCK194 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK195 OFF;
ALTER TABLE STOCK195 DROP CONSTRAINT STOCK195CKC;
ALTER TABLE STOCK195 ADD CONSTRAINT STOCK195CKC CHECK (S_W_ID BETWEEN 310401
AND 312000);
SET INTEGRITY FOR STOCK195 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK196 OFF;
ALTER TABLE STOCK196 DROP CONSTRAINT STOCK196CKC;
ALTER TABLE STOCK196 ADD CONSTRAINT STOCK196CKC CHECK (S_W_ID BETWEEN 312001
AND 313600);
SET INTEGRITY FOR STOCK196 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK197 OFF;
ALTER TABLE STOCK197 DROP CONSTRAINT STOCK197CKC;
ALTER TABLE STOCK197 ADD CONSTRAINT STOCK197CKC CHECK (S_W_ID BETWEEN 313601
AND 315200);
SET INTEGRITY FOR STOCK197 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK198 OFF;
ALTER TABLE STOCK198 DROP CONSTRAINT STOCK198CKC;
ALTER TABLE STOCK198 ADD CONSTRAINT STOCK198CKC CHECK (S_W_ID BETWEEN 315201
AND 316800);
SET INTEGRITY FOR STOCK198 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK199 OFF;
ALTER TABLE STOCK199 DROP CONSTRAINT STOCK199CKC;
ALTER TABLE STOCK199 ADD CONSTRAINT STOCK199CKC CHECK (S_W_ID BETWEEN 316801
AND 318400);
SET INTEGRITY FOR STOCK199 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR STOCK200 OFF;
ALTER TABLE STOCK200 DROP CONSTRAINT STOCK200CKC;
ALTER TABLE STOCK200 ADD CONSTRAINT STOCK200CKC CHECK (S_W_ID >= 318401);
SET INTEGRITY FOR STOCK200 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRCONST_WAREHOUSE.ddl

```
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE1 OFF;
ALTER TABLE WAREHOUSE1 DROP CONSTRAINT WAREHOUSE1CKC;
ALTER TABLE WAREHOUSE1 ADD CONSTRAINT WAREHOUSE1CKC CHECK (W_ID BETWEEN 1
AND 8000);
SET INTEGRITY FOR WAREHOUSE1 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE2 OFF;
ALTER TABLE WAREHOUSE2 DROP CONSTRAINT WAREHOUSE2CKC;
ALTER TABLE WAREHOUSE2 ADD CONSTRAINT WAREHOUSE2CKC CHECK (W_ID BETWEEN
8001 AND 16000);
SET INTEGRITY FOR WAREHOUSE2 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE3 OFF;
ALTER TABLE WAREHOUSE3 DROP CONSTRAINT WAREHOUSE3CKC;
ALTER TABLE WAREHOUSE3 ADD CONSTRAINT WAREHOUSE3CKC CHECK (W_ID BETWEEN
16001 AND 24000);
SET INTEGRITY FOR WAREHOUSE3 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE4 OFF;
ALTER TABLE WAREHOUSE4 DROP CONSTRAINT WAREHOUSE4CKC;
```

```
ALTER TABLE WAREHOUSE4 ADD CONSTRAINT WAREHOUSE4CKC CHECK (W_ID BETWEEN
24001 AND 32000);
SET INTEGRITY FOR WAREHOUSE4 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE5 OFF;
ALTER TABLE WAREHOUSE5 DROP CONSTRAINT WAREHOUSE5CKC;
ALTER TABLE WAREHOUSE5 ADD CONSTRAINT WAREHOUSE5CKC CHECK (W_ID BETWEEN
32001 AND 40000);
SET INTEGRITY FOR WAREHOUSE5 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE6 OFF;
ALTER TABLE WAREHOUSE6 DROP CONSTRAINT WAREHOUSE6CKC;
ALTER TABLE WAREHOUSE6 ADD CONSTRAINT WAREHOUSE6CKC CHECK (W_ID BETWEEN
40001 AND 48000);
SET INTEGRITY FOR WAREHOUSE6 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE7 OFF;
ALTER TABLE WAREHOUSE7 DROP CONSTRAINT WAREHOUSE7CKC;
ALTER TABLE WAREHOUSE7 ADD CONSTRAINT WAREHOUSE7CKC CHECK (W_ID BETWEEN
48001 AND 56000);
SET INTEGRITY FOR WAREHOUSE7 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE8 OFF;
ALTER TABLE WAREHOUSE8 DROP CONSTRAINT WAREHOUSE8CKC;
ALTER TABLE WAREHOUSE8 ADD CONSTRAINT WAREHOUSE8CKC CHECK (W_ID BETWEEN
56001 AND 64000);
SET INTEGRITY FOR WAREHOUSE8 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE9 OFF;
ALTER TABLE WAREHOUSE9 DROP CONSTRAINT WAREHOUSE9CKC;
ALTER TABLE WAREHOUSE9 ADD CONSTRAINT WAREHOUSE9CKC CHECK (W_ID BETWEEN
64001 AND 72000);
SET INTEGRITY FOR WAREHOUSE9 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE10 OFF;
ALTER TABLE WAREHOUSE10 DROP CONSTRAINT WAREHOUSE10CKC;
ALTER TABLE WAREHOUSE10 ADD CONSTRAINT WAREHOUSE10CKC CHECK (W_ID BETWEEN
72001 AND 80000);
SET INTEGRITY FOR WAREHOUSE10 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE11 OFF;
ALTER TABLE WAREHOUSE11 DROP CONSTRAINT WAREHOUSE11CKC;
ALTER TABLE WAREHOUSE11 ADD CONSTRAINT WAREHOUSE11CKC CHECK (W_ID BETWEEN
80001 AND 88000);
SET INTEGRITY FOR WAREHOUSE11 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE12 OFF;
ALTER TABLE WAREHOUSE12 DROP CONSTRAINT WAREHOUSE12CKC;
ALTER TABLE WAREHOUSE12 ADD CONSTRAINT WAREHOUSE12CKC CHECK (W_ID BETWEEN
88001 AND 96000);
SET INTEGRITY FOR WAREHOUSE12 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE13 OFF;
ALTER TABLE WAREHOUSE13 DROP CONSTRAINT WAREHOUSE13CKC;
ALTER TABLE WAREHOUSE13 ADD CONSTRAINT WAREHOUSE13CKC CHECK (W_ID BETWEEN
96001 AND 104000);
SET INTEGRITY FOR WAREHOUSE13 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE14 OFF;
ALTER TABLE WAREHOUSE14 DROP CONSTRAINT WAREHOUSE14CKC;
ALTER TABLE WAREHOUSE14 ADD CONSTRAINT WAREHOUSE14CKC CHECK (W_ID BETWEEN
104001 AND 112000);
SET INTEGRITY FOR WAREHOUSE14 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE15 OFF;
ALTER TABLE WAREHOUSE15 DROP CONSTRAINT WAREHOUSE15CKC;
ALTER TABLE WAREHOUSE15 ADD CONSTRAINT WAREHOUSE15CKC CHECK (W_ID BETWEEN
112001 AND 120000);
SET INTEGRITY FOR WAREHOUSE15 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE16 OFF;
ALTER TABLE WAREHOUSE16 DROP CONSTRAINT WAREHOUSE16CKC;
ALTER TABLE WAREHOUSE16 ADD CONSTRAINT WAREHOUSE16CKC CHECK (W_ID BETWEEN
120001 AND 128000);
SET INTEGRITY FOR WAREHOUSE16 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE17 OFF;
ALTER TABLE WAREHOUSE17 DROP CONSTRAINT WAREHOUSE17CKC;
ALTER TABLE WAREHOUSE17 ADD CONSTRAINT WAREHOUSE17CKC CHECK (W_ID BETWEEN
128001 AND 136000);
SET INTEGRITY FOR WAREHOUSE17 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE18 OFF;
ALTER TABLE WAREHOUSE18 DROP CONSTRAINT WAREHOUSE18CKC;
ALTER TABLE WAREHOUSE18 ADD CONSTRAINT WAREHOUSE18CKC CHECK (W_ID BETWEEN
136001 AND 144000);
SET INTEGRITY FOR WAREHOUSE18 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE19 OFF;
ALTER TABLE WAREHOUSE19 DROP CONSTRAINT WAREHOUSE19CKC;
ALTER TABLE WAREHOUSE19 ADD CONSTRAINT WAREHOUSE19CKC CHECK (W_ID BETWEEN
144001 AND 152000);
SET INTEGRITY FOR WAREHOUSE19 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE20 OFF;
ALTER TABLE WAREHOUSE20 DROP CONSTRAINT WAREHOUSE20CKC;
ALTER TABLE WAREHOUSE20 ADD CONSTRAINT WAREHOUSE20CKC CHECK (W_ID BETWEEN
152001 AND 160000);
SET INTEGRITY FOR WAREHOUSE20 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE21 OFF;
ALTER TABLE WAREHOUSE21 DROP CONSTRAINT WAREHOUSE21CKC;
ALTER TABLE WAREHOUSE21 ADD CONSTRAINT WAREHOUSE21CKC CHECK (W_ID BETWEEN
160001 AND 168000);
SET INTEGRITY FOR WAREHOUSE21 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE22 OFF;
ALTER TABLE WAREHOUSE22 DROP CONSTRAINT WAREHOUSE22CKC;
ALTER TABLE WAREHOUSE22 ADD CONSTRAINT WAREHOUSE22CKC CHECK (W_ID BETWEEN
168001 AND 176000);
SET INTEGRITY FOR WAREHOUSE22 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE23 OFF;
ALTER TABLE WAREHOUSE23 DROP CONSTRAINT WAREHOUSE23CKC;
ALTER TABLE WAREHOUSE23 ADD CONSTRAINT WAREHOUSE23CKC CHECK (W_ID BETWEEN
176001 AND 184000);
SET INTEGRITY FOR WAREHOUSE23 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE24 OFF;
ALTER TABLE WAREHOUSE24 DROP CONSTRAINT WAREHOUSE24CKC;
ALTER TABLE WAREHOUSE24 ADD CONSTRAINT WAREHOUSE24CKC CHECK (W_ID BETWEEN
184001 AND 192000);
SET INTEGRITY FOR WAREHOUSE24 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE25 OFF;
ALTER TABLE WAREHOUSE25 DROP CONSTRAINT WAREHOUSE25CKC;
ALTER TABLE WAREHOUSE25 ADD CONSTRAINT WAREHOUSE25CKC CHECK (W_ID BETWEEN
192001 AND 200000);
SET INTEGRITY FOR WAREHOUSE25 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE26 OFF;
ALTER TABLE WAREHOUSE26 DROP CONSTRAINT WAREHOUSE26CKC;
ALTER TABLE WAREHOUSE26 ADD CONSTRAINT WAREHOUSE26CKC CHECK (W_ID BETWEEN
200001 AND 208000);
SET INTEGRITY FOR WAREHOUSE26 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE27 OFF;
ALTER TABLE WAREHOUSE27 DROP CONSTRAINT WAREHOUSE27CKC;
ALTER TABLE WAREHOUSE27 ADD CONSTRAINT WAREHOUSE27CKC CHECK (W_ID BETWEEN
208001 AND 216000);
SET INTEGRITY FOR WAREHOUSE27 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE28 OFF;
ALTER TABLE WAREHOUSE28 DROP CONSTRAINT WAREHOUSE28CKC;
ALTER TABLE WAREHOUSE28 ADD CONSTRAINT WAREHOUSE28CKC CHECK (W_ID BETWEEN
216001 AND 224000);
SET INTEGRITY FOR WAREHOUSE28 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE29 OFF;
ALTER TABLE WAREHOUSE29 DROP CONSTRAINT WAREHOUSE29CKC;
ALTER TABLE WAREHOUSE29 ADD CONSTRAINT WAREHOUSE29CKC CHECK (W_ID BETWEEN
224001 AND 232000);
SET INTEGRITY FOR WAREHOUSE29 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE30 OFF;
ALTER TABLE WAREHOUSE30 DROP CONSTRAINT WAREHOUSE30CKC;
ALTER TABLE WAREHOUSE30 ADD CONSTRAINT WAREHOUSE30CKC CHECK (W_ID BETWEEN
232001 AND 240000);
SET INTEGRITY FOR WAREHOUSE30 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE31 OFF;
ALTER TABLE WAREHOUSE31 DROP CONSTRAINT WAREHOUSE31CKC;
ALTER TABLE WAREHOUSE31 ADD CONSTRAINT WAREHOUSE31CKC CHECK (W_ID BETWEEN
240001 AND 248000);
SET INTEGRITY FOR WAREHOUSE31 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE32 OFF;
ALTER TABLE WAREHOUSE32 DROP CONSTRAINT WAREHOUSE32CKC;
ALTER TABLE WAREHOUSE32 ADD CONSTRAINT WAREHOUSE32CKC CHECK (W_ID BETWEEN
248001 AND 256000);
SET INTEGRITY FOR WAREHOUSE32 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE33 OFF;
ALTER TABLE WAREHOUSE33 DROP CONSTRAINT WAREHOUSE33CKC;
ALTER TABLE WAREHOUSE33 ADD CONSTRAINT WAREHOUSE33CKC CHECK (W_ID BETWEEN
256001 AND 264000);
SET INTEGRITY FOR WAREHOUSE33 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE34 OFF;
ALTER TABLE WAREHOUSE34 DROP CONSTRAINT WAREHOUSE34CKC;
ALTER TABLE WAREHOUSE34 ADD CONSTRAINT WAREHOUSE34CKC CHECK (W_ID BETWEEN
264001 AND 272000);
SET INTEGRITY FOR WAREHOUSE34 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE35 OFF;
ALTER TABLE WAREHOUSE35 DROP CONSTRAINT WAREHOUSE35CKC;
ALTER TABLE WAREHOUSE35 ADD CONSTRAINT WAREHOUSE35CKC CHECK (W_ID BETWEEN
272001 AND 280000);
```

```
SET INTEGRITY FOR WAREHOUSE35 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE36 OFF;
ALTER TABLE WAREHOUSE36 DROP CONSTRAINT WAREHOUSE36CKC;
ALTER TABLE WAREHOUSE36 ADD CONSTRAINT WAREHOUSE36CKC CHECK (W_ID BETWEEN
280001 AND 288000);
SET INTEGRITY FOR WAREHOUSE36 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE37 OFF;
ALTER TABLE WAREHOUSE37 DROP CONSTRAINT WAREHOUSE37CKC;
ALTER TABLE WAREHOUSE37 ADD CONSTRAINT WAREHOUSE37CKC CHECK (W_ID BETWEEN
288001 AND 296000);
SET INTEGRITY FOR WAREHOUSE37 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE38 OFF;
ALTER TABLE WAREHOUSE38 DROP CONSTRAINT WAREHOUSE38CKC;
ALTER TABLE WAREHOUSE38 ADD CONSTRAINT WAREHOUSE38CKC CHECK (W_ID BETWEEN
296001 AND 304000);
SET INTEGRITY FOR WAREHOUSE38 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE39 OFF;
ALTER TABLE WAREHOUSE39 DROP CONSTRAINT WAREHOUSE39CKC;
ALTER TABLE WAREHOUSE39 ADD CONSTRAINT WAREHOUSE39CKC CHECK (W_ID BETWEEN
304001 AND 312000);
SET INTEGRITY FOR WAREHOUSE39 ALL IMMEDIATE UNCHECKED;
connect reset;
connect to TPCC in share mode;
SET INTEGRITY FOR WAREHOUSE40 OFF;
ALTER TABLE WAREHOUSE40 DROP CONSTRAINT WAREHOUSE40CKC;
ALTER TABLE WAREHOUSE40 ADD CONSTRAINT WAREHOUSE40CKC CHECK (W_ID >= 312001);
SET INTEGRITY FOR WAREHOUSE40 ALL IMMEDIATE UNCHECKED;
connect reset;
```

DDL/CRIDX_CUST_IDXB.ddl

```
connect to TPCC in share mode;
DROP INDEX CUST_IDXB1;
CREATE INDEX CUST_IDXB1
        ON CUSTOMER1(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB2;
CREATE INDEX CUST_IDXB2
        ON CUSTOMER2(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB3;
CREATE INDEX CUST_IDXB3
        ON CUSTOMER3(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB4;
CREATE INDEX CUST_IDXB4
        ON CUSTOMER4(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB5;
CREATE INDEX CUST_IDXB5
        ON CUSTOMER5(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB6;
CREATE INDEX CUST_IDXB6
        ON CUSTOMER6(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB7;
CREATE INDEX CUST_IDXB7
        ON CUSTOMER7(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB8;
CREATE INDEX CUST_IDXB8
        ON CUSTOMER8(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB9;
CREATE INDEX CUST_IDXB9
        ON CUSTOMER9(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB10;
CREATE INDEX CUST_IDXB10
        ON CUSTOMER10(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB11;
CREATE INDEX CUST_IDXB11
        ON CUSTOMER11(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB12;
CREATE INDEX CUST_IDXB12
        ON CUSTOMER12(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB13;
CREATE INDEX CUST_IDXB13
        ON CUSTOMER13(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB14;
CREATE INDEX CUST_IDXB14
        ON CUSTOMER14(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB15;
CREATE INDEX CUST_IDXB15
        ON CUSTOMER15(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB16;
CREATE INDEX CUST_IDXB16
        ON CUSTOMER16(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB17;
CREATE INDEX CUST_IDXB17
        ON CUSTOMER17(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB18;
CREATE INDEX CUST_IDXB18
        ON CUSTOMER18(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB19;
CREATE INDEX CUST_IDXB19
        ON CUSTOMER19(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB20;
CREATE INDEX CUST_IDXB20
        ON CUSTOMER20(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB21;
CREATE INDEX CUST_IDXB21
        ON CUSTOMER21(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB22;
CREATE INDEX CUST_IDXB22
        ON CUSTOMER22(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB23;
CREATE INDEX CUST_IDXB23
        ON CUSTOMER23(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB24;
CREATE INDEX CUST_IDXB24
        ON CUSTOMER24(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB25;
CREATE INDEX CUST_IDXB25
        ON CUSTOMER25(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB26;
CREATE INDEX CUST_IDXB26
        ON CUSTOMER26(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB27;
CREATE INDEX CUST_IDXB27
        ON CUSTOMER27(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB28;
CREATE INDEX CUST_IDXB28
        ON CUSTOMER28(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB29;
CREATE INDEX CUST_IDXB29
        ON CUSTOMER29(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB30;
CREATE INDEX CUST_IDXB30
        ON CUSTOMER30(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB31;
CREATE INDEX CUST_IDXB31
        ON CUSTOMER31(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB32;
CREATE INDEX CUST_IDXB32
        ON CUSTOMER32(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB33;
CREATE INDEX CUST_IDXB33
        ON CUSTOMER33(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB34;
CREATE INDEX CUST_IDXB34
        ON CUSTOMER34(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB35;
CREATE INDEX CUST_IDXB35
        ON CUSTOMER35(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB36;
```

```
CREATE INDEX CUST_IDXB36
        ON CUSTOMER36(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB37;
CREATE INDEX CUST_IDXB37
        ON CUSTOMER37(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB38;
CREATE INDEX CUST_IDXB38
        ON CUSTOMER38(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB39;
CREATE INDEX CUST_IDXB39
        ON CUSTOMER39(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB40;
CREATE INDEX CUST_IDXB40
        ON CUSTOMER40(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB41;
CREATE INDEX CUST_IDXB41
        ON CUSTOMER41(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB42;
CREATE INDEX CUST_IDXB42
        ON CUSTOMER42(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB43;
CREATE INDEX CUST_IDXB43
        ON CUSTOMER43(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB44;
CREATE INDEX CUST_IDXB44
        ON CUSTOMER44(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB45;
CREATE INDEX CUST_IDXB45
        ON CUSTOMER45(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB46;
CREATE INDEX CUST_IDXB46
        ON CUSTOMER46(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB47;
CREATE INDEX CUST_IDXB47
        ON CUSTOMER47(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB48;
CREATE INDEX CUST_IDXB48
        ON CUSTOMER48(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB49;
CREATE INDEX CUST_IDXB49
        ON CUSTOMER49(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB50;
CREATE INDEX CUST_IDXB50
        ON CUSTOMER50(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB51;
CREATE INDEX CUST_IDXB51
        ON CUSTOMER51(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB52;
CREATE INDEX CUST_IDXB52
        ON CUSTOMER52(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB53;
CREATE INDEX CUST_IDXB53
        ON CUSTOMER53(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB54;
CREATE INDEX CUST_IDXB54
        ON CUSTOMER54(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB55;
CREATE INDEX CUST_IDXB55
        ON CUSTOMER55(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB56;
CREATE INDEX CUST_IDXB56
        ON CUSTOMER56(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB57;
CREATE INDEX CUST_IDXB57
        ON CUSTOMER57(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB58;
CREATE INDEX CUST_IDXB58
        ON CUSTOMER58(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB59;
CREATE INDEX CUST_IDXB59
        ON CUSTOMER59(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB60;
CREATE INDEX CUST_IDXB60
        ON CUSTOMER60(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB61;
CREATE INDEX CUST_IDXB61
        ON CUSTOMER61(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB62;
CREATE INDEX CUST_IDXB62
        ON CUSTOMER62(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB63;
CREATE INDEX CUST_IDXB63
        ON CUSTOMER63(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB64;
CREATE INDEX CUST_IDXB64
        ON CUSTOMER64(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB65;
CREATE INDEX CUST_IDXB65
        ON CUSTOMER65(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB66;
CREATE INDEX CUST_IDXB66
        ON CUSTOMER66(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB67;
CREATE INDEX CUST_IDXB67
        ON CUSTOMER67(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB68;
CREATE INDEX CUST_IDXB68
        ON CUSTOMER68(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB69;
CREATE INDEX CUST_IDXB69
        ON CUSTOMER69(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB70;
CREATE INDEX CUST_IDXB70
        ON CUSTOMER70(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB71;
CREATE INDEX CUST_IDXB71
        ON CUSTOMER71(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB72;
CREATE INDEX CUST_IDXB72
        ON CUSTOMER72(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB73;
CREATE INDEX CUST_IDXB73
        ON CUSTOMER73(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB74;
CREATE INDEX CUST_IDXB74
        ON CUSTOMER74(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB75;
CREATE INDEX CUST_IDXB75
        ON CUSTOMER75(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB76;
CREATE INDEX CUST_IDXB76
        ON CUSTOMER76(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB77;
CREATE INDEX CUST_IDXB77
        ON CUSTOMER77(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB78;
CREATE INDEX CUST_IDXB78
        ON CUSTOMER78(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB79;
CREATE INDEX CUST_IDXB79
        ON CUSTOMER79(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
```

```
DROP INDEX CUST_IDXB80;
CREATE INDEX CUST_IDXB80
        ON CUSTOMER80(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB81;
CREATE INDEX CUST_IDXB81
        ON CUSTOMER81(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB82;
CREATE INDEX CUST_IDXB82
        ON CUSTOMER82(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB83;
CREATE INDEX CUST_IDXB83
        ON CUSTOMER83(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB84;
CREATE INDEX CUST_IDXB84
        ON CUSTOMER84(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB85;
CREATE INDEX CUST_IDXB85
        ON CUSTOMER85(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB86;
CREATE INDEX CUST_IDXB86
        ON CUSTOMER86(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB87;
CREATE INDEX CUST_IDXB87
        ON CUSTOMER87(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB88;
CREATE INDEX CUST_IDXB88
        ON CUSTOMER88(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB89;
CREATE INDEX CUST_IDXB89
        ON CUSTOMER89(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB90;
CREATE INDEX CUST_IDXB90
        ON CUSTOMER90(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB91;
CREATE INDEX CUST_IDXB91
        ON CUSTOMER91(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB92;
CREATE INDEX CUST_IDXB92
        ON CUSTOMER92(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB93;
CREATE INDEX CUST_IDXB93
        ON CUSTOMER93(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB94;
CREATE INDEX CUST_IDXB94
        ON CUSTOMER94(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB95;
CREATE INDEX CUST_IDXB95
        ON CUSTOMER95(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB96;
CREATE INDEX CUST_IDXB96
        ON CUSTOMER96(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB97;
CREATE INDEX CUST_IDXB97
        ON CUSTOMER97(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB98;
CREATE INDEX CUST_IDXB98
        ON CUSTOMER98(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB99;
CREATE INDEX CUST_IDXB99
        ON CUSTOMER99(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB100;
CREATE INDEX CUST_IDXB100
        ON CUSTOMER100(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB101;
CREATE INDEX CUST_IDXB101
        ON CUSTOMER101(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB102;
CREATE INDEX CUST_IDXB102
        ON CUSTOMER102(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB103;
CREATE INDEX CUST_IDXB103
        ON CUSTOMER103(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB104;
CREATE INDEX CUST_IDXB104
        ON CUSTOMER104(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB105;
CREATE INDEX CUST_IDXB105
        ON CUSTOMER105(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB106;
CREATE INDEX CUST_IDXB106
        ON CUSTOMER106(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB107;
CREATE INDEX CUST_IDXB107
        ON CUSTOMER107(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB108;
CREATE INDEX CUST_IDXB108
        ON CUSTOMER108(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB109;
CREATE INDEX CUST_IDXB109
        ON CUSTOMER109(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB110;
CREATE INDEX CUST_IDXB110
        ON CUSTOMER110(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB111;
CREATE INDEX CUST_IDXB111
        ON CUSTOMER111(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB112;
CREATE INDEX CUST_IDXB112
        ON CUSTOMER112(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB113;
CREATE INDEX CUST_IDXB113
        ON CUSTOMER113(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB114;
CREATE INDEX CUST_IDXB114
        ON CUSTOMER114(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB115;
CREATE INDEX CUST_IDXB115
        ON CUSTOMER115(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB116;
CREATE INDEX CUST_IDXB116
        ON CUSTOMER116(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB117;
CREATE INDEX CUST_IDXB117
        ON CUSTOMER117(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB118;
CREATE INDEX CUST_IDXB118
        ON CUSTOMER118(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB119;
CREATE INDEX CUST_IDXB119
        ON CUSTOMER119(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB120;
CREATE INDEX CUST_IDXB120
        ON CUSTOMER120(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB121;
CREATE INDEX CUST_IDXB121
        ON CUSTOMER121(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB122;
CREATE INDEX CUST_IDXB122
        ON CUSTOMER122(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB123;
CREATE INDEX CUST_IDXB123
        ON CUSTOMER123(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
```

```
connect to TPCC in share mode;
DROP INDEX CUST_IDXB124;
CREATE INDEX CUST_IDXB124
        ON CUSTOMER124(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB125;
CREATE INDEX CUST_IDXB125
        ON CUSTOMER125(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB126;
CREATE INDEX CUST_IDXB126
        ON CUSTOMER126(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB127;
CREATE INDEX CUST_IDXB127
        ON CUSTOMER127(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB128;
CREATE INDEX CUST_IDXB128
        ON CUSTOMER128(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB129;
CREATE INDEX CUST_IDXB129
        ON CUSTOMER129(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB130;
CREATE INDEX CUST_IDXB130
        ON CUSTOMER130(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB131;
CREATE INDEX CUST_IDXB131
        ON CUSTOMER131(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB132;
CREATE INDEX CUST_IDXB132
        ON CUSTOMER132(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB133;
CREATE INDEX CUST_IDXB133
        ON CUSTOMER133(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB134;
CREATE INDEX CUST_IDXB134
        ON CUSTOMER134(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB135;
CREATE INDEX CUST_IDXB135
        ON CUSTOMER135(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB136;
CREATE INDEX CUST_IDXB136
        ON CUSTOMER136(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB137;
CREATE INDEX CUST_IDXB137
        ON CUSTOMER137(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB138;
CREATE INDEX CUST_IDXB138
        ON CUSTOMER138(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB139;
CREATE INDEX CUST_IDXB139
        ON CUSTOMER139(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB140;
CREATE INDEX CUST_IDXB140
        ON CUSTOMER140(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB141;
CREATE INDEX CUST_IDXB141
        ON CUSTOMER141(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB142;
CREATE INDEX CUST_IDXB142
        ON CUSTOMER142(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB143;
CREATE INDEX CUST_IDXB143
        ON CUSTOMER143(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB144;
CREATE INDEX CUST_IDXB144
        ON CUSTOMER144(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB145;
CREATE INDEX CUST_IDXB145
        ON CUSTOMER145(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB146;
CREATE INDEX CUST_IDXB146
        ON CUSTOMER146(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB147;
CREATE INDEX CUST_IDXB147
        ON CUSTOMER147(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB148;
CREATE INDEX CUST_IDXB148
        ON CUSTOMER148(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB149;
CREATE INDEX CUST_IDXB149
        ON CUSTOMER149(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB150;
CREATE INDEX CUST_IDXB150
        ON CUSTOMER150(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB151;
CREATE INDEX CUST_IDXB151
        ON CUSTOMER151(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB152;
CREATE INDEX CUST_IDXB152
        ON CUSTOMER152(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB153;
CREATE INDEX CUST_IDXB153
        ON CUSTOMER153(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB154;
CREATE INDEX CUST_IDXB154
        ON CUSTOMER154(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB155;
CREATE INDEX CUST_IDXB155
        ON CUSTOMER155(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB156;
CREATE INDEX CUST_IDXB156
        ON CUSTOMER156(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB157;
CREATE INDEX CUST_IDXB157
        ON CUSTOMER157(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB158;
CREATE INDEX CUST_IDXB158
        ON CUSTOMER158(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB159;
CREATE INDEX CUST_IDXB159
        ON CUSTOMER159(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB160;
CREATE INDEX CUST_IDXB160
        ON CUSTOMER160(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB161;
CREATE INDEX CUST_IDXB161
        ON CUSTOMER161(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB162;
CREATE INDEX CUST_IDXB162
        ON CUSTOMER162(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB163;
CREATE INDEX CUST_IDXB163
        ON CUSTOMER163(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB164;
CREATE INDEX CUST_IDXB164
        ON CUSTOMER164(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB165;
CREATE INDEX CUST_IDXB165
        ON CUSTOMER165(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB166;
CREATE INDEX CUST_IDXB166
        ON CUSTOMER166(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB167;
CREATE INDEX CUST_IDXB167
        ON CUSTOMER167(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
```

```
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB168;
CREATE INDEX CUST_IDXB168
        ON CUSTOMER168(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB169;
CREATE INDEX CUST_IDXB169
        ON CUSTOMER169(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB170;
CREATE INDEX CUST_IDXB170
        ON CUSTOMER170(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB171;
CREATE INDEX CUST_IDXB171
        ON CUSTOMER171(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB172;
CREATE INDEX CUST_IDXB172
        ON CUSTOMER172(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB173;
CREATE INDEX CUST_IDXB173
        ON CUSTOMER173(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB174;
CREATE INDEX CUST_IDXB174
        ON CUSTOMER174(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB175;
CREATE INDEX CUST_IDXB175
        ON CUSTOMER175(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB176;
CREATE INDEX CUST_IDXB176
        ON CUSTOMER176(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB177;
CREATE INDEX CUST_IDXB177
        ON CUSTOMER177(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB178;
CREATE INDEX CUST_IDXB178
        ON CUSTOMER178(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB179;
CREATE INDEX CUST_IDXB179
        ON CUSTOMER179(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB180;
CREATE INDEX CUST_IDXB180
        ON CUSTOMER180(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB181;
CREATE INDEX CUST_IDXB181
        ON CUSTOMER181(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB182;
CREATE INDEX CUST_IDXB182
        ON CUSTOMER182(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB183;
CREATE INDEX CUST_IDXB183
        ON CUSTOMER183(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB184;
CREATE INDEX CUST_IDXB184
        ON CUSTOMER184(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB185;
CREATE INDEX CUST_IDXB185
        ON CUSTOMER185(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB186;
CREATE INDEX CUST_IDXB186
        ON CUSTOMER186(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB187;
CREATE INDEX CUST_IDXB187
        ON CUSTOMER187(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB188;
CREATE INDEX CUST_IDXB188
        ON CUSTOMER188(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB189;
CREATE INDEX CUST_IDXB189
        ON CUSTOMER189(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB190;
CREATE INDEX CUST_IDXB190
        ON CUSTOMER190(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB191;
CREATE INDEX CUST_IDXB191
        ON CUSTOMER191(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB192;
CREATE INDEX CUST_IDXB192
        ON CUSTOMER192(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB193;
CREATE INDEX CUST_IDXB193
        ON CUSTOMER193(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB194;
CREATE INDEX CUST_IDXB194
        ON CUSTOMER194(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB195;
CREATE INDEX CUST_IDXB195
        ON CUSTOMER195(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB196;
CREATE INDEX CUST_IDXB196
        ON CUSTOMER196(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB197;
CREATE INDEX CUST_IDXB197
        ON CUSTOMER197(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB198;
CREATE INDEX CUST_IDXB198
        ON CUSTOMER198(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB199;
CREATE INDEX CUST_IDXB199
        ON CUSTOMER199(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
connect to TPCC in share mode;
DROP INDEX CUST_IDXB200;
CREATE INDEX CUST_IDXB200
        ON CUSTOMER200(C_LAST, C_W_ID, C_D_ID, C_FIRST, C_ID) PCTFREE 0;
connect reset;
```

DDL/CRIDX_ORDR_IDXB.ddl

```
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB1;
CREATE INDEX ORDR_IDXB1
        ON ORDERS1(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB2;
CREATE INDEX ORDR_IDXB2
        ON ORDERS2(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB3;
CREATE INDEX ORDR_IDXB3
        ON ORDERS3(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB4;
CREATE INDEX ORDR_IDXB4
        ON ORDERS4(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB5;
CREATE INDEX ORDR_IDXB5
        ON ORDERS5(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB6;
CREATE INDEX ORDR_IDXB6
        ON ORDERS6(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB7;
CREATE INDEX ORDR_IDXB7
        ON ORDERS7(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB8;
CREATE INDEX ORDR_IDXB8
        ON ORDERS8(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
```

```
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB9;
CREATE INDEX ORDR_IDXB9
        ON ORDERS9(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB10;
CREATE INDEX ORDR_IDXB10
        ON ORDERS10(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB11;
CREATE INDEX ORDR_IDXB11
        ON ORDERS11(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB12;
CREATE INDEX ORDR_IDXB12
        ON ORDERS12(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB13;
CREATE INDEX ORDR_IDXB13
        ON ORDERS13(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB14;
CREATE INDEX ORDR_IDXB14
        ON ORDERS14(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB15;
CREATE INDEX ORDR_IDXB15
        ON ORDERS15(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB16;
CREATE INDEX ORDR_IDXB16
        ON ORDERS16(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB17;
CREATE INDEX ORDR_IDXB17
        ON ORDERS17(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB18;
CREATE INDEX ORDR_IDXB18
        ON ORDERS18(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB19;
CREATE INDEX ORDR_IDXB19
        ON ORDERS19(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB20;
CREATE INDEX ORDR_IDXB20
        ON ORDERS20(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB21;
CREATE INDEX ORDR_IDXB21
        ON ORDERS21(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB22;
CREATE INDEX ORDR_IDXB22
        ON ORDERS22(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB23;
CREATE INDEX ORDR_IDXB23
        ON ORDERS23(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB24;
CREATE INDEX ORDR_IDXB24
        ON ORDERS24(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB25;
CREATE INDEX ORDR_IDXB25
        ON ORDERS25(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB26;
CREATE INDEX ORDR_IDXB26
        ON ORDERS26(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB27;
CREATE INDEX ORDR_IDXB27
        ON ORDERS27(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB28;
CREATE INDEX ORDR_IDXB28
        ON ORDERS28(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB29;
CREATE INDEX ORDR_IDXB29
        ON ORDERS29(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB30;
CREATE INDEX ORDR_IDXB30
        ON ORDERS30(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB31;
CREATE INDEX ORDR_IDXB31
        ON ORDERS31(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB32;
CREATE INDEX ORDR_IDXB32
        ON ORDERS32(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB33;
CREATE INDEX ORDR_IDXB33
        ON ORDERS33(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB34;
CREATE INDEX ORDR_IDXB34
        ON ORDERS34(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB35;
CREATE INDEX ORDR_IDXB35
        ON ORDERS35(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB36;
CREATE INDEX ORDR_IDXB36
        ON ORDERS36(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB37;
CREATE INDEX ORDR_IDXB37
        ON ORDERS37(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB38;
CREATE INDEX ORDR_IDXB38
        ON ORDERS38(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB39;
CREATE INDEX ORDR_IDXB39
        ON ORDERS39(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB40;
CREATE INDEX ORDR_IDXB40
        ON ORDERS40(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB41;
CREATE INDEX ORDR_IDXB41
        ON ORDERS41(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB42;
CREATE INDEX ORDR_IDXB42
        ON ORDERS42(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB43;
CREATE INDEX ORDR_IDXB43
        ON ORDERS43(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB44;
CREATE INDEX ORDR_IDXB44
        ON ORDERS44(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB45;
```

```
CREATE INDEX ORDR_IDXB45
        ON ORDERS45(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB46;
CREATE INDEX ORDR_IDXB46
        ON ORDERS46(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB47;
CREATE INDEX ORDR_IDXB47
        ON ORDERS47(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB48;
CREATE INDEX ORDR_IDXB48
        ON ORDERS48(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB49;
CREATE INDEX ORDR_IDXB49
        ON ORDERS49(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB50;
CREATE INDEX ORDR_IDXB50
        ON ORDERS50(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB51;
CREATE INDEX ORDR_IDXB51
        ON ORDERS51(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB52;
CREATE INDEX ORDR_IDXB52
        ON ORDERS52(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB53;
CREATE INDEX ORDR_IDXB53
        ON ORDERS53(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB54;
CREATE INDEX ORDR_IDXB54
        ON ORDERS54(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB55;
CREATE INDEX ORDR_IDXB55
        ON ORDERS55(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB56;
CREATE INDEX ORDR_IDXB56
        ON ORDERS56(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB57;
CREATE INDEX ORDR_IDXB57
        ON ORDERS57(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB58;
CREATE INDEX ORDR_IDXB58
        ON ORDERS58(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB59;
CREATE INDEX ORDR_IDXB59
        ON ORDERS59(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB60;
CREATE INDEX ORDR_IDXB60
        ON ORDERS60(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB61;
CREATE INDEX ORDR_IDXB61
        ON ORDERS61(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB62;
CREATE INDEX ORDR_IDXB62
        ON ORDERS62(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB63;
CREATE INDEX ORDR_IDXB63
        ON ORDERS63(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB64;
CREATE INDEX ORDR_IDXB64
        ON ORDERS64(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB65;
CREATE INDEX ORDR_IDXB65
        ON ORDERS65(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB66;
CREATE INDEX ORDR_IDXB66
        ON ORDERS66(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB67;
CREATE INDEX ORDR_IDXB67
        ON ORDERS67(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB68;
CREATE INDEX ORDR_IDXB68
        ON ORDERS68(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB69;
CREATE INDEX ORDR_IDXB69
        ON ORDERS69(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB70;
CREATE INDEX ORDR_IDXB70
        ON ORDERS70(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB71;
CREATE INDEX ORDR_IDXB71
        ON ORDERS71(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB72;
CREATE INDEX ORDR_IDXB72
        ON ORDERS72(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB73;
CREATE INDEX ORDR_IDXB73
        ON ORDERS73(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB74;
CREATE INDEX ORDR_IDXB74
        ON ORDERS74(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB75;
CREATE INDEX ORDR_IDXB75
        ON ORDERS75(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB76;
CREATE INDEX ORDR_IDXB76
        ON ORDERS76(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB77;
CREATE INDEX ORDR_IDXB77
        ON ORDERS77(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB78;
CREATE INDEX ORDR_IDXB78
        ON ORDERS78(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB79;
CREATE INDEX ORDR_IDXB79
        ON ORDERS79(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB80;
CREATE INDEX ORDR_IDXB80
        ON ORDERS80(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB81;
CREATE INDEX ORDR_IDXB81
```

```
        ON ORDERS81(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB82;
CREATE INDEX ORDR_IDXB82
        ON ORDERS82(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB83;
CREATE INDEX ORDR_IDXB83
        ON ORDERS83(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB84;
CREATE INDEX ORDR_IDXB84
        ON ORDERS84(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB85;
CREATE INDEX ORDR_IDXB85
        ON ORDERS85(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB86;
CREATE INDEX ORDR_IDXB86
        ON ORDERS86(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB87;
CREATE INDEX ORDR_IDXB87
        ON ORDERS87(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB88;
CREATE INDEX ORDR_IDXB88
        ON ORDERS88(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB89;
CREATE INDEX ORDR_IDXB89
        ON ORDERS89(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB90;
CREATE INDEX ORDR_IDXB90
        ON ORDERS90(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB91;
CREATE INDEX ORDR_IDXB91
        ON ORDERS91(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB92;
CREATE INDEX ORDR_IDXB92
        ON ORDERS92(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB93;
CREATE INDEX ORDR_IDXB93
        ON ORDERS93(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB94;
CREATE INDEX ORDR_IDXB94
        ON ORDERS94(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB95;
CREATE INDEX ORDR_IDXB95
        ON ORDERS95(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB96;
CREATE INDEX ORDR_IDXB96
        ON ORDERS96(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB97;
CREATE INDEX ORDR_IDXB97
        ON ORDERS97(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB98;
CREATE INDEX ORDR_IDXB98
        ON ORDERS98(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB99;
CREATE INDEX ORDR_IDXB99
        ON ORDERS99(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB100;
CREATE INDEX ORDR_IDXB100
        ON ORDERS100(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB101;
CREATE INDEX ORDR_IDXB101
        ON ORDERS101(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB102;
CREATE INDEX ORDR_IDXB102
        ON ORDERS102(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB103;
CREATE INDEX ORDR_IDXB103
        ON ORDERS103(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB104;
CREATE INDEX ORDR_IDXB104
        ON ORDERS104(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB105;
CREATE INDEX ORDR_IDXB105
        ON ORDERS105(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB106;
CREATE INDEX ORDR_IDXB106
        ON ORDERS106(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB107;
CREATE INDEX ORDR_IDXB107
        ON ORDERS107(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB108;
CREATE INDEX ORDR_IDXB108
        ON ORDERS108(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB109;
CREATE INDEX ORDR_IDXB109
        ON ORDERS109(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB110;
CREATE INDEX ORDR_IDXB110
        ON ORDERS110(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB111;
CREATE INDEX ORDR_IDXB111
        ON ORDERS111(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB112;
CREATE INDEX ORDR_IDXB112
        ON ORDERS112(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB113;
CREATE INDEX ORDR_IDXB113
        ON ORDERS113(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB114;
CREATE INDEX ORDR_IDXB114
        ON ORDERS114(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB115;
CREATE INDEX ORDR_IDXB115
        ON ORDERS115(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB116;
CREATE INDEX ORDR_IDXB116
        ON ORDERS116(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB117;
CREATE INDEX ORDR_IDXB117
```

```
        ON ORDERS117(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB118;
CREATE INDEX ORDR_IDXB118
        ON ORDERS118(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB119;
CREATE INDEX ORDR_IDXB119
        ON ORDERS119(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB120;
CREATE INDEX ORDR_IDXB120
        ON ORDERS120(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB121;
CREATE INDEX ORDR_IDXB121
        ON ORDERS121(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB122;
CREATE INDEX ORDR_IDXB122
        ON ORDERS122(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB123;
CREATE INDEX ORDR_IDXB123
        ON ORDERS123(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB124;
CREATE INDEX ORDR_IDXB124
        ON ORDERS124(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB125;
CREATE INDEX ORDR_IDXB125
        ON ORDERS125(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB126;
CREATE INDEX ORDR_IDXB126
        ON ORDERS126(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB127;
CREATE INDEX ORDR_IDXB127
        ON ORDERS127(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB128;
CREATE INDEX ORDR_IDXB128
        ON ORDERS128(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB129;
CREATE INDEX ORDR_IDXB129
        ON ORDERS129(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB130;
CREATE INDEX ORDR_IDXB130
        ON ORDERS130(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB131;
CREATE INDEX ORDR_IDXB131
        ON ORDERS131(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB132;
CREATE INDEX ORDR_IDXB132
        ON ORDERS132(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB133;
CREATE INDEX ORDR_IDXB133
        ON ORDERS133(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB134;
CREATE INDEX ORDR_IDXB134
        ON ORDERS134(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB135;
CREATE INDEX ORDR_IDXB135
        ON ORDERS135(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB136;
CREATE INDEX ORDR_IDXB136
        ON ORDERS136(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB137;
CREATE INDEX ORDR_IDXB137
        ON ORDERS137(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB138;
CREATE INDEX ORDR_IDXB138
        ON ORDERS138(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB139;
CREATE INDEX ORDR_IDXB139
        ON ORDERS139(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB140;
CREATE INDEX ORDR_IDXB140
        ON ORDERS140(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB141;
CREATE INDEX ORDR_IDXB141
        ON ORDERS141(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB142;
CREATE INDEX ORDR_IDXB142
        ON ORDERS142(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB143;
CREATE INDEX ORDR_IDXB143
        ON ORDERS143(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB144;
CREATE INDEX ORDR_IDXB144
        ON ORDERS144(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB145;
CREATE INDEX ORDR_IDXB145
        ON ORDERS145(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB146;
CREATE INDEX ORDR_IDXB146
        ON ORDERS146(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB147;
CREATE INDEX ORDR_IDXB147
        ON ORDERS147(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB148;
CREATE INDEX ORDR_IDXB148
        ON ORDERS148(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB149;
CREATE INDEX ORDR_IDXB149
        ON ORDERS149(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB150;
CREATE INDEX ORDR_IDXB150
        ON ORDERS150(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB151;
CREATE INDEX ORDR_IDXB151
        ON ORDERS151(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB152;
CREATE INDEX ORDR_IDXB152
        ON ORDERS152(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB153;
CREATE INDEX ORDR_IDXB153
```

```
        ON ORDERS153(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB154;
CREATE INDEX ORDR_IDXB154
        ON ORDERS154(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB155;
CREATE INDEX ORDR_IDXB155
        ON ORDERS155(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB156;
CREATE INDEX ORDR_IDXB156
        ON ORDERS156(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB157;
CREATE INDEX ORDR_IDXB157
        ON ORDERS157(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB158;
CREATE INDEX ORDR_IDXB158
        ON ORDERS158(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB159;
CREATE INDEX ORDR_IDXB159
        ON ORDERS159(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB160;
CREATE INDEX ORDR_IDXB160
        ON ORDERS160(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB161;
CREATE INDEX ORDR_IDXB161
        ON ORDERS161(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB162;
CREATE INDEX ORDR_IDXB162
        ON ORDERS162(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB163;
CREATE INDEX ORDR_IDXB163
        ON ORDERS163(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB164;
CREATE INDEX ORDR_IDXB164
        ON ORDERS164(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB165;
CREATE INDEX ORDR_IDXB165
        ON ORDERS165(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB166;
CREATE INDEX ORDR_IDXB166
        ON ORDERS166(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB167;
CREATE INDEX ORDR_IDXB167
        ON ORDERS167(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB168;
CREATE INDEX ORDR_IDXB168
        ON ORDERS168(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB169;
CREATE INDEX ORDR_IDXB169
        ON ORDERS169(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB170;
CREATE INDEX ORDR_IDXB170
        ON ORDERS170(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB171;
CREATE INDEX ORDR_IDXB171
        ON ORDERS171(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB172;
CREATE INDEX ORDR_IDXB172
        ON ORDERS172(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB173;
CREATE INDEX ORDR_IDXB173
        ON ORDERS173(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB174;
CREATE INDEX ORDR_IDXB174
        ON ORDERS174(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB175;
CREATE INDEX ORDR_IDXB175
        ON ORDERS175(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB176;
CREATE INDEX ORDR_IDXB176
        ON ORDERS176(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB177;
CREATE INDEX ORDR_IDXB177
        ON ORDERS177(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB178;
CREATE INDEX ORDR_IDXB178
        ON ORDERS178(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB179;
CREATE INDEX ORDR_IDXB179
        ON ORDERS179(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB180;
CREATE INDEX ORDR_IDXB180
        ON ORDERS180(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB181;
CREATE INDEX ORDR_IDXB181
        ON ORDERS181(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB182;
CREATE INDEX ORDR_IDXB182
        ON ORDERS182(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB183;
CREATE INDEX ORDR_IDXB183
        ON ORDERS183(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB184;
CREATE INDEX ORDR_IDXB184
        ON ORDERS184(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB185;
CREATE INDEX ORDR_IDXB185
        ON ORDERS185(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB186;
CREATE INDEX ORDR_IDXB186
        ON ORDERS186(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB187;
CREATE INDEX ORDR_IDXB187
        ON ORDERS187(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB188;
CREATE INDEX ORDR_IDXB188
        ON ORDERS188(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB189;
CREATE INDEX ORDR_IDXB189
```

```
        ON ORDERS189(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB190;
CREATE INDEX ORDR_IDXB190
        ON ORDERS190(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB191;
CREATE INDEX ORDR_IDXB191
        ON ORDERS191(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB192;
CREATE INDEX ORDR_IDXB192
        ON ORDERS192(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB193;
CREATE INDEX ORDR_IDXB193
        ON ORDERS193(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB194;
CREATE INDEX ORDR_IDXB194
        ON ORDERS194(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB195;
CREATE INDEX ORDR_IDXB195
        ON ORDERS195(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB196;
CREATE INDEX ORDR_IDXB196
        ON ORDERS196(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB197;
CREATE INDEX ORDR_IDXB197
        ON ORDERS197(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB198;
CREATE INDEX ORDR_IDXB198
        ON ORDERS198(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB199;
CREATE INDEX ORDR_IDXB199
        ON ORDERS199(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
connect to TPCC in share mode;
DROP INDEX ORDR_IDXB200;
CREATE INDEX ORDR_IDXB200
        ON ORDERS200(O_C_ID, O_W_ID, O_D_ID, O_ID DESC) PCTFREE 20 LEVEL2
PCTFREE 20;
connect reset;
```

CRTB_CUSTOMER_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE CUSTOMER1;
CREATE TABLE CUSTOMER1
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER       NOT NULL
        )
        IN ts_customer_001
        INDEX IN is_customer_001
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 1 ENDING AT 1600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER2;
CREATE TABLE CUSTOMER2
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER       NOT NULL
        )
        IN ts_customer_002
        INDEX IN is_customer_002
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 1601 ENDING AT 3200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER3;
CREATE TABLE CUSTOMER3
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER       NOT NULL
        )
        IN ts_customer_003
        INDEX IN is_customer_003
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 3201 ENDING AT 4800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER4;
CREATE TABLE CUSTOMER4
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER       NOT NULL
        )
        IN ts_customer_004
        INDEX IN is_customer_004
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 4801 ENDING AT 6400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
```

```
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER5;
CREATE TABLE CUSTOMER5
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_005
        INDEX IN is_customer_005
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 6401 ENDING AT 8000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER6;
CREATE TABLE CUSTOMER6
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_006
        INDEX IN is_customer_006
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 8001 ENDING AT 9600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER7;
CREATE TABLE CUSTOMER7
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_007
        INDEX IN is_customer_007
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 9601 ENDING AT 11200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER8;
CREATE TABLE CUSTOMER8
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_008
        INDEX IN is_customer_008
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 11201 ENDING AT 12800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER9;
CREATE TABLE CUSTOMER9
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_009
        INDEX IN is_customer_009
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 12801 ENDING AT 14400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER10;
CREATE TABLE CUSTOMER10
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT  INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_010
        INDEX IN is_customer_010
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 14401 ENDING AT 16000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER11;
CREATE TABLE CUSTOMER11
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
```

```
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_011
        INDEX IN is_customer_011
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 16001 ENDING AT 17600,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER12;
CREATE TABLE CUSTOMER12
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_012
        INDEX IN is_customer_012
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 17601 ENDING AT 19200,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER13;
CREATE TABLE CUSTOMER13
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_013
        INDEX IN is_customer_013
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 19201 ENDING AT 20800,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER14;
CREATE TABLE CUSTOMER14
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_014
        INDEX IN is_customer_014
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 20801 ENDING AT 22400,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER15;
CREATE TABLE CUSTOMER15
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_015
        INDEX IN is_customer_015
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 22401 ENDING AT 24000,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER16;
CREATE TABLE CUSTOMER16
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT INTEGER       NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
        )
        IN ts_customer_016
        INDEX IN is_customer_016
        ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 24001 ENDING AT 25600,
        C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER17;
CREATE TABLE CUSTOMER17
        (
        C_ID           INTEGER       NOT NULL,
        C_STATE        CHAR(2)       NOT NULL,
        C_ZIP          CHAR(9)       NOT NULL,
        C_PHONE        CHAR(16)      NOT NULL,
        C_SINCE        TIMESTAMP     NOT NULL,
        C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
        C_MIDDLE       CHAR(2)       NOT NULL,
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
```

```
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_017
   INDEX IN is_customer_017
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 25601 ENDING AT 27200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER18;
CREATE TABLE CUSTOMER18
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
   IN ts_customer_018
   INDEX IN is_customer_018
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 27201 ENDING AT 28800,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER19;
CREATE TABLE CUSTOMER19
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
   IN ts_customer_019
   INDEX IN is_customer_019
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 28801 ENDING AT 30400,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER20;
CREATE TABLE CUSTOMER20
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
   IN ts_customer_020
   INDEX IN is_customer_020
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 30401 ENDING AT 32000,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER21;
CREATE TABLE CUSTOMER21
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
   IN ts_customer_021
   INDEX IN is_customer_021
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 32001 ENDING AT 33600,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER22;
CREATE TABLE CUSTOMER22
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
   IN ts_customer_022
   INDEX IN is_customer_022
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 33601 ENDING AT 35200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER23;
CREATE TABLE CUSTOMER23
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER      NOT NULL
   )
```

```
        IN ts_customer_023
        INDEX IN is_customer_023
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 35201 ENDING AT 36800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER24;
CREATE TABLE CUSTOMER24
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_024
        INDEX IN is_customer_024
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 36801 ENDING AT 38400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER25;
CREATE TABLE CUSTOMER25
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_025
        INDEX IN is_customer_025
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 38401 ENDING AT 40000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER26;
CREATE TABLE CUSTOMER26
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_026
        INDEX IN is_customer_026
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 40001 ENDING AT 41600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER27;
CREATE TABLE CUSTOMER27
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_027
        INDEX IN is_customer_027
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 41601 ENDING AT 43200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER28;
CREATE TABLE CUSTOMER28
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_028
        INDEX IN is_customer_028
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 43201 ENDING AT 44800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER29;
CREATE TABLE CUSTOMER29
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_029
        INDEX IN is_customer_029
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 44801 ENDING AT 46400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
```

```
connect to TPCC in share mode;
DROP TABLE CUSTOMER30;
CREATE TABLE CUSTOMER30
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_030
        INDEX IN is_customer_030
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 46401 ENDING AT 48000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER31;
CREATE TABLE CUSTOMER31
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_031
        INDEX IN is_customer_031
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 48001 ENDING AT 49600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER32;
CREATE TABLE CUSTOMER32
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_032
        INDEX IN is_customer_032
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 49601 ENDING AT 51200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER33;
CREATE TABLE CUSTOMER33
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_033
        INDEX IN is_customer_033
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 51201 ENDING AT 52800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER34;
CREATE TABLE CUSTOMER34
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_034
        INDEX IN is_customer_034
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 52801 ENDING AT 54400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER35;
CREATE TABLE CUSTOMER35
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_035
        INDEX IN is_customer_035
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 54401 ENDING AT 56000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER36;
CREATE TABLE CUSTOMER36
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
```

```
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_036
   INDEX IN is_customer_036
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 56001 ENDING AT 57600,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER37;
CREATE TABLE CUSTOMER37
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_037
   INDEX IN is_customer_037
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 57601 ENDING AT 59200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER38;
CREATE TABLE CUSTOMER38
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_038
   INDEX IN is_customer_038
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 59201 ENDING AT 60800,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER39;
CREATE TABLE CUSTOMER39
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_039
   INDEX IN is_customer_039
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 60801 ENDING AT 62400,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER40;
CREATE TABLE CUSTOMER40
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_040
   INDEX IN is_customer_040
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 62401 ENDING AT 64000,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER41;
CREATE TABLE CUSTOMER41
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_041
   INDEX IN is_customer_041
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 64001 ENDING AT 65600,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER42;
CREATE TABLE CUSTOMER42
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
```

```
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_042
INDEX IN is_customer_042
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 65601 ENDING AT 67200,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER43;
CREATE TABLE CUSTOMER43
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_043
INDEX IN is_customer_043
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 67201 ENDING AT 68800,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER44;
CREATE TABLE CUSTOMER44
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_044
INDEX IN is_customer_044
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 68801 ENDING AT 70400,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER45;
CREATE TABLE CUSTOMER45
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_045
INDEX IN is_customer_045
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 70401 ENDING AT 72000,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER46;
CREATE TABLE CUSTOMER46
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_046
INDEX IN is_customer_046
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 72001 ENDING AT 73600,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER47;
CREATE TABLE CUSTOMER47
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_047
INDEX IN is_customer_047
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 73601 ENDING AT 75200,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER48;
CREATE TABLE CUSTOMER48
        (
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT      REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1      VARCHAR(20)   NOT NULL,
 C_STREET_2      VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT  INTEGER       NOT NULL,
 C_BALANCE       DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_048
```

```
            INDEX IN is_customer_048
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 75201 ENDING AT 76800,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER49;
CREATE TABLE CUSTOMER49
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_049
            INDEX IN is_customer_049
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 76801 ENDING AT 78400,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER50;
CREATE TABLE CUSTOMER50
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_050
            INDEX IN is_customer_050
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 78401 ENDING AT 80000,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER51;
CREATE TABLE CUSTOMER51
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_051
            INDEX IN is_customer_051
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 80001 ENDING AT 81600,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER52;
CREATE TABLE CUSTOMER52
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_052
            INDEX IN is_customer_052
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 81601 ENDING AT 83200,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER53;
CREATE TABLE CUSTOMER53
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_053
            INDEX IN is_customer_053
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 83201 ENDING AT 84800,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER54;
CREATE TABLE CUSTOMER54
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_054
            INDEX IN is_customer_054
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 84801 ENDING AT 86400,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
```

```
DROP TABLE CUSTOMER55;
CREATE TABLE CUSTOMER55
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_055
        INDEX IN is_customer_055
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 86401 ENDING AT 88000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER56;
CREATE TABLE CUSTOMER56
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_056
        INDEX IN is_customer_056
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 88001 ENDING AT 89600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER57;
CREATE TABLE CUSTOMER57
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_057
        INDEX IN is_customer_057
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 89601 ENDING AT 91200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER58;
CREATE TABLE CUSTOMER58
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_058
        INDEX IN is_customer_058
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 91201 ENDING AT 92800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER59;
CREATE TABLE CUSTOMER59
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_059
        INDEX IN is_customer_059
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 92801 ENDING AT 94400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER60;
CREATE TABLE CUSTOMER60
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_060
        INDEX IN is_customer_060
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 94401 ENDING AT 96000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER61;
CREATE TABLE CUSTOMER61
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
```

```
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_061
INDEX IN is_customer_061
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 96001 ENDING AT 97600,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER62;
CREATE TABLE CUSTOMER62
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_062
INDEX IN is_customer_062
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 97601 ENDING AT 99200,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER63;
CREATE TABLE CUSTOMER63
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_063
INDEX IN is_customer_063
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 99201 ENDING AT 100800,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER64;
CREATE TABLE CUSTOMER64
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_064
INDEX IN is_customer_064
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 100801 ENDING AT 102400,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER65;
CREATE TABLE CUSTOMER65
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_065
INDEX IN is_customer_065
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 102401 ENDING AT 104000,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER66;
CREATE TABLE CUSTOMER66
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
C_D_ID         SMALLINT      NOT NULL,
C_W_ID         INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER      NOT NULL,
C_BALANCE      DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT  INTEGER       NOT NULL
)
IN ts_customer_066
INDEX IN is_customer_066
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 104001 ENDING AT 105600,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER67;
CREATE TABLE CUSTOMER67
(
C_ID           INTEGER       NOT NULL,
C_STATE        CHAR(2)       NOT NULL,
C_ZIP          CHAR(9)       NOT NULL,
C_PHONE        CHAR(16)      NOT NULL,
C_SINCE        TIMESTAMP     NOT NULL,
C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
C_MIDDLE       CHAR(2)       NOT NULL,
C_CREDIT       CHAR(2)       NOT NULL,
C_DISCOUNT     REAL          NOT NULL,
C_DATA         VARCHAR(500)  NOT NULL,
C_LAST         VARCHAR(16)   NOT NULL,
C_FIRST        VARCHAR(16)   NOT NULL,
C_STREET_1     VARCHAR(20)   NOT NULL,
C_STREET_2     VARCHAR(20)   NOT NULL,
C_CITY         VARCHAR(20)   NOT NULL,
```

```
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_067
               INDEX IN is_customer_067
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 105601 ENDING AT 107200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER68;
CREATE TABLE CUSTOMER68
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_068
               INDEX IN is_customer_068
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 107201 ENDING AT 108800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER69;
CREATE TABLE CUSTOMER69
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_069
               INDEX IN is_customer_069
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 108801 ENDING AT 110400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER70;
CREATE TABLE CUSTOMER70
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_070
               INDEX IN is_customer_070
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 110401 ENDING AT 112000,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER71;
CREATE TABLE CUSTOMER71
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_071
               INDEX IN is_customer_071
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 112001 ENDING AT 113600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER72;
CREATE TABLE CUSTOMER72
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_072
               INDEX IN is_customer_072
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 113601 ENDING AT 115200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER73;
CREATE TABLE CUSTOMER73
               (
                C_ID          INTEGER      NOT NULL,
                C_STATE       CHAR(2)      NOT NULL,
                C_ZIP         CHAR(9)      NOT NULL,
                C_PHONE       CHAR(16)     NOT NULL,
                C_SINCE       TIMESTAMP    NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)      NOT NULL,
                C_CREDIT      CHAR(2)      NOT NULL,
                C_DISCOUNT    REAL         NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)  NOT NULL,
                C_FIRST       VARCHAR(16)  NOT NULL,
                C_STREET_1    VARCHAR(20)  NOT NULL,
                C_STREET_2    VARCHAR(20)  NOT NULL,
                C_CITY        VARCHAR(20)  NOT NULL,
                C_D_ID        SMALLINT     NOT NULL,
                C_W_ID        INTEGER      NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_073
               INDEX IN is_customer_073
```

```
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 115201 ENDING AT 116800,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER74;
CREATE TABLE CUSTOMER74
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_074
            INDEX IN is_customer_074
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 116801 ENDING AT 118400,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER75;
CREATE TABLE CUSTOMER75
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_075
            INDEX IN is_customer_075
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 118401 ENDING AT 120000,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER76;
CREATE TABLE CUSTOMER76
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_076
            INDEX IN is_customer_076
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 120001 ENDING AT 121600,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER77;
CREATE TABLE CUSTOMER77
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_077
            INDEX IN is_customer_077
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 121601 ENDING AT 123200,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER78;
CREATE TABLE CUSTOMER78
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_078
            INDEX IN is_customer_078
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 123201 ENDING AT 124800,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER79;
CREATE TABLE CUSTOMER79
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_079
            INDEX IN is_customer_079
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 124801 ENDING AT 126400,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER80;
```

```
CREATE TABLE CUSTOMER80
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_080
        INDEX IN is_customer_080
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 126401 ENDING AT 128000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER81;
CREATE TABLE CUSTOMER81
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_081
        INDEX IN is_customer_081
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 128001 ENDING AT 129600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER82;
CREATE TABLE CUSTOMER82
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_082
        INDEX IN is_customer_082
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 129601 ENDING AT 131200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER83;
CREATE TABLE CUSTOMER83
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_083
        INDEX IN is_customer_083
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 131201 ENDING AT 132800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER84;
CREATE TABLE CUSTOMER84
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_084
        INDEX IN is_customer_084
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 132801 ENDING AT 134400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER85;
CREATE TABLE CUSTOMER85
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
         C_CREDIT      CHAR(2)      NOT NULL,
         C_DISCOUNT    REAL         NOT NULL,
         C_DATA        VARCHAR(500) NOT NULL,
         C_LAST        VARCHAR(16)  NOT NULL,
         C_FIRST       VARCHAR(16)  NOT NULL,
         C_STREET_1    VARCHAR(20)  NOT NULL,
         C_STREET_2    VARCHAR(20)  NOT NULL,
         C_CITY        VARCHAR(20)  NOT NULL,
         C_D_ID        SMALLINT     NOT NULL,
         C_W_ID        INTEGER      NOT NULL,
         C_DELIVERY_CNT INTEGER     NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT INTEGER      NOT NULL
        )
        IN ts_customer_085
        INDEX IN is_customer_085
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 134401 ENDING AT 136000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER86;
CREATE TABLE CUSTOMER86
        (
         C_ID          INTEGER      NOT NULL,
         C_STATE       CHAR(2)      NOT NULL,
         C_ZIP         CHAR(9)      NOT NULL,
         C_PHONE       CHAR(16)     NOT NULL,
         C_SINCE       TIMESTAMP    NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)      NOT NULL,
```

```
        C_CREDIT       CHAR(2)       NOT NULL,
        C_DISCOUNT     REAL          NOT NULL,
        C_DATA         VARCHAR(500)  NOT NULL,
        C_LAST         VARCHAR(16)   NOT NULL,
        C_FIRST        VARCHAR(16)   NOT NULL,
        C_STREET_1     VARCHAR(20)   NOT NULL,
        C_STREET_2     VARCHAR(20)   NOT NULL,
        C_CITY         VARCHAR(20)   NOT NULL,
        C_D_ID         SMALLINT      NOT NULL,
        C_W_ID         INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER      NOT NULL,
        C_BALANCE      DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER       NOT NULL
       )
       IN ts_customer_086
       INDEX IN is_customer_086
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 136001 ENDING AT 137600,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER87;
CREATE TABLE CUSTOMER87
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
        C_W_ID        INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER     NOT NULL,
        C_BALANCE     DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER      NOT NULL
       )
       IN ts_customer_087
       INDEX IN is_customer_087
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 137601 ENDING AT 139200,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER88;
CREATE TABLE CUSTOMER88
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
        C_W_ID        INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER     NOT NULL,
        C_BALANCE     DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER      NOT NULL
       )
       IN ts_customer_088
       INDEX IN is_customer_088
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 139201 ENDING AT 140800,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER89;
CREATE TABLE CUSTOMER89
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
        C_W_ID        INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER     NOT NULL,
        C_BALANCE     DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER      NOT NULL
       )
       IN ts_customer_089
       INDEX IN is_customer_089
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 140801 ENDING AT 142400,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER90;
CREATE TABLE CUSTOMER90
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
        C_W_ID        INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER     NOT NULL,
        C_BALANCE     DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER      NOT NULL
       )
       IN ts_customer_090
       INDEX IN is_customer_090
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 142401 ENDING AT 144000,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER91;
CREATE TABLE CUSTOMER91
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
        C_W_ID        INTEGER       NOT NULL,
        C_DELIVERY_CNT  INTEGER     NOT NULL,
        C_BALANCE     DECIMAL(12,2) NOT NULL,
        C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
        C_PAYMENT_CNT  INTEGER      NOT NULL
       )
       IN ts_customer_091
       INDEX IN is_customer_091
       ORGANIZE BY KEY SEQUENCE (
        C_ID STARTING FROM 1 ENDING AT 3000,
        C_W_ID STARTING FROM 144001 ENDING AT 145600,
        C_D_ID STARTING FROM 1 ENDING AT 10
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER92;
CREATE TABLE CUSTOMER92
       (
        C_ID          INTEGER       NOT NULL,
        C_STATE       CHAR(2)       NOT NULL,
        C_ZIP         CHAR(9)       NOT NULL,
        C_PHONE       CHAR(16)      NOT NULL,
        C_SINCE       TIMESTAMP     NOT NULL,
        C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
        C_MIDDLE      CHAR(2)       NOT NULL,
        C_CREDIT      CHAR(2)       NOT NULL,
        C_DISCOUNT    REAL          NOT NULL,
        C_DATA        VARCHAR(500)  NOT NULL,
        C_LAST        VARCHAR(16)   NOT NULL,
        C_FIRST       VARCHAR(16)   NOT NULL,
        C_STREET_1    VARCHAR(20)   NOT NULL,
        C_STREET_2    VARCHAR(20)   NOT NULL,
        C_CITY        VARCHAR(20)   NOT NULL,
        C_D_ID        SMALLINT      NOT NULL,
```

```
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_092
    INDEX IN is_customer_092
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 145601 ENDING AT 147200,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER93;
CREATE TABLE CUSTOMER93
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_093
    INDEX IN is_customer_093
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 147201 ENDING AT 148800,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER94;
CREATE TABLE CUSTOMER94
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_094
    INDEX IN is_customer_094
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 148801 ENDING AT 150400,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER95;
CREATE TABLE CUSTOMER95
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_095
    INDEX IN is_customer_095
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 150401 ENDING AT 152000,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER96;
CREATE TABLE CUSTOMER96
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_096
    INDEX IN is_customer_096
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 152001 ENDING AT 153600,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER97;
CREATE TABLE CUSTOMER97
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_097
    INDEX IN is_customer_097
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 153601 ENDING AT 155200,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER98;
CREATE TABLE CUSTOMER98
    (
    C_ID            INTEGER       NOT NULL,
    C_STATE         CHAR(2)       NOT NULL,
    C_ZIP           CHAR(9)       NOT NULL,
    C_PHONE         CHAR(16)      NOT NULL,
    C_SINCE         TIMESTAMP     NOT NULL,
    C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
    C_MIDDLE        CHAR(2)       NOT NULL,
    C_CREDIT        CHAR(2)       NOT NULL,
    C_DISCOUNT      REAL          NOT NULL,
    C_DATA          VARCHAR(500)  NOT NULL,
    C_LAST          VARCHAR(16)   NOT NULL,
    C_FIRST         VARCHAR(16)   NOT NULL,
    C_STREET_1      VARCHAR(20)   NOT NULL,
    C_STREET_2      VARCHAR(20)   NOT NULL,
    C_CITY          VARCHAR(20)   NOT NULL,
    C_D_ID          SMALLINT      NOT NULL,
    C_W_ID          INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_098
    INDEX IN is_customer_098
    ORGANIZE BY KEY SEQUENCE (
```

```
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 155201 ENDING AT 156800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER99;
CREATE TABLE CUSTOMER99
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_099
               INDEX IN is_customer_099
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 156801 ENDING AT 158400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER100;
CREATE TABLE CUSTOMER100
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_100
               INDEX IN is_customer_100
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 158401 ENDING AT 160000,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER101;
CREATE TABLE CUSTOMER101
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_101
               INDEX IN is_customer_101
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 160001 ENDING AT 161600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER102;
CREATE TABLE CUSTOMER102
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_102
               INDEX IN is_customer_102
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 161601 ENDING AT 163200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER103;
CREATE TABLE CUSTOMER103
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_103
               INDEX IN is_customer_103
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 163201 ENDING AT 164800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER104;
CREATE TABLE CUSTOMER104
               (
                C_ID          INTEGER       NOT NULL,
                C_STATE       CHAR(2)       NOT NULL,
                C_ZIP         CHAR(9)       NOT NULL,
                C_PHONE       CHAR(16)      NOT NULL,
                C_SINCE       TIMESTAMP     NOT NULL,
                C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
                C_MIDDLE      CHAR(2)       NOT NULL,
                C_CREDIT      CHAR(2)       NOT NULL,
                C_DISCOUNT    REAL          NOT NULL,
                C_DATA        VARCHAR(500)  NOT NULL,
                C_LAST        VARCHAR(16)   NOT NULL,
                C_FIRST       VARCHAR(16)   NOT NULL,
                C_STREET_1    VARCHAR(20)   NOT NULL,
                C_STREET_2    VARCHAR(20)   NOT NULL,
                C_CITY        VARCHAR(20)   NOT NULL,
                C_D_ID        SMALLINT      NOT NULL,
                C_W_ID        INTEGER       NOT NULL,
                C_DELIVERY_CNT INTEGER      NOT NULL,
                C_BALANCE     DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT  INTEGER      NOT NULL
               )
               IN ts_customer_104
               INDEX IN is_customer_104
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 164801 ENDING AT 166400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER105;
CREATE TABLE CUSTOMER105
```

```
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_105
        INDEX IN is_customer_105
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 166401 ENDING AT 168000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER106;
CREATE TABLE CUSTOMER106
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_106
        INDEX IN is_customer_106
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 168001 ENDING AT 169600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER107;
CREATE TABLE CUSTOMER107
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_107
        INDEX IN is_customer_107
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 169601 ENDING AT 171200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER108;
CREATE TABLE CUSTOMER108
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_108
        INDEX IN is_customer_108
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 171201 ENDING AT 172800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER109;
CREATE TABLE CUSTOMER109
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_109
        INDEX IN is_customer_109
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 172801 ENDING AT 174400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER110;
CREATE TABLE CUSTOMER110
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_110
        INDEX IN is_customer_110
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 174401 ENDING AT 176000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER111;
CREATE TABLE CUSTOMER111
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
```

```
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_111
               INDEX IN is_customer_111
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 176001 ENDING AT 177600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER112;
CREATE TABLE CUSTOMER112
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_112
               INDEX IN is_customer_112
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 177601 ENDING AT 179200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER113;
CREATE TABLE CUSTOMER113
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_113
               INDEX IN is_customer_113
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 179201 ENDING AT 180800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER114;
CREATE TABLE CUSTOMER114
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_114
               INDEX IN is_customer_114
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 180801 ENDING AT 182400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER115;
CREATE TABLE CUSTOMER115
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_115
               INDEX IN is_customer_115
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 182401 ENDING AT 184000,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER116;
CREATE TABLE CUSTOMER116
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_116
               INDEX IN is_customer_116
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 184001 ENDING AT 185600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER117;
CREATE TABLE CUSTOMER117
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT      REAL         NOT NULL,
                C_DATA          VARCHAR(500)  NOT NULL,
                C_LAST          VARCHAR(16)   NOT NULL,
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
```

```
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_117
    INDEX IN is_customer_117
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 185601 ENDING AT 187200,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER118;
CREATE TABLE CUSTOMER118
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_118
    INDEX IN is_customer_118
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 187201 ENDING AT 188800,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER119;
CREATE TABLE CUSTOMER119
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_119
    INDEX IN is_customer_119
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 188801 ENDING AT 190400,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER120;
CREATE TABLE CUSTOMER120
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_120
    INDEX IN is_customer_120
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 190401 ENDING AT 192000,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER121;
CREATE TABLE CUSTOMER121
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_121
    INDEX IN is_customer_121
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 192001 ENDING AT 193600,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER122;
CREATE TABLE CUSTOMER122
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_122
    INDEX IN is_customer_122
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 193601 ENDING AT 195200,
    C_D_ID STARTING FROM 1 ENDING AT 10
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER123;
CREATE TABLE CUSTOMER123
    (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER       NOT NULL,
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
    )
    IN ts_customer_123
    INDEX IN is_customer_123
    ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
```

```
 C_W_ID STARTING FROM 195201 ENDING AT 196800,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER124;
CREATE TABLE CUSTOMER124
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_124
INDEX IN is_customer_124
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 196801 ENDING AT 198400,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER125;
CREATE TABLE CUSTOMER125
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_125
INDEX IN is_customer_125
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 198401 ENDING AT 200000,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER126;
CREATE TABLE CUSTOMER126
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_126
INDEX IN is_customer_126
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 200001 ENDING AT 201600,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER127;
CREATE TABLE CUSTOMER127
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_127
INDEX IN is_customer_127
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 201601 ENDING AT 203200,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER128;
CREATE TABLE CUSTOMER128
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_128
INDEX IN is_customer_128
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 203201 ENDING AT 204800,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER129;
CREATE TABLE CUSTOMER129
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_129
INDEX IN is_customer_129
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 204801 ENDING AT 206400,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER130;
CREATE TABLE CUSTOMER130
(
```

```
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_130
            INDEX IN is_customer_130
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 206401 ENDING AT 208000,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER131;
CREATE TABLE CUSTOMER131
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_131
            INDEX IN is_customer_131
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 208001 ENDING AT 209600,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER132;
CREATE TABLE CUSTOMER132
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_132
            INDEX IN is_customer_132
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 209601 ENDING AT 211200,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER133;
CREATE TABLE CUSTOMER133
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_133
            INDEX IN is_customer_133
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 211201 ENDING AT 212800,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER134;
CREATE TABLE CUSTOMER134
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_134
            INDEX IN is_customer_134
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 212801 ENDING AT 214400,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER135;
CREATE TABLE CUSTOMER135
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
            C_DATA        VARCHAR(500)  NOT NULL,
            C_LAST        VARCHAR(16)   NOT NULL,
            C_FIRST       VARCHAR(16)   NOT NULL,
            C_STREET_1    VARCHAR(20)   NOT NULL,
            C_STREET_2    VARCHAR(20)   NOT NULL,
            C_CITY        VARCHAR(20)   NOT NULL,
            C_D_ID        SMALLINT      NOT NULL,
            C_W_ID        INTEGER       NOT NULL,
            C_DELIVERY_CNT INTEGER      NOT NULL,
            C_BALANCE     DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_135
            INDEX IN is_customer_135
            ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 214401 ENDING AT 216000,
            C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER136;
CREATE TABLE CUSTOMER136
            (
            C_ID          INTEGER       NOT NULL,
            C_STATE       CHAR(2)       NOT NULL,
            C_ZIP         CHAR(9)       NOT NULL,
            C_PHONE       CHAR(16)      NOT NULL,
            C_SINCE       TIMESTAMP     NOT NULL,
            C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
            C_MIDDLE      CHAR(2)       NOT NULL,
            C_CREDIT      CHAR(2)       NOT NULL,
            C_DISCOUNT    REAL          NOT NULL,
```

```
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_136
               INDEX IN is_customer_136
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 216001 ENDING AT 217600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER137;
CREATE TABLE CUSTOMER137
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_137
               INDEX IN is_customer_137
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 217601 ENDING AT 219200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER138;
CREATE TABLE CUSTOMER138
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_138
               INDEX IN is_customer_138
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 219201 ENDING AT 220800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER139;
CREATE TABLE CUSTOMER139
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_139
               INDEX IN is_customer_139
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 220801 ENDING AT 222400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER140;
CREATE TABLE CUSTOMER140
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_140
               INDEX IN is_customer_140
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 222401 ENDING AT 224000,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER141;
CREATE TABLE CUSTOMER141
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE      DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_141
               INDEX IN is_customer_141
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 224001 ENDING AT 225600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER142;
CREATE TABLE CUSTOMER142
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
```

```
    C_BALANCE       DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_142
   INDEX IN is_customer_142
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 225601 ENDING AT 227200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER143;
CREATE TABLE CUSTOMER143
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_143
   INDEX IN is_customer_143
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 227201 ENDING AT 228800,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER144;
CREATE TABLE CUSTOMER144
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_144
   INDEX IN is_customer_144
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 228801 ENDING AT 230400,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER145;
CREATE TABLE CUSTOMER145
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_145
   INDEX IN is_customer_145
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 230401 ENDING AT 232000,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER146;
CREATE TABLE CUSTOMER146
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_146
   INDEX IN is_customer_146
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 232001 ENDING AT 233600,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER147;
CREATE TABLE CUSTOMER147
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_147
   INDEX IN is_customer_147
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 233601 ENDING AT 235200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER148;
CREATE TABLE CUSTOMER148
   (
    C_ID          INTEGER       NOT NULL,
    C_STATE       CHAR(2)       NOT NULL,
    C_ZIP         CHAR(9)       NOT NULL,
    C_PHONE       CHAR(16)      NOT NULL,
    C_SINCE       TIMESTAMP     NOT NULL,
    C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
    C_MIDDLE      CHAR(2)       NOT NULL,
    C_CREDIT      CHAR(2)       NOT NULL,
    C_DISCOUNT    REAL          NOT NULL,
    C_DATA        VARCHAR(500)  NOT NULL,
    C_LAST        VARCHAR(16)   NOT NULL,
    C_FIRST       VARCHAR(16)   NOT NULL,
    C_STREET_1    VARCHAR(20)   NOT NULL,
    C_STREET_2    VARCHAR(20)   NOT NULL,
    C_CITY        VARCHAR(20)   NOT NULL,
    C_D_ID        SMALLINT      NOT NULL,
    C_W_ID        INTEGER       NOT NULL,
    C_DELIVERY_CNT INTEGER      NOT NULL,
    C_BALANCE     DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT  INTEGER      NOT NULL
   )
   IN ts_customer_148
   INDEX IN is_customer_148
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 235201 ENDING AT 236800,
```

```
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER149;
CREATE TABLE CUSTOMER149
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_149
INDEX IN is_customer_149
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 236801 ENDING AT 238400,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER150;
CREATE TABLE CUSTOMER150
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_150
INDEX IN is_customer_150
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 238401 ENDING AT 240000,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER151;
CREATE TABLE CUSTOMER151
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_151
INDEX IN is_customer_151
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 240001 ENDING AT 241600,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER152;
CREATE TABLE CUSTOMER152
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_152
INDEX IN is_customer_152
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 241601 ENDING AT 243200,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER153;
CREATE TABLE CUSTOMER153
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_153
INDEX IN is_customer_153
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 243201 ENDING AT 244800,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER154;
CREATE TABLE CUSTOMER154
(
 C_ID          INTEGER       NOT NULL,
 C_STATE       CHAR(2)       NOT NULL,
 C_ZIP         CHAR(9)       NOT NULL,
 C_PHONE       CHAR(16)      NOT NULL,
 C_SINCE       TIMESTAMP     NOT NULL,
 C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
 C_MIDDLE      CHAR(2)       NOT NULL,
 C_CREDIT      CHAR(2)       NOT NULL,
 C_DISCOUNT    REAL          NOT NULL,
 C_DATA        VARCHAR(500)  NOT NULL,
 C_LAST        VARCHAR(16)   NOT NULL,
 C_FIRST       VARCHAR(16)   NOT NULL,
 C_STREET_1    VARCHAR(20)   NOT NULL,
 C_STREET_2    VARCHAR(20)   NOT NULL,
 C_CITY        VARCHAR(20)   NOT NULL,
 C_D_ID        SMALLINT      NOT NULL,
 C_W_ID        INTEGER       NOT NULL,
 C_DELIVERY_CNT INTEGER      NOT NULL,
 C_BALANCE     DECIMAL(12,2) NOT NULL,
 C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
 C_PAYMENT_CNT INTEGER       NOT NULL
)
IN ts_customer_154
INDEX IN is_customer_154
ORGANIZE BY KEY SEQUENCE (
 C_ID STARTING FROM 1 ENDING AT 3000,
 C_W_ID STARTING FROM 244801 ENDING AT 246400,
 C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER155;
CREATE TABLE CUSTOMER155
(
 C_ID          INTEGER       NOT NULL,
```

```
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_155
	INDEX IN is_customer_155
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 246401 ENDING AT 248000,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER156;
CREATE TABLE CUSTOMER156
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_156
	INDEX IN is_customer_156
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 248001 ENDING AT 249600,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER157;
CREATE TABLE CUSTOMER157
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_157
	INDEX IN is_customer_157
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 249601 ENDING AT 251200,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER158;
CREATE TABLE CUSTOMER158
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_158
	INDEX IN is_customer_158
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 251201 ENDING AT 252800,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER159;
CREATE TABLE CUSTOMER159
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_159
	INDEX IN is_customer_159
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 252801 ENDING AT 254400,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER160;
CREATE TABLE CUSTOMER160
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
	C_LAST		VARCHAR(16)	NOT NULL,
	C_FIRST		VARCHAR(16)	NOT NULL,
	C_STREET_1	VARCHAR(20)	NOT NULL,
	C_STREET_2	VARCHAR(20)	NOT NULL,
	C_CITY		VARCHAR(20)	NOT NULL,
	C_D_ID		SMALLINT	NOT NULL,
	C_W_ID		INTEGER		NOT NULL,
	C_DELIVERY_CNT	INTEGER		NOT NULL,
	C_BALANCE	DECIMAL(12,2) NOT NULL,
	C_YTD_PAYMENT	DECIMAL(12,2) NOT NULL,
	C_PAYMENT_CNT	INTEGER		NOT NULL
	)
	IN ts_customer_160
	INDEX IN is_customer_160
	ORGANIZE BY KEY SEQUENCE (
	C_ID STARTING FROM 1 ENDING AT 3000,
	C_W_ID STARTING FROM 254401 ENDING AT 256000,
	C_D_ID STARTING FROM 1 ENDING AT 10
	)
	ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER161;
CREATE TABLE CUSTOMER161
	(
	C_ID		INTEGER		NOT NULL,
	C_STATE		CHAR(2)		NOT NULL,
	C_ZIP		CHAR(9)		NOT NULL,
	C_PHONE		CHAR(16)	NOT NULL,
	C_SINCE		TIMESTAMP	NOT NULL,
	C_CREDIT_LIM	DECIMAL(12,2) NOT NULL,
	C_MIDDLE	CHAR(2)		NOT NULL,
	C_CREDIT	CHAR(2)		NOT NULL,
	C_DISCOUNT	REAL		NOT NULL,
	C_DATA		VARCHAR(500)	NOT NULL,
```

```
C_LAST          VARCHAR(16)   NOT NULL,
C_FIRST         VARCHAR(16)   NOT NULL,
C_STREET_1      VARCHAR(20)   NOT NULL,
C_STREET_2      VARCHAR(20)   NOT NULL,
C_CITY          VARCHAR(20)   NOT NULL,
C_D_ID          SMALLINT      NOT NULL,
C_W_ID          INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_161
INDEX IN is_customer_161
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 256001 ENDING AT 257600,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER162;
CREATE TABLE CUSTOMER162
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_162
INDEX IN is_customer_162
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 257601 ENDING AT 259200,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER163;
CREATE TABLE CUSTOMER163
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_163
INDEX IN is_customer_163
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 259201 ENDING AT 260800,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER164;
CREATE TABLE CUSTOMER164
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_164
INDEX IN is_customer_164
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 260801 ENDING AT 262400,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER165;
CREATE TABLE CUSTOMER165
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_165
INDEX IN is_customer_165
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 262401 ENDING AT 264000,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER166;
CREATE TABLE CUSTOMER166
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
C_PAYMENT_CNT   INTEGER       NOT NULL
)
IN ts_customer_166
INDEX IN is_customer_166
ORGANIZE BY KEY SEQUENCE (
C_ID STARTING FROM 1 ENDING AT 3000,
C_W_ID STARTING FROM 264001 ENDING AT 265600,
C_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER167;
CREATE TABLE CUSTOMER167
(
C_ID          INTEGER       NOT NULL,
C_STATE       CHAR(2)       NOT NULL,
C_ZIP         CHAR(9)       NOT NULL,
C_PHONE       CHAR(16)      NOT NULL,
C_SINCE       TIMESTAMP     NOT NULL,
C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
C_MIDDLE      CHAR(2)       NOT NULL,
C_CREDIT      CHAR(2)       NOT NULL,
C_DISCOUNT    REAL          NOT NULL,
C_DATA        VARCHAR(500)  NOT NULL,
C_LAST        VARCHAR(16)   NOT NULL,
C_FIRST       VARCHAR(16)   NOT NULL,
C_STREET_1    VARCHAR(20)   NOT NULL,
C_STREET_2    VARCHAR(20)   NOT NULL,
C_CITY        VARCHAR(20)   NOT NULL,
C_D_ID        SMALLINT      NOT NULL,
C_W_ID        INTEGER       NOT NULL,
C_DELIVERY_CNT  INTEGER       NOT NULL,
C_BALANCE       DECIMAL(12,2) NOT NULL,
```

```
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_167
   INDEX IN is_customer_167
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 265601 ENDING AT 267200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER168;
CREATE TABLE CUSTOMER168
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_168
   INDEX IN is_customer_168
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 267201 ENDING AT 268800,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER169;
CREATE TABLE CUSTOMER169
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_169
   INDEX IN is_customer_169
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 268801 ENDING AT 270400,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER170;
CREATE TABLE CUSTOMER170
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_170
   INDEX IN is_customer_170
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 270401 ENDING AT 272000,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER171;
CREATE TABLE CUSTOMER171
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_171
   INDEX IN is_customer_171
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 272001 ENDING AT 273600,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER172;
CREATE TABLE CUSTOMER172
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_172
   INDEX IN is_customer_172
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 273601 ENDING AT 275200,
    C_D_ID STARTING FROM 1 ENDING AT 10
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER173;
CREATE TABLE CUSTOMER173
   (
    C_ID           INTEGER       NOT NULL,
    C_STATE        CHAR(2)       NOT NULL,
    C_ZIP          CHAR(9)       NOT NULL,
    C_PHONE        CHAR(16)      NOT NULL,
    C_SINCE        TIMESTAMP     NOT NULL,
    C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
    C_MIDDLE       CHAR(2)       NOT NULL,
    C_CREDIT       CHAR(2)       NOT NULL,
    C_DISCOUNT     REAL          NOT NULL,
    C_DATA         VARCHAR(500)  NOT NULL,
    C_LAST         VARCHAR(16)   NOT NULL,
    C_FIRST        VARCHAR(16)   NOT NULL,
    C_STREET_1     VARCHAR(20)   NOT NULL,
    C_STREET_2     VARCHAR(20)   NOT NULL,
    C_CITY         VARCHAR(20)   NOT NULL,
    C_D_ID         SMALLINT      NOT NULL,
    C_W_ID         INTEGER       NOT NULL,
    C_DELIVERY_CNT  INTEGER      NOT NULL,
    C_BALANCE      DECIMAL(12,2) NOT NULL,
    C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
    C_PAYMENT_CNT   INTEGER       NOT NULL
   )
   IN ts_customer_173
   INDEX IN is_customer_173
   ORGANIZE BY KEY SEQUENCE (
    C_ID STARTING FROM 1 ENDING AT 3000,
    C_W_ID STARTING FROM 275201 ENDING AT 276800,
    C_D_ID STARTING FROM 1 ENDING AT 10
```

```
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER174;
CREATE TABLE CUSTOMER174
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_174
        INDEX IN is_customer_174
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 276801 ENDING AT 278400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER175;
CREATE TABLE CUSTOMER175
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_175
        INDEX IN is_customer_175
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 278401 ENDING AT 280000,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER176;
CREATE TABLE CUSTOMER176
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_176
        INDEX IN is_customer_176
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 280001 ENDING AT 281600,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER177;
CREATE TABLE CUSTOMER177
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_177
        INDEX IN is_customer_177
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 281601 ENDING AT 283200,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER178;
CREATE TABLE CUSTOMER178
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_178
        INDEX IN is_customer_178
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 283201 ENDING AT 284800,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER179;
CREATE TABLE CUSTOMER179
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
         C_ZIP         CHAR(9)       NOT NULL,
         C_PHONE       CHAR(16)      NOT NULL,
         C_SINCE       TIMESTAMP     NOT NULL,
         C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
         C_MIDDLE      CHAR(2)       NOT NULL,
         C_CREDIT      CHAR(2)       NOT NULL,
         C_DISCOUNT    REAL          NOT NULL,
         C_DATA        VARCHAR(500)  NOT NULL,
         C_LAST        VARCHAR(16)   NOT NULL,
         C_FIRST       VARCHAR(16)   NOT NULL,
         C_STREET_1    VARCHAR(20)   NOT NULL,
         C_STREET_2    VARCHAR(20)   NOT NULL,
         C_CITY        VARCHAR(20)   NOT NULL,
         C_D_ID        SMALLINT      NOT NULL,
         C_W_ID        INTEGER       NOT NULL,
         C_DELIVERY_CNT INTEGER      NOT NULL,
         C_BALANCE     DECIMAL(12,2) NOT NULL,
         C_YTD_PAYMENT  DECIMAL(12,2) NOT NULL,
         C_PAYMENT_CNT  INTEGER      NOT NULL
        )
        IN ts_customer_179
        INDEX IN is_customer_179
        ORGANIZE BY KEY SEQUENCE (
         C_ID STARTING FROM 1 ENDING AT 3000,
         C_W_ID STARTING FROM 284801 ENDING AT 286400,
         C_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER180;
CREATE TABLE CUSTOMER180
        (
         C_ID          INTEGER       NOT NULL,
         C_STATE       CHAR(2)       NOT NULL,
```

```
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_180
           INDEX IN is_customer_180
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 286401 ENDING AT 288000,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER181;
CREATE TABLE CUSTOMER181
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_181
           INDEX IN is_customer_181
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 288001 ENDING AT 289600,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER182;
CREATE TABLE CUSTOMER182
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_182
           INDEX IN is_customer_182
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 289601 ENDING AT 291200,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER183;
CREATE TABLE CUSTOMER183
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_183
           INDEX IN is_customer_183
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 291201 ENDING AT 292800,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER184;
CREATE TABLE CUSTOMER184
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_184
           INDEX IN is_customer_184
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 292801 ENDING AT 294400,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER185;
CREATE TABLE CUSTOMER185
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
            C_FIRST        VARCHAR(16)   NOT NULL,
            C_STREET_1     VARCHAR(20)   NOT NULL,
            C_STREET_2     VARCHAR(20)   NOT NULL,
            C_CITY         VARCHAR(20)   NOT NULL,
            C_D_ID         SMALLINT      NOT NULL,
            C_W_ID         INTEGER       NOT NULL,
            C_DELIVERY_CNT  INTEGER       NOT NULL,
            C_BALANCE      DECIMAL(12,2) NOT NULL,
            C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
            C_PAYMENT_CNT   INTEGER       NOT NULL
           )
           IN ts_customer_185
           INDEX IN is_customer_185
           ORGANIZE BY KEY SEQUENCE (
            C_ID STARTING FROM 1 ENDING AT 3000,
            C_W_ID STARTING FROM 294401 ENDING AT 296000,
            C_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER186;
CREATE TABLE CUSTOMER186
           (
            C_ID           INTEGER       NOT NULL,
            C_STATE        CHAR(2)       NOT NULL,
            C_ZIP          CHAR(9)       NOT NULL,
            C_PHONE        CHAR(16)      NOT NULL,
            C_SINCE        TIMESTAMP     NOT NULL,
            C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
            C_MIDDLE       CHAR(2)       NOT NULL,
            C_CREDIT       CHAR(2)       NOT NULL,
            C_DISCOUNT     REAL          NOT NULL,
            C_DATA         VARCHAR(500)  NOT NULL,
            C_LAST         VARCHAR(16)   NOT NULL,
```

```
                C_FIRST         VARCHAR(16)   NOT NULL,
                C_STREET_1      VARCHAR(20)   NOT NULL,
                C_STREET_2      VARCHAR(20)   NOT NULL,
                C_CITY          VARCHAR(20)   NOT NULL,
                C_D_ID          SMALLINT      NOT NULL,
                C_W_ID          INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER       NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER       NOT NULL
               )
               IN ts_customer_186
               INDEX IN is_customer_186
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 296001 ENDING AT 297600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER187;
CREATE TABLE CUSTOMER187
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_187
               INDEX IN is_customer_187
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 297601 ENDING AT 299200,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER188;
CREATE TABLE CUSTOMER188
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_188
               INDEX IN is_customer_188
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 299201 ENDING AT 300800,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER189;
CREATE TABLE CUSTOMER189
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_189
               INDEX IN is_customer_189
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 300801 ENDING AT 302400,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER190;
CREATE TABLE CUSTOMER190
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_190
               INDEX IN is_customer_190
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 302401 ENDING AT 304000,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER191;
CREATE TABLE CUSTOMER191
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                C_PAYMENT_CNT   INTEGER      NOT NULL
               )
               IN ts_customer_191
               INDEX IN is_customer_191
               ORGANIZE BY KEY SEQUENCE (
                C_ID STARTING FROM 1 ENDING AT 3000,
                C_W_ID STARTING FROM 304001 ENDING AT 305600,
                C_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER192;
CREATE TABLE CUSTOMER192
               (
                C_ID           INTEGER       NOT NULL,
                C_STATE        CHAR(2)       NOT NULL,
                C_ZIP          CHAR(9)       NOT NULL,
                C_PHONE        CHAR(16)      NOT NULL,
                C_SINCE        TIMESTAMP     NOT NULL,
                C_CREDIT_LIM   DECIMAL(12,2) NOT NULL,
                C_MIDDLE       CHAR(2)       NOT NULL,
                C_CREDIT       CHAR(2)       NOT NULL,
                C_DISCOUNT     REAL          NOT NULL,
                C_DATA         VARCHAR(500)  NOT NULL,
                C_LAST         VARCHAR(16)   NOT NULL,
                C_FIRST        VARCHAR(16)   NOT NULL,
                C_STREET_1     VARCHAR(20)   NOT NULL,
                C_STREET_2     VARCHAR(20)   NOT NULL,
                C_CITY         VARCHAR(20)   NOT NULL,
                C_D_ID         SMALLINT      NOT NULL,
                C_W_ID         INTEGER       NOT NULL,
                C_DELIVERY_CNT  INTEGER      NOT NULL,
                C_BALANCE       DECIMAL(12,2) NOT NULL,
                C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
```

```
                C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_192
                INDEX IN is_customer_192
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 305601 ENDING AT 307200,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER193;
CREATE TABLE CUSTOMER193
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_193
                INDEX IN is_customer_193
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 307201 ENDING AT 308800,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER194;
CREATE TABLE CUSTOMER194
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_194
                INDEX IN is_customer_194
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 308801 ENDING AT 310400,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER195;
CREATE TABLE CUSTOMER195
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_195
                INDEX IN is_customer_195
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 310401 ENDING AT 312000,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER196;
CREATE TABLE CUSTOMER196
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_196
                INDEX IN is_customer_196
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 312001 ENDING AT 313600,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER197;
CREATE TABLE CUSTOMER197
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_197
                INDEX IN is_customer_197
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 313601 ENDING AT 315200,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER198;
CREATE TABLE CUSTOMER198
                (
                 C_ID           INTEGER       NOT NULL,
                 C_STATE        CHAR(2)       NOT NULL,
                 C_ZIP          CHAR(9)       NOT NULL,
                 C_PHONE        CHAR(16)      NOT NULL,
                 C_SINCE        TIMESTAMP     NOT NULL,
                 C_CREDIT_LIM    DECIMAL(12,2) NOT NULL,
                 C_MIDDLE       CHAR(2)       NOT NULL,
                 C_CREDIT       CHAR(2)       NOT NULL,
                 C_DISCOUNT      REAL          NOT NULL,
                 C_DATA         VARCHAR(500)  NOT NULL,
                 C_LAST         VARCHAR(16)   NOT NULL,
                 C_FIRST        VARCHAR(16)   NOT NULL,
                 C_STREET_1     VARCHAR(20)   NOT NULL,
                 C_STREET_2     VARCHAR(20)   NOT NULL,
                 C_CITY         VARCHAR(20)   NOT NULL,
                 C_D_ID         SMALLINT      NOT NULL,
                 C_W_ID         INTEGER       NOT NULL,
                 C_DELIVERY_CNT  INTEGER       NOT NULL,
                 C_BALANCE       DECIMAL(12,2) NOT NULL,
                 C_YTD_PAYMENT   DECIMAL(12,2) NOT NULL,
                 C_PAYMENT_CNT   INTEGER       NOT NULL
                )
                IN ts_customer_198
                INDEX IN is_customer_198
                ORGANIZE BY KEY SEQUENCE (
                 C_ID STARTING FROM 1 ENDING AT 3000,
                 C_W_ID STARTING FROM 315201 ENDING AT 316800,
                 C_D_ID STARTING FROM 1 ENDING AT 10
                )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER199;
CREATE TABLE CUSTOMER199
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_199
            INDEX IN is_customer_199
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 316801 ENDING AT 318400,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE CUSTOMER200;
CREATE TABLE CUSTOMER200
            (
             C_ID          INTEGER       NOT NULL,
             C_STATE       CHAR(2)       NOT NULL,
             C_ZIP         CHAR(9)       NOT NULL,
             C_PHONE       CHAR(16)      NOT NULL,
             C_SINCE       TIMESTAMP     NOT NULL,
             C_CREDIT_LIM  DECIMAL(12,2) NOT NULL,
             C_MIDDLE      CHAR(2)       NOT NULL,
             C_CREDIT      CHAR(2)       NOT NULL,
             C_DISCOUNT    REAL          NOT NULL,
             C_DATA        VARCHAR(500)  NOT NULL,
             C_LAST        VARCHAR(16)   NOT NULL,
             C_FIRST       VARCHAR(16)   NOT NULL,
             C_STREET_1    VARCHAR(20)   NOT NULL,
             C_STREET_2    VARCHAR(20)   NOT NULL,
             C_CITY        VARCHAR(20)   NOT NULL,
             C_D_ID        SMALLINT      NOT NULL,
             C_W_ID        INTEGER       NOT NULL,
             C_DELIVERY_CNT INTEGER      NOT NULL,
             C_BALANCE     DECIMAL(12,2) NOT NULL,
             C_YTD_PAYMENT DECIMAL(12,2) NOT NULL,
             C_PAYMENT_CNT INTEGER       NOT NULL
            )
            IN ts_customer_200
            INDEX IN is_customer_200
            ORGANIZE BY KEY SEQUENCE (
             C_ID STARTING FROM 1 ENDING AT 3000,
             C_W_ID STARTING FROM 318401 ENDING AT 320000,
             C_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
```

CRTB_DISTRICT_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE DISTRICT1;
CREATE TABLE DISTRICT1
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_001
            INDEX IN ts_dist_001
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 1 ENDING AT 8000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT2;
CREATE TABLE DISTRICT2
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_002
            INDEX IN ts_dist_002
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 8001 ENDING AT 16000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT3;
CREATE TABLE DISTRICT3
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_003
            INDEX IN ts_dist_003
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 16001 ENDING AT 24000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT4;
CREATE TABLE DISTRICT4
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_004
            INDEX IN ts_dist_004
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 24001 ENDING AT 32000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT5;
CREATE TABLE DISTRICT5
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_005
            INDEX IN ts_dist_005
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 32001 ENDING AT 40000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT6;
CREATE TABLE DISTRICT6
            (
             D_NEXT_O_ID INTEGER       NOT NULL,
             D_TAX       REAL          NOT NULL,
             D_YTD       DECIMAL(12,2) NOT NULL,
             D_NAME      CHAR(10)      NOT NULL,
             D_STREET_1  CHAR(20)      NOT NULL,
             D_STREET_2  CHAR(20)      NOT NULL,
             D_CITY      CHAR(20)      NOT NULL,
             D_STATE     CHAR(2)       NOT NULL,
             D_ZIP       CHAR(9)       NOT NULL,
             D_ID        SMALLINT      NOT NULL,
             D_W_ID      INTEGER       NOT NULL
            )
            IN ts_dist_006
            INDEX IN ts_dist_006
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 40001 ENDING AT 48000
            )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT7;
CREATE TABLE DISTRICT7
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_007
            INDEX IN ts_dist_007
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 48001 ENDING AT 56000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT8;
CREATE TABLE DISTRICT8
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_008
            INDEX IN ts_dist_008
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 56001 ENDING AT 64000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT9;
CREATE TABLE DISTRICT9
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_009
            INDEX IN ts_dist_009
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 64001 ENDING AT 72000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT10;
CREATE TABLE DISTRICT10
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_010
            INDEX IN ts_dist_010
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 72001 ENDING AT 80000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT11;
CREATE TABLE DISTRICT11
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_011
            INDEX IN ts_dist_011
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 80001 ENDING AT 88000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT12;
CREATE TABLE DISTRICT12
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_012
            INDEX IN ts_dist_012
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 88001 ENDING AT 96000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT13;
CREATE TABLE DISTRICT13
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_013
            INDEX IN ts_dist_013
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 96001 ENDING AT 104000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT14;
CREATE TABLE DISTRICT14
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_014
            INDEX IN ts_dist_014
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 104001 ENDING AT 112000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT15;
CREATE TABLE DISTRICT15
            (
             D_NEXT_O_ID INTEGER        NOT NULL,
             D_TAX       REAL           NOT NULL,
             D_YTD       DECIMAL(12,2)  NOT NULL,
             D_NAME      CHAR(10)       NOT NULL,
             D_STREET_1  CHAR(20)       NOT NULL,
             D_STREET_2  CHAR(20)       NOT NULL,
             D_CITY      CHAR(20)       NOT NULL,
             D_STATE     CHAR(2)        NOT NULL,
             D_ZIP       CHAR(9)        NOT NULL,
             D_ID        SMALLINT       NOT NULL,
             D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_015
            INDEX IN ts_dist_015
            ORGANIZE BY KEY SEQUENCE (
             D_ID STARTING FROM 1 ENDING AT 10,
             D_W_ID STARTING FROM 112001 ENDING AT 120000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
```

```
DROP TABLE DISTRICT16;
CREATE TABLE DISTRICT16
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_016
        INDEX IN ts_dist_016
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 120001 ENDING AT 128000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT17;
CREATE TABLE DISTRICT17
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_017
        INDEX IN ts_dist_017
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 128001 ENDING AT 136000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT18;
CREATE TABLE DISTRICT18
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_018
        INDEX IN ts_dist_018
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 136001 ENDING AT 144000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT19;
CREATE TABLE DISTRICT19
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_019
        INDEX IN ts_dist_019
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 144001 ENDING AT 152000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT20;
CREATE TABLE DISTRICT20
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_020
        INDEX IN ts_dist_020
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 152001 ENDING AT 160000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT21;
CREATE TABLE DISTRICT21
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_021
        INDEX IN ts_dist_021
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 160001 ENDING AT 168000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT22;
CREATE TABLE DISTRICT22
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_022
        INDEX IN ts_dist_022
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 168001 ENDING AT 176000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT23;
CREATE TABLE DISTRICT23
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_023
        INDEX IN ts_dist_023
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 176001 ENDING AT 184000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT24;
CREATE TABLE DISTRICT24
        (
         D_NEXT_O_ID INTEGER        NOT NULL,
         D_TAX       REAL           NOT NULL,
         D_YTD       DECIMAL(12,2)  NOT NULL,
         D_NAME      CHAR(10)       NOT NULL,
         D_STREET_1  CHAR(20)       NOT NULL,
         D_STREET_2  CHAR(20)       NOT NULL,
         D_CITY      CHAR(20)       NOT NULL,
         D_STATE     CHAR(2)        NOT NULL,
         D_ZIP       CHAR(9)        NOT NULL,
         D_ID        SMALLINT       NOT NULL,
         D_W_ID      INTEGER        NOT NULL
        )
        IN ts_dist_024
        INDEX IN ts_dist_024
        ORGANIZE BY KEY SEQUENCE (
         D_ID STARTING FROM 1 ENDING AT 10,
         D_W_ID STARTING FROM 184001 ENDING AT 192000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT25;
CREATE TABLE DISTRICT25
        (
```

```
                D_NEXT_O_ID INTEGER        NOT NULL,
                D_TAX       REAL           NOT NULL,
                D_YTD       DECIMAL(12,2)  NOT NULL,
                D_NAME      CHAR(10)       NOT NULL,
                D_STREET_1  CHAR(20)       NOT NULL,
                D_STREET_2  CHAR(20)       NOT NULL,
                D_CITY      CHAR(20)       NOT NULL,
                D_STATE     CHAR(2)        NOT NULL,
                D_ZIP       CHAR(9)        NOT NULL,
                D_ID        SMALLINT       NOT NULL,
                D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_025
                INDEX IN ts_dist_025
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 192001 ENDING AT 200000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT26;
CREATE TABLE DISTRICT26
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_026
                INDEX IN ts_dist_026
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 200001 ENDING AT 208000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT27;
CREATE TABLE DISTRICT27
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_027
                INDEX IN ts_dist_027
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 208001 ENDING AT 216000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT28;
CREATE TABLE DISTRICT28
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_028
                INDEX IN ts_dist_028
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 216001 ENDING AT 224000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT29;
CREATE TABLE DISTRICT29
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_029
                INDEX IN ts_dist_029
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 224001 ENDING AT 232000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT30;
CREATE TABLE DISTRICT30
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_030
                INDEX IN ts_dist_030
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 232001 ENDING AT 240000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT31;
CREATE TABLE DISTRICT31
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_031
                INDEX IN ts_dist_031
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 240001 ENDING AT 248000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT32;
CREATE TABLE DISTRICT32
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_032
                INDEX IN ts_dist_032
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 248001 ENDING AT 256000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT33;
CREATE TABLE DISTRICT33
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
                 D_NAME      CHAR(10)       NOT NULL,
                 D_STREET_1  CHAR(20)       NOT NULL,
                 D_STREET_2  CHAR(20)       NOT NULL,
                 D_CITY      CHAR(20)       NOT NULL,
                 D_STATE     CHAR(2)        NOT NULL,
                 D_ZIP       CHAR(9)        NOT NULL,
                 D_ID        SMALLINT       NOT NULL,
                 D_W_ID      INTEGER        NOT NULL
                )
                IN ts_dist_033
                INDEX IN ts_dist_033
                ORGANIZE BY KEY SEQUENCE (
                 D_ID STARTING FROM 1 ENDING AT 10,
                 D_W_ID STARTING FROM 256001 ENDING AT 264000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT34;
CREATE TABLE DISTRICT34
                (
                 D_NEXT_O_ID INTEGER        NOT NULL,
                 D_TAX       REAL           NOT NULL,
                 D_YTD       DECIMAL(12,2)  NOT NULL,
```

```
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_034
            INDEX IN ts_dist_034
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 264001 ENDING AT 272000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT35;
CREATE TABLE DISTRICT35
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_035
            INDEX IN ts_dist_035
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 272001 ENDING AT 280000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT36;
CREATE TABLE DISTRICT36
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_036
            INDEX IN ts_dist_036
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 280001 ENDING AT 288000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT37;
CREATE TABLE DISTRICT37
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_037
            INDEX IN ts_dist_037
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 288001 ENDING AT 296000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT38;
CREATE TABLE DISTRICT38
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_038
            INDEX IN ts_dist_038
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 296001 ENDING AT 304000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT39;
CREATE TABLE DISTRICT39
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_039
            INDEX IN ts_dist_039
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 304001 ENDING AT 312000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE DISTRICT40;
CREATE TABLE DISTRICT40
            (
            D_NEXT_O_ID INTEGER        NOT NULL,
            D_TAX       REAL           NOT NULL,
            D_YTD       DECIMAL(12,2)  NOT NULL,
            D_NAME      CHAR(10)       NOT NULL,
            D_STREET_1  CHAR(20)       NOT NULL,
            D_STREET_2  CHAR(20)       NOT NULL,
            D_CITY      CHAR(20)       NOT NULL,
            D_STATE     CHAR(2)        NOT NULL,
            D_ZIP       CHAR(9)        NOT NULL,
            D_ID        SMALLINT       NOT NULL,
            D_W_ID      INTEGER        NOT NULL
            )
            IN ts_dist_040
            INDEX IN ts_dist_040
            ORGANIZE BY KEY SEQUENCE (
            D_ID STARTING FROM 1 ENDING AT 10,
            D_W_ID STARTING FROM 312001 ENDING AT 320000
            )
            ALLOW OVERFLOW;
connect reset;
```

CRTB_HISTORY_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE HISTORY1;
CREATE TABLE HISTORY1
            (
            H_C_ID        INTEGER     NOT NULL,
            H_C_D_ID      SMALLINT    NOT NULL,
            H_C_W_ID      INTEGER     NOT NULL,
            H_D_ID        SMALLINT    NOT NULL,
            H_W_ID        INTEGER     NOT NULL,
            H_DATE        TIMESTAMP   NOT NULL,
            H_AMOUNT      DECIMAL(6,2) NOT NULL,
            H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_001
            INDEX IN ts_history_001;
ALTER TABLE HISTORY1 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY2;
CREATE TABLE HISTORY2
            (
            H_C_ID        INTEGER     NOT NULL,
            H_C_D_ID      SMALLINT    NOT NULL,
            H_C_W_ID      INTEGER     NOT NULL,
            H_D_ID        SMALLINT    NOT NULL,
            H_W_ID        INTEGER     NOT NULL,
            H_DATE        TIMESTAMP   NOT NULL,
            H_AMOUNT      DECIMAL(6,2) NOT NULL,
            H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_002
            INDEX IN ts_history_002;
ALTER TABLE HISTORY2 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY3;
CREATE TABLE HISTORY3
            (
            H_C_ID        INTEGER     NOT NULL,
            H_C_D_ID      SMALLINT    NOT NULL,
            H_C_W_ID      INTEGER     NOT NULL,
            H_D_ID        SMALLINT    NOT NULL,
            H_W_ID        INTEGER     NOT NULL,
            H_DATE        TIMESTAMP   NOT NULL,
            H_AMOUNT      DECIMAL(6,2) NOT NULL,
            H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_003
            INDEX IN ts_history_003;
ALTER TABLE HISTORY3 APPEND ON;
connect reset;
```

```
connect to TPCC in share mode;
DROP TABLE HISTORY4;
CREATE TABLE HISTORY4
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_004
        INDEX IN ts_history_004;
ALTER TABLE HISTORY4 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY5;
CREATE TABLE HISTORY5
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_005
        INDEX IN ts_history_005;
ALTER TABLE HISTORY5 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY6;
CREATE TABLE HISTORY6
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_006
        INDEX IN ts_history_006;
ALTER TABLE HISTORY6 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY7;
CREATE TABLE HISTORY7
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_007
        INDEX IN ts_history_007;
ALTER TABLE HISTORY7 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY8;
CREATE TABLE HISTORY8
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_008
        INDEX IN ts_history_008;
ALTER TABLE HISTORY8 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY9;
CREATE TABLE HISTORY9
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_009
        INDEX IN ts_history_009;
ALTER TABLE HISTORY9 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY10;
CREATE TABLE HISTORY10
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_010
        INDEX IN ts_history_010;
ALTER TABLE HISTORY10 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY11;
CREATE TABLE HISTORY11
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_011
        INDEX IN ts_history_011;
ALTER TABLE HISTORY11 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY12;
CREATE TABLE HISTORY12
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_012
        INDEX IN ts_history_012;
ALTER TABLE HISTORY12 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY13;
CREATE TABLE HISTORY13
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_013
        INDEX IN ts_history_013;
ALTER TABLE HISTORY13 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY14;
CREATE TABLE HISTORY14
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_014
        INDEX IN ts_history_014;
ALTER TABLE HISTORY14 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY15;
CREATE TABLE HISTORY15
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_015
        INDEX IN ts_history_015;
ALTER TABLE HISTORY15 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY16;
CREATE TABLE HISTORY16
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_016
        INDEX IN ts_history_016;
```

```
ALTER TABLE HISTORY16 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY17;
CREATE TABLE HISTORY17
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_017
        INDEX IN ts_history_017;
ALTER TABLE HISTORY17 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY18;
CREATE TABLE HISTORY18
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_018
        INDEX IN ts_history_018;
ALTER TABLE HISTORY18 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY19;
CREATE TABLE HISTORY19
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_019
        INDEX IN ts_history_019;
ALTER TABLE HISTORY19 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY20;
CREATE TABLE HISTORY20
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_020
        INDEX IN ts_history_020;
ALTER TABLE HISTORY20 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY21;
CREATE TABLE HISTORY21
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_021
        INDEX IN ts_history_021;
ALTER TABLE HISTORY21 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY22;
CREATE TABLE HISTORY22
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_022
        INDEX IN ts_history_022;
ALTER TABLE HISTORY22 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY23;
CREATE TABLE HISTORY23
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_023
        INDEX IN ts_history_023;
ALTER TABLE HISTORY23 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY24;
CREATE TABLE HISTORY24
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_024
        INDEX IN ts_history_024;
ALTER TABLE HISTORY24 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY25;
CREATE TABLE HISTORY25
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_025
        INDEX IN ts_history_025;
ALTER TABLE HISTORY25 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY26;
CREATE TABLE HISTORY26
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_026
        INDEX IN ts_history_026;
ALTER TABLE HISTORY26 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY27;
CREATE TABLE HISTORY27
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_027
        INDEX IN ts_history_027;
ALTER TABLE HISTORY27 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY28;
CREATE TABLE HISTORY28
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
        IN ts_history_028
        INDEX IN ts_history_028;
ALTER TABLE HISTORY28 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY29;
CREATE TABLE HISTORY29
        (
         H_C_ID        INTEGER     NOT NULL,
         H_C_D_ID      SMALLINT    NOT NULL,
         H_C_W_ID      INTEGER     NOT NULL,
         H_D_ID        SMALLINT    NOT NULL,
         H_W_ID        INTEGER     NOT NULL,
         H_DATE        TIMESTAMP   NOT NULL,
         H_AMOUNT      DECIMAL(6,2) NOT NULL,
         H_DATA        CHAR(24)    NOT NULL
        )
```

```
            IN ts_history_029
            INDEX IN ts_history_029;
ALTER TABLE HISTORY29 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY30;
CREATE TABLE HISTORY30
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_030
            INDEX IN ts_history_030;
ALTER TABLE HISTORY30 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY31;
CREATE TABLE HISTORY31
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_031
            INDEX IN ts_history_031;
ALTER TABLE HISTORY31 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY32;
CREATE TABLE HISTORY32
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_032
            INDEX IN ts_history_032;
ALTER TABLE HISTORY32 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY33;
CREATE TABLE HISTORY33
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_033
            INDEX IN ts_history_033;
ALTER TABLE HISTORY33 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY34;
CREATE TABLE HISTORY34
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_034
            INDEX IN ts_history_034;
ALTER TABLE HISTORY34 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY35;
CREATE TABLE HISTORY35
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_035
            INDEX IN ts_history_035;
ALTER TABLE HISTORY35 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY36;
CREATE TABLE HISTORY36
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_036
            INDEX IN ts_history_036;
ALTER TABLE HISTORY36 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY37;
CREATE TABLE HISTORY37
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_037
            INDEX IN ts_history_037;
ALTER TABLE HISTORY37 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY38;
CREATE TABLE HISTORY38
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_038
            INDEX IN ts_history_038;
ALTER TABLE HISTORY38 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY39;
CREATE TABLE HISTORY39
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_039
            INDEX IN ts_history_039;
ALTER TABLE HISTORY39 APPEND ON;
connect reset;
connect to TPCC in share mode;
DROP TABLE HISTORY40;
CREATE TABLE HISTORY40
            (
             H_C_ID        INTEGER     NOT NULL,
             H_C_D_ID      SMALLINT    NOT NULL,
             H_C_W_ID      INTEGER     NOT NULL,
             H_D_ID        SMALLINT    NOT NULL,
             H_W_ID        INTEGER     NOT NULL,
             H_DATE        TIMESTAMP   NOT NULL,
             H_AMOUNT      DECIMAL(6,2) NOT NULL,
             H_DATA        CHAR(24)    NOT NULL
            )
            IN ts_history_040
            INDEX IN ts_history_040;
ALTER TABLE HISTORY40 APPEND ON;
connect reset;
```

CRTB_ITEM.ddl

```
connect to TPCC in share mode;
DROP TABLE ITEM;
CREATE TABLE ITEM
            (
             I_NAME        CHAR(24)    NOT NULL,
             I_PRICE       DECIMAL(5,2) NOT NULL,
             I_DATA        VARCHAR(50)  NOT NULL,
             I_IM_ID       INTEGER     NOT NULL,
             I_ID          INTEGER     NOT NULL
            )
            IN ts_item_001
            INDEX IN ts_item_001
            ORGANIZE BY KEY SEQUENCE (
             I_ID STARTING FROM 1 ENDING AT 100000
            )
            ALLOW OVERFLOW;
ALTER TABLE ITEM LOCKSIZE TABLE;
connect reset;
```

CRTB_NEW_ORDERA_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA1;
CREATE TABLE NEW_ORDERA1
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_001
        INDEX IN ts_newordA_001
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 1 ENDING AT 8000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA2;
CREATE TABLE NEW_ORDERA2
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_002
        INDEX IN ts_newordA_002
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 8001 ENDING AT 16000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA3;
CREATE TABLE NEW_ORDERA3
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_003
        INDEX IN ts_newordA_003
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 16001 ENDING AT 24000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA4;
CREATE TABLE NEW_ORDERA4
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_004
        INDEX IN ts_newordA_004
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 24001 ENDING AT 32000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA5;
CREATE TABLE NEW_ORDERA5
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_005
        INDEX IN ts_newordA_005
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 32001 ENDING AT 40000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA6;
CREATE TABLE NEW_ORDERA6
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_006
        INDEX IN ts_newordA_006
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 40001 ENDING AT 48000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA7;
CREATE TABLE NEW_ORDERA7
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_007
        INDEX IN ts_newordA_007
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 48001 ENDING AT 56000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA8;
CREATE TABLE NEW_ORDERA8
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_008
        INDEX IN ts_newordA_008
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 56001 ENDING AT 64000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA9;
CREATE TABLE NEW_ORDERA9
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_009
        INDEX IN ts_newordA_009
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 64001 ENDING AT 72000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA10;
CREATE TABLE NEW_ORDERA10
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_010
        INDEX IN ts_newordA_010
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 72001 ENDING AT 80000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA11;
CREATE TABLE NEW_ORDERA11
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_011
        INDEX IN ts_newordA_011
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 80001 ENDING AT 88000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA12;
CREATE TABLE NEW_ORDERA12
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_012
        INDEX IN ts_newordA_012
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 88001 ENDING AT 96000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA13;
CREATE TABLE NEW_ORDERA13
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_013
        INDEX IN ts_newordA_013
        ORGANIZE BY KEY SEQUENCE (
```

```
 NO_W_ID STARTING FROM 96001 ENDING AT 104000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA14;
CREATE TABLE NEW_ORDERA14
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_014
INDEX IN ts_newordA_014
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 104001 ENDING AT 112000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA15;
CREATE TABLE NEW_ORDERA15
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_015
INDEX IN ts_newordA_015
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 112001 ENDING AT 120000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA16;
CREATE TABLE NEW_ORDERA16
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_016
INDEX IN ts_newordA_016
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 120001 ENDING AT 128000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA17;
CREATE TABLE NEW_ORDERA17
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_017
INDEX IN ts_newordA_017
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 128001 ENDING AT 136000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA18;
CREATE TABLE NEW_ORDERA18
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_018
INDEX IN ts_newordA_018
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 136001 ENDING AT 144000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA19;
CREATE TABLE NEW_ORDERA19
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_019
INDEX IN ts_newordA_019
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 144001 ENDING AT 152000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA20;
CREATE TABLE NEW_ORDERA20
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_020
INDEX IN ts_newordA_020
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 152001 ENDING AT 160000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA21;
CREATE TABLE NEW_ORDERA21
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_021
INDEX IN ts_newordA_021
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 160001 ENDING AT 168000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA22;
CREATE TABLE NEW_ORDERA22
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_022
INDEX IN ts_newordA_022
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 168001 ENDING AT 176000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA23;
CREATE TABLE NEW_ORDERA23
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_023
INDEX IN ts_newordA_023
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 176001 ENDING AT 184000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA24;
CREATE TABLE NEW_ORDERA24
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_024
INDEX IN ts_newordA_024
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 184001 ENDING AT 192000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA25;
CREATE TABLE NEW_ORDERA25
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_025
INDEX IN ts_newordA_025
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 192001 ENDING AT 200000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 1900 ENDING AT 3675
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA26;
CREATE TABLE NEW_ORDERA26
(
 NO_O_ID  INTEGER  NOT NULL,
 NO_D_ID  SMALLINT  NOT NULL,
 NO_W_ID  INTEGER  NOT NULL
)
IN ts_newordA_026
```

```
            INDEX IN ts_newordA_026
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 200001 ENDING AT 208000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA27;
CREATE TABLE NEW_ORDERA27
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_027
            INDEX IN ts_newordA_027
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 208001 ENDING AT 216000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA28;
CREATE TABLE NEW_ORDERA28
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_028
            INDEX IN ts_newordA_028
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 216001 ENDING AT 224000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA29;
CREATE TABLE NEW_ORDERA29
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_029
            INDEX IN ts_newordA_029
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 224001 ENDING AT 232000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA30;
CREATE TABLE NEW_ORDERA30
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_030
            INDEX IN ts_newordA_030
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 232001 ENDING AT 240000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA31;
CREATE TABLE NEW_ORDERA31
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_031
            INDEX IN ts_newordA_031
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 240001 ENDING AT 248000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA32;
CREATE TABLE NEW_ORDERA32
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_032
            INDEX IN ts_newordA_032
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 248001 ENDING AT 256000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA33;
CREATE TABLE NEW_ORDERA33
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_033
            INDEX IN ts_newordA_033
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 256001 ENDING AT 264000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA34;
CREATE TABLE NEW_ORDERA34
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_034
            INDEX IN ts_newordA_034
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 264001 ENDING AT 272000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA35;
CREATE TABLE NEW_ORDERA35
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_035
            INDEX IN ts_newordA_035
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 272001 ENDING AT 280000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA36;
CREATE TABLE NEW_ORDERA36
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_036
            INDEX IN ts_newordA_036
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 280001 ENDING AT 288000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA37;
CREATE TABLE NEW_ORDERA37
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_037
            INDEX IN ts_newordA_037
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 288001 ENDING AT 296000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA38;
CREATE TABLE NEW_ORDERA38
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordA_038
            INDEX IN ts_newordA_038
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 296001 ENDING AT 304000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 1900 ENDING AT 3675
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA39;
CREATE TABLE NEW_ORDERA39
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
```

```
        )
        IN ts_newordA_039
        INDEX IN ts_newordA_039
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 304001 ENDING AT 312000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERA40;
CREATE TABLE NEW_ORDERA40
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordA_040
        INDEX IN ts_newordA_040
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 312001 ENDING AT 320000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 1900 ENDING AT 3675
        )
        ALLOW OVERFLOW;
connect reset;
```

CRTB_NEW_ORDERB_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB1;
CREATE TABLE NEW_ORDERB1
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_001
        INDEX IN ts_newordB_001
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 1 ENDING AT 8000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB2;
CREATE TABLE NEW_ORDERB2
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_002
        INDEX IN ts_newordB_002
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 8001 ENDING AT 16000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB3;
CREATE TABLE NEW_ORDERB3
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_003
        INDEX IN ts_newordB_003
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 16001 ENDING AT 24000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB4;
CREATE TABLE NEW_ORDERB4
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_004
        INDEX IN ts_newordB_004
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 24001 ENDING AT 32000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB5;
CREATE TABLE NEW_ORDERB5
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_005
        INDEX IN ts_newordB_005
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 32001 ENDING AT 40000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB6;
CREATE TABLE NEW_ORDERB6
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_006
        INDEX IN ts_newordB_006
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 40001 ENDING AT 48000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB7;
CREATE TABLE NEW_ORDERB7
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_007
        INDEX IN ts_newordB_007
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 48001 ENDING AT 56000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB8;
CREATE TABLE NEW_ORDERB8
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_008
        INDEX IN ts_newordB_008
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 56001 ENDING AT 64000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB9;
CREATE TABLE NEW_ORDERB9
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_009
        INDEX IN ts_newordB_009
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 64001 ENDING AT 72000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB10;
CREATE TABLE NEW_ORDERB10
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_010
        INDEX IN ts_newordB_010
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 72001 ENDING AT 80000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB11;
CREATE TABLE NEW_ORDERB11
        (
         NO_O_ID       INTEGER    NOT NULL,
         NO_D_ID       SMALLINT   NOT NULL,
         NO_W_ID       INTEGER    NOT NULL
        )
        IN ts_newordB_011
        INDEX IN ts_newordB_011
        ORGANIZE BY KEY SEQUENCE (
         NO_W_ID STARTING FROM 80001 ENDING AT 88000,
         NO_D_ID STARTING FROM 1 ENDING AT 10,
         NO_O_ID STARTING FROM 3676 ENDING AT 5451
        )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB12;
CREATE TABLE NEW_ORDERB12
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_012
            INDEX IN ts_newordB_012
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 88001 ENDING AT 96000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB13;
CREATE TABLE NEW_ORDERB13
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_013
            INDEX IN ts_newordB_013
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 96001 ENDING AT 104000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB14;
CREATE TABLE NEW_ORDERB14
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_014
            INDEX IN ts_newordB_014
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 104001 ENDING AT 112000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB15;
CREATE TABLE NEW_ORDERB15
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_015
            INDEX IN ts_newordB_015
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 112001 ENDING AT 120000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB16;
CREATE TABLE NEW_ORDERB16
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_016
            INDEX IN ts_newordB_016
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 120001 ENDING AT 128000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB17;
CREATE TABLE NEW_ORDERB17
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_017
            INDEX IN ts_newordB_017
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 128001 ENDING AT 136000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB18;
CREATE TABLE NEW_ORDERB18
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_018
            INDEX IN ts_newordB_018
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 136001 ENDING AT 144000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB19;
CREATE TABLE NEW_ORDERB19
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_019
            INDEX IN ts_newordB_019
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 144001 ENDING AT 152000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB20;
CREATE TABLE NEW_ORDERB20
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_020
            INDEX IN ts_newordB_020
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 152001 ENDING AT 160000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB21;
CREATE TABLE NEW_ORDERB21
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_021
            INDEX IN ts_newordB_021
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 160001 ENDING AT 168000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB22;
CREATE TABLE NEW_ORDERB22
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_022
            INDEX IN ts_newordB_022
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 168001 ENDING AT 176000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB23;
CREATE TABLE NEW_ORDERB23
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_023
            INDEX IN ts_newordB_023
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 176001 ENDING AT 184000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
             NO_O_ID STARTING FROM 3676 ENDING AT 5451
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB24;
CREATE TABLE NEW_ORDERB24
            (
             NO_O_ID       INTEGER    NOT NULL,
             NO_D_ID       SMALLINT   NOT NULL,
             NO_W_ID       INTEGER    NOT NULL
            )
            IN ts_newordB_024
            INDEX IN ts_newordB_024
            ORGANIZE BY KEY SEQUENCE (
             NO_W_ID STARTING FROM 184001 ENDING AT 192000,
             NO_D_ID STARTING FROM 1 ENDING AT 10,
```

```
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB25;
CREATE TABLE NEW_ORDERB25
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_025
INDEX IN ts_newordB_025
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 192001 ENDING AT 200000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB26;
CREATE TABLE NEW_ORDERB26
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_026
INDEX IN ts_newordB_026
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 200001 ENDING AT 208000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB27;
CREATE TABLE NEW_ORDERB27
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_027
INDEX IN ts_newordB_027
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 208001 ENDING AT 216000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB28;
CREATE TABLE NEW_ORDERB28
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_028
INDEX IN ts_newordB_028
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 216001 ENDING AT 224000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB29;
CREATE TABLE NEW_ORDERB29
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_029
INDEX IN ts_newordB_029
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 224001 ENDING AT 232000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB30;
CREATE TABLE NEW_ORDERB30
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_030
INDEX IN ts_newordB_030
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 232001 ENDING AT 240000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB31;
CREATE TABLE NEW_ORDERB31
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_031
INDEX IN ts_newordB_031
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 240001 ENDING AT 248000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB32;
CREATE TABLE NEW_ORDERB32
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_032
INDEX IN ts_newordB_032
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 248001 ENDING AT 256000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB33;
CREATE TABLE NEW_ORDERB33
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_033
INDEX IN ts_newordB_033
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 256001 ENDING AT 264000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB34;
CREATE TABLE NEW_ORDERB34
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_034
INDEX IN ts_newordB_034
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 264001 ENDING AT 272000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB35;
CREATE TABLE NEW_ORDERB35
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_035
INDEX IN ts_newordB_035
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 272001 ENDING AT 280000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB36;
CREATE TABLE NEW_ORDERB36
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_036
INDEX IN ts_newordB_036
ORGANIZE BY KEY SEQUENCE (
 NO_W_ID STARTING FROM 280001 ENDING AT 288000,
 NO_D_ID STARTING FROM 1 ENDING AT 10,
 NO_O_ID STARTING FROM 3676 ENDING AT 5451
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB37;
CREATE TABLE NEW_ORDERB37
(
 NO_O_ID       INTEGER    NOT NULL,
 NO_D_ID       SMALLINT   NOT NULL,
 NO_W_ID       INTEGER    NOT NULL
)
IN ts_newordB_037
INDEX IN ts_newordB_037
ORGANIZE BY KEY SEQUENCE (
```

```
            NO_W_ID STARTING FROM 288001 ENDING AT 296000,
            NO_D_ID STARTING FROM 1 ENDING AT 10,
            NO_O_ID STARTING FROM 3676 ENDING AT 5451
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB38;
CREATE TABLE NEW_ORDERB38
           (
            NO_O_ID       INTEGER    NOT NULL,
            NO_D_ID       SMALLINT   NOT NULL,
            NO_W_ID       INTEGER    NOT NULL
           )
           IN ts_newordB_038
           INDEX IN ts_newordB_038
           ORGANIZE BY KEY SEQUENCE (
            NO_W_ID STARTING FROM 296001 ENDING AT 304000,
            NO_D_ID STARTING FROM 1 ENDING AT 10,
            NO_O_ID STARTING FROM 3676 ENDING AT 5451
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB39;
CREATE TABLE NEW_ORDERB39
           (
            NO_O_ID       INTEGER    NOT NULL,
            NO_D_ID       SMALLINT   NOT NULL,
            NO_W_ID       INTEGER    NOT NULL
           )
           IN ts_newordB_039
           INDEX IN ts_newordB_039
           ORGANIZE BY KEY SEQUENCE (
            NO_W_ID STARTING FROM 304001 ENDING AT 312000,
            NO_D_ID STARTING FROM 1 ENDING AT 10,
            NO_O_ID STARTING FROM 3676 ENDING AT 5451
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE NEW_ORDERB40;
CREATE TABLE NEW_ORDERB40
           (
            NO_O_ID       INTEGER    NOT NULL,
            NO_D_ID       SMALLINT   NOT NULL,
            NO_W_ID       INTEGER    NOT NULL
           )
           IN ts_newordB_040
           INDEX IN ts_newordB_040
           ORGANIZE BY KEY SEQUENCE (
            NO_W_ID STARTING FROM 312001 ENDING AT 320000,
            NO_D_ID STARTING FROM 1 ENDING AT 10,
            NO_O_ID STARTING FROM 3676 ENDING AT 5451
           )
           ALLOW OVERFLOW;
connect reset;
```

CRTB_ORDERS_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE ORDERS1;
CREATE TABLE ORDERS1
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_001
           INDEX IN is_order_001
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 1 ENDING AT 1600,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS2;
CREATE TABLE ORDERS2
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_002
           INDEX IN is_order_002
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 1601 ENDING AT 3200,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS3;
CREATE TABLE ORDERS3
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_003
           INDEX IN is_order_003
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 3201 ENDING AT 4800,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS4;
CREATE TABLE ORDERS4
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_004
           INDEX IN is_order_004
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 4801 ENDING AT 6400,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS5;
CREATE TABLE ORDERS5
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_005
           INDEX IN is_order_005
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 6401 ENDING AT 8000,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS6;
CREATE TABLE ORDERS6
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_006
           INDEX IN is_order_006
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 8001 ENDING AT 9600,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS7;
CREATE TABLE ORDERS7
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_007
           INDEX IN is_order_007
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 9601 ENDING AT 11200,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
```

```
DROP TABLE ORDERS8;
CREATE TABLE ORDERS8
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_008
        INDEX IN is_order_008
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 11201 ENDING AT 12800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS9;
CREATE TABLE ORDERS9
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_009
        INDEX IN is_order_009
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 12801 ENDING AT 14400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS10;
CREATE TABLE ORDERS10
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_010
        INDEX IN is_order_010
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 14401 ENDING AT 16000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS11;
CREATE TABLE ORDERS11
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_011
        INDEX IN is_order_011
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 16001 ENDING AT 17600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS12;
CREATE TABLE ORDERS12
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_012
        INDEX IN is_order_012
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 17601 ENDING AT 19200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS13;
CREATE TABLE ORDERS13
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_013
        INDEX IN is_order_013
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 19201 ENDING AT 20800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS14;
CREATE TABLE ORDERS14
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_014
        INDEX IN is_order_014
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 20801 ENDING AT 22400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS15;
CREATE TABLE ORDERS15
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_015
        INDEX IN is_order_015
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 22401 ENDING AT 24000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS16;
CREATE TABLE ORDERS16
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_016
        INDEX IN is_order_016
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 24001 ENDING AT 25600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS17;
CREATE TABLE ORDERS17
        (
         O_C_ID        INTEGER    NOT NULL,
         O_ENTRY_D     TIMESTAMP  NOT NULL,
         O_CARRIER_ID  SMALLINT   NOT NULL,
         O_OL_CNT      SMALLINT   NOT NULL,
         O_ALL_LOCAL   SMALLINT   NOT NULL,
         O_ID          INTEGER    NOT NULL,
         O_W_ID        INTEGER    NOT NULL,
         O_D_ID        SMALLINT   NOT NULL
        )
        IN ts_order_017
        INDEX IN is_order_017
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 25601 ENDING AT 27200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
```

```
connect to TPCC in share mode;
DROP TABLE ORDERS18;
CREATE TABLE ORDERS18
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_018
        INDEX IN is_order_018
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 27201 ENDING AT 28800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS19;
CREATE TABLE ORDERS19
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_019
        INDEX IN is_order_019
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 28801 ENDING AT 30400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS20;
CREATE TABLE ORDERS20
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_020
        INDEX IN is_order_020
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 30401 ENDING AT 32000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS21;
CREATE TABLE ORDERS21
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_021
        INDEX IN is_order_021
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 32001 ENDING AT 33600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS22;
CREATE TABLE ORDERS22
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_022
        INDEX IN is_order_022
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 33601 ENDING AT 35200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS23;
CREATE TABLE ORDERS23
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_023
        INDEX IN is_order_023
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 35201 ENDING AT 36800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS24;
CREATE TABLE ORDERS24
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_024
        INDEX IN is_order_024
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 36801 ENDING AT 38400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS25;
CREATE TABLE ORDERS25
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_025
        INDEX IN is_order_025
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 38401 ENDING AT 40000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS26;
CREATE TABLE ORDERS26
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_026
        INDEX IN is_order_026
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 40001 ENDING AT 41600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS27;
CREATE TABLE ORDERS27
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_027
        INDEX IN is_order_027
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 41601 ENDING AT 43200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
```

```
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS28;
CREATE TABLE ORDERS28
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_028
        INDEX IN is_order_028
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 43201 ENDING AT 44800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS29;
CREATE TABLE ORDERS29
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_029
        INDEX IN is_order_029
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 44801 ENDING AT 46400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS30;
CREATE TABLE ORDERS30
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_030
        INDEX IN is_order_030
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 46401 ENDING AT 48000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS31;
CREATE TABLE ORDERS31
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_031
        INDEX IN is_order_031
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 48001 ENDING AT 49600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS32;
CREATE TABLE ORDERS32
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_032
        INDEX IN is_order_032
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 49601 ENDING AT 51200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS33;
CREATE TABLE ORDERS33
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_033
        INDEX IN is_order_033
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 51201 ENDING AT 52800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS34;
CREATE TABLE ORDERS34
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_034
        INDEX IN is_order_034
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 52801 ENDING AT 54400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS35;
CREATE TABLE ORDERS35
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_035
        INDEX IN is_order_035
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 54401 ENDING AT 56000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS36;
CREATE TABLE ORDERS36
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_036
        INDEX IN is_order_036
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 56001 ENDING AT 57600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS37;
CREATE TABLE ORDERS37
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_037
        INDEX IN is_order_037
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 57601 ENDING AT 59200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS38;
CREATE TABLE ORDERS38
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_038
            INDEX IN is_order_038
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 59201 ENDING AT 60800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS39;
CREATE TABLE ORDERS39
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_039
            INDEX IN is_order_039
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 60801 ENDING AT 62400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS40;
CREATE TABLE ORDERS40
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_040
            INDEX IN is_order_040
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 62401 ENDING AT 64000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS41;
CREATE TABLE ORDERS41
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_041
            INDEX IN is_order_041
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 64001 ENDING AT 65600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS42;
CREATE TABLE ORDERS42
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_042
            INDEX IN is_order_042
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 65601 ENDING AT 67200,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS43;
CREATE TABLE ORDERS43
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_043
            INDEX IN is_order_043
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 67201 ENDING AT 68800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS44;
CREATE TABLE ORDERS44
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_044
            INDEX IN is_order_044
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 68801 ENDING AT 70400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS45;
CREATE TABLE ORDERS45
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_045
            INDEX IN is_order_045
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 70401 ENDING AT 72000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS46;
CREATE TABLE ORDERS46
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_046
            INDEX IN is_order_046
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 72001 ENDING AT 73600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS47;
CREATE TABLE ORDERS47
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_047
            INDEX IN is_order_047
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 73601 ENDING AT 75200,
             O_D_ID STARTING FROM 1 ENDING AT 10
```

```
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS48;
CREATE TABLE ORDERS48
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_048
INDEX IN is_order_048
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 75201 ENDING AT 76800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS49;
CREATE TABLE ORDERS49
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_049
INDEX IN is_order_049
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 76801 ENDING AT 78400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS50;
CREATE TABLE ORDERS50
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_050
INDEX IN is_order_050
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 78401 ENDING AT 80000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS51;
CREATE TABLE ORDERS51
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_051
INDEX IN is_order_051
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 80001 ENDING AT 81600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS52;
CREATE TABLE ORDERS52
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_052
INDEX IN is_order_052
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 81601 ENDING AT 83200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS53;
CREATE TABLE ORDERS53
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_053
INDEX IN is_order_053
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 83201 ENDING AT 84800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS54;
CREATE TABLE ORDERS54
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_054
INDEX IN is_order_054
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 84801 ENDING AT 86400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS55;
CREATE TABLE ORDERS55
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_055
INDEX IN is_order_055
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 86401 ENDING AT 88000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS56;
CREATE TABLE ORDERS56
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_056
INDEX IN is_order_056
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 88001 ENDING AT 89600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS57;
CREATE TABLE ORDERS57
(
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_057
INDEX IN is_order_057
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 89601 ENDING AT 91200,
```

```
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS58;
CREATE TABLE ORDERS58
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_058
               INDEX IN is_order_058
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 91201 ENDING AT 92800,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS59;
CREATE TABLE ORDERS59
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_059
               INDEX IN is_order_059
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 92801 ENDING AT 94400,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS60;
CREATE TABLE ORDERS60
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_060
               INDEX IN is_order_060
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 94401 ENDING AT 96000,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS61;
CREATE TABLE ORDERS61
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_061
               INDEX IN is_order_061
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 96001 ENDING AT 97600,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS62;
CREATE TABLE ORDERS62
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_062
               INDEX IN is_order_062
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 97601 ENDING AT 99200,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS63;
CREATE TABLE ORDERS63
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_063
               INDEX IN is_order_063
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 99201 ENDING AT 100800,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS64;
CREATE TABLE ORDERS64
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_064
               INDEX IN is_order_064
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 100801 ENDING AT 102400,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS65;
CREATE TABLE ORDERS65
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_065
               INDEX IN is_order_065
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 102401 ENDING AT 104000,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS66;
CREATE TABLE ORDERS66
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_066
               INDEX IN is_order_066
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 104001 ENDING AT 105600,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS67;
CREATE TABLE ORDERS67
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D     TIMESTAMP   NOT NULL,
                O_CARRIER_ID  SMALLINT    NOT NULL,
                O_OL_CNT      SMALLINT    NOT NULL,
                O_ALL_LOCAL   SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID        INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_067
               INDEX IN is_order_067
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
```

```
 O_W_ID STARTING FROM 105601 ENDING AT 107200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS68;
CREATE TABLE ORDERS68
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_068
INDEX IN is_order_068
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 107201 ENDING AT 108800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS69;
CREATE TABLE ORDERS69
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_069
INDEX IN is_order_069
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 108801 ENDING AT 110400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS70;
CREATE TABLE ORDERS70
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_070
INDEX IN is_order_070
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 110401 ENDING AT 112000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS71;
CREATE TABLE ORDERS71
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_071
INDEX IN is_order_071
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 112001 ENDING AT 113600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS72;
CREATE TABLE ORDERS72
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_072
INDEX IN is_order_072
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 113601 ENDING AT 115200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS73;
CREATE TABLE ORDERS73
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_073
INDEX IN is_order_073
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 115201 ENDING AT 116800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS74;
CREATE TABLE ORDERS74
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_074
INDEX IN is_order_074
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 116801 ENDING AT 118400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS75;
CREATE TABLE ORDERS75
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_075
INDEX IN is_order_075
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 118401 ENDING AT 120000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS76;
CREATE TABLE ORDERS76
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_076
INDEX IN is_order_076
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 120001 ENDING AT 121600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS77;
CREATE TABLE ORDERS77
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_077
INDEX IN is_order_077
ORGANIZE BY KEY SEQUENCE (
```

```
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 121601 ENDING AT 123200,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS78;
CREATE TABLE ORDERS78
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_078
           INDEX IN is_order_078
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 123201 ENDING AT 124800,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS79;
CREATE TABLE ORDERS79
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_079
           INDEX IN is_order_079
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 124801 ENDING AT 126400,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS80;
CREATE TABLE ORDERS80
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_080
           INDEX IN is_order_080
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 126401 ENDING AT 128000,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS81;
CREATE TABLE ORDERS81
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_081
           INDEX IN is_order_081
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 128001 ENDING AT 129600,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS82;
CREATE TABLE ORDERS82
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_082
           INDEX IN is_order_082
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 129601 ENDING AT 131200,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS83;
CREATE TABLE ORDERS83
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_083
           INDEX IN is_order_083
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 131201 ENDING AT 132800,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS84;
CREATE TABLE ORDERS84
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_084
           INDEX IN is_order_084
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 132801 ENDING AT 134400,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS85;
CREATE TABLE ORDERS85
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_085
           INDEX IN is_order_085
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 134401 ENDING AT 136000,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS86;
CREATE TABLE ORDERS86
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_086
           INDEX IN is_order_086
           ORGANIZE BY KEY SEQUENCE (
            O_ID STARTING FROM 1 ENDING AT 3675,
            O_W_ID STARTING FROM 136001 ENDING AT 137600,
            O_D_ID STARTING FROM 1 ENDING AT 10
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS87;
CREATE TABLE ORDERS87
           (
            O_C_ID        INTEGER    NOT NULL,
            O_ENTRY_D     TIMESTAMP  NOT NULL,
            O_CARRIER_ID  SMALLINT   NOT NULL,
            O_OL_CNT      SMALLINT   NOT NULL,
            O_ALL_LOCAL   SMALLINT   NOT NULL,
            O_ID          INTEGER    NOT NULL,
            O_W_ID        INTEGER    NOT NULL,
            O_D_ID        SMALLINT   NOT NULL
           )
           IN ts_order_087
           INDEX IN is_order_087
```

```
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 137601 ENDING AT 139200,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS88;
CREATE TABLE ORDERS88
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_088
            INDEX IN is_order_088
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 139201 ENDING AT 140800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS89;
CREATE TABLE ORDERS89
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_089
            INDEX IN is_order_089
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 140801 ENDING AT 142400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS90;
CREATE TABLE ORDERS90
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_090
            INDEX IN is_order_090
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 142401 ENDING AT 144000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS91;
CREATE TABLE ORDERS91
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_091
            INDEX IN is_order_091
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 144001 ENDING AT 145600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS92;
CREATE TABLE ORDERS92
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_092
            INDEX IN is_order_092
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 145601 ENDING AT 147200,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS93;
CREATE TABLE ORDERS93
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_093
            INDEX IN is_order_093
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 147201 ENDING AT 148800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS94;
CREATE TABLE ORDERS94
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_094
            INDEX IN is_order_094
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 148801 ENDING AT 150400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS95;
CREATE TABLE ORDERS95
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_095
            INDEX IN is_order_095
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 150401 ENDING AT 152000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS96;
CREATE TABLE ORDERS96
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_096
            INDEX IN is_order_096
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 152001 ENDING AT 153600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS97;
CREATE TABLE ORDERS97
            (
             O_C_ID        INTEGER    NOT NULL,
             O_ENTRY_D     TIMESTAMP  NOT NULL,
             O_CARRIER_ID  SMALLINT   NOT NULL,
             O_OL_CNT      SMALLINT   NOT NULL,
             O_ALL_LOCAL   SMALLINT   NOT NULL,
             O_ID          INTEGER    NOT NULL,
             O_W_ID        INTEGER    NOT NULL,
             O_D_ID        SMALLINT   NOT NULL
            )
            IN ts_order_097
```

```
        INDEX IN is_order_097
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 153601 ENDING AT 155200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS98;
CREATE TABLE ORDERS98
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_098
        INDEX IN is_order_098
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 155201 ENDING AT 156800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS99;
CREATE TABLE ORDERS99
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_099
        INDEX IN is_order_099
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 156801 ENDING AT 158400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS100;
CREATE TABLE ORDERS100
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_100
        INDEX IN is_order_100
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 158401 ENDING AT 160000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS101;
CREATE TABLE ORDERS101
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_101
        INDEX IN is_order_101
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 160001 ENDING AT 161600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS102;
CREATE TABLE ORDERS102
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_102
        INDEX IN is_order_102
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 161601 ENDING AT 163200,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS103;
CREATE TABLE ORDERS103
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_103
        INDEX IN is_order_103
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 163201 ENDING AT 164800,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS104;
CREATE TABLE ORDERS104
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_104
        INDEX IN is_order_104
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 164801 ENDING AT 166400,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS105;
CREATE TABLE ORDERS105
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_105
        INDEX IN is_order_105
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 166401 ENDING AT 168000,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS106;
CREATE TABLE ORDERS106
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_106
        INDEX IN is_order_106
        ORGANIZE BY KEY SEQUENCE (
         O_ID STARTING FROM 1 ENDING AT 3675,
         O_W_ID STARTING FROM 168001 ENDING AT 169600,
         O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS107;
CREATE TABLE ORDERS107
        (
         O_C_ID        INTEGER     NOT NULL,
         O_ENTRY_D     TIMESTAMP   NOT NULL,
         O_CARRIER_ID  SMALLINT    NOT NULL,
         O_OL_CNT      SMALLINT    NOT NULL,
         O_ALL_LOCAL   SMALLINT    NOT NULL,
         O_ID          INTEGER     NOT NULL,
         O_W_ID        INTEGER     NOT NULL,
         O_D_ID        SMALLINT    NOT NULL
        )
```

```
            IN ts_order_107
            INDEX IN is_order_107
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 169601 ENDING AT 171200,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS108;
CREATE TABLE ORDERS108
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_108
            INDEX IN is_order_108
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 171201 ENDING AT 172800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS109;
CREATE TABLE ORDERS109
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_109
            INDEX IN is_order_109
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 172801 ENDING AT 174400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS110;
CREATE TABLE ORDERS110
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_110
            INDEX IN is_order_110
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 174401 ENDING AT 176000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS111;
CREATE TABLE ORDERS111
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_111
            INDEX IN is_order_111
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 176001 ENDING AT 177600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS112;
CREATE TABLE ORDERS112
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_112
            INDEX IN is_order_112
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 177601 ENDING AT 179200,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS113;
CREATE TABLE ORDERS113
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_113
            INDEX IN is_order_113
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 179201 ENDING AT 180800,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS114;
CREATE TABLE ORDERS114
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_114
            INDEX IN is_order_114
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 180801 ENDING AT 182400,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS115;
CREATE TABLE ORDERS115
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_115
            INDEX IN is_order_115
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 182401 ENDING AT 184000,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS116;
CREATE TABLE ORDERS116
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
            )
            IN ts_order_116
            INDEX IN is_order_116
            ORGANIZE BY KEY SEQUENCE (
             O_ID STARTING FROM 1 ENDING AT 3675,
             O_W_ID STARTING FROM 184001 ENDING AT 185600,
             O_D_ID STARTING FROM 1 ENDING AT 10
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS117;
CREATE TABLE ORDERS117
            (
             O_C_ID        INTEGER     NOT NULL,
             O_ENTRY_D     TIMESTAMP   NOT NULL,
             O_CARRIER_ID  SMALLINT    NOT NULL,
             O_OL_CNT      SMALLINT    NOT NULL,
             O_ALL_LOCAL   SMALLINT    NOT NULL,
             O_ID          INTEGER     NOT NULL,
             O_W_ID        INTEGER     NOT NULL,
             O_D_ID        SMALLINT    NOT NULL
```

```
)
IN ts_order_117
INDEX IN is_order_117
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 185601 ENDING AT 187200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS118;
CREATE TABLE ORDERS118
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_118
INDEX IN is_order_118
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 187201 ENDING AT 188800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS119;
CREATE TABLE ORDERS119
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_119
INDEX IN is_order_119
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 188801 ENDING AT 190400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS120;
CREATE TABLE ORDERS120
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_120
INDEX IN is_order_120
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 190401 ENDING AT 192000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS121;
CREATE TABLE ORDERS121
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_121
INDEX IN is_order_121
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 192001 ENDING AT 193600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS122;
CREATE TABLE ORDERS122
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_122
INDEX IN is_order_122
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 193601 ENDING AT 195200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS123;
CREATE TABLE ORDERS123
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_123
INDEX IN is_order_123
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 195201 ENDING AT 196800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS124;
CREATE TABLE ORDERS124
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_124
INDEX IN is_order_124
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 196801 ENDING AT 198400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS125;
CREATE TABLE ORDERS125
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_125
INDEX IN is_order_125
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 198401 ENDING AT 200000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS126;
CREATE TABLE ORDERS126
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
 O_D_ID        SMALLINT   NOT NULL
)
IN ts_order_126
INDEX IN is_order_126
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 200001 ENDING AT 201600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS127;
CREATE TABLE ORDERS127
(
 O_C_ID        INTEGER    NOT NULL,
 O_ENTRY_D     TIMESTAMP  NOT NULL,
 O_CARRIER_ID  SMALLINT   NOT NULL,
 O_OL_CNT      SMALLINT   NOT NULL,
 O_ALL_LOCAL   SMALLINT   NOT NULL,
 O_ID          INTEGER    NOT NULL,
 O_W_ID        INTEGER    NOT NULL,
```

```
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_127
INDEX IN is_order_127
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 201601 ENDING AT 203200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS128;
CREATE TABLE ORDERS128
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_128
INDEX IN is_order_128
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 203201 ENDING AT 204800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS129;
CREATE TABLE ORDERS129
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_129
INDEX IN is_order_129
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 204801 ENDING AT 206400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS130;
CREATE TABLE ORDERS130
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_130
INDEX IN is_order_130
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 206401 ENDING AT 208000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS131;
CREATE TABLE ORDERS131
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_131
INDEX IN is_order_131
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 208001 ENDING AT 209600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS132;
CREATE TABLE ORDERS132
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_132
INDEX IN is_order_132
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 209601 ENDING AT 211200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS133;
CREATE TABLE ORDERS133
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_133
INDEX IN is_order_133
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 211201 ENDING AT 212800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS134;
CREATE TABLE ORDERS134
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_134
INDEX IN is_order_134
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 212801 ENDING AT 214400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS135;
CREATE TABLE ORDERS135
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_135
INDEX IN is_order_135
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 214401 ENDING AT 216000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS136;
CREATE TABLE ORDERS136
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
 O_W_ID        INTEGER     NOT NULL,
 O_D_ID        SMALLINT    NOT NULL
)
IN ts_order_136
INDEX IN is_order_136
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 216001 ENDING AT 217600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS137;
CREATE TABLE ORDERS137
        (
 O_C_ID        INTEGER     NOT NULL,
 O_ENTRY_D     TIMESTAMP   NOT NULL,
 O_CARRIER_ID  SMALLINT    NOT NULL,
 O_OL_CNT      SMALLINT    NOT NULL,
 O_ALL_LOCAL   SMALLINT    NOT NULL,
 O_ID          INTEGER     NOT NULL,
```

```
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_137
                INDEX IN is_order_137
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 217601 ENDING AT 219200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS138;
CREATE TABLE ORDERS138
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_138
                INDEX IN is_order_138
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 219201 ENDING AT 220800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS139;
CREATE TABLE ORDERS139
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_139
                INDEX IN is_order_139
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 220801 ENDING AT 222400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS140;
CREATE TABLE ORDERS140
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_140
                INDEX IN is_order_140
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 222401 ENDING AT 224000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS141;
CREATE TABLE ORDERS141
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_141
                INDEX IN is_order_141
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 224001 ENDING AT 225600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS142;
CREATE TABLE ORDERS142
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_142
                INDEX IN is_order_142
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 225601 ENDING AT 227200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS143;
CREATE TABLE ORDERS143
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_143
                INDEX IN is_order_143
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 227201 ENDING AT 228800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS144;
CREATE TABLE ORDERS144
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_144
                INDEX IN is_order_144
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 228801 ENDING AT 230400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS145;
CREATE TABLE ORDERS145
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_145
                INDEX IN is_order_145
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 230401 ENDING AT 232000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS146;
CREATE TABLE ORDERS146
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
                O_ID          INTEGER    NOT NULL,
                O_W_ID        INTEGER    NOT NULL,
                O_D_ID        SMALLINT   NOT NULL
                )
                IN ts_order_146
                INDEX IN is_order_146
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 232001 ENDING AT 233600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS147;
CREATE TABLE ORDERS147
                (
                O_C_ID        INTEGER    NOT NULL,
                O_ENTRY_D     TIMESTAMP  NOT NULL,
                O_CARRIER_ID  SMALLINT   NOT NULL,
                O_OL_CNT      SMALLINT   NOT NULL,
                O_ALL_LOCAL   SMALLINT   NOT NULL,
```

```
                O_ID          INTEGER    NOT NULL,
                O_W_ID         INTEGER    NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_147
               INDEX IN is_order_147
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 233601 ENDING AT 235200,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS148;
CREATE TABLE ORDERS148
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_148
               INDEX IN is_order_148
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 235201 ENDING AT 236800,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS149;
CREATE TABLE ORDERS149
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_149
               INDEX IN is_order_149
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 236801 ENDING AT 238400,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS150;
CREATE TABLE ORDERS150
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_150
               INDEX IN is_order_150
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 238401 ENDING AT 240000,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS151;
CREATE TABLE ORDERS151
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_151
               INDEX IN is_order_151
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 240001 ENDING AT 241600,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS152;
CREATE TABLE ORDERS152
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_152
               INDEX IN is_order_152
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 241601 ENDING AT 243200,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS153;
CREATE TABLE ORDERS153
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_153
               INDEX IN is_order_153
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 243201 ENDING AT 244800,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS154;
CREATE TABLE ORDERS154
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_154
               INDEX IN is_order_154
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 244801 ENDING AT 246400,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS155;
CREATE TABLE ORDERS155
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_155
               INDEX IN is_order_155
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 246401 ENDING AT 248000,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS156;
CREATE TABLE ORDERS156
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID          INTEGER     NOT NULL,
                O_W_ID         INTEGER     NOT NULL,
                O_D_ID        SMALLINT    NOT NULL
               )
               IN ts_order_156
               INDEX IN is_order_156
               ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 248001 ENDING AT 249600,
                O_D_ID STARTING FROM 1 ENDING AT 10
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS157;
CREATE TABLE ORDERS157
               (
                O_C_ID        INTEGER     NOT NULL,
                O_ENTRY_D      TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT       SMALLINT    NOT NULL,
```

```
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_157
        INDEX IN is_order_157
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 249601 ENDING AT 251200,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS158;
CREATE TABLE ORDERS158
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_158
        INDEX IN is_order_158
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 251201 ENDING AT 252800,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS159;
CREATE TABLE ORDERS159
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_159
        INDEX IN is_order_159
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 252801 ENDING AT 254400,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS160;
CREATE TABLE ORDERS160
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_160
        INDEX IN is_order_160
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 254401 ENDING AT 256000,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS161;
CREATE TABLE ORDERS161
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_161
        INDEX IN is_order_161
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 256001 ENDING AT 257600,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS162;
CREATE TABLE ORDERS162
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_162
        INDEX IN is_order_162
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 257601 ENDING AT 259200,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS163;
CREATE TABLE ORDERS163
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_163
        INDEX IN is_order_163
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 259201 ENDING AT 260800,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS164;
CREATE TABLE ORDERS164
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_164
        INDEX IN is_order_164
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 260801 ENDING AT 262400,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS165;
CREATE TABLE ORDERS165
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_165
        INDEX IN is_order_165
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 262401 ENDING AT 264000,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS166;
CREATE TABLE ORDERS166
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
        O_OL_CNT        SMALLINT    NOT NULL,
        O_ALL_LOCAL     SMALLINT    NOT NULL,
        O_ID            INTEGER     NOT NULL,
        O_W_ID          INTEGER     NOT NULL,
        O_D_ID          SMALLINT    NOT NULL
        )
        IN ts_order_166
        INDEX IN is_order_166
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 264001 ENDING AT 265600,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS167;
CREATE TABLE ORDERS167
        (
        O_C_ID          INTEGER     NOT NULL,
        O_ENTRY_D       TIMESTAMP   NOT NULL,
        O_CARRIER_ID    SMALLINT    NOT NULL,
```

```
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_167
                INDEX IN is_order_167
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 265601 ENDING AT 267200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS168;
CREATE TABLE ORDERS168
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_168
                INDEX IN is_order_168
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 267201 ENDING AT 268800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS169;
CREATE TABLE ORDERS169
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_169
                INDEX IN is_order_169
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 268801 ENDING AT 270400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS170;
CREATE TABLE ORDERS170
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_170
                INDEX IN is_order_170
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 270401 ENDING AT 272000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS171;
CREATE TABLE ORDERS171
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_171
                INDEX IN is_order_171
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 272001 ENDING AT 273600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS172;
CREATE TABLE ORDERS172
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_172
                INDEX IN is_order_172
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 273601 ENDING AT 275200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS173;
CREATE TABLE ORDERS173
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_173
                INDEX IN is_order_173
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 275201 ENDING AT 276800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS174;
CREATE TABLE ORDERS174
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_174
                INDEX IN is_order_174
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 276801 ENDING AT 278400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS175;
CREATE TABLE ORDERS175
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_175
                INDEX IN is_order_175
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 278401 ENDING AT 280000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS176;
CREATE TABLE ORDERS176
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_176
                INDEX IN is_order_176
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 280001 ENDING AT 281600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS177;
CREATE TABLE ORDERS177
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
```

```
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_177
INDEX IN is_order_177
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 281601 ENDING AT 283200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS178;
CREATE TABLE ORDERS178
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_178
INDEX IN is_order_178
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 283201 ENDING AT 284800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS179;
CREATE TABLE ORDERS179
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_179
INDEX IN is_order_179
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 284801 ENDING AT 286400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS180;
CREATE TABLE ORDERS180
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_180
INDEX IN is_order_180
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 286401 ENDING AT 288000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS181;
CREATE TABLE ORDERS181
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_181
INDEX IN is_order_181
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 288001 ENDING AT 289600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS182;
CREATE TABLE ORDERS182
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_182
INDEX IN is_order_182
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 289601 ENDING AT 291200,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS183;
CREATE TABLE ORDERS183
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_183
INDEX IN is_order_183
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 291201 ENDING AT 292800,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS184;
CREATE TABLE ORDERS184
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_184
INDEX IN is_order_184
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 292801 ENDING AT 294400,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS185;
CREATE TABLE ORDERS185
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_185
INDEX IN is_order_185
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 294401 ENDING AT 296000,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS186;
CREATE TABLE ORDERS186
(
 O_C_ID          INTEGER     NOT NULL,
 O_ENTRY_D       TIMESTAMP   NOT NULL,
 O_CARRIER_ID    SMALLINT    NOT NULL,
 O_OL_CNT        SMALLINT    NOT NULL,
 O_ALL_LOCAL     SMALLINT    NOT NULL,
 O_ID            INTEGER     NOT NULL,
 O_W_ID          INTEGER     NOT NULL,
 O_D_ID          SMALLINT    NOT NULL
)
IN ts_order_186
INDEX IN is_order_186
ORGANIZE BY KEY SEQUENCE (
 O_ID STARTING FROM 1 ENDING AT 3675,
 O_W_ID STARTING FROM 296001 ENDING AT 297600,
 O_D_ID STARTING FROM 1 ENDING AT 10
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS187;
CREATE TABLE ORDERS187
(
 O_C_ID          INTEGER     NOT NULL,
```

```
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_187
                INDEX IN is_order_187
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 297601 ENDING AT 299200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS188;
CREATE TABLE ORDERS188
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_188
                INDEX IN is_order_188
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 299201 ENDING AT 300800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS189;
CREATE TABLE ORDERS189
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_189
                INDEX IN is_order_189
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 300801 ENDING AT 302400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS190;
CREATE TABLE ORDERS190
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_190
                INDEX IN is_order_190
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 302401 ENDING AT 304000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS191;
CREATE TABLE ORDERS191
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_191
                INDEX IN is_order_191
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 304001 ENDING AT 305600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS192;
CREATE TABLE ORDERS192
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_192
                INDEX IN is_order_192
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 305601 ENDING AT 307200,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS193;
CREATE TABLE ORDERS193
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_193
                INDEX IN is_order_193
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 307201 ENDING AT 308800,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS194;
CREATE TABLE ORDERS194
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_194
                INDEX IN is_order_194
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 308801 ENDING AT 310400,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS195;
CREATE TABLE ORDERS195
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_195
                INDEX IN is_order_195
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 310401 ENDING AT 312000,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS196;
CREATE TABLE ORDERS196
                (
                O_C_ID          INTEGER     NOT NULL,
                O_ENTRY_D       TIMESTAMP   NOT NULL,
                O_CARRIER_ID    SMALLINT    NOT NULL,
                O_OL_CNT        SMALLINT    NOT NULL,
                O_ALL_LOCAL     SMALLINT    NOT NULL,
                O_ID            INTEGER     NOT NULL,
                O_W_ID          INTEGER     NOT NULL,
                O_D_ID          SMALLINT    NOT NULL
                )
                IN ts_order_196
                INDEX IN is_order_196
                ORGANIZE BY KEY SEQUENCE (
                O_ID STARTING FROM 1 ENDING AT 3675,
                O_W_ID STARTING FROM 312001 ENDING AT 313600,
                O_D_ID STARTING FROM 1 ENDING AT 10
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS197;
CREATE TABLE ORDERS197
                (
```

```
        O_C_ID        INTEGER     NOT NULL,
        O_ENTRY_D     TIMESTAMP   NOT NULL,
        O_CARRIER_ID  SMALLINT    NOT NULL,
        O_OL_CNT      SMALLINT    NOT NULL,
        O_ALL_LOCAL   SMALLINT    NOT NULL,
        O_ID          INTEGER     NOT NULL,
        O_W_ID        INTEGER     NOT NULL,
        O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_197
        INDEX IN is_order_197
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 313601 ENDING AT 315200,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS198;
CREATE TABLE ORDERS198
        (
        O_C_ID        INTEGER     NOT NULL,
        O_ENTRY_D     TIMESTAMP   NOT NULL,
        O_CARRIER_ID  SMALLINT    NOT NULL,
        O_OL_CNT      SMALLINT    NOT NULL,
        O_ALL_LOCAL   SMALLINT    NOT NULL,
        O_ID          INTEGER     NOT NULL,
        O_W_ID        INTEGER     NOT NULL,
        O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_198
        INDEX IN is_order_198
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 315201 ENDING AT 316800,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS199;
CREATE TABLE ORDERS199
        (
        O_C_ID        INTEGER     NOT NULL,
        O_ENTRY_D     TIMESTAMP   NOT NULL,
        O_CARRIER_ID  SMALLINT    NOT NULL,
        O_OL_CNT      SMALLINT    NOT NULL,
        O_ALL_LOCAL   SMALLINT    NOT NULL,
        O_ID          INTEGER     NOT NULL,
        O_W_ID        INTEGER     NOT NULL,
        O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_199
        INDEX IN is_order_199
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 316801 ENDING AT 318400,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDERS200;
CREATE TABLE ORDERS200
        (
        O_C_ID        INTEGER     NOT NULL,
        O_ENTRY_D     TIMESTAMP   NOT NULL,
        O_CARRIER_ID  SMALLINT    NOT NULL,
        O_OL_CNT      SMALLINT    NOT NULL,
        O_ALL_LOCAL   SMALLINT    NOT NULL,
        O_ID          INTEGER     NOT NULL,
        O_W_ID        INTEGER     NOT NULL,
        O_D_ID        SMALLINT    NOT NULL
        )
        IN ts_order_200
        INDEX IN is_order_200
        ORGANIZE BY KEY SEQUENCE (
        O_ID STARTING FROM 1 ENDING AT 3675,
        O_W_ID STARTING FROM 318401 ENDING AT 320000,
        O_D_ID STARTING FROM 1 ENDING AT 10
        )
        ALLOW OVERFLOW;
connect reset;
```

CRTB_ORDER_LINE_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE ORDER_LINE1;
CREATE TABLE ORDER_LINE1
        (
        OL_DELIVERY_D   TIMESTAMP    NOT NULL,
        OL_AMOUNT       DECIMAL(6,2) NOT NULL,
        OL_I_ID         INTEGER      NOT NULL,
        OL_SUPPLY_W_ID  INTEGER      NOT NULL,
        OL_QUANTITY     SMALLINT     NOT NULL,
        OL_DIST_INFO    CHAR(24)     NOT NULL,
        OL_O_ID         INTEGER      NOT NULL,
        OL_D_ID         SMALLINT     NOT NULL,
        OL_W_ID         INTEGER      NOT NULL,
        OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_001
        INDEX IN ts_orderline_001
        ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 1 ENDING AT 1600,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE2;
CREATE TABLE ORDER_LINE2
        (
        OL_DELIVERY_D   TIMESTAMP    NOT NULL,
        OL_AMOUNT       DECIMAL(6,2) NOT NULL,
        OL_I_ID         INTEGER      NOT NULL,
        OL_SUPPLY_W_ID  INTEGER      NOT NULL,
        OL_QUANTITY     SMALLINT     NOT NULL,
        OL_DIST_INFO    CHAR(24)     NOT NULL,
        OL_O_ID         INTEGER      NOT NULL,
        OL_D_ID         SMALLINT     NOT NULL,
        OL_W_ID         INTEGER      NOT NULL,
        OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_002
        INDEX IN ts_orderline_002
        ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 1601 ENDING AT 3200,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE3;
CREATE TABLE ORDER_LINE3
        (
        OL_DELIVERY_D   TIMESTAMP    NOT NULL,
        OL_AMOUNT       DECIMAL(6,2) NOT NULL,
        OL_I_ID         INTEGER      NOT NULL,
        OL_SUPPLY_W_ID  INTEGER      NOT NULL,
        OL_QUANTITY     SMALLINT     NOT NULL,
        OL_DIST_INFO    CHAR(24)     NOT NULL,
        OL_O_ID         INTEGER      NOT NULL,
        OL_D_ID         SMALLINT     NOT NULL,
        OL_W_ID         INTEGER      NOT NULL,
        OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_003
        INDEX IN ts_orderline_003
        ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 3201 ENDING AT 4800,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE4;
CREATE TABLE ORDER_LINE4
        (
        OL_DELIVERY_D   TIMESTAMP    NOT NULL,
        OL_AMOUNT       DECIMAL(6,2) NOT NULL,
        OL_I_ID         INTEGER      NOT NULL,
        OL_SUPPLY_W_ID  INTEGER      NOT NULL,
        OL_QUANTITY     SMALLINT     NOT NULL,
        OL_DIST_INFO    CHAR(24)     NOT NULL,
        OL_O_ID         INTEGER      NOT NULL,
        OL_D_ID         SMALLINT     NOT NULL,
        OL_W_ID         INTEGER      NOT NULL,
        OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_004
        INDEX IN ts_orderline_004
        ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 4801 ENDING AT 6400,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE5;
CREATE TABLE ORDER_LINE5
        (
        OL_DELIVERY_D   TIMESTAMP    NOT NULL,
        OL_AMOUNT       DECIMAL(6,2) NOT NULL,
        OL_I_ID         INTEGER      NOT NULL,
        OL_SUPPLY_W_ID  INTEGER      NOT NULL,
        OL_QUANTITY     SMALLINT     NOT NULL,
        OL_DIST_INFO    CHAR(24)     NOT NULL,
        OL_O_ID         INTEGER      NOT NULL,
        OL_D_ID         SMALLINT     NOT NULL,
        OL_W_ID         INTEGER      NOT NULL,
        OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_005
        INDEX IN ts_orderline_005
        ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 6401 ENDING AT 8000,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE6;
CREATE TABLE ORDER_LINE6
```

```
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_006
        INDEX IN ts_orderline_006
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 8001 ENDING AT 9600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE7;
CREATE TABLE ORDER_LINE7
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_007
        INDEX IN ts_orderline_007
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 9601 ENDING AT 11200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE8;
CREATE TABLE ORDER_LINE8
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_008
        INDEX IN ts_orderline_008
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 11201 ENDING AT 12800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE9;
CREATE TABLE ORDER_LINE9
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_009
        INDEX IN ts_orderline_009
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 12801 ENDING AT 14400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE10;
CREATE TABLE ORDER_LINE10
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_010
        INDEX IN ts_orderline_010
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 14401 ENDING AT 16000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE11;
CREATE TABLE ORDER_LINE11
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_011
        INDEX IN ts_orderline_011
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 16001 ENDING AT 17600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE12;
CREATE TABLE ORDER_LINE12
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_012
        INDEX IN ts_orderline_012
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 17601 ENDING AT 19200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE13;
CREATE TABLE ORDER_LINE13
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_013
        INDEX IN ts_orderline_013
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 19201 ENDING AT 20800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE14;
CREATE TABLE ORDER_LINE14
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_014
        INDEX IN ts_orderline_014
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 20801 ENDING AT 22400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
```

```
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE15;
CREATE TABLE ORDER_LINE15
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_015
        INDEX IN ts_orderline_015
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 22401 ENDING AT 24000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE16;
CREATE TABLE ORDER_LINE16
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_016
        INDEX IN ts_orderline_016
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 24001 ENDING AT 25600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE17;
CREATE TABLE ORDER_LINE17
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_017
        INDEX IN ts_orderline_017
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 25601 ENDING AT 27200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE18;
CREATE TABLE ORDER_LINE18
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_018
        INDEX IN ts_orderline_018
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 27201 ENDING AT 28800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE19;
CREATE TABLE ORDER_LINE19
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_019
        INDEX IN ts_orderline_019
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 28801 ENDING AT 30400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE20;
CREATE TABLE ORDER_LINE20
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_020
        INDEX IN ts_orderline_020
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 30401 ENDING AT 32000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE21;
CREATE TABLE ORDER_LINE21
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_021
        INDEX IN ts_orderline_021
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 32001 ENDING AT 33600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE22;
CREATE TABLE ORDER_LINE22
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_022
        INDEX IN ts_orderline_022
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 33601 ENDING AT 35200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE23;
CREATE TABLE ORDER_LINE23
        (
         OL_DELIVERY_D   TIMESTAMP   NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER     NOT NULL,
         OL_SUPPLY_W_ID  INTEGER     NOT NULL,
         OL_QUANTITY     SMALLINT    NOT NULL,
         OL_DIST_INFO    CHAR(24)    NOT NULL,
         OL_O_ID         INTEGER     NOT NULL,
         OL_D_ID         SMALLINT    NOT NULL,
         OL_W_ID         INTEGER     NOT NULL,
         OL_NUMBER       SMALLINT    NOT NULL
        )
        IN ts_orderline_023
```

```
        INDEX IN ts_orderline_023
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 35201 ENDING AT 36800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE24;
CREATE TABLE ORDER_LINE24
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_024
        INDEX IN ts_orderline_024
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 36801 ENDING AT 38400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE25;
CREATE TABLE ORDER_LINE25
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_025
        INDEX IN ts_orderline_025
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 38401 ENDING AT 40000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE26;
CREATE TABLE ORDER_LINE26
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_026
        INDEX IN ts_orderline_026
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 40001 ENDING AT 41600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE27;
CREATE TABLE ORDER_LINE27
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_027
        INDEX IN ts_orderline_027
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 41601 ENDING AT 43200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE28;
CREATE TABLE ORDER_LINE28
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_028
        INDEX IN ts_orderline_028
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 43201 ENDING AT 44800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE29;
CREATE TABLE ORDER_LINE29
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_029
        INDEX IN ts_orderline_029
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 44801 ENDING AT 46400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE30;
CREATE TABLE ORDER_LINE30
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_030
        INDEX IN ts_orderline_030
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 46401 ENDING AT 48000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE31;
CREATE TABLE ORDER_LINE31
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_031
        INDEX IN ts_orderline_031
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 48001 ENDING AT 49600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE32;
CREATE TABLE ORDER_LINE32
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
```

```
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_032
INDEX IN ts_orderline_032
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 49601 ENDING AT 51200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE33;
CREATE TABLE ORDER_LINE33
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_033
INDEX IN ts_orderline_033
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 51201 ENDING AT 52800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE34;
CREATE TABLE ORDER_LINE34
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_034
INDEX IN ts_orderline_034
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 52801 ENDING AT 54400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE35;
CREATE TABLE ORDER_LINE35
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_035
INDEX IN ts_orderline_035
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 54401 ENDING AT 56000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE36;
CREATE TABLE ORDER_LINE36
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_036
INDEX IN ts_orderline_036
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 56001 ENDING AT 57600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE37;
CREATE TABLE ORDER_LINE37
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_037
INDEX IN ts_orderline_037
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 57601 ENDING AT 59200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE38;
CREATE TABLE ORDER_LINE38
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_038
INDEX IN ts_orderline_038
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 59201 ENDING AT 60800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE39;
CREATE TABLE ORDER_LINE39
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_039
INDEX IN ts_orderline_039
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 60801 ENDING AT 62400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE40;
CREATE TABLE ORDER_LINE40
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_040
INDEX IN ts_orderline_040
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 62401 ENDING AT 64000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE41;
CREATE TABLE ORDER_LINE41
(
```

```
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_041
       INDEX IN ts_orderline_041
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 64001 ENDING AT 65600,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE42;
CREATE TABLE ORDER_LINE42
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_042
       INDEX IN ts_orderline_042
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 65601 ENDING AT 67200,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE43;
CREATE TABLE ORDER_LINE43
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_043
       INDEX IN ts_orderline_043
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 67201 ENDING AT 68800,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE44;
CREATE TABLE ORDER_LINE44
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_044
       INDEX IN ts_orderline_044
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 68801 ENDING AT 70400,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE45;
CREATE TABLE ORDER_LINE45
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_045
       INDEX IN ts_orderline_045
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 70401 ENDING AT 72000,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE46;
CREATE TABLE ORDER_LINE46
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_046
       INDEX IN ts_orderline_046
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 72001 ENDING AT 73600,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE47;
CREATE TABLE ORDER_LINE47
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_047
       INDEX IN ts_orderline_047
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 73601 ENDING AT 75200,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE48;
CREATE TABLE ORDER_LINE48
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_048
       INDEX IN ts_orderline_048
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 75201 ENDING AT 76800,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE49;
CREATE TABLE ORDER_LINE49
       (
        OL_DELIVERY_D    TIMESTAMP    NOT NULL,
        OL_AMOUNT        DECIMAL(6,2) NOT NULL,
        OL_I_ID          INTEGER      NOT NULL,
        OL_SUPPLY_W_ID   INTEGER      NOT NULL,
        OL_QUANTITY      SMALLINT     NOT NULL,
        OL_DIST_INFO     CHAR(24)     NOT NULL,
        OL_O_ID          INTEGER      NOT NULL,
        OL_D_ID          SMALLINT     NOT NULL,
        OL_W_ID          INTEGER      NOT NULL,
        OL_NUMBER        SMALLINT     NOT NULL
       )
       IN ts_orderline_049
       INDEX IN ts_orderline_049
       ORGANIZE BY KEY SEQUENCE (
        OL_W_ID STARTING FROM 76801 ENDING AT 78400,
        OL_D_ID STARTING FROM 1 ENDING AT 10,
        OL_O_ID STARTING FROM 1 ENDING AT 3675,
        OL_NUMBER STARTING FROM 1 ENDING AT 15
       )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE50;
CREATE TABLE ORDER_LINE50
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_050
            INDEX IN ts_orderline_050
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 78401 ENDING AT 80000,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE51;
CREATE TABLE ORDER_LINE51
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_051
            INDEX IN ts_orderline_051
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 80001 ENDING AT 81600,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE52;
CREATE TABLE ORDER_LINE52
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_052
            INDEX IN ts_orderline_052
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 81601 ENDING AT 83200,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE53;
CREATE TABLE ORDER_LINE53
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_053
            INDEX IN ts_orderline_053
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 83201 ENDING AT 84800,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE54;
CREATE TABLE ORDER_LINE54
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_054
            INDEX IN ts_orderline_054
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 84801 ENDING AT 86400,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE55;
CREATE TABLE ORDER_LINE55
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_055
            INDEX IN ts_orderline_055
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 86401 ENDING AT 88000,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE56;
CREATE TABLE ORDER_LINE56
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_056
            INDEX IN ts_orderline_056
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 88001 ENDING AT 89600,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE57;
CREATE TABLE ORDER_LINE57
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_057
            INDEX IN ts_orderline_057
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 89601 ENDING AT 91200,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE58;
CREATE TABLE ORDER_LINE58
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_058
            INDEX IN ts_orderline_058
```

```
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 91201 ENDING AT 92800,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE59;
CREATE TABLE ORDER_LINE59
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_059
            INDEX IN ts_orderline_059
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 92801 ENDING AT 94400,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE60;
CREATE TABLE ORDER_LINE60
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_060
            INDEX IN ts_orderline_060
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 94401 ENDING AT 96000,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE61;
CREATE TABLE ORDER_LINE61
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_061
            INDEX IN ts_orderline_061
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 96001 ENDING AT 97600,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE62;
CREATE TABLE ORDER_LINE62
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_062
            INDEX IN ts_orderline_062
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 97601 ENDING AT 99200,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE63;
CREATE TABLE ORDER_LINE63
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_063
            INDEX IN ts_orderline_063
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 99201 ENDING AT 100800,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE64;
CREATE TABLE ORDER_LINE64
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_064
            INDEX IN ts_orderline_064
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 100801 ENDING AT 102400,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE65;
CREATE TABLE ORDER_LINE65
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_065
            INDEX IN ts_orderline_065
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 102401 ENDING AT 104000,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE66;
CREATE TABLE ORDER_LINE66
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
             OL_D_ID          SMALLINT     NOT NULL,
             OL_W_ID          INTEGER      NOT NULL,
             OL_NUMBER        SMALLINT     NOT NULL
            )
            IN ts_orderline_066
            INDEX IN ts_orderline_066
            ORGANIZE BY KEY SEQUENCE (
             OL_W_ID STARTING FROM 104001 ENDING AT 105600,
             OL_D_ID STARTING FROM 1 ENDING AT 10,
             OL_O_ID STARTING FROM 1 ENDING AT 3675,
             OL_NUMBER STARTING FROM 1 ENDING AT 15
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE67;
CREATE TABLE ORDER_LINE67
            (
             OL_DELIVERY_D    TIMESTAMP    NOT NULL,
             OL_AMOUNT        DECIMAL(6,2) NOT NULL,
             OL_I_ID          INTEGER      NOT NULL,
             OL_SUPPLY_W_ID   INTEGER      NOT NULL,
             OL_QUANTITY      SMALLINT     NOT NULL,
             OL_DIST_INFO     CHAR(24)     NOT NULL,
             OL_O_ID          INTEGER      NOT NULL,
```

```
 OL_D_ID         SMALLINT     NOT NULL,
 OL_W_ID         INTEGER      NOT NULL,
 OL_NUMBER       SMALLINT     NOT NULL
)
IN ts_orderline_067
INDEX IN ts_orderline_067
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 105601 ENDING AT 107200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE68;
CREATE TABLE ORDER_LINE68
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_068
INDEX IN ts_orderline_068
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 107201 ENDING AT 108800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE69;
CREATE TABLE ORDER_LINE69
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_069
INDEX IN ts_orderline_069
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 108801 ENDING AT 110400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE70;
CREATE TABLE ORDER_LINE70
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_070
INDEX IN ts_orderline_070
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 110401 ENDING AT 112000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE71;
CREATE TABLE ORDER_LINE71
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_071
INDEX IN ts_orderline_071
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 112001 ENDING AT 113600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE72;
CREATE TABLE ORDER_LINE72
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_072
INDEX IN ts_orderline_072
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 113601 ENDING AT 115200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE73;
CREATE TABLE ORDER_LINE73
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_073
INDEX IN ts_orderline_073
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 115201 ENDING AT 116800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE74;
CREATE TABLE ORDER_LINE74
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_074
INDEX IN ts_orderline_074
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 116801 ENDING AT 118400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE75;
CREATE TABLE ORDER_LINE75
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_075
INDEX IN ts_orderline_075
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 118401 ENDING AT 120000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE76;
CREATE TABLE ORDER_LINE76
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
```

```
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_076
INDEX IN ts_orderline_076
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 120001 ENDING AT 121600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE77;
CREATE TABLE ORDER_LINE77
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_077
INDEX IN ts_orderline_077
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 121601 ENDING AT 123200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE78;
CREATE TABLE ORDER_LINE78
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_078
INDEX IN ts_orderline_078
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 123201 ENDING AT 124800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE79;
CREATE TABLE ORDER_LINE79
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_079
INDEX IN ts_orderline_079
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 124801 ENDING AT 126400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE80;
CREATE TABLE ORDER_LINE80
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_080
INDEX IN ts_orderline_080
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 126401 ENDING AT 128000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE81;
CREATE TABLE ORDER_LINE81
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_081
INDEX IN ts_orderline_081
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 128001 ENDING AT 129600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE82;
CREATE TABLE ORDER_LINE82
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_082
INDEX IN ts_orderline_082
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 129601 ENDING AT 131200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE83;
CREATE TABLE ORDER_LINE83
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_083
INDEX IN ts_orderline_083
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 131201 ENDING AT 132800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE84;
CREATE TABLE ORDER_LINE84
(
 OL_DELIVERY_D   TIMESTAMP   NOT NULL,
 OL_AMOUNT       DECIMAL(6,2) NOT NULL,
 OL_I_ID         INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY     SMALLINT    NOT NULL,
 OL_DIST_INFO    CHAR(24)    NOT NULL,
 OL_O_ID         INTEGER     NOT NULL,
 OL_D_ID         SMALLINT    NOT NULL,
 OL_W_ID         INTEGER     NOT NULL,
 OL_NUMBER       SMALLINT    NOT NULL
)
IN ts_orderline_084
INDEX IN ts_orderline_084
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 132801 ENDING AT 134400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
```

```
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE85;
CREATE TABLE ORDER_LINE85
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_085
        INDEX IN ts_orderline_085
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 134401 ENDING AT 136000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE86;
CREATE TABLE ORDER_LINE86
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_086
        INDEX IN ts_orderline_086
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 136001 ENDING AT 137600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE87;
CREATE TABLE ORDER_LINE87
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_087
        INDEX IN ts_orderline_087
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 137601 ENDING AT 139200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE88;
CREATE TABLE ORDER_LINE88
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_088
        INDEX IN ts_orderline_088
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 139201 ENDING AT 140800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE89;
CREATE TABLE ORDER_LINE89
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_089
        INDEX IN ts_orderline_089
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 140801 ENDING AT 142400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE90;
CREATE TABLE ORDER_LINE90
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_090
        INDEX IN ts_orderline_090
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 142401 ENDING AT 144000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE91;
CREATE TABLE ORDER_LINE91
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_091
        INDEX IN ts_orderline_091
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 144001 ENDING AT 145600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE92;
CREATE TABLE ORDER_LINE92
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_092
        INDEX IN ts_orderline_092
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 145601 ENDING AT 147200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE93;
CREATE TABLE ORDER_LINE93
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_093
        INDEX IN ts_orderline_093
        ORGANIZE BY KEY SEQUENCE (
```

```
 OL_W_ID STARTING FROM 147201 ENDING AT 148800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE94;
CREATE TABLE ORDER_LINE94
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_094
INDEX IN ts_orderline_094
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 148801 ENDING AT 150400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE95;
CREATE TABLE ORDER_LINE95
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_095
INDEX IN ts_orderline_095
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 150401 ENDING AT 152000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE96;
CREATE TABLE ORDER_LINE96
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_096
INDEX IN ts_orderline_096
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 152001 ENDING AT 153600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE97;
CREATE TABLE ORDER_LINE97
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_097
INDEX IN ts_orderline_097
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 153601 ENDING AT 155200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE98;
CREATE TABLE ORDER_LINE98
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_098
INDEX IN ts_orderline_098
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 155201 ENDING AT 156800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE99;
CREATE TABLE ORDER_LINE99
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_099
INDEX IN ts_orderline_099
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 156801 ENDING AT 158400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE100;
CREATE TABLE ORDER_LINE100
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_100
INDEX IN ts_orderline_100
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 158401 ENDING AT 160000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE101;
CREATE TABLE ORDER_LINE101
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
 OL_W_ID        INTEGER     NOT NULL,
 OL_NUMBER      SMALLINT    NOT NULL
)
IN ts_orderline_101
INDEX IN ts_orderline_101
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 160001 ENDING AT 161600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE102;
CREATE TABLE ORDER_LINE102
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT      DECIMAL(6,2) NOT NULL,
 OL_I_ID        INTEGER     NOT NULL,
 OL_SUPPLY_W_ID  INTEGER     NOT NULL,
 OL_QUANTITY    SMALLINT    NOT NULL,
 OL_DIST_INFO   CHAR(24)    NOT NULL,
 OL_O_ID        INTEGER     NOT NULL,
 OL_D_ID        SMALLINT    NOT NULL,
```

```
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_102
    INDEX IN ts_orderline_102
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 161601 ENDING AT 163200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE103;
CREATE TABLE ORDER_LINE103
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_103
    INDEX IN ts_orderline_103
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 163201 ENDING AT 164800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE104;
CREATE TABLE ORDER_LINE104
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_104
    INDEX IN ts_orderline_104
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 164801 ENDING AT 166400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE105;
CREATE TABLE ORDER_LINE105
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_105
    INDEX IN ts_orderline_105
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 166401 ENDING AT 168000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE106;
CREATE TABLE ORDER_LINE106
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_106
    INDEX IN ts_orderline_106
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 168001 ENDING AT 169600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE107;
CREATE TABLE ORDER_LINE107
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_107
    INDEX IN ts_orderline_107
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 169601 ENDING AT 171200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE108;
CREATE TABLE ORDER_LINE108
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_108
    INDEX IN ts_orderline_108
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 171201 ENDING AT 172800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE109;
CREATE TABLE ORDER_LINE109
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_109
    INDEX IN ts_orderline_109
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 172801 ENDING AT 174400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE110;
CREATE TABLE ORDER_LINE110
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_110
    INDEX IN ts_orderline_110
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 174401 ENDING AT 176000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE111;
CREATE TABLE ORDER_LINE111
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
```

```
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_111
   INDEX IN ts_orderline_111
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 176001 ENDING AT 177600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE112;
CREATE TABLE ORDER_LINE112
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_112
   INDEX IN ts_orderline_112
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 177601 ENDING AT 179200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE113;
CREATE TABLE ORDER_LINE113
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_113
   INDEX IN ts_orderline_113
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 179201 ENDING AT 180800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE114;
CREATE TABLE ORDER_LINE114
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_114
   INDEX IN ts_orderline_114
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 180801 ENDING AT 182400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE115;
CREATE TABLE ORDER_LINE115
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_115
   INDEX IN ts_orderline_115
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 182401 ENDING AT 184000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE116;
CREATE TABLE ORDER_LINE116
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_116
   INDEX IN ts_orderline_116
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 184001 ENDING AT 185600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE117;
CREATE TABLE ORDER_LINE117
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_117
   INDEX IN ts_orderline_117
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 185601 ENDING AT 187200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE118;
CREATE TABLE ORDER_LINE118
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_118
   INDEX IN ts_orderline_118
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 187201 ENDING AT 188800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE119;
CREATE TABLE ORDER_LINE119
   (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
   )
   IN ts_orderline_119
   INDEX IN ts_orderline_119
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 188801 ENDING AT 190400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
```

```
connect to TPCC in share mode;
DROP TABLE ORDER_LINE120;
CREATE TABLE ORDER_LINE120
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_120
        INDEX IN ts_orderline_120
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 190401 ENDING AT 192000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE121;
CREATE TABLE ORDER_LINE121
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_121
        INDEX IN ts_orderline_121
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 192001 ENDING AT 193600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE122;
CREATE TABLE ORDER_LINE122
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_122
        INDEX IN ts_orderline_122
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 193601 ENDING AT 195200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE123;
CREATE TABLE ORDER_LINE123
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_123
        INDEX IN ts_orderline_123
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 195201 ENDING AT 196800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE124;
CREATE TABLE ORDER_LINE124
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_124
        INDEX IN ts_orderline_124
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 196801 ENDING AT 198400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE125;
CREATE TABLE ORDER_LINE125
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_125
        INDEX IN ts_orderline_125
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 198401 ENDING AT 200000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE126;
CREATE TABLE ORDER_LINE126
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_126
        INDEX IN ts_orderline_126
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 200001 ENDING AT 201600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE127;
CREATE TABLE ORDER_LINE127
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_127
        INDEX IN ts_orderline_127
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 201601 ENDING AT 203200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE128;
CREATE TABLE ORDER_LINE128
        (
         OL_DELIVERY_D   TIMESTAMP    NOT NULL,
         OL_AMOUNT       DECIMAL(6,2) NOT NULL,
         OL_I_ID         INTEGER      NOT NULL,
         OL_SUPPLY_W_ID  INTEGER      NOT NULL,
         OL_QUANTITY     SMALLINT     NOT NULL,
         OL_DIST_INFO    CHAR(24)     NOT NULL,
         OL_O_ID         INTEGER      NOT NULL,
         OL_D_ID         SMALLINT     NOT NULL,
         OL_W_ID         INTEGER      NOT NULL,
         OL_NUMBER       SMALLINT     NOT NULL
        )
        IN ts_orderline_128
        INDEX IN ts_orderline_128
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 203201 ENDING AT 204800,
```

```
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE129;
CREATE TABLE ORDER_LINE129
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_129
   INDEX IN ts_orderline_129
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 204801 ENDING AT 206400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE130;
CREATE TABLE ORDER_LINE130
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_130
   INDEX IN ts_orderline_130
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 206401 ENDING AT 208000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE131;
CREATE TABLE ORDER_LINE131
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_131
   INDEX IN ts_orderline_131
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 208001 ENDING AT 209600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE132;
CREATE TABLE ORDER_LINE132
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_132
   INDEX IN ts_orderline_132
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 209601 ENDING AT 211200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE133;
CREATE TABLE ORDER_LINE133
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_133
   INDEX IN ts_orderline_133
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 211201 ENDING AT 212800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE134;
CREATE TABLE ORDER_LINE134
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_134
   INDEX IN ts_orderline_134
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 212801 ENDING AT 214400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE135;
CREATE TABLE ORDER_LINE135
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_135
   INDEX IN ts_orderline_135
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 214401 ENDING AT 216000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE136;
CREATE TABLE ORDER_LINE136
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
    OL_NUMBER       SMALLINT     NOT NULL
   )
   IN ts_orderline_136
   INDEX IN ts_orderline_136
   ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 216001 ENDING AT 217600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
   )
   ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE137;
CREATE TABLE ORDER_LINE137
   (
    OL_DELIVERY_D   TIMESTAMP    NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER      NOT NULL,
    OL_SUPPLY_W_ID  INTEGER      NOT NULL,
    OL_QUANTITY     SMALLINT     NOT NULL,
    OL_DIST_INFO    CHAR(24)     NOT NULL,
    OL_O_ID         INTEGER      NOT NULL,
    OL_D_ID         SMALLINT     NOT NULL,
    OL_W_ID         INTEGER      NOT NULL,
```

```
 OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_137
 INDEX IN ts_orderline_137
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 217601 ENDING AT 219200,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE138;
CREATE TABLE ORDER_LINE138
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_138
 INDEX IN ts_orderline_138
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 219201 ENDING AT 220800,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE139;
CREATE TABLE ORDER_LINE139
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_139
 INDEX IN ts_orderline_139
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 220801 ENDING AT 222400,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE140;
CREATE TABLE ORDER_LINE140
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_140
 INDEX IN ts_orderline_140
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 222401 ENDING AT 224000,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE141;
CREATE TABLE ORDER_LINE141
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_141
 INDEX IN ts_orderline_141
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 224001 ENDING AT 225600,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE142;
CREATE TABLE ORDER_LINE142
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_142
 INDEX IN ts_orderline_142
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 225601 ENDING AT 227200,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE143;
CREATE TABLE ORDER_LINE143
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_143
 INDEX IN ts_orderline_143
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 227201 ENDING AT 228800,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE144;
CREATE TABLE ORDER_LINE144
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_144
 INDEX IN ts_orderline_144
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 228801 ENDING AT 230400,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE145;
CREATE TABLE ORDER_LINE145
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
  OL_SUPPLY_W_ID  INTEGER     NOT NULL,
  OL_QUANTITY     SMALLINT    NOT NULL,
  OL_DIST_INFO    CHAR(24)    NOT NULL,
  OL_O_ID         INTEGER     NOT NULL,
  OL_D_ID         SMALLINT    NOT NULL,
  OL_W_ID         INTEGER     NOT NULL,
  OL_NUMBER       SMALLINT    NOT NULL
 )
 IN ts_orderline_145
 INDEX IN ts_orderline_145
 ORGANIZE BY KEY SEQUENCE (
  OL_W_ID STARTING FROM 230401 ENDING AT 232000,
  OL_D_ID STARTING FROM 1 ENDING AT 10,
  OL_O_ID STARTING FROM 1 ENDING AT 3675,
  OL_NUMBER STARTING FROM 1 ENDING AT 15
 )
 ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE146;
CREATE TABLE ORDER_LINE146
 (
  OL_DELIVERY_D   TIMESTAMP   NOT NULL,
  OL_AMOUNT       DECIMAL(6,2) NOT NULL,
  OL_I_ID         INTEGER     NOT NULL,
```

```
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_146
    INDEX IN ts_orderline_146
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 232001 ENDING AT 233600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE147;
CREATE TABLE ORDER_LINE147
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_147
    INDEX IN ts_orderline_147
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 233601 ENDING AT 235200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE148;
CREATE TABLE ORDER_LINE148
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_148
    INDEX IN ts_orderline_148
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 235201 ENDING AT 236800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE149;
CREATE TABLE ORDER_LINE149
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_149
    INDEX IN ts_orderline_149
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 236801 ENDING AT 238400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE150;
CREATE TABLE ORDER_LINE150
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_150
    INDEX IN ts_orderline_150
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 238401 ENDING AT 240000,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE151;
CREATE TABLE ORDER_LINE151
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_151
    INDEX IN ts_orderline_151
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 240001 ENDING AT 241600,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE152;
CREATE TABLE ORDER_LINE152
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_152
    INDEX IN ts_orderline_152
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 241601 ENDING AT 243200,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE153;
CREATE TABLE ORDER_LINE153
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_153
    INDEX IN ts_orderline_153
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 243201 ENDING AT 244800,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE154;
CREATE TABLE ORDER_LINE154
    (
    OL_DELIVERY_D   TIMESTAMP   NOT NULL,
    OL_AMOUNT       DECIMAL(6,2) NOT NULL,
    OL_I_ID         INTEGER     NOT NULL,
    OL_SUPPLY_W_ID  INTEGER     NOT NULL,
    OL_QUANTITY     SMALLINT    NOT NULL,
    OL_DIST_INFO    CHAR(24)    NOT NULL,
    OL_O_ID         INTEGER     NOT NULL,
    OL_D_ID         SMALLINT    NOT NULL,
    OL_W_ID         INTEGER     NOT NULL,
    OL_NUMBER       SMALLINT    NOT NULL
    )
    IN ts_orderline_154
    INDEX IN ts_orderline_154
    ORGANIZE BY KEY SEQUENCE (
    OL_W_ID STARTING FROM 244801 ENDING AT 246400,
    OL_D_ID STARTING FROM 1 ENDING AT 10,
    OL_O_ID STARTING FROM 1 ENDING AT 3675,
    OL_NUMBER STARTING FROM 1 ENDING AT 15
    )
    ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
```

```
DROP TABLE ORDER_LINE155;
CREATE TABLE ORDER_LINE155
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_155
        INDEX IN ts_orderline_155
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 246401 ENDING AT 248000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE156;
CREATE TABLE ORDER_LINE156
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_156
        INDEX IN ts_orderline_156
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 248001 ENDING AT 249600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE157;
CREATE TABLE ORDER_LINE157
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_157
        INDEX IN ts_orderline_157
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 249601 ENDING AT 251200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE158;
CREATE TABLE ORDER_LINE158
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_158
        INDEX IN ts_orderline_158
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 251201 ENDING AT 252800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE159;
CREATE TABLE ORDER_LINE159
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_159
        INDEX IN ts_orderline_159
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 252801 ENDING AT 254400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE160;
CREATE TABLE ORDER_LINE160
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_160
        INDEX IN ts_orderline_160
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 254401 ENDING AT 256000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE161;
CREATE TABLE ORDER_LINE161
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_161
        INDEX IN ts_orderline_161
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 256001 ENDING AT 257600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE162;
CREATE TABLE ORDER_LINE162
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_162
        INDEX IN ts_orderline_162
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 257601 ENDING AT 259200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE163;
CREATE TABLE ORDER_LINE163
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_163
        INDEX IN ts_orderline_163
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 259201 ENDING AT 260800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
```

```
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE164;
CREATE TABLE ORDER_LINE164
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_164
INDEX IN ts_orderline_164
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 260801 ENDING AT 262400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE165;
CREATE TABLE ORDER_LINE165
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_165
INDEX IN ts_orderline_165
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 262401 ENDING AT 264000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE166;
CREATE TABLE ORDER_LINE166
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_166
INDEX IN ts_orderline_166
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 264001 ENDING AT 265600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE167;
CREATE TABLE ORDER_LINE167
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_167
INDEX IN ts_orderline_167
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 265601 ENDING AT 267200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE168;
CREATE TABLE ORDER_LINE168
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_168
INDEX IN ts_orderline_168
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 267201 ENDING AT 268800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE169;
CREATE TABLE ORDER_LINE169
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_169
INDEX IN ts_orderline_169
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 268801 ENDING AT 270400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE170;
CREATE TABLE ORDER_LINE170
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_170
INDEX IN ts_orderline_170
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 270401 ENDING AT 272000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE171;
CREATE TABLE ORDER_LINE171
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
)
IN ts_orderline_171
INDEX IN ts_orderline_171
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 272001 ENDING AT 273600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE172;
CREATE TABLE ORDER_LINE172
(
 OL_DELIVERY_D  TIMESTAMP  NOT NULL,
 OL_AMOUNT  DECIMAL(6,2) NOT NULL,
 OL_I_ID  INTEGER  NOT NULL,
 OL_SUPPLY_W_ID  INTEGER  NOT NULL,
 OL_QUANTITY  SMALLINT  NOT NULL,
 OL_DIST_INFO  CHAR(24)  NOT NULL,
 OL_O_ID  INTEGER  NOT NULL,
 OL_D_ID  SMALLINT  NOT NULL,
 OL_W_ID  INTEGER  NOT NULL,
 OL_NUMBER  SMALLINT  NOT NULL
```

```
        )
        IN ts_orderline_172
        INDEX IN ts_orderline_172
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 273601 ENDING AT 275200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE173;
CREATE TABLE ORDER_LINE173
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_173
        INDEX IN ts_orderline_173
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 275201 ENDING AT 276800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE174;
CREATE TABLE ORDER_LINE174
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_174
        INDEX IN ts_orderline_174
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 276801 ENDING AT 278400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE175;
CREATE TABLE ORDER_LINE175
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_175
        INDEX IN ts_orderline_175
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 278401 ENDING AT 280000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE176;
CREATE TABLE ORDER_LINE176
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_176
        INDEX IN ts_orderline_176
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 280001 ENDING AT 281600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE177;
CREATE TABLE ORDER_LINE177
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_177
        INDEX IN ts_orderline_177
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 281601 ENDING AT 283200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE178;
CREATE TABLE ORDER_LINE178
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_178
        INDEX IN ts_orderline_178
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 283201 ENDING AT 284800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE179;
CREATE TABLE ORDER_LINE179
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_179
        INDEX IN ts_orderline_179
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 284801 ENDING AT 286400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE180;
CREATE TABLE ORDER_LINE180
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_180
        INDEX IN ts_orderline_180
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 286401 ENDING AT 288000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE181;
CREATE TABLE ORDER_LINE181
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
```

```
 OL_QUANTITY     SMALLINT     NOT NULL,
 OL_DIST_INFO    CHAR(24)     NOT NULL,
 OL_O_ID         INTEGER      NOT NULL,
 OL_D_ID         SMALLINT     NOT NULL,
 OL_W_ID         INTEGER      NOT NULL,
 OL_NUMBER       SMALLINT     NOT NULL
)
IN ts_orderline_181
INDEX IN ts_orderline_181
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 288001 ENDING AT 289600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE182;
CREATE TABLE ORDER_LINE182
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_182
INDEX IN ts_orderline_182
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 289601 ENDING AT 291200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE183;
CREATE TABLE ORDER_LINE183
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_183
INDEX IN ts_orderline_183
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 291201 ENDING AT 292800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE184;
CREATE TABLE ORDER_LINE184
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_184
INDEX IN ts_orderline_184
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 292801 ENDING AT 294400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE185;
CREATE TABLE ORDER_LINE185
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_185
INDEX IN ts_orderline_185
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 294401 ENDING AT 296000,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE186;
CREATE TABLE ORDER_LINE186
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_186
INDEX IN ts_orderline_186
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 296001 ENDING AT 297600,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE187;
CREATE TABLE ORDER_LINE187
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_187
INDEX IN ts_orderline_187
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 297601 ENDING AT 299200,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE188;
CREATE TABLE ORDER_LINE188
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_188
INDEX IN ts_orderline_188
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 299201 ENDING AT 300800,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE189;
CREATE TABLE ORDER_LINE189
(
 OL_DELIVERY_D    TIMESTAMP    NOT NULL,
 OL_AMOUNT        DECIMAL(6,2) NOT NULL,
 OL_I_ID          INTEGER      NOT NULL,
 OL_SUPPLY_W_ID   INTEGER      NOT NULL,
 OL_QUANTITY      SMALLINT     NOT NULL,
 OL_DIST_INFO     CHAR(24)     NOT NULL,
 OL_O_ID          INTEGER      NOT NULL,
 OL_D_ID          SMALLINT     NOT NULL,
 OL_W_ID          INTEGER      NOT NULL,
 OL_NUMBER        SMALLINT     NOT NULL
)
IN ts_orderline_189
INDEX IN ts_orderline_189
ORGANIZE BY KEY SEQUENCE (
 OL_W_ID STARTING FROM 300801 ENDING AT 302400,
 OL_D_ID STARTING FROM 1 ENDING AT 10,
 OL_O_ID STARTING FROM 1 ENDING AT 3675,
 OL_NUMBER STARTING FROM 1 ENDING AT 15
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE190;
```

```
CREATE TABLE ORDER_LINE190
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_190
        INDEX IN ts_orderline_190
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 302401 ENDING AT 304000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE191;
CREATE TABLE ORDER_LINE191
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_191
        INDEX IN ts_orderline_191
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 304001 ENDING AT 305600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE192;
CREATE TABLE ORDER_LINE192
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_192
        INDEX IN ts_orderline_192
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 305601 ENDING AT 307200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE193;
CREATE TABLE ORDER_LINE193
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_193
        INDEX IN ts_orderline_193
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 307201 ENDING AT 308800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE194;
CREATE TABLE ORDER_LINE194
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_194
        INDEX IN ts_orderline_194
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 308801 ENDING AT 310400,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE195;
CREATE TABLE ORDER_LINE195
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_195
        INDEX IN ts_orderline_195
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 310401 ENDING AT 312000,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE196;
CREATE TABLE ORDER_LINE196
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_196
        INDEX IN ts_orderline_196
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 312001 ENDING AT 313600,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE197;
CREATE TABLE ORDER_LINE197
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_197
        INDEX IN ts_orderline_197
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 313601 ENDING AT 315200,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
         OL_NUMBER STARTING FROM 1 ENDING AT 15
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE198;
CREATE TABLE ORDER_LINE198
        (
         OL_DELIVERY_D    TIMESTAMP    NOT NULL,
         OL_AMOUNT        DECIMAL(6,2) NOT NULL,
         OL_I_ID          INTEGER      NOT NULL,
         OL_SUPPLY_W_ID   INTEGER      NOT NULL,
         OL_QUANTITY      SMALLINT     NOT NULL,
         OL_DIST_INFO     CHAR(24)     NOT NULL,
         OL_O_ID          INTEGER      NOT NULL,
         OL_D_ID          SMALLINT     NOT NULL,
         OL_W_ID          INTEGER      NOT NULL,
         OL_NUMBER        SMALLINT     NOT NULL
        )
        IN ts_orderline_198
        INDEX IN ts_orderline_198
        ORGANIZE BY KEY SEQUENCE (
         OL_W_ID STARTING FROM 315201 ENDING AT 316800,
         OL_D_ID STARTING FROM 1 ENDING AT 10,
         OL_O_ID STARTING FROM 1 ENDING AT 3675,
```

```
            OL_NUMBER STARTING FROM 1 ENDING AT 15
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE199;
CREATE TABLE ORDER_LINE199
           (
            OL_DELIVERY_D   TIMESTAMP   NOT NULL,
            OL_AMOUNT       DECIMAL(6,2) NOT NULL,
            OL_I_ID         INTEGER     NOT NULL,
            OL_SUPPLY_W_ID  INTEGER     NOT NULL,
            OL_QUANTITY     SMALLINT    NOT NULL,
            OL_DIST_INFO    CHAR(24)    NOT NULL,
            OL_O_ID         INTEGER     NOT NULL,
            OL_D_ID         SMALLINT    NOT NULL,
            OL_W_ID         INTEGER     NOT NULL,
            OL_NUMBER       SMALLINT    NOT NULL
           )
           IN ts_orderline_199
           INDEX IN ts_orderline_199
           ORGANIZE BY KEY SEQUENCE (
            OL_W_ID STARTING FROM 316801 ENDING AT 318400,
            OL_D_ID STARTING FROM 1 ENDING AT 10,
            OL_O_ID STARTING FROM 1 ENDING AT 3675,
            OL_NUMBER STARTING FROM 1 ENDING AT 15
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE ORDER_LINE200;
CREATE TABLE ORDER_LINE200
           (
            OL_DELIVERY_D   TIMESTAMP   NOT NULL,
            OL_AMOUNT       DECIMAL(6,2) NOT NULL,
            OL_I_ID         INTEGER     NOT NULL,
            OL_SUPPLY_W_ID  INTEGER     NOT NULL,
            OL_QUANTITY     SMALLINT    NOT NULL,
            OL_DIST_INFO    CHAR(24)    NOT NULL,
            OL_O_ID         INTEGER     NOT NULL,
            OL_D_ID         SMALLINT    NOT NULL,
            OL_W_ID         INTEGER     NOT NULL,
            OL_NUMBER       SMALLINT    NOT NULL
           )
           IN ts_orderline_200
           INDEX IN ts_orderline_200
           ORGANIZE BY KEY SEQUENCE (
            OL_W_ID STARTING FROM 318401 ENDING AT 320000,
            OL_D_ID STARTING FROM 1 ENDING AT 10,
            OL_O_ID STARTING FROM 1 ENDING AT 3675,
            OL_NUMBER STARTING FROM 1 ENDING AT 15
           )
           ALLOW OVERFLOW;
connect reset;
```

CRTB_STOCK_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE STOCK1;
CREATE TABLE STOCK1
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_001
           INDEX IN ts_stock_001
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 1 ENDING AT 1600
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK2;
CREATE TABLE STOCK2
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_002
           INDEX IN ts_stock_002
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 1601 ENDING AT 3200
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK3;
CREATE TABLE STOCK3
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_003
           INDEX IN ts_stock_003
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 3201 ENDING AT 4800
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK4;
CREATE TABLE STOCK4
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_004
           INDEX IN ts_stock_004
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 4801 ENDING AT 6400
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK5;
CREATE TABLE STOCK5
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_005
           INDEX IN ts_stock_005
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 6401 ENDING AT 8000
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK6;
CREATE TABLE STOCK6
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
```

```
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_006
       INDEX IN ts_stock_006
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 8001 ENDING AT 9600
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK7;
CREATE TABLE STOCK7
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_007
       INDEX IN ts_stock_007
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 9601 ENDING AT 11200
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK8;
CREATE TABLE STOCK8
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_008
       INDEX IN ts_stock_008
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 11201 ENDING AT 12800
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK9;
CREATE TABLE STOCK9
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_009
       INDEX IN ts_stock_009
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 12801 ENDING AT 14400
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK10;
CREATE TABLE STOCK10
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_010
       INDEX IN ts_stock_010
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 14401 ENDING AT 16000
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK11;
CREATE TABLE STOCK11
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_011
       INDEX IN ts_stock_011
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 16001 ENDING AT 17600
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK12;
CREATE TABLE STOCK12
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_012
       INDEX IN ts_stock_012
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 17601 ENDING AT 19200
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK13;
CREATE TABLE STOCK13
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
```

```
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_013
                INDEX IN ts_stock_013
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 19201 ENDING AT 20800
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK14;
CREATE TABLE STOCK14
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_014
                INDEX IN ts_stock_014
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 20801 ENDING AT 22400
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK15;
CREATE TABLE STOCK15
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_015
                INDEX IN ts_stock_015
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 22401 ENDING AT 24000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK16;
CREATE TABLE STOCK16
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_016
                INDEX IN ts_stock_016
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 24001 ENDING AT 25600
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK17;
CREATE TABLE STOCK17
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_017
                INDEX IN ts_stock_017
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 25601 ENDING AT 27200
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK18;
CREATE TABLE STOCK18
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_018
                INDEX IN ts_stock_018
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 27201 ENDING AT 28800
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK19;
CREATE TABLE STOCK19
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_019
                INDEX IN ts_stock_019
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 28801 ENDING AT 30400
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK20;
CREATE TABLE STOCK20
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_020
                INDEX IN ts_stock_020
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
```

```
            S_W_ID STARTING FROM 30401 ENDING AT 32000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK21;
CREATE TABLE STOCK21
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_021
            INDEX IN ts_stock_021
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 32001 ENDING AT 33600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK22;
CREATE TABLE STOCK22
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_022
            INDEX IN ts_stock_022
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 33601 ENDING AT 35200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK23;
CREATE TABLE STOCK23
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_023
            INDEX IN ts_stock_023
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 35201 ENDING AT 36800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK24;
CREATE TABLE STOCK24
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_024
            INDEX IN ts_stock_024
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 36801 ENDING AT 38400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK25;
CREATE TABLE STOCK25
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_025
            INDEX IN ts_stock_025
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 38401 ENDING AT 40000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK26;
CREATE TABLE STOCK26
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_026
            INDEX IN ts_stock_026
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 40001 ENDING AT 41600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK27;
CREATE TABLE STOCK27
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_027
            INDEX IN ts_stock_027
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 41601 ENDING AT 43200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK28;
CREATE TABLE STOCK28
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
```

```
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_028
        INDEX IN ts_stock_028
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 43201 ENDING AT 44800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK29;
CREATE TABLE STOCK29
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_029
        INDEX IN ts_stock_029
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 44801 ENDING AT 46400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK30;
CREATE TABLE STOCK30
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_030
        INDEX IN ts_stock_030
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 46401 ENDING AT 48000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK31;
CREATE TABLE STOCK31
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_031
        INDEX IN ts_stock_031
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 48001 ENDING AT 49600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK32;
CREATE TABLE STOCK32
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_032
        INDEX IN ts_stock_032
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 49601 ENDING AT 51200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK33;
CREATE TABLE STOCK33
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_033
        INDEX IN ts_stock_033
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 51201 ENDING AT 52800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK34;
CREATE TABLE STOCK34
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_034
        INDEX IN ts_stock_034
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 52801 ENDING AT 54400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK35;
CREATE TABLE STOCK35
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
```

```
        S_DIST_06      CHAR(24)    NOT NULL,
        S_DIST_07      CHAR(24)    NOT NULL,
        S_DIST_08      CHAR(24)    NOT NULL,
        S_DIST_09      CHAR(24)    NOT NULL,
        S_DIST_10      CHAR(24)    NOT NULL,
        S_I_ID         INTEGER     NOT NULL,
        S_W_ID         INTEGER     NOT NULL
        )
        IN ts_stock_035
        INDEX IN ts_stock_035
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 54401 ENDING AT 56000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK36;
CREATE TABLE STOCK36
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_036
        INDEX IN ts_stock_036
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 56001 ENDING AT 57600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK37;
CREATE TABLE STOCK37
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_037
        INDEX IN ts_stock_037
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 57601 ENDING AT 59200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK38;
CREATE TABLE STOCK38
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_038
        INDEX IN ts_stock_038
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 59201 ENDING AT 60800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK39;
CREATE TABLE STOCK39
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_039
        INDEX IN ts_stock_039
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 60801 ENDING AT 62400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK40;
CREATE TABLE STOCK40
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_040
        INDEX IN ts_stock_040
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 62401 ENDING AT 64000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK41;
CREATE TABLE STOCK41
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_041
        INDEX IN ts_stock_041
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 64001 ENDING AT 65600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK42;
CREATE TABLE STOCK42
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_042
```

```
        INDEX IN ts_stock_042
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 65601 ENDING AT 67200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK43;
CREATE TABLE STOCK43
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_043
        INDEX IN ts_stock_043
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 67201 ENDING AT 68800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK44;
CREATE TABLE STOCK44
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_044
        INDEX IN ts_stock_044
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 68801 ENDING AT 70400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK45;
CREATE TABLE STOCK45
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_045
        INDEX IN ts_stock_045
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 70401 ENDING AT 72000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK46;
CREATE TABLE STOCK46
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_046
        INDEX IN ts_stock_046
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 72001 ENDING AT 73600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK47;
CREATE TABLE STOCK47
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_047
        INDEX IN ts_stock_047
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 73601 ENDING AT 75200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK48;
CREATE TABLE STOCK48
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_048
        INDEX IN ts_stock_048
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 75201 ENDING AT 76800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK49;
CREATE TABLE STOCK49
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_049
        INDEX IN ts_stock_049
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 76801 ENDING AT 78400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK50;
```

```
CREATE TABLE STOCK50
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_050
        INDEX IN ts_stock_050
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 78401 ENDING AT 80000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK51;
CREATE TABLE STOCK51
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_051
        INDEX IN ts_stock_051
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 80001 ENDING AT 81600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK52;
CREATE TABLE STOCK52
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_052
        INDEX IN ts_stock_052
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 81601 ENDING AT 83200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK53;
CREATE TABLE STOCK53
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_053
        INDEX IN ts_stock_053
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 83201 ENDING AT 84800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK54;
CREATE TABLE STOCK54
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_054
        INDEX IN ts_stock_054
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 84801 ENDING AT 86400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK55;
CREATE TABLE STOCK55
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_055
        INDEX IN ts_stock_055
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 86401 ENDING AT 88000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK56;
CREATE TABLE STOCK56
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_056
        INDEX IN ts_stock_056
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 88001 ENDING AT 89600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK57;
CREATE TABLE STOCK57
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
```

```
        S_DIST_03      CHAR(24)    NOT NULL,
        S_DIST_04      CHAR(24)    NOT NULL,
        S_DIST_05      CHAR(24)    NOT NULL,
        S_DIST_06      CHAR(24)    NOT NULL,
        S_DIST_07      CHAR(24)    NOT NULL,
        S_DIST_08      CHAR(24)    NOT NULL,
        S_DIST_09      CHAR(24)    NOT NULL,
        S_DIST_10      CHAR(24)    NOT NULL,
        S_I_ID         INTEGER     NOT NULL,
        S_W_ID         INTEGER     NOT NULL
        )
        IN ts_stock_057
        INDEX IN ts_stock_057
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 89601 ENDING AT 91200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK58;
CREATE TABLE STOCK58
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_058
        INDEX IN ts_stock_058
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 91201 ENDING AT 92800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK59;
CREATE TABLE STOCK59
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_059
        INDEX IN ts_stock_059
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 92801 ENDING AT 94400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK60;
CREATE TABLE STOCK60
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_060
        INDEX IN ts_stock_060
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 94401 ENDING AT 96000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK61;
CREATE TABLE STOCK61
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_061
        INDEX IN ts_stock_061
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 96001 ENDING AT 97600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK62;
CREATE TABLE STOCK62
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_062
        INDEX IN ts_stock_062
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 97601 ENDING AT 99200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK63;
CREATE TABLE STOCK63
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_063
        INDEX IN ts_stock_063
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 99201 ENDING AT 100800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK64;
CREATE TABLE STOCK64
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
```

```
 S_W_ID        INTEGER    NOT NULL
)
IN ts_stock_064
INDEX IN ts_stock_064
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 100801 ENDING AT 102400
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK65;
CREATE TABLE STOCK65
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_065
INDEX IN ts_stock_065
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 102401 ENDING AT 104000
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK66;
CREATE TABLE STOCK66
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_066
INDEX IN ts_stock_066
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 104001 ENDING AT 105600
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK67;
CREATE TABLE STOCK67
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_067
INDEX IN ts_stock_067
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 105601 ENDING AT 107200
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK68;
CREATE TABLE STOCK68
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_068
INDEX IN ts_stock_068
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 107201 ENDING AT 108800
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK69;
CREATE TABLE STOCK69
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_069
INDEX IN ts_stock_069
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 108801 ENDING AT 110400
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK70;
CREATE TABLE STOCK70
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_070
INDEX IN ts_stock_070
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 110401 ENDING AT 112000
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK71;
CREATE TABLE STOCK71
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_071
INDEX IN ts_stock_071
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 112001 ENDING AT 113600
)
ALLOW OVERFLOW;
```

```
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK72;
CREATE TABLE STOCK72
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_072
        INDEX IN ts_stock_072
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 113601 ENDING AT 115200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK73;
CREATE TABLE STOCK73
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_073
        INDEX IN ts_stock_073
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 115201 ENDING AT 116800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK74;
CREATE TABLE STOCK74
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_074
        INDEX IN ts_stock_074
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 116801 ENDING AT 118400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK75;
CREATE TABLE STOCK75
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_075
        INDEX IN ts_stock_075
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 118401 ENDING AT 120000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK76;
CREATE TABLE STOCK76
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_076
        INDEX IN ts_stock_076
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 120001 ENDING AT 121600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK77;
CREATE TABLE STOCK77
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_077
        INDEX IN ts_stock_077
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 121601 ENDING AT 123200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK78;
CREATE TABLE STOCK78
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_078
        INDEX IN ts_stock_078
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 123201 ENDING AT 124800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK79;
CREATE TABLE STOCK79
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
```

```
        S_DATA         VARCHAR(50) NOT NULL,
        S_DIST_01      CHAR(24)    NOT NULL,
        S_DIST_02      CHAR(24)    NOT NULL,
        S_DIST_03      CHAR(24)    NOT NULL,
        S_DIST_04      CHAR(24)    NOT NULL,
        S_DIST_05      CHAR(24)    NOT NULL,
        S_DIST_06      CHAR(24)    NOT NULL,
        S_DIST_07      CHAR(24)    NOT NULL,
        S_DIST_08      CHAR(24)    NOT NULL,
        S_DIST_09      CHAR(24)    NOT NULL,
        S_DIST_10      CHAR(24)    NOT NULL,
        S_I_ID         INTEGER     NOT NULL,
        S_W_ID         INTEGER     NOT NULL
       )
       IN ts_stock_079
       INDEX IN ts_stock_079
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 124801 ENDING AT 126400
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK80;
CREATE TABLE STOCK80
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_080
       INDEX IN ts_stock_080
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 126401 ENDING AT 128000
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK81;
CREATE TABLE STOCK81
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_081
       INDEX IN ts_stock_081
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 128001 ENDING AT 129600
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK82;
CREATE TABLE STOCK82
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_082
       INDEX IN ts_stock_082
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 129601 ENDING AT 131200
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK83;
CREATE TABLE STOCK83
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_083
       INDEX IN ts_stock_083
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 131201 ENDING AT 132800
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK84;
CREATE TABLE STOCK84
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_084
       INDEX IN ts_stock_084
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 132801 ENDING AT 134400
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK85;
CREATE TABLE STOCK85
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_085
       INDEX IN ts_stock_085
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 134401 ENDING AT 136000
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK86;
CREATE TABLE STOCK86
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
```

```
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_086
                INDEX IN ts_stock_086
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 136001 ENDING AT 137600
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK87;
CREATE TABLE STOCK87
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_087
                INDEX IN ts_stock_087
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 137601 ENDING AT 139200
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK88;
CREATE TABLE STOCK88
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_088
                INDEX IN ts_stock_088
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 139201 ENDING AT 140800
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK89;
CREATE TABLE STOCK89
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_089
                INDEX IN ts_stock_089
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 140801 ENDING AT 142400
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK90;
CREATE TABLE STOCK90
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_090
                INDEX IN ts_stock_090
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 142401 ENDING AT 144000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK91;
CREATE TABLE STOCK91
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_091
                INDEX IN ts_stock_091
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 144001 ENDING AT 145600
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK92;
CREATE TABLE STOCK92
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_092
                INDEX IN ts_stock_092
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 145601 ENDING AT 147200
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK93;
CREATE TABLE STOCK93
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_093
                INDEX IN ts_stock_093
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
```

```
            S_W_ID STARTING FROM 147201 ENDING AT 148800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK94;
CREATE TABLE STOCK94
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_094
            INDEX IN ts_stock_094
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 148801 ENDING AT 150400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK95;
CREATE TABLE STOCK95
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_095
            INDEX IN ts_stock_095
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 150401 ENDING AT 152000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK96;
CREATE TABLE STOCK96
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_096
            INDEX IN ts_stock_096
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 152001 ENDING AT 153600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK97;
CREATE TABLE STOCK97
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_097
            INDEX IN ts_stock_097
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 153601 ENDING AT 155200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK98;
CREATE TABLE STOCK98
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_098
            INDEX IN ts_stock_098
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 155201 ENDING AT 156800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK99;
CREATE TABLE STOCK99
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_099
            INDEX IN ts_stock_099
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 156801 ENDING AT 158400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK100;
CREATE TABLE STOCK100
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_100
            INDEX IN ts_stock_100
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 158401 ENDING AT 160000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK101;
CREATE TABLE STOCK101
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
```

```
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_101
        INDEX IN ts_stock_101
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 160001 ENDING AT 161600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK102;
CREATE TABLE STOCK102
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_102
        INDEX IN ts_stock_102
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 161601 ENDING AT 163200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK103;
CREATE TABLE STOCK103
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_103
        INDEX IN ts_stock_103
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 163201 ENDING AT 164800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK104;
CREATE TABLE STOCK104
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_104
        INDEX IN ts_stock_104
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 164801 ENDING AT 166400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK105;
CREATE TABLE STOCK105
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_105
        INDEX IN ts_stock_105
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 166401 ENDING AT 168000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK106;
CREATE TABLE STOCK106
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_106
        INDEX IN ts_stock_106
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 168001 ENDING AT 169600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK107;
CREATE TABLE STOCK107
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_107
        INDEX IN ts_stock_107
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 169601 ENDING AT 171200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK108;
CREATE TABLE STOCK108
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
```

```
            S_DIST_06      CHAR(24)    NOT NULL,
            S_DIST_07      CHAR(24)    NOT NULL,
            S_DIST_08      CHAR(24)    NOT NULL,
            S_DIST_09      CHAR(24)    NOT NULL,
            S_DIST_10      CHAR(24)    NOT NULL,
            S_I_ID         INTEGER     NOT NULL,
            S_W_ID         INTEGER     NOT NULL
            )
            IN ts_stock_108
            INDEX IN ts_stock_108
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 171201 ENDING AT 172800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK109;
CREATE TABLE STOCK109
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_109
            INDEX IN ts_stock_109
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 172801 ENDING AT 174400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK110;
CREATE TABLE STOCK110
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_110
            INDEX IN ts_stock_110
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 174401 ENDING AT 176000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK111;
CREATE TABLE STOCK111
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_111
            INDEX IN ts_stock_111
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 176001 ENDING AT 177600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK112;
CREATE TABLE STOCK112
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_112
            INDEX IN ts_stock_112
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 177601 ENDING AT 179200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK113;
CREATE TABLE STOCK113
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_113
            INDEX IN ts_stock_113
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 179201 ENDING AT 180800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK114;
CREATE TABLE STOCK114
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_114
            INDEX IN ts_stock_114
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 180801 ENDING AT 182400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK115;
CREATE TABLE STOCK115
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_115
```

```
        INDEX IN ts_stock_115
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 182401 ENDING AT 184000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK116;
CREATE TABLE STOCK116
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_116
        INDEX IN ts_stock_116
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 184001 ENDING AT 185600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK117;
CREATE TABLE STOCK117
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_117
        INDEX IN ts_stock_117
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 185601 ENDING AT 187200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK118;
CREATE TABLE STOCK118
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_118
        INDEX IN ts_stock_118
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 187201 ENDING AT 188800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK119;
CREATE TABLE STOCK119
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_119
        INDEX IN ts_stock_119
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 188801 ENDING AT 190400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK120;
CREATE TABLE STOCK120
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_120
        INDEX IN ts_stock_120
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 190401 ENDING AT 192000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK121;
CREATE TABLE STOCK121
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_121
        INDEX IN ts_stock_121
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 192001 ENDING AT 193600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK122;
CREATE TABLE STOCK122
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_122
        INDEX IN ts_stock_122
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 193601 ENDING AT 195200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK123;
```

```
CREATE TABLE STOCK123
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_123
        INDEX IN ts_stock_123
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 195201 ENDING AT 196800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK124;
CREATE TABLE STOCK124
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_124
        INDEX IN ts_stock_124
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 196801 ENDING AT 198400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK125;
CREATE TABLE STOCK125
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_125
        INDEX IN ts_stock_125
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 198401 ENDING AT 200000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK126;
CREATE TABLE STOCK126
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_126
        INDEX IN ts_stock_126
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 200001 ENDING AT 201600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK127;
CREATE TABLE STOCK127
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_127
        INDEX IN ts_stock_127
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 201601 ENDING AT 203200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK128;
CREATE TABLE STOCK128
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_128
        INDEX IN ts_stock_128
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 203201 ENDING AT 204800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK129;
CREATE TABLE STOCK129
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_129
        INDEX IN ts_stock_129
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 204801 ENDING AT 206400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK130;
CREATE TABLE STOCK130
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
```

```
            S_DIST_03      CHAR(24)    NOT NULL,
            S_DIST_04      CHAR(24)    NOT NULL,
            S_DIST_05      CHAR(24)    NOT NULL,
            S_DIST_06      CHAR(24)    NOT NULL,
            S_DIST_07      CHAR(24)    NOT NULL,
            S_DIST_08      CHAR(24)    NOT NULL,
            S_DIST_09      CHAR(24)    NOT NULL,
            S_DIST_10      CHAR(24)    NOT NULL,
            S_I_ID         INTEGER     NOT NULL,
            S_W_ID         INTEGER     NOT NULL
            )
            IN ts_stock_130
            INDEX IN ts_stock_130
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 206401 ENDING AT 208000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK131;
CREATE TABLE STOCK131
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_131
            INDEX IN ts_stock_131
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 208001 ENDING AT 209600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK132;
CREATE TABLE STOCK132
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_132
            INDEX IN ts_stock_132
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 209601 ENDING AT 211200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK133;
CREATE TABLE STOCK133
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_133
            INDEX IN ts_stock_133
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 211201 ENDING AT 212800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK134;
CREATE TABLE STOCK134
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_134
            INDEX IN ts_stock_134
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 212801 ENDING AT 214400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK135;
CREATE TABLE STOCK135
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_135
            INDEX IN ts_stock_135
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 214401 ENDING AT 216000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK136;
CREATE TABLE STOCK136
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_136
            INDEX IN ts_stock_136
            ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 216001 ENDING AT 217600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK137;
CREATE TABLE STOCK137
            (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
```

```
 S_W_ID        INTEGER    NOT NULL
)
IN ts_stock_137
INDEX IN ts_stock_137
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 217601 ENDING AT 219200
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK138;
CREATE TABLE STOCK138
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_138
INDEX IN ts_stock_138
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 219201 ENDING AT 220800
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK139;
CREATE TABLE STOCK139
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_139
INDEX IN ts_stock_139
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 220801 ENDING AT 222400
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK140;
CREATE TABLE STOCK140
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_140
INDEX IN ts_stock_140
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 222401 ENDING AT 224000
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK141;
CREATE TABLE STOCK141
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_141
INDEX IN ts_stock_141
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 224001 ENDING AT 225600
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK142;
CREATE TABLE STOCK142
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_142
INDEX IN ts_stock_142
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 225601 ENDING AT 227200
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK143;
CREATE TABLE STOCK143
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_143
INDEX IN ts_stock_143
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 227201 ENDING AT 228800
)
ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK144;
CREATE TABLE STOCK144
(
 S_REMOTE_CNT   INTEGER    NOT NULL,
 S_QUANTITY     INTEGER    NOT NULL,
 S_ORDER_CNT    INTEGER    NOT NULL,
 S_YTD          INTEGER    NOT NULL,
 S_DATA         VARCHAR(50) NOT NULL,
 S_DIST_01      CHAR(24)   NOT NULL,
 S_DIST_02      CHAR(24)   NOT NULL,
 S_DIST_03      CHAR(24)   NOT NULL,
 S_DIST_04      CHAR(24)   NOT NULL,
 S_DIST_05      CHAR(24)   NOT NULL,
 S_DIST_06      CHAR(24)   NOT NULL,
 S_DIST_07      CHAR(24)   NOT NULL,
 S_DIST_08      CHAR(24)   NOT NULL,
 S_DIST_09      CHAR(24)   NOT NULL,
 S_DIST_10      CHAR(24)   NOT NULL,
 S_I_ID         INTEGER    NOT NULL,
 S_W_ID         INTEGER    NOT NULL
)
IN ts_stock_144
INDEX IN ts_stock_144
ORGANIZE BY KEY SEQUENCE (
 S_I_ID STARTING FROM 1 ENDING AT 100000,
 S_W_ID STARTING FROM 228801 ENDING AT 230400
)
ALLOW OVERFLOW;
```

```
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK145;
CREATE TABLE STOCK145
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_145
        INDEX IN ts_stock_145
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 230401 ENDING AT 232000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK146;
CREATE TABLE STOCK146
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_146
        INDEX IN ts_stock_146
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 232001 ENDING AT 233600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK147;
CREATE TABLE STOCK147
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_147
        INDEX IN ts_stock_147
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 233601 ENDING AT 235200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK148;
CREATE TABLE STOCK148
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_148
        INDEX IN ts_stock_148
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 235201 ENDING AT 236800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK149;
CREATE TABLE STOCK149
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_149
        INDEX IN ts_stock_149
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 236801 ENDING AT 238400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK150;
CREATE TABLE STOCK150
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_150
        INDEX IN ts_stock_150
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 238401 ENDING AT 240000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK151;
CREATE TABLE STOCK151
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_151
        INDEX IN ts_stock_151
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 240001 ENDING AT 241600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK152;
CREATE TABLE STOCK152
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
```

```
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_152
       INDEX IN ts_stock_152
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 241601 ENDING AT 243200
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK153;
CREATE TABLE STOCK153
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_153
       INDEX IN ts_stock_153
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 243201 ENDING AT 244800
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK154;
CREATE TABLE STOCK154
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_154
       INDEX IN ts_stock_154
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 244801 ENDING AT 246400
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK155;
CREATE TABLE STOCK155
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_155
       INDEX IN ts_stock_155
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 246401 ENDING AT 248000
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK156;
CREATE TABLE STOCK156
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_156
       INDEX IN ts_stock_156
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 248001 ENDING AT 249600
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK157;
CREATE TABLE STOCK157
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_157
       INDEX IN ts_stock_157
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 249601 ENDING AT 251200
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK158;
CREATE TABLE STOCK158
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
       )
       IN ts_stock_158
       INDEX IN ts_stock_158
       ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 251201 ENDING AT 252800
       )
       ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK159;
CREATE TABLE STOCK159
       (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
```

```
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_159
                INDEX IN ts_stock_159
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 252801 ENDING AT 254400
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK160;
CREATE TABLE STOCK160
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_160
                INDEX IN ts_stock_160
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 254401 ENDING AT 256000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK161;
CREATE TABLE STOCK161
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_161
                INDEX IN ts_stock_161
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 256001 ENDING AT 257600
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK162;
CREATE TABLE STOCK162
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_162
                INDEX IN ts_stock_162
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 257601 ENDING AT 259200
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK163;
CREATE TABLE STOCK163
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_163
                INDEX IN ts_stock_163
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 259201 ENDING AT 260800
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK164;
CREATE TABLE STOCK164
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_164
                INDEX IN ts_stock_164
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 260801 ENDING AT 262400
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK165;
CREATE TABLE STOCK165
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_165
                INDEX IN ts_stock_165
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
                S_W_ID STARTING FROM 262401 ENDING AT 264000
                )
                ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK166;
CREATE TABLE STOCK166
                (
                S_REMOTE_CNT    INTEGER     NOT NULL,
                S_QUANTITY      INTEGER     NOT NULL,
                S_ORDER_CNT     INTEGER     NOT NULL,
                S_YTD           INTEGER     NOT NULL,
                S_DATA          VARCHAR(50) NOT NULL,
                S_DIST_01       CHAR(24)    NOT NULL,
                S_DIST_02       CHAR(24)    NOT NULL,
                S_DIST_03       CHAR(24)    NOT NULL,
                S_DIST_04       CHAR(24)    NOT NULL,
                S_DIST_05       CHAR(24)    NOT NULL,
                S_DIST_06       CHAR(24)    NOT NULL,
                S_DIST_07       CHAR(24)    NOT NULL,
                S_DIST_08       CHAR(24)    NOT NULL,
                S_DIST_09       CHAR(24)    NOT NULL,
                S_DIST_10       CHAR(24)    NOT NULL,
                S_I_ID          INTEGER     NOT NULL,
                S_W_ID          INTEGER     NOT NULL
                )
                IN ts_stock_166
                INDEX IN ts_stock_166
                ORGANIZE BY KEY SEQUENCE (
                S_I_ID STARTING FROM 1 ENDING AT 100000,
```

```
            S_W_ID STARTING FROM 264001 ENDING AT 265600
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK167;
CREATE TABLE STOCK167
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_167
           INDEX IN ts_stock_167
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 265601 ENDING AT 267200
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK168;
CREATE TABLE STOCK168
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_168
           INDEX IN ts_stock_168
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 267201 ENDING AT 268800
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK169;
CREATE TABLE STOCK169
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_169
           INDEX IN ts_stock_169
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 268801 ENDING AT 270400
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK170;
CREATE TABLE STOCK170
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_170
           INDEX IN ts_stock_170
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 270401 ENDING AT 272000
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK171;
CREATE TABLE STOCK171
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_171
           INDEX IN ts_stock_171
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 272001 ENDING AT 273600
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK172;
CREATE TABLE STOCK172
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_172
           INDEX IN ts_stock_172
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 273601 ENDING AT 275200
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK173;
CREATE TABLE STOCK173
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
            S_QUANTITY      INTEGER     NOT NULL,
            S_ORDER_CNT     INTEGER     NOT NULL,
            S_YTD           INTEGER     NOT NULL,
            S_DATA          VARCHAR(50) NOT NULL,
            S_DIST_01       CHAR(24)    NOT NULL,
            S_DIST_02       CHAR(24)    NOT NULL,
            S_DIST_03       CHAR(24)    NOT NULL,
            S_DIST_04       CHAR(24)    NOT NULL,
            S_DIST_05       CHAR(24)    NOT NULL,
            S_DIST_06       CHAR(24)    NOT NULL,
            S_DIST_07       CHAR(24)    NOT NULL,
            S_DIST_08       CHAR(24)    NOT NULL,
            S_DIST_09       CHAR(24)    NOT NULL,
            S_DIST_10       CHAR(24)    NOT NULL,
            S_I_ID          INTEGER     NOT NULL,
            S_W_ID          INTEGER     NOT NULL
           )
           IN ts_stock_173
           INDEX IN ts_stock_173
           ORGANIZE BY KEY SEQUENCE (
            S_I_ID STARTING FROM 1 ENDING AT 100000,
            S_W_ID STARTING FROM 275201 ENDING AT 276800
           )
           ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK174;
CREATE TABLE STOCK174
           (
            S_REMOTE_CNT    INTEGER     NOT NULL,
```

```
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_174
		INDEX IN ts_stock_174
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 276801 ENDING AT 278400
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK175;
CREATE TABLE STOCK175
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_175
		INDEX IN ts_stock_175
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 278401 ENDING AT 280000
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK176;
CREATE TABLE STOCK176
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_176
		INDEX IN ts_stock_176
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 280001 ENDING AT 281600
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK177;
CREATE TABLE STOCK177
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_177
		INDEX IN ts_stock_177
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 281601 ENDING AT 283200
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK178;
CREATE TABLE STOCK178
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_178
		INDEX IN ts_stock_178
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 283201 ENDING AT 284800
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK179;
CREATE TABLE STOCK179
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_179
		INDEX IN ts_stock_179
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 284801 ENDING AT 286400
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK180;
CREATE TABLE STOCK180
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
		S_DIST_06	CHAR(24)	NOT NULL,
		S_DIST_07	CHAR(24)	NOT NULL,
		S_DIST_08	CHAR(24)	NOT NULL,
		S_DIST_09	CHAR(24)	NOT NULL,
		S_DIST_10	CHAR(24)	NOT NULL,
		S_I_ID		INTEGER	NOT NULL,
		S_W_ID		INTEGER	NOT NULL
		)
		IN ts_stock_180
		INDEX IN ts_stock_180
		ORGANIZE BY KEY SEQUENCE (
		S_I_ID STARTING FROM 1 ENDING AT 100000,
		S_W_ID STARTING FROM 286401 ENDING AT 288000
		)
		ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK181;
CREATE TABLE STOCK181
		(
		S_REMOTE_CNT	INTEGER	NOT NULL,
		S_QUANTITY	INTEGER	NOT NULL,
		S_ORDER_CNT	INTEGER	NOT NULL,
		S_YTD		INTEGER	NOT NULL,
		S_DATA		VARCHAR(50) NOT NULL,
		S_DIST_01	CHAR(24)	NOT NULL,
		S_DIST_02	CHAR(24)	NOT NULL,
		S_DIST_03	CHAR(24)	NOT NULL,
		S_DIST_04	CHAR(24)	NOT NULL,
		S_DIST_05	CHAR(24)	NOT NULL,
```

```
        S_DIST_06      CHAR(24)    NOT NULL,
        S_DIST_07      CHAR(24)    NOT NULL,
        S_DIST_08      CHAR(24)    NOT NULL,
        S_DIST_09      CHAR(24)    NOT NULL,
        S_DIST_10      CHAR(24)    NOT NULL,
        S_I_ID         INTEGER     NOT NULL,
        S_W_ID         INTEGER     NOT NULL
        )
        IN ts_stock_181
        INDEX IN ts_stock_181
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 288001 ENDING AT 289600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK182;
CREATE TABLE STOCK182
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_182
        INDEX IN ts_stock_182
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 289601 ENDING AT 291200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK183;
CREATE TABLE STOCK183
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_183
        INDEX IN ts_stock_183
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 291201 ENDING AT 292800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK184;
CREATE TABLE STOCK184
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_184
        INDEX IN ts_stock_184
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 292801 ENDING AT 294400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK185;
CREATE TABLE STOCK185
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_185
        INDEX IN ts_stock_185
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 294401 ENDING AT 296000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK186;
CREATE TABLE STOCK186
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_186
        INDEX IN ts_stock_186
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 296001 ENDING AT 297600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK187;
CREATE TABLE STOCK187
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_187
        INDEX IN ts_stock_187
        ORGANIZE BY KEY SEQUENCE (
        S_I_ID STARTING FROM 1 ENDING AT 100000,
        S_W_ID STARTING FROM 297601 ENDING AT 299200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK188;
CREATE TABLE STOCK188
        (
        S_REMOTE_CNT    INTEGER     NOT NULL,
        S_QUANTITY      INTEGER     NOT NULL,
        S_ORDER_CNT     INTEGER     NOT NULL,
        S_YTD           INTEGER     NOT NULL,
        S_DATA          VARCHAR(50) NOT NULL,
        S_DIST_01       CHAR(24)    NOT NULL,
        S_DIST_02       CHAR(24)    NOT NULL,
        S_DIST_03       CHAR(24)    NOT NULL,
        S_DIST_04       CHAR(24)    NOT NULL,
        S_DIST_05       CHAR(24)    NOT NULL,
        S_DIST_06       CHAR(24)    NOT NULL,
        S_DIST_07       CHAR(24)    NOT NULL,
        S_DIST_08       CHAR(24)    NOT NULL,
        S_DIST_09       CHAR(24)    NOT NULL,
        S_DIST_10       CHAR(24)    NOT NULL,
        S_I_ID          INTEGER     NOT NULL,
        S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_188
```

```
        INDEX IN ts_stock_188
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 299201 ENDING AT 300800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK189;
CREATE TABLE STOCK189
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_189
        INDEX IN ts_stock_189
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 300801 ENDING AT 302400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK190;
CREATE TABLE STOCK190
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_190
        INDEX IN ts_stock_190
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 302401 ENDING AT 304000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK191;
CREATE TABLE STOCK191
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_191
        INDEX IN ts_stock_191
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 304001 ENDING AT 305600
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK192;
CREATE TABLE STOCK192
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_192
        INDEX IN ts_stock_192
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 305601 ENDING AT 307200
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK193;
CREATE TABLE STOCK193
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_193
        INDEX IN ts_stock_193
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 307201 ENDING AT 308800
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK194;
CREATE TABLE STOCK194
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_194
        INDEX IN ts_stock_194
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 308801 ENDING AT 310400
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK195;
CREATE TABLE STOCK195
        (
         S_REMOTE_CNT    INTEGER     NOT NULL,
         S_QUANTITY      INTEGER     NOT NULL,
         S_ORDER_CNT     INTEGER     NOT NULL,
         S_YTD           INTEGER     NOT NULL,
         S_DATA          VARCHAR(50) NOT NULL,
         S_DIST_01       CHAR(24)    NOT NULL,
         S_DIST_02       CHAR(24)    NOT NULL,
         S_DIST_03       CHAR(24)    NOT NULL,
         S_DIST_04       CHAR(24)    NOT NULL,
         S_DIST_05       CHAR(24)    NOT NULL,
         S_DIST_06       CHAR(24)    NOT NULL,
         S_DIST_07       CHAR(24)    NOT NULL,
         S_DIST_08       CHAR(24)    NOT NULL,
         S_DIST_09       CHAR(24)    NOT NULL,
         S_DIST_10       CHAR(24)    NOT NULL,
         S_I_ID          INTEGER     NOT NULL,
         S_W_ID          INTEGER     NOT NULL
        )
        IN ts_stock_195
        INDEX IN ts_stock_195
        ORGANIZE BY KEY SEQUENCE (
         S_I_ID STARTING FROM 1 ENDING AT 100000,
         S_W_ID STARTING FROM 310401 ENDING AT 312000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK196;
```

```
CREATE TABLE STOCK196
            (
             S_REMOTE_CNT    INTEGER     NOT NULL,
             S_QUANTITY      INTEGER     NOT NULL,
             S_ORDER_CNT     INTEGER     NOT NULL,
             S_YTD           INTEGER     NOT NULL,
             S_DATA          VARCHAR(50) NOT NULL,
             S_DIST_01       CHAR(24)    NOT NULL,
             S_DIST_02       CHAR(24)    NOT NULL,
             S_DIST_03       CHAR(24)    NOT NULL,
             S_DIST_04       CHAR(24)    NOT NULL,
             S_DIST_05       CHAR(24)    NOT NULL,
             S_DIST_06       CHAR(24)    NOT NULL,
             S_DIST_07       CHAR(24)    NOT NULL,
             S_DIST_08       CHAR(24)    NOT NULL,
             S_DIST_09       CHAR(24)    NOT NULL,
             S_DIST_10       CHAR(24)    NOT NULL,
             S_I_ID          INTEGER     NOT NULL,
             S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_196
            INDEX IN ts_stock_196
            ORGANIZE BY KEY SEQUENCE (
             S_I_ID STARTING FROM 1 ENDING AT 100000,
             S_W_ID STARTING FROM 312001 ENDING AT 313600
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK197;
CREATE TABLE STOCK197
            (
             S_REMOTE_CNT    INTEGER     NOT NULL,
             S_QUANTITY      INTEGER     NOT NULL,
             S_ORDER_CNT     INTEGER     NOT NULL,
             S_YTD           INTEGER     NOT NULL,
             S_DATA          VARCHAR(50) NOT NULL,
             S_DIST_01       CHAR(24)    NOT NULL,
             S_DIST_02       CHAR(24)    NOT NULL,
             S_DIST_03       CHAR(24)    NOT NULL,
             S_DIST_04       CHAR(24)    NOT NULL,
             S_DIST_05       CHAR(24)    NOT NULL,
             S_DIST_06       CHAR(24)    NOT NULL,
             S_DIST_07       CHAR(24)    NOT NULL,
             S_DIST_08       CHAR(24)    NOT NULL,
             S_DIST_09       CHAR(24)    NOT NULL,
             S_DIST_10       CHAR(24)    NOT NULL,
             S_I_ID          INTEGER     NOT NULL,
             S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_197
            INDEX IN ts_stock_197
            ORGANIZE BY KEY SEQUENCE (
             S_I_ID STARTING FROM 1 ENDING AT 100000,
             S_W_ID STARTING FROM 313601 ENDING AT 315200
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK198;
CREATE TABLE STOCK198
            (
             S_REMOTE_CNT    INTEGER     NOT NULL,
             S_QUANTITY      INTEGER     NOT NULL,
             S_ORDER_CNT     INTEGER     NOT NULL,
             S_YTD           INTEGER     NOT NULL,
             S_DATA          VARCHAR(50) NOT NULL,
             S_DIST_01       CHAR(24)    NOT NULL,
             S_DIST_02       CHAR(24)    NOT NULL,
             S_DIST_03       CHAR(24)    NOT NULL,
             S_DIST_04       CHAR(24)    NOT NULL,
             S_DIST_05       CHAR(24)    NOT NULL,
             S_DIST_06       CHAR(24)    NOT NULL,
             S_DIST_07       CHAR(24)    NOT NULL,
             S_DIST_08       CHAR(24)    NOT NULL,
             S_DIST_09       CHAR(24)    NOT NULL,
             S_DIST_10       CHAR(24)    NOT NULL,
             S_I_ID          INTEGER     NOT NULL,
             S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_198
            INDEX IN ts_stock_198
            ORGANIZE BY KEY SEQUENCE (
             S_I_ID STARTING FROM 1 ENDING AT 100000,
             S_W_ID STARTING FROM 315201 ENDING AT 316800
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK199;
CREATE TABLE STOCK199
            (
             S_REMOTE_CNT    INTEGER     NOT NULL,
             S_QUANTITY      INTEGER     NOT NULL,
             S_ORDER_CNT     INTEGER     NOT NULL,
             S_YTD           INTEGER     NOT NULL,
             S_DATA          VARCHAR(50) NOT NULL,
             S_DIST_01       CHAR(24)    NOT NULL,
             S_DIST_02       CHAR(24)    NOT NULL,
             S_DIST_03       CHAR(24)    NOT NULL,
             S_DIST_04       CHAR(24)    NOT NULL,
             S_DIST_05       CHAR(24)    NOT NULL,
             S_DIST_06       CHAR(24)    NOT NULL,
             S_DIST_07       CHAR(24)    NOT NULL,
             S_DIST_08       CHAR(24)    NOT NULL,
             S_DIST_09       CHAR(24)    NOT NULL,
             S_DIST_10       CHAR(24)    NOT NULL,
             S_I_ID          INTEGER     NOT NULL,
             S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_199
            INDEX IN ts_stock_199
            ORGANIZE BY KEY SEQUENCE (
             S_I_ID STARTING FROM 1 ENDING AT 100000,
             S_W_ID STARTING FROM 316801 ENDING AT 318400
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE STOCK200;
CREATE TABLE STOCK200
            (
             S_REMOTE_CNT    INTEGER     NOT NULL,
             S_QUANTITY      INTEGER     NOT NULL,
             S_ORDER_CNT     INTEGER     NOT NULL,
             S_YTD           INTEGER     NOT NULL,
             S_DATA          VARCHAR(50) NOT NULL,
             S_DIST_01       CHAR(24)    NOT NULL,
             S_DIST_02       CHAR(24)    NOT NULL,
             S_DIST_03       CHAR(24)    NOT NULL,
             S_DIST_04       CHAR(24)    NOT NULL,
             S_DIST_05       CHAR(24)    NOT NULL,
             S_DIST_06       CHAR(24)    NOT NULL,
             S_DIST_07       CHAR(24)    NOT NULL,
             S_DIST_08       CHAR(24)    NOT NULL,
             S_DIST_09       CHAR(24)    NOT NULL,
             S_DIST_10       CHAR(24)    NOT NULL,
             S_I_ID          INTEGER     NOT NULL,
             S_W_ID          INTEGER     NOT NULL
            )
            IN ts_stock_200
            INDEX IN ts_stock_200
            ORGANIZE BY KEY SEQUENCE (
             S_I_ID STARTING FROM 1 ENDING AT 100000,
             S_W_ID STARTING FROM 318401 ENDING AT 320000
            )
            ALLOW OVERFLOW;
connect reset;
```

CRTB_WAREHOUSE_ALL.ddl

```
connect to TPCC in share mode;
DROP TABLE WAREHOUSE1;
CREATE TABLE WAREHOUSE1
            (
             W_NAME      CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY      CHAR(20)       NOT NULL,
             W_STATE     CHAR(2)        NOT NULL,
             W_ZIP       CHAR(9)        NOT NULL,
             W_TAX       REAL           NOT NULL,
             W_YTD       DECIMAL(12,2)  NOT NULL,
             W_ID        INTEGER        NOT NULL
            )
            IN ts_ware_001
            INDEX IN ts_ware_001
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 1 ENDING AT 8000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE2;
CREATE TABLE WAREHOUSE2
            (
             W_NAME      CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY      CHAR(20)       NOT NULL,
             W_STATE     CHAR(2)        NOT NULL,
             W_ZIP       CHAR(9)        NOT NULL,
             W_TAX       REAL           NOT NULL,
             W_YTD       DECIMAL(12,2)  NOT NULL,
             W_ID        INTEGER        NOT NULL
            )
            IN ts_ware_002
            INDEX IN ts_ware_002
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 8001 ENDING AT 16000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE3;
CREATE TABLE WAREHOUSE3
            (
             W_NAME      CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY      CHAR(20)       NOT NULL,
             W_STATE     CHAR(2)        NOT NULL,
             W_ZIP       CHAR(9)        NOT NULL,
             W_TAX       REAL           NOT NULL,
             W_YTD       DECIMAL(12,2)  NOT NULL,
             W_ID        INTEGER        NOT NULL
            )
            IN ts_ware_003
            INDEX IN ts_ware_003
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 16001 ENDING AT 24000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
```

```
DROP TABLE WAREHOUSE4;
CREATE TABLE WAREHOUSE4
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_004
        INDEX IN ts_ware_004
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 24001 ENDING AT 32000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE5;
CREATE TABLE WAREHOUSE5
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_005
        INDEX IN ts_ware_005
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 32001 ENDING AT 40000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE6;
CREATE TABLE WAREHOUSE6
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_006
        INDEX IN ts_ware_006
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 40001 ENDING AT 48000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE7;
CREATE TABLE WAREHOUSE7
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_007
        INDEX IN ts_ware_007
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 48001 ENDING AT 56000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE8;
CREATE TABLE WAREHOUSE8
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_008
        INDEX IN ts_ware_008
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 56001 ENDING AT 64000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE9;
CREATE TABLE WAREHOUSE9
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_009
        INDEX IN ts_ware_009
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 64001 ENDING AT 72000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE10;
CREATE TABLE WAREHOUSE10
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_010
        INDEX IN ts_ware_010
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 72001 ENDING AT 80000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE11;
CREATE TABLE WAREHOUSE11
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_011
        INDEX IN ts_ware_011
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 80001 ENDING AT 88000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE12;
CREATE TABLE WAREHOUSE12
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_012
        INDEX IN ts_ware_012
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 88001 ENDING AT 96000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE13;
CREATE TABLE WAREHOUSE13
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
         W_TAX      REAL           NOT NULL,
         W_YTD      DECIMAL(12,2)  NOT NULL,
         W_ID       INTEGER        NOT NULL
        )
        IN ts_ware_013
        INDEX IN ts_ware_013
        ORGANIZE BY KEY SEQUENCE (
         W_ID STARTING FROM 96001 ENDING AT 104000
        )
        ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE14;
CREATE TABLE WAREHOUSE14
        (
         W_NAME     CHAR(10)       NOT NULL,
         W_STREET_1  CHAR(20)       NOT NULL,
         W_STREET_2  CHAR(20)       NOT NULL,
         W_CITY     CHAR(20)       NOT NULL,
         W_STATE    CHAR(2)        NOT NULL,
         W_ZIP      CHAR(9)        NOT NULL,
```

```
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_014
               INDEX IN ts_ware_014
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 104001 ENDING AT 112000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE15;
CREATE TABLE WAREHOUSE15
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_015
               INDEX IN ts_ware_015
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 112001 ENDING AT 120000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE16;
CREATE TABLE WAREHOUSE16
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_016
               INDEX IN ts_ware_016
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 120001 ENDING AT 128000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE17;
CREATE TABLE WAREHOUSE17
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_017
               INDEX IN ts_ware_017
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 128001 ENDING AT 136000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE18;
CREATE TABLE WAREHOUSE18
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_018
               INDEX IN ts_ware_018
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 136001 ENDING AT 144000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE19;
CREATE TABLE WAREHOUSE19
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_019
               INDEX IN ts_ware_019
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 144001 ENDING AT 152000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE20;
CREATE TABLE WAREHOUSE20
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_020
               INDEX IN ts_ware_020
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 152001 ENDING AT 160000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE21;
CREATE TABLE WAREHOUSE21
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_021
               INDEX IN ts_ware_021
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 160001 ENDING AT 168000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE22;
CREATE TABLE WAREHOUSE22
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_022
               INDEX IN ts_ware_022
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 168001 ENDING AT 176000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE23;
CREATE TABLE WAREHOUSE23
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_023
               INDEX IN ts_ware_023
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 176001 ENDING AT 184000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE24;
CREATE TABLE WAREHOUSE24
               (
                W_NAME      CHAR(10)        NOT NULL,
                W_STREET_1  CHAR(20)        NOT NULL,
                W_STREET_2  CHAR(20)        NOT NULL,
                W_CITY      CHAR(20)        NOT NULL,
                W_STATE     CHAR(2)         NOT NULL,
                W_ZIP       CHAR(9)         NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)   NOT NULL,
                W_ID        INTEGER         NOT NULL
               )
               IN ts_ware_024
               INDEX IN ts_ware_024
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 184001 ENDING AT 192000
               )
```

```
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE25;
CREATE TABLE WAREHOUSE25
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_025
            INDEX IN ts_ware_025
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 192001 ENDING AT 200000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE26;
CREATE TABLE WAREHOUSE26
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_026
            INDEX IN ts_ware_026
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 200001 ENDING AT 208000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE27;
CREATE TABLE WAREHOUSE27
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_027
            INDEX IN ts_ware_027
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 208001 ENDING AT 216000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE28;
CREATE TABLE WAREHOUSE28
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_028
            INDEX IN ts_ware_028
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 216001 ENDING AT 224000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE29;
CREATE TABLE WAREHOUSE29
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_029
            INDEX IN ts_ware_029
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 224001 ENDING AT 232000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE30;
CREATE TABLE WAREHOUSE30
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_030
            INDEX IN ts_ware_030
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 232001 ENDING AT 240000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE31;
CREATE TABLE WAREHOUSE31
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_031
            INDEX IN ts_ware_031
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 240001 ENDING AT 248000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE32;
CREATE TABLE WAREHOUSE32
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_032
            INDEX IN ts_ware_032
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 248001 ENDING AT 256000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE33;
CREATE TABLE WAREHOUSE33
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_033
            INDEX IN ts_ware_033
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 256001 ENDING AT 264000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE34;
CREATE TABLE WAREHOUSE34
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
             W_CITY     CHAR(20)       NOT NULL,
             W_STATE    CHAR(2)        NOT NULL,
             W_ZIP      CHAR(9)        NOT NULL,
             W_TAX      REAL           NOT NULL,
             W_YTD      DECIMAL(12,2)  NOT NULL,
             W_ID       INTEGER        NOT NULL
            )
            IN ts_ware_034
            INDEX IN ts_ware_034
            ORGANIZE BY KEY SEQUENCE (
             W_ID STARTING FROM 264001 ENDING AT 272000
            )
            ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE35;
CREATE TABLE WAREHOUSE35
            (
             W_NAME     CHAR(10)       NOT NULL,
             W_STREET_1  CHAR(20)       NOT NULL,
             W_STREET_2  CHAR(20)       NOT NULL,
```

```
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_035
               INDEX IN ts_ware_035
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 272001 ENDING AT 280000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE36;
CREATE TABLE WAREHOUSE36
               (
                W_NAME      CHAR(10)       NOT NULL,
                W_STREET_1  CHAR(20)       NOT NULL,
                W_STREET_2  CHAR(20)       NOT NULL,
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_036
               INDEX IN ts_ware_036
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 280001 ENDING AT 288000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE37;
CREATE TABLE WAREHOUSE37
               (
                W_NAME      CHAR(10)       NOT NULL,
                W_STREET_1  CHAR(20)       NOT NULL,
                W_STREET_2  CHAR(20)       NOT NULL,
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_037
               INDEX IN ts_ware_037
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 288001 ENDING AT 296000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE38;
CREATE TABLE WAREHOUSE38
               (
                W_NAME      CHAR(10)       NOT NULL,
                W_STREET_1  CHAR(20)       NOT NULL,
                W_STREET_2  CHAR(20)       NOT NULL,
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_038
               INDEX IN ts_ware_038
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 296001 ENDING AT 304000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE39;
CREATE TABLE WAREHOUSE39
               (
                W_NAME      CHAR(10)       NOT NULL,
                W_STREET_1  CHAR(20)       NOT NULL,
                W_STREET_2  CHAR(20)       NOT NULL,
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_039
               INDEX IN ts_ware_039
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 304001 ENDING AT 312000
               )
               ALLOW OVERFLOW;
connect reset;
connect to TPCC in share mode;
DROP TABLE WAREHOUSE40;
CREATE TABLE WAREHOUSE40
               (
                W_NAME      CHAR(10)       NOT NULL,
                W_STREET_1  CHAR(20)       NOT NULL,
                W_STREET_2  CHAR(20)       NOT NULL,
                W_CITY      CHAR(20)       NOT NULL,
                W_STATE     CHAR(2)        NOT NULL,
                W_ZIP       CHAR(9)        NOT NULL,
                W_TAX       REAL           NOT NULL,
                W_YTD       DECIMAL(12,2)  NOT NULL,
                W_ID        INTEGER        NOT NULL
               )
               IN ts_ware_040
               INDEX IN ts_ware_040
               ORGANIZE BY KEY SEQUENCE (
                W_ID STARTING FROM 312001 ENDING AT 320000
               )
               ALLOW OVERFLOW;
connect reset;
```

DDL/CRVW_CUSTOMER.ddl

```
connect to TPCC in share mode;
DROP VIEW CUSTOMER;
CREATE VIEW CUSTOMER
               (C_ID,
                C_STATE,
                C_ZIP,
                C_PHONE,
                C_SINCE,
                C_CREDIT_LIM,
                C_MIDDLE,
                C_CREDIT,
                C_DISCOUNT,
                C_DATA,
                C_LAST,
                C_FIRST,
                C_STREET_1,
                C_STREET_2,
                C_CITY,
                C_D_ID,
                C_W_ID,
                C_DELIVERY_CNT,
                C_BALANCE,
                C_YTD_PAYMENT,
                C_PAYMENT_CNT
               ) AS SELECT * FROM CUSTOMER1 UNION ALL
SELECT * FROM CUSTOMER2 UNION ALL
SELECT * FROM CUSTOMER3 UNION ALL
SELECT * FROM CUSTOMER4 UNION ALL
SELECT * FROM CUSTOMER5 UNION ALL
SELECT * FROM CUSTOMER6 UNION ALL
SELECT * FROM CUSTOMER7 UNION ALL
SELECT * FROM CUSTOMER8 UNION ALL
SELECT * FROM CUSTOMER9 UNION ALL
SELECT * FROM CUSTOMER10 UNION ALL
SELECT * FROM CUSTOMER11 UNION ALL
SELECT * FROM CUSTOMER12 UNION ALL
SELECT * FROM CUSTOMER13 UNION ALL
SELECT * FROM CUSTOMER14 UNION ALL
SELECT * FROM CUSTOMER15 UNION ALL
SELECT * FROM CUSTOMER16 UNION ALL
SELECT * FROM CUSTOMER17 UNION ALL
SELECT * FROM CUSTOMER18 UNION ALL
SELECT * FROM CUSTOMER19 UNION ALL
SELECT * FROM CUSTOMER20 UNION ALL
SELECT * FROM CUSTOMER21 UNION ALL
SELECT * FROM CUSTOMER22 UNION ALL
SELECT * FROM CUSTOMER23 UNION ALL
SELECT * FROM CUSTOMER24 UNION ALL
SELECT * FROM CUSTOMER25 UNION ALL
SELECT * FROM CUSTOMER26 UNION ALL
SELECT * FROM CUSTOMER27 UNION ALL
SELECT * FROM CUSTOMER28 UNION ALL
SELECT * FROM CUSTOMER29 UNION ALL
SELECT * FROM CUSTOMER30 UNION ALL
SELECT * FROM CUSTOMER31 UNION ALL
SELECT * FROM CUSTOMER32 UNION ALL
SELECT * FROM CUSTOMER33 UNION ALL
SELECT * FROM CUSTOMER34 UNION ALL
SELECT * FROM CUSTOMER35 UNION ALL
SELECT * FROM CUSTOMER36 UNION ALL
SELECT * FROM CUSTOMER37 UNION ALL
SELECT * FROM CUSTOMER38 UNION ALL
SELECT * FROM CUSTOMER39 UNION ALL
SELECT * FROM CUSTOMER40 UNION ALL
SELECT * FROM CUSTOMER41 UNION ALL
SELECT * FROM CUSTOMER42 UNION ALL
SELECT * FROM CUSTOMER43 UNION ALL
SELECT * FROM CUSTOMER44 UNION ALL
SELECT * FROM CUSTOMER45 UNION ALL
SELECT * FROM CUSTOMER46 UNION ALL
SELECT * FROM CUSTOMER47 UNION ALL
SELECT * FROM CUSTOMER48 UNION ALL
SELECT * FROM CUSTOMER49 UNION ALL
SELECT * FROM CUSTOMER50 UNION ALL
SELECT * FROM CUSTOMER51 UNION ALL
SELECT * FROM CUSTOMER52 UNION ALL
SELECT * FROM CUSTOMER53 UNION ALL
SELECT * FROM CUSTOMER54 UNION ALL
SELECT * FROM CUSTOMER55 UNION ALL
SELECT * FROM CUSTOMER56 UNION ALL
SELECT * FROM CUSTOMER57 UNION ALL
SELECT * FROM CUSTOMER58 UNION ALL
SELECT * FROM CUSTOMER59 UNION ALL
SELECT * FROM CUSTOMER60 UNION ALL
SELECT * FROM CUSTOMER61 UNION ALL
SELECT * FROM CUSTOMER62 UNION ALL
SELECT * FROM CUSTOMER63 UNION ALL
SELECT * FROM CUSTOMER64 UNION ALL
SELECT * FROM CUSTOMER65 UNION ALL
SELECT * FROM CUSTOMER66 UNION ALL
SELECT * FROM CUSTOMER67 UNION ALL
SELECT * FROM CUSTOMER68 UNION ALL
SELECT * FROM CUSTOMER69 UNION ALL
```

```
SELECT * FROM CUSTOMER70 UNION ALL
SELECT * FROM CUSTOMER71 UNION ALL
SELECT * FROM CUSTOMER72 UNION ALL
SELECT * FROM CUSTOMER73 UNION ALL
SELECT * FROM CUSTOMER74 UNION ALL
SELECT * FROM CUSTOMER75 UNION ALL
SELECT * FROM CUSTOMER76 UNION ALL
SELECT * FROM CUSTOMER77 UNION ALL
SELECT * FROM CUSTOMER78 UNION ALL
SELECT * FROM CUSTOMER79 UNION ALL
SELECT * FROM CUSTOMER80 UNION ALL
SELECT * FROM CUSTOMER81 UNION ALL
SELECT * FROM CUSTOMER82 UNION ALL
SELECT * FROM CUSTOMER83 UNION ALL
SELECT * FROM CUSTOMER84 UNION ALL
SELECT * FROM CUSTOMER85 UNION ALL
SELECT * FROM CUSTOMER86 UNION ALL
SELECT * FROM CUSTOMER87 UNION ALL
SELECT * FROM CUSTOMER88 UNION ALL
SELECT * FROM CUSTOMER89 UNION ALL
SELECT * FROM CUSTOMER90 UNION ALL
SELECT * FROM CUSTOMER91 UNION ALL
SELECT * FROM CUSTOMER92 UNION ALL
SELECT * FROM CUSTOMER93 UNION ALL
SELECT * FROM CUSTOMER94 UNION ALL
SELECT * FROM CUSTOMER95 UNION ALL
SELECT * FROM CUSTOMER96 UNION ALL
SELECT * FROM CUSTOMER97 UNION ALL
SELECT * FROM CUSTOMER98 UNION ALL
SELECT * FROM CUSTOMER99 UNION ALL
SELECT * FROM CUSTOMER100 UNION ALL
SELECT * FROM CUSTOMER101 UNION ALL
SELECT * FROM CUSTOMER102 UNION ALL
SELECT * FROM CUSTOMER103 UNION ALL
SELECT * FROM CUSTOMER104 UNION ALL
SELECT * FROM CUSTOMER105 UNION ALL
SELECT * FROM CUSTOMER106 UNION ALL
SELECT * FROM CUSTOMER107 UNION ALL
SELECT * FROM CUSTOMER108 UNION ALL
SELECT * FROM CUSTOMER109 UNION ALL
SELECT * FROM CUSTOMER110 UNION ALL
SELECT * FROM CUSTOMER111 UNION ALL
SELECT * FROM CUSTOMER112 UNION ALL
SELECT * FROM CUSTOMER113 UNION ALL
SELECT * FROM CUSTOMER114 UNION ALL
SELECT * FROM CUSTOMER115 UNION ALL
SELECT * FROM CUSTOMER116 UNION ALL
SELECT * FROM CUSTOMER117 UNION ALL
SELECT * FROM CUSTOMER118 UNION ALL
SELECT * FROM CUSTOMER119 UNION ALL
SELECT * FROM CUSTOMER120 UNION ALL
SELECT * FROM CUSTOMER121 UNION ALL
SELECT * FROM CUSTOMER122 UNION ALL
SELECT * FROM CUSTOMER123 UNION ALL
SELECT * FROM CUSTOMER124 UNION ALL
SELECT * FROM CUSTOMER125 UNION ALL
SELECT * FROM CUSTOMER126 UNION ALL
SELECT * FROM CUSTOMER127 UNION ALL
SELECT * FROM CUSTOMER128 UNION ALL
SELECT * FROM CUSTOMER129 UNION ALL
SELECT * FROM CUSTOMER130 UNION ALL
SELECT * FROM CUSTOMER131 UNION ALL
SELECT * FROM CUSTOMER132 UNION ALL
SELECT * FROM CUSTOMER133 UNION ALL
SELECT * FROM CUSTOMER134 UNION ALL
SELECT * FROM CUSTOMER135 UNION ALL
SELECT * FROM CUSTOMER136 UNION ALL
SELECT * FROM CUSTOMER137 UNION ALL
SELECT * FROM CUSTOMER138 UNION ALL
SELECT * FROM CUSTOMER139 UNION ALL
SELECT * FROM CUSTOMER140 UNION ALL
SELECT * FROM CUSTOMER141 UNION ALL
SELECT * FROM CUSTOMER142 UNION ALL
SELECT * FROM CUSTOMER143 UNION ALL
SELECT * FROM CUSTOMER144 UNION ALL
SELECT * FROM CUSTOMER145 UNION ALL
SELECT * FROM CUSTOMER146 UNION ALL
SELECT * FROM CUSTOMER147 UNION ALL
SELECT * FROM CUSTOMER148 UNION ALL
SELECT * FROM CUSTOMER149 UNION ALL
SELECT * FROM CUSTOMER150 UNION ALL
SELECT * FROM CUSTOMER151 UNION ALL
SELECT * FROM CUSTOMER152 UNION ALL
SELECT * FROM CUSTOMER153 UNION ALL
SELECT * FROM CUSTOMER154 UNION ALL
SELECT * FROM CUSTOMER155 UNION ALL
SELECT * FROM CUSTOMER156 UNION ALL
SELECT * FROM CUSTOMER157 UNION ALL
SELECT * FROM CUSTOMER158 UNION ALL
SELECT * FROM CUSTOMER159 UNION ALL
SELECT * FROM CUSTOMER160 UNION ALL
SELECT * FROM CUSTOMER161 UNION ALL
SELECT * FROM CUSTOMER162 UNION ALL
SELECT * FROM CUSTOMER163 UNION ALL
SELECT * FROM CUSTOMER164 UNION ALL
SELECT * FROM CUSTOMER165 UNION ALL
SELECT * FROM CUSTOMER166 UNION ALL
SELECT * FROM CUSTOMER167 UNION ALL
SELECT * FROM CUSTOMER168 UNION ALL
SELECT * FROM CUSTOMER169 UNION ALL
SELECT * FROM CUSTOMER170 UNION ALL
SELECT * FROM CUSTOMER171 UNION ALL
SELECT * FROM CUSTOMER172 UNION ALL
SELECT * FROM CUSTOMER173 UNION ALL
SELECT * FROM CUSTOMER174 UNION ALL
SELECT * FROM CUSTOMER175 UNION ALL
SELECT * FROM CUSTOMER176 UNION ALL
SELECT * FROM CUSTOMER177 UNION ALL
SELECT * FROM CUSTOMER178 UNION ALL
SELECT * FROM CUSTOMER179 UNION ALL
SELECT * FROM CUSTOMER180 UNION ALL
SELECT * FROM CUSTOMER181 UNION ALL
SELECT * FROM CUSTOMER182 UNION ALL
SELECT * FROM CUSTOMER183 UNION ALL
SELECT * FROM CUSTOMER184 UNION ALL
SELECT * FROM CUSTOMER185 UNION ALL
SELECT * FROM CUSTOMER186 UNION ALL
SELECT * FROM CUSTOMER187 UNION ALL
SELECT * FROM CUSTOMER188 UNION ALL
SELECT * FROM CUSTOMER189 UNION ALL
SELECT * FROM CUSTOMER190 UNION ALL
SELECT * FROM CUSTOMER191 UNION ALL
SELECT * FROM CUSTOMER192 UNION ALL
SELECT * FROM CUSTOMER193 UNION ALL
SELECT * FROM CUSTOMER194 UNION ALL
SELECT * FROM CUSTOMER195 UNION ALL
SELECT * FROM CUSTOMER196 UNION ALL
SELECT * FROM CUSTOMER197 UNION ALL
SELECT * FROM CUSTOMER198 UNION ALL
SELECT * FROM CUSTOMER199 UNION ALL
SELECT * FROM CUSTOMER200
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_DISTRICT.ddl

```
connect to TPCC in share mode;
DROP VIEW DISTRICT;
CREATE VIEW DISTRICT
            (D_NEXT_O_ID,
             D_TAX,
             D_YTD,
             D_NAME,
             D_STREET_1,
             D_STREET_2,
             D_CITY,
             D_STATE,
             D_ZIP,
             D_ID,
             D_W_ID
            ) AS SELECT * FROM DISTRICT1 UNION ALL
SELECT * FROM DISTRICT2 UNION ALL
SELECT * FROM DISTRICT3 UNION ALL
SELECT * FROM DISTRICT4 UNION ALL
SELECT * FROM DISTRICT5 UNION ALL
SELECT * FROM DISTRICT6 UNION ALL
SELECT * FROM DISTRICT7 UNION ALL
SELECT * FROM DISTRICT8 UNION ALL
SELECT * FROM DISTRICT9 UNION ALL
SELECT * FROM DISTRICT10 UNION ALL
SELECT * FROM DISTRICT11 UNION ALL
SELECT * FROM DISTRICT12 UNION ALL
SELECT * FROM DISTRICT13 UNION ALL
SELECT * FROM DISTRICT14 UNION ALL
SELECT * FROM DISTRICT15 UNION ALL
SELECT * FROM DISTRICT16 UNION ALL
SELECT * FROM DISTRICT17 UNION ALL
SELECT * FROM DISTRICT18 UNION ALL
SELECT * FROM DISTRICT19 UNION ALL
SELECT * FROM DISTRICT20 UNION ALL
SELECT * FROM DISTRICT21 UNION ALL
SELECT * FROM DISTRICT22 UNION ALL
SELECT * FROM DISTRICT23 UNION ALL
SELECT * FROM DISTRICT24 UNION ALL
SELECT * FROM DISTRICT25 UNION ALL
SELECT * FROM DISTRICT26 UNION ALL
SELECT * FROM DISTRICT27 UNION ALL
SELECT * FROM DISTRICT28 UNION ALL
SELECT * FROM DISTRICT29 UNION ALL
SELECT * FROM DISTRICT30 UNION ALL
SELECT * FROM DISTRICT31 UNION ALL
SELECT * FROM DISTRICT32 UNION ALL
SELECT * FROM DISTRICT33 UNION ALL
SELECT * FROM DISTRICT34 UNION ALL
SELECT * FROM DISTRICT35 UNION ALL
SELECT * FROM DISTRICT36 UNION ALL
SELECT * FROM DISTRICT37 UNION ALL
SELECT * FROM DISTRICT38 UNION ALL
SELECT * FROM DISTRICT39 UNION ALL
SELECT * FROM DISTRICT40
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_HISTORY.ddl

```
connect to TPCC in share mode;
DROP VIEW HISTORY;
CREATE VIEW HISTORY
            (H_C_ID,
             H_C_D_ID,
             H_C_W_ID,
             H_D_ID,
             H_W_ID,
             H_DATE,
             H_AMOUNT,
             H_DATA
            ) AS SELECT * FROM HISTORY1 UNION ALL
SELECT * FROM HISTORY2 UNION ALL
SELECT * FROM HISTORY3 UNION ALL
SELECT * FROM HISTORY4 UNION ALL
SELECT * FROM HISTORY5 UNION ALL
```

```
SELECT * FROM HISTORY6 UNION ALL
SELECT * FROM HISTORY7 UNION ALL
SELECT * FROM HISTORY8 UNION ALL
SELECT * FROM HISTORY9 UNION ALL
SELECT * FROM HISTORY10 UNION ALL
SELECT * FROM HISTORY11 UNION ALL
SELECT * FROM HISTORY12 UNION ALL
SELECT * FROM HISTORY13 UNION ALL
SELECT * FROM HISTORY14 UNION ALL
SELECT * FROM HISTORY15 UNION ALL
SELECT * FROM HISTORY16 UNION ALL
SELECT * FROM HISTORY17 UNION ALL
SELECT * FROM HISTORY18 UNION ALL
SELECT * FROM HISTORY19 UNION ALL
SELECT * FROM HISTORY20 UNION ALL
SELECT * FROM HISTORY21 UNION ALL
SELECT * FROM HISTORY22 UNION ALL
SELECT * FROM HISTORY23 UNION ALL
SELECT * FROM HISTORY24 UNION ALL
SELECT * FROM HISTORY25 UNION ALL
SELECT * FROM HISTORY26 UNION ALL
SELECT * FROM HISTORY27 UNION ALL
SELECT * FROM HISTORY28 UNION ALL
SELECT * FROM HISTORY29 UNION ALL
SELECT * FROM HISTORY30 UNION ALL
SELECT * FROM HISTORY31 UNION ALL
SELECT * FROM HISTORY32 UNION ALL
SELECT * FROM HISTORY33 UNION ALL
SELECT * FROM HISTORY34 UNION ALL
SELECT * FROM HISTORY35 UNION ALL
SELECT * FROM HISTORY36 UNION ALL
SELECT * FROM HISTORY37 UNION ALL
SELECT * FROM HISTORY38 UNION ALL
SELECT * FROM HISTORY39 UNION ALL
SELECT * FROM HISTORY40
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_NEW_ORDER.ddl

```
connect to TPCC in share mode;
DROP VIEW NEW_ORDER;
CREATE VIEW NEW_ORDER
            (NO_O_ID,
             NO_D_ID,
             NO_W_ID
            ) AS SELECT * FROM NEW_ORDERA1 UNION ALL
SELECT * FROM NEW_ORDERA2 UNION ALL
SELECT * FROM NEW_ORDERA3 UNION ALL
SELECT * FROM NEW_ORDERA4 UNION ALL
SELECT * FROM NEW_ORDERA5 UNION ALL
SELECT * FROM NEW_ORDERA6 UNION ALL
SELECT * FROM NEW_ORDERA7 UNION ALL
SELECT * FROM NEW_ORDERA8 UNION ALL
SELECT * FROM NEW_ORDERA9 UNION ALL
SELECT * FROM NEW_ORDERA10 UNION ALL
SELECT * FROM NEW_ORDERA11 UNION ALL
SELECT * FROM NEW_ORDERA12 UNION ALL
SELECT * FROM NEW_ORDERA13 UNION ALL
SELECT * FROM NEW_ORDERA14 UNION ALL
SELECT * FROM NEW_ORDERA15 UNION ALL
SELECT * FROM NEW_ORDERA16 UNION ALL
SELECT * FROM NEW_ORDERA17 UNION ALL
SELECT * FROM NEW_ORDERA18 UNION ALL
SELECT * FROM NEW_ORDERA19 UNION ALL
SELECT * FROM NEW_ORDERA20 UNION ALL
SELECT * FROM NEW_ORDERA21 UNION ALL
SELECT * FROM NEW_ORDERA22 UNION ALL
SELECT * FROM NEW_ORDERA23 UNION ALL
SELECT * FROM NEW_ORDERA24 UNION ALL
SELECT * FROM NEW_ORDERA25 UNION ALL
SELECT * FROM NEW_ORDERA26 UNION ALL
SELECT * FROM NEW_ORDERA27 UNION ALL
SELECT * FROM NEW_ORDERA28 UNION ALL
SELECT * FROM NEW_ORDERA29 UNION ALL
SELECT * FROM NEW_ORDERA30 UNION ALL
SELECT * FROM NEW_ORDERA31 UNION ALL
SELECT * FROM NEW_ORDERA32 UNION ALL
SELECT * FROM NEW_ORDERA33 UNION ALL
SELECT * FROM NEW_ORDERA34 UNION ALL
SELECT * FROM NEW_ORDERA35 UNION ALL
SELECT * FROM NEW_ORDERA36 UNION ALL
SELECT * FROM NEW_ORDERA37 UNION ALL
SELECT * FROM NEW_ORDERA38 UNION ALL
SELECT * FROM NEW_ORDERA39 UNION ALL
SELECT * FROM NEW_ORDERA40 UNION ALL
SELECT * FROM NEW_ORDERB1 UNION ALL
SELECT * FROM NEW_ORDERB2 UNION ALL
SELECT * FROM NEW_ORDERB3 UNION ALL
SELECT * FROM NEW_ORDERB4 UNION ALL
SELECT * FROM NEW_ORDERB5 UNION ALL
SELECT * FROM NEW_ORDERB6 UNION ALL
SELECT * FROM NEW_ORDERB7 UNION ALL
SELECT * FROM NEW_ORDERB8 UNION ALL
SELECT * FROM NEW_ORDERB9 UNION ALL
SELECT * FROM NEW_ORDERB10 UNION ALL
SELECT * FROM NEW_ORDERB11 UNION ALL
SELECT * FROM NEW_ORDERB12 UNION ALL
SELECT * FROM NEW_ORDERB13 UNION ALL
SELECT * FROM NEW_ORDERB14 UNION ALL
SELECT * FROM NEW_ORDERB15 UNION ALL
SELECT * FROM NEW_ORDERB16 UNION ALL
SELECT * FROM NEW_ORDERB17 UNION ALL
SELECT * FROM NEW_ORDERB18 UNION ALL
SELECT * FROM NEW_ORDERB19 UNION ALL
SELECT * FROM NEW_ORDERB20 UNION ALL
SELECT * FROM NEW_ORDERB21 UNION ALL
SELECT * FROM NEW_ORDERB22 UNION ALL
SELECT * FROM NEW_ORDERB23 UNION ALL
SELECT * FROM NEW_ORDERB24 UNION ALL
SELECT * FROM NEW_ORDERB25 UNION ALL
SELECT * FROM NEW_ORDERB26 UNION ALL
SELECT * FROM NEW_ORDERB27 UNION ALL
SELECT * FROM NEW_ORDERB28 UNION ALL
SELECT * FROM NEW_ORDERB29 UNION ALL
SELECT * FROM NEW_ORDERB30 UNION ALL
SELECT * FROM NEW_ORDERB31 UNION ALL
SELECT * FROM NEW_ORDERB32 UNION ALL
SELECT * FROM NEW_ORDERB33 UNION ALL
SELECT * FROM NEW_ORDERB34 UNION ALL
SELECT * FROM NEW_ORDERB35 UNION ALL
SELECT * FROM NEW_ORDERB36 UNION ALL
SELECT * FROM NEW_ORDERB37 UNION ALL
SELECT * FROM NEW_ORDERB38 UNION ALL
SELECT * FROM NEW_ORDERB39 UNION ALL
SELECT * FROM NEW_ORDERB40
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_ORDERS.ddl

```
connect to TPCC in share mode;
DROP VIEW ORDERS;
CREATE VIEW ORDERS
            (O_C_ID,
             O_ENTRY_D,
             O_CARRIER_ID,
             O_OL_CNT,
             O_ALL_LOCAL,
             O_ID,
             O_W_ID,
             O_D_ID
            ) AS SELECT * FROM ORDERS1 UNION ALL
SELECT * FROM ORDERS2 UNION ALL
SELECT * FROM ORDERS3 UNION ALL
SELECT * FROM ORDERS4 UNION ALL
SELECT * FROM ORDERS5 UNION ALL
SELECT * FROM ORDERS6 UNION ALL
SELECT * FROM ORDERS7 UNION ALL
SELECT * FROM ORDERS8 UNION ALL
SELECT * FROM ORDERS9 UNION ALL
SELECT * FROM ORDERS10 UNION ALL
SELECT * FROM ORDERS11 UNION ALL
SELECT * FROM ORDERS12 UNION ALL
SELECT * FROM ORDERS13 UNION ALL
SELECT * FROM ORDERS14 UNION ALL
SELECT * FROM ORDERS15 UNION ALL
SELECT * FROM ORDERS16 UNION ALL
SELECT * FROM ORDERS17 UNION ALL
SELECT * FROM ORDERS18 UNION ALL
SELECT * FROM ORDERS19 UNION ALL
SELECT * FROM ORDERS20 UNION ALL
SELECT * FROM ORDERS21 UNION ALL
SELECT * FROM ORDERS22 UNION ALL
SELECT * FROM ORDERS23 UNION ALL
SELECT * FROM ORDERS24 UNION ALL
SELECT * FROM ORDERS25 UNION ALL
SELECT * FROM ORDERS26 UNION ALL
SELECT * FROM ORDERS27 UNION ALL
SELECT * FROM ORDERS28 UNION ALL
SELECT * FROM ORDERS29 UNION ALL
SELECT * FROM ORDERS30 UNION ALL
SELECT * FROM ORDERS31 UNION ALL
SELECT * FROM ORDERS32 UNION ALL
SELECT * FROM ORDERS33 UNION ALL
SELECT * FROM ORDERS34 UNION ALL
SELECT * FROM ORDERS35 UNION ALL
SELECT * FROM ORDERS36 UNION ALL
SELECT * FROM ORDERS37 UNION ALL
SELECT * FROM ORDERS38 UNION ALL
SELECT * FROM ORDERS39 UNION ALL
SELECT * FROM ORDERS40 UNION ALL
SELECT * FROM ORDERS41 UNION ALL
SELECT * FROM ORDERS42 UNION ALL
SELECT * FROM ORDERS43 UNION ALL
SELECT * FROM ORDERS44 UNION ALL
SELECT * FROM ORDERS45 UNION ALL
SELECT * FROM ORDERS46 UNION ALL
SELECT * FROM ORDERS47 UNION ALL
SELECT * FROM ORDERS48 UNION ALL
SELECT * FROM ORDERS49 UNION ALL
SELECT * FROM ORDERS50 UNION ALL
SELECT * FROM ORDERS51 UNION ALL
SELECT * FROM ORDERS52 UNION ALL
SELECT * FROM ORDERS53 UNION ALL
SELECT * FROM ORDERS54 UNION ALL
SELECT * FROM ORDERS55 UNION ALL
SELECT * FROM ORDERS56 UNION ALL
SELECT * FROM ORDERS57 UNION ALL
SELECT * FROM ORDERS58 UNION ALL
SELECT * FROM ORDERS59 UNION ALL
SELECT * FROM ORDERS60 UNION ALL
SELECT * FROM ORDERS61 UNION ALL
SELECT * FROM ORDERS62 UNION ALL
SELECT * FROM ORDERS63 UNION ALL
SELECT * FROM ORDERS64 UNION ALL
SELECT * FROM ORDERS65 UNION ALL
SELECT * FROM ORDERS66 UNION ALL
SELECT * FROM ORDERS67 UNION ALL
SELECT * FROM ORDERS68 UNION ALL
SELECT * FROM ORDERS69 UNION ALL
```

```
SELECT * FROM ORDERS70 UNION ALL
SELECT * FROM ORDERS71 UNION ALL
SELECT * FROM ORDERS72 UNION ALL
SELECT * FROM ORDERS73 UNION ALL
SELECT * FROM ORDERS74 UNION ALL
SELECT * FROM ORDERS75 UNION ALL
SELECT * FROM ORDERS76 UNION ALL
SELECT * FROM ORDERS77 UNION ALL
SELECT * FROM ORDERS78 UNION ALL
SELECT * FROM ORDERS79 UNION ALL
SELECT * FROM ORDERS80 UNION ALL
SELECT * FROM ORDERS81 UNION ALL
SELECT * FROM ORDERS82 UNION ALL
SELECT * FROM ORDERS83 UNION ALL
SELECT * FROM ORDERS84 UNION ALL
SELECT * FROM ORDERS85 UNION ALL
SELECT * FROM ORDERS86 UNION ALL
SELECT * FROM ORDERS87 UNION ALL
SELECT * FROM ORDERS88 UNION ALL
SELECT * FROM ORDERS89 UNION ALL
SELECT * FROM ORDERS90 UNION ALL
SELECT * FROM ORDERS91 UNION ALL
SELECT * FROM ORDERS92 UNION ALL
SELECT * FROM ORDERS93 UNION ALL
SELECT * FROM ORDERS94 UNION ALL
SELECT * FROM ORDERS95 UNION ALL
SELECT * FROM ORDERS96 UNION ALL
SELECT * FROM ORDERS97 UNION ALL
SELECT * FROM ORDERS98 UNION ALL
SELECT * FROM ORDERS99 UNION ALL
SELECT * FROM ORDERS100 UNION ALL
SELECT * FROM ORDERS101 UNION ALL
SELECT * FROM ORDERS102 UNION ALL
SELECT * FROM ORDERS103 UNION ALL
SELECT * FROM ORDERS104 UNION ALL
SELECT * FROM ORDERS105 UNION ALL
SELECT * FROM ORDERS106 UNION ALL
SELECT * FROM ORDERS107 UNION ALL
SELECT * FROM ORDERS108 UNION ALL
SELECT * FROM ORDERS109 UNION ALL
SELECT * FROM ORDERS110 UNION ALL
SELECT * FROM ORDERS111 UNION ALL
SELECT * FROM ORDERS112 UNION ALL
SELECT * FROM ORDERS113 UNION ALL
SELECT * FROM ORDERS114 UNION ALL
SELECT * FROM ORDERS115 UNION ALL
SELECT * FROM ORDERS116 UNION ALL
SELECT * FROM ORDERS117 UNION ALL
SELECT * FROM ORDERS118 UNION ALL
SELECT * FROM ORDERS119 UNION ALL
SELECT * FROM ORDERS120 UNION ALL
SELECT * FROM ORDERS121 UNION ALL
SELECT * FROM ORDERS122 UNION ALL
SELECT * FROM ORDERS123 UNION ALL
SELECT * FROM ORDERS124 UNION ALL
SELECT * FROM ORDERS125 UNION ALL
SELECT * FROM ORDERS126 UNION ALL
SELECT * FROM ORDERS127 UNION ALL
SELECT * FROM ORDERS128 UNION ALL
SELECT * FROM ORDERS129 UNION ALL
SELECT * FROM ORDERS130 UNION ALL
SELECT * FROM ORDERS131 UNION ALL
SELECT * FROM ORDERS132 UNION ALL
SELECT * FROM ORDERS133 UNION ALL
SELECT * FROM ORDERS134 UNION ALL
SELECT * FROM ORDERS135 UNION ALL
SELECT * FROM ORDERS136 UNION ALL
SELECT * FROM ORDERS137 UNION ALL
SELECT * FROM ORDERS138 UNION ALL
SELECT * FROM ORDERS139 UNION ALL
SELECT * FROM ORDERS140 UNION ALL
SELECT * FROM ORDERS141 UNION ALL
SELECT * FROM ORDERS142 UNION ALL
SELECT * FROM ORDERS143 UNION ALL
SELECT * FROM ORDERS144 UNION ALL
SELECT * FROM ORDERS145 UNION ALL
SELECT * FROM ORDERS146 UNION ALL
SELECT * FROM ORDERS147 UNION ALL
SELECT * FROM ORDERS148 UNION ALL
SELECT * FROM ORDERS149 UNION ALL
SELECT * FROM ORDERS150 UNION ALL
SELECT * FROM ORDERS151 UNION ALL
SELECT * FROM ORDERS152 UNION ALL
SELECT * FROM ORDERS153 UNION ALL
SELECT * FROM ORDERS154 UNION ALL
SELECT * FROM ORDERS155 UNION ALL
SELECT * FROM ORDERS156 UNION ALL
SELECT * FROM ORDERS157 UNION ALL
SELECT * FROM ORDERS158 UNION ALL
SELECT * FROM ORDERS159 UNION ALL
SELECT * FROM ORDERS160 UNION ALL
SELECT * FROM ORDERS161 UNION ALL
SELECT * FROM ORDERS162 UNION ALL
SELECT * FROM ORDERS163 UNION ALL
SELECT * FROM ORDERS164 UNION ALL
SELECT * FROM ORDERS165 UNION ALL
SELECT * FROM ORDERS166 UNION ALL
SELECT * FROM ORDERS167 UNION ALL
SELECT * FROM ORDERS168 UNION ALL
SELECT * FROM ORDERS169 UNION ALL
SELECT * FROM ORDERS170 UNION ALL
SELECT * FROM ORDERS171 UNION ALL
SELECT * FROM ORDERS172 UNION ALL
SELECT * FROM ORDERS173 UNION ALL
SELECT * FROM ORDERS174 UNION ALL
SELECT * FROM ORDERS175 UNION ALL
SELECT * FROM ORDERS176 UNION ALL
SELECT * FROM ORDERS177 UNION ALL
SELECT * FROM ORDERS178 UNION ALL
SELECT * FROM ORDERS179 UNION ALL
SELECT * FROM ORDERS180 UNION ALL
SELECT * FROM ORDERS181 UNION ALL
SELECT * FROM ORDERS182 UNION ALL
SELECT * FROM ORDERS183 UNION ALL
SELECT * FROM ORDERS184 UNION ALL
SELECT * FROM ORDERS185 UNION ALL
SELECT * FROM ORDERS186 UNION ALL
SELECT * FROM ORDERS187 UNION ALL
SELECT * FROM ORDERS188 UNION ALL
SELECT * FROM ORDERS189 UNION ALL
SELECT * FROM ORDERS190 UNION ALL
SELECT * FROM ORDERS191 UNION ALL
SELECT * FROM ORDERS192 UNION ALL
SELECT * FROM ORDERS193 UNION ALL
SELECT * FROM ORDERS194 UNION ALL
SELECT * FROM ORDERS195 UNION ALL
SELECT * FROM ORDERS196 UNION ALL
SELECT * FROM ORDERS197 UNION ALL
SELECT * FROM ORDERS198 UNION ALL
SELECT * FROM ORDERS199 UNION ALL
SELECT * FROM ORDERS200
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_ORDER_LINE.ddl

```
connect to TPCC in share mode;
DROP VIEW ORDER_LINE;
CREATE VIEW ORDER_LINE
            (OL_DELIVERY_D,
             OL_AMOUNT,
             OL_I_ID,
             OL_SUPPLY_W_ID,
             OL_QUANTITY,
             OL_DIST_INFO,
             OL_O_ID,
             OL_D_ID,
             OL_W_ID,
             OL_NUMBER
            ) AS SELECT * FROM ORDER_LINE1 UNION ALL
SELECT * FROM ORDER_LINE2 UNION ALL
SELECT * FROM ORDER_LINE3 UNION ALL
SELECT * FROM ORDER_LINE4 UNION ALL
SELECT * FROM ORDER_LINE5 UNION ALL
SELECT * FROM ORDER_LINE6 UNION ALL
SELECT * FROM ORDER_LINE7 UNION ALL
SELECT * FROM ORDER_LINE8 UNION ALL
SELECT * FROM ORDER_LINE9 UNION ALL
SELECT * FROM ORDER_LINE10 UNION ALL
SELECT * FROM ORDER_LINE11 UNION ALL
SELECT * FROM ORDER_LINE12 UNION ALL
SELECT * FROM ORDER_LINE13 UNION ALL
SELECT * FROM ORDER_LINE14 UNION ALL
SELECT * FROM ORDER_LINE15 UNION ALL
SELECT * FROM ORDER_LINE16 UNION ALL
SELECT * FROM ORDER_LINE17 UNION ALL
SELECT * FROM ORDER_LINE18 UNION ALL
SELECT * FROM ORDER_LINE19 UNION ALL
SELECT * FROM ORDER_LINE20 UNION ALL
SELECT * FROM ORDER_LINE21 UNION ALL
SELECT * FROM ORDER_LINE22 UNION ALL
SELECT * FROM ORDER_LINE23 UNION ALL
SELECT * FROM ORDER_LINE24 UNION ALL
SELECT * FROM ORDER_LINE25 UNION ALL
SELECT * FROM ORDER_LINE26 UNION ALL
SELECT * FROM ORDER_LINE27 UNION ALL
SELECT * FROM ORDER_LINE28 UNION ALL
SELECT * FROM ORDER_LINE29 UNION ALL
SELECT * FROM ORDER_LINE30 UNION ALL
SELECT * FROM ORDER_LINE31 UNION ALL
SELECT * FROM ORDER_LINE32 UNION ALL
SELECT * FROM ORDER_LINE33 UNION ALL
SELECT * FROM ORDER_LINE34 UNION ALL
SELECT * FROM ORDER_LINE35 UNION ALL
SELECT * FROM ORDER_LINE36 UNION ALL
SELECT * FROM ORDER_LINE37 UNION ALL
SELECT * FROM ORDER_LINE38 UNION ALL
SELECT * FROM ORDER_LINE39 UNION ALL
SELECT * FROM ORDER_LINE40 UNION ALL
SELECT * FROM ORDER_LINE41 UNION ALL
SELECT * FROM ORDER_LINE42 UNION ALL
SELECT * FROM ORDER_LINE43 UNION ALL
SELECT * FROM ORDER_LINE44 UNION ALL
SELECT * FROM ORDER_LINE45 UNION ALL
SELECT * FROM ORDER_LINE46 UNION ALL
SELECT * FROM ORDER_LINE47 UNION ALL
SELECT * FROM ORDER_LINE48 UNION ALL
SELECT * FROM ORDER_LINE49 UNION ALL
SELECT * FROM ORDER_LINE50 UNION ALL
SELECT * FROM ORDER_LINE51 UNION ALL
SELECT * FROM ORDER_LINE52 UNION ALL
SELECT * FROM ORDER_LINE53 UNION ALL
SELECT * FROM ORDER_LINE54 UNION ALL
SELECT * FROM ORDER_LINE55 UNION ALL
SELECT * FROM ORDER_LINE56 UNION ALL
SELECT * FROM ORDER_LINE57 UNION ALL
SELECT * FROM ORDER_LINE58 UNION ALL
SELECT * FROM ORDER_LINE59 UNION ALL
SELECT * FROM ORDER_LINE60 UNION ALL
SELECT * FROM ORDER_LINE61 UNION ALL
SELECT * FROM ORDER_LINE62 UNION ALL
SELECT * FROM ORDER_LINE63 UNION ALL
SELECT * FROM ORDER_LINE64 UNION ALL
SELECT * FROM ORDER_LINE65 UNION ALL
SELECT * FROM ORDER_LINE66 UNION ALL
```

```
SELECT * FROM ORDER_LINE67 UNION ALL
SELECT * FROM ORDER_LINE68 UNION ALL
SELECT * FROM ORDER_LINE69 UNION ALL
SELECT * FROM ORDER_LINE70 UNION ALL
SELECT * FROM ORDER_LINE71 UNION ALL
SELECT * FROM ORDER_LINE72 UNION ALL
SELECT * FROM ORDER_LINE73 UNION ALL
SELECT * FROM ORDER_LINE74 UNION ALL
SELECT * FROM ORDER_LINE75 UNION ALL
SELECT * FROM ORDER_LINE76 UNION ALL
SELECT * FROM ORDER_LINE77 UNION ALL
SELECT * FROM ORDER_LINE78 UNION ALL
SELECT * FROM ORDER_LINE79 UNION ALL
SELECT * FROM ORDER_LINE80 UNION ALL
SELECT * FROM ORDER_LINE81 UNION ALL
SELECT * FROM ORDER_LINE82 UNION ALL
SELECT * FROM ORDER_LINE83 UNION ALL
SELECT * FROM ORDER_LINE84 UNION ALL
SELECT * FROM ORDER_LINE85 UNION ALL
SELECT * FROM ORDER_LINE86 UNION ALL
SELECT * FROM ORDER_LINE87 UNION ALL
SELECT * FROM ORDER_LINE88 UNION ALL
SELECT * FROM ORDER_LINE89 UNION ALL
SELECT * FROM ORDER_LINE90 UNION ALL
SELECT * FROM ORDER_LINE91 UNION ALL
SELECT * FROM ORDER_LINE92 UNION ALL
SELECT * FROM ORDER_LINE93 UNION ALL
SELECT * FROM ORDER_LINE94 UNION ALL
SELECT * FROM ORDER_LINE95 UNION ALL
SELECT * FROM ORDER_LINE96 UNION ALL
SELECT * FROM ORDER_LINE97 UNION ALL
SELECT * FROM ORDER_LINE98 UNION ALL
SELECT * FROM ORDER_LINE99 UNION ALL
SELECT * FROM ORDER_LINE100 UNION ALL
SELECT * FROM ORDER_LINE101 UNION ALL
SELECT * FROM ORDER_LINE102 UNION ALL
SELECT * FROM ORDER_LINE103 UNION ALL
SELECT * FROM ORDER_LINE104 UNION ALL
SELECT * FROM ORDER_LINE105 UNION ALL
SELECT * FROM ORDER_LINE106 UNION ALL
SELECT * FROM ORDER_LINE107 UNION ALL
SELECT * FROM ORDER_LINE108 UNION ALL
SELECT * FROM ORDER_LINE109 UNION ALL
SELECT * FROM ORDER_LINE110 UNION ALL
SELECT * FROM ORDER_LINE111 UNION ALL
SELECT * FROM ORDER_LINE112 UNION ALL
SELECT * FROM ORDER_LINE113 UNION ALL
SELECT * FROM ORDER_LINE114 UNION ALL
SELECT * FROM ORDER_LINE115 UNION ALL
SELECT * FROM ORDER_LINE116 UNION ALL
SELECT * FROM ORDER_LINE117 UNION ALL
SELECT * FROM ORDER_LINE118 UNION ALL
SELECT * FROM ORDER_LINE119 UNION ALL
SELECT * FROM ORDER_LINE120 UNION ALL
SELECT * FROM ORDER_LINE121 UNION ALL
SELECT * FROM ORDER_LINE122 UNION ALL
SELECT * FROM ORDER_LINE123 UNION ALL
SELECT * FROM ORDER_LINE124 UNION ALL
SELECT * FROM ORDER_LINE125 UNION ALL
SELECT * FROM ORDER_LINE126 UNION ALL
SELECT * FROM ORDER_LINE127 UNION ALL
SELECT * FROM ORDER_LINE128 UNION ALL
SELECT * FROM ORDER_LINE129 UNION ALL
SELECT * FROM ORDER_LINE130 UNION ALL
SELECT * FROM ORDER_LINE131 UNION ALL
SELECT * FROM ORDER_LINE132 UNION ALL
SELECT * FROM ORDER_LINE133 UNION ALL
SELECT * FROM ORDER_LINE134 UNION ALL
SELECT * FROM ORDER_LINE135 UNION ALL
SELECT * FROM ORDER_LINE136 UNION ALL
SELECT * FROM ORDER_LINE137 UNION ALL
SELECT * FROM ORDER_LINE138 UNION ALL
SELECT * FROM ORDER_LINE139 UNION ALL
SELECT * FROM ORDER_LINE140 UNION ALL
SELECT * FROM ORDER_LINE141 UNION ALL
SELECT * FROM ORDER_LINE142 UNION ALL
SELECT * FROM ORDER_LINE143 UNION ALL
SELECT * FROM ORDER_LINE144 UNION ALL
SELECT * FROM ORDER_LINE145 UNION ALL
SELECT * FROM ORDER_LINE146 UNION ALL
SELECT * FROM ORDER_LINE147 UNION ALL
SELECT * FROM ORDER_LINE148 UNION ALL
SELECT * FROM ORDER_LINE149 UNION ALL
SELECT * FROM ORDER_LINE150 UNION ALL
SELECT * FROM ORDER_LINE151 UNION ALL
SELECT * FROM ORDER_LINE152 UNION ALL
SELECT * FROM ORDER_LINE153 UNION ALL
SELECT * FROM ORDER_LINE154 UNION ALL
SELECT * FROM ORDER_LINE155 UNION ALL
SELECT * FROM ORDER_LINE156 UNION ALL
SELECT * FROM ORDER_LINE157 UNION ALL
SELECT * FROM ORDER_LINE158 UNION ALL
SELECT * FROM ORDER_LINE159 UNION ALL
SELECT * FROM ORDER_LINE160 UNION ALL
SELECT * FROM ORDER_LINE161 UNION ALL
SELECT * FROM ORDER_LINE162 UNION ALL
SELECT * FROM ORDER_LINE163 UNION ALL
SELECT * FROM ORDER_LINE164 UNION ALL
SELECT * FROM ORDER_LINE165 UNION ALL
SELECT * FROM ORDER_LINE166 UNION ALL
SELECT * FROM ORDER_LINE167 UNION ALL
SELECT * FROM ORDER_LINE168 UNION ALL
SELECT * FROM ORDER_LINE169 UNION ALL
SELECT * FROM ORDER_LINE170 UNION ALL
SELECT * FROM ORDER_LINE171 UNION ALL
SELECT * FROM ORDER_LINE172 UNION ALL
SELECT * FROM ORDER_LINE173 UNION ALL
SELECT * FROM ORDER_LINE174 UNION ALL
SELECT * FROM ORDER_LINE175 UNION ALL
SELECT * FROM ORDER_LINE176 UNION ALL
SELECT * FROM ORDER_LINE177 UNION ALL
SELECT * FROM ORDER_LINE178 UNION ALL
SELECT * FROM ORDER_LINE179 UNION ALL
SELECT * FROM ORDER_LINE180 UNION ALL
SELECT * FROM ORDER_LINE181 UNION ALL
SELECT * FROM ORDER_LINE182 UNION ALL
SELECT * FROM ORDER_LINE183 UNION ALL
SELECT * FROM ORDER_LINE184 UNION ALL
SELECT * FROM ORDER_LINE185 UNION ALL
SELECT * FROM ORDER_LINE186 UNION ALL
SELECT * FROM ORDER_LINE187 UNION ALL
SELECT * FROM ORDER_LINE188 UNION ALL
SELECT * FROM ORDER_LINE189 UNION ALL
SELECT * FROM ORDER_LINE190 UNION ALL
SELECT * FROM ORDER_LINE191 UNION ALL
SELECT * FROM ORDER_LINE192 UNION ALL
SELECT * FROM ORDER_LINE193 UNION ALL
SELECT * FROM ORDER_LINE194 UNION ALL
SELECT * FROM ORDER_LINE195 UNION ALL
SELECT * FROM ORDER_LINE196 UNION ALL
SELECT * FROM ORDER_LINE197 UNION ALL
SELECT * FROM ORDER_LINE198 UNION ALL
SELECT * FROM ORDER_LINE199 UNION ALL
SELECT * FROM ORDER_LINE200
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_STOCK.ddl

```
connect to TPCC in share mode;
DROP VIEW STOCK;
CREATE VIEW STOCK
            (S_REMOTE_CNT,
             S_QUANTITY,
             S_ORDER_CNT,
             S_YTD,
             S_DATA,
             S_DIST_01,
             S_DIST_02,
             S_DIST_03,
             S_DIST_04,
             S_DIST_05,
             S_DIST_06,
             S_DIST_07,
             S_DIST_08,
             S_DIST_09,
             S_DIST_10,
             S_I_ID,
             S_W_ID
            ) AS SELECT * FROM STOCK1 UNION ALL
SELECT * FROM STOCK2 UNION ALL
SELECT * FROM STOCK3 UNION ALL
SELECT * FROM STOCK4 UNION ALL
SELECT * FROM STOCK5 UNION ALL
SELECT * FROM STOCK6 UNION ALL
SELECT * FROM STOCK7 UNION ALL
SELECT * FROM STOCK8 UNION ALL
SELECT * FROM STOCK9 UNION ALL
SELECT * FROM STOCK10 UNION ALL
SELECT * FROM STOCK11 UNION ALL
SELECT * FROM STOCK12 UNION ALL
SELECT * FROM STOCK13 UNION ALL
SELECT * FROM STOCK14 UNION ALL
SELECT * FROM STOCK15 UNION ALL
SELECT * FROM STOCK16 UNION ALL
SELECT * FROM STOCK17 UNION ALL
SELECT * FROM STOCK18 UNION ALL
SELECT * FROM STOCK19 UNION ALL
SELECT * FROM STOCK20 UNION ALL
SELECT * FROM STOCK21 UNION ALL
SELECT * FROM STOCK22 UNION ALL
SELECT * FROM STOCK23 UNION ALL
SELECT * FROM STOCK24 UNION ALL
SELECT * FROM STOCK25 UNION ALL
SELECT * FROM STOCK26 UNION ALL
SELECT * FROM STOCK27 UNION ALL
SELECT * FROM STOCK28 UNION ALL
SELECT * FROM STOCK29 UNION ALL
SELECT * FROM STOCK30 UNION ALL
SELECT * FROM STOCK31 UNION ALL
SELECT * FROM STOCK32 UNION ALL
SELECT * FROM STOCK33 UNION ALL
SELECT * FROM STOCK34 UNION ALL
SELECT * FROM STOCK35 UNION ALL
SELECT * FROM STOCK36 UNION ALL
SELECT * FROM STOCK37 UNION ALL
SELECT * FROM STOCK38 UNION ALL
SELECT * FROM STOCK39 UNION ALL
SELECT * FROM STOCK40 UNION ALL
SELECT * FROM STOCK41 UNION ALL
SELECT * FROM STOCK42 UNION ALL
SELECT * FROM STOCK43 UNION ALL
SELECT * FROM STOCK44 UNION ALL
SELECT * FROM STOCK45 UNION ALL
SELECT * FROM STOCK46 UNION ALL
SELECT * FROM STOCK47 UNION ALL
SELECT * FROM STOCK48 UNION ALL
SELECT * FROM STOCK49 UNION ALL
SELECT * FROM STOCK50 UNION ALL
SELECT * FROM STOCK51 UNION ALL
SELECT * FROM STOCK52 UNION ALL
SELECT * FROM STOCK53 UNION ALL
SELECT * FROM STOCK54 UNION ALL
SELECT * FROM STOCK55 UNION ALL
SELECT * FROM STOCK56 UNION ALL
```

```
SELECT * FROM STOCK57 UNION ALL
SELECT * FROM STOCK58 UNION ALL
SELECT * FROM STOCK59 UNION ALL
SELECT * FROM STOCK60 UNION ALL
SELECT * FROM STOCK61 UNION ALL
SELECT * FROM STOCK62 UNION ALL
SELECT * FROM STOCK63 UNION ALL
SELECT * FROM STOCK64 UNION ALL
SELECT * FROM STOCK65 UNION ALL
SELECT * FROM STOCK66 UNION ALL
SELECT * FROM STOCK67 UNION ALL
SELECT * FROM STOCK68 UNION ALL
SELECT * FROM STOCK69 UNION ALL
SELECT * FROM STOCK70 UNION ALL
SELECT * FROM STOCK71 UNION ALL
SELECT * FROM STOCK72 UNION ALL
SELECT * FROM STOCK73 UNION ALL
SELECT * FROM STOCK74 UNION ALL
SELECT * FROM STOCK75 UNION ALL
SELECT * FROM STOCK76 UNION ALL
SELECT * FROM STOCK77 UNION ALL
SELECT * FROM STOCK78 UNION ALL
SELECT * FROM STOCK79 UNION ALL
SELECT * FROM STOCK80 UNION ALL
SELECT * FROM STOCK81 UNION ALL
SELECT * FROM STOCK82 UNION ALL
SELECT * FROM STOCK83 UNION ALL
SELECT * FROM STOCK84 UNION ALL
SELECT * FROM STOCK85 UNION ALL
SELECT * FROM STOCK86 UNION ALL
SELECT * FROM STOCK87 UNION ALL
SELECT * FROM STOCK88 UNION ALL
SELECT * FROM STOCK89 UNION ALL
SELECT * FROM STOCK90 UNION ALL
SELECT * FROM STOCK91 UNION ALL
SELECT * FROM STOCK92 UNION ALL
SELECT * FROM STOCK93 UNION ALL
SELECT * FROM STOCK94 UNION ALL
SELECT * FROM STOCK95 UNION ALL
SELECT * FROM STOCK96 UNION ALL
SELECT * FROM STOCK97 UNION ALL
SELECT * FROM STOCK98 UNION ALL
SELECT * FROM STOCK99 UNION ALL
SELECT * FROM STOCK100 UNION ALL
SELECT * FROM STOCK101 UNION ALL
SELECT * FROM STOCK102 UNION ALL
SELECT * FROM STOCK103 UNION ALL
SELECT * FROM STOCK104 UNION ALL
SELECT * FROM STOCK105 UNION ALL
SELECT * FROM STOCK106 UNION ALL
SELECT * FROM STOCK107 UNION ALL
SELECT * FROM STOCK108 UNION ALL
SELECT * FROM STOCK109 UNION ALL
SELECT * FROM STOCK110 UNION ALL
SELECT * FROM STOCK111 UNION ALL
SELECT * FROM STOCK112 UNION ALL
SELECT * FROM STOCK113 UNION ALL
SELECT * FROM STOCK114 UNION ALL
SELECT * FROM STOCK115 UNION ALL
SELECT * FROM STOCK116 UNION ALL
SELECT * FROM STOCK117 UNION ALL
SELECT * FROM STOCK118 UNION ALL
SELECT * FROM STOCK119 UNION ALL
SELECT * FROM STOCK120 UNION ALL
SELECT * FROM STOCK121 UNION ALL
SELECT * FROM STOCK122 UNION ALL
SELECT * FROM STOCK123 UNION ALL
SELECT * FROM STOCK124 UNION ALL
SELECT * FROM STOCK125 UNION ALL
SELECT * FROM STOCK126 UNION ALL
SELECT * FROM STOCK127 UNION ALL
SELECT * FROM STOCK128 UNION ALL
SELECT * FROM STOCK129 UNION ALL
SELECT * FROM STOCK130 UNION ALL
SELECT * FROM STOCK131 UNION ALL
SELECT * FROM STOCK132 UNION ALL
SELECT * FROM STOCK133 UNION ALL
SELECT * FROM STOCK134 UNION ALL
SELECT * FROM STOCK135 UNION ALL
SELECT * FROM STOCK136 UNION ALL
SELECT * FROM STOCK137 UNION ALL
SELECT * FROM STOCK138 UNION ALL
SELECT * FROM STOCK139 UNION ALL
SELECT * FROM STOCK140 UNION ALL
SELECT * FROM STOCK141 UNION ALL
SELECT * FROM STOCK142 UNION ALL
SELECT * FROM STOCK143 UNION ALL
SELECT * FROM STOCK144 UNION ALL
SELECT * FROM STOCK145 UNION ALL
SELECT * FROM STOCK146 UNION ALL
SELECT * FROM STOCK147 UNION ALL
SELECT * FROM STOCK148 UNION ALL
SELECT * FROM STOCK149 UNION ALL
SELECT * FROM STOCK150 UNION ALL
SELECT * FROM STOCK151 UNION ALL
SELECT * FROM STOCK152 UNION ALL
SELECT * FROM STOCK153 UNION ALL
SELECT * FROM STOCK154 UNION ALL
SELECT * FROM STOCK155 UNION ALL
SELECT * FROM STOCK156 UNION ALL
SELECT * FROM STOCK157 UNION ALL
SELECT * FROM STOCK158 UNION ALL
SELECT * FROM STOCK159 UNION ALL
SELECT * FROM STOCK160 UNION ALL
SELECT * FROM STOCK161 UNION ALL
SELECT * FROM STOCK162 UNION ALL
SELECT * FROM STOCK163 UNION ALL
SELECT * FROM STOCK164 UNION ALL
SELECT * FROM STOCK165 UNION ALL
SELECT * FROM STOCK166 UNION ALL
SELECT * FROM STOCK167 UNION ALL
SELECT * FROM STOCK168 UNION ALL
SELECT * FROM STOCK169 UNION ALL
SELECT * FROM STOCK170 UNION ALL
SELECT * FROM STOCK171 UNION ALL
SELECT * FROM STOCK172 UNION ALL
SELECT * FROM STOCK173 UNION ALL
SELECT * FROM STOCK174 UNION ALL
SELECT * FROM STOCK175 UNION ALL
SELECT * FROM STOCK176 UNION ALL
SELECT * FROM STOCK177 UNION ALL
SELECT * FROM STOCK178 UNION ALL
SELECT * FROM STOCK179 UNION ALL
SELECT * FROM STOCK180 UNION ALL
SELECT * FROM STOCK181 UNION ALL
SELECT * FROM STOCK182 UNION ALL
SELECT * FROM STOCK183 UNION ALL
SELECT * FROM STOCK184 UNION ALL
SELECT * FROM STOCK185 UNION ALL
SELECT * FROM STOCK186 UNION ALL
SELECT * FROM STOCK187 UNION ALL
SELECT * FROM STOCK188 UNION ALL
SELECT * FROM STOCK189 UNION ALL
SELECT * FROM STOCK190 UNION ALL
SELECT * FROM STOCK191 UNION ALL
SELECT * FROM STOCK192 UNION ALL
SELECT * FROM STOCK193 UNION ALL
SELECT * FROM STOCK194 UNION ALL
SELECT * FROM STOCK195 UNION ALL
SELECT * FROM STOCK196 UNION ALL
SELECT * FROM STOCK197 UNION ALL
SELECT * FROM STOCK198 UNION ALL
SELECT * FROM STOCK199 UNION ALL
SELECT * FROM STOCK200
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/CRVW_WAREHOUSE.ddl

```
connect to TPCC in share mode;
DROP VIEW WAREHOUSE;
CREATE VIEW WAREHOUSE
            (W_NAME,
             W_STREET_1,
             W_STREET_2,
             W_CITY,
             W_STATE,
             W_ZIP,
             W_TAX,
             W_YTD,
             W_ID
            ) AS SELECT * FROM WAREHOUSE1 UNION ALL
SELECT * FROM WAREHOUSE2 UNION ALL
SELECT * FROM WAREHOUSE3 UNION ALL
SELECT * FROM WAREHOUSE4 UNION ALL
SELECT * FROM WAREHOUSE5 UNION ALL
SELECT * FROM WAREHOUSE6 UNION ALL
SELECT * FROM WAREHOUSE7 UNION ALL
SELECT * FROM WAREHOUSE8 UNION ALL
SELECT * FROM WAREHOUSE9 UNION ALL
SELECT * FROM WAREHOUSE10 UNION ALL
SELECT * FROM WAREHOUSE11 UNION ALL
SELECT * FROM WAREHOUSE12 UNION ALL
SELECT * FROM WAREHOUSE13 UNION ALL
SELECT * FROM WAREHOUSE14 UNION ALL
SELECT * FROM WAREHOUSE15 UNION ALL
SELECT * FROM WAREHOUSE16 UNION ALL
SELECT * FROM WAREHOUSE17 UNION ALL
SELECT * FROM WAREHOUSE18 UNION ALL
SELECT * FROM WAREHOUSE19 UNION ALL
SELECT * FROM WAREHOUSE20 UNION ALL
SELECT * FROM WAREHOUSE21 UNION ALL
SELECT * FROM WAREHOUSE22 UNION ALL
SELECT * FROM WAREHOUSE23 UNION ALL
SELECT * FROM WAREHOUSE24 UNION ALL
SELECT * FROM WAREHOUSE25 UNION ALL
SELECT * FROM WAREHOUSE26 UNION ALL
SELECT * FROM WAREHOUSE27 UNION ALL
SELECT * FROM WAREHOUSE28 UNION ALL
SELECT * FROM WAREHOUSE29 UNION ALL
SELECT * FROM WAREHOUSE30 UNION ALL
SELECT * FROM WAREHOUSE31 UNION ALL
SELECT * FROM WAREHOUSE32 UNION ALL
SELECT * FROM WAREHOUSE33 UNION ALL
SELECT * FROM WAREHOUSE34 UNION ALL
SELECT * FROM WAREHOUSE35 UNION ALL
SELECT * FROM WAREHOUSE36 UNION ALL
SELECT * FROM WAREHOUSE37 UNION ALL
SELECT * FROM WAREHOUSE38 UNION ALL
SELECT * FROM WAREHOUSE39 UNION ALL
SELECT * FROM WAREHOUSE40
WITH ROW MOVEMENT;
COMMIT WORK;
connect reset;
```

DDL/GEN_CUSTOMER_ALL.sh

```
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 1 320 -f1 /flats/F1_001/customer_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 321 640 -f1 /flats/F1_001/customer_001_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 641 960 -f1 /flats/F1_001/customer_001_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 961 1280 -f1 /flats/F1_001/customer_001_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 1281 1600 -f1 /flats/F1_001/customer_001_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 1601 1920 -f1 /flats/F1_002/customer_002_1.dat
```

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 1921 2240 -f1 /flats/F1_002/customer_002_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 2241 2560 -f1 /flats/F1_002/customer_002_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 2561 2880 -f1 /flats/F1_002/customer_002_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 2881 3200 -f1 /flats/F1_002/customer_002_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 3201 3520 -f1 /flats/F1_003/customer_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 3521 3840 -f1 /flats/F1_003/customer_003_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 3841 4160 -f1 /flats/F1_003/customer_003_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 4161 4480 -f1 /flats/F1_003/customer_003_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 4481 4800 -f1 /flats/F1_003/customer_003_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 4801 5120 -f1 /flats/F1_004/customer_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 5121 5440 -f1 /flats/F1_004/customer_004_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 5441 5760 -f1 /flats/F1_004/customer_004_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 5761 6080 -f1 /flats/F1_004/customer_004_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 6081 6400 -f1 /flats/F1_004/customer_004_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 6401 6720 -f1 /flats/F1_005/customer_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 6721 7040 -f1 /flats/F1_005/customer_005_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 7041 7360 -f1 /flats/F1_005/customer_005_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 7361 7680 -f1 /flats/F1_005/customer_005_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 7681 8000 -f1 /flats/F1_005/customer_005_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 8001 8320 -f1 /flats/F1_006/customer_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 8321 8640 -f1 /flats/F1_006/customer_006_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 8641 8960 -f1 /flats/F1_006/customer_006_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 8961 9280 -f1 /flats/F1_006/customer_006_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 9281 9600 -f1 /flats/F1_006/customer_006_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 9601 9920 -f1 /flats/F1_007/customer_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 9921 10240 -f1 /flats/F1_007/customer_007_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 10241 10560 -f1 /flats/F1_007/customer_007_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 10561 10880 -f1 /flats/F1_007/customer_007_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 10881 11200 -f1 /flats/F1_007/customer_007_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 11201 11520 -f1 /flats/F1_008/customer_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 11521 11840 -f1 /flats/F1_008/customer_008_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 11841 12160 -f1 /flats/F1_008/customer_008_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 12161 12480 -f1 /flats/F1_008/customer_008_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 12481 12800 -f1 /flats/F1_008/customer_008_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 12801 13120 -f1 /flats/F1_009/customer_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 13121 13440 -f1 /flats/F1_009/customer_009_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 13441 13760 -f1 /flats/F1_009/customer_009_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 13761 14080 -f1 /flats/F1_009/customer_009_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 14081 14400 -f1 /flats/F1_009/customer_009_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 14401 14720 -f1 /flats/F1_010/customer_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 14721 15040 -f1 /flats/F1_010/customer_010_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 15041 15360 -f1 /flats/F1_010/customer_010_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 15361 15680 -f1 /flats/F1_010/customer_010_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 15681 16000 -f1 /flats/F1_010/customer_010_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 16001 16320 -f1 /flats/F1_011/customer_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 16321 16640 -f1 /flats/F1_011/customer_011_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 16641 16960 -f1 /flats/F1_011/customer_011_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 16961 17280 -f1 /flats/F1_011/customer_011_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 17281 17600 -f1 /flats/F1_011/customer_011_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 17601 17920 -f1 /flats/F1_012/customer_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 17921 18240 -f1 /flats/F1_012/customer_012_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 18241 18560 -f1 /flats/F1_012/customer_012_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 18561 18880 -f1 /flats/F1_012/customer_012_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 18881 19200 -f1 /flats/F1_012/customer_012_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 19201 19520 -f1 /flats/F1_013/customer_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 19521 19840 -f1 /flats/F1_013/customer_013_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 19841 20160 -f1 /flats/F1_013/customer_013_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 20161 20480 -f1 /flats/F1_013/customer_013_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 20481 20800 -f1 /flats/F1_013/customer_013_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 20801 21120 -f1 /flats/F1_014/customer_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 21121 21440 -f1 /flats/F1_014/customer_014_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 21441 21760 -f1 /flats/F1_014/customer_014_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 21761 22080 -f1 /flats/F1_014/customer_014_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 22081 22400 -f1 /flats/F1_014/customer_014_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 22401 22720 -f1 /flats/F1_015/customer_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 22721 23040 -f1 /flats/F1_015/customer_015_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 23041 23360 -f1 /flats/F1_015/customer_015_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 23361 23680 -f1 /flats/F1_015/customer_015_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 23681 24000 -f1 /flats/F1_015/customer_015_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 24001 24320 -f1 /flats/F1_016/customer_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 24321 24640 -f1 /flats/F1_016/customer_016_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 24641 24960 -f1 /flats/F1_016/customer_016_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 24961 25280 -f1 /flats/F1_016/customer_016_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 25281 25600 -f1 /flats/F1_016/customer_016_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 25601 25920 -f1 /flats/F1_017/customer_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 25921 26240 -f1 /flats/F1_017/customer_017_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 26241 26560 -f1 /flats/F1_017/customer_017_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 26561 26880 -f1 /flats/F1_017/customer_017_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 26881 27200 -f1 /flats/F1_017/customer_017_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 27201 27520 -f1 /flats/F1_018/customer_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 27521 27840 -f1 /flats/F1_018/customer_018_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 27841 28160 -f1 /flats/F1_018/customer_018_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 28161 28480 -f1 /flats/F1_018/customer_018_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 28481 28800 -f1 /flats/F1_018/customer_018_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 28801 29120 -f1 /flats/F1_019/customer_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 29121 29440 -f1 /flats/F1_019/customer_019_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 29441 29760 -f1 /flats/F1_019/customer_019_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 29761 30080 -f1 /flats/F1_019/customer_019_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 30081 30400 -f1 /flats/F1_019/customer_019_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 30401 30720 -f1 /flats/F1_020/customer_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 30721 31040 -f1 /flats/F1_020/customer_020_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 31041 31360 -f1 /flats/F1_020/customer_020_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 31361 31680 -f1 /flats/F1_020/customer_020_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 31681 32000 -f1 /flats/F1_020/customer_020_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 32001 32320 -f1 /flats/F1_021/customer_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 32321 32640 -f1 /flats/F1_021/customer_021_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 32641 32960 -f1 /flats/F1_021/customer_021_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 32961 33280 -f1 /flats/F1_021/customer_021_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 33281 33600 -f1 /flats/F1_021/customer_021_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 33601 33920 -f1 /flats/F1_022/customer_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 33921 34240 -f1 /flats/F1_022/customer_022_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 34241 34560 -f1 /flats/F1_022/customer_022_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 34561 34880 -f1 /flats/F1_022/customer_022_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 34881 35200 -f1 /flats/F1_022/customer_022_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 35201 35520 -f1 /flats/F1_023/customer_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 35521 35840 -f1 /flats/F1_023/customer_023_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 35841 36160 -f1 /flats/F1_023/customer_023_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 36161 36480 -f1 /flats/F1_023/customer_023_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 36481 36800 -f1 /flats/F1_023/customer_023_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 36801 37120 -f1 /flats/F1_024/customer_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 37121 37440 -f1 /flats/F1_024/customer_024_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 37441 37760 -f1 /flats/F1_024/customer_024_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 37761 38080 -f1 /flats/F1_024/customer_024_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 38081 38400 -f1 /flats/F1_024/customer_024_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 38401 38720 -f1 /flats/F1_025/customer_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 38721 39040 -f1 /flats/F1_025/customer_025_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 39041 39360 -f1 /flats/F1_025/customer_025_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 39361 39680 -f1 /flats/F1_025/customer_025_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 39681 40000 -f1 /flats/F1_025/customer_025_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 40001 40320 -f1 /flats/F1_026/customer_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 40321 40640 -f1 /flats/F1_026/customer_026_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 40641 40960 -f1 /flats/F1_026/customer_026_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 40961 41280 -f1 /flats/F1_026/customer_026_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 41281 41600 -f1 /flats/F1_026/customer_026_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 41601 41920 -f1 /flats/F1_027/customer_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 41921 42240 -f1 /flats/F1_027/customer_027_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 42241 42560 -f1 /flats/F1_027/customer_027_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 42561 42880 -f1 /flats/F1_027/customer_027_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 42881 43200 -f1 /flats/F1_027/customer_027_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 43201 43520 -f1 /flats/F1_028/customer_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 43521 43840 -f1 /flats/F1_028/customer_028_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 43841 44160 -f1 /flats/F1_028/customer_028_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 44161 44480 -f1 /flats/F1_028/customer_028_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 44481 44800 -f1 /flats/F1_028/customer_028_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 44801 45120 -f1 /flats/F1_029/customer_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 45121 45440 -f1 /flats/F1_029/customer_029_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 45441 45760 -f1 /flats/F1_029/customer_029_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 45761 46080 -f1 /flats/F1_029/customer_029_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 46081 46400 -f1 /flats/F1_029/customer_029_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 46401 46720 -f1 /flats/F1_030/customer_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 46721 47040 -f1 /flats/F1_030/customer_030_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 47041 47360 -f1 /flats/F1_030/customer_030_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 47361 47680 -f1 /flats/F1_030/customer_030_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 47681 48000 -f1 /flats/F1_030/customer_030_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 48001 48320 -f1 /flats/F1_031/customer_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 48321 48640 -f1 /flats/F1_031/customer_031_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 48641 48960 -f1 /flats/F1_031/customer_031_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 48961 49280 -f1 /flats/F1_031/customer_031_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 49281 49600 -f1 /flats/F1_031/customer_031_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 49601 49920 -f1 /flats/F1_032/customer_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 49921 50240 -f1 /flats/F1_032/customer_032_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 50241 50560 -f1 /flats/F1_032/customer_032_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 50561 50880 -f1 /flats/F1_032/customer_032_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 50881 51200 -f1 /flats/F1_032/customer_032_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 51201 51520 -f1 /flats/F1_033/customer_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 51521 51840 -f1 /flats/F1_033/customer_033_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 51841 52160 -f1 /flats/F1_033/customer_033_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 52161 52480 -f1 /flats/F1_033/customer_033_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 52481 52800 -f1 /flats/F1_033/customer_033_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 52801 53120 -f1 /flats/F1_034/customer_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 53121 53440 -f1 /flats/F1_034/customer_034_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 53441 53760 -f1 /flats/F1_034/customer_034_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 53761 54080 -f1 /flats/F1_034/customer_034_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 54081 54400 -f1 /flats/F1_034/customer_034_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 54401 54720 -f1 /flats/F1_035/customer_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 54721 55040 -f1 /flats/F1_035/customer_035_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 55041 55360 -f1 /flats/F1_035/customer_035_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 55361 55680 -f1 /flats/F1_035/customer_035_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 55681 56000 -f1 /flats/F1_035/customer_035_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 56001 56320 -f1 /flats/F1_036/customer_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 56321 56640 -f1 /flats/F1_036/customer_036_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 56641 56960 -f1 /flats/F1_036/customer_036_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 56961 57280 -f1 /flats/F1_036/customer_036_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 57281 57600 -f1 /flats/F1_036/customer_036_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 57601 57920 -f1 /flats/F1_037/customer_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 57921 58240 -f1 /flats/F1_037/customer_037_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 58241 58560 -f1 /flats/F1_037/customer_037_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 58561 58880 -f1 /flats/F1_037/customer_037_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 58881 59200 -f1 /flats/F1_037/customer_037_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 59201 59520 -f1 /flats/F1_038/customer_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 59521 59840 -f1 /flats/F1_038/customer_038_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 59841 60160 -f1 /flats/F1_038/customer_038_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 60161 60480 -f1 /flats/F1_038/customer_038_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 60481 60800 -f1 /flats/F1_038/customer_038_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 60801 61120 -f1 /flats/F1_039/customer_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 61121 61440 -f1 /flats/F1_039/customer_039_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 61441 61760 -f1 /flats/F1_039/customer_039_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 61761 62080 -f1 /flats/F1_039/customer_039_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 62081 62400 -f1 /flats/F1_039/customer_039_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 62401 62720 -f1 /flats/F1_040/customer_040_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 62721 63040 -f1 /flats/F1_040/customer_040_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 63041 63360 -f1 /flats/F1_040/customer_040_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 63361 63680 -f1 /flats/F1_040/customer_040_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 63681 64000 -f1 /flats/F1_040/customer_040_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 64001 64320 -f1 /flats/F1_041/customer_041_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 64321 64640 -f1 /flats/F1_041/customer_041_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 64641 64960 -f1 /flats/F1_041/customer_041_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 64961 65280 -f1 /flats/F1_041/customer_041_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 65281 65600 -f1 /flats/F1_041/customer_041_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 65601 65920 -f1 /flats/F1_042/customer_042_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 65921 66240 -f1 /flats/F1_042/customer_042_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 66241 66560 -f1 /flats/F1_042/customer_042_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 66561 66880 -f1 /flats/F1_042/customer_042_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 66881 67200 -f1 /flats/F1_042/customer_042_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 67201 67520 -f1 /flats/F1_043/customer_043_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 67521 67840 -f1 /flats/F1_043/customer_043_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 67841 68160 -f1 /flats/F1_043/customer_043_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 68161 68480 -f1 /flats/F1_043/customer_043_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 68481 68800 -f1 /flats/F1_043/customer_043_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 68801 69120 -f1 /flats/F1_044/customer_044_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 69121 69440 -f1 /flats/F1_044/customer_044_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 69441 69760 -f1 /flats/F1_044/customer_044_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 69761 70080 -f1 /flats/F1_044/customer_044_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 70081 70400 -f1 /flats/F1_044/customer_044_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 70401 70720 -f1 /flats/F1_045/customer_045_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 70721 71040 -f1 /flats/F1_045/customer_045_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 71041 71360 -f1 /flats/F1_045/customer_045_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 71361 71680 -f1 /flats/F1_045/customer_045_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 71681 72000 -f1 /flats/F1_045/customer_045_5.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 72001 72320 -f1 /flats/F1_046/customer_046_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 72321 72640 -f1 /flats/F1_046/customer_046_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 72641 72960 -f1 /flats/F1_046/customer_046_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 72961 73280 -f1 /flats/F1_046/customer_046_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 73281 73600 -f1 /flats/F1_046/customer_046_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 73601 73920 -f1 /flats/F1_047/customer_047_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 73921 74240 -f1 /flats/F1_047/customer_047_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 74241 74560 -f1 /flats/F1_047/customer_047_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 74561 74880 -f1 /flats/F1_047/customer_047_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 74881 75200 -f1 /flats/F1_047/customer_047_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 75201 75520 -f1 /flats/F1_048/customer_048_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 75521 75840 -f1 /flats/F1_048/customer_048_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 75841 76160 -f1 /flats/F1_048/customer_048_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 76161 76480 -f1 /flats/F1_048/customer_048_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 76481 76800 -f1 /flats/F1_048/customer_048_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 76801 77120 -f1 /flats/F1_049/customer_049_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 77121 77440 -f1 /flats/F1_049/customer_049_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 77441 77760 -f1 /flats/F1_049/customer_049_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 77761 78080 -f1 /flats/F1_049/customer_049_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 78081 78400 -f1 /flats/F1_049/customer_049_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 78401 78720 -f1 /flats/F1_050/customer_050_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 78721 79040 -f1 /flats/F1_050/customer_050_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 79041 79360 -f1 /flats/F1_050/customer_050_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 79361 79680 -f1 /flats/F1_050/customer_050_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 79681 80000 -f1 /flats/F1_050/customer_050_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 80001 80320 -f1 /flats/F1_051/customer_051_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 80321 80640 -f1 /flats/F1_051/customer_051_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 80641 80960 -f1 /flats/F1_051/customer_051_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 80961 81280 -f1 /flats/F1_051/customer_051_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 81281 81600 -f1 /flats/F1_051/customer_051_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 81601 81920 -f1 /flats/F1_052/customer_052_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 81921 82240 -f1 /flats/F1_052/customer_052_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 82241 82560 -f1 /flats/F1_052/customer_052_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 82561 82880 -f1 /flats/F1_052/customer_052_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 82881 83200 -f1 /flats/F1_052/customer_052_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 83201 83520 -f1 /flats/F1_053/customer_053_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 83521 83840 -f1 /flats/F1_053/customer_053_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 83841 84160 -f1 /flats/F1_053/customer_053_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 84161 84480 -f1 /flats/F1_053/customer_053_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 84481 84800 -f1 /flats/F1_053/customer_053_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 84801 85120 -f1 /flats/F1_054/customer_054_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 85121 85440 -f1 /flats/F1_054/customer_054_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 85441 85760 -f1 /flats/F1_054/customer_054_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 85761 86080 -f1 /flats/F1_054/customer_054_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 86081 86400 -f1 /flats/F1_054/customer_054_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 86401 86720 -f1 /flats/F1_055/customer_055_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 86721 87040 -f1 /flats/F1_055/customer_055_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 87041 87360 -f1 /flats/F1_055/customer_055_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 87361 87680 -f1 /flats/F1_055/customer_055_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 87681 88000 -f1 /flats/F1_055/customer_055_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 88001 88320 -f1 /flats/F1_056/customer_056_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 88321 88640 -f1 /flats/F1_056/customer_056_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 88641 88960 -f1 /flats/F1_056/customer_056_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 88961 89280 -f1 /flats/F1_056/customer_056_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 89281 89600 -f1 /flats/F1_056/customer_056_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 89601 89920 -f1 /flats/F1_057/customer_057_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 89921 90240 -f1 /flats/F1_057/customer_057_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 90241 90560 -f1 /flats/F1_057/customer_057_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 90561 90880 -f1 /flats/F1_057/customer_057_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 90881 91200 -f1 /flats/F1_057/customer_057_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 91201 91520 -f1 /flats/F1_058/customer_058_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 91521 91840 -f1 /flats/F1_058/customer_058_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 91841 92160 -f1 /flats/F1_058/customer_058_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 92161 92480 -f1 /flats/F1_058/customer_058_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 92481 92800 -f1 /flats/F1_058/customer_058_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 92801 93120 -f1 /flats/F1_059/customer_059_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 93121 93440 -f1 /flats/F1_059/customer_059_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 93441 93760 -f1 /flats/F1_059/customer_059_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 93761 94080 -f1 /flats/F1_059/customer_059_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 94081 94400 -f1 /flats/F1_059/customer_059_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 94401 94720 -f1 /flats/F1_060/customer_060_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 94721 95040 -f1 /flats/F1_060/customer_060_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 95041 95360 -f1 /flats/F1_060/customer_060_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 95361 95680 -f1 /flats/F1_060/customer_060_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 95681 96000 -f1 /flats/F1_060/customer_060_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 96001 96320 -f1 /flats/F1_061/customer_061_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 96321 96640 -f1 /flats/F1_061/customer_061_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 96641 96960 -f1 /flats/F1_061/customer_061_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 96961 97280 -f1 /flats/F1_061/customer_061_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 97281 97600 -f1 /flats/F1_061/customer_061_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 97601 97920 -f1 /flats/F1_062/customer_062_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 97921 98240 -f1 /flats/F1_062/customer_062_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 98241 98560 -f1 /flats/F1_062/customer_062_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 98561 98880 -f1 /flats/F1_062/customer_062_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 98881 99200 -f1 /flats/F1_062/customer_062_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 99201 99520 -f1 /flats/F1_063/customer_063_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 99521 99840 -f1 /flats/F1_063/customer_063_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 99841 100160 -f1 /flats/F1_063/customer_063_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 100161 100480 -f1 /flats/F1_063/customer_063_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 100481 100800 -f1 /flats/F1_063/customer_063_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 100801 101120 -f1 /flats/F1_064/customer_064_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 101121 101440 -f1 /flats/F1_064/customer_064_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 101441 101760 -f1 /flats/F1_064/customer_064_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 101761 102080 -f1 /flats/F1_064/customer_064_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 102081 102400 -f1 /flats/F1_064/customer_064_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 102401 102720 -f1 /flats/F1_065/customer_065_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 102721 103040 -f1 /flats/F1_065/customer_065_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 103041 103360 -f1 /flats/F1_065/customer_065_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 103361 103680 -f1 /flats/F1_065/customer_065_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 103681 104000 -f1 /flats/F1_065/customer_065_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 104001 104320 -f1 /flats/F1_066/customer_066_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 104321 104640 -f1 /flats/F1_066/customer_066_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 104641 104960 -f1 /flats/F1_066/customer_066_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 104961 105280 -f1 /flats/F1_066/customer_066_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 105281 105600 -f1 /flats/F1_066/customer_066_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 105601 105920 -f1 /flats/F1_067/customer_067_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 105921 106240 -f1 /flats/F1_067/customer_067_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 106241 106560 -f1 /flats/F1_067/customer_067_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 106561 106880 -f1 /flats/F1_067/customer_067_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 106881 107200 -f1 /flats/F1_067/customer_067_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 107201 107520 -f1 /flats/F1_068/customer_068_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 107521 107840 -f1 /flats/F1_068/customer_068_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 107841 108160 -f1 /flats/F1_068/customer_068_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 108161 108480 -f1 /flats/F1_068/customer_068_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 108481 108800 -f1 /flats/F1_068/customer_068_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 108801 109120 -f1 /flats/F1_069/customer_069_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 109121 109440 -f1 /flats/F1_069/customer_069_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 109441 109760 -f1 /flats/F1_069/customer_069_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 109761 110080 -f1 /flats/F1_069/customer_069_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 110081 110400 -f1 /flats/F1_069/customer_069_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 110401 110720 -f1 /flats/F1_070/customer_070_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 110721 111040 -f1 /flats/F1_070/customer_070_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 111041 111360 -f1 /flats/F1_070/customer_070_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 111361 111680 -f1 /flats/F1_070/customer_070_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 111681 112000 -f1 /flats/F1_070/customer_070_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 112001 112320 -f1 /flats/F1_071/customer_071_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 112321 112640 -f1 /flats/F1_071/customer_071_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 112641 112960 -f1 /flats/F1_071/customer_071_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 112961 113280 -f1 /flats/F1_071/customer_071_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 113281 113600 -f1 /flats/F1_071/customer_071_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 113601 113920 -f1 /flats/F1_072/customer_072_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 113921 114240 -f1 /flats/F1_072/customer_072_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 114241 114560 -f1 /flats/F1_072/customer_072_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 114561 114880 -f1 /flats/F1_072/customer_072_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 114881 115200 -f1 /flats/F1_072/customer_072_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 115201 115520 -f1 /flats/F1_073/customer_073_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 115521 115840 -f1 /flats/F1_073/customer_073_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 115841 116160 -f1 /flats/F1_073/customer_073_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 116161 116480 -f1 /flats/F1_073/customer_073_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 116481 116800 -f1 /flats/F1_073/customer_073_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 116801 117120 -f1 /flats/F1_074/customer_074_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 117121 117440 -f1 /flats/F1_074/customer_074_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 117441 117760 -f1 /flats/F1_074/customer_074_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 117761 118080 -f1 /flats/F1_074/customer_074_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 118081 118400 -f1 /flats/F1_074/customer_074_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 118401 118720 -f1 /flats/F1_075/customer_075_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 118721 119040 -f1 /flats/F1_075/customer_075_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 119041 119360 -f1 /flats/F1_075/customer_075_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 119361 119680 -f1 /flats/F1_075/customer_075_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 119681 120000 -f1 /flats/F1_075/customer_075_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 120001 120320 -f1 /flats/F1_076/customer_076_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 120321 120640 -f1 /flats/F1_076/customer_076_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 120641 120960 -f1 /flats/F1_076/customer_076_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 120961 121280 -f1 /flats/F1_076/customer_076_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 121281 121600 -f1 /flats/F1_076/customer_076_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 121601 121920 -f1 /flats/F1_077/customer_077_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 121921 122240 -f1 /flats/F1_077/customer_077_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 122241 122560 -f1 /flats/F1_077/customer_077_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 122561 122880 -f1 /flats/F1_077/customer_077_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 122881 123200 -f1 /flats/F1_077/customer_077_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 123201 123520 -f1 /flats/F1_078/customer_078_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 123521 123840 -f1 /flats/F1_078/customer_078_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 123841 124160 -f1 /flats/F1_078/customer_078_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 124161 124480 -f1 /flats/F1_078/customer_078_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 124481 124800 -f1 /flats/F1_078/customer_078_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 124801 125120 -f1 /flats/F1_079/customer_079_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 125121 125440 -f1 /flats/F1_079/customer_079_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 125441 125760 -f1 /flats/F1_079/customer_079_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 125761 126080 -f1 /flats/F1_079/customer_079_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 126081 126400 -f1 /flats/F1_079/customer_079_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 126401 126720 -f1 /flats/F1_080/customer_080_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 126721 127040 -f1 /flats/F1_080/customer_080_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 127041 127360 -f1 /flats/F1_080/customer_080_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 127361 127680 -f1 /flats/F1_080/customer_080_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 127681 128000 -f1 /flats/F1_080/customer_080_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 128001 128320 -f1 /flats/F1_081/customer_081_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 128321 128640 -f1 /flats/F1_081/customer_081_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 128641 128960 -f1 /flats/F1_081/customer_081_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 128961 129280 -f1 /flats/F1_081/customer_081_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 129281 129600 -f1 /flats/F1_081/customer_081_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 129601 129920 -f1 /flats/F1_082/customer_082_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 129921 130240 -f1 /flats/F1_082/customer_082_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 130241 130560 -f1 /flats/F1_082/customer_082_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 130561 130880 -f1 /flats/F1_082/customer_082_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 130881 131200 -f1 /flats/F1_082/customer_082_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 131201 131520 -f1 /flats/F1_083/customer_083_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 131521 131840 -f1 /flats/F1_083/customer_083_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 131841 132160 -f1 /flats/F1_083/customer_083_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 132161 132480 -f1 /flats/F1_083/customer_083_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 132481 132800 -f1 /flats/F1_083/customer_083_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 132801 133120 -f1 /flats/F1_084/customer_084_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 133121 133440 -f1 /flats/F1_084/customer_084_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 133441 133760 -f1 /flats/F1_084/customer_084_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 133761 134080 -f1 /flats/F1_084/customer_084_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 134081 134400 -f1 /flats/F1_084/customer_084_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 134401 134720 -f1 /flats/F1_085/customer_085_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 134721 135040 -f1 /flats/F1_085/customer_085_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 135041 135360 -f1 /flats/F1_085/customer_085_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 135361 135680 -f1 /flats/F1_085/customer_085_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 135681 136000 -f1 /flats/F1_085/customer_085_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 136001 136320 -f1 /flats/F1_086/customer_086_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 136321 136640 -f1 /flats/F1_086/customer_086_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 136641 136960 -f1 /flats/F1_086/customer_086_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 136961 137280 -f1 /flats/F1_086/customer_086_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 137281 137600 -f1 /flats/F1_086/customer_086_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 137601 137920 -f1 /flats/F1_087/customer_087_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 137921 138240 -f1 /flats/F1_087/customer_087_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 138241 138560 -f1 /flats/F1_087/customer_087_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 138561 138880 -f1 /flats/F1_087/customer_087_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 138881 139200 -f1 /flats/F1_087/customer_087_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 139201 139520 -f1 /flats/F1_088/customer_088_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 139521 139840 -f1 /flats/F1_088/customer_088_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 139841 140160 -f1 /flats/F1_088/customer_088_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 140161 140480 -f1 /flats/F1_088/customer_088_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 140481 140800 -f1 /flats/F1_088/customer_088_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 140801 141120 -f1 /flats/F1_089/customer_089_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 141121 141440 -f1 /flats/F1_089/customer_089_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 141441 141760 -f1 /flats/F1_089/customer_089_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 141761 142080 -f1 /flats/F1_089/customer_089_4.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 142081 142400 -f1 /flats/F1_089/customer_089_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 142401 142720 -f1 /flats/F1_090/customer_090_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 142721 143040 -f1 /flats/F1_090/customer_090_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 143041 143360 -f1 /flats/F1_090/customer_090_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 143361 143680 -f1 /flats/F1_090/customer_090_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 143681 144000 -f1 /flats/F1_090/customer_090_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 144001 144320 -f1 /flats/F1_091/customer_091_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 144321 144640 -f1 /flats/F1_091/customer_091_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 144641 144960 -f1 /flats/F1_091/customer_091_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 144961 145280 -f1 /flats/F1_091/customer_091_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 145281 145600 -f1 /flats/F1_091/customer_091_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 145601 145920 -f1 /flats/F1_092/customer_092_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 145921 146240 -f1 /flats/F1_092/customer_092_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 146241 146560 -f1 /flats/F1_092/customer_092_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 146561 146880 -f1 /flats/F1_092/customer_092_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 146881 147200 -f1 /flats/F1_092/customer_092_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 147201 147520 -f1 /flats/F1_093/customer_093_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 147521 147840 -f1 /flats/F1_093/customer_093_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 147841 148160 -f1 /flats/F1_093/customer_093_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 148161 148480 -f1 /flats/F1_093/customer_093_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 148481 148800 -f1 /flats/F1_093/customer_093_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 148801 149120 -f1 /flats/F1_094/customer_094_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 149121 149440 -f1 /flats/F1_094/customer_094_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 149441 149760 -f1 /flats/F1_094/customer_094_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 149761 150080 -f1 /flats/F1_094/customer_094_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 150081 150400 -f1 /flats/F1_094/customer_094_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 150401 150720 -f1 /flats/F1_095/customer_095_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 150721 151040 -f1 /flats/F1_095/customer_095_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 151041 151360 -f1 /flats/F1_095/customer_095_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 151361 151680 -f1 /flats/F1_095/customer_095_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 151681 152000 -f1 /flats/F1_095/customer_095_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 152001 152320 -f1 /flats/F1_096/customer_096_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 152321 152640 -f1 /flats/F1_096/customer_096_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 152641 152960 -f1 /flats/F1_096/customer_096_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 152961 153280 -f1 /flats/F1_096/customer_096_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 153281 153600 -f1 /flats/F1_096/customer_096_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 153601 153920 -f1 /flats/F1_097/customer_097_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 153921 154240 -f1 /flats/F1_097/customer_097_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 154241 154560 -f1 /flats/F1_097/customer_097_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 154561 154880 -f1 /flats/F1_097/customer_097_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 154881 155200 -f1 /flats/F1_097/customer_097_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 155201 155520 -f1 /flats/F1_098/customer_098_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 155521 155840 -f1 /flats/F1_098/customer_098_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 155841 156160 -f1 /flats/F1_098/customer_098_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 156161 156480 -f1 /flats/F1_098/customer_098_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 156481 156800 -f1 /flats/F1_098/customer_098_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 156801 157120 -f1 /flats/F1_099/customer_099_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 157121 157440 -f1 /flats/F1_099/customer_099_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 157441 157760 -f1 /flats/F1_099/customer_099_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 157761 158080 -f1 /flats/F1_099/customer_099_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 158081 158400 -f1 /flats/F1_099/customer_099_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 158401 158720 -f1 /flats/F1_100/customer_100_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 158721 159040 -f1 /flats/F1_100/customer_100_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 159041 159360 -f1 /flats/F1_100/customer_100_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 159361 159680 -f1 /flats/F1_100/customer_100_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 159681 160000 -f1 /flats/F1_100/customer_100_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 160001 160320 -f1 /flats/F1_101/customer_101_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 160321 160640 -f1 /flats/F1_101/customer_101_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 160641 160960 -f1 /flats/F1_101/customer_101_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 160961 161280 -f1 /flats/F1_101/customer_101_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 161281 161600 -f1 /flats/F1_101/customer_101_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 161601 161920 -f1 /flats/F1_102/customer_102_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 161921 162240 -f1 /flats/F1_102/customer_102_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 162241 162560 -f1 /flats/F1_102/customer_102_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 162561 162880 -f1 /flats/F1_102/customer_102_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 162881 163200 -f1 /flats/F1_102/customer_102_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 163201 163520 -f1 /flats/F1_103/customer_103_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 163521 163840 -f1 /flats/F1_103/customer_103_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 163841 164160 -f1 /flats/F1_103/customer_103_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 164161 164480 -f1 /flats/F1_103/customer_103_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 164481 164800 -f1 /flats/F1_103/customer_103_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 164801 165120 -f1 /flats/F1_104/customer_104_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 165121 165440 -f1 /flats/F1_104/customer_104_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 165441 165760 -f1 /flats/F1_104/customer_104_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 165761 166080 -f1 /flats/F1_104/customer_104_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 166081 166400 -f1 /flats/F1_104/customer_104_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 166401 166720 -f1 /flats/F1_105/customer_105_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 166721 167040 -f1 /flats/F1_105/customer_105_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 167041 167360 -f1 /flats/F1_105/customer_105_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 167361 167680 -f1 /flats/F1_105/customer_105_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 167681 168000 -f1 /flats/F1_105/customer_105_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 168001 168320 -f1 /flats/F1_106/customer_106_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 168321 168640 -f1 /flats/F1_106/customer_106_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 168641 168960 -f1 /flats/F1_106/customer_106_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 168961 169280 -f1 /flats/F1_106/customer_106_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 169281 169600 -f1 /flats/F1_106/customer_106_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 169601 169920 -f1 /flats/F1_107/customer_107_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 169921 170240 -f1 /flats/F1_107/customer_107_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 170241 170560 -f1 /flats/F1_107/customer_107_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 170561 170880 -f1 /flats/F1_107/customer_107_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 170881 171200 -f1 /flats/F1_107/customer_107_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 171201 171520 -f1 /flats/F1_108/customer_108_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 171521 171840 -f1 /flats/F1_108/customer_108_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 171841 172160 -f1 /flats/F1_108/customer_108_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 172161 172480 -f1 /flats/F1_108/customer_108_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 172481 172800 -f1 /flats/F1_108/customer_108_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 172801 173120 -f1 /flats/F1_109/customer_109_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 173121 173440 -f1 /flats/F1_109/customer_109_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 173441 173760 -f1 /flats/F1_109/customer_109_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 173761 174080 -f1 /flats/F1_109/customer_109_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 174081 174400 -f1 /flats/F1_109/customer_109_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 174401 174720 -f1 /flats/F1_110/customer_110_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 174721 175040 -f1 /flats/F1_110/customer_110_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 175041 175360 -f1 /flats/F1_110/customer_110_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 175361 175680 -f1 /flats/F1_110/customer_110_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 175681 176000 -f1 /flats/F1_110/customer_110_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 176001 176320 -f1 /flats/F1_111/customer_111_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 176321 176640 -f1 /flats/F1_111/customer_111_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 176641 176960 -f1 /flats/F1_111/customer_111_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 176961 177280 -f1 /flats/F1_111/customer_111_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 177281 177600 -f1 /flats/F1_111/customer_111_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 177601 177920 -f1 /flats/F1_112/customer_112_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 177921 178240 -f1 /flats/F1_112/customer_112_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 178241 178560 -f1 /flats/F1_112/customer_112_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 178561 178880 -f1 /flats/F1_112/customer_112_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 178881 179200 -f1 /flats/F1_112/customer_112_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 179201 179520 -f1 /flats/F1_113/customer_113_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 179521 179840 -f1 /flats/F1_113/customer_113_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 179841 180160 -f1 /flats/F1_113/customer_113_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 180161 180480 -f1 /flats/F1_113/customer_113_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 180481 180800 -f1 /flats/F1_113/customer_113_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 180801 181120 -f1 /flats/F1_114/customer_114_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 181121 181440 -f1 /flats/F1_114/customer_114_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 181441 181760 -f1 /flats/F1_114/customer_114_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 181761 182080 -f1 /flats/F1_114/customer_114_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 182081 182400 -f1 /flats/F1_114/customer_114_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 182401 182720 -f1 /flats/F1_115/customer_115_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 182721 183040 -f1 /flats/F1_115/customer_115_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 183041 183360 -f1 /flats/F1_115/customer_115_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 183361 183680 -f1 /flats/F1_115/customer_115_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 183681 184000 -f1 /flats/F1_115/customer_115_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 184001 184320 -f1 /flats/F1_116/customer_116_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 184321 184640 -f1 /flats/F1_116/customer_116_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 184641 184960 -f1 /flats/F1_116/customer_116_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 184961 185280 -f1 /flats/F1_116/customer_116_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 185281 185600 -f1 /flats/F1_116/customer_116_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 185601 185920 -f1 /flats/F1_117/customer_117_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 185921 186240 -f1 /flats/F1_117/customer_117_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 186241 186560 -f1 /flats/F1_117/customer_117_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 186561 186880 -f1 /flats/F1_117/customer_117_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 186881 187200 -f1 /flats/F1_117/customer_117_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 187201 187520 -f1 /flats/F1_118/customer_118_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 187521 187840 -f1 /flats/F1_118/customer_118_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 187841 188160 -f1 /flats/F1_118/customer_118_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 188161 188480 -f1 /flats/F1_118/customer_118_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 188481 188800 -f1 /flats/F1_118/customer_118_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 188801 189120 -f1 /flats/F1_119/customer_119_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 189121 189440 -f1 /flats/F1_119/customer_119_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 189441 189760 -f1 /flats/F1_119/customer_119_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 189761 190080 -f1 /flats/F1_119/customer_119_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 190081 190400 -f1 /flats/F1_119/customer_119_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 190401 190720 -f1 /flats/F1_120/customer_120_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 190721 191040 -f1 /flats/F1_120/customer_120_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 191041 191360 -f1 /flats/F1_120/customer_120_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 191361 191680 -f1 /flats/F1_120/customer_120_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 191681 192000 -f1 /flats/F1_120/customer_120_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 192001 192320 -f1 /flats/F1_121/customer_121_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 192321 192640 -f1 /flats/F1_121/customer_121_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 192641 192960 -f1 /flats/F1_121/customer_121_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 192961 193280 -f1 /flats/F1_121/customer_121_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 193281 193600 -f1 /flats/F1_121/customer_121_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 193601 193920 -f1 /flats/F1_122/customer_122_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 193921 194240 -f1 /flats/F1_122/customer_122_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 194241 194560 -f1 /flats/F1_122/customer_122_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 194561 194880 -f1 /flats/F1_122/customer_122_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 194881 195200 -f1 /flats/F1_122/customer_122_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 195201 195520 -f1 /flats/F1_123/customer_123_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 195521 195840 -f1 /flats/F1_123/customer_123_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 195841 196160 -f1 /flats/F1_123/customer_123_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 196161 196480 -f1 /flats/F1_123/customer_123_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 196481 196800 -f1 /flats/F1_123/customer_123_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 196801 197120 -f1 /flats/F1_124/customer_124_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 197121 197440 -f1 /flats/F1_124/customer_124_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 197441 197760 -f1 /flats/F1_124/customer_124_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 197761 198080 -f1 /flats/F1_124/customer_124_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 198081 198400 -f1 /flats/F1_124/customer_124_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 198401 198720 -f1 /flats/F1_125/customer_125_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 198721 199040 -f1 /flats/F1_125/customer_125_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 199041 199360 -f1 /flats/F1_125/customer_125_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 199361 199680 -f1 /flats/F1_125/customer_125_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 199681 200000 -f1 /flats/F1_125/customer_125_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 200001 200320 -f1 /flats/F1_126/customer_126_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 200321 200640 -f1 /flats/F1_126/customer_126_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 200641 200960 -f1 /flats/F1_126/customer_126_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 200961 201280 -f1 /flats/F1_126/customer_126_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 201281 201600 -f1 /flats/F1_126/customer_126_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 201601 201920 -f1 /flats/F1_127/customer_127_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 201921 202240 -f1 /flats/F1_127/customer_127_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 202241 202560 -f1 /flats/F1_127/customer_127_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 202561 202880 -f1 /flats/F1_127/customer_127_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 202881 203200 -f1 /flats/F1_127/customer_127_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 203201 203520 -f1 /flats/F1_128/customer_128_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 203521 203840 -f1 /flats/F1_128/customer_128_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 203841 204160 -f1 /flats/F1_128/customer_128_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 204161 204480 -f1 /flats/F1_128/customer_128_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 204481 204800 -f1 /flats/F1_128/customer_128_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 204801 205120 -f1 /flats/F1_129/customer_129_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 205121 205440 -f1 /flats/F1_129/customer_129_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 205441 205760 -f1 /flats/F1_129/customer_129_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 205761 206080 -f1 /flats/F1_129/customer_129_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 206081 206400 -f1 /flats/F1_129/customer_129_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 206401 206720 -f1 /flats/F1_130/customer_130_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 206721 207040 -f1 /flats/F1_130/customer_130_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 207041 207360 -f1 /flats/F1_130/customer_130_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 207361 207680 -f1 /flats/F1_130/customer_130_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 207681 208000 -f1 /flats/F1_130/customer_130_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 208001 208320 -f1 /flats/F1_131/customer_131_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 208321 208640 -f1 /flats/F1_131/customer_131_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 208641 208960 -f1 /flats/F1_131/customer_131_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 208961 209280 -f1 /flats/F1_131/customer_131_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 209281 209600 -f1 /flats/F1_131/customer_131_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 209601 209920 -f1 /flats/F1_132/customer_132_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 209921 210240 -f1 /flats/F1_132/customer_132_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 210241 210560 -f1 /flats/F1_132/customer_132_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 210561 210880 -f1 /flats/F1_132/customer_132_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 210881 211200 -f1 /flats/F1_132/customer_132_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 211201 211520 -f1 /flats/F1_133/customer_133_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 211521 211840 -f1 /flats/F1_133/customer_133_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 211841 212160 -f1 /flats/F1_133/customer_133_3.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 212161 212480 -f1 /flats/F1_133/customer_133_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 212481 212800 -f1 /flats/F1_133/customer_133_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 212801 213120 -f1 /flats/F1_134/customer_134_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 213121 213440 -f1 /flats/F1_134/customer_134_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 213441 213760 -f1 /flats/F1_134/customer_134_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 213761 214080 -f1 /flats/F1_134/customer_134_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 214081 214400 -f1 /flats/F1_134/customer_134_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 214401 214720 -f1 /flats/F1_135/customer_135_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 214721 215040 -f1 /flats/F1_135/customer_135_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 215041 215360 -f1 /flats/F1_135/customer_135_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 215361 215680 -f1 /flats/F1_135/customer_135_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 215681 216000 -f1 /flats/F1_135/customer_135_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 216001 216320 -f1 /flats/F1_136/customer_136_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 216321 216640 -f1 /flats/F1_136/customer_136_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 216641 216960 -f1 /flats/F1_136/customer_136_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 216961 217280 -f1 /flats/F1_136/customer_136_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 217281 217600 -f1 /flats/F1_136/customer_136_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 217601 217920 -f1 /flats/F1_137/customer_137_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 217921 218240 -f1 /flats/F1_137/customer_137_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 218241 218560 -f1 /flats/F1_137/customer_137_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 218561 218880 -f1 /flats/F1_137/customer_137_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 218881 219200 -f1 /flats/F1_137/customer_137_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 219201 219520 -f1 /flats/F1_138/customer_138_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 219521 219840 -f1 /flats/F1_138/customer_138_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 219841 220160 -f1 /flats/F1_138/customer_138_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 220161 220480 -f1 /flats/F1_138/customer_138_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 220481 220800 -f1 /flats/F1_138/customer_138_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 220801 221120 -f1 /flats/F1_139/customer_139_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 221121 221440 -f1 /flats/F1_139/customer_139_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 221441 221760 -f1 /flats/F1_139/customer_139_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 221761 222080 -f1 /flats/F1_139/customer_139_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 222081 222400 -f1 /flats/F1_139/customer_139_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 222401 222720 -f1 /flats/F1_140/customer_140_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 222721 223040 -f1 /flats/F1_140/customer_140_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 223041 223360 -f1 /flats/F1_140/customer_140_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 223361 223680 -f1 /flats/F1_140/customer_140_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 223681 224000 -f1 /flats/F1_140/customer_140_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 224001 224320 -f1 /flats/F1_141/customer_141_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 224321 224640 -f1 /flats/F1_141/customer_141_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 224641 224960 -f1 /flats/F1_141/customer_141_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 224961 225280 -f1 /flats/F1_141/customer_141_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 225281 225600 -f1 /flats/F1_141/customer_141_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 225601 225920 -f1 /flats/F1_142/customer_142_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 225921 226240 -f1 /flats/F1_142/customer_142_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 226241 226560 -f1 /flats/F1_142/customer_142_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 226561 226880 -f1 /flats/F1_142/customer_142_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 226881 227200 -f1 /flats/F1_142/customer_142_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 227201 227520 -f1 /flats/F1_143/customer_143_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 227521 227840 -f1 /flats/F1_143/customer_143_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 227841 228160 -f1 /flats/F1_143/customer_143_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 228161 228480 -f1 /flats/F1_143/customer_143_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 228481 228800 -f1 /flats/F1_143/customer_143_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 228801 229120 -f1 /flats/F1_144/customer_144_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 229121 229440 -f1 /flats/F1_144/customer_144_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 229441 229760 -f1 /flats/F1_144/customer_144_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 229761 230080 -f1 /flats/F1_144/customer_144_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 230081 230400 -f1 /flats/F1_144/customer_144_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 230401 230720 -f1 /flats/F1_145/customer_145_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 230721 231040 -f1 /flats/F1_145/customer_145_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 231041 231360 -f1 /flats/F1_145/customer_145_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 231361 231680 -f1 /flats/F1_145/customer_145_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 231681 232000 -f1 /flats/F1_145/customer_145_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 232001 232320 -f1 /flats/F1_146/customer_146_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 232321 232640 -f1 /flats/F1_146/customer_146_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 232641 232960 -f1 /flats/F1_146/customer_146_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 232961 233280 -f1 /flats/F1_146/customer_146_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 233281 233600 -f1 /flats/F1_146/customer_146_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 233601 233920 -f1 /flats/F1_147/customer_147_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 233921 234240 -f1 /flats/F1_147/customer_147_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 234241 234560 -f1 /flats/F1_147/customer_147_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 234561 234880 -f1 /flats/F1_147/customer_147_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 234881 235200 -f1 /flats/F1_147/customer_147_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 235201 235520 -f1 /flats/F1_148/customer_148_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 235521 235840 -f1 /flats/F1_148/customer_148_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 235841 236160 -f1 /flats/F1_148/customer_148_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 236161 236480 -f1 /flats/F1_148/customer_148_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 236481 236800 -f1 /flats/F1_148/customer_148_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 236801 237120 -f1 /flats/F1_149/customer_149_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 237121 237440 -f1 /flats/F1_149/customer_149_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 237441 237760 -f1 /flats/F1_149/customer_149_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 237761 238080 -f1 /flats/F1_149/customer_149_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 238081 238400 -f1 /flats/F1_149/customer_149_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 238401 238720 -f1 /flats/F1_150/customer_150_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 238721 239040 -f1 /flats/F1_150/customer_150_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 239041 239360 -f1 /flats/F1_150/customer_150_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 239361 239680 -f1 /flats/F1_150/customer_150_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 239681 240000 -f1 /flats/F1_150/customer_150_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 240001 240320 -f1 /flats/F1_151/customer_151_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 240321 240640 -f1 /flats/F1_151/customer_151_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 240641 240960 -f1 /flats/F1_151/customer_151_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 240961 241280 -f1 /flats/F1_151/customer_151_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 241281 241600 -f1 /flats/F1_151/customer_151_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 241601 241920 -f1 /flats/F1_152/customer_152_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 241921 242240 -f1 /flats/F1_152/customer_152_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 242241 242560 -f1 /flats/F1_152/customer_152_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 242561 242880 -f1 /flats/F1_152/customer_152_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 242881 243200 -f1 /flats/F1_152/customer_152_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 243201 243520 -f1 /flats/F1_153/customer_153_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 243521 243840 -f1 /flats/F1_153/customer_153_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 243841 244160 -f1 /flats/F1_153/customer_153_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 244161 244480 -f1 /flats/F1_153/customer_153_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 244481 244800 -f1 /flats/F1_153/customer_153_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 244801 245120 -f1 /flats/F1_154/customer_154_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 245121 245440 -f1 /flats/F1_154/customer_154_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 245441 245760 -f1 /flats/F1_154/customer_154_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 245761 246080 -f1 /flats/F1_154/customer_154_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 246081 246400 -f1 /flats/F1_154/customer_154_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 246401 246720 -f1 /flats/F1_155/customer_155_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 246721 247040 -f1 /flats/F1_155/customer_155_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 247041 247360 -f1 /flats/F1_155/customer_155_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 247361 247680 -f1 /flats/F1_155/customer_155_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 247681 248000 -f1 /flats/F1_155/customer_155_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 248001 248320 -f1 /flats/F1_156/customer_156_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 248321 248640 -f1 /flats/F1_156/customer_156_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 248641 248960 -f1 /flats/F1_156/customer_156_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 248961 249280 -f1 /flats/F1_156/customer_156_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 249281 249600 -f1 /flats/F1_156/customer_156_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 249601 249920 -f1 /flats/F1_157/customer_157_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 249921 250240 -f1 /flats/F1_157/customer_157_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 250241 250560 -f1 /flats/F1_157/customer_157_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 250561 250880 -f1 /flats/F1_157/customer_157_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 250881 251200 -f1 /flats/F1_157/customer_157_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 251201 251520 -f1 /flats/F1_158/customer_158_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 251521 251840 -f1 /flats/F1_158/customer_158_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 251841 252160 -f1 /flats/F1_158/customer_158_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 252161 252480 -f1 /flats/F1_158/customer_158_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 252481 252800 -f1 /flats/F1_158/customer_158_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 252801 253120 -f1 /flats/F1_159/customer_159_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 253121 253440 -f1 /flats/F1_159/customer_159_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 253441 253760 -f1 /flats/F1_159/customer_159_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 253761 254080 -f1 /flats/F1_159/customer_159_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 254081 254400 -f1 /flats/F1_159/customer_159_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 254401 254720 -f1 /flats/F1_160/customer_160_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 254721 255040 -f1 /flats/F1_160/customer_160_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 255041 255360 -f1 /flats/F1_160/customer_160_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 255361 255680 -f1 /flats/F1_160/customer_160_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 255681 256000 -f1 /flats/F1_160/customer_160_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 256001 256320 -f1 /flats/F1_161/customer_161_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 256321 256640 -f1 /flats/F1_161/customer_161_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 256641 256960 -f1 /flats/F1_161/customer_161_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 256961 257280 -f1 /flats/F1_161/customer_161_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 257281 257600 -f1 /flats/F1_161/customer_161_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 257601 257920 -f1 /flats/F1_162/customer_162_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 257921 258240 -f1 /flats/F1_162/customer_162_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 258241 258560 -f1 /flats/F1_162/customer_162_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 258561 258880 -f1 /flats/F1_162/customer_162_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 258881 259200 -f1 /flats/F1_162/customer_162_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 259201 259520 -f1 /flats/F1_163/customer_163_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 259521 259840 -f1 /flats/F1_163/customer_163_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 259841 260160 -f1 /flats/F1_163/customer_163_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 260161 260480 -f1 /flats/F1_163/customer_163_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 260481 260800 -f1 /flats/F1_163/customer_163_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 260801 261120 -f1 /flats/F1_164/customer_164_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 261121 261440 -f1 /flats/F1_164/customer_164_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 261441 261760 -f1 /flats/F1_164/customer_164_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 261761 262080 -f1 /flats/F1_164/customer_164_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 262081 262400 -f1 /flats/F1_164/customer_164_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 262401 262720 -f1 /flats/F1_165/customer_165_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 262721 263040 -f1 /flats/F1_165/customer_165_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 263041 263360 -f1 /flats/F1_165/customer_165_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 263361 263680 -f1 /flats/F1_165/customer_165_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 263681 264000 -f1 /flats/F1_165/customer_165_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 264001 264320 -f1 /flats/F1_166/customer_166_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 264321 264640 -f1 /flats/F1_166/customer_166_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 264641 264960 -f1 /flats/F1_166/customer_166_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 264961 265280 -f1 /flats/F1_166/customer_166_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 265281 265600 -f1 /flats/F1_166/customer_166_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 265601 265920 -f1 /flats/F1_167/customer_167_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 265921 266240 -f1 /flats/F1_167/customer_167_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 266241 266560 -f1 /flats/F1_167/customer_167_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 266561 266880 -f1 /flats/F1_167/customer_167_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 266881 267200 -f1 /flats/F1_167/customer_167_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 267201 267520 -f1 /flats/F1_168/customer_168_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 267521 267840 -f1 /flats/F1_168/customer_168_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 267841 268160 -f1 /flats/F1_168/customer_168_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 268161 268480 -f1 /flats/F1_168/customer_168_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 268481 268800 -f1 /flats/F1_168/customer_168_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 268801 269120 -f1 /flats/F1_169/customer_169_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 269121 269440 -f1 /flats/F1_169/customer_169_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 269441 269760 -f1 /flats/F1_169/customer_169_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 269761 270080 -f1 /flats/F1_169/customer_169_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 270081 270400 -f1 /flats/F1_169/customer_169_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 270401 270720 -f1 /flats/F1_170/customer_170_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 270721 271040 -f1 /flats/F1_170/customer_170_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 271041 271360 -f1 /flats/F1_170/customer_170_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 271361 271680 -f1 /flats/F1_170/customer_170_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 271681 272000 -f1 /flats/F1_170/customer_170_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 272001 272320 -f1 /flats/F1_171/customer_171_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 272321 272640 -f1 /flats/F1_171/customer_171_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 272641 272960 -f1 /flats/F1_171/customer_171_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 272961 273280 -f1 /flats/F1_171/customer_171_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 273281 273600 -f1 /flats/F1_171/customer_171_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 273601 273920 -f1 /flats/F1_172/customer_172_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 273921 274240 -f1 /flats/F1_172/customer_172_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 274241 274560 -f1 /flats/F1_172/customer_172_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 274561 274880 -f1 /flats/F1_172/customer_172_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 274881 275200 -f1 /flats/F1_172/customer_172_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 275201 275520 -f1 /flats/F1_173/customer_173_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 275521 275840 -f1 /flats/F1_173/customer_173_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 275841 276160 -f1 /flats/F1_173/customer_173_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 276161 276480 -f1 /flats/F1_173/customer_173_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 276481 276800 -f1 /flats/F1_173/customer_173_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 276801 277120 -f1 /flats/F1_174/customer_174_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 277121 277440 -f1 /flats/F1_174/customer_174_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 277441 277760 -f1 /flats/F1_174/customer_174_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 277761 278080 -f1 /flats/F1_174/customer_174_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 278081 278400 -f1 /flats/F1_174/customer_174_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 278401 278720 -f1 /flats/F1_175/customer_175_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 278721 279040 -f1 /flats/F1_175/customer_175_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 279041 279360 -f1 /flats/F1_175/customer_175_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 279361 279680 -f1 /flats/F1_175/customer_175_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 279681 280000 -f1 /flats/F1_175/customer_175_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 280001 280320 -f1 /flats/F1_176/customer_176_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 280321 280640 -f1 /flats/F1_176/customer_176_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 280641 280960 -f1 /flats/F1_176/customer_176_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 280961 281280 -f1 /flats/F1_176/customer_176_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 281281 281600 -f1 /flats/F1_176/customer_176_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 281601 281920 -f1 /flats/F1_177/customer_177_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 281921 282240 -f1 /flats/F1_177/customer_177_2.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 282241 282560 -f1 /flats/F1_177/customer_177_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 282561 282880 -f1 /flats/F1_177/customer_177_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 282881 283200 -f1 /flats/F1_177/customer_177_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 283201 283520 -f1 /flats/F1_178/customer_178_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 283521 283840 -f1 /flats/F1_178/customer_178_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 283841 284160 -f1 /flats/F1_178/customer_178_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 284161 284480 -f1 /flats/F1_178/customer_178_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 284481 284800 -f1 /flats/F1_178/customer_178_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 284801 285120 -f1 /flats/F1_179/customer_179_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 285121 285440 -f1 /flats/F1_179/customer_179_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 285441 285760 -f1 /flats/F1_179/customer_179_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 285761 286080 -f1 /flats/F1_179/customer_179_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 286081 286400 -f1 /flats/F1_179/customer_179_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 286401 286720 -f1 /flats/F1_180/customer_180_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 286721 287040 -f1 /flats/F1_180/customer_180_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 287041 287360 -f1 /flats/F1_180/customer_180_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 287361 287680 -f1 /flats/F1_180/customer_180_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 287681 288000 -f1 /flats/F1_180/customer_180_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 288001 288320 -f1 /flats/F1_181/customer_181_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 288321 288640 -f1 /flats/F1_181/customer_181_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 288641 288960 -f1 /flats/F1_181/customer_181_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 288961 289280 -f1 /flats/F1_181/customer_181_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 289281 289600 -f1 /flats/F1_181/customer_181_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 289601 289920 -f1 /flats/F1_182/customer_182_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 289921 290240 -f1 /flats/F1_182/customer_182_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 290241 290560 -f1 /flats/F1_182/customer_182_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 290561 290880 -f1 /flats/F1_182/customer_182_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 290881 291200 -f1 /flats/F1_182/customer_182_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 291201 291520 -f1 /flats/F1_183/customer_183_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 291521 291840 -f1 /flats/F1_183/customer_183_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 291841 292160 -f1 /flats/F1_183/customer_183_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 292161 292480 -f1 /flats/F1_183/customer_183_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 292481 292800 -f1 /flats/F1_183/customer_183_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 292801 293120 -f1 /flats/F1_184/customer_184_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 293121 293440 -f1 /flats/F1_184/customer_184_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 293441 293760 -f1 /flats/F1_184/customer_184_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 293761 294080 -f1 /flats/F1_184/customer_184_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 294081 294400 -f1 /flats/F1_184/customer_184_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 294401 294720 -f1 /flats/F1_185/customer_185_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 294721 295040 -f1 /flats/F1_185/customer_185_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 295041 295360 -f1 /flats/F1_185/customer_185_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 295361 295680 -f1 /flats/F1_185/customer_185_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 295681 296000 -f1 /flats/F1_185/customer_185_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 296001 296320 -f1 /flats/F1_186/customer_186_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 296321 296640 -f1 /flats/F1_186/customer_186_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 296641 296960 -f1 /flats/F1_186/customer_186_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 296961 297280 -f1 /flats/F1_186/customer_186_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 297281 297600 -f1 /flats/F1_186/customer_186_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 297601 297920 -f1 /flats/F1_187/customer_187_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 297921 298240 -f1 /flats/F1_187/customer_187_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 298241 298560 -f1 /flats/F1_187/customer_187_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 298561 298880 -f1 /flats/F1_187/customer_187_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 298881 299200 -f1 /flats/F1_187/customer_187_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 299201 299520 -f1 /flats/F1_188/customer_188_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 299521 299840 -f1 /flats/F1_188/customer_188_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 299841 300160 -f1 /flats/F1_188/customer_188_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 300161 300480 -f1 /flats/F1_188/customer_188_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 300481 300800 -f1 /flats/F1_188/customer_188_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 300801 301120 -f1 /flats/F1_189/customer_189_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 301121 301440 -f1 /flats/F1_189/customer_189_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 301441 301760 -f1 /flats/F1_189/customer_189_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 301761 302080 -f1 /flats/F1_189/customer_189_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 302081 302400 -f1 /flats/F1_189/customer_189_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 302401 302720 -f1 /flats/F1_190/customer_190_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 302721 303040 -f1 /flats/F1_190/customer_190_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 303041 303360 -f1 /flats/F1_190/customer_190_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 303361 303680 -f1 /flats/F1_190/customer_190_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 303681 304000 -f1 /flats/F1_190/customer_190_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 304001 304320 -f1 /flats/F1_191/customer_191_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 304321 304640 -f1 /flats/F1_191/customer_191_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 304641 304960 -f1 /flats/F1_191/customer_191_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 304961 305280 -f1 /flats/F1_191/customer_191_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 305281 305600 -f1 /flats/F1_191/customer_191_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 305601 305920 -f1 /flats/F1_192/customer_192_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 305921 306240 -f1 /flats/F1_192/customer_192_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 306241 306560 -f1 /flats/F1_192/customer_192_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 306561 306880 -f1 /flats/F1_192/customer_192_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 306881 307200 -f1 /flats/F1_192/customer_192_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 307201 307520 -f1 /flats/F1_193/customer_193_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 307521 307840 -f1 /flats/F1_193/customer_193_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 307841 308160 -f1 /flats/F1_193/customer_193_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 308161 308480 -f1 /flats/F1_193/customer_193_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 308481 308800 -f1 /flats/F1_193/customer_193_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 308801 309120 -f1 /flats/F1_194/customer_194_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 309121 309440 -f1 /flats/F1_194/customer_194_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 309441 309760 -f1 /flats/F1_194/customer_194_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 309761 310080 -f1 /flats/F1_194/customer_194_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 310081 310400 -f1 /flats/F1_194/customer_194_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 310401 310720 -f1 /flats/F1_195/customer_195_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 310721 311040 -f1 /flats/F1_195/customer_195_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 311041 311360 -f1 /flats/F1_195/customer_195_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 311361 311680 -f1 /flats/F1_195/customer_195_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 311681 312000 -f1 /flats/F1_195/customer_195_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 312001 312320 -f1 /flats/F1_196/customer_196_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 312321 312640 -f1 /flats/F1_196/customer_196_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 312641 312960 -f1 /flats/F1_196/customer_196_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 312961 313280 -f1 /flats/F1_196/customer_196_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 313281 313600 -f1 /flats/F1_196/customer_196_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 313601 313920 -f1 /flats/F1_197/customer_197_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 313921 314240 -f1 /flats/F1_197/customer_197_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 314241 314560 -f1 /flats/F1_197/customer_197_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 314561 314880 -f1 /flats/F1_197/customer_197_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 314881 315200 -f1 /flats/F1_197/customer_197_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 315201 315520 -f1 /flats/F1_198/customer_198_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 315521 315840 -f1 /flats/F1_198/customer_198_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 315841 316160 -f1 /flats/F1_198/customer_198_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 316161 316480 -f1 /flats/F1_198/customer_198_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 316481 316800 -f1 /flats/F1_198/customer_198_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 316801 317120 -f1 /flats/F1_199/customer_199_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 317121 317440 -f1 /flats/F1_199/customer_199_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 317441 317760 -f1 /flats/F1_199/customer_199_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 317761 318080 -f1 /flats/F1_199/customer_199_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 318081 318400 -f1 /flats/F1_199/customer_199_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 318401 318720 -f1 /flats/F1_200/customer_200_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 318721 319040 -f1 /flats/F1_200/customer_200_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 319041 319360 -f1 /flats/F1_200/customer_200_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 319361 319680 -f1 /flats/F1_200/customer_200_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 7 -r 319681 320000 -f1 /flats/F1_200/customer_200_5.dat

DDL/GEN_DISTRICT_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 1 8000 -f1 /flats/F1_001/district_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 8001 16000 -f1 /flats/F1_002/district_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 16001 24000 -f1 /flats/F1_003/district_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 24001 32000 -f1 /flats/F1_004/district_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 32001 40000 -f1 /flats/F1_005/district_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 40001 48000 -f1 /flats/F1_006/district_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 48001 56000 -f1 /flats/F1_007/district_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 56001 64000 -f1 /flats/F1_008/district_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 64001 72000 -f1 /flats/F1_009/district_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 72001 80000 -f1 /flats/F1_010/district_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 80001 88000 -f1 /flats/F1_011/district_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 88001 96000 -f1 /flats/F1_012/district_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 96001 104000 -f1 /flats/F1_013/district_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 104001 112000 -f1 /flats/F1_014/district_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 112001 120000 -f1 /flats/F1_015/district_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 120001 128000 -f1 /flats/F1_016/district_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 128001 136000 -f1 /flats/F1_017/district_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 136001 144000 -f1 /flats/F1_018/district_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 144001 152000 -f1 /flats/F1_019/district_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 152001 160000 -f1 /flats/F1_020/district_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 160001 168000 -f1 /flats/F1_021/district_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 168001 176000 -f1 /flats/F1_022/district_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 176001 184000 -f1 /flats/F1_023/district_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 184001 192000 -f1 /flats/F1_024/district_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 192001 200000 -f1 /flats/F1_025/district_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 200001 208000 -f1 /flats/F1_026/district_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 208001 216000 -f1 /flats/F1_027/district_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 216001 224000 -f1 /flats/F1_028/district_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 224001 232000 -f1 /flats/F1_029/district_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 232001 240000 -f1 /flats/F1_030/district_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 240001 248000 -f1 /flats/F1_031/district_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 248001 256000 -f1 /flats/F1_032/district_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 256001 264000 -f1 /flats/F1_033/district_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 264001 272000 -f1 /flats/F1_034/district_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 272001 280000 -f1 /flats/F1_035/district_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 280001 288000 -f1 /flats/F1_036/district_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 288001 296000 -f1 /flats/F1_037/district_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 296001 304000 -f1 /flats/F1_038/district_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 304001 312000 -f1 /flats/F1_039/district_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 4 -r 312001 320000 -f1 /flats/F1_040/district_040_1.dat

DDL/GEN_HISTORY_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 1 8000 -f1 /flats/F1_001/history_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 8001 16000 -f1 /flats/F1_002/history_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 16001 24000 -f1 /flats/F1_003/history_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 24001 32000 -f1 /flats/F1_004/history_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 32001 40000 -f1 /flats/F1_005/history_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 40001 48000 -f1 /flats/F1_006/history_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 48001 56000 -f1 /flats/F1_007/history_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 56001 64000 -f1 /flats/F1_008/history_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 64001 72000 -f1 /flats/F1_009/history_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 72001 80000 -f1 /flats/F1_010/history_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 80001 88000 -f1 /flats/F1_011/history_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 88001 96000 -f1 /flats/F1_012/history_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 96001 104000 -f1 /flats/F1_013/history_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 104001 112000 -f1 /flats/F1_014/history_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 112001 120000 -f1 /flats/F1_015/history_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 120001 128000 -f1 /flats/F1_016/history_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 128001 136000 -f1 /flats/F1_017/history_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 136001 144000 -f1 /flats/F1_018/history_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 144001 152000 -f1 /flats/F1_019/history_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 152001 160000 -f1 /flats/F1_020/history_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 160001 168000 -f1 /flats/F1_021/history_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 168001 176000 -f1 /flats/F1_022/history_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 176001 184000 -f1 /flats/F1_023/history_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 184001 192000 -f1 /flats/F1_024/history_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 192001 200000 -f1 /flats/F1_025/history_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 200001 208000 -f1 /flats/F1_026/history_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 208001 216000 -f1 /flats/F1_027/history_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 216001 224000 -f1 /flats/F1_028/history_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 224001 232000 -f1 /flats/F1_029/history_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 232001 240000 -f1 /flats/F1_030/history_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 240001 248000 -f1 /flats/F1_031/history_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 248001 256000 -f1 /flats/F1_032/history_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 256001 264000 -f1 /flats/F1_033/history_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 264001 272000 -f1 /flats/F1_034/history_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 272001 280000 -f1 /flats/F1_035/history_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 280001 288000 -f1 /flats/F1_036/history_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 288001 296000 -f1 /flats/F1_037/history_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 296001 304000 -f1 /flats/F1_038/history_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 304001 312000 -f1 /flats/F1_039/history_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 8 -r 312001 320000 -f1 /flats/F1_040/history_040_1.dat

DDL/GEN_ITEM_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 5 -f1 /flats/F1_001/item_1.dat

DDL/GEN_NEW_ORDER_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 1 8000 -f1 /flats/F1_001/neworder_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 8001 16000 -f1 /flats/F1_002/neworder_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 16001 24000 -f1 /flats/F1_003/neworder_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 24001 32000 -f1 /flats/F1_004/neworder_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 32001 40000 -f1 /flats/F1_005/neworder_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 40001 48000 -f1 /flats/F1_006/neworder_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 48001 56000 -f1 /flats/F1_007/neworder_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 56001 64000 -f1 /flats/F1_008/neworder_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 64001 72000 -f1 /flats/F1_009/neworder_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 72001 80000 -f1 /flats/F1_010/neworder_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 80001 88000 -f1 /flats/F1_011/neworder_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 88001 96000 -f1 /flats/F1_012/neworder_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 96001 104000 -f1 /flats/F1_013/neworder_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 104001 112000 -f1 /flats/F1_014/neworder_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 112001 120000 -f1 /flats/F1_015/neworder_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 120001 128000 -f1 /flats/F1_016/neworder_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 128001 136000 -f1 /flats/F1_017/neworder_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 136001 144000 -f1 /flats/F1_018/neworder_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 144001 152000 -f1 /flats/F1_019/neworder_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 152001 160000 -f1 /flats/F1_020/neworder_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 160001 168000 -f1 /flats/F1_021/neworder_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 168001 176000 -f1 /flats/F1_022/neworder_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 176001 184000 -f1 /flats/F1_023/neworder_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 184001 192000 -f1 /flats/F1_024/neworder_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 192001 200000 -f1 /flats/F1_025/neworder_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 200001 208000 -f1 /flats/F1_026/neworder_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 208001 216000 -f1 /flats/F1_027/neworder_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 216001 224000 -f1 /flats/F1_028/neworder_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 224001 232000 -f1 /flats/F1_029/neworder_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 232001 240000 -f1 /flats/F1_030/neworder_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 240001 248000 -f1 /flats/F1_031/neworder_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 248001 256000 -f1 /flats/F1_032/neworder_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 256001 264000 -f1 /flats/F1_033/neworder_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 264001 272000 -f1 /flats/F1_034/neworder_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 272001 280000 -f1 /flats/F1_035/neworder_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 280001 288000 -f1 /flats/F1_036/neworder_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 288001 296000 -f1 /flats/F1_037/neworder_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 296001 304000 -f1 /flats/F1_038/neworder_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 304001 312000 -f1 /flats/F1_039/neworder_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 11 -r 312001 320000 -f1 /flats/F1_040/neworder_040_1.dat

DDL/GEN_ORDERS_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 1 320 -f1 /flats/F1_001/orders_001_1.dat -f2 /flats/F1_001/orderline_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 321 640 -f1 /flats/F1_001/orders_001_2.dat -f2 /flats/F1_001/orderline_001_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 641 960 -f1 /flats/F1_001/orders_001_3.dat -f2 /flats/F1_001/orderline_001_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 961 1280 -f1 /flats/F1_001/orders_001_4.dat -f2 /flats/F1_001/orderline_001_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 1281 1600 -f1 /flats/F1_001/orders_001_5.dat -f2 /flats/F1_001/orderline_001_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 1601 1920 -f1 /flats/F1_002/orders_002_1.dat -f2 /flats/F1_002/orderline_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 1921 2240 -f1 /flats/F1_002/orders_002_2.dat -f2 /flats/F1_002/orderline_002_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 2241 2560 -f1 /flats/F1_002/orders_002_3.dat -f2 /flats/F1_002/orderline_002_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 2561 2880 -f1 /flats/F1_002/orders_002_4.dat -f2 /flats/F1_002/orderline_002_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 2881 3200 -f1 /flats/F1_002/orders_002_5.dat -f2 /flats/F1_002/orderline_002_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 3201 3520 -f1 /flats/F1_003/orders_003_1.dat -f2 /flats/F1_003/orderline_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 3521 3840 -f1 /flats/F1_003/orders_003_2.dat -f2 /flats/F1_003/orderline_003_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 3841 4160 -f1 /flats/F1_003/orders_003_3.dat -f2 /flats/F1_003/orderline_003_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 4161 4480 -f1 /flats/F1_003/orders_003_4.dat -f2 /flats/F1_003/orderline_003_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 4481 4800 -f1 /flats/F1_003/orders_003_5.dat -f2 /flats/F1_003/orderline_003_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 4801 5120 -f1 /flats/F1_004/orders_004_1.dat -f2 /flats/F1_004/orderline_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 5121 5440 -f1 /flats/F1_004/orders_004_2.dat -f2 /flats/F1_004/orderline_004_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 5441 5760 -f1 /flats/F1_004/orders_004_3.dat -f2 /flats/F1_004/orderline_004_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 5761 6080 -f1 /flats/F1_004/orders_004_4.dat -f2 /flats/F1_004/orderline_004_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 6081 6400 -f1 /flats/F1_004/orders_004_5.dat -f2 /flats/F1_004/orderline_004_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 6401 6720 -f1 /flats/F1_005/orders_005_1.dat -f2 /flats/F1_005/orderline_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 6721 7040 -f1 /flats/F1_005/orders_005_2.dat -f2 /flats/F1_005/orderline_005_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 7041 7360 -f1 /flats/F1_005/orders_005_3.dat -f2 /flats/F1_005/orderline_005_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 7361 7680 -f1 /flats/F1_005/orders_005_4.dat -f2 /flats/F1_005/orderline_005_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 7681 8000 -f1 /flats/F1_005/orders_005_5.dat -f2 /flats/F1_005/orderline_005_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 8001 8320 -f1 /flats/F1_006/orders_006_1.dat -f2 /flats/F1_006/orderline_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 8321 8640 -f1 /flats/F1_006/orders_006_2.dat -f2 /flats/F1_006/orderline_006_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 8641 8960 -f1 /flats/F1_006/orders_006_3.dat -f2 /flats/F1_006/orderline_006_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 8961 9280 -f1 /flats/F1_006/orders_006_4.dat -f2 /flats/F1_006/orderline_006_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 9281 9600 -f1 /flats/F1_006/orders_006_5.dat -f2 /flats/F1_006/orderline_006_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 9601 9920 -f1 /flats/F1_007/orders_007_1.dat -f2 /flats/F1_007/orderline_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 9921 10240 -f1 /flats/F1_007/orders_007_2.dat -f2 /flats/F1_007/orderline_007_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 10241 10560 -f1 /flats/F1_007/orders_007_3.dat -f2 /flats/F1_007/orderline_007_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 10561 10880 -f1 /flats/F1_007/orders_007_4.dat -f2 /flats/F1_007/orderline_007_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 10881 11200 -f1 /flats/F1_007/orders_007_5.dat -f2 /flats/F1_007/orderline_007_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 11201 11520 -f1 /flats/F1_008/orders_008_1.dat -f2 /flats/F1_008/orderline_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 11521 11840 -f1 /flats/F1_008/orders_008_2.dat -f2 /flats/F1_008/orderline_008_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 11841 12160 -f1 /flats/F1_008/orders_008_3.dat -f2 /flats/F1_008/orderline_008_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 12161 12480 -f1 /flats/F1_008/orders_008_4.dat -f2 /flats/F1_008/orderline_008_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 12481 12800 -f1 /flats/F1_008/orders_008_5.dat -f2 /flats/F1_008/orderline_008_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 12801 13120 -f1 /flats/F1_009/orders_009_1.dat -f2 /flats/F1_009/orderline_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 13121 13440 -f1 /flats/F1_009/orders_009_2.dat -f2 /flats/F1_009/orderline_009_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 13441 13760 -f1 /flats/F1_009/orders_009_3.dat -f2 /flats/F1_009/orderline_009_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 13761 14080 -f1 /flats/F1_009/orders_009_4.dat -f2 /flats/F1_009/orderline_009_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 14081 14400 -f1 /flats/F1_009/orders_009_5.dat -f2 /flats/F1_009/orderline_009_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 14401 14720 -f1 /flats/F1_010/orders_010_1.dat -f2 /flats/F1_010/orderline_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 14721 15040 -f1 /flats/F1_010/orders_010_2.dat -f2 /flats/F1_010/orderline_010_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 15041 15360 -f1 /flats/F1_010/orders_010_3.dat -f2 /flats/F1_010/orderline_010_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 15361 15680 -f1 /flats/F1_010/orders_010_4.dat -f2 /flats/F1_010/orderline_010_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 15681 16000 -f1 /flats/F1_010/orders_010_5.dat -f2 /flats/F1_010/orderline_010_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 16001 16320 -f1 /flats/F1_011/orders_011_1.dat -f2 /flats/F1_011/orderline_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 16321 16640 -f1 /flats/F1_011/orders_011_2.dat -f2 /flats/F1_011/orderline_011_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 16641 16960 -f1 /flats/F1_011/orders_011_3.dat -f2 /flats/F1_011/orderline_011_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 16961 17280 -f1 /flats/F1_011/orders_011_4.dat -f2 /flats/F1_011/orderline_011_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 17281 17600 -f1 /flats/F1_011/orders_011_5.dat -f2 /flats/F1_011/orderline_011_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 17601 17920 -f1 /flats/F1_012/orders_012_1.dat -f2 /flats/F1_012/orderline_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 17921 18240 -f1 /flats/F1_012/orders_012_2.dat -f2 /flats/F1_012/orderline_012_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 18241 18560 -f1 /flats/F1_012/orders_012_3.dat -f2 /flats/F1_012/orderline_012_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 18561 18880 -f1 /flats/F1_012/orders_012_4.dat -f2 /flats/F1_012/orderline_012_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 18881 19200 -f1 /flats/F1_012/orders_012_5.dat -f2 /flats/F1_012/orderline_012_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 19201 19520 -f1 /flats/F1_013/orders_013_1.dat -f2 /flats/F1_013/orderline_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 19521 19840 -f1 /flats/F1_013/orders_013_2.dat -f2 /flats/F1_013/orderline_013_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 19841 20160 -f1 /flats/F1_013/orders_013_3.dat -f2 /flats/F1_013/orderline_013_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 20161 20480 -f1 /flats/F1_013/orders_013_4.dat -f2 /flats/F1_013/orderline_013_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 20481 20800 -f1 /flats/F1_013/orders_013_5.dat -f2 /flats/F1_013/orderline_013_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 20801 21120 -f1 /flats/F1_014/orders_014_1.dat -f2 /flats/F1_014/orderline_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 21121 21440 -f1 /flats/F1_014/orders_014_2.dat -f2 /flats/F1_014/orderline_014_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 21441 21760 -f1 /flats/F1_014/orders_014_3.dat -f2 /flats/F1_014/orderline_014_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 21761 22080 -f1 /flats/F1_014/orders_014_4.dat -f2 /flats/F1_014/orderline_014_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 22081 22400 -f1 /flats/F1_014/orders_014_5.dat -f2 /flats/F1_014/orderline_014_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 22401 22720 -f1 /flats/F1_015/orders_015_1.dat -f2 /flats/F1_015/orderline_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 22721 23040 -f1 /flats/F1_015/orders_015_2.dat -f2 /flats/F1_015/orderline_015_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 23041 23360 -f1 /flats/F1_015/orders_015_3.dat -f2 /flats/F1_015/orderline_015_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 23361 23680 -f1 /flats/F1_015/orders_015_4.dat -f2 /flats/F1_015/orderline_015_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 23681 24000 -f1 /flats/F1_015/orders_015_5.dat -f2 /flats/F1_015/orderline_015_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 24001 24320 -f1 /flats/F1_016/orders_016_1.dat -f2 /flats/F1_016/orderline_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 24321 24640 -f1 /flats/F1_016/orders_016_2.dat -f2 /flats/F1_016/orderline_016_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 24641 24960 -f1 /flats/F1_016/orders_016_3.dat -f2 /flats/F1_016/orderline_016_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 24961 25280 -f1 /flats/F1_016/orders_016_4.dat -f2 /flats/F1_016/orderline_016_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 25281 25600 -f1 /flats/F1_016/orders_016_5.dat -f2 /flats/F1_016/orderline_016_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 25601 25920 -f1 /flats/F1_017/orders_017_1.dat -f2 /flats/F1_017/orderline_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 25921 26240 -f1 /flats/F1_017/orders_017_2.dat -f2 /flats/F1_017/orderline_017_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 26241 26560 -f1 /flats/F1_017/orders_017_3.dat -f2 /flats/F1_017/orderline_017_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 26561 26880 -f1 /flats/F1_017/orders_017_4.dat -f2 /flats/F1_017/orderline_017_4.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 26881 27200 -f1 /flats/F1_017/orders_017_5.dat -f2 /flats/F1_017/orderline_017_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 27201 27520 -f1 /flats/F1_018/orders_018_1.dat -f2 /flats/F1_018/orderline_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 27521 27840 -f1 /flats/F1_018/orders_018_2.dat -f2 /flats/F1_018/orderline_018_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 27841 28160 -f1 /flats/F1_018/orders_018_3.dat -f2 /flats/F1_018/orderline_018_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 28161 28480 -f1 /flats/F1_018/orders_018_4.dat -f2 /flats/F1_018/orderline_018_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 28481 28800 -f1 /flats/F1_018/orders_018_5.dat -f2 /flats/F1_018/orderline_018_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 28801 29120 -f1 /flats/F1_019/orders_019_1.dat -f2 /flats/F1_019/orderline_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 29121 29440 -f1 /flats/F1_019/orders_019_2.dat -f2 /flats/F1_019/orderline_019_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 29441 29760 -f1 /flats/F1_019/orders_019_3.dat -f2 /flats/F1_019/orderline_019_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 29761 30080 -f1 /flats/F1_019/orders_019_4.dat -f2 /flats/F1_019/orderline_019_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 30081 30400 -f1 /flats/F1_019/orders_019_5.dat -f2 /flats/F1_019/orderline_019_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 30401 30720 -f1 /flats/F1_020/orders_020_1.dat -f2 /flats/F1_020/orderline_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 30721 31040 -f1 /flats/F1_020/orders_020_2.dat -f2 /flats/F1_020/orderline_020_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 31041 31360 -f1 /flats/F1_020/orders_020_3.dat -f2 /flats/F1_020/orderline_020_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 31361 31680 -f1 /flats/F1_020/orders_020_4.dat -f2 /flats/F1_020/orderline_020_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 31681 32000 -f1 /flats/F1_020/orders_020_5.dat -f2 /flats/F1_020/orderline_020_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 32001 32320 -f1 /flats/F1_021/orders_021_1.dat -f2 /flats/F1_021/orderline_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 32321 32640 -f1 /flats/F1_021/orders_021_2.dat -f2 /flats/F1_021/orderline_021_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 32641 32960 -f1 /flats/F1_021/orders_021_3.dat -f2 /flats/F1_021/orderline_021_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 32961 33280 -f1 /flats/F1_021/orders_021_4.dat -f2 /flats/F1_021/orderline_021_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 33281 33600 -f1 /flats/F1_021/orders_021_5.dat -f2 /flats/F1_021/orderline_021_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 33601 33920 -f1 /flats/F1_022/orders_022_1.dat -f2 /flats/F1_022/orderline_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 33921 34240 -f1 /flats/F1_022/orders_022_2.dat -f2 /flats/F1_022/orderline_022_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 34241 34560 -f1 /flats/F1_022/orders_022_3.dat -f2 /flats/F1_022/orderline_022_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 34561 34880 -f1 /flats/F1_022/orders_022_4.dat -f2 /flats/F1_022/orderline_022_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 34881 35200 -f1 /flats/F1_022/orders_022_5.dat -f2 /flats/F1_022/orderline_022_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 35201 35520 -f1 /flats/F1_023/orders_023_1.dat -f2 /flats/F1_023/orderline_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 35521 35840 -f1 /flats/F1_023/orders_023_2.dat -f2 /flats/F1_023/orderline_023_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 35841 36160 -f1 /flats/F1_023/orders_023_3.dat -f2 /flats/F1_023/orderline_023_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 36161 36480 -f1 /flats/F1_023/orders_023_4.dat -f2 /flats/F1_023/orderline_023_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 36481 36800 -f1 /flats/F1_023/orders_023_5.dat -f2 /flats/F1_023/orderline_023_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 36801 37120 -f1 /flats/F1_024/orders_024_1.dat -f2 /flats/F1_024/orderline_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 37121 37440 -f1 /flats/F1_024/orders_024_2.dat -f2 /flats/F1_024/orderline_024_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 37441 37760 -f1 /flats/F1_024/orders_024_3.dat -f2 /flats/F1_024/orderline_024_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 37761 38080 -f1 /flats/F1_024/orders_024_4.dat -f2 /flats/F1_024/orderline_024_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 38081 38400 -f1 /flats/F1_024/orders_024_5.dat -f2 /flats/F1_024/orderline_024_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 38401 38720 -f1 /flats/F1_025/orders_025_1.dat -f2 /flats/F1_025/orderline_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 38721 39040 -f1 /flats/F1_025/orders_025_2.dat -f2 /flats/F1_025/orderline_025_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 39041 39360 -f1 /flats/F1_025/orders_025_3.dat -f2 /flats/F1_025/orderline_025_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 39361 39680 -f1 /flats/F1_025/orders_025_4.dat -f2 /flats/F1_025/orderline_025_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 39681 40000 -f1 /flats/F1_025/orders_025_5.dat -f2 /flats/F1_025/orderline_025_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 40001 40320 -f1 /flats/F1_026/orders_026_1.dat -f2 /flats/F1_026/orderline_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 40321 40640 -f1 /flats/F1_026/orders_026_2.dat -f2 /flats/F1_026/orderline_026_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 40641 40960 -f1 /flats/F1_026/orders_026_3.dat -f2 /flats/F1_026/orderline_026_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 40961 41280 -f1 /flats/F1_026/orders_026_4.dat -f2 /flats/F1_026/orderline_026_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 41281 41600 -f1 /flats/F1_026/orders_026_5.dat -f2 /flats/F1_026/orderline_026_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 41601 41920 -f1 /flats/F1_027/orders_027_1.dat -f2 /flats/F1_027/orderline_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 41921 42240 -f1 /flats/F1_027/orders_027_2.dat -f2 /flats/F1_027/orderline_027_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 42241 42560 -f1 /flats/F1_027/orders_027_3.dat -f2 /flats/F1_027/orderline_027_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 42561 42880 -f1 /flats/F1_027/orders_027_4.dat -f2 /flats/F1_027/orderline_027_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 42881 43200 -f1 /flats/F1_027/orders_027_5.dat -f2 /flats/F1_027/orderline_027_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 43201 43520 -f1 /flats/F1_028/orders_028_1.dat -f2 /flats/F1_028/orderline_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 43521 43840 -f1 /flats/F1_028/orders_028_2.dat -f2 /flats/F1_028/orderline_028_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 43841 44160 -f1 /flats/F1_028/orders_028_3.dat -f2 /flats/F1_028/orderline_028_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 44161 44480 -f1 /flats/F1_028/orders_028_4.dat -f2 /flats/F1_028/orderline_028_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 44481 44800 -f1 /flats/F1_028/orders_028_5.dat -f2 /flats/F1_028/orderline_028_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 44801 45120 -f1 /flats/F1_029/orders_029_1.dat -f2 /flats/F1_029/orderline_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 45121 45440 -f1 /flats/F1_029/orders_029_2.dat -f2 /flats/F1_029/orderline_029_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 45441 45760 -f1 /flats/F1_029/orders_029_3.dat -f2 /flats/F1_029/orderline_029_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 45761 46080 -f1 /flats/F1_029/orders_029_4.dat -f2 /flats/F1_029/orderline_029_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 46081 46400 -f1 /flats/F1_029/orders_029_5.dat -f2 /flats/F1_029/orderline_029_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 46401 46720 -f1 /flats/F1_030/orders_030_1.dat -f2 /flats/F1_030/orderline_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 46721 47040 -f1 /flats/F1_030/orders_030_2.dat -f2 /flats/F1_030/orderline_030_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 47041 47360 -f1 /flats/F1_030/orders_030_3.dat -f2 /flats/F1_030/orderline_030_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 47361 47680 -f1 /flats/F1_030/orders_030_4.dat -f2 /flats/F1_030/orderline_030_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 47681 48000 -f1 /flats/F1_030/orders_030_5.dat -f2 /flats/F1_030/orderline_030_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 48001 48320 -f1 /flats/F1_031/orders_031_1.dat -f2 /flats/F1_031/orderline_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 48321 48640 -f1 /flats/F1_031/orders_031_2.dat -f2 /flats/F1_031/orderline_031_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 48641 48960 -f1 /flats/F1_031/orders_031_3.dat -f2 /flats/F1_031/orderline_031_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 48961 49280 -f1 /flats/F1_031/orders_031_4.dat -f2 /flats/F1_031/orderline_031_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 49281 49600 -f1 /flats/F1_031/orders_031_5.dat -f2 /flats/F1_031/orderline_031_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 49601 49920 -f1 /flats/F1_032/orders_032_1.dat -f2 /flats/F1_032/orderline_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 49921 50240 -f1 /flats/F1_032/orders_032_2.dat -f2 /flats/F1_032/orderline_032_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 50241 50560 -f1 /flats/F1_032/orders_032_3.dat -f2 /flats/F1_032/orderline_032_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 50561 50880 -f1 /flats/F1_032/orders_032_4.dat -f2 /flats/F1_032/orderline_032_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 50881 51200 -f1 /flats/F1_032/orders_032_5.dat -f2 /flats/F1_032/orderline_032_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 51201 51520 -f1 /flats/F1_033/orders_033_1.dat -f2 /flats/F1_033/orderline_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 51521 51840 -f1 /flats/F1_033/orders_033_2.dat -f2 /flats/F1_033/orderline_033_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 51841 52160 -f1 /flats/F1_033/orders_033_3.dat -f2 /flats/F1_033/orderline_033_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 52161 52480 -f1 /flats/F1_033/orders_033_4.dat -f2 /flats/F1_033/orderline_033_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 52481 52800 -f1 /flats/F1_033/orders_033_5.dat -f2 /flats/F1_033/orderline_033_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 52801 53120 -f1 /flats/F1_034/orders_034_1.dat -f2 /flats/F1_034/orderline_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 53121 53440 -f1 /flats/F1_034/orders_034_2.dat -f2 /flats/F1_034/orderline_034_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 53441 53760 -f1 /flats/F1_034/orders_034_3.dat -f2 /flats/F1_034/orderline_034_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 53761 54080 -f1 /flats/F1_034/orders_034_4.dat -f2 /flats/F1_034/orderline_034_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 54081 54400 -f1 /flats/F1_034/orders_034_5.dat -f2 /flats/F1_034/orderline_034_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 54401 54720 -f1 /flats/F1_035/orders_035_1.dat -f2 /flats/F1_035/orderline_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 54721 55040 -f1 /flats/F1_035/orders_035_2.dat -f2 /flats/F1_035/orderline_035_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 55041 55360 -f1 /flats/F1_035/orders_035_3.dat -f2 /flats/F1_035/orderline_035_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 55361 55680 -f1 /flats/F1_035/orders_035_4.dat -f2 /flats/F1_035/orderline_035_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 55681 56000 -f1 /flats/F1_035/orders_035_5.dat -f2 /flats/F1_035/orderline_035_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 56001 56320 -f1 /flats/F1_036/orders_036_1.dat -f2 /flats/F1_036/orderline_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 56321 56640 -f1 /flats/F1_036/orders_036_2.dat -f2 /flats/F1_036/orderline_036_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 56641 56960 -f1 /flats/F1_036/orders_036_3.dat -f2 /flats/F1_036/orderline_036_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 56961 57280 -f1 /flats/F1_036/orders_036_4.dat -f2 /flats/F1_036/orderline_036_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 57281 57600 -f1 /flats/F1_036/orders_036_5.dat -f2 /flats/F1_036/orderline_036_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 57601 57920 -f1 /flats/F1_037/orders_037_1.dat -f2 /flats/F1_037/orderline_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 57921 58240 -f1 /flats/F1_037/orders_037_2.dat -f2 /flats/F1_037/orderline_037_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 58241 58560 -f1 /flats/F1_037/orders_037_3.dat -f2 /flats/F1_037/orderline_037_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 58561 58880 -f1 /flats/F1_037/orders_037_4.dat -f2 /flats/F1_037/orderline_037_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 58881 59200 -f1 /flats/F1_037/orders_037_5.dat -f2 /flats/F1_037/orderline_037_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 59201 59520 -f1 /flats/F1_038/orders_038_1.dat -f2 /flats/F1_038/orderline_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 59521 59840 -f1 /flats/F1_038/orders_038_2.dat -f2 /flats/F1_038/orderline_038_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 59841 60160 -f1 /flats/F1_038/orders_038_3.dat -f2 /flats/F1_038/orderline_038_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 60161 60480 -f1 /flats/F1_038/orders_038_4.dat -f2 /flats/F1_038/orderline_038_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 60481 60800 -f1 /flats/F1_038/orders_038_5.dat -f2 /flats/F1_038/orderline_038_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 60801 61120 -f1 /flats/F1_039/orders_039_1.dat -f2 /flats/F1_039/orderline_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 61121 61440 -f1 /flats/F1_039/orders_039_2.dat -f2 /flats/F1_039/orderline_039_2.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 61441 61760 -f1 /flats/F1_039/orders_039_3.dat -f2 /flats/F1_039/orderline_039_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 61761 62080 -f1 /flats/F1_039/orders_039_4.dat -f2 /flats/F1_039/orderline_039_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 62081 62400 -f1 /flats/F1_039/orders_039_5.dat -f2 /flats/F1_039/orderline_039_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 62401 62720 -f1 /flats/F1_040/orders_040_1.dat -f2 /flats/F1_040/orderline_040_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 62721 63040 -f1 /flats/F1_040/orders_040_2.dat -f2 /flats/F1_040/orderline_040_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 63041 63360 -f1 /flats/F1_040/orders_040_3.dat -f2 /flats/F1_040/orderline_040_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 63361 63680 -f1 /flats/F1_040/orders_040_4.dat -f2 /flats/F1_040/orderline_040_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 63681 64000 -f1 /flats/F1_040/orders_040_5.dat -f2 /flats/F1_040/orderline_040_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 64001 64320 -f1 /flats/F1_041/orders_041_1.dat -f2 /flats/F1_041/orderline_041_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 64321 64640 -f1 /flats/F1_041/orders_041_2.dat -f2 /flats/F1_041/orderline_041_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 64641 64960 -f1 /flats/F1_041/orders_041_3.dat -f2 /flats/F1_041/orderline_041_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 64961 65280 -f1 /flats/F1_041/orders_041_4.dat -f2 /flats/F1_041/orderline_041_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 65281 65600 -f1 /flats/F1_041/orders_041_5.dat -f2 /flats/F1_041/orderline_041_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 65601 65920 -f1 /flats/F1_042/orders_042_1.dat -f2 /flats/F1_042/orderline_042_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 65921 66240 -f1 /flats/F1_042/orders_042_2.dat -f2 /flats/F1_042/orderline_042_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 66241 66560 -f1 /flats/F1_042/orders_042_3.dat -f2 /flats/F1_042/orderline_042_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 66561 66880 -f1 /flats/F1_042/orders_042_4.dat -f2 /flats/F1_042/orderline_042_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 66881 67200 -f1 /flats/F1_042/orders_042_5.dat -f2 /flats/F1_042/orderline_042_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 67201 67520 -f1 /flats/F1_043/orders_043_1.dat -f2 /flats/F1_043/orderline_043_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 67521 67840 -f1 /flats/F1_043/orders_043_2.dat -f2 /flats/F1_043/orderline_043_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 67841 68160 -f1 /flats/F1_043/orders_043_3.dat -f2 /flats/F1_043/orderline_043_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 68161 68480 -f1 /flats/F1_043/orders_043_4.dat -f2 /flats/F1_043/orderline_043_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 68481 68800 -f1 /flats/F1_043/orders_043_5.dat -f2 /flats/F1_043/orderline_043_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 68801 69120 -f1 /flats/F1_044/orders_044_1.dat -f2 /flats/F1_044/orderline_044_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 69121 69440 -f1 /flats/F1_044/orders_044_2.dat -f2 /flats/F1_044/orderline_044_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 69441 69760 -f1 /flats/F1_044/orders_044_3.dat -f2 /flats/F1_044/orderline_044_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 69761 70080 -f1 /flats/F1_044/orders_044_4.dat -f2 /flats/F1_044/orderline_044_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 70081 70400 -f1 /flats/F1_044/orders_044_5.dat -f2 /flats/F1_044/orderline_044_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 70401 70720 -f1 /flats/F1_045/orders_045_1.dat -f2 /flats/F1_045/orderline_045_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 70721 71040 -f1 /flats/F1_045/orders_045_2.dat -f2 /flats/F1_045/orderline_045_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 71041 71360 -f1 /flats/F1_045/orders_045_3.dat -f2 /flats/F1_045/orderline_045_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 71361 71680 -f1 /flats/F1_045/orders_045_4.dat -f2 /flats/F1_045/orderline_045_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 71681 72000 -f1 /flats/F1_045/orders_045_5.dat -f2 /flats/F1_045/orderline_045_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 72001 72320 -f1 /flats/F1_046/orders_046_1.dat -f2 /flats/F1_046/orderline_046_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 72321 72640 -f1 /flats/F1_046/orders_046_2.dat -f2 /flats/F1_046/orderline_046_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 72641 72960 -f1 /flats/F1_046/orders_046_3.dat -f2 /flats/F1_046/orderline_046_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 72961 73280 -f1 /flats/F1_046/orders_046_4.dat -f2 /flats/F1_046/orderline_046_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 73281 73600 -f1 /flats/F1_046/orders_046_5.dat -f2 /flats/F1_046/orderline_046_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 73601 73920 -f1 /flats/F1_047/orders_047_1.dat -f2 /flats/F1_047/orderline_047_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 73921 74240 -f1 /flats/F1_047/orders_047_2.dat -f2 /flats/F1_047/orderline_047_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 74241 74560 -f1 /flats/F1_047/orders_047_3.dat -f2 /flats/F1_047/orderline_047_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 74561 74880 -f1 /flats/F1_047/orders_047_4.dat -f2 /flats/F1_047/orderline_047_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 74881 75200 -f1 /flats/F1_047/orders_047_5.dat -f2 /flats/F1_047/orderline_047_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 75201 75520 -f1 /flats/F1_048/orders_048_1.dat -f2 /flats/F1_048/orderline_048_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 75521 75840 -f1 /flats/F1_048/orders_048_2.dat -f2 /flats/F1_048/orderline_048_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 75841 76160 -f1 /flats/F1_048/orders_048_3.dat -f2 /flats/F1_048/orderline_048_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 76161 76480 -f1 /flats/F1_048/orders_048_4.dat -f2 /flats/F1_048/orderline_048_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 76481 76800 -f1 /flats/F1_048/orders_048_5.dat -f2 /flats/F1_048/orderline_048_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 76801 77120 -f1 /flats/F1_049/orders_049_1.dat -f2 /flats/F1_049/orderline_049_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 77121 77440 -f1 /flats/F1_049/orders_049_2.dat -f2 /flats/F1_049/orderline_049_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 77441 77760 -f1 /flats/F1_049/orders_049_3.dat -f2 /flats/F1_049/orderline_049_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 77761 78080 -f1 /flats/F1_049/orders_049_4.dat -f2 /flats/F1_049/orderline_049_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 78081 78400 -f1 /flats/F1_049/orders_049_5.dat -f2 /flats/F1_049/orderline_049_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 78401 78720 -f1 /flats/F1_050/orders_050_1.dat -f2 /flats/F1_050/orderline_050_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 78721 79040 -f1 /flats/F1_050/orders_050_2.dat -f2 /flats/F1_050/orderline_050_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 79041 79360 -f1 /flats/F1_050/orders_050_3.dat -f2 /flats/F1_050/orderline_050_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 79361 79680 -f1 /flats/F1_050/orders_050_4.dat -f2 /flats/F1_050/orderline_050_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 79681 80000 -f1 /flats/F1_050/orders_050_5.dat -f2 /flats/F1_050/orderline_050_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 80001 80320 -f1 /flats/F1_051/orders_051_1.dat -f2 /flats/F1_051/orderline_051_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 80321 80640 -f1 /flats/F1_051/orders_051_2.dat -f2 /flats/F1_051/orderline_051_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 80641 80960 -f1 /flats/F1_051/orders_051_3.dat -f2 /flats/F1_051/orderline_051_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 80961 81280 -f1 /flats/F1_051/orders_051_4.dat -f2 /flats/F1_051/orderline_051_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 81281 81600 -f1 /flats/F1_051/orders_051_5.dat -f2 /flats/F1_051/orderline_051_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 81601 81920 -f1 /flats/F1_052/orders_052_1.dat -f2 /flats/F1_052/orderline_052_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 81921 82240 -f1 /flats/F1_052/orders_052_2.dat -f2 /flats/F1_052/orderline_052_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 82241 82560 -f1 /flats/F1_052/orders_052_3.dat -f2 /flats/F1_052/orderline_052_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 82561 82880 -f1 /flats/F1_052/orders_052_4.dat -f2 /flats/F1_052/orderline_052_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 82881 83200 -f1 /flats/F1_052/orders_052_5.dat -f2 /flats/F1_052/orderline_052_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 83201 83520 -f1 /flats/F1_053/orders_053_1.dat -f2 /flats/F1_053/orderline_053_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 83521 83840 -f1 /flats/F1_053/orders_053_2.dat -f2 /flats/F1_053/orderline_053_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 83841 84160 -f1 /flats/F1_053/orders_053_3.dat -f2 /flats/F1_053/orderline_053_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 84161 84480 -f1 /flats/F1_053/orders_053_4.dat -f2 /flats/F1_053/orderline_053_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 84481 84800 -f1 /flats/F1_053/orders_053_5.dat -f2 /flats/F1_053/orderline_053_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 84801 85120 -f1 /flats/F1_054/orders_054_1.dat -f2 /flats/F1_054/orderline_054_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 85121 85440 -f1 /flats/F1_054/orders_054_2.dat -f2 /flats/F1_054/orderline_054_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 85441 85760 -f1 /flats/F1_054/orders_054_3.dat -f2 /flats/F1_054/orderline_054_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 85761 86080 -f1 /flats/F1_054/orders_054_4.dat -f2 /flats/F1_054/orderline_054_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 86081 86400 -f1 /flats/F1_054/orders_054_5.dat -f2 /flats/F1_054/orderline_054_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 86401 86720 -f1 /flats/F1_055/orders_055_1.dat -f2 /flats/F1_055/orderline_055_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 86721 87040 -f1 /flats/F1_055/orders_055_2.dat -f2 /flats/F1_055/orderline_055_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 87041 87360 -f1 /flats/F1_055/orders_055_3.dat -f2 /flats/F1_055/orderline_055_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 87361 87680 -f1 /flats/F1_055/orders_055_4.dat -f2 /flats/F1_055/orderline_055_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 87681 88000 -f1 /flats/F1_055/orders_055_5.dat -f2 /flats/F1_055/orderline_055_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 88001 88320 -f1 /flats/F1_056/orders_056_1.dat -f2 /flats/F1_056/orderline_056_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 88321 88640 -f1 /flats/F1_056/orders_056_2.dat -f2 /flats/F1_056/orderline_056_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 88641 88960 -f1 /flats/F1_056/orders_056_3.dat -f2 /flats/F1_056/orderline_056_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 88961 89280 -f1 /flats/F1_056/orders_056_4.dat -f2 /flats/F1_056/orderline_056_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 89281 89600 -f1 /flats/F1_056/orders_056_5.dat -f2 /flats/F1_056/orderline_056_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 89601 89920 -f1 /flats/F1_057/orders_057_1.dat -f2 /flats/F1_057/orderline_057_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 89921 90240 -f1 /flats/F1_057/orders_057_2.dat -f2 /flats/F1_057/orderline_057_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 90241 90560 -f1 /flats/F1_057/orders_057_3.dat -f2 /flats/F1_057/orderline_057_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 90561 90880 -f1 /flats/F1_057/orders_057_4.dat -f2 /flats/F1_057/orderline_057_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 90881 91200 -f1 /flats/F1_057/orders_057_5.dat -f2 /flats/F1_057/orderline_057_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 91201 91520 -f1 /flats/F1_058/orders_058_1.dat -f2 /flats/F1_058/orderline_058_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 91521 91840 -f1 /flats/F1_058/orders_058_2.dat -f2 /flats/F1_058/orderline_058_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 91841 92160 -f1 /flats/F1_058/orders_058_3.dat -f2 /flats/F1_058/orderline_058_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 92161 92480 -f1 /flats/F1_058/orders_058_4.dat -f2 /flats/F1_058/orderline_058_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 92481 92800 -f1 /flats/F1_058/orders_058_5.dat -f2 /flats/F1_058/orderline_058_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 92801 93120 -f1 /flats/F1_059/orders_059_1.dat -f2 /flats/F1_059/orderline_059_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 93121 93440 -f1 /flats/F1_059/orders_059_2.dat -f2 /flats/F1_059/orderline_059_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 93441 93760 -f1 /flats/F1_059/orders_059_3.dat -f2 /flats/F1_059/orderline_059_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 93761 94080 -f1 /flats/F1_059/orders_059_4.dat -f2 /flats/F1_059/orderline_059_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 94081 94400 -f1 /flats/F1_059/orders_059_5.dat -f2 /flats/F1_059/orderline_059_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 94401 94720 -f1 /flats/F1_060/orders_060_1.dat -f2 /flats/F1_060/orderline_060_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 94721 95040 -f1 /flats/F1_060/orders_060_2.dat -f2 /flats/F1_060/orderline_060_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 95041 95360 -f1 /flats/F1_060/orders_060_3.dat -f2 /flats/F1_060/orderline_060_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 95361 95680 -f1 /flats/F1_060/orders_060_4.dat -f2 /flats/F1_060/orderline_060_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 95681 96000 -f1 /flats/F1_060/orders_060_5.dat -f2 /flats/F1_060/orderline_060_5.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 96001 96320 -f1 /flats/F1_061/orders_061_1.dat -f2 /flats/F1_061/orderline_061_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 96321 96640 -f1 /flats/F1_061/orders_061_2.dat -f2 /flats/F1_061/orderline_061_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 96641 96960 -f1 /flats/F1_061/orders_061_3.dat -f2 /flats/F1_061/orderline_061_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 96961 97280 -f1 /flats/F1_061/orders_061_4.dat -f2 /flats/F1_061/orderline_061_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 97281 97600 -f1 /flats/F1_061/orders_061_5.dat -f2 /flats/F1_061/orderline_061_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 97601 97920 -f1 /flats/F1_062/orders_062_1.dat -f2 /flats/F1_062/orderline_062_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 97921 98240 -f1 /flats/F1_062/orders_062_2.dat -f2 /flats/F1_062/orderline_062_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 98241 98560 -f1 /flats/F1_062/orders_062_3.dat -f2 /flats/F1_062/orderline_062_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 98561 98880 -f1 /flats/F1_062/orders_062_4.dat -f2 /flats/F1_062/orderline_062_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 98881 99200 -f1 /flats/F1_062/orders_062_5.dat -f2 /flats/F1_062/orderline_062_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 99201 99520 -f1 /flats/F1_063/orders_063_1.dat -f2 /flats/F1_063/orderline_063_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 99521 99840 -f1 /flats/F1_063/orders_063_2.dat -f2 /flats/F1_063/orderline_063_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 99841 100160 -f1 /flats/F1_063/orders_063_3.dat -f2 /flats/F1_063/orderline_063_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 100161 100480 -f1 /flats/F1_063/orders_063_4.dat -f2 /flats/F1_063/orderline_063_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 100481 100800 -f1 /flats/F1_063/orders_063_5.dat -f2 /flats/F1_063/orderline_063_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 100801 101120 -f1 /flats/F1_064/orders_064_1.dat -f2 /flats/F1_064/orderline_064_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 101121 101440 -f1 /flats/F1_064/orders_064_2.dat -f2 /flats/F1_064/orderline_064_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 101441 101760 -f1 /flats/F1_064/orders_064_3.dat -f2 /flats/F1_064/orderline_064_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 101761 102080 -f1 /flats/F1_064/orders_064_4.dat -f2 /flats/F1_064/orderline_064_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 102081 102400 -f1 /flats/F1_064/orders_064_5.dat -f2 /flats/F1_064/orderline_064_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 102401 102720 -f1 /flats/F1_065/orders_065_1.dat -f2 /flats/F1_065/orderline_065_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 102721 103040 -f1 /flats/F1_065/orders_065_2.dat -f2 /flats/F1_065/orderline_065_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 103041 103360 -f1 /flats/F1_065/orders_065_3.dat -f2 /flats/F1_065/orderline_065_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 103361 103680 -f1 /flats/F1_065/orders_065_4.dat -f2 /flats/F1_065/orderline_065_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 103681 104000 -f1 /flats/F1_065/orders_065_5.dat -f2 /flats/F1_065/orderline_065_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 104001 104320 -f1 /flats/F1_066/orders_066_1.dat -f2 /flats/F1_066/orderline_066_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 104321 104640 -f1 /flats/F1_066/orders_066_2.dat -f2 /flats/F1_066/orderline_066_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 104641 104960 -f1 /flats/F1_066/orders_066_3.dat -f2 /flats/F1_066/orderline_066_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 104961 105280 -f1 /flats/F1_066/orders_066_4.dat -f2 /flats/F1_066/orderline_066_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 105281 105600 -f1 /flats/F1_066/orders_066_5.dat -f2 /flats/F1_066/orderline_066_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 105601 105920 -f1 /flats/F1_067/orders_067_1.dat -f2 /flats/F1_067/orderline_067_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 105921 106240 -f1 /flats/F1_067/orders_067_2.dat -f2 /flats/F1_067/orderline_067_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 106241 106560 -f1 /flats/F1_067/orders_067_3.dat -f2 /flats/F1_067/orderline_067_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 106561 106880 -f1 /flats/F1_067/orders_067_4.dat -f2 /flats/F1_067/orderline_067_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 106881 107200 -f1 /flats/F1_067/orders_067_5.dat -f2 /flats/F1_067/orderline_067_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 107201 107520 -f1 /flats/F1_068/orders_068_1.dat -f2 /flats/F1_068/orderline_068_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 107521 107840 -f1 /flats/F1_068/orders_068_2.dat -f2 /flats/F1_068/orderline_068_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 107841 108160 -f1 /flats/F1_068/orders_068_3.dat -f2 /flats/F1_068/orderline_068_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 108161 108480 -f1 /flats/F1_068/orders_068_4.dat -f2 /flats/F1_068/orderline_068_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 108481 108800 -f1 /flats/F1_068/orders_068_5.dat -f2 /flats/F1_068/orderline_068_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 108801 109120 -f1 /flats/F1_069/orders_069_1.dat -f2 /flats/F1_069/orderline_069_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 109121 109440 -f1 /flats/F1_069/orders_069_2.dat -f2 /flats/F1_069/orderline_069_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 109441 109760 -f1 /flats/F1_069/orders_069_3.dat -f2 /flats/F1_069/orderline_069_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 109761 110080 -f1 /flats/F1_069/orders_069_4.dat -f2 /flats/F1_069/orderline_069_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 110081 110400 -f1 /flats/F1_069/orders_069_5.dat -f2 /flats/F1_069/orderline_069_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 110401 110720 -f1 /flats/F1_070/orders_070_1.dat -f2 /flats/F1_070/orderline_070_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 110721 111040 -f1 /flats/F1_070/orders_070_2.dat -f2 /flats/F1_070/orderline_070_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 111041 111360 -f1 /flats/F1_070/orders_070_3.dat -f2 /flats/F1_070/orderline_070_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 111361 111680 -f1 /flats/F1_070/orders_070_4.dat -f2 /flats/F1_070/orderline_070_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 111681 112000 -f1 /flats/F1_070/orders_070_5.dat -f2 /flats/F1_070/orderline_070_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 112001 112320 -f1 /flats/F1_071/orders_071_1.dat -f2 /flats/F1_071/orderline_071_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 112321 112640 -f1 /flats/F1_071/orders_071_2.dat -f2 /flats/F1_071/orderline_071_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 112641 112960 -f1 /flats/F1_071/orders_071_3.dat -f2 /flats/F1_071/orderline_071_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 112961 113280 -f1 /flats/F1_071/orders_071_4.dat -f2 /flats/F1_071/orderline_071_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 113281 113600 -f1 /flats/F1_071/orders_071_5.dat -f2 /flats/F1_071/orderline_071_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 113601 113920 -f1 /flats/F1_072/orders_072_1.dat -f2 /flats/F1_072/orderline_072_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 113921 114240 -f1 /flats/F1_072/orders_072_2.dat -f2 /flats/F1_072/orderline_072_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 114241 114560 -f1 /flats/F1_072/orders_072_3.dat -f2 /flats/F1_072/orderline_072_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 114561 114880 -f1 /flats/F1_072/orders_072_4.dat -f2 /flats/F1_072/orderline_072_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 114881 115200 -f1 /flats/F1_072/orders_072_5.dat -f2 /flats/F1_072/orderline_072_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 115201 115520 -f1 /flats/F1_073/orders_073_1.dat -f2 /flats/F1_073/orderline_073_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 115521 115840 -f1 /flats/F1_073/orders_073_2.dat -f2 /flats/F1_073/orderline_073_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 115841 116160 -f1 /flats/F1_073/orders_073_3.dat -f2 /flats/F1_073/orderline_073_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 116161 116480 -f1 /flats/F1_073/orders_073_4.dat -f2 /flats/F1_073/orderline_073_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 116481 116800 -f1 /flats/F1_073/orders_073_5.dat -f2 /flats/F1_073/orderline_073_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 116801 117120 -f1 /flats/F1_074/orders_074_1.dat -f2 /flats/F1_074/orderline_074_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 117121 117440 -f1 /flats/F1_074/orders_074_2.dat -f2 /flats/F1_074/orderline_074_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 117441 117760 -f1 /flats/F1_074/orders_074_3.dat -f2 /flats/F1_074/orderline_074_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 117761 118080 -f1 /flats/F1_074/orders_074_4.dat -f2 /flats/F1_074/orderline_074_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 118081 118400 -f1 /flats/F1_074/orders_074_5.dat -f2 /flats/F1_074/orderline_074_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 118401 118720 -f1 /flats/F1_075/orders_075_1.dat -f2 /flats/F1_075/orderline_075_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 118721 119040 -f1 /flats/F1_075/orders_075_2.dat -f2 /flats/F1_075/orderline_075_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 119041 119360 -f1 /flats/F1_075/orders_075_3.dat -f2 /flats/F1_075/orderline_075_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 119361 119680 -f1 /flats/F1_075/orders_075_4.dat -f2 /flats/F1_075/orderline_075_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 119681 120000 -f1 /flats/F1_075/orders_075_5.dat -f2 /flats/F1_075/orderline_075_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 120001 120320 -f1 /flats/F1_076/orders_076_1.dat -f2 /flats/F1_076/orderline_076_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 120321 120640 -f1 /flats/F1_076/orders_076_2.dat -f2 /flats/F1_076/orderline_076_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 120641 120960 -f1 /flats/F1_076/orders_076_3.dat -f2 /flats/F1_076/orderline_076_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 120961 121280 -f1 /flats/F1_076/orders_076_4.dat -f2 /flats/F1_076/orderline_076_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 121281 121600 -f1 /flats/F1_076/orders_076_5.dat -f2 /flats/F1_076/orderline_076_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 121601 121920 -f1 /flats/F1_077/orders_077_1.dat -f2 /flats/F1_077/orderline_077_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 121921 122240 -f1 /flats/F1_077/orders_077_2.dat -f2 /flats/F1_077/orderline_077_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 122241 122560 -f1 /flats/F1_077/orders_077_3.dat -f2 /flats/F1_077/orderline_077_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 122561 122880 -f1 /flats/F1_077/orders_077_4.dat -f2 /flats/F1_077/orderline_077_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 122881 123200 -f1 /flats/F1_077/orders_077_5.dat -f2 /flats/F1_077/orderline_077_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 123201 123520 -f1 /flats/F1_078/orders_078_1.dat -f2 /flats/F1_078/orderline_078_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 123521 123840 -f1 /flats/F1_078/orders_078_2.dat -f2 /flats/F1_078/orderline_078_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 123841 124160 -f1 /flats/F1_078/orders_078_3.dat -f2 /flats/F1_078/orderline_078_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 124161 124480 -f1 /flats/F1_078/orders_078_4.dat -f2 /flats/F1_078/orderline_078_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 124481 124800 -f1 /flats/F1_078/orders_078_5.dat -f2 /flats/F1_078/orderline_078_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 124801 125120 -f1 /flats/F1_079/orders_079_1.dat -f2 /flats/F1_079/orderline_079_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 125121 125440 -f1 /flats/F1_079/orders_079_2.dat -f2 /flats/F1_079/orderline_079_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 125441 125760 -f1 /flats/F1_079/orders_079_3.dat -f2 /flats/F1_079/orderline_079_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 125761 126080 -f1 /flats/F1_079/orders_079_4.dat -f2 /flats/F1_079/orderline_079_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 126081 126400 -f1 /flats/F1_079/orders_079_5.dat -f2 /flats/F1_079/orderline_079_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 126401 126720 -f1 /flats/F1_080/orders_080_1.dat -f2 /flats/F1_080/orderline_080_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 126721 127040 -f1 /flats/F1_080/orders_080_2.dat -f2 /flats/F1_080/orderline_080_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 127041 127360 -f1 /flats/F1_080/orders_080_3.dat -f2 /flats/F1_080/orderline_080_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 127361 127680 -f1 /flats/F1_080/orders_080_4.dat -f2 /flats/F1_080/orderline_080_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 127681 128000 -f1 /flats/F1_080/orders_080_5.dat -f2 /flats/F1_080/orderline_080_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 128001 128320 -f1 /flats/F1_081/orders_081_1.dat -f2 /flats/F1_081/orderline_081_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 128321 128640 -f1 /flats/F1_081/orders_081_2.dat -f2 /flats/F1_081/orderline_081_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 128641 128960 -f1 /flats/F1_081/orders_081_3.dat -f2 /flats/F1_081/orderline_081_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 128961 129280 -f1 /flats/F1_081/orders_081_4.dat -f2 /flats/F1_081/orderline_081_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 129281 129600 -f1 /flats/F1_081/orders_081_5.dat -f2 /flats/F1_081/orderline_081_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 129601 129920 -f1 /flats/F1_082/orders_082_1.dat -f2 /flats/F1_082/orderline_082_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 129921 130240 -f1 /flats/F1_082/orders_082_2.dat -f2 /flats/F1_082/orderline_082_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 130241 130560 -f1 /flats/F1_082/orders_082_3.dat -f2 /flats/F1_082/orderline_082_3.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 130561 130880 -f1 /flats/F1_082/orders_082_4.dat -f2 /flats/F1_082/orderline_082_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 130881 131200 -f1 /flats/F1_082/orders_082_5.dat -f2 /flats/F1_082/orderline_082_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 131201 131520 -f1 /flats/F1_083/orders_083_1.dat -f2 /flats/F1_083/orderline_083_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 131521 131840 -f1 /flats/F1_083/orders_083_2.dat -f2 /flats/F1_083/orderline_083_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 131841 132160 -f1 /flats/F1_083/orders_083_3.dat -f2 /flats/F1_083/orderline_083_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 132161 132480 -f1 /flats/F1_083/orders_083_4.dat -f2 /flats/F1_083/orderline_083_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 132481 132800 -f1 /flats/F1_083/orders_083_5.dat -f2 /flats/F1_083/orderline_083_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 132801 133120 -f1 /flats/F1_084/orders_084_1.dat -f2 /flats/F1_084/orderline_084_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 133121 133440 -f1 /flats/F1_084/orders_084_2.dat -f2 /flats/F1_084/orderline_084_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 133441 133760 -f1 /flats/F1_084/orders_084_3.dat -f2 /flats/F1_084/orderline_084_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 133761 134080 -f1 /flats/F1_084/orders_084_4.dat -f2 /flats/F1_084/orderline_084_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 134081 134400 -f1 /flats/F1_084/orders_084_5.dat -f2 /flats/F1_084/orderline_084_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 134401 134720 -f1 /flats/F1_085/orders_085_1.dat -f2 /flats/F1_085/orderline_085_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 134721 135040 -f1 /flats/F1_085/orders_085_2.dat -f2 /flats/F1_085/orderline_085_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 135041 135360 -f1 /flats/F1_085/orders_085_3.dat -f2 /flats/F1_085/orderline_085_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 135361 135680 -f1 /flats/F1_085/orders_085_4.dat -f2 /flats/F1_085/orderline_085_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 135681 136000 -f1 /flats/F1_085/orders_085_5.dat -f2 /flats/F1_085/orderline_085_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 136001 136320 -f1 /flats/F1_086/orders_086_1.dat -f2 /flats/F1_086/orderline_086_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 136321 136640 -f1 /flats/F1_086/orders_086_2.dat -f2 /flats/F1_086/orderline_086_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 136641 136960 -f1 /flats/F1_086/orders_086_3.dat -f2 /flats/F1_086/orderline_086_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 136961 137280 -f1 /flats/F1_086/orders_086_4.dat -f2 /flats/F1_086/orderline_086_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 137281 137600 -f1 /flats/F1_086/orders_086_5.dat -f2 /flats/F1_086/orderline_086_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 137601 137920 -f1 /flats/F1_087/orders_087_1.dat -f2 /flats/F1_087/orderline_087_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 137921 138240 -f1 /flats/F1_087/orders_087_2.dat -f2 /flats/F1_087/orderline_087_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 138241 138560 -f1 /flats/F1_087/orders_087_3.dat -f2 /flats/F1_087/orderline_087_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 138561 138880 -f1 /flats/F1_087/orders_087_4.dat -f2 /flats/F1_087/orderline_087_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 138881 139200 -f1 /flats/F1_087/orders_087_5.dat -f2 /flats/F1_087/orderline_087_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 139201 139520 -f1 /flats/F1_088/orders_088_1.dat -f2 /flats/F1_088/orderline_088_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 139521 139840 -f1 /flats/F1_088/orders_088_2.dat -f2 /flats/F1_088/orderline_088_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 139841 140160 -f1 /flats/F1_088/orders_088_3.dat -f2 /flats/F1_088/orderline_088_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 140161 140480 -f1 /flats/F1_088/orders_088_4.dat -f2 /flats/F1_088/orderline_088_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 140481 140800 -f1 /flats/F1_088/orders_088_5.dat -f2 /flats/F1_088/orderline_088_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 140801 141120 -f1 /flats/F1_089/orders_089_1.dat -f2 /flats/F1_089/orderline_089_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 141121 141440 -f1 /flats/F1_089/orders_089_2.dat -f2 /flats/F1_089/orderline_089_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 141441 141760 -f1 /flats/F1_089/orders_089_3.dat -f2 /flats/F1_089/orderline_089_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 141761 142080 -f1 /flats/F1_089/orders_089_4.dat -f2 /flats/F1_089/orderline_089_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 142081 142400 -f1 /flats/F1_089/orders_089_5.dat -f2 /flats/F1_089/orderline_089_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 142401 142720 -f1 /flats/F1_090/orders_090_1.dat -f2 /flats/F1_090/orderline_090_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 142721 143040 -f1 /flats/F1_090/orders_090_2.dat -f2 /flats/F1_090/orderline_090_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 143041 143360 -f1 /flats/F1_090/orders_090_3.dat -f2 /flats/F1_090/orderline_090_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 143361 143680 -f1 /flats/F1_090/orders_090_4.dat -f2 /flats/F1_090/orderline_090_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 143681 144000 -f1 /flats/F1_090/orders_090_5.dat -f2 /flats/F1_090/orderline_090_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 144001 144320 -f1 /flats/F1_091/orders_091_1.dat -f2 /flats/F1_091/orderline_091_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 144321 144640 -f1 /flats/F1_091/orders_091_2.dat -f2 /flats/F1_091/orderline_091_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 144641 144960 -f1 /flats/F1_091/orders_091_3.dat -f2 /flats/F1_091/orderline_091_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 144961 145280 -f1 /flats/F1_091/orders_091_4.dat -f2 /flats/F1_091/orderline_091_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 145281 145600 -f1 /flats/F1_091/orders_091_5.dat -f2 /flats/F1_091/orderline_091_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 145601 145920 -f1 /flats/F1_092/orders_092_1.dat -f2 /flats/F1_092/orderline_092_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 145921 146240 -f1 /flats/F1_092/orders_092_2.dat -f2 /flats/F1_092/orderline_092_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 146241 146560 -f1 /flats/F1_092/orders_092_3.dat -f2 /flats/F1_092/orderline_092_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 146561 146880 -f1 /flats/F1_092/orders_092_4.dat -f2 /flats/F1_092/orderline_092_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 146881 147200 -f1 /flats/F1_092/orders_092_5.dat -f2 /flats/F1_092/orderline_092_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 147201 147520 -f1 /flats/F1_093/orders_093_1.dat -f2 /flats/F1_093/orderline_093_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 147521 147840 -f1 /flats/F1_093/orders_093_2.dat -f2 /flats/F1_093/orderline_093_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 147841 148160 -f1 /flats/F1_093/orders_093_3.dat -f2 /flats/F1_093/orderline_093_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 148161 148480 -f1 /flats/F1_093/orders_093_4.dat -f2 /flats/F1_093/orderline_093_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 148481 148800 -f1 /flats/F1_093/orders_093_5.dat -f2 /flats/F1_093/orderline_093_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 148801 149120 -f1 /flats/F1_094/orders_094_1.dat -f2 /flats/F1_094/orderline_094_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 149121 149440 -f1 /flats/F1_094/orders_094_2.dat -f2 /flats/F1_094/orderline_094_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 149441 149760 -f1 /flats/F1_094/orders_094_3.dat -f2 /flats/F1_094/orderline_094_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 149761 150080 -f1 /flats/F1_094/orders_094_4.dat -f2 /flats/F1_094/orderline_094_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 150081 150400 -f1 /flats/F1_094/orders_094_5.dat -f2 /flats/F1_094/orderline_094_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 150401 150720 -f1 /flats/F1_095/orders_095_1.dat -f2 /flats/F1_095/orderline_095_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 150721 151040 -f1 /flats/F1_095/orders_095_2.dat -f2 /flats/F1_095/orderline_095_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 151041 151360 -f1 /flats/F1_095/orders_095_3.dat -f2 /flats/F1_095/orderline_095_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 151361 151680 -f1 /flats/F1_095/orders_095_4.dat -f2 /flats/F1_095/orderline_095_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 151681 152000 -f1 /flats/F1_095/orders_095_5.dat -f2 /flats/F1_095/orderline_095_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 152001 152320 -f1 /flats/F1_096/orders_096_1.dat -f2 /flats/F1_096/orderline_096_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 152321 152640 -f1 /flats/F1_096/orders_096_2.dat -f2 /flats/F1_096/orderline_096_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 152641 152960 -f1 /flats/F1_096/orders_096_3.dat -f2 /flats/F1_096/orderline_096_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 152961 153280 -f1 /flats/F1_096/orders_096_4.dat -f2 /flats/F1_096/orderline_096_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 153281 153600 -f1 /flats/F1_096/orders_096_5.dat -f2 /flats/F1_096/orderline_096_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 153601 153920 -f1 /flats/F1_097/orders_097_1.dat -f2 /flats/F1_097/orderline_097_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 153921 154240 -f1 /flats/F1_097/orders_097_2.dat -f2 /flats/F1_097/orderline_097_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 154241 154560 -f1 /flats/F1_097/orders_097_3.dat -f2 /flats/F1_097/orderline_097_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 154561 154880 -f1 /flats/F1_097/orders_097_4.dat -f2 /flats/F1_097/orderline_097_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 154881 155200 -f1 /flats/F1_097/orders_097_5.dat -f2 /flats/F1_097/orderline_097_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 155201 155520 -f1 /flats/F1_098/orders_098_1.dat -f2 /flats/F1_098/orderline_098_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 155521 155840 -f1 /flats/F1_098/orders_098_2.dat -f2 /flats/F1_098/orderline_098_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 155841 156160 -f1 /flats/F1_098/orders_098_3.dat -f2 /flats/F1_098/orderline_098_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 156161 156480 -f1 /flats/F1_098/orders_098_4.dat -f2 /flats/F1_098/orderline_098_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 156481 156800 -f1 /flats/F1_098/orders_098_5.dat -f2 /flats/F1_098/orderline_098_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 156801 157120 -f1 /flats/F1_099/orders_099_1.dat -f2 /flats/F1_099/orderline_099_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 157121 157440 -f1 /flats/F1_099/orders_099_2.dat -f2 /flats/F1_099/orderline_099_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 157441 157760 -f1 /flats/F1_099/orders_099_3.dat -f2 /flats/F1_099/orderline_099_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 157761 158080 -f1 /flats/F1_099/orders_099_4.dat -f2 /flats/F1_099/orderline_099_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 158081 158400 -f1 /flats/F1_099/orders_099_5.dat -f2 /flats/F1_099/orderline_099_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 158401 158720 -f1 /flats/F1_100/orders_100_1.dat -f2 /flats/F1_100/orderline_100_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 158721 159040 -f1 /flats/F1_100/orders_100_2.dat -f2 /flats/F1_100/orderline_100_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 159041 159360 -f1 /flats/F1_100/orders_100_3.dat -f2 /flats/F1_100/orderline_100_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 159361 159680 -f1 /flats/F1_100/orders_100_4.dat -f2 /flats/F1_100/orderline_100_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 159681 160000 -f1 /flats/F1_100/orders_100_5.dat -f2 /flats/F1_100/orderline_100_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 160001 160320 -f1 /flats/F1_101/orders_101_1.dat -f2 /flats/F1_101/orderline_101_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 160321 160640 -f1 /flats/F1_101/orders_101_2.dat -f2 /flats/F1_101/orderline_101_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 160641 160960 -f1 /flats/F1_101/orders_101_3.dat -f2 /flats/F1_101/orderline_101_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 160961 161280 -f1 /flats/F1_101/orders_101_4.dat -f2 /flats/F1_101/orderline_101_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 161281 161600 -f1 /flats/F1_101/orders_101_5.dat -f2 /flats/F1_101/orderline_101_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 161601 161920 -f1 /flats/F1_102/orders_102_1.dat -f2 /flats/F1_102/orderline_102_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 161921 162240 -f1 /flats/F1_102/orders_102_2.dat -f2 /flats/F1_102/orderline_102_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 162241 162560 -f1 /flats/F1_102/orders_102_3.dat -f2 /flats/F1_102/orderline_102_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 162561 162880 -f1 /flats/F1_102/orders_102_4.dat -f2 /flats/F1_102/orderline_102_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 162881 163200 -f1 /flats/F1_102/orders_102_5.dat -f2 /flats/F1_102/orderline_102_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 163201 163520 -f1 /flats/F1_103/orders_103_1.dat -f2 /flats/F1_103/orderline_103_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 163521 163840 -f1 /flats/F1_103/orders_103_2.dat -f2 /flats/F1_103/orderline_103_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 163841 164160 -f1 /flats/F1_103/orders_103_3.dat -f2 /flats/F1_103/orderline_103_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 164161 164480 -f1 /flats/F1_103/orders_103_4.dat -f2 /flats/F1_103/orderline_103_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 164481 164800 -f1 /flats/F1_103/orders_103_5.dat -f2 /flats/F1_103/orderline_103_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 164801 165120 -f1 /flats/F1_104/orders_104_1.dat -f2 /flats/F1_104/orderline_104_1.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 165121 165440 -f1 /flats/F1_104/orders_104_2.dat -f2 /flats/F1_104/orderline_104_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 165441 165760 -f1 /flats/F1_104/orders_104_3.dat -f2 /flats/F1_104/orderline_104_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 165761 166080 -f1 /flats/F1_104/orders_104_4.dat -f2 /flats/F1_104/orderline_104_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 166081 166400 -f1 /flats/F1_104/orders_104_5.dat -f2 /flats/F1_104/orderline_104_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 166401 166720 -f1 /flats/F1_105/orders_105_1.dat -f2 /flats/F1_105/orderline_105_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 166721 167040 -f1 /flats/F1_105/orders_105_2.dat -f2 /flats/F1_105/orderline_105_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 167041 167360 -f1 /flats/F1_105/orders_105_3.dat -f2 /flats/F1_105/orderline_105_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 167361 167680 -f1 /flats/F1_105/orders_105_4.dat -f2 /flats/F1_105/orderline_105_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 167681 168000 -f1 /flats/F1_105/orders_105_5.dat -f2 /flats/F1_105/orderline_105_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 168001 168320 -f1 /flats/F1_106/orders_106_1.dat -f2 /flats/F1_106/orderline_106_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 168321 168640 -f1 /flats/F1_106/orders_106_2.dat -f2 /flats/F1_106/orderline_106_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 168641 168960 -f1 /flats/F1_106/orders_106_3.dat -f2 /flats/F1_106/orderline_106_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 168961 169280 -f1 /flats/F1_106/orders_106_4.dat -f2 /flats/F1_106/orderline_106_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 169281 169600 -f1 /flats/F1_106/orders_106_5.dat -f2 /flats/F1_106/orderline_106_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 169601 169920 -f1 /flats/F1_107/orders_107_1.dat -f2 /flats/F1_107/orderline_107_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 169921 170240 -f1 /flats/F1_107/orders_107_2.dat -f2 /flats/F1_107/orderline_107_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 170241 170560 -f1 /flats/F1_107/orders_107_3.dat -f2 /flats/F1_107/orderline_107_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 170561 170880 -f1 /flats/F1_107/orders_107_4.dat -f2 /flats/F1_107/orderline_107_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 170881 171200 -f1 /flats/F1_107/orders_107_5.dat -f2 /flats/F1_107/orderline_107_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 171201 171520 -f1 /flats/F1_108/orders_108_1.dat -f2 /flats/F1_108/orderline_108_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 171521 171840 -f1 /flats/F1_108/orders_108_2.dat -f2 /flats/F1_108/orderline_108_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 171841 172160 -f1 /flats/F1_108/orders_108_3.dat -f2 /flats/F1_108/orderline_108_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 172161 172480 -f1 /flats/F1_108/orders_108_4.dat -f2 /flats/F1_108/orderline_108_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 172481 172800 -f1 /flats/F1_108/orders_108_5.dat -f2 /flats/F1_108/orderline_108_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 172801 173120 -f1 /flats/F1_109/orders_109_1.dat -f2 /flats/F1_109/orderline_109_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 173121 173440 -f1 /flats/F1_109/orders_109_2.dat -f2 /flats/F1_109/orderline_109_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 173441 173760 -f1 /flats/F1_109/orders_109_3.dat -f2 /flats/F1_109/orderline_109_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 173761 174080 -f1 /flats/F1_109/orders_109_4.dat -f2 /flats/F1_109/orderline_109_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 174081 174400 -f1 /flats/F1_109/orders_109_5.dat -f2 /flats/F1_109/orderline_109_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 174401 174720 -f1 /flats/F1_110/orders_110_1.dat -f2 /flats/F1_110/orderline_110_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 174721 175040 -f1 /flats/F1_110/orders_110_2.dat -f2 /flats/F1_110/orderline_110_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 175041 175360 -f1 /flats/F1_110/orders_110_3.dat -f2 /flats/F1_110/orderline_110_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 175361 175680 -f1 /flats/F1_110/orders_110_4.dat -f2 /flats/F1_110/orderline_110_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 175681 176000 -f1 /flats/F1_110/orders_110_5.dat -f2 /flats/F1_110/orderline_110_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 176001 176320 -f1 /flats/F1_111/orders_111_1.dat -f2 /flats/F1_111/orderline_111_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 176321 176640 -f1 /flats/F1_111/orders_111_2.dat -f2 /flats/F1_111/orderline_111_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 176641 176960 -f1 /flats/F1_111/orders_111_3.dat -f2 /flats/F1_111/orderline_111_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 176961 177280 -f1 /flats/F1_111/orders_111_4.dat -f2 /flats/F1_111/orderline_111_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 177281 177600 -f1 /flats/F1_111/orders_111_5.dat -f2 /flats/F1_111/orderline_111_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 177601 177920 -f1 /flats/F1_112/orders_112_1.dat -f2 /flats/F1_112/orderline_112_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 177921 178240 -f1 /flats/F1_112/orders_112_2.dat -f2 /flats/F1_112/orderline_112_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 178241 178560 -f1 /flats/F1_112/orders_112_3.dat -f2 /flats/F1_112/orderline_112_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 178561 178880 -f1 /flats/F1_112/orders_112_4.dat -f2 /flats/F1_112/orderline_112_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 178881 179200 -f1 /flats/F1_112/orders_112_5.dat -f2 /flats/F1_112/orderline_112_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 179201 179520 -f1 /flats/F1_113/orders_113_1.dat -f2 /flats/F1_113/orderline_113_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 179521 179840 -f1 /flats/F1_113/orders_113_2.dat -f2 /flats/F1_113/orderline_113_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 179841 180160 -f1 /flats/F1_113/orders_113_3.dat -f2 /flats/F1_113/orderline_113_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 180161 180480 -f1 /flats/F1_113/orders_113_4.dat -f2 /flats/F1_113/orderline_113_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 180481 180800 -f1 /flats/F1_113/orders_113_5.dat -f2 /flats/F1_113/orderline_113_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 180801 181120 -f1 /flats/F1_114/orders_114_1.dat -f2 /flats/F1_114/orderline_114_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 181121 181440 -f1 /flats/F1_114/orders_114_2.dat -f2 /flats/F1_114/orderline_114_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 181441 181760 -f1 /flats/F1_114/orders_114_3.dat -f2 /flats/F1_114/orderline_114_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 181761 182080 -f1 /flats/F1_114/orders_114_4.dat -f2 /flats/F1_114/orderline_114_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 182081 182400 -f1 /flats/F1_114/orders_114_5.dat -f2 /flats/F1_114/orderline_114_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 182401 182720 -f1 /flats/F1_115/orders_115_1.dat -f2 /flats/F1_115/orderline_115_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 182721 183040 -f1 /flats/F1_115/orders_115_2.dat -f2 /flats/F1_115/orderline_115_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 183041 183360 -f1 /flats/F1_115/orders_115_3.dat -f2 /flats/F1_115/orderline_115_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 183361 183680 -f1 /flats/F1_115/orders_115_4.dat -f2 /flats/F1_115/orderline_115_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 183681 184000 -f1 /flats/F1_115/orders_115_5.dat -f2 /flats/F1_115/orderline_115_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 184001 184320 -f1 /flats/F1_116/orders_116_1.dat -f2 /flats/F1_116/orderline_116_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 184321 184640 -f1 /flats/F1_116/orders_116_2.dat -f2 /flats/F1_116/orderline_116_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 184641 184960 -f1 /flats/F1_116/orders_116_3.dat -f2 /flats/F1_116/orderline_116_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 184961 185280 -f1 /flats/F1_116/orders_116_4.dat -f2 /flats/F1_116/orderline_116_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 185281 185600 -f1 /flats/F1_116/orders_116_5.dat -f2 /flats/F1_116/orderline_116_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 185601 185920 -f1 /flats/F1_117/orders_117_1.dat -f2 /flats/F1_117/orderline_117_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 185921 186240 -f1 /flats/F1_117/orders_117_2.dat -f2 /flats/F1_117/orderline_117_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 186241 186560 -f1 /flats/F1_117/orders_117_3.dat -f2 /flats/F1_117/orderline_117_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 186561 186880 -f1 /flats/F1_117/orders_117_4.dat -f2 /flats/F1_117/orderline_117_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 186881 187200 -f1 /flats/F1_117/orders_117_5.dat -f2 /flats/F1_117/orderline_117_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 187201 187520 -f1 /flats/F1_118/orders_118_1.dat -f2 /flats/F1_118/orderline_118_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 187521 187840 -f1 /flats/F1_118/orders_118_2.dat -f2 /flats/F1_118/orderline_118_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 187841 188160 -f1 /flats/F1_118/orders_118_3.dat -f2 /flats/F1_118/orderline_118_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 188161 188480 -f1 /flats/F1_118/orders_118_4.dat -f2 /flats/F1_118/orderline_118_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 188481 188800 -f1 /flats/F1_118/orders_118_5.dat -f2 /flats/F1_118/orderline_118_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 188801 189120 -f1 /flats/F1_119/orders_119_1.dat -f2 /flats/F1_119/orderline_119_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 189121 189440 -f1 /flats/F1_119/orders_119_2.dat -f2 /flats/F1_119/orderline_119_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 189441 189760 -f1 /flats/F1_119/orders_119_3.dat -f2 /flats/F1_119/orderline_119_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 189761 190080 -f1 /flats/F1_119/orders_119_4.dat -f2 /flats/F1_119/orderline_119_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 190081 190400 -f1 /flats/F1_119/orders_119_5.dat -f2 /flats/F1_119/orderline_119_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 190401 190720 -f1 /flats/F1_120/orders_120_1.dat -f2 /flats/F1_120/orderline_120_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 190721 191040 -f1 /flats/F1_120/orders_120_2.dat -f2 /flats/F1_120/orderline_120_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 191041 191360 -f1 /flats/F1_120/orders_120_3.dat -f2 /flats/F1_120/orderline_120_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 191361 191680 -f1 /flats/F1_120/orders_120_4.dat -f2 /flats/F1_120/orderline_120_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 191681 192000 -f1 /flats/F1_120/orders_120_5.dat -f2 /flats/F1_120/orderline_120_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 192001 192320 -f1 /flats/F1_121/orders_121_1.dat -f2 /flats/F1_121/orderline_121_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 192321 192640 -f1 /flats/F1_121/orders_121_2.dat -f2 /flats/F1_121/orderline_121_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 192641 192960 -f1 /flats/F1_121/orders_121_3.dat -f2 /flats/F1_121/orderline_121_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 192961 193280 -f1 /flats/F1_121/orders_121_4.dat -f2 /flats/F1_121/orderline_121_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 193281 193600 -f1 /flats/F1_121/orders_121_5.dat -f2 /flats/F1_121/orderline_121_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 193601 193920 -f1 /flats/F1_122/orders_122_1.dat -f2 /flats/F1_122/orderline_122_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 193921 194240 -f1 /flats/F1_122/orders_122_2.dat -f2 /flats/F1_122/orderline_122_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 194241 194560 -f1 /flats/F1_122/orders_122_3.dat -f2 /flats/F1_122/orderline_122_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 194561 194880 -f1 /flats/F1_122/orders_122_4.dat -f2 /flats/F1_122/orderline_122_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 194881 195200 -f1 /flats/F1_122/orders_122_5.dat -f2 /flats/F1_122/orderline_122_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 195201 195520 -f1 /flats/F1_123/orders_123_1.dat -f2 /flats/F1_123/orderline_123_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 195521 195840 -f1 /flats/F1_123/orders_123_2.dat -f2 /flats/F1_123/orderline_123_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 195841 196160 -f1 /flats/F1_123/orders_123_3.dat -f2 /flats/F1_123/orderline_123_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 196161 196480 -f1 /flats/F1_123/orders_123_4.dat -f2 /flats/F1_123/orderline_123_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 196481 196800 -f1 /flats/F1_123/orders_123_5.dat -f2 /flats/F1_123/orderline_123_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 196801 197120 -f1 /flats/F1_124/orders_124_1.dat -f2 /flats/F1_124/orderline_124_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 197121 197440 -f1 /flats/F1_124/orders_124_2.dat -f2 /flats/F1_124/orderline_124_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 197441 197760 -f1 /flats/F1_124/orders_124_3.dat -f2 /flats/F1_124/orderline_124_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 197761 198080 -f1 /flats/F1_124/orders_124_4.dat -f2 /flats/F1_124/orderline_124_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 198081 198400 -f1 /flats/F1_124/orders_124_5.dat -f2 /flats/F1_124/orderline_124_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 198401 198720 -f1 /flats/F1_125/orders_125_1.dat -f2 /flats/F1_125/orderline_125_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 198721 199040 -f1 /flats/F1_125/orders_125_2.dat -f2 /flats/F1_125/orderline_125_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 199041 199360 -f1 /flats/F1_125/orders_125_3.dat -f2 /flats/F1_125/orderline_125_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 199361 199680 -f1 /flats/F1_125/orders_125_4.dat -f2 /flats/F1_125/orderline_125_4.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 199681 200000 -f1 /flats/F1_125/orders_125_5.dat -f2 /flats/F1_125/orderline_125_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 200001 200320 -f1 /flats/F1_126/orders_126_1.dat -f2 /flats/F1_126/orderline_126_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 200321 200640 -f1 /flats/F1_126/orders_126_2.dat -f2 /flats/F1_126/orderline_126_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 200641 200960 -f1 /flats/F1_126/orders_126_3.dat -f2 /flats/F1_126/orderline_126_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 200961 201280 -f1 /flats/F1_126/orders_126_4.dat -f2 /flats/F1_126/orderline_126_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 201281 201600 -f1 /flats/F1_126/orders_126_5.dat -f2 /flats/F1_126/orderline_126_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 201601 201920 -f1 /flats/F1_127/orders_127_1.dat -f2 /flats/F1_127/orderline_127_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 201921 202240 -f1 /flats/F1_127/orders_127_2.dat -f2 /flats/F1_127/orderline_127_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 202241 202560 -f1 /flats/F1_127/orders_127_3.dat -f2 /flats/F1_127/orderline_127_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 202561 202880 -f1 /flats/F1_127/orders_127_4.dat -f2 /flats/F1_127/orderline_127_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 202881 203200 -f1 /flats/F1_127/orders_127_5.dat -f2 /flats/F1_127/orderline_127_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 203201 203520 -f1 /flats/F1_128/orders_128_1.dat -f2 /flats/F1_128/orderline_128_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 203521 203840 -f1 /flats/F1_128/orders_128_2.dat -f2 /flats/F1_128/orderline_128_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 203841 204160 -f1 /flats/F1_128/orders_128_3.dat -f2 /flats/F1_128/orderline_128_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 204161 204480 -f1 /flats/F1_128/orders_128_4.dat -f2 /flats/F1_128/orderline_128_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 204481 204800 -f1 /flats/F1_128/orders_128_5.dat -f2 /flats/F1_128/orderline_128_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 204801 205120 -f1 /flats/F1_129/orders_129_1.dat -f2 /flats/F1_129/orderline_129_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 205121 205440 -f1 /flats/F1_129/orders_129_2.dat -f2 /flats/F1_129/orderline_129_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 205441 205760 -f1 /flats/F1_129/orders_129_3.dat -f2 /flats/F1_129/orderline_129_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 205761 206080 -f1 /flats/F1_129/orders_129_4.dat -f2 /flats/F1_129/orderline_129_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 206081 206400 -f1 /flats/F1_129/orders_129_5.dat -f2 /flats/F1_129/orderline_129_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 206401 206720 -f1 /flats/F1_130/orders_130_1.dat -f2 /flats/F1_130/orderline_130_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 206721 207040 -f1 /flats/F1_130/orders_130_2.dat -f2 /flats/F1_130/orderline_130_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 207041 207360 -f1 /flats/F1_130/orders_130_3.dat -f2 /flats/F1_130/orderline_130_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 207361 207680 -f1 /flats/F1_130/orders_130_4.dat -f2 /flats/F1_130/orderline_130_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 207681 208000 -f1 /flats/F1_130/orders_130_5.dat -f2 /flats/F1_130/orderline_130_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 208001 208320 -f1 /flats/F1_131/orders_131_1.dat -f2 /flats/F1_131/orderline_131_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 208321 208640 -f1 /flats/F1_131/orders_131_2.dat -f2 /flats/F1_131/orderline_131_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 208641 208960 -f1 /flats/F1_131/orders_131_3.dat -f2 /flats/F1_131/orderline_131_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 208961 209280 -f1 /flats/F1_131/orders_131_4.dat -f2 /flats/F1_131/orderline_131_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 209281 209600 -f1 /flats/F1_131/orders_131_5.dat -f2 /flats/F1_131/orderline_131_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 209601 209920 -f1 /flats/F1_132/orders_132_1.dat -f2 /flats/F1_132/orderline_132_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 209921 210240 -f1 /flats/F1_132/orders_132_2.dat -f2 /flats/F1_132/orderline_132_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 210241 210560 -f1 /flats/F1_132/orders_132_3.dat -f2 /flats/F1_132/orderline_132_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 210561 210880 -f1 /flats/F1_132/orders_132_4.dat -f2 /flats/F1_132/orderline_132_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 210881 211200 -f1 /flats/F1_132/orders_132_5.dat -f2 /flats/F1_132/orderline_132_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 211201 211520 -f1 /flats/F1_133/orders_133_1.dat -f2 /flats/F1_133/orderline_133_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 211521 211840 -f1 /flats/F1_133/orders_133_2.dat -f2 /flats/F1_133/orderline_133_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 211841 212160 -f1 /flats/F1_133/orders_133_3.dat -f2 /flats/F1_133/orderline_133_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 212161 212480 -f1 /flats/F1_133/orders_133_4.dat -f2 /flats/F1_133/orderline_133_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 212481 212800 -f1 /flats/F1_133/orders_133_5.dat -f2 /flats/F1_133/orderline_133_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 212801 213120 -f1 /flats/F1_134/orders_134_1.dat -f2 /flats/F1_134/orderline_134_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 213121 213440 -f1 /flats/F1_134/orders_134_2.dat -f2 /flats/F1_134/orderline_134_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 213441 213760 -f1 /flats/F1_134/orders_134_3.dat -f2 /flats/F1_134/orderline_134_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 213761 214080 -f1 /flats/F1_134/orders_134_4.dat -f2 /flats/F1_134/orderline_134_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 214081 214400 -f1 /flats/F1_134/orders_134_5.dat -f2 /flats/F1_134/orderline_134_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 214401 214720 -f1 /flats/F1_135/orders_135_1.dat -f2 /flats/F1_135/orderline_135_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 214721 215040 -f1 /flats/F1_135/orders_135_2.dat -f2 /flats/F1_135/orderline_135_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 215041 215360 -f1 /flats/F1_135/orders_135_3.dat -f2 /flats/F1_135/orderline_135_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 215361 215680 -f1 /flats/F1_135/orders_135_4.dat -f2 /flats/F1_135/orderline_135_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 215681 216000 -f1 /flats/F1_135/orders_135_5.dat -f2 /flats/F1_135/orderline_135_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 216001 216320 -f1 /flats/F1_136/orders_136_1.dat -f2 /flats/F1_136/orderline_136_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 216321 216640 -f1 /flats/F1_136/orders_136_2.dat -f2 /flats/F1_136/orderline_136_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 216641 216960 -f1 /flats/F1_136/orders_136_3.dat -f2 /flats/F1_136/orderline_136_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 216961 217280 -f1 /flats/F1_136/orders_136_4.dat -f2 /flats/F1_136/orderline_136_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 217281 217600 -f1 /flats/F1_136/orders_136_5.dat -f2 /flats/F1_136/orderline_136_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 217601 217920 -f1 /flats/F1_137/orders_137_1.dat -f2 /flats/F1_137/orderline_137_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 217921 218240 -f1 /flats/F1_137/orders_137_2.dat -f2 /flats/F1_137/orderline_137_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 218241 218560 -f1 /flats/F1_137/orders_137_3.dat -f2 /flats/F1_137/orderline_137_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 218561 218880 -f1 /flats/F1_137/orders_137_4.dat -f2 /flats/F1_137/orderline_137_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 218881 219200 -f1 /flats/F1_137/orders_137_5.dat -f2 /flats/F1_137/orderline_137_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 219201 219520 -f1 /flats/F1_138/orders_138_1.dat -f2 /flats/F1_138/orderline_138_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 219521 219840 -f1 /flats/F1_138/orders_138_2.dat -f2 /flats/F1_138/orderline_138_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 219841 220160 -f1 /flats/F1_138/orders_138_3.dat -f2 /flats/F1_138/orderline_138_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 220161 220480 -f1 /flats/F1_138/orders_138_4.dat -f2 /flats/F1_138/orderline_138_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 220481 220800 -f1 /flats/F1_138/orders_138_5.dat -f2 /flats/F1_138/orderline_138_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 220801 221120 -f1 /flats/F1_139/orders_139_1.dat -f2 /flats/F1_139/orderline_139_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 221121 221440 -f1 /flats/F1_139/orders_139_2.dat -f2 /flats/F1_139/orderline_139_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 221441 221760 -f1 /flats/F1_139/orders_139_3.dat -f2 /flats/F1_139/orderline_139_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 221761 222080 -f1 /flats/F1_139/orders_139_4.dat -f2 /flats/F1_139/orderline_139_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 222081 222400 -f1 /flats/F1_139/orders_139_5.dat -f2 /flats/F1_139/orderline_139_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 222401 222720 -f1 /flats/F1_140/orders_140_1.dat -f2 /flats/F1_140/orderline_140_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 222721 223040 -f1 /flats/F1_140/orders_140_2.dat -f2 /flats/F1_140/orderline_140_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 223041 223360 -f1 /flats/F1_140/orders_140_3.dat -f2 /flats/F1_140/orderline_140_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 223361 223680 -f1 /flats/F1_140/orders_140_4.dat -f2 /flats/F1_140/orderline_140_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 223681 224000 -f1 /flats/F1_140/orders_140_5.dat -f2 /flats/F1_140/orderline_140_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 224001 224320 -f1 /flats/F1_141/orders_141_1.dat -f2 /flats/F1_141/orderline_141_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 224321 224640 -f1 /flats/F1_141/orders_141_2.dat -f2 /flats/F1_141/orderline_141_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 224641 224960 -f1 /flats/F1_141/orders_141_3.dat -f2 /flats/F1_141/orderline_141_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 224961 225280 -f1 /flats/F1_141/orders_141_4.dat -f2 /flats/F1_141/orderline_141_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 225281 225600 -f1 /flats/F1_141/orders_141_5.dat -f2 /flats/F1_141/orderline_141_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 225601 225920 -f1 /flats/F1_142/orders_142_1.dat -f2 /flats/F1_142/orderline_142_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 225921 226240 -f1 /flats/F1_142/orders_142_2.dat -f2 /flats/F1_142/orderline_142_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 226241 226560 -f1 /flats/F1_142/orders_142_3.dat -f2 /flats/F1_142/orderline_142_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 226561 226880 -f1 /flats/F1_142/orders_142_4.dat -f2 /flats/F1_142/orderline_142_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 226881 227200 -f1 /flats/F1_142/orders_142_5.dat -f2 /flats/F1_142/orderline_142_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 227201 227520 -f1 /flats/F1_143/orders_143_1.dat -f2 /flats/F1_143/orderline_143_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 227521 227840 -f1 /flats/F1_143/orders_143_2.dat -f2 /flats/F1_143/orderline_143_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 227841 228160 -f1 /flats/F1_143/orders_143_3.dat -f2 /flats/F1_143/orderline_143_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 228161 228480 -f1 /flats/F1_143/orders_143_4.dat -f2 /flats/F1_143/orderline_143_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 228481 228800 -f1 /flats/F1_143/orders_143_5.dat -f2 /flats/F1_143/orderline_143_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 228801 229120 -f1 /flats/F1_144/orders_144_1.dat -f2 /flats/F1_144/orderline_144_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 229121 229440 -f1 /flats/F1_144/orders_144_2.dat -f2 /flats/F1_144/orderline_144_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 229441 229760 -f1 /flats/F1_144/orders_144_3.dat -f2 /flats/F1_144/orderline_144_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 229761 230080 -f1 /flats/F1_144/orders_144_4.dat -f2 /flats/F1_144/orderline_144_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 230081 230400 -f1 /flats/F1_144/orders_144_5.dat -f2 /flats/F1_144/orderline_144_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 230401 230720 -f1 /flats/F1_145/orders_145_1.dat -f2 /flats/F1_145/orderline_145_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 230721 231040 -f1 /flats/F1_145/orders_145_2.dat -f2 /flats/F1_145/orderline_145_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 231041 231360 -f1 /flats/F1_145/orders_145_3.dat -f2 /flats/F1_145/orderline_145_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 231361 231680 -f1 /flats/F1_145/orders_145_4.dat -f2 /flats/F1_145/orderline_145_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 231681 232000 -f1 /flats/F1_145/orders_145_5.dat -f2 /flats/F1_145/orderline_145_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 232001 232320 -f1 /flats/F1_146/orders_146_1.dat -f2 /flats/F1_146/orderline_146_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 232321 232640 -f1 /flats/F1_146/orders_146_2.dat -f2 /flats/F1_146/orderline_146_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 232641 232960 -f1 /flats/F1_146/orders_146_3.dat -f2 /flats/F1_146/orderline_146_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 232961 233280 -f1 /flats/F1_146/orders_146_4.dat -f2 /flats/F1_146/orderline_146_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 233281 233600 -f1 /flats/F1_146/orders_146_5.dat -f2 /flats/F1_146/orderline_146_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 233601 233920 -f1 /flats/F1_147/orders_147_1.dat -f2 /flats/F1_147/orderline_147_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 233921 234240 -f1 /flats/F1_147/orders_147_2.dat -f2 /flats/F1_147/orderline_147_2.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 234241 234560 -f1 /flats/F1_147/orders_147_3.dat -f2 /flats/F1_147/orderline_147_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 234561 234880 -f1 /flats/F1_147/orders_147_4.dat -f2 /flats/F1_147/orderline_147_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 234881 235200 -f1 /flats/F1_147/orders_147_5.dat -f2 /flats/F1_147/orderline_147_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 235201 235520 -f1 /flats/F1_148/orders_148_1.dat -f2 /flats/F1_148/orderline_148_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 235521 235840 -f1 /flats/F1_148/orders_148_2.dat -f2 /flats/F1_148/orderline_148_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 235841 236160 -f1 /flats/F1_148/orders_148_3.dat -f2 /flats/F1_148/orderline_148_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 236161 236480 -f1 /flats/F1_148/orders_148_4.dat -f2 /flats/F1_148/orderline_148_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 236481 236800 -f1 /flats/F1_148/orders_148_5.dat -f2 /flats/F1_148/orderline_148_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 236801 237120 -f1 /flats/F1_149/orders_149_1.dat -f2 /flats/F1_149/orderline_149_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 237121 237440 -f1 /flats/F1_149/orders_149_2.dat -f2 /flats/F1_149/orderline_149_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 237441 237760 -f1 /flats/F1_149/orders_149_3.dat -f2 /flats/F1_149/orderline_149_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 237761 238080 -f1 /flats/F1_149/orders_149_4.dat -f2 /flats/F1_149/orderline_149_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 238081 238400 -f1 /flats/F1_149/orders_149_5.dat -f2 /flats/F1_149/orderline_149_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 238401 238720 -f1 /flats/F1_150/orders_150_1.dat -f2 /flats/F1_150/orderline_150_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 238721 239040 -f1 /flats/F1_150/orders_150_2.dat -f2 /flats/F1_150/orderline_150_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 239041 239360 -f1 /flats/F1_150/orders_150_3.dat -f2 /flats/F1_150/orderline_150_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 239361 239680 -f1 /flats/F1_150/orders_150_4.dat -f2 /flats/F1_150/orderline_150_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 239681 240000 -f1 /flats/F1_150/orders_150_5.dat -f2 /flats/F1_150/orderline_150_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 240001 240320 -f1 /flats/F1_151/orders_151_1.dat -f2 /flats/F1_151/orderline_151_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 240321 240640 -f1 /flats/F1_151/orders_151_2.dat -f2 /flats/F1_151/orderline_151_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 240641 240960 -f1 /flats/F1_151/orders_151_3.dat -f2 /flats/F1_151/orderline_151_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 240961 241280 -f1 /flats/F1_151/orders_151_4.dat -f2 /flats/F1_151/orderline_151_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 241281 241600 -f1 /flats/F1_151/orders_151_5.dat -f2 /flats/F1_151/orderline_151_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 241601 241920 -f1 /flats/F1_152/orders_152_1.dat -f2 /flats/F1_152/orderline_152_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 241921 242240 -f1 /flats/F1_152/orders_152_2.dat -f2 /flats/F1_152/orderline_152_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 242241 242560 -f1 /flats/F1_152/orders_152_3.dat -f2 /flats/F1_152/orderline_152_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 242561 242880 -f1 /flats/F1_152/orders_152_4.dat -f2 /flats/F1_152/orderline_152_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 242881 243200 -f1 /flats/F1_152/orders_152_5.dat -f2 /flats/F1_152/orderline_152_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 243201 243520 -f1 /flats/F1_153/orders_153_1.dat -f2 /flats/F1_153/orderline_153_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 243521 243840 -f1 /flats/F1_153/orders_153_2.dat -f2 /flats/F1_153/orderline_153_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 243841 244160 -f1 /flats/F1_153/orders_153_3.dat -f2 /flats/F1_153/orderline_153_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 244161 244480 -f1 /flats/F1_153/orders_153_4.dat -f2 /flats/F1_153/orderline_153_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 244481 244800 -f1 /flats/F1_153/orders_153_5.dat -f2 /flats/F1_153/orderline_153_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 244801 245120 -f1 /flats/F1_154/orders_154_1.dat -f2 /flats/F1_154/orderline_154_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 245121 245440 -f1 /flats/F1_154/orders_154_2.dat -f2 /flats/F1_154/orderline_154_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 245441 245760 -f1 /flats/F1_154/orders_154_3.dat -f2 /flats/F1_154/orderline_154_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 245761 246080 -f1 /flats/F1_154/orders_154_4.dat -f2 /flats/F1_154/orderline_154_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 246081 246400 -f1 /flats/F1_154/orders_154_5.dat -f2 /flats/F1_154/orderline_154_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 246401 246720 -f1 /flats/F1_155/orders_155_1.dat -f2 /flats/F1_155/orderline_155_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 246721 247040 -f1 /flats/F1_155/orders_155_2.dat -f2 /flats/F1_155/orderline_155_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 247041 247360 -f1 /flats/F1_155/orders_155_3.dat -f2 /flats/F1_155/orderline_155_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 247361 247680 -f1 /flats/F1_155/orders_155_4.dat -f2 /flats/F1_155/orderline_155_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 247681 248000 -f1 /flats/F1_155/orders_155_5.dat -f2 /flats/F1_155/orderline_155_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 248001 248320 -f1 /flats/F1_156/orders_156_1.dat -f2 /flats/F1_156/orderline_156_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 248321 248640 -f1 /flats/F1_156/orders_156_2.dat -f2 /flats/F1_156/orderline_156_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 248641 248960 -f1 /flats/F1_156/orders_156_3.dat -f2 /flats/F1_156/orderline_156_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 248961 249280 -f1 /flats/F1_156/orders_156_4.dat -f2 /flats/F1_156/orderline_156_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 249281 249600 -f1 /flats/F1_156/orders_156_5.dat -f2 /flats/F1_156/orderline_156_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 249601 249920 -f1 /flats/F1_157/orders_157_1.dat -f2 /flats/F1_157/orderline_157_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 249921 250240 -f1 /flats/F1_157/orders_157_2.dat -f2 /flats/F1_157/orderline_157_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 250241 250560 -f1 /flats/F1_157/orders_157_3.dat -f2 /flats/F1_157/orderline_157_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 250561 250880 -f1 /flats/F1_157/orders_157_4.dat -f2 /flats/F1_157/orderline_157_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 250881 251200 -f1 /flats/F1_157/orders_157_5.dat -f2 /flats/F1_157/orderline_157_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 251201 251520 -f1 /flats/F1_158/orders_158_1.dat -f2 /flats/F1_158/orderline_158_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 251521 251840 -f1 /flats/F1_158/orders_158_2.dat -f2 /flats/F1_158/orderline_158_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 251841 252160 -f1 /flats/F1_158/orders_158_3.dat -f2 /flats/F1_158/orderline_158_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 252161 252480 -f1 /flats/F1_158/orders_158_4.dat -f2 /flats/F1_158/orderline_158_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 252481 252800 -f1 /flats/F1_158/orders_158_5.dat -f2 /flats/F1_158/orderline_158_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 252801 253120 -f1 /flats/F1_159/orders_159_1.dat -f2 /flats/F1_159/orderline_159_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 253121 253440 -f1 /flats/F1_159/orders_159_2.dat -f2 /flats/F1_159/orderline_159_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 253441 253760 -f1 /flats/F1_159/orders_159_3.dat -f2 /flats/F1_159/orderline_159_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 253761 254080 -f1 /flats/F1_159/orders_159_4.dat -f2 /flats/F1_159/orderline_159_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 254081 254400 -f1 /flats/F1_159/orders_159_5.dat -f2 /flats/F1_159/orderline_159_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 254401 254720 -f1 /flats/F1_160/orders_160_1.dat -f2 /flats/F1_160/orderline_160_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 254721 255040 -f1 /flats/F1_160/orders_160_2.dat -f2 /flats/F1_160/orderline_160_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 255041 255360 -f1 /flats/F1_160/orders_160_3.dat -f2 /flats/F1_160/orderline_160_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 255361 255680 -f1 /flats/F1_160/orders_160_4.dat -f2 /flats/F1_160/orderline_160_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 255681 256000 -f1 /flats/F1_160/orders_160_5.dat -f2 /flats/F1_160/orderline_160_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 256001 256320 -f1 /flats/F1_161/orders_161_1.dat -f2 /flats/F1_161/orderline_161_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 256321 256640 -f1 /flats/F1_161/orders_161_2.dat -f2 /flats/F1_161/orderline_161_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 256641 256960 -f1 /flats/F1_161/orders_161_3.dat -f2 /flats/F1_161/orderline_161_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 256961 257280 -f1 /flats/F1_161/orders_161_4.dat -f2 /flats/F1_161/orderline_161_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 257281 257600 -f1 /flats/F1_161/orders_161_5.dat -f2 /flats/F1_161/orderline_161_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 257601 257920 -f1 /flats/F1_162/orders_162_1.dat -f2 /flats/F1_162/orderline_162_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 257921 258240 -f1 /flats/F1_162/orders_162_2.dat -f2 /flats/F1_162/orderline_162_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 258241 258560 -f1 /flats/F1_162/orders_162_3.dat -f2 /flats/F1_162/orderline_162_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 258561 258880 -f1 /flats/F1_162/orders_162_4.dat -f2 /flats/F1_162/orderline_162_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 258881 259200 -f1 /flats/F1_162/orders_162_5.dat -f2 /flats/F1_162/orderline_162_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 259201 259520 -f1 /flats/F1_163/orders_163_1.dat -f2 /flats/F1_163/orderline_163_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 259521 259840 -f1 /flats/F1_163/orders_163_2.dat -f2 /flats/F1_163/orderline_163_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 259841 260160 -f1 /flats/F1_163/orders_163_3.dat -f2 /flats/F1_163/orderline_163_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 260161 260480 -f1 /flats/F1_163/orders_163_4.dat -f2 /flats/F1_163/orderline_163_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 260481 260800 -f1 /flats/F1_163/orders_163_5.dat -f2 /flats/F1_163/orderline_163_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 260801 261120 -f1 /flats/F1_164/orders_164_1.dat -f2 /flats/F1_164/orderline_164_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 261121 261440 -f1 /flats/F1_164/orders_164_2.dat -f2 /flats/F1_164/orderline_164_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 261441 261760 -f1 /flats/F1_164/orders_164_3.dat -f2 /flats/F1_164/orderline_164_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 261761 262080 -f1 /flats/F1_164/orders_164_4.dat -f2 /flats/F1_164/orderline_164_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 262081 262400 -f1 /flats/F1_164/orders_164_5.dat -f2 /flats/F1_164/orderline_164_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 262401 262720 -f1 /flats/F1_165/orders_165_1.dat -f2 /flats/F1_165/orderline_165_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 262721 263040 -f1 /flats/F1_165/orders_165_2.dat -f2 /flats/F1_165/orderline_165_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 263041 263360 -f1 /flats/F1_165/orders_165_3.dat -f2 /flats/F1_165/orderline_165_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 263361 263680 -f1 /flats/F1_165/orders_165_4.dat -f2 /flats/F1_165/orderline_165_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 263681 264000 -f1 /flats/F1_165/orders_165_5.dat -f2 /flats/F1_165/orderline_165_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 264001 264320 -f1 /flats/F1_166/orders_166_1.dat -f2 /flats/F1_166/orderline_166_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 264321 264640 -f1 /flats/F1_166/orders_166_2.dat -f2 /flats/F1_166/orderline_166_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 264641 264960 -f1 /flats/F1_166/orders_166_3.dat -f2 /flats/F1_166/orderline_166_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 264961 265280 -f1 /flats/F1_166/orders_166_4.dat -f2 /flats/F1_166/orderline_166_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 265281 265600 -f1 /flats/F1_166/orders_166_5.dat -f2 /flats/F1_166/orderline_166_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 265601 265920 -f1 /flats/F1_167/orders_167_1.dat -f2 /flats/F1_167/orderline_167_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 265921 266240 -f1 /flats/F1_167/orders_167_2.dat -f2 /flats/F1_167/orderline_167_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 266241 266560 -f1 /flats/F1_167/orders_167_3.dat -f2 /flats/F1_167/orderline_167_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 266561 266880 -f1 /flats/F1_167/orders_167_4.dat -f2 /flats/F1_167/orderline_167_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 266881 267200 -f1 /flats/F1_167/orders_167_5.dat -f2 /flats/F1_167/orderline_167_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 267201 267520 -f1 /flats/F1_168/orders_168_1.dat -f2 /flats/F1_168/orderline_168_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 267521 267840 -f1 /flats/F1_168/orders_168_2.dat -f2 /flats/F1_168/orderline_168_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 267841 268160 -f1 /flats/F1_168/orders_168_3.dat -f2 /flats/F1_168/orderline_168_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 268161 268480 -f1 /flats/F1_168/orders_168_4.dat -f2 /flats/F1_168/orderline_168_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 268481 268800 -f1 /flats/F1_168/orders_168_5.dat -f2 /flats/F1_168/orderline_168_5.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 268801 269120 -f1 /flats/F1_169/orders_169_1.dat -f2 /flats/F1_169/orderline_169_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 269121 269440 -f1 /flats/F1_169/orders_169_2.dat -f2 /flats/F1_169/orderline_169_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 269441 269760 -f1 /flats/F1_169/orders_169_3.dat -f2 /flats/F1_169/orderline_169_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 269761 270080 -f1 /flats/F1_169/orders_169_4.dat -f2 /flats/F1_169/orderline_169_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 270081 270400 -f1 /flats/F1_169/orders_169_5.dat -f2 /flats/F1_169/orderline_169_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 270401 270720 -f1 /flats/F1_170/orders_170_1.dat -f2 /flats/F1_170/orderline_170_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 270721 271040 -f1 /flats/F1_170/orders_170_2.dat -f2 /flats/F1_170/orderline_170_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 271041 271360 -f1 /flats/F1_170/orders_170_3.dat -f2 /flats/F1_170/orderline_170_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 271361 271680 -f1 /flats/F1_170/orders_170_4.dat -f2 /flats/F1_170/orderline_170_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 271681 272000 -f1 /flats/F1_170/orders_170_5.dat -f2 /flats/F1_170/orderline_170_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 272001 272320 -f1 /flats/F1_171/orders_171_1.dat -f2 /flats/F1_171/orderline_171_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 272321 272640 -f1 /flats/F1_171/orders_171_2.dat -f2 /flats/F1_171/orderline_171_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 272641 272960 -f1 /flats/F1_171/orders_171_3.dat -f2 /flats/F1_171/orderline_171_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 272961 273280 -f1 /flats/F1_171/orders_171_4.dat -f2 /flats/F1_171/orderline_171_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 273281 273600 -f1 /flats/F1_171/orders_171_5.dat -f2 /flats/F1_171/orderline_171_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 273601 273920 -f1 /flats/F1_172/orders_172_1.dat -f2 /flats/F1_172/orderline_172_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 273921 274240 -f1 /flats/F1_172/orders_172_2.dat -f2 /flats/F1_172/orderline_172_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 274241 274560 -f1 /flats/F1_172/orders_172_3.dat -f2 /flats/F1_172/orderline_172_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 274561 274880 -f1 /flats/F1_172/orders_172_4.dat -f2 /flats/F1_172/orderline_172_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 274881 275200 -f1 /flats/F1_172/orders_172_5.dat -f2 /flats/F1_172/orderline_172_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 275201 275520 -f1 /flats/F1_173/orders_173_1.dat -f2 /flats/F1_173/orderline_173_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 275521 275840 -f1 /flats/F1_173/orders_173_2.dat -f2 /flats/F1_173/orderline_173_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 275841 276160 -f1 /flats/F1_173/orders_173_3.dat -f2 /flats/F1_173/orderline_173_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 276161 276480 -f1 /flats/F1_173/orders_173_4.dat -f2 /flats/F1_173/orderline_173_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 276481 276800 -f1 /flats/F1_173/orders_173_5.dat -f2 /flats/F1_173/orderline_173_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 276801 277120 -f1 /flats/F1_174/orders_174_1.dat -f2 /flats/F1_174/orderline_174_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 277121 277440 -f1 /flats/F1_174/orders_174_2.dat -f2 /flats/F1_174/orderline_174_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 277441 277760 -f1 /flats/F1_174/orders_174_3.dat -f2 /flats/F1_174/orderline_174_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 277761 278080 -f1 /flats/F1_174/orders_174_4.dat -f2 /flats/F1_174/orderline_174_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 278081 278400 -f1 /flats/F1_174/orders_174_5.dat -f2 /flats/F1_174/orderline_174_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 278401 278720 -f1 /flats/F1_175/orders_175_1.dat -f2 /flats/F1_175/orderline_175_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 278721 279040 -f1 /flats/F1_175/orders_175_2.dat -f2 /flats/F1_175/orderline_175_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 279041 279360 -f1 /flats/F1_175/orders_175_3.dat -f2 /flats/F1_175/orderline_175_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 279361 279680 -f1 /flats/F1_175/orders_175_4.dat -f2 /flats/F1_175/orderline_175_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 279681 280000 -f1 /flats/F1_175/orders_175_5.dat -f2 /flats/F1_175/orderline_175_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 280001 280320 -f1 /flats/F1_176/orders_176_1.dat -f2 /flats/F1_176/orderline_176_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 280321 280640 -f1 /flats/F1_176/orders_176_2.dat -f2 /flats/F1_176/orderline_176_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 280641 280960 -f1 /flats/F1_176/orders_176_3.dat -f2 /flats/F1_176/orderline_176_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 280961 281280 -f1 /flats/F1_176/orders_176_4.dat -f2 /flats/F1_176/orderline_176_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 281281 281600 -f1 /flats/F1_176/orders_176_5.dat -f2 /flats/F1_176/orderline_176_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 281601 281920 -f1 /flats/F1_177/orders_177_1.dat -f2 /flats/F1_177/orderline_177_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 281921 282240 -f1 /flats/F1_177/orders_177_2.dat -f2 /flats/F1_177/orderline_177_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 282241 282560 -f1 /flats/F1_177/orders_177_3.dat -f2 /flats/F1_177/orderline_177_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 282561 282880 -f1 /flats/F1_177/orders_177_4.dat -f2 /flats/F1_177/orderline_177_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 282881 283200 -f1 /flats/F1_177/orders_177_5.dat -f2 /flats/F1_177/orderline_177_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 283201 283520 -f1 /flats/F1_178/orders_178_1.dat -f2 /flats/F1_178/orderline_178_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 283521 283840 -f1 /flats/F1_178/orders_178_2.dat -f2 /flats/F1_178/orderline_178_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 283841 284160 -f1 /flats/F1_178/orders_178_3.dat -f2 /flats/F1_178/orderline_178_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 284161 284480 -f1 /flats/F1_178/orders_178_4.dat -f2 /flats/F1_178/orderline_178_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 284481 284800 -f1 /flats/F1_178/orders_178_5.dat -f2 /flats/F1_178/orderline_178_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 284801 285120 -f1 /flats/F1_179/orders_179_1.dat -f2 /flats/F1_179/orderline_179_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 285121 285440 -f1 /flats/F1_179/orders_179_2.dat -f2 /flats/F1_179/orderline_179_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 285441 285760 -f1 /flats/F1_179/orders_179_3.dat -f2 /flats/F1_179/orderline_179_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 285761 286080 -f1 /flats/F1_179/orders_179_4.dat -f2 /flats/F1_179/orderline_179_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 286081 286400 -f1 /flats/F1_179/orders_179_5.dat -f2 /flats/F1_179/orderline_179_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 286401 286720 -f1 /flats/F1_180/orders_180_1.dat -f2 /flats/F1_180/orderline_180_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 286721 287040 -f1 /flats/F1_180/orders_180_2.dat -f2 /flats/F1_180/orderline_180_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 287041 287360 -f1 /flats/F1_180/orders_180_3.dat -f2 /flats/F1_180/orderline_180_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 287361 287680 -f1 /flats/F1_180/orders_180_4.dat -f2 /flats/F1_180/orderline_180_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 287681 288000 -f1 /flats/F1_180/orders_180_5.dat -f2 /flats/F1_180/orderline_180_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 288001 288320 -f1 /flats/F1_181/orders_181_1.dat -f2 /flats/F1_181/orderline_181_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 288321 288640 -f1 /flats/F1_181/orders_181_2.dat -f2 /flats/F1_181/orderline_181_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 288641 288960 -f1 /flats/F1_181/orders_181_3.dat -f2 /flats/F1_181/orderline_181_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 288961 289280 -f1 /flats/F1_181/orders_181_4.dat -f2 /flats/F1_181/orderline_181_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 289281 289600 -f1 /flats/F1_181/orders_181_5.dat -f2 /flats/F1_181/orderline_181_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 289601 289920 -f1 /flats/F1_182/orders_182_1.dat -f2 /flats/F1_182/orderline_182_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 289921 290240 -f1 /flats/F1_182/orders_182_2.dat -f2 /flats/F1_182/orderline_182_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 290241 290560 -f1 /flats/F1_182/orders_182_3.dat -f2 /flats/F1_182/orderline_182_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 290561 290880 -f1 /flats/F1_182/orders_182_4.dat -f2 /flats/F1_182/orderline_182_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 290881 291200 -f1 /flats/F1_182/orders_182_5.dat -f2 /flats/F1_182/orderline_182_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 291201 291520 -f1 /flats/F1_183/orders_183_1.dat -f2 /flats/F1_183/orderline_183_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 291521 291840 -f1 /flats/F1_183/orders_183_2.dat -f2 /flats/F1_183/orderline_183_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 291841 292160 -f1 /flats/F1_183/orders_183_3.dat -f2 /flats/F1_183/orderline_183_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 292161 292480 -f1 /flats/F1_183/orders_183_4.dat -f2 /flats/F1_183/orderline_183_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 292481 292800 -f1 /flats/F1_183/orders_183_5.dat -f2 /flats/F1_183/orderline_183_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 292801 293120 -f1 /flats/F1_184/orders_184_1.dat -f2 /flats/F1_184/orderline_184_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 293121 293440 -f1 /flats/F1_184/orders_184_2.dat -f2 /flats/F1_184/orderline_184_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 293441 293760 -f1 /flats/F1_184/orders_184_3.dat -f2 /flats/F1_184/orderline_184_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 293761 294080 -f1 /flats/F1_184/orders_184_4.dat -f2 /flats/F1_184/orderline_184_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 294081 294400 -f1 /flats/F1_184/orders_184_5.dat -f2 /flats/F1_184/orderline_184_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 294401 294720 -f1 /flats/F1_185/orders_185_1.dat -f2 /flats/F1_185/orderline_185_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 294721 295040 -f1 /flats/F1_185/orders_185_2.dat -f2 /flats/F1_185/orderline_185_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 295041 295360 -f1 /flats/F1_185/orders_185_3.dat -f2 /flats/F1_185/orderline_185_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 295361 295680 -f1 /flats/F1_185/orders_185_4.dat -f2 /flats/F1_185/orderline_185_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 295681 296000 -f1 /flats/F1_185/orders_185_5.dat -f2 /flats/F1_185/orderline_185_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 296001 296320 -f1 /flats/F1_186/orders_186_1.dat -f2 /flats/F1_186/orderline_186_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 296321 296640 -f1 /flats/F1_186/orders_186_2.dat -f2 /flats/F1_186/orderline_186_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 296641 296960 -f1 /flats/F1_186/orders_186_3.dat -f2 /flats/F1_186/orderline_186_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 296961 297280 -f1 /flats/F1_186/orders_186_4.dat -f2 /flats/F1_186/orderline_186_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 297281 297600 -f1 /flats/F1_186/orders_186_5.dat -f2 /flats/F1_186/orderline_186_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 297601 297920 -f1 /flats/F1_187/orders_187_1.dat -f2 /flats/F1_187/orderline_187_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 297921 298240 -f1 /flats/F1_187/orders_187_2.dat -f2 /flats/F1_187/orderline_187_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 298241 298560 -f1 /flats/F1_187/orders_187_3.dat -f2 /flats/F1_187/orderline_187_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 298561 298880 -f1 /flats/F1_187/orders_187_4.dat -f2 /flats/F1_187/orderline_187_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 298881 299200 -f1 /flats/F1_187/orders_187_5.dat -f2 /flats/F1_187/orderline_187_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 299201 299520 -f1 /flats/F1_188/orders_188_1.dat -f2 /flats/F1_188/orderline_188_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 299521 299840 -f1 /flats/F1_188/orders_188_2.dat -f2 /flats/F1_188/orderline_188_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 299841 300160 -f1 /flats/F1_188/orders_188_3.dat -f2 /flats/F1_188/orderline_188_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 300161 300480 -f1 /flats/F1_188/orders_188_4.dat -f2 /flats/F1_188/orderline_188_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 300481 300800 -f1 /flats/F1_188/orders_188_5.dat -f2 /flats/F1_188/orderline_188_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 300801 301120 -f1 /flats/F1_189/orders_189_1.dat -f2 /flats/F1_189/orderline_189_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 301121 301440 -f1 /flats/F1_189/orders_189_2.dat -f2 /flats/F1_189/orderline_189_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 301441 301760 -f1 /flats/F1_189/orders_189_3.dat -f2 /flats/F1_189/orderline_189_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 301761 302080 -f1 /flats/F1_189/orders_189_4.dat -f2 /flats/F1_189/orderline_189_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 302081 302400 -f1 /flats/F1_189/orders_189_5.dat -f2 /flats/F1_189/orderline_189_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 302401 302720 -f1 /flats/F1_190/orders_190_1.dat -f2 /flats/F1_190/orderline_190_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 302721 303040 -f1 /flats/F1_190/orders_190_2.dat -f2 /flats/F1_190/orderline_190_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 303041 303360 -f1 /flats/F1_190/orders_190_3.dat -f2 /flats/F1_190/orderline_190_3.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 303361 303680 -f1 /flats/F1_190/orders_190_4.dat -f2 /flats/F1_190/orderline_190_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 303681 304000 -f1 /flats/F1_190/orders_190_5.dat -f2 /flats/F1_190/orderline_190_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 304001 304320 -f1 /flats/F1_191/orders_191_1.dat -f2 /flats/F1_191/orderline_191_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 304321 304640 -f1 /flats/F1_191/orders_191_2.dat -f2 /flats/F1_191/orderline_191_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 304641 304960 -f1 /flats/F1_191/orders_191_3.dat -f2 /flats/F1_191/orderline_191_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 304961 305280 -f1 /flats/F1_191/orders_191_4.dat -f2 /flats/F1_191/orderline_191_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 305281 305600 -f1 /flats/F1_191/orders_191_5.dat -f2 /flats/F1_191/orderline_191_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 305601 305920 -f1 /flats/F1_192/orders_192_1.dat -f2 /flats/F1_192/orderline_192_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 305921 306240 -f1 /flats/F1_192/orders_192_2.dat -f2 /flats/F1_192/orderline_192_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 306241 306560 -f1 /flats/F1_192/orders_192_3.dat -f2 /flats/F1_192/orderline_192_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 306561 306880 -f1 /flats/F1_192/orders_192_4.dat -f2 /flats/F1_192/orderline_192_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 306881 307200 -f1 /flats/F1_192/orders_192_5.dat -f2 /flats/F1_192/orderline_192_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 307201 307520 -f1 /flats/F1_193/orders_193_1.dat -f2 /flats/F1_193/orderline_193_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 307521 307840 -f1 /flats/F1_193/orders_193_2.dat -f2 /flats/F1_193/orderline_193_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 307841 308160 -f1 /flats/F1_193/orders_193_3.dat -f2 /flats/F1_193/orderline_193_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 308161 308480 -f1 /flats/F1_193/orders_193_4.dat -f2 /flats/F1_193/orderline_193_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 308481 308800 -f1 /flats/F1_193/orders_193_5.dat -f2 /flats/F1_193/orderline_193_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 308801 309120 -f1 /flats/F1_194/orders_194_1.dat -f2 /flats/F1_194/orderline_194_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 309121 309440 -f1 /flats/F1_194/orders_194_2.dat -f2 /flats/F1_194/orderline_194_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 309441 309760 -f1 /flats/F1_194/orders_194_3.dat -f2 /flats/F1_194/orderline_194_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 309761 310080 -f1 /flats/F1_194/orders_194_4.dat -f2 /flats/F1_194/orderline_194_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 310081 310400 -f1 /flats/F1_194/orders_194_5.dat -f2 /flats/F1_194/orderline_194_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 310401 310720 -f1 /flats/F1_195/orders_195_1.dat -f2 /flats/F1_195/orderline_195_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 310721 311040 -f1 /flats/F1_195/orders_195_2.dat -f2 /flats/F1_195/orderline_195_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 311041 311360 -f1 /flats/F1_195/orders_195_3.dat -f2 /flats/F1_195/orderline_195_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 311361 311680 -f1 /flats/F1_195/orders_195_4.dat -f2 /flats/F1_195/orderline_195_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 311681 312000 -f1 /flats/F1_195/orders_195_5.dat -f2 /flats/F1_195/orderline_195_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 312001 312320 -f1 /flats/F1_196/orders_196_1.dat -f2 /flats/F1_196/orderline_196_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 312321 312640 -f1 /flats/F1_196/orders_196_2.dat -f2 /flats/F1_196/orderline_196_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 312641 312960 -f1 /flats/F1_196/orders_196_3.dat -f2 /flats/F1_196/orderline_196_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 312961 313280 -f1 /flats/F1_196/orders_196_4.dat -f2 /flats/F1_196/orderline_196_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 313281 313600 -f1 /flats/F1_196/orders_196_5.dat -f2 /flats/F1_196/orderline_196_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 313601 313920 -f1 /flats/F1_197/orders_197_1.dat -f2 /flats/F1_197/orderline_197_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 313921 314240 -f1 /flats/F1_197/orders_197_2.dat -f2 /flats/F1_197/orderline_197_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 314241 314560 -f1 /flats/F1_197/orders_197_3.dat -f2 /flats/F1_197/orderline_197_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 314561 314880 -f1 /flats/F1_197/orders_197_4.dat -f2 /flats/F1_197/orderline_197_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 314881 315200 -f1 /flats/F1_197/orders_197_5.dat -f2 /flats/F1_197/orderline_197_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 315201 315520 -f1 /flats/F1_198/orders_198_1.dat -f2 /flats/F1_198/orderline_198_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 315521 315840 -f1 /flats/F1_198/orders_198_2.dat -f2 /flats/F1_198/orderline_198_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 315841 316160 -f1 /flats/F1_198/orders_198_3.dat -f2 /flats/F1_198/orderline_198_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 316161 316480 -f1 /flats/F1_198/orders_198_4.dat -f2 /flats/F1_198/orderline_198_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 316481 316800 -f1 /flats/F1_198/orders_198_5.dat -f2 /flats/F1_198/orderline_198_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 316801 317120 -f1 /flats/F1_199/orders_199_1.dat -f2 /flats/F1_199/orderline_199_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 317121 317440 -f1 /flats/F1_199/orders_199_2.dat -f2 /flats/F1_199/orderline_199_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 317441 317760 -f1 /flats/F1_199/orders_199_3.dat -f2 /flats/F1_199/orderline_199_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 317761 318080 -f1 /flats/F1_199/orders_199_4.dat -f2 /flats/F1_199/orderline_199_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 318081 318400 -f1 /flats/F1_199/orders_199_5.dat -f2 /flats/F1_199/orderline_199_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 318401 318720 -f1 /flats/F1_200/orders_200_1.dat -f2 /flats/F1_200/orderline_200_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 318721 319040 -f1 /flats/F1_200/orders_200_2.dat -f2 /flats/F1_200/orderline_200_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 319041 319360 -f1 /flats/F1_200/orders_200_3.dat -f2 /flats/F1_200/orderline_200_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 319361 319680 -f1 /flats/F1_200/orders_200_4.dat -f2 /flats/F1_200/orderline_200_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 9 -r 319681 320000 -f1 /flats/F1_200/orders_200_5.dat -f2 /flats/F1_200/orderline_200_5.dat

DDL/GEN_STOCK_ALL.sh

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 1 320 -f1 /flats/F1_001/stock_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 321 640 -f1 /flats/F1_001/stock_001_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 641 960 -f1 /flats/F1_001/stock_001_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 961 1280 -f1 /flats/F1_001/stock_001_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 1281 1600 -f1 /flats/F1_001/stock_001_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 1601 1920 -f1 /flats/F1_002/stock_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 1921 2240 -f1 /flats/F1_002/stock_002_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 2241 2560 -f1 /flats/F1_002/stock_002_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 2561 2880 -f1 /flats/F1_002/stock_002_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 2881 3200 -f1 /flats/F1_002/stock_002_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 3201 3520 -f1 /flats/F1_003/stock_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 3521 3840 -f1 /flats/F1_003/stock_003_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 3841 4160 -f1 /flats/F1_003/stock_003_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 4161 4480 -f1 /flats/F1_003/stock_003_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 4481 4800 -f1 /flats/F1_003/stock_003_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 4801 5120 -f1 /flats/F1_004/stock_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 5121 5440 -f1 /flats/F1_004/stock_004_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 5441 5760 -f1 /flats/F1_004/stock_004_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 5761 6080 -f1 /flats/F1_004/stock_004_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 6081 6400 -f1 /flats/F1_004/stock_004_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 6401 6720 -f1 /flats/F1_005/stock_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 6721 7040 -f1 /flats/F1_005/stock_005_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 7041 7360 -f1 /flats/F1_005/stock_005_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 7361 7680 -f1 /flats/F1_005/stock_005_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 7681 8000 -f1 /flats/F1_005/stock_005_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 8001 8320 -f1 /flats/F1_006/stock_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 8321 8640 -f1 /flats/F1_006/stock_006_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 8641 8960 -f1 /flats/F1_006/stock_006_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 8961 9280 -f1 /flats/F1_006/stock_006_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 9281 9600 -f1 /flats/F1_006/stock_006_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 9601 9920 -f1 /flats/F1_007/stock_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 9921 10240 -f1 /flats/F1_007/stock_007_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 10241 10560 -f1 /flats/F1_007/stock_007_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 10561 10880 -f1 /flats/F1_007/stock_007_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 10881 11200 -f1 /flats/F1_007/stock_007_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 11201 11520 -f1 /flats/F1_008/stock_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 11521 11840 -f1 /flats/F1_008/stock_008_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 11841 12160 -f1 /flats/F1_008/stock_008_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 12161 12480 -f1 /flats/F1_008/stock_008_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 12481 12800 -f1 /flats/F1_008/stock_008_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 12801 13120 -f1 /flats/F1_009/stock_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 13121 13440 -f1 /flats/F1_009/stock_009_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 13441 13760 -f1 /flats/F1_009/stock_009_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 13761 14080 -f1 /flats/F1_009/stock_009_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 14081 14400 -f1 /flats/F1_009/stock_009_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 14401 14720 -f1 /flats/F1_010/stock_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 14721 15040 -f1 /flats/F1_010/stock_010_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 15041 15360 -f1 /flats/F1_010/stock_010_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 15361 15680 -f1 /flats/F1_010/stock_010_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 15681 16000 -f1 /flats/F1_010/stock_010_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 16001 16320 -f1 /flats/F1_011/stock_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 16321 16640 -f1 /flats/F1_011/stock_011_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 16641 16960 -f1 /flats/F1_011/stock_011_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 16961 17280 -f1 /flats/F1_011/stock_011_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 17281 17600 -f1 /flats/F1_011/stock_011_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 17601 17920 -f1 /flats/F1_012/stock_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 17921 18240 -f1 /flats/F1_012/stock_012_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 18241 18560 -f1 /flats/F1_012/stock_012_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 18561 18880 -f1 /flats/F1_012/stock_012_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 18881 19200 -f1 /flats/F1_012/stock_012_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 19201 19520 -f1 /flats/F1_013/stock_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 19521 19840 -f1 /flats/F1_013/stock_013_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 19841 20160 -f1 /flats/F1_013/stock_013_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 20161 20480 -f1 /flats/F1_013/stock_013_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 20481 20800 -f1 /flats/F1_013/stock_013_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 20801 21120 -f1 /flats/F1_014/stock_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 21121 21440 -f1 /flats/F1_014/stock_014_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 21441 21760 -f1 /flats/F1_014/stock_014_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 21761 22080 -f1 /flats/F1_014/stock_014_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 22081 22400 -f1 /flats/F1_014/stock_014_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 22401 22720 -f1 /flats/F1_015/stock_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 22721 23040 -f1 /flats/F1_015/stock_015_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 23041 23360 -f1 /flats/F1_015/stock_015_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 23361 23680 -f1 /flats/F1_015/stock_015_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 23681 24000 -f1 /flats/F1_015/stock_015_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 24001 24320 -f1 /flats/F1_016/stock_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 24321 24640 -f1 /flats/F1_016/stock_016_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 24641 24960 -f1 /flats/F1_016/stock_016_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 24961 25280 -f1 /flats/F1_016/stock_016_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 25281 25600 -f1 /flats/F1_016/stock_016_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 25601 25920 -f1 /flats/F1_017/stock_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 25921 26240 -f1 /flats/F1_017/stock_017_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 26241 26560 -f1 /flats/F1_017/stock_017_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 26561 26880 -f1 /flats/F1_017/stock_017_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 26881 27200 -f1 /flats/F1_017/stock_017_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 27201 27520 -f1 /flats/F1_018/stock_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 27521 27840 -f1 /flats/F1_018/stock_018_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 27841 28160 -f1 /flats/F1_018/stock_018_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 28161 28480 -f1 /flats/F1_018/stock_018_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 28481 28800 -f1 /flats/F1_018/stock_018_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 28801 29120 -f1 /flats/F1_019/stock_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 29121 29440 -f1 /flats/F1_019/stock_019_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 29441 29760 -f1 /flats/F1_019/stock_019_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 29761 30080 -f1 /flats/F1_019/stock_019_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 30081 30400 -f1 /flats/F1_019/stock_019_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 30401 30720 -f1 /flats/F1_020/stock_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 30721 31040 -f1 /flats/F1_020/stock_020_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 31041 31360 -f1 /flats/F1_020/stock_020_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 31361 31680 -f1 /flats/F1_020/stock_020_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 31681 32000 -f1 /flats/F1_020/stock_020_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 32001 32320 -f1 /flats/F1_021/stock_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 32321 32640 -f1 /flats/F1_021/stock_021_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 32641 32960 -f1 /flats/F1_021/stock_021_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 32961 33280 -f1 /flats/F1_021/stock_021_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 33281 33600 -f1 /flats/F1_021/stock_021_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 33601 33920 -f1 /flats/F1_022/stock_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 33921 34240 -f1 /flats/F1_022/stock_022_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 34241 34560 -f1 /flats/F1_022/stock_022_3.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 34561 34880 -f1 /flats/F1_022/stock_022_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 34881 35200 -f1 /flats/F1_022/stock_022_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 35201 35520 -f1 /flats/F1_023/stock_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 35521 35840 -f1 /flats/F1_023/stock_023_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 35841 36160 -f1 /flats/F1_023/stock_023_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 36161 36480 -f1 /flats/F1_023/stock_023_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 36481 36800 -f1 /flats/F1_023/stock_023_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 36801 37120 -f1 /flats/F1_024/stock_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 37121 37440 -f1 /flats/F1_024/stock_024_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 37441 37760 -f1 /flats/F1_024/stock_024_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 37761 38080 -f1 /flats/F1_024/stock_024_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 38081 38400 -f1 /flats/F1_024/stock_024_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 38401 38720 -f1 /flats/F1_025/stock_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 38721 39040 -f1 /flats/F1_025/stock_025_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 39041 39360 -f1 /flats/F1_025/stock_025_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 39361 39680 -f1 /flats/F1_025/stock_025_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 39681 40000 -f1 /flats/F1_025/stock_025_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 40001 40320 -f1 /flats/F1_026/stock_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 40321 40640 -f1 /flats/F1_026/stock_026_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 40641 40960 -f1 /flats/F1_026/stock_026_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 40961 41280 -f1 /flats/F1_026/stock_026_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 41281 41600 -f1 /flats/F1_026/stock_026_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 41601 41920 -f1 /flats/F1_027/stock_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 41921 42240 -f1 /flats/F1_027/stock_027_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 42241 42560 -f1 /flats/F1_027/stock_027_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 42561 42880 -f1 /flats/F1_027/stock_027_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 42881 43200 -f1 /flats/F1_027/stock_027_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 43201 43520 -f1 /flats/F1_028/stock_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 43521 43840 -f1 /flats/F1_028/stock_028_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 43841 44160 -f1 /flats/F1_028/stock_028_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 44161 44480 -f1 /flats/F1_028/stock_028_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 44481 44800 -f1 /flats/F1_028/stock_028_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 44801 45120 -f1 /flats/F1_029/stock_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 45121 45440 -f1 /flats/F1_029/stock_029_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 45441 45760 -f1 /flats/F1_029/stock_029_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 45761 46080 -f1 /flats/F1_029/stock_029_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 46081 46400 -f1 /flats/F1_029/stock_029_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 46401 46720 -f1 /flats/F1_030/stock_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 46721 47040 -f1 /flats/F1_030/stock_030_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 47041 47360 -f1 /flats/F1_030/stock_030_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 47361 47680 -f1 /flats/F1_030/stock_030_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 47681 48000 -f1 /flats/F1_030/stock_030_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 48001 48320 -f1 /flats/F1_031/stock_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 48321 48640 -f1 /flats/F1_031/stock_031_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 48641 48960 -f1 /flats/F1_031/stock_031_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 48961 49280 -f1 /flats/F1_031/stock_031_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 49281 49600 -f1 /flats/F1_031/stock_031_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 49601 49920 -f1 /flats/F1_032/stock_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 49921 50240 -f1 /flats/F1_032/stock_032_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 50241 50560 -f1 /flats/F1_032/stock_032_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 50561 50880 -f1 /flats/F1_032/stock_032_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 50881 51200 -f1 /flats/F1_032/stock_032_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 51201 51520 -f1 /flats/F1_033/stock_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 51521 51840 -f1 /flats/F1_033/stock_033_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 51841 52160 -f1 /flats/F1_033/stock_033_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 52161 52480 -f1 /flats/F1_033/stock_033_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 52481 52800 -f1 /flats/F1_033/stock_033_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 52801 53120 -f1 /flats/F1_034/stock_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 53121 53440 -f1 /flats/F1_034/stock_034_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 53441 53760 -f1 /flats/F1_034/stock_034_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 53761 54080 -f1 /flats/F1_034/stock_034_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 54081 54400 -f1 /flats/F1_034/stock_034_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 54401 54720 -f1 /flats/F1_035/stock_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 54721 55040 -f1 /flats/F1_035/stock_035_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 55041 55360 -f1 /flats/F1_035/stock_035_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 55361 55680 -f1 /flats/F1_035/stock_035_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 55681 56000 -f1 /flats/F1_035/stock_035_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 56001 56320 -f1 /flats/F1_036/stock_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 56321 56640 -f1 /flats/F1_036/stock_036_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 56641 56960 -f1 /flats/F1_036/stock_036_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 56961 57280 -f1 /flats/F1_036/stock_036_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 57281 57600 -f1 /flats/F1_036/stock_036_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 57601 57920 -f1 /flats/F1_037/stock_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 57921 58240 -f1 /flats/F1_037/stock_037_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 58241 58560 -f1 /flats/F1_037/stock_037_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 58561 58880 -f1 /flats/F1_037/stock_037_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 58881 59200 -f1 /flats/F1_037/stock_037_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 59201 59520 -f1 /flats/F1_038/stock_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 59521 59840 -f1 /flats/F1_038/stock_038_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 59841 60160 -f1 /flats/F1_038/stock_038_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 60161 60480 -f1 /flats/F1_038/stock_038_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 60481 60800 -f1 /flats/F1_038/stock_038_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 60801 61120 -f1 /flats/F1_039/stock_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 61121 61440 -f1 /flats/F1_039/stock_039_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 61441 61760 -f1 /flats/F1_039/stock_039_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 61761 62080 -f1 /flats/F1_039/stock_039_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 62081 62400 -f1 /flats/F1_039/stock_039_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 62401 62720 -f1 /flats/F1_040/stock_040_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 62721 63040 -f1 /flats/F1_040/stock_040_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 63041 63360 -f1 /flats/F1_040/stock_040_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 63361 63680 -f1 /flats/F1_040/stock_040_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 63681 64000 -f1 /flats/F1_040/stock_040_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 64001 64320 -f1 /flats/F1_041/stock_041_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 64321 64640 -f1 /flats/F1_041/stock_041_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 64641 64960 -f1 /flats/F1_041/stock_041_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 64961 65280 -f1 /flats/F1_041/stock_041_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 65281 65600 -f1 /flats/F1_041/stock_041_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 65601 65920 -f1 /flats/F1_042/stock_042_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 65921 66240 -f1 /flats/F1_042/stock_042_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 66241 66560 -f1 /flats/F1_042/stock_042_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 66561 66880 -f1 /flats/F1_042/stock_042_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 66881 67200 -f1 /flats/F1_042/stock_042_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 67201 67520 -f1 /flats/F1_043/stock_043_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 67521 67840 -f1 /flats/F1_043/stock_043_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 67841 68160 -f1 /flats/F1_043/stock_043_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 68161 68480 -f1 /flats/F1_043/stock_043_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 68481 68800 -f1 /flats/F1_043/stock_043_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 68801 69120 -f1 /flats/F1_044/stock_044_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 69121 69440 -f1 /flats/F1_044/stock_044_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 69441 69760 -f1 /flats/F1_044/stock_044_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 69761 70080 -f1 /flats/F1_044/stock_044_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 70081 70400 -f1 /flats/F1_044/stock_044_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 70401 70720 -f1 /flats/F1_045/stock_045_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 70721 71040 -f1 /flats/F1_045/stock_045_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 71041 71360 -f1 /flats/F1_045/stock_045_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 71361 71680 -f1 /flats/F1_045/stock_045_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 71681 72000 -f1 /flats/F1_045/stock_045_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 72001 72320 -f1 /flats/F1_046/stock_046_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 72321 72640 -f1 /flats/F1_046/stock_046_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 72641 72960 -f1 /flats/F1_046/stock_046_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 72961 73280 -f1 /flats/F1_046/stock_046_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 73281 73600 -f1 /flats/F1_046/stock_046_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 73601 73920 -f1 /flats/F1_047/stock_047_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 73921 74240 -f1 /flats/F1_047/stock_047_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 74241 74560 -f1 /flats/F1_047/stock_047_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 74561 74880 -f1 /flats/F1_047/stock_047_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 74881 75200 -f1 /flats/F1_047/stock_047_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 75201 75520 -f1 /flats/F1_048/stock_048_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 75521 75840 -f1 /flats/F1_048/stock_048_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 75841 76160 -f1 /flats/F1_048/stock_048_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 76161 76480 -f1 /flats/F1_048/stock_048_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 76481 76800 -f1 /flats/F1_048/stock_048_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 76801 77120 -f1 /flats/F1_049/stock_049_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 77121 77440 -f1 /flats/F1_049/stock_049_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 77441 77760 -f1 /flats/F1_049/stock_049_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 77761 78080 -f1 /flats/F1_049/stock_049_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 78081 78400 -f1 /flats/F1_049/stock_049_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 78401 78720 -f1 /flats/F1_050/stock_050_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 78721 79040 -f1 /flats/F1_050/stock_050_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 79041 79360 -f1 /flats/F1_050/stock_050_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 79361 79680 -f1 /flats/F1_050/stock_050_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 79681 80000 -f1 /flats/F1_050/stock_050_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 80001 80320 -f1 /flats/F1_051/stock_051_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 80321 80640 -f1 /flats/F1_051/stock_051_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 80641 80960 -f1 /flats/F1_051/stock_051_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 80961 81280 -f1 /flats/F1_051/stock_051_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 81281 81600 -f1 /flats/F1_051/stock_051_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 81601 81920 -f1 /flats/F1_052/stock_052_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 81921 82240 -f1 /flats/F1_052/stock_052_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 82241 82560 -f1 /flats/F1_052/stock_052_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 82561 82880 -f1 /flats/F1_052/stock_052_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 82881 83200 -f1 /flats/F1_052/stock_052_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 83201 83520 -f1 /flats/F1_053/stock_053_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 83521 83840 -f1 /flats/F1_053/stock_053_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 83841 84160 -f1 /flats/F1_053/stock_053_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 84161 84480 -f1 /flats/F1_053/stock_053_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 84481 84800 -f1 /flats/F1_053/stock_053_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 84801 85120 -f1 /flats/F1_054/stock_054_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 85121 85440 -f1 /flats/F1_054/stock_054_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 85441 85760 -f1 /flats/F1_054/stock_054_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 85761 86080 -f1 /flats/F1_054/stock_054_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 86081 86400 -f1 /flats/F1_054/stock_054_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 86401 86720 -f1 /flats/F1_055/stock_055_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 86721 87040 -f1 /flats/F1_055/stock_055_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 87041 87360 -f1 /flats/F1_055/stock_055_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 87361 87680 -f1 /flats/F1_055/stock_055_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 87681 88000 -f1 /flats/F1_055/stock_055_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 88001 88320 -f1 /flats/F1_056/stock_056_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 88321 88640 -f1 /flats/F1_056/stock_056_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 88641 88960 -f1 /flats/F1_056/stock_056_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 88961 89280 -f1 /flats/F1_056/stock_056_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 89281 89600 -f1 /flats/F1_056/stock_056_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 89601 89920 -f1 /flats/F1_057/stock_057_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 89921 90240 -f1 /flats/F1_057/stock_057_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 90241 90560 -f1 /flats/F1_057/stock_057_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 90561 90880 -f1 /flats/F1_057/stock_057_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 90881 91200 -f1 /flats/F1_057/stock_057_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 91201 91520 -f1 /flats/F1_058/stock_058_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 91521 91840 -f1 /flats/F1_058/stock_058_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 91841 92160 -f1 /flats/F1_058/stock_058_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 92161 92480 -f1 /flats/F1_058/stock_058_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 92481 92800 -f1 /flats/F1_058/stock_058_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 92801 93120 -f1 /flats/F1_059/stock_059_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 93121 93440 -f1 /flats/F1_059/stock_059_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 93441 93760 -f1 /flats/F1_059/stock_059_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 93761 94080 -f1 /flats/F1_059/stock_059_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 94081 94400 -f1 /flats/F1_059/stock_059_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 94401 94720 -f1 /flats/F1_060/stock_060_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 94721 95040 -f1 /flats/F1_060/stock_060_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 95041 95360 -f1 /flats/F1_060/stock_060_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 95361 95680 -f1 /flats/F1_060/stock_060_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 95681 96000 -f1 /flats/F1_060/stock_060_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 96001 96320 -f1 /flats/F1_061/stock_061_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 96321 96640 -f1 /flats/F1_061/stock_061_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 96641 96960 -f1 /flats/F1_061/stock_061_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 96961 97280 -f1 /flats/F1_061/stock_061_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 97281 97600 -f1 /flats/F1_061/stock_061_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 97601 97920 -f1 /flats/F1_062/stock_062_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 97921 98240 -f1 /flats/F1_062/stock_062_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 98241 98560 -f1 /flats/F1_062/stock_062_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 98561 98880 -f1 /flats/F1_062/stock_062_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 98881 99200 -f1 /flats/F1_062/stock_062_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 99201 99520 -f1 /flats/F1_063/stock_063_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 99521 99840 -f1 /flats/F1_063/stock_063_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 99841 100160 -f1 /flats/F1_063/stock_063_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 100161 100480 -f1 /flats/F1_063/stock_063_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 100481 100800 -f1 /flats/F1_063/stock_063_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 100801 101120 -f1 /flats/F1_064/stock_064_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 101121 101440 -f1 /flats/F1_064/stock_064_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 101441 101760 -f1 /flats/F1_064/stock_064_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 101761 102080 -f1 /flats/F1_064/stock_064_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 102081 102400 -f1 /flats/F1_064/stock_064_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 102401 102720 -f1 /flats/F1_065/stock_065_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 102721 103040 -f1 /flats/F1_065/stock_065_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 103041 103360 -f1 /flats/F1_065/stock_065_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 103361 103680 -f1 /flats/F1_065/stock_065_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 103681 104000 -f1 /flats/F1_065/stock_065_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 104001 104320 -f1 /flats/F1_066/stock_066_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 104321 104640 -f1 /flats/F1_066/stock_066_2.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 104641 104960 -f1 /flats/F1_066/stock_066_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 104961 105280 -f1 /flats/F1_066/stock_066_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 105281 105600 -f1 /flats/F1_066/stock_066_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 105601 105920 -f1 /flats/F1_067/stock_067_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 105921 106240 -f1 /flats/F1_067/stock_067_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 106241 106560 -f1 /flats/F1_067/stock_067_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 106561 106880 -f1 /flats/F1_067/stock_067_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 106881 107200 -f1 /flats/F1_067/stock_067_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 107201 107520 -f1 /flats/F1_068/stock_068_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 107521 107840 -f1 /flats/F1_068/stock_068_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 107841 108160 -f1 /flats/F1_068/stock_068_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 108161 108480 -f1 /flats/F1_068/stock_068_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 108481 108800 -f1 /flats/F1_068/stock_068_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 108801 109120 -f1 /flats/F1_069/stock_069_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 109121 109440 -f1 /flats/F1_069/stock_069_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 109441 109760 -f1 /flats/F1_069/stock_069_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 109761 110080 -f1 /flats/F1_069/stock_069_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 110081 110400 -f1 /flats/F1_069/stock_069_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 110401 110720 -f1 /flats/F1_070/stock_070_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 110721 111040 -f1 /flats/F1_070/stock_070_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 111041 111360 -f1 /flats/F1_070/stock_070_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 111361 111680 -f1 /flats/F1_070/stock_070_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 111681 112000 -f1 /flats/F1_070/stock_070_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 112001 112320 -f1 /flats/F1_071/stock_071_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 112321 112640 -f1 /flats/F1_071/stock_071_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 112641 112960 -f1 /flats/F1_071/stock_071_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 112961 113280 -f1 /flats/F1_071/stock_071_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 113281 113600 -f1 /flats/F1_071/stock_071_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 113601 113920 -f1 /flats/F1_072/stock_072_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 113921 114240 -f1 /flats/F1_072/stock_072_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 114241 114560 -f1 /flats/F1_072/stock_072_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 114561 114880 -f1 /flats/F1_072/stock_072_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 114881 115200 -f1 /flats/F1_072/stock_072_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 115201 115520 -f1 /flats/F1_073/stock_073_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 115521 115840 -f1 /flats/F1_073/stock_073_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 115841 116160 -f1 /flats/F1_073/stock_073_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 116161 116480 -f1 /flats/F1_073/stock_073_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 116481 116800 -f1 /flats/F1_073/stock_073_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 116801 117120 -f1 /flats/F1_074/stock_074_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 117121 117440 -f1 /flats/F1_074/stock_074_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 117441 117760 -f1 /flats/F1_074/stock_074_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 117761 118080 -f1 /flats/F1_074/stock_074_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 118081 118400 -f1 /flats/F1_074/stock_074_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 118401 118720 -f1 /flats/F1_075/stock_075_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 118721 119040 -f1 /flats/F1_075/stock_075_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 119041 119360 -f1 /flats/F1_075/stock_075_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 119361 119680 -f1 /flats/F1_075/stock_075_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 119681 120000 -f1 /flats/F1_075/stock_075_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 120001 120320 -f1 /flats/F1_076/stock_076_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 120321 120640 -f1 /flats/F1_076/stock_076_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 120641 120960 -f1 /flats/F1_076/stock_076_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 120961 121280 -f1 /flats/F1_076/stock_076_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 121281 121600 -f1 /flats/F1_076/stock_076_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 121601 121920 -f1 /flats/F1_077/stock_077_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 121921 122240 -f1 /flats/F1_077/stock_077_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 122241 122560 -f1 /flats/F1_077/stock_077_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 122561 122880 -f1 /flats/F1_077/stock_077_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 122881 123200 -f1 /flats/F1_077/stock_077_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 123201 123520 -f1 /flats/F1_078/stock_078_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 123521 123840 -f1 /flats/F1_078/stock_078_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 123841 124160 -f1 /flats/F1_078/stock_078_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 124161 124480 -f1 /flats/F1_078/stock_078_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 124481 124800 -f1 /flats/F1_078/stock_078_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 124801 125120 -f1 /flats/F1_079/stock_079_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 125121 125440 -f1 /flats/F1_079/stock_079_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 125441 125760 -f1 /flats/F1_079/stock_079_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 125761 126080 -f1 /flats/F1_079/stock_079_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 126081 126400 -f1 /flats/F1_079/stock_079_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 126401 126720 -f1 /flats/F1_080/stock_080_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 126721 127040 -f1 /flats/F1_080/stock_080_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 127041 127360 -f1 /flats/F1_080/stock_080_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 127361 127680 -f1 /flats/F1_080/stock_080_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 127681 128000 -f1 /flats/F1_080/stock_080_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 128001 128320 -f1 /flats/F1_081/stock_081_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 128321 128640 -f1 /flats/F1_081/stock_081_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 128641 128960 -f1 /flats/F1_081/stock_081_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 128961 129280 -f1 /flats/F1_081/stock_081_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 129281 129600 -f1 /flats/F1_081/stock_081_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 129601 129920 -f1 /flats/F1_082/stock_082_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 129921 130240 -f1 /flats/F1_082/stock_082_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 130241 130560 -f1 /flats/F1_082/stock_082_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 130561 130880 -f1 /flats/F1_082/stock_082_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 130881 131200 -f1 /flats/F1_082/stock_082_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 131201 131520 -f1 /flats/F1_083/stock_083_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 131521 131840 -f1 /flats/F1_083/stock_083_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 131841 132160 -f1 /flats/F1_083/stock_083_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 132161 132480 -f1 /flats/F1_083/stock_083_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 132481 132800 -f1 /flats/F1_083/stock_083_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 132801 133120 -f1 /flats/F1_084/stock_084_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 133121 133440 -f1 /flats/F1_084/stock_084_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 133441 133760 -f1 /flats/F1_084/stock_084_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 133761 134080 -f1 /flats/F1_084/stock_084_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 134081 134400 -f1 /flats/F1_084/stock_084_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 134401 134720 -f1 /flats/F1_085/stock_085_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 134721 135040 -f1 /flats/F1_085/stock_085_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 135041 135360 -f1 /flats/F1_085/stock_085_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 135361 135680 -f1 /flats/F1_085/stock_085_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 135681 136000 -f1 /flats/F1_085/stock_085_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 136001 136320 -f1 /flats/F1_086/stock_086_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 136321 136640 -f1 /flats/F1_086/stock_086_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 136641 136960 -f1 /flats/F1_086/stock_086_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 136961 137280 -f1 /flats/F1_086/stock_086_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 137281 137600 -f1 /flats/F1_086/stock_086_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 137601 137920 -f1 /flats/F1_087/stock_087_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 137921 138240 -f1 /flats/F1_087/stock_087_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 138241 138560 -f1 /flats/F1_087/stock_087_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 138561 138880 -f1 /flats/F1_087/stock_087_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 138881 139200 -f1 /flats/F1_087/stock_087_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 139201 139520 -f1 /flats/F1_088/stock_088_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 139521 139840 -f1 /flats/F1_088/stock_088_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 139841 140160 -f1 /flats/F1_088/stock_088_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 140161 140480 -f1 /flats/F1_088/stock_088_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 140481 140800 -f1 /flats/F1_088/stock_088_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 140801 141120 -f1 /flats/F1_089/stock_089_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 141121 141440 -f1 /flats/F1_089/stock_089_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 141441 141760 -f1 /flats/F1_089/stock_089_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 141761 142080 -f1 /flats/F1_089/stock_089_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 142081 142400 -f1 /flats/F1_089/stock_089_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 142401 142720 -f1 /flats/F1_090/stock_090_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 142721 143040 -f1 /flats/F1_090/stock_090_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 143041 143360 -f1 /flats/F1_090/stock_090_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 143361 143680 -f1 /flats/F1_090/stock_090_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 143681 144000 -f1 /flats/F1_090/stock_090_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 144001 144320 -f1 /flats/F1_091/stock_091_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 144321 144640 -f1 /flats/F1_091/stock_091_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 144641 144960 -f1 /flats/F1_091/stock_091_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 144961 145280 -f1 /flats/F1_091/stock_091_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 145281 145600 -f1 /flats/F1_091/stock_091_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 145601 145920 -f1 /flats/F1_092/stock_092_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 145921 146240 -f1 /flats/F1_092/stock_092_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 146241 146560 -f1 /flats/F1_092/stock_092_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 146561 146880 -f1 /flats/F1_092/stock_092_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 146881 147200 -f1 /flats/F1_092/stock_092_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 147201 147520 -f1 /flats/F1_093/stock_093_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 147521 147840 -f1 /flats/F1_093/stock_093_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 147841 148160 -f1 /flats/F1_093/stock_093_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 148161 148480 -f1 /flats/F1_093/stock_093_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 148481 148800 -f1 /flats/F1_093/stock_093_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 148801 149120 -f1 /flats/F1_094/stock_094_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 149121 149440 -f1 /flats/F1_094/stock_094_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 149441 149760 -f1 /flats/F1_094/stock_094_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 149761 150080 -f1 /flats/F1_094/stock_094_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 150081 150400 -f1 /flats/F1_094/stock_094_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 150401 150720 -f1 /flats/F1_095/stock_095_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 150721 151040 -f1 /flats/F1_095/stock_095_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 151041 151360 -f1 /flats/F1_095/stock_095_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 151361 151680 -f1 /flats/F1_095/stock_095_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 151681 152000 -f1 /flats/F1_095/stock_095_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 152001 152320 -f1 /flats/F1_096/stock_096_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 152321 152640 -f1 /flats/F1_096/stock_096_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 152641 152960 -f1 /flats/F1_096/stock_096_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 152961 153280 -f1 /flats/F1_096/stock_096_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 153281 153600 -f1 /flats/F1_096/stock_096_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 153601 153920 -f1 /flats/F1_097/stock_097_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 153921 154240 -f1 /flats/F1_097/stock_097_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 154241 154560 -f1 /flats/F1_097/stock_097_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 154561 154880 -f1 /flats/F1_097/stock_097_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 154881 155200 -f1 /flats/F1_097/stock_097_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 155201 155520 -f1 /flats/F1_098/stock_098_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 155521 155840 -f1 /flats/F1_098/stock_098_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 155841 156160 -f1 /flats/F1_098/stock_098_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 156161 156480 -f1 /flats/F1_098/stock_098_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 156481 156800 -f1 /flats/F1_098/stock_098_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 156801 157120 -f1 /flats/F1_099/stock_099_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 157121 157440 -f1 /flats/F1_099/stock_099_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 157441 157760 -f1 /flats/F1_099/stock_099_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 157761 158080 -f1 /flats/F1_099/stock_099_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 158081 158400 -f1 /flats/F1_099/stock_099_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 158401 158720 -f1 /flats/F1_100/stock_100_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 158721 159040 -f1 /flats/F1_100/stock_100_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 159041 159360 -f1 /flats/F1_100/stock_100_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 159361 159680 -f1 /flats/F1_100/stock_100_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 159681 160000 -f1 /flats/F1_100/stock_100_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 160001 160320 -f1 /flats/F1_101/stock_101_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 160321 160640 -f1 /flats/F1_101/stock_101_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 160641 160960 -f1 /flats/F1_101/stock_101_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 160961 161280 -f1 /flats/F1_101/stock_101_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 161281 161600 -f1 /flats/F1_101/stock_101_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 161601 161920 -f1 /flats/F1_102/stock_102_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 161921 162240 -f1 /flats/F1_102/stock_102_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 162241 162560 -f1 /flats/F1_102/stock_102_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 162561 162880 -f1 /flats/F1_102/stock_102_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 162881 163200 -f1 /flats/F1_102/stock_102_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 163201 163520 -f1 /flats/F1_103/stock_103_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 163521 163840 -f1 /flats/F1_103/stock_103_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 163841 164160 -f1 /flats/F1_103/stock_103_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 164161 164480 -f1 /flats/F1_103/stock_103_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 164481 164800 -f1 /flats/F1_103/stock_103_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 164801 165120 -f1 /flats/F1_104/stock_104_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 165121 165440 -f1 /flats/F1_104/stock_104_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 165441 165760 -f1 /flats/F1_104/stock_104_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 165761 166080 -f1 /flats/F1_104/stock_104_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 166081 166400 -f1 /flats/F1_104/stock_104_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 166401 166720 -f1 /flats/F1_105/stock_105_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 166721 167040 -f1 /flats/F1_105/stock_105_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 167041 167360 -f1 /flats/F1_105/stock_105_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 167361 167680 -f1 /flats/F1_105/stock_105_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 167681 168000 -f1 /flats/F1_105/stock_105_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 168001 168320 -f1 /flats/F1_106/stock_106_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 168321 168640 -f1 /flats/F1_106/stock_106_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 168641 168960 -f1 /flats/F1_106/stock_106_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 168961 169280 -f1 /flats/F1_106/stock_106_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 169281 169600 -f1 /flats/F1_106/stock_106_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 169601 169920 -f1 /flats/F1_107/stock_107_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 169921 170240 -f1 /flats/F1_107/stock_107_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 170241 170560 -f1 /flats/F1_107/stock_107_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 170561 170880 -f1 /flats/F1_107/stock_107_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 170881 171200 -f1 /flats/F1_107/stock_107_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 171201 171520 -f1 /flats/F1_108/stock_108_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 171521 171840 -f1 /flats/F1_108/stock_108_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 171841 172160 -f1 /flats/F1_108/stock_108_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 172161 172480 -f1 /flats/F1_108/stock_108_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 172481 172800 -f1 /flats/F1_108/stock_108_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 172801 173120 -f1 /flats/F1_109/stock_109_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 173121 173440 -f1 /flats/F1_109/stock_109_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 173441 173760 -f1 /flats/F1_109/stock_109_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 173761 174080 -f1 /flats/F1_109/stock_109_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 174081 174400 -f1 /flats/F1_109/stock_109_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 174401 174720 -f1 /flats/F1_110/stock_110_1.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 174721 175040 -f1 /flats/F1_110/stock_110_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 175041 175360 -f1 /flats/F1_110/stock_110_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 175361 175680 -f1 /flats/F1_110/stock_110_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 175681 176000 -f1 /flats/F1_110/stock_110_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 176001 176320 -f1 /flats/F1_111/stock_111_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 176321 176640 -f1 /flats/F1_111/stock_111_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 176641 176960 -f1 /flats/F1_111/stock_111_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 176961 177280 -f1 /flats/F1_111/stock_111_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 177281 177600 -f1 /flats/F1_111/stock_111_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 177601 177920 -f1 /flats/F1_112/stock_112_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 177921 178240 -f1 /flats/F1_112/stock_112_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 178241 178560 -f1 /flats/F1_112/stock_112_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 178561 178880 -f1 /flats/F1_112/stock_112_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 178881 179200 -f1 /flats/F1_112/stock_112_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 179201 179520 -f1 /flats/F1_113/stock_113_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 179521 179840 -f1 /flats/F1_113/stock_113_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 179841 180160 -f1 /flats/F1_113/stock_113_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 180161 180480 -f1 /flats/F1_113/stock_113_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 180481 180800 -f1 /flats/F1_113/stock_113_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 180801 181120 -f1 /flats/F1_114/stock_114_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 181121 181440 -f1 /flats/F1_114/stock_114_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 181441 181760 -f1 /flats/F1_114/stock_114_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 181761 182080 -f1 /flats/F1_114/stock_114_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 182081 182400 -f1 /flats/F1_114/stock_114_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 182401 182720 -f1 /flats/F1_115/stock_115_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 182721 183040 -f1 /flats/F1_115/stock_115_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 183041 183360 -f1 /flats/F1_115/stock_115_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 183361 183680 -f1 /flats/F1_115/stock_115_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 183681 184000 -f1 /flats/F1_115/stock_115_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 184001 184320 -f1 /flats/F1_116/stock_116_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 184321 184640 -f1 /flats/F1_116/stock_116_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 184641 184960 -f1 /flats/F1_116/stock_116_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 184961 185280 -f1 /flats/F1_116/stock_116_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 185281 185600 -f1 /flats/F1_116/stock_116_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 185601 185920 -f1 /flats/F1_117/stock_117_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 185921 186240 -f1 /flats/F1_117/stock_117_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 186241 186560 -f1 /flats/F1_117/stock_117_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 186561 186880 -f1 /flats/F1_117/stock_117_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 186881 187200 -f1 /flats/F1_117/stock_117_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 187201 187520 -f1 /flats/F1_118/stock_118_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 187521 187840 -f1 /flats/F1_118/stock_118_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 187841 188160 -f1 /flats/F1_118/stock_118_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 188161 188480 -f1 /flats/F1_118/stock_118_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 188481 188800 -f1 /flats/F1_118/stock_118_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 188801 189120 -f1 /flats/F1_119/stock_119_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 189121 189440 -f1 /flats/F1_119/stock_119_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 189441 189760 -f1 /flats/F1_119/stock_119_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 189761 190080 -f1 /flats/F1_119/stock_119_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 190081 190400 -f1 /flats/F1_119/stock_119_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 190401 190720 -f1 /flats/F1_120/stock_120_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 190721 191040 -f1 /flats/F1_120/stock_120_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 191041 191360 -f1 /flats/F1_120/stock_120_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 191361 191680 -f1 /flats/F1_120/stock_120_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 191681 192000 -f1 /flats/F1_120/stock_120_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 192001 192320 -f1 /flats/F1_121/stock_121_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 192321 192640 -f1 /flats/F1_121/stock_121_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 192641 192960 -f1 /flats/F1_121/stock_121_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 192961 193280 -f1 /flats/F1_121/stock_121_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 193281 193600 -f1 /flats/F1_121/stock_121_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 193601 193920 -f1 /flats/F1_122/stock_122_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 193921 194240 -f1 /flats/F1_122/stock_122_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 194241 194560 -f1 /flats/F1_122/stock_122_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 194561 194880 -f1 /flats/F1_122/stock_122_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 194881 195200 -f1 /flats/F1_122/stock_122_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 195201 195520 -f1 /flats/F1_123/stock_123_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 195521 195840 -f1 /flats/F1_123/stock_123_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 195841 196160 -f1 /flats/F1_123/stock_123_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 196161 196480 -f1 /flats/F1_123/stock_123_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 196481 196800 -f1 /flats/F1_123/stock_123_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 196801 197120 -f1 /flats/F1_124/stock_124_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 197121 197440 -f1 /flats/F1_124/stock_124_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 197441 197760 -f1 /flats/F1_124/stock_124_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 197761 198080 -f1 /flats/F1_124/stock_124_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 198081 198400 -f1 /flats/F1_124/stock_124_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 198401 198720 -f1 /flats/F1_125/stock_125_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 198721 199040 -f1 /flats/F1_125/stock_125_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 199041 199360 -f1 /flats/F1_125/stock_125_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 199361 199680 -f1 /flats/F1_125/stock_125_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 199681 200000 -f1 /flats/F1_125/stock_125_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 200001 200320 -f1 /flats/F1_126/stock_126_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 200321 200640 -f1 /flats/F1_126/stock_126_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 200641 200960 -f1 /flats/F1_126/stock_126_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 200961 201280 -f1 /flats/F1_126/stock_126_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 201281 201600 -f1 /flats/F1_126/stock_126_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 201601 201920 -f1 /flats/F1_127/stock_127_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 201921 202240 -f1 /flats/F1_127/stock_127_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 202241 202560 -f1 /flats/F1_127/stock_127_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 202561 202880 -f1 /flats/F1_127/stock_127_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 202881 203200 -f1 /flats/F1_127/stock_127_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 203201 203520 -f1 /flats/F1_128/stock_128_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 203521 203840 -f1 /flats/F1_128/stock_128_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 203841 204160 -f1 /flats/F1_128/stock_128_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 204161 204480 -f1 /flats/F1_128/stock_128_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 204481 204800 -f1 /flats/F1_128/stock_128_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 204801 205120 -f1 /flats/F1_129/stock_129_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 205121 205440 -f1 /flats/F1_129/stock_129_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 205441 205760 -f1 /flats/F1_129/stock_129_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 205761 206080 -f1 /flats/F1_129/stock_129_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 206081 206400 -f1 /flats/F1_129/stock_129_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 206401 206720 -f1 /flats/F1_130/stock_130_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 206721 207040 -f1 /flats/F1_130/stock_130_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 207041 207360 -f1 /flats/F1_130/stock_130_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 207361 207680 -f1 /flats/F1_130/stock_130_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 207681 208000 -f1 /flats/F1_130/stock_130_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 208001 208320 -f1 /flats/F1_131/stock_131_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 208321 208640 -f1 /flats/F1_131/stock_131_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 208641 208960 -f1 /flats/F1_131/stock_131_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 208961 209280 -f1 /flats/F1_131/stock_131_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 209281 209600 -f1 /flats/F1_131/stock_131_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 209601 209920 -f1 /flats/F1_132/stock_132_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 209921 210240 -f1 /flats/F1_132/stock_132_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 210241 210560 -f1 /flats/F1_132/stock_132_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 210561 210880 -f1 /flats/F1_132/stock_132_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 210881 211200 -f1 /flats/F1_132/stock_132_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 211201 211520 -f1 /flats/F1_133/stock_133_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 211521 211840 -f1 /flats/F1_133/stock_133_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 211841 212160 -f1 /flats/F1_133/stock_133_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 212161 212480 -f1 /flats/F1_133/stock_133_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 212481 212800 -f1 /flats/F1_133/stock_133_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 212801 213120 -f1 /flats/F1_134/stock_134_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 213121 213440 -f1 /flats/F1_134/stock_134_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 213441 213760 -f1 /flats/F1_134/stock_134_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 213761 214080 -f1 /flats/F1_134/stock_134_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 214081 214400 -f1 /flats/F1_134/stock_134_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 214401 214720 -f1 /flats/F1_135/stock_135_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 214721 215040 -f1 /flats/F1_135/stock_135_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 215041 215360 -f1 /flats/F1_135/stock_135_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 215361 215680 -f1 /flats/F1_135/stock_135_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 215681 216000 -f1 /flats/F1_135/stock_135_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 216001 216320 -f1 /flats/F1_136/stock_136_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 216321 216640 -f1 /flats/F1_136/stock_136_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 216641 216960 -f1 /flats/F1_136/stock_136_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 216961 217280 -f1 /flats/F1_136/stock_136_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 217281 217600 -f1 /flats/F1_136/stock_136_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 217601 217920 -f1 /flats/F1_137/stock_137_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 217921 218240 -f1 /flats/F1_137/stock_137_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 218241 218560 -f1 /flats/F1_137/stock_137_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 218561 218880 -f1 /flats/F1_137/stock_137_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 218881 219200 -f1 /flats/F1_137/stock_137_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 219201 219520 -f1 /flats/F1_138/stock_138_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 219521 219840 -f1 /flats/F1_138/stock_138_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 219841 220160 -f1 /flats/F1_138/stock_138_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 220161 220480 -f1 /flats/F1_138/stock_138_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 220481 220800 -f1 /flats/F1_138/stock_138_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 220801 221120 -f1 /flats/F1_139/stock_139_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 221121 221440 -f1 /flats/F1_139/stock_139_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 221441 221760 -f1 /flats/F1_139/stock_139_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 221761 222080 -f1 /flats/F1_139/stock_139_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 222081 222400 -f1 /flats/F1_139/stock_139_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 222401 222720 -f1 /flats/F1_140/stock_140_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 222721 223040 -f1 /flats/F1_140/stock_140_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 223041 223360 -f1 /flats/F1_140/stock_140_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 223361 223680 -f1 /flats/F1_140/stock_140_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 223681 224000 -f1 /flats/F1_140/stock_140_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 224001 224320 -f1 /flats/F1_141/stock_141_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 224321 224640 -f1 /flats/F1_141/stock_141_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 224641 224960 -f1 /flats/F1_141/stock_141_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 224961 225280 -f1 /flats/F1_141/stock_141_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 225281 225600 -f1 /flats/F1_141/stock_141_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 225601 225920 -f1 /flats/F1_142/stock_142_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 225921 226240 -f1 /flats/F1_142/stock_142_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 226241 226560 -f1 /flats/F1_142/stock_142_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 226561 226880 -f1 /flats/F1_142/stock_142_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 226881 227200 -f1 /flats/F1_142/stock_142_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 227201 227520 -f1 /flats/F1_143/stock_143_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 227521 227840 -f1 /flats/F1_143/stock_143_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 227841 228160 -f1 /flats/F1_143/stock_143_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 228161 228480 -f1 /flats/F1_143/stock_143_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 228481 228800 -f1 /flats/F1_143/stock_143_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 228801 229120 -f1 /flats/F1_144/stock_144_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 229121 229440 -f1 /flats/F1_144/stock_144_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 229441 229760 -f1 /flats/F1_144/stock_144_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 229761 230080 -f1 /flats/F1_144/stock_144_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 230081 230400 -f1 /flats/F1_144/stock_144_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 230401 230720 -f1 /flats/F1_145/stock_145_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 230721 231040 -f1 /flats/F1_145/stock_145_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 231041 231360 -f1 /flats/F1_145/stock_145_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 231361 231680 -f1 /flats/F1_145/stock_145_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 231681 232000 -f1 /flats/F1_145/stock_145_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 232001 232320 -f1 /flats/F1_146/stock_146_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 232321 232640 -f1 /flats/F1_146/stock_146_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 232641 232960 -f1 /flats/F1_146/stock_146_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 232961 233280 -f1 /flats/F1_146/stock_146_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 233281 233600 -f1 /flats/F1_146/stock_146_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 233601 233920 -f1 /flats/F1_147/stock_147_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 233921 234240 -f1 /flats/F1_147/stock_147_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 234241 234560 -f1 /flats/F1_147/stock_147_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 234561 234880 -f1 /flats/F1_147/stock_147_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 234881 235200 -f1 /flats/F1_147/stock_147_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 235201 235520 -f1 /flats/F1_148/stock_148_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 235521 235840 -f1 /flats/F1_148/stock_148_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 235841 236160 -f1 /flats/F1_148/stock_148_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 236161 236480 -f1 /flats/F1_148/stock_148_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 236481 236800 -f1 /flats/F1_148/stock_148_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 236801 237120 -f1 /flats/F1_149/stock_149_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 237121 237440 -f1 /flats/F1_149/stock_149_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 237441 237760 -f1 /flats/F1_149/stock_149_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 237761 238080 -f1 /flats/F1_149/stock_149_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 238081 238400 -f1 /flats/F1_149/stock_149_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 238401 238720 -f1 /flats/F1_150/stock_150_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 238721 239040 -f1 /flats/F1_150/stock_150_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 239041 239360 -f1 /flats/F1_150/stock_150_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 239361 239680 -f1 /flats/F1_150/stock_150_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 239681 240000 -f1 /flats/F1_150/stock_150_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 240001 240320 -f1 /flats/F1_151/stock_151_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 240321 240640 -f1 /flats/F1_151/stock_151_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 240641 240960 -f1 /flats/F1_151/stock_151_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 240961 241280 -f1 /flats/F1_151/stock_151_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 241281 241600 -f1 /flats/F1_151/stock_151_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 241601 241920 -f1 /flats/F1_152/stock_152_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 241921 242240 -f1 /flats/F1_152/stock_152_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 242241 242560 -f1 /flats/F1_152/stock_152_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 242561 242880 -f1 /flats/F1_152/stock_152_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 242881 243200 -f1 /flats/F1_152/stock_152_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 243201 243520 -f1 /flats/F1_153/stock_153_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 243521 243840 -f1 /flats/F1_153/stock_153_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 243841 244160 -f1 /flats/F1_153/stock_153_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 244161 244480 -f1 /flats/F1_153/stock_153_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 244481 244800 -f1 /flats/F1_153/stock_153_5.dat

/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 244801 245120 -f1 /flats/F1_154/stock_154_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 245121 245440 -f1 /flats/F1_154/stock_154_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 245441 245760 -f1 /flats/F1_154/stock_154_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 245761 246080 -f1 /flats/F1_154/stock_154_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 246081 246400 -f1 /flats/F1_154/stock_154_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 246401 246720 -f1 /flats/F1_155/stock_155_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 246721 247040 -f1 /flats/F1_155/stock_155_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 247041 247360 -f1 /flats/F1_155/stock_155_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 247361 247680 -f1 /flats/F1_155/stock_155_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 247681 248000 -f1 /flats/F1_155/stock_155_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 248001 248320 -f1 /flats/F1_156/stock_156_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 248321 248640 -f1 /flats/F1_156/stock_156_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 248641 248960 -f1 /flats/F1_156/stock_156_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 248961 249280 -f1 /flats/F1_156/stock_156_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 249281 249600 -f1 /flats/F1_156/stock_156_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 249601 249920 -f1 /flats/F1_157/stock_157_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 249921 250240 -f1 /flats/F1_157/stock_157_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 250241 250560 -f1 /flats/F1_157/stock_157_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 250561 250880 -f1 /flats/F1_157/stock_157_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 250881 251200 -f1 /flats/F1_157/stock_157_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 251201 251520 -f1 /flats/F1_158/stock_158_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 251521 251840 -f1 /flats/F1_158/stock_158_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 251841 252160 -f1 /flats/F1_158/stock_158_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 252161 252480 -f1 /flats/F1_158/stock_158_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 252481 252800 -f1 /flats/F1_158/stock_158_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 252801 253120 -f1 /flats/F1_159/stock_159_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 253121 253440 -f1 /flats/F1_159/stock_159_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 253441 253760 -f1 /flats/F1_159/stock_159_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 253761 254080 -f1 /flats/F1_159/stock_159_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 254081 254400 -f1 /flats/F1_159/stock_159_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 254401 254720 -f1 /flats/F1_160/stock_160_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 254721 255040 -f1 /flats/F1_160/stock_160_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 255041 255360 -f1 /flats/F1_160/stock_160_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 255361 255680 -f1 /flats/F1_160/stock_160_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 255681 256000 -f1 /flats/F1_160/stock_160_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 256001 256320 -f1 /flats/F1_161/stock_161_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 256321 256640 -f1 /flats/F1_161/stock_161_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 256641 256960 -f1 /flats/F1_161/stock_161_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 256961 257280 -f1 /flats/F1_161/stock_161_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 257281 257600 -f1 /flats/F1_161/stock_161_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 257601 257920 -f1 /flats/F1_162/stock_162_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 257921 258240 -f1 /flats/F1_162/stock_162_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 258241 258560 -f1 /flats/F1_162/stock_162_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 258561 258880 -f1 /flats/F1_162/stock_162_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 258881 259200 -f1 /flats/F1_162/stock_162_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 259201 259520 -f1 /flats/F1_163/stock_163_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 259521 259840 -f1 /flats/F1_163/stock_163_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 259841 260160 -f1 /flats/F1_163/stock_163_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 260161 260480 -f1 /flats/F1_163/stock_163_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 260481 260800 -f1 /flats/F1_163/stock_163_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 260801 261120 -f1 /flats/F1_164/stock_164_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 261121 261440 -f1 /flats/F1_164/stock_164_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 261441 261760 -f1 /flats/F1_164/stock_164_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 261761 262080 -f1 /flats/F1_164/stock_164_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 262081 262400 -f1 /flats/F1_164/stock_164_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 262401 262720 -f1 /flats/F1_165/stock_165_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 262721 263040 -f1 /flats/F1_165/stock_165_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 263041 263360 -f1 /flats/F1_165/stock_165_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 263361 263680 -f1 /flats/F1_165/stock_165_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 263681 264000 -f1 /flats/F1_165/stock_165_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 264001 264320 -f1 /flats/F1_166/stock_166_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 264321 264640 -f1 /flats/F1_166/stock_166_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 264641 264960 -f1 /flats/F1_166/stock_166_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 264961 265280 -f1 /flats/F1_166/stock_166_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 265281 265600 -f1 /flats/F1_166/stock_166_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 265601 265920 -f1 /flats/F1_167/stock_167_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 265921 266240 -f1 /flats/F1_167/stock_167_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 266241 266560 -f1 /flats/F1_167/stock_167_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 266561 266880 -f1 /flats/F1_167/stock_167_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 266881 267200 -f1 /flats/F1_167/stock_167_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 267201 267520 -f1 /flats/F1_168/stock_168_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 267521 267840 -f1 /flats/F1_168/stock_168_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 267841 268160 -f1 /flats/F1_168/stock_168_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 268161 268480 -f1 /flats/F1_168/stock_168_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 268481 268800 -f1 /flats/F1_168/stock_168_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 268801 269120 -f1 /flats/F1_169/stock_169_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 269121 269440 -f1 /flats/F1_169/stock_169_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 269441 269760 -f1 /flats/F1_169/stock_169_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 269761 270080 -f1 /flats/F1_169/stock_169_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 270081 270400 -f1 /flats/F1_169/stock_169_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 270401 270720 -f1 /flats/F1_170/stock_170_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 270721 271040 -f1 /flats/F1_170/stock_170_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 271041 271360 -f1 /flats/F1_170/stock_170_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 271361 271680 -f1 /flats/F1_170/stock_170_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 271681 272000 -f1 /flats/F1_170/stock_170_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 272001 272320 -f1 /flats/F1_171/stock_171_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 272321 272640 -f1 /flats/F1_171/stock_171_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 272641 272960 -f1 /flats/F1_171/stock_171_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 272961 273280 -f1 /flats/F1_171/stock_171_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 273281 273600 -f1 /flats/F1_171/stock_171_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 273601 273920 -f1 /flats/F1_172/stock_172_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 273921 274240 -f1 /flats/F1_172/stock_172_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 274241 274560 -f1 /flats/F1_172/stock_172_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 274561 274880 -f1 /flats/F1_172/stock_172_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 274881 275200 -f1 /flats/F1_172/stock_172_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 275201 275520 -f1 /flats/F1_173/stock_173_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 275521 275840 -f1 /flats/F1_173/stock_173_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 275841 276160 -f1 /flats/F1_173/stock_173_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 276161 276480 -f1 /flats/F1_173/stock_173_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 276481 276800 -f1 /flats/F1_173/stock_173_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 276801 277120 -f1 /flats/F1_174/stock_174_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 277121 277440 -f1 /flats/F1_174/stock_174_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 277441 277760 -f1 /flats/F1_174/stock_174_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 277761 278080 -f1 /flats/F1_174/stock_174_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 278081 278400 -f1 /flats/F1_174/stock_174_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 278401 278720 -f1 /flats/F1_175/stock_175_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 278721 279040 -f1 /flats/F1_175/stock_175_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 279041 279360 -f1 /flats/F1_175/stock_175_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 279361 279680 -f1 /flats/F1_175/stock_175_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 279681 280000 -f1 /flats/F1_175/stock_175_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 280001 280320 -f1 /flats/F1_176/stock_176_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 280321 280640 -f1 /flats/F1_176/stock_176_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 280641 280960 -f1 /flats/F1_176/stock_176_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 280961 281280 -f1 /flats/F1_176/stock_176_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 281281 281600 -f1 /flats/F1_176/stock_176_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 281601 281920 -f1 /flats/F1_177/stock_177_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 281921 282240 -f1 /flats/F1_177/stock_177_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 282241 282560 -f1 /flats/F1_177/stock_177_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 282561 282880 -f1 /flats/F1_177/stock_177_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 282881 283200 -f1 /flats/F1_177/stock_177_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 283201 283520 -f1 /flats/F1_178/stock_178_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 283521 283840 -f1 /flats/F1_178/stock_178_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 283841 284160 -f1 /flats/F1_178/stock_178_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 284161 284480 -f1 /flats/F1_178/stock_178_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 284481 284800 -f1 /flats/F1_178/stock_178_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 284801 285120 -f1 /flats/F1_179/stock_179_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 285121 285440 -f1 /flats/F1_179/stock_179_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 285441 285760 -f1 /flats/F1_179/stock_179_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 285761 286080 -f1 /flats/F1_179/stock_179_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 286081 286400 -f1 /flats/F1_179/stock_179_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 286401 286720 -f1 /flats/F1_180/stock_180_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 286721 287040 -f1 /flats/F1_180/stock_180_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 287041 287360 -f1 /flats/F1_180/stock_180_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 287361 287680 -f1 /flats/F1_180/stock_180_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 287681 288000 -f1 /flats/F1_180/stock_180_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 288001 288320 -f1 /flats/F1_181/stock_181_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 288321 288640 -f1 /flats/F1_181/stock_181_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 288641 288960 -f1 /flats/F1_181/stock_181_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 288961 289280 -f1 /flats/F1_181/stock_181_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 289281 289600 -f1 /flats/F1_181/stock_181_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 289601 289920 -f1 /flats/F1_182/stock_182_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 289921 290240 -f1 /flats/F1_182/stock_182_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 290241 290560 -f1 /flats/F1_182/stock_182_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 290561 290880 -f1 /flats/F1_182/stock_182_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 290881 291200 -f1 /flats/F1_182/stock_182_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 291201 291520 -f1 /flats/F1_183/stock_183_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 291521 291840 -f1 /flats/F1_183/stock_183_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 291841 292160 -f1 /flats/F1_183/stock_183_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 292161 292480 -f1 /flats/F1_183/stock_183_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 292481 292800 -f1 /flats/F1_183/stock_183_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 292801 293120 -f1 /flats/F1_184/stock_184_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 293121 293440 -f1 /flats/F1_184/stock_184_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 293441 293760 -f1 /flats/F1_184/stock_184_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 293761 294080 -f1 /flats/F1_184/stock_184_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 294081 294400 -f1 /flats/F1_184/stock_184_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 294401 294720 -f1 /flats/F1_185/stock_185_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 294721 295040 -f1 /flats/F1_185/stock_185_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 295041 295360 -f1 /flats/F1_185/stock_185_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 295361 295680 -f1 /flats/F1_185/stock_185_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 295681 296000 -f1 /flats/F1_185/stock_185_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 296001 296320 -f1 /flats/F1_186/stock_186_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 296321 296640 -f1 /flats/F1_186/stock_186_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 296641 296960 -f1 /flats/F1_186/stock_186_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 296961 297280 -f1 /flats/F1_186/stock_186_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 297281 297600 -f1 /flats/F1_186/stock_186_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 297601 297920 -f1 /flats/F1_187/stock_187_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 297921 298240 -f1 /flats/F1_187/stock_187_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 298241 298560 -f1 /flats/F1_187/stock_187_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 298561 298880 -f1 /flats/F1_187/stock_187_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 298881 299200 -f1 /flats/F1_187/stock_187_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 299201 299520 -f1 /flats/F1_188/stock_188_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 299521 299840 -f1 /flats/F1_188/stock_188_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 299841 300160 -f1 /flats/F1_188/stock_188_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 300161 300480 -f1 /flats/F1_188/stock_188_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 300481 300800 -f1 /flats/F1_188/stock_188_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 300801 301120 -f1 /flats/F1_189/stock_189_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 301121 301440 -f1 /flats/F1_189/stock_189_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 301441 301760 -f1 /flats/F1_189/stock_189_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 301761 302080 -f1 /flats/F1_189/stock_189_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 302081 302400 -f1 /flats/F1_189/stock_189_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 302401 302720 -f1 /flats/F1_190/stock_190_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 302721 303040 -f1 /flats/F1_190/stock_190_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 303041 303360 -f1 /flats/F1_190/stock_190_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 303361 303680 -f1 /flats/F1_190/stock_190_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 303681 304000 -f1 /flats/F1_190/stock_190_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 304001 304320 -f1 /flats/F1_191/stock_191_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 304321 304640 -f1 /flats/F1_191/stock_191_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 304641 304960 -f1 /flats/F1_191/stock_191_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 304961 305280 -f1 /flats/F1_191/stock_191_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 305281 305600 -f1 /flats/F1_191/stock_191_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 305601 305920 -f1 /flats/F1_192/stock_192_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 305921 306240 -f1 /flats/F1_192/stock_192_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 306241 306560 -f1 /flats/F1_192/stock_192_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 306561 306880 -f1 /flats/F1_192/stock_192_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 306881 307200 -f1 /flats/F1_192/stock_192_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 307201 307520 -f1 /flats/F1_193/stock_193_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 307521 307840 -f1 /flats/F1_193/stock_193_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 307841 308160 -f1 /flats/F1_193/stock_193_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 308161 308480 -f1 /flats/F1_193/stock_193_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 308481 308800 -f1 /flats/F1_193/stock_193_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 308801 309120 -f1 /flats/F1_194/stock_194_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 309121 309440 -f1 /flats/F1_194/stock_194_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 309441 309760 -f1 /flats/F1_194/stock_194_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 309761 310080 -f1 /flats/F1_194/stock_194_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 310081 310400 -f1 /flats/F1_194/stock_194_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 310401 310720 -f1 /flats/F1_195/stock_195_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 310721 311040 -f1 /flats/F1_195/stock_195_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 311041 311360 -f1 /flats/F1_195/stock_195_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 311361 311680 -f1 /flats/F1_195/stock_195_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 311681 312000 -f1 /flats/F1_195/stock_195_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 312001 312320 -f1 /flats/F1_196/stock_196_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 312321 312640 -f1 /flats/F1_196/stock_196_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 312641 312960 -f1 /flats/F1_196/stock_196_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 312961 313280 -f1 /flats/F1_196/stock_196_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 313281 313600 -f1 /flats/F1_196/stock_196_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 313601 313920 -f1 /flats/F1_197/stock_197_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 313921 314240 -f1 /flats/F1_197/stock_197_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 314241 314560 -f1 /flats/F1_197/stock_197_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 314561 314880 -f1 /flats/F1_197/stock_197_4.dat

```
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 314881 315200 -f1 /flats/F1_197/stock_197_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 315201 315520 -f1 /flats/F1_198/stock_198_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 315521 315840 -f1 /flats/F1_198/stock_198_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 315841 316160 -f1 /flats/F1_198/stock_198_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 316161 316480 -f1 /flats/F1_198/stock_198_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 316481 316800 -f1 /flats/F1_198/stock_198_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 316801 317120 -f1 /flats/F1_199/stock_199_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 317121 317440 -f1 /flats/F1_199/stock_199_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 317441 317760 -f1 /flats/F1_199/stock_199_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 317761 318080 -f1 /flats/F1_199/stock_199_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 318081 318400 -f1 /flats/F1_199/stock_199_5.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 318401 318720 -f1 /flats/F1_200/stock_200_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 318721 319040 -f1 /flats/F1_200/stock_200_2.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 319041 319360 -f1 /flats/F1_200/stock_200_3.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 319361 319680 -f1 /flats/F1_200/stock_200_4.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 6 -r 319681 320000 -f1 /flats/F1_200/stock_200_5.dat
```

DDL/GEN_WAREHOUSE_ALL.sh

```
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 1 8000 -f1 /flats/F1_001/warehouse_001_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 8001 16000 -f1 /flats/F1_002/warehouse_002_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 16001 24000 -f1 /flats/F1_003/warehouse_003_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 24001 32000 -f1 /flats/F1_004/warehouse_004_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 32001 40000 -f1 /flats/F1_005/warehouse_005_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 40001 48000 -f1 /flats/F1_006/warehouse_006_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 48001 56000 -f1 /flats/F1_007/warehouse_007_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 56001 64000 -f1 /flats/F1_008/warehouse_008_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 64001 72000 -f1 /flats/F1_009/warehouse_009_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 72001 80000 -f1 /flats/F1_010/warehouse_010_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 80001 88000 -f1 /flats/F1_011/warehouse_011_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 88001 96000 -f1 /flats/F1_012/warehouse_012_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 96001 104000 -f1 /flats/F1_013/warehouse_013_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 104001 112000 -f1 /flats/F1_014/warehouse_014_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 112001 120000 -f1 /flats/F1_015/warehouse_015_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 120001 128000 -f1 /flats/F1_016/warehouse_016_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 128001 136000 -f1 /flats/F1_017/warehouse_017_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 136001 144000 -f1 /flats/F1_018/warehouse_018_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 144001 152000 -f1 /flats/F1_019/warehouse_019_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 152001 160000 -f1 /flats/F1_020/warehouse_020_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 160001 168000 -f1 /flats/F1_021/warehouse_021_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 168001 176000 -f1 /flats/F1_022/warehouse_022_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 176001 184000 -f1 /flats/F1_023/warehouse_023_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 184001 192000 -f1 /flats/F1_024/warehouse_024_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 192001 200000 -f1 /flats/F1_025/warehouse_025_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 200001 208000 -f1 /flats/F1_026/warehouse_026_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 208001 216000 -f1 /flats/F1_027/warehouse_027_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 216001 224000 -f1 /flats/F1_028/warehouse_028_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 224001 232000 -f1 /flats/F1_029/warehouse_029_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 232001 240000 -f1 /flats/F1_030/warehouse_030_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 240001 248000 -f1 /flats/F1_031/warehouse_031_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 248001 256000 -f1 /flats/F1_032/warehouse_032_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 256001 264000 -f1 /flats/F1_033/warehouse_033_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 264001 272000 -f1 /flats/F1_034/warehouse_034_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 272001 280000 -f1 /flats/F1_035/warehouse_035_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 280001 288000 -f1 /flats/F1_036/warehouse_036_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 288001 296000 -f1 /flats/F1_037/warehouse_037_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 296001 304000 -f1 /flats/F1_038/warehouse_038_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 304001 312000 -f1 /flats/F1_039/warehouse_039_1.dat
/home2/nbissoon/tpc-c.ibm/dbgen/gendata -t 3 -r 312001 320000 -f1 /flats/F1_040/warehouse_040_1.dat
```

DDL/LOAD_CUSTOMER_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/customer_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/customer_001_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/customer_001_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/customer_001_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/customer_001_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/customer_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/customer_002_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/customer_002_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/customer_002_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/customer_002_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/customer_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/customer_003_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/customer_003_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/customer_003_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/customer_003_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/customer_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/customer_004_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/customer_004_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/customer_004_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER4;
COMMIT WORK;
CONNECT RESET;
```

```
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/customer_004_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/customer_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/customer_005_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/customer_005_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/customer_005_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/customer_005_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/customer_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/customer_006_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/customer_006_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/customer_006_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/customer_006_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/customer_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/customer_007_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/customer_007_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/customer_007_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/customer_007_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/customer_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/customer_008_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/customer_008_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/customer_008_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/customer_008_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/customer_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/customer_009_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/customer_009_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/customer_009_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/customer_009_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/customer_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER10 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_010/customer_010_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/customer_010_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/customer_010_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/customer_010_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/customer_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/customer_011_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/customer_011_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/customer_011_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/customer_011_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER12 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_012/customer_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/customer_012_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/customer_012_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/customer_012_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/customer_012_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/customer_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/customer_013_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/customer_013_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/customer_013_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER13 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_013/customer_013_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/customer_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/customer_014_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/customer_014_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/customer_014_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/customer_014_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/customer_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/customer_015_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/customer_015_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER15 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_015/customer_015_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/customer_015_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/customer_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/customer_016_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/customer_016_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/customer_016_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/customer_016_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/customer_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/customer_017_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/customer_017_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/customer_017_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/customer_017_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/customer_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/customer_018_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/customer_018_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/customer_018_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/customer_018_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/customer_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/customer_019_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/customer_019_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/customer_019_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/customer_019_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/customer_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/customer_020_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/customer_020_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/customer_020_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/customer_020_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER21 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_021/customer_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/customer_021_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/customer_021_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/customer_021_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/customer_021_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/customer_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/customer_022_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/customer_022_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/customer_022_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER22 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_022/customer_022_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/customer_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/customer_023_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/customer_023_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/customer_023_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/customer_023_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/customer_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/customer_024_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/customer_024_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER24 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_024/customer_024_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/customer_024_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/customer_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/customer_025_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/customer_025_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/customer_025_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/customer_025_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/customer_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/customer_026_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER26 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_026/customer_026_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/customer_026_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/customer_026_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/customer_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/customer_027_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/customer_027_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/customer_027_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/customer_027_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/customer_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER28 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_028/customer_028_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/customer_028_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/customer_028_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/customer_028_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/customer_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/customer_029_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/customer_029_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/customer_029_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/customer_029_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER30 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_030/customer_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/customer_030_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/customer_030_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/customer_030_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/customer_030_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/customer_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/customer_031_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/customer_031_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/customer_031_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER31 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_031/customer_031_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/customer_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/customer_032_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/customer_032_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/customer_032_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/customer_032_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/customer_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/customer_033_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/customer_033_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/customer_033_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/customer_033_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/customer_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/customer_034_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/customer_034_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/customer_034_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/customer_034_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/customer_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/customer_035_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/customer_035_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/customer_035_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/customer_035_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/customer_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/customer_036_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/customer_036_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/customer_036_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/customer_036_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/customer_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER37 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_037/customer_037_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/customer_037_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/customer_037_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/customer_037_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/customer_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/customer_038_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/customer_038_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/customer_038_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/customer_038_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER39 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_039/customer_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/customer_039_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/customer_039_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/customer_039_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/customer_039_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/customer_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/customer_040_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/customer_040_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/customer_040_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER40 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_040/customer_040_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/customer_041_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/customer_041_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/customer_041_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/customer_041_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/customer_041_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/customer_042_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/customer_042_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/customer_042_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER42 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_042/customer_042_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/customer_042_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/customer_043_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/customer_043_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/customer_043_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/customer_043_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/customer_043_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/customer_044_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/customer_044_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/customer_044_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/customer_044_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/customer_044_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/customer_045_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/customer_045_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/customer_045_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/customer_045_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/customer_045_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/customer_046_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/customer_046_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/customer_046_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/customer_046_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/customer_046_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/customer_047_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/customer_047_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/customer_047_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/customer_047_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/customer_047_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER48 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_048/customer_048_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/customer_048_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/customer_048_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/customer_048_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/customer_048_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/customer_049_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/customer_049_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/customer_049_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/customer_049_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER49 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_049/customer_049_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/customer_050_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/customer_050_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/customer_050_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/customer_050_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/customer_050_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/customer_051_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/customer_051_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/customer_051_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER51 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_051/customer_051_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/customer_051_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/customer_052_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/customer_052_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/customer_052_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/customer_052_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/customer_052_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/customer_053_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/customer_053_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER53 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_053/customer_053_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/customer_053_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/customer_053_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/customer_054_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/customer_054_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/customer_054_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/customer_054_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/customer_054_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/customer_055_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/customer_055_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/customer_055_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/customer_055_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/customer_055_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/customer_056_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/customer_056_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/customer_056_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/customer_056_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/customer_056_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/customer_057_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/customer_057_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/customer_057_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/customer_057_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/customer_057_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/customer_058_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/customer_058_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/customer_058_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/customer_058_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER58 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_058/customer_058_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/customer_059_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/customer_059_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/customer_059_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/customer_059_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/customer_059_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/customer_060_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/customer_060_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/customer_060_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER60 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_060/customer_060_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/customer_060_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/customer_061_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/customer_061_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/customer_061_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/customer_061_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/customer_061_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/customer_062_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/customer_062_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER62 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_062/customer_062_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/customer_062_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/customer_062_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/customer_063_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/customer_063_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/customer_063_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/customer_063_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/customer_063_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/customer_064_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER64 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_064/customer_064_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/customer_064_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/customer_064_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/customer_064_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/customer_065_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/customer_065_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/customer_065_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/customer_065_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/customer_065_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER66 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_066/customer_066_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/customer_066_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/customer_066_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/customer_066_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/customer_066_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/customer_067_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/customer_067_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/customer_067_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/customer_067_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER67 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_067/customer_067_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/customer_068_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/customer_068_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/customer_068_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/customer_068_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/customer_068_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/customer_069_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/customer_069_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/customer_069_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER69 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_069/customer_069_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/customer_069_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/customer_070_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/customer_070_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/customer_070_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/customer_070_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/customer_070_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/customer_071_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/customer_071_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/customer_071_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/customer_071_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/customer_071_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/customer_072_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/customer_072_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/customer_072_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/customer_072_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/customer_072_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/customer_073_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/customer_073_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/customer_073_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/customer_073_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/customer_073_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/customer_074_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/customer_074_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/customer_074_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/customer_074_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/customer_074_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER75 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_075/customer_075_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/customer_075_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/customer_075_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/customer_075_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/customer_075_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/customer_076_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/customer_076_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/customer_076_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/customer_076_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/customer_076_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/customer_077_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/customer_077_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/customer_077_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/customer_077_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/customer_077_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/customer_078_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/customer_078_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/customer_078_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/customer_078_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/customer_078_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/customer_079_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/customer_079_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/customer_079_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/customer_079_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/customer_079_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/customer_080_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/customer_080_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER80 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_080/customer_080_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/customer_080_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/customer_080_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/customer_081_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/customer_081_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/customer_081_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/customer_081_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/customer_081_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/customer_082_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER82 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_082/customer_082_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/customer_082_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/customer_082_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/customer_082_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/customer_083_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/customer_083_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/customer_083_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/customer_083_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/customer_083_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER84 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_084/customer_084_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/customer_084_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/customer_084_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/customer_084_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/customer_084_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/customer_085_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/customer_085_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/customer_085_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/customer_085_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER85 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_085/customer_085_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/customer_086_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/customer_086_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/customer_086_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/customer_086_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/customer_086_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/customer_087_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/customer_087_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/customer_087_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER87 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_087/customer_087_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/customer_087_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/customer_088_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/customer_088_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/customer_088_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/customer_088_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/customer_088_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/customer_089_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/customer_089_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER89 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_089/customer_089_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/customer_089_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/customer_089_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/customer_090_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/customer_090_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/customer_090_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/customer_090_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/customer_090_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/customer_091_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER91 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_091/customer_091_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/customer_091_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/customer_091_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/customer_091_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/customer_092_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/customer_092_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/customer_092_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/customer_092_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/customer_092_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER93 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_093/customer_093_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/customer_093_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/customer_093_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/customer_093_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/customer_093_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/customer_094_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/customer_094_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/customer_094_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/customer_094_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER94 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_094/customer_094_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/customer_095_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/customer_095_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/customer_095_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/customer_095_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/customer_095_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/customer_096_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/customer_096_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/customer_096_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER96 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_096/customer_096_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/customer_096_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/customer_097_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/customer_097_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/customer_097_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/customer_097_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/customer_097_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/customer_098_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/customer_098_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER98 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_098/customer_098_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/customer_098_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/customer_098_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/customer_099_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/customer_099_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/customer_099_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/customer_099_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/customer_099_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/customer_100_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER100 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_100/customer_100_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/customer_100_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/customer_100_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/customer_100_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/customer_101_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/customer_101_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/customer_101_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/customer_101_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/customer_101_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER102 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_102/customer_102_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/customer_102_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/customer_102_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/customer_102_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/customer_102_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/customer_103_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/customer_103_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/customer_103_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/customer_103_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER103 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_103/customer_103_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/customer_104_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/customer_104_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/customer_104_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/customer_104_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/customer_104_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/customer_105_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/customer_105_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/customer_105_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER105 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_105/customer_105_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/customer_105_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/customer_106_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/customer_106_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/customer_106_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/customer_106_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/customer_106_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/customer_107_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/customer_107_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER107 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_107/customer_107_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/customer_107_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/customer_107_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/customer_108_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/customer_108_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/customer_108_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/customer_108_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/customer_108_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/customer_109_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER109 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_109/customer_109_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/customer_109_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/customer_109_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/customer_109_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/customer_110_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/customer_110_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/customer_110_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/customer_110_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/customer_110_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER111 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_111/customer_111_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/customer_111_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/customer_111_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/customer_111_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/customer_111_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/customer_112_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/customer_112_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/customer_112_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/customer_112_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER112 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_112/customer_112_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/customer_113_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/customer_113_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/customer_113_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/customer_113_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/customer_113_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/customer_114_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/customer_114_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/customer_114_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/customer_114_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/customer_114_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/customer_115_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/customer_115_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/customer_115_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/customer_115_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/customer_115_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/customer_116_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/customer_116_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/customer_116_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/customer_116_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/customer_116_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/customer_117_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/customer_117_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/customer_117_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/customer_117_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/customer_117_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/customer_118_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER118 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_118/customer_118_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/customer_118_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/customer_118_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/customer_118_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/customer_119_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/customer_119_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/customer_119_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/customer_119_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/customer_119_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER120 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_120/customer_120_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/customer_120_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/customer_120_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/customer_120_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/customer_120_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/customer_121_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/customer_121_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/customer_121_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/customer_121_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER121 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_121/customer_121_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/customer_122_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/customer_122_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/customer_122_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/customer_122_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/customer_122_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/customer_123_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/customer_123_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/customer_123_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER123 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_123/customer_123_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/customer_123_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/customer_124_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/customer_124_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/customer_124_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/customer_124_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/customer_124_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/customer_125_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/customer_125_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/customer_125_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/customer_125_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/customer_125_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/customer_126_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/customer_126_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/customer_126_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/customer_126_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/customer_126_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/customer_127_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/customer_127_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/customer_127_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/customer_127_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/customer_127_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/customer_128_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/customer_128_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/customer_128_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/customer_128_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/customer_128_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER129 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_129/customer_129_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/customer_129_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/customer_129_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/customer_129_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/customer_129_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/customer_130_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/customer_130_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/customer_130_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/customer_130_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER130 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_130/customer_130_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/customer_131_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/customer_131_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/customer_131_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/customer_131_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/customer_131_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/customer_132_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/customer_132_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/customer_132_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER132 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_132/customer_132_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/customer_132_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/customer_133_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/customer_133_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/customer_133_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/customer_133_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/customer_133_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/customer_134_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/customer_134_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER134 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_134/customer_134_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/customer_134_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/customer_134_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/customer_135_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/customer_135_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/customer_135_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/customer_135_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/customer_135_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/customer_136_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/customer_136_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/customer_136_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/customer_136_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/customer_136_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/customer_137_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/customer_137_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/customer_137_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/customer_137_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/customer_137_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/customer_138_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/customer_138_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/customer_138_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/customer_138_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/customer_138_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/customer_139_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/customer_139_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/customer_139_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/customer_139_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER139 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_139/customer_139_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/customer_140_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/customer_140_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/customer_140_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/customer_140_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/customer_140_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/customer_141_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/customer_141_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/customer_141_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER141 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_141/customer_141_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/customer_141_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/customer_142_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/customer_142_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/customer_142_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/customer_142_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/customer_142_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/customer_143_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/customer_143_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER143 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_143/customer_143_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/customer_143_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/customer_143_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/customer_144_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/customer_144_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/customer_144_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/customer_144_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/customer_144_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/customer_145_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER145 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_145/customer_145_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/customer_145_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/customer_145_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/customer_145_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/customer_146_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/customer_146_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/customer_146_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/customer_146_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/customer_146_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER147 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_147/customer_147_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/customer_147_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/customer_147_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/customer_147_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/customer_147_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/customer_148_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/customer_148_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/customer_148_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/customer_148_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER148 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_148/customer_148_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/customer_149_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/customer_149_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/customer_149_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/customer_149_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/customer_149_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/customer_150_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/customer_150_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/customer_150_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER150 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_150/customer_150_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/customer_150_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/customer_151_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/customer_151_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/customer_151_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/customer_151_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/customer_151_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/customer_152_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/customer_152_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER152 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_152/customer_152_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/customer_152_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/customer_152_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/customer_153_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/customer_153_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/customer_153_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/customer_153_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/customer_153_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/customer_154_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER154 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_154/customer_154_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/customer_154_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/customer_154_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/customer_154_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/customer_155_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/customer_155_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/customer_155_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/customer_155_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/customer_155_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER156 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_156/customer_156_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/customer_156_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/customer_156_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/customer_156_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/customer_156_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/customer_157_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/customer_157_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/customer_157_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/customer_157_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/customer_157_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/customer_158_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/customer_158_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/customer_158_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/customer_158_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/customer_158_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/customer_159_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/customer_159_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/customer_159_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/customer_159_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/customer_159_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/customer_160_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/customer_160_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/customer_160_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/customer_160_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/customer_160_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/customer_161_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/customer_161_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER161 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_161/customer_161_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/customer_161_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/customer_161_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/customer_162_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/customer_162_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/customer_162_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/customer_162_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/customer_162_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/customer_163_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER163 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_163/customer_163_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/customer_163_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/customer_163_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/customer_163_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/customer_164_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/customer_164_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/customer_164_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/customer_164_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/customer_164_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER165 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_165/customer_165_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/customer_165_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/customer_165_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/customer_165_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/customer_165_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/customer_166_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/customer_166_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/customer_166_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/customer_166_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER166 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_166/customer_166_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/customer_167_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/customer_167_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/customer_167_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/customer_167_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/customer_167_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/customer_168_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/customer_168_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/customer_168_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER168 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_168/customer_168_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/customer_168_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/customer_169_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/customer_169_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/customer_169_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/customer_169_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/customer_169_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/customer_170_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/customer_170_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER170 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_170/customer_170_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/customer_170_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/customer_170_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/customer_171_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/customer_171_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/customer_171_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/customer_171_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/customer_171_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/customer_172_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER172 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_172/customer_172_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/customer_172_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/customer_172_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/customer_172_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/customer_173_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/customer_173_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/customer_173_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/customer_173_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/customer_173_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER174 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_174/customer_174_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/customer_174_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/customer_174_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/customer_174_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/customer_174_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/customer_175_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/customer_175_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/customer_175_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/customer_175_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER175 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_175/customer_175_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/customer_176_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/customer_176_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/customer_176_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/customer_176_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/customer_176_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/customer_177_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/customer_177_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/customer_177_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER177 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_177/customer_177_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/customer_177_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/customer_178_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/customer_178_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/customer_178_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/customer_178_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/customer_178_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/customer_179_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/customer_179_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER179 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_179/customer_179_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/customer_179_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/customer_179_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/customer_180_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/customer_180_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/customer_180_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/customer_180_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/customer_180_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/customer_181_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER181 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_181/customer_181_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/customer_181_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/customer_181_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/customer_181_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/customer_182_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/customer_182_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/customer_182_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/customer_182_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/customer_182_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER183 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_183/customer_183_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/customer_183_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/customer_183_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/customer_183_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/customer_183_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/customer_184_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/customer_184_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/customer_184_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/customer_184_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER184 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_184/customer_184_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/customer_185_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/customer_185_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/customer_185_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/customer_185_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/customer_185_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/customer_186_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/customer_186_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/customer_186_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER186 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_186/customer_186_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/customer_186_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/customer_187_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/customer_187_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/customer_187_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/customer_187_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/customer_187_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/customer_188_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/customer_188_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER188 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_188/customer_188_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/customer_188_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/customer_188_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/customer_189_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/customer_189_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/customer_189_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/customer_189_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/customer_189_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/customer_190_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/customer_190_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/customer_190_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/customer_190_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/customer_190_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/customer_191_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/customer_191_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/customer_191_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/customer_191_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/customer_191_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/customer_192_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/customer_192_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/customer_192_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/customer_192_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/customer_192_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/customer_193_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/customer_193_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/customer_193_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/customer_193_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER193 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_193/customer_193_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/customer_194_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/customer_194_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/customer_194_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/customer_194_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/customer_194_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/customer_195_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/customer_195_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/customer_195_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/customer_195_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/customer_195_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/customer_196_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/customer_196_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/customer_196_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/customer_196_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/customer_196_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/customer_197_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/customer_197_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/customer_197_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/customer_197_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/customer_197_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/customer_198_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/customer_198_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/customer_198_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/customer_198_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/customer_198_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/customer_199_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER199 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_199/customer_199_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/customer_199_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/customer_199_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/customer_199_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/customer_200_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/customer_200_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/customer_200_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/customer_200_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE CUSTOMER200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/customer_200_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO CUSTOMER200;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_DISTRICT_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_001/district_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_002/district_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_003/district_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_004/district_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_005/district_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_006/district_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_007/district_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_008/district_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_009/district_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_010/district_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_011/district_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_012/district_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_013/district_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_014/district_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_015/district_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_016/district_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_017/district_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_018/district_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_019/district_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_020/district_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_021/district_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_022/district_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_023/district_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
```

```
IMPORT FROM /flats/F1_024/district_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_025/district_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_026/district_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_027/district_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_028/district_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_029/district_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_030/district_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_031/district_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_032/district_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_033/district_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_034/district_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_035/district_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_036/district_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_037/district_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_038/district_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_039/district_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_040/district_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO DISTRICT40;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_HISTORY_ALL.ddl

```
connect to TPCC in share mode;
LOAD FROM /flats/F1_001/history_001_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY1 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_002/history_002_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY2 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_003/history_003_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY3 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_004/history_004_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY4 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_005/history_005_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY5 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_006/history_006_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY6 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_007/history_007_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY7 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_008/history_008_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY8 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_009/history_009_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY9 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_010/history_010_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY10 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_011/history_011_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY11 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_012/history_012_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY12 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_013/history_013_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY13 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_014/history_014_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY14 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_015/history_015_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY15 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_016/history_016_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY16 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_017/history_017_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY17 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_018/history_018_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY18 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_019/history_019_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY19 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_020/history_020_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY20 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_021/history_021_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY21 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_022/history_022_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY22 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
```

```
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_023/history_023_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY23 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_024/history_024_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY24 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_025/history_025_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY25 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_026/history_026_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY26 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_027/history_027_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY27 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_028/history_028_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY28 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_029/history_029_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY29 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_030/history_030_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY30 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_031/history_031_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY31 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_032/history_032_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY32 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_033/history_033_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY33 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_034/history_034_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY34 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_035/history_035_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY35 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_036/history_036_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY36 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_037/history_037_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY37 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_038/history_038_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY38 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_039/history_039_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY39 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
connect to TPCC in share mode;
LOAD FROM /flats/F1_040/history_040_1.dat OF DEL MODIFIED BY COLDEL| KEEPBLANKS
FASTPARSE REPLACE INTO HISTORY40 NONRECOVERABLE DATA BUFFER 16000
CPU_PARALLELISM 4 ;
connect reset;
```

DDL/LOAD_ITEM_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_001/item_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
1000 INSERT INTO ITEM;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_NEW_ORDER_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_001/neworder_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_002/neworder_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_003/neworder_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_004/neworder_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_005/neworder_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_006/neworder_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_007/neworder_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_008/neworder_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_009/neworder_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_010/neworder_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_011/neworder_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_012/neworder_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_013/neworder_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_014/neworder_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_015/neworder_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_016/neworder_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_017/neworder_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_018/neworder_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
```

```
IMPORT FROM /flats/F1_019/neworder_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_020/neworder_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_021/neworder_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_022/neworder_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_023/neworder_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_024/neworder_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_025/neworder_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_026/neworder_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_027/neworder_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_028/neworder_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_029/neworder_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_030/neworder_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_031/neworder_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_032/neworder_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_033/neworder_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_034/neworder_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_035/neworder_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_036/neworder_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_037/neworder_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_038/neworder_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_039/neworder_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_040/neworder_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO NEW_ORDERA40;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_ORDERS_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orders_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orders_001_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orders_001_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orders_001_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orders_001_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orders_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orders_002_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orders_002_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orders_002_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orders_002_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
```

```
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orders_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orders_003_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orders_003_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orders_003_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orders_003_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orders_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orders_004_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orders_004_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orders_004_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orders_004_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orders_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orders_005_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orders_005_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orders_005_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orders_005_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orders_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orders_006_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orders_006_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orders_006_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orders_006_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orders_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orders_007_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orders_007_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orders_007_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orders_007_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orders_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orders_008_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS8 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_008/orders_008_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orders_008_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orders_008_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orders_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orders_009_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orders_009_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orders_009_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orders_009_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orders_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orders_010_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orders_010_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orders_010_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orders_010_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orders_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orders_011_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orders_011_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orders_011_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orders_011_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orders_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orders_012_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orders_012_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orders_012_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orders_012_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orders_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orders_013_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orders_013_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orders_013_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS13 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_013/orders_013_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orders_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orders_014_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orders_014_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orders_014_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orders_014_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orders_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orders_015_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orders_015_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS15 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_015/orders_015_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orders_015_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orders_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orders_016_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orders_016_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orders_016_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orders_016_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orders_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orders_017_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS17 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_017/orders_017_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orders_017_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orders_017_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orders_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orders_018_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orders_018_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orders_018_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orders_018_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orders_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS19 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_019/orders_019_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orders_019_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orders_019_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orders_019_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orders_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orders_020_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orders_020_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orders_020_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orders_020_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orders_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orders_021_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orders_021_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orders_021_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orders_021_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orders_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orders_022_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orders_022_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orders_022_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orders_022_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orders_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orders_023_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orders_023_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orders_023_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orders_023_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orders_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orders_024_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orders_024_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS24 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_024/orders_024_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orders_024_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orders_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orders_025_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orders_025_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orders_025_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orders_025_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orders_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orders_026_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orders_026_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orders_026_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orders_026_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orders_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orders_027_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orders_027_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orders_027_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orders_027_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orders_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orders_028_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orders_028_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orders_028_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orders_028_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orders_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orders_029_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orders_029_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orders_029_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orders_029_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS30 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_030/orders_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orders_030_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orders_030_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orders_030_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orders_030_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orders_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orders_031_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orders_031_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orders_031_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS31 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_031/orders_031_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orders_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orders_032_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orders_032_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orders_032_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orders_032_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orders_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orders_033_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orders_033_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS33 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_033/orders_033_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orders_033_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orders_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orders_034_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orders_034_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orders_034_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orders_034_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orders_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orders_035_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS35 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_035/orders_035_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orders_035_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orders_035_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orders_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orders_036_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orders_036_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orders_036_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orders_036_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orders_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orders_037_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orders_037_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orders_037_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orders_037_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orders_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orders_038_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orders_038_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orders_038_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orders_038_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orders_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orders_039_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orders_039_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orders_039_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orders_039_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orders_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orders_040_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orders_040_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orders_040_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS40 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_040/orders_040_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orders_041_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orders_041_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orders_041_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orders_041_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orders_041_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orders_042_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orders_042_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orders_042_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS42 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_042/orders_042_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orders_042_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orders_043_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orders_043_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orders_043_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orders_043_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orders_043_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orders_044_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orders_044_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS44 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_044/orders_044_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orders_044_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orders_044_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orders_045_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orders_045_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orders_045_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orders_045_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orders_045_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orders_046_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS46 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_046/orders_046_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orders_046_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orders_046_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orders_046_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orders_047_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orders_047_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orders_047_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orders_047_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orders_047_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS48 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_048/orders_048_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orders_048_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orders_048_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orders_048_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orders_048_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orders_049_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orders_049_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orders_049_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orders_049_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS49 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_049/orders_049_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orders_050_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orders_050_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orders_050_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orders_050_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orders_050_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orders_051_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orders_051_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orders_051_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS51 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_051/orders_051_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orders_051_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orders_052_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orders_052_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orders_052_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orders_052_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orders_052_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orders_053_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orders_053_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS53 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_053/orders_053_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orders_053_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orders_053_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orders_054_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orders_054_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orders_054_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orders_054_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orders_054_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orders_055_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS55 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_055/orders_055_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orders_055_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orders_055_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orders_055_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orders_056_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orders_056_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orders_056_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orders_056_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orders_056_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS57 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_057/orders_057_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orders_057_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orders_057_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orders_057_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orders_057_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orders_058_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orders_058_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orders_058_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orders_058_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS58 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_058/orders_058_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orders_059_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orders_059_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orders_059_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orders_059_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orders_059_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orders_060_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orders_060_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orders_060_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS60 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_060/orders_060_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orders_060_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orders_061_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orders_061_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orders_061_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orders_061_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orders_061_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orders_062_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orders_062_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS62 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_062/orders_062_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orders_062_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orders_062_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orders_063_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orders_063_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orders_063_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orders_063_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orders_063_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orders_064_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orders_064_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orders_064_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orders_064_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orders_064_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orders_065_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orders_065_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orders_065_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orders_065_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orders_065_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orders_066_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orders_066_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orders_066_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orders_066_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orders_066_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orders_067_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orders_067_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orders_067_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orders_067_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS67 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_067/orders_067_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orders_068_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orders_068_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orders_068_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orders_068_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orders_068_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orders_069_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orders_069_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orders_069_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS69 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_069/orders_069_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orders_069_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orders_070_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orders_070_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orders_070_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orders_070_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orders_070_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orders_071_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orders_071_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS71 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_071/orders_071_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orders_071_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orders_071_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orders_072_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orders_072_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orders_072_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orders_072_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orders_072_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orders_073_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS73 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_073/orders_073_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orders_073_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orders_073_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orders_073_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orders_074_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orders_074_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orders_074_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orders_074_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orders_074_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS75 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_075/orders_075_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orders_075_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orders_075_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orders_075_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orders_075_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orders_076_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orders_076_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orders_076_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orders_076_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS76 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_076/orders_076_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orders_077_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orders_077_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orders_077_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orders_077_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orders_077_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orders_078_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orders_078_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orders_078_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS78 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_078/orders_078_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orders_078_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orders_079_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orders_079_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orders_079_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orders_079_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orders_079_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orders_080_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orders_080_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS80 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_080/orders_080_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orders_080_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orders_080_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orders_081_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orders_081_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orders_081_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orders_081_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orders_081_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orders_082_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS82 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_082/orders_082_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orders_082_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orders_082_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orders_082_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orders_083_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orders_083_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orders_083_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orders_083_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orders_083_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS84 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_084/orders_084_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orders_084_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orders_084_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orders_084_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orders_084_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orders_085_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orders_085_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orders_085_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orders_085_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS85 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_085/orders_085_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orders_086_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orders_086_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orders_086_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orders_086_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orders_086_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orders_087_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orders_087_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orders_087_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS87 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_087/orders_087_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orders_087_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orders_088_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orders_088_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orders_088_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orders_088_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orders_088_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orders_089_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orders_089_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS89 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_089/orders_089_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orders_089_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orders_089_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orders_090_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orders_090_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orders_090_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orders_090_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orders_090_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orders_091_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS91 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_091/orders_091_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orders_091_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orders_091_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orders_091_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orders_092_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orders_092_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orders_092_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orders_092_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orders_092_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS93 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_093/orders_093_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orders_093_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orders_093_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orders_093_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orders_093_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orders_094_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orders_094_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orders_094_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orders_094_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS94 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_094/orders_094_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orders_095_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orders_095_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orders_095_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orders_095_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orders_095_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orders_096_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orders_096_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orders_096_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orders_096_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orders_096_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orders_097_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orders_097_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orders_097_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orders_097_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orders_097_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orders_098_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orders_098_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orders_098_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orders_098_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orders_098_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orders_099_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orders_099_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orders_099_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orders_099_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orders_099_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orders_100_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS100 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_100/orders_100_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orders_100_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orders_100_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orders_100_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orders_101_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orders_101_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orders_101_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orders_101_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orders_101_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS102 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_102/orders_102_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orders_102_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orders_102_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orders_102_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orders_102_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orders_103_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orders_103_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orders_103_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orders_103_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS103 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_103/orders_103_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orders_104_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orders_104_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orders_104_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orders_104_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orders_104_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orders_105_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orders_105_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orders_105_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS105 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_105/orders_105_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orders_105_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orders_106_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orders_106_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orders_106_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orders_106_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orders_106_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orders_107_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orders_107_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orders_107_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orders_107_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orders_107_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orders_108_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orders_108_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orders_108_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orders_108_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orders_108_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orders_109_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orders_109_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orders_109_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orders_109_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orders_109_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orders_110_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orders_110_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orders_110_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orders_110_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orders_110_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS111 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_111/orders_111_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orders_111_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orders_111_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orders_111_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orders_111_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orders_112_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orders_112_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orders_112_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orders_112_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS112 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_112/orders_112_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orders_113_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orders_113_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orders_113_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orders_113_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orders_113_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orders_114_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orders_114_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orders_114_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS114 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_114/orders_114_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orders_114_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orders_115_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orders_115_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orders_115_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orders_115_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orders_115_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orders_116_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orders_116_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS116 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_116/orders_116_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orders_116_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orders_116_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orders_117_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orders_117_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orders_117_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orders_117_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orders_117_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orders_118_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS118 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_118/orders_118_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orders_118_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orders_118_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orders_118_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orders_119_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orders_119_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orders_119_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orders_119_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orders_119_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS120 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_120/orders_120_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orders_120_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orders_120_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orders_120_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orders_120_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orders_121_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orders_121_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orders_121_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orders_121_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS121 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_121/orders_121_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orders_122_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orders_122_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orders_122_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orders_122_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orders_122_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orders_123_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orders_123_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orders_123_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS123 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_123/orders_123_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orders_123_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orders_124_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orders_124_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orders_124_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orders_124_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orders_124_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orders_125_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orders_125_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS125 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_125/orders_125_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orders_125_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orders_125_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orders_126_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orders_126_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orders_126_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orders_126_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orders_126_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orders_127_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS127 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_127/orders_127_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orders_127_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orders_127_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orders_127_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orders_128_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orders_128_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orders_128_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orders_128_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orders_128_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS129 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_129/orders_129_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orders_129_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orders_129_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orders_129_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orders_129_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orders_130_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orders_130_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orders_130_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orders_130_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS130 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_130/orders_130_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orders_131_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orders_131_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orders_131_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orders_131_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orders_131_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orders_132_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orders_132_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orders_132_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS132 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_132/orders_132_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orders_132_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orders_133_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orders_133_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orders_133_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orders_133_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orders_133_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orders_134_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orders_134_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orders_134_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orders_134_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orders_134_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orders_135_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orders_135_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orders_135_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orders_135_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orders_135_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orders_136_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orders_136_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orders_136_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orders_136_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orders_136_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orders_137_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orders_137_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orders_137_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orders_137_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orders_137_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS138 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_138/orders_138_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orders_138_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orders_138_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orders_138_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orders_138_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orders_139_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orders_139_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orders_139_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orders_139_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS139 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_139/orders_139_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orders_140_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orders_140_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orders_140_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orders_140_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orders_140_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orders_141_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orders_141_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orders_141_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS141 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_141/orders_141_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orders_141_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orders_142_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orders_142_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orders_142_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orders_142_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orders_142_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orders_143_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orders_143_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS143 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_143/orders_143_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orders_143_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orders_143_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orders_144_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orders_144_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orders_144_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orders_144_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orders_144_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orders_145_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orders_145_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orders_145_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orders_145_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orders_145_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orders_146_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orders_146_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orders_146_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orders_146_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orders_146_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orders_147_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orders_147_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orders_147_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orders_147_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orders_147_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orders_148_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orders_148_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orders_148_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orders_148_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS148 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_148/orders_148_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orders_149_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orders_149_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orders_149_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orders_149_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orders_149_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orders_150_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orders_150_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orders_150_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS150 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_150/orders_150_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orders_150_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orders_151_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orders_151_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orders_151_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orders_151_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orders_151_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orders_152_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orders_152_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS152 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_152/orders_152_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orders_152_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orders_152_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orders_153_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orders_153_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orders_153_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orders_153_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orders_153_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orders_154_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS154 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_154/orders_154_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orders_154_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orders_154_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orders_154_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orders_155_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orders_155_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orders_155_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orders_155_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orders_155_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS156 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_156/orders_156_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orders_156_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orders_156_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orders_156_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orders_156_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orders_157_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orders_157_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orders_157_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orders_157_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS157 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_157/orders_157_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orders_158_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orders_158_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orders_158_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orders_158_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orders_158_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orders_159_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orders_159_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orders_159_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS159 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_159/orders_159_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orders_159_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orders_160_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orders_160_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orders_160_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orders_160_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orders_160_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orders_161_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orders_161_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orders_161_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orders_161_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orders_161_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orders_162_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orders_162_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orders_162_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orders_162_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orders_162_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orders_163_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orders_163_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orders_163_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orders_163_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orders_163_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orders_164_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orders_164_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orders_164_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orders_164_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orders_164_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS165 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_165/orders_165_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orders_165_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orders_165_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orders_165_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orders_165_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orders_166_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orders_166_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orders_166_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orders_166_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS166 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_166/orders_166_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orders_167_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orders_167_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orders_167_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orders_167_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orders_167_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orders_168_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orders_168_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orders_168_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS168 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_168/orders_168_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orders_168_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orders_169_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orders_169_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orders_169_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orders_169_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orders_169_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orders_170_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orders_170_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS170 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_170/orders_170_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orders_170_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orders_170_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orders_171_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orders_171_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orders_171_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orders_171_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orders_171_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orders_172_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orders_172_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orders_172_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orders_172_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orders_172_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orders_173_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orders_173_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orders_173_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orders_173_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orders_173_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orders_174_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orders_174_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orders_174_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orders_174_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orders_174_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orders_175_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orders_175_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orders_175_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orders_175_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS175 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_175/orders_175_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orders_176_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orders_176_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orders_176_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orders_176_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orders_176_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orders_177_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orders_177_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orders_177_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orders_177_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orders_177_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orders_178_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orders_178_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orders_178_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orders_178_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orders_178_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orders_179_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orders_179_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orders_179_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orders_179_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orders_179_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orders_180_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orders_180_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orders_180_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orders_180_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orders_180_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orders_181_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS181 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_181/orders_181_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orders_181_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orders_181_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orders_181_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orders_182_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orders_182_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orders_182_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orders_182_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orders_182_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS183 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_183/orders_183_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orders_183_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orders_183_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orders_183_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orders_183_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orders_184_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orders_184_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orders_184_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orders_184_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS184 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_184/orders_184_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orders_185_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orders_185_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orders_185_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orders_185_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orders_185_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orders_186_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orders_186_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orders_186_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS186 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_186/orders_186_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orders_186_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orders_187_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orders_187_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orders_187_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orders_187_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orders_187_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orders_188_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orders_188_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orders_188_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orders_188_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orders_188_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orders_189_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orders_189_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orders_189_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orders_189_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orders_189_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orders_190_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orders_190_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orders_190_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orders_190_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orders_190_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orders_191_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orders_191_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orders_191_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orders_191_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orders_191_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS192 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_192/orders_192_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orders_192_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orders_192_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orders_192_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orders_192_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orders_193_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orders_193_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orders_193_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orders_193_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS193 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_193/orders_193_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orders_194_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orders_194_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orders_194_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orders_194_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orders_194_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orders_195_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orders_195_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orders_195_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS195 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_195/orders_195_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orders_195_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orders_196_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orders_196_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orders_196_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orders_196_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orders_196_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orders_197_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orders_197_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS197 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_197/orders_197_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orders_197_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orders_197_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orders_198_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orders_198_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orders_198_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orders_198_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orders_198_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orders_199_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orders_199_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orders_199_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orders_199_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orders_199_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orders_200_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orders_200_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orders_200_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orders_200_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDERS200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orders_200_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
9600000 INSERT INTO ORDERS200;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_ORDER_LINE_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orderline_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orderline_001_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orderline_001_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orderline_001_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/orderline_001_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orderline_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orderline_002_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orderline_002_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE2 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_002/orderline_002_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/orderline_002_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orderline_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orderline_003_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orderline_003_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orderline_003_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/orderline_003_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orderline_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orderline_004_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orderline_004_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orderline_004_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/orderline_004_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orderline_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orderline_005_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orderline_005_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orderline_005_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/orderline_005_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orderline_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orderline_006_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orderline_006_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orderline_006_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/orderline_006_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orderline_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orderline_007_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orderline_007_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orderline_007_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/orderline_007_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE8 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_008/orderline_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orderline_008_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orderline_008_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orderline_008_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/orderline_008_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orderline_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orderline_009_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orderline_009_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orderline_009_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/orderline_009_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orderline_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orderline_010_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orderline_010_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orderline_010_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/orderline_010_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orderline_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orderline_011_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orderline_011_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orderline_011_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/orderline_011_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orderline_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orderline_012_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orderline_012_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orderline_012_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/orderline_012_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orderline_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orderline_013_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE13 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_013/orderline_013_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orderline_013_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/orderline_013_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orderline_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orderline_014_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orderline_014_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orderline_014_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/orderline_014_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orderline_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orderline_015_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orderline_015_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orderline_015_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/orderline_015_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orderline_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orderline_016_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orderline_016_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orderline_016_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/orderline_016_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orderline_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orderline_017_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orderline_017_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orderline_017_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/orderline_017_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orderline_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orderline_018_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orderline_018_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/orderline_018_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE18 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_018/orderline_018_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orderline_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orderline_019_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orderline_019_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orderline_019_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/orderline_019_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orderline_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orderline_020_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orderline_020_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orderline_020_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/orderline_020_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orderline_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orderline_021_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orderline_021_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orderline_021_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/orderline_021_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orderline_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orderline_022_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orderline_022_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orderline_022_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/orderline_022_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orderline_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orderline_023_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orderline_023_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orderline_023_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/orderline_023_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orderline_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE24 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_024/orderline_024_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orderline_024_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orderline_024_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/orderline_024_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orderline_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orderline_025_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orderline_025_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orderline_025_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/orderline_025_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orderline_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orderline_026_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orderline_026_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orderline_026_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/orderline_026_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orderline_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orderline_027_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orderline_027_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orderline_027_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/orderline_027_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orderline_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orderline_028_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orderline_028_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orderline_028_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/orderline_028_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orderline_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orderline_029_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orderline_029_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE29 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_029/orderline_029_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/orderline_029_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orderline_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orderline_030_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orderline_030_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orderline_030_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/orderline_030_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orderline_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orderline_031_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orderline_031_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orderline_031_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/orderline_031_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orderline_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orderline_032_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orderline_032_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orderline_032_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/orderline_032_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orderline_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orderline_033_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orderline_033_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orderline_033_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/orderline_033_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orderline_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orderline_034_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orderline_034_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orderline_034_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/orderline_034_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE35 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_035/orderline_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orderline_035_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orderline_035_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orderline_035_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/orderline_035_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orderline_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orderline_036_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orderline_036_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/orderline_036_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE36 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_036/orderline_036_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orderline_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orderline_037_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orderline_037_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orderline_037_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/orderline_037_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orderline_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orderline_038_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orderline_038_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE38 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_038/orderline_038_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/orderline_038_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orderline_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orderline_039_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orderline_039_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orderline_039_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/orderline_039_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orderline_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orderline_040_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE40 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_040/orderline_040_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orderline_040_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/orderline_040_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orderline_041_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orderline_041_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orderline_041_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orderline_041_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/orderline_041_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orderline_042_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orderline_042_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orderline_042_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orderline_042_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/orderline_042_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orderline_043_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orderline_043_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orderline_043_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orderline_043_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/orderline_043_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orderline_044_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orderline_044_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orderline_044_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orderline_044_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/orderline_044_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orderline_045_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orderline_045_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orderline_045_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/orderline_045_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE45 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_045/orderline_045_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orderline_046_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orderline_046_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orderline_046_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orderline_046_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/orderline_046_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orderline_047_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orderline_047_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orderline_047_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orderline_047_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/orderline_047_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orderline_048_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orderline_048_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orderline_048_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orderline_048_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/orderline_048_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orderline_049_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orderline_049_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orderline_049_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orderline_049_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/orderline_049_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orderline_050_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orderline_050_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orderline_050_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orderline_050_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/orderline_050_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orderline_051_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE51 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_051/orderline_051_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orderline_051_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orderline_051_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/orderline_051_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orderline_052_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orderline_052_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orderline_052_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orderline_052_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/orderline_052_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE53 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_053/orderline_053_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orderline_053_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orderline_053_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orderline_053_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/orderline_053_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orderline_054_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orderline_054_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orderline_054_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/orderline_054_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE54 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_054/orderline_054_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orderline_055_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orderline_055_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orderline_055_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orderline_055_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/orderline_055_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orderline_056_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orderline_056_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orderline_056_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE56 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_056/orderline_056_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/orderline_056_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orderline_057_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orderline_057_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orderline_057_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orderline_057_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/orderline_057_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orderline_058_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orderline_058_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orderline_058_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orderline_058_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/orderline_058_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orderline_059_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orderline_059_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orderline_059_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orderline_059_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/orderline_059_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orderline_060_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orderline_060_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orderline_060_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orderline_060_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/orderline_060_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orderline_061_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orderline_061_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orderline_061_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orderline_061_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/orderline_061_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE62 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_062/orderline_062_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orderline_062_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orderline_062_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orderline_062_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/orderline_062_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orderline_063_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orderline_063_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orderline_063_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/orderline_063_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE63 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_063/orderline_063_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orderline_064_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orderline_064_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orderline_064_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orderline_064_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/orderline_064_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orderline_065_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orderline_065_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orderline_065_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE65 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_065/orderline_065_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/orderline_065_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orderline_066_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orderline_066_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orderline_066_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orderline_066_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/orderline_066_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orderline_067_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orderline_067_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE67 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_067/orderline_067_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orderline_067_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/orderline_067_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orderline_068_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orderline_068_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orderline_068_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orderline_068_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/orderline_068_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orderline_069_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE69 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_069/orderline_069_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orderline_069_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orderline_069_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/orderline_069_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orderline_070_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orderline_070_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orderline_070_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orderline_070_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/orderline_070_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE71 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_071/orderline_071_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orderline_071_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orderline_071_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orderline_071_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/orderline_071_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orderline_072_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orderline_072_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orderline_072_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/orderline_072_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE72 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_072/orderline_072_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orderline_073_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orderline_073_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orderline_073_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orderline_073_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/orderline_073_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orderline_074_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orderline_074_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orderline_074_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orderline_074_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/orderline_074_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orderline_075_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orderline_075_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orderline_075_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orderline_075_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/orderline_075_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orderline_076_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orderline_076_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orderline_076_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orderline_076_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/orderline_076_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orderline_077_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orderline_077_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orderline_077_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orderline_077_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/orderline_077_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orderline_078_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE78 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_078/orderline_078_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orderline_078_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orderline_078_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/orderline_078_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orderline_079_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orderline_079_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orderline_079_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orderline_079_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/orderline_079_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE80 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_080/orderline_080_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orderline_080_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orderline_080_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orderline_080_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/orderline_080_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orderline_081_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orderline_081_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orderline_081_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/orderline_081_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE81 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_081/orderline_081_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orderline_082_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orderline_082_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orderline_082_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orderline_082_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/orderline_082_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orderline_083_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orderline_083_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orderline_083_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE83 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_083/orderline_083_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/orderline_083_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orderline_084_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orderline_084_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orderline_084_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orderline_084_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/orderline_084_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orderline_085_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orderline_085_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orderline_085_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orderline_085_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/orderline_085_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orderline_086_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orderline_086_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orderline_086_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orderline_086_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/orderline_086_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orderline_087_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orderline_087_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orderline_087_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orderline_087_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/orderline_087_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orderline_088_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orderline_088_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orderline_088_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orderline_088_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/orderline_088_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE89 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_089/orderline_089_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orderline_089_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orderline_089_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orderline_089_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/orderline_089_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orderline_090_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orderline_090_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orderline_090_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orderline_090_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/orderline_090_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orderline_091_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orderline_091_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orderline_091_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orderline_091_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/orderline_091_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orderline_092_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orderline_092_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orderline_092_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orderline_092_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/orderline_092_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orderline_093_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orderline_093_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orderline_093_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orderline_093_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/orderline_093_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orderline_094_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orderline_094_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE94 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_094/orderline_094_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orderline_094_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/orderline_094_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orderline_095_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orderline_095_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orderline_095_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orderline_095_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/orderline_095_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orderline_096_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orderline_096_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orderline_096_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orderline_096_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/orderline_096_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orderline_097_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orderline_097_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orderline_097_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orderline_097_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/orderline_097_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orderline_098_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orderline_098_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orderline_098_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orderline_098_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/orderline_098_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orderline_099_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orderline_099_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orderline_099_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/orderline_099_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE99 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_099/orderline_099_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orderline_100_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orderline_100_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orderline_100_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orderline_100_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/orderline_100_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orderline_101_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orderline_101_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orderline_101_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orderline_101_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/orderline_101_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orderline_102_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orderline_102_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orderline_102_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orderline_102_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/orderline_102_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orderline_103_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orderline_103_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orderline_103_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orderline_103_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/orderline_103_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orderline_104_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orderline_104_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orderline_104_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orderline_104_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/orderline_104_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orderline_105_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE105 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_105/orderline_105_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orderline_105_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orderline_105_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/orderline_105_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orderline_106_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orderline_106_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orderline_106_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orderline_106_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/orderline_106_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orderline_107_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orderline_107_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orderline_107_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orderline_107_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/orderline_107_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orderline_108_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orderline_108_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orderline_108_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orderline_108_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/orderline_108_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orderline_109_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orderline_109_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orderline_109_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orderline_109_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/orderline_109_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orderline_110_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orderline_110_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orderline_110_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE110 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_110/orderline_110_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/orderline_110_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orderline_111_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orderline_111_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orderline_111_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orderline_111_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/orderline_111_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orderline_112_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orderline_112_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orderline_112_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orderline_112_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/orderline_112_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orderline_113_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orderline_113_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orderline_113_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orderline_113_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/orderline_113_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orderline_114_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orderline_114_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orderline_114_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orderline_114_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/orderline_114_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orderline_115_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orderline_115_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orderline_115_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orderline_115_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/orderline_115_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE116 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_116/orderline_116_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orderline_116_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orderline_116_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orderline_116_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/orderline_116_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orderline_117_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orderline_117_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orderline_117_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/orderline_117_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE117 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_117/orderline_117_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orderline_118_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orderline_118_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orderline_118_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orderline_118_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/orderline_118_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orderline_119_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orderline_119_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orderline_119_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE119 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_119/orderline_119_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/orderline_119_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orderline_120_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orderline_120_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orderline_120_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orderline_120_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/orderline_120_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orderline_121_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orderline_121_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE121 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_121/orderline_121_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orderline_121_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/orderline_121_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orderline_122_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orderline_122_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orderline_122_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orderline_122_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/orderline_122_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orderline_123_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orderline_123_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orderline_123_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orderline_123_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/orderline_123_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orderline_124_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orderline_124_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orderline_124_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orderline_124_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/orderline_124_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orderline_125_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orderline_125_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orderline_125_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orderline_125_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/orderline_125_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orderline_126_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orderline_126_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orderline_126_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/orderline_126_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE126 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_126/orderline_126_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orderline_127_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orderline_127_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orderline_127_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orderline_127_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/orderline_127_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orderline_128_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orderline_128_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orderline_128_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orderline_128_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/orderline_128_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orderline_129_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orderline_129_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orderline_129_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orderline_129_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/orderline_129_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orderline_130_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orderline_130_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orderline_130_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orderline_130_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/orderline_130_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orderline_131_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orderline_131_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orderline_131_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orderline_131_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/orderline_131_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orderline_132_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE132 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_132/orderline_132_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orderline_132_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orderline_132_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/orderline_132_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orderline_133_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orderline_133_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orderline_133_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orderline_133_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/orderline_133_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE134 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_134/orderline_134_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orderline_134_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orderline_134_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orderline_134_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/orderline_134_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orderline_135_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orderline_135_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orderline_135_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/orderline_135_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE135 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_135/orderline_135_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orderline_136_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orderline_136_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orderline_136_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orderline_136_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/orderline_136_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orderline_137_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orderline_137_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orderline_137_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE137 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_137/orderline_137_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/orderline_137_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orderline_138_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orderline_138_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orderline_138_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orderline_138_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/orderline_138_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orderline_139_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orderline_139_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE139 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_139/orderline_139_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orderline_139_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/orderline_139_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orderline_140_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orderline_140_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orderline_140_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orderline_140_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/orderline_140_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orderline_141_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE141 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_141/orderline_141_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orderline_141_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orderline_141_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/orderline_141_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orderline_142_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orderline_142_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orderline_142_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orderline_142_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/orderline_142_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE143 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_143/orderline_143_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orderline_143_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orderline_143_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orderline_143_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/orderline_143_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orderline_144_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orderline_144_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orderline_144_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/orderline_144_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE144 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_144/orderline_144_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orderline_145_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orderline_145_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orderline_145_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orderline_145_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/orderline_145_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orderline_146_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orderline_146_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orderline_146_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE146 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_146/orderline_146_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/orderline_146_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orderline_147_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orderline_147_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orderline_147_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orderline_147_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/orderline_147_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orderline_148_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orderline_148_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE148 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_148/orderline_148_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orderline_148_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/orderline_148_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orderline_149_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orderline_149_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orderline_149_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orderline_149_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/orderline_149_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orderline_150_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orderline_150_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orderline_150_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orderline_150_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/orderline_150_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orderline_151_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orderline_151_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orderline_151_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orderline_151_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/orderline_151_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orderline_152_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orderline_152_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orderline_152_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orderline_152_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/orderline_152_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orderline_153_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orderline_153_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orderline_153_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/orderline_153_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE153 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_153/orderline_153_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orderline_154_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orderline_154_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orderline_154_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orderline_154_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/orderline_154_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orderline_155_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orderline_155_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orderline_155_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orderline_155_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/orderline_155_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orderline_156_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orderline_156_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orderline_156_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orderline_156_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/orderline_156_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orderline_157_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orderline_157_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orderline_157_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orderline_157_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/orderline_157_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orderline_158_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orderline_158_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orderline_158_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orderline_158_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/orderline_158_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orderline_159_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE159 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_159/orderline_159_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orderline_159_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orderline_159_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/orderline_159_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orderline_160_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orderline_160_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orderline_160_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orderline_160_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/orderline_160_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orderline_161_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orderline_161_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orderline_161_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orderline_161_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/orderline_161_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orderline_162_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orderline_162_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orderline_162_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orderline_162_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/orderline_162_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orderline_163_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orderline_163_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orderline_163_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orderline_163_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/orderline_163_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orderline_164_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orderline_164_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orderline_164_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE164 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_164/orderline_164_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/orderline_164_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orderline_165_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orderline_165_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orderline_165_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orderline_165_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/orderline_165_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orderline_166_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orderline_166_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orderline_166_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orderline_166_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/orderline_166_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orderline_167_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orderline_167_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orderline_167_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orderline_167_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/orderline_167_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orderline_168_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orderline_168_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orderline_168_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orderline_168_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/orderline_168_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orderline_169_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orderline_169_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orderline_169_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orderline_169_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/orderline_169_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE170 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_170/orderline_170_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orderline_170_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orderline_170_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orderline_170_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/orderline_170_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orderline_171_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orderline_171_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orderline_171_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/orderline_171_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE171 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_171/orderline_171_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orderline_172_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orderline_172_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orderline_172_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orderline_172_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/orderline_172_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orderline_173_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orderline_173_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orderline_173_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE173 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_173/orderline_173_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/orderline_173_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orderline_174_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orderline_174_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orderline_174_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orderline_174_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/orderline_174_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orderline_175_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orderline_175_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE175 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_175/orderline_175_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orderline_175_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/orderline_175_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orderline_176_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orderline_176_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orderline_176_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orderline_176_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/orderline_176_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orderline_177_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orderline_177_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orderline_177_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orderline_177_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/orderline_177_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orderline_178_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orderline_178_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orderline_178_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orderline_178_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/orderline_178_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orderline_179_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orderline_179_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orderline_179_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orderline_179_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/orderline_179_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orderline_180_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orderline_180_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orderline_180_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/orderline_180_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE180 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_180/orderline_180_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orderline_181_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orderline_181_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orderline_181_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orderline_181_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/orderline_181_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orderline_182_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orderline_182_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orderline_182_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE182 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_182/orderline_182_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/orderline_182_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orderline_183_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orderline_183_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orderline_183_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orderline_183_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/orderline_183_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orderline_184_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orderline_184_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE184 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_184/orderline_184_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orderline_184_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/orderline_184_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orderline_185_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orderline_185_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orderline_185_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orderline_185_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/orderline_185_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orderline_186_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE186 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_186/orderline_186_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orderline_186_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orderline_186_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/orderline_186_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orderline_187_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orderline_187_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orderline_187_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orderline_187_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/orderline_187_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE188 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_188/orderline_188_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orderline_188_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orderline_188_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orderline_188_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/orderline_188_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orderline_189_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orderline_189_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orderline_189_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/orderline_189_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE189 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_189/orderline_189_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orderline_190_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orderline_190_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orderline_190_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orderline_190_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/orderline_190_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orderline_191_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orderline_191_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orderline_191_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE191 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_191/orderline_191_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/orderline_191_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orderline_192_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orderline_192_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orderline_192_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orderline_192_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/orderline_192_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orderline_193_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orderline_193_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orderline_193_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orderline_193_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/orderline_193_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orderline_194_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orderline_194_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orderline_194_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orderline_194_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/orderline_194_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orderline_195_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orderline_195_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orderline_195_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orderline_195_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/orderline_195_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orderline_196_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orderline_196_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orderline_196_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orderline_196_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/orderline_196_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE197 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_197/orderline_197_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orderline_197_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orderline_197_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orderline_197_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/orderline_197_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orderline_198_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orderline_198_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orderline_198_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orderline_198_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/orderline_198_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orderline_199_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orderline_199_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orderline_199_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orderline_199_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/orderline_199_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orderline_200_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orderline_200_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orderline_200_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orderline_200_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE ORDER_LINE200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/orderline_200_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
105600000 INSERT INTO ORDER_LINE200;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_STOCK_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/stock_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/stock_001_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/stock_001_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/stock_001_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK1 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_001/stock_001_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/stock_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/stock_002_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK2;
```

```
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/stock_002_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/stock_002_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK2 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_002/stock_002_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/stock_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/stock_003_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/stock_003_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/stock_003_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK3 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_003/stock_003_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/stock_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/stock_004_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/stock_004_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/stock_004_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK4 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_004/stock_004_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/stock_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/stock_005_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/stock_005_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/stock_005_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK5 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_005/stock_005_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/stock_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/stock_006_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/stock_006_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/stock_006_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK6 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_006/stock_006_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/stock_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/stock_007_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/stock_007_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/stock_007_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
```

```
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK7 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_007/stock_007_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/stock_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/stock_008_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/stock_008_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/stock_008_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK8 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_008/stock_008_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK8;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/stock_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/stock_009_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/stock_009_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/stock_009_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK9 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_009/stock_009_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/stock_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/stock_010_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/stock_010_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/stock_010_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK10 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_010/stock_010_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/stock_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/stock_011_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/stock_011_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/stock_011_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK11 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_011/stock_011_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/stock_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/stock_012_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/stock_012_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/stock_012_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK12 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_012/stock_012_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/stock_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK13 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_013/stock_013_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/stock_013_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/stock_013_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK13 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_013/stock_013_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/stock_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/stock_014_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/stock_014_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/stock_014_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK14 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_014/stock_014_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/stock_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/stock_015_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/stock_015_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/stock_015_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK15 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_015/stock_015_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/stock_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/stock_016_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/stock_016_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/stock_016_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK16 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_016/stock_016_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/stock_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/stock_017_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/stock_017_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/stock_017_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK17 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_017/stock_017_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/stock_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/stock_018_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/stock_018_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK18 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_018/stock_018_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK18 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_018/stock_018_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/stock_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/stock_019_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/stock_019_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/stock_019_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK19 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_019/stock_019_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/stock_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/stock_020_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/stock_020_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/stock_020_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK20 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_020/stock_020_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/stock_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/stock_021_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/stock_021_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/stock_021_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK21 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_021/stock_021_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/stock_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/stock_022_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/stock_022_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/stock_022_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK22 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_022/stock_022_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/stock_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/stock_023_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/stock_023_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/stock_023_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK23 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_023/stock_023_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK24 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_024/stock_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/stock_024_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/stock_024_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/stock_024_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK24 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_024/stock_024_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/stock_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/stock_025_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/stock_025_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/stock_025_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK25 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_025/stock_025_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/stock_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/stock_026_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/stock_026_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/stock_026_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK26 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_026/stock_026_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/stock_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/stock_027_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/stock_027_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/stock_027_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK27 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_027/stock_027_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/stock_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/stock_028_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/stock_028_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/stock_028_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK28 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_028/stock_028_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/stock_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/stock_029_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK29 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_029/stock_029_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/stock_029_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK29 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_029/stock_029_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/stock_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/stock_030_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/stock_030_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/stock_030_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK30 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_030/stock_030_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/stock_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/stock_031_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/stock_031_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/stock_031_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK31 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_031/stock_031_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/stock_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/stock_032_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/stock_032_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/stock_032_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK32 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_032/stock_032_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/stock_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/stock_033_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/stock_033_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/stock_033_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK33 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_033/stock_033_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/stock_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/stock_034_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/stock_034_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK34 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_034/stock_034_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK34 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_034/stock_034_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/stock_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/stock_035_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/stock_035_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/stock_035_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK35 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_035/stock_035_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/stock_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/stock_036_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/stock_036_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/stock_036_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK36 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_036/stock_036_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/stock_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/stock_037_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/stock_037_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/stock_037_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK37 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_037/stock_037_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/stock_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/stock_038_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/stock_038_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/stock_038_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK38 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_038/stock_038_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/stock_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/stock_039_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/stock_039_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/stock_039_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK39 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_039/stock_039_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/stock_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK40 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_040/stock_040_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/stock_040_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/stock_040_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK40 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_040/stock_040_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK40;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/stock_041_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/stock_041_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/stock_041_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/stock_041_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK41 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_041/stock_041_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK41;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK42 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_042/stock_042_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/stock_042_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/stock_042_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/stock_042_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK42 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_042/stock_042_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK42;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/stock_043_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/stock_043_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/stock_043_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK43 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_043/stock_043_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK43 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_043/stock_043_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK43;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/stock_044_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/stock_044_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/stock_044_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/stock_044_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK44 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_044/stock_044_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK44;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/stock_045_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/stock_045_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/stock_045_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK45 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_045/stock_045_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK45 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_045/stock_045_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK45;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/stock_046_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/stock_046_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/stock_046_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/stock_046_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK46 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_046/stock_046_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK46;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/stock_047_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/stock_047_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/stock_047_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/stock_047_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK47 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_047/stock_047_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK47;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/stock_048_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/stock_048_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/stock_048_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/stock_048_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK48 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_048/stock_048_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK48;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/stock_049_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/stock_049_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/stock_049_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/stock_049_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK49 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_049/stock_049_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK49;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/stock_050_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/stock_050_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/stock_050_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/stock_050_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK50 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_050/stock_050_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK50;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK51 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_051/stock_051_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/stock_051_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/stock_051_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/stock_051_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK51 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_051/stock_051_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK51;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/stock_052_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/stock_052_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/stock_052_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK52 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_052/stock_052_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK52 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_052/stock_052_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK52;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/stock_053_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/stock_053_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/stock_053_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/stock_053_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK53 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_053/stock_053_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK53;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/stock_054_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/stock_054_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/stock_054_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK54 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_054/stock_054_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK54 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_054/stock_054_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK54;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/stock_055_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/stock_055_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/stock_055_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/stock_055_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK55 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_055/stock_055_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK55;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/stock_056_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/stock_056_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK56 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_056/stock_056_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/stock_056_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK56 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_056/stock_056_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK56;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/stock_057_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/stock_057_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/stock_057_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/stock_057_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK57 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_057/stock_057_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK57;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/stock_058_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/stock_058_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/stock_058_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/stock_058_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK58 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_058/stock_058_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK58;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/stock_059_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/stock_059_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/stock_059_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/stock_059_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK59 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_059/stock_059_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK59;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/stock_060_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/stock_060_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/stock_060_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/stock_060_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK60 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_060/stock_060_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK60;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/stock_061_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/stock_061_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/stock_061_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK61 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_061/stock_061_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK61 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_061/stock_061_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK61;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/stock_062_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/stock_062_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/stock_062_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/stock_062_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK62 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_062/stock_062_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK62;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/stock_063_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/stock_063_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/stock_063_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/stock_063_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK63 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_063/stock_063_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK63;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/stock_064_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/stock_064_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/stock_064_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/stock_064_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK64 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_064/stock_064_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK64;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/stock_065_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/stock_065_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/stock_065_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/stock_065_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK65 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_065/stock_065_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK65;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/stock_066_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/stock_066_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/stock_066_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/stock_066_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK66 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_066/stock_066_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK66;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/stock_067_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK67 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_067/stock_067_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/stock_067_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/stock_067_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK67 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_067/stock_067_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK67;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/stock_068_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/stock_068_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/stock_068_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/stock_068_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK68 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_068/stock_068_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK68;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/stock_069_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/stock_069_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/stock_069_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/stock_069_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK69 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_069/stock_069_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK69;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/stock_070_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/stock_070_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/stock_070_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/stock_070_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK70 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_070/stock_070_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK70;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/stock_071_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/stock_071_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/stock_071_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/stock_071_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK71 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_071/stock_071_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK71;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/stock_072_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/stock_072_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/stock_072_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK72 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_072/stock_072_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK72 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_072/stock_072_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK72;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/stock_073_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/stock_073_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/stock_073_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/stock_073_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK73 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_073/stock_073_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK73;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/stock_074_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/stock_074_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/stock_074_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/stock_074_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK74 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_074/stock_074_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK74;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/stock_075_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/stock_075_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/stock_075_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/stock_075_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK75 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_075/stock_075_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK75;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/stock_076_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/stock_076_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/stock_076_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/stock_076_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK76 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_076/stock_076_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK76;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/stock_077_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/stock_077_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/stock_077_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/stock_077_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK77 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_077/stock_077_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK77;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK78 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_078/stock_078_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/stock_078_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/stock_078_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/stock_078_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK78 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_078/stock_078_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK78;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/stock_079_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/stock_079_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/stock_079_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/stock_079_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK79 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_079/stock_079_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK79;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/stock_080_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/stock_080_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/stock_080_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/stock_080_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK80 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_080/stock_080_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK80;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/stock_081_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/stock_081_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/stock_081_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/stock_081_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK81 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_081/stock_081_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK81;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/stock_082_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/stock_082_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/stock_082_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/stock_082_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK82 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_082/stock_082_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK82;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/stock_083_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/stock_083_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK83 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_083/stock_083_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/stock_083_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK83 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_083/stock_083_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK83;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/stock_084_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/stock_084_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/stock_084_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/stock_084_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK84 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_084/stock_084_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK84;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/stock_085_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/stock_085_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/stock_085_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/stock_085_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK85 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_085/stock_085_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK85;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/stock_086_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/stock_086_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/stock_086_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/stock_086_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK86 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_086/stock_086_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK86;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/stock_087_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/stock_087_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/stock_087_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/stock_087_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK87 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_087/stock_087_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK87;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/stock_088_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/stock_088_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/stock_088_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK88 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_088/stock_088_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK88 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_088/stock_088_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK88;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/stock_089_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/stock_089_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/stock_089_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/stock_089_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK89 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_089/stock_089_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK89;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/stock_090_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/stock_090_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/stock_090_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/stock_090_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK90 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_090/stock_090_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK90;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/stock_091_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/stock_091_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/stock_091_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/stock_091_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK91 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_091/stock_091_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK91;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/stock_092_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/stock_092_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/stock_092_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/stock_092_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK92 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_092/stock_092_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK92;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/stock_093_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/stock_093_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/stock_093_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/stock_093_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK93 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_093/stock_093_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK93;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/stock_094_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK94 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_094/stock_094_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/stock_094_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/stock_094_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK94 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_094/stock_094_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK94;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/stock_095_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/stock_095_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/stock_095_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/stock_095_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK95 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_095/stock_095_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK95;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK96 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_096/stock_096_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/stock_096_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/stock_096_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/stock_096_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK96 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_096/stock_096_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK96;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/stock_097_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/stock_097_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/stock_097_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK97 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_097/stock_097_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK97 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_097/stock_097_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK97;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/stock_098_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/stock_098_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/stock_098_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/stock_098_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK98 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_098/stock_098_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK98;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/stock_099_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/stock_099_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/stock_099_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK99 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_099/stock_099_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK99 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_099/stock_099_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK99;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/stock_100_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/stock_100_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/stock_100_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/stock_100_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK100 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_100/stock_100_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK100;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/stock_101_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/stock_101_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/stock_101_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/stock_101_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK101 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_101/stock_101_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK101;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/stock_102_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/stock_102_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/stock_102_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/stock_102_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK102 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_102/stock_102_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK102;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/stock_103_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/stock_103_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/stock_103_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/stock_103_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK103 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_103/stock_103_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK103;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/stock_104_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/stock_104_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/stock_104_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/stock_104_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK104 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_104/stock_104_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK104;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK105 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_105/stock_105_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/stock_105_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/stock_105_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/stock_105_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK105 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_105/stock_105_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK105;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/stock_106_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/stock_106_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/stock_106_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/stock_106_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK106 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_106/stock_106_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK106;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/stock_107_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/stock_107_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/stock_107_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/stock_107_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK107 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_107/stock_107_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK107;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/stock_108_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/stock_108_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/stock_108_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/stock_108_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK108 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_108/stock_108_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK108;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/stock_109_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/stock_109_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/stock_109_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/stock_109_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK109 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_109/stock_109_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK109;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/stock_110_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/stock_110_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK110 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_110/stock_110_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/stock_110_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK110 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_110/stock_110_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK110;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/stock_111_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/stock_111_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/stock_111_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/stock_111_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK111 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_111/stock_111_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK111;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/stock_112_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/stock_112_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/stock_112_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/stock_112_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK112 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_112/stock_112_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK112;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/stock_113_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/stock_113_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/stock_113_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/stock_113_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK113 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_113/stock_113_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK113;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/stock_114_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/stock_114_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/stock_114_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/stock_114_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK114 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_114/stock_114_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK114;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/stock_115_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/stock_115_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/stock_115_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK115 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_115/stock_115_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK115 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_115/stock_115_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK115;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/stock_116_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/stock_116_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/stock_116_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/stock_116_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK116 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_116/stock_116_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK116;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/stock_117_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/stock_117_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/stock_117_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/stock_117_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK117 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_117/stock_117_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK117;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/stock_118_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/stock_118_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/stock_118_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/stock_118_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK118 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_118/stock_118_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK118;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/stock_119_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/stock_119_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/stock_119_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/stock_119_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK119 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_119/stock_119_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK119;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/stock_120_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/stock_120_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/stock_120_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/stock_120_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK120 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_120/stock_120_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK120;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/stock_121_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK121 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_121/stock_121_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/stock_121_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/stock_121_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK121 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_121/stock_121_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK121;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/stock_122_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/stock_122_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/stock_122_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/stock_122_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK122 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_122/stock_122_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK122;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK123 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_123/stock_123_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/stock_123_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/stock_123_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/stock_123_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK123 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_123/stock_123_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK123;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/stock_124_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/stock_124_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/stock_124_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK124 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_124/stock_124_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK124 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_124/stock_124_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK124;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/stock_125_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/stock_125_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/stock_125_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/stock_125_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK125 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_125/stock_125_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK125;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/stock_126_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/stock_126_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/stock_126_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK126 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_126/stock_126_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK126 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_126/stock_126_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK126;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/stock_127_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/stock_127_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/stock_127_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/stock_127_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK127 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_127/stock_127_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK127;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/stock_128_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/stock_128_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/stock_128_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/stock_128_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK128 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_128/stock_128_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK128;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/stock_129_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/stock_129_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/stock_129_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/stock_129_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK129 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_129/stock_129_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK129;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/stock_130_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/stock_130_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/stock_130_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/stock_130_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK130 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_130/stock_130_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK130;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/stock_131_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/stock_131_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/stock_131_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/stock_131_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK131 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_131/stock_131_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK131;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK132 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_132/stock_132_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/stock_132_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/stock_132_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/stock_132_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK132 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_132/stock_132_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK132;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/stock_133_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/stock_133_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/stock_133_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/stock_133_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK133 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_133/stock_133_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK133;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/stock_134_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/stock_134_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/stock_134_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/stock_134_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK134 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_134/stock_134_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK134;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/stock_135_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/stock_135_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/stock_135_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/stock_135_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK135 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_135/stock_135_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK135;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/stock_136_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/stock_136_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/stock_136_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/stock_136_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK136 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_136/stock_136_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK136;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/stock_137_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/stock_137_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK137 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_137/stock_137_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/stock_137_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK137 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_137/stock_137_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK137;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/stock_138_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/stock_138_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/stock_138_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/stock_138_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK138 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_138/stock_138_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK138;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/stock_139_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK139 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_139/stock_139_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/stock_139_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/stock_139_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK139 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_139/stock_139_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK139;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/stock_140_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/stock_140_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/stock_140_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/stock_140_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK140 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_140/stock_140_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK140;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK141 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_141/stock_141_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/stock_141_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/stock_141_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/stock_141_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK141 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_141/stock_141_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK141;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/stock_142_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/stock_142_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/stock_142_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK142 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_142/stock_142_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK142 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_142/stock_142_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK142;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/stock_143_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/stock_143_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/stock_143_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/stock_143_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK143 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_143/stock_143_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK143;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/stock_144_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/stock_144_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/stock_144_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/stock_144_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK144 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_144/stock_144_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK144;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/stock_145_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/stock_145_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/stock_145_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/stock_145_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK145 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_145/stock_145_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK145;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/stock_146_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/stock_146_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/stock_146_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/stock_146_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK146 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_146/stock_146_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK146;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/stock_147_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/stock_147_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/stock_147_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/stock_147_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK147 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_147/stock_147_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK147;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/stock_148_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK148 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_148/stock_148_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/stock_148_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/stock_148_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK148 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_148/stock_148_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK148;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/stock_149_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/stock_149_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/stock_149_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/stock_149_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK149 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_149/stock_149_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK149;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK150 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_150/stock_150_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/stock_150_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/stock_150_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/stock_150_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK150 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_150/stock_150_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK150;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/stock_151_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/stock_151_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/stock_151_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK151 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_151/stock_151_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK151 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_151/stock_151_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK151;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/stock_152_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/stock_152_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/stock_152_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/stock_152_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK152 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_152/stock_152_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK152;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/stock_153_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/stock_153_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/stock_153_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK153 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_153/stock_153_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK153 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_153/stock_153_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK153;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/stock_154_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/stock_154_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/stock_154_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/stock_154_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK154 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_154/stock_154_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK154;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/stock_155_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/stock_155_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/stock_155_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/stock_155_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK155 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_155/stock_155_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK155;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/stock_156_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/stock_156_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/stock_156_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/stock_156_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK156 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_156/stock_156_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK156;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/stock_157_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/stock_157_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/stock_157_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/stock_157_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK157 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_157/stock_157_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK157;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/stock_158_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/stock_158_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/stock_158_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/stock_158_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK158 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_158/stock_158_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK158;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK159 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_159/stock_159_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/stock_159_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/stock_159_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/stock_159_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK159 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_159/stock_159_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK159;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/stock_160_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/stock_160_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/stock_160_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK160 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_160/stock_160_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK160 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_160/stock_160_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK160;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/stock_161_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/stock_161_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/stock_161_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/stock_161_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK161 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_161/stock_161_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK161;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/stock_162_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/stock_162_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/stock_162_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK162 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_162/stock_162_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK162 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_162/stock_162_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK162;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/stock_163_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/stock_163_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/stock_163_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/stock_163_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK163 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_163/stock_163_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK163;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/stock_164_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/stock_164_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK164 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_164/stock_164_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/stock_164_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK164 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_164/stock_164_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK164;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/stock_165_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/stock_165_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/stock_165_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/stock_165_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK165 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_165/stock_165_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK165;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/stock_166_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/stock_166_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/stock_166_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/stock_166_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK166 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_166/stock_166_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK166;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/stock_167_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/stock_167_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/stock_167_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/stock_167_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK167 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_167/stock_167_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK167;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/stock_168_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/stock_168_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/stock_168_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/stock_168_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK168 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_168/stock_168_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK168;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/stock_169_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/stock_169_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/stock_169_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK169 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_169/stock_169_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK169 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_169/stock_169_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK169;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/stock_170_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/stock_170_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/stock_170_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/stock_170_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK170 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_170/stock_170_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK170;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/stock_171_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/stock_171_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/stock_171_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/stock_171_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK171 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_171/stock_171_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK171;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/stock_172_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/stock_172_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/stock_172_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/stock_172_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK172 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_172/stock_172_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK172;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/stock_173_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/stock_173_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/stock_173_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/stock_173_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK173 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_173/stock_173_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK173;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/stock_174_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/stock_174_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/stock_174_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/stock_174_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK174 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_174/stock_174_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK174;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/stock_175_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK175 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_175/stock_175_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/stock_175_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/stock_175_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK175 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_175/stock_175_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK175;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/stock_176_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/stock_176_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/stock_176_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/stock_176_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK176 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_176/stock_176_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK176;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK177 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_177/stock_177_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/stock_177_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/stock_177_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/stock_177_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK177 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_177/stock_177_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK177;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/stock_178_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/stock_178_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/stock_178_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK178 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_178/stock_178_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK178 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_178/stock_178_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK178;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/stock_179_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/stock_179_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/stock_179_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/stock_179_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK179 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_179/stock_179_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK179;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/stock_180_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/stock_180_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/stock_180_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK180 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_180/stock_180_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK180 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_180/stock_180_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK180;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/stock_181_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/stock_181_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/stock_181_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/stock_181_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK181 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_181/stock_181_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK181;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/stock_182_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/stock_182_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/stock_182_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/stock_182_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK182 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_182/stock_182_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK182;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/stock_183_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/stock_183_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/stock_183_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/stock_183_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK183 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_183/stock_183_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK183;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/stock_184_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/stock_184_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/stock_184_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/stock_184_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK184 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_184/stock_184_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK184;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/stock_185_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/stock_185_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/stock_185_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/stock_185_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK185 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_185/stock_185_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK185;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK186 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_186/stock_186_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/stock_186_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/stock_186_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/stock_186_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK186 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_186/stock_186_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK186;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/stock_187_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/stock_187_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/stock_187_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/stock_187_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK187 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_187/stock_187_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK187;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/stock_188_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/stock_188_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/stock_188_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/stock_188_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK188 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_188/stock_188_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK188;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/stock_189_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/stock_189_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/stock_189_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/stock_189_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK189 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_189/stock_189_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK189;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/stock_190_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/stock_190_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/stock_190_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/stock_190_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK190 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_190/stock_190_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK190;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/stock_191_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/stock_191_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK191 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_191/stock_191_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/stock_191_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK191 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_191/stock_191_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK191;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/stock_192_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/stock_192_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/stock_192_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/stock_192_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK192 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_192/stock_192_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK192;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/stock_193_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/stock_193_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/stock_193_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/stock_193_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK193 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_193/stock_193_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK193;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/stock_194_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/stock_194_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/stock_194_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/stock_194_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK194 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_194/stock_194_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK194;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/stock_195_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/stock_195_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/stock_195_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/stock_195_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK195 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_195/stock_195_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK195;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/stock_196_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/stock_196_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/stock_196_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK196 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_196/stock_196_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK196 ACTIVATE NOT LOGGED INITIALLY;
```

```
IMPORT FROM /flats/F1_196/stock_196_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK196;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/stock_197_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/stock_197_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/stock_197_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/stock_197_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK197 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_197/stock_197_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK197;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/stock_198_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/stock_198_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/stock_198_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/stock_198_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK198 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_198/stock_198_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK198;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/stock_199_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/stock_199_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/stock_199_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/stock_199_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK199 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_199/stock_199_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK199;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/stock_200_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/stock_200_2.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/stock_200_3.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/stock_200_4.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK200;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
UPDATE COMMAND OPTIONS USING C OFF;
ALTER TABLE STOCK200 ACTIVATE NOT LOGGED INITIALLY;
IMPORT FROM /flats/F1_200/stock_200_5.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50  COMMITCOUNT
32000000 INSERT INTO STOCK200;
COMMIT WORK;
CONNECT RESET;
```

DDL/LOAD_WAREHOUSE_ALL.ddl

```
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_001/warehouse_001_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE1;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_002/warehouse_002_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE2;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_003/warehouse_003_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE3;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_004/warehouse_004_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE4;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_005/warehouse_005_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE5;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_006/warehouse_006_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE6;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_007/warehouse_007_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE7;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_008/warehouse_008_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE8;
```

```
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_009/warehouse_009_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE9;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_010/warehouse_010_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE10;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_011/warehouse_011_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE11;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_012/warehouse_012_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE12;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_013/warehouse_013_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE13;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_014/warehouse_014_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE14;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_015/warehouse_015_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE15;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_016/warehouse_016_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE16;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_017/warehouse_017_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE17;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_018/warehouse_018_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE18;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_019/warehouse_019_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE19;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_020/warehouse_020_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE20;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_021/warehouse_021_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE21;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_022/warehouse_022_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE22;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_023/warehouse_023_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE23;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_024/warehouse_024_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE24;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_025/warehouse_025_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE25;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_026/warehouse_026_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE26;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_027/warehouse_027_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE27;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_028/warehouse_028_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE28;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_029/warehouse_029_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE29;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_030/warehouse_030_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE30;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_031/warehouse_031_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE31;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_032/warehouse_032_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE32;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_033/warehouse_033_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE33;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_034/warehouse_034_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE34;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_035/warehouse_035_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE35;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_036/warehouse_036_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE36;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_037/warehouse_037_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE37;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_038/warehouse_038_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE38;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_039/warehouse_039_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE39;
COMMIT WORK;
CONNECT RESET;
CONNECT TO TPCC IN SHARE MODE;
IMPORT FROM /flats/F1_040/warehouse_040_1.dat OF DEL MODIFIED BY COLDEL|
TIMESTAMPFORMAT="YYYY-MM-DD HH:MM:SS" KEEPBLANKS COMPOUND=50 ALLOW WRITE
ACCESS COMMITCOUNT 1000 INSERT INTO WAREHOUSE40;
COMMIT WORK;
CONNECT RESET;
```

DDL/RNST_CUSTOMER.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER5 AND INDEXES ALL;
COMMIT WORK;
```

```
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER41 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER42 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER43 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER44 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER45 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER46 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER47 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER48 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER49 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER50 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER51 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER52 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER53 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER54 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER55 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER56 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER57 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER58 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER59 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER60 AND INDEXES ALL;
```

```
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER61 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER62 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER63 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER64 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER65 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER66 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER67 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER68 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER69 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER70 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER71 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER72 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER73 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER74 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER75 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER76 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER77 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER78 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER79 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER80 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER81 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER82 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER83 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER84 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER85 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER86 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER87 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER88 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER89 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER90 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER91 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER92 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER93 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER94 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER95 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER96 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER97 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER98 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER99 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER100 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER101 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER102 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER103 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER104 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER105 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER106 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER107 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER108 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER109 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER110 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER111 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER112 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER113 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER114 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
```

```
RUNSTATS ON TABLE nbissoon.CUSTOMER115 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER116 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER117 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER118 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER119 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER120 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER121 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER122 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER123 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER124 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER125 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER126 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER127 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER128 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER129 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER130 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER131 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER132 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER133 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER134 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER135 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER136 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER137 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER138 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER139 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER140 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER141 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER142 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER143 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER144 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER145 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER146 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER147 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER148 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER149 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER150 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER151 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER152 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER153 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER154 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER155 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER156 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER157 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER158 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER159 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER160 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER161 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER162 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER163 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER164 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER165 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER166 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER167 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER168 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER169 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER170 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER171 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER172 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER173 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER174 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER175 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER176 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER177 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER178 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER179 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER180 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER181 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER182 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER183 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER184 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER185 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER186 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER187 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER188 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER189 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER190 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER191 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER192 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER193 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER194 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER195 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER196 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER197 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER198 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER199 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.CUSTOMER200 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_DISTRICT.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
```

```
RUNSTATS ON TABLE nbissoon.DISTRICT23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.DISTRICT40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_HISTORY.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY36 AND INDEXES ALL;
```

```
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.HISTORY40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_ITEM.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ITEM AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_NEW_ORDERA.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERA40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_NEW_ORDERB.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.NEW_ORDERB40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_ORDERS.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
```

```
RUNSTATS ON TABLE nbissoon.ORDERS19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS41 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS42 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS43 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS44 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS45 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS46 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS47 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS48 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS49 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS50 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS51 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS52 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS53 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS54 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS55 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS56 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS57 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS58 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS59 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS60 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS61 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS62 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS63 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS64 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS65 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS66 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS67 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS68 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS69 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS70 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS71 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS72 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS73 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS74 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS75 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS76 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS77 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS78 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS79 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS80 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS81 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS82 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS83 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS84 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS85 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS86 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS87 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS88 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS89 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS90 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS91 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS92 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS93 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS94 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS95 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS96 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS97 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS98 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS99 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS100 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS101 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS102 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS103 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS104 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS105 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS106 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS107 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS108 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS109 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS110 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS111 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS112 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS113 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS114 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS115 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS116 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS117 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS118 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS119 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS120 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS121 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS122 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS123 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS124 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS125 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS126 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS127 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS128 AND INDEXES ALL;
COMMIT WORK;
```

```
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS129 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS130 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS131 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS132 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS133 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS134 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS135 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS136 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS137 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS138 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS139 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS140 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS141 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS142 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS143 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS144 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS145 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS146 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS147 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS148 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS149 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS150 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS151 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS152 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS153 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS154 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS155 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS156 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS157 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS158 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS159 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS160 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS161 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS162 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS163 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS164 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS165 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS166 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS167 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS168 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS169 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS170 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS171 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS172 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS173 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS174 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS175 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS176 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS177 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS178 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS179 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS180 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS181 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS182 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS183 AND INDEXES ALL;
```

```
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS184 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS185 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS186 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS187 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS188 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS189 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS190 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS191 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS192 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS193 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS194 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS195 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS196 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS197 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS198 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS199 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDERS200 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_ORDER_LINE.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE36 AND INDEXES ALL;
```

```
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE41 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE42 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE43 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE44 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE45 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE46 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE47 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE48 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE49 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE50 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE51 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE52 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE53 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE54 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE55 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE56 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE57 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE58 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE59 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE60 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE61 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE62 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE63 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE64 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE65 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE66 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE67 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE68 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE69 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE70 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE71 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE72 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE73 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE74 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE75 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE76 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE77 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE78 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE79 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE80 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE81 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE82 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE83 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE84 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE85 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE86 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE87 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE88 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE89 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE90 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
```

```
RUNSTATS ON TABLE nbissoon.ORDER_LINE91 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE92 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE93 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE94 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE95 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE96 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE97 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE98 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE99 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE100 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE101 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE102 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE103 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE104 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE105 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE106 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE107 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE108 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE109 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE110 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE111 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE112 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE113 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE114 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE115 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE116 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE117 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE118 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE119 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE120 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE121 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE122 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE123 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE124 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE125 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE126 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE127 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE128 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE129 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE130 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE131 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE132 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE133 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE134 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE135 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE136 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE137 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE138 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE139 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE140 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE141 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE142 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE143 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE144 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE145 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE146 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE147 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE148 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE149 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE150 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE151 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE152 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE153 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE154 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE155 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE156 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE157 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE158 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE159 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE160 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE161 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE162 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE163 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE164 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE165 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE166 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE167 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE168 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE169 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE170 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE171 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE172 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE173 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE174 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE175 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE176 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE177 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE178 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE179 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE180 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE181 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE182 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE183 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE184 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE185 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE186 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE187 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE188 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE189 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE190 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE191 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE192 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE193 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE194 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE195 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE196 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE197 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE198 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE199 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.ORDER_LINE200 AND INDEXES ALL;
COMMIT WORK;
```

```
connect reset;
```

DDL/RNST_STOCK.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK16 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK41 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK42 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK43 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK44 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK45 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK46 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK47 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK48 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK49 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK50 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK51 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK52 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK53 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK54 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK55 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK56 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK57 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK58 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK59 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK60 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK61 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK62 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK63 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK64 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK65 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK66 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK67 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK68 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK69 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK70 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK71 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK72 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK73 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK74 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK75 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK76 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK77 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK78 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK79 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK80 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK81 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK82 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK83 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK84 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK85 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK86 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK87 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK88 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK89 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK90 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK91 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK92 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK93 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK94 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK95 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK96 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK97 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK98 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK99 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK100 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK101 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK102 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK103 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK104 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK105 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK106 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK107 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK108 AND INDEXES ALL;
COMMIT WORK;
```

```
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK109 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK110 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK111 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK112 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK113 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK114 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK115 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK116 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK117 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK118 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK119 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK120 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK121 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK122 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK123 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK124 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK125 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK126 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK127 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK128 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK129 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK130 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK131 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK132 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK133 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK134 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK135 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK136 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK137 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK138 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK139 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK140 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK141 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK142 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK143 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK144 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK145 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK146 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK147 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK148 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK149 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK150 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK151 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK152 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK153 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK154 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK155 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK156 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK157 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK158 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK159 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK160 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK161 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK162 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK163 AND INDEXES ALL;
```

```
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK164 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK165 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK166 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK167 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK168 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK169 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK170 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK171 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK172 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK173 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK174 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK175 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK176 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK177 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK178 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK179 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK180 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK181 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK182 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK183 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK184 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK185 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK186 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK187 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK188 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK189 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK190 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK191 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK192 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK193 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK194 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK195 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK196 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK197 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK198 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK199 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.STOCK200 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

DDL/RNST_WAREHOUSE.ddl

```
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE1 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE2 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE3 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE4 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE5 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE6 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE7 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE8 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE9 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE10 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE11 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE12 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE13 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE14 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE15 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE16 AND INDEXES ALL;
COMMIT WORK;
```

```
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE17 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE18 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE19 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE20 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE21 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE22 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE23 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE24 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE25 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE26 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE27 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE28 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE29 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE30 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE31 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE32 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE33 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE34 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE35 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE36 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE37 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE38 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE39 AND INDEXES ALL;
COMMIT WORK;
connect reset;
connect to TPCC in share mode;
RUNSTATS ON TABLE nbissoon.WAREHOUSE40 AND INDEXES ALL;
COMMIT WORK;
connect reset;
```

bp/alter_bufferpool.ddl

```
-----------------------------------------------------------------------------
-- Licensed Materials - Property of IBM
--
-- Governed under the terms of the International
-- License Agreement for Non-Warranted Sample Code.
--
-- (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
-- All Rights Reserved.
--
-- US Government Users Restricted Rights - Use, duplication or
-- disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
-----------------------------------------------------------------------------
-- Set Bufferpools For Tablespaces
connect to tpcc;
ALTER BUFFERPOOL WAR1 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR2 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR3 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR4 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR5 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR6 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR7 DEFERRED SIZE 1268;
ALTER BUFFERPOOL WAR8 DEFERRED SIZE 1268;
ALTER BUFFERPOOL DIS1 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS2 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS3 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS4 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS5 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS6 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS7 DEFERRED SIZE 12812;
ALTER BUFFERPOOL DIS8 DEFERRED SIZE 12812;
ALTER BUFFERPOOL ITM DEFERRED SIZE 4843;
ALTER BUFFERPOOL HST1 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST2 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST3 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST4 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST5 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST6 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST7 DEFERRED SIZE 2250;
ALTER BUFFERPOOL HST8 DEFERRED SIZE 2250;
ALTER BUFFERPOOL NEW1 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW2 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW3 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW4 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW5 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW6 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW7 DEFERRED SIZE 846258;
ALTER BUFFERPOOL NEW8 DEFERRED SIZE 846258;
ALTER BUFFERPOOL ORD1 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD2 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD3 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD4 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD5 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD6 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD7 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD8 DEFERRED SIZE 875118;
ALTER BUFFERPOOL ORD_I1 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I2 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I3 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I4 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I5 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I6 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I7 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL ORD_I8 DEFERRED SIZE 2619217;
ALTER BUFFERPOOL OLN1 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN2 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN3 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN4 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN5 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN6 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN7 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL OLN8 DEFERRED SIZE 1606802;
ALTER BUFFERPOOL CST1 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST2 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST3 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST4 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST5 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST6 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST7 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST8 DEFERRED SIZE 800000;
ALTER BUFFERPOOL CST_I1 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I2 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I3 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I4 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I5 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I6 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I7 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL CST_I8 DEFERRED SIZE 1339747;
ALTER BUFFERPOOL STK1 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK2 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK3 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK4 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK5 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK6 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK7 DEFERRED SIZE 47845104;
ALTER BUFFERPOOL STK8 DEFERRED SIZE 47845104;
connect reset;
terminate;
```

bp/alter_tablespace.ddl

```
-----------------------------------------------------------------------------
-- Licensed Materials - Property of IBM
--
-- Governed under the terms of the International
-- License Agreement for Non-Warranted Sample Code.
--
-- (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
-- All Rights Reserved.
--
-- US Government Users Restricted Rights - Use, duplication or
-- disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
-----------------------------------------------------------------------------
-- Set Bufferpools For Tablespaces
```

```
connect to tpcc;
-- ----------------------------
-- Non-Affinitized Bufferpools
-- ----------------------------
ALTER TABLESPACE ts_item_001 BUFFERPOOL ITM;
-- ------------------------
-- Affinitized Bufferpools
-- ------------------------
-- WAREHOUSE
ALTER TABLESPACE ts_ware_001 BUFFERPOOL WAR1;
ALTER TABLESPACE ts_ware_002 BUFFERPOOL WAR1;
ALTER TABLESPACE ts_ware_003 BUFFERPOOL WAR1;
ALTER TABLESPACE ts_ware_004 BUFFERPOOL WAR1;
ALTER TABLESPACE ts_ware_005 BUFFERPOOL WAR1;
ALTER TABLESPACE ts_ware_006 BUFFERPOOL WAR2;
ALTER TABLESPACE ts_ware_007 BUFFERPOOL WAR2;
ALTER TABLESPACE ts_ware_008 BUFFERPOOL WAR2;
ALTER TABLESPACE ts_ware_009 BUFFERPOOL WAR2;
ALTER TABLESPACE ts_ware_010 BUFFERPOOL WAR2;
ALTER TABLESPACE ts_ware_011 BUFFERPOOL WAR3;
ALTER TABLESPACE ts_ware_012 BUFFERPOOL WAR3;
ALTER TABLESPACE ts_ware_013 BUFFERPOOL WAR3;
ALTER TABLESPACE ts_ware_014 BUFFERPOOL WAR3;
ALTER TABLESPACE ts_ware_015 BUFFERPOOL WAR3;
ALTER TABLESPACE ts_ware_016 BUFFERPOOL WAR4;
ALTER TABLESPACE ts_ware_017 BUFFERPOOL WAR4;
ALTER TABLESPACE ts_ware_018 BUFFERPOOL WAR4;
ALTER TABLESPACE ts_ware_019 BUFFERPOOL WAR4;
ALTER TABLESPACE ts_ware_020 BUFFERPOOL WAR4;
ALTER TABLESPACE ts_ware_021 BUFFERPOOL WAR5;
ALTER TABLESPACE ts_ware_022 BUFFERPOOL WAR5;
ALTER TABLESPACE ts_ware_023 BUFFERPOOL WAR5;
ALTER TABLESPACE ts_ware_024 BUFFERPOOL WAR5;
ALTER TABLESPACE ts_ware_025 BUFFERPOOL WAR5;
ALTER TABLESPACE ts_ware_026 BUFFERPOOL WAR6;
ALTER TABLESPACE ts_ware_027 BUFFERPOOL WAR6;
ALTER TABLESPACE ts_ware_028 BUFFERPOOL WAR6;
ALTER TABLESPACE ts_ware_029 BUFFERPOOL WAR6;
ALTER TABLESPACE ts_ware_030 BUFFERPOOL WAR6;
ALTER TABLESPACE ts_ware_031 BUFFERPOOL WAR7;
ALTER TABLESPACE ts_ware_032 BUFFERPOOL WAR7;
ALTER TABLESPACE ts_ware_033 BUFFERPOOL WAR7;
ALTER TABLESPACE ts_ware_034 BUFFERPOOL WAR7;
ALTER TABLESPACE ts_ware_035 BUFFERPOOL WAR7;
ALTER TABLESPACE ts_ware_036 BUFFERPOOL WAR8;
ALTER TABLESPACE ts_ware_037 BUFFERPOOL WAR8;
ALTER TABLESPACE ts_ware_038 BUFFERPOOL WAR8;
ALTER TABLESPACE ts_ware_039 BUFFERPOOL WAR8;
ALTER TABLESPACE ts_ware_040 BUFFERPOOL WAR8;
-- DISTRICT
ALTER TABLESPACE ts_dist_001 BUFFERPOOL DIS1;
ALTER TABLESPACE ts_dist_002 BUFFERPOOL DIS1;
ALTER TABLESPACE ts_dist_003 BUFFERPOOL DIS1;
ALTER TABLESPACE ts_dist_004 BUFFERPOOL DIS1;
ALTER TABLESPACE ts_dist_005 BUFFERPOOL DIS1;
ALTER TABLESPACE ts_dist_006 BUFFERPOOL DIS2;
ALTER TABLESPACE ts_dist_007 BUFFERPOOL DIS2;
ALTER TABLESPACE ts_dist_008 BUFFERPOOL DIS2;
ALTER TABLESPACE ts_dist_009 BUFFERPOOL DIS2;
ALTER TABLESPACE ts_dist_010 BUFFERPOOL DIS2;
ALTER TABLESPACE ts_dist_011 BUFFERPOOL DIS3;
ALTER TABLESPACE ts_dist_012 BUFFERPOOL DIS3;
ALTER TABLESPACE ts_dist_013 BUFFERPOOL DIS3;
ALTER TABLESPACE ts_dist_014 BUFFERPOOL DIS3;
ALTER TABLESPACE ts_dist_015 BUFFERPOOL DIS3;
ALTER TABLESPACE ts_dist_016 BUFFERPOOL DIS4;
ALTER TABLESPACE ts_dist_017 BUFFERPOOL DIS4;
ALTER TABLESPACE ts_dist_018 BUFFERPOOL DIS4;
ALTER TABLESPACE ts_dist_019 BUFFERPOOL DIS4;
ALTER TABLESPACE ts_dist_020 BUFFERPOOL DIS4;
ALTER TABLESPACE ts_dist_021 BUFFERPOOL DIS5;
ALTER TABLESPACE ts_dist_022 BUFFERPOOL DIS5;
ALTER TABLESPACE ts_dist_023 BUFFERPOOL DIS5;
ALTER TABLESPACE ts_dist_024 BUFFERPOOL DIS5;
ALTER TABLESPACE ts_dist_025 BUFFERPOOL DIS5;
ALTER TABLESPACE ts_dist_026 BUFFERPOOL DIS6;
ALTER TABLESPACE ts_dist_027 BUFFERPOOL DIS6;
ALTER TABLESPACE ts_dist_028 BUFFERPOOL DIS6;
ALTER TABLESPACE ts_dist_029 BUFFERPOOL DIS6;
ALTER TABLESPACE ts_dist_030 BUFFERPOOL DIS6;
ALTER TABLESPACE ts_dist_031 BUFFERPOOL DIS7;
ALTER TABLESPACE ts_dist_032 BUFFERPOOL DIS7;
ALTER TABLESPACE ts_dist_033 BUFFERPOOL DIS7;
ALTER TABLESPACE ts_dist_034 BUFFERPOOL DIS7;
ALTER TABLESPACE ts_dist_035 BUFFERPOOL DIS7;
ALTER TABLESPACE ts_dist_036 BUFFERPOOL DIS8;
ALTER TABLESPACE ts_dist_037 BUFFERPOOL DIS8;
ALTER TABLESPACE ts_dist_038 BUFFERPOOL DIS8;
ALTER TABLESPACE ts_dist_039 BUFFERPOOL DIS8;
ALTER TABLESPACE ts_dist_040 BUFFERPOOL DIS8;
-- STOCK
ALTER TABLESPACE ts_stock_001 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_002 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_003 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_004 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_005 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_006 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_007 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_008 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_009 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_010 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_011 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_012 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_013 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_014 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_015 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_016 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_017 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_018 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_019 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_020 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_021 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_022 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_023 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_024 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_025 BUFFERPOOL STK1;
ALTER TABLESPACE ts_stock_026 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_027 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_028 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_029 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_030 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_031 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_032 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_033 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_034 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_035 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_036 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_037 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_038 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_039 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_040 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_041 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_042 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_043 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_044 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_045 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_046 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_047 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_048 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_049 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_050 BUFFERPOOL STK2;
ALTER TABLESPACE ts_stock_051 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_052 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_053 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_054 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_055 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_056 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_057 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_058 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_059 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_060 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_061 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_062 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_063 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_064 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_065 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_066 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_067 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_068 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_069 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_070 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_071 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_072 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_073 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_074 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_075 BUFFERPOOL STK3;
ALTER TABLESPACE ts_stock_076 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_077 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_078 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_079 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_080 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_081 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_082 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_083 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_084 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_085 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_086 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_087 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_088 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_089 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_090 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_091 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_092 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_093 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_094 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_095 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_096 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_097 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_098 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_099 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_100 BUFFERPOOL STK4;
ALTER TABLESPACE ts_stock_101 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_102 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_103 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_104 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_105 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_106 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_107 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_108 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_109 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_110 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_111 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_112 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_113 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_114 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_115 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_116 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_117 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_118 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_119 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_120 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_121 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_122 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_123 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_124 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_125 BUFFERPOOL STK5;
ALTER TABLESPACE ts_stock_126 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_127 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_128 BUFFERPOOL STK6;
```

```
ALTER TABLESPACE ts_stock_129 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_130 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_131 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_132 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_133 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_134 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_135 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_136 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_137 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_138 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_139 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_140 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_141 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_142 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_143 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_144 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_145 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_146 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_147 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_148 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_149 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_150 BUFFERPOOL STK6;
ALTER TABLESPACE ts_stock_151 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_152 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_153 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_154 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_155 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_156 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_157 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_158 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_159 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_160 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_161 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_162 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_163 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_164 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_165 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_166 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_167 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_168 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_169 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_170 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_171 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_172 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_173 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_174 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_175 BUFFERPOOL STK7;
ALTER TABLESPACE ts_stock_176 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_177 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_178 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_179 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_180 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_181 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_182 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_183 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_184 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_185 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_186 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_187 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_188 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_189 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_190 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_191 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_192 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_193 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_194 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_195 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_196 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_197 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_198 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_199 BUFFERPOOL STK8;
ALTER TABLESPACE ts_stock_200 BUFFERPOOL STK8;
-- CUSTOMER
ALTER TABLESPACE ts_customer_001 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_002 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_003 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_004 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_005 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_006 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_007 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_008 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_009 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_010 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_011 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_012 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_013 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_014 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_015 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_016 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_017 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_018 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_019 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_020 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_021 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_022 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_023 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_024 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_025 BUFFERPOOL CST1;
ALTER TABLESPACE ts_customer_026 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_027 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_028 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_029 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_030 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_031 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_032 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_033 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_034 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_035 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_036 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_037 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_038 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_039 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_040 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_041 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_042 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_043 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_044 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_045 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_046 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_047 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_048 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_049 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_050 BUFFERPOOL CST2;
ALTER TABLESPACE ts_customer_051 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_052 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_053 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_054 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_055 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_056 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_057 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_058 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_059 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_060 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_061 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_062 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_063 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_064 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_065 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_066 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_067 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_068 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_069 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_070 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_071 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_072 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_073 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_074 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_075 BUFFERPOOL CST3;
ALTER TABLESPACE ts_customer_076 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_077 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_078 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_079 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_080 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_081 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_082 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_083 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_084 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_085 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_086 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_087 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_088 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_089 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_090 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_091 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_092 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_093 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_094 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_095 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_096 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_097 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_098 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_099 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_100 BUFFERPOOL CST4;
ALTER TABLESPACE ts_customer_101 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_102 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_103 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_104 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_105 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_106 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_107 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_108 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_109 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_110 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_111 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_112 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_113 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_114 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_115 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_116 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_117 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_118 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_119 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_120 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_121 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_122 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_123 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_124 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_125 BUFFERPOOL CST5;
ALTER TABLESPACE ts_customer_126 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_127 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_128 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_129 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_130 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_131 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_132 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_133 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_134 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_135 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_136 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_137 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_138 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_139 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_140 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_141 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_142 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_143 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_144 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_145 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_146 BUFFERPOOL CST6;
```

```
ALTER TABLESPACE ts_customer_147 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_148 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_149 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_150 BUFFERPOOL CST6;
ALTER TABLESPACE ts_customer_151 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_152 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_153 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_154 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_155 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_156 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_157 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_158 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_159 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_160 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_161 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_162 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_163 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_164 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_165 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_166 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_167 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_168 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_169 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_170 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_171 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_172 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_173 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_174 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_175 BUFFERPOOL CST7;
ALTER TABLESPACE ts_customer_176 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_177 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_178 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_179 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_180 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_181 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_182 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_183 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_184 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_185 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_186 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_187 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_188 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_189 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_190 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_191 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_192 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_193 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_194 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_195 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_196 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_197 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_198 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_199 BUFFERPOOL CST8;
ALTER TABLESPACE ts_customer_200 BUFFERPOOL CST8;
ALTER TABLESPACE is_customer_001 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_002 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_003 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_004 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_005 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_006 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_007 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_008 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_009 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_010 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_011 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_012 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_013 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_014 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_015 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_016 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_017 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_018 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_019 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_020 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_021 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_022 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_023 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_024 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_025 BUFFERPOOL CST_I1;
ALTER TABLESPACE is_customer_026 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_027 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_028 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_029 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_030 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_031 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_032 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_033 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_034 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_035 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_036 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_037 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_038 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_039 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_040 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_041 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_042 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_043 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_044 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_045 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_046 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_047 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_048 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_049 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_050 BUFFERPOOL CST_I2;
ALTER TABLESPACE is_customer_051 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_052 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_053 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_054 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_055 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_056 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_057 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_058 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_059 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_060 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_061 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_062 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_063 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_064 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_065 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_066 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_067 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_068 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_069 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_070 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_071 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_072 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_073 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_074 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_075 BUFFERPOOL CST_I3;
ALTER TABLESPACE is_customer_076 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_077 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_078 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_079 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_080 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_081 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_082 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_083 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_084 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_085 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_086 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_087 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_088 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_089 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_090 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_091 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_092 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_093 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_094 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_095 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_096 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_097 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_098 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_099 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_100 BUFFERPOOL CST_I4;
ALTER TABLESPACE is_customer_101 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_102 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_103 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_104 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_105 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_106 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_107 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_108 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_109 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_110 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_111 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_112 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_113 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_114 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_115 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_116 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_117 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_118 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_119 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_120 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_121 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_122 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_123 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_124 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_125 BUFFERPOOL CST_I5;
ALTER TABLESPACE is_customer_126 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_127 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_128 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_129 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_130 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_131 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_132 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_133 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_134 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_135 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_136 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_137 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_138 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_139 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_140 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_141 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_142 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_143 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_144 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_145 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_146 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_147 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_148 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_149 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_150 BUFFERPOOL CST_I6;
ALTER TABLESPACE is_customer_151 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_152 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_153 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_154 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_155 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_156 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_157 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_158 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_159 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_160 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_161 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_162 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_163 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_164 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_165 BUFFERPOOL CST_I7;
```

```
ALTER TABLESPACE is_customer_166 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_167 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_168 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_169 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_170 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_171 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_172 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_173 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_174 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_175 BUFFERPOOL CST_I7;
ALTER TABLESPACE is_customer_176 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_177 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_178 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_179 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_180 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_181 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_182 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_183 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_184 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_185 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_186 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_187 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_188 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_189 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_190 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_191 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_192 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_193 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_194 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_195 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_196 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_197 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_198 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_199 BUFFERPOOL CST_I8;
ALTER TABLESPACE is_customer_200 BUFFERPOOL CST_I8;
-- HISTORY
ALTER TABLESPACE ts_history_001 BUFFERPOOL HST1;
ALTER TABLESPACE ts_history_002 BUFFERPOOL HST1;
ALTER TABLESPACE ts_history_003 BUFFERPOOL HST1;
ALTER TABLESPACE ts_history_004 BUFFERPOOL HST1;
ALTER TABLESPACE ts_history_005 BUFFERPOOL HST1;
ALTER TABLESPACE ts_history_006 BUFFERPOOL HST2;
ALTER TABLESPACE ts_history_007 BUFFERPOOL HST2;
ALTER TABLESPACE ts_history_008 BUFFERPOOL HST2;
ALTER TABLESPACE ts_history_009 BUFFERPOOL HST2;
ALTER TABLESPACE ts_history_010 BUFFERPOOL HST2;
ALTER TABLESPACE ts_history_011 BUFFERPOOL HST3;
ALTER TABLESPACE ts_history_012 BUFFERPOOL HST3;
ALTER TABLESPACE ts_history_013 BUFFERPOOL HST3;
ALTER TABLESPACE ts_history_014 BUFFERPOOL HST3;
ALTER TABLESPACE ts_history_015 BUFFERPOOL HST3;
ALTER TABLESPACE ts_history_016 BUFFERPOOL HST4;
ALTER TABLESPACE ts_history_017 BUFFERPOOL HST4;
ALTER TABLESPACE ts_history_018 BUFFERPOOL HST4;
ALTER TABLESPACE ts_history_019 BUFFERPOOL HST4;
ALTER TABLESPACE ts_history_020 BUFFERPOOL HST4;
ALTER TABLESPACE ts_history_021 BUFFERPOOL HST5;
ALTER TABLESPACE ts_history_022 BUFFERPOOL HST5;
ALTER TABLESPACE ts_history_023 BUFFERPOOL HST5;
ALTER TABLESPACE ts_history_024 BUFFERPOOL HST5;
ALTER TABLESPACE ts_history_025 BUFFERPOOL HST5;
ALTER TABLESPACE ts_history_026 BUFFERPOOL HST6;
ALTER TABLESPACE ts_history_027 BUFFERPOOL HST6;
ALTER TABLESPACE ts_history_028 BUFFERPOOL HST6;
ALTER TABLESPACE ts_history_029 BUFFERPOOL HST6;
ALTER TABLESPACE ts_history_030 BUFFERPOOL HST6;
ALTER TABLESPACE ts_history_031 BUFFERPOOL HST7;
ALTER TABLESPACE ts_history_032 BUFFERPOOL HST7;
ALTER TABLESPACE ts_history_033 BUFFERPOOL HST7;
ALTER TABLESPACE ts_history_034 BUFFERPOOL HST7;
ALTER TABLESPACE ts_history_035 BUFFERPOOL HST7;
ALTER TABLESPACE ts_history_036 BUFFERPOOL HST8;
ALTER TABLESPACE ts_history_037 BUFFERPOOL HST8;
ALTER TABLESPACE ts_history_038 BUFFERPOOL HST8;
ALTER TABLESPACE ts_history_039 BUFFERPOOL HST8;
ALTER TABLESPACE ts_history_040 BUFFERPOOL HST8;
-- ORDERS --
ALTER TABLESPACE ts_order_001 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_002 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_003 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_004 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_005 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_006 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_007 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_008 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_009 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_010 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_011 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_012 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_013 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_014 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_015 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_016 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_017 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_018 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_019 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_020 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_021 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_022 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_023 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_024 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_025 BUFFERPOOL ORD1;
ALTER TABLESPACE ts_order_026 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_027 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_028 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_029 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_030 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_031 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_032 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_033 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_034 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_035 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_036 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_037 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_038 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_039 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_040 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_041 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_042 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_043 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_044 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_045 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_046 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_047 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_048 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_049 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_050 BUFFERPOOL ORD2;
ALTER TABLESPACE ts_order_051 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_052 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_053 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_054 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_055 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_056 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_057 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_058 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_059 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_060 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_061 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_062 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_063 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_064 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_065 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_066 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_067 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_068 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_069 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_070 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_071 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_072 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_073 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_074 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_075 BUFFERPOOL ORD3;
ALTER TABLESPACE ts_order_076 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_077 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_078 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_079 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_080 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_081 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_082 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_083 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_084 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_085 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_086 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_087 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_088 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_089 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_090 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_091 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_092 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_093 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_094 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_095 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_096 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_097 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_098 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_099 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_100 BUFFERPOOL ORD4;
ALTER TABLESPACE ts_order_101 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_102 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_103 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_104 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_105 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_106 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_107 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_108 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_109 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_110 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_111 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_112 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_113 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_114 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_115 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_116 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_117 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_118 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_119 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_120 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_121 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_122 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_123 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_124 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_125 BUFFERPOOL ORD5;
ALTER TABLESPACE ts_order_126 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_127 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_128 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_129 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_130 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_131 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_132 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_133 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_134 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_135 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_136 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_137 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_138 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_139 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_140 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_141 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_142 BUFFERPOOL ORD6;
```

```
ALTER TABLESPACE ts_order_143 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_144 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_145 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_146 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_147 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_148 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_149 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_150 BUFFERPOOL ORD6;
ALTER TABLESPACE ts_order_151 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_152 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_153 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_154 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_155 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_156 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_157 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_158 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_159 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_160 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_161 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_162 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_163 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_164 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_165 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_166 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_167 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_168 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_169 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_170 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_171 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_172 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_173 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_174 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_175 BUFFERPOOL ORD7;
ALTER TABLESPACE ts_order_176 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_177 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_178 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_179 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_180 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_181 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_182 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_183 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_184 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_185 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_186 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_187 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_188 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_189 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_190 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_191 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_192 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_193 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_194 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_195 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_196 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_197 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_198 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_199 BUFFERPOOL ORD8;
ALTER TABLESPACE ts_order_200 BUFFERPOOL ORD8;
ALTER TABLESPACE is_order_001 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_002 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_003 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_004 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_005 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_006 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_007 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_008 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_009 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_010 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_011 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_012 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_013 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_014 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_015 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_016 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_017 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_018 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_019 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_020 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_021 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_022 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_023 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_024 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_025 BUFFERPOOL ORD_I1;
ALTER TABLESPACE is_order_026 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_027 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_028 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_029 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_030 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_031 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_032 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_033 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_034 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_035 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_036 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_037 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_038 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_039 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_040 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_041 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_042 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_043 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_044 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_045 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_046 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_047 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_048 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_049 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_050 BUFFERPOOL ORD_I2;
ALTER TABLESPACE is_order_051 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_052 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_053 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_054 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_055 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_056 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_057 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_058 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_059 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_060 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_061 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_062 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_063 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_064 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_065 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_066 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_067 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_068 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_069 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_070 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_071 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_072 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_073 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_074 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_075 BUFFERPOOL ORD_I3;
ALTER TABLESPACE is_order_076 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_077 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_078 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_079 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_080 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_081 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_082 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_083 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_084 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_085 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_086 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_087 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_088 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_089 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_090 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_091 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_092 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_093 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_094 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_095 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_096 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_097 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_098 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_099 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_100 BUFFERPOOL ORD_I4;
ALTER TABLESPACE is_order_101 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_102 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_103 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_104 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_105 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_106 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_107 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_108 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_109 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_110 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_111 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_112 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_113 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_114 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_115 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_116 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_117 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_118 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_119 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_120 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_121 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_122 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_123 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_124 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_125 BUFFERPOOL ORD_I5;
ALTER TABLESPACE is_order_126 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_127 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_128 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_129 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_130 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_131 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_132 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_133 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_134 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_135 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_136 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_137 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_138 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_139 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_140 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_141 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_142 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_143 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_144 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_145 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_146 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_147 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_148 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_149 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_150 BUFFERPOOL ORD_I6;
ALTER TABLESPACE is_order_151 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_152 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_153 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_154 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_155 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_156 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_157 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_158 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_159 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_160 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_161 BUFFERPOOL ORD_I7;
```

```
ALTER TABLESPACE is_order_162 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_163 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_164 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_165 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_166 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_167 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_168 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_169 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_170 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_171 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_172 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_173 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_174 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_175 BUFFERPOOL ORD_I7;
ALTER TABLESPACE is_order_176 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_177 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_178 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_179 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_180 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_181 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_182 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_183 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_184 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_185 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_186 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_187 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_188 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_189 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_190 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_191 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_192 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_193 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_194 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_195 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_196 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_197 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_198 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_199 BUFFERPOOL ORD_I8;
ALTER TABLESPACE is_order_200 BUFFERPOOL ORD_I8;
-- ORDERLINE
ALTER TABLESPACE ts_orderline_001 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_002 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_003 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_004 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_005 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_006 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_007 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_008 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_009 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_010 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_011 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_012 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_013 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_014 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_015 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_016 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_017 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_018 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_019 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_020 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_021 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_022 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_023 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_024 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_025 BUFFERPOOL OLN1;
ALTER TABLESPACE ts_orderline_026 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_027 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_028 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_029 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_030 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_031 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_032 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_033 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_034 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_035 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_036 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_037 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_038 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_039 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_040 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_041 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_042 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_043 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_044 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_045 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_046 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_047 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_048 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_049 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_050 BUFFERPOOL OLN2;
ALTER TABLESPACE ts_orderline_051 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_052 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_053 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_054 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_055 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_056 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_057 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_058 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_059 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_060 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_061 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_062 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_063 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_064 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_065 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_066 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_067 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_068 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_069 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_070 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_071 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_072 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_073 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_074 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_075 BUFFERPOOL OLN3;
ALTER TABLESPACE ts_orderline_076 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_077 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_078 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_079 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_080 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_081 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_082 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_083 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_084 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_085 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_086 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_087 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_088 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_089 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_090 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_091 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_092 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_093 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_094 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_095 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_096 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_097 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_098 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_099 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_100 BUFFERPOOL OLN4;
ALTER TABLESPACE ts_orderline_101 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_102 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_103 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_104 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_105 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_106 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_107 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_108 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_109 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_110 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_111 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_112 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_113 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_114 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_115 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_116 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_117 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_118 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_119 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_120 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_121 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_122 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_123 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_124 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_125 BUFFERPOOL OLN5;
ALTER TABLESPACE ts_orderline_126 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_127 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_128 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_129 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_130 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_131 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_132 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_133 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_134 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_135 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_136 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_137 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_138 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_139 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_140 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_141 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_142 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_143 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_144 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_145 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_146 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_147 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_148 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_149 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_150 BUFFERPOOL OLN6;
ALTER TABLESPACE ts_orderline_151 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_152 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_153 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_154 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_155 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_156 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_157 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_158 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_159 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_160 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_161 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_162 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_163 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_164 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_165 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_166 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_167 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_168 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_169 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_170 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_171 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_172 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_173 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_174 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_175 BUFFERPOOL OLN7;
ALTER TABLESPACE ts_orderline_176 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_177 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_178 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_179 BUFFERPOOL OLN8;
```

```
ALTER TABLESPACE ts_orderline_180 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_181 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_182 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_183 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_184 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_185 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_186 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_187 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_188 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_189 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_190 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_191 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_192 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_193 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_194 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_195 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_196 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_197 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_198 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_199 BUFFERPOOL OLN8;
ALTER TABLESPACE ts_orderline_200 BUFFERPOOL OLN8;
-- NEWORDERA
ALTER TABLESPACE ts_newordA_001 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordA_002 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordA_003 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordA_004 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordA_005 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordA_006 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordA_007 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordA_008 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordA_009 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordA_010 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordA_011 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordA_012 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordA_013 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordA_014 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordA_015 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordA_016 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordA_017 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordA_018 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordA_019 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordA_020 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordA_021 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordA_022 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordA_023 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordA_024 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordA_025 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordA_026 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordA_027 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordA_028 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordA_029 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordA_030 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordA_031 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordA_032 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordA_033 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordA_034 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordA_035 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordA_036 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordA_037 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordA_038 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordA_039 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordA_040 BUFFERPOOL NEW8;
-- NEWORDERB
ALTER TABLESPACE ts_newordB_001 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordB_002 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordB_003 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordB_004 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordB_005 BUFFERPOOL NEW1;
ALTER TABLESPACE ts_newordB_006 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordB_007 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordB_008 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordB_009 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordB_010 BUFFERPOOL NEW2;
ALTER TABLESPACE ts_newordB_011 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordB_012 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordB_013 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordB_014 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordB_015 BUFFERPOOL NEW3;
ALTER TABLESPACE ts_newordB_016 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordB_017 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordB_018 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordB_019 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordB_020 BUFFERPOOL NEW4;
ALTER TABLESPACE ts_newordB_021 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordB_022 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordB_023 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordB_024 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordB_025 BUFFERPOOL NEW5;
ALTER TABLESPACE ts_newordB_026 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordB_027 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordB_028 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordB_029 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordB_030 BUFFERPOOL NEW6;
ALTER TABLESPACE ts_newordB_031 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordB_032 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordB_033 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordB_034 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordB_035 BUFFERPOOL NEW7;
ALTER TABLESPACE ts_newordB_036 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordB_037 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordB_038 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordB_039 BUFFERPOOL NEW8;
ALTER TABLESPACE ts_newordB_040 BUFFERPOOL NEW8;
connect reset;
terminate;
```

bp/create_bufferpool.ddl

```
-------------------------------------------------------------------------------
-- Licensed Materials - Property of IBM
--
-- Governed under the terms of the International
-- License Agreement for Non-Warranted Sample Code.
--
-- (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
-- All Rights Reserved.
--
-- US Government Users Restricted Rights - Use, duplication or
-- disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
-------------------------------------------------------------------------------
-- Create Bufferpools
connect to tpcc;
create bufferpool IBMDEFAULTBP8K  size 100 pagesize 8K;
create bufferpool IBMDEFAULTBP16K size 100 pagesize 16K;
CREATE BUFFERPOOL WAR1 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR2 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR3 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR4 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR5 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR6 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR7 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL WAR8 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS1 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS2 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS3 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS4 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS5 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS6 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS7 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL DIS8 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL ITM SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL HST1 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST2 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST3 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST4 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST5 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST6 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST7 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL HST8 SIZE 100 PAGESIZE 16384;
CREATE BUFFERPOOL NEW1 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW2 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW3 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW4 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW5 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW6 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW7 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL NEW8 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL ORD1 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD2 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD3 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD4 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD5 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD6 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD7 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD8 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I1 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I2 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I3 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I4 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I5 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I6 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I7 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL ORD_I8 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN1 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN2 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN3 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN4 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN5 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN6 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN7 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL OLN8 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST1 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST2 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST3 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST4 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST5 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST6 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST7 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST8 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL CST_I1 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I2 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I3 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I4 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I5 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I6 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I7 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL CST_I8 SIZE 100 PAGESIZE 8192;
CREATE BUFFERPOOL STK1 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK2 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK3 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK4 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK5 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK6 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK7 SIZE 100 PAGESIZE 4096;
CREATE BUFFERPOOL STK8 SIZE 100 PAGESIZE 4096;
connect reset;
terminate;
```

db/create_database.ddl

```
-------------------------------------------------------------------------------
-- Licensed Materials - Property of IBM
--
```

```
-- Governed under the terms of the International
-- License Agreement for Non-Warranted Sample Code.
--
-- (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
-- All Rights Reserved.
--
-- US Government Users Restricted Rights - Use, duplication or
-- disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
-------------------------------------------------------------------------------
drop database tpcc;
create database tpcc on /home/tpcc/db/tpccdb1 collate using identity
catalog tablespace
managed by system using ('/home/tpcc/db/db1catalog');
```

ts/cris_customer.ddl

```
connect to tpcc;
-- now creating TS for is_customer_001 of D1
drop tablespace is_customer_001;
create regular tablespace is_customer_001 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F01V1CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_002 of D1
drop tablespace is_customer_002;
create regular tablespace is_customer_002 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F01V2CSTI' 320192
                      )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_003 of D1
drop tablespace is_customer_003;
create regular tablespace is_customer_003 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F01V3CSTI' 320192
                     )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_004 of D1
drop tablespace is_customer_004;
create regular tablespace is_customer_004 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F01V4CSTI' 320192
                     )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_005 of D1
drop tablespace is_customer_005;
create regular tablespace is_customer_005 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F01V5CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_006 of D1
drop tablespace is_customer_006;
create regular tablespace is_customer_006 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F02V1CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_007 of D1
drop tablespace is_customer_007;
create regular tablespace is_customer_007 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F02V2CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_008 of D1
drop tablespace is_customer_008;
create regular tablespace is_customer_008 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F02V3CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_009 of D1
drop tablespace is_customer_009;
create regular tablespace is_customer_009 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F02V4CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_010 of D1
drop tablespace is_customer_010;
create regular tablespace is_customer_010 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F02V5CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_011 of D1
drop tablespace is_customer_011;
create regular tablespace is_customer_011 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F03V1CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_012 of D1
drop tablespace is_customer_012;
create regular tablespace is_customer_012 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F03V2CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_013 of D1
drop tablespace is_customer_013;
create regular tablespace is_customer_013 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F03V3CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_014 of D1
drop tablespace is_customer_014;
create regular tablespace is_customer_014 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F03V4CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_015 of D1
drop tablespace is_customer_015;
create regular tablespace is_customer_015 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F03V5CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_016 of D1
drop tablespace is_customer_016;
create regular tablespace is_customer_016 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F04V1CSTI' 320192
                       )
           extentsize 64
           prefetchsize 4096
           bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_017 of D1
drop tablespace is_customer_017;
create regular tablespace is_customer_017 pagesize 8K
            managed by database
            using
            (
                        device '/dev/rD1F04V2CSTI' 320192
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_018 of D1
drop tablespace is_customer_018;
create regular tablespace is_customer_018 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_019 of D1
drop tablespace is_customer_019;
create regular tablespace is_customer_019 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_020 of D1
drop tablespace is_customer_020;
create regular tablespace is_customer_020 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_021 of D1
drop tablespace is_customer_021;
create regular tablespace is_customer_021 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_022 of D1
drop tablespace is_customer_022;
create regular tablespace is_customer_022 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_023 of D1
drop tablespace is_customer_023;
create regular tablespace is_customer_023 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_024 of D1
drop tablespace is_customer_024;
create regular tablespace is_customer_024 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_025 of D1
drop tablespace is_customer_025;
create regular tablespace is_customer_025 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_026 of D1
drop tablespace is_customer_026;
create regular tablespace is_customer_026 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_027 of D1
drop tablespace is_customer_027;
create regular tablespace is_customer_027 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_028 of D1
drop tablespace is_customer_028;
create regular tablespace is_customer_028 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_029 of D1
drop tablespace is_customer_029;
create regular tablespace is_customer_029 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_030 of D1
drop tablespace is_customer_030;
create regular tablespace is_customer_030 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_031 of D1
drop tablespace is_customer_031;
create regular tablespace is_customer_031 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_032 of D1
drop tablespace is_customer_032;
create regular tablespace is_customer_032 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_033 of D1
drop tablespace is_customer_033;
create regular tablespace is_customer_033 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_034 of D1
drop tablespace is_customer_034;
create regular tablespace is_customer_034 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_035 of D1
drop tablespace is_customer_035;
create regular tablespace is_customer_035 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_036 of D1
drop tablespace is_customer_036;
create regular tablespace is_customer_036 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_037 of D1
drop tablespace is_customer_037;
create regular tablespace is_customer_037 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_038 of D1
drop tablespace is_customer_038;
create regular tablespace is_customer_038 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_039 of D1
drop tablespace is_customer_039;
create regular tablespace is_customer_039 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_040 of D1
drop tablespace is_customer_040;
create regular tablespace is_customer_040 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_041 of D1
drop tablespace is_customer_041;
create regular tablespace is_customer_041 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_042 of D1
drop tablespace is_customer_042;
create regular tablespace is_customer_042 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_043 of D1
drop tablespace is_customer_043;
create regular tablespace is_customer_043 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_044 of D1
drop tablespace is_customer_044;
create regular tablespace is_customer_044 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_045 of D1
drop tablespace is_customer_045;
create regular tablespace is_customer_045 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_046 of D1
drop tablespace is_customer_046;
create regular tablespace is_customer_046 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_047 of D1
drop tablespace is_customer_047;
create regular tablespace is_customer_047 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_048 of D1
drop tablespace is_customer_048;
create regular tablespace is_customer_048 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_049 of D1
drop tablespace is_customer_049;
create regular tablespace is_customer_049 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_050 of D1
drop tablespace is_customer_050;
create regular tablespace is_customer_050 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_051 of D1
drop tablespace is_customer_051;
create regular tablespace is_customer_051 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_052 of D1
drop tablespace is_customer_052;
create regular tablespace is_customer_052 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_053 of D1
drop tablespace is_customer_053;
create regular tablespace is_customer_053 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_054 of D1
```

```
drop tablespace is_customer_054;
create regular tablespace is_customer_054 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F11V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_055 of D1
drop tablespace is_customer_055;
create regular tablespace is_customer_055 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F11V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_056 of D1
drop tablespace is_customer_056;
create regular tablespace is_customer_056 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_057 of D1
drop tablespace is_customer_057;
create regular tablespace is_customer_057 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_058 of D1
drop tablespace is_customer_058;
create regular tablespace is_customer_058 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_059 of D1
drop tablespace is_customer_059;
create regular tablespace is_customer_059 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_060 of D1
drop tablespace is_customer_060;
create regular tablespace is_customer_060 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_061 of D1
drop tablespace is_customer_061;
create regular tablespace is_customer_061 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_062 of D1
drop tablespace is_customer_062;
create regular tablespace is_customer_062 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_063 of D1
drop tablespace is_customer_063;
create regular tablespace is_customer_063 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_064 of D1
drop tablespace is_customer_064;
create regular tablespace is_customer_064 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_065 of D1
drop tablespace is_customer_065;
create regular tablespace is_customer_065 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_066 of D1
drop tablespace is_customer_066;
create regular tablespace is_customer_066 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_067 of D1
drop tablespace is_customer_067;
create regular tablespace is_customer_067 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_068 of D1
drop tablespace is_customer_068;
create regular tablespace is_customer_068 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_069 of D1
drop tablespace is_customer_069;
create regular tablespace is_customer_069 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_070 of D1
drop tablespace is_customer_070;
create regular tablespace is_customer_070 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_071 of D1
drop tablespace is_customer_071;
create regular tablespace is_customer_071 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_072 of D1
drop tablespace is_customer_072;
create regular tablespace is_customer_072 pagesize 8K
        managed by database
```

```
            using
            (
                    device '/dev/rD1F15V2CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_073 of D1
drop tablespace is_customer_073;
create regular tablespace is_customer_073 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F15V3CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_074 of D1
drop tablespace is_customer_074;
create regular tablespace is_customer_074 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F15V4CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_075 of D1
drop tablespace is_customer_075;
create regular tablespace is_customer_075 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F15V5CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_076 of D1
drop tablespace is_customer_076;
create regular tablespace is_customer_076 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F16V1CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_077 of D1
drop tablespace is_customer_077;
create regular tablespace is_customer_077 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F16V2CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_078 of D1
drop tablespace is_customer_078;
create regular tablespace is_customer_078 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F16V3CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_079 of D1
drop tablespace is_customer_079;
create regular tablespace is_customer_079 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F16V4CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_080 of D1
drop tablespace is_customer_080;
create regular tablespace is_customer_080 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F16V5CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_081 of D1
drop tablespace is_customer_081;
create regular tablespace is_customer_081 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F17V1CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_082 of D1
drop tablespace is_customer_082;
create regular tablespace is_customer_082 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F17V2CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_083 of D1
drop tablespace is_customer_083;
create regular tablespace is_customer_083 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F17V3CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_084 of D1
drop tablespace is_customer_084;
create regular tablespace is_customer_084 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F17V4CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_085 of D1
drop tablespace is_customer_085;
create regular tablespace is_customer_085 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F17V5CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_086 of D1
drop tablespace is_customer_086;
create regular tablespace is_customer_086 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F18V1CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_087 of D1
drop tablespace is_customer_087;
create regular tablespace is_customer_087 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F18V2CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_088 of D1
drop tablespace is_customer_088;
create regular tablespace is_customer_088 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F18V3CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_089 of D1
drop tablespace is_customer_089;
create regular tablespace is_customer_089 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F18V4CSTI' 320192
                  )
          extentsize 64
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_090 of D1
drop tablespace is_customer_090;
create regular tablespace is_customer_090 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F18V5CSTI' 320192
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_091 of D1
drop tablespace is_customer_091;
create regular tablespace is_customer_091 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_092 of D1
drop tablespace is_customer_092;
create regular tablespace is_customer_092 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_093 of D1
drop tablespace is_customer_093;
create regular tablespace is_customer_093 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_094 of D1
drop tablespace is_customer_094;
create regular tablespace is_customer_094 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_095 of D1
drop tablespace is_customer_095;
create regular tablespace is_customer_095 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_096 of D1
drop tablespace is_customer_096;
create regular tablespace is_customer_096 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_097 of D1
drop tablespace is_customer_097;
create regular tablespace is_customer_097 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_098 of D1
drop tablespace is_customer_098;
create regular tablespace is_customer_098 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_099 of D1
drop tablespace is_customer_099;
create regular tablespace is_customer_099 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_100 of D1
drop tablespace is_customer_100;
create regular tablespace is_customer_100 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_101 of D1
drop tablespace is_customer_101;
create regular tablespace is_customer_101 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_102 of D1
drop tablespace is_customer_102;
create regular tablespace is_customer_102 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_103 of D1
drop tablespace is_customer_103;
create regular tablespace is_customer_103 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_104 of D1
drop tablespace is_customer_104;
create regular tablespace is_customer_104 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_105 of D1
drop tablespace is_customer_105;
create regular tablespace is_customer_105 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_106 of D1
drop tablespace is_customer_106;
create regular tablespace is_customer_106 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_107 of D1
drop tablespace is_customer_107;
create regular tablespace is_customer_107 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_108 of D1
drop tablespace is_customer_108;
create regular tablespace is_customer_108 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_109 of D1
drop tablespace is_customer_109;
create regular tablespace is_customer_109 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F22V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_110 of D1
drop tablespace is_customer_110;
create regular tablespace is_customer_110 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F22V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_111 of D1
drop tablespace is_customer_111;
create regular tablespace is_customer_111 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_112 of D1
drop tablespace is_customer_112;
create regular tablespace is_customer_112 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_113 of D1
drop tablespace is_customer_113;
create regular tablespace is_customer_113 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_114 of D1
drop tablespace is_customer_114;
create regular tablespace is_customer_114 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_115 of D1
drop tablespace is_customer_115;
create regular tablespace is_customer_115 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_116 of D1
drop tablespace is_customer_116;
create regular tablespace is_customer_116 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_117 of D1
drop tablespace is_customer_117;
create regular tablespace is_customer_117 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_118 of D1
drop tablespace is_customer_118;
create regular tablespace is_customer_118 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_119 of D1
drop tablespace is_customer_119;
create regular tablespace is_customer_119 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_120 of D1
drop tablespace is_customer_120;
create regular tablespace is_customer_120 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_121 of D1
drop tablespace is_customer_121;
create regular tablespace is_customer_121 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_122 of D1
drop tablespace is_customer_122;
create regular tablespace is_customer_122 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_123 of D1
drop tablespace is_customer_123;
create regular tablespace is_customer_123 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_124 of D1
drop tablespace is_customer_124;
create regular tablespace is_customer_124 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_125 of D1
drop tablespace is_customer_125;
create regular tablespace is_customer_125 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_126 of D1
drop tablespace is_customer_126;
create regular tablespace is_customer_126 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_127 of D1
```

```
drop tablespace is_customer_127;
create regular tablespace is_customer_127 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_128 of D1
drop tablespace is_customer_128;
create regular tablespace is_customer_128 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_129 of D1
drop tablespace is_customer_129;
create regular tablespace is_customer_129 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_130 of D1
drop tablespace is_customer_130;
create regular tablespace is_customer_130 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_131 of D1
drop tablespace is_customer_131;
create regular tablespace is_customer_131 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_132 of D1
drop tablespace is_customer_132;
create regular tablespace is_customer_132 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_133 of D1
drop tablespace is_customer_133;
create regular tablespace is_customer_133 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_134 of D1
drop tablespace is_customer_134;
create regular tablespace is_customer_134 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_135 of D1
drop tablespace is_customer_135;
create regular tablespace is_customer_135 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_136 of D1
drop tablespace is_customer_136;
create regular tablespace is_customer_136 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_137 of D1
drop tablespace is_customer_137;
create regular tablespace is_customer_137 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_138 of D1
drop tablespace is_customer_138;
create regular tablespace is_customer_138 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_139 of D1
drop tablespace is_customer_139;
create regular tablespace is_customer_139 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_140 of D1
drop tablespace is_customer_140;
create regular tablespace is_customer_140 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_141 of D1
drop tablespace is_customer_141;
create regular tablespace is_customer_141 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_142 of D1
drop tablespace is_customer_142;
create regular tablespace is_customer_142 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_143 of D1
drop tablespace is_customer_143;
create regular tablespace is_customer_143 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_144 of D1
drop tablespace is_customer_144;
create regular tablespace is_customer_144 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_145 of D1
drop tablespace is_customer_145;
create regular tablespace is_customer_145 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F29V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_146 of D1
drop tablespace is_customer_146;
create regular tablespace is_customer_146 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_147 of D1
drop tablespace is_customer_147;
create regular tablespace is_customer_147 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_148 of D1
drop tablespace is_customer_148;
create regular tablespace is_customer_148 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_149 of D1
drop tablespace is_customer_149;
create regular tablespace is_customer_149 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_150 of D1
drop tablespace is_customer_150;
create regular tablespace is_customer_150 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_151 of D1
drop tablespace is_customer_151;
create regular tablespace is_customer_151 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_152 of D1
drop tablespace is_customer_152;
create regular tablespace is_customer_152 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_153 of D1
drop tablespace is_customer_153;
create regular tablespace is_customer_153 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_154 of D1
drop tablespace is_customer_154;
create regular tablespace is_customer_154 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_155 of D1
drop tablespace is_customer_155;
create regular tablespace is_customer_155 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_156 of D1
drop tablespace is_customer_156;
create regular tablespace is_customer_156 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_157 of D1
drop tablespace is_customer_157;
create regular tablespace is_customer_157 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_158 of D1
drop tablespace is_customer_158;
create regular tablespace is_customer_158 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V3CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_159 of D1
drop tablespace is_customer_159;
create regular tablespace is_customer_159 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V4CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_160 of D1
drop tablespace is_customer_160;
create regular tablespace is_customer_160 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_161 of D1
drop tablespace is_customer_161;
create regular tablespace is_customer_161 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V1CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_162 of D1
drop tablespace is_customer_162;
create regular tablespace is_customer_162 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V2CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_163 of D1
drop tablespace is_customer_163;
create regular tablespace is_customer_163 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V3CSTI' 320192
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_164 of D1
drop tablespace is_customer_164;
create regular tablespace is_customer_164 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F33V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_165 of D1
drop tablespace is_customer_165;
create regular tablespace is_customer_165 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F33V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_166 of D1
drop tablespace is_customer_166;
create regular tablespace is_customer_166 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_167 of D1
drop tablespace is_customer_167;
create regular tablespace is_customer_167 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_168 of D1
drop tablespace is_customer_168;
create regular tablespace is_customer_168 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_169 of D1
drop tablespace is_customer_169;
create regular tablespace is_customer_169 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_170 of D1
drop tablespace is_customer_170;
create regular tablespace is_customer_170 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_171 of D1
drop tablespace is_customer_171;
create regular tablespace is_customer_171 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_172 of D1
drop tablespace is_customer_172;
create regular tablespace is_customer_172 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_173 of D1
drop tablespace is_customer_173;
create regular tablespace is_customer_173 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_174 of D1
drop tablespace is_customer_174;
create regular tablespace is_customer_174 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_175 of D1
drop tablespace is_customer_175;
create regular tablespace is_customer_175 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_176 of D1
drop tablespace is_customer_176;
create regular tablespace is_customer_176 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_177 of D1
drop tablespace is_customer_177;
create regular tablespace is_customer_177 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V2CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_178 of D1
drop tablespace is_customer_178;
create regular tablespace is_customer_178 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V3CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_179 of D1
drop tablespace is_customer_179;
create regular tablespace is_customer_179 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V4CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_180 of D1
drop tablespace is_customer_180;
create regular tablespace is_customer_180 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V5CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_181 of D1
drop tablespace is_customer_181;
create regular tablespace is_customer_181 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V1CSTI' 320192
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_182 of D1
drop tablespace is_customer_182;
create regular tablespace is_customer_182 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_183 of D1
drop tablespace is_customer_183;
create regular tablespace is_customer_183 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_184 of D1
drop tablespace is_customer_184;
create regular tablespace is_customer_184 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_185 of D1
drop tablespace is_customer_185;
create regular tablespace is_customer_185 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_186 of D1
drop tablespace is_customer_186;
create regular tablespace is_customer_186 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_187 of D1
drop tablespace is_customer_187;
create regular tablespace is_customer_187 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_188 of D1
drop tablespace is_customer_188;
create regular tablespace is_customer_188 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_189 of D1
drop tablespace is_customer_189;
create regular tablespace is_customer_189 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_190 of D1
drop tablespace is_customer_190;
create regular tablespace is_customer_190 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_191 of D1
drop tablespace is_customer_191;
create regular tablespace is_customer_191 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_192 of D1
drop tablespace is_customer_192;
create regular tablespace is_customer_192 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_193 of D1
drop tablespace is_customer_193;
create regular tablespace is_customer_193 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_194 of D1
drop tablespace is_customer_194;
create regular tablespace is_customer_194 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_195 of D1
drop tablespace is_customer_195;
create regular tablespace is_customer_195 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V5CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_196 of D1
drop tablespace is_customer_196;
create regular tablespace is_customer_196 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V1CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_197 of D1
drop tablespace is_customer_197;
create regular tablespace is_customer_197 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V2CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_198 of D1
drop tablespace is_customer_198;
create regular tablespace is_customer_198 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V3CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_199 of D1
drop tablespace is_customer_199;
create regular tablespace is_customer_199 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V4CSTI' 320192
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_customer_200 of D1
```

```
drop tablespace is_customer_200;
create regular tablespace is_customer_200 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F40V5CSTI' 320192
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
connect reset;
```

ts/cris_order.ddl

```
connect to tpcc;
-- now creating TS for is_order_001 of D1
drop tablespace is_order_001;
create regular tablespace is_order_001 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_002 of D1
drop tablespace is_order_002;
create regular tablespace is_order_002 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_003 of D1
drop tablespace is_order_003;
create regular tablespace is_order_003 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_004 of D1
drop tablespace is_order_004;
create regular tablespace is_order_004 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_005 of D1
drop tablespace is_order_005;
create regular tablespace is_order_005 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_006 of D1
drop tablespace is_order_006;
create regular tablespace is_order_006 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F02V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_007 of D1
drop tablespace is_order_007;
create regular tablespace is_order_007 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F02V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_008 of D1
drop tablespace is_order_008;
create regular tablespace is_order_008 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F02V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_009 of D1
drop tablespace is_order_009;
create regular tablespace is_order_009 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F02V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_010 of D1
drop tablespace is_order_010;
create regular tablespace is_order_010 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F02V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_011 of D1
drop tablespace is_order_011;
create regular tablespace is_order_011 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_012 of D1
drop tablespace is_order_012;
create regular tablespace is_order_012 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_013 of D1
drop tablespace is_order_013;
create regular tablespace is_order_013 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_014 of D1
drop tablespace is_order_014;
create regular tablespace is_order_014 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_015 of D1
drop tablespace is_order_015;
create regular tablespace is_order_015 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_016 of D1
drop tablespace is_order_016;
create regular tablespace is_order_016 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_017 of D1
drop tablespace is_order_017;
create regular tablespace is_order_017 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V2ORDI' 262656
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_018 of D1
drop tablespace is_order_018;
create regular tablespace is_order_018 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_019 of D1
drop tablespace is_order_019;
create regular tablespace is_order_019 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_020 of D1
drop tablespace is_order_020;
create regular tablespace is_order_020 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F04V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_021 of D1
drop tablespace is_order_021;
create regular tablespace is_order_021 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_022 of D1
drop tablespace is_order_022;
create regular tablespace is_order_022 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_023 of D1
drop tablespace is_order_023;
create regular tablespace is_order_023 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_024 of D1
drop tablespace is_order_024;
create regular tablespace is_order_024 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_025 of D1
drop tablespace is_order_025;
create regular tablespace is_order_025 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F05V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_026 of D1
drop tablespace is_order_026;
create regular tablespace is_order_026 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_027 of D1
drop tablespace is_order_027;
create regular tablespace is_order_027 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_028 of D1
drop tablespace is_order_028;
create regular tablespace is_order_028 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_029 of D1
drop tablespace is_order_029;
create regular tablespace is_order_029 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_030 of D1
drop tablespace is_order_030;
create regular tablespace is_order_030 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_031 of D1
drop tablespace is_order_031;
create regular tablespace is_order_031 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_032 of D1
drop tablespace is_order_032;
create regular tablespace is_order_032 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_033 of D1
drop tablespace is_order_033;
create regular tablespace is_order_033 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_034 of D1
drop tablespace is_order_034;
create regular tablespace is_order_034 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_035 of D1
drop tablespace is_order_035;
create regular tablespace is_order_035 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_036 of D1
drop tablespace is_order_036;
create regular tablespace is_order_036 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_037 of D1
drop tablespace is_order_037;
create regular tablespace is_order_037 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_038 of D1
drop tablespace is_order_038;
create regular tablespace is_order_038 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_039 of D1
drop tablespace is_order_039;
create regular tablespace is_order_039 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_040 of D1
drop tablespace is_order_040;
create regular tablespace is_order_040 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F08V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_041 of D1
drop tablespace is_order_041;
create regular tablespace is_order_041 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_042 of D1
drop tablespace is_order_042;
create regular tablespace is_order_042 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_043 of D1
drop tablespace is_order_043;
create regular tablespace is_order_043 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_044 of D1
drop tablespace is_order_044;
create regular tablespace is_order_044 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_045 of D1
drop tablespace is_order_045;
create regular tablespace is_order_045 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F09V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_046 of D1
drop tablespace is_order_046;
create regular tablespace is_order_046 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_047 of D1
drop tablespace is_order_047;
create regular tablespace is_order_047 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_048 of D1
drop tablespace is_order_048;
create regular tablespace is_order_048 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_049 of D1
drop tablespace is_order_049;
create regular tablespace is_order_049 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_050 of D1
drop tablespace is_order_050;
create regular tablespace is_order_050 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_051 of D1
drop tablespace is_order_051;
create regular tablespace is_order_051 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_052 of D1
drop tablespace is_order_052;
create regular tablespace is_order_052 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_053 of D1
drop tablespace is_order_053;
create regular tablespace is_order_053 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_054 of D1
```

```
drop tablespace is_order_054;
create regular tablespace is_order_054 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F11V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_055 of D1
drop tablespace is_order_055;
create regular tablespace is_order_055 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F11V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_056 of D1
drop tablespace is_order_056;
create regular tablespace is_order_056 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_057 of D1
drop tablespace is_order_057;
create regular tablespace is_order_057 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_058 of D1
drop tablespace is_order_058;
create regular tablespace is_order_058 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_059 of D1
drop tablespace is_order_059;
create regular tablespace is_order_059 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_060 of D1
drop tablespace is_order_060;
create regular tablespace is_order_060 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F12V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_061 of D1
drop tablespace is_order_061;
create regular tablespace is_order_061 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_062 of D1
drop tablespace is_order_062;
create regular tablespace is_order_062 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_063 of D1
drop tablespace is_order_063;
create regular tablespace is_order_063 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_064 of D1
drop tablespace is_order_064;
create regular tablespace is_order_064 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_065 of D1
drop tablespace is_order_065;
create regular tablespace is_order_065 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_066 of D1
drop tablespace is_order_066;
create regular tablespace is_order_066 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_067 of D1
drop tablespace is_order_067;
create regular tablespace is_order_067 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_068 of D1
drop tablespace is_order_068;
create regular tablespace is_order_068 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_069 of D1
drop tablespace is_order_069;
create regular tablespace is_order_069 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_070 of D1
drop tablespace is_order_070;
create regular tablespace is_order_070 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_071 of D1
drop tablespace is_order_071;
create regular tablespace is_order_071 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_072 of D1
drop tablespace is_order_072;
create regular tablespace is_order_072 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F15V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_073 of D1
drop tablespace is_order_073;
create regular tablespace is_order_073 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F15V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_074 of D1
drop tablespace is_order_074;
create regular tablespace is_order_074 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F15V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_075 of D1
drop tablespace is_order_075;
create regular tablespace is_order_075 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F15V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_076 of D1
drop tablespace is_order_076;
create regular tablespace is_order_076 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F16V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_077 of D1
drop tablespace is_order_077;
create regular tablespace is_order_077 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F16V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_078 of D1
drop tablespace is_order_078;
create regular tablespace is_order_078 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F16V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_079 of D1
drop tablespace is_order_079;
create regular tablespace is_order_079 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F16V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_080 of D1
drop tablespace is_order_080;
create regular tablespace is_order_080 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F16V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_081 of D1
drop tablespace is_order_081;
create regular tablespace is_order_081 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_082 of D1
drop tablespace is_order_082;
create regular tablespace is_order_082 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_083 of D1
drop tablespace is_order_083;
create regular tablespace is_order_083 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_084 of D1
drop tablespace is_order_084;
create regular tablespace is_order_084 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_085 of D1
drop tablespace is_order_085;
create regular tablespace is_order_085 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_086 of D1
drop tablespace is_order_086;
create regular tablespace is_order_086 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_087 of D1
drop tablespace is_order_087;
create regular tablespace is_order_087 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_088 of D1
drop tablespace is_order_088;
create regular tablespace is_order_088 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_089 of D1
drop tablespace is_order_089;
create regular tablespace is_order_089 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_090 of D1
drop tablespace is_order_090;
create regular tablespace is_order_090 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V5ORDI' 262656
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_091 of D1
drop tablespace is_order_091;
create regular tablespace is_order_091 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_092 of D1
drop tablespace is_order_092;
create regular tablespace is_order_092 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_093 of D1
drop tablespace is_order_093;
create regular tablespace is_order_093 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_094 of D1
drop tablespace is_order_094;
create regular tablespace is_order_094 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_095 of D1
drop tablespace is_order_095;
create regular tablespace is_order_095 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F19V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_096 of D1
drop tablespace is_order_096;
create regular tablespace is_order_096 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_097 of D1
drop tablespace is_order_097;
create regular tablespace is_order_097 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_098 of D1
drop tablespace is_order_098;
create regular tablespace is_order_098 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_099 of D1
drop tablespace is_order_099;
create regular tablespace is_order_099 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_100 of D1
drop tablespace is_order_100;
create regular tablespace is_order_100 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F20V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_101 of D1
drop tablespace is_order_101;
create regular tablespace is_order_101 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_102 of D1
drop tablespace is_order_102;
create regular tablespace is_order_102 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_103 of D1
drop tablespace is_order_103;
create regular tablespace is_order_103 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_104 of D1
drop tablespace is_order_104;
create regular tablespace is_order_104 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_105 of D1
drop tablespace is_order_105;
create regular tablespace is_order_105 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_106 of D1
drop tablespace is_order_106;
create regular tablespace is_order_106 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_107 of D1
drop tablespace is_order_107;
create regular tablespace is_order_107 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_108 of D1
drop tablespace is_order_108;
create regular tablespace is_order_108 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_109 of D1
drop tablespace is_order_109;
create regular tablespace is_order_109 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F22V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_110 of D1
drop tablespace is_order_110;
create regular tablespace is_order_110 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F22V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_111 of D1
drop tablespace is_order_111;
create regular tablespace is_order_111 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_112 of D1
drop tablespace is_order_112;
create regular tablespace is_order_112 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_113 of D1
drop tablespace is_order_113;
create regular tablespace is_order_113 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_114 of D1
drop tablespace is_order_114;
create regular tablespace is_order_114 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_115 of D1
drop tablespace is_order_115;
create regular tablespace is_order_115 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F23V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_116 of D1
drop tablespace is_order_116;
create regular tablespace is_order_116 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_117 of D1
drop tablespace is_order_117;
create regular tablespace is_order_117 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_118 of D1
drop tablespace is_order_118;
create regular tablespace is_order_118 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_119 of D1
drop tablespace is_order_119;
create regular tablespace is_order_119 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_120 of D1
drop tablespace is_order_120;
create regular tablespace is_order_120 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_121 of D1
drop tablespace is_order_121;
create regular tablespace is_order_121 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_122 of D1
drop tablespace is_order_122;
create regular tablespace is_order_122 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_123 of D1
drop tablespace is_order_123;
create regular tablespace is_order_123 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_124 of D1
drop tablespace is_order_124;
create regular tablespace is_order_124 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_125 of D1
drop tablespace is_order_125;
create regular tablespace is_order_125 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_126 of D1
drop tablespace is_order_126;
create regular tablespace is_order_126 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_127 of D1
```

```
drop tablespace is_order_127;
create regular tablespace is_order_127 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_128 of D1
drop tablespace is_order_128;
create regular tablespace is_order_128 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_129 of D1
drop tablespace is_order_129;
create regular tablespace is_order_129 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_130 of D1
drop tablespace is_order_130;
create regular tablespace is_order_130 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F26V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_131 of D1
drop tablespace is_order_131;
create regular tablespace is_order_131 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_132 of D1
drop tablespace is_order_132;
create regular tablespace is_order_132 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_133 of D1
drop tablespace is_order_133;
create regular tablespace is_order_133 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_134 of D1
drop tablespace is_order_134;
create regular tablespace is_order_134 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_135 of D1
drop tablespace is_order_135;
create regular tablespace is_order_135 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F27V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_136 of D1
drop tablespace is_order_136;
create regular tablespace is_order_136 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_137 of D1
drop tablespace is_order_137;
create regular tablespace is_order_137 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_138 of D1
drop tablespace is_order_138;
create regular tablespace is_order_138 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_139 of D1
drop tablespace is_order_139;
create regular tablespace is_order_139 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_140 of D1
drop tablespace is_order_140;
create regular tablespace is_order_140 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_141 of D1
drop tablespace is_order_141;
create regular tablespace is_order_141 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_142 of D1
drop tablespace is_order_142;
create regular tablespace is_order_142 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_143 of D1
drop tablespace is_order_143;
create regular tablespace is_order_143 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_144 of D1
drop tablespace is_order_144;
create regular tablespace is_order_144 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_145 of D1
drop tablespace is_order_145;
create regular tablespace is_order_145 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F29V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_146 of D1
drop tablespace is_order_146;
create regular tablespace is_order_146 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_147 of D1
drop tablespace is_order_147;
create regular tablespace is_order_147 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_148 of D1
drop tablespace is_order_148;
create regular tablespace is_order_148 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_149 of D1
drop tablespace is_order_149;
create regular tablespace is_order_149 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_150 of D1
drop tablespace is_order_150;
create regular tablespace is_order_150 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F30V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_151 of D1
drop tablespace is_order_151;
create regular tablespace is_order_151 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_152 of D1
drop tablespace is_order_152;
create regular tablespace is_order_152 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_153 of D1
drop tablespace is_order_153;
create regular tablespace is_order_153 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_154 of D1
drop tablespace is_order_154;
create regular tablespace is_order_154 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_155 of D1
drop tablespace is_order_155;
create regular tablespace is_order_155 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F31V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_156 of D1
drop tablespace is_order_156;
create regular tablespace is_order_156 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_157 of D1
drop tablespace is_order_157;
create regular tablespace is_order_157 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_158 of D1
drop tablespace is_order_158;
create regular tablespace is_order_158 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V3ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_159 of D1
drop tablespace is_order_159;
create regular tablespace is_order_159 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V4ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_160 of D1
drop tablespace is_order_160;
create regular tablespace is_order_160 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V5ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_161 of D1
drop tablespace is_order_161;
create regular tablespace is_order_161 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V1ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_162 of D1
drop tablespace is_order_162;
create regular tablespace is_order_162 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V2ORDI' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_163 of D1
drop tablespace is_order_163;
create regular tablespace is_order_163 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V3ORDI' 262656
```

```
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_164 of D1
drop tablespace is_order_164;
create regular tablespace is_order_164 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F33V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_165 of D1
drop tablespace is_order_165;
create regular tablespace is_order_165 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F33V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_166 of D1
drop tablespace is_order_166;
create regular tablespace is_order_166 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_167 of D1
drop tablespace is_order_167;
create regular tablespace is_order_167 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_168 of D1
drop tablespace is_order_168;
create regular tablespace is_order_168 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_169 of D1
drop tablespace is_order_169;
create regular tablespace is_order_169 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_170 of D1
drop tablespace is_order_170;
create regular tablespace is_order_170 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F34V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_171 of D1
drop tablespace is_order_171;
create regular tablespace is_order_171 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_172 of D1
drop tablespace is_order_172;
create regular tablespace is_order_172 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_173 of D1
drop tablespace is_order_173;
create regular tablespace is_order_173 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_174 of D1
drop tablespace is_order_174;
create regular tablespace is_order_174 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_175 of D1
drop tablespace is_order_175;
create regular tablespace is_order_175 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_176 of D1
drop tablespace is_order_176;
create regular tablespace is_order_176 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_177 of D1
drop tablespace is_order_177;
create regular tablespace is_order_177 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V2ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_178 of D1
drop tablespace is_order_178;
create regular tablespace is_order_178 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V3ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_179 of D1
drop tablespace is_order_179;
create regular tablespace is_order_179 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V4ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_180 of D1
drop tablespace is_order_180;
create regular tablespace is_order_180 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V5ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_181 of D1
drop tablespace is_order_181;
create regular tablespace is_order_181 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V1ORDI' 262656
                )
        extentsize 64
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_182 of D1
drop tablespace is_order_182;
create regular tablespace is_order_182 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_183 of D1
drop tablespace is_order_183;
create regular tablespace is_order_183 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_184 of D1
drop tablespace is_order_184;
create regular tablespace is_order_184 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_185 of D1
drop tablespace is_order_185;
create regular tablespace is_order_185 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F37V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_186 of D1
drop tablespace is_order_186;
create regular tablespace is_order_186 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_187 of D1
drop tablespace is_order_187;
create regular tablespace is_order_187 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_188 of D1
drop tablespace is_order_188;
create regular tablespace is_order_188 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_189 of D1
drop tablespace is_order_189;
create regular tablespace is_order_189 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_190 of D1
drop tablespace is_order_190;
create regular tablespace is_order_190 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F38V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_191 of D1
drop tablespace is_order_191;
create regular tablespace is_order_191 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_192 of D1
drop tablespace is_order_192;
create regular tablespace is_order_192 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_193 of D1
drop tablespace is_order_193;
create regular tablespace is_order_193 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_194 of D1
drop tablespace is_order_194;
create regular tablespace is_order_194 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_195 of D1
drop tablespace is_order_195;
create regular tablespace is_order_195 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V5ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_196 of D1
drop tablespace is_order_196;
create regular tablespace is_order_196 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V1ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_197 of D1
drop tablespace is_order_197;
create regular tablespace is_order_197 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V2ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_198 of D1
drop tablespace is_order_198;
create regular tablespace is_order_198 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V3ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_199 of D1
drop tablespace is_order_199;
create regular tablespace is_order_199 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V4ORDI' 262656
                 )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for is_order_200 of D1
```

```
drop tablespace is_order_200;
create regular tablespace is_order_200 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F40V5ORDl' 262656
               )
        extentsize 64
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
connect reset;
```

ts/crts_customer.ddl

```
connect to tpcc;
-- now creating TS for ts_customer_001 of D1
drop tablespace ts_customer_001;
create regular tablespace ts_customer_001 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_002 of D1
drop tablespace ts_customer_002;
create regular tablespace ts_customer_002 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_003 of D1
drop tablespace ts_customer_003;
create regular tablespace ts_customer_003 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_004 of D1
drop tablespace ts_customer_004;
create regular tablespace ts_customer_004 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_005 of D1
drop tablespace ts_customer_005;
create regular tablespace ts_customer_005 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_006 of D1
drop tablespace ts_customer_006;
create regular tablespace ts_customer_006 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_007 of D1
drop tablespace ts_customer_007;
create regular tablespace ts_customer_007 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_008 of D1
drop tablespace ts_customer_008;
create regular tablespace ts_customer_008 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_009 of D1
drop tablespace ts_customer_009;
create regular tablespace ts_customer_009 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_010 of D1
drop tablespace ts_customer_010;
create regular tablespace ts_customer_010 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_011 of D1
drop tablespace ts_customer_011;
create regular tablespace ts_customer_011 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_012 of D1
drop tablespace ts_customer_012;
create regular tablespace ts_customer_012 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_013 of D1
drop tablespace ts_customer_013;
create regular tablespace ts_customer_013 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_014 of D1
drop tablespace ts_customer_014;
create regular tablespace ts_customer_014 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_015 of D1
drop tablespace ts_customer_015;
create regular tablespace ts_customer_015 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_016 of D1
drop tablespace ts_customer_016;
create regular tablespace ts_customer_016 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_017 of D1
drop tablespace ts_customer_017;
create regular tablespace ts_customer_017 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_018 of D1
drop tablespace ts_customer_018;
create regular tablespace ts_customer_018 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_019 of D1
```

```
drop tablespace ts_customer_019;
create regular tablespace ts_customer_019 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_020 of D1
drop tablespace ts_customer_020;
create regular tablespace ts_customer_020 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_021 of D1
drop tablespace ts_customer_021;
create regular tablespace ts_customer_021 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_022 of D1
drop tablespace ts_customer_022;
create regular tablespace ts_customer_022 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_023 of D1
drop tablespace ts_customer_023;
create regular tablespace ts_customer_023 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_024 of D1
drop tablespace ts_customer_024;
create regular tablespace ts_customer_024 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_025 of D1
drop tablespace ts_customer_025;
create regular tablespace ts_customer_025 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_026 of D1
drop tablespace ts_customer_026;
create regular tablespace ts_customer_026 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_027 of D1
drop tablespace ts_customer_027;
create regular tablespace ts_customer_027 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_028 of D1
drop tablespace ts_customer_028;
create regular tablespace ts_customer_028 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_029 of D1
drop tablespace ts_customer_029;
create regular tablespace ts_customer_029 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_030 of D1
drop tablespace ts_customer_030;
create regular tablespace ts_customer_030 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_031 of D1
drop tablespace ts_customer_031;
create regular tablespace ts_customer_031 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_032 of D1
drop tablespace ts_customer_032;
create regular tablespace ts_customer_032 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_033 of D1
drop tablespace ts_customer_033;
create regular tablespace ts_customer_033 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_034 of D1
drop tablespace ts_customer_034;
create regular tablespace ts_customer_034 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_035 of D1
drop tablespace ts_customer_035;
create regular tablespace ts_customer_035 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_036 of D1
drop tablespace ts_customer_036;
create regular tablespace ts_customer_036 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_037 of D1
drop tablespace ts_customer_037;
create regular tablespace ts_customer_037 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_038 of D1
drop tablespace ts_customer_038;
create regular tablespace ts_customer_038 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
```

```
-- now creating TS for ts_customer_039 of D1
drop tablespace ts_customer_039;
create regular tablespace ts_customer_039 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_040 of D1
drop tablespace ts_customer_040;
create regular tablespace ts_customer_040 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_041 of D1
drop tablespace ts_customer_041;
create regular tablespace ts_customer_041 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_042 of D1
drop tablespace ts_customer_042;
create regular tablespace ts_customer_042 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_043 of D1
drop tablespace ts_customer_043;
create regular tablespace ts_customer_043 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_044 of D1
drop tablespace ts_customer_044;
create regular tablespace ts_customer_044 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_045 of D1
drop tablespace ts_customer_045;
create regular tablespace ts_customer_045 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_046 of D1
drop tablespace ts_customer_046;
create regular tablespace ts_customer_046 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_047 of D1
drop tablespace ts_customer_047;
create regular tablespace ts_customer_047 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_048 of D1
drop tablespace ts_customer_048;
create regular tablespace ts_customer_048 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_049 of D1
drop tablespace ts_customer_049;
create regular tablespace ts_customer_049 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_050 of D1
drop tablespace ts_customer_050;
create regular tablespace ts_customer_050 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_051 of D1
drop tablespace ts_customer_051;
create regular tablespace ts_customer_051 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_052 of D1
drop tablespace ts_customer_052;
create regular tablespace ts_customer_052 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_053 of D1
drop tablespace ts_customer_053;
create regular tablespace ts_customer_053 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_054 of D1
drop tablespace ts_customer_054;
create regular tablespace ts_customer_054 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_055 of D1
drop tablespace ts_customer_055;
create regular tablespace ts_customer_055 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_056 of D1
drop tablespace ts_customer_056;
create regular tablespace ts_customer_056 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V1CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_057 of D1
drop tablespace ts_customer_057;
create regular tablespace ts_customer_057 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V2CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_058 of D1
drop tablespace ts_customer_058;
create regular tablespace ts_customer_058 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
```

```
commit;
-- now creating TS for ts_customer_059 of D1
drop tablespace ts_customer_059;
create regular tablespace ts_customer_059 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F12V4CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_060 of D1
drop tablespace ts_customer_060;
create regular tablespace ts_customer_060 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F12V5CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_061 of D1
drop tablespace ts_customer_061;
create regular tablespace ts_customer_061 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F13V1CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_062 of D1
drop tablespace ts_customer_062;
create regular tablespace ts_customer_062 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F13V2CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_063 of D1
drop tablespace ts_customer_063;
create regular tablespace ts_customer_063 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F13V3CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_064 of D1
drop tablespace ts_customer_064;
create regular tablespace ts_customer_064 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F13V4CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_065 of D1
drop tablespace ts_customer_065;
create regular tablespace ts_customer_065 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F13V5CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_066 of D1
drop tablespace ts_customer_066;
create regular tablespace ts_customer_066 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F14V1CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_067 of D1
drop tablespace ts_customer_067;
create regular tablespace ts_customer_067 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F14V2CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_068 of D1
drop tablespace ts_customer_068;
create regular tablespace ts_customer_068 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F14V3CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_069 of D1
drop tablespace ts_customer_069;
create regular tablespace ts_customer_069 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F14V4CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_070 of D1
drop tablespace ts_customer_070;
create regular tablespace ts_customer_070 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F14V5CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_071 of D1
drop tablespace ts_customer_071;
create regular tablespace ts_customer_071 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V1CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_072 of D1
drop tablespace ts_customer_072;
create regular tablespace ts_customer_072 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V2CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_073 of D1
drop tablespace ts_customer_073;
create regular tablespace ts_customer_073 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V3CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_074 of D1
drop tablespace ts_customer_074;
create regular tablespace ts_customer_074 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V4CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_075 of D1
drop tablespace ts_customer_075;
create regular tablespace ts_customer_075 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V5CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_076 of D1
drop tablespace ts_customer_076;
create regular tablespace ts_customer_076 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V1CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_077 of D1
drop tablespace ts_customer_077;
create regular tablespace ts_customer_077 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V2CST' 10080512
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_customer_078 of D1
drop tablespace ts_customer_078;
create regular tablespace ts_customer_078 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V3CST' 10080512
                       )
           extentsize 256
```

```
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_079 of D1
drop tablespace ts_customer_079;
create regular tablespace ts_customer_079 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F16V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_080 of D1
drop tablespace ts_customer_080;
create regular tablespace ts_customer_080 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F16V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_081 of D1
drop tablespace ts_customer_081;
create regular tablespace ts_customer_081 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F17V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_082 of D1
drop tablespace ts_customer_082;
create regular tablespace ts_customer_082 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F17V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_083 of D1
drop tablespace ts_customer_083;
create regular tablespace ts_customer_083 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F17V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_084 of D1
drop tablespace ts_customer_084;
create regular tablespace ts_customer_084 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F17V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_085 of D1
drop tablespace ts_customer_085;
create regular tablespace ts_customer_085 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F17V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_086 of D1
drop tablespace ts_customer_086;
create regular tablespace ts_customer_086 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F18V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_087 of D1
drop tablespace ts_customer_087;
create regular tablespace ts_customer_087 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F18V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_088 of D1
drop tablespace ts_customer_088;
create regular tablespace ts_customer_088 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F18V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_089 of D1
drop tablespace ts_customer_089;
create regular tablespace ts_customer_089 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F18V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_090 of D1
drop tablespace ts_customer_090;
create regular tablespace ts_customer_090 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F18V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_091 of D1
drop tablespace ts_customer_091;
create regular tablespace ts_customer_091 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_092 of D1
drop tablespace ts_customer_092;
create regular tablespace ts_customer_092 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_093 of D1
drop tablespace ts_customer_093;
create regular tablespace ts_customer_093 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_094 of D1
drop tablespace ts_customer_094;
create regular tablespace ts_customer_094 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_095 of D1
drop tablespace ts_customer_095;
create regular tablespace ts_customer_095 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_096 of D1
drop tablespace ts_customer_096;
create regular tablespace ts_customer_096 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_097 of D1
drop tablespace ts_customer_097;
create regular tablespace ts_customer_097 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_098 of D1
drop tablespace ts_customer_098;
create regular tablespace ts_customer_098 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V3CST' 10080512
                )
```

```
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_099 of D1
drop tablespace ts_customer_099;
create regular tablespace ts_customer_099 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_100 of D1
drop tablespace ts_customer_100;
create regular tablespace ts_customer_100 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_101 of D1
drop tablespace ts_customer_101;
create regular tablespace ts_customer_101 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_102 of D1
drop tablespace ts_customer_102;
create regular tablespace ts_customer_102 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_103 of D1
drop tablespace ts_customer_103;
create regular tablespace ts_customer_103 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_104 of D1
drop tablespace ts_customer_104;
create regular tablespace ts_customer_104 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_105 of D1
drop tablespace ts_customer_105;
create regular tablespace ts_customer_105 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_106 of D1
drop tablespace ts_customer_106;
create regular tablespace ts_customer_106 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_107 of D1
drop tablespace ts_customer_107;
create regular tablespace ts_customer_107 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_108 of D1
drop tablespace ts_customer_108;
create regular tablespace ts_customer_108 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_109 of D1
drop tablespace ts_customer_109;
create regular tablespace ts_customer_109 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_110 of D1
drop tablespace ts_customer_110;
create regular tablespace ts_customer_110 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_111 of D1
drop tablespace ts_customer_111;
create regular tablespace ts_customer_111 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_112 of D1
drop tablespace ts_customer_112;
create regular tablespace ts_customer_112 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_113 of D1
drop tablespace ts_customer_113;
create regular tablespace ts_customer_113 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_114 of D1
drop tablespace ts_customer_114;
create regular tablespace ts_customer_114 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_115 of D1
drop tablespace ts_customer_115;
create regular tablespace ts_customer_115 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_116 of D1
drop tablespace ts_customer_116;
create regular tablespace ts_customer_116 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_117 of D1
drop tablespace ts_customer_117;
create regular tablespace ts_customer_117 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_118 of D1
drop tablespace ts_customer_118;
create regular tablespace ts_customer_118 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V3CST' 10080512
```

```
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_119 of D1
drop tablespace ts_customer_119;
create regular tablespace ts_customer_119 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F24V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_120 of D1
drop tablespace ts_customer_120;
create regular tablespace ts_customer_120 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F24V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_121 of D1
drop tablespace ts_customer_121;
create regular tablespace ts_customer_121 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_122 of D1
drop tablespace ts_customer_122;
create regular tablespace ts_customer_122 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_123 of D1
drop tablespace ts_customer_123;
create regular tablespace ts_customer_123 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_124 of D1
drop tablespace ts_customer_124;
create regular tablespace ts_customer_124 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_125 of D1
drop tablespace ts_customer_125;
create regular tablespace ts_customer_125 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_126 of D1
drop tablespace ts_customer_126;
create regular tablespace ts_customer_126 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_127 of D1
drop tablespace ts_customer_127;
create regular tablespace ts_customer_127 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_128 of D1
drop tablespace ts_customer_128;
create regular tablespace ts_customer_128 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_129 of D1
drop tablespace ts_customer_129;
create regular tablespace ts_customer_129 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_130 of D1
drop tablespace ts_customer_130;
create regular tablespace ts_customer_130 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_131 of D1
drop tablespace ts_customer_131;
create regular tablespace ts_customer_131 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_132 of D1
drop tablespace ts_customer_132;
create regular tablespace ts_customer_132 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_133 of D1
drop tablespace ts_customer_133;
create regular tablespace ts_customer_133 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_134 of D1
drop tablespace ts_customer_134;
create regular tablespace ts_customer_134 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_135 of D1
drop tablespace ts_customer_135;
create regular tablespace ts_customer_135 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_136 of D1
drop tablespace ts_customer_136;
create regular tablespace ts_customer_136 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_137 of D1
drop tablespace ts_customer_137;
create regular tablespace ts_customer_137 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_138 of D1
drop tablespace ts_customer_138;
create regular tablespace ts_customer_138 pagesize 4K
         managed by database
         using
         (
```

```
                device '/dev/rD1F28V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_139 of D1
drop tablespace ts_customer_139;
create regular tablespace ts_customer_139 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_140 of D1
drop tablespace ts_customer_140;
create regular tablespace ts_customer_140 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_141 of D1
drop tablespace ts_customer_141;
create regular tablespace ts_customer_141 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_142 of D1
drop tablespace ts_customer_142;
create regular tablespace ts_customer_142 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_143 of D1
drop tablespace ts_customer_143;
create regular tablespace ts_customer_143 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_144 of D1
drop tablespace ts_customer_144;
create regular tablespace ts_customer_144 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_145 of D1
drop tablespace ts_customer_145;
create regular tablespace ts_customer_145 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_146 of D1
drop tablespace ts_customer_146;
create regular tablespace ts_customer_146 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_147 of D1
drop tablespace ts_customer_147;
create regular tablespace ts_customer_147 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_148 of D1
drop tablespace ts_customer_148;
create regular tablespace ts_customer_148 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_149 of D1
drop tablespace ts_customer_149;
create regular tablespace ts_customer_149 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_150 of D1
drop tablespace ts_customer_150;
create regular tablespace ts_customer_150 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_151 of D1
drop tablespace ts_customer_151;
create regular tablespace ts_customer_151 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_152 of D1
drop tablespace ts_customer_152;
create regular tablespace ts_customer_152 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_153 of D1
drop tablespace ts_customer_153;
create regular tablespace ts_customer_153 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_154 of D1
drop tablespace ts_customer_154;
create regular tablespace ts_customer_154 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V4CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_155 of D1
drop tablespace ts_customer_155;
create regular tablespace ts_customer_155 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V5CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_156 of D1
drop tablespace ts_customer_156;
create regular tablespace ts_customer_156 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V1CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_157 of D1
drop tablespace ts_customer_157;
create regular tablespace ts_customer_157 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V2CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_158 of D1
drop tablespace ts_customer_158;
create regular tablespace ts_customer_158 pagesize 4K
         managed by database
         using
```

```
        (
                device '/dev/rD1F32V3CST' 10080512
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_159 of D1
drop tablespace ts_customer_159;
create regular tablespace ts_customer_159 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_160 of D1
drop tablespace ts_customer_160;
create regular tablespace ts_customer_160 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_161 of D1
drop tablespace ts_customer_161;
create regular tablespace ts_customer_161 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_162 of D1
drop tablespace ts_customer_162;
create regular tablespace ts_customer_162 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_163 of D1
drop tablespace ts_customer_163;
create regular tablespace ts_customer_163 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_164 of D1
drop tablespace ts_customer_164;
create regular tablespace ts_customer_164 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_165 of D1
drop tablespace ts_customer_165;
create regular tablespace ts_customer_165 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_166 of D1
drop tablespace ts_customer_166;
create regular tablespace ts_customer_166 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_167 of D1
drop tablespace ts_customer_167;
create regular tablespace ts_customer_167 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_168 of D1
drop tablespace ts_customer_168;
create regular tablespace ts_customer_168 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_169 of D1
drop tablespace ts_customer_169;
create regular tablespace ts_customer_169 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_170 of D1
drop tablespace ts_customer_170;
create regular tablespace ts_customer_170 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_171 of D1
drop tablespace ts_customer_171;
create regular tablespace ts_customer_171 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_172 of D1
drop tablespace ts_customer_172;
create regular tablespace ts_customer_172 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_173 of D1
drop tablespace ts_customer_173;
create regular tablespace ts_customer_173 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V3CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_174 of D1
drop tablespace ts_customer_174;
create regular tablespace ts_customer_174 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V4CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_175 of D1
drop tablespace ts_customer_175;
create regular tablespace ts_customer_175 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V5CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_176 of D1
drop tablespace ts_customer_176;
create regular tablespace ts_customer_176 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F36V1CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_177 of D1
drop tablespace ts_customer_177;
create regular tablespace ts_customer_177 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F36V2CST' 10080512
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_178 of D1
drop tablespace ts_customer_178;
create regular tablespace ts_customer_178 pagesize 4K
         managed by database
```

```
            using
            (
                    device '/dev/rD1F36V3CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_179 of D1
drop tablespace ts_customer_179;
create regular tablespace ts_customer_179 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F36V4CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_180 of D1
drop tablespace ts_customer_180;
create regular tablespace ts_customer_180 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F36V5CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_181 of D1
drop tablespace ts_customer_181;
create regular tablespace ts_customer_181 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F37V1CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_182 of D1
drop tablespace ts_customer_182;
create regular tablespace ts_customer_182 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F37V2CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_183 of D1
drop tablespace ts_customer_183;
create regular tablespace ts_customer_183 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F37V3CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_184 of D1
drop tablespace ts_customer_184;
create regular tablespace ts_customer_184 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F37V4CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_185 of D1
drop tablespace ts_customer_185;
create regular tablespace ts_customer_185 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F37V5CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_186 of D1
drop tablespace ts_customer_186;
create regular tablespace ts_customer_186 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F38V1CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_187 of D1
drop tablespace ts_customer_187;
create regular tablespace ts_customer_187 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F38V2CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_188 of D1
drop tablespace ts_customer_188;
create regular tablespace ts_customer_188 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F38V3CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_189 of D1
drop tablespace ts_customer_189;
create regular tablespace ts_customer_189 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F38V4CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_190 of D1
drop tablespace ts_customer_190;
create regular tablespace ts_customer_190 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F38V5CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_191 of D1
drop tablespace ts_customer_191;
create regular tablespace ts_customer_191 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F39V1CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_192 of D1
drop tablespace ts_customer_192;
create regular tablespace ts_customer_192 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F39V2CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_193 of D1
drop tablespace ts_customer_193;
create regular tablespace ts_customer_193 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F39V3CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_194 of D1
drop tablespace ts_customer_194;
create regular tablespace ts_customer_194 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F39V4CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_195 of D1
drop tablespace ts_customer_195;
create regular tablespace ts_customer_195 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F39V5CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_196 of D1
drop tablespace ts_customer_196;
create regular tablespace ts_customer_196 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F40V1CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_197 of D1
drop tablespace ts_customer_197;
create regular tablespace ts_customer_197 pagesize 4K
            managed by database
            using
            (
                    device '/dev/rD1F40V2CST' 10080512
                  )
          extentsize 256
          prefetchsize 4096;
commit;
-- now creating TS for ts_customer_198 of D1
drop tablespace ts_customer_198;
create regular tablespace ts_customer_198 pagesize 4K
```

```
        managed by database
        using
        (
                device '/dev/rD1F40V3CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_199 of D1
drop tablespace ts_customer_199;
create regular tablespace ts_customer_199 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F40V4CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_customer_200 of D1
drop tablespace ts_customer_200;
create regular tablespace ts_customer_200 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F40V5CST' 10080512
        )
        extentsize 256
        prefetchsize 4096;
commit;
connect reset;
```

ts/crts_dist.ddl

```
connect to tpcc;
-- now creating TS for ts_dist_001 of D1
drop tablespace ts_dist_001;
create regular tablespace ts_dist_001 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V1DIST' 1280,
                device '/dev/rD1F01V2DIST' 1280,
                device '/dev/rD1F01V3DIST' 1280,
                device '/dev/rD1F01V4DIST' 1280,
                device '/dev/rD1F01V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_002 of D1
drop tablespace ts_dist_002;
create regular tablespace ts_dist_002 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V1DIST' 1280,
                device '/dev/rD1F02V2DIST' 1280,
                device '/dev/rD1F02V3DIST' 1280,
                device '/dev/rD1F02V4DIST' 1280,
                device '/dev/rD1F02V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_003 of D1
drop tablespace ts_dist_003;
create regular tablespace ts_dist_003 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V1DIST' 1280,
                device '/dev/rD1F03V2DIST' 1280,
                device '/dev/rD1F03V3DIST' 1280,
                device '/dev/rD1F03V4DIST' 1280,
                device '/dev/rD1F03V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_004 of D1
drop tablespace ts_dist_004;
create regular tablespace ts_dist_004 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V1DIST' 1280,
                device '/dev/rD1F04V2DIST' 1280,
                device '/dev/rD1F04V3DIST' 1280,
                device '/dev/rD1F04V4DIST' 1280,
                device '/dev/rD1F04V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_005 of D1
drop tablespace ts_dist_005;
create regular tablespace ts_dist_005 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V1DIST' 1280,
                device '/dev/rD1F05V2DIST' 1280,
                device '/dev/rD1F05V3DIST' 1280,
                device '/dev/rD1F05V4DIST' 1280,
                device '/dev/rD1F05V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_006 of D1
drop tablespace ts_dist_006;
create regular tablespace ts_dist_006 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V1DIST' 1280,
                device '/dev/rD1F06V2DIST' 1280,
                device '/dev/rD1F06V3DIST' 1280,
                device '/dev/rD1F06V4DIST' 1280,
                device '/dev/rD1F06V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_007 of D1
drop tablespace ts_dist_007;
create regular tablespace ts_dist_007 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V1DIST' 1280,
                device '/dev/rD1F07V2DIST' 1280,
                device '/dev/rD1F07V3DIST' 1280,
                device '/dev/rD1F07V4DIST' 1280,
                device '/dev/rD1F07V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_008 of D1
drop tablespace ts_dist_008;
create regular tablespace ts_dist_008 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V1DIST' 1280,
                device '/dev/rD1F08V2DIST' 1280,
                device '/dev/rD1F08V3DIST' 1280,
                device '/dev/rD1F08V4DIST' 1280,
                device '/dev/rD1F08V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_009 of D1
drop tablespace ts_dist_009;
create regular tablespace ts_dist_009 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V1DIST' 1280,
                device '/dev/rD1F09V2DIST' 1280,
                device '/dev/rD1F09V3DIST' 1280,
                device '/dev/rD1F09V4DIST' 1280,
                device '/dev/rD1F09V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_010 of D1
drop tablespace ts_dist_010;
create regular tablespace ts_dist_010 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V1DIST' 1280,
                device '/dev/rD1F10V2DIST' 1280,
                device '/dev/rD1F10V3DIST' 1280,
                device '/dev/rD1F10V4DIST' 1280,
                device '/dev/rD1F10V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_011 of D1
drop tablespace ts_dist_011;
create regular tablespace ts_dist_011 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V1DIST' 1280,
                device '/dev/rD1F11V2DIST' 1280,
                device '/dev/rD1F11V3DIST' 1280,
                device '/dev/rD1F11V4DIST' 1280,
                device '/dev/rD1F11V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_012 of D1
drop tablespace ts_dist_012;
create regular tablespace ts_dist_012 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V1DIST' 1280,
                device '/dev/rD1F12V2DIST' 1280,
                device '/dev/rD1F12V3DIST' 1280,
                device '/dev/rD1F12V4DIST' 1280,
                device '/dev/rD1F12V5DIST' 1280
        )
        extentsize 256
        prefetchsize 4096;
commit;
```

```
-- now creating TS for ts_dist_013 of D1
drop tablespace ts_dist_013;
create regular tablespace ts_dist_013 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V1DIST' 1280,
                device '/dev/rD1F13V2DIST' 1280,
                device '/dev/rD1F13V3DIST' 1280,
                device '/dev/rD1F13V4DIST' 1280,
                device '/dev/rD1F13V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_014 of D1
drop tablespace ts_dist_014;
create regular tablespace ts_dist_014 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V1DIST' 1280,
                device '/dev/rD1F14V2DIST' 1280,
                device '/dev/rD1F14V3DIST' 1280,
                device '/dev/rD1F14V4DIST' 1280,
                device '/dev/rD1F14V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_015 of D1
drop tablespace ts_dist_015;
create regular tablespace ts_dist_015 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F15V1DIST' 1280,
                device '/dev/rD1F15V2DIST' 1280,
                device '/dev/rD1F15V3DIST' 1280,
                device '/dev/rD1F15V4DIST' 1280,
                device '/dev/rD1F15V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_016 of D1
drop tablespace ts_dist_016;
create regular tablespace ts_dist_016 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F16V1DIST' 1280,
                device '/dev/rD1F16V2DIST' 1280,
                device '/dev/rD1F16V3DIST' 1280,
                device '/dev/rD1F16V4DIST' 1280,
                device '/dev/rD1F16V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_017 of D1
drop tablespace ts_dist_017;
create regular tablespace ts_dist_017 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F17V1DIST' 1280,
                device '/dev/rD1F17V2DIST' 1280,
                device '/dev/rD1F17V3DIST' 1280,
                device '/dev/rD1F17V4DIST' 1280,
                device '/dev/rD1F17V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_018 of D1
drop tablespace ts_dist_018;
create regular tablespace ts_dist_018 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F18V1DIST' 1280,
                device '/dev/rD1F18V2DIST' 1280,
                device '/dev/rD1F18V3DIST' 1280,
                device '/dev/rD1F18V4DIST' 1280,
                device '/dev/rD1F18V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_019 of D1
drop tablespace ts_dist_019;
create regular tablespace ts_dist_019 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F19V1DIST' 1280,
                device '/dev/rD1F19V2DIST' 1280,
                device '/dev/rD1F19V3DIST' 1280,
                device '/dev/rD1F19V4DIST' 1280,
                device '/dev/rD1F19V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_020 of D1
drop tablespace ts_dist_020;
create regular tablespace ts_dist_020 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F20V1DIST' 1280,
                device '/dev/rD1F20V2DIST' 1280,
                device '/dev/rD1F20V3DIST' 1280,
                device '/dev/rD1F20V4DIST' 1280,
                device '/dev/rD1F20V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_021 of D1
drop tablespace ts_dist_021;
create regular tablespace ts_dist_021 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F21V1DIST' 1280,
                device '/dev/rD1F21V2DIST' 1280,
                device '/dev/rD1F21V3DIST' 1280,
                device '/dev/rD1F21V4DIST' 1280,
                device '/dev/rD1F21V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_022 of D1
drop tablespace ts_dist_022;
create regular tablespace ts_dist_022 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F22V1DIST' 1280,
                device '/dev/rD1F22V2DIST' 1280,
                device '/dev/rD1F22V3DIST' 1280,
                device '/dev/rD1F22V4DIST' 1280,
                device '/dev/rD1F22V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_023 of D1
drop tablespace ts_dist_023;
create regular tablespace ts_dist_023 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F23V1DIST' 1280,
                device '/dev/rD1F23V2DIST' 1280,
                device '/dev/rD1F23V3DIST' 1280,
                device '/dev/rD1F23V4DIST' 1280,
                device '/dev/rD1F23V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_024 of D1
drop tablespace ts_dist_024;
create regular tablespace ts_dist_024 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F24V1DIST' 1280,
                device '/dev/rD1F24V2DIST' 1280,
                device '/dev/rD1F24V3DIST' 1280,
                device '/dev/rD1F24V4DIST' 1280,
                device '/dev/rD1F24V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_025 of D1
drop tablespace ts_dist_025;
create regular tablespace ts_dist_025 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F25V1DIST' 1280,
                device '/dev/rD1F25V2DIST' 1280,
                device '/dev/rD1F25V3DIST' 1280,
                device '/dev/rD1F25V4DIST' 1280,
                device '/dev/rD1F25V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_026 of D1
drop tablespace ts_dist_026;
create regular tablespace ts_dist_026 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F26V1DIST' 1280,
                device '/dev/rD1F26V2DIST' 1280,
                device '/dev/rD1F26V3DIST' 1280,
                device '/dev/rD1F26V4DIST' 1280,
                device '/dev/rD1F26V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_027 of D1
drop tablespace ts_dist_027;
create regular tablespace ts_dist_027 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F27V1DIST' 1280,
                device '/dev/rD1F27V2DIST' 1280,
                device '/dev/rD1F27V3DIST' 1280,
```

```
                device '/dev/rD1F27V4DIST' 1280,
                device '/dev/rD1F27V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_028 of D1
drop tablespace ts_dist_028;
create regular tablespace ts_dist_028 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V1DIST' 1280,
                device '/dev/rD1F28V2DIST' 1280,
                device '/dev/rD1F28V3DIST' 1280,
                device '/dev/rD1F28V4DIST' 1280,
                device '/dev/rD1F28V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_029 of D1
drop tablespace ts_dist_029;
create regular tablespace ts_dist_029 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V1DIST' 1280,
                device '/dev/rD1F29V2DIST' 1280,
                device '/dev/rD1F29V3DIST' 1280,
                device '/dev/rD1F29V4DIST' 1280,
                device '/dev/rD1F29V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_030 of D1
drop tablespace ts_dist_030;
create regular tablespace ts_dist_030 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V1DIST' 1280,
                device '/dev/rD1F30V2DIST' 1280,
                device '/dev/rD1F30V3DIST' 1280,
                device '/dev/rD1F30V4DIST' 1280,
                device '/dev/rD1F30V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_031 of D1
drop tablespace ts_dist_031;
create regular tablespace ts_dist_031 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V1DIST' 1280,
                device '/dev/rD1F31V2DIST' 1280,
                device '/dev/rD1F31V3DIST' 1280,
                device '/dev/rD1F31V4DIST' 1280,
                device '/dev/rD1F31V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_032 of D1
drop tablespace ts_dist_032;
create regular tablespace ts_dist_032 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V1DIST' 1280,
                device '/dev/rD1F32V2DIST' 1280,
                device '/dev/rD1F32V3DIST' 1280,
                device '/dev/rD1F32V4DIST' 1280,
                device '/dev/rD1F32V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_033 of D1
drop tablespace ts_dist_033;
create regular tablespace ts_dist_033 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V1DIST' 1280,
                device '/dev/rD1F33V2DIST' 1280,
                device '/dev/rD1F33V3DIST' 1280,
                device '/dev/rD1F33V4DIST' 1280,
                device '/dev/rD1F33V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_034 of D1
drop tablespace ts_dist_034;
create regular tablespace ts_dist_034 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V1DIST' 1280,
                device '/dev/rD1F34V2DIST' 1280,
                device '/dev/rD1F34V3DIST' 1280,
                device '/dev/rD1F34V4DIST' 1280,
                device '/dev/rD1F34V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_035 of D1
drop tablespace ts_dist_035;
create regular tablespace ts_dist_035 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V1DIST' 1280,
                device '/dev/rD1F35V2DIST' 1280,
                device '/dev/rD1F35V3DIST' 1280,
                device '/dev/rD1F35V4DIST' 1280,
                device '/dev/rD1F35V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_036 of D1
drop tablespace ts_dist_036;
create regular tablespace ts_dist_036 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F36V1DIST' 1280,
                device '/dev/rD1F36V2DIST' 1280,
                device '/dev/rD1F36V3DIST' 1280,
                device '/dev/rD1F36V4DIST' 1280,
                device '/dev/rD1F36V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_037 of D1
drop tablespace ts_dist_037;
create regular tablespace ts_dist_037 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F37V1DIST' 1280,
                device '/dev/rD1F37V2DIST' 1280,
                device '/dev/rD1F37V3DIST' 1280,
                device '/dev/rD1F37V4DIST' 1280,
                device '/dev/rD1F37V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_038 of D1
drop tablespace ts_dist_038;
create regular tablespace ts_dist_038 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F38V1DIST' 1280,
                device '/dev/rD1F38V2DIST' 1280,
                device '/dev/rD1F38V3DIST' 1280,
                device '/dev/rD1F38V4DIST' 1280,
                device '/dev/rD1F38V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_039 of D1
drop tablespace ts_dist_039;
create regular tablespace ts_dist_039 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V1DIST' 1280,
                device '/dev/rD1F39V2DIST' 1280,
                device '/dev/rD1F39V3DIST' 1280,
                device '/dev/rD1F39V4DIST' 1280,
                device '/dev/rD1F39V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_dist_040 of D1
drop tablespace ts_dist_040;
create regular tablespace ts_dist_040 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V1DIST' 1280,
                device '/dev/rD1F40V2DIST' 1280,
                device '/dev/rD1F40V3DIST' 1280,
                device '/dev/rD1F40V4DIST' 1280,
                device '/dev/rD1F40V5DIST' 1280
               )
        extentsize 256
        prefetchsize 4096;
commit;
connect reset;
```

ts/crts_history.ddl

```
connect to tpcc;
-- now creating TS for ts_history_001 of D1
drop tablespace ts_history_001;
create regular tablespace ts_history_001 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F01V1HIST' 239872,
                device '/dev/rD1F01V2HIST' 239872,
                device '/dev/rD1F01V3HIST' 239872,
```

```
                device '/dev/rD1F01V4HIST' 239872,
                device '/dev/rD1F01V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_002 of D1
drop tablespace ts_history_002;
create regular tablespace ts_history_002 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F02V1HIST' 239872,
                device '/dev/rD1F02V2HIST' 239872,
                device '/dev/rD1F02V3HIST' 239872,
                device '/dev/rD1F02V4HIST' 239872,
                device '/dev/rD1F02V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_003 of D1
drop tablespace ts_history_003;
create regular tablespace ts_history_003 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F03V1HIST' 239872,
                device '/dev/rD1F03V2HIST' 239872,
                device '/dev/rD1F03V3HIST' 239872,
                device '/dev/rD1F03V4HIST' 239872,
                device '/dev/rD1F03V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_004 of D1
drop tablespace ts_history_004;
create regular tablespace ts_history_004 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F04V1HIST' 239872,
                device '/dev/rD1F04V2HIST' 239872,
                device '/dev/rD1F04V3HIST' 239872,
                device '/dev/rD1F04V4HIST' 239872,
                device '/dev/rD1F04V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_005 of D1
drop tablespace ts_history_005;
create regular tablespace ts_history_005 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F05V1HIST' 239872,
                device '/dev/rD1F05V2HIST' 239872,
                device '/dev/rD1F05V3HIST' 239872,
                device '/dev/rD1F05V4HIST' 239872,
                device '/dev/rD1F05V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_006 of D1
drop tablespace ts_history_006;
create regular tablespace ts_history_006 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F06V1HIST' 239872,
                device '/dev/rD1F06V2HIST' 239872,
                device '/dev/rD1F06V3HIST' 239872,
                device '/dev/rD1F06V4HIST' 239872,
                device '/dev/rD1F06V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_007 of D1
drop tablespace ts_history_007;
create regular tablespace ts_history_007 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F07V1HIST' 239872,
                device '/dev/rD1F07V2HIST' 239872,
                device '/dev/rD1F07V3HIST' 239872,
                device '/dev/rD1F07V4HIST' 239872,
                device '/dev/rD1F07V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_008 of D1
drop tablespace ts_history_008;
create regular tablespace ts_history_008 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F08V1HIST' 239872,
                device '/dev/rD1F08V2HIST' 239872,
                device '/dev/rD1F08V3HIST' 239872,
                device '/dev/rD1F08V4HIST' 239872,
                device '/dev/rD1F08V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_009 of D1
drop tablespace ts_history_009;
create regular tablespace ts_history_009 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F09V1HIST' 239872,
                device '/dev/rD1F09V2HIST' 239872,
                device '/dev/rD1F09V3HIST' 239872,
                device '/dev/rD1F09V4HIST' 239872,
                device '/dev/rD1F09V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_010 of D1
drop tablespace ts_history_010;
create regular tablespace ts_history_010 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F10V1HIST' 239872,
                device '/dev/rD1F10V2HIST' 239872,
                device '/dev/rD1F10V3HIST' 239872,
                device '/dev/rD1F10V4HIST' 239872,
                device '/dev/rD1F10V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_011 of D1
drop tablespace ts_history_011;
create regular tablespace ts_history_011 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F11V1HIST' 239872,
                device '/dev/rD1F11V2HIST' 239872,
                device '/dev/rD1F11V3HIST' 239872,
                device '/dev/rD1F11V4HIST' 239872,
                device '/dev/rD1F11V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_012 of D1
drop tablespace ts_history_012;
create regular tablespace ts_history_012 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F12V1HIST' 239872,
                device '/dev/rD1F12V2HIST' 239872,
                device '/dev/rD1F12V3HIST' 239872,
                device '/dev/rD1F12V4HIST' 239872,
                device '/dev/rD1F12V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_013 of D1
drop tablespace ts_history_013;
create regular tablespace ts_history_013 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F13V1HIST' 239872,
                device '/dev/rD1F13V2HIST' 239872,
                device '/dev/rD1F13V3HIST' 239872,
                device '/dev/rD1F13V4HIST' 239872,
                device '/dev/rD1F13V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_014 of D1
drop tablespace ts_history_014;
create regular tablespace ts_history_014 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F14V1HIST' 239872,
                device '/dev/rD1F14V2HIST' 239872,
                device '/dev/rD1F14V3HIST' 239872,
                device '/dev/rD1F14V4HIST' 239872,
                device '/dev/rD1F14V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_015 of D1
drop tablespace ts_history_015;
create regular tablespace ts_history_015 pagesize 16K
         managed by database
```

```
        using
        (
                device '/dev/rD1F15V1HIST' 239872,
                device '/dev/rD1F15V2HIST' 239872,
                device '/dev/rD1F15V3HIST' 239872,
                device '/dev/rD1F15V4HIST' 239872,
                device '/dev/rD1F15V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_016 of D1
drop tablespace ts_history_016;
create regular tablespace ts_history_016 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F16V1HIST' 239872,
                device '/dev/rD1F16V2HIST' 239872,
                device '/dev/rD1F16V3HIST' 239872,
                device '/dev/rD1F16V4HIST' 239872,
                device '/dev/rD1F16V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_017 of D1
drop tablespace ts_history_017;
create regular tablespace ts_history_017 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F17V1HIST' 239872,
                device '/dev/rD1F17V2HIST' 239872,
                device '/dev/rD1F17V3HIST' 239872,
                device '/dev/rD1F17V4HIST' 239872,
                device '/dev/rD1F17V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_018 of D1
drop tablespace ts_history_018;
create regular tablespace ts_history_018 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F18V1HIST' 239872,
                device '/dev/rD1F18V2HIST' 239872,
                device '/dev/rD1F18V3HIST' 239872,
                device '/dev/rD1F18V4HIST' 239872,
                device '/dev/rD1F18V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_019 of D1
drop tablespace ts_history_019;
create regular tablespace ts_history_019 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F19V1HIST' 239872,
                device '/dev/rD1F19V2HIST' 239872,
                device '/dev/rD1F19V3HIST' 239872,
                device '/dev/rD1F19V4HIST' 239872,
                device '/dev/rD1F19V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_020 of D1
drop tablespace ts_history_020;
create regular tablespace ts_history_020 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F20V1HIST' 239872,
                device '/dev/rD1F20V2HIST' 239872,
                device '/dev/rD1F20V3HIST' 239872,
                device '/dev/rD1F20V4HIST' 239872,
                device '/dev/rD1F20V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_021 of D1
drop tablespace ts_history_021;
create regular tablespace ts_history_021 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F21V1HIST' 239872,
                device '/dev/rD1F21V2HIST' 239872,
                device '/dev/rD1F21V3HIST' 239872,
                device '/dev/rD1F21V4HIST' 239872,
                device '/dev/rD1F21V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_022 of D1
drop tablespace ts_history_022;
create regular tablespace ts_history_022 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F22V1HIST' 239872,
                device '/dev/rD1F22V2HIST' 239872,
                device '/dev/rD1F22V3HIST' 239872,
                device '/dev/rD1F22V4HIST' 239872,
                device '/dev/rD1F22V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_023 of D1
drop tablespace ts_history_023;
create regular tablespace ts_history_023 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F23V1HIST' 239872,
                device '/dev/rD1F23V2HIST' 239872,
                device '/dev/rD1F23V3HIST' 239872,
                device '/dev/rD1F23V4HIST' 239872,
                device '/dev/rD1F23V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_024 of D1
drop tablespace ts_history_024;
create regular tablespace ts_history_024 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F24V1HIST' 239872,
                device '/dev/rD1F24V2HIST' 239872,
                device '/dev/rD1F24V3HIST' 239872,
                device '/dev/rD1F24V4HIST' 239872,
                device '/dev/rD1F24V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_025 of D1
drop tablespace ts_history_025;
create regular tablespace ts_history_025 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F25V1HIST' 239872,
                device '/dev/rD1F25V2HIST' 239872,
                device '/dev/rD1F25V3HIST' 239872,
                device '/dev/rD1F25V4HIST' 239872,
                device '/dev/rD1F25V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_026 of D1
drop tablespace ts_history_026;
create regular tablespace ts_history_026 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F26V1HIST' 239872,
                device '/dev/rD1F26V2HIST' 239872,
                device '/dev/rD1F26V3HIST' 239872,
                device '/dev/rD1F26V4HIST' 239872,
                device '/dev/rD1F26V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_027 of D1
drop tablespace ts_history_027;
create regular tablespace ts_history_027 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F27V1HIST' 239872,
                device '/dev/rD1F27V2HIST' 239872,
                device '/dev/rD1F27V3HIST' 239872,
                device '/dev/rD1F27V4HIST' 239872,
                device '/dev/rD1F27V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_028 of D1
drop tablespace ts_history_028;
create regular tablespace ts_history_028 pagesize 16K
         managed by database
         using
         (
                device '/dev/rD1F28V1HIST' 239872,
                device '/dev/rD1F28V2HIST' 239872,
                device '/dev/rD1F28V3HIST' 239872,
                device '/dev/rD1F28V4HIST' 239872,
                device '/dev/rD1F28V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
```

```
commit;
-- now creating TS for ts_history_029 of D1
drop tablespace ts_history_029;
create regular tablespace ts_history_029 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F29V1HIST' 239872,
                device '/dev/rD1F29V2HIST' 239872,
                device '/dev/rD1F29V3HIST' 239872,
                device '/dev/rD1F29V4HIST' 239872,
                device '/dev/rD1F29V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_030 of D1
drop tablespace ts_history_030;
create regular tablespace ts_history_030 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F30V1HIST' 239872,
                device '/dev/rD1F30V2HIST' 239872,
                device '/dev/rD1F30V3HIST' 239872,
                device '/dev/rD1F30V4HIST' 239872,
                device '/dev/rD1F30V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_031 of D1
drop tablespace ts_history_031;
create regular tablespace ts_history_031 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F31V1HIST' 239872,
                device '/dev/rD1F31V2HIST' 239872,
                device '/dev/rD1F31V3HIST' 239872,
                device '/dev/rD1F31V4HIST' 239872,
                device '/dev/rD1F31V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_032 of D1
drop tablespace ts_history_032;
create regular tablespace ts_history_032 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F32V1HIST' 239872,
                device '/dev/rD1F32V2HIST' 239872,
                device '/dev/rD1F32V3HIST' 239872,
                device '/dev/rD1F32V4HIST' 239872,
                device '/dev/rD1F32V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_033 of D1
drop tablespace ts_history_033;
create regular tablespace ts_history_033 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F33V1HIST' 239872,
                device '/dev/rD1F33V2HIST' 239872,
                device '/dev/rD1F33V3HIST' 239872,
                device '/dev/rD1F33V4HIST' 239872,
                device '/dev/rD1F33V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_034 of D1
drop tablespace ts_history_034;
create regular tablespace ts_history_034 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F34V1HIST' 239872,
                device '/dev/rD1F34V2HIST' 239872,
                device '/dev/rD1F34V3HIST' 239872,
                device '/dev/rD1F34V4HIST' 239872,
                device '/dev/rD1F34V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_035 of D1
drop tablespace ts_history_035;
create regular tablespace ts_history_035 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F35V1HIST' 239872,
                device '/dev/rD1F35V2HIST' 239872,
                device '/dev/rD1F35V3HIST' 239872,
                device '/dev/rD1F35V4HIST' 239872,
                device '/dev/rD1F35V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_036 of D1
drop tablespace ts_history_036;
create regular tablespace ts_history_036 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F36V1HIST' 239872,
                device '/dev/rD1F36V2HIST' 239872,
                device '/dev/rD1F36V3HIST' 239872,
                device '/dev/rD1F36V4HIST' 239872,
                device '/dev/rD1F36V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_037 of D1
drop tablespace ts_history_037;
create regular tablespace ts_history_037 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F37V1HIST' 239872,
                device '/dev/rD1F37V2HIST' 239872,
                device '/dev/rD1F37V3HIST' 239872,
                device '/dev/rD1F37V4HIST' 239872,
                device '/dev/rD1F37V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_038 of D1
drop tablespace ts_history_038;
create regular tablespace ts_history_038 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F38V1HIST' 239872,
                device '/dev/rD1F38V2HIST' 239872,
                device '/dev/rD1F38V3HIST' 239872,
                device '/dev/rD1F38V4HIST' 239872,
                device '/dev/rD1F38V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_039 of D1
drop tablespace ts_history_039;
create regular tablespace ts_history_039 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F39V1HIST' 239872,
                device '/dev/rD1F39V2HIST' 239872,
                device '/dev/rD1F39V3HIST' 239872,
                device '/dev/rD1F39V4HIST' 239872,
                device '/dev/rD1F39V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
-- now creating TS for ts_history_040 of D1
drop tablespace ts_history_040;
create regular tablespace ts_history_040 pagesize 16K
        managed by database
        using
        (
                device '/dev/rD1F40V1HIST' 239872,
                device '/dev/rD1F40V2HIST' 239872,
                device '/dev/rD1F40V3HIST' 239872,
                device '/dev/rD1F40V4HIST' 239872,
                device '/dev/rD1F40V5HIST' 239872
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp16K;
commit;
connect reset;
```

ts/crts_item.ddl

```
connect to tpcc;
-- now creating TS for ts_item_001 of D1
drop tablespace ts_item_001;
create regular tablespace ts_item_001 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F01V1ITEM' 304,
                device '/dev/rD1F01V2ITEM' 304,
                device '/dev/rD1F01V3ITEM' 304,
                device '/dev/rD1F01V4ITEM' 304,
                device '/dev/rD1F01V5ITEM' 304,
                device '/dev/rD1F02V1ITEM' 304,
                device '/dev/rD1F02V2ITEM' 304,
                device '/dev/rD1F02V3ITEM' 304,
                device '/dev/rD1F02V4ITEM' 304,
                device '/dev/rD1F02V5ITEM' 304,
                device '/dev/rD1F03V1ITEM' 304,
```

```
device '/dev/rD1F03V2I1TEM' 304,
device '/dev/rD1F03V3I1TEM' 304,
device '/dev/rD1F03V4I1TEM' 304,
device '/dev/rD1F03V5I1TEM' 304,
device '/dev/rD1F04V1I1TEM' 304,
device '/dev/rD1F04V2I1TEM' 304,
device '/dev/rD1F04V3I1TEM' 304,
device '/dev/rD1F04V4I1TEM' 304,
device '/dev/rD1F04V5I1TEM' 304,
device '/dev/rD1F05V1I1TEM' 304,
device '/dev/rD1F05V2I1TEM' 304,
device '/dev/rD1F05V3I1TEM' 304,
device '/dev/rD1F05V4I1TEM' 304,
device '/dev/rD1F05V5I1TEM' 304,
device '/dev/rD1F06V1I1TEM' 304,
device '/dev/rD1F06V2I1TEM' 304,
device '/dev/rD1F06V3I1TEM' 304,
device '/dev/rD1F06V4I1TEM' 304,
device '/dev/rD1F06V5I1TEM' 304,
device '/dev/rD1F07V1I1TEM' 304,
device '/dev/rD1F07V2I1TEM' 304,
device '/dev/rD1F07V3I1TEM' 304,
device '/dev/rD1F07V4I1TEM' 304,
device '/dev/rD1F07V5I1TEM' 304,
device '/dev/rD1F08V1I1TEM' 304,
device '/dev/rD1F08V2I1TEM' 304,
device '/dev/rD1F08V3I1TEM' 304,
device '/dev/rD1F08V4I1TEM' 304,
device '/dev/rD1F08V5I1TEM' 304,
device '/dev/rD1F09V1I1TEM' 304,
device '/dev/rD1F09V2I1TEM' 304,
device '/dev/rD1F09V3I1TEM' 304,
device '/dev/rD1F09V4I1TEM' 304,
device '/dev/rD1F09V5I1TEM' 304,
device '/dev/rD1F10V1I1TEM' 304,
device '/dev/rD1F10V2I1TEM' 304,
device '/dev/rD1F10V3I1TEM' 304,
device '/dev/rD1F10V4I1TEM' 304,
device '/dev/rD1F10V5I1TEM' 304,
device '/dev/rD1F11V1I1TEM' 304,
device '/dev/rD1F11V2I1TEM' 304,
device '/dev/rD1F11V3I1TEM' 304,
device '/dev/rD1F11V4I1TEM' 304,
device '/dev/rD1F11V5I1TEM' 304,
device '/dev/rD1F12V1I1TEM' 304,
device '/dev/rD1F12V2I1TEM' 304,
device '/dev/rD1F12V3I1TEM' 304,
device '/dev/rD1F12V4I1TEM' 304,
device '/dev/rD1F12V5I1TEM' 304,
device '/dev/rD1F13V1I1TEM' 304,
device '/dev/rD1F13V2I1TEM' 304,
device '/dev/rD1F13V3I1TEM' 304,
device '/dev/rD1F13V4I1TEM' 304,
device '/dev/rD1F13V5I1TEM' 304,
device '/dev/rD1F14V1I1TEM' 304,
device '/dev/rD1F14V2I1TEM' 304,
device '/dev/rD1F14V3I1TEM' 304,
device '/dev/rD1F14V4I1TEM' 304,
device '/dev/rD1F14V5I1TEM' 304,
device '/dev/rD1F15V1I1TEM' 304,
device '/dev/rD1F15V2I1TEM' 304,
device '/dev/rD1F15V3I1TEM' 304,
device '/dev/rD1F15V4I1TEM' 304,
device '/dev/rD1F15V5I1TEM' 304,
device '/dev/rD1F16V1I1TEM' 304,
device '/dev/rD1F16V2I1TEM' 304,
device '/dev/rD1F16V3I1TEM' 304,
device '/dev/rD1F16V4I1TEM' 304,
device '/dev/rD1F16V5I1TEM' 304,
device '/dev/rD1F17V1I1TEM' 304,
device '/dev/rD1F17V2I1TEM' 304,
device '/dev/rD1F17V3I1TEM' 304,
device '/dev/rD1F17V4I1TEM' 304,
device '/dev/rD1F17V5I1TEM' 304,
device '/dev/rD1F18V1I1TEM' 304,
device '/dev/rD1F18V2I1TEM' 304,
device '/dev/rD1F18V3I1TEM' 304,
device '/dev/rD1F18V4I1TEM' 304,
device '/dev/rD1F18V5I1TEM' 304,
device '/dev/rD1F19V1I1TEM' 304,
device '/dev/rD1F19V2I1TEM' 304,
device '/dev/rD1F19V3I1TEM' 304,
device '/dev/rD1F19V4I1TEM' 304,
device '/dev/rD1F19V5I1TEM' 304,
device '/dev/rD1F20V1I1TEM' 304,
device '/dev/rD1F20V2I1TEM' 304,
device '/dev/rD1F20V3I1TEM' 304,
device '/dev/rD1F20V4I1TEM' 304,
device '/dev/rD1F20V5I1TEM' 304,
device '/dev/rD1F21V1I1TEM' 304,
device '/dev/rD1F21V2I1TEM' 304,
device '/dev/rD1F21V3I1TEM' 304,
device '/dev/rD1F21V4I1TEM' 304,
device '/dev/rD1F21V5I1TEM' 304,
device '/dev/rD1F22V1I1TEM' 304,
device '/dev/rD1F22V2I1TEM' 304,
device '/dev/rD1F22V3I1TEM' 304,
device '/dev/rD1F22V4I1TEM' 304,
device '/dev/rD1F22V5I1TEM' 304,
device '/dev/rD1F23V1I1TEM' 304,
device '/dev/rD1F23V2I1TEM' 304,
device '/dev/rD1F23V3I1TEM' 304,
device '/dev/rD1F23V4I1TEM' 304,
device '/dev/rD1F23V5I1TEM' 304,
device '/dev/rD1F24V1I1TEM' 304,
device '/dev/rD1F24V2I1TEM' 304,
device '/dev/rD1F24V3I1TEM' 304,
device '/dev/rD1F24V4I1TEM' 304,
device '/dev/rD1F24V5I1TEM' 304,
device '/dev/rD1F25V1I1TEM' 304,
device '/dev/rD1F25V2I1TEM' 304,
device '/dev/rD1F25V3I1TEM' 304,
device '/dev/rD1F25V4I1TEM' 304,
device '/dev/rD1F25V5I1TEM' 304,
device '/dev/rD1F26V1I1TEM' 304,
device '/dev/rD1F26V2I1TEM' 304,
device '/dev/rD1F26V3I1TEM' 304,
device '/dev/rD1F26V4I1TEM' 304,
device '/dev/rD1F26V5I1TEM' 304,
device '/dev/rD1F27V1I1TEM' 304,
device '/dev/rD1F27V2I1TEM' 304,
device '/dev/rD1F27V3I1TEM' 304,
device '/dev/rD1F27V4I1TEM' 304,
device '/dev/rD1F27V5I1TEM' 304,
device '/dev/rD1F28V1I1TEM' 304,
device '/dev/rD1F28V2I1TEM' 304,
device '/dev/rD1F28V3I1TEM' 304,
device '/dev/rD1F28V4I1TEM' 304,
device '/dev/rD1F28V5I1TEM' 304,
device '/dev/rD1F29V1I1TEM' 304,
device '/dev/rD1F29V2I1TEM' 304,
device '/dev/rD1F29V3I1TEM' 304,
device '/dev/rD1F29V4I1TEM' 304,
device '/dev/rD1F29V5I1TEM' 304,
device '/dev/rD1F30V1I1TEM' 304,
device '/dev/rD1F30V2I1TEM' 304,
device '/dev/rD1F30V3I1TEM' 304,
device '/dev/rD1F30V4I1TEM' 304,
device '/dev/rD1F30V5I1TEM' 304,
device '/dev/rD1F31V1I1TEM' 304,
device '/dev/rD1F31V2I1TEM' 304,
device '/dev/rD1F31V3I1TEM' 304,
device '/dev/rD1F31V4I1TEM' 304,
device '/dev/rD1F31V5I1TEM' 304,
device '/dev/rD1F32V1I1TEM' 304,
device '/dev/rD1F32V2I1TEM' 304,
device '/dev/rD1F32V3I1TEM' 304,
device '/dev/rD1F32V4I1TEM' 304,
device '/dev/rD1F32V5I1TEM' 304,
device '/dev/rD1F33V1I1TEM' 304,
device '/dev/rD1F33V2I1TEM' 304,
device '/dev/rD1F33V3I1TEM' 304,
device '/dev/rD1F33V4I1TEM' 304,
device '/dev/rD1F33V5I1TEM' 304,
device '/dev/rD1F34V1I1TEM' 304,
device '/dev/rD1F34V2I1TEM' 304,
device '/dev/rD1F34V3I1TEM' 304,
device '/dev/rD1F34V4I1TEM' 304,
device '/dev/rD1F34V5I1TEM' 304,
device '/dev/rD1F35V1I1TEM' 304,
device '/dev/rD1F35V2I1TEM' 304,
device '/dev/rD1F35V3I1TEM' 304,
device '/dev/rD1F35V4I1TEM' 304,
device '/dev/rD1F35V5I1TEM' 304,
device '/dev/rD1F36V1I1TEM' 304,
device '/dev/rD1F36V2I1TEM' 304,
device '/dev/rD1F36V3I1TEM' 304,
device '/dev/rD1F36V4I1TEM' 304,
device '/dev/rD1F36V5I1TEM' 304,
device '/dev/rD1F37V1I1TEM' 304,
device '/dev/rD1F37V2I1TEM' 304,
device '/dev/rD1F37V3I1TEM' 304,
device '/dev/rD1F37V4I1TEM' 304,
device '/dev/rD1F37V5I1TEM' 304,
device '/dev/rD1F38V1I1TEM' 304,
device '/dev/rD1F38V2I1TEM' 304,
device '/dev/rD1F38V3I1TEM' 304,
device '/dev/rD1F38V4I1TEM' 304,
device '/dev/rD1F38V5I1TEM' 304,
device '/dev/rD1F39V1I1TEM' 304,
device '/dev/rD1F39V2I1TEM' 304,
device '/dev/rD1F39V3I1TEM' 304,
device '/dev/rD1F39V4I1TEM' 304,
device '/dev/rD1F39V5I1TEM' 304,
device '/dev/rD1F40V1I1TEM' 304,
device '/dev/rD1F40V2I1TEM' 304,
device '/dev/rD1F40V3I1TEM' 304,
device '/dev/rD1F40V4I1TEM' 304,
device '/dev/rD1F40V5I1TEM' 304
)
        extentsize 16
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
connect reset;
```

ts/crts_neworda.ddl

```
connect to tpcc;
-- now creating TS for ts_neworda_001 of D1
drop tablespace ts_neworda_001;
create regular tablespace ts_neworda_001 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F01V1NORA' 149248,
                device '/dev/rD1F01V2NORA' 149248,
                device '/dev/rD1F01V3NORA' 149248,
                device '/dev/rD1F01V4NORA' 149248,
                device '/dev/rD1F01V5NORA' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_002 of D1
```

```
drop tablespace ts_neworda_002;
create regular tablespace ts_neworda_002 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F02V1NORA' 149248,
                device '/dev/rD1F02V2NORA' 149248,
                device '/dev/rD1F02V3NORA' 149248,
                device '/dev/rD1F02V4NORA' 149248,
                device '/dev/rD1F02V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_003 of D1
drop tablespace ts_neworda_003;
create regular tablespace ts_neworda_003 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V1NORA' 149248,
                device '/dev/rD1F03V2NORA' 149248,
                device '/dev/rD1F03V3NORA' 149248,
                device '/dev/rD1F03V4NORA' 149248,
                device '/dev/rD1F03V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_004 of D1
drop tablespace ts_neworda_004;
create regular tablespace ts_neworda_004 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V1NORA' 149248,
                device '/dev/rD1F04V2NORA' 149248,
                device '/dev/rD1F04V3NORA' 149248,
                device '/dev/rD1F04V4NORA' 149248,
                device '/dev/rD1F04V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_005 of D1
drop tablespace ts_neworda_005;
create regular tablespace ts_neworda_005 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V1NORA' 149248,
                device '/dev/rD1F05V2NORA' 149248,
                device '/dev/rD1F05V3NORA' 149248,
                device '/dev/rD1F05V4NORA' 149248,
                device '/dev/rD1F05V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_006 of D1
drop tablespace ts_neworda_006;
create regular tablespace ts_neworda_006 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V1NORA' 149248,
                device '/dev/rD1F06V2NORA' 149248,
                device '/dev/rD1F06V3NORA' 149248,
                device '/dev/rD1F06V4NORA' 149248,
                device '/dev/rD1F06V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_007 of D1
drop tablespace ts_neworda_007;
create regular tablespace ts_neworda_007 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V1NORA' 149248,
                device '/dev/rD1F07V2NORA' 149248,
                device '/dev/rD1F07V3NORA' 149248,
                device '/dev/rD1F07V4NORA' 149248,
                device '/dev/rD1F07V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_008 of D1
drop tablespace ts_neworda_008;
create regular tablespace ts_neworda_008 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V1NORA' 149248,
                device '/dev/rD1F08V2NORA' 149248,
                device '/dev/rD1F08V3NORA' 149248,
                device '/dev/rD1F08V4NORA' 149248,
                device '/dev/rD1F08V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_009 of D1
drop tablespace ts_neworda_009;
create regular tablespace ts_neworda_009 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V1NORA' 149248,
                device '/dev/rD1F09V2NORA' 149248,
                device '/dev/rD1F09V3NORA' 149248,
                device '/dev/rD1F09V4NORA' 149248,
                device '/dev/rD1F09V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_010 of D1
drop tablespace ts_neworda_010;
create regular tablespace ts_neworda_010 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V1NORA' 149248,
                device '/dev/rD1F10V2NORA' 149248,
                device '/dev/rD1F10V3NORA' 149248,
                device '/dev/rD1F10V4NORA' 149248,
                device '/dev/rD1F10V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_011 of D1
drop tablespace ts_neworda_011;
create regular tablespace ts_neworda_011 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V1NORA' 149248,
                device '/dev/rD1F11V2NORA' 149248,
                device '/dev/rD1F11V3NORA' 149248,
                device '/dev/rD1F11V4NORA' 149248,
                device '/dev/rD1F11V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_012 of D1
drop tablespace ts_neworda_012;
create regular tablespace ts_neworda_012 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V1NORA' 149248,
                device '/dev/rD1F12V2NORA' 149248,
                device '/dev/rD1F12V3NORA' 149248,
                device '/dev/rD1F12V4NORA' 149248,
                device '/dev/rD1F12V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_013 of D1
drop tablespace ts_neworda_013;
create regular tablespace ts_neworda_013 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V1NORA' 149248,
                device '/dev/rD1F13V2NORA' 149248,
                device '/dev/rD1F13V3NORA' 149248,
                device '/dev/rD1F13V4NORA' 149248,
                device '/dev/rD1F13V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_014 of D1
drop tablespace ts_neworda_014;
create regular tablespace ts_neworda_014 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V1NORA' 149248,
                device '/dev/rD1F14V2NORA' 149248,
                device '/dev/rD1F14V3NORA' 149248,
                device '/dev/rD1F14V4NORA' 149248,
                device '/dev/rD1F14V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_015 of D1
drop tablespace ts_neworda_015;
create regular tablespace ts_neworda_015 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F15V1NORA' 149248,
                device '/dev/rD1F15V2NORA' 149248,
                device '/dev/rD1F15V3NORA' 149248,
                device '/dev/rD1F15V4NORA' 149248,
                device '/dev/rD1F15V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_016 of D1
drop tablespace ts_neworda_016;
create regular tablespace ts_neworda_016 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F16V1NORA' 149248,
                device '/dev/rD1F16V2NORA' 149248,
                device '/dev/rD1F16V3NORA' 149248,
                device '/dev/rD1F16V4NORA' 149248,
```

```
                device '/dev/rD1F16V5NORA' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_017 of D1
drop tablespace ts_neworda_017;
create regular tablespace ts_neworda_017 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F17V1NORA' 149248,
                device '/dev/rD1F17V2NORA' 149248,
                device '/dev/rD1F17V3NORA' 149248,
                device '/dev/rD1F17V4NORA' 149248,
                device '/dev/rD1F17V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_018 of D1
drop tablespace ts_neworda_018;
create regular tablespace ts_neworda_018 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F18V1NORA' 149248,
                device '/dev/rD1F18V2NORA' 149248,
                device '/dev/rD1F18V3NORA' 149248,
                device '/dev/rD1F18V4NORA' 149248,
                device '/dev/rD1F18V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_019 of D1
drop tablespace ts_neworda_019;
create regular tablespace ts_neworda_019 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F19V1NORA' 149248,
                device '/dev/rD1F19V2NORA' 149248,
                device '/dev/rD1F19V3NORA' 149248,
                device '/dev/rD1F19V4NORA' 149248,
                device '/dev/rD1F19V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_020 of D1
drop tablespace ts_neworda_020;
create regular tablespace ts_neworda_020 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F20V1NORA' 149248,
                device '/dev/rD1F20V2NORA' 149248,
                device '/dev/rD1F20V3NORA' 149248,
                device '/dev/rD1F20V4NORA' 149248,
                device '/dev/rD1F20V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_021 of D1
drop tablespace ts_neworda_021;
create regular tablespace ts_neworda_021 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F21V1NORA' 149248,
                device '/dev/rD1F21V2NORA' 149248,
                device '/dev/rD1F21V3NORA' 149248,
                device '/dev/rD1F21V4NORA' 149248,
                device '/dev/rD1F21V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_022 of D1
drop tablespace ts_neworda_022;
create regular tablespace ts_neworda_022 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F22V1NORA' 149248,
                device '/dev/rD1F22V2NORA' 149248,
                device '/dev/rD1F22V3NORA' 149248,
                device '/dev/rD1F22V4NORA' 149248,
                device '/dev/rD1F22V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_023 of D1
drop tablespace ts_neworda_023;
create regular tablespace ts_neworda_023 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F23V1NORA' 149248,
                device '/dev/rD1F23V2NORA' 149248,
                device '/dev/rD1F23V3NORA' 149248,
                device '/dev/rD1F23V4NORA' 149248,
                device '/dev/rD1F23V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_024 of D1
drop tablespace ts_neworda_024;
create regular tablespace ts_neworda_024 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F24V1NORA' 149248,
                device '/dev/rD1F24V2NORA' 149248,
                device '/dev/rD1F24V3NORA' 149248,
                device '/dev/rD1F24V4NORA' 149248,
                device '/dev/rD1F24V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_025 of D1
drop tablespace ts_neworda_025;
create regular tablespace ts_neworda_025 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F25V1NORA' 149248,
                device '/dev/rD1F25V2NORA' 149248,
                device '/dev/rD1F25V3NORA' 149248,
                device '/dev/rD1F25V4NORA' 149248,
                device '/dev/rD1F25V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_026 of D1
drop tablespace ts_neworda_026;
create regular tablespace ts_neworda_026 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F26V1NORA' 149248,
                device '/dev/rD1F26V2NORA' 149248,
                device '/dev/rD1F26V3NORA' 149248,
                device '/dev/rD1F26V4NORA' 149248,
                device '/dev/rD1F26V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_027 of D1
drop tablespace ts_neworda_027;
create regular tablespace ts_neworda_027 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V1NORA' 149248,
                device '/dev/rD1F27V2NORA' 149248,
                device '/dev/rD1F27V3NORA' 149248,
                device '/dev/rD1F27V4NORA' 149248,
                device '/dev/rD1F27V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_028 of D1
drop tablespace ts_neworda_028;
create regular tablespace ts_neworda_028 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V1NORA' 149248,
                device '/dev/rD1F28V2NORA' 149248,
                device '/dev/rD1F28V3NORA' 149248,
                device '/dev/rD1F28V4NORA' 149248,
                device '/dev/rD1F28V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_029 of D1
drop tablespace ts_neworda_029;
create regular tablespace ts_neworda_029 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V1NORA' 149248,
                device '/dev/rD1F29V2NORA' 149248,
                device '/dev/rD1F29V3NORA' 149248,
                device '/dev/rD1F29V4NORA' 149248,
                device '/dev/rD1F29V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_030 of D1
drop tablespace ts_neworda_030;
create regular tablespace ts_neworda_030 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V1NORA' 149248,
                device '/dev/rD1F30V2NORA' 149248,
                device '/dev/rD1F30V3NORA' 149248,
                device '/dev/rD1F30V4NORA' 149248,
                device '/dev/rD1F30V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_031 of D1
drop tablespace ts_neworda_031;
create regular tablespace ts_neworda_031 pagesize 4K
         managed by database
```

```
        using
        (
                device '/dev/rD1F31V1NORA' 149248,
                device '/dev/rD1F31V2NORA' 149248,
                device '/dev/rD1F31V3NORA' 149248,
                device '/dev/rD1F31V4NORA' 149248,
                device '/dev/rD1F31V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_032 of D1
drop tablespace ts_neworda_032;
create regular tablespace ts_neworda_032 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V1NORA' 149248,
                device '/dev/rD1F32V2NORA' 149248,
                device '/dev/rD1F32V3NORA' 149248,
                device '/dev/rD1F32V4NORA' 149248,
                device '/dev/rD1F32V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_033 of D1
drop tablespace ts_neworda_033;
create regular tablespace ts_neworda_033 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V1NORA' 149248,
                device '/dev/rD1F33V2NORA' 149248,
                device '/dev/rD1F33V3NORA' 149248,
                device '/dev/rD1F33V4NORA' 149248,
                device '/dev/rD1F33V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_034 of D1
drop tablespace ts_neworda_034;
create regular tablespace ts_neworda_034 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V1NORA' 149248,
                device '/dev/rD1F34V2NORA' 149248,
                device '/dev/rD1F34V3NORA' 149248,
                device '/dev/rD1F34V4NORA' 149248,
                device '/dev/rD1F34V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_035 of D1
drop tablespace ts_neworda_035;
create regular tablespace ts_neworda_035 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V1NORA' 149248,
                device '/dev/rD1F35V2NORA' 149248,
                device '/dev/rD1F35V3NORA' 149248,
                device '/dev/rD1F35V4NORA' 149248,
                device '/dev/rD1F35V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_036 of D1
drop tablespace ts_neworda_036;
create regular tablespace ts_neworda_036 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F36V1NORA' 149248,
                device '/dev/rD1F36V2NORA' 149248,
                device '/dev/rD1F36V3NORA' 149248,
                device '/dev/rD1F36V4NORA' 149248,
                device '/dev/rD1F36V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_037 of D1
drop tablespace ts_neworda_037;
create regular tablespace ts_neworda_037 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F37V1NORA' 149248,
                device '/dev/rD1F37V2NORA' 149248,
                device '/dev/rD1F37V3NORA' 149248,
                device '/dev/rD1F37V4NORA' 149248,
                device '/dev/rD1F37V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_038 of D1
drop tablespace ts_neworda_038;
create regular tablespace ts_neworda_038 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F38V1NORA' 149248,
                device '/dev/rD1F38V2NORA' 149248,
                device '/dev/rD1F38V3NORA' 149248,
                device '/dev/rD1F38V4NORA' 149248,
                device '/dev/rD1F38V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_039 of D1
drop tablespace ts_neworda_039;
create regular tablespace ts_neworda_039 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V1NORA' 149248,
                device '/dev/rD1F39V2NORA' 149248,
                device '/dev/rD1F39V3NORA' 149248,
                device '/dev/rD1F39V4NORA' 149248,
                device '/dev/rD1F39V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_neworda_040 of D1
drop tablespace ts_neworda_040;
create regular tablespace ts_neworda_040 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V1NORA' 149248,
                device '/dev/rD1F40V2NORA' 149248,
                device '/dev/rD1F40V3NORA' 149248,
                device '/dev/rD1F40V4NORA' 149248,
                device '/dev/rD1F40V5NORA' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
connect reset;
```

ts/crts_newordb.ddl

```
connect to tpcc;
-- now creating TS for ts_newordb_001 of D1
drop tablespace ts_newordb_001;
create regular tablespace ts_newordb_001 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F01V1NORB' 149248,
                device '/dev/rD1F01V2NORB' 149248,
                device '/dev/rD1F01V3NORB' 149248,
                device '/dev/rD1F01V4NORB' 149248,
                device '/dev/rD1F01V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_002 of D1
drop tablespace ts_newordb_002;
create regular tablespace ts_newordb_002 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F02V1NORB' 149248,
                device '/dev/rD1F02V2NORB' 149248,
                device '/dev/rD1F02V3NORB' 149248,
                device '/dev/rD1F02V4NORB' 149248,
                device '/dev/rD1F02V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_003 of D1
drop tablespace ts_newordb_003;
create regular tablespace ts_newordb_003 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F03V1NORB' 149248,
                device '/dev/rD1F03V2NORB' 149248,
                device '/dev/rD1F03V3NORB' 149248,
                device '/dev/rD1F03V4NORB' 149248,
                device '/dev/rD1F03V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_004 of D1
drop tablespace ts_newordb_004;
create regular tablespace ts_newordb_004 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F04V1NORB' 149248,
                device '/dev/rD1F04V2NORB' 149248,
                device '/dev/rD1F04V3NORB' 149248,
                device '/dev/rD1F04V4NORB' 149248,
                device '/dev/rD1F04V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_005 of D1
drop tablespace ts_newordb_005;
create regular tablespace ts_newordb_005 pagesize 4K
         managed by database
```

```
        using
        (
                device '/dev/rD1F05V1NORB' 149248,
                device '/dev/rD1F05V2NORB' 149248,
                device '/dev/rD1F05V3NORB' 149248,
                device '/dev/rD1F05V4NORB' 149248,
                device '/dev/rD1F05V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_006 of D1
drop tablespace ts_newordb_006;
create regular tablespace ts_newordb_006 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F06V1NORB' 149248,
                device '/dev/rD1F06V2NORB' 149248,
                device '/dev/rD1F06V3NORB' 149248,
                device '/dev/rD1F06V4NORB' 149248,
                device '/dev/rD1F06V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_007 of D1
drop tablespace ts_newordb_007;
create regular tablespace ts_newordb_007 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F07V1NORB' 149248,
                device '/dev/rD1F07V2NORB' 149248,
                device '/dev/rD1F07V3NORB' 149248,
                device '/dev/rD1F07V4NORB' 149248,
                device '/dev/rD1F07V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_008 of D1
drop tablespace ts_newordb_008;
create regular tablespace ts_newordb_008 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F08V1NORB' 149248,
                device '/dev/rD1F08V2NORB' 149248,
                device '/dev/rD1F08V3NORB' 149248,
                device '/dev/rD1F08V4NORB' 149248,
                device '/dev/rD1F08V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_009 of D1
drop tablespace ts_newordb_009;
create regular tablespace ts_newordb_009 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F09V1NORB' 149248,
                device '/dev/rD1F09V2NORB' 149248,
                device '/dev/rD1F09V3NORB' 149248,
                device '/dev/rD1F09V4NORB' 149248,
                device '/dev/rD1F09V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_010 of D1
drop tablespace ts_newordb_010;
create regular tablespace ts_newordb_010 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F10V1NORB' 149248,
                device '/dev/rD1F10V2NORB' 149248,
                device '/dev/rD1F10V3NORB' 149248,
                device '/dev/rD1F10V4NORB' 149248,
                device '/dev/rD1F10V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_011 of D1
drop tablespace ts_newordb_011;
create regular tablespace ts_newordb_011 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F11V1NORB' 149248,
                device '/dev/rD1F11V2NORB' 149248,
                device '/dev/rD1F11V3NORB' 149248,
                device '/dev/rD1F11V4NORB' 149248,
                device '/dev/rD1F11V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_012 of D1
drop tablespace ts_newordb_012;
create regular tablespace ts_newordb_012 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F12V1NORB' 149248,
                device '/dev/rD1F12V2NORB' 149248,
                device '/dev/rD1F12V3NORB' 149248,
                device '/dev/rD1F12V4NORB' 149248,
                device '/dev/rD1F12V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_013 of D1
drop tablespace ts_newordb_013;
create regular tablespace ts_newordb_013 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F13V1NORB' 149248,
                device '/dev/rD1F13V2NORB' 149248,
                device '/dev/rD1F13V3NORB' 149248,
                device '/dev/rD1F13V4NORB' 149248,
                device '/dev/rD1F13V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_014 of D1
drop tablespace ts_newordb_014;
create regular tablespace ts_newordb_014 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F14V1NORB' 149248,
                device '/dev/rD1F14V2NORB' 149248,
                device '/dev/rD1F14V3NORB' 149248,
                device '/dev/rD1F14V4NORB' 149248,
                device '/dev/rD1F14V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_015 of D1
drop tablespace ts_newordb_015;
create regular tablespace ts_newordb_015 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F15V1NORB' 149248,
                device '/dev/rD1F15V2NORB' 149248,
                device '/dev/rD1F15V3NORB' 149248,
                device '/dev/rD1F15V4NORB' 149248,
                device '/dev/rD1F15V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_016 of D1
drop tablespace ts_newordb_016;
create regular tablespace ts_newordb_016 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F16V1NORB' 149248,
                device '/dev/rD1F16V2NORB' 149248,
                device '/dev/rD1F16V3NORB' 149248,
                device '/dev/rD1F16V4NORB' 149248,
                device '/dev/rD1F16V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_017 of D1
drop tablespace ts_newordb_017;
create regular tablespace ts_newordb_017 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F17V1NORB' 149248,
                device '/dev/rD1F17V2NORB' 149248,
                device '/dev/rD1F17V3NORB' 149248,
                device '/dev/rD1F17V4NORB' 149248,
                device '/dev/rD1F17V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_018 of D1
drop tablespace ts_newordb_018;
create regular tablespace ts_newordb_018 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F18V1NORB' 149248,
                device '/dev/rD1F18V2NORB' 149248,
                device '/dev/rD1F18V3NORB' 149248,
                device '/dev/rD1F18V4NORB' 149248,
                device '/dev/rD1F18V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_019 of D1
drop tablespace ts_newordb_019;
create regular tablespace ts_newordb_019 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F19V1NORB' 149248,
                device '/dev/rD1F19V2NORB' 149248,
                device '/dev/rD1F19V3NORB' 149248,
                device '/dev/rD1F19V4NORB' 149248,
                device '/dev/rD1F19V5NORB' 149248
               )
        extentsize 256
```

```
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_020 of D1
drop tablespace ts_newordb_020;
create regular tablespace ts_newordb_020 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V1NORB' 149248,
                  device '/dev/rD1F20V2NORB' 149248,
                  device '/dev/rD1F20V3NORB' 149248,
                  device '/dev/rD1F20V4NORB' 149248,
                  device '/dev/rD1F20V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_021 of D1
drop tablespace ts_newordb_021;
create regular tablespace ts_newordb_021 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V1NORB' 149248,
                  device '/dev/rD1F21V2NORB' 149248,
                  device '/dev/rD1F21V3NORB' 149248,
                  device '/dev/rD1F21V4NORB' 149248,
                  device '/dev/rD1F21V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_022 of D1
drop tablespace ts_newordb_022;
create regular tablespace ts_newordb_022 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V1NORB' 149248,
                  device '/dev/rD1F22V2NORB' 149248,
                  device '/dev/rD1F22V3NORB' 149248,
                  device '/dev/rD1F22V4NORB' 149248,
                  device '/dev/rD1F22V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_023 of D1
drop tablespace ts_newordb_023;
create regular tablespace ts_newordb_023 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V1NORB' 149248,
                  device '/dev/rD1F23V2NORB' 149248,
                  device '/dev/rD1F23V3NORB' 149248,
                  device '/dev/rD1F23V4NORB' 149248,
                  device '/dev/rD1F23V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_024 of D1
drop tablespace ts_newordb_024;
create regular tablespace ts_newordb_024 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V1NORB' 149248,
                  device '/dev/rD1F24V2NORB' 149248,
                  device '/dev/rD1F24V3NORB' 149248,
                  device '/dev/rD1F24V4NORB' 149248,
                  device '/dev/rD1F24V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_025 of D1
drop tablespace ts_newordb_025;
create regular tablespace ts_newordb_025 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V1NORB' 149248,
                  device '/dev/rD1F25V2NORB' 149248,
                  device '/dev/rD1F25V3NORB' 149248,
                  device '/dev/rD1F25V4NORB' 149248,
                  device '/dev/rD1F25V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_026 of D1
drop tablespace ts_newordb_026;
create regular tablespace ts_newordb_026 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V1NORB' 149248,
                  device '/dev/rD1F26V2NORB' 149248,
                  device '/dev/rD1F26V3NORB' 149248,
                  device '/dev/rD1F26V4NORB' 149248,
                  device '/dev/rD1F26V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_027 of D1
drop tablespace ts_newordb_027;
create regular tablespace ts_newordb_027 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F27V1NORB' 149248,
                  device '/dev/rD1F27V2NORB' 149248,
                  device '/dev/rD1F27V3NORB' 149248,
                  device '/dev/rD1F27V4NORB' 149248,
                  device '/dev/rD1F27V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_028 of D1
drop tablespace ts_newordb_028;
create regular tablespace ts_newordb_028 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F28V1NORB' 149248,
                  device '/dev/rD1F28V2NORB' 149248,
                  device '/dev/rD1F28V3NORB' 149248,
                  device '/dev/rD1F28V4NORB' 149248,
                  device '/dev/rD1F28V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_029 of D1
drop tablespace ts_newordb_029;
create regular tablespace ts_newordb_029 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F29V1NORB' 149248,
                  device '/dev/rD1F29V2NORB' 149248,
                  device '/dev/rD1F29V3NORB' 149248,
                  device '/dev/rD1F29V4NORB' 149248,
                  device '/dev/rD1F29V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_030 of D1
drop tablespace ts_newordb_030;
create regular tablespace ts_newordb_030 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F30V1NORB' 149248,
                  device '/dev/rD1F30V2NORB' 149248,
                  device '/dev/rD1F30V3NORB' 149248,
                  device '/dev/rD1F30V4NORB' 149248,
                  device '/dev/rD1F30V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_031 of D1
drop tablespace ts_newordb_031;
create regular tablespace ts_newordb_031 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F31V1NORB' 149248,
                  device '/dev/rD1F31V2NORB' 149248,
                  device '/dev/rD1F31V3NORB' 149248,
                  device '/dev/rD1F31V4NORB' 149248,
                  device '/dev/rD1F31V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_032 of D1
drop tablespace ts_newordb_032;
create regular tablespace ts_newordb_032 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F32V1NORB' 149248,
                  device '/dev/rD1F32V2NORB' 149248,
                  device '/dev/rD1F32V3NORB' 149248,
                  device '/dev/rD1F32V4NORB' 149248,
                  device '/dev/rD1F32V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_033 of D1
drop tablespace ts_newordb_033;
create regular tablespace ts_newordb_033 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F33V1NORB' 149248,
                  device '/dev/rD1F33V2NORB' 149248,
                  device '/dev/rD1F33V3NORB' 149248,
                  device '/dev/rD1F33V4NORB' 149248,
                  device '/dev/rD1F33V5NORB' 149248
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_034 of D1
drop tablespace ts_newordb_034;
create regular tablespace ts_newordb_034 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F34V1NORB' 149248,
```

```
                device '/dev/rD1F34V2NORB' 149248,
                device '/dev/rD1F34V3NORB' 149248,
                device '/dev/rD1F34V4NORB' 149248,
                device '/dev/rD1F34V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_035 of D1
drop tablespace ts_newordb_035;
create regular tablespace ts_newordb_035 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F35V1NORB' 149248,
                device '/dev/rD1F35V2NORB' 149248,
                device '/dev/rD1F35V3NORB' 149248,
                device '/dev/rD1F35V4NORB' 149248,
                device '/dev/rD1F35V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_036 of D1
drop tablespace ts_newordb_036;
create regular tablespace ts_newordb_036 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F36V1NORB' 149248,
                device '/dev/rD1F36V2NORB' 149248,
                device '/dev/rD1F36V3NORB' 149248,
                device '/dev/rD1F36V4NORB' 149248,
                device '/dev/rD1F36V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_037 of D1
drop tablespace ts_newordb_037;
create regular tablespace ts_newordb_037 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F37V1NORB' 149248,
                device '/dev/rD1F37V2NORB' 149248,
                device '/dev/rD1F37V3NORB' 149248,
                device '/dev/rD1F37V4NORB' 149248,
                device '/dev/rD1F37V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_038 of D1
drop tablespace ts_newordb_038;
create regular tablespace ts_newordb_038 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F38V1NORB' 149248,
                device '/dev/rD1F38V2NORB' 149248,
                device '/dev/rD1F38V3NORB' 149248,
                device '/dev/rD1F38V4NORB' 149248,
                device '/dev/rD1F38V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_039 of D1
drop tablespace ts_newordb_039;
create regular tablespace ts_newordb_039 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V1NORB' 149248,
                device '/dev/rD1F39V2NORB' 149248,
                device '/dev/rD1F39V3NORB' 149248,
                device '/dev/rD1F39V4NORB' 149248,
                device '/dev/rD1F39V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_newordb_040 of D1
drop tablespace ts_newordb_040;
create regular tablespace ts_newordb_040 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V1NORB' 149248,
                device '/dev/rD1F40V2NORB' 149248,
                device '/dev/rD1F40V3NORB' 149248,
                device '/dev/rD1F40V4NORB' 149248,
                device '/dev/rD1F40V5NORB' 149248
               )
        extentsize 256
        prefetchsize 4096;
commit;
connect reset;
```

ts/crts_order.ddl

```
connect to tpcc;
-- now creating TS for ts_order_001 of D1
drop tablespace ts_order_001;
create regular tablespace ts_order_001 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F01V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_002 of D1
drop tablespace ts_order_002;
create regular tablespace ts_order_002 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F01V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_003 of D1
drop tablespace ts_order_003;
create regular tablespace ts_order_003 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F01V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_004 of D1
drop tablespace ts_order_004;
create regular tablespace ts_order_004 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F01V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_005 of D1
drop tablespace ts_order_005;
create regular tablespace ts_order_005 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F01V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_006 of D1
drop tablespace ts_order_006;
create regular tablespace ts_order_006 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F02V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_007 of D1
drop tablespace ts_order_007;
create regular tablespace ts_order_007 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F02V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_008 of D1
drop tablespace ts_order_008;
create regular tablespace ts_order_008 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F02V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_009 of D1
drop tablespace ts_order_009;
create regular tablespace ts_order_009 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F02V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_010 of D1
drop tablespace ts_order_010;
create regular tablespace ts_order_010 pagesize 8K
         managed by database
```

```
        using
        (
                device '/dev/rD1F02V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_011 of D1
drop tablespace ts_order_011;
create regular tablespace ts_order_011 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_012 of D1
drop tablespace ts_order_012;
create regular tablespace ts_order_012 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_013 of D1
drop tablespace ts_order_013;
create regular tablespace ts_order_013 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_014 of D1
drop tablespace ts_order_014;
create regular tablespace ts_order_014 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_015 of D1
drop tablespace ts_order_015;
create regular tablespace ts_order_015 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F03V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_016 of D1
drop tablespace ts_order_016;
create regular tablespace ts_order_016 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_017 of D1
drop tablespace ts_order_017;
create regular tablespace ts_order_017 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_018 of D1
drop tablespace ts_order_018;
create regular tablespace ts_order_018 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_019 of D1
drop tablespace ts_order_019;
create regular tablespace ts_order_019 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_020 of D1
drop tablespace ts_order_020;
create regular tablespace ts_order_020 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F04V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_021 of D1
drop tablespace ts_order_021;
create regular tablespace ts_order_021 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F05V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_022 of D1
drop tablespace ts_order_022;
create regular tablespace ts_order_022 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F05V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_023 of D1
drop tablespace ts_order_023;
create regular tablespace ts_order_023 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F05V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_024 of D1
drop tablespace ts_order_024;
create regular tablespace ts_order_024 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F05V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_025 of D1
drop tablespace ts_order_025;
create regular tablespace ts_order_025 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F05V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_026 of D1
drop tablespace ts_order_026;
create regular tablespace ts_order_026 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F06V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_027 of D1
drop tablespace ts_order_027;
create regular tablespace ts_order_027 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F06V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_028 of D1
drop tablespace ts_order_028;
create regular tablespace ts_order_028 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F06V3ORD' 304640
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_029 of D1
drop tablespace ts_order_029;
create regular tablespace ts_order_029 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_030 of D1
drop tablespace ts_order_030;
create regular tablespace ts_order_030 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_031 of D1
drop tablespace ts_order_031;
create regular tablespace ts_order_031 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_032 of D1
drop tablespace ts_order_032;
create regular tablespace ts_order_032 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_033 of D1
drop tablespace ts_order_033;
create regular tablespace ts_order_033 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_034 of D1
drop tablespace ts_order_034;
create regular tablespace ts_order_034 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_035 of D1
drop tablespace ts_order_035;
create regular tablespace ts_order_035 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_036 of D1
drop tablespace ts_order_036;
create regular tablespace ts_order_036 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_037 of D1
drop tablespace ts_order_037;
create regular tablespace ts_order_037 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_038 of D1
drop tablespace ts_order_038;
create regular tablespace ts_order_038 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_039 of D1
drop tablespace ts_order_039;
create regular tablespace ts_order_039 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_040 of D1
drop tablespace ts_order_040;
create regular tablespace ts_order_040 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_041 of D1
drop tablespace ts_order_041;
create regular tablespace ts_order_041 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_042 of D1
drop tablespace ts_order_042;
create regular tablespace ts_order_042 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_043 of D1
drop tablespace ts_order_043;
create regular tablespace ts_order_043 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_044 of D1
drop tablespace ts_order_044;
create regular tablespace ts_order_044 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_045 of D1
drop tablespace ts_order_045;
create regular tablespace ts_order_045 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_046 of D1
drop tablespace ts_order_046;
create regular tablespace ts_order_046 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F10V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_047 of D1
drop tablespace ts_order_047;
create regular tablespace ts_order_047 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_048 of D1
drop tablespace ts_order_048;
create regular tablespace ts_order_048 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_049 of D1
drop tablespace ts_order_049;
create regular tablespace ts_order_049 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_050 of D1
drop tablespace ts_order_050;
create regular tablespace ts_order_050 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_051 of D1
drop tablespace ts_order_051;
create regular tablespace ts_order_051 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_052 of D1
drop tablespace ts_order_052;
create regular tablespace ts_order_052 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_053 of D1
drop tablespace ts_order_053;
create regular tablespace ts_order_053 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_054 of D1
drop tablespace ts_order_054;
create regular tablespace ts_order_054 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_055 of D1
drop tablespace ts_order_055;
create regular tablespace ts_order_055 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_056 of D1
drop tablespace ts_order_056;
create regular tablespace ts_order_056 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_057 of D1
drop tablespace ts_order_057;
create regular tablespace ts_order_057 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_058 of D1
drop tablespace ts_order_058;
create regular tablespace ts_order_058 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_059 of D1
drop tablespace ts_order_059;
create regular tablespace ts_order_059 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_060 of D1
drop tablespace ts_order_060;
create regular tablespace ts_order_060 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_061 of D1
drop tablespace ts_order_061;
create regular tablespace ts_order_061 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_062 of D1
drop tablespace ts_order_062;
create regular tablespace ts_order_062 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_063 of D1
drop tablespace ts_order_063;
create regular tablespace ts_order_063 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_064 of D1
drop tablespace ts_order_064;
create regular tablespace ts_order_064 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_065 of D1
```

```
drop tablespace ts_order_065;
create regular tablespace ts_order_065 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_066 of D1
drop tablespace ts_order_066;
create regular tablespace ts_order_066 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_067 of D1
drop tablespace ts_order_067;
create regular tablespace ts_order_067 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_068 of D1
drop tablespace ts_order_068;
create regular tablespace ts_order_068 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_069 of D1
drop tablespace ts_order_069;
create regular tablespace ts_order_069 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_070 of D1
drop tablespace ts_order_070;
create regular tablespace ts_order_070 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_071 of D1
drop tablespace ts_order_071;
create regular tablespace ts_order_071 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_072 of D1
drop tablespace ts_order_072;
create regular tablespace ts_order_072 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_073 of D1
drop tablespace ts_order_073;
create regular tablespace ts_order_073 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_074 of D1
drop tablespace ts_order_074;
create regular tablespace ts_order_074 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_075 of D1
drop tablespace ts_order_075;
create regular tablespace ts_order_075 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_076 of D1
drop tablespace ts_order_076;
create regular tablespace ts_order_076 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_077 of D1
drop tablespace ts_order_077;
create regular tablespace ts_order_077 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_078 of D1
drop tablespace ts_order_078;
create regular tablespace ts_order_078 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_079 of D1
drop tablespace ts_order_079;
create regular tablespace ts_order_079 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_080 of D1
drop tablespace ts_order_080;
create regular tablespace ts_order_080 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_081 of D1
drop tablespace ts_order_081;
create regular tablespace ts_order_081 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_082 of D1
drop tablespace ts_order_082;
create regular tablespace ts_order_082 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_083 of D1
drop tablespace ts_order_083;
create regular tablespace ts_order_083 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F17V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_084 of D1
drop tablespace ts_order_084;
create regular tablespace ts_order_084 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_085 of D1
drop tablespace ts_order_085;
create regular tablespace ts_order_085 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_086 of D1
drop tablespace ts_order_086;
create regular tablespace ts_order_086 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F18V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_087 of D1
drop tablespace ts_order_087;
create regular tablespace ts_order_087 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F18V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_088 of D1
drop tablespace ts_order_088;
create regular tablespace ts_order_088 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F18V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_089 of D1
drop tablespace ts_order_089;
create regular tablespace ts_order_089 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F18V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_090 of D1
drop tablespace ts_order_090;
create regular tablespace ts_order_090 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F18V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_091 of D1
drop tablespace ts_order_091;
create regular tablespace ts_order_091 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F19V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_092 of D1
drop tablespace ts_order_092;
create regular tablespace ts_order_092 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F19V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_093 of D1
drop tablespace ts_order_093;
create regular tablespace ts_order_093 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F19V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_094 of D1
drop tablespace ts_order_094;
create regular tablespace ts_order_094 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F19V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_095 of D1
drop tablespace ts_order_095;
create regular tablespace ts_order_095 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F19V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_096 of D1
drop tablespace ts_order_096;
create regular tablespace ts_order_096 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F20V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_097 of D1
drop tablespace ts_order_097;
create regular tablespace ts_order_097 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F20V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_098 of D1
drop tablespace ts_order_098;
create regular tablespace ts_order_098 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F20V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_099 of D1
drop tablespace ts_order_099;
create regular tablespace ts_order_099 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F20V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_100 of D1
drop tablespace ts_order_100;
create regular tablespace ts_order_100 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F20V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_101 of D1
drop tablespace ts_order_101;
create regular tablespace ts_order_101 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F21V1ORD' 304640
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_102 of D1
drop tablespace ts_order_102;
create regular tablespace ts_order_102 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_103 of D1
drop tablespace ts_order_103;
create regular tablespace ts_order_103 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_104 of D1
drop tablespace ts_order_104;
create regular tablespace ts_order_104 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_105 of D1
drop tablespace ts_order_105;
create regular tablespace ts_order_105 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_106 of D1
drop tablespace ts_order_106;
create regular tablespace ts_order_106 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_107 of D1
drop tablespace ts_order_107;
create regular tablespace ts_order_107 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_108 of D1
drop tablespace ts_order_108;
create regular tablespace ts_order_108 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_109 of D1
drop tablespace ts_order_109;
create regular tablespace ts_order_109 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_110 of D1
drop tablespace ts_order_110;
create regular tablespace ts_order_110 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_111 of D1
drop tablespace ts_order_111;
create regular tablespace ts_order_111 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_112 of D1
drop tablespace ts_order_112;
create regular tablespace ts_order_112 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_113 of D1
drop tablespace ts_order_113;
create regular tablespace ts_order_113 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_114 of D1
drop tablespace ts_order_114;
create regular tablespace ts_order_114 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_115 of D1
drop tablespace ts_order_115;
create regular tablespace ts_order_115 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_116 of D1
drop tablespace ts_order_116;
create regular tablespace ts_order_116 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_117 of D1
drop tablespace ts_order_117;
create regular tablespace ts_order_117 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_118 of D1
drop tablespace ts_order_118;
create regular tablespace ts_order_118 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_119 of D1
drop tablespace ts_order_119;
create regular tablespace ts_order_119 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_120 of D1
drop tablespace ts_order_120;
create regular tablespace ts_order_120 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_121 of D1
drop tablespace ts_order_121;
create regular tablespace ts_order_121 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_122 of D1
drop tablespace ts_order_122;
create regular tablespace ts_order_122 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_123 of D1
drop tablespace ts_order_123;
create regular tablespace ts_order_123 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_124 of D1
drop tablespace ts_order_124;
create regular tablespace ts_order_124 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_125 of D1
drop tablespace ts_order_125;
create regular tablespace ts_order_125 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_126 of D1
drop tablespace ts_order_126;
create regular tablespace ts_order_126 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_127 of D1
drop tablespace ts_order_127;
create regular tablespace ts_order_127 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_128 of D1
drop tablespace ts_order_128;
create regular tablespace ts_order_128 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_129 of D1
drop tablespace ts_order_129;
create regular tablespace ts_order_129 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_130 of D1
drop tablespace ts_order_130;
create regular tablespace ts_order_130 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_131 of D1
drop tablespace ts_order_131;
create regular tablespace ts_order_131 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_132 of D1
drop tablespace ts_order_132;
create regular tablespace ts_order_132 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_133 of D1
drop tablespace ts_order_133;
create regular tablespace ts_order_133 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_134 of D1
drop tablespace ts_order_134;
create regular tablespace ts_order_134 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_135 of D1
drop tablespace ts_order_135;
create regular tablespace ts_order_135 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_136 of D1
drop tablespace ts_order_136;
create regular tablespace ts_order_136 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F28V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_137 of D1
drop tablespace ts_order_137;
create regular tablespace ts_order_137 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F28V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_138 of D1
```

```
drop tablespace ts_order_138;
create regular tablespace ts_order_138 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_139 of D1
drop tablespace ts_order_139;
create regular tablespace ts_order_139 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_140 of D1
drop tablespace ts_order_140;
create regular tablespace ts_order_140 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_141 of D1
drop tablespace ts_order_141;
create regular tablespace ts_order_141 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_142 of D1
drop tablespace ts_order_142;
create regular tablespace ts_order_142 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_143 of D1
drop tablespace ts_order_143;
create regular tablespace ts_order_143 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_144 of D1
drop tablespace ts_order_144;
create regular tablespace ts_order_144 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_145 of D1
drop tablespace ts_order_145;
create regular tablespace ts_order_145 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_146 of D1
drop tablespace ts_order_146;
create regular tablespace ts_order_146 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_147 of D1
drop tablespace ts_order_147;
create regular tablespace ts_order_147 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_148 of D1
drop tablespace ts_order_148;
create regular tablespace ts_order_148 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_149 of D1
drop tablespace ts_order_149;
create regular tablespace ts_order_149 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_150 of D1
drop tablespace ts_order_150;
create regular tablespace ts_order_150 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_151 of D1
drop tablespace ts_order_151;
create regular tablespace ts_order_151 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V1ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_152 of D1
drop tablespace ts_order_152;
create regular tablespace ts_order_152 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V2ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_153 of D1
drop tablespace ts_order_153;
create regular tablespace ts_order_153 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V3ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_154 of D1
drop tablespace ts_order_154;
create regular tablespace ts_order_154 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V4ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_155 of D1
drop tablespace ts_order_155;
create regular tablespace ts_order_155 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V5ORD' 304640
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_156 of D1
drop tablespace ts_order_156;
create regular tablespace ts_order_156 pagesize 8K
        managed by database
```

```
            using
            (
                    device '/dev/rD1F32V1ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_157 of D1
drop tablespace ts_order_157;
create regular tablespace ts_order_157 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F32V2ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_158 of D1
drop tablespace ts_order_158;
create regular tablespace ts_order_158 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F32V3ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_159 of D1
drop tablespace ts_order_159;
create regular tablespace ts_order_159 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F32V4ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_160 of D1
drop tablespace ts_order_160;
create regular tablespace ts_order_160 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F32V5ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_161 of D1
drop tablespace ts_order_161;
create regular tablespace ts_order_161 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F33V1ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_162 of D1
drop tablespace ts_order_162;
create regular tablespace ts_order_162 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F33V2ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_163 of D1
drop tablespace ts_order_163;
create regular tablespace ts_order_163 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F33V3ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_164 of D1
drop tablespace ts_order_164;
create regular tablespace ts_order_164 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F33V4ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_165 of D1
drop tablespace ts_order_165;
create regular tablespace ts_order_165 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F33V5ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_166 of D1
drop tablespace ts_order_166;
create regular tablespace ts_order_166 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F34V1ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_167 of D1
drop tablespace ts_order_167;
create regular tablespace ts_order_167 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F34V2ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_168 of D1
drop tablespace ts_order_168;
create regular tablespace ts_order_168 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F34V3ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_169 of D1
drop tablespace ts_order_169;
create regular tablespace ts_order_169 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F34V4ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_170 of D1
drop tablespace ts_order_170;
create regular tablespace ts_order_170 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F34V5ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_171 of D1
drop tablespace ts_order_171;
create regular tablespace ts_order_171 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F35V1ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_172 of D1
drop tablespace ts_order_172;
create regular tablespace ts_order_172 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F35V2ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_173 of D1
drop tablespace ts_order_173;
create regular tablespace ts_order_173 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F35V3ORD' 304640
                  )
          extentsize 256
          prefetchsize 4096
          bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_174 of D1
drop tablespace ts_order_174;
create regular tablespace ts_order_174 pagesize 8K
            managed by database
            using
            (
                    device '/dev/rD1F35V4ORD' 304640
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_175 of D1
drop tablespace ts_order_175;
create regular tablespace ts_order_175 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_176 of D1
drop tablespace ts_order_176;
create regular tablespace ts_order_176 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_177 of D1
drop tablespace ts_order_177;
create regular tablespace ts_order_177 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_178 of D1
drop tablespace ts_order_178;
create regular tablespace ts_order_178 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_179 of D1
drop tablespace ts_order_179;
create regular tablespace ts_order_179 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_180 of D1
drop tablespace ts_order_180;
create regular tablespace ts_order_180 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_181 of D1
drop tablespace ts_order_181;
create regular tablespace ts_order_181 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_182 of D1
drop tablespace ts_order_182;
create regular tablespace ts_order_182 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_183 of D1
drop tablespace ts_order_183;
create regular tablespace ts_order_183 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_184 of D1
drop tablespace ts_order_184;
create regular tablespace ts_order_184 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_185 of D1
drop tablespace ts_order_185;
create regular tablespace ts_order_185 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_186 of D1
drop tablespace ts_order_186;
create regular tablespace ts_order_186 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_187 of D1
drop tablespace ts_order_187;
create regular tablespace ts_order_187 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_188 of D1
drop tablespace ts_order_188;
create regular tablespace ts_order_188 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V3ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_189 of D1
drop tablespace ts_order_189;
create regular tablespace ts_order_189 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V4ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_190 of D1
drop tablespace ts_order_190;
create regular tablespace ts_order_190 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V5ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_191 of D1
drop tablespace ts_order_191;
create regular tablespace ts_order_191 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F39V1ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_192 of D1
drop tablespace ts_order_192;
create regular tablespace ts_order_192 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F39V2ORD' 304640
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_193 of D1
drop tablespace ts_order_193;
create regular tablespace ts_order_193 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_194 of D1
drop tablespace ts_order_194;
create regular tablespace ts_order_194 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_195 of D1
drop tablespace ts_order_195;
create regular tablespace ts_order_195 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_196 of D1
drop tablespace ts_order_196;
create regular tablespace ts_order_196 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V1ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_197 of D1
drop tablespace ts_order_197;
create regular tablespace ts_order_197 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V2ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_198 of D1
drop tablespace ts_order_198;
create regular tablespace ts_order_198 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V3ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_199 of D1
drop tablespace ts_order_199;
create regular tablespace ts_order_199 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V4ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_order_200 of D1
drop tablespace ts_order_200;
create regular tablespace ts_order_200 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V5ORD' 304640
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
connect reset;
```

ts/crts_orderline.ddl

```
connect to tpcc;
-- now creating TS for ts_orderline_001 of D1
drop tablespace ts_orderline_001;
create regular tablespace ts_orderline_001 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F01V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_002 of D1
drop tablespace ts_orderline_002;
create regular tablespace ts_orderline_002 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F01V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_003 of D1
drop tablespace ts_orderline_003;
create regular tablespace ts_orderline_003 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F01V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_004 of D1
drop tablespace ts_orderline_004;
create regular tablespace ts_orderline_004 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F01V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_005 of D1
drop tablespace ts_orderline_005;
create regular tablespace ts_orderline_005 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F01V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_006 of D1
drop tablespace ts_orderline_006;
create regular tablespace ts_orderline_006 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F02V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_007 of D1
drop tablespace ts_orderline_007;
create regular tablespace ts_orderline_007 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F02V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_008 of D1
drop tablespace ts_orderline_008;
create regular tablespace ts_orderline_008 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F02V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_009 of D1
drop tablespace ts_orderline_009;
create regular tablespace ts_orderline_009 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F02V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_010 of D1
drop tablespace ts_orderline_010;
create regular tablespace ts_orderline_010 pagesize 8K
         managed by database
```

```
            using
            (
                    device '/dev/rD1F02V5ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_011 of D1
drop tablespace ts_orderline_011;
create regular tablespace ts_orderline_011 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F03V1ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_012 of D1
drop tablespace ts_orderline_012;
create regular tablespace ts_orderline_012 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F03V2ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_013 of D1
drop tablespace ts_orderline_013;
create regular tablespace ts_orderline_013 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F03V3ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_014 of D1
drop tablespace ts_orderline_014;
create regular tablespace ts_orderline_014 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F03V4ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_015 of D1
drop tablespace ts_orderline_015;
create regular tablespace ts_orderline_015 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F03V5ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_016 of D1
drop tablespace ts_orderline_016;
create regular tablespace ts_orderline_016 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F04V1ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_017 of D1
drop tablespace ts_orderline_017;
create regular tablespace ts_orderline_017 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F04V2ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_018 of D1
drop tablespace ts_orderline_018;
create regular tablespace ts_orderline_018 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F04V3ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_019 of D1
drop tablespace ts_orderline_019;
create regular tablespace ts_orderline_019 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F04V4ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_020 of D1
drop tablespace ts_orderline_020;
create regular tablespace ts_orderline_020 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F04V5ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_021 of D1
drop tablespace ts_orderline_021;
create regular tablespace ts_orderline_021 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F05V1ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_022 of D1
drop tablespace ts_orderline_022;
create regular tablespace ts_orderline_022 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F05V2ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_023 of D1
drop tablespace ts_orderline_023;
create regular tablespace ts_orderline_023 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F05V3ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_024 of D1
drop tablespace ts_orderline_024;
create regular tablespace ts_orderline_024 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F05V4ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_025 of D1
drop tablespace ts_orderline_025;
create regular tablespace ts_orderline_025 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F05V5ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_026 of D1
drop tablespace ts_orderline_026;
create regular tablespace ts_orderline_026 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F06V1ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_027 of D1
drop tablespace ts_orderline_027;
create regular tablespace ts_orderline_027 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F06V2ORL' 7984128
                   )
            extentsize 256
            prefetchsize 4096
            bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_028 of D1
drop tablespace ts_orderline_028;
create regular tablespace ts_orderline_028 pagesize 8K
             managed by database
             using
             (
                    device '/dev/rD1F06V3ORL' 7984128
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_029 of D1
drop tablespace ts_orderline_029;
create regular tablespace ts_orderline_029 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_030 of D1
drop tablespace ts_orderline_030;
create regular tablespace ts_orderline_030 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F06V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_031 of D1
drop tablespace ts_orderline_031;
create regular tablespace ts_orderline_031 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_032 of D1
drop tablespace ts_orderline_032;
create regular tablespace ts_orderline_032 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_033 of D1
drop tablespace ts_orderline_033;
create regular tablespace ts_orderline_033 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_034 of D1
drop tablespace ts_orderline_034;
create regular tablespace ts_orderline_034 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_035 of D1
drop tablespace ts_orderline_035;
create regular tablespace ts_orderline_035 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F07V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_036 of D1
drop tablespace ts_orderline_036;
create regular tablespace ts_orderline_036 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_037 of D1
drop tablespace ts_orderline_037;
create regular tablespace ts_orderline_037 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_038 of D1
drop tablespace ts_orderline_038;
create regular tablespace ts_orderline_038 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_039 of D1
drop tablespace ts_orderline_039;
create regular tablespace ts_orderline_039 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_040 of D1
drop tablespace ts_orderline_040;
create regular tablespace ts_orderline_040 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F08V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_041 of D1
drop tablespace ts_orderline_041;
create regular tablespace ts_orderline_041 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_042 of D1
drop tablespace ts_orderline_042;
create regular tablespace ts_orderline_042 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_043 of D1
drop tablespace ts_orderline_043;
create regular tablespace ts_orderline_043 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_044 of D1
drop tablespace ts_orderline_044;
create regular tablespace ts_orderline_044 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_045 of D1
drop tablespace ts_orderline_045;
create regular tablespace ts_orderline_045 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F09V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_046 of D1
drop tablespace ts_orderline_046;
create regular tablespace ts_orderline_046 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F10V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_047 of D1
drop tablespace ts_orderline_047;
create regular tablespace ts_orderline_047 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_048 of D1
drop tablespace ts_orderline_048;
create regular tablespace ts_orderline_048 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_049 of D1
drop tablespace ts_orderline_049;
create regular tablespace ts_orderline_049 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_050 of D1
drop tablespace ts_orderline_050;
create regular tablespace ts_orderline_050 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F10V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_051 of D1
drop tablespace ts_orderline_051;
create regular tablespace ts_orderline_051 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_052 of D1
drop tablespace ts_orderline_052;
create regular tablespace ts_orderline_052 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_053 of D1
drop tablespace ts_orderline_053;
create regular tablespace ts_orderline_053 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_054 of D1
drop tablespace ts_orderline_054;
create regular tablespace ts_orderline_054 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_055 of D1
drop tablespace ts_orderline_055;
create regular tablespace ts_orderline_055 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F11V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_056 of D1
drop tablespace ts_orderline_056;
create regular tablespace ts_orderline_056 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_057 of D1
drop tablespace ts_orderline_057;
create regular tablespace ts_orderline_057 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_058 of D1
drop tablespace ts_orderline_058;
create regular tablespace ts_orderline_058 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_059 of D1
drop tablespace ts_orderline_059;
create regular tablespace ts_orderline_059 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_060 of D1
drop tablespace ts_orderline_060;
create regular tablespace ts_orderline_060 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F12V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_061 of D1
drop tablespace ts_orderline_061;
create regular tablespace ts_orderline_061 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_062 of D1
drop tablespace ts_orderline_062;
create regular tablespace ts_orderline_062 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_063 of D1
drop tablespace ts_orderline_063;
create regular tablespace ts_orderline_063 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_064 of D1
drop tablespace ts_orderline_064;
create regular tablespace ts_orderline_064 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F13V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_065 of D1
```

```
drop tablespace ts_orderline_065;
create regular tablespace ts_orderline_065 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F13V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_066 of D1
drop tablespace ts_orderline_066;
create regular tablespace ts_orderline_066 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_067 of D1
drop tablespace ts_orderline_067;
create regular tablespace ts_orderline_067 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_068 of D1
drop tablespace ts_orderline_068;
create regular tablespace ts_orderline_068 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_069 of D1
drop tablespace ts_orderline_069;
create regular tablespace ts_orderline_069 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_070 of D1
drop tablespace ts_orderline_070;
create regular tablespace ts_orderline_070 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F14V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_071 of D1
drop tablespace ts_orderline_071;
create regular tablespace ts_orderline_071 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_072 of D1
drop tablespace ts_orderline_072;
create regular tablespace ts_orderline_072 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_073 of D1
drop tablespace ts_orderline_073;
create regular tablespace ts_orderline_073 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_074 of D1
drop tablespace ts_orderline_074;
create regular tablespace ts_orderline_074 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_075 of D1
drop tablespace ts_orderline_075;
create regular tablespace ts_orderline_075 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F15V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_076 of D1
drop tablespace ts_orderline_076;
create regular tablespace ts_orderline_076 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_077 of D1
drop tablespace ts_orderline_077;
create regular tablespace ts_orderline_077 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_078 of D1
drop tablespace ts_orderline_078;
create regular tablespace ts_orderline_078 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_079 of D1
drop tablespace ts_orderline_079;
create regular tablespace ts_orderline_079 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_080 of D1
drop tablespace ts_orderline_080;
create regular tablespace ts_orderline_080 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F16V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_081 of D1
drop tablespace ts_orderline_081;
create regular tablespace ts_orderline_081 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_082 of D1
drop tablespace ts_orderline_082;
create regular tablespace ts_orderline_082 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F17V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_083 of D1
drop tablespace ts_orderline_083;
create regular tablespace ts_orderline_083 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F17V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_084 of D1
drop tablespace ts_orderline_084;
create regular tablespace ts_orderline_084 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_085 of D1
drop tablespace ts_orderline_085;
create regular tablespace ts_orderline_085 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F17V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_086 of D1
drop tablespace ts_orderline_086;
create regular tablespace ts_orderline_086 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_087 of D1
drop tablespace ts_orderline_087;
create regular tablespace ts_orderline_087 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_088 of D1
drop tablespace ts_orderline_088;
create regular tablespace ts_orderline_088 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_089 of D1
drop tablespace ts_orderline_089;
create regular tablespace ts_orderline_089 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_090 of D1
drop tablespace ts_orderline_090;
create regular tablespace ts_orderline_090 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F18V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_091 of D1
drop tablespace ts_orderline_091;
create regular tablespace ts_orderline_091 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F19V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_092 of D1
drop tablespace ts_orderline_092;
create regular tablespace ts_orderline_092 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F19V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_093 of D1
drop tablespace ts_orderline_093;
create regular tablespace ts_orderline_093 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F19V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_094 of D1
drop tablespace ts_orderline_094;
create regular tablespace ts_orderline_094 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F19V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_095 of D1
drop tablespace ts_orderline_095;
create regular tablespace ts_orderline_095 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F19V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_096 of D1
drop tablespace ts_orderline_096;
create regular tablespace ts_orderline_096 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F20V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_097 of D1
drop tablespace ts_orderline_097;
create regular tablespace ts_orderline_097 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F20V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_098 of D1
drop tablespace ts_orderline_098;
create regular tablespace ts_orderline_098 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F20V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_099 of D1
drop tablespace ts_orderline_099;
create regular tablespace ts_orderline_099 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F20V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_100 of D1
drop tablespace ts_orderline_100;
create regular tablespace ts_orderline_100 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F20V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_101 of D1
drop tablespace ts_orderline_101;
create regular tablespace ts_orderline_101 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F21V1ORL' 7984128
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_102 of D1
drop tablespace ts_orderline_102;
create regular tablespace ts_orderline_102 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_103 of D1
drop tablespace ts_orderline_103;
create regular tablespace ts_orderline_103 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_104 of D1
drop tablespace ts_orderline_104;
create regular tablespace ts_orderline_104 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_105 of D1
drop tablespace ts_orderline_105;
create regular tablespace ts_orderline_105 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F21V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_106 of D1
drop tablespace ts_orderline_106;
create regular tablespace ts_orderline_106 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_107 of D1
drop tablespace ts_orderline_107;
create regular tablespace ts_orderline_107 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_108 of D1
drop tablespace ts_orderline_108;
create regular tablespace ts_orderline_108 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_109 of D1
drop tablespace ts_orderline_109;
create regular tablespace ts_orderline_109 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_110 of D1
drop tablespace ts_orderline_110;
create regular tablespace ts_orderline_110 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F22V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_111 of D1
drop tablespace ts_orderline_111;
create regular tablespace ts_orderline_111 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_112 of D1
drop tablespace ts_orderline_112;
create regular tablespace ts_orderline_112 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_113 of D1
drop tablespace ts_orderline_113;
create regular tablespace ts_orderline_113 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_114 of D1
drop tablespace ts_orderline_114;
create regular tablespace ts_orderline_114 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_115 of D1
drop tablespace ts_orderline_115;
create regular tablespace ts_orderline_115 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F23V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_116 of D1
drop tablespace ts_orderline_116;
create regular tablespace ts_orderline_116 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_117 of D1
drop tablespace ts_orderline_117;
create regular tablespace ts_orderline_117 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_118 of D1
drop tablespace ts_orderline_118;
create regular tablespace ts_orderline_118 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_119 of D1
drop tablespace ts_orderline_119;
create regular tablespace ts_orderline_119 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F24V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_120 of D1
drop tablespace ts_orderline_120;
create regular tablespace ts_orderline_120 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F24V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_121 of D1
drop tablespace ts_orderline_121;
create regular tablespace ts_orderline_121 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_122 of D1
drop tablespace ts_orderline_122;
create regular tablespace ts_orderline_122 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_123 of D1
drop tablespace ts_orderline_123;
create regular tablespace ts_orderline_123 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_124 of D1
drop tablespace ts_orderline_124;
create regular tablespace ts_orderline_124 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_125 of D1
drop tablespace ts_orderline_125;
create regular tablespace ts_orderline_125 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F25V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_126 of D1
drop tablespace ts_orderline_126;
create regular tablespace ts_orderline_126 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_127 of D1
drop tablespace ts_orderline_127;
create regular tablespace ts_orderline_127 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_128 of D1
drop tablespace ts_orderline_128;
create regular tablespace ts_orderline_128 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_129 of D1
drop tablespace ts_orderline_129;
create regular tablespace ts_orderline_129 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_130 of D1
drop tablespace ts_orderline_130;
create regular tablespace ts_orderline_130 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F26V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_131 of D1
drop tablespace ts_orderline_131;
create regular tablespace ts_orderline_131 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_132 of D1
drop tablespace ts_orderline_132;
create regular tablespace ts_orderline_132 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_133 of D1
drop tablespace ts_orderline_133;
create regular tablespace ts_orderline_133 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_134 of D1
drop tablespace ts_orderline_134;
create regular tablespace ts_orderline_134 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_135 of D1
drop tablespace ts_orderline_135;
create regular tablespace ts_orderline_135 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F27V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_136 of D1
drop tablespace ts_orderline_136;
create regular tablespace ts_orderline_136 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F28V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_137 of D1
drop tablespace ts_orderline_137;
create regular tablespace ts_orderline_137 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F28V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_138 of D1
```

```
drop tablespace ts_orderline_138;
create regular tablespace ts_orderline_138 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_139 of D1
drop tablespace ts_orderline_139;
create regular tablespace ts_orderline_139 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_140 of D1
drop tablespace ts_orderline_140;
create regular tablespace ts_orderline_140 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F28V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_141 of D1
drop tablespace ts_orderline_141;
create regular tablespace ts_orderline_141 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_142 of D1
drop tablespace ts_orderline_142;
create regular tablespace ts_orderline_142 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_143 of D1
drop tablespace ts_orderline_143;
create regular tablespace ts_orderline_143 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_144 of D1
drop tablespace ts_orderline_144;
create regular tablespace ts_orderline_144 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_145 of D1
drop tablespace ts_orderline_145;
create regular tablespace ts_orderline_145 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F29V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_146 of D1
drop tablespace ts_orderline_146;
create regular tablespace ts_orderline_146 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_147 of D1
drop tablespace ts_orderline_147;
create regular tablespace ts_orderline_147 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_148 of D1
drop tablespace ts_orderline_148;
create regular tablespace ts_orderline_148 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_149 of D1
drop tablespace ts_orderline_149;
create regular tablespace ts_orderline_149 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_150 of D1
drop tablespace ts_orderline_150;
create regular tablespace ts_orderline_150 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F30V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_151 of D1
drop tablespace ts_orderline_151;
create regular tablespace ts_orderline_151 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_152 of D1
drop tablespace ts_orderline_152;
create regular tablespace ts_orderline_152 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_153 of D1
drop tablespace ts_orderline_153;
create regular tablespace ts_orderline_153 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_154 of D1
drop tablespace ts_orderline_154;
create regular tablespace ts_orderline_154 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_155 of D1
drop tablespace ts_orderline_155;
create regular tablespace ts_orderline_155 pagesize 8K
        managed by database
        using
        (
                device '/dev/rD1F31V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_156 of D1
drop tablespace ts_orderline_156;
create regular tablespace ts_orderline_156 pagesize 8K
        managed by database
```

```
        using
        (
                device '/dev/rD1F32V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_157 of D1
drop tablespace ts_orderline_157;
create regular tablespace ts_orderline_157 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_158 of D1
drop tablespace ts_orderline_158;
create regular tablespace ts_orderline_158 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_159 of D1
drop tablespace ts_orderline_159;
create regular tablespace ts_orderline_159 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_160 of D1
drop tablespace ts_orderline_160;
create regular tablespace ts_orderline_160 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F32V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_161 of D1
drop tablespace ts_orderline_161;
create regular tablespace ts_orderline_161 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_162 of D1
drop tablespace ts_orderline_162;
create regular tablespace ts_orderline_162 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_163 of D1
drop tablespace ts_orderline_163;
create regular tablespace ts_orderline_163 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_164 of D1
drop tablespace ts_orderline_164;
create regular tablespace ts_orderline_164 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_165 of D1
drop tablespace ts_orderline_165;
create regular tablespace ts_orderline_165 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F33V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_166 of D1
drop tablespace ts_orderline_166;
create regular tablespace ts_orderline_166 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F34V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_167 of D1
drop tablespace ts_orderline_167;
create regular tablespace ts_orderline_167 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F34V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_168 of D1
drop tablespace ts_orderline_168;
create regular tablespace ts_orderline_168 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F34V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_169 of D1
drop tablespace ts_orderline_169;
create regular tablespace ts_orderline_169 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F34V4ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_170 of D1
drop tablespace ts_orderline_170;
create regular tablespace ts_orderline_170 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F34V5ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_171 of D1
drop tablespace ts_orderline_171;
create regular tablespace ts_orderline_171 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F35V1ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_172 of D1
drop tablespace ts_orderline_172;
create regular tablespace ts_orderline_172 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F35V2ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_173 of D1
drop tablespace ts_orderline_173;
create regular tablespace ts_orderline_173 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F35V3ORL' 7984128
               )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_174 of D1
drop tablespace ts_orderline_174;
create regular tablespace ts_orderline_174 pagesize 8K
         managed by database
         using
         (
                device '/dev/rD1F35V4ORL' 7984128
```

```
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_175 of D1
drop tablespace ts_orderline_175;
create regular tablespace ts_orderline_175 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F35V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_176 of D1
drop tablespace ts_orderline_176;
create regular tablespace ts_orderline_176 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_177 of D1
drop tablespace ts_orderline_177;
create regular tablespace ts_orderline_177 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_178 of D1
drop tablespace ts_orderline_178;
create regular tablespace ts_orderline_178 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_179 of D1
drop tablespace ts_orderline_179;
create regular tablespace ts_orderline_179 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_180 of D1
drop tablespace ts_orderline_180;
create regular tablespace ts_orderline_180 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F36V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_181 of D1
drop tablespace ts_orderline_181;
create regular tablespace ts_orderline_181 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_182 of D1
drop tablespace ts_orderline_182;
create regular tablespace ts_orderline_182 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_183 of D1
drop tablespace ts_orderline_183;
create regular tablespace ts_orderline_183 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_184 of D1
drop tablespace ts_orderline_184;
create regular tablespace ts_orderline_184 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_185 of D1
drop tablespace ts_orderline_185;
create regular tablespace ts_orderline_185 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F37V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_186 of D1
drop tablespace ts_orderline_186;
create regular tablespace ts_orderline_186 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_187 of D1
drop tablespace ts_orderline_187;
create regular tablespace ts_orderline_187 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_188 of D1
drop tablespace ts_orderline_188;
create regular tablespace ts_orderline_188 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V3ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_189 of D1
drop tablespace ts_orderline_189;
create regular tablespace ts_orderline_189 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V4ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_190 of D1
drop tablespace ts_orderline_190;
create regular tablespace ts_orderline_190 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F38V5ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_191 of D1
drop tablespace ts_orderline_191;
create regular tablespace ts_orderline_191 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F39V1ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_192 of D1
drop tablespace ts_orderline_192;
create regular tablespace ts_orderline_192 pagesize 8K
         managed by database
         using
         (
                 device '/dev/rD1F39V2ORL' 7984128
                )
        extentsize 256
        prefetchsize 4096
```

```
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_193 of D1
drop tablespace ts_orderline_193;
create regular tablespace ts_orderline_193 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_194 of D1
drop tablespace ts_orderline_194;
create regular tablespace ts_orderline_194 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_195 of D1
drop tablespace ts_orderline_195;
create regular tablespace ts_orderline_195 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F39V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_196 of D1
drop tablespace ts_orderline_196;
create regular tablespace ts_orderline_196 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V1ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_197 of D1
drop tablespace ts_orderline_197;
create regular tablespace ts_orderline_197 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V2ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_198 of D1
drop tablespace ts_orderline_198;
create regular tablespace ts_orderline_198 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V3ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_199 of D1
drop tablespace ts_orderline_199;
create regular tablespace ts_orderline_199 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V4ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
-- now creating TS for ts_orderline_200 of D1
drop tablespace ts_orderline_200;
create regular tablespace ts_orderline_200 pagesize 8K
         managed by database
         using
         (
                  device '/dev/rD1F40V5ORL' 7984128
                 )
        extentsize 256
        prefetchsize 4096
        bufferpool ibmdefaultbp8K;
commit;
connect reset;
```

ts/crts_stock.ddl

```
connect to tpcc;
-- now creating TS for ts_stock_001 of D1
drop tablespace ts_stock_001;
create regular tablespace ts_stock_001 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F01V1STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_002 of D1
drop tablespace ts_stock_002;
create regular tablespace ts_stock_002 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F01V2STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_003 of D1
drop tablespace ts_stock_003;
create regular tablespace ts_stock_003 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F01V3STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_004 of D1
drop tablespace ts_stock_004;
create regular tablespace ts_stock_004 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F01V4STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_005 of D1
drop tablespace ts_stock_005;
create regular tablespace ts_stock_005 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F01V5STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_006 of D1
drop tablespace ts_stock_006;
create regular tablespace ts_stock_006 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F02V1STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_007 of D1
drop tablespace ts_stock_007;
create regular tablespace ts_stock_007 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F02V2STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_008 of D1
drop tablespace ts_stock_008;
create regular tablespace ts_stock_008 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F02V3STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_009 of D1
drop tablespace ts_stock_009;
create regular tablespace ts_stock_009 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F02V4STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_010 of D1
drop tablespace ts_stock_010;
create regular tablespace ts_stock_010 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F02V5STK' 14000384
                 )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_011 of D1
drop tablespace ts_stock_011;
```

```
create regular tablespace ts_stock_011 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_012 of D1
drop tablespace ts_stock_012;
create regular tablespace ts_stock_012 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_013 of D1
drop tablespace ts_stock_013;
create regular tablespace ts_stock_013 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_014 of D1
drop tablespace ts_stock_014;
create regular tablespace ts_stock_014 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_015 of D1
drop tablespace ts_stock_015;
create regular tablespace ts_stock_015 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F03V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_016 of D1
drop tablespace ts_stock_016;
create regular tablespace ts_stock_016 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_017 of D1
drop tablespace ts_stock_017;
create regular tablespace ts_stock_017 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_018 of D1
drop tablespace ts_stock_018;
create regular tablespace ts_stock_018 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_019 of D1
drop tablespace ts_stock_019;
create regular tablespace ts_stock_019 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_020 of D1
drop tablespace ts_stock_020;
create regular tablespace ts_stock_020 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F04V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_021 of D1
drop tablespace ts_stock_021;
create regular tablespace ts_stock_021 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_022 of D1
drop tablespace ts_stock_022;
create regular tablespace ts_stock_022 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_023 of D1
drop tablespace ts_stock_023;
create regular tablespace ts_stock_023 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_024 of D1
drop tablespace ts_stock_024;
create regular tablespace ts_stock_024 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_025 of D1
drop tablespace ts_stock_025;
create regular tablespace ts_stock_025 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F05V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_026 of D1
drop tablespace ts_stock_026;
create regular tablespace ts_stock_026 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_027 of D1
drop tablespace ts_stock_027;
create regular tablespace ts_stock_027 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_028 of D1
drop tablespace ts_stock_028;
create regular tablespace ts_stock_028 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_029 of D1
drop tablespace ts_stock_029;
create regular tablespace ts_stock_029 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_030 of D1
drop tablespace ts_stock_030;
create regular tablespace ts_stock_030 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F06V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_031 of D1
```

```
drop tablespace ts_stock_031;
create regular tablespace ts_stock_031 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V1STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_032 of D1
drop tablespace ts_stock_032;
create regular tablespace ts_stock_032 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V2STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_033 of D1
drop tablespace ts_stock_033;
create regular tablespace ts_stock_033 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V3STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_034 of D1
drop tablespace ts_stock_034;
create regular tablespace ts_stock_034 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V4STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_035 of D1
drop tablespace ts_stock_035;
create regular tablespace ts_stock_035 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F07V5STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_036 of D1
drop tablespace ts_stock_036;
create regular tablespace ts_stock_036 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V1STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_037 of D1
drop tablespace ts_stock_037;
create regular tablespace ts_stock_037 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V2STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_038 of D1
drop tablespace ts_stock_038;
create regular tablespace ts_stock_038 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V3STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_039 of D1
drop tablespace ts_stock_039;
create regular tablespace ts_stock_039 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V4STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_040 of D1
drop tablespace ts_stock_040;
create regular tablespace ts_stock_040 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V5STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_041 of D1
drop tablespace ts_stock_041;
create regular tablespace ts_stock_041 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V1STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_042 of D1
drop tablespace ts_stock_042;
create regular tablespace ts_stock_042 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V2STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_043 of D1
drop tablespace ts_stock_043;
create regular tablespace ts_stock_043 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V3STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_044 of D1
drop tablespace ts_stock_044;
create regular tablespace ts_stock_044 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V4STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_045 of D1
drop tablespace ts_stock_045;
create regular tablespace ts_stock_045 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V5STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_046 of D1
drop tablespace ts_stock_046;
create regular tablespace ts_stock_046 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V1STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_047 of D1
drop tablespace ts_stock_047;
create regular tablespace ts_stock_047 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V2STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_048 of D1
drop tablespace ts_stock_048;
create regular tablespace ts_stock_048 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V3STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_049 of D1
drop tablespace ts_stock_049;
create regular tablespace ts_stock_049 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V4STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_050 of D1
drop tablespace ts_stock_050;
create regular tablespace ts_stock_050 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V5STK' 14000384
        )
        extentsize 256
        prefetchsize 4096;
commit;
```

```
-- now creating TS for ts_stock_051 of D1
drop tablespace ts_stock_051;
create regular tablespace ts_stock_051 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V1STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_052 of D1
drop tablespace ts_stock_052;
create regular tablespace ts_stock_052 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V2STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_053 of D1
drop tablespace ts_stock_053;
create regular tablespace ts_stock_053 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V3STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_054 of D1
drop tablespace ts_stock_054;
create regular tablespace ts_stock_054 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V4STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_055 of D1
drop tablespace ts_stock_055;
create regular tablespace ts_stock_055 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V5STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_056 of D1
drop tablespace ts_stock_056;
create regular tablespace ts_stock_056 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V1STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_057 of D1
drop tablespace ts_stock_057;
create regular tablespace ts_stock_057 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V2STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_058 of D1
drop tablespace ts_stock_058;
create regular tablespace ts_stock_058 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V3STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_059 of D1
drop tablespace ts_stock_059;
create regular tablespace ts_stock_059 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V4STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_060 of D1
drop tablespace ts_stock_060;
create regular tablespace ts_stock_060 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V5STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_061 of D1
drop tablespace ts_stock_061;
create regular tablespace ts_stock_061 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V1STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_062 of D1
drop tablespace ts_stock_062;
create regular tablespace ts_stock_062 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V2STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_063 of D1
drop tablespace ts_stock_063;
create regular tablespace ts_stock_063 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V3STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_064 of D1
drop tablespace ts_stock_064;
create regular tablespace ts_stock_064 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V4STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_065 of D1
drop tablespace ts_stock_065;
create regular tablespace ts_stock_065 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V5STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_066 of D1
drop tablespace ts_stock_066;
create regular tablespace ts_stock_066 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V1STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_067 of D1
drop tablespace ts_stock_067;
create regular tablespace ts_stock_067 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V2STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_068 of D1
drop tablespace ts_stock_068;
create regular tablespace ts_stock_068 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V3STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_069 of D1
drop tablespace ts_stock_069;
create regular tablespace ts_stock_069 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V4STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_070 of D1
drop tablespace ts_stock_070;
create regular tablespace ts_stock_070 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V5STK' 14000384
               )
        extentsize 256
        prefetchsize 4096;
```

```
commit;
-- now creating TS for ts_stock_071 of D1
drop tablespace ts_stock_071;
create regular tablespace ts_stock_071 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V1STK' 14000384
                       )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_072 of D1
drop tablespace ts_stock_072;
create regular tablespace ts_stock_072 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V2STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_073 of D1
drop tablespace ts_stock_073;
create regular tablespace ts_stock_073 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V3STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_074 of D1
drop tablespace ts_stock_074;
create regular tablespace ts_stock_074 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V4STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_075 of D1
drop tablespace ts_stock_075;
create regular tablespace ts_stock_075 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F15V5STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_076 of D1
drop tablespace ts_stock_076;
create regular tablespace ts_stock_076 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V1STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_077 of D1
drop tablespace ts_stock_077;
create regular tablespace ts_stock_077 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V2STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_078 of D1
drop tablespace ts_stock_078;
create regular tablespace ts_stock_078 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V3STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_079 of D1
drop tablespace ts_stock_079;
create regular tablespace ts_stock_079 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V4STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_080 of D1
drop tablespace ts_stock_080;
create regular tablespace ts_stock_080 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F16V5STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_081 of D1
drop tablespace ts_stock_081;
create regular tablespace ts_stock_081 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F17V1STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_082 of D1
drop tablespace ts_stock_082;
create regular tablespace ts_stock_082 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F17V2STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_083 of D1
drop tablespace ts_stock_083;
create regular tablespace ts_stock_083 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F17V3STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_084 of D1
drop tablespace ts_stock_084;
create regular tablespace ts_stock_084 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F17V4STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_085 of D1
drop tablespace ts_stock_085;
create regular tablespace ts_stock_085 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F17V5STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_086 of D1
drop tablespace ts_stock_086;
create regular tablespace ts_stock_086 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F18V1STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_087 of D1
drop tablespace ts_stock_087;
create regular tablespace ts_stock_087 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F18V2STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_088 of D1
drop tablespace ts_stock_088;
create regular tablespace ts_stock_088 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F18V3STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_089 of D1
drop tablespace ts_stock_089;
create regular tablespace ts_stock_089 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F18V4STK' 14000384
                      )
           extentsize 256
           prefetchsize 4096;
commit;
-- now creating TS for ts_stock_090 of D1
drop tablespace ts_stock_090;
create regular tablespace ts_stock_090 pagesize 4K
            managed by database
            using
            (
                        device '/dev/rD1F18V5STK' 14000384
                      )
           extentsize 256
```

```
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_091 of D1
drop tablespace ts_stock_091;
create regular tablespace ts_stock_091 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_092 of D1
drop tablespace ts_stock_092;
create regular tablespace ts_stock_092 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_093 of D1
drop tablespace ts_stock_093;
create regular tablespace ts_stock_093 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_094 of D1
drop tablespace ts_stock_094;
create regular tablespace ts_stock_094 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_095 of D1
drop tablespace ts_stock_095;
create regular tablespace ts_stock_095 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F19V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_096 of D1
drop tablespace ts_stock_096;
create regular tablespace ts_stock_096 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_097 of D1
drop tablespace ts_stock_097;
create regular tablespace ts_stock_097 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_098 of D1
drop tablespace ts_stock_098;
create regular tablespace ts_stock_098 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_099 of D1
drop tablespace ts_stock_099;
create regular tablespace ts_stock_099 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_100 of D1
drop tablespace ts_stock_100;
create regular tablespace ts_stock_100 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F20V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_101 of D1
drop tablespace ts_stock_101;
create regular tablespace ts_stock_101 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_102 of D1
drop tablespace ts_stock_102;
create regular tablespace ts_stock_102 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_103 of D1
drop tablespace ts_stock_103;
create regular tablespace ts_stock_103 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_104 of D1
drop tablespace ts_stock_104;
create regular tablespace ts_stock_104 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_105 of D1
drop tablespace ts_stock_105;
create regular tablespace ts_stock_105 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F21V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_106 of D1
drop tablespace ts_stock_106;
create regular tablespace ts_stock_106 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_107 of D1
drop tablespace ts_stock_107;
create regular tablespace ts_stock_107 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_108 of D1
drop tablespace ts_stock_108;
create regular tablespace ts_stock_108 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_109 of D1
drop tablespace ts_stock_109;
create regular tablespace ts_stock_109 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_110 of D1
drop tablespace ts_stock_110;
create regular tablespace ts_stock_110 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V5STK' 14000384
                )
```

```
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_111 of D1
drop tablespace ts_stock_111;
create regular tablespace ts_stock_111 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_112 of D1
drop tablespace ts_stock_112;
create regular tablespace ts_stock_112 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_113 of D1
drop tablespace ts_stock_113;
create regular tablespace ts_stock_113 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_114 of D1
drop tablespace ts_stock_114;
create regular tablespace ts_stock_114 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_115 of D1
drop tablespace ts_stock_115;
create regular tablespace ts_stock_115 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_116 of D1
drop tablespace ts_stock_116;
create regular tablespace ts_stock_116 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_117 of D1
drop tablespace ts_stock_117;
create regular tablespace ts_stock_117 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_118 of D1
drop tablespace ts_stock_118;
create regular tablespace ts_stock_118 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_119 of D1
drop tablespace ts_stock_119;
create regular tablespace ts_stock_119 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_120 of D1
drop tablespace ts_stock_120;
create regular tablespace ts_stock_120 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_121 of D1
drop tablespace ts_stock_121;
create regular tablespace ts_stock_121 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_122 of D1
drop tablespace ts_stock_122;
create regular tablespace ts_stock_122 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_123 of D1
drop tablespace ts_stock_123;
create regular tablespace ts_stock_123 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_124 of D1
drop tablespace ts_stock_124;
create regular tablespace ts_stock_124 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_125 of D1
drop tablespace ts_stock_125;
create regular tablespace ts_stock_125 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_126 of D1
drop tablespace ts_stock_126;
create regular tablespace ts_stock_126 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_127 of D1
drop tablespace ts_stock_127;
create regular tablespace ts_stock_127 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_128 of D1
drop tablespace ts_stock_128;
create regular tablespace ts_stock_128 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_129 of D1
drop tablespace ts_stock_129;
create regular tablespace ts_stock_129 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_130 of D1
drop tablespace ts_stock_130;
create regular tablespace ts_stock_130 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V5STK' 14000384
```

```
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_131 of D1
drop tablespace ts_stock_131;
create regular tablespace ts_stock_131 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_132 of D1
drop tablespace ts_stock_132;
create regular tablespace ts_stock_132 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_133 of D1
drop tablespace ts_stock_133;
create regular tablespace ts_stock_133 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_134 of D1
drop tablespace ts_stock_134;
create regular tablespace ts_stock_134 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_135 of D1
drop tablespace ts_stock_135;
create regular tablespace ts_stock_135 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F27V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_136 of D1
drop tablespace ts_stock_136;
create regular tablespace ts_stock_136 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_137 of D1
drop tablespace ts_stock_137;
create regular tablespace ts_stock_137 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_138 of D1
drop tablespace ts_stock_138;
create regular tablespace ts_stock_138 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_139 of D1
drop tablespace ts_stock_139;
create regular tablespace ts_stock_139 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_140 of D1
drop tablespace ts_stock_140;
create regular tablespace ts_stock_140 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F28V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_141 of D1
drop tablespace ts_stock_141;
create regular tablespace ts_stock_141 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_142 of D1
drop tablespace ts_stock_142;
create regular tablespace ts_stock_142 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_143 of D1
drop tablespace ts_stock_143;
create regular tablespace ts_stock_143 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_144 of D1
drop tablespace ts_stock_144;
create regular tablespace ts_stock_144 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_145 of D1
drop tablespace ts_stock_145;
create regular tablespace ts_stock_145 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F29V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_146 of D1
drop tablespace ts_stock_146;
create regular tablespace ts_stock_146 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_147 of D1
drop tablespace ts_stock_147;
create regular tablespace ts_stock_147 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_148 of D1
drop tablespace ts_stock_148;
create regular tablespace ts_stock_148 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_149 of D1
drop tablespace ts_stock_149;
create regular tablespace ts_stock_149 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F30V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_150 of D1
drop tablespace ts_stock_150;
create regular tablespace ts_stock_150 pagesize 4K
         managed by database
         using
         (
```

```
                device '/dev/rD1F30V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_151 of D1
drop tablespace ts_stock_151;
create regular tablespace ts_stock_151 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_152 of D1
drop tablespace ts_stock_152;
create regular tablespace ts_stock_152 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_153 of D1
drop tablespace ts_stock_153;
create regular tablespace ts_stock_153 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_154 of D1
drop tablespace ts_stock_154;
create regular tablespace ts_stock_154 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_155 of D1
drop tablespace ts_stock_155;
create regular tablespace ts_stock_155 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F31V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_156 of D1
drop tablespace ts_stock_156;
create regular tablespace ts_stock_156 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_157 of D1
drop tablespace ts_stock_157;
create regular tablespace ts_stock_157 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_158 of D1
drop tablespace ts_stock_158;
create regular tablespace ts_stock_158 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_159 of D1
drop tablespace ts_stock_159;
create regular tablespace ts_stock_159 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_160 of D1
drop tablespace ts_stock_160;
create regular tablespace ts_stock_160 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F32V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_161 of D1
drop tablespace ts_stock_161;
create regular tablespace ts_stock_161 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_162 of D1
drop tablespace ts_stock_162;
create regular tablespace ts_stock_162 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_163 of D1
drop tablespace ts_stock_163;
create regular tablespace ts_stock_163 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_164 of D1
drop tablespace ts_stock_164;
create regular tablespace ts_stock_164 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_165 of D1
drop tablespace ts_stock_165;
create regular tablespace ts_stock_165 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F33V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_166 of D1
drop tablespace ts_stock_166;
create regular tablespace ts_stock_166 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_167 of D1
drop tablespace ts_stock_167;
create regular tablespace ts_stock_167 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_168 of D1
drop tablespace ts_stock_168;
create regular tablespace ts_stock_168 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_169 of D1
drop tablespace ts_stock_169;
create regular tablespace ts_stock_169 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F34V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_170 of D1
drop tablespace ts_stock_170;
create regular tablespace ts_stock_170 pagesize 4K
         managed by database
         using
```

```
        (
                device '/dev/rD1F34V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_171 of D1
drop tablespace ts_stock_171;
create regular tablespace ts_stock_171 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F35V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_172 of D1
drop tablespace ts_stock_172;
create regular tablespace ts_stock_172 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F35V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_173 of D1
drop tablespace ts_stock_173;
create regular tablespace ts_stock_173 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F35V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_174 of D1
drop tablespace ts_stock_174;
create regular tablespace ts_stock_174 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F35V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_175 of D1
drop tablespace ts_stock_175;
create regular tablespace ts_stock_175 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F35V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_176 of D1
drop tablespace ts_stock_176;
create regular tablespace ts_stock_176 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F36V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_177 of D1
drop tablespace ts_stock_177;
create regular tablespace ts_stock_177 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F36V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_178 of D1
drop tablespace ts_stock_178;
create regular tablespace ts_stock_178 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F36V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_179 of D1
drop tablespace ts_stock_179;
create regular tablespace ts_stock_179 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F36V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_180 of D1
drop tablespace ts_stock_180;
create regular tablespace ts_stock_180 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F36V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_181 of D1
drop tablespace ts_stock_181;
create regular tablespace ts_stock_181 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F37V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_182 of D1
drop tablespace ts_stock_182;
create regular tablespace ts_stock_182 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F37V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_183 of D1
drop tablespace ts_stock_183;
create regular tablespace ts_stock_183 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F37V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_184 of D1
drop tablespace ts_stock_184;
create regular tablespace ts_stock_184 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F37V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_185 of D1
drop tablespace ts_stock_185;
create regular tablespace ts_stock_185 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F37V5STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_186 of D1
drop tablespace ts_stock_186;
create regular tablespace ts_stock_186 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F38V1STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_187 of D1
drop tablespace ts_stock_187;
create regular tablespace ts_stock_187 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F38V2STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_188 of D1
drop tablespace ts_stock_188;
create regular tablespace ts_stock_188 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F38V3STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_189 of D1
drop tablespace ts_stock_189;
create regular tablespace ts_stock_189 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F38V4STK' 14000384
                )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_190 of D1
drop tablespace ts_stock_190;
create regular tablespace ts_stock_190 pagesize 4K
        managed by database
```

```
        using
        (
                device '/dev/rD1F38V5STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_191 of D1
drop tablespace ts_stock_191;
create regular tablespace ts_stock_191 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V1STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_192 of D1
drop tablespace ts_stock_192;
create regular tablespace ts_stock_192 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V2STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_193 of D1
drop tablespace ts_stock_193;
create regular tablespace ts_stock_193 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V3STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_194 of D1
drop tablespace ts_stock_194;
create regular tablespace ts_stock_194 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V4STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_195 of D1
drop tablespace ts_stock_195;
create regular tablespace ts_stock_195 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V5STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_196 of D1
drop tablespace ts_stock_196;
create regular tablespace ts_stock_196 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V1STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_197 of D1
drop tablespace ts_stock_197;
create regular tablespace ts_stock_197 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V2STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_198 of D1
drop tablespace ts_stock_198;
create regular tablespace ts_stock_198 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V3STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_199 of D1
drop tablespace ts_stock_199;
create regular tablespace ts_stock_199 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V4STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
-- now creating TS for ts_stock_200 of D1
drop tablespace ts_stock_200;
create regular tablespace ts_stock_200 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V5STK' 14000384
              )
        extentsize 256
        prefetchsize 4096;
commit;
connect reset;
```

ts/crts_ware.ddl

```
connect to tpcc;
-- now creating TS for ts_ware_001 of D1
drop tablespace ts_ware_001;
create regular tablespace ts_ware_001 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F01V1WARE' 160,
                device '/dev/rD1F01V2WARE' 160,
                device '/dev/rD1F01V3WARE' 160,
                device '/dev/rD1F01V4WARE' 160,
                device '/dev/rD1F01V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_002 of D1
drop tablespace ts_ware_002;
create regular tablespace ts_ware_002 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F02V1WARE' 160,
                device '/dev/rD1F02V2WARE' 160,
                device '/dev/rD1F02V3WARE' 160,
                device '/dev/rD1F02V4WARE' 160,
                device '/dev/rD1F02V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_003 of D1
drop tablespace ts_ware_003;
create regular tablespace ts_ware_003 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F03V1WARE' 160,
                device '/dev/rD1F03V2WARE' 160,
                device '/dev/rD1F03V3WARE' 160,
                device '/dev/rD1F03V4WARE' 160,
                device '/dev/rD1F03V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_004 of D1
drop tablespace ts_ware_004;
create regular tablespace ts_ware_004 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F04V1WARE' 160,
                device '/dev/rD1F04V2WARE' 160,
                device '/dev/rD1F04V3WARE' 160,
                device '/dev/rD1F04V4WARE' 160,
                device '/dev/rD1F04V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_005 of D1
drop tablespace ts_ware_005;
create regular tablespace ts_ware_005 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F05V1WARE' 160,
                device '/dev/rD1F05V2WARE' 160,
                device '/dev/rD1F05V3WARE' 160,
                device '/dev/rD1F05V4WARE' 160,
                device '/dev/rD1F05V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_006 of D1
drop tablespace ts_ware_006;
create regular tablespace ts_ware_006 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F06V1WARE' 160,
                device '/dev/rD1F06V2WARE' 160,
                device '/dev/rD1F06V3WARE' 160,
                device '/dev/rD1F06V4WARE' 160,
                device '/dev/rD1F06V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_007 of D1
drop tablespace ts_ware_007;
create regular tablespace ts_ware_007 pagesize 4K
```

```
        managed by database
        using
        (
                device '/dev/rD1F07V1WARE' 160,
                device '/dev/rD1F07V2WARE' 160,
                device '/dev/rD1F07V3WARE' 160,
                device '/dev/rD1F07V4WARE' 160,
                device '/dev/rD1F07V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_008 of D1
drop tablespace ts_ware_008;
create regular tablespace ts_ware_008 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F08V1WARE' 160,
                device '/dev/rD1F08V2WARE' 160,
                device '/dev/rD1F08V3WARE' 160,
                device '/dev/rD1F08V4WARE' 160,
                device '/dev/rD1F08V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_009 of D1
drop tablespace ts_ware_009;
create regular tablespace ts_ware_009 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F09V1WARE' 160,
                device '/dev/rD1F09V2WARE' 160,
                device '/dev/rD1F09V3WARE' 160,
                device '/dev/rD1F09V4WARE' 160,
                device '/dev/rD1F09V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_010 of D1
drop tablespace ts_ware_010;
create regular tablespace ts_ware_010 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F10V1WARE' 160,
                device '/dev/rD1F10V2WARE' 160,
                device '/dev/rD1F10V3WARE' 160,
                device '/dev/rD1F10V4WARE' 160,
                device '/dev/rD1F10V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_011 of D1
drop tablespace ts_ware_011;
create regular tablespace ts_ware_011 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F11V1WARE' 160,
                device '/dev/rD1F11V2WARE' 160,
                device '/dev/rD1F11V3WARE' 160,
                device '/dev/rD1F11V4WARE' 160,
                device '/dev/rD1F11V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_012 of D1
drop tablespace ts_ware_012;
create regular tablespace ts_ware_012 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F12V1WARE' 160,
                device '/dev/rD1F12V2WARE' 160,
                device '/dev/rD1F12V3WARE' 160,
                device '/dev/rD1F12V4WARE' 160,
                device '/dev/rD1F12V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_013 of D1
drop tablespace ts_ware_013;
create regular tablespace ts_ware_013 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F13V1WARE' 160,
                device '/dev/rD1F13V2WARE' 160,
                device '/dev/rD1F13V3WARE' 160,
                device '/dev/rD1F13V4WARE' 160,
                device '/dev/rD1F13V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_014 of D1
drop tablespace ts_ware_014;
create regular tablespace ts_ware_014 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F14V1WARE' 160,
                device '/dev/rD1F14V2WARE' 160,
                device '/dev/rD1F14V3WARE' 160,
                device '/dev/rD1F14V4WARE' 160,
                device '/dev/rD1F14V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_015 of D1
drop tablespace ts_ware_015;
create regular tablespace ts_ware_015 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F15V1WARE' 160,
                device '/dev/rD1F15V2WARE' 160,
                device '/dev/rD1F15V3WARE' 160,
                device '/dev/rD1F15V4WARE' 160,
                device '/dev/rD1F15V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_016 of D1
drop tablespace ts_ware_016;
create regular tablespace ts_ware_016 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F16V1WARE' 160,
                device '/dev/rD1F16V2WARE' 160,
                device '/dev/rD1F16V3WARE' 160,
                device '/dev/rD1F16V4WARE' 160,
                device '/dev/rD1F16V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_017 of D1
drop tablespace ts_ware_017;
create regular tablespace ts_ware_017 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F17V1WARE' 160,
                device '/dev/rD1F17V2WARE' 160,
                device '/dev/rD1F17V3WARE' 160,
                device '/dev/rD1F17V4WARE' 160,
                device '/dev/rD1F17V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_018 of D1
drop tablespace ts_ware_018;
create regular tablespace ts_ware_018 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F18V1WARE' 160,
                device '/dev/rD1F18V2WARE' 160,
                device '/dev/rD1F18V3WARE' 160,
                device '/dev/rD1F18V4WARE' 160,
                device '/dev/rD1F18V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_019 of D1
drop tablespace ts_ware_019;
create regular tablespace ts_ware_019 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F19V1WARE' 160,
                device '/dev/rD1F19V2WARE' 160,
                device '/dev/rD1F19V3WARE' 160,
                device '/dev/rD1F19V4WARE' 160,
                device '/dev/rD1F19V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_020 of D1
drop tablespace ts_ware_020;
create regular tablespace ts_ware_020 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F20V1WARE' 160,
                device '/dev/rD1F20V2WARE' 160,
                device '/dev/rD1F20V3WARE' 160,
                device '/dev/rD1F20V4WARE' 160,
                device '/dev/rD1F20V5WARE' 160
              )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_021 of D1
drop tablespace ts_ware_021;
create regular tablespace ts_ware_021 pagesize 4K
        managed by database
        using
        (
                device '/dev/rD1F21V1WARE' 160,
                device '/dev/rD1F21V2WARE' 160,
                device '/dev/rD1F21V3WARE' 160,
                device '/dev/rD1F21V4WARE' 160,
                device '/dev/rD1F21V5WARE' 160
              )
```

```
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_022 of D1
drop tablespace ts_ware_022;
create regular tablespace ts_ware_022 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F22V1WARE' 160,
                  device '/dev/rD1F22V2WARE' 160,
                  device '/dev/rD1F22V3WARE' 160,
                  device '/dev/rD1F22V4WARE' 160,
                  device '/dev/rD1F22V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_023 of D1
drop tablespace ts_ware_023;
create regular tablespace ts_ware_023 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F23V1WARE' 160,
                  device '/dev/rD1F23V2WARE' 160,
                  device '/dev/rD1F23V3WARE' 160,
                  device '/dev/rD1F23V4WARE' 160,
                  device '/dev/rD1F23V5WARE' 160
                )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_024 of D1
drop tablespace ts_ware_024;
create regular tablespace ts_ware_024 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F24V1WARE' 160,
                  device '/dev/rD1F24V2WARE' 160,
                  device '/dev/rD1F24V3WARE' 160,
                  device '/dev/rD1F24V4WARE' 160,
                  device '/dev/rD1F24V5WARE' 160
                )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_025 of D1
drop tablespace ts_ware_025;
create regular tablespace ts_ware_025 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F25V1WARE' 160,
                  device '/dev/rD1F25V2WARE' 160,
                  device '/dev/rD1F25V3WARE' 160,
                  device '/dev/rD1F25V4WARE' 160,
                  device '/dev/rD1F25V5WARE' 160
                )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_026 of D1
drop tablespace ts_ware_026;
create regular tablespace ts_ware_026 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F26V1WARE' 160,
                  device '/dev/rD1F26V2WARE' 160,
                  device '/dev/rD1F26V3WARE' 160,
                  device '/dev/rD1F26V4WARE' 160,
                  device '/dev/rD1F26V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_027 of D1
drop tablespace ts_ware_027;
create regular tablespace ts_ware_027 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F27V1WARE' 160,
                  device '/dev/rD1F27V2WARE' 160,
                  device '/dev/rD1F27V3WARE' 160,
                  device '/dev/rD1F27V4WARE' 160,
                  device '/dev/rD1F27V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_028 of D1
drop tablespace ts_ware_028;
create regular tablespace ts_ware_028 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F28V1WARE' 160,
                  device '/dev/rD1F28V2WARE' 160,
                  device '/dev/rD1F28V3WARE' 160,
                  device '/dev/rD1F28V4WARE' 160,
                  device '/dev/rD1F28V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_029 of D1
drop tablespace ts_ware_029;
create regular tablespace ts_ware_029 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F29V1WARE' 160,
                  device '/dev/rD1F29V2WARE' 160,
                  device '/dev/rD1F29V3WARE' 160,
                  device '/dev/rD1F29V4WARE' 160,
                  device '/dev/rD1F29V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_030 of D1
drop tablespace ts_ware_030;
create regular tablespace ts_ware_030 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F30V1WARE' 160,
                  device '/dev/rD1F30V2WARE' 160,
                  device '/dev/rD1F30V3WARE' 160,
                  device '/dev/rD1F30V4WARE' 160,
                  device '/dev/rD1F30V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_031 of D1
drop tablespace ts_ware_031;
create regular tablespace ts_ware_031 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F31V1WARE' 160,
                  device '/dev/rD1F31V2WARE' 160,
                  device '/dev/rD1F31V3WARE' 160,
                  device '/dev/rD1F31V4WARE' 160,
                  device '/dev/rD1F31V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_032 of D1
drop tablespace ts_ware_032;
create regular tablespace ts_ware_032 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F32V1WARE' 160,
                  device '/dev/rD1F32V2WARE' 160,
                  device '/dev/rD1F32V3WARE' 160,
                  device '/dev/rD1F32V4WARE' 160,
                  device '/dev/rD1F32V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_033 of D1
drop tablespace ts_ware_033;
create regular tablespace ts_ware_033 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F33V1WARE' 160,
                  device '/dev/rD1F33V2WARE' 160,
                  device '/dev/rD1F33V3WARE' 160,
                  device '/dev/rD1F33V4WARE' 160,
                  device '/dev/rD1F33V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_034 of D1
drop tablespace ts_ware_034;
create regular tablespace ts_ware_034 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F34V1WARE' 160,
                  device '/dev/rD1F34V2WARE' 160,
                  device '/dev/rD1F34V3WARE' 160,
                  device '/dev/rD1F34V4WARE' 160,
                  device '/dev/rD1F34V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_035 of D1
drop tablespace ts_ware_035;
create regular tablespace ts_ware_035 pagesize 4K
         managed by database
         using
         (
                  device '/dev/rD1F35V1WARE' 160,
                  device '/dev/rD1F35V2WARE' 160,
                  device '/dev/rD1F35V3WARE' 160,
                  device '/dev/rD1F35V4WARE' 160,
                  device '/dev/rD1F35V5WARE' 160
                 )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_036 of D1
drop tablespace ts_ware_036;
create regular tablespace ts_ware_036 pagesize 4K
         managed by database
         using
         (
```

```
                device '/dev/rD1F36V1WARE' 160,
                device '/dev/rD1F36V2WARE' 160,
                device '/dev/rD1F36V3WARE' 160,
                device '/dev/rD1F36V4WARE' 160,
                device '/dev/rD1F36V5WARE' 160
               )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_037 of D1
drop tablespace ts_ware_037;
create regular tablespace ts_ware_037 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F37V1WARE' 160,
                device '/dev/rD1F37V2WARE' 160,
                device '/dev/rD1F37V3WARE' 160,
                device '/dev/rD1F37V4WARE' 160,
                device '/dev/rD1F37V5WARE' 160
               )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_038 of D1
drop tablespace ts_ware_038;
create regular tablespace ts_ware_038 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F38V1WARE' 160,
                device '/dev/rD1F38V2WARE' 160,
                device '/dev/rD1F38V3WARE' 160,
                device '/dev/rD1F38V4WARE' 160,
                device '/dev/rD1F38V5WARE' 160
               )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_039 of D1
drop tablespace ts_ware_039;
create regular tablespace ts_ware_039 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F39V1WARE' 160,
                device '/dev/rD1F39V2WARE' 160,
                device '/dev/rD1F39V3WARE' 160,
                device '/dev/rD1F39V4WARE' 160,
                device '/dev/rD1F39V5WARE' 160
               )
        extentsize 32
        prefetchsize 4096;
commit;
-- now creating TS for ts_ware_040 of D1
drop tablespace ts_ware_040;
create regular tablespace ts_ware_040 pagesize 4K
         managed by database
         using
         (
                device '/dev/rD1F40V1WARE' 160,
                device '/dev/rD1F40V2WARE' 160,
                device '/dev/rD1F40V3WARE' 160,
                device '/dev/rD1F40V4WARE' 160,
                device '/dev/rD1F40V5WARE' 160
               )
        extentsize 32
        prefetchsize 4096;
commit;
connect reset;
```

C.2 Data Generation Code

Makefile.config

```
#################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
#################################################################################
#
# Makefile.config - AIX 64-bit
#
#
# Make Configuration
MAKE=make
# Compiler Configuration.
# CFLAGS_DEBUG may be set to "-g", "-DDEBUGIT" "-g -DDEBUGIT" or left blank
CC=xlc
CFLAGS_OS=-qflag=i:i -qlanglvl=ansi -qcpluscmt -DSQLUNIX -DSQLAIX -q64 -O3 -D_LARGE_FILES
CFLAGS_OUT=-o
CFLAGS_DEBUG=
# Linker Configuration
LD_EXEC=xlc
LD_STORP=xlc
LDFLAGS_EXEC=-lm -q64
LDFLAGS_SHLIB=-qmkshrobj
LDFLAGS_STORP=$(LDFLAGS_SHLIB) -bE:$@.exp -lc -b64
LDFLAGS_LIB=-L$(TPCC_SQLLIB)/lib -ldb2
LDFLAGS_OUT=-o
# Library Configuration
AR=ar
ARFLAGS=-r -v -X64
ARFLAGS_LIB=
ARFLAGS_OUT=
# OS Commands
ERASE=rm -f
ERASEDIR=$(ERASE) -R
MOVE=mv
COPY=cp
# OS File Extensions & Path Separators
OBJEXT=.o
LIBEXT=.a
SHLIBEXT=.a
BINEXT=
SLASH=/
CMDSEP=;
```

Src.Common/Makefile

```
#################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
#################################################################################
#
# Makefile - Makefile for Src.Common
#
#
include $(TPCC_ROOT)/Makefile.config
# ###################################################################
# Preprocessor, Compiler and LInker Flags
# ###################################################################
BND_OPTS =    GRANT PUBLIC \
              MESSAGES $*.bnd.msg
PRP_OPTS =    BINDFILE \
              OPTLEVEL 1 \
              ISOLATION RR \
              MESSAGES $*.prep.msg \
              LEVEL $(TPCC_VERSION) \
              NOLINEMACRO
INCLUDE =     -I$(TPCC_SQLLIB)/include -I$(TPCC_ROOT)/include
CFLAGS =      $(CFLAGS_OS) $(CFLAGS_DEBUG) $(INCLUDE) \
              -DSQLA_NOLINES -D$(DB2EDITION) -D$(DB2VERSION) \
              -D$(TPCC_SPTYPE)
UTIL_OBJ =    tpccmisc$(OBJEXT) tpccdbg$(OBJEXT)
UTIL_OBJ_DB2 =        tpccctx$(OBJEXT)
# ###################################################################
# User Targets
# ###################################################################
all:      dbgen connect $(UTIL_OBJ_DB2) disconnect
dbgen:  $(UTIL_OBJ)
clean:
        - $(ERASE) *$(OBJEXT) *.bnd *.msg tpccctx.c
# ###################################################################
# Helper Targets
# ###################################################################
connect:
        - db2 connect to $(TPCC_DBNAME)
disconnect:
        - db2 connect reset
        - db2 terminate
rebind:  connect
        db2 bind tpccctx.bnd $(BND_OPTS)
# ###################################################################
# Build Rules
# ###################################################################
.SUFFIXES:
.SUFFIXES: $(OBJEXT) .c .sqc
.sqc.c:
        @echo "Prepping $*.sqc"
        -db2 prep $*.sqc $(PRP_OPTS)
        @echo "Binding $*.bnd"
        db2 bind $*.bnd $(BND_OPTS)
# ###################################################################
# Dependencies
# ###################################################################
# Source
tpccdbg$(OBJEXT):      tpccdbg.c
tpccctx$(OBJEXT):      tpccctx.c
tpccmisc$(OBJEXT):     tpccmisc.c
# Headers
tpccdbg.c:      $(TPCC_ROOT)/include/db2tpcc.h
```

Src.Common/tpccmisc.c

```
/*************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
```

```
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 *
 * tpccmisc.c - Miscellaneous routines
 *
 */
#include <stdlib.h>
#include <sys/types.h>
#include <sys/time.h>
double current_time_ms(void);
double current_time(void);

/* Current time in SECONDS, precision SECONDS */
double current_time(void)
{
  /* use time() to get seconds */
  return(time(NULL));
}
/* Current time in SECONDS, precision MILLISECONDS */
double current_time_ms(void)
{
   /* gettimeofday() returns seconds and microseconds */
   /* convert to fractional seconds */
  struct timeval t;
  gettimeofday(&t,NULL);
  return (t.tv_sec + (double)t.tv_usec/(1000*1000));
}
```

dbgen/Makefile

```
################################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
################################################################################
# Makefile - Build gendata tool
#
include $(TPCC_ROOT)/Makefile.config
# ############################################################################
# Preprocessor, Compiler and Linker Flags
# ############################################################################
INCLUDE =       -I$(TPCC_SQLLIB)/include -I$(TPCC_ROOT)/include
CFLAGS =        $(INCLUDE) $(CFLAGS_OS) -DLINT_ARGS -DSQLA_NOLINES \
                -D$(DB2EDITION) -D$(DB2VERSION) $(CFLAGS_DEBUG)
LDFLAGS =       $(LDFLAGS_EXEC) $(LDFLAGS_LIB)
# ############################################################################
# File Collections
# ############################################################################
OBJS =          tpccrnd$(OBJEXT) \
                $(TPCC_ROOT)/Src.Common/tpccmisc$(OBJEXT)
OBJ_EEE =       $(TPCC_ROOT)/Src.Common/tpcclwh$(OBJEXT)
EXEC =          gendata$(BINEXT)
# ############################################################################
# End-User Targets
# ############################################################################
all:    $(EXEC)
clean:
        - $(ERASE) *$(OBJEXT) $(EXEC)
# ############################################################################
# Build Rules
# ############################################################################
.SUFFIXES:
.SUFFIXES:      $(OBJEXT) .c
# We use $@$(OBJEXT) here so that the UNIX makefiles work with both
# 'traditional' make and GNU make
$(EXEC):
        $(LD_EXEC) $(LDFLAGS) $(OBJS) $@$(OBJEXT) $(LDFLAGS_OUT)$@
# ############################################################################
# Dependencies
# ############################################################################
# Link Dependencies
gendata$(BINEXT):       $(OBJS) gendata$(OBJEXT)
# Build Dependencies
# Source
gendata$(OBJEXT):       gendata.c
# Headers
gendata.c:      $(TPCC_ROOT)/include/tpccrnd.h $(TPCC_ROOT)/include/lval.h
```

dbgen/gendata.c

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * gendata.c - Generate data for TPC-C database
 *
 */
#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <sqlutil.h>
/* UNIX named pipe support */
#include <sys/stat.h>
#include <errno.h>
#include <fcntl.h>
#include <time.h>
#include "platform.h"
#include "db2tpcc.h"
#include "tpccrnd.h"
#include "tpccmisc.h"
#include "lval.h"

/*  PROTOTYPES.  */
void gen_dist_tbl( void );
void gen_cust_tbl( void );
void gen_hist_tbl( void );
void gen_nu_ord_tbl( void );
void gen_ordr_tbl( void );
void gen_item_tbl( void );
void gen_stock_tbl( void );
void gen_ware_tbl( void );
int i, j;
double timestamp1, timestamp2, elapse;
int rc, rc1, rc2;
int using_range = 0;
int using_npipe = 0;
int using_rctload = 0;
int quiet_mode = 0;
sqlint32 ware_start=-1, ware_end=-1;
char fmtWare[]    = "%s|%s|%s|%s|%s|%s|%04.4f|%.2f|%d\n";
char fmtDist[]    = "%d|%04.4f|%.2f|%s|%s|%s|%s|%s|%d|%d\n";
char fmtItem[]    = "%s|%.2f|%s|%d|%d\n";
char fmtStock[]   = "%d|%d|%d|%d|%d|%s|%s|%s|%s|%s|%s|%s|%s|%s|%s|%d|%d\n";
char fmtCust[]    =
"%d|%s|%s|%s|%s|%.2f|%s|%s|%04.4f|%s|%s|%s|%s|%s|%s|%d|%d|%d|%.2f|%.2f|%d\n";
char fmtHist[]    = "%d|%d|%d|%d|%d|%s|%.2f|%s\n";
char fmtOrdr[]    = "%d|%s|%d|%d|%d|%d|%d|%d\n";
char fmtOLine[]   = "%s|%.2f|%d|%d|%d|%s|%d|%d|%d|%d\n";
char fmtNewOrd[]  = "%d|%d|%d\n";
void InitFormatStrings(char delim);
void ScalingReport(void);
int outtype1 = 0;
int outtype2 = 0;
char *outname1 = NULL;
char *outname2 = NULL;
/*-------------------------------------------------------------------------*/
/*      main                                                               */
/*-------------------------------------------------------------------------*/
int main (int argc, char *argv[])
{
   int option = -1;
   char *delim = NULL;
   /* ********************************************************************* */
   /* Compute Warehouse Ranges                                              */
   /* ********************************************************************* */
   ware_start = 1;
   ware_end = WAREHOUSES;
   /* ********************************************************************* */
   /* Process Command Line Arguments                                        */
   /* ********************************************************************* */
   /* Valid Command Line Options
    * ------------------------
    * Table Option:           -t <table>        (-t 3 for warehouse)
    * Output Column Delimiter:  -d <char>         (-d ' ', -d '|', etc)
    * Output to File:         -f[n] <file>      (-f customer.dat)
    * Output to Pipe:         -p[n] <pipename>   (-p tpccpipe.000)
    * Warehouse Range:          -r <start> <end>   (-r 1 100)
    * Scaling Report:          -s
    * Quiet Mode:             -q
    *
    * The -f[n] and/or -p[n] options are required.
    * The -t, -d, -r, -s and -q options are optional.
    *
    * If -d is omitted, the vertical bar (pipe) symbol ('|') will be used.
    * If -r is omitted, the range [1..WAREHOUSES] will be used.
    *
    * Due to the TPC-C spec requiring that orders and orderline be
    * generated at the same time, there is an extension to the -f and -p
    * options to specify one of the two output streams for each argument.
    *
    * -f1 orders.dat -f2 orderline.dat will output to two files
    * -f1 orders.dat -p2 tpccpipe.000 will output to a file and a pipe
    *
    * -f1/-p1 specifies the destination for the orders table
    * -f2/-p2 specifies the destination for the orderline table
    *
    */
   /* Read Arguments */
   for (i=1; i<argc; i++)
   {
     if (strcmp(argv[i], "-t") == 0) {
        option = atoi(argv[i+1]);
        i++;
     } else if (strcmp(argv[i], "-r") == 0) {
        ware_start = atoi(argv[i+1]);
        ware_end = atoi(argv[i+2]);
        i += 2;
     } else if (strcmp(argv[i], "-d") == 0) {
        delim = argv[i+1];
        i++;
     } else if ((strcmp(argv[i], "-f")  == 0) ||
```

```
            (strcmp(argv[i], "-f1") == 0)) {
        outtype1 = IOH_FILE;
        outname1 = argv[i+1];
        i++;
      } else if (strcmp(argv[i], "-f2") == 0) {
        outtype2 = IOH_FILE;
        outname2 = argv[i+1];
        i++;
      } else if ((strcmp(argv[i], "-p")  == 0) ||
            (strcmp(argv[i], "-p1") == 0)) {
        outtype1 = IOH_PIPE;
        outname1 = argv[i+1];
        i++;
      } else if (strcmp(argv[i], "-p2") == 0) {
        outtype2 = IOH_PIPE;
        outname2 = argv[i+1];
        i++;
      } else if (strcmp(argv[i], "-s") == 0) {
        ScalingReport();
        exit(0);
      } else if (strcmp(argv[i], "-q") == 0) {
        quiet_mode = 1;
      } else {
        fprintf(stderr, "gendata: Don't understand argument: %s\n",argv[i]);
        exit(-1);
      }
    }
    /* ********************************************************************** */
    /* Validate Command Line Arguments                                        */
    /* ********************************************************************** */
    /* Validate Table Argument */
    if (option < 3 || option > 11 || option == 10)
    {
      fprintf(stderr,"gendata: Invalid table selected: %d\n",option);
      exit(-1);
    }
    /* Validate Delimiter Argument */
    if (delim == NULL) {
      // default delimiter is used for IMPORT & LOAD, no changes neccessary
      using_rctload = 0;
    } else if (strlen(delim) == 1 && !isalnum(delim[0]) &&
              delim[0] != '.' && delim[0] != '%')
    {
      // user-supplied delimiter used for rctload
      InitFormatStrings(delim[0]);
      using_rctload = 1;
    } else {
      fprintf(stderr,"gendata: Invalid delimiter specified: %s\n",delim);
      exit(-1);
    }
    /* Validate File/Pipe Arguments */
    if (option != 9 && outtype1 > 0 && outtype2 > 0)
    {
      fprintf(stderr,"gendata: Specifying two output file/pipes allowed only when
generating\norders/orderline.\n");
      exit(-1);
    }
    if (option == 9 && ((outtype1 == 0) || (outtype2 == 0)))
    {
      fprintf(stderr,"gendata: Must specify two output file/pipes when generating orders/orderline.\n");
      exit(-1);
    }
    if (outtype1 == 0 || outname1 == NULL || strcmp(outname1,"") == 0)
    {
      fprintf(stderr,"gendata: Invalid 1st output file/pipe specified.\n");
      exit(-1);
    }
    if (option == 9 && (outtype2 == 0 || outname2 == NULL || strcmp(outname2,"") == 0))
    {
      fprintf(stderr,"gendata: Invalid 2nd output file/pipe specified.\n");
      exit(-1);
    }
    if (option == 9)
    {
      if (outtype1 == IOH_FILE) outtype1 = IOH_FILE_APPEND;
      if (outtype2 == IOH_FILE) outtype2 = IOH_FILE_APPEND;
    }
    /* Validate Range Arguments */
    if (ware_start <= 0 || ware_start > WAREHOUSES) {
      fprintf(stderr,"gendata: Invalid range starting value: %d\n",ware_start);
       exit(-1);
    }
    if (ware_end <= 0 || ware_end > WAREHOUSES || ware_end < ware_start) {
      fprintf(stderr,"gendata: Invalid range ending value: %d\n",ware_end);
      exit(-1);
    }
    initialize_random();
    /* ********************************************************************** */
    /* Generate Data                                                          */
    /* ********************************************************************** */
    switch (option) {
     case 3: /* WAREHOUSE */
       gen_ware_tbl();
       break;
     case 4: /* DISTRICT  */
       gen_dist_tbl();
       break;
     case 5: /* ITEM  */
       gen_item_tbl();
       break;
     case 6: /* STOCK     */
       gen_stock_tbl();
       break;
     case 7: /* CUSTOMER  */
       gen_cust_tbl();
       break;
     case 8: /* HISTORY   */
       gen_hist_tbl();
       break;
     case 9: /* ORDERS + ORDER_LINE */
       gen_ordr_tbl();
       break;
     case 11: /* NEW_ORDER */
       gen_nu_ord_tbl();
       break;
     case 2:
     case 10:
     default:
       fprintf(stderr, "Error: invalid option = %d \n",(option));
       break;
     }
     return 0;
    }
    /*----------------------------------------------------------------------*/
    /* generate item table                                                  */
    /*----------------------------------------------------------------------*/
    void gen_item_tbl( void )
    {
      sqlint32  item_num = 0 ;
      sqlint32  item_im_id ;
      char  item_name[25] ;
      double  item_price ;
      char  item_data[51] ;
      IOH_NUM numBytes;
      ioHandle hnd;
      char Buffer[1024];
      timestamp1 = current_time();
      rc = GenericOpen(&hnd, outtype1, outname1);
      if (rc != 0) { goto item_done; }
      for(item_num = 1; item_num <= ITEMS; item_num++)
      {
        /* create image id field */
        item_im_id = rand_integer( 1, 10000 ) ;
        /* create name field */
        create_random_a_string( item_name, 14, 24);
        /* create price field */
        item_price = rand_decimal( 100, 10000, 2 ) ;
        /* create ORIGINAL field */
        create_a_string_with_original( item_data, 26, 50, 10) ;
        numBytes = sprintf(Buffer, fmtItem,
                           item_name,
                           item_price,
                           item_data,
                           item_im_id,
                           item_num);
        rc = GenericWrite(&hnd, Buffer, numBytes);
        if (rc != 0) { goto item_done; }
      } /* end for... */
      rc = GenericClose(&hnd);
    item_done:
      timestamp2 = current_time();
      elapse = timestamp2 - timestamp1;
      if (rc == 0) {
        if (!quiet_mode) {
          fprintf(stdout,"\nITEM table generated in %8.2f seconds.\n\n",elapse);
          fflush(stdout);
        }
      } else {
        fprintf(stderr,"\nITEM table FAILED at (I %d) after %8.2f seconds.\n\n",item_num,elapse);
        fflush(stderr);
      }
    }
    /*----------------------------------------------------------------------*/
    /* generate stock table                                                 */
    /*----------------------------------------------------------------------*/
    void gen_stock_tbl( void )
    {
      sqlint32 ware_num = 0 ;
      sqlint32 stock_num = 0 ;
      sqlint32 stock_quant;
      sqlint32 s_ytd;
      sqlint32 s_order_cnt, s_remote_cnt;
      char  stock_dist_01[25] ;
      char  stock_dist_02[25] ;
      char  stock_dist_03[25] ;
      char  stock_dist_04[25] ;
      char  stock_dist_05[25] ;
      char  stock_dist_06[25] ;
      char  stock_dist_07[25] ;
      char  stock_dist_08[25] ;
      char  stock_dist_09[25] ;
      char  stock_dist_10[25] ;
      char  stock_data[51] ;
      IOH_NUM numBytes;
      ioHandle hnd;
      char Buffer[1024];
      timestamp1 = current_time();
      rc = GenericOpen(&hnd, outtype1, outname1);
      if (rc != 0) { goto stock_done; }
      for (stock_num = 1; stock_num <= STOCK_PER_WAREHOUSE; stock_num++)
      {
        if (!quiet_mode && (stock_num%500 == 0))
        {
          fprintf(stdout, "STOCK for Item #%d\n",stock_num);
          fflush(stdout);
        }
        for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
        {
          stock_quant = rand_integer( 10, 100 ) ;
          create_random_a_string( stock_dist_01, 24, 24);
          create_random_a_string( stock_dist_02, 24, 24);
          create_random_a_string( stock_dist_03, 24, 24);
          create_random_a_string( stock_dist_04, 24, 24);
          create_random_a_string( stock_dist_05, 24, 24);
          create_random_a_string( stock_dist_06, 24, 24);
          create_random_a_string( stock_dist_07, 24, 24);
          create_random_a_string( stock_dist_08, 24, 24);
          create_random_a_string( stock_dist_09, 24, 24);
```

```
      create_random_a_string( stock_dist_10, 24, 24);
      /* create ORIGINAL field */
      create_a_string_with_original( stock_data, 26, 50, 10 );
      s_ytd = s_order_cnt = s_remote_cnt = 0;
      numBytes = sprintf(Buffer, fmtStock,
                  s_remote_cnt,
                  stock_quant,
                  s_order_cnt,
                  s_ytd,
                  stock_data,
                  stock_dist_01,
                  stock_dist_02,
                  stock_dist_03,
                  stock_dist_04,
                  stock_dist_05,
                  stock_dist_06,
                  stock_dist_07,
                  stock_dist_08,
                  stock_dist_09,
                  stock_dist_10,
                  stock_num,
                  ware_num);
      rc = GenericWrite(&hnd, Buffer, numBytes);
      if (rc != 0) { goto stock_done; }
    } /* end for... */
  } /* end for... */
  rc = GenericClose(&hnd);
stock_done:
  timestamp2 = current_time();
  elapse = timestamp2 - timestamp1;
  if (rc == 0) {
    if (!quiet_mode) {
      fprintf(stdout,"\nSTOCK table generated in %8.2f seconds.\n\n",elapse);
      fflush(stdout);
    }
  } else {
    fprintf(stderr,"\nSTOCK table FAILED at (S %d W %d) after %8.2f seconds.\n\n",stock_num,
ware_num, elapse);
    fflush(stderr);
  }
}
/*---------------------------------------------------------------------*/
/* generate warehouse table                                            */
/*---------------------------------------------------------------------*/
void gen_ware_tbl( void )
{
  sqlint32 ware_num = 0 ;
  char ware_name[11] ;
  char ware_street_1[21] ;
  char ware_street_2[21] ;
  char ware_city[21] ;
  char ware_state[3]  ;
  char ware_zip[10]  ;
  double ware_tax ;
  double ware_YTD ;
  IOH_NUM numBytes;
  ioHandle hnd;
  char Buffer[1024];
  timestamp1 = current_time();
  rc = GenericOpen(&hnd, outtype1, outname1);
  if (rc != 0) { goto ware_done; }
  for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
  {
    if (!quiet_mode && ((ware_num % 500) == 0)) {
      fprintf(stdout, "Warehouse #%d\n", ware_num);
      fflush(stdout);
    }
    create_random_a_string( ware_name,      6,10) ; /* create name */
    create_random_a_string( ware_street_1, 10,20) ; /* create street 1 */
    create_random_a_string( ware_street_2, 10,20) ; /* create street 2 */
    create_random_a_string( ware_city,     10,20) ; /* create city */
    create_random_a_string( ware_state,     2,2) ;  /* create state */
    create_random_n_string( ware_zip,       4,4) ;  /* create zip */
    strcat(ware_zip, "11111");
    ware_tax = rand_decimal(0, 2000,4);
    ware_YTD = 300000.00;
    numBytes = sprintf(Buffer, fmtWare,
                ware_name,
                ware_street_1,
                ware_street_2,
                ware_city,
                ware_state,
                ware_zip,
                    ware_tax,
                    ware_YTD,
                ware_num);
    rc = GenericWrite(&hnd, Buffer, numBytes);
    if (rc != 0) { goto ware_done; }
  } /* end for */
  rc = GenericClose(&hnd);
ware_done:
  timestamp2 = current_time();
  elapse = timestamp2 - timestamp1;
  if (rc == 0) {
    if (!quiet_mode) {
      fprintf(stdout,"\nWAREHOUSE table generated in %8.2f seconds.\n\n",elapse);
      fflush(stdout);
    }
  } else {
    fprintf(stderr,"\nWAREHOUSE table FAILED at (W %d) after %8.2f seconds.\n\n",ware_num, elapse);
    fflush(stderr);
  }
}
/*---------------------------------------------------------------------*/
/* generate dist table                                                 */
/*---------------------------------------------------------------------*/
void gen_dist_tbl( void )
{
  sqlint32 ware_num = 0 ;
  sqlint32 dist_num = 0 ;
  char dist_name[11];
  char dist_street_1[21];
  char dist_street_2[21];
  char dist_city[21];
  char dist_state[3];
  char dist_zip[10];
  double dist_tax;
  sqlint32 next_o_id;
  double dist_YTD;
  IOH_NUM numBytes;
  ioHandle hnd;
  char Buffer[1024];
  next_o_id = CUSTOMERS_PER_DISTRICT + 1;
  timestamp1 = current_time();
  rc = GenericOpen(&hnd, outtype1, outname1);
  if (rc != 0) { goto dist_done; }
  for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
  {
    if (!quiet_mode) {
      fprintf(stdout, "DISTRICT for Warehouse #%d\n", ware_num);
      fflush(stdout);
    }
    for (dist_num = 1; dist_num <= DISTRICTS_PER_WAREHOUSE; dist_num++)
    {
      create_random_a_string( dist_name,      6,10) ; /* create name */
      create_random_a_string( dist_street_1, 10,20) ; /* create street 1 */
      create_random_a_string( dist_street_2, 10,20) ; /* create street 2 */
      create_random_a_string( dist_city,     10,20) ; /* create city */
      create_random_a_string( dist_state,     2,2) ;  /* create state */
      create_random_n_string( dist_zip,       4,4) ;  /* create zip */
      strcat(dist_zip, "11111");
      dist_tax = rand_decimal(0, 2000,4);
      dist_YTD = 30000.00;
      numBytes = sprintf(Buffer, fmtDist,
                  next_o_id,
                  dist_tax,
                  dist_YTD,
                  dist_name,
                  dist_street_1,
                  dist_street_2,
                  dist_city,
                  dist_state,
                  dist_zip,
                  dist_num,
                  ware_num);
      rc = GenericWrite(&hnd, Buffer, numBytes);
      if (rc != 0) { goto dist_done; }
    } /* end for... */
  } /* end for... */
  rc = GenericClose(&hnd);
dist_done:
  timestamp2 = current_time();
  elapse = timestamp2 - timestamp1;
  if (rc == 0) {
    if (!quiet_mode) {
      fprintf(stdout,"\nDISTRICT table generated in %8.2f seconds.\n\n",elapse);
      fflush(stdout);
    }
  } else {
    fprintf(stderr,"\nDISTRICT table FAILED at (W %d D %d) after %8.2f
seconds.\n\n",ware_num,dist_num,elapse);
    fflush(stderr);
  }
}
/*---------------------------------------------------------------------*/
/* generate customer table                                             */
/*---------------------------------------------------------------------*/
void gen_cust_tbl( void )
{
  sqlint32 ware_num = 0 ;
  sqlint32 dist_num = 0 ;
  sqlint32 cust_num = 0 ;
  char cust_last[17];
  char cust_middle[3];
  char cust_first[17];
  char cust_street_1[21];
  char cust_street_2[21];
  char cust_city[21];
  char cust_state[3];
  char cust_zip[10];
  char cust_phone[17];
  char cust_credit[3];
  char cust_data[501];
  char cust_since[27];
  double cust_discount;
  double cust_balance;
  double cust_YTD_payment;
  double cust_credit_lim;
  IOH_NUM numBytes;
  ioHandle hnd;
  char Buffer[1024];
  int len, pos;
  timestamp1 = current_time();
  rc = GenericOpen(&hnd, outtype1, outname1);
  if (rc != 0) { goto cust_done; }
  strcpy(cust_middle, "OE");

  createTimestampString(cust_since);
  for (cust_num = 1; cust_num <= CUSTOMERS_PER_DISTRICT; cust_num++)
  {
    if (!quiet_mode) {
      fprintf(stdout, "CUSTOMER #%d:\n", cust_num);
      fflush(stdout);
    }
    for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
    {
      for (dist_num = 1; dist_num <= DISTRICTS_PER_WAREHOUSE; dist_num++)
      {
        if (cust_num <= 1000)                   /* create last name */
```

```
        create_random_last_name( cust_last, cust_num);
      else                              /* create last name */
        create_random_last_name( cust_last, 0);
      create_random_a_string( cust_first,     8,16) ; /* create first name */
      create_random_a_string( cust_street_1, 10,20) ; /* create street 1 */
      create_random_a_string( cust_street_2, 10,20) ; /* create street 2 */
      create_random_a_string( cust_city,     10,20) ; /* create city */
      create_random_a_string( cust_state,     2,2) ;  /* create state */
      create_random_n_string( cust_zip,       4,4) ;  /* create zip */
      strcat(cust_zip, "11111");
      /* create phone number */
      create_random_n_string( cust_phone, 16,16) ;
      if ( rand_integer( 1, 100 ) <= 10 )
        strcpy( cust_credit, "BC" ) ;
      else
        strcpy( cust_credit, "GC" ) ;
      /* create discount rate */
      cust_discount = rand_decimal(0,5000,4);
      /* create customer data */
      create_random_a_string(cust_data, 300, 500);
      /* pad customer data (only for non-rctload) */
      if (using_rctload == 0) {
        for (pos=strlen(cust_data); pos<500; pos++)
          cust_data[pos] = ' ';
        cust_data[500] = '\0';
      }
      cust_credit_lim = 50000.00;
      cust_balance = -10.00;
      cust_YTD_payment = 10.00;
      if (cust_num == 1 && dist_num == 1 && ware_num == 1)
      {
        sprintf(cust_first,"C_LAST_LOAD=%d",C_C_LAST_LOAD);
      }
      numBytes = sprintf(Buffer, fmtCust,
                         cust_num,
                         cust_state,
                         cust_zip,
                         cust_phone,
                         cust_since,
                         cust_credit_lim,
                         cust_middle,
                         cust_credit,
                         cust_discount,
                         cust_data,
                         cust_last,
                         cust_first,
                         cust_street_1,
                         cust_street_2,
                         cust_city,
                         dist_num,
                         ware_num,
                         0,
                         cust_balance,
                         cust_YTD_payment,
                         1);
      rc = GenericWrite(&hnd, Buffer, numBytes);
      if (rc != 0) { goto cust_done; }
    } /* end for district... */
  } /* end for warehouse... */
 } /* end for customer... */
 rc = GenericClose(&hnd);
cust_done:
 timestamp2 = current_time();
 elapse = timestamp2 - timestamp1;
 if (rc == 0) {
   if (!quiet_mode) {
     fprintf(stdout,"\nCUSTOMER table generated in %8.2f seconds.\n\n",elapse);
     fflush(stdout);
   }
 } else {
   fprintf(stderr,"\nCUSTOMER table FAILED at (W %d D %d C %d) after %8.2f seconds.\n\n",ware_num,
dist_num, cust_num, elapse);
   fflush(stderr);
 }
}
/*------------------------------------------------------------------------*/
/* generate hist table                                                    */
/*------------------------------------------------------------------------*/
void gen_hist_tbl( void )
{
 sqlint32 ware_num = 0 ;
 sqlint32 dist_num = 0 ;
 sqlint32 cust_num = 0 ;
 char hist_data[25] ;
 char h_date[27] ;
 IOH_NUM numBytes;
 ioHandle hnd;
 char Buffer[1024];
 timestamp1 = current_time();
 rc = GenericOpen(&hnd, outtype1, outname1);
 if (rc != 0) { goto hist_done; }
 createTimestampString(h_date);

 for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
 {
   if (!quiet_mode) {
     fprintf(stdout, "HISTORY for Warehouse #%d:\n", ware_num);
     fflush(stdout);
   }
   for (dist_num = 1; dist_num <= DISTRICTS_PER_WAREHOUSE; dist_num++)
   {
     for (cust_num = 1; cust_num <= CUSTOMERS_PER_DISTRICT; cust_num++)
     {
       /* create history data */
       create_random_a_string( hist_data, 12,24) ;
       numBytes = sprintf(Buffer, fmtHist,
                          cust_num,
                          dist_num,
                          ware_num,
                          dist_num,
                          ware_num,
                          h_date,
                                10.00,
                          hist_data);
       rc = GenericWrite(&hnd, Buffer, numBytes);
       if (rc != 0) { goto hist_done; }
     } /* end for customer... */
   } /* end for district... */
 } /* end for warehouse... */
 rc = GenericClose(&hnd);
hist_done:
 timestamp2 = current_time();
 elapse = timestamp2 - timestamp1;
 if (rc == 0) {
   if (!quiet_mode) {
     fprintf(stdout,"\nHISTORY table generated in %8.2f seconds.\n\n",elapse);
     fflush(stdout);
   }
 } else {
   fprintf(stderr,"\nHISTORY table FAILED at (W %d D %d C %d) after %8.2f seconds.\n\n",ware_num,
dist_num, cust_num, elapse);
   fflush(stderr);
 }
}
/*------------------------------------------------------------------------*/
/* generate nu_ord table                                                  */
/*------------------------------------------------------------------------*/
void gen_nu_ord_tbl( void )
{
 sqlint32 ware_num = 0 ;
 sqlint32 dist_num = 0 ;
 sqlint32 nu_ord_id = 0 ;
 int nu_ord_hi ;
 IOH_NUM numBytes;
 ioHandle hnd;
 char Buffer[1024];
 /* compute maximum and minimum
    order numbers for this
    district */
 nu_ord_hi = CUSTOMERS_PER_DISTRICT - NU_ORDERS_PER_DISTRICT + 1;
 if (nu_ord_hi < 0) {
   nu_ord_hi = CUSTOMERS_PER_DISTRICT - (CUSTOMERS_PER_DISTRICT / 3) + 1;
   fprintf(stderr,"\n**** WARNING **** NU_ORDERS_PER_DISTRICT is >
CUSTOMERS_PER_DISTRICT\n");
   fprintf(stderr,"              Check the values in file lval.h\n");
   fprintf(stderr,"              Loading New-Order with 1/3 of CUSTOMERS_PER_DISTRICT\n");
 }
 timestamp1 = current_time();
 rc = GenericOpen(&hnd, outtype1, outname1);
 if (rc != 0) { goto neword_done; }

 for (nu_ord_id = nu_ord_hi;
      nu_ord_id <= CUSTOMERS_PER_DISTRICT;
      nu_ord_id++)
 {
   if (!quiet_mode) {
     fprintf(stdout, "NEW_ORDER for Customer #%d:\n", nu_ord_id);
     fflush(stdout);
   }
   for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
   {
     for (dist_num = 1; dist_num <= DISTRICTS_PER_WAREHOUSE; dist_num++)
     {
       numBytes = sprintf(Buffer, fmtNewOrd,
                          nu_ord_id,
                          dist_num,
                          ware_num);
       rc = GenericWrite(&hnd, Buffer, numBytes);
       if (rc != 0) { goto neword_done; }
     } /* end for... */
   } /* end for... */
 } /* end for... */
 rc = GenericClose(&hnd);
neword_done:
 timestamp2 = current_time();
 elapse = timestamp2 - timestamp1;
 if (rc == 0) {
   if (!quiet_mode) {
     fprintf(stdout,"\nNEW_ORDER table generated in %8.2f seconds.\n\n",elapse);
     fflush(stdout);
   }
 } else {
   fprintf(stderr,"\nNEW_ORDER table FAILED at (W %d D %d O %d) after %8.2f
seconds.\n\n",ware_num, dist_num, nu_ord_id, elapse);
   fflush(stderr);
 }
}
/*------------------------------------------------------------------------*/
/* generate order and order_line tables                                   */
/*------------------------------------------------------------------------*/
void gen_ordr_tbl( void )
{
 sqlint32 ware_num = 0 ;
 sqlint32 dist_num = 0 ;
 sqlint32 cust_num = 0 ;
 sqlint32 ord_num = 0 ;
 sqlint32 ordr_carrier_id;
 sqlint32 ordr_ol_cnt;
 sqlint32 oline_ol_num;
 sqlint32 oline_item_num;
 double oline_amount;
 char oline_dist_info[25];
 IOH_NUM numBytes;
 ioHandle hnd1, hnd2;
 char Buffer[1024];
 char currtmstmp[27];
 char nulltmstmp[27] = "0001-01-01 00:00:00";
 oline_dist_info[24] = '\0';
 timestamp1 = current_time();
```

```
  rc1 = GenericOpen(&hnd1, outtype1, outname1);
  if (rc1 != 0) { goto ool_done; }
  rc2 = GenericOpen(&hnd2, outtype2, outname2);
  if (rc2 != 0) { goto ool_done; }
  createTimestampString(currtmstmp);

  for (ware_num = ware_start; ware_num <= ware_end; ware_num++)
  {
    if (!quiet_mode) {
      fprintf(stdout, "ORDERS & ORDER_LINE for Warehouse #%d\n", ware_num);
      fflush(stdout);
    }
    for (dist_num = 1; dist_num <= DISTRICTS_PER_WAREHOUSE; dist_num++)
    {
      if (!quiet_mode) {
        fprintf(stdout, "District #%d\t", dist_num);
        fflush(stdout);
      }
      seed_1_3000();

      for (ord_num = 1; ord_num <= CUSTOMERS_PER_DISTRICT; ord_num++)
      {
        if (ord_num < 2101)
          ordr_carrier_id = rand_integer( 1, 10 ) ;
        else
          ordr_carrier_id = 0;
        cust_num = random_1_3000();
        ordr_ol_cnt = rand_integer(MIN_OL_PER_ORDER,MAX_OL_PER_ORDER);
        numBytes = sprintf(Buffer, fmtOrdr,
                           cust_num,
                           currtmstmp,
                           ordr_carrier_id,
                           ordr_ol_cnt,
                           1,
                           ord_num,
                           ware_num,
                           dist_num);
        rc1 = GenericWrite(&hnd1, Buffer, numBytes);
        if (rc1 != 0) { goto ool_done; }
        for ( oline_ol_num = 1; oline_ol_num <= ordr_ol_cnt; oline_ol_num++ )
        {
          oline_item_num = rand_integer(1, ITEMS) ;
          create_random_a_string( oline_dist_info, 24, 24) ;
          numBytes = sprintf(Buffer, fmtOLine,
                             ((ord_num < 2101) ? currtmstmp : nulltmstmp),
                             ((ord_num < 2101) ? 0.00 : rand_decimal(1,999999,2)),
                             oline_item_num,
                             ware_num,
                             5,
                             oline_dist_info,
                             ord_num,
                             dist_num,
                             ware_num,
                             oline_ol_num);
          rc2 = GenericWrite(&hnd2, Buffer, numBytes);
          if (rc2 != 0) { goto ool_done; }
        } /* for order_line */
      } /* for order */
    } /* for dist */
  } /* for ware */
  rc1 = GenericClose(&hnd2);
  rc2 = GenericClose(&hnd1);
ool_done:
  timestamp2 = current_time();
  elapse = timestamp2 - timestamp1;
  if (rc1 == 0 && rc2 == 0) {
    if (!quiet_mode) {
      fprintf(stdout,"\nORDERS & ORDER_LINE tables generated in %8.2f seconds.\n\n",elapse);
      fflush(stdout);
    }
  } else {
    fprintf(stderr,"\nORDERS & ORDER_LINE tables FAILED at (W %d D %d O %d OL %d) after %8.2f
seconds.\n\n",ware_num, dist_num, ord_num, oline_ol_num, elapse);
    fflush(stderr);
  }
}
// This routine will initalize the printf format strings and replace the
// delimiter with the one provided.  The pipe symbol is the default.
void InitFormatStrings(char delim)
{
  char *p;
  // Check if Using Default Delimiter
  if (delim == '|') return;
  // Replace Delimiters
  while (p = strchr(fmtWare,'|'))   { *p = delim; }
  while (p = strchr(fmtDist,'|'))   { *p = delim; }
  while (p = strchr(fmtItem,'|'))   { *p = delim; }
  while (p = strchr(fmtStock,'|'))  { *p = delim; }
  while (p = strchr(fmtCust,'|'))   { *p = delim; }
  while (p = strchr(fmtHist,'|'))   { *p = delim; }
  while (p = strchr(fmtOrdr,'|'))   { *p = delim; }
  while (p = strchr(fmtOLine,'|'))  { *p = delim; }
  while (p = strchr(fmtNewOrd,'|')) { *p = delim; }
}
void ScalingReport(void)
{
  /* Print Scaling Values */
  fprintf(stdout,"Scaling Values in Use\n");
  fprintf(stdout,"------------------------------\n");
  fprintf(stdout,"Warehouses:            %d\n", WAREHOUSES);
  fprintf(stdout,"Districts/Warehouse:   %d\n", DISTRICTS_PER_WAREHOUSE);
  fprintf(stdout,"Customers/District:    %d\n", CUSTOMERS_PER_DISTRICT);
  fprintf(stdout,"Items:                 %d\n", ITEMS);
  fprintf(stdout,"Stock/Warehouse:       %d\n", STOCK_PER_WAREHOUSE);
  fprintf(stdout,"Min Order Lines/Order: %d\n", MIN_OL_PER_ORDER);
  fprintf(stdout,"Max Order Lines/Order: %d\n", MAX_OL_PER_ORDER);
  fprintf(stdout,"New Orders/District:   %d\n", NU_ORDERS_PER_DISTRICT);
  fprintf(stdout,"------------------------------\n");
}
```

dbgen/tpccrnd.c

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * tpccrnd.c - Random generation functions for TPC-C
 *
 */
#include <stdio.h>
#include <string.h>
#include <math.h>
#include "db2tpcc.h"
#include "tpccmisc.h"
#include "lval.h"
static char tbl_cust[CUSTOMERS_PER_DISTRICT];
static char alnum[] =
  "0123456789abcdefghijklmnopqrstuvwxyzABCDEFGHIJKLMNOPQRSTUVWXYZ";
static char *last_name_parts[] =
{
  "BAR",
  "OUGHT",
  "ABLE",
  "PRI",
  "PRES",
  "ESE",
  "ANTI",
  "CALLY",
  "ATION",
  "EING"
};
/*
*********************************************************************
*  rand_integer
*
*  create a uniform random numeric value of type integer, of random
*  value between lo and hi. Number is NOT placed in BUFFER, and IS
*  simply RETURNED.
*
*  Routine RETURNS the VALUE.
*
*  parameters
*  ----------
*  lo end of acceptable value range
*  hi end of acceptable value range
*
*  output
*  ------
*  random integer value  RETURNED
*
*********************************************************************
*/
int rand_integer ( int val_lo, int val_hi )
{
  return((random()%(val_hi-val_lo+1))+val_lo);
}
/*
*********************************************************************
*  rand_decimal
*
*  create a uniform random numeric value of type double, of random
*  value between lo and hi with val_dec fractional digits.
*  Number is NOT placed in BUFFER, and IS simply RETURNED.
*
*  Routine RETURNS the VALUE.
*
*  parameters
*  ----------
*  lo end of acceptable value range
*  hi end of acceptable value range
*  number of fractional digits
*
*  output
*  ------
*  random double value  RETURNED
*
*********************************************************************
*/
double rand_decimal ( int val_lo, int val_hi, int val_dec )
{
  return(rand_integer(val_lo,val_hi)/pow(10.0,(double)val_dec));
}
/*
*********************************************************************
*  seed_1_3000
*
*
*********************************************************************
*/
void seed_1_3000( void )
{
  int i;
  for (i = 0; i < CUSTOMERS_PER_DISTRICT; i++) {
    tbl_cust[i] = 0;
  }
}
/*
```

```
*******************************************************************
*   random_1_3000
*
*
*******************************************************************
*/
int random_1_3000( void )
{
  static int i;
  static int x;
  x = rand_integer(0, CUSTOMERS_PER_DISTRICT - 1);
  for (i = 0; i < CUSTOMERS_PER_DISTRICT; i++)
  {
    if (tbl_cust[x] == 0)
    {
      tbl_cust[x] = 1;
      return(x+1);
    } else {
      x++;
    }
    if (x == CUSTOMERS_PER_DISTRICT)
      x=0;
  }
  printf("\nfatal error in random_1_3000 \n");
  abort();
}

/*
*******************************************************************
*   initialize_random
*******************************************************************
*/
void initialize_random(void)
{
  int t = current_time();
  srand(t);
  srandom(t);
}

/*
*******************************************************************
*   create_random_a_string
*
*   create a random alphanumeric string, of random length between lo and
*   hi and place them in designated buffer. Routine returns the actual
*   length.
*
*   parameters
*   ----------
*   lo end of acceptable length range
*   hi end of acceptable length range
*
*   output
*   ------
*   actual length
*   random alphanumeric string
*
*******************************************************************
*/
int create_random_a_string( char *out_buffer, int length_lo, int length_hi )
{
  int i, actual_length ;
  actual_length = rand_integer( length_lo, length_hi ) ;
  for (i = 0; i < actual_length; i++ )
  {
    out_buffer[i] = alnum[rand_integer( 0, 61 )] ;
  }
  out_buffer[actual_length] = '\0' ;
  return (actual_length);
}

/*
*******************************************************************
*   create_random_n_string
*
*   create a random numeric string, of random length between lo and
*   hi and place them in designated buffer. Routine returns the actual
*   length.
*
*   parameters
*   ----------
*   lo end of acceptable length range
*   hi end of acceptable length range
*
*   output
*   ------
*   actual length
*   random numeric string
*
*******************************************************************
*/
int create_random_n_string( char *out_buffer, int length_lo, int length_hi )
{
  int i, actual_length ;
  actual_length = rand_integer( length_lo, length_hi ) ;
  for (i = 0; i < actual_length; i++ )
  {
    out_buffer[i] = (char)rand_integer( 48,57 ) ;
  }
  out_buffer[actual_length] = '\0' ;
  return (actual_length);
}
/*
*******************************************************************
*   NUrand_val
*
*   create a non-uniform random numeric value of type integer, of random
*   value between lo and hi. Number is NOT placed in BUFFER, and IS
*   simply RETURNED.
*
*   Routine RETURNS the VALUE.
*
*   parameters
*   ----------
*   lo end of acceptable value range
*   hi end of acceptable value range
*
*   output
*   ------
*   random integer value  RETURNED
*
*******************************************************************
*/
int NUrand_val ( int A, int x, int y, int C )
{
  return((((rand_integer(0,A)|rand_integer(x,y))+C)%(y-x+1))+x);
}
/*
*******************************************************************
*   create_a_string_with_original
*
*   create a random alphanumeric string, of random length between lo and
*   hi and place them in designated buffer. Routine returns the actual
*   length.
*
*   the word "ORIGINAL" is placed at a random location in the buffer at
*   random, for a given percent of the records.
*
*   percent_to_set must be an integer value from 0 to 100.
*   if 0, no records will be set. If 100, all records will be set.
*
*   CANNOT USE ON STRINGS OF LENGTH LESS THAN 8 ! LOWER LIMIT MUST BE > 8 !
*
*   parameters
*   ----------
*   lo end of acceptable length range
*   hi end of acceptable length range
*   percentage of records to set to ORIGINAL
*
*   output
*   ------
*   actual length
*   random alphanumeric string with the word "ORIGINAL" is placed at a
*       random location
*
*******************************************************************************
*/
int create_a_string_with_original( char *out_buffer, int length_lo,
                                   int length_hi, int percent_to_set )
{
  int actual_length, start_pos ;
  actual_length = create_random_a_string( out_buffer, length_lo, length_hi ) ;
  if ( rand_integer( 1, 100 ) <= percent_to_set )
  {
    start_pos = rand_integer( 0, actual_length-8 ) ;
    strncpy(out_buffer+start_pos,"ORIGINAL",8) ;
  }
  return (actual_length);
}
/*******************************************************************************
 *
 * create_random_last_name
 *
 * parameters:
 *    out_buffer - target buffer for the generated last name
 *
 * description:
 *    create_random_last_name generates a random number from 0 to 999
 *    inclusive. a random name is generated by associating a random string
 *    with each digit of the generated number. the three strings are
 *    concatenated to generate the name
 *
 *******************************************************************************/
int create_random_last_name(char *out_buffer, int cust_num)
{
 int random_num;
 if (cust_num == 0)
   random_num = NUrand_val( A_C_LAST, 0, 999, C_C_LAST_LOAD );
 else
   random_num = cust_num - 1;
 strcpy(out_buffer, last_name_parts[random_num / 100]);
 random_num %= 100;
 strcat(out_buffer, last_name_parts[random_num / 10]);
 random_num %= 10;
 strcat(out_buffer, last_name_parts[random_num]);
 return(strlen(out_buffer));
}
```

include/db2tpcc.h

```
/*******************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*******************************************************************************/
/*
 * db2tpcc.h - Macros and Miscellany
 *
 */
```

```
#ifndef __DB2TPCC_H
#define __DB2TPCC_H
#include <sys/types.h>
#include "lval.h"
/* ********************************************************************** */
/* Transaction Return Codes (s_transtatus)                                */
/* ********************************************************************** */
#define INVALID_ITEM            100
#define TRAN_OK                 0
#define FATAL_SQLERROR          -1
/* ********************************************************************** */
/* Definition of Unused and Bad Items                                     */
/* ********************************************************************** */
/* Define unused item ID to be 0. This allows the SUT to determine the    */
/* number of items in the order as required by 2.4.1.3 and 2.4.2.2 since  */
/* the assumption that any item with OL_I_ID = 0 is unused will be true.  */
/* This in turn requires that the value used for an invalid item is       */
/* equal to ITEMS + 1.                                                    */
/* ********************************************************************** */
#define INVALID_ITEM_ID (2 * ITEMS) + 1
#define UNUSED_ITEM_ID 0
#define MIN_WAREHOUSE 1
#define MAX_WAREHOUSE WAREHOUSES
/************************************************************************/
/* NURand Constants                                                     */
/* C_C_LAST_RUN and C_C_LAST_LOAD must adhere to clause 2.1.6.          */
/* Analysis indicates that a C_LAST delta of 85 is optimal.             */
/************************************************************************/
#define C_C_LAST_RUN            88
#define C_C_LAST_LOAD           173
#define C_C_ID                  319
#define C_OL_I_ID               3849
#define A_C_LAST                255
#define A_C_ID                  1023
#define A_OL_I_ID               8191
/************************************************************************/
/* Transaction Type Identifiers                                         */
/************************************************************************/
#define CLIENT_SQL   0
#define NEWORD_SQL   1
#define PAYMENT_SQL  2
#define ORDSTAT_SQL  3
#define DELIVERY_SQL 4
#define STOCKLEV_SQL 5
#define SPGENERAL_PAD 3
#define SPGENERAL_ADJUST sizeof(int16_t)
struct in_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   in_items_struct {
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad1[3];
  } in_item[15];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  s_O_OL_CNT;            /* init by SUT */
  int16_t  s_all_local;
  int16_t  duplicate_items;
};
struct out_neword_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  struct   items_struct {
    float  s_I_PRICE;
    float  s_OL_AMOUNT;
    int16_t  s_S_QUANTITY;
    int16_t  pad2;
    char     s_I_NAME[25];
    char     s_brand_generic;
  } item[15];
  float  s_W_TAX;
  float  s_D_TAX;
  float  s_C_DISCOUNT;
  float  s_total_amount;
  int32_t  s_O_ID;
  int16_t  s_O_OL_CNT;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_C_LAST[17];
  char     s_C_CREDIT[3];
  char     s_O_ENTRY_D_time[27];

};
struct in_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  float  s_H_AMOUNT;
  int32_t  s_W_ID;
  int32_t  s_C_W_ID;
  int32_t  s_C_ID;
  int16_t  s_C_D_ID;
  int16_t  s_D_ID;
  char     s_C_LAST[17];
};
struct out_payment_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_CREDIT_LIM;
  double  s_C_BALANCE;
  float  s_C_DISCOUNT;
  int32_t  s_C_ID;
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_W_STREET_1[21];
  char     s_W_STREET_2[21];
  char     s_W_CITY[21];
  char     s_W_STATE[3];
  char     s_W_ZIP[10];
  char     s_D_STREET_1[21];
  char     s_D_STREET_2[21];
  char     s_D_CITY[21];
  char     s_D_STATE[3];
  char     s_D_ZIP[10];
  char     s_C_FIRST[17];
  char     s_C_MIDDLE[3];
  char     s_C_LAST[17];
  char     s_C_STREET_1[21];
  char     s_C_STREET_2[21];
  char     s_C_CITY[21];
  char     s_C_STATE[3];
  char     s_C_ZIP[10];
  char     s_C_PHONE[17];
  char     s_C_CREDIT[3];
  char     s_C_DATA[201];
  char     s_H_DATE_time[27];
  char     s_C_SINCE_time[27];
};
struct in_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_C_ID;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
  int16_t  pad1[3];
  char     s_C_LAST[17];
};
struct out_ordstat_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  double  s_C_BALANCE;
  int32_t  s_C_ID;
  int32_t  s_O_ID;
  int16_t  s_O_CARRIER_ID;
  int16_t  s_ol_cnt;
  int16_t  pad1[2];
  struct   oitems_struct {
    double  s_OL_AMOUNT;
    int32_t  s_OL_I_ID;
    int32_t  s_OL_SUPPLY_W_ID;
    int16_t  s_OL_QUANTITY;
    int16_t  pad2;
    char     s_OL_DELIVERY_D_time[27];
  } item[15];
  int16_t  s_transtatus;
  int16_t  deadlocks;
  char     s_C_FIRST[17];
  char     s_C_MIDDLE[3];
  char     s_C_LAST[17];
  char     s_O_ENTRY_D_time[27];
  int16_t  pad3[2];
};
struct in_delivery_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_W_ID;
  int16_t  s_O_CARRIER_ID;
};
struct out_delivery_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_O_ID[10];
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
struct in_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_threshold;
  int32_t  s_W_ID;
  int16_t  s_D_ID;
};
struct out_stocklev_struct {
  int16_t  len;
  int16_t  pad[SPGENERAL_PAD];
  int32_t  s_low_stock;
  int16_t  s_transtatus;
  int16_t  deadlocks;
};
/* ********************************************************************** */
/* Transaction Prototypes                                                 */
/* ********************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int neword_sql(struct in_neword_struct*, struct out_neword_struct*);
extern int payment_sql(struct in_payment_struct*, struct out_payment_struct*);
extern int ordstat_sql(struct in_ordstat_struct*, struct out_ordstat_struct*);
extern int delivery_sql(struct in_delivery_struct*, struct out_delivery_struct*);
extern int stocklev_sql(struct in_stocklev_struct*, struct out_stocklev_struct*);
#ifdef __cplusplus
}
#endif
/* ********************************************************************** */
/* DB2 Connect/Disconnect & Thread Context Wrappers                       */
/* ********************************************************************** */
#ifdef __cplusplus
extern "C" {
#endif
extern int connect_to_TM(char*);
extern int connect_to_TM_auth(char*, char*, char*);
extern int disconnect_from_TM(void);

#ifdef __cplusplus
}
#endif
#endif // __DB2TPCC_H
```

include/lval.h

```
/* lval.h - generated automatically at 20060614.2208 */
#ifndef __LVAL_H
#define __LVAL_H
#define WAREHOUSES 320000
#define DISTRICTS_PER_WAREHOUSE 10
#define CUSTOMERS_PER_DISTRICT 3000
#define ITEMS 100000
#define STOCK_PER_WAREHOUSE 100000
#define MIN_OL_PER_ORDER 5
#define MAX_OL_PER_ORDER 15
#define NU_ORDERS_PER_DISTRICT 900
#endif // __LVAL_H
```

include/platform.h

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * platform.h - Platform Isolation Layer
 *
 */
#ifndef __PLATFORM_H
#define __PLATFORM_H
/* ***************************************************************************/
/* Generic Macros                                                            */
/* ***************************************************************************/
#define GEN_ERRCODE           errno
/* ***************************************************************************/
/* Windows I/O Macros                                                        */
/* ***************************************************************************/
/* ***************************************************************************/
/* UNIX I/O Macros                                                           */
/* ***************************************************************************/
#include <fcntl.h>
#define IOH_INIT(hnd, type, name)                                   \
  hnd->fd = -1;                                                     \
  hnd->type = type;                                                 \
  hnd->name = name;
#define IOH_CREATE(hnd)                                             \
  if (hnd->type == IOH_PIPE) {                                      \
    rc = mkfifo(hnd->name, 0666);                                   \
  } else {                                                          \
    rc = 0;                                                         \
  }
#define IOH_OPEN(hnd)                                               \
  if (hnd->type == IOH_FILE_APPEND) {                               \
    hnd->fd = open(hnd->name, O_WRONLY | O_CREAT | O_APPEND, 0666);     \
  } else {                                                          \
    hnd->fd = open(hnd->name, O_WRONLY | O_CREAT | O_TRUNC, 0666);      \
  }                                                                 \
  if (hnd->fd == -1) {                                              \
    rc = -1;                                                        \
  } else {                                                          \
    rc = 0;                                                         \
  }
#define IOH_WRITE(hnd, buff, num, num2)                             \
  rc = write(hnd->fd, buff, num);                                   \
  if (rc >= 0) {                                                    \
    num2 = rc;                                                      \
    rc = 0;                                                         \
  }
#define IOH_FLUSH(hnd)          rc = 0;
#define IOH_CLOSE(hnd)          rc = close(hnd->fd);
#define IOH_DELETE(hnd)         if (hnd->type == IOH_PIPE) { rc = unlink(hnd->name); }
typedef unsigned int IOH_NUM;
typedef int IOH_HND;
/* ***************************************************************************/
/* UNIX Semaphore Macros                                                     */
/* ***************************************************************************/
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
union semun {
  int val;
  struct semid_ds *buf;
  unsigned short int *array;
} semUnion;
struct sembuf semBuf;
#define SEM_HANDLE int
#define SEM_INIT(hnd, x, name)                                      \
  if ( (hnd = semget(IPC_PRIVATE, 1 , IPC_CREAT | IPC_EXCL | S_IRUSR | S_IWUSR | S_IRGRP |
S_IWGRP | S_IROTH | S_IWOTH)) == -1)                                \
    API_ERROR(__LINE__, "semget", (rc=GEN_ERRCODE));                \
  semUnion.val = x;                                                 \
  if ( semctl(hnd, 0, SETVAL, semUnion) < 0 )                       \
    API_ERROR(__LINE__, "semctl SETVAL", (rc=GEN_ERRCODE));
#define SEM_WAIT(hnd)                                               \
  semBuf.sem_num = 0;                                               \
  semBuf.sem_op = -1;                                               \
  semBuf.sem_flg = SEM_UNDO;                                        \
  if ( semop(hnd, &semBuf, 1) < 0 )                                 \
    API_ERROR(__LINE__, "semop wait", (rc=GEN_ERRCODE));
#define SEM_FREE(hnd)                                               \
  semBuf.sem_num = 0;                                               \
  semBuf.sem_op = 1;                                                \
  semBuf.sem_flg = SEM_UNDO;                                        \
  if ( semop(hnd, &semBuf, 1) < 0 )                                 \
    API_ERROR(__LINE__, "semop free", (rc=GEN_ERRCODE));
#define SEM_DESTROY(hnd)                                            \
  if ( semctl(hnd, 0, IPC_RMID, 0) )                                \
    API_ERROR(__LINE__, "semctl IPC_RMID", (rc=GEN_ERRCODE));

/* ***************************************************************************/
/* Common I/O Macros and Definitions                                         */
/* ***************************************************************************/
#define IOH_FILE 1
#define IOH_PIPE 2
#define IOH_FILE_APPEND 3
#define IOH_ERRMSG(hnd, msg)                                        \
  if (rc != 0) {                                                    \
    fprintf(stderr, "Error %d %s fd %d (%d, %s)\n", GEN_ERRCODE, msg,     \
            hnd->fd, hnd->type, hnd->name);                         \
    return rc;                                                      \
  }
struct _ioh {
  IOH_HND fd;
  int type;
  char *name;
};
typedef struct _ioh ioHandle;
/* ***************************************************************************/
/* Generic I/O Routine Prototypes                                            */
/* ***************************************************************************/
int GenericOpen(ioHandle *hnd, int type, char *name);
int GenericWrite(ioHandle *hnd, char *Buffer, unsigned int numBytes);
int GenericClose(ioHandle *hnd);
/* ***************************************************************************/
/* Generic I/O Routines                                                      */
/* ***************************************************************************/
int GenericOpen(ioHandle *hnd, int type, char *name)
{
  int rc = 0;
  IOH_INIT(hnd, type, name)
  IOH_CREATE(hnd)
  IOH_ERRMSG(hnd, "creating")
  IOH_OPEN(hnd)
  IOH_ERRMSG(hnd, "opening")
  return rc;
}
int GenericWrite(ioHandle *hnd, char *Buffer, unsigned int numBytes)
{
  int rc = 0;
  int numBytesWritten = -1;
  IOH_WRITE(hnd, Buffer, numBytes, numBytesWritten)
  IOH_ERRMSG(hnd, "writing")
  if (numBytes != numBytesWritten) {
    fprintf(stderr, "Truncated data writing to fd %d (%d, %s)\n", hnd->fd, hnd->type, hnd->name);
    rc = -1;
  }
  return rc;
}
int GenericClose(ioHandle *hnd)
{
  int rc = 0;
  IOH_FLUSH(hnd)
  IOH_ERRMSG(hnd, "flushing")
  IOH_CLOSE(hnd)
  IOH_ERRMSG(hnd, "closing")

  IOH_DELETE(hnd)
  IOH_ERRMSG(hnd, "deleting")
  return rc;
}
#endif // __PLATFORM_H
```

include/tpccmisc.h

```
/*****************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2005
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*****************************************************************************/
/*
 * tpccmisc.h - Miscellanouse Routines
 *
 */
#ifndef __TPCCMISC_H
#define __TPCCMISC_H

extern double current_time_ms(void);
extern double current_time(void);
#include <time.h>
#define createTimestampString(buf)                  \
{                                                   \
  time_t now;                                       \
  struct tm *tm;                                    \
  time(&now);                                       \
  tm = localtime(&now);                             \
  sprintf(buf,                                      \
          "%4.4d-%2.2d-%2.2d %2.2d:%2.2d:%2.2d",      \
          tm->tm_year + 1900, tm->tm_mon, tm->tm_mday, \
          tm->tm_hour, tm->tm_min, tm->tm_sec);     \
}
```

```
#endif // __TPCCMISC_H
```

include/tpccrnd.h

```
/*************************************************************************
** Licensed Materials - Property of IBM
**
** Governed under the terms of the International
** License Agreement for Non-Warranted Sample Code.
**
** (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
** All Rights Reserved.
**
** US Government Users Restricted Rights - Use, duplication or
** disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
*************************************************************************/
/*
 * tpccrnd.h - Random generation functions for TPC-C
 *
 */
#ifndef __TPCCRND_H
#define __TPCCRND_H
void initialize_random(void);
int rand_integer( int val_lo, int val_hi ) ;
double rand_decimal( int val_lo, int val_hi, int val_dec ) ;
int NUrand_val( int A, int val_lo, int val_hi, int C ) ;
void seed_1_3000( void );
int random_1_3000( void );
int create_random_a_string( char *out_buffer,
                        int length_lo,
                        int length_hi );
int create_random_n_string( char *out_buffer,
                        int length_lo,
                        int length_hi );
int create_a_string_with_original( char *out_buffer,
                            int length_lo,
                            int length_hi,
                            int percent_to_set ) ;
int create_random_last_name(char *out_buffer, int cust_num);
#endif // __TPCCRND_H
```

tpccenv.sh

```
###############################################################################
## Licensed Materials - Property of IBM
##
## Governed under the terms of the International
## License Agreement for Non-Warranted Sample Code.
##
## (C) COPYRIGHT International Business Machines Corp. 1996 - 2006
## All Rights Reserved.
##
## US Government Users Restricted Rights - Use, duplication or
## disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
###############################################################################
#
# tpccenv.sh - UNIX Environment Setup
#
# The Kit Version
export TPCC_VERSION=CK060601
# The DB2 Instance Name (for DB2)
export DB2INSTANCE=${USER}
# The OS being used (i.e. "UNIX", "LINUX", "WINDOWS","AIX")
export PLATFORM=AIX
# The type of make command and slash used by the OS.
# (i.e. UNIX - "/", WINDOWS - "\").
# These are referenced all over the kit.
export SLASH="/";
export MAKE=make
export TPCC_SPTYPE=SPGENERAL
export DB2VERSION=v8
export TPCC_SCHEMA=${USER}
export DB2EDITION=EE
export DB2NODE=0
export DB2NODES=1;
export TPCC_DBNAME=TPCC
export TPCC_ROOT=${HOME}/tpc-c.ibm
export TPCC_SQLLIB=${HOME}/sqllib
export TPCC_RUNDATA=${HOME}/tpccdata
export TPCC_DEBUGDIR=/tmp
export TPCC_SPDIR=${TPCC_SQLLIB}/function
export TPCC_FENCED=NO
```

Appendix - D: Pricing Information

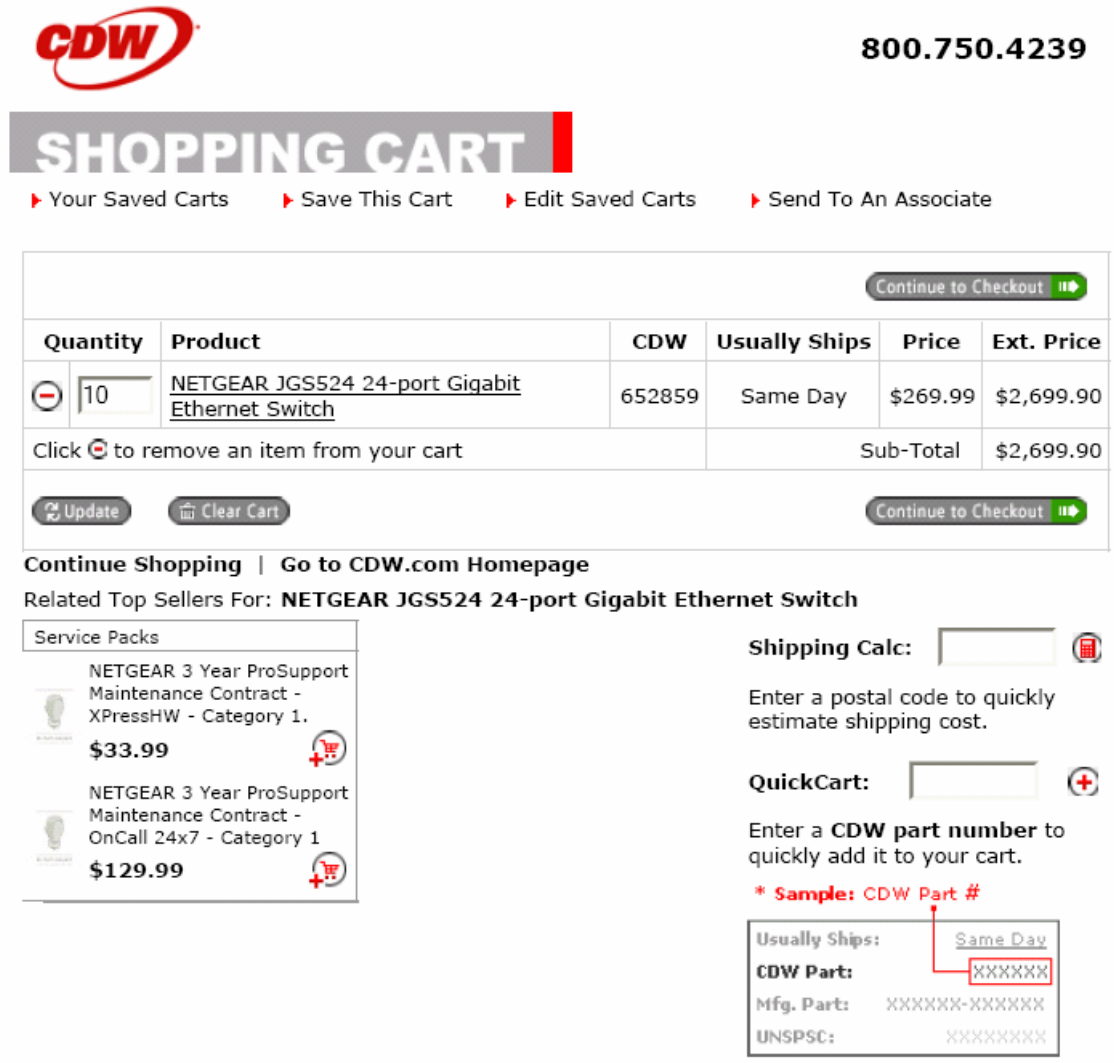

800.750.4239

SHOPPING CART

Your Saved Carts | Save This Cart | Edit Saved Carts | Send To An Associate

Continue to Checkout

Quantity	Product	CDW	Usually Ships	Price	Ext. Price
10	NETGEAR JGS524 24-port Gigabit Ethernet Switch	652859	Same Day	$269.99	$2,699.90
Click to remove an item from your cart				Sub-Total	$2,699.90

Update | Clear Cart | Continue to Checkout

Continue Shopping | **Go to CDW.com Homepage**

Related Top Sellers For: **NETGEAR JGS524 24-port Gigabit Ethernet Switch**

Service Packs

NETGEAR 3 Year ProSupport Maintenance Contract - XPressHW - Category 1.
$33.99

NETGEAR 3 Year ProSupport Maintenance Contract - OnCall 24x7 - Category 1
$129.99

Shipping Calc:

Enter a postal code to quickly estimate shipping cost.

QuickCart:

Enter a **CDW part number** to quickly add it to your cart.

*** Sample:** CDW Part #

Usually Ships: Same Day
CDW Part: XXXXXX
Mfg. Part: XXXXXX-XXXXXX
UNSPSC: XXXXXXXX

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
http://www.microsoft.com/

Microsoft

July 24, 2006

IBM Corporation
Tony Petrossian
11501 BURNET ROAD
Austin, TX 78758

Mr. Petrossian:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars ($).

Part Number	Description	Unit Price	Quantity	Price
C11-00821	**Windows 2000 Server** *Server License Only - No CALs* *Discount Schedule: No Level* *Unit Price reflects a 8% discount from the retail unit price of $799.*	$738	160	$118,080
254-00170	**Visual C++ Standard Edition** *No Discounts Applied*	$109	1	$109
N/A	**Microsoft Problem Resolution Services** *Professional Support* *(1 Incident)*	$245	1	$245

All products are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's authorized resellers can be found at: http://www.microsoft.com/products/info/render.aspx?view=22&type=mnp&content=22/licensing.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at $245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCtope0622016403.
Please include this Reference ID in any correspondence regarding this price quote.

International Business Machines Corporation

11400 BURNET RD
AUSTIN TX 78758

July 18, 2006

Dear Tony,

The requested quote for the System p 595 TPC-C benchmark using DB2 9 and IBM System Storage DS4800

Description	Part No.	Source	Unit Price	Qty	Ext Price	Maint Price
Server Hardware						
Server 1:9119 Model 595	9119-595	1	93,372	1	93,372	63,000
SCSI Cable, B&C TO Media Drawer, 1.5M, Mini-68P TO 68F	2137	1	275	1	275	
RIO-2 (Remote I/O-2) Cable, 3.5M	3147	1	728	8	5,824	
RIO-2(Remote I/O-2)Cbl, 8.0M	3170	1	800	24	19,200	
36.4 GB 15,000 RPM Ultra320 SCSI Disk Drive Assembly	3277	1	599	8	4,792	
IBM 10/100/1000 Base-TX Ethernet PCI-X Adapter	5701	1	699	8	5,592	
2 Gigabit Fibre Channel PCI-X Adapter	5716	1	1,999	90	179,910	
PCI-X Dual Channel Ultra320 SCSI Adapter	5736	1	777	1	777	
4.7 GB SCSI DVD-RAM Drive	5752	1	660	1	660	
Expansion Rack, Powered	5792	1	60,000	1	60,000	3,960
I/O Drawer, 20 Slots, 8 Disk Bays	5794	1	30,000	8	240,000	32,640
Media Drawer, Rack Mounted	5795	1	1,700	1	1,700	
I/O Drw.Cbl.Grp, Prim.Rck/5U	6122	1	400	1	400	
I/O Drw.Cbl.Grp, Prim.Rck/1U	6123	1	400	1	400	
Power Cable, I/O Drawer to Media Drawer	6179	1	300	1	300	
Bulk Power Regulator	6186	1	4,000	10	40,000	
Slim Line Doors	6251	1	6,000	2	12,000	
Ethernet Cable, 15M, Hardware Management	7802	1	34	2	68	
Bulk Power Controller Assembly	7803	1	4,000	4	16,000	
Cooling Group, 2-4 Processor Books	7807	1	4,000	1	4,000	
DC Power Converter, Processor Book	7809	1	6,000	12	72,000	
Processor Clock Card, Programmable	7810	1	575	2	1,150	
System Service Processor	7811	1	3,500	2	7,000	
Multiplexer Card	7812	1	2,200	4	8,800	
Processor Activation, #7668 2.3 Turbo	7668	1	31,800	64	2,035,200	506,880
Remote I/O-2 (RIO-2) Loop Adapter, Two Port	7818	1	3,400	16	54,400	
Pwr.Cbl.Grp, CEC Primary Fans	7821	1	650	1	650	
Pwr.Cbl.Grp, 1st CEC Book	7822	1	650	1	650	
Pwr.Cbl.Grp, 2nd CEC Book	7823	1	650	1	650	
Pwr.Cbl.Grp, 3rd CEC Book	7824	1	650	1	650	
Pwr.Cbl.Grp, 4th CEC Book	7825	1	650	1	650	
Pwr.Cbl.Grp, 7807 Cooling Grp.	7826	1	650	1	650	
Bulk Power Distribution Assembly	7837	1	2,500	6	15,000	
Power Cables, 4x, 01U	7853	1	650	1	650	
Power Cables, 4x, 05U	7854	1	650	1	650	
Power Cables, 4x, 09U	7855	1	650	1	650	
Power Cables, 4x, 19U	7857	1	400	1	400	
Power Cables, 4x, 23U	7858	1	400	1	400	
Power Cables, 4x, 27U	7859	1	400	1	400	
512GB DDR1 Memory (16 X 32GB Cards)	8200	1	172,462	4	689,848	
256GB Bundle DDR2 Activations	8493	1	480,000	8	3,840,000	
Line Cord, 6AWG/Type W, 14ft, IEC309 60A Plug	8688	1	2,000	4	8,000	

16-Way POWER5 Turbo CUoD Processor Book, 0-Way Act	8968	1	127,200	4	508,800	68,640
HMC 1:7310-C04 Desktop Hardw.Mgmt.Console	7310-C04	1	1,830	1	1,830	1,344
IBM T541H /L150p 15 inch TFT Color Monitor	3637	1	508	1	508	
Power Cord (6-foot), To Wall (125V, 15A), Plug Type #4	6470	1	18	2	36	
Ethernet Cable, 6M, Hardware Management	7801	1	15	1	15	
Quiet Touch Keyboard - USB, Business Black,	8800	1	104	1	104	
Mouse - Business Black with Keyboard Attachment	8841	1	78	1	78	
				Subtotal	**7,935,089**	**676,464**
Storage						
DS4800 Disk System Model 82 (4 GB Cache)	1815-82A	1	53,995	43	2,321,785	
DS4800 8-Storage Partitions	8870	1	10,000	43	430,000	
(22R4255) DS4800 AIX Host Kit	7711	1	7,000	43	301,000	
DS4000 EXP810 Enclosure	1812-81A	1	6,000	126	756,000	
36.4GB/15K Drive FC disks	5412	1	1,115	360	401,400	
36.4GB/15K Drive FC disks	5231	1	1,115	352	392,480	
Fiber Cable 25m	5625	1	189	86	16,254	
Fiber Cable 1m	5601	1	79	252	19,908	
DS4000 EXP810 Storage Pack -- Enclosures with 1008 36GB 15K RPM disks	1812-36T	1	868,461	6	5,210,766	
3 Year Warranty Service Upgrade 1812-81A 24x7x4		1	960	504		483,840
3 Year Warranty Service Upgrade 1815-82A 24x7x4		1	3,200	43		137,600
				Subtotal	**9,849,593**	**621,440**
Server Software						
AIX 5.3 (media only)	5692-A5L	1	50	1	50	
AIX Software per Processor	5765-G03	1	2,495	64	159,680	
AIX Software Maintanance (3Y)	5773-SM3-474	1	2,836	64		181,504
AIX Software Maintanance 24x7 Upgrade (3Y)	5773-SM3-476	1	732	64		46,848
PLM Software Maintanance 24x7 upgrade (3Y)	5773-PL3-779	1	35	64		2,240
PLM Software Maintanance (3Y)	5773-PL3-780	1	14	64		896
VIO Software Maintanance (3Y)	5773-VI3-781	1	155	64		9,920
VIO Software Maintanance 24x7 upgrade (3Y)	5773-VI3-782	1	64	64		4,096
HMC Software SUB (3Y)	5773-0570	1	236	1		236
HMC Software Support (3Y)	5773-0569	1	675	1		675
C for AIX user Lic+SW maint 12 MO	D5A1DLL	1	515	1	515	
C for AIX user annual SW maint renewal	E1A1FLL	1	103	2		206
DB2 Enterprise Server Edition Proc Lic/1 yr Maint.		1	26,265	64	1,680,960	
DB2 Enterprise Server Ed Proc Maint Renew		1	1,251	128		160,128
				Subtotal	**1,841,205**	**406,749**
Client Hardware and Software						
xSeries 226	86485AU	1	1,299	160	207,840	93,760
3.2 GHz 800 MHz 2MB L2 Cache	25R8901	1	549	160	87,840	
1GB (2x512MB Kit) PC2-3200	39M5821	1	275	160	44,000	
512MB (1x512MB DIMM) PC2-3200	39M5858	1	135	160	21,600	
36GB (Gen 3) Hot-Swap 3.5" 15K RPM Ultra 320	90P1380	1	249	160	39,840	
NetBay42 Standard Rack	93074SX	1	1,489	43	64,027	
Optical 3-Button Mouse - USB	90P0744	1	15	1	15	
Preferred Pro Full Size PS/2 Keyboard	25R6968	1	29	1	29	
IBM C117 17" CRT Monitor	49387NU	1	149	1	149	
				Subtotal	**465,340**	**93,760**
				Total	**20,091,227**	**1,798,413**
					Total IBM Discounts	**-10,069,234**
					Three-Year Cost of Ownership	**11,820,406**

For additional information, please contact me directly at 1-512-838-6804.

William R. Casey

Enterprise Offering Manager
IBM Corporation
wrcasey@us.ibm.com
1-512-838-1422

Appendix - E: Orderability Information

The following product(s) will be orderable after 10/30/2006:

DS4000 EXP810 Storage Pack -- Enclosures with 1008 36GB 15K RPM disks -- model 1812-36T
Odering information will be available at http://www.ibm.com/servers/storage/product/p.html