

**TPC Benchmark™ C
Full Disclosure Report
for
Dell PowerEdge 6600
Using
Microsoft SQL Server 2000 Enterprise
Edition
and
Microsoft Windows 2003 Server Enterprise**

First Edition
Submitted for Review

May 27, 2004

First Printing, May 27, 2004

Dell believes that the information included in this document is accurate as of the publication date. The information in this document is subject to change without notice. Furthermore, Dell is not responsible for any errors contained within this document.

The pricing information given in this FDR is accurate as of the publication date, May 27, 2004 and is generally available.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result for these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Actual performance experienced by a particular customer may vary due to differences in system layout and configuration, hardware and/or software revision levels, and background system activity. The content of this document is for informational purposes only.

Copyright 2004 Dell

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

PowerEdge is a trademark of Dell.

Microsoft, Windows 2003 and SQL Server are registered trademarks of Microsoft Corporation.

TPC Benchmark, TPC-C and tpmC are registered trademarks of the Transaction Processing Performance Council.

Intel and Pentium are registered trademarks of Intel Corporation.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark™ C test conducted on Dell PowerEdge 6600. The tests were run in a client/server configuration using four PowerEdge 1600SC as the clients. The operating system used for the benchmark was Microsoft Windows 2003 Server Enterprise Edition on the database server and Microsoft Windows 2003 Server on the client. The database management software was Microsoft SQL Server 2000 Enterprise Edition. Microsoft COM+ provided the database connection queues. All tests were done in compliance with Revision 5.2 of the Transaction Processing Council's TPC Benchmark™ C Standard Specification. Two standard TPC Benchmark™ C metrics, transactions per second (tpmC) and price per tpmC (\$/tpmC) are reported and referred to in this document. The results from the tests are summarized below.

Hardware	Software	Total System Cost	tpmC	\$/tpmC	Availability Date
Dell PowerEdge 6600	Microsoft Windows 2003 Server Enterprise with SQL Server 2000 Enterprise Edition	\$266,260	94,172	\$2.83	May 27, 2004

Auditor

The results of the benchmark and test methodology used to produce the results were audited by Tom Sawyer of Performance Metrics and have fully met the TPC-C rev 5.2 specifications.

Additional copies of this Full Disclosure Report can be obtained from either the Transaction Processing Performance Council or Dell at the following address:

Transaction Processing Performance Council (TPC)
c/o Administrator, TPC
Presidio of San Francisco
Bldg 572B Ruger St.
San Francisco, CA 94129-0920
Phone: (415) 561-6272, fax 415-561 6120
[www\(tpc.org](http://www(tpc.org)

or

Dell Inc.
One Dell Drive RR5
Round Rock, TX 78682
Attention: Mike Molloy, Ph.D.



PowerEdge 6600

Client/Server w/ 4 PE1600SC Front Ends

TPC-C Rev 5.2
Report Date
May 27 2004



Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
\$266,260	94,172 tpmC	\$2.83 / tpmC	MAY 27, 2004
Processors	Database Manager	OS	Other Software
4 x Intel Xeon™ MP Processors 3.0 GHz 4MB L3 Cache	Microsoft SQL Server 2000 Enterprise Edition	Microsoft Windows 2003 Server Enterprise	Windows 2003 Server w/ COM+ Internet Information Server 6.0 Microsoft Visual C++



PE6600

w/ 4 3.0 GHz Intel Xeon MP CPUs
w/ 4MB L3 cache,
32GB RAM,
1 PERC4-DC Controller and
6 LSI 320-4X MegaRAID Controllers
1 18GB 15K RPM U320 SCSI disk

26 PV220S Disk Pods
336 18GB 15K RPM U320 SCSI Disks
16 36GB 15K RPM U320 SCSI Disks



4 PowerEdge 1600SC Client

2 Intel Xeon DP @ 3.06GHz
w/ 512 KB L2
1024 MB RAM
1 36 GB Disk
2 Intel Pro100+ Ethernet NICs

System Component	Server		Each Client	
Processors	4	Intel Xeon MP @ 3.0GHz	2	Intel Xeon w/ 512 KB L2 Client @ 2.4 GHz
Cache		4MB L3 cache		
Memory		32768MB		1024 MB
Disk Controllers	1	PERC4-DC	1	Adaptec On-Board
	6	LSI 320-4X MegaRAID		
Disk Drives	337	18 GB SCSI	1	36 GB
	16	36 GB SCSI		
Total Storage		6642 GB		36 GB
Other	2	2GB NIC	2	10/100MB BT NIC
	1	CD-ROM		

Dell		PowerEdge 6600			TPC-C REV 5.2 EXECUTIVE SUMMARY PAGE 2 OF 3		
		Client/Server		Report Date: 27-May-04			
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price	
Server Hardware		Brand	Pricing				
Dell PowerEdge 6600	221-4646		1	6,382	1	6,382	1,100
Intel Xeon MP3.0GHz / 4 MB - 4 processors	311-3526		1	14,999	1	14,999	-
32 GB,DDR, 16 x 2048MB DIMMS	311-2352		1	27,899	1	27,899	-
18GB SCSI 15K HDD U320	340-8723		1	249	1	249	-
Dell 15" Monitor	320-0960		1	129	1	129	-
MegaRAID series 320-4X SCSI RAID controller	A0171598	LSI	1	1,183	6	7,098	0
PERC4/DC	340-8157		1	999	1	999	0
				Subtotal	56,756	1,100	
PowerVault Disk Subsystem							
PV220S, U3 SCSI, PS, Rack mount	220-4476, etc.		1	2,054	26	53,404	10,426
2 SCSI Cables	310-0679		1	99	13	1,287	-
18 GB SCSI 15K RPM U320 Hard Drive *	340-9472		1	249	336	83,664	-
36 GB SCSI 15K RPM Hard Drive *	340-9371		1	349	16	5,584	-
42U Rack	220-4492		1	964	2	1,928	-
				Subtotal	145,867	10,426	
Server Software							
SQL Server 2000 Ent Edition, Per processor licensing **	810-00846	Microsoft	2	16,541	4	66,164	5,850
Windows 2003 Server Enterprise Edition **	P72-00264	Microsoft	2	2,399	1	2,399	-
				Subtotal	68,563	5,850	
Client Hardware							
Dell PowerEdge 1600SC, 3.06 GHz Xeon w/ 512KB L3	221-3218		1	576	4	2,304	1,160
2nd Proc 3.06GHz/512K/533 Xeon	311-3069		1	799	4	3,196	-
1024MB RAM, 2 DIMMs	311-1940		1	548	4	2,192	-
36GB U320M SCSI 10K RPM Hard Drive	340-7546			249	4	996	-
Dell 15" Monitor	320-0960		1	129	4	516	-
				Subtotal	9,204	1,160	
Client Software							
Windows 2003 Server Standard **	P73-00295	Microsoft	2	738	4	2,952	-
Visual C++ **	254-00170	Microsoft	2	109	1	109	-
				Subtotal	3,061	-	
User Connectivity							
PowerConnect 2616	221-3984		1	329	1	329	40
Cat5E cables	506168		1	11	5	55	
				Subtotal	384	40	
				Other Discounts	(36,151)	-	
				Total	247,684	18,576	
Notes: * Maint. included in PowerVault 220S disk pod or PV650F/630F fibre channel disk pod				Three-Year Cost of Ownership:			
** All Microsoft maintenance is covered by the maintenance costs of Microsoft SQL Server				266,260			
*** 10% or minimum 2 spares are added in place of onsite service (products have a five year return-to-vendor warranty) Pricing: 1 - Dell 2 - Microsoft				tpmC Rating:			
**** Discount based upon total system cost as purchased by a regular customer. Pricing may be verified by calling 1-800-BUY-DELL referencing quote numbers as complex quotes.				94172			
Audited by Tom Sawyer, Performance Metrics Inc.				\$ / tpmC:			
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these items, please inform the TPC at pricing@tpc.org.				2.83			

MQTh , computed Maximum Qualified Throughput	94,172 tpmC
Response Times (in seconds)	
- Neworder	Average 0.64
- Payment	90 th 0.87
- Delivery (interactive portion)	Max 5.94
- Stock-Level	0.54
- Order Status	0.11
- Delivery (deferred portion)	1.35
- Menu	0.85
	1.71
	0.54
	1.28
	0.11
	0.77
	6.67
	1.91
	4.56
Response time delay added for emulated components	Menu 0.1 Resp 0.1
Transaction Mix , in percent of total transactions	
- New-Order	44.84%
- Payment	43.02 %
- Delivery	4.05 %
- Stock-Level	4.05 %
- Order-Status	4.04 %
Keying/Think Times (in seconds),	Min Average Max
- New-Order	18.02 0.0 18.04 12.05 22.85 120.62
- Payment	3.01 0.0 3.04 12.04 7.85 121.03
- Delivery	2.01 0.0 2.04 5.05 6.60 50.41
- Stock-Level	2.01 0.0 2.04 5.06 6.83 50.41
- Order-Status	2.01 0.0 2.04 10.04 6.77 101.74
Test Duration	
- Ramp-up time	51 minutes
- Measurement interval	120 minutes
- Number of checkpoints	4
- Checkpoint interval	30 minutes
- Number of transactions (all types) completed in measurement interval	26,223,808

Table of Contents

ABSTRACT	1
OVERVIEW	1
AUDITOR.....	1
TABLE OF CONTENTS.....	1
INTRODUCTION	5
DOCUMENT STRUCTURE.....	5
BENCHMARK OVERVIEW	5
SYSTEM OVERVIEW	6
GENERAL ITEMS	7
TEST SPONSOR.....	7
APPLICATION CODE AND DEFINITION STATEMENTS	7
PARAMETER SETTINGS	7
CONFIGURATION DIAGRAMS.....	8
CLAUSE 1 -- LOGICAL DATABASE DESIGN RELATED ITEMS	9
CLAUSE 1 -- LOGICAL DATABASE DESIGN RELATED ITEMS	10
TABLE DEFINITIONS	10
PHYSICAL ORGANIZATION OF THE DATABASE.....	10
INSERT AND DELETE OPERATIONS.....	10
HORIZONTAL AND VERTICAL PARTITIONING.....	10
REPLICATION	10
TABLE ATTRIBUTES	10
CLAUSE 2 -- TRANSACTION AND TERMINAL PROFILES RELATED ITEMS	11
RANDOM NUMBER GENERATION	11
SCREEN LAYOUT.....	11
TERMINAL VERIFICATION.....	11
INTELLIGENT TERMINALS.....	11
TRANSACTION PROFILES	11
TRANSACTION MIX	12
DEFERRED DELIVERY MECHANISM	12
CLAUSE 3 -- TRANSACTION AND SYSTEM PROPERTIES RELATED ITEMS	13
ACID TESTS	13
<i>Atomicity</i>	13
<i>Consistency</i>	13
<i>Isolation</i>	13
<i>Durability</i>	14
CLAUSE 4 -- SCALING AND DATABASE POPULATION RELATED ITEMS	16
TABLE CARDINALITY	16
CONSTANT VALUES	16
DATA DISTRIBUTION	17
PARTITION MAPPING.....	21
60 DAY SPACE CALCULATION.....	21

CLAUSE 5 -- PERFORMANCE METRICS AND RESPONSE TIME RELATED ITEMS	23
MEASURED TPMC	23
RESPONSE TIMES.....	23
THINK TIMES & KEY TIMES.....	23
RESPONSE TIME DISTRIBUTION CURVES	24
NEW-ORDER THINK TIME DISTRIBUTION GRAPH	27
STEADY-STATE GRAPH	28
STEADY-STATE METHODOLOGY	28
WORK PERFORMED DURING STEADY STATE	28
MEASUREMENT INTERVAL	29
MEASUREMENT PERIOD DURATION AND CHECKPOINT DURATION.....	29
TRANSACTION MIX	29
OTHER METRICS	30
RTE PARAMETERS.....	31
EMULATED COMPONENTS	31
BENCHMARKED AND TARGETED SYSTEM CONFIGURATION DIAGRAMS.....	31
NETWORK CONFIGURATION	31
NETWORK BANDWIDTH	31
OPERATOR INTERVENTION	32
CLAUSE 7 -- PRICING RELATED ITEMS	33
HARDWARE AND SOFTWARE LIST	33
AVAILABILITY DATE.....	33
MEASURED TPMC	33
COUNTRY SPECIFIC PRICING	33
USAGE PRICING	33
SYSTEM PRICING.....	34
CLAUSE 9 -- AUDIT RELATED ITEMS	35
AUDITOR.....	35
AVAILABILITY OF THE FULL DISCLOSURE REPORT	35
APPENDIX A - APPLICATION SOURCE CODE.....	39
TPCC.DLL ISAPI DLL SOURCE CODE	39
<i>isapi_dll/src/tpcc.def</i>	39
<i>Isapi_dll/src/tpcc.h</i>	39
<i>isapi_dll/src/tpcc.rc</i>	41
<i>isapi_dll/src/tpcc.cpp</i>	42
<i>isapi_dll/src/resource.h</i>	63
<i>common/src/ReadRegistry.cpp</i>	63
<i>common/src/ReadRegistry.h</i>	64
<i>common/src/error.h</i>	65
<i>common/src/trans.h</i>	67
<i>common/src/txn_base.h</i>	69
<i>db_dbllib_dll/src/tpcc_dbllib.cpp</i>	69
<i>db_dbllib_dll/src/tpcc_dbllib.h</i>	79
<i>tm_com_dll/src/tpcc_com.cpp</i>	80
<i>tm_com_dll/src/tpcc_com.h</i>	82
<i>tpcc_com_all/src/methods.h</i>	83
<i>tpcc_com_all/src/resource.h</i>	85
<i>tpcc_com_all/src/tpcc_com_all.cpp</i>	85
<i>tpcc_com_all/src/tpcc_com_all.def</i>	90
<i>tpcc_com_all/src/tpcc_com_all.h</i>	90

<i>tpcc_com_all/src/tpcc_com_all.idl</i>	91
<i>tpcc_com_all/src/tpcc_com_all.rc</i>	92
<i>tpcc_com_all/src/tpcc_com_all.rgs</i>	93
<i>tpcc_com_all/src/tpcc_com_all_i.c</i>	93
<i>tpcc_com_all/src/tpcc_com_no.rgs</i>	95
<i>tpcc_com_all/src/tpcc_com_os.rgs</i>	95
<i>tpcc_com_all/src/tpcc_com_pay.rgs</i>	96
<i>tpcc_com_all/src/tpcc_com_ps.h</i>	96
<i>tpcc_com_all/src/tpcc_com_si.rgs</i>	98
<i>tpcc_com_ps/src/dlldata.c</i>	99
<i>tpcc_com_ps/src/tpcc_com_ps.def</i>	99
<i>tpcc_com_ps/src/tpcc_com_ps.h</i>	99
<i>tpcc_com_ps/src/tpcc_com_ps.idl</i>	102
<i>tpcc_com_ps/src/tpcc_com_ps_i.c</i>	102
<i>tpcc_com_ps/src/tpcc_com_ps_p.c</i>	103
<i>common/txnlog/include/retime.h</i>	124
<i>common/txnlog/include/spinlock.h</i>	124
<i>common/txnlog/include/txnlog.h</i>	125
APPENDIX B - DATABASE DESIGN.....	129
BUILD SCRIPTS	129
<i>setup.cmd</i>	129
<i>tables.sql</i>	130
<i>idxcuscl.sql</i>	134
<i>idxcusnc.sql</i>	135
<i>idxdiscl.sql</i>	135
<i>idxitmcl.sql</i>	135
<i>idxnodcl.sql</i>	135
<i>idxodlcl.sql</i>	136
<i>idxordcl.sql</i>	136
<i>idxstkcl.sql</i>	136
<i>idxwarcl.sql</i>	136
<i>dbopt1.sql</i>	137
<i>dbopt2.sql</i>	137
<i>dbopt3.sql</i>	138
<i>backup.sql</i>	138
<i>restore.sql</i>	138
STORED PROCEDURES	140
<i>neword.sql</i>	140
<i>payment.sql</i>	142
<i>ordstat.sql</i>	144
<i>delivery.sql</i>	145
<i>stocklev.sql</i>	146
LOADER SOURCE CODE.....	146
<i>tpcc.h</i>	146
<i>tpccldr.c</i>	148
<i>getargs.c</i>	168
<i>random.c</i>	169
<i>strings.c</i>	171
<i>time.c</i>	174
APPENDIX C - TUNABLE PARAMETERS.....	175
SERVER CONFIGURATION PARAMETERS	175
<i>Microsoft Windows 2003 Server Parameters</i>	175

<i>Microsoft Windows 2003 Server Configuration</i>	175
<i>Microsoft SQL Server 2000 Startup Parameters</i>	175
<i>Microsoft SQL Server Stack Size</i>	176
<i>Microsoft SQL Server 2000 Configuration Parameters</i>	176
<i>TPCC Application Registry Parameters</i>	345
<i>World Wide Web Service Registry Parameters</i>	346
RTE INPUT PARAMETERS	347
<i>BenchCraft Configuration File</i>	<i>Error! Bookmark not defined.</i>
APPENDIX D – DISK STORAGE	356
APPENDIX E - PRICE QUOTATIONS	357

Introduction

Document Structure

The TPC Benchmark C Standard Specification Revision 5.2, written and approved by the Transaction Processing Performance Council (TPC), determines the contents of this report. The format of this report is based on this specification. Most sections of this report begin with the specification requirements printed in italic type, immediately followed by the detail in plain type of how Dell complied with the specification. Where extensive listings are required (such as listing of code), a note is included which references an appendix containing the listing.

Benchmark Overview

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint.

The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of

systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

System Overview

The hardware configuration used in this TPC-C test is a Dell PowerEdge 6600 server driven by four Dell PowerEdge 1600SC clients. The PE6600 has two internal Gigabit Ethernet adapters, of which only one is in use. The clients and server are networked together via a PowerConnect 2616 unmanaged switch. Two remote terminal emulator (RTE) systems (PowerEdge 63X0's) emulate 76,200 users executing the standard TPC-C workload. The RTE's are connected to the clients through a 100 BaseT switch. The switch connects to the client machines at 100 BaseT and to the RTE machines at 10Mbit/sec, half duplex. Microsoft Windows 2003 Server Enterprise was the operating system used on the server. Microsoft Windows 2003 Server Standard was used on the clients. Microsoft SQL Server 2000 Enterprise Edition was the database on the server machine.

The PowerEdge 6600 motherboard uses the ServerWorks Grand Champion High End chipset and can hold up to four Intel Xeon MP processors (3.0 GHz with 4 MB L3 cache). The system has 10 PCI-X 64-bit/100MHz I/O slots and a single legacy 32-bit/33MHz PCI slot. The measured configuration used 32,768 Gbytes of DDR RAM, which was achieved by using sixteen 2048 Mbyte DIMMs.

The PowerEdge 6600 has an integrated U160 SCSI controller to which was attached 1 18GB hard disk containing the OS. In addition, six LSI MegaRAID 320-4X 4-channel RAID controllers and one PERC4/DC 2-channel RAID controller were installed in PCI-X slots. The six 320-4X controllers were connected to four PV220 disk pods enclosing a total of 56 18GB 15K RPM SCSI disks, containing database data. There was one empty PCI-X slot.

The clients have dual 3.06GHz Intel Xeon DP processors with 512 Kbytes of L2 cache. The clients have 1024 Mbytes of RAM, one 36 GB hard disk, one intergrated Intel gigabit ethernet adapter and one Intel Pro 100 Network Interface Card. The clients' Intel Ethernet adapter was connected to the RTE machines through a 10/100 BaseT switch and the Intel Pro NIC was connected to the Database Server through a PowerConnect 2616 switch. The clients were driven through 8 network segments to run a total of 76,200 emulated users. The network segments between the switches and RTEs were fixed at 10 Mbit/sec, half duplex.

General Items

Test Sponsor

A statement identifying the sponsor of the Benchmark and any other companies who have participated.

Dell Inc. was the test sponsor of this TPC Benchmark™ C.

Application Code and Definition Statements

The application program must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input/output functions.

The application consists of the Microsoft Benchcraft Remote Terminal Emulator (RTE) program emulating a set of users entering TPC-C transactions through web browsers, and communicating with Client machines running the Microsoft Internet Information Server (IIS) web server. The Client machines use the COM+ transaction monitor to communicate with the database server machine.

On each Client machine, IIS loads a custom Microsoft Internet Information Server Application Programming Interface dynamic link library (ISAPI DLL) application program that communicates with the emulated web browsers through the HTTP protocol and with the database server through the COM+ transaction monitor and the Microsoft DBLIB interface. The application supplies fill-in screens to the user for each transaction, then parses the data in each request, and makes a call on SQL Server through the COM+ layer, which manages a set of DBLIB connections to the database server. The resulting data is passed back to the application where it is formatted into HTML and sent back to the user's browser. The Delivery transaction is handled directly from the application to the database without the use of COM+.

The web Client code is listed in Appendix A.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the default found in actual products; including but not limited to:

- Database options
- Recover/commit options
- Consistency/locking options
- System parameter, application parameters, and configuration parameters.

This requirement can be satisfied by providing a full listing of all parameters and options.

Appendix C contains all the database, Windows 2003 Server, and Internet Information Service parameters used in this benchmark.

Appendix D contains the 60 day space calculations.

Configuration Diagrams

Diagrams of both the measured and priced system must be provided, accompanied by a description of the differences.

Figures 1 and 2 respectively show the measured and priced full client/server configurations. The system under test (SUT) in the measured system was identical to what was priced.

Figure 1: Measured Configuration


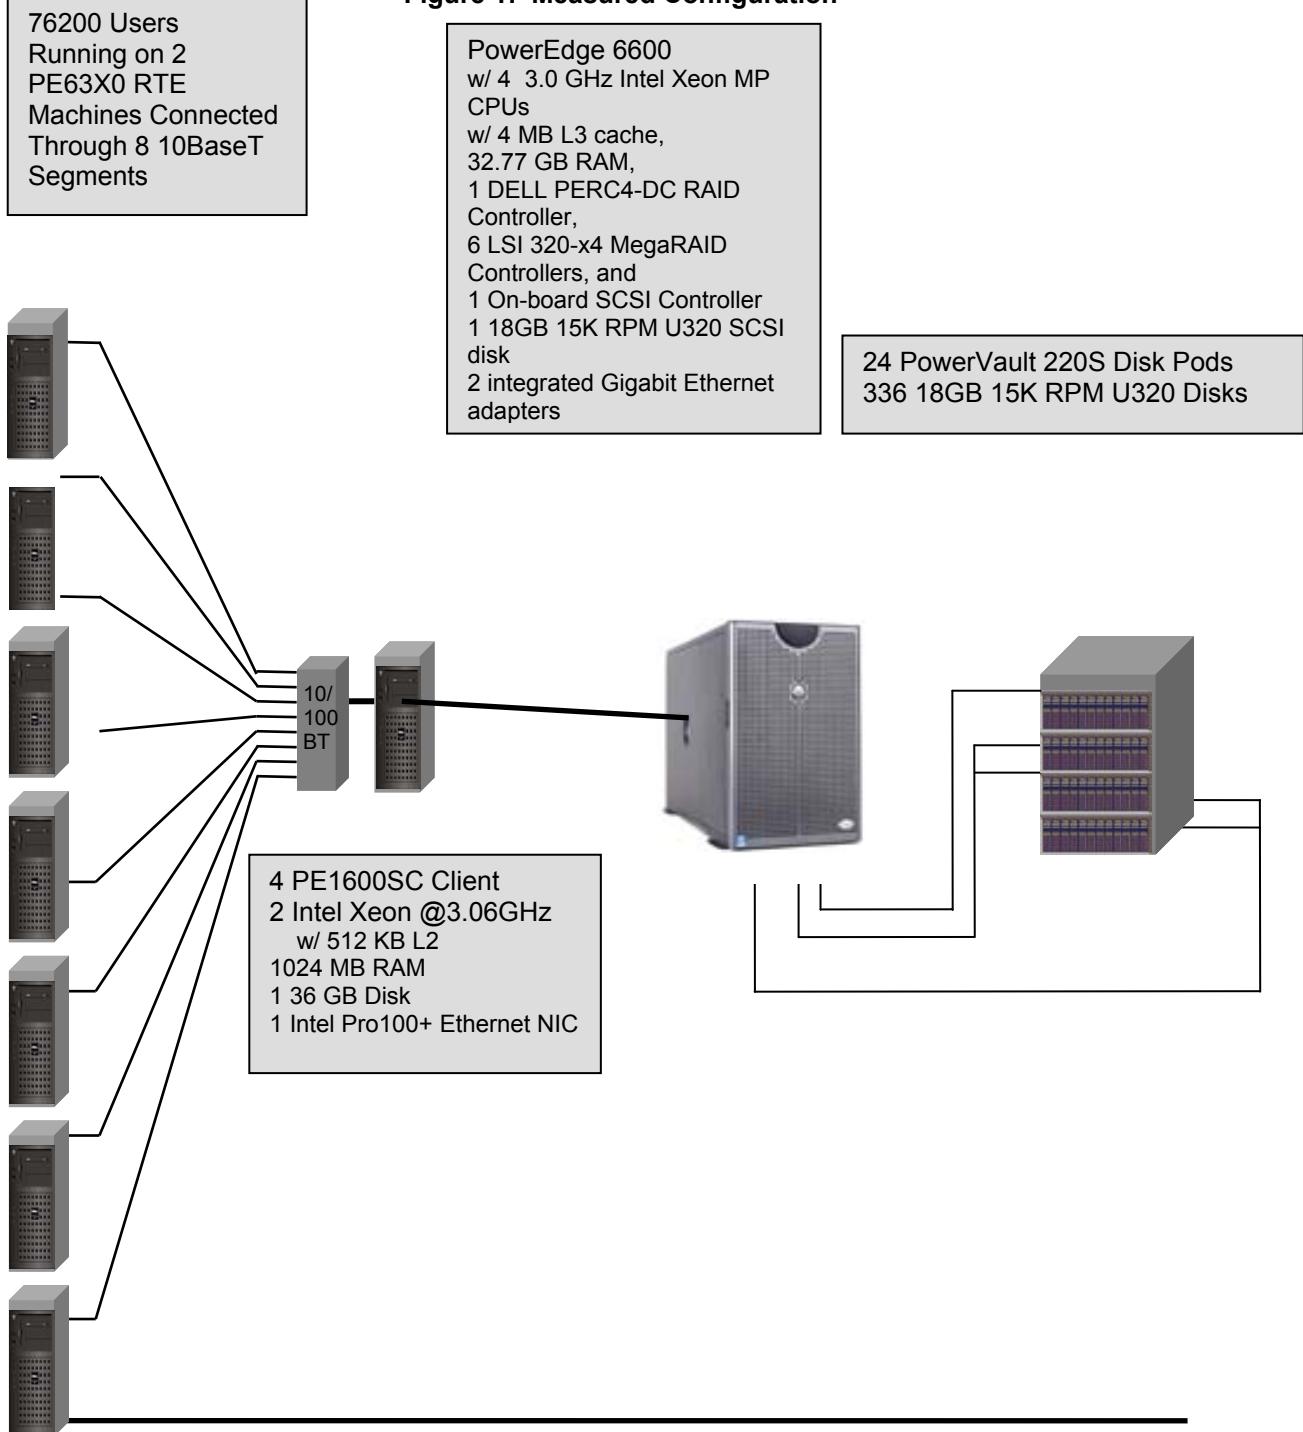


Figure 2: Priced Configuration

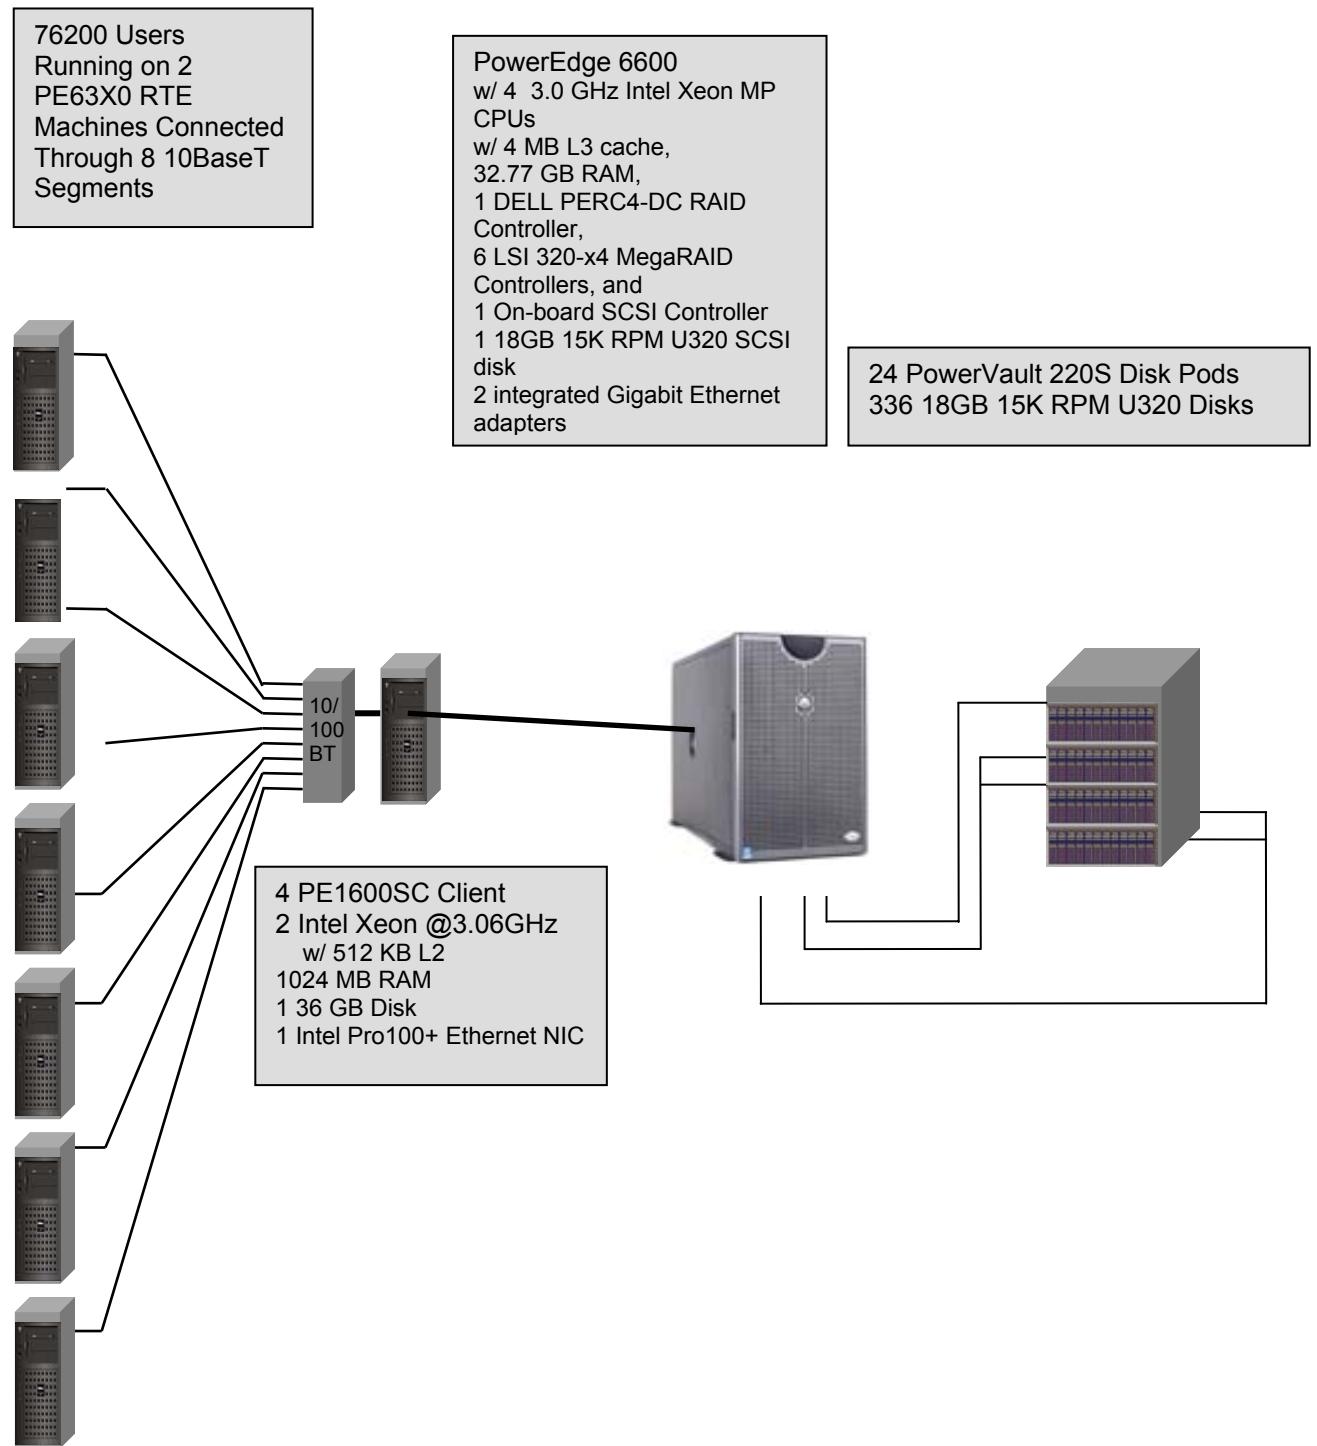

Clause 1 -- Logical Database Design Related Items

Table Definitions

Listings must be provided for all table definition statements and all other statements used to set-up the database. (8.1.2.1)

Appendix B contains the code used to define and load the database tables.

Physical Organization of the Database

The physical organization of tables and indices, within the database, must be disclosed. (8.1.2.2)

The measured configuration used 336 disk drives for the database files and 16 drives for the log. The organization is shown in Table 5: Data Distribution.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows. (8.1.2.3)

Insert and delete functionality was fully operational during the benchmark.

Horizontal and Vertical Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark (see Clause 1.6), any such partitioning must be disclosed. (8.1.2.4)

Partitioning was not used in this benchmark.

Replication

Replication of tables, if used, must be disclosed (see Clause 1.4.6). (8.1.2.5)

Replication was not used in this benchmark.

Table Attributes

Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance (see Clause 1.4.7). (8.1.2.6)

No additional attributes were used in this benchmark.

Clause 2 -- Transaction and Terminal Profiles Related Items

Random Number Generation

The method of verification for the random number generation must be described. (8.1.3.1)

The random number generation was done internal to the Microsoft BenchCraft RTE program, which was audited independently.

Screen Layout

The actual layouts of the terminal input/output screens must be disclosed. (8.1.3.2)

The screen layouts are based on those in Clauses 2.4.3, 2.5.3, 2.6.3, 2.7.3, and 2.8.3 of the TPC-C Standard Specification. There are some very minor differences based on the fact that this is a web client implementation.

Terminal Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance). (8.1.3.3)

The terminal features were verified by allowing the auditor to manually execute each of the five transaction types, using Microsoft Internet Explorer version 6.0.

Intelligent Terminals

Any usage of presentation managers or intelligent terminals must be explained. (8.1.3.4)

Comment 1: *The intent of this clause is to describe any special manipulations performed by a local terminal or workstation to off-load work from the SUT. This includes, but is not limited to: screen presentations, message bundling, and local storage of TPC-C rows.*

Comment 2: *This disclosure also requires that all data manipulation functions performed by the local terminal to provide navigational aids for transaction(s) must also be described. Within this disclosure, the purpose of such additional function(s) must be explained.*

Application code involved in the manipulation of data was run on the client. Screen manipulation commands in the form of HTML were downloaded to the web browser, which handled input and output presentation graphics. A listing of this code is included in Appendix A. Microsoft Internet Information Service assisted in the processing and presentation of this data.

Transaction Profiles

The percentage of home and remote order-lines in the New-Order transactions must be disclosed. (8.1.3.5)

The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed. (8.1.3.6)

The number of items per orders entered by New-Order transactions must be disclosed. (8.1.3.7)

The percentage of home and remote Payment transactions must be disclosed. (8.1.3.8)

The percentage of Payment and Order-Status transactions that used non-primary key (C_LAST) access to the database must be disclosed. (8.1.3.9)

The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed. (8.1.3.10)

Table 1: Transaction Statistics

Transaction	Function	Value
New Order	Home Warehouse Items	99.00%
	Remote Warehouse Items	1.00%
	Rolled Back Transactions	1.00%
	Average Lines Per Order	10.00
Payment	Home Warehouse	85.00%
	Remote Warehouse	15.00%
	Non-Primary Key Access	60.01%
Order Status	Non-Primary Key Access	60.03%
Delivery	Skipped Transactions	0

Transaction Mix

The mix (i.e., percentages) of transaction types seen by the SUT must be disclosed. (8.1.3.11)

Table 2: Transaction mix

Transaction	Percentage
New Order	44.84%
Payment	43.02%
Order Status	4.04%
Delivery	4.05%
Stock Level	4.05%

Deferred Delivery Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed. (8.1.3.12)

The application creates a semaphore-base thread pool consisting of a user-specified number of threads, which open DBLIB connections on the database. When a Delivery transaction is posted one of these threads makes the database call while the transaction's original thread returns control to the user. Upon completion the Delivery thread writes an entry in the Delivery log and returns to the thread pool.

The source code is listed in Appendix A.

Clause 3 -- Transaction and System Properties Related Items

ACID Tests

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7. (8.1.4.1)

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a shell script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests. A run was executed under full load lasting over ten (10) minutes and included a checkpoint. The shell script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through seven were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Durability from media failure was demonstrated on the 8000 warehouse database. The standard driving mechanism was used to generate the transaction load of 76,200 users for the Loss of Data.

Loss of Data

Loss of data was demonstrated on the 8000 Warehouse database. The standard driving mechanism was used to generate the transaction load of 76,200 users for the test. To demonstrate recovery from a permanent failure of durable media containing TPC-C tables, the following steps were executed:

1. The 8000 Warehouse database was used for this test.
2. The database was backed up using SQL Server backup facilities.
3. A sum of D_NEXT_O_ID was taken.
4. 76,200 users were logged in to the database and ran transactions for 5 minutes at steady state.
5. One disk drive in the data array was removed causing SQL Server errors.
6. The RTE was allowed to continue running. Completed transactions enroute from the clients were recorded. Error messages began appearing on the RTE screen.
7. The RTE was stopped.
8. SQL Server was stopped and restarted and a dump of the transaction log was taken.
9. SQL Server was stopped, Windows 2003 was shutdown and the machine powered off.
10. The failed disk was replaced.
11. The machine was powered up, Windows 2003 and SQL Server were started.
12. The TPC-C database was dropped and restored from backup.
13. The transaction log was restored and transactions rolled forward.
14. A new count of D_NEXT_O_ID was taken.
15. This number was compared with the number of new orders reported by the RTE. The difference was valid per the spec.

Instantaneous Interruption and Loss of Memory/Loss of Log

Instantaneous Interruption and Loss of Memory were demonstrated on the full database with 8000 warehouses in a single test. The standard driving mechanism was used to generate the transaction load of 76200 users for the test. To demonstrate recovery an instantaneous system interruption caused by powering off the Server, the following steps were executed:

1. The 8000 database was used.
2. A sum of D_NEXT_O_ID was taken.
3. 76200 users were logged in to the database and ran transactions.
4. The system was running at steady state for 5 minutes
5. One disk drive in the transaction log array was removed with no effect on Windows 2003 or SQL Server.
6. The system ran for an additional 5 minutes.
6. The Server was powered off by normal means, causing instantaneous interruption.

7. The RTE was allowed to continue running. Completed transactions enroute from the clients were recorded. Error messages began appearing on the RTE screen.
8. The RTE was stopped.
9. The server was powered on again and rebooted.
10. SQL Server was restarted and automatically recovered.
11. A new count of D_NEXT_O_ID was taken.
12. This number was compared with the number of new orders reported by the RTE. The difference was valid per the spec.

Clause 4 -- Scaling and Database Population Related Items

Table Cardinality

The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run (see Clause 4.2), must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2), the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed. (8.1.5.1)

The database was originally built with 8000 warehouses. The performance run used 7620 warehouses and this was verified by runcheck.

Table 3: Table Cardinality

Table	Cardinality as Benchmarked
Warehouse	8,000
District	80,000
Customer	240,000,000
History	240,000,000
NewOrder	72,000,000
Orders	240,000,000
OrderLine	2,147,483,647
Item	100,000
Stock	800,000,000
Deleted Warehouses	0

Constant Values

The following values were used as constant value inputs to the NURand function for this benchmark.

Table 4: Constant Values

Function	Constant C Value
C_LAST (Build)	123
C_LAST (Run)	233

Data Distribution

The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems. (8.1.5.2)

The Database was built using a total of 353 disks: 336 18GB for data, 16 36GB for log and 1 18GB for OS and application software. The data drives were configured as hardware RAID 0. Log was configured as hardware RAID 10. 6 LSI 320-4x controllers were configured with 1 logical drive each. Each logical drive spanned 56 disk drives. PERC4/DC was configured with 1 logical drive spanning 16 36GB SCSI drives. Each Windows 2003 data drive contained 3 partitions: partition 1 for customer/stock, partition 2 for miscellaneous, and partition 3 for backup. Partitions 1 and 2 were RAW file systems and partition 3 was formatted NTFS. The details are shown in Table 5.

Table 5: Data Distribution

W2K3 Disk Administration		Onboard SCSI Configuration					
Disk 7 16940MB		On-Board		Controller # 1			
Partition		On-Board		Channels			
1	Internal	SCSI ID	0				
C: OS NTFS 16940 MB		0	A0-1				
		1					
		2					
		3					

W2K3 Disk Administration				LSI 320-4x Configuration				
Disk 0 944890MB				Controller # 2				
Partition				Slot# 1		Channels		
1	2	3		SCSI ID		A	B	C
K: CS1 RAW 292.97GB	Y: MS1 RAW 292.97GB	U: Backup1 B1 NTFS 358.94GB		0	A1-1	A2-1	A3-1	A4-1
				1	A1-2	A2-2	A3-2	A4-2
				2	A1-3	A2-3	A3-3	A4-3
				3	A1-4	A2-4	A3-4	A4-4
				4	A1-5	A2-5	A3-5	A4-5
				5	A1-6	A2-6	A3-6	A4-6
				8	A1-7	A2-7	A3-7	A4-7
				9	A1-8	A2-8	A3-8	A4-8
				10	A1-9	A2-9	A3-9	A4-9
				11	A1-10	A2-10	A3-10	A4-10
				12	A1-11	A2-11	A3-11	A4-11
				13	A1-12	A2-12	A3-12	A4-12
				14	A1-13	A2-13	A3-13	A4-13
				15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			LSI 320-4x Configuration				
Disk 1 944890MB			Controller # 3				
Partition			Slot# 1		Channels		
1	2	3	SCSI ID	A	B	C	D
S: CS2 RAW 292.97GB	W: MS2 RAW 292.97GB	V: Backup2 B2 NTFS 358.94GB	0	A1-1	A2-1	A3-1	A4-1
			1	A1-2	A2-2	A3-2	A4-2
			2	A1-3	A2-3	A3-3	A4-3
			3	A1-4	A2-4	A3-4	A4-4
			4	A1-5	A2-5	A3-5	A4-5
			5	A1-6	A2-6	A3-6	A4-6
			8	A1-7	A2-7	A3-7	A4-7
			9	A1-8	A2-8	A3-8	A4-8
			10	A1-9	A2-9	A3-9	A4-9
			11	A1-10	A2-10	A3-10	A4-10
			12	A1-11	A2-11	A3-11	A4-11
			13	A1-12	A2-12	A3-12	A4-12
			14	A1-13	A2-13	A3-13	A4-13
			15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			LSI 320-4x Configuration				
Disk 2 944890MB			Controller # 4				
Partition			Slot# 1		Channels		
1	2	3	SCSI ID	A	B	C	D
M: CS3 RAW 292.97GB	Z: MS3 RAW 292.97GB	B: Backup3 B3 NTFS 358.94GB	0	A1-1	A2-1	A3-1	A4-1
			1	A1-2	A2-2	A3-2	A4-2
			2	A1-3	A2-3	A3-3	A4-3
			3	A1-4	A2-4	A3-4	A4-4
			4	A1-5	A2-5	A3-5	A4-5
			5	A1-6	A2-6	A3-6	A4-6
			8	A1-7	A2-7	A3-7	A4-7
			9	A1-8	A2-8	A3-8	A4-8
			10	A1-9	A2-9	A3-9	A4-9
			11	A1-10	A2-10	A3-10	A4-10
			12	A1-11	A2-11	A3-11	A4-11
			13	A1-12	A2-12	A3-12	A4-12
			14	A1-13	A2-13	A3-13	A4-13
			15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			LSI 320-4x Configuration				
Disk 3 944890MB			Controller # 5				
Partition			Slot# 1		Channels		
1	2	3	SCSI ID	A	B	C	D
E: CS4 RAW 292.97GB	F: MS4 RAW 292.97GB	G: Backup4 B4 NTFS 358.94GB	0	A1-1	A2-1	A3-1	A4-1
			1	A1-2	A2-2	A3-2	A4-2
			2	A1-3	A2-3	A3-3	A4-3
			3	A1-4	A2-4	A3-4	A4-4
			4	A1-5	A2-5	A3-5	A4-5
			5	A1-6	A2-6	A3-6	A4-6
			8	A1-7	A2-7	A3-7	A4-7
			9	A1-8	A2-8	A3-8	A4-8
			10	A1-9	A2-9	A3-9	A4-9
			11	A1-10	A2-10	A3-10	A4-10
			12	A1-11	A2-11	A3-11	A4-11
			13	A1-12	A2-12	A3-12	A4-12
			14	A1-13	A2-13	A3-13	A4-13
			15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			LSI 320-4x Configuration				
Disk 4 944890MB			Controller # 6				
Partition			Slot# 1		Channels		
1	2	3	SCSI ID	A	B	C	D
H: CS5 RAW 292.97GB	I: MS5 RAW 292.97GB	J: Backup5 B5 NTFS 358.94GB	0	A1-1	A2-1	A3-1	A4-1
			1	A1-2	A2-2	A3-2	A4-2
			2	A1-3	A2-3	A3-3	A4-3
			3	A1-4	A2-4	A3-4	A4-4
			4	A1-5	A2-5	A3-5	A4-5
			5	A1-6	A2-6	A3-6	A4-6
			8	A1-7	A2-7	A3-7	A4-7
			9	A1-8	A2-8	A3-8	A4-8
			10	A1-9	A2-9	A3-9	A4-9
			11	A1-10	A2-10	A3-10	A4-10
			12	A1-11	A2-11	A3-11	A4-11
			13	A1-12	A2-12	A3-12	A4-12
			14	A1-13	A2-13	A3-13	A4-13
			15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			LSI 320-4x Configuration				
Disk 5 944890MB			Controller # 7				
Partition			Slot# 1		Channels		
1	2	3	SCSI ID	A	B	C	D
N: CS6 RAW 292.97GB	O: MS6 RAW 292.97GB	P: Backup6 B6 NTFS 358.94GB	0	A1-1	A2-1	A3-1	A4-1
			1	A1-2	A2-2	A3-2	A4-2
			2	A1-3	A2-3	A3-3	A4-3
			3	A1-4	A2-4	A3-4	A4-4
			4	A1-5	A2-5	A3-5	A4-5
			5	A1-6	A2-6	A3-6	A4-6
			8	A1-7	A2-7	A3-7	A4-7
			9	A1-8	A2-8	A3-8	A4-8
			10	A1-9	A2-9	A3-9	A4-9
			11	A1-10	A2-10	A3-10	A4-10
			12	A1-11	A2-11	A3-11	A4-11
			13	A1-12	A2-12	A3-12	A4-12
			14	A1-13	A2-13	A3-13	A4-13
			15	A1-14	A2-14	A3-14	A4-14

W2K3 Disk Administration			DELL PERC4-DC Configuration				
Disk 6 472440MB			Controller # 8				
Partition			Slot# 2		Channels		
1	2	3	SCSI ID	A	B	C	D
L: Log RAW 270.92GB			0				
			1	A1-2	A2-2		
			2	A1-3	A2-3		
			3	A1-4	A2-4		
			4	A1-5	A2-5		
			5	A1-6	A2-6		
			8	A1-7	A2-7		
			9	A1-8	A2-8		
			10	A1-9	A2-9		
			11				
			12				
			13				
			14				
			15				

Comment: Detailed diagrams for layout of database files on disks can widely vary, and it is difficult to provide exact guideline suitable for all implementations. The intent is to provide sufficient detail to allow independent reconstruction of the test database. The two figures below are examples of database layout descriptions and are not intended to depict or imply any optimal layout for the TPC-C database.

8.1.5.3 A statement must be provided that describes:

1. The data model implemented by the DBMS used (e.g., relational, network, hierarchical)
2. The database interface (e.g., embedded, call level) and access language (e.g., SQL, DL/1, COBOL read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.

Microsoft SQL Server 2000 Enterprise Edition is the relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code using the Microsoft DBLIB interface.

Partition Mapping

The mapping of database partitions/replications must be explicitly described.

Comment: The intent is to provide sufficient detail about partitioning and replication to allow independent reconstruction of the test database. (8.1.5.4)

An description of a database partitioning scheme is presented below as an example. The nomenclature of this example was outlined using the CUSTOMER table (in Clause 8.1.2.1), and has been extended to use the ORDER and ORDER_LINE tables as well.

The database was not replicated.

60 day Space Calculation

Details of the 60 day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed (see Clause 4.2.3). (8.1.5.5)

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

1. The current log space usage was determined by running `dbcc sqlperf(logspace)`
2. Transactions were run against the database with a full load of users.
3. The final log space usage was determined by running `dbcc sqlperf(logspace)`
4. The space used was calculated as the difference between the first and second query.
5. The number of NEW-ORDERS was verified from an RTE report covering the entire run.
6. The space used was divided by the number of NEW-ORDERS giving a spaceused per NEW-ORDER transaction.
7. The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The results of the above steps yielded a requirement of 405.2698 GB (including mirror) to sustain the log for 8 hours. Space available on the transaction log volume was 539.94GB (including mirror), indicating that enough storage was configured to sustain 8 hours of growth.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

The details of the 60-day space requirement is shown in Appendix D.

Clause 5 -- Performance Metrics and Response Time Related Items

Measured TpmC

Measured tpmC must be reported. (8.1.6.1)

Measured TpmC	94,172
Price per TpmC	\$2.83

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time. (8.1.6.2)

Table 6: Transaction Response Times

Transaction	Average	90%	Maximum
New Order	0.64	0.87	5.94
Payment	0.54	0.75	5.35
Interactive Delivery	0.11	0.12	2.48
Stock Level	1.35	1.71	6.67
Order Status	0.85	1.28	6.68
Deferred Delivery	0.54	0.77	1.91
Menu	0.11	0.12	4.56

Think Times & Key Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type. (8.1.6.3)

Table 7: Transaction Key Times

Transaction	Minimum	Average	Maximum
New Order	18.01	18.04	22.85
Payment	3.01	3.04	7.85
Delivery	2.01	2.04	6.60
Stock Level	2.01	2.04	6.83
Order Status	2.01	2.04	6.77

Table 8: Transaction Think Times

Transaction	Minimum	Average	Maximum
New Order	0.00	12.05	120.62
Payment	0.00	12.04	121.03
Delivery	0.00	5.05	50.41
Stock Level	0.00	5.05	50.41
Order Status	0.00	10.03	101.74

Response Time Distribution Curves

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type. (8.1.6.4)

Figure 3: New Order Response Time Distribution

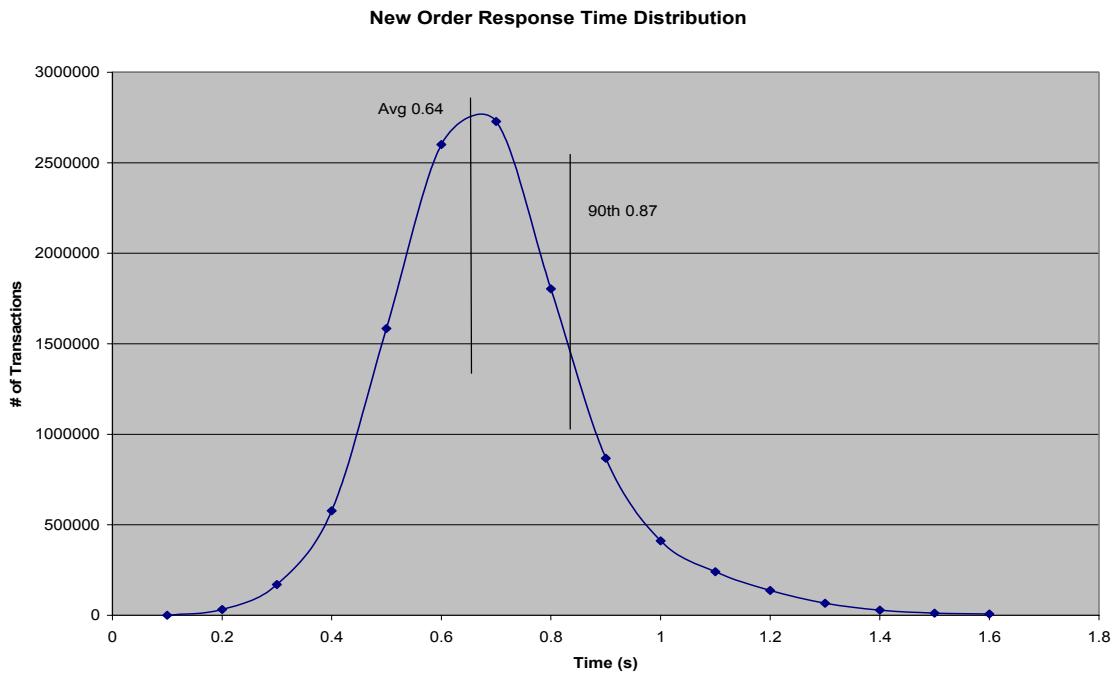


Figure 4: Payment Response Time Distribution

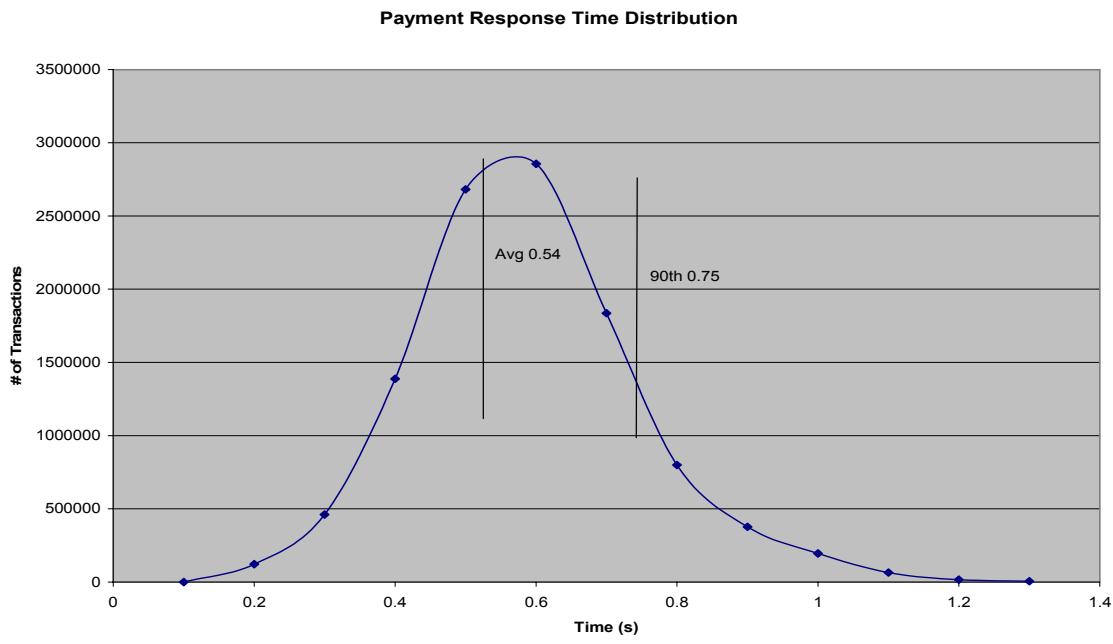


Figure 5: Order Status Response Time Distribution

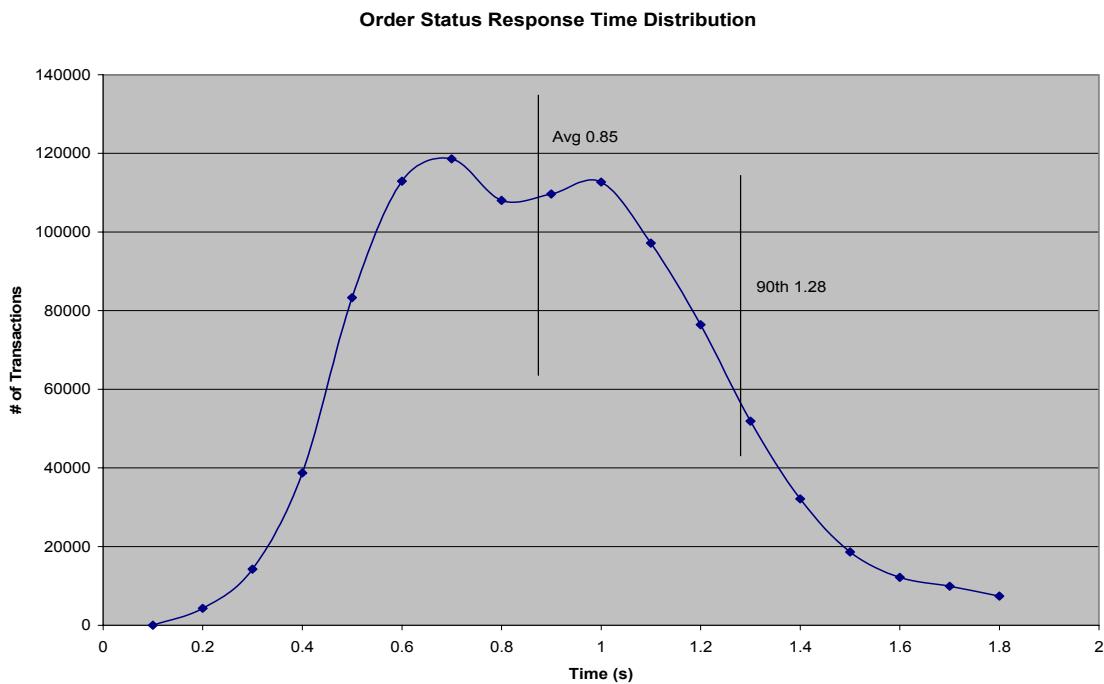


Figure 6: Delivery Response Time Distribution


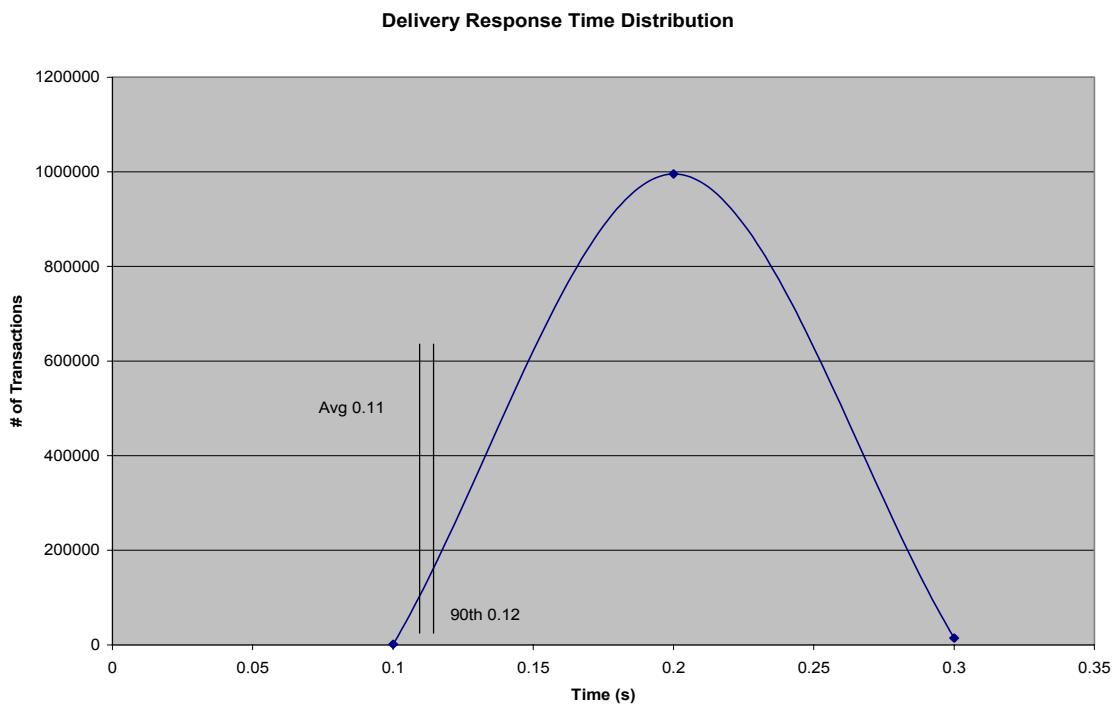



Figure 7: Stock Level Response Time Distribution

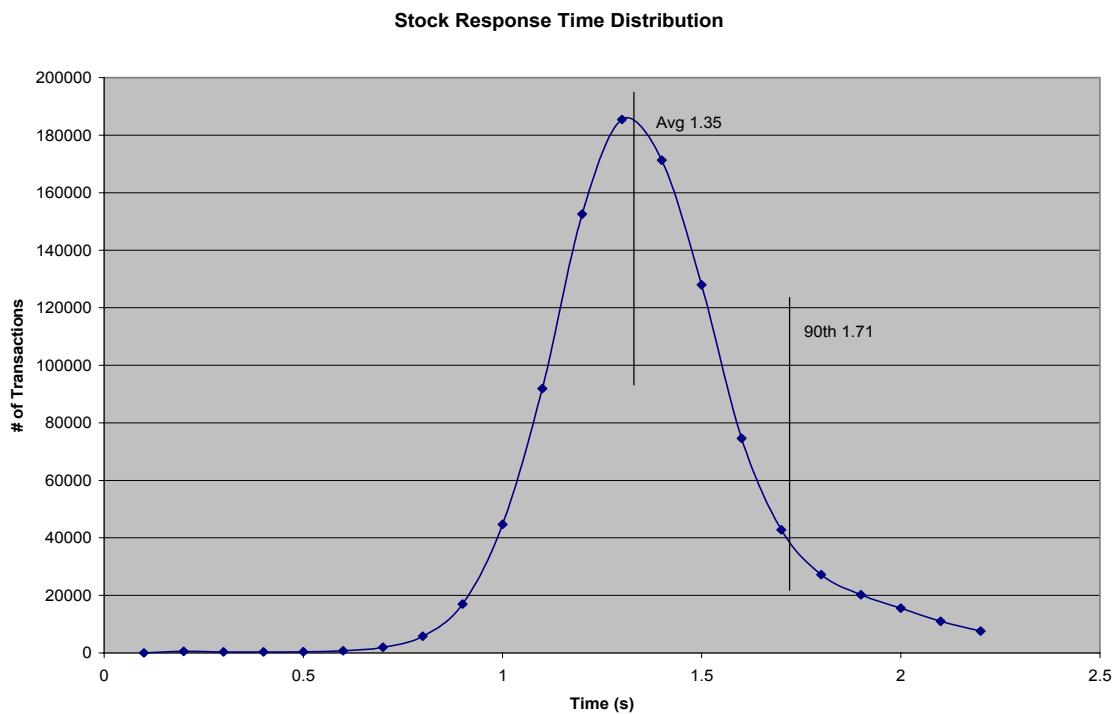

New-Order Response Time vs. Throughput Graph

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction. (8.1.6.5)

Figure 8: New Order Response Time vs. Throughput

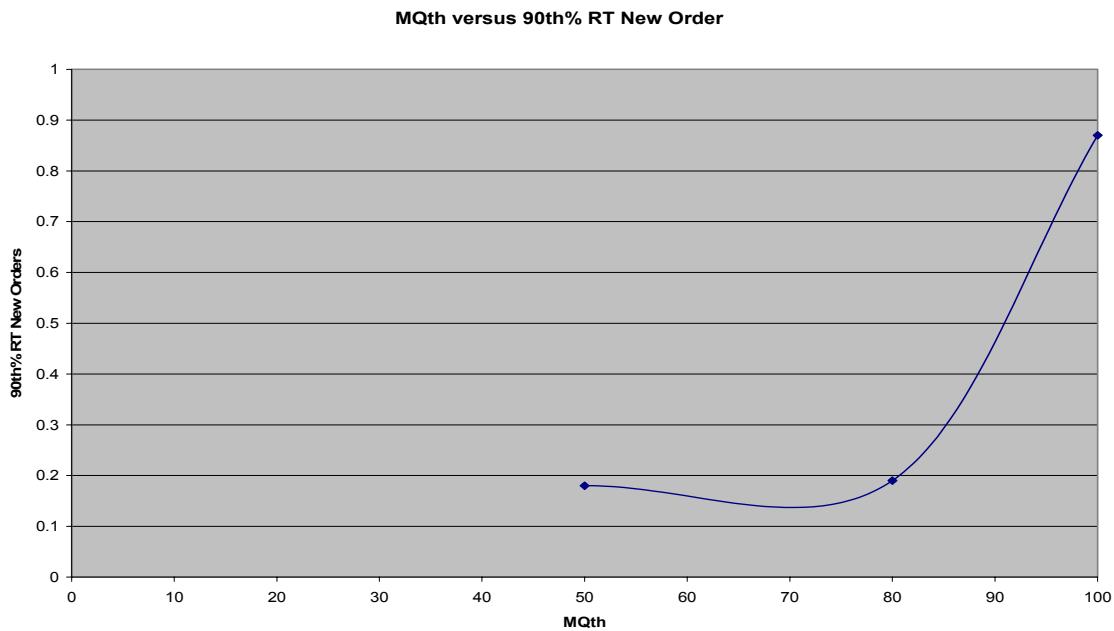

New-Order Think Time Distribution Graph

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for the New-Order transaction (8.1.6.6)


Figure 9: New Order Think Time Distribution



Steady-State Graph

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction. (8.1.6.8)

Figure 10: New Order Throughput vs. Time

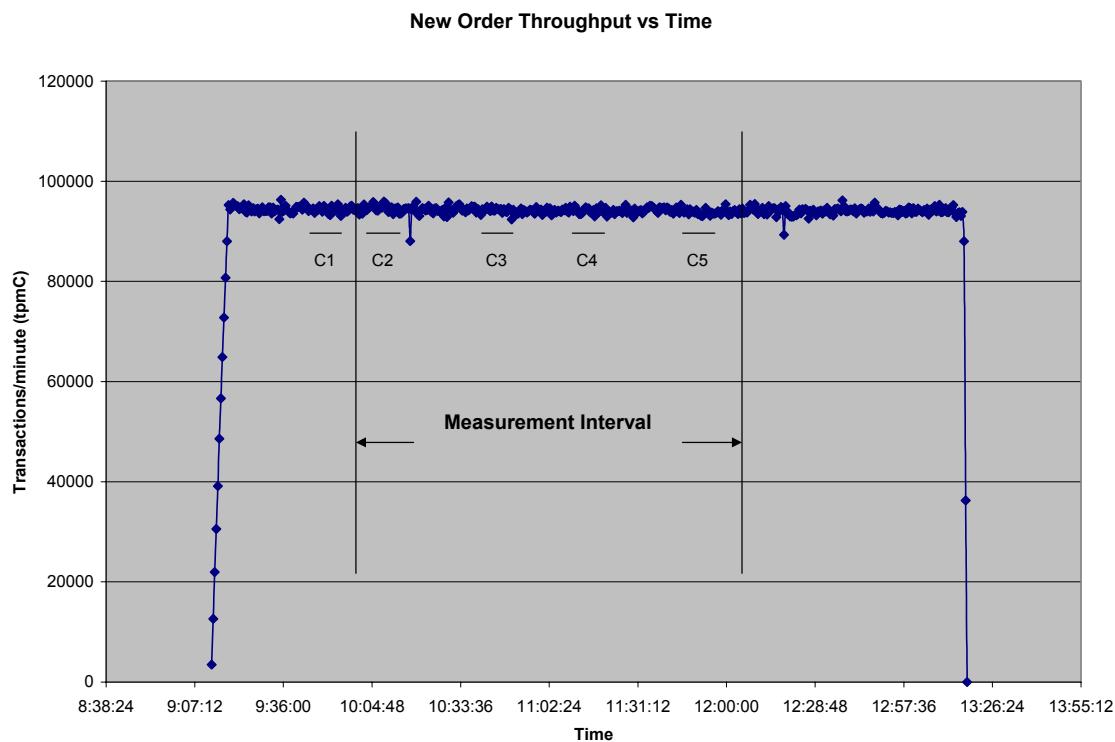

Steady-State Methodology

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described. (8.1.6.9)

Steady state was determined using real time monitor utilities from both the operating system and the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported. (8.1.6.10)

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The menu response for the requested transaction was verified and timestamped in the RTE log files.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the HTTP request to the client. The transmission

was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction and was logged in the RTE log.

The RTE then waited the required think time interval before repeating the process starting at selecting another transaction from the menu.

The RTE transmissions were sent to the web-based application program running on the client machines through Ethernet LANs. These web clients managed the emulated web browser interface as well as all requests to the database on the server. The applications communicated with the database server over another Ethernet LAN using the COM+ transaction monitor and Microsoft SQL Server DBLIB library and RPC calls.

To perform checkpoints at specific intervals, we set SQL Server *recovery interval* to the maximum allowable value and wrote a script to schedule multiple checkpoints at specific intervals. By setting the TRACE FLAG #3502, SQL Server logged the checkpoint beginning and ending time in the ERRORLOG file. The script included a wait time between each checkpoint equal to the measurement interval, which was 30 minutes. The checkpoint script was started manually after the RTE had all users logged in and sending transactions.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. Upon completion of the checkpoint, Microsoft SQL Server wrote a special record to the recovery log to indicate that all disk operations had been satisfied to this point.

Measurement Interval

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included. (8.1.6.12)

The measurement interval was 7200 minutes.

Measurement Period Duration and Checkpoint Duration

The start time and duration in seconds of at least the four (4) longest checkpoints during the measurement interval must be disclosed (see clause 5.5.2.2(2)) (8.1.6.11)

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included. (8.1.6.12)

	Start	End	Duration
Measurement Interval	10:02:22	12:02:22	7,200
1 st Checkpoint	10:07:58	10:27:58	1,200
2 nd Checkpoint	10:37:53	10:57:53	1,200
3 rd Checkpoint	11:07:48	11:27:48	1,200
4 th Checkpoint	11:37:42	11:57:43	1,200

Transaction Mix

8.1.6.13 The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed. (8.1.6.13)

The RTE was given a weighted random distribution that was not adjusted during the run.

The percentage of the total mix for each transaction type must be disclosed. (8.1.6.14)

Table 9: Transaction Mix

Transaction	Percentage
New Order	44.84%
Payment	43.02%
Order Status	4.04%
Delivery	4.05%
Stock Level	4.05%

Other Metrics

The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. (8.1.6.15)

The average number of order-lines entered per New-Order transaction must be disclosed. (8.1.6.16)

The percentage of remote order-lines entered per New-Order transaction must be disclosed. (8.1.6.17)

The percentage of remote Payment transactions must be disclosed. (8.1.6.18)

The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. (8.1.6.19)

The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed. (8.1.6.20)

Table 10: Transaction Statistics

Transaction	Function	Value
New Order	Home Warehouse Items	99.00%
	Remote Warehouse Items	1.00%
	Rolled Back Transactions	1.00%
	Average Lines Per Order	10.00
Payment	Home Warehouse	85.00%
	Remote Warehouse	15.00%
	Non-Primary Key Access	60.01%
Order Status	Non-Primary Key Access	60.03%
Delivery	Skipped Transactions	0

Clause 6 -- SUT, Driver, and Communication Definition Related Items

RTE Parameters

The RTE input parameters, code fragments, functions, etc. used to generate each transaction input field must be disclosed. (8.1.7.1)

Comment: *The intent is to demonstrate the RTE was configured to generate transaction input data as specified in Clause 2.*

The RTE input parameters are listed in Appendix C - Tunable Parameters.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed. (8.1.7.2)

No components were emulated.

Benchmarked and Targeted System Configuration Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all software and hardware functionality being performed on the Driver System, and its interface to the SUT must be disclosed (see Clause 6.6.3.6). (8.1.7.3)

The driver system performed transaction data generation and communication to the client through the standard web browser (HTTP) protocol. It also captured and timestamped the SUT output data for post-processing of the reported metrics. No other functionality was included on the driver system.

Figures 1 & 2 of this report contain detailed diagrams of both the benchmark configuration and the priced configuration.

Network Configuration

The network configurations of both the tested services and the proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed (see Clause 6.6.4). (8.1.7.4)

The network configurations of the benchmarked and priced configurations were identical.

Network Bandwidth

The bandwidth of the network(s) used in the tested/priced configuration must be disclosed. (8.1.7.5)

The bandwidth of the tested and priced networks were as follows:

- 10 BaseT (10 Mbit/sec) network segments between the RTE/Emulated Users and the switch.
- 100 BaseT (100 Mbit/sec) between the Clients and Server.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed. (8.1.7.6)

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 -- Pricing Related Items

Hardware and Software List

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed.

Pricing source(s) and effective date(s) of price(s) must also be reported. (8.1.8.1)

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed. (8.1.8.2)

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability Date

The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available. (8.1.8.3)

Hardware Availability Date: May 27, 2004
Software Availability Date: May 27, 2004

Measured TpmC

A statement of the measured tpmC, as well as the respective calculations for 5-year pricing, price/performance (price/tpmC), and the availability date must be included. (8.1.8.4)

Maximum Qualified Throughput: 94,172 tpmC
Price Performance Metric: \$2.83

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7. (8.1.8.5)

This system is priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose (8.1.8.6):

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

Comment: Usage pricing may include, but is not limited to, the operating system and database management software.

The component pricing based on usage is shown below:

- 1 Microsoft Windows 2003 Server Enterprise License.
- 4 Microsoft Windows 2003 Server Standard License.
- 1 Microsoft SQL Server 2000 Enterprise Edition License.
- 1 Microsoft Visual C++ 32 bit Edition.
- 3 Year Support for Software Components.

System Pricing

System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components used for terminal connection (see Clause 7.2.2.3). Clause 6.1 describes the Server and Client components. An example of the standard pricing sheet is shown in Appendix B. (8.1.8.7)

System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third party pricing. See example in Appendix B. (8.1.8.8)

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Clause 9 -- Audit Related Items

Auditor

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report. (8.1.9.1)

A review of the pricing model is required to ensure that all components required are priced (see Clause 9.2.8). The auditor is not required to review the final Full Disclosure Report or the final pricing prior to issuing the attestations letter. (8.1.9.2)

This TPC-C benchmark has been audited by Tom Sawyer of Performance Metrics.

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

Transaction Processing Performance Council
c/o Administrator, TPC
Presidio of San Francisco
Bldg 572B Ruger St.
San Francisco, CA 94129-0920
Phone: (415) 561-6272, fax 415-561 6120
[www.tpc.org](http://www(tpc.org)

or:

Dell
One Dell Way
Round Rock, TX 78682
Attention: Mike Molloy



May 17, 2004

Mr. Kong Yang
Dell Computer Corporation
One Dell Way
Round Rock, TX 78682

I have verified the TPC Benchmark™ C for the following configuration:

Platform: Dell PowerEdge 6600
Database Manager: Microsoft SQL Server 2000 Enterprise Edition
Operating System: Microsoft Windows 2003 Enterprise Server
Transaction Monitor: COM+

Server: Dell PowerEdge 6600				
CPU's	Memory	Disks	90% Response	TpmC
4 Intel Xeon MP @ 3.0 GHz	Main: 32 GB Cache: 512KB each	337 @ 18GB 16 @ 36GB	0.87 sec	94,172
4 Clients: Dell Poweredge 1600SC				
2 Intel Xeon @ 3.0 GHz	Main: 1 GB Cache: 512 KB	1 @ 36GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database was properly sized and populated.
- The database was properly scaled with 8,000 warehouses, 7,620 of which were active during the Measured Interval. I verified that `d_next_o_id` and `w_ytd` contained initial values.
- The ACID properties were successfully demonstrated.
- The durability data loss and log loss tests were performed on the fully scaled database with 76,200 users and 7,620 active warehouses, running at over 10% load.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was configured on the measured system.
- Eight hours of dynamic table growth space was configured on the measured system.
- The 60-day space calculation was verified. The measured configuration has sufficient storage to satisfy this requirement.
- Measurement cycle times included a 0.1 second menu and a 0.1 second response time delays for emulated Web browsers.
- There were 76,200 user contexts present on the system.
- Each emulated user group started with the same random number seed.

- The NURand constants used for database load and at run time were 123 and 233 respectively.
- The steady state portion of the test was 2 hours (7200 seconds).
- One checkpoint was taken before the measured interval and after steady state was reached.
- Four checkpoints were taken during the measured interval.
- The system pricing was checked for major components and maintenance.

Auditor Notes:

One client had an 18GB disk; a 36GB disk was substituted in the pricing. I concluded this would not affect the result.

Sincerely,



Tom Sawyer
Auditor

Appendix A - Application Source Code

Appendix A - Application Source Code

tpcc.dll ISAPI DLL Source Code

isapi_dll/src/tpcc.def

```
LIBRARY TPCC.DLL
EXPORTS
    GetExtensionVersion @1
    HttpExtensionProc    @2
    TerminateExtension   @3
```

Isapi_dll/src/tpcc.h

```
/*
 *      FILE:          TPCC.H
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
 *      Performance Metrics, 3/17/99
 *
 *      PURPOSE: Header file for ISAPI TPCC.DLL, defines structures and functions used
 *      in the isapi tpcc.dll.
 */
/* VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE          101
#define _APS_NEXT_COMMAND_VALUE           40001
#define _APS_NEXT_CONTROL_VALUE          1000
#define _APS_NEXT_SYMED_VALUE            101

#define TP_MAX_RETRIES                  50

//note that the welcome form must be processed first as terminal ids assigned here, once
the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM                   1
    //beginning form no term id assigned, form id
#define MAIN_MENU_FORM                 2
    //term id assigned main menu form id
```

```
#define NEW_ORDER_FORM               3
    //new order form id
#define PAYMENT_FORM                 4
    //payment form id
#define DELIVERY_FORM                5
    //delivery form id
#define ORDER_STATUS_FORM             6
    //order status id
#define STOCK_LEVEL_FORM              7
    //stock level form id

//This macro is used to prevent the compiler error unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each terminal or client
connection.
typedef struct _CLIENTDATA
{
    int                               iNextFree;
    //index of next free element or -1 if this entry in use.
    int                               w_id;
    //warehouse id assigned at welcome form
    int                               d_id;
    //district id assigned at welcome form

    int                               iSyncId;
    //synchronization id
    int                               iTickCount;
    //time of last access;

    CTPCC_BASE                      *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal id support
typedef struct _TERM
{
    int                               iNumEntries;
    //total allocated terminal array entries
    int                               iFreeList;
    //next available terminal array element or -1 if none
    int                               iMasterSyncId;
    //synchronization id
    CLIENTDATA                       *pClientData;
    //pointer to allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
```

Appendix A - Application Source Code

```
ERR_HTML_ILL_FORMED,
ERR_INVALID_SYNC_CONNECTION,
ERR_INVALID_TERMID,
ERR_LOADDLL_FAILED,
ERR_MAX_CONNECTIONS_EXCEEDED,
ERR_MEM_ALLOC_FAILED,
ERR_MISSING_REGISTRY_ENTRIES,
ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CID_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNTErr : public CBaseErr
{
public:
    CWEBCLNTErr(WEBERROr Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
    }
}
```

```
    m_szErrorText = NULL;
};

CWEBCLNTErr(WEBERROr Err, char *szTextDetail, DWORD dwSystemErr)
{
    m_Error = Err;
    m_szTextDetail = new char[strlen(szTextDetail)+1];
    strcpy( m_szTextDetail, szTextDetail );
    m_SystemErr = dwSystemErr;
    m_szErrorText = NULL;
};

~CWEBCLNTErr()
{
    if (m_szTextDetail != NULL)
        delete [] m_szTextDetail;
    if (m_szErrorText != NULL)
        delete [] m_szErrorText;
};

WEBERROr m_Error;
char *m_szTextDetail; // m_szErrorText;
char *m_szErrorText;
DWORD m_SystemErr;

int ErrorType() {return ERR_TYPE_WEBDLL;};
int ErrorNum() {return m_Error;};
char *ErrorText(),
//These constants have already been defined in engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6 //used to record a warning into the log
//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId, int *pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax, WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum, int iTermId, int iSyncId, char *szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput, char *szForm);
```

Appendix A - Application Source Code

```
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput, char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
```

isapi_dll/src/tbcc.rc

```
//Microsoft Developer Studio generated resource script.
//include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

////////////////////////////////////////////////////////////////////////
#ifndef APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifndef MAC
////////////////////////////////////////////////////////////////////////
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifndef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
#endif
```

```
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)\0"
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)\0"
VALUE "FileVersion", "0, 4, 0, 0\0"
VALUE "InternalName", "tpcc\0"
VALUE "LegalCopyright", "Copyright © 1997\0"
VALUE "OriginalFilename", "tpcc.dll\0"
VALUE "ProductName", "Microsoft tpcc\0"
VALUE "ProductVersion", "0, 4, 0, 0\0"
END
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////////////
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
"resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
"#include ""afxres.h""\r\n"
"\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
"\r\n"
"\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////////////////////////////////////////
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "Dialog"
```

Appendix A - Application Source Code

```
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON  "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON      "Cancel", IDCANCEL, 129, 24, 50, 14
END

///////////////////////////////
// DESIGNINFO
//

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

#endif // English (U.S.) resources
///////////////////////////////

#ifndef APSTUDIO_INVOKED
/////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
//
/////////////////////////////
#endif // not APSTUDIO_INVOKED
```

isapi_dll/src/tpcc.cpp

```
/*
 * FILE:          TPCC.C
 *                Microsoft TPC-C Kit Ver. 4.20.000
 *                Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 *                Version 4.10.000 audited by Richard Gimarc,
 * Performance Metrics, 3/17/99
 *
 * PURPOSE: Main module for TPCC.DLL which is an ISAPI service dll.
 * Contact: Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 *                4.20.000 - reworked error handling; added options for COM and Encina
 * txm monitors
 */
```

```
#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <iо.h>
#include <assert.h>

#include <sqatypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "...\\common\\src\\trans.h"           //tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txn_base.h"
#include "...\\common\\src\\ReadRegistry.h"

#include "...\\common\\txnlog\\include\\rtetime.h"
#include "...\\common\\txnlog\\include\\spinlock.h"
#include "...\\common\\txnlog\\include\\txnlog.h"

// Database layer includes
#include "...\\db_dblib_dll\\src\\tpcc_dblib.h"      // DBLIB implementation of
TPC-C txns                                         // ODBC implementation of
#include "...\\db_odbc_dll\\src\\tpcc_odbc.h"         // TPC-C txns

// Txn monitor layer includes
#include "...\\tm_com_dll\\src\\tpcc_com.h"           // COM Services
implementation on TPC-C txns
#include "...\\tm_tuxedo_dll\\src\\tpcc_tux.h"          // interface to Tuxedo
libraries
#include "...\\tm_encina_dll\\src\\tpcc_enc.h"          // interface to Encina
libraries

#include "httpext.h"                                //ISAPI DLL information
header
#include "tpcc.h"                                    //this dlls specific
structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT VERSION string specifies the version level of this web client interface.
// The RTE must be synchronized with the interface level on login, otherwise the login
```

Appendix A - Application Source Code

```
// will fail. This is a sanity check to catch problems resulting from mismatched
// versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection; //critical section
for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize = 100;
DWORD dwDelBuffFreeCount;
DWORD dwDelBuffBusyIndex = 0;
DWORD dwDelBuffFreeIndex = 0;
// index position of unused entry

#include "..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point for the DLL. This implementation is
based on the
* fact that DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS: HANDLE hModule module handle
*             DWORD ul_reason_for_call reason for call
*             LPVOID lpReserved
* reserved for future use
*
* RETURNS:    BOOL FALSE errors
occured in initialization
*                         TRUE
* DLL successfully initialized

```

```
/*
BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

    // debugging...
    // DebugBreak();

    try
    {
        switch( ul_reason_for_call )
        {
            case DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
                    &dwSize);
                    szMyComputerName[dwSize] = 0;
                }
        }
        DisableThreadLibraryCalls((HMODULE)hModule);
        InitializeCriticalSection(&TermCriticalSection);

        if ( ReadTPCCRegistrySettings( &Reg ) )
            throw new CWEBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        dwDelBufferSize = min( Reg.dwMaxPendingDeliveries,
10000 ); // min with 10000 as a sanity constraint
        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity constraint
        TermInit();
        // load DLL for txn monitor
        if (Reg.eTxnMon == TUXEDO)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_tuxedo.dll");
            hLibInstanceTm = LoadLibrary( szDllName );
        }
        if (hLibInstanceTm == NULL)
            throw new CWEBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
        // get function pointer to wrapper for
        class constructor
        pCTPCC_TUXEDO_new =
(TYPE_CTPCC_TUXEDO*) GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
        if (pCTPCC_TUXEDO_new == NULL)
            throw new CWEBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        else if (Reg.eTxnMon == ENCINA)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_encina.dll");
        }
    }
}
```

Appendix A - Application Source Code

```
);  
                hLibInstanceTm = LoadLibrary( szDllName  
                if (hLibInstanceTm == NULL)  
                    throw new CWEBCNT_ERR(  
ERR_LOADDLL_FAILED, szDllName, GetLastError() );  
                // get function pointer to wrapper for  
class constructor  
                pCTPCC_ENCINA_new =  
(TYPE_CTPCC_ENCINA*) GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");  
                pCTPCC_ENCINA_post_init =  
(TYPE_CTPCC_ENCINA*) GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init");  
                if (pCTPCC_ENCINA_new == NULL)  
                    throw new CWEBCNT_ERR(  
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );  
                else if (Reg.eTxnMon == COM)  
                {  
                    strcpy( szDllName, Reg.szPath );  
                    strcat( szDllName, "tpcc_com.dll");  
                    hLibInstanceTm = LoadLibrary( szDllName  
);  
                    if (hLibInstanceTm == NULL)  
                        throw new CWEBCNT_ERR(  
ERR_LOADDLL_FAILED, szDllName, GetLastError() );  
                // get function pointer to wrapper for  
class constructor  
                pCTPCC_COM_new = (TYPE_CTPCC_COM*)  
GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");  
                if (pCTPCC_COM_new == NULL)  
                    throw new CWEBCNT_ERR(  
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );  
                // load DLL for database connection  
                if ((Reg.eTxnMon == None) ||  
(dwNumDeliveryThreads > 0))  
                {  
                    if (Reg.eDB_Protocol == DBLIB)  
                    {  
                        strcpy( szDllName, Reg.szPath  
);  
                        strcat( szDllName,  
hLibInstanceDb = LoadLibrary(  
szDllName );  
                        if (hLibInstanceDb == NULL)  
                            throw new  
CWEBCNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );  
                    // get function pointer to  
wrapper for class constructor  
                    pCTPCC_DBLIB_new =  
(TYPE_CTPCC_DBLIB*) GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");  
                    if (pCTPCC_DBLIB_new == NULL)  
                        throw new  
CWEBCNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );  
                    else if (Reg.eDB_Protocol == ODBC)  
                    {  
                        strcpy( szDllName, Reg.szPath  
);  
                }  
};
```

```
strcat( szDllName,  
hLibInstanceDb = LoadLibrary(  
szDllName );  
if (hLibInstanceDb == NULL)  
    throw new  
CWEBCNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );  
// get function pointer to  
wrapper for class constructor  
pCTPCC_ODBC_new =  
(TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");  
if (pCTPCC_ODBC_new == NULL)  
    throw new  
CWEBCNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );  
}  
}  
if (dwNumDeliveryThreads)  
{  
    // for deferred delivery txns:  
    hDoneEvent = CreateEvent( NULL, TRUE /*  
manual reset */, FALSE /* initially not signalled */ , NULL );  
    InitializeCriticalSection(&DelBuffCriticalSection);  
    hWorkerSemaphore = CreateSemaphore(  
NULL, 0, dwDelBuffSize, NULL );  
    dwDelBuffFreeCount = dwDelBuffSize;  
    InitJulianTime(NULL);  
    // create unique log file name based on  
    delilog-yyyymmdd-hhmm.log  
    SYSTEMTIME Time;  
    GetLocalTime( &Time );  
    wsprintf( szLogFile, "%sdelivery-%  
%2.2d%2.2d%2.2d-%2.2d%2.2d.log",  
Time.wYear % 100, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute );  
    txndelilog = new CTxnLog(szLogFile,  
TXN_LOG_WRITE);  
    //write event into txn log for START  
    txndelilog->WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName, sizeof(szMyComputerName));  
    // allocate structures for delivery  
    buffers and thread mgmt  
    pDeliHandles = new  
HANDLE[dwNumDeliveryThreads];  
    DELIVERY_TRANSACTION[dwDelBuffSize];  
    perform actual delivery txns  
    for(i=0; i<dwNumDeliveryThreads; i++)  
    {  
        pDeliHandles[i] = (HANDLE)  
        _beginthread( DeliveryWorkerThread, 0, NULL );  
        if (pDeliHandles[i] ==  
INVALID_HANDLE_VALUE)  
            throw new  
CWEBCNT_ERR( ERR_DELIVERY_THREAD_FAILED );  
    }
```

Appendix A - Application Source Code

```
        }

        break;

    case DLL_PROCESS_DETACH:
        if (dwNumDeliveryThreads)
        {
            if (txnDelilog != NULL)
            {
                //write event into txn log
                txnDelilog-
                txnDelilogLocal =
                txndelilog= NULL;
                delete txnDelilogLocal;
            }

            delete [] pDeliHandles;
            delete [] pDelBuff;

            CloseHandle( hWorkerSemaphore );
            CloseHandle( hDoneEvent );

            DeleteCriticalSection(&DelBuffCriticalSection);
        }

        DeleteCriticalSection(&TermCriticalSection);

        if (hLibInstanceTm != NULL)
            FreeLibrary( hLibInstanceTm );
        hLibInstanceTm = NULL;

        if (hLibInstanceDb != NULL)
            FreeLibrary( hLibInstanceDb );
        hLibInstanceDb = NULL;

        Sleep(500);
        break;

        default:
            /* nothing */
        }
    }

    catch (CBaseErr *e)
    {
        WriteMessageToEventLog( e->ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
    }

    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception. DLL could not
load."));

        TerminateExtension(0);
        return FALSE;
    }
}
```

```
        return TRUE;
    }

/* FUNCTION: GetExtensionVersion
*
* PURPOSE:      This function is called by the inet service when the DLL is first
loaded.
*
* ARGUMENTS:    HSE_VERSION_INFO      *pVer      passed in structure in which to place
expected version number.
*
* RETURNS:      TRUE      inet service expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
    pVer->dwExtensionVersion = MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C Server.", HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE:      This function is called by the inet service when the DLL is about to
be unloaded.
*
*               Release all resources in anticipation of being unloaded.
*
* RETURNS:      TRUE      inet service expected return value.
*/
BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0; i<dwNumDeliveryThreads; i++)
            WaitForSingleObject( pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:      This function is the main entry point for the TPCC DLL. The internet
service
*
*               calls this function passing in the http string.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK      *pECB      structure pointer to passed
in internet
*
*               service information.
*
* RETURNS:      DWORD      HSE_STATUS_SUCCESS
connection can be dropped if error

```

Appendix A - Application Source Code

```
*      HSE_STATUS_SUCCESS_AND_KEEP_CONN      keep connect valid comment sent
*
* COMMENTS:      None
*
*/
DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int           iCmd, FormId, TermId, iSyncId;
    char          szBuffer[4096];
    int           lpbSize;
    static char  szHeader[] = "200 Ok";
    DWORD         dwSize = 6;           // initial value is
strlen(szHeader)
    char          szHeader1[4096];

#endif ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd, &FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if (TermId < 0 || TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )
            {
                // debugging...
                char szTmp[128];
                wsprintf( szTmp, "Invalid term ID; TermId = %d",
TermId );
                WriteMessageToEventLog( szTmp );

                throw new CWECLNT_ERR( ERR_INVALID_TERMID );
            }

            //must have a valid syncid here since termid is valid
            if (iSyncId != Term.pClientData[TermId].iSyncId)
                throw new CWECLNT_ERR(
ERR_INVALID_SYNC_CONNECTION );

            //set use time
            Term.pClientData[TermId].iTickCount = GetTickCount();
        }

        switch(iCmd)
        {
        case 0:
            WelcomeForm(pECB, szBuffer);
            break;
        case 1:
            switch( FormId )
            {
                case WELCOME_FORM:
                case MAIN_MENU_FORM:
                    break;
                
```

```
szBuffer);
                break;
            case NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId,
break;
            case PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId,
break;
            case DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId,
break;
            case ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId,
break;
            case STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId,
break;
            }
        }
        case 2:
            // new-order selected from menu; display new-order input
            form
            MakeNewOrderForm(TermId, NULL, INPUT_FORM, szBuffer);
            break;
        case 3:
            // payment selected from menu; display payment input form
            input form
            MakePaymentForm(TermId, NULL, INPUT_FORM, szBuffer);
            break;
        case 4:
            // delivery selected from menu; display delivery input form
            input form
            MakeDeliveryForm(TermId, NULL, INPUT_FORM, szBuffer);
            break;
        case 5:
            // order-status selected from menu; display order-status
            input form
            MakeOrderStatusForm(TermId, NULL, INPUT_FORM, szBuffer);
            break;
        case 6:
            // stock-level selected from menu; display stock-level
            input form
            MakeStockLevelForm(TermId, NULL, INPUT_FORM, szBuffer);
            break;
        case 7:
            // ExitCmd
            TermDelete(TermId);
            WelcomeForm(pECB, szBuffer);
            break;
        case 8:
            SubmitCmd(pECB, szBuffer);
            break;
        case 9:
            // menu
            szBuffer);
            MakeMainMenuForm(TermId, Term.pClientData[TermId].iSyncId,
break;
        case 10:
            // CMD=Clear
            // resets all connections; should only be used when no
other connections are active
            szBuffer);
            TermDeleteAll();
    }
}
```

Appendix A - Application Source Code

```
        TermInit();
        WelcomeForm(pECB, szBuffer);
        break;
    case 11: // CMD=Stats
        StatsCmd(pECB, szBuffer);
        break;
    }
}
catch (CBaseErr *e)
{
    ErrorForm( pECB, e->ErrorType(), e->ErrorNum(), TermId, iSyncId, e->ErrorText(), szBuffer );
    delete e;
}
catch (...)
{
    ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId, iSyncId, "Error: Unhandled exception in Web Client.", szBuffer );
}

#ifndef ICECAP
    StopCAP();
#endif

lpbSize = strlen(szBuffer);
wsprintf(szHeader1,
         "Content-Type: text/html\r\n"
         "Content-Length: %d\r\n"
         "Connection: Keep-Alive\r\n\r\n" , lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB->ConnID, HSE_REQ_SEND_RESPONSE_HEADER,
szHeader, (LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatuscode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR     szMsg[256];
    HANDLE    hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));

    sprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
                    EVENTLOG_ERROR_TYPE, // event type
                    0,                  // event category
                    0,                  // event ID
                    NULL,               // current user's SID
                    2,                  // strings in lpszStrings

```

```
                                0,                      // no bytes of raw data
                                (LPCTSTR *)lpszStrings, // array of error strings
                                NULL);                // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }

/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE:      This function processes deferred delivery txns.  There are typically several
 * determined by an entry
 * waiting on semaphore.
 * After processing
 * status and execution
 * time.
 */
/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE           *pTxn = NULL;
    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA       pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF  txnDeliRec;

    DWORD                index;
    HANDLE               handles[2];

    SYSTEMTIME           trans_end;          //delivery
    transaction finished time
    SYSTEMTIME           trans_start;        //delivery transaction start
    time

    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = PCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName, Reg.szSPPrefix );
        else if (Reg.eDB_Protocol == DBLIB)
            pTxn = PCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        pDeliveryData = pTxn->BuffAddr_Delivery();
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in Delivery Txn thread. Could not connect to
database. "
                        "%s. Server=%s, User=%s, Password=%s,
Database=%s",
                        e->ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
        delete e;
    }
}
```

Appendix A - Application Source Code

```
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread."));
        goto ErrorExit;
    }

    while (TRUE)
    {
        try
        {
            //while delivery thread running, i.e. user has not
requested termination
            while (TRUE)
            {
                // need to wait for multiple objects: program
exit or worker semaphore;
                handles[0] = hDoneEvent;
                handles[1] = hWorkerSemaphore;
                index = WaitForMultipleObjects( 2, &handles[0],
FALSE, INFINITE );
                if (index == WAIT_OBJECT_0)
                    goto ErrorExit;

                ZeroMemory(&txnDeliRec, sizeof(txnDeliRec));
                txnDeliRec.TxnType = TXN_REC_TYPE_TPCC_DELIV_DEF;

                // make a local copy of current entry from
delivery buffer and increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection);
                delivery = *(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;
                dwDelBuffBusyIndex++;
                if (dwDelBuffBusyIndex == dwDelBuffSize)
// wrap-around if at end of buffer
                    dwDelBuffBusyIndex = 0;

                LeaveCriticalSection(&DelBuffCriticalSection);

                pDeliveryData->w_id = delivery.w_id;
                pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

                txnDeliRec.w_id = pDeliveryData->w_id;
                txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;
                Get64BitTime(&delivery.queue);

                GetLocalTime( &trans_start );
                pTxn->Delivery();
                GetLocalTime( &trans_end );

                //log txn
                txnDeliRec.TxnStatus = ERR_SUCCESS;
                for ( int i=0; i<10; i++)
                    txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];
                txnDeliRec.DeltaT4 =
(int) (Get64BitTime(&trans_end) - txnDeliRec.TxnStartT0);
```

```
        txnDeliRec.DeltaTxnExec =
(int) (Get64BitTime(&trans_end) - Get64BitTime(&trans_start));
        if (txnDeliLog != NULL)
            txnDeliLog->WriteToLog(&txnDeliRec);
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in Delivery Txn thread. %s", e-
>ErrorText() );
        WriteMessageToEventLog( szTmp );

        // log the error txn
        txnDeliRec.TxnStatus = e->ErrorType();
        if (txnDeliLog != NULL)
            txnDeliLog->WriteToLog(&txnDeliRec);

        delete e;
    }
    catch (...)
    {
        // unhandled exception; shouldn't happen; not much we can
do...
        WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread."));
    }
}

ErrorExit:
    delete pTxn;
    _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery txn into the deferred delivery
buffer.
*
* RETURNS:      BOOL      FALSE      delivery information posted
successfully
*               TRUE      error cannot post
delivery info
*/
BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id
            = w_id;
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id
            = o_carrier_id;
        GetLocalTime( &(pDelBuff+dwDelBuffFreeIndex)->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0; // wrap-around if
at end of buffer
```

Appendix A - Application Source Code

```
    }

    else
        // No free buffers.  Return an error, which indicates that the
        // delivery buffer is full.
        // Most likely, the number of delivery worker threads needs to be
        increased to keep up
        // with the txn rate.
        bError = TRUE;
        LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to wake up a worker thread
        ReleaseSemaphore( hWorkerSemaphore, 1, NULL );

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:      This function extracts the relevant information out of the http
command passed in from
*                  the browser.
*
* COMMENTS:     If this is the initial connection i.e. client is at welcome screen
then
*                  there will not be a terminal id or current form
id.  If this is the case
*                  then the pTermid and pFormid return values are
undefined.
*/
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId, int
*pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e. CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..", "..Payment..", "..Delivery..", "..Order-
Status..", "..Stock-Level..",
        "..Exit..", "Submit", "Menu", "Clear", "Stats", ""
    };

    *pCmd      = 0;           // default is the login screen
    *pTermId   = 0;

    // if no params (i.e., empty query string), then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID", NO_ERR, NO_ERR);
    *pTermId = GetIntKeyValue(&ptr, "TERMID", NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID", NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer, sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; ; i++)

```

```
    {

        if (szCmds[i][0] == 0)
            // no more; no match; return error
            throw new CWEBCLNT_ERR( ERR_COMMAND_UNDEFINED );
        if ( !strcmp(szCmds[i], szBuffer) )
        {
            *pCmd = i+1;
            break;
        }
    }

/* FUNCTION: void WelcomeForm
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this is first form client sees.
    strcpy( szBuffer, "<HTML><HEAD><TITLE>TPC-C Web Client</TITLE></HEAD><BODY>" );
    Client (ver 4.20)</BIG></B> <BR> <BR>
    New\ "><PRE>" "Compiled: __DATE__",
    "__TIME__" <BR>
    (" __TIMESTAMP__") <BR>
    METHOD=<"GET\ ">
    NAME=\ "STATUSID\ " VALUE=\ "0\ ">" <INPUT TYPE=\ "hidden\ "
    NAME=\ "ERROR\ " VALUE=\ "0\ ">" <INPUT TYPE=\ "hidden\ "
    NAME=\ "FORMID\ " VALUE=\ "1\ ">" <INPUT TYPE=\ "hidden\ "
    NAME=\ "TERMID\ " VALUE=\ "0\ ">" <INPUT TYPE=\ "hidden\ "
    NAME=\ "SYNCID\ " VALUE=\ "0\ ">" <INPUT TYPE=\ "hidden\ "
    NAME=\ "VERSION\ " VALUE=\ "" WEBCLIENT_VERSION \ ">" <INPUT TYPE=\ "hidden\ "
    );
    sprintf( szTmp, "Configuration Settings: <BR><font face=\ "Courier New\ "
color=\ "blue\ "><PRE>" Txn Monitor = <BR>%s</B><BR>" Database protocol = <BR>%s</B><BR>" Max Connections = <BR>%d</B><BR>" # of Delivery Threads = <BR>%d</B><BR>" Max Pending Deliveries = <BR>%d</B><BR>" , szTxnMonNames[Reg.eTxnMon], szDBNames[Reg.eDB_Protocol], Reg.dwMaxConnections, dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);
}

```

Appendix A - Application Source Code

```
if (Reg.eTxnMon == COM)
{
    sprintf( szTmp,      "COM Single Pool      = <B>%s</B><BR>",
            Reg.bCOM_SinglePool ? "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTxnMon == None)
{
    // connection options may be specified when not using a txn monitor
    sprintf( szTmp,      "Please enter your database options for this
connection:<BR>"                                     "<PRE>\n"
NAME=\"db_server\" SIZE=20 VALUE=\"%s\"><BR>"           "DB Server      = <INPUT
NAME=\"db_user\" SIZE=20 VALUE=\"%s\"><BR>"             "DB User ID     = <INPUT
NAME=\"db_passwd\" SIZE=20 VALUE=\"%s\"><BR>"           "DB Password     = <INPUT
NAME=\"db_name\" SIZE=20 VALUE=\"%s\"><BR>"             "DB Name        = <INPUT
                                            "</PRE></font>"           , Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    else
        // if using a txn monitor, connection options are determined from
registry; can't
        // set per user. show options fyi
        sprintf( szTmp,      "Database options which will be used by the
transaction monitor:<BR>"                                     "<PRE>\n"
<B>%s</B><BR>"                                         "DB Server      =
<B>%s</B><BR>"                                         "DB User ID     =
<B>%s</B><BR>"                                         "DB Password     =
<B>%s</B><BR>"                                         "DB Name        =
                                            "</PRE></font>"           , Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp,      "Please enter your Warehouse and District for this
session:<BR>"                                     "<PRE>" );
    strcat( szBuffer, szTmp);
    strcat( szBuffer,      "Warehouse ID = <INPUT NAME=\"w_id\" SIZE=6><BR>"           "District ID   = <INPUT
NAME=\"d_id\" SIZE=2><BR>"                                     "</PRE></font><HR>"           "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"Submit\">"                           "</FORM></BODY></HTML>" );
}

/* FUNCTION: SubmitCmd
*/

```

```
* PURPOSE:          This function allocated a new terminal id in the Term structure
array.
*
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int             iNewTerm;
    char    *ptr = pECB->lpszQueryString;

    char    szVersion[32]      = { 0 };
    char    szServer[32]       = { 0 };
    char    szUser[32]          = "sa";
    char    szPassword[32]      = { 0 };
    char    szDatabase[32]      = "tpcc";

    // validate version field; the version field ensures that the RTE is
synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
ERR_VERSION_MISMATCH);
    if (strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCNT_ERR( ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer, sizeof(szServer),
ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword, sizeof(szPassword),
NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase, sizeof(szDatabase), NO_ERR);
    }

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id", ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCNT_ERR( ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id", ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCNT_ERR( ERR_D_ID_INVALID );

    iNewTerm = TermAdd();
    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == TUXEDO)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_TUXEDO_new();
        else if (Reg.eTxnMon == ENCINA)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_ENCINA_new();
        else if (Reg.eTxnMon == COM)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_COM_new(
Reg.bCOM_SinglePool );
        else if (Reg.eDB_Protocol == ODBC)

```

Appendix A - Application Source Code

```
        Term.pClientData[iNewTerm].pTxn = pCTPCC_ODBC_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase, Reg.szSPPrefix );
        else if (Reg.eDB_Protocol == DBLIB)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_DBLIB_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        throw; // pass exception upward
    }

    MakeMainMenuForm(iNewTerm, Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 *
 * PURPOSE: This function returns to the browser the total number of active
terminal ids.
 *          This routine is for development/debugging purposes.
 */
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTotal++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
              "<HTML><HEAD><TITLE>TPC-C Web Client Stats</TITLE></HEAD>"
              "<BODY><B><BIG> Total Active Connections: %d
</BIG></B><BR></BODY></HTML>",
              iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_COMMAND_UNDEFINED,
        "Command undefined." },
        { ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10." },
        { ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range must be 1 - 10." },
        { ERR_DELIVERY_CARRIER_INVALID,
        "Carrier ID invalid must be numeric 1 - 10." }
    };
}
```

```
        {
            ERR_DELIVERY_MISSING_OCD_KEY,
            "Delivery missing Carrier ID key \\"OCD*\\\"."
        },
        {
            ERR_DELIVERY_THREAD_FAILED,
            "Could not start delivery worker thread."
        },
        {
            ERR_GETPROCADDR_FAILED,
            "Could not map proc in DLL. GetProcAddress error. DLL="
        },
        {
            ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML string."
        },
        {
            ERR_INVALID_SYNC_CONNECTION,
            "Terminal Sync ID."
        },
        {
            ERR_INVALID_TERMID,
            "Invalid Terminal ID."
        },
        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed. DLL="
        },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available. Max Connections is probably too low."
        },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing. Rerun INSTALL to correct."
        },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid data type, range = 1 to 3000."
        },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key \\"CID*\\\"."
        },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid range 1 - 10."
        },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key \\"DID*\\\"."
        },
        {
            ERR_NEWORDER_ITEMID_INVALID,
            "Order Item Id is wrong data type, must be numeric."
        },
        {
            ERR_NEWORDER_ITEMID_RANGE,
            "New Order Item Id is out of range. Range = 1 to 999999."
        },
        {
            ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
            "Order Item_Id field entered without a corresponding Supp_W."
        },
        {
            ERR_NEWORDER_MISSING_IID_KEY,
            "Order missing Item Id key \\"IID*\\\"."
        },
        {
            ERR_NEWORDER_MISSING_QTY_KEY,
            "Order Missing Qty key \\"Qty##*\\\"."
        },
        {
            ERR_NEWORDER_MISSING_SUPPW_KEY,
            "New Order missing Supp_W key \\"SP##*\\\"."
        },
        {
            ERR_NEWORDER_NOITEMS_ENTERED,
            "Order No order lines entered."
        },
        {
            ERR_NEWORDER_QTY_INVALID,
            "New Order Qty invalid must be numeric range 1 - 99."
        },
        {
            ERR_NEWORDER_QTY_RANGE,
            "New Order Qty is out of range. Range = 1 to 99."
        },
    };
}
```

Appendix A - Application Source Code

```
{           ERR_NEWORDER_QTY_WITHOUT_SUPPW,  
"New Order Qty field entered without a corresponding Supp_W."  
},  
{           ERR_NEWORDER_SUPPW_INVALID,  
"New Order Supp_W invalid data type must be numeric."  
},  
{           ERR_NO_SERVER_SPECIFIED,  
"No Server name specified."  
},  
{           ERR_ORDERSTATUS_CID_AND_CLT,  
Status Only Customer ID or Last Name may be entered, not both."  
},  
{           ERR_ORDERSTATUS_CID_INVALID,  
Status Customer ID invalid, range must be numeric 1 - 3000."  
},  
{           ERR_ORDERSTATUS_CLT_RANGE,  
"Order Status Customer last name longer than 16 characters."  
},  
{           ERR_ORDERSTATUS_DID_INVALID,  
Status District invalid, value must be numeric 1 - 10."  
},  
{           ERR_ORDERSTATUS_MISSING_CID_CLT,  
Status Either Customer ID or Last Name must be entered."  
},  
{           ERR_ORDERSTATUS_MISSING_CID_KEY,  
Status missing Customer key \"CID*\".  
},  
{           ERR_ORDERSTATUS_MISSING_CLT_KEY,  
Status missing Customer Last Name key \"CLT*\".  
},  
{           ERR_ORDERSTATUS_MISSING_DID_KEY,  
Status missing District key \"DID*\".  
},  
{           ERR_PAYMENT_CDI_INVALID,  
"Payment Customer district invalid must be numeric."  
},  
{           ERR_PAYMENT_CID_AND_CLT,  
"Payment Only Customer ID or Last Name may be entered, not both."  
},  
{           ERR_PAYMENT_CUSTOMER_INVALID,  
Customer data type invalid, must be numeric."  
},  
{           ERR_PAYMENT_CWI_INVALID,  
"Payment Customer Warehouse invalid, must be numeric."  
},  
{           ERR_PAYMENT_DISTRICT_INVALID,  
District ID is invalid, must be 1 - 10."  
},  
{           ERR_PAYMENT_HAM_INVALID,  
"Payment Amount invalid data type must be numeric."  
},  
{           ERR_PAYMENT_HAM_RANGE,  
"Payment Amount out of range, 0 - 9999.99."  
},  
{           ERR_PAYMENT_LAST_NAME_TO_LONG,  
"Payment Customer last name longer than 16 characters."  
},  
{           ERR_PAYMENT_MISSING_CDI_KEY,  
missing Customer district key \"CDI*\".  
},  
{           ERR_PAYMENT_MISSING_CID_CLT,  
Either Customer ID or Last Name must be entered."  
},  
{           ERR_PAYMENT_MISSING_CID_KEY,  
missing Customer Key \"CID*\".  
},  
{           ERR_PAYMENT_MISSING_CLT_KEY,  
missing Customer Last Name key \"CLT*\".  
},
```

```
{           ERR_PAYMENT_MISSING_CWI_KEY,  
missing Customer Warehouse key \"CWI*\".  
},  
{           ERR_PAYMENT_MISSING_DID_KEY,  
missing District Key \"DID*\".  
},  
{           ERR_PAYMENT_MISSING_HAM_KEY,  
missing Amount key \"HAM*\".  
},  
{           ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,  
missing Threshold key \"TT*\".  
},  
{           ERR_STOCKLEVEL_THRESHOLD_INVALID,  
Level; Threshold value must be in the range = 1 - 99."  
},  
{           ERR_STOCKLEVEL_THRESHOLD_RANGE,  
"Stock Level Threshold out of range, range must be 1 - 99."  
},  
{           ERR_VERSION_MISMATCH,  
"Invalid version field. RTE and Web Client are probably out of sync."  
},  
{           ERR_W_ID_INVALID,  
"Invalid Warehouse ID."  
},  
{           0,  
"},  
};  
char szTmp[256];  
int i = 0;  
while (TRUE)  
{  
    if (errorMsgs[i].szMsg[0] == 0)  
    {  
        strcpy( szTmp, "Unknown error number." );  
        break;  
    }  
    if (m_Error == errorMsgs[i].iError)  
    {  
        strcpy( szTmp, errorMsgs[i].szMsg );  
        break;  
    }  
    i++;  
}  
if (m_szTextDetail)  
    strcat( szTmp, m_szTextDetail );  
if (m_SystemErr)  
    wsprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr );  
  
m_szErrorText = new char[strlen(szTmp)+1];  
strcpy( m_szErrorText, szTmp );  
return m_szErrorText;  
}  
/* FUNCTION: GetKeyValue  
* PURPOSE:      This function parses a http formatted string for specific key values.  
* ARGUMENTS:    char *pQueryString          http string from  
client browser
```

Appendix A - Application Source Code

```
*          char          *pKey
*      key value to look for          char          *pValue
*          character array into which to place key's value
*          int          iMax
*          maximum length of key value array.
*          WEBERROR          err
*      error value to throw
*
* RETURNS:          nothing.
*
* ERROR:          if (the pKey value is not found) then
*                  if (err == 0)
*                      return (empty string)
*                  else
*                      throw CWEBCNT_ERR(err)
*
* COMMENTS:          http keys are formatted either KEY=value& or KEY=value\0. This DLL
formats
*          TPC-C input fields in such a manner that the keys
can be extracted in the
*          above manner.
*/
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating null
    while( *ptr && *ptr != '&' && iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null

    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:          This function parses a http formatted string for a specific key
value.
*
* ARGUMENTS:          char          *pQueryString          http string from
client browser
*          key value to look for          char          *pKey
*          WEBERROR          NoKeyErr          error
value to throw if key not found
```

```
*          value to throw if value not numeric          WEBERROR          NotIntErr          error
*
* RETURNS:          integer
*
* ERROR:          if (the pKey value is not found) then
*                  if (NoKeyErr != NO_ERR)
*                      throw CWEBCNT_ERR(err)
*                  else
*                      return 0
*          else if (non-numeric char found) then
*                  if (NotIntErr != NO_ERR) then
*                      throw CWEBCNT_ERR(err)
*                  else
*                      return 0
*
* COMMENTS:          http keys are formatted either KEY=value& or KEY=value\0. This DLL
formats
*          TPC-C input fields in such a manner that the keys
can be extracted in the
*          above manner.
*/
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember starting point
    // scan string until a terminator (null or &) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr) )
        ptr++;

    // make sure we stopped scanning for the right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCNT_ERR( NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCNT_ERR( NoKeyErr );
    return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:          This function initializes the client terminal structure; it is called
when the TPCC.DLL
*          is first loaded by the inet service.
```

Appendix A - Application Source Code

```
/*
 */

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData = (PCLIENTDATA)malloc(Term.iNumEntries * sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCNLT_ERR( ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData, Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks it as "in use".
    // This is intentional, as the zero entry is used as an anchor and never
    // allocated as an actual terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree = i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
 *
 * PURPOSE: This function frees allocated resources associated with the terminal
 * structure.
 *
 * ARGUMENTS: none
 *
 * RETURNS: None
 *
 * COMMENTS: This function is called only when the inet service unloads the
 * TPCC.DLL
 */
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            delete Term.pClientData[i].pTxn;
    }

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if (Term.pClientData)
        free(Term.pClientData);
    Term.pClientData = NULL;
```

```
LeaveCriticalSection(&TermCriticalSection);

}

/* FUNCTION: TermAdd
 *
 * PURPOSE: This function assigns a terminal id which is used to identify a
 * client browser.
 *
 * RETURNS: int assigned terminal id
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList = Term.pClientData[iNewTerm].iNextFree;
        Term.pClientData[iNewTerm].iNextFree = -1; // indicates this
        position is in use
    }
    else
    {
        // no open slots, so find the slot that hasn't been used in the
        longest time and reuse it
        for(iNewTerm=1, i=1, iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections;
        i++)
        {
            if (iTickCount > Term.pClientData[i].iTickCount)
            {
                iTickCount = Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than one minute old, it probably means that
        more connections
        // are being attempted than were specified as "Max Connections" at
        install. In this case,
        // do not bump existing connection; instead, return error to
        requestor.
        if ((GetTickCount() - iTickCount) < 60000)
        {
            LeaveCriticalSection(&TermCriticalSection);
            throw new CWEBCNLT_ERR( ERR_MAX_CONNECTIONS_EXCEEDED );
        }
    }

    Term.pClientData[iNewTerm].iTickCount = GetTickCount();
    Term.pClientData[iNewTerm].iSyncId = Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
 */
```

Appendix A - Application Source Code

```

* PURPOSE: This function makes a terminal entry in the Term array available for
reuse.
*
* ARGUMENTS:      int id
*                  Terminal id of client exiting
*
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree = Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
 */
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum, int iTermId, int
iSyncId, char *szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<BOLD>An Error Occurred</BOLD><BR><BR>%"
        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></BODY></HTML>"
        , iType, iErrorNum, MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
 */
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm)
{
    wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main Menu</TITLE></HEAD><BODY>"
        "Select Desired Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"

```

```

        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">" 
    "</FORM></BODY></HTML>" 
    , MAIN_MENU_FORM, iTermId, iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE:      This function constructs the Stock Level HTML page.
*
* COMMENTS:     The internal client buffer is created when the terminal id is
assigned and should not
*                           be freed except when the client terminal id is no
longer needed.
*/
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput, char
*szForm)
{
    int      c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock Level</TITLE></HEAD><FORM
ACTION=\"tpcc.dll\" METHOD=\"GET\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">" 
        "<PRE><font face=\"Courier\">" 
        "Warehouse: %6.6d District: %2.2d<BR> <BR>", 
        STOCK_LEVEL_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
        Term.pClientData[iTermId].w_id, Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold: <INPUT NAME=\"TT*\" SIZE=2><BR>
<BR>" 
            "low stock:   </font><BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR>" 
            " <BR> <BR> <BR> <BR> <BR> <BR> <PRE><HR>" 
            "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">" 
            "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">" 
        "</FORM></HTML>" );
    }
    else
    {
        wsprintf(szForm+c,
            "Stock Level Threshold: %2.2d<BR> <BR>" 
            "low stock: %3.3d</font> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>" 
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR><PRE><HR>" 
            "<INPUT TYPE=\"submit\" NAME=\"CMD\">" 
        VALUE=\"..NewOrder..\">>" );
    }
}

```

Appendix A - Application Source Code

```
VALUE=..\Payment.." >"          "<INPUT TYPE=\"submit\" NAME=\"CMD\""
VALUE=..\Delivery.." >"          "<INPUT TYPE=\"submit\" NAME=\"CMD\""
Status.." >"          "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=..\Order-
Level.." >"          "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=..\Stock-
"          "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=..\Exit.." >""
"</FORM></HTML>"           , pStockLevelData->threshold, pStockLevelData->low_stock);
}

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS:      The internal client buffer is created when the terminal id is
assigned and should not
*                  be freed except when the client terminal id is no
longer needed.
*/
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL bInput, char
*szForm)
{
    int             i, c;
    BOOL            bValid;
    static   char szBR[] = " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>";
    if (!bInput)
        assert( pNewOrderData->exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );
    bValid = (bInput || (pNewOrderData->exec_status_code == eOK));
    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C New Order</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">           New
Order<BR>"           , bValid ? 0 : ERR_BAD_ITEM_ID, NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncid;
    if ( bInput )
    {
        c += wsprintf(szForm+c, "Warehouse: %6.6d    ", Term.pClientData[iTermId].w_id );
        strcpy( szForm+c, "District: <INPUT NAME=\"DID\" SIZE=1>" );
Date:<BR>"           "Customer: <INPUT NAME=\"CID\" SIZE=4>    Name:
Credit:     %Disc:<BR>"           "Order Number:           Number of Lines:       W_tax:
D_tax:<BR> <BR>"           " Supp_W  Item_Id  Item Name                Qty Stock
B/G Price    Amount<BR>"
```

```
SIZE=6>          "<INPUT NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\""
SIZE=6>          "<INPUT NAME=\"SP01*\" SIZE=1><BR>"           <INPUT NAME=\"IID01*\""
SIZE=6>          "<INPUT NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\""
SIZE=6>          "<INPUT NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\""
SIZE=6>          "<INPUT NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\""
SIZE=6>          "<INPUT NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\""
SIZE=6>          "<INPUT NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\""
SIZE=6>          "<INPUT NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\""
SIZE=6>          "<INPUT NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\""
SIZE=6>          "<INPUT NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\""
SIZE=6>          "<INPUT NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\""
SIZE=6>          "<INPUT NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\""
SIZE=6>          "<INPUT NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\""
SIZE=6>          "<INPUT NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\""
SIZE=6>          "<INPUT NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\""
Total:<BR>"          "Execution Status:
"          "</font></PRE><HR>"           "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">"
"          "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"           "</FORM></HTML>""
);
}
else
{
    c += wsprintf(szForm+c, "Warehouse: %6.6d    District: %2.2d
Date: ", pNewOrderData->w_id, pNewOrderData->d_id);
    if ( bValid )
    {
        c += wsprintf(szForm+c, "%2.2d:%2.2d:%2.2d",
%2.2d:%2.2d:%2.2d", pNewOrderData->o_entry_d.day,
pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
    }
    c += wsprintf(szForm+c, "<BR>Customer: %4.4d    Name: %-16s    Credit:
%-2s    ", pNewOrderData->c_id, pNewOrderData->c_last, pNewOrderData-
>c_credit);
    if ( bValid )
```

Appendix A - Application Source Code

```
{  
    c += sprintf(szForm+c,  
                "%%Disc: %5.2f  
<BR>  
                "Order Number: %8.8d Number  
of Lines: %2.2d      W_tax: %5.2f    D_tax: %5.2f  <BR> <BR>"  
                "Supp_W  Item_Id  Item Name  
Qty  Stock  B/G  Price  Amount<BR>";  
    100.0*pNewOrderData->c_discount,  
    pNewOrderData->o_id,  
    pNewOrderData->o.ol_cnt,  
    100.0 * pNewOrderData->w_tax,  
    100.0 * pNewOrderData->d_tax);  
  
    for(i=0; i<pNewOrderData->o.ol_cnt; i++)  
    {  
        c += sprintf(szForm+c, "%6.6d  %6.6d  %-24s  
%2.2d  %3.3d  %1.1s  $%6.2f  $%7.2f  <BR>",  
                    pNewOrderData->OL[i].ol_supply_w_id,  
                    pNewOrderData->OL[i].ol_i_id,  
                    pNewOrderData->OL[i].ol_i_name,  
                    pNewOrderData->OL[i].ol_quantity,  
                    pNewOrderData->OL[i].ol_stock,  
                    pNewOrderData->OL[i].ol_brand_generic,  
                    pNewOrderData->OL[i].ol_i_price,  
                    pNewOrderData->OL[i].ol_amount );  
    }  
}  
else  
{  
    c += wsprintf(szForm+c,  
                  "%Disc:<BR>"  
                  "Order Number: %8.8d Number of Lines:  
W_tax:      D_tax:<BR> <BR>"  
                  "Supp_W  Item_Id  Item Name          Qty  
Stock  B/G  Price  Amount<BR>";  
    , pNewOrderData->o_id);  
  
    i = 0;  
}  
  
strncpy( szForm+c, szBR, (15-i)*5 );  
c += (15-i)*5;  
  
if ( bValid )  
    c += sprintf(szForm+c, "Execution Status: Transaction  
committed.  
Total: $%8.2f ",  
                pNewOrderData->total_amount);  
else  
    c += wsprintf(szForm+c, "Execution Status: Item number is  
not valid.  
Total:" );  
  
strcpy(szForm+c,  
      "<BR></font></PRE><HR>"  
      "<INPUT TYPE=\"submit\" NAME=\"CMD\"  
VALUE=\"..NewOrder..\">"  
      "<INPUT TYPE=\"submit\" NAME=\"CMD\"  
VALUE=\"..Payment..\">"  
      "<INPUT TYPE=\"submit\" NAME=\"CMD\"  
VALUE=\"..Delivery..\">"  
      "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-  
Status..\">"  
);
```

```
Level..\">"  
"  
"  ""  "</FORM></HTML>"  
");  
}  
  
/* FUNCTION: MakePaymentForm  
*  
* COMMENTS: The internal client buffer is created when the terminal id is  
assigned and should not  
* be freed except when the client terminal id is no  
longer needed.  
*/  
  
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL bInput, char *szForm)  
{  
    int c;  
  
    c = wsprintf(szForm,  
                 "<HTML><HEAD><TITLE>TPC-C Payment</TITLE></HEAD><BODY>"  
                 "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"  
                 "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"  
                 "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"  
                 "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"  
                 "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%s\">"  
                 "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"  
                 "<PRE><font face=\"Courier\">"  
Payment<BR>  
"Date: "  
     , PAYMENT_FORM, iTermId, Term.pClientData[iTermId].iSyncId);  
  
    if ( !bInput )  
    {  
        c += wsprintf(szForm+c, "%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",  
                      pPaymentData->h_date.day,  
                      pPaymentData->h_date.month,  
                      pPaymentData->h_date.year,  
                      pPaymentData->h_date.hour,  
                      pPaymentData->h_date.minute,  
                      pPaymentData->h_date.second);  
    }  
  
    if ( bInput )  
    {  
        c += wsprintf(szForm+c,  
                      "<BR> <BR>Warehouse: %6.6d"  
                      " District: <INPUT NAME=\"DID\" SIZE=1>"  
SIZE=1<BR> <BR> <BR> <BR> <BR>"  
                      "Customer: <INPUT NAME=\"CID\" SIZE=4>"  
                      "Cust-Warehouse: <INPUT NAME=\"CWI\" SIZE=4> "  
                      "Cust-District: <INPUT NAME=\"CDI\" SIZE=1><BR>"  
                      "Name: <INPUT NAME=\"CLT\" SIZE=16>"  
Since:<BR>"  
Credit:<BR>"  
Disc:<BR>"  
Phone:<BR> <BR>"Amount Paid: $<INPUT NAME=\"HAM\" SIZE=7>  
New Cust-Balance:<BR>"  
);  
}
```

Appendix A - Application Source Code

```
<BR></font></PRE><HR>
        "Credit Limit:<BR> <BR>Cust-Data: <BR> <BR> <BR>
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\"
</BODY></FORM></HTML>
, Term.pClientData[iTermId].w_id);
}
else
{
    c += wsprintf(szForm+c,
        "<BR> <BR>Warehouse: %6.6d
%2.2d<BR>" District:
        "%-20s          %-20s<BR>" 
        "%-20s          %-20s<BR>" 
        "%-20s %-2s %5.5s-%4.4s      %-20s %-2s %5.5s-%4.4s<BR>
<BR>" Customer: %4.4d Cust-Warehouse: %6.6d Cust-District:
        "Name:   %-16s %-2s %-16s Since: %2.2d-%2.2d-
%4.4d<BR>" 
        "           %-20s          Credit: %-2s<BR>
        , Term.pClientData[iTermId].w_id, pPaymentData->d_id
        , pPaymentData->w_street_1, pPaymentData->d_street_1
        , pPaymentData->w_street_2, pPaymentData->d_street_2
        , pPaymentData->w_city, pPaymentData->w_state,
pPaymentData->w_zip, pPaymentData->w_zip+5
        , pPaymentData->d_city, pPaymentData->d_state,
pPaymentData->d_zip, pPaymentData->d_zip+5
        , pPaymentData->c_id, pPaymentData->c_w_id,
pPaymentData->c_d_id
        , pPaymentData->c_first, pPaymentData->c_middle,
pPaymentData->c_last
        , pPaymentData->c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
        , pPaymentData->c_street_1, pPaymentData->c_credit
    );
}

c += sprintf(szForm+c,
    "           %-20s          %%Disc: %5.2f<BR>",
    pPaymentData->c_street_2, 100.0*pPaymentData->c_discount);

c += wsprintf(szForm+c,
    "           %-20s %-2s %5.5s-%4.4s      Phone: %6.6s-%3.3s-
%3.3s-%4.4s<BR>",
    pPaymentData->c_city, pPaymentData->c_state, pPaymentData-
>c_zip, pPaymentData->c_zip+5,
    pPaymentData->c_phone, pPaymentData->c_phone+6,
pPaymentData->c_phone+9, pPaymentData->c_phone+12 );

c += sprintf(szForm+c,
    "Amount Paid:      $%7.2f      New Cust-Balance:
$%14.2f<BR>"
    "Credit Limit:      $%13.2f<BR> <BR>
    , pPaymentData->h_amount, pPaymentData->c_balance
    , pPaymentData->c_credit_lim
    );
if ( pPaymentData->c_credit[0] == 'B' && pPaymentData->c_credit[1] ==
'C' )
    c += wsprintf(szForm+c,
        "Cust-Data: %-50.50s<BR>      %-
50.50s<BR>",

```

```
        pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData->c_data+150 );
else
    strcpy(szForm+c, "Cust-Data: <BR> <BR> <BR> <BR>");
strcat(szForm, " <BR></font></PRE><HR>
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">" 
    }
}

/* FUNCTION: MakeOrderStatusForm
*
* COMMENTS:      The internal client buffer is created when the terminal id is
assigned and should not
*                           be freed except when the client terminal id is no
longer needed.
*/
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>";
    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Order-Status</TITLE></HEAD><BODY>
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\\">" 
        "<PRE><font face=\"Courier\">" Order-
Status<BR>
        "Warehouse: %6.6d      ,
        ORDER_STATUS_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);
        if ( bInput )
        {
            strcpy(szForm+c,
                "District: <INPUT NAME=\"DID\" SIZE=1><BR>
                "Customer: <INPUT NAME=\"CID\" SIZE=4>      Name:
<INPUT NAME=\"CLT\" SIZE=23><BR>
                "Cust-Balance:<BR> <BR>
                "Order-Number:          Entry-Date:
Carrier-Number:<BR>" 
                "Supply-W      Item-Id      Qty      Amount      Delivery-
Date<BR> <BR> <BR> <BR> <BR>"
```

Appendix A - Application Source Code

```
" <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></font></PRE>" <HR><INPUT TYPE="submit" NAME="CMD" VALUE="Process"><INPUT TYPE="submit" NAME="CMD" VALUE="Menu">" </BODY></FORM></HTML>" );
}
else
{
    c += wsprintf(szForm+c,
        "District: %.2d<BR>"
        "Customer: %4.4d Name: %-16s %-2s %-16s<BR>",
        pOrderStatusData->d_id, pOrderStatusData->c_id,
        pOrderStatusData->c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);

    c += sprintf(szForm+c, "Cust-Balance: $%9.2f<BR> <BR>",
        pOrderStatusData->c_balance);

    c += wsprintf(szForm+c,
        "Order-Number: %.8.8d Entry-Date: %.2d-%.2d-%4.4d
%.2d:%.2d:%.2d Carrier-Number: %.2d<BR>"
        "Supply-W Item-Id Qty Amount Delivery-
Date<BR>",
        pOrderStatusData->o_id,
        pOrderStatusData->o_entry_d.day,
        pOrderStatusData->o_entry_d.month,
        pOrderStatusData->o_entry_d.year,
        pOrderStatusData->o_entry_d.hour,
        pOrderStatusData->o_entry_d.minute,
        pOrderStatusData->o_entry_d.second,
        pOrderStatusData->o_carrier_id);

    for(i=0; i < pOrderStatusData->o_o1_cnt; i++)
    {
        c += sprintf(szForm+c, " %.6d %.6d %.2d
%.2d-%.2d-%4.4d<BR>",
            pOrderStatusData->OL[i].ol_supply_w_id,
            pOrderStatusData->OL[i].ol_i_id,
            pOrderStatusData->OL[i].ol_quantity,
            pOrderStatusData->OL[i].ol_amount,
            pOrderStatusData->OL[i].ol_delivery_d.day,
            pOrderStatusData->OL[i].ol_delivery_d.month,
            pOrderStatusData->OL[i].ol_delivery_d.year);
    }

    strncpy( szForm+c, szBR, (15-i)*5 );
    c += (15-i)*5;

    strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE='submit' NAME='CMD'
VALUE='..NewOrder..'">
        "<INPUT TYPE='submit' NAME='CMD'
VALUE='..Payment..'">
        "<INPUT TYPE='submit' NAME='CMD'
VALUE='..Delivery..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Order-
Status..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Stock-
Level..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Exit..">"
        "</BODY></FORM></HTML>" );
}
```

```
/* FUNCTION: MakeDeliveryForm
*
* COMMENTS: The internal client buffer is created when the terminal id is
assigned and should not
* be freed except when the client terminal id is no
longer needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput, char
*szForm)
{
    int c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Delivery</TITLE></HEAD><BODY>
        "<FORM ACTION='tppc.dll' METHOD='GET'>
        "<INPUT TYPE='hidden' NAME='STATUSID' VALUE='%d'>
        "<INPUT TYPE='hidden' NAME='ERROR' VALUE='0'>
        "<INPUT TYPE='hidden' NAME='FORMID' VALUE='%d'>
        "<INPUT TYPE='hidden' NAME='TERMID' VALUE='%d'>
        "<INPUT TYPE='hidden' NAME='SYNCID' VALUE='%d'>
        "<PRE><font face='Courier'>
Delivery<BR>
        "Warehouse: %.6d<BR> <BR>,
        (!bInput && (pDeliveryData->exec_status_code != eOK)) ?
ERR_TYPE_DELIVERY_POST : 0,
        DELIVERY_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT NAME='OCD*' SIZE=1><BR> <BR>
            "Execution Status: <BR> <BR> <BR> <BR> <BR> <BR> <BR>
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
</font></PRE><HR>" <INPUT TYPE='submit' NAME='CMD' VALUE='Process'>
        "<INPUT TYPE='submit' NAME='CMD' VALUE='Menu'">
        "</BODY></FORM></HTML>" );
    }
    else
    {
        wsprintf( szForm+c,
            "Carrier Number: %.2d<BR> <BR>
            "Execution Status: %s <BR> <BR> <BR> <BR> <BR> <BR>
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>" <HR><INPUT TYPE='submit' NAME='CMD'
VALUE='..NewOrder..'">
        "<INPUT TYPE='submit' NAME='CMD'
VALUE='..Payment..'">
        "<INPUT TYPE='submit' NAME='CMD'
VALUE='..Delivery..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Order-
Status..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Stock-
Level..'">
        "<INPUT TYPE='submit' NAME='CMD' VALUE='..Exit..">
        "</BODY></FORM></HTML>" ,
        pDeliveryData->o_carrier_id,
```

Appendix A - Application Source Code

```
    (pDeliveryData->exec_status_code == eOK) ? "Delivery has
been queued." : "Delivery Post Failed      "
);
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates the input data from the new order
form
*           filling in the required input variables. It then calls the
SQLNewOrder
*           transaction, constructs the output form and writes it back
to client
*           browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA          pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();

    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates the input data from the payment form
filling in the required input variables. It then calls the
SQLPayment
*           transaction, constructs the output form and writes it back
to client
*           browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK      *pECB      passed in structure pointer
from inetsrv.
*           int
*           iTermId   client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA          pPayment;

    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM, szBuffer );
}
```

```
/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates the input data from the Order Status
form filling in the required input variables. It then calls
the
*           SQLOrderStatus transaction, constructs the output form and
writes it
*           back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK      *pECB      passed in structure pointer
from inetsrv.
*           int
*           iTermId   client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA      pOrderStatus;

    pOrderStatus = Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);

    Term.pClientData[iTermId].pTxn->OrderStatus();

    pOrderStatus = Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM, szBuffer );
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates the input data from the delivery
form
*           filling in the required input variables. It then calls the
PostDeliveryInfo
*           Api, The client is then informed that the transaction has
been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK      *pECB      passed in structure pointer
from inetsrv.
*           int
*           iTermId   client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    char      *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA          pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
    pDelivery->w_id = Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id = GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY, ERR_DELIVERY_CARRIER_INVALID);
    if( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR( ERR_DELIVERY_CARRIER_ID_RANGE );
```

Appendix A - Application Source Code

```
if (dwNumDeliveryThreads)
{
    //post delivery info
    if ( PostDeliveryInfo(pDelivery->w_id, pDelivery->o_carrier_id) )
        pDelivery->exec_status_code = eDeliveryFailed;
    else
        pDelivery->exec_status_code = eOK;
}
else // delivery is done synchronously if no delivery threads configured
    Term.pClientData[iTermId].pTxn->Delivery();

pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates the input data from the Stock Level
*          form filling in the required input variables. It then calls
*          the
*          SQLStockLevel transaction, constructs the output form and
*          writes it
*          back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK      *pECB      passed in structure pointer
* from inetsrv.
*           int
*           iTermId   client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    char          *ptr = pECB->lpszQueryString;

    PSTOCK_LEVEL_DATA  pStockLevel;

    pStockLevel = Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
    ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
    pStockLevel->d_id = Term.pClientData[iTermId].d_id;

    pStockLevel->threshold = GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY, ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ('pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new CWEBCLNTR_ERR( ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn->StockLevel();

    pStockLevel = Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE: This function extracts and validates the new order form data from an
*          http command string.
*
* ARGUMENTS: LPSTR          lpszQueryString      client
*          browser http command string
*          NEW_ORDER_DATA      *pNewOrderData
*          pointer to new order data structure

```

```
/*
 */

void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData)
{
    char      szTmp[26];
    int       i;
    short     items;
    int       ol_i_id, ol_quantity;
    char      *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
    {
        "SP00*", "SP01*", "SP02*", "SP03*", "SP04*",
        "SP05*", "SP06*", "SP07*", "SP08*", "SP09*",
        "SP10*", "SP11*", "SP12*", "SP13*", "SP14*"
    };
    static char szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    {
        "IID00*", "IID01*", "IID02*", "IID03*", "IID04*",
        "IID05*", "IID06*", "IID07*", "IID08*", "IID09*",
        "IID10*", "IID11*", "IID12*", "IID13*", "IID14*"
    };
    static char szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    {
        "Qty00*", "Qty01*", "Qty02*", "Qty03*", "Qty04*",
        "Qty05*", "Qty06*", "Qty07*", "Qty08*", "Qty09*",
        "Qty10*", "Qty11*", "Qty12*", "Qty13*", "Qty14*"
    };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_NEWORDER_FORM_MISSING_DID, ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNTR_ERR(
ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData->OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id = pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY, ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 99999 || ol_i_id < 1 )
                throw new CWEBCLNTR_ERR( ERR_NEWORDER_ITEMID_RANGE
);

            ol_quantity = pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY, ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99 || ol_quantity < 1 )
                throw new CWEBCLNTR_ERR( ERR_NEWORDER_QTY_RANGE );

            items++;
        }
        else
        {
            // nothing entered for supply warehouse, so item id and qty
            must also be blank
            GetKeyValue(&ptr, szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new CWEBCLNTR_ERR(
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
        }
    }
}
```

Appendix A - Application Source Code

```
GetKeyValue(&ptr, szQty[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_QTY_KEY);
    if ( szTmp[0] )
        throw new CWEBCNT_ERR(
ERR_NEORDER_QTY_WITHOUT_SUPP );
}
    }
    if ( items == 0 )
        throw new CWEBCNT_ERR( ERR_NEORDER_NOITEMS_ENTERED );
pNewOrderData->o_ol_cnt = items;
}

/* FUNCTION: GetPaymentData
*
* PURPOSE: This function extracts and validates the payment form data from an
http command string.
*
* ARGUMENTS: LPSTR lpszQueryString client
browser http command string
* PAYMENT_DATA *pPaymentData
pointer to payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData)
{
    char szTmp[26];
    char *ptr = lpszQueryString;
    BOOL bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCNT_ERR( ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*",
ERR_PAYMENT_MISSING_CWI_KEY, ERR_PAYMENT_CWI_INVALID);
    pPaymentData->d_id = GetIntKeyValue(&ptr, "CDI*", ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCNT_ERR( ERR_PAYMENT_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN )
            throw new CWEBCNT_ERR( ERR_PAYMENT_LAST_NAME_TO_LONG );
    }
}
```

```
strcpy(pPaymentData->c_last, szTmp);
}
else
{
    // parse customer id and verify that last name was NOT entered
    GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] != 0 )
        throw new CWEBCNT_ERR( ERR_PAYMENT_CID_AND_CLT );
}

GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
if ( !IsDecimal(szTmp) )
    throw new CWEBCNT_ERR( ERR_PAYMENT_HAM_INVALID );
pPaymentData->h_amount = atof(szTmp);
if ( pPaymentData->h_amount >= 10000.00 || pPaymentData->h_amount < 0 )
    throw new CWEBCNT_ERR( ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE: This function extracts and validates the payment form data from an
http command string.
*/
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA *pOrderStatusData)
{
    char szTmp[26];
    char *ptr = lpszQueryString;

    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*", ERR_ORDERSTATUS_MISSING_DID_KEY, ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCNT_ERR( ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) > LAST_NAME_LEN )
            throw new CWEBCNT_ERR( ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCNT_ERR( ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCNT_ERR( ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
```

Appendix A - Application Source Code

```
* PURPOSE: This function determines if a string is numeric. It fails if any
characters other than numeric and null terminator are present.
*
* ARGUMENTS: char *ptr pointer to string to check.
*
* RETURNS: BOOL FALSE if string is not all numeric
*           TRUE if string contains
only numeric characters i.e. '0' - '9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE: This function determines if a string is a non-negative decimal value.
*          It fails if any characters other than a series of numbers followed by
*          a decimal point, another series of numbers, and a null
terminator are present.
*
* ARGUMENTS: char *ptr pointer to string to check.
*
* RETURNS: BOOL FALSE if string is not a valid non-negative
decimal value
*           TRUE if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ( *(dotptr+1) == 0 )
        return FALSE; // nothing but a decimal point is bad
    else
        bValid = TRUE;

    if ( *(dotptr+1) != 0 )
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
```

```
        return bValid;
}
```

isapi_dll/src/resource.h

```
///{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif
```

common/src/ReadRegistry.cpp

```
/*
*   FILE:           READREGISTRY.CPP
*                   Microsoft TPC-C Kit Ver. 4.20.000
*                   Copyright Microsoft, 1999
*
*                   All Rights Reserved
*
*                   not yet audited
*
*   PURPOSE: Implementation for TPC-C Tuxedo class.
*   Contact: Charles Levine (clevine@microsoft.com)
*
*   Change history:
*                   4.20.000 - first version
*/

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT registry for startup parameters. There
parameters are
*           under the TPCC key.
*
* RETURNS FALSE = no errors
*           TRUE = error reading registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];
```

Appendix A - Application Source Code

```
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ,
&hKey) != ERROR_SUCCESS )
    return TRUE;

// determine database protocol to use; may be either ODBC or DBLIB
pReg->eDB_Protocol = Unspecified;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "DB_Protocol", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, szDBNames[ODBC]) )
        pReg->eDB_Protocol = ODBC;
    else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
        pReg->eDB_Protocol = DBLIB;
}

pReg->eTxnMon = None;
// determine txn monitor to use; may be either TUXEDO, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
        pReg->eTxnMon = TUXEDO;
    else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
        pReg->eTxnMon = ENCINA;
    else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool = TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxPendingDeliveries = dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "NumberOfDeliveryThreads", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwNumberOfDeliveryThreads = dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0, &type, (BYTE *)&pReg->szPath, &size) !=
ERROR_SUCCESS )
```

```
    pReg->szPath[0] = 0;

    size = sizeof( pReg->szDbServer );
    if ( RegQueryValueEx(hKey, "DbServer", 0, &type, (BYTE *)&pReg->szDbServer,
&size) != ERROR_SUCCESS )
        pReg->szDbServer[0] = 0;

    size = sizeof( pReg->szDbName );
    if ( RegQueryValueEx(hKey, "DbName", 0, &type, (BYTE *)&pReg->szDbName, &size)
!= ERROR_SUCCESS )
        pReg->szDbName[0] = 0;

    size = sizeof( pReg->szDbUser );
    if ( RegQueryValueEx(hKey, "DbUser", 0, &type, (BYTE *)&pReg->szDbUser, &size)
!= ERROR_SUCCESS )
        pReg->szDbUser[0] = 0;

    size = sizeof( pReg->szDbPassword );
    if ( RegQueryValueEx(hKey, "DbPassword", 0, &type, (BYTE *)&pReg->szDbPassword,
&size) != ERROR_SUCCESS )
        pReg->szDbPassword[0] = 0;

    size = sizeof( pReg->szSPPrefix );
    if ( RegQueryValueExW(hKey, L"SPPrefix", 0, &type, (BYTE *)&pReg->szSPPrefix,
&size) != ERROR_SUCCESS )
        pReg->szSPPrefix[0] = L'\0';

    RegCloseKey(hKey);

    return FALSE;
}
```

common/src/ReadRegistry.h

```
/*
 *      FILE:          ReadRegistry.h
 *                      Microsoft TPC-C Kit Ver. 4.20.000
 *                      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *                      not audited
 *
 *      PURPOSE: Header for registry related code.
 *
 *      Change history:
 *                      4.20.000 - first version
 */
enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM" };

//This structure defines the data necessary to keep distinct for each terminal or client
connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
```

Appendix A - Application Source Code

```
DWORD dwMaxConnections;
DWORD dwMaxPendingDeliveries;
DWORD dwNumberOfDeliveryThreads;
char szPath[128];
char szDbServer[32];
char szDbName[32];
char szDbUser[32];
char szDbPassword[32];
wchar_t szSPPrefix[32];      //tpcc_odbc.dll stored procedures prefix
} TPCCREGISTRYDATA, *TPCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCREGISTRYDATA *pReg );
```

common/src/error.h

```
/*
 * FILE:          ERROR.H
 *                 Microsoft TPC-C Kit Ver. 4.20.000
 *                 Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
 * Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for error exception classes.
 *
 * Change history:
 *   4.20.000 - updated rev number to match kit
 *   4.21.000 - fixed bug: ~CBaseErr needed to be declared virtual
 */

#pragma once

#ifndef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int             iError;           //error id of
message    char      szMsg[256];     //message to sent to browser
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL        = 1,
    ERR_WARNING_LEVEL      = 2,
    ERR_INFORMATION_LEVEL  = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC
-1           //logic error in program; internal error
```

```
#define ERR_SUCCESS
0                         //success (a non-error error)
#define ERR_BAD_ITEM_ID
1                         //expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST
2                         //expected delivery post failed
#define ERR_TYPE_WEBDLL
3                         //tpcc web generated error
#define ERR_TYPE_SQL
4                         //sql server generated error
#define ERR_TYPE_DBLIB
5                         //dblib generated error
#define ERR_TYPE_ODBC
6                         //odbc generated error
#define ERR_TYPE_SOCKET
7                         //error on communication socket client rte only
#define ERR_TYPE_DEADLOCK
8                         //dblib and odbc only deadlock condition
#define ERR_TYPE_COM
9                         //error from COM call
#define ERR_TYPE_TUXEDO
10                        //tuxedo error
#define ERR_TYPE_OS
11                        //operating system error
#define ERR_TYPE_MEMORY
12                        //memory allocation error
#define ERR_TYPE_TPCC_ODBC
13                        //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB
14                        //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV
15                        //delivery server error
#define ERR_TYPE_TXNLOG
16                        //txn log error
#define ERR_TYPE_BCCCONN
17                        //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN
18                        //Benchcraft connection class
#define ERR_TYPE_ENCINA
19                        //Encina error
#define ERR_TYPE_COMPONENT
20                        //error from COM component
#define ERR_TYPE_RTE
21                        //Benchcraft rte
#define ERR_TYPE_AUTOMATION
22                        //Benchcraft automation errors
#define ERR_TYPE_DRIVER
23                        //Driver engine errors
#define ERR_TYPE_RTE_BASE
24                        //Framework errors
#define ERR_BUF_OVERFLOW
25                        //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP
26                        //HTTP/SOAP dll generated error
// TPC-W error types
#define ERR_TYPE_TPCW_CONN
50                        //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML
51                        //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER
52                        //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE
53
#define ERR_TYPE_TPCW_ENG_OS
54
```

Appendix A - Application Source Code

```
#define ERR_TYPE_HTML_RESP      55
#define ERR_TYPE_TFCW_ODBC      56
#define ERR_TYPE_SCHANNEL        57
#define ERR_TYPE_THINK_LIST      58

#define ERR_INS_MEMORY           "Insufficient Memory to continue."
#define ERR_UNKNOWN               "Unknown error."
#define ERR_MSG_BUF_SIZE          512
#define INV_ERROR_CODE            -1
#define ERR_INS_BUF_OVERFLOW      "Insufficient Buffer size to receive HTML pages."


class CBaseErr
{
public:
    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg = GetLastError(); //take the error code
immediately before it is reset by other functions

        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;

        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };
}
```

```
virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
{
    int j = 0;
    char szTmp[512];

    if (szStr)
        j += wsprintf(szTmp, "%s\n", szStr);
    if (ErrorNum() != INV_ERROR_CODE)
        j += wsprintf(szTmp+j, "Error = %d\n", ErrorNum());
    if (m_szLoc)
        j += wsprintf(szTmp+j, "Location = %s\n", GetLocation());

    j += wsprintf(szTmp+j, "%s\n", ErrorText());
}

::MessageBox(hwnd, szTmp, m_szApp, MB_OK);

char *GetApp(void) { return m_szApp; }
char *GetLocation(void) { return m_szLoc; }
virtual int ErrorNum() { return m_idMsg; }

virtual int ErrorType() = 0; // a value which distinguishes the kind of error
that occurred
virtual char *ErrorText() = 0; // a string (i.e., human readable)
representation of the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where the error occurred
    int m_idMsg;

    //short m_errType;
};

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eNonRetryable,
    };
    CSocketErr(Action eAction, LPCTSTR szLocation = NULL);
```

Appendix A - Application Source Code

```
~CSocketErr()
{
    if (m_szErrorText != NULL)
        delete [] m_szErrorText;
}

Action    m_eAction;
char     *m_szErrorText;

int ErrorType() { return ERR_TYPE_SOCKET; };
char *ErrorText(void);

};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eFSeek,
        eFRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
    };

    CSystemErr(Action eAction, LPCTSTR szLocation);
    CSystemErr(int iError, Action eAction, LPCTSTR szLocation);
    ErrorType() { return ERR_TYPE_OS; };

    int     *ErrorText(void);
    void    Draw(HWND hwnd, LPCTSTR szStr = NULL);
};
```

```
        Action    m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int ErrorType() {return ERR_TYPE_MEMORY;};
    char *ErrorText() {return ERR_INS_MEMORY;};
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int ErrorType() {return ERR_BUF_OVERFLOW;};
    char *ErrorText() {return ERR_INS_BUF_OVERFLOW;};
};
```

common/src/trans.h

```
/*
 *      FILE:          TRANS.H
 *      Microsoft TPC-C Kit Ver. 4.42.000
 *      Copyright Microsoft, 2002
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
 *      Performance Metrics, 3/17/99
 *
 *      PURPOSE: Header file for TPC-C structure templates.
 *
 *      Change history:
 *      4.42.000 - changed w_id fields from short to long to support >32K
 *      warehouses
 *      4.20.000 - updated rev number to match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN           20
#define DATABASE_NAME_LEN         20
#define USER_NAME_LEN             20
#define PASSWORD_LEN              20
#define TABLE_NAME_LEN            20
#define I_DATA_LEN                50
#define I_NAME_LEN                24
#define BRAND_LEN                 1
#define LAST_NAME_LEN             16
#define W_NAME_LEN                10
#define ADDRESS_LEN               20
#define STATE_LEN                 2
```

Appendix A - Application Source Code

```
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OI_NEW_ORDER_ITEMS 15
#define MAX_OI_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OI_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header file sqatypes.h, but is not available
// when compiling with dblib, so redefined here. Note: we are using the symbol
// __SQLTYPES
// (declared in sqatypes.h) as a way to determine if TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
    typedef struct
    {
        short          /* SQLSMALLINT */ year;
        unsigned short /* SQLUSMALLINT */ month;
        unsigned short /* SQLUSMALLINT */ day;
        unsigned short /* SQLUSMALLINT */ hour;
        unsigned short /* SQLUSMALLINT */ minute;
        unsigned short /* SQLUSMALLINT */ second;
        unsigned long   /* SQLINTEGER */ fraction;
    } TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    eOK,           // 0      "Transaction committed."
    eInvalidItem, // 1      "Item number is not valid."
    eDeliveryFailed // 2     "Delivery Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long          ol_supply_w_id;
    long          ol_i_id;
    short         ol_quantity;

    // output params
    char          ol_i_name[I_NAME_LEN+1];
    char          ol_brand_generic[BRAND_LEN+1];
    double        ol_i_price;
    double        ol_amount;
    short         ol_stock;
} OI_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short         d_id;
}
```

```
long          c_id;
short         o.ol_cnt;

// output params
EXEC_STATUS   exec_status_code;
char          c_last[LAST_NAME_LEN+1];
char          c_credit[CREDIT_LEN+1];
double        c_discount;
double        w_tax;
double        d_tax;
long          o_id;
short         o_entry_d;
short         o_all_local;
double        total_amount;
OI_NEW_ORDER_DATA OL[MAX_OI_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    d_id;
    c_id;
    c_d_id;
    c_w_id;
    h_amount;
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS   exec_status_code;
    TIMESTAMP_STRUCT h_date,
                    w_street_1[ADDRESS_LEN+1];
    w_street_2[ADDRESS_LEN+1];
    w_city[ADDRESS_LEN+1];
    w_state[STATE_LEN+1];
    w_zip[ZIP_LEN+1];
    d_street_1[ADDRESS_LEN+1];
    d_street_2[ADDRESS_LEN+1];
    d_city[ADDRESS_LEN+1];
    d_state[STATE_LEN+1];
    d_zip[ZIP_LEN+1];
    c_first[FIRST_NAME_LEN+1];
    c_middle[MIDDLE_NAME_LEN + 1];
    c_street_1[ADDRESS_LEN+1];
    c_street_2[ADDRESS_LEN+1];
    c_city[ADDRESS_LEN+1];
    c_state[STATE_LEN+1];
    c_zip[ZIP_LEN+1];
    c_phone[PHONE_LEN+1];
    c_credit[CREDIT_LEN+1];
    c_credit_lim;
    c_discount;
    c_balance;
    c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long          ol_i_id;
    ol_supply_w_id;
    ol_quantity;
    ol_amount;
}
```

Appendix A - Application Source Code

```
TIMESTAMP_STRUCT ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    long w_id;
    short d_id;
    long c_id;
    char c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS exec_status_code;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    double c_balance;
    long o_id;
    TIMESTAMP_STRUCT o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA OL[MAX_OLE_ORDER_STATUS_ITEMS];
    short o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long w_id;
    short o_carrier_id;

    // output params
    EXEC_STATUS exec_status_code;
    SYSTEMTIME queue_time;
    long o_id[10];           // id's of
delivered orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery transactions and for writing them to the
delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME queue;           //time delivery transaction
queued
    long w_id;                  //delivery warehouse
    short o_carrier_id;         //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long w_id;
    short d_id;
    short threshold;

    // output params
    EXEC_STATUS exec_status_code;
    long low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;
```

common/src/txn_base.h

```
/* FILE: TXN_BASE.H
```

```
Microsoft TPC-C Kit Ver. 4.20.000
Copyright Microsoft, 1999

All Rights Reserved
*
Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
PURPOSE: Header file for TPC-C txn class implementation.
*
Change history:
* 4.20.000 - updated rev number to match kit
*/
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA BuffAddr_NewOrder();
    virtual PPAYMENT_DATA BuffAddr_Payment();
    virtual PDELIVERY_DATA BuffAddr_Delivery();
    virtual PSTOCK_LEVEL_DATA BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA BuffAddr_OrderStatus() = 0;

    virtual void NewOrder() = 0;
    virtual void Payment() = 0;
    virtual void Delivery() = 0;
    virtual void StockLevel() = 0;
    virtual void OrderStatus() = 0;
};

BuffAddr_NewOrder()
BuffAddr_Payment()
BuffAddr_Delivery()
BuffAddr_StockLevel()
BuffAddr_OrderStatus()
```

db dblib_dll/src/tpcc dblib.cpp

```
/* FILE: TPCC_DBLIB.CPP
Microsoft TPC-C Kit Ver. 4.42.000
Copyright Microsoft, 2002

All Rights Reserved
*
Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
PURPOSE: Implements dblib calls for TPC-C txns.
Contact: Charles Levine (clevine@microsoft.com)
*
Change history:
* 4.42.000 - changed w_id fields from short to long to support >32K
warehouses
```

Appendix A - Application Source Code

```
*          4.20.000 - updated rev number to match kit
*          4.10.001 - not deleting error class in catch handler on deadlock
retry;
*
*          not a functional bug, but a memory leak
*          - had to tweak some declarations to compile with
latest SDK; no functional change
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE           4096

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const           iMaxRetries = 10;           // how many retries on
deadlock
static long    iConnectionCount = 0;      // number of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit();           // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit();          // close all dblib
            structures/connections
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr, LPCSTR dberrstr,
LPCSTR oserrstr)
```

```
{
    CTPCC_DBLIB                                *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr, dberrstr, oserrstr );
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int severity,
char *msgtext)
*
* PURPOSE:      This function handles DB-Library SQL Server error messages
*
* ARGUMENTS:    DBPROCESS             *dbproc
*               DBPROCESS id
*               pointer
*               DBINT                msgno
*               message number
*               int                  msgstate
*               message state
*               int                  severity
*               char                 *msgtext
*               printable message description
*
* RETURNS:      int
*               continue if error is SQLETIME else INT_CANCEL action
*               INT_CONTINUE
*               INT_CANCEL           cancel operation
*
* COMMENTS:     This function also sets the dead lock dbproc variable if necessary.
*
*/
// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS, DBINT, INT, INT, LPCSTR, LPCSTR,
LPCSTR, DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int severity,
LPCSTR msgtext, LPCSTR srvname, LPCSTR proname,
DBUSMALLINT line)
{
    CTPCC_DBLIB                                *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity, msgtext );
    }
    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
*
* PURPOSE:      This function copies n characters from string pSrc to pDst and places
*               a
*               null character at the end of the destination string.
*
```

Appendix A - Application Source Code

```
*          char      *pDest   destination string pointer
*          char      *pSrc    source
string pointer
*          int       n
     number of characters to copy
*
* RETURNS:           None
*
* COMMENTS:        Unlike strncpy this function ensures that the result string is
*                   always null terminated.
*
*/
inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/
/*
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
procs on database server"},           "Wrong version of stored
        { ERR_INVALID_CUST,                  "Invalid Customer id,name."
customer."},                         },
        { ERR_NO_SUCH_ORDER,                "No orders found for
succeded."},                          },
        { ERR_RETRYED_TRANS,               "Retries before transaction
succeeded."},                         },
        { 0,                                ""
    };

    static char szNotFound[] = "Unknown error number./";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,                      // name of SQL server
    LPCSTR szUser,                        // user name for login
    LPCSTR szPassword,                   // password for login
```

```
           // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
           // name of database to use
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,                      // name of SQL server
    LPCSTR szUser,                        // user name for login
    LPCSTR szPassword,                   // password for login
    LPCSTR szHost,                       // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
           // name of database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SQLerr = (CSQLERR*)NULL;

    m_MaxRetries = 10;                  // how many retries on deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
    }

    // allocate a login structure
    login = dblogin();
    if ( login == NULL )
        ThrowError(CDBLIBERR::eLogin);
    InterlockedIncrement( &iConnectionCount );

    // register error and message handler functions
    if ( dbprocerrhandle(login, err_handler) == NULL )
        ThrowError(CDBLIBERR::eDbProcHandler);

    if ( dbprocmsgshandle(login, msg_handler) == NULL )
        ThrowError(CDBLIBERR::eDbProcHandler);

    DBSETLUSER(login, szUser);
    DBSETLPWD(login, szPassword);
    DBSETLHOST(login, szHost);
    DBSETLPACKET(login, (unsigned short)DEFCLPACKSIZE);
    DBSETLVERSION(login, DBVER60);           // use dblib ver 6.0 client
behavior

    // set time to wait for login
    if ( dbsetlogintime(60) == FAIL )
        ThrowError(CDBLIBERR::eDbSet);

    // set time to wait for statement execution
    if ( dbsettime(180) == FAIL )
        ThrowError(CDBLIBERR::eDbSet);

    m_dbproc = dbopen(login, szServer);
```

Appendix A - Application Source Code

```
// deallocate login structure before checking for success
dbfreelogin( login );

if (m_dbproc == NULL)
    ThrowError(CDBLIBERR::eDbOpen);

// save address of class instance so that the message and error handler
// can get to data.
dbsetuserdata(m_dbproc, (LPVOID)this);

// Use the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

dbcmd(m_dbproc, "set nocount on");                                // do not return
row counts
dbcmd(m_dbproc, "set XACT_ABORT ON");                                // rollback transaction on
abort

if (dbsqlexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbSqlExec);

DiscardNextResults(2);

// verify that version of stored procs on server is correct
dbrpcinit(m_dbproc, "tpcc_version", 0);

if (dbrpcexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

char szSrvVersion[16];
pData=dbdata(m_dbproc, 1);
if (pData)
    UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc, 1));
else
    szSrvVersion[0]=0;
if (strcmp(szSrvVersion,sVersion))
    throw new CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

DiscardNextRows(0);
DiscardNextResults(0);
}

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}
```

```
void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr, LPCSTR dberrstr,
LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr, oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first;  if yes, throw it and ignore any DBLib
error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL;      // clear our pointer to instance; catch handler
will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to happen, since it means that an error
was returned
        // but the error handlers were not called.
        pDbLibErr = new CDBLIBERR(eAction);
    else
    {
```

Appendix A - Application Source Code

```
pDbLibErr = m_DbLibErr;
pDbLibErr->m_eAction = eAction;
m_DbLibErr = NULL; // clear our pointer to instance; catch
handler will delete
}

throw pDbLibErr;
}

// Read and discard rows until no more. Throw an exception if number of rows read
// doesn't
// match number of rows expected. The row count will be ignored if the expected count
value
// passed in is negative. A typical use of this routine is to verify that there are no
more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int             iRowsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an exception if number of result sets
read doesn't
// match number expected. The result set count will be ignored if the expected count
value
// passed in is negative. A typical use of this routine is to verify that there are no
more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{
    int             iResultsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)
                ThrowError(CDBLIBERR::eDbResults);
            else

```

```
                break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    void CTPCC_DBLIB::StockLevel()
    {
        int             iTryCount = 0;
        const BYTE      *pData;
        ResetError();
        while (TRUE)
        {
            try
            {
                dbrpcinit(m_dbproc, "tpcc_stocklevel", 0);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *) 
&m_txn.StockLevel.w_id); // @w_id int
                dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *) 
&m_txn.StockLevel.d_id); // @d_id tinyint
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE *) 
&m_txn.StockLevel.threshold); // @threshold smallint
                if (dbrpcexec(m_dbproc) == FAIL)
                    ThrowError(CDBLIBERR::eDbRpcExec);

                if (dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);

                if (dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if (pData=dbdata(m_dbproc, 1))
                    m_txn.StockLevel.low_stock = *((long *) pData);
                DiscardNextRows(0);
                DiscardNextResults(0);

                m_txn.StockLevel.exec_status_code = eOK;
                return;
            }
            catch (CSQLERR *e)
            {
                if ((e->m_msgno == 1205 ||
                     (e->m_msgno == iErrOleDbProvider &&
                      strstr(e->m_msgrtext, sErrTimeoutExpired) !=
NULL)) &&
                    period
                    // hit deadlock; backoff for increasingly longer
                    (++iTryCount <= iMaxRetries))
                {
                    delete e;
                    Sleep(10 * iTryCount);
                }
            }
        }
    }
}
```

Appendix A - Application Source Code

```
        else
            throw;
    }
} // while (TRUE)

//if (iTryCount)
//    throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int i;
    DBINT commit_flag;
    DBDATETIME datetime;
    DBDATEREC daterec;

    int iTryCount = 0;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);

&m_txn.NewOrder.w_id;
&m_txn.NewOrder.d_id;
&m_txn.NewOrder.c_id;
&m_txn.NewOrder.o.ol_cnt;

            // check whether any order lines are for a remote warehouse
            m_txn.NewOrder.o.all_local = 1;
            for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                if (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o.all_local = 0; // at
least one remote warehouse
                    break;
                }
            }
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o.all_local);

            for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1,
(BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1,
(BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }
        }
    }
}
```

```
        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order line results
        m_txn.NewOrder.total_amount = 0;
        for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
        {
            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (pData=dbdata(m_dbproc, 1))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name, pData, dbdatlen(m_dbproc, 1));
            if (pData=dbdata(m_dbproc, 2))
                m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;
            if (pData=dbdata(m_dbproc, 3))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_generic, pData, dbdatlen(m_dbproc,
3));
            if (pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
*) &m_txn.NewOrder.OL[i].ol_i_price, 8);
            if (pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
*) &m_txn.NewOrder.OL[i].ol_amount, 8);

            m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount + m_txn.NewOrder.OL[i].ol_amount;
            DiscardNextRows(0);
        }

        // get remaining values for w_tax, d_tax, o_id, c_last,
c_discount, c_credit, o_entry_d, commit_flag
        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if (pData=dbdata(m_dbproc, 1))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc, 1), SQLFLT8, (BYTE *)&m_txn.NewOrder.w_tax, 8);
    }
}
```

Appendix A - Application Source Code

```
        if (pData=dbdata(m_dbproc, 2))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc, 2), SQLFLT8, (BYTE *)&m_txn.NewOrder.d_tax, 8);
        if (pData=dbdata(m_dbproc, 3))
            m_txn.NewOrder.o_id = (*DBINT *) pData;
        if (pData=dbdata(m_dbproc, 4))
            UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if (pData=dbdata(m_dbproc, 5))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc, 5), SQLFLT8, (BYTE *)&m_txn.NewOrder.c_discount, 8);
        if (pData=dbdata(m_dbproc, 6))
            UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if (pData=dbdata(m_dbproc, 7))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.NewOrder.o_entry_d.year = daterec.year;
            m_txn.NewOrder.o_entry_d.month = daterec.month;
            m_txn.NewOrder.o_entry_d.day = daterec.day;
            m_txn.NewOrder.o_entry_d.hour = daterec.hour;
            m_txn.NewOrder.o_entry_d.minute = daterec.minute;
            m_txn.NewOrder.o_entry_d.second = daterec.second;
        }
        if (pData=dbdata(m_dbproc, 8))
            commit_flag = (*DBTINYINT *) pData;

DiscardNextRows(0);
DiscardNextResults(0);

        if (commit_flag == 1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 - m_txn.NewOrder.c_discount));
            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code = eInvalidItem;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno == iErrOleDbProvider &&
            strstr(e->m_msgetext, sErrTimeoutExpired) !=
NULL)) &&
            period
            (++iTryCount <= iMaxRetries))
        {
            // hit deadlock; backoff for increasingly longer
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

// if (iTryCount)
```

```
// iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC daterec;

    int                  iTryCount = 0;
    const BYTE            *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_payment", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *)
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *)
            dbrpcparam(m_dbproc, NULL, 0, SQLFLT8, -1, -1, (BYTE *)
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *)
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *)
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *)

            // if customer id is zero, then payment is by name
            if (m_txn.Payment.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char *)m_txn.Payment.c_last);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 27)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.Payment.c_id = *((DBINT *) pData);
            if (pData=dbdata(m_dbproc, 2))
                UtilStrCpy(m_txn.Payment.c_last, pData,
if (pData=dbdata(m_dbproc, 3))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.Payment.h_date.year = daterec.year;
    m_txn.Payment.h_date.month = daterec.month;
    m_txn.Payment.h_date.day = daterec.day;
```

Appendix A - Application Source Code

```
        m_txn.Payment.h_date.hour = daterec.hour;
        m_txn.Payment.h_date.minute = daterec.minute;
        m_txn.Payment.h_date.second = daterec.second;
    }
    if (pData=dbdata(m_dbproc, 4))
        UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
    if (pData=dbdata(m_dbproc, 5))
        UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
    if (pData=dbdata(m_dbproc, 6))
        UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
    if (pData=dbdata(m_dbproc, 7))
        UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));
    if (pData=dbdata(m_dbproc, 8))
        UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
    if (pData=dbdata(m_dbproc, 9))
        UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
    if (pData=dbdata(m_dbproc, 10))
        UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
    if (pData=dbdata(m_dbproc, 11))
        UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
    if (pData=dbdata(m_dbproc, 12))
        UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
    if (pData=dbdata(m_dbproc, 13))
        UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
    if (pData=dbdata(m_dbproc, 14))
        UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
    if (pData=dbdata(m_dbproc, 15))
        UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
    if (pData=dbdata(m_dbproc, 16))
        UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
    if (pData=dbdata(m_dbproc, 17))
        UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
    if (pData=dbdata(m_dbproc, 18))
        UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
    if (pData=dbdata(m_dbproc, 19))
        UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
    if (pData=dbdata(m_dbproc, 20))
        UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
    if (pData=dbdata(m_dbproc, 21))
        UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
    if (pData=dbdata(m_dbproc, 22))
    {
        datetime = *((DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec, &datetime);
        m_txn.Payment.c_since.year = daterec.year;
```

```
        m_txn.Payment.c_since.month = daterec.month;
        m_txn.Payment.c_since.day = daterec.day;
        m_txn.Payment.c_since.hour = daterec.hour;
        m_txn.Payment.c_since.minute = daterec.minute;
        m_txn.Payment.c_since.second = daterec.second;
    }
    if(pData=dbdata(m_dbproc, 23))
        UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
    if(pData=dbdata(m_dbproc, 24))
        dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc,24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim, 8);
        if(pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc,25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount, 8);
            if(pData=dbdata(m_dbproc, 26))
                dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc,26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance, 8);
                if(pData=dbdata(m_dbproc, 27))
                    UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
                    DiscardNextRows(0);
                    DiscardNextResults(0);

                    if (m_txn.Payment.c_id == 0)
                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
                    else
                        m_txn.Payment.exec_status_code = eOK;

                    return;
                }
                catch (CSQLERR *e)
                {
                    if ((e->m_msno == 1205 ||
(e->m_msno == iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) !=
NULL)) &&
period
{
                    // hit deadlock; backoff for increasingly longer
                    delete e;
                    Sleep(10 * iTryCount);
                }
                else
                    throw;
            }
            // while (TRUE)
        //
        if (iTryCount)
            throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
    }

    void CTPCC_DBLIB::OrderStatus()
    {
        int
        DBDATETIME
        i;
        datetime;
```

Appendix A - Application Source Code

```
DBDATEREC daterec;

int iTryCount = 0;
RETCODE rc;
const BYTE *pData;

ResetError();

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc, "tpcc_orderstatus", 0);

        dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *) &m_txn.OrderStatus.w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *) &m_txn.OrderStatus.d_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *) &m_txn.OrderStatus.c_id);

        // if customer id is zero, then order status is by name
        if (m_txn.OrderStatus.c_id == 0)
            dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1, strlen(m_txn.OrderStatus.c_last), (unsigned char *)m_txn.OrderStatus.c_last);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order lines
        if (dbresults(m_dbproc) != SUCCEED)
        {
            if ((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
            else
                ThrowError(CDBLIBERR::eDbResults);
        }

        if (dbnumcols(m_dbproc) != 5)
            ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*DBINT *) pData;
            if (pData=dbdata(m_dbproc, 2))
                m_txn.OrderStatus.OL[i].ol_i_id =
(*DBINT *) pData;
            if (pData=dbdata(m_dbproc, 3))
                m_txn.OrderStatus.OL[i].ol_quantity =
(*DBSMALLINT *) pData;
            if (pData=dbdata(m_dbproc, 4))
```

```
        dbconvert(m_dbproc, SQLNUMERIC,
SQLFLT8, (BYTE *) &m_txn.OrderStatus.OL[i].ol_amount, 8);
        if (pData=dbdata(m_dbproc, 5))
            datetime = *((DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec,
&datetime);

        m_txn.OrderStatus.OL[i].ol_delivery_d.year = daterec.year;
        m_txn.OrderStatus.OL[i].ol_delivery_d.month = daterec.month;
        m_txn.OrderStatus.OL[i].ol_delivery_d.day = daterec.day;
        m_txn.OrderStatus.OL[i].ol_delivery_d.hour = daterec.hour;
        m_txn.OrderStatus.OL[i].ol_delivery_d.minute = daterec.minute;
        m_txn.OrderStatus.OL[i].ol_delivery_d.second = daterec.second;
    }
    i++;
}
m_txn.OrderStatus.o.ol_cnt = i;

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc) != 8)
    ThrowError(CDBLIBERR::eWrongNumCols);

if (pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*(DBINT *) pData);
if (pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
if (pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first, pData,
if (pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle, pData,
if (pData=dbdata(m_dbproc, 5))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.OrderStatus.o_entry_d.year =
        m_txn.OrderStatus.o_entry_d.month =
            m_txn.OrderStatus.o_entry_d.day =
                m_txn.OrderStatus.o_entry_d.hour =
                    m_txn.OrderStatus.o_entry_d.minute =
                        m_txn.OrderStatus.o_entry_d.second =
                            }
```

Appendix A - Application Source Code

```
        if(pData=dbdata(m_dbproc, 6))
            m_txn.OrderStatus.o_carrier_id = (*(DBSMALLINT *)pData);
        if(pData=dbdata(m_dbproc, 7))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
dbdatlen(m_dbproc,7),
                        SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);
        if(pData=dbdata(m_dbproc, 8))
            m_txn.OrderStatus.o_id = (*((DBINT *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (m_txn.OrderStatus.o_o1_cnt == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
        else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.OrderStatus.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
(e->m_msgno == iErrOleDbProvider &&
strtr(e->m_msgtext, sErrTimeoutExpired) != NULL)) &&
period
{
            // hit deadlock; backoff for increasingly longer
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int                     i;
    int                     iTryCount = 0;
    const BYTE              *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
```

```
        dbrpcinit(m_dbproc, "tpcc_delivery", 0);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *)
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        &m_txn.Delivery.o_carrier_id);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 10)
            ThrowError(CDBLIBERR::eWrongNumCols);

        for (i=0; i<10; i++)
        {
            if (pData = dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = *((DBINT *)
*pData);
        }

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.Delivery.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
(e->m_msgno == iErrOleDbProvider &&
strtr(e->m_msgtext, sErrTimeoutExpired) != NULL)) &&
period
{
            // hit deadlock; backoff for increasingly longer
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }
}
```

Appendix A - Application Source Code

```
if (m_SqlErr != NULL)
{
    delete m_SqlErr;
    m_SqlErr = (CSQLERR*)NULL;
}
return;
```

db_dblib_dll/src/tpcc_dblib.h

```
/*      FILE:          TPCC_DBLIB.H
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*      PURPOSE: Header file for TPC-C txn class implementation.
*
*      Change history:
*          4.20.000 - updated rev number to match kit
*/
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };
    ~CSQLERR()
    {
        delete [] m_msgtext;
    };
    int           m_msgno;
    int           m_msgstate;
    int           m_severity;
    char  *m_msgtext;
    int ErrorType() {return ERR_TYPE_SQL;};

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
```

```
int ErrorNum() {return m_msgno;};
char *ErrorText() {return m_msgtext;};

};

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin,
        // error from
        dblogin
        eDbOpen, // error from dbopen
        eDbUse, // error from dbuse
        eDbSqlExec, // error from
        dbsqlexec
        eDbSet, // error from one
        of the dbset* routines
        eDbNextRow, // error from
        dbnextrow
        eWrongRowCount, // more or less rows returned
        than expected
        eWrongNumCols, // more or less columns
        returned than expected
        eDbResults, // error from
        dbresults
        eDbRpcExec, // error from
        dbrpcexec
        eDbSetMaxProcs, // error from dbsetmaxprocs
        eDbProcHandler // error from either
        dbprocerrhandle or dbprocmsghandle
    };

    CDBLIBERR(ACTION eAction, int severity = 0, int dberror = 0, int
oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    };

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    };

    ACTION   m_eAction;
    int           m_severity;
    int           m_dberror;
    int           m_oserr;
    char  *m_dberrstr;
    char  *m_oserrstr;

    int ErrorType() {return ERR_TYPE_DBLIB;};
    int ErrorNum() {return m_dberror;};
    char *ErrorText() {return m_dberrstr;};
```

Appendix A - Application Source Code

```
};

class CTPCC_DBLIB_ERR : public CBaseErr
{
    public:
        enum CTPCC_DBLIB_ERRS
        {
            ERR_WRONG_SP_VERSION = 1,      // "Wrong version of stored
procs on database server"
            ERR_INVALID_CUST,             // "Invalid
Customer id.name."
            ERR_NO SUCH ORDER             // "No orders found
for customer."
        };

        CTPCC_DBLIB_ERR( int iErr ) { m_errno = iErr; };

        int           m_errno;

        int ErrorType() { return ERR_TYPE_TPPCC_DBLIB; };
        int ErrorNum() { return m_errno; };

        char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
    private:
        // declare variables and private functions here...
        PDBPROCESS          m_dbproc;
        CDBLIBERR *m_DbLibErr;           // not allocated until needed
(maybe never)
        CSQLERR             *m_SqlErr;           // not
allocated until needed (maybe never)
        int                 m_MaxRetries;         // retry
count on deadlock

        void DiscardNextRows(int iExpectedCount);
        void DiscardNextResults(int iExpectedCount);
        void ThrowError( CDBLIBERR::ACTION eAction );
        void ResetError();

        union
        {
            NEW_ORDER_DATA           NewOrder;
            PAYMENT_DATA              Payment;
            DELIVERY_DATA              Delivery;
            STOCK_LEVEL_DATA          StockLevel;
            ORDER_STATUS_DATA          OrderStatus;
            m_txn;
        };

    public:
        CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR
szHost, LPCSTR szDatabase);
        ~CTPCC_DBLIB(void);

        inline PNEW_ORDER_DATA      BuffAddr_NewOrder()
        { return &m_txn.NewOrder; };
        inline PPAYMENT DATA        BuffAddr_Payment()
        { return &m_txn.Payment; };
        inline PDELIVERY DATA       BuffAddr_Delivery()
        { return &m_txn.Delivery; };

```

```
        inline PSTOCK_LEVEL_DATA     BuffAddr_StockLevel()
        { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA    BuffAddr_OrderStatus()
        { return
&m_txn.OrderStatus; };

        void NewOrder                ();
        void Payment                 ();
        void Delivery                ();
        void StockLevel              ();
        void OrderStatus              ();

        // these are public because they must be called from the dblib
err_handler and msg_handler
        // outside of the class
        void SetDbLibError(int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr);
        void SetSqlError( int msgno, int msgstate, int severity, LPCSTR
msgtext );

};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost, LPCSTR
szDatabase );

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCSTR);

tm_com_dll/src/tpcc_com.cpp

/*
 *      FILE:          TPCC_COM.CPP
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not yet audited
 *
 *      PURPOSE:  Source file for TPC-C COM+ class implementation.
 *      Contact: Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *      4.20.000 - first version
 */

// needed for CoinitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"           //tpckit transaction header contains
definations of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"

```

Appendix A - Application Source Code

```
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray = SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray->pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL, COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC, NULL, CLSCTX_SERVER, IID_ITPCC,
(void**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for each txn

        hr = CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER, IID_ITPCC,
(void**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER, IID_ITPCC,
(void**)&m_pPayment);
```

```
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_StockLevel, NULL, CLSCTX_SERVER,
IID_ITPCC, (void**)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_OrderStatus, NULL, CLSCTX_SERVER,
IID_ITPCC, (void**)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // call setcomplete to release each component back into pool
        hr = m_pNewOrder->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        if (!m_bSinglePool)
        {
            hr = m_pPayment->CallSetComplete();
            if (FAILED(hr))
                throw new CCOMERR(hr);

            hr = m_pStockLevel->CallSetComplete();
            if (FAILED(hr))
                throw new CCOMERR(hr);

            hr = m_pOrderStatus->CallSetComplete();
            if (FAILED(hr))
                throw new CCOMERR(hr);
        }
    }

    CTPCC_COM::~CTPCC_COM()
    {
        if (m_pTxn)
            SafeArrayDestroy(m_vTxn.parray);

        ReleaseInterface(m_pNewOrder);
        if (!m_bSinglePool)
        {
            ReleaseInterface(m_pPayment);
            ReleaseInterface(m_pStockLevel);
            ReleaseInterface(m_pOrderStatus);
        }
        CoUninitialize();
    }

    void CTPCC_COM::NewOrder()
    {
        VARIANT vTxn_out;

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn, &vTxn_out);
        if (FAILED(hr))
            throw new CCOMERR( hr );
        memcpy(m_pTxn, (void*)vTxn_out.parray->pvData, vTxn_out.parray-
>rgsabound[0].cElements);
        SafeArrayDestroy(vTxn_out.parray);

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
```

Appendix A - Application Source Code

```
}

void CTPCC_COM::Payment()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pStockLevel->StockLevel(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus->OrderStatus(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}
```

tm_com_dll/src/tpcc_com.h

```
/*
 *      FILE:          TPCC_COM.H
 *                      Microsoft TPC-C Kit Ver. 4.20.000
 *                      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *                      not yet audited
 *
 *      PURPOSE: Header file for TPC-C COM+ class implementation.
 *
 *      Change history:
 */
```

```
*
*          4.20.000 - first version
*/
#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to impersonate a non-COM error type
    CCOMERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can impersonate another class, which happens if
    // the error
    // back via COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_COM;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf( m_szErrorText, "Error: Class %d, error # %d", m_iErrorType, m_iError );
        else
            sprintf( m_szErrorText, "Error: COM HRESULT %x", m_hr );
        return m_szErrorText;
    }
}
```

Appendix A - Application Source Code

```
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } u;
    } *m_pTxn;

    VARIANT m_vTxn;
public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA BuffAddr_NewOrder()
    { return &m_pTxn->u.NewOrder; }
    inline PPAYMENT_DATA BuffAddr_Payment()
    { return &m_pTxn->u.Payment; }
    inline PDELIVERY_DATA BuffAddr_Delivery()
    { return &m_pTxn->u.Delivery; }
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; }
    inline PORDER_STATUS_DATA BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; }

    void NewOrder();
    void Payment();
    void StockLevel();
    void OrderStatus();
    void Delivery() { throw new CCOMERR(E_NOTIMPL); }

// not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}
```

```
// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);
```

tpcc_com_all/src/methods.h

```
/*
 *      FILE:          METHODS.H
 *                      Microsoft TPC-C Kit Ver. 4.20.000
 *                      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not yet audited
 *
 *      PURPOSE: Header file for COM components.
 *
 *      Change history:
 *                      4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD
dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy(m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    }

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail != NULL)
            delete [] m_szTextDetail;
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    }

    COMPONENT_ERROR m_Error;
```

Appendix A - Application Source Code

```
char *m_szTextDetail;
char *m_szErrorText;
DWORD m_SystemErr;

int Errortype() { return ERR_TYPE_COMPONENT; }
int ErrorNum() { return m_Error; }
char *ErrorText();

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
    public ITPCC,
    public IOBJECTCONTROL,
    public IOBJECTCONSTRUCT,
    public CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IOBJECTCONTROL)
    COM_INTERFACE_ENTRY(IOBJECTCONSTRUCT)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(           VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(            VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel(         VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(        VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IOBJECTCONTROL
    STDMETHODIMP_(BOOL) CanBePooled() { return m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; } // we don't support COM Services transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }

// IOBJECTCONSTRUCT
    STDMETHODIMP Construct(IDispatch * pUnk);

    // helper methods
private:
    BOOL m_bCanBePooled;
    CTPCC_BASE *m_pTxn;

    struct COM_DATA
    {
        int retval;
        int error;
        union
        {
            NEW_ORDER_DATA
            NewOrder;
        };
    };
}
```

```
PAYMENT_DATA Payment;
DELIVERY_DATA Delivery;
STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;

} u;
};

////////////////////////////////////////////////////////////////
// CTPCC
class CTPCC :
    public CTPCC_Common,
    public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

};

////////////////////////////////////////////////////////////////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder, &CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    // HRESULT __stdcall NewOrder(           VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    // HRESULT __stdcall Payment(            VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    // HRESULT __stdcall StockLevel(         VARIANT txn_in, VARIANT* txn_out) (return E_NOTIMPL;)
    // HRESULT __stdcall OrderStatus(        VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;};

    // COrderStatus
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus, &CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
```

Appendix A - Application Source Code

```
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall Payment(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
//    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};

///////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment, &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
//    HRESULT __stdcall Payment(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};

///////////////////////////////
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel, &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
```

```
    HRESULT __stdcall Payment(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
//    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};
```

tpcc_com_all/src/resource.h

```
//{{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc_com_all.rc
//
#define IDS_PROJNAME           100
#define IDR_TPCC               101
#define IDR_NEWORDER            102
#define IDR_ORDERSTATUS         103
#define IDR_PAYMENT              104
#define IDR_STOCKLEVEL           105

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE   202
#define _APS_NEXT_COMMAND_VALUE   32768
#define _APS_NEXT_CONTROL_VALUE   201
#define _APS_NEXT_SYMED_VALUE     106
#endif
#endif
```

tpcc_com_all/src/tpcc_com_all.cpp

```
/*
 *      FILE:          TPCC_COM_ALL.CPP
 *                      Microsoft TPC-C Kit Ver. 4.20.000
 *                      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
 *      Performance Metrics, 3/17/99
 *
 *      PURPOSE: Implementation for TPC-C Tuxedo class.
 *      Contact: Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *      4.20.000 - updated rev number to match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADS

#include <stdio.h>
```

Appendix A - Application Source Code

```
#include <atlbase.h>
//You may derive a class from CComModule and use it if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>
#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\common\src\trans.h" //tpckit
transaction header contains definitions of structures specific to TPC-C
#include "..\common\src\txn_base.h"
#include "..\common\src\error.h"
#include "..\common\src\ReadRegistry.h"
#include "..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB implementation of
TPC-C txns
#include "..\db_odbc_dll\src\tpcc_odbc.h" // ODBC implementation of
TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus, COrderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];
```

```
try
{
    if (dwReason == DLL_PROCESS_ATTACH)
    {
        _Module.Init(ObjectMap, hInstance);
        DisableThreadLibraryCalls(hInstance);

        DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
        GetComputerName(szMyComputerName, &dwSize);
        szMyComputerName[dwSize] = 0;

        if ( ReadTFCRegistrySettings( &Reg ) )
            throw new CCOMPONENT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        if (Reg.eDB_Protocol == DBLIB)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_dblib.dll" );
            hLibInstanceDb = LoadLibrary( szDllName );
            if (hLibInstanceDb == NULL)
                throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
            // get function pointer to wrapper for class
            constructor
            pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
            if (pCTPCC_DBLIB_new == NULL)
                throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
            else if (Reg.eDB_Protocol == ODBC)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName, "tpcc_odbc.dll" );
                hLibInstanceDb = LoadLibrary( szDllName );
                if (hLibInstanceDb == NULL)
                    throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
                // get function pointer to wrapper for class
                constructor
                pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");
                if (pCTPCC_ODBC_new == NULL)
                    throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                else
                    throw new CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL
);
            }
            else if (dwReason == DLL_PROCESS_DETACH)
                _Module.Term();
        }
        catch (CBaseErr *e)
        {
            WriteMessageToEventLog(e->ErrorText());
            delete e;
            return FALSE;
        }
    }
}
```

Appendix A - Application Source Code

```
        catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception in object
DllMain"));
        return FALSE;
    }

    return TRUE;           // OK
}

// Used to determine whether the DLL can be unloaded by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK : S_FALSE;
}

// Returns a class factory to create an object of the requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid, ppv);
}

// DllRegisterServer - Adds entries to the system registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

// DllUnregisterServer - Removes entries from the system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("tpcc_com_all.dll"));

    _stprintf(szMsg, TEXT("Error in COM+ TPC-C Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
                    EVENTLOG_ERROR_TYPE, // event type

```

```
                    0,           // event category
                    0,           // event ID
                    NULL,        // current user's SID
                    2,           // strings in lpszStrings
                    0,           // no bytes of raw data
                    (LPCWSTR *)lpszStrings, // array of error strings
                    NULL);      // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
 */
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES, "Required entries missing
from registry." },
        { ERR_LOADDLL_FAILED, "Load of DLL
failed. DLL=%s" },
        { ERR_GETPROCAADDR_FAILED, "Could not map proc in DLL.
GetProcAddress error. DLL=%s" },
        { ERR_UNKNOWN_DB_PROTOCOL,
            "Unknown database protocol
specified in registry." },
        { 0, "" }
    };

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown error number." );
            break;
        }
        if (m_Error == errorMsgs[i].iError)
        {
            strcpy( szTmp, errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)

```

Appendix A - Application Source Code

```
    wsprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn)
        delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext( IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

// called by the ctor activator
// STDMETHODIMP CTPCC_Common::Construct(IDispatch * pUnk)
{
    // Code to access construction string, if needed later...
    //     if (!pUnk)
    //         return E_UNEXPECTED;
    //     IObjectConstructString * pString = NULL;
    //     HRESULT hr = pUnk->QueryInterface(IID_IObjectConstructString, (void
    **)&pString);
    //     pString->Release();

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            m_pTxn = pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol == DBLIB)
            m_pTxn = pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e->ErrorText());
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
    }
}
```

```
    ::Construct"));
    return E_FAIL;
}

return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in, VARIANT* txn_out)
{
    PNEW_ORDER_DATA      pNewOrder;
    COM_DATA              *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pNewOrder = m_pTxn->BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData->u.NewOrder, sizeof(NEW_ORDER_DATA));

        m_pTxn->NewOrder();                                // do the actual txn

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector(VT_UI1,
                                                txin.parray-
                                                >rgsabound->cElements,
                                                txin.parray-
                                                >rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;

        memcpy( &pData->u.NewOrder, pNewOrder, sizeof(NEW_ORDER_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() ==
10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in, VARIANT* txn_out)
{
    PPAYMENT_DATA          pPayment;
```

Appendix A - Application Source Code

```
COM_DATA *pData;
try
{
    pData = (COM_DATA*)txn_in.parray->pvData;
    pPayment = m_pTxn->BuffAddr_Payment();

    memcpy(pPayment, &pData->u.Payment, sizeof(PAYMENT_DATA));

    m_pTxn->Payment(); // do the actual txn

    VariantInit(txn_out);
    txn_out->vt = VT_SAFEARRAY;
    txn_out->parray = SafeArrayCreateVector( VT_UI1,
                                             txin.parray-
>rgsabound->cElements,
                                             txin.parray-
>rgsabound->cElements);
    pData = (COM_DATA*) txn_out->parray->pvData;

    memcpy( &pData->u.Payment, pPayment, sizeof(PAYMENT_DATA));

    pData->retval = ERR_SUCCESS;
    pData->error = 0;
    return S_OK;
}
catch (CBaseErr *e)
{
    // check for lost database connection; if yes, component is toast
    if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;

    pData->retval = e->ErrorType();
    pData->error = e->ErrorNum();
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception."));
    pData->retval = ERR_TYPE_LOGIC;
    pData->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in, VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA *pData;

    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pStockLevel = m_pTxn->BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData->u.StockLevel, sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();
    }
    catch (CBaseErr *e)
    {
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
                                               txin.parray-
>rgsabound->cElements,
                                               txin.parray-
>rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;

        memcpy( &pData->u.StockLevel, pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in, VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pOrderStatus = m_pTxn->BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData->u.OrderStatus,
               sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
                                               txin.parray-
>rgsabound->cElements,
                                               txin.parray-
>rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;
    }
}
```

Appendix A - Application Source Code

```
    memcpy( &pData->u.OrderStatus, pOrderStatus,
sizeof(ORDER_STATUS_DATA));

    pData->retval = ERR_SUCCESS;
    pData->error = 0;
    return S_OK;
}
catch (CBaseErr *e)
{
    // check for lost database connection; if yes, component is toast
    if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;

    pData->retval = e->ErrorType();
    pData->error = e->ErrorNum();
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception."));
    pData->retval = ERR_TYPE_LOGIC;
    pData->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}
```

tpcc_com_all/src/tpcc_com_all.def

```
; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow    @1 PRIVATE
    DllGetClassObject   @2 PRIVATE
    DllRegisterServer   @3 PRIVATE
    DllUnregisterServer @4 PRIVATE
```

tpcc_com_all/src/tpcc_com_all.h

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:18 2000
```

```
/*
 * Compiler settings for .\src\tpcc_com_all.idl:
 * Oicf (OptLevel=2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
 * error checks: allocation ref bounds_check enum stub_data
 * VC __declspec() decoration level:
 *     __declspec(uuid()), __declspec(selectany), __declspec(novtable)
 * DECLSPEC_UUID(), MIDL_INTERFACE()
 */
//@@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__
#endif

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#ifndef __TPCC_FWD_DEFINED__
#endif

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__
#endif

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#ifndef __NewOrder_FWD_DEFINED__
#endif

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__
#endif

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#ifndef __OrderStatus_FWD_DEFINED__
#endif

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

```

Appendix A - Application Source Code

```
#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifndef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;
#ifdef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;
#ifdef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;
#ifdef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;
#ifdef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;
#endif
#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif
```

tpcc_com_all/src/tpcc_com_all.idl

```
/*
 *      FILE:          TPCC.IDL
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not yet audited
 *
 *      PURPOSE: IDL source for TPCC.dll. This file is processed by the MIDL tool to
 *      produce the type library (TPCC.tlb) and
 *      marshalling code.
 *
```

Appendix A - Application Source Code

```
* Change history:  
* 4.20.000 - first version  
*/  
  
interface TPCC;  
interface NewOrder;  
interface OrderStatus;  
interface Payment;  
interface StockLevel;  
  
import "oaidl.idl";  
import "ocidl.idl";  
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";  
  
[  
    uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),  
    version(1.0),  
    helpstring("TPC-C 1.0 Type Library")  
]  
library TPCCLib  
{  
    importlib("stdole32.tlb");  
    importlib("stdole2.tlb");  
  
    [  
        uuid(122A3128-2520-11D3-BA71-00C04FBFE08B),  
        helpstring("All Txns Class")  
    ]  
    coclass TPCC  
    {  
        [default] interface ITPCC;  
    };  
  
    [  
        uuid(975BAA8F-84A7-11D2-BA47-00C04FBFE08B),  
        helpstring("NewOrder Class")  
    ]  
    coclass NewOrder  
    {  
        [default] interface ITPCC;  
    };  
  
    [  
        uuid(266836AD-A50D-11D2-BA4E-00C04FBFE08B),  
        helpstring("OrderStatus Class")  
    ]  
    coclass OrderStatus  
    {  
        [default] interface ITPCC;  
    };  
  
    [  
        uuid(CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B),  
        helpstring("Payment Class")  
    ]  
    coclass Payment  
    {  
        [default] interface ITPCC;  
    };
```

```
[  
    uuid(2668369E-A50D-11D2-BA4E-00C04FBFE08B),  
    helpstring("StockLevel Class")  
]  
coclass StockLevel  
{  
    [default] interface ITPCC;  
};  
};
```

tpcc_com_all/src/tpcc_com_all.rc

```
//Microsoft Developer Studio generated resource script.  
//  
#include "resource.h"  
  
#define APSTUDIO_READONLY_SYMBOLS  
/////////////////////////////////////////////////////////////////////////  
//  
// Generated from the TEXTINCLUDE 2 resource.  
//  
#include "winres.h"  
/////////////////////////////////////////////////////////////////////////  
#undef APSTUDIO_READONLY_SYMBOLS  
/////////////////////////////////////////////////////////////////////////  
// English (U.S.) resources  
  
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)  
#ifdef _WIN32  
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US  
#pragma code_page(1252)  
#endif // _WIN32  
  
#ifdef APSTUDIO_INVOKED  
/////////////////////////////////////////////////////////////////////////  
//  
// TEXTINCLUDE  
//  
  
1 TEXTINCLUDE DISCARDABLE  
BEGIN  
    "resource.h\0"  
END  
  
2 TEXTINCLUDE DISCARDABLE  
BEGIN  
    "#include ""winres.h""\r\n"  
    "\0"  
END  
  
3 TEXTINCLUDE DISCARDABLE  
BEGIN  
    "1 TYPELIB ""tpcc_com_all.tlb""\r\n"  
    "\0"
```

Appendix A - Application Source Code

```
END

#endif // APSTUDIO_INVOKED

#ifndef _MAC
////////// Version
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3FL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904B0"
BEGIN
VALUE "CompanyName", "\0"
VALUE "FileDescription", "tpcc_com_all Module\0"
VALUE "FileVersion", "1, 0, 0, 1\0"
VALUE "InternalName", "TPCCNEWORDER\0"
VALUE "LegalCopyright", "Copyright 1997\0"
VALUE "OriginalFilename", "tpcc_com_all.DLL\0"
VALUE "ProductName", "tpcc_com_all_Module\0"
VALUE "ProductVersion", "1, 0, 0, 1\0"
VALUE "OLESelfRegister", "\0"
END
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
END
#endif // !_MAC

////////// Registry
// Registry
//


IDR_TPCC      REGISTRY DISCARDABLE    "tpcc_com_all.rgs"
IDR_NEWORDER  REGISTRY DISCARDABLE    "tpcc_com_no.rgs"
IDR_ORDERSTATUS REGISTRY DISCARDABLE  "tpcc_com_os.rgs"
IDR_PAYMENT   REGISTRY DISCARDABLE    "tpcc_com_pay.rgs"
IDR_STOCKLEVEL REGISTRY DISCARDABLE   "tpcc_com_si.rgs"

// String Table
//
```

```
STRINGTABLE DISCARDABLE
BEGIN
IDS_PROJNAME          "tpcc_com_all"

#endif // English (U.S.) resources
////////// Generated from the TEXTINCLUDE 3 resource.
//
1 TYPELIB "tpcc_com_all.tlb"

#endif // not APSTUDIO_INVOKED
```

tpcc_com_all/src/tpcc_com_all.rgs

```
HKCR
{
    TPCC.AllTxns.1 = s 'All Txns Class'
    {
        CLSID = s '{122A3128-2520-11D3-BA71-00C04FBFE08B}'
    }
    TPCC.AllTxns = s 'TPCC Class'
    {
        CurVer = s 'TPCC.AllTxns.1'
    }
    NoRemove CLSID
    {
        ForceRemove {122A3128-2520-11D3-BA71-00C04FBFE08B} = s 'TPCC Class'
        {
            ProgID = s 'TPCC.AllTxns.1'
            VersionIndependentProgID = s 'TPCC.AllTxns'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}
```

tpcc_com_all/src/tpcc_com_all_i.c

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */
```

Appendix A - Application Source Code

```
/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */
/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:18 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#ifndef _M_IA64_ && !_defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpndr.h>

#ifndef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct __IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif // !_MIDL_USE_GUIDDEF_


#endif // !_MIDL_USE_GUIDDEF_


#endif // !_MIDL_USE_GUIDDEF_


#endif // !_MIDL_USE_GUIDDEF_


#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#endif // !_MIDL_USE_GUIDDEF_


#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID(IID,
/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:18 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>

#endif // !_MIDL_USE_GUIDDEF_
```

Appendix A - Application Source Code

```
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef !_MIDL_USE_GUIDDEF_
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#ifndef !_MIDL_USE_GUIDDEF_
MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);
```

```
#undef MIDL_DEFINE_GUID

#ifndef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */
```

tpcc_com_all/src/tpcc_com_no.rgs

```
HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-BA47-00C04FBFE08B}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975BAABF-84A7-11D2-BA47-00C04FBFE08B} = s 'NewOrder
Class'
    }
    {
        ProgID = s 'TPCC.NewOrder.1'
        VersionIndependentProgID = s 'TPCC.NewOrder'
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s 'Both'
        }
    }
}
```

tpcc_com_all/src/tpcc_com_os.rgs

```
HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
        CLSID = s '{266836AD-A50D-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {
        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
```

Appendix A - Application Source Code

```
Class'          ForceRemove {266836AD-A50D-11D2-BA4E-00C04FBFE08B} = s 'OrderStatus
{
    ProgID = s 'TPCC.OrderStatus.1'
    VersionIndependentProgID = s 'TPCC.OrderStatus'
    InprocServer32 = s '%MODULE%'
    {
        val ThreadingModel = s 'Both'
    }
}
}
```

tpcc_com_all/src/tpcc_com_pay.rgs

```
HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B} = s 'Payment
Class'
        {
            ProgID = s 'TPCC.Payment.1'
            VersionIndependentProgID = s 'TPCC.Payment'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}
```

tpcc_com_all/src/tpcc_com_ps.h

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
```

```
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADING( )

/* verify that the <rpcnldr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcnldr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcnldr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef _tpcc_com_ps_h_
#define _tpcc_com_ps_h_

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */
```

```
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;
```

Appendix A - Application Source Code

```
#if defined(__cplusplus) && !defined(CINTERFACE)
MIDL_INTERFACE("FEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall CallSetComplete( void ) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )( 
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )( 
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *NewOrder )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    END_INTERFACE
} ITPCCVtbl;
#endif /* COBJMACROS */

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lVtbl->AddRef(This)

#define ITPCC_Release(This) \
    (This)->lVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lVtbl->Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lVtbl->Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lVtbl->StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lVtbl->OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lVtbl->CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
```

Appendix A - Application Source Code

```
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER VARIANT_UserSize( unsigned long __RPC_FAR *,
unsigned long , VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserMarshal( unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserUnmarshal(unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long __RPC_FAR *,
VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif
#endif
```

[tpcc_com_all/src/tpcc_com_si.rgs](#)

```
HKCR
{
    TPCC.StockLevel.1 = s 'StockLevel Class'
    {
        CLSID = s '(2668369E-A50D-11D2-BA4E-00C04FBFE08B)'
    }
    TPCC.StockLevel = s 'StockLevel Class'
    {
        CurVer = s 'TPCC.StockLevel.1'
    }
    NoRemove CLSID
    {
        ForceRemove {2668369E-A50D-11D2-BA4E-00C04FBFE08B} = s 'StockLevel
Class'
        {
            ProgID = s 'TPCC.StockLevel.1'
            VersionIndependentProgID = s 'TPCC.StockLevel'
            InprocServer32 = s '%MODULE%'
        }
    }
}
```

Appendix A - Application Source Code

```
        val ThreadingModel = s 'Both'  
    }  
}  
}
```

tpcc_com_ps/src/dlldata.c

```
*****  
DllData file -- generated by MIDL compiler  
  
DO NOT ALTER THIS FILE  
  
This file is regenerated by MIDL on every IDL file compile.  
  
To completely reconstruct this file, delete it and rerun MIDL  
on all the IDL files in this DLL, specifying this file for the  
/dlldata command line option  
*****  
  
#include <rpcproxy.h>  
  
#ifdef __cplusplus  
extern "C" {  
#endif  
  
EXTERN_PROXY_FILE( tpcc_com_ps )  
  
PROXYFILE_LIST_START  
/* Start of list */  
REFERENCE_PROXY_FILE( tpcc_com_ps ),  
/* End of list */  
PROXYFILE_LIST_END  
  
DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )  
  
#ifdef __cplusplus  
} /*extern "C" */  
#endif  
  
/* end of generated dlldata file */
```

tpcc_com_ps/src/tpcc_com_ps.def

```
LIBRARY      "tpcc_com_ps"  
  
DESCRIPTION  'Proxy/Stub DLL'  
  
EXPORTS  
        DllGetClassObject     @1     PRIVATE
```

DllCanUnloadNow	@2	PRIVATE
GetProxyDllInfo	@3	PRIVATE
DllRegisterServer	@4	PRIVATE
DllUnregisterServer	@5	PRIVATE

tpcc_com_ps/src/tpcc_com_ps.h

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */  
  
/* this ALWAYS GENERATED file contains the definitions for the interfaces */  
  
/* File created by MIDL compiler version 5.03.0280 */  
/* at Sat Apr 08 16:40:10 2000 */  
/* Compiler settings for .\src\tpcc_com_ps.idl:  
Oicf (OptLevel=2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext  
error checks: allocation ref bounds_check enum stub_data  
VC __declspec() decoration level:  
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)  
    DECLSPEC_UUID(), MIDL_INTERFACE()  
*/  
//@@@MIDL_FILE_HEADING( )  
  
/* verify that the <rpcndr.h> version is high enough to compile this file*/  
#ifndef __REQUIRED_RPCNDR_H_VERSION__  
#define __REQUIRED_RPCNDR_H_VERSION__ 440  
#endif  
  
#include "rpc.h"  
#include "rpcndr.h"  
  
#ifndef __RPCNDR_H_VERSION__  
#error this stub requires an updated version of <rpcndr.h>  
#endif // __RPCNDR_H_VERSION__  
  
#ifndef COM_NO_WINDOWS_H  
#include "windows.h"  
#include "ole2.h"  
#endif /*COM_NO_WINDOWS_H*/  
  
#ifndef __tpcc_com_ps_h__  
#define __tpcc_com_ps_h__  
  
/* Forward Declarations */  
  
#ifndef __ITPCC_FWD_DEFINED__  
#define __ITPCC_FWD_DEFINED__  
typedef interface ITPCC ITPCC;  
#endif /* __ITPCC_FWD_DEFINED__ */  
  
/* header files for imported files */  
#include "oaidl.h"  
#include "ocidl.h"
```

Appendix A - Application Source Code

```
#ifdef __cplusplus
extern "C"
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
    ITPCC : public IUnknown
    {
        public:
            virtual HRESULT __stdcall NewOrder(
                /* [in] */ VARIANT txn_in,
                /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

            virtual HRESULT __stdcall Payment(
                /* [in] */ VARIANT txn_in,
                /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

            virtual HRESULT __stdcall Delivery(
                /* [in] */ VARIANT txn_in,
                /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

            virtual HRESULT __stdcall StockLevel(
                /* [in] */ VARIANT txn_in,
                /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

            virtual HRESULT __stdcall OrderStatus(
                /* [in] */ VARIANT txn_in,
                /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

            virtual HRESULT __stdcall CallSetComplete( void ) = 0;
    };

#else /* C style interface */

    typedef struct ITPCCVtbl
    {
        BEGIN_INTERFACE

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )( This, riid,ppvObject );
        ITPCC __RPC_FAR * This;
    };

```

```
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

        ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )( ITPCC __RPC_FAR * This);
        ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )( ITPCC __RPC_FAR * This);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *NewOrder )( ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *Payment )( ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *Delivery )( ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *StockLevel )( ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *OrderStatus )( ITPCC __RPC_FAR * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT __RPC_FAR *txn_out);

        HRESULT ( STDMETHODCALLTYPE __stdcall __RPC_FAR *CallSetComplete )( ITPCC __RPC_FAR * This);
    };

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#endif /* COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl -> QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl -> NewOrder(This,txn_in,txn_out)
```

Appendix A - Application Source Code

```
#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lpVtbl -> Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#ifndef __RPC_INTERFACE_DEFINED__
/* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * _pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

#endif /* __RPC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER VARIANT_UserSize( unsigned long __RPC_FAR *,
                                             VARIANT __RPC_FAR * );
unsigned long __RPC_FAR * __RPC_USER VARIANT_UserMarshal( unsigned long __RPC_FAR *,
                                                       VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserUnmarshal(unsigned long __RPC_FAR *,
                                                       VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long __RPC_FAR *,
                                   VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif
```

Appendix A - Application Source Code

tpcc_com_ps/src/tpcc_com_ps.idl

```
/*
 * FILE:           ITPCC.IDL
 *                 Microsoft TPC-C Kit Ver. 4.20.000
 *                 Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 * not yet audited
 *
 * PURPOSE: Defines the interface used by TPCC. This interface can be implemented
 * by C++ components.
 *
 * Change history:
 *   4.20.000 - first version
 */
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT _stdcall NewOrder
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        );

    HRESULT _stdcall Payment
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        );

    HRESULT _stdcall Delivery
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        );

    HRESULT _stdcall StockLevel
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        );

    HRESULT _stdcall OrderStatus
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        );
}
```

```
HRESULT _stdcall CallSetComplete
(
);

}; // interface ITPCC
```

tpcc_com_ps/src/tpcc_com_ps_i.c

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oifc (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#ifndef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcoldr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif
#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)
#else // !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__

```

Appendix A - Application Source Code

```
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif !__MIDL_USE_GUIDDEF__

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
   error checks: allocation ref bounds _check enum stub _data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>

#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif !__MIDL_USE_GUIDDEF__

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */
```

tpcc_com_ps/src/tpcc_com_ps_p.c

Appendix A - Application Source Code

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=12), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef __REDO_RPCPROXY_H_VERSION
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 997
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
   GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
   GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
   GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) __ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */ ,
};

const CInterfaceStubVtbl __ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
```

Appendix A - Application Source Code

```

{
    0,
    {

        /* Procedure NewOrder */

        /* FC_AUTO_HANDLE */
        /* Old Flags: object, Oi2 */

/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#endif
#endif
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#ifndef
#ifndef
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
#endif
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */
          /* 3 */
          /* 3 */

        /* Parameter txn_in */

/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#endif
#endif
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#ifndef
#ifndef
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
#endif
#endif
/* 20 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#endif
#endif
NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#ifndef
#ifndef
NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
#endif
#endif
#endif

```

Appendix A - Application Source Code

```
/* 26 */ NdrFcShort( 0x3da ),           /* Type Offset=986 */

        /* Return value */

/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
        NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 32 */ 0x8,
        /* FC_LONG */
0x0,             /* 0 */

/* Procedure Payment */

/* 34 */ 0x33,          /* FC_AUTO_HANDLE */
0x6c,             /* Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
        NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7,
        /* Oi2 Flags: srv must size, clt must size, has return, */
0x3,             /* 3 */

/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
        NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
```

```
/* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ),           /* Flags: must size, must free, out, simple ref,
srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
        NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ),           /* Type Offset=986 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
        NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 66 */ 0x8,
        /* FC_LONG */
0x0,             /* 0 */

/* Procedure Delivery */

/* 68 */ 0x33,          /* FC_AUTO_HANDLE */
0x6c,             /* Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
        NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#endif
#ifndef _PPC_
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#ifndef _ALPHA_
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7,
        /* Oi2 Flags: srv must size, clt must size, has return, */
0x3,             /* 3 */

/* Parameter txn_in */
```

Appendix A - Application Source Code

```
/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#endif
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#endif
NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3d ), /* Type Offset=968 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#endif
NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 100 */ 0x8,
/* FC_LONG */
0x0, /* 0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
```

```
#if !defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#ifndef _PPC_
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */
0x3, /* 3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#endif
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#endif
NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3d ), /* Type Offset=968 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#endif

```

Appendix A - Application Source Code

```
#else
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#else
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 134 */ 0x8,
    /* FC_LONG */
    0x0,           /* 0 */

    /* Procedure OrderStatus */

/* 136 */ 0x33,
    /* FC_AUTO_HANDLE */
    0x6c,           /* Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
    NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7,
    /* Oi2 Flags: srv must size, clt must size, has return, */
    0x3,           /* 3 */

    /* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
    NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
    NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#ifndef _ALPHA_
    NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 156 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

    /* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple ref,
svr alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
    NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#endif
#endif
```

```
#endif
#endif
/* 162 */ NdrFcShort( 0x3da ), /* Type Offset=986 */
    /* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
    NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#endif
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#ifndef _ALPHA_
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 168 */ 0x8,
    /* FC_LONG */
    0x0,           /* 0 */

    /* Procedure CallSetComplete */

/* 170 */ 0x33,
    /* FC_AUTO_HANDLE */
    0x6c,           /* Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
#ifndef _ALPHA_
/* 178 */ NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset = 8 */
#else
    NdrFcShort( 0x10 ), /* Alpha Stack size/offset = 16 */
#endif
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4,
    /* Oi2 Flags: has return, */
    0x1,           /* 1 */

    /* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 188 */ NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset = 4 */
#else
    NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 190 */ 0x8,
    /* FC_LONG */
    0x0,           /* 0 */

    }
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* 0 */
        /* 2 */
    }
};
```

Appendix A - Application Source Code

```
/* 4 */ NdrFcShort( 0x3b0 ), /* Offset= 944 (948) */
/* 6 */
0xb2, /* FC_NON_ENCAPSULATED_UNION */
0x9, /* FC ULONG */
/* 8 */ 0x7, /* Corr desc: FC USHORT */
0x0, /* */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2b ), /* 43 */
/* 18 */ NdrFcLong( 0x3 ), /* 3 */
/* 22 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 24 */ NdrFcLong( 0x11 ), /* 17 */
/* 28 */ NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 30 */ NdrFcLong( 0x2 ), /* 2 */
/* 34 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 36 */ NdrFcLong( 0x4 ), /* 4 */
/* 40 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 42 */ NdrFcLong( 0x5 ), /* 5 */
/* 46 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 48 */ NdrFcLong( 0xb ), /* 11 */
/* 52 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 54 */ NdrFcLong( 0xa ), /* 10 */
/* 58 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 60 */ NdrFcLong( 0x6 ), /* 6 */
/* 64 */ NdrFcShort( 0xd6 ), /* Offset= 214 (278) */
/* 66 */ NdrFcLong( 0x7 ), /* 7 */
/* 70 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 72 */ NdrFcLong( 0x8 ), /* 8 */
/* 76 */ NdrFcShort( 0xd0 ), /* Offset= 208 (284) */
/* 78 */ NdrFcLong( 0xd ), /* 13 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0x9 ), /* 9 */
/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset= 776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset= 770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset= 768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset= 766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset= 764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset= 762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset= 760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset= 746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 160 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset= 738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (908) */
```

```
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset= 734 (912) */
/* 180 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset= 732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset= 730 (920) */
/* 192 */ NdrFcLong( 0x10 ), /* 16 */
/* 196 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 198 */ NdrFcLong( 0x12 ), /* 18 */
/* 202 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 204 */ NdrFcLong( 0x13 ), /* 19 */
/* 208 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 210 */ NdrFcLong( 0x16 ), /* 22 */
/* 214 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 216 */ NdrFcLong( 0x17 ), /* 23 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 222 */ NdrFcLong( 0xe ), /* 14 */
/* 226 */ NdrFcShort( 0x2be ), /* Offset= 702 (928) */
/* 228 */ NdrFcLong( 0x400e ), /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ), /* Offset= 708 (940) */
/* 234 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ), /* Offset= 706 (944) */
/* 240 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFcShort( 0x280 ), /* Offset= 640 (884) */
/* 246 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFcShort( 0x27e ), /* Offset= 638 (888) */
/* 252 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x278 ), /* Offset= 632 (888) */
/* 258 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFcShort( 0x272 ), /* Offset= 626 (888) */
/* 264 */ NdrFcLong( 0x0 ), /* 0 */
/* 268 */ NdrFcShort( 0x0 ), /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ), /* 1 */
/* 274 */ NdrFcShort( 0x0 ), /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (275) */
/* 278 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 280 */ NdrFcShort( 0x8 ), /* 8 */
/* 282 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 284 */
0x12, 0x0, /* FC_UP */
/* 286 */ NdrFcShort( 0xc ), /* Offset= 12 (298) */
/* 288 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 290 */ NdrFcShort( 0x2 ), /* 2 */
/* 292 */ 0x9, /* Corr desc: FC ULONG */
0x0, /* */
/* 294 */ NdrFcShort( 0xffffc ), /* -4 */
/* 296 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 298 */
0x17, /* FC_CSTRUCT */
0x3, /* 3 */
/* 300 */ NdrFcShort( 0x8 ), /* 8 */
/* 302 */ NdrFcShort( 0xfffffff2 ), /* Offset= -14 (288) */
/* 304 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 306 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 308 */
```

Appendix A - Application Source Code

```

0x2f,          /* FC_IP */
0x5a,          /* FC_CONSTANT_IID */

/* 310 */ NdrFcLong( 0x0 ), /* 0 */
/* 314 */ NdrFcShort( 0x0 ), /* 0 */
/* 316 */ NdrFcShort( 0x0 ), /* 0 */
/* 318 */ 0xc0,           /* 192 */
0x0,           /* 0 */
/* 320 */ 0x0,           /* 0 */
0x0,           /* 0 */
/* 322 */ 0x0,           /* 0 */
0x0,           /* 0 */
/* 324 */ 0x0,           /* 0 */
0x46,          /* 70 */
/* 326 */
0x2f,          /* FC_IP */
0x5a,          /* FC_CONSTANT_IID */
/* 328 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 332 */ NdrFcShort( 0x0 ), /* 0 */
/* 334 */ NdrFcShort( 0x0 ), /* 0 */
/* 336 */ 0xc0,           /* 192 */
0x0,           /* 0 */
/* 338 */ 0x0,           /* 0 */
0x0,           /* 0 */
/* 340 */ 0x0,           /* 0 */
0x0,           /* 0 */
/* 342 */ 0x0,           /* 0 */
0x46,          /* 70 */
/* 344 */
0x12, 0x10,    /* FC_UP [pointer_deref] */
/* 346 */ NdrFcShort( 0x2 ), /* Offset= 2 (348) */
/* 348 */
0x12, 0x0,     /* FC_UP */
/* 350 */ NdrFcShort( 0x1fc ), /* Offset= 508 (858) */
/* 352 */
0x2a,          /* FC_ENCAPSULATED_UNION */
0x49,          /* 73 */
/* 354 */ NdrFcShort( 0x18 ), /* 24 */
/* 356 */ NdrFcShort( 0xa ), /* 10 */
/* 358 */ NdrFcLong( 0x8 ), /* 8 */
/* 362 */ NdrFcShort( 0x58 ), /* Offset= 88 (450) */
/* 364 */ NdrFcLong( 0xd ), /* 13 */
/* 368 */ NdrFcShort( 0x78 ), /* Offset= 120 (488) */
/* 370 */ NdrFcLong( 0x9 ), /* 9 */
/* 374 */ NdrFcShort( 0x94 ), /* Offset= 148 (522) */
/* 376 */ NdrFcLong( 0xc ), /* 12 */
/* 380 */ NdrFcShort( 0xbc ), /* Offset= 188 (568) */
/* 382 */ NdrFcLong( 0x24 ), /* 36 */
/* 386 */ NdrFcShort( 0x114 ), /* Offset= 276 (662) */
/* 388 */ NdrFcLong( 0x800d ), /* 32781 */
/* 392 */ NdrFcShort( 0x130 ), /* Offset= 304 (696) */
/* 394 */ NdrFcLong( 0x10 ), /* 16 */
/* 398 */ NdrFcShort( 0x148 ), /* Offset= 328 (726) */
/* 400 */ NdrFcLong( 0x2 ), /* 2 */
/* 404 */ NdrFcShort( 0x160 ), /* Offset= 352 (756) */
/* 406 */ NdrFcLong( 0x3 ), /* 3 */
/* 410 */ NdrFcShort( 0x178 ), /* Offset= 376 (786) */
/* 412 */ NdrFcLong( 0x14 ), /* 20 */
/* 416 */ NdrFcShort( 0x190 ), /* Offset= 400 (816) */
/* 418 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (417) */
/* 420 */
0x1b,          /* FC_CARRAY */
0x3,           /* 3 */
/* 422 */ NdrFcShort( 0x4 ), /* 4 */

```

```

/* 424 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* 0 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */
0x4b,          /* FC_PP */
0x5c,          /* FC_PAD */
/* 430 */
0x48,          /* FC_VARIABLE_REPEAT */
0x49,          /* FC_FIXED_OFFSET */
/* 432 */ NdrFcShort( 0x4 ), /* 4 */
/* 434 */ NdrFcShort( 0x0 ), /* 0 */
/* 436 */ NdrFcShort( 0x1 ), /* 1 */
/* 438 */ NdrFcShort( 0x0 ), /* 0 */
/* 440 */ NdrFcShort( 0x0 ), /* 0 */
/* 442 */ 0x12, 0x0,      /* FC_UP */
/* 444 */ NdrFcShort( 0xfffffff6e ), /* Offset= -146 (298) */
/* 446 */
0x5b,          /* FC_END */
/* 448 */ 0x5c,          /* FC_PAD */
0x8,           /* FC_LONG */
0x5b,          /* FC_END */
/* 450 */
0x16,          /* FC_PSTRUCT */
0x3,           /* 3 */
/* 452 */ NdrFcShort( 0x8 ), /* 8 */
/* 454 */
0x4b,          /* FC_PP */
0x5c,          /* FC_PAD */
/* 456 */
0x46,          /* FC_NO_REPEAT */
0x5c,          /* FC_PAD */
/* 458 */ NdrFcShort( 0x4 ), /* 4 */
/* 460 */ NdrFcShort( 0x4 ), /* 4 */
/* 462 */ 0x11, 0x0,      /* FC_RP */
/* 464 */ NdrFcShort( 0xfffffff4 ), /* Offset= -44 (420) */
/* 466 */
0x5b,          /* FC_END */
/* 468 */ 0x8,           /* FC_LONG */
0x5b,          /* FC_END */
/* 470 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */
/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* 0 */
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xfffffff ), /* -1 */
/* 482 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
0x0,           /* 0 */
/* 484 */ NdrFcShort( 0xfffffff50 ), /* Offset= -176 (308) */
/* 486 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */
/* 488 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */
/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8,           /* FC_LONG */
0x36,          /* FC_POINTER */

```

Appendix A - Application Source Code

```
/* 498 */ 0x5c,          /* FC_PAD */          /* FC_END */
/* 500 */
          0x11, 0x0,           /* FC_RP */
/* 502 */ NdrFcShort( 0xfffffff0 ), /* Offset= -32 (470) */
/* 504 */
          0x21,               /* FC_BOGUS_ARRAY */
          0x3,                /* 3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19,             /* Corr desc: field pointer, FC ULONG */
          0x0,                /* */
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 516 */ 0x4c,              /* FC_EMBEDDED_COMPLEX */
          0x0,                /* 0 */
/* 518 */ NdrFcShort( 0xfffffff40 ), /* Offset= -192 (326) */
/* 520 */ 0x5c,              /* FC_PAD */
          0x5b,               /* FC_END */
/* 522 */
          0x1a,               /* FC_BOGUS_STRUCT */
          0x3,                /* 3 */
/* 524 */ NdrFcShort( 0x8 ), /* 8 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8,               /* FC_LONG */
          0x36,               /* FC_POINTER */
/* 532 */ 0x5c,              /* FC_PAD */
          0x5b,               /* FC_END */
/* 534 */
          0x11, 0x0,           /* FC_RP */
/* 536 */ NdrFcShort( 0xfffffff0 ), /* Offset= -32 (504) */
/* 538 */
          0x1b,               /* FC_CARRAY */
          0x3,                /* 3 */
/* 540 */ NdrFcShort( 0x4 ), /* 4 */
/* 542 */ 0x19,             /* Corr desc: field pointer, FC ULONG */
          0x0,                /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */
          0x4b,               /* FC_PP */
          0x5c,               /* FC_PAD */
/* 548 */
          0x48,               /* FC_VARIABLE_REPEAT */
          0x49,               /* FC_FIXED_OFFSET */
/* 550 */ NdrFcShort( 0x4 ), /* 4 */
/* 552 */ NdrFcShort( 0x0 ), /* 0 */
/* 554 */ NdrFcShort( 0x1 ), /* 1 */
/* 556 */ NdrFcShort( 0x0 ), /* 0 */
/* 558 */ NdrFcShort( 0x0 ), /* 0 */
/* 560 */ 0x12, 0x0,         /* FC_UP */
/* 562 */ NdrFcShort( 0x182 ), /* Offset= 386 (948) */
/* 564 */
          0x5b,               /* FC_END */
          0x8,                /* FC_LONG */
/* 566 */ 0x5c,              /* FC_PAD */
          0x5b,               /* FC_END */
/* 568 */
          0x1a,               /* FC_BOGUS_STRUCT */
          0x3,                /* 3 */
/* 570 */ NdrFcShort( 0x8 ), /* 8 */
/* 572 */ NdrFcShort( 0x0 ), /* 0 */
/* 574 */ NdrFcShort( 0x6 ), /* Offset= 6 (580) */

/* 576 */ 0x8,               /* FC_LONG */
          0x36,               /* FC_POINTER */
/* 578 */ 0x5c,              /* FC_PAD */
          0x5b,               /* FC_END */
/* 580 */
          0x11, 0x0,           /* FC_RP */
/* 582 */ NdrFcShort( 0xfffffff4 ), /* Offset= -44 (538) */
/* 584 */
          0x2f,               /* FC_IP */
          0x5a,               /* FC_CONSTANT_IID */
/* 586 */ NdrFcLong( 0x2f ), /* 47 */
/* 590 */ NdrFcShort( 0x0 ), /* 0 */
/* 592 */ NdrFcShort( 0x0 ), /* 0 */
/* 594 */ 0xc0,              /* 192 */
          0x0,                /* 0 */
/* 596 */ 0x0,               /* 0 */
          0x0,                /* 0 */
/* 598 */ 0x0,               /* 0 */
          0x0,                /* 0 */
/* 600 */ 0x0,               /* 0 */
          0x46,               /* 70 */
/* 602 */
          0x1b,               /* FC_CARRAY */
          0x0,                /* 0 */
/* 604 */ NdrFcShort( 0x1 ), /* 1 */
/* 606 */ 0x19,             /* Corr desc: field pointer, FC ULONG */
          0x0,                /* */
/* 608 */ NdrFcShort( 0x4 ), /* 4 */
/* 610 */ 0x1,               /* FC_BYTE */
          0x5b,               /* FC_END */
/* 612 */
          0x1a,               /* FC_BOGUS_STRUCT */
          0x3,                /* 3 */
/* 614 */ NdrFcShort( 0x10 ), /* 16 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ NdrFcShort( 0xa ), /* Offset= 10 (628) */
/* 620 */ 0x8,               /* FC_LONG */
          0x8,                /* FC_LONG */
/* 622 */ 0x4c,              /* FC_EMBEDDED_COMPLEX */
          0x0,                /* 0 */
/* 624 */ NdrFcShort( 0xfffffff8 ), /* Offset= -40 (584) */
/* 626 */ 0x36,              /* FC_POINTER */
          0x5b,               /* FC_END */
/* 628 */
          0x12, 0x0,           /* FC_UP */
/* 630 */ NdrFcShort( 0xffffffe4 ), /* Offset= -28 (602) */
/* 632 */
          0x1b,               /* FC_CARRAY */
          0x3,                /* 3 */
/* 634 */ NdrFcShort( 0x4 ), /* 4 */
/* 636 */ 0x19,             /* Corr desc: field pointer, FC ULONG */
          0x0,                /* */
/* 638 */ NdrFcShort( 0x0 ), /* 0 */
/* 640 */
          0x4b,               /* FC_PP */
          0x5c,               /* FC_PAD */
/* 642 */
          0x48,               /* FC_VARIABLE_REPEAT */
          0x49,               /* FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ), /* 4 */
/* 646 */ NdrFcShort( 0x0 ), /* 0 */
/* 648 */ NdrFcShort( 0x1 ), /* 1 */
/* 650 */ NdrFcShort( 0x0 ), /* 0 */
```

Appendix A - Application Source Code

```
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xfffffffffd4 ), /* Offset= -44 (612) */
/* 658 */
    0x5b, /* FC_END */
    0x8, /* FC_LONG */
    0x5c, /* FC_PAD */
    0x5b, /* FC_END */
/* 662 */
    0x1a, /* FC_BOGUS_STRUCT */
    0x3, /* 3 */
/* 664 */ NdrFcShort( 0x8 ), /* 8 */
/* 666 */ NdrFcShort( 0x0 ), /* 0 */
/* 668 */ NdrFcShort( 0x6 ), /* Offset= 6 (674) */
/* 670 */ 0x8,
    0x36, /* FC_POINTER */
    0x5c, /* FC_PAD */
    0x5b, /* FC_END */
/* 674 */
    0x11, 0x0, /* FC_RP */
/* 676 */ NdrFcShort( 0xfffffffffd4 ), /* Offset= -44 (632) */
/* 678 */
    0x1d, /* FC_SMFARRAY */
    0x0, /* 0 */
/* 680 */ NdrFcShort( 0x8 ), /* 8 */
/* 682 */ 0x2,
    0x5b, /* FC_END */
/* 684 */
    0x15, /* FC_STRUCT */
    0x3, /* 3 */
/* 686 */ NdrFcShort( 0x10 ), /* 16 */
/* 688 */ 0x8,
    0x6, /* FC_SHORT */
/* 690 */ 0x6,
    0x4c, /* FC_EMBEDDED_COMPLEX */
/* 692 */ 0x0,
    NdrFcShort( 0xfffffffff1 ), /* Offset= -15 (678) */
    0x5b, /* FC_END */
/* 696 */
    0x1a, /* FC_BOGUS_STRUCT */
    0x3, /* 3 */
/* 698 */ NdrFcShort( 0x18 ), /* 24 */
/* 700 */ NdrFcShort( 0x0 ), /* 0 */
/* 702 */ NdrFcShort( 0xa ), /* Offset= 10 (712) */
/* 704 */ 0x8,
    0x36, /* FC_LONG */
    0x36, /* FC_POINTER */
    0x4c, /* FC_EMBEDDED_COMPLEX */
    0x0, /* 0 */
/* 708 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (684) */
/* 710 */ 0x5c,
    0x5b, /* FC_END */
/* 712 */
    0x11, 0x0, /* FC_RP */
/* 714 */ NdrFcShort( 0xfffffffffc ), /* Offset= -244 (470) */
/* 716 */
    0x1b, /* FC_CARRAY */
    0x0, /* 0 */
/* 718 */ NdrFcShort( 0x1 ), /* 1 */
/* 720 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0, /* * */
/* 722 */ NdrFcShort( 0x0 ), /* 0 */
/* 724 */ 0x1, /* FC_BYTEx */
```

```
    0x5b, /* FC_END */
    0x16, /* FC_PSTRUCT */
    0x3, /* 3 */
/* 728 */ NdrFcShort( 0x8 ), /* 8 */
/* 730 */
    0x4b, /* FC_PP */
    0x5c, /* FC_PAD */
/* 732 */
    0x46, /* FC_NO_REPEAT */
    0x5c, /* FC_PAD */
/* 734 */ NdrFcShort( 0x4 ), /* 4 */
/* 736 */ NdrFcShort( 0x4 ), /* 4 */
/* 738 */ 0x12, 0x0, /* FC_UP */
/* 740 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (716) */
/* 742 */
    0x5b, /* FC_END */
    0x8, /* FC_LONG */
    0x5b, /* FC_END */
/* 744 */ 0x8,
    0x1b, /* FC_CARRAY */
    0x1, /* 1 */
/* 748 */ NdrFcShort( 0x2 ), /* 2 */
/* 750 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0, /* * */
/* 752 */ NdrFcShort( 0x0 ), /* 0 */
/* 754 */ 0x6,
    0x5b, /* FC_SHORT */
    0x5b, /* FC_END */
/* 756 */
    0x16, /* FC_PSTRUCT */
    0x3, /* 3 */
/* 758 */ NdrFcShort( 0x8 ), /* 8 */
/* 760 */
    0x4b, /* FC_PP */
    0x5c, /* FC_PAD */
/* 762 */
    0x46, /* FC_NO_REPEAT */
    0x5c, /* FC_PAD */
/* 764 */ NdrFcShort( 0x4 ), /* 4 */
/* 766 */ NdrFcShort( 0x4 ), /* 4 */
/* 768 */ 0x12, 0x0, /* FC_UP */
/* 770 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (746) */
/* 772 */
    0x5b, /* FC_END */
    0x8, /* FC_LONG */
    0x5b, /* FC_END */
/* 776 */
    0x1b, /* FC_CARRAY */
    0x3, /* 3 */
/* 778 */ NdrFcShort( 0x4 ), /* 4 */
/* 780 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0, /* * */
/* 782 */ NdrFcShort( 0x0 ), /* 0 */
/* 784 */ 0x8,
    0x5b, /* FC_END */
    0x16, /* FC_PSTRUCT */
    0x3, /* 3 */
/* 788 */ NdrFcShort( 0x8 ), /* 8 */
```

Appendix A - Application Source Code

```
/* 790 */
    0x4b,           /* FC_PP */
    0x5c,           /* FC_PAD */
/* 792 */
    0x46,           /* FC_NO_REPEAT */
    0x5c,           /* FC_PAD */
/* 794 */ NdrFcShort( 0x4 ), /* 4 */
/* 796 */ NdrFcShort( 0x4 ), /* 4 */
/* 798 */ 0x12, 0x0, /* FC_UP */
/* 800 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (776) */
/* 802 */
    0x5b,           /* FC_END */
/* 804 */ 0x8,
    0x8,            /* FC_LONG */
    0x5b,           /* FC_END */
/* 806 */
    0x1b,           /* FC_CARRAY */
    0x7,            /* 7 */
/* 808 */ NdrFcShort( 0x8 ), /* 8 */
/* 810 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0,             /* * */
/* 812 */ NdrFcShort( 0x0 ), /* 0 */
/* 814 */ 0xb,
    /* FC_HYPER */
    0x5b,           /* FC_END */
/* 816 */
    0x16,           /* FC_PSTRUCT */
    0x3,            /* 3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */
    0x4b,           /* FC_PP */
    0x5c,           /* FC_PAD */
/* 822 */
    0x46,           /* FC_NO_REPEAT */
    0x5c,           /* FC_PAD */
/* 824 */ NdrFcShort( 0x4 ), /* 4 */
/* 826 */ NdrFcShort( 0x4 ), /* 4 */
/* 828 */ 0x12, 0x0, /* FC_UP */
/* 830 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (806) */
/* 832 */
    0x5b,           /* FC_END */
    0x8,            /* FC_LONG */
    0x5b,           /* FC_END */
/* 836 */
    0x15,           /* FC_STRUCT */
    0x3,            /* 3 */
/* 838 */ NdrFcShort( 0x8 ), /* 8 */
/* 840 */ 0x8,
    /* FC_LONG */
    0x5c,           /* FC_PAD */
/* 842 */ 0x5c,
    0x5b,           /* FC_END */
/* 844 */
    0x1b,           /* FC_CARRAY */
    0x3,            /* 3 */
/* 846 */ NdrFcShort( 0x8 ), /* 8 */
/* 848 */ 0x7,
    /* Corr desc: FC USHORT */
    0x0,             /* * */
/* 850 */ NdrFcShort( 0xfffd8 ), /* -40 */
/* 852 */ 0x4c,
    /* FC_EMBEDDED_COMPLEX */
    0x0,             /* 0 */
/* 854 */ NdrFcShort( 0xffffffe8 ), /* Offset= -18 (836) */

/* 856 */ 0x5c,           /* FC_PAD */
    0x5b,           /* FC_END */
/* 858 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,             /* 3 */
/* 860 */ NdrFcShort( 0x28 ), /* 40 */
/* 862 */ NdrFcShort( 0xfffffff8 ), /* Offset= -18 (844) */
/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6,
    /* FC_SHORT */
    0x6,             /* FC_SHORT */
/* 868 */ 0x38,
    /* FC_ALIGNM4 */
    0x8,             /* FC_LONG */
/* 870 */ 0x8,
    /* FC_LONG */
/* 872 */ 0x0,
    /* 0 */
    NdrFcShort( 0xfffffd7 ), /* Offset= -521 (352) */
    0x5b,           /* FC_END */
/* 876 */
    0x12, 0x0,       /* FC_UP */
/* 878 */ NdrFcShort( 0xfffffe6 ), /* Offset= -266 (612) */
/* 880 */
    0x12, 0x8,       /* FC_UP [simple_pointer] */
/* 882 */ 0x1,
    /* FC_BYTE */
    0x5c,           /* FC_PAD */
/* 884 */
    0x12, 0x8,       /* FC_UP [simple_pointer] */
/* 886 */ 0x6,
    /* FC_SHORT */
    0x5c,           /* FC_PAD */
/* 888 */
    0x12, 0x8,       /* FC_UP [simple_pointer] */
/* 890 */ 0x8,
    /* FC_LONG */
    0x5c,           /* FC_PAD */
/* 892 */
    0x12, 0x8,       /* FC_UP [simple_pointer] */
/* 894 */ 0xa,
    /* FC_FLOAT */
    0x5c,           /* FC_PAD */
/* 896 */
    0x12, 0x8,       /* FC_UP [simple_pointer] */
/* 898 */ 0xc,
    /* FC_DOUBLE */
    0x5c,           /* FC_PAD */
/* 900 */
    0x12, 0x0,       /* FC_UP */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= -624 (278) */
/* 904 */
    0x12, 0x10,       /* FC_UP [pointer_deref] */
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= -622 (284) */
/* 908 */
    0x12, 0x10,       /* FC_UP [pointer_deref] */
/* 910 */ NdrFcShort( 0xfffffd94 ), /* Offset= -602 (308) */
/* 912 */
    0x12, 0x10,       /* FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfffffd96 ), /* Offset= -588 (326) */
/* 916 */
    0x12, 0x10,       /* FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfffffd98 ), /* Offset= -574 (344) */
/* 920 */
    0x12, 0x10,       /* FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
    0x12, 0x0,       /* FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
    0x15,             /* FC_STRUCT */
```

Appendix A - Application Source Code

```
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6, /* FC_SHORT */
0x1, /* FC_BYTEx */
0x1, /* FC_BYTE */
0x38, /* FC_ALIGNM4 */
/* 934 */ 0x1,
0x38, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 936 */ 0x8,
0x39, /* FC_HYPER */
0x5b, /* FC_END */
/* 940 */
0x12, 0x0, /* FC_UP */
/* 942 */ NdrFcShort( 0xfffffffff2 ), /* Offset= -14 (928) */
/* 944 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 946 */ 0x2,
/* FC_CHAR */
0x5c, /* FC_PAD */
/* 948 */
0x1a, /* FC_BOGUS_STRUCT */
0x7, /* 7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8,
/* FC_LONG */
0x8, /* FC_LONG */
/* 958 */ 0x6,
/* FC_SHORT */
0x6, /* FC_SHORT */
/* 960 */ 0x6,
/* FC_SHORT */
0x6, /* FC_SHORT */
/* 962 */ 0x4c,
/* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 964 */ NdrFcShort( 0xfffffc42 ), /* Offset= -958 (6) */
/* 966 */ 0x5c,
/* FC_PAD */
0x5b, /* FC_END */
/* 968 */ 0xb4,
/* FC_USER_MARSHAL */
0x83, /* 131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffc32 ), /* Offset= -974 (2) */
/* 978 */
0x11, 0x4, /* FC_RP [allocated_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
0x13, 0x0, /* FC_OP */
/* 984 */ NdrFcShort( 0xfffffdcc ), /* Offset= -36 (948) */
/* 986 */ 0xb4,
/* FC_USER_MARSHAL */
0x83, /* 131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xfffffff4 ), /* Offset= -12 (982) */

        0x0
    }

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};
```

```
const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID, n)
int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(! _tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oifc (OptLev=i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
       __declspec(uuid()), __declspec(selectany), __declspec(novtable)
       DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )
```

Appendix A - Application Source Code

```
#if defined(_M_IA64) || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpccproxy.h> version is high enough to compile this file*/
#ifndef __REQD_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpccproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpccproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
   GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
   GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
   GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
```

```
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */ ,
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
```

Appendix A - Application Source Code

```
0,
    MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x5030118, /* MIDL Version 5.3.280 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* Reserved3 */
0, /* Reserved4 */
0, /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {

        {
            VARIANT_UserSize
            ,VARIANT_UserMarshal
            ,VARIANT_UserUnmarshal
            ,VARIANT_UserFree
        }
    };

#if !defined(_RPC_WIN64_)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {

        /* Procedure NewOrder */

        0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifndef _ALPHA_
/* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x47,      /* Oi2 Flags: srv must size, clt must size, has return,
has ext, */
        0x3,           /* 3 */
/* 16 */ 0xa,       /* 10 */
        0x7,           /* Ext Flags: new corr desc, clt corr
check, srv corr check, */
/* 18 */ NdrFcShort( 0x20 ), /* 32 */
/* 20 */ NdrFcShort( 0x20 ), /* 32 */
/* 22 */ NdrFcShort( 0x0 ), /* 0 */
/* 24 */ NdrFcShort( 0x0 ), /* 0 */

```

```
        /* Parameter txn_in */

/* 26 */ NdrFcShort( 0xb ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 30 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

        /* Parameter txn_out */

/* 32 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=24 */
#ifndef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 36 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Return value */

/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type */
#ifndef _ALPHA_
/* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 42 */ 0x8,           /* FC_LONG */
        0x0,           /* 0 */

        /* Procedure Payment */

/* 44 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
/* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47,           /* Oi2 Flags: srv must size, clt must size, has return,
has ext, */
        0x3,           /* 3 */
/* 60 */ 0xa,           /* 10 */
        0x7,           /* Ext Flags: new corr desc, clt corr
check, srv corr check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

/* 70 */ NdrFcShort( 0xb ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else

```

Appendix A - Application Source Code

```
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 74 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 76 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=24 */
#ifndef _ALPHA_
/* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 80 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */

/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
/* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has return,
has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr
check, srv corr check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0xb ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */


```

```
/* 120 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=24 */
#ifndef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 124 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 130 */ 0x8, /* FC_LONG */
0x0, /* 0 */
/* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has return,
has ext, */
0x3, /* 3 */
/* 148 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr
check, srv corr check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0xb ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 162 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=24 */
#ifndef _ALPHA_
/* 166 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
#endif
```

Appendix A - Application Source Code

```
/* 168 */ NdrFcShort( 0x3c8 ),           /* Type Offset=968 */
          /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
          NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 174 */ 0x8,
          /* FC_LONG */
          0x0,             /* 0 */

          /* Procedure OrderStatus */

/* 176 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
          NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47,
          /* Oi2 Flags: srv must size, clt must size, has return,
has ext, */
          0x3,             /* 3 */
/* 192 */ 0xa,
          /* 10 */
          0x7,             /* Ext Flags: new corr desc, clt corr
check, srv corr check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

          /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 204 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
          NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ),           /* Type Offset=950 */

          /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple ref,
srv alloc size=24 */
#ifndef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
          NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ),           /* Type Offset=968 */

          /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 216 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */

```

```
#else
          NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */

#endif
/* 218 */ 0x8,
          /* FC_LONG */
          0x0,             /* 0 */

          /* Procedure CallSetComplete */

/* 220 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, axp64 Stack size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44,
          /* Oi2 Flags: has return, has ext, */
          0x1,             /* 1 */
/* 236 */ 0xa,
          /* 10 */
          0x1,             /* 1 */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

          /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, axp64 Stack size/offset = 8 */
/* 250 */ 0x8,
          /* FC_LONG */
          0x0,             /* 0 */

          0x0
        }

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
  0,
  {
    NdrFcShort( 0x0 ), /* 0 */
/* 2 */ 0x12, 0x0,           /* FC_UP */
/* 4 */ NdrFcShort( 0x39e ), /* Offset= 926 (930) */
/* 6 */ 0x2b,               /* FC_NON_ENCAPSULATED_UNION */
          0x9,             /* FC ULONG */
/* 8 */ 0x7,               /* Corr desc: FC USHORT */
          0x0,             /* */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2b ), /* 43 */
/* 20 */ NdrFcLong( 0x3 ), /* 3 */
/* 24 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 26 */ NdrFcLong( 0x11 ), /* 17 */
/* 30 */ NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 32 */ NdrFcLong( 0x2 ), /* 2 */
/* 36 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 38 */ NdrFcLong( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 44 */ NdrFcLong( 0x5 ), /* 5 */
/* 48 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */

```

Appendix A - Application Source Code

```
/* 50 */ NdrFcLong( 0xb ), /* 11 */
/* 54 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 56 */ NdrFcLong( 0xa ), /* 10 */
/* 60 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 62 */ NdrFcLong( 0x6 ), /* 6 */
/* 66 */ NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */ NdrFcLong( 0x7 ), /* 7 */
/* 72 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 74 */ NdrFcLong( 0x8 ), /* 8 */
/* 78 */ NdrFcShort( 0x0d ), /* Offset= 208 (286) */
/* 80 */ NdrFcLong( 0xd ), /* 13 */
/* 84 */ NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */ NdrFcLong( 0x9 ), /* 9 */
/* 90 */ NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */ NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */ NdrFcLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* Offset= 756 (858) */
/* 104 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */ NdrFcShort( 0x2ee ), /* Offset= 750 (858) */
/* 110 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x2ec ), /* Offset= 748 (862) */
/* 116 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* Offset= 746 (866) */
/* 122 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* Offset= 744 (870) */
/* 128 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (874) */
/* 134 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (878) */
/* 140 */ NdrFcLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* Offset= 722 (866) */
/* 146 */ NdrFcLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* Offset= 720 (870) */
/* 152 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* Offset= 726 (882) */
/* 158 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* Offset= 716 (878) */
/* 164 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* Offset= 718 (886) */
/* 170 */ NdrFcLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* Offset= 716 (890) */
/* 176 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* Offset= 714 (894) */
/* 182 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* Offset= 712 (898) */
/* 188 */ NdrFcLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* Offset= 710 (902) */
/* 194 */ NdrFcLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 200 */ NdrFcLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 206 */ NdrFcLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 212 */ NdrFcLong( 0x16 ), /* 22 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 218 */ NdrFcLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 224 */ NdrFcLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0x2aa ), /* Offset= 682 (910) */
/* 230 */ NdrFcLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* Offset= 688 (922) */
/* 236 */ NdrFcLong( 0x4010 ), /* 16400 */

/* 240 */ NdrFcShort( 0x2ae ), /* Offset= 686 (926) */
/* 242 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 246 */ NdrFcShort( 0x26c ), /* Offset= 620 (866) */
/* 248 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* Offset= 618 (870) */
/* 254 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x264 ), /* Offset= 612 (870) */
/* 260 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 264 */ NdrFcShort( 0x25e ), /* Offset= 606 (870) */
/* 266 */ NdrFcLong( 0x0 ), /* 0 */
/* 270 */ NdrFcShort( 0x0 ), /* Offset= 0 (270) */
/* 272 */ NdrFcLong( 0x1 ), /* 1 */
/* 276 */ NdrFcShort( 0x0 ), /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (277) */
/* 280 */ 0x15, /* FC_STRUCT */
/* 282 */ NdrFcShort( 0x8 ), /* 8 */
/* 284 */ 0xb, /* FC_HYPER */
/* 286 */ 0x5b, /* FC_END */
/* 288 */ 0x12, 0x0, /* FC_UP */
/* 290 */ 0x1b, /* FC_CARRAY */
/* 292 */ NdrFcShort( 0x2 ), /* 2 */
/* 294 */ 0x9, /* Corr desc: FC ULONG */
/* 296 */ NdrFcShort( 0xffffc ), /* -4 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early */
/* 300 */ 0x6, /* FC_SHORT */
/* 302 */ 0x5b, /* FC_END */
/* 304 */ 0x17, /* FC_CSTRUCT */
/* 306 */ NdrFcShort( 0xfffffffff0 ), /* Offset= -16 (290) */
/* 308 */ 0x8, /* FC_LONG */
/* 310 */ 0x5c, /* FC_PAD */
/* 312 */ 0x2f, /* FC_IP */
/* 314 */ NdrFcLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 320 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ 0xc0, /* 192 */
/* 324 */ 0x0, /* 0 */
/* 326 */ 0x0, /* 0 */
/* 328 */ 0x0, /* 0 */
/* 330 */ 0x46, /* 70 */
/* 332 */ 0x2f, /* FC_IP */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
/* 332 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
```

Appendix A - Application Source Code

```
0x0,          /* 0 */
/* 342 */ 0x0,          /* 0 */
0x0,          /* 0 */
/* 344 */ 0x0,          /* 0 */
0x0,          /* 0 */
/* 346 */ 0x0,          /* 0 */
0x46,          /* 70 */
/* 348 */
0x12, 0x10,      /* FC_UP [pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ), /* Offset= 2 (352) */
/* 352 */
0x12, 0x0,       /* FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ), /* Offset= 486 (840) */
/* 356 */
0x2a,          /* FC_ENCAPSULATED_UNION */
0x89,          /* 137 */
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFcLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* Offset= 260 (650) */
/* 392 */ NdrFcLong( 0x800d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* Offset= 288 (684) */
/* 398 */ NdrFcLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* Offset= 314 (716) */
/* 404 */ NdrFcLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* Offset= 336 (744) */
/* 410 */ NdrFcLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* Offset= 358 (772) */
/* 416 */ NdrFcLong( 0x14 ), /* 20 */
/* 420 */ NdrFcShort( 0x17c ), /* Offset= 380 (800) */
/* 422 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (421) */
/* 424 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 434 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 440 */
0x12, 0x0,       /* FC_UP */
/* 442 */ NdrFcShort( 0xfffffff74 ), /* Offset= -140 (302) */
/* 444 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */
/* 446 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* Offset= 6 (458) */
/* 454 */ 0x8,           /* FC_LONG */
0x39,          /* FC_ALIGNM8 */
/* 456 */ 0x36,          /* FC_POINTER */
0x5b,          /* FC_END */
/* 458 */
0x11, 0x0,       /* FC_RP */
/* 460 */ NdrFcShort( 0xfffffff7dc ), /* Offset= -36 (424) */
/* 462 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 472 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
0x0,           /* 0 */
/* 480 */ NdrFcShort( 0xfffffff58 ), /* Offset= -168 (312) */
/* 482 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */
/* 484 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* Offset= 6 (496) */
/* 492 */ 0x8,           /* FC_LONG */
0x39,          /* FC_ALIGNM8 */
/* 494 */ 0x36,          /* FC_POINTER */
0x5b,          /* FC_END */
/* 496 */
0x11, 0x0,       /* FC_RP */
/* 498 */ NdrFcShort( 0xfffffff7dc ), /* Offset= -36 (462) */
/* 500 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */
/* 502 */ NdrFcShort( 0x0 ), /* 0 */
/* 504 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 510 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 516 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
0x0,           /* 0 */
/* 518 */ NdrFcShort( 0xfffffff44 ), /* Offset= -188 (330) */
/* 520 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */
/* 522 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */
/* 524 */ NdrFcShort( 0x10 ), /* 16 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8,           /* FC_LONG */
0x39,          /* FC_ALIGNM8 */
/* 532 */ 0x36,          /* FC_POINTER */
0x5b,          /* FC_END */
/* 534 */
0x11, 0x0,       /* FC_RP */
/* 536 */ NdrFcShort( 0xfffffff7dc ), /* Offset= -36 (500) */
/* 538 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */
```

Appendix A - Application Source Code

```
/* 540 */ NdrFcShort( 0x0 ), /* 0 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 548 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 552 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 554 */
0x12, 0x0, /* FC_UP */
/* 556 */ NdrFcShort( 0x176 ), /* Offset= 374 (930) */
/* 558 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 560 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 562 */ NdrFcShort( 0x10 ), /* 16 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ NdrFcShort( 0x6 ), /* Offset= 6 (572) */
/* 568 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 570 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 572 */
0x11, 0x0, /* FC_RP */
/* 574 */ NdrFcShort( 0xfffffff0 ), /* Offset= -36 (538) */
/* 576 */
0x2f, /* FC_IP */
0x5a, /* FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ), /* 47 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ NdrFcShort( 0x0 ), /* 0 */
/* 586 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 588 */ 0x0, /* 0 */
0x0, /* 0 */
/* 590 */ 0x0, /* 0 */
0x0, /* 0 */
/* 592 */ 0x0, /* 0 */
0x46, /* 70 */
/* 594 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 596 */ NdrFcShort( 0x1 ), /* 1 */
/* 598 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/* 600 */ NdrFcShort( 0x4 ), /* 4 */
/* 602 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 604 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 606 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 608 */ NdrFcShort( 0x18 ), /* 24 */
/* 610 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ NdrFcShort( 0xc ), /* Offset= 12 (624) */
/* 614 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 618 */ NdrFcShort( 0xfffffd06 ), /* Offset= -42 (576) */
/* 620 */ 0x39, /* FC_ALIGNM8 */
0x36, /* FC_POINTER */
/* 622 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
0x5b, /* FC_END */
/* 624 */
0x12, 0x0, /* FC_UP */
/* 626 */ NdrFcShort( 0xffffffe0 ), /* Offset= -32 (594) */
/* 628 */
0x21, /* FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 630 */ NdrFcShort( 0x0 ), /* 0 */
/* 632 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
0x12, 0x0, /* FC_UP */
/* 646 */ NdrFcShort( 0xfffffd8 ), /* Offset= -40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 650 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
/* 658 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 662 */
0x11, 0x0, /* FC_RP */
/* 664 */ NdrFcShort( 0xfffffd0 ), /* Offset= -36 (628) */
/* 666 */
0x1d, /* FC_SMFARRAY */
0x0, /* 0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x2, /* FC_CHAR */
0x5b, /* FC_END */
/* 672 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8, /* FC_LONG */
0x6, /* FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
0x4c, /* FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0, /* 0 */
NdrFcShort( 0xfffffd1 ), /* Offset= -15 (666) */
0x5b, /* FC_END */
/* 684 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */
/* 692 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
0x4c, /* FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0, /* 0 */
NdrFcShort( 0xffffffe7 ), /* Offset= -25 (672) */
0x5b, /* FC_END */
/* 700 */
```

Appendix A - Application Source Code

```
/* 702 */ NdrFcShort( 0xfffffff10 ), /* Offset= -240 (462) */
/* 704 */
    0x1b,           /* FC_CARRAY */
    0x0,            /* 0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19,           /* Corr desc: field pointer, FC ULONG */
    0x0,            /* 0 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 714 */ 0x1,            /* FC_BYT */
    0x5b,           /* FC_END */
/* 716 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
/* 724 */ 0x8,            /* FC_LONG */
    0x39,           /* FC_ALIGNM8 */
/* 726 */ 0x36,           /* FC_POINTER */
    0x5b,           /* FC_END */
/* 728 */
    0x12,           /* FC_UP */
/* 730 */ NdrFcShort( 0xfffffff6 ), /* Offset= -26 (704) */
/* 732 */
    0x1b,           /* FC_CARRAY */
    0x1,            /* 1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19,           /* Corr desc: field pointer, FC ULONG */
    0x0,            /* 0 */
/* 738 */ NdrFcShort( 0x0 ), /* 0 */
/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 742 */ 0x6,            /* FC_SHORT */
    0x5b,           /* FC_END */
/* 744 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
/* 752 */ 0x8,            /* FC_LONG */
    0x39,           /* FC_ALIGNM8 */
/* 754 */ 0x36,           /* FC_POINTER */
    0x5b,           /* FC_END */
/* 756 */
    0x12,           /* FC_UP */
/* 758 */ NdrFcShort( 0xfffffff6 ), /* Offset= -26 (732) */
/* 760 */
    0x1b,           /* FC_CARRAY */
    0x3,            /* 3 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19,           /* Corr desc: field pointer, FC ULONG */
    0x0,            /* 0 */
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 770 */ 0x8,            /* FC_LONG */
    0x5b,           /* FC_END */
/* 772 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
/* 780 */ 0x8,            /* FC_LONG */
    0x39,           /* FC_ALIGNM8 */
/* 782 */ 0x36,           /* FC_POINTER */
    0x5b,           /* FC_END */
/* 784 */
    0x12,           /* FC_UP */
/* 786 */ NdrFcShort( 0xfffffff6 ), /* Offset= -26 (760) */
/* 788 */
    0x1b,           /* FC_CARRAY */
    0x7,            /* 7 */
/* 790 */ NdrFcShort( 0x8 ), /* 8 */
/* 792 */ 0x19,           /* Corr desc: field pointer, FC ULONG */
    0x0,            /* 0 */
/* 794 */ NdrFcShort( 0x0 ), /* 0 */
/* 796 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 798 */ 0xb,            /* FC_HYPER */
    0x5b,           /* FC_END */
/* 800 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 802 */ NdrFcShort( 0x10 ), /* 16 */
/* 804 */ NdrFcShort( 0x0 ), /* 0 */
/* 806 */ NdrFcShort( 0x6 ), /* Offset= 6 (812) */
/* 808 */ 0x8,            /* FC_LONG */
    0x39,           /* FC_ALIGNM8 */
/* 810 */ 0x36,           /* FC_POINTER */
    0x5b,           /* FC_END */
/* 812 */
    0x12,           /* FC_UP */
/* 814 */ NdrFcShort( 0xfffffff6 ), /* Offset= -26 (788) */
/* 816 */
    0x15,           /* FC_STRUCT */
    0x3,            /* 3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */ 0x8,            /* FC_LONG */
    0x8,             /* FC_PAD */
    0x5b,           /* FC_END */
/* 824 */
    0x1b,           /* FC_CARRAY */
    0x3,            /* 3 */
/* 826 */ NdrFcShort( 0x8 ), /* 8 */
/* 828 */ 0x7,            /* Corr desc: FC USHORT */
    0x0,            /* 0 */
/* 830 */ NdrFcShort( 0xfffc8 ), /* -56 */
/* 832 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 834 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
    0x0,            /* 0 */
/* 836 */ NdrFcShort( 0xfffffffec ), /* Offset= -20 (816) */
/* 838 */ 0x5c,           /* FC_PAD */
    0x5b,           /* FC_END */
/* 840 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 842 */ NdrFcShort( 0x38 ), /* 56 */
/* 844 */ NdrFcShort( 0xfffffffec ), /* Offset= -20 (824) */
/* 846 */ NdrFcShort( 0x0 ), /* Offset= 0 (846) */
/* 848 */ 0x6,            /* FC_SHORT */
    0x6,             /* FC_SHORT */
/* 850 */ 0x38,           /* FC_ALIGNM4 */
    0x8,             /* FC_LONG */
    0x8,             /* FC_LONG */
/* 852 */ 0x8,            /* FC_LONG */
```

Appendix A - Application Source Code

```
/* 854 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
/* 4 */
NdrFcShort( 0xfffffe0d ), /* Offset= -499 (356) */
/* 858 */
0x5b,                   /* FC_END */

/* 860 */ NdrFcShort( 0xffffffff02 ), /* Offset= -254 (606) */
/* 862 */
0x12, 0x0,              /* FC_UP */
/* 864 */ 0x12, 0x8,           /* FC_UP [simple_pointer] */
/* 866 */
0x5c,                   /* FC_PAD */

/* 868 */ 0x12, 0x8,           /* FC_UP [simple_pointer] */
/* 870 */
0x5c,                   /* FC_PAD */

/* 872 */ 0x12, 0x8,           /* FC_UP [simple_pointer] */
/* 874 */
0x5c,                   /* FC_PAD */

/* 876 */ 0x12, 0x8,           /* FC_UP [simple_pointer] */
/* 878 */
0x5c,                   /* FC_PAD */

/* 880 */ 0x12, 0x8,           /* FC_UP [simple_pointer] */
/* 882 */
0x5c,                   /* FC_PAD */

/* 884 */ NdrFcShort( 0xfffffd4 ), /* Offset= -604 (280) */
/* 886 */
0x12, 0x10,              /* FC_UP [pointer_deref] */
/* 888 */ NdrFcShort( 0xfffffd4 ), /* Offset= -602 (286) */
/* 890 */
0x12, 0x10,              /* FC_UP [pointer_deref] */
/* 892 */ NdrFcShort( 0xfffffd8 ), /* Offset= -580 (312) */
/* 894 */
0x12, 0x10,              /* FC_UP [pointer_deref] */
/* 896 */ NdrFcShort( 0xfffffdca ), /* Offset= -566 (330) */
/* 898 */
0x12, 0x10,              /* FC_UP [pointer_deref] */
/* 900 */ NdrFcShort( 0xfffffd8 ), /* Offset= -552 (348) */
/* 902 */
0x12, 0x10,              /* FC_UP [pointer_deref] */
/* 904 */ NdrFcShort( 0x2 ), /* Offset= 2 (906) */
/* 906 */
0x12, 0x0,               /* FC_UP */

/* 908 */ NdrFcShort( 0x16 ), /* Offset= 22 (930) */
/* 910 */
0x15,                   /* FC_STRUCT */
0x7,                   /* 7 */

/* 912 */ NdrFcShort( 0x10 ), /* 16 */
/* 914 */
0x6,                   /* FC_SHORT */
0x1,                   /* FC_BYTE */
/* 916 */
0x1,                   /* FC_BYTE */
0x38,                  /* FC_ALIGNM4 */
/* 918 */
0x8,                   /* FC_LONG */
0x39,                  /* FC_ALIGNM8 */
/* 920 */
0xb,                   /* FC_HYPER */
0x5b,                  /* FC_END */

/* 922 */
0x12, 0x0,              /* FC_UP */
/* 924 */ NdrFcShort( 0xfffffffff2 ), /* Offset= -14 (910) */
```

```
/* 926 */
0x12, 0x8,              /* FC_UP [simple_pointer] */
/* 928 */
0x5c,                   /* FC_PAD */

/* 930 */
0x1a,                   /* FC_BOGUS_STRUCT */
0x7,                   /* 7 */

/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */
0x0,                   /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */
0x8,                   /* FC_LONG */
0x8,                   /* FC_LONG */
/* 940 */
0x6,                   /* FC_SHORT */
0x6,                   /* FC_SHORT */
/* 942 */
0x6,                   /* FC_SHORT */
0x6,                   /* FC_SHORT */
/* 944 */
0x4c,                   /* FC_EMBEDDED_COMPLEX */
0x0,                   /* 0 */
/* 946 */ NdrFcShort( 0xfffffc54 ), /* Offset= -940 (6) */
/* 948 */
0x5c,                   /* FC_PAD */
0x5b,                   /* FC_END */
/* 950 */
0xb4,                   /* FC_USER_MARSHAL */
0x83,                  /* 131 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */
0x18,                  /* 24 */
/* 956 */
0x0,                   /* 0 */
/* 958 */ NdrFcShort( 0xfffffc44 ), /* Offset= -956 (2) */
/* 960 */
0x11, 0x4,              /* FC_RP [alloced_on_stack] */
/* 962 */
0x6,                   /* Offset= 6 (968) */
/* 964 */
0x13, 0x0,              /* FC_OP */
/* 966 */ NdrFcShort( 0xfffffdcc ), /* Offset= -36 (930) */
/* 968 */
0xb4,                   /* FC_USER_MARSHAL */
0x83,                  /* 131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */
0x18,                  /* 24 */
/* 974 */
0x0,                   /* 0 */
/* 976 */ NdrFcShort( 0xfffffff4 ), /* Offset= -12 (964) */
0x0
    }
};

const CIInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    (CIInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CIInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    (CIInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};
```

Appendix A - Application Source Code

```
#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID, n)
int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) & _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) & _tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) & _tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* defined(_M_IA64) || defined(_M_AXP64) */
```

common/txnlog/include/retime.h

```
/* FILE: retime.h : header file
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Charles Levine, Philip Durr
 *          Microsoft Corp.
 */

#define MAX_JULIAN_TIME          0x7FFFFFFFFFFFFF
#define JULIAN_TIME __int64
#define TC_TIME      DWORD
extern "C"
{
    BOOL           InitJulianTime(LPSYSTEMTIME lpInitTime);
    JULIAN_TIME   GetJulianTime(void);
    DWORD          MyTickCount(void);
    void           GetJulianAndTC(JULIAN_TIME *pJulian, DWORD *pTC);
    JULIAN_TIME   ConvertTo64BitTime(int iYear, int iMonth, int iDay, int iHour, int
iMinute, int iSecond);
    JULIAN_TIME   Get64BitTime(LPSYSTEMTIME lpInitTime);
    int            JulianDay( int yr, int mm, int dd );
```

```
void JulianToTime(JULIAN_TIME julianTS, int* yr, int* mm, int* dd, int
*hh, int *mi, int *ss );
void JulianToCalendar( int day, int* yr, int* mm, int* dd );
```

common/txnlog/include/spinlock.h

```
/*
 *      FILE: SPINLOCK.H
 *
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 *          Microsoft Corp.
 */

#ifndef _INC_Spinlock
#define _INC_Spinlock

const LONG LockClosed      = 1;
const LONG LockOpen       = 0;

/*********************************************
 *      Spinlock and Semaphore locking.
 *
 * This class provides a very conservative locking scheme.
 * The assumption behind the code is that locks will be
 * held for a very short time. When a lock is taken a memory
 * location is exchanged. All other threads that want this
 * lock wait by spinning and sometimes sleeping on a semaphore
 * until it becomes free again. The only other choice is not
 * to wait at all and move on to do something else. This
 * module should normally be used in conjunction with cache
 * aligned memory to minimize cache line misses.
 *
********************************************/

class Spinlock
{
    // Private data.
    HANDLE          Semaphore;
    volatile LONG   m_Spinlock;
    volatile LONG   Waiting;

#ifdef _DEBUG
    // Counters for debugging builds.
    volatile LONG   TotalLocks;
    volatile LONG   TotalSleeps;
    volatile LONG   TotalSpins;
    volatile LONG   TotalWaits;
#endif

public:
    // Public functions.
    Spinlock( void );
```

Appendix A - Application Source Code

```
inline BOOL ClaimLock( BOOL Wait = TRUE );
inline void ReleaseLock( void );
~Spinlock( void );
// Disabled operations.
Spinlock( const Spinlock & Copy );
void operator=( const Spinlock & Copy );

private:
    // Private functions.
    inline BOOL ClaimSpinlock( volatile LONG *sl );
    void WaitForLock( void );
    void WakeAllSleepers( void );
};

/*********************************************
*
*   A guaranteed atomic exchange.
*
*   An attempt is made to claim the Spinlock. This action is
*   guaranteed to be atomic.
*
*********************************************/

inline BOOL Spinlock::ClaimSpinlock( volatile LONG *Spinlock )
{
    #ifdef _DEBUG
        InterlockedIncrement( (LPLONG) & TotalLocks );
    #endif
    return ( ((*Spinlock) == LockOpen) && (InterlockedExchange(
(LPLONG)Spinlock, LockClosed ) == LockOpen) );
}

/*********************************************
*
*   Claim the Spinlock.
*
*   Claim the lock if available else wait or exit.
*
********************************************/

inline BOOL Spinlock::ClaimLock( BOOL Wait )
{
    if ( ! ClaimSpinlock( (volatile LONG*) & m_Spinlock ) )
    {
        if ( Wait )
            WaitForLock();
        return Wait;
    }
    return TRUE;
}

/*********************************************
*
*   Release the Spinlock.
*
*   Release the lock and if needed wakeup any sleepers.
*
********************************************/

inline void Spinlock::ReleaseLock( void )
{
    m_Spinlock = LockOpen;
}
```

```
        if ( Waiting > 0 )
            WakeAllSleepers();
    }

#define _INC_Spinlock
#endif
```

common/txnlog/include/txnlog.h

```
/*
*   FILE:          TXNLOG.H
*                   Microsoft TPC-C Kit Ver. 4.10.000
*
*                   NOTE: this file is RTE specific and should not be
*                         included in Full Disclosure Reports.
*
*                   Copyright Microsoft, 1999
*
*                   PURPOSE: Structure definitions for logging delivery txn completion stats.
*                   Contact: Charles Levine (clevine@microsoft.com)
*/
*/
```

```
typedef struct _TXN_NEWORDER
{
    BYTE      OL_Count;           //range 0 to 31
    BYTE      OL_Remote_Count;    //range 0 to 31
    WORD     c_id;
    int       o_id;
} TXN_NEWORDER;

typedef struct _TXN_PAYMENT
{
    BYTE      CustByName;
    BYTE      IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS
{
    BYTE      CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER      NewOrder;
    TXN_PAYMENT       Payment;
    TXN_ORDERSTATUS   OrderStatus;
} TXN_DETAILS;
```

```
// Common header for all records in txn log. The TxnType field is
// a switch which identifies the particular variant.
#define TXN_REC_TYPE_CONTROL 1 //
```

Appendix A - Application Source Code

```

#define TXN_REC_TYPE_TPCC           2      // replaces
TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF 3

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME     TxnStartT0;          // start of txn
    BYTE            TxnType;             // one of TXN_REC_TYPE_*
    BYTE            TxnSubType;          // depends on
TxnType } TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME     TxnStartT0;          // start of txn
    BYTE            TxnType;             // = TXN_REC_TYPE_CONTROL
    BYTE            TxnSubType;          // depends on
TxnType // end of common header

    DWORD           Len;                // number of bytes
after this field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//

// 'TxnStartT0' is a Julian timestamp corresponding to the moment the
// txm is sent to the SUT, i.e., beginning of response time.  Deltas
// are in milliseconds.  Note that if RTDelay > 0, then the txm was
// delayed by this amount.  The delay occurs at the beginning of the
// response time.  So if RTDelay > 0, then the txm was actually sent
// at TxnStartT0 + RTDelay.
//
// Graphically:
//   time -->
//   |--- Menu ---|--- Keying ---|--- Response ---|--- Think ---|
//   <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 -> <- DeltaT3 ->
//   ^
//   ^ TxnStartT0
//
// RTDelay is the amount of response time delay included in DeltaT4.
// RTDelay is recorded per txm because this value can be changed on
// the fly, and so may vary from txm to txm.
//
// TxnStatus is the txm completion code.  It is used to indicate errors.
// For example, in the New Order txm, 1% of txms abort.  TxnStatus will
// reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME     TxnStartT0;          // start of txn
    BYTE            TxnType;             // = TXN_REC_TYPE_TPCC
    BYTE            TxnSubType;          // depends on
TxnType // end of common header

    int             DeltaT1;             // menu time (ms)

```

```

int             DeltaT2;             // keying time (ms)
int             DeltaT3;             // think time (ms)
int             DeltaT4;             // response time (ms)
int             RTDelay;             // response time delay (ms)
int             TxnError;            // error code providing more
detail for TxnStatus
WORD            w_id;                // warehouse ID
BYTE            d_id;                // assigned district ID for
this thread
BYTE            d_id_ThisTxn;         // district ID chosen for this
particular
BYTE            TxnStatus;            // completion status for txm
to indicate errors
BYTE            reserved;            // for word alignment
TXN_DETAILS     TxnDetails;          // TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txm Record Layout:
//
// Incorporating delivery transaction information into the above
// structure would increase the size of TXN_DETAILS from 8 to 42 bytes.
// Hence, we store delivery transaction details in a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME     TxnStartT0;          // start of txm
    BYTE            TxnType;             // =
TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE            TxnSubType;          // = 0
// end of common header

    int             DeltaT4;             // response time (ms)
    int             DeltaTxnExec;        // execution time (ms)
    WORD            w_id;                // warehouse ID
    BYTE            TxnStatus;            // completion status for txm
to indicate errors
BYTE            reserved;            // for word alignment
short           o_carrier_id;        // carrier id
long            o_id[10];             // returned delivery transaction ids
} TXN_RECORD_TPCC_DELIV_DEF, *PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION 1
#define TXN_DATA_START 4096 // offset in log file where
log records start
#define TXN_LOG_EYE_CATCHER "BC" // signature bytes at the start of log
file

///////////////////////////////
// The transaction log has a header as the first 4K block.
//
typedef struct _TXN_LOG_HEADER
{
    char            EyeCatcher[2];        // signature bytes;
should always be "BC"
    int             LogVersion;           //
// set to TXN_LOG_VERSION
    JULIAN_TIME     BeginTxnTS;          // timestamp of first (lowest) txm start

```

Appendix A - Application Source Code

```
JULIAN_TIME           EndTxnTS;          // timestamp of
last (highest) txn completion time      int             iRecCount;
                                         // number of records in log file
                                         BOOL            bLogSorted;
                                         int             iFileSize;
                                         // file size in bytes
                                         // the record map provides a fast way to get close to a particular
timestamp in a sorted log file.
//                                         struct
//                                         {
//                                             JULIAN_TIME     TS;
//                                             // timestamp of record
//                                             int             iPos;
//                                             // byte position in file
//                                         }
//#define RecMapSize    RecMap[RecMapSize];
                                         200
} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

#define READ_BUFFER_SIZE   64*1024
#define WRITE_BUFFER_SIZE  8*1024

#define NUM_READ_BUFFERS  1
#define NUM_WRITE_BUFFERS 2
#define MAX_NUM_BUFFERS   2

// flags passed in to the constructor
#define TXN_LOG_WRITE     0x01
#define TXN_LOG_READ      0x02
#define TXN_LOG_SORTED    0x04

#define TXN_LOG_OS_ERROR  1
#define TXN_LOG_NOT_SORTED 2

#define SKIP_CTRL_RECS    1

class CTxnLog
{
    private:
        DWORD           iBufferSize;          //buffer
allocated size          DWORD           iBytesFreeInBuffer; //total bytes
available for use in buffer
        int             iNumBuffers;
        //buffers in use
        int             iActiveBuffer;
        //indicates which buffer is active: 0 or 1
        int             iiIoBuffer;
        //buffer for any pending IO operation
        int             iFilePointer;
        //position in file.
        int             iNextRec;
        //when reading, ordinal value of next record

        // A "save point" is remembered each time GetNextRecord is called
with a start time specified.
        // The next time it is called, if start time is after the save point,
we start scanning from the
}
```

```
// save point. This is particularly useful in FindBestInterval,
where the log is scanned repeatedly.
JULIAN_TIME           SavePtTime;
int                 iSavePtFilePointer;
int                 iSavePtNextRec;

JULIAN_TIME           lastTS;
//when writing sorted output, used to verify records are sorted
BOOL                bWrite;
//writing log file
                                         bLogSorted;
// is log file sorted? applies to both input and output
JULIAN_TIME           BeginTxnTS;
// timestamp of first (lowest) txn start
JULIAN_TIME           EndTxnTS;          //
timestamp of last (highest) txn completion time
                                         int             iRecCount;
                                         // number of records in log file
                                         BYTE            *pCurrent;
                                         //ptr to current buffer
                                         BYTE            *pBuffer[MAX_NUM_BUFFERS];

                                         PTXN_RECORD_HEADER *TxnArray;          //transaction
record pointer array for sort

                                         DWORD           dwError;
                                         HANDLE          hTxnFile;          //handle
to log file
                                         HANDLE          hMapFile;          //map
file used when sorting the log
                                         HANDLE          hIoComplete;        //event
to signify that there are no pending IOs
                                         HANDLE          hLogFileIo;
                                         //event to signal the IO thread to write the inactive buffer
                                         Spinlock         Spin;             //spin
lock to protect the txn log file buffers
                                         int             Write(BYTE *ptr, DWORD Size);
                                         static void LogFileIO(CTxnLog *);

public:
    CTxnLog::CTxnLog(LPCTSTR szFileName, DWORD dwOpts);
    ~CTxnLog(void);

    int WriteToLog(PTXN_RECORD_TPC pTxnRcd);
    int WriteToLog(PTXN_RECORD_TPC_DELIV_DEF pTxnRcd);
    int WriteToLog(PTXN_RECORD_CONTROL pCtrlRec);
    int WriteToLog(PTXN_RECORD_HEADER pCtrlRec);

    int WriteCtrlRecToLog(BYTE SubType, LPTSTR lpStr, DWORD dwLen);

    void CloseTransactionLogFile(void);

    PTXN_RECORD_HEADER GetNextRecord(BOOL bSkipCtrlRecs = FALSE);
    PTXN_RECORD_HEADER GetNextRecord(JULIAN_TIME SeekTimeTo, BOOL
bSkipCtrlRecs = FALSE);

    int Sort(void);
    PTXN_RECORD_HEADER GetSortedRecord(int index);
}
```

Appendix A - Application Source Code

```
inline BOOL IsSorted(void) { return bLogSorted; };
inline JULIAN_TIME BeginTS(void) { return BeginTxnTS; };
inline JULIAN_TIME EndTS(void) { return EndTxnTS; };
inline int RecordCount(void) { return iRecCount; };

};

class CTXNLOG_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_BAD_FILE_FORMAT = 1,           // "File format is invalid."
        ERR_UNKNOWN_LOG_VERSION,         // "Log file version is
unknown."
        ERR_BROKEN_LOG_FILE,             // "Log file is
broken."
        ERR_LOG_NOT_SORTED,              // "Log file is not
sorted"
        ERR_INVALID_TIME_SEQ,            // "Internal Error:
Record Time Sequence invalid."
    };

    CTXNLOG_ERR( int iErr ) { m_errno = iErr; };

    int          m_errno;
    int ErrorType() {return ERR_TYPE_TXNLOG;};
    int ErrorNum() {return m_errno;};

    // TODO: need to complete...
    char *ErrorText() {return "";};
};


```

Appendix B - Database Design

Appendix B - Database Design

Build Scripts

setup.cmd

```
ECHO OFF

@ECHO ****
@ECHO *
@ECHO * Microsoft TPC-C Benchmark Kit Ver. 4.01
@ECHO *
@ECHO ****

if '%1'==' goto usage
if '%2'==' goto usage
if '%3'==' goto usage
if '%4'==' goto usage
if not '%5'==' if not '%5' == 'scaled' goto usage

::Cleanup any old .err files
@if exist logs*.err del logs\*.err
>nul

if '%3'=='full' goto start
if '%3'=='builddb' goto builddb
if '%3'=='objects' goto objects
if '%3'=='bulkload' goto bulkload
if '%3'=='objectsfull' goto objects
if '%3'=='bulkloadfull' goto bulkload
if '%3'=='backup' goto backup
goto usage

:start
:: Cleanup the logs directory...
@if exist logs\version.log del logs\version.log
@if exist logs\db.log del logs\db.log
@if exist logs\objects.log del logs\objects.log
@if exist logs\objects.log del logs\objects.log
@if exist logs\bulkload.log del logs\bulkload.log
@if exist logs\backup.log del logs\backup.log

isql -Usa -P -S%1 -Q"select @@version"
logs\version.log
isql -Usa -P -S%1 -Q"select getdate()"
logs\version.log

:builddb
@if exist logs\db.log del logs\db.log
@ECHO Building database files and database...
isql -Usa -P -S%1 -e < scripts\%2.war\%4\createdb.sql
logs\db.log
@ECHO Database build complete.
if '%3'=='full' goto objects
```

```
goto end

:objects
@if exist logs\objects.log del logs\objects.log
@ECHO Creating database objects...
isql -Usa -P -S%1 -e < scripts\ddl\%4\tables.sql
isql -Usa -P -S%1 -e < scripts\dml\%4\neword.sql
isql -Usa -P -S%1 -e < scripts\dml\%4\payment.sql
isql -Usa -P -S%1 -e < scripts\dml\%4\ordstat.sql
isql -Usa -P -S%1 -e < scripts\dml\%4\delivery.sql
logs\objects.log
isql -Usa -P -S%1 -e < scripts\dml\%4\stocklev.sql
logs\objects.log
@ECHO Database object creation complete.
if '%3'=='full' goto bulkload
if '%3'=='objectsfull' goto bulkload
goto end

:bulkload
@if exist logs\bulkload.log del logs\bulkload.log
@ECHO Beginning data load and index creation...
isql -Usa -P -S%1 -e < scripts\utility\%4\dbopt1.sql
logs\objects.log
if '%4'=='mssql70' goto odbc
if '%4'=='mssql65' goto dblib
goto usage
:dblib
if '%5'==''
    loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c0
if '%5'=='normal' loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c0
if '%5'=='scaled' loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c1
goto bulkloaddone
:odbc
if '%5'==''
    loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c0
if '%5'=='normal' loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c0
if '%5'=='scaled' loader\%4\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -dscripts\ddl\%4 -c1
goto bulkloaddone
:bulkloaddone
isql -Usa -P -S%1 -e < scripts\utility\%4\dbopt2.sql
logs\bulkload.log
@ECHO Data load and index creation complete.
if '%3'=='full' goto backup
if '%3'=='objectsfull' goto backup
if '%3'=='bulkloadfull' goto backup
goto end

:backup
@if exist logs\backup.log del logs\backup.log
@ECHO Backing up database...
isql -Usa -P -S%1 -e < scripts\%2.war\%4\backup.sql
logs\backup.log
@ECHO Database backup complete.
if '%3'=='full' goto verifyload
if '%3'=='objectsfull' goto verifyload
if '%3'=='bulkloadfull' goto verifyload
goto complete

:verifyload
@if exist logs\verifyload.log del logs\verifyload.log
@ECHO Verifying TPC-C database load...
```

Appendix B - Database Design

```
isql -Usa -P -$% < scripts\utility\%4\verifytpccload.sql          >
logs\verifyload.log
@ECHO Check logs\verifyload.log to verify database load.

:complete
@ECHO ****
@ECHO *
@ECHO *   Full TPC-C build complete.  Check logs directory for setup errors. *
@ECHO *
@ECHO *
@ECHO ****

goto end

:usage
@ECHO ****
@ECHO *
@ECHO *   The TPC-C setup command file requires the following parameters: *
@ECHO *
@ECHO *     setup SERVER NUMWAR BLDOPT VERSION DBTYPE
@ECHO *
@ECHO *       SERVER = machine name of server (use "" for local server)
@ECHO *       NUMWAR = number of warehouses
@ECHO *       BLDOPT = full, buildbb, objects, objectsfull, bulkload,
@ECHO *                 bulkloadfull, or backup
@ECHO *       VERSION = mssql165 or mssql170
@ECHO *       DBTYPE = normal or scaled
@ECHO *
@ECHO *   Note #1: the BLDOPT and VERSION parameters are case sensitive.
@ECHO *
@ECHO *   Note #2: the DBTYPE is optional. If no DBTYPE is specified, SETUP
@ECHO *             will default to NORMAL.
@ECHO *
@ECHO *   Example:
@ECHO *
@ECHO *   The following command would be used to build a complete 200
@ECHO *   warehouse database on SQL Server 7.0 running on server \\myserver.
@ECHO *
@ECHO *     SETUP myserver 200 full mssql170
@ECHO *
@ECHO *   Note, this command file does a backup of the database by default
@ECHO *   after the database build process is complete. If you do not wish
@ECHO *   to make a backup (strongly discouraged), you must edit this file
@ECHO *   and comment that section out. Also, if you need to run the dbcheck
@ECHO *   and the dbtables scripts on the fresh database load for an audit,
@ECHO *   you must either run them manually or edit this file to include them.
@ECHO *
@ECHO ****

:end

-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates tpcc database and backup files

use master
go

-- Create temporary table for timing
if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go

create table tpcc_timer
(
    start_date                char(30),
    end_date                  char(30)
)
```

Appendix B - Database Design

```
insert      into tpcc_timer values (0,0)

go

--      Store starting time

update      tpcc_timer

set        start_date      = (select convert(char(30), getdate(),9))

go

--  create main database files

CREATE DATABASE tpcc

ON PRIMARY

(      NAME          = MSSQL_tpcc_root,
      FILENAME    = "C:\MSSQL_tpcc_root.mdf",
      SIZE         = 8MB,
      FILEGROWTH  =0),
      FILEGROUP  MSSQL_misc_fg
(      NAME          = MSSQL_misc1,
      FILENAME    = "K:",
      SIZE         = 180000MB,
      FILEGROWTH  = 0),
      (
        NAME          = MSSQL_misc2,
        FILENAME    = "S:",
        SIZE         = 180000MB,
        FILEGROWTH  = 0),
        (
          NAME          = MSSQL_misc3,
          FILENAME    = "M:",
          SIZE         = 180000MB,
          FILEGROWTH  = 0),
          (
            NAME          = MSSQL_misc4,
            FILENAME    = "E:",
            SIZE         = 180000MB,
            FILEGROWTH  = 0),
            (
              NAME          = MSSQL_misc5,
              FILENAME    = "H:",
              SIZE         = 180000MB,
              FILEGROWTH  = 0),
              (
                NAME          = MSSQL_misc6,
```

Appendix B - Database Design

```
FILENAME  = "N:",  
SIZE      = 180000MB,  
FILEGROWTH = 0),  
  
FILEGROUP MSSQL_cs_fg  
  
(  NAME      = MSSQL_cs1,  
   FILENAME = "Y:",  
   SIZE     = 270000MB,  
   FILEGROWTH = 0),  
  
(  NAME      = MSSQL_cs2,  
   FILENAME = "W:",  
   SIZE     = 270000MB,  
   FILEGROWTH = 0),  
  
(  NAME      = MSSQL_cs3,  
   FILENAME = "Z:",  
   SIZE     = 270000MB,  
   FILEGROWTH = 0),  
  
(  NAME      = MSSQL_cs4,  
   FILENAME = "F:",  
   SIZE     = 270000MB,  
   FILEGROWTH = 0),  
  
(      NAME      = MSSQL_cs5,  
      FILENAME = "I:",  
      SIZE     = 270000MB,  
      FILEGROWTH = 0),  
  
(      NAME      = MSSQL_cs6,  
      FILENAME = "O:",  
      SIZE     = 270000MB,  
      FILEGROWTH = 0)  
  
LOG ON  
  
(      NAME      =MSSQL_tpcc_log,  
      FILENAME = "L:",  
      SIZE     =260000MB,  
      FILEGROWTH =0)  
  
COLLATE Latin1_General_BIN  
  
go  
  
-- Store ending time  
update    tpcc_timer
```

Appendix B - Database Design

```
set      end_date  = (select convert(char(30), getdate(),9))
go
select "Elapsed time (in seconds): ", datediff(second,(select start_date from tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
    drop table tpcc_timer
go
```

tables.sql

```
-- File:      TABLES.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates TPC-C tables

use tpcc
go

-- Remove all existing TPC-C tables
--

if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
```

```
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

-- Create new tables
--

create table warehouse
(
    w_id                         smallint,
    w_name                        char(10),
    w_street_1                     char(20),
    w_street_2                     char(20),
    w_city                         char(20),
    w_state                        char(2),
    w_zip                          char(9),
    w_tax                          numeric(4,4),
    w_ytd                          numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id                         tinyint,
    d_w_id                        smallint,
    d_name                        char(10),
    d_street_1                     char(20),
    d_street_2                     char(20),
    d_city                         char(20),
    d_state                        char(2),
    d_zip                          char(9),
    d_tax                          numeric(4,4),
    d_ytd                          numeric(12,2),
    d_next_o_id                    int
) on MSSQL_misc_fg
go

create table customer
(
    c_id                          int,
    c_d_id                        tinyint,
    c_w_id                        smallint,
    c_first                        char(16),
    c_middle                       char(2),
    c_last                         char(16),
    c_street_1                     char(20),
    c_street_2                     char(20),
    c_city                         char(20),
    c_state                        char(2),
    c_zip                          char(9),
    c_phone                        char(16),
    c_since                        datetime,
)
```

Appendix B - Database Design

```
c_credit          char(2),
c_credit_lim     numeric(12,2),
c_discount       numeric(4,4),
c_balance        numeric(12,2),
c_ytd_payment   numeric(12,2),
c_payment_cnt   smallint,
c_delivery_cnt  smallint,
c_data           char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id          int,
    h_c_d_id        tinyint,
    h_c_w_id        smallint,
    h_d_id          tinyint,
    h_w_id          smallint,
    h_date          datetime,
    h_amount        numeric(6,2),
    h_data           char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id         int,
    no_d_id         tinyint,
    no_w_id         smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id            int,
    o_d_id          tinyint,
    o_w_id          smallint,
    o_c_id          int,
    o_entry_d       datetime,
    o_carrier_id   tinyint,
    o.ol_cnt        tinyint,
    o.all_local     tinyint
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id         int,
    ol_d_id         tinyint,
    ol_w_id         smallint,
    ol_number       tinyint,
    ol_i_id          int,
    ol_supply_w_id  smallint,
    ol_delivery_d   datetime,
    ol_quantity     smallint,
    ol_amount       numeric(6,2),
    ol_dist_info    char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id            int,
```

```
    i_im_id        int,
    i_name          char(24),
    i_price         numeric(5,2),
    i_data          char(50)
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id          int,
    s_w_id          smallint,
    s_quantity      smallint,
    s_dist_01       char(24),
    s_dist_02       char(24),
    s_dist_03       char(24),
    s_dist_04       char(24),
    s_dist_05       char(24),
    s_dist_06       char(24),
    s_dist_07       char(24),
    s_dist_08       char(24),
    s_dist_09       char(24),
    s_dist_10       char(24),
    s_ytd           int,
    s_order_cnt    smallint,
    s_remote_cnt   smallint,
    s_data          char(50)
) on MSSQL_cs_fg
go
```

idxcuscl.sql

```
-- File:      IDXCUSCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_c1' )
    drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id, c_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
go
```

Appendix B - Database Design

idxcusnc.sql

```
-- File:      IDXCUSNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id, c_last,
c_first, c_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

go

idxitmcl.sql

```
-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxdiscl.sql

```
-- File:     >IDXDISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on district table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
    drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

idxnodcl.sql

```
-- File:      IDKNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on new_order table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
    drop index new_order.new_order_c1

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id, no_o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

Appendix B - Database Design

go

idxodcl.sql

```
-- File:      IDXODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on order_line table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on order_line(o_l_w_id, o_l_d_id, o_l_o_id,
o_l_number)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxordcl.sql

```
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
```

```
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxstkcl.sql

```
-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on stock table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxwarcl.sql

```
-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
```

Appendix B - Database Design

```
drop index warehouse.warehouse_c1
create unique clustered index warehouse_c1 on warehouse(w_id)
    with fillfactor=100 on MSSQL_msc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

dbopt1.sql

```
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Sets database options for data load

use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go

use tpcc
go

checkpoint
go
```

dbopt2.sql

```
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Resets database options after data load

use master
go

sp_dboption tpcc,'select ',false
go

sp_dboption tpcc,'trunc. ',false
go

use tpcc
```

```
go

checkpoint
go

sp_configure allow,1
go

reconfigure with override
go

/*
/* Set option values for user-defined indexes */
*/

sp_indexoption 'customer','AllowPageLocks',FALSE
go
sp_indexoption 'district','AllowPageLocks',FALSE
go
sp_indexoption 'warehouse','AllowPageLocks',FALSE
go
sp_indexoption 'stock','AllowPageLocks',FALSE
go
sp_indexoption 'order_line','AllowPageLocks',FALSE
go
sp_indexoption 'orders','AllowPageLocks',FALSE
go
sp_indexoption 'new_order','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowPageLocks',FALSE
go

Print '
Print *****
Print 'Pre-specified Locking Hierarchy:
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print '

select name,lockflags
from sysindexes
where object_id("warehouse")=id or
      object_id("district")=id or
      object_id("customer")=id or
      object_id("stock")=id or
      object_id("orders")=id or
      object_id("order_line")=id or
      object_id("history")=id or
      object_id("new_order")=id or
      object_id("item")=id
order by lockflags asc
go

sp_configure allow,0
go

reconfigure with override
go
```

Appendix B - Database Design

```
exec sp_dboption tpcc, 'auto update statistics', FALSE
exec sp_dboption tpcc, 'auto create statistics', FALSE
go

exec sp_tableoption "district","pintable",true
exec sp_tableoption "warehouse","pintable",true
exec sp_tableoption "new_order","pintable",true
exec sp_tableoption "item","pintable",true
go
```

dbopt3.sql

```
use tpcc
go
sp_indexoption 'orders','AllowPagelocks',TRUE
go
sp_indexoption 'orders','AllowRowlocks',FALSE
go
sp_indexoption 'order_line','AllowPagelocks',TRUE
go
sp_indexoption 'order_line','AllowRowlocks',FALSE
go
```

backup.sql

```
-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

backup database tpcc to tpccback1, tpccback2, tpccback3, tpccback4, tpccback5, tpccback6
with init, stats = 1
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

restore.sql

```
-- File:      RESTORE.SQL
```

Appendix B - Database Design

```
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Loads database backup from backup files

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

load database tpcc from tpccback1, tpccback2, tpccback3, tpccback4, tpccback5, tpccback6
with stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

Appendix B - Database Design

Stored Procedures

neword.sql

```
-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.01
--           Copyright Microsoft, 1996
-- Purpose:   Creates new order transaction stored procedure
--
-- Modified 9/21/98 - Jamie Reding - Microsoft Corporation
--                 Reordered @rowcount check so that invalid supply warehouse id,
--                 as well as invalid item id, is detected and causes explicit
--                 transaction rollback.
--
use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder
    @w_id          smallint,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt      tinyint,
    @o.all_local   tinyint,
    @i_id1         int = 0, @s_w_id1 smallint = 0,
    @i_id2         int = 0, @s_w_id2 smallint = 0,
    @i_id3         int = 0, @s_w_id3 smallint = 0,
    @i_id4         int = 0, @s_w_id4 smallint = 0,
    @i_id5         int = 0, @s_w_id5 smallint = 0,
    @i_id6         int = 0, @s_w_id6 smallint = 0,
    @i_id7         int = 0, @s_w_id7 smallint = 0,
    @i_id8         int = 0, @s_w_id8 smallint = 0,
    @i_id9         int = 0, @s_w_id9 smallint = 0,
    @i_id10        int = 0, @s_w_id10 smallint =
    @i_id11        int = 0, @s_w_id11 smallint =
    @i_id12        int = 0, @s_w_id12 smallint =
    @i_id13        int = 0, @s_w_id13 smallint =
    @ol_qty1       smallint = 0,
    @ol_qty2       smallint = 0,
    @ol_qty3       smallint = 0,
    @ol_qty4       smallint = 0,
    @ol_qty5       smallint = 0,
    @ol_qty6       smallint = 0,
    @ol_qty7       smallint = 0,
    @ol_qty8       smallint = 0,
    @ol_qty9       smallint = 0,
    @ol_qty10      smallint = 0,
    @ol_qty11      smallint = 0,
    @ol_qty12      smallint = 0,
    @ol_qty13      smallint = 0,
```

```
    @i_id14       int = 0, @s_w_id14 smallint =
    @i_id15       int = 0, @s_w_id15 smallint =
    0, @ol_qty15  smallint = 0

    as
declare    @w_tax           numeric(4,4),
            @d_tax           numeric(4,4),
            @c_last          char(16),
            @c_credit         char(2),
            @c_discount       numeric(4,4),
            @i_price          numeric(5,2),
            @i_name           char(24),
            @i_data           char(50),
            @o_entry_d        datetime,
            @remote_flag      int,
            @s_quantity       smallint,
            @s_data           char(50),
            @s_dist           char(24),
            @li_no            int,
            @o_id             int,
            @commit_flag      tinyint,
            @li_id            int,
            @li_s_w_id        smallint,
            @li_qty           smallint,
            @ol_number        int,
            @c_id_local       int

begin
    begin transaction n
    -- get district tax and next available order id and update
    -- plus initialize local variables
    update   district
    set      @d_tax      = d_tax,
            @o_id       = d_next_o_id,
            d_next_o_id = d_next_o_id + 1,
            @o_entry_d  = getdate(),
            @li_no      = 0,
            @commit_flag = 1
    where   d_w_id      = @w_id and
            d_id       = @d_id

    -- process orderlines
    while (@li_no < @o.ol_cnt)
        begin
            select @li_no = @li_no + 1
            -- set i_id, s_w_id, and qty for this lineitem
            select @li_id = case @li_no
                when 1 then @i_id1
                when 2 then @i_id2
                when 3 then @i_id3
                when 4 then @i_id4
                when 5 then @i_id5
                when 6 then @i_id6
                when 7 then @i_id7
```

Appendix B - Database Design

```

when 8 then @i_id8
when 9 then @i_id9
when 10 then @i_id10
when 11 then @i_id11
when 12 then @i_id12
when 13 then @i_id13
when 14 then @i_id14
when 15 then @i_id15
end,
@li_s_w_id = case @li_no
when 1 then @s_w_id1
when 2 then @s_w_id2
when 3 then @s_w_id3
when 4 then @s_w_id4
when 5 then @s_w_id5
when 6 then @s_w_id6
when 7 then @s_w_id7
when 8 then @s_w_id8
when 9 then @s_w_id9
when 10 then @s_w_id10
when 11 then @s_w_id11
when 12 then @s_w_id12
when 13 then @s_w_id13
when 14 then @s_w_id14
when 15 then @s_w_id15
end,
@li_qty = case @li_no
when 1 then @ol_qty1
when 2 then @ol_qty2
when 3 then @ol_qty3
when 4 then @ol_qty4
when 5 then @ol_qty5
when 6 then @ol_qty6
when 7 then @ol_qty7
when 8 then @ol_qty8
when 9 then @ol_qty9
when 10 then @ol_qty10
when 11 then @ol_qty11
when 12 then @ol_qty12
when 13 then @ol_qty13
when 14 then @ol_qty14
when 15 then @ol_qty15
end
-- get item data (no one updates item)
select      @i_price = i_price,
            @i_name  = i_name,
            @i_data  = i_data
from        item (tablock repeatableread)
where       i_id = @li_id
-- update stock values
update      stock
set          s_ytd      = s_ytd + @li_qty,
            @s_quantity = s_quantity - @li_qty +
case when (s_quantity - @li_qty < 10) then 91 else 0 end,
            s_order_cnt = s_order_cnt + 1,

```

```

s_remote_cnt = s_remote_cnt +
case when (@li_s_w_id = @w_id) then 0 else 1 end,
@s_data      = s_data,
@s_dist       = case @d_id
when 1
then s_dist_01
when 2 then s_dist_02
when 3 then s_dist_03
when 4 then s_dist_04
when 5 then s_dist_05
when 6 then s_dist_06
when 7 then s_dist_07
when 8 then s_dist_08
when 9 then s_dist_09
when 10 then s_dist_10
end
where      s_i_id      = @li_id and
           s_w_id      = @li_s_w_id
-- if there actually is a stock (and item) with these ids, go to work
if (@@rowcount > 0)
begin
-- insert order_line data (using data from item and stock)
insert into order_line values(@o_id,
@d_id,
@w_id,
@li_no,
@li_id,
@li_s_w_id,
"dec 31, 1899",
@li_qty,
@i_price * @li_qty,
@s_dist)

-- send line-item data to client
select      @i_name,
@s_quantity,
b_g = case when (
patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
then "B" else "G"
end,
@i_price,
@i_price * @li_qty
else
end

```

Appendix B - Database Design

```
begin  
  
-- no item (or stock) found - triggers rollback condition  
  
    select "",0,"",0,0  
    select @commit_flag = 0  
  
end  
  
-- get customer last name, discount, and credit rating  
  
select      @c_last      = c_last,  
            @c_discount = c_discount,  
            @c_credit   = c_credit,  
            @c_id_local = c_id  
from customer (repeatableread)  
where c_id      = @c_id and  
      c_w_id      = @w_id and  
      c_d_id      = @d_id  
  
-- insert fresh row into orders table  
  
insert into orders values (@o_id,  
                           @d_id,  
                           @w_id,  
                           @c_id_local,  
                           @o_entry_d,  
                           0,  
                           @o.ol_cnt,  
                           @o.all_local)  
  
-- insert corresponding row into new-order table  
  
insert into new_order values (@o_id,  
                             @d_id,  
                             @w_id)  
  
-- select warehouse tax  
  
select      @w_tax      = w_tax  
from warehouse (repeatableread)  
where w_id      = @w_id  
  
if (@commit_flag = 1)  
    commit transaction n  
else  
  
-- all that work for nuthin!!!  
    rollback transaction n  
  
-- return order data to client  
  
select @w_tax,  
       @d_tax,  
       @o_id,  
       @c_last,  
       @c_discount,  
       @c_credit,  
       @c_entry_d,  
       @commit_flag
```

```
end  
go  
  
payment.sql  
  
-- File:      PAYMENT.SQL  
--           Microsoft TPC-C Benchmark Kit Ver. 4.00  
--           Copyright Microsoft, 1996  
-- Purpose:   Creates payment transaction stored procedure  
  
use tpcc  
go  
  
if exists (select name from sysobjects where name = "tpcc_payment")  
    drop procedure tpcc_payment  
go  
  
create proc tpcc_payment @w_id           smallint,  
                           @c_w_id          smallint,  
                           @h_amount         numeric(6,2),  
                           @d_id             tinyint,  
                           @c_d_id           tinyint,  
                           @c_id              int,  
                           @c_last            char(16) =  
                           ""  
  
as  
declare @w_street_1      char(20),  
        @w_street_2      char(20),  
        @w_city          char(20),  
        @w_state         char(2),  
        @w_zip           char(9),  
        @w_name          char(10),  
        @d_street_1      char(20),  
        @d_street_2      char(20),  
        @d_city          char(20),  
        @d_state         char(2),  
        @d_zip           char(9),  
        @d_name          char(10),  
        @c_first          char(16),  
        @c_middle         char(2),  
        @c_street_1      char(20),  
        @c_street_2      char(20),  
        @c_city          char(20),  
        @c_state         char(2),  
        @c_zip           char(9),  
        @c_phone          char(16),  
        @c_since          datetime,  
        @c_credit          char(2),  
        @c_credit_lim     numeric(12,2),  
        @c_balance        numeric(12,2),  
        @c_discount       numeric(4,4),  
        @data             char(500),  
        @c_data           char(500),  
        @datetime         datetime,  
        @w_ytd            numeric(12,2),
```

Appendix B - Database Design

```
@d_ytd      numeric(12,2),
@cnt        smallint,
@val        smallint,
@screen_data    char(200),
@d_id_local   tinyint,
@w_id_local   smallint,
@c_id_local   int

select @screen_data = ""

begin tran p
-- get payment date
    select @datetime = getdate()
    if (@c_id = 0)
        begin
-- get customer id and info using last name
            select @cnt = count(*)
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @c_w_id and
                  c_d_id = @c_d_id

            select @val = (@cnt + 1) / 2
            set rowcount @val

            select @c_id = c_id
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @c_w_id and
                  c_d_id = @c_d_id
            order by c_last, c_first

            set rowcount 0
        end
-- get customer info and update balances
        update customer set
            @c_balance      = c_balance - @h_amount,
            c_payment_cnt   = c_payment_cnt + 1,
            c_ytd_payment   = c_ytd_payment + @h_amount,
            @c_first        = c_first,
            @c_middle       = c_middle,
            @c_last         = c_last,
            @c_street_1     = c_street_1,
            @c_street_2     = c_street_2,
            @c_city          = c_city,
            @c_state         = c_state,
            @c_zip           = c_zip,
            @c_phone         = c_phone,
            @c_credit        = c_credit,
            @c_credit_lim    = c_credit_lim,
            @c_discount      = c_discount,
            @c_since         = c_since,
            @data            = c_data,
            @c_id_local      = c_id
        where c_id = @c_id and

c_w_id = @c_w_id and
c_d_id = @c_d_id

-- if customer has bad credit get some more info
if (@c_credit = "BC")
begin
-- compute new info
    select @c_data = convert(char(5),@c_id) +
                    convert(char(4),@c_d_id) +
                    convert(char(5),@c_w_id) +
                    convert(char(4),@d_id) +
                    convert(char(5),@w_id) +
                    convert(char(19),@h_amount) +
                    substring(@data, 1, 458)

-- update customer info
    update customer set
        c_data = @c_data
    where c_id = @c_id and
          c_w_id = @c_w_id and
          c_d_id = @c_d_id

    select @screen_data = substring (@c_data,1,200)
end
-- get district data and update year-to-date
    update district
    set d_ytd = d_ytd + @h_amount,
        @d_street_1 = d_street_1,
        @d_street_2 = d_street_2,
        @d_city    = d_city,
        @d_state   = d_state,
        @d_zip     = d_zip,
        @d_name    = d_name,
        @d_id_local = d_id
    where d_w_id = @w_id and
          d_id = @d_id

-- get warehouse data and update year-to-date
    update warehouse
    set w_ytd = w_ytd + @h_amount,
        @w_street_1 = w_street_1,
        @w_street_2 = w_street_2,
        @w_city    = w_city,
        @w_state   = w_state,
        @w_zip     = w_zip,
        @w_name    = w_name,
        @w_id_local = w_id
    where w_id = @w_id

-- create history record
    insert into history values (@c_id_local,
                                @c_d_id,
                                @c_w_id,
                                @d_id_local,
```

Appendix B - Database Design

```
@w_id_local,
@datetime,
@h_amount,
+ "    " + @d_name)

commit tran p

-- return data to client

select  @c_id,
        @c_last,
        @c_datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data

go
```

ordstat.sql

```
-- File:      ORDSTAT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
-- Copyright Microsoft, 1996
-- Purpose:   Creates order status transaction stored procedure

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
    drop procedure tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id
                                smallint,
```

```
tinyint,
int,
= ""
as

declare @c_balance      numeric(12,2),
        @c_first       char(16),
        @c_middle      char(2),
        @c_id          int,
        @c_entry_d    datetime,
        @c_carrier_id smallint,
        @cnt           smallint

begin tran o

if (@c_id = 0)
    begin

-- get customer id and info using last name

select @cnt = (count(*)+1)/2
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @w_id and
      c_d_id = @d_id

set rowcount @cnt

select @c_id = c_id,
       @c_balance = c_balance,
       @c_first  = c_first,
       @c_last   = c_last,
       @c_middle = c_middle
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @w_id and
      c_d_id = @d_id
order by c_w_id, c_d_id, c_last, c_first

set rowcount 0
end

else
begin

-- get customer info if by id

select @c_balance = c_balance,
       @c_first  = c_first,
       @c_middle = c_middle,
       @c_last   = c_last
from customer (repeatableread)
where c_id = @c_id and
      c_d_id = @d_id and
      c_w_id = @w_id

select @cnt = @@rowcount

end
```

Appendix B - Database Design

```
-- if no such customer
if (@cnt = 0)
begin
    raiserror("Customer not found",18,1)
    goto custnotfound
end

-- get order info
select @o_id = o_id,
       @o_entry_d   = o_entry_d,
       @o_carrier_id = o_carrier_id
from orders (serializable)
where o_c_id = @c_id and
      o_d_id = @d_id and
      o_w_id = @w_id
order by o_id asc

-- select order lines for the current order
select ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
from order_line (repeatableread)
where ol_o_id = @o_id and
      ol_d_id = @d_id and
      ol_w_id = @w_id

custnotfound:
commit tran o

-- return data to client
select @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

go
```

delivery.sql

```
-- File:      DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.00
-- Copyright Microsoft, 1996
-- Purpose:   Creates delivery transaction stored procedure
```

```
use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
drop procedure tpcc_delivery
go

create proc tpcc_delivery      @w_id           smallint,
                                @o_carrier_id  smallint
as
declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0
begin tran d
while (@d_id < 10)
begin
    select @d_id = @d_id + 1,
           @total = 0,
           @o_id = 0
    select top 1 @o_id = no_o_id
    from new_order (serializable updlock)
    where no_w_id = @w_id and
          no_d_id = @d_id
    order by no_o_id asc
    if (@@rowcount <> 0)
    begin
        -- claim the order for this district
        delete new_order
        where no_w_id = @w_id and
              no_d_id = @d_id and
              no_o_id = @o_id
        -- set carrier_id on this order (and get customer id)
        update orders
               set o_carrier_id = @o_carrier_id,
                   @c_id      = @c_id
        where o_w_id = @w_id and
              o_d_id = @d_id and
              o_id      = @o_id
```

Appendix B - Database Design

```
-- set date in all lineitems for this order (and sum amounts)

    update order_line
        set ol_delivery_d = getdate(),
            @total          = @total + ol_amount
    where ol_w_id = @w_id and
          ol_d_id = @d_id and
          ol_o_id = @o_id

-- accummulate lineitem amounts for this order into customer

    update customer
        set c_balance      = c_balance + @total,
            c_delivery_cnt = c_delivery_cnt + 1
    where c_w_id = @w_id and
          c_d_id = @d_id and
          c_id     = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
       @oid2 = case @d_id when 2 then @o_id else @oid2 end,
       @oid3 = case @d_id when 3 then @o_id else @oid3 end,
       @oid4 = case @d_id when 4 then @o_id else @oid4 end,
       @oid5 = case @d_id when 5 then @o_id else @oid5 end,
       @oid6 = case @d_id when 6 then @o_id else @oid6 end,
       @oid7 = case @d_id when 7 then @o_id else @oid7 end,
       @oid8 = case @d_id when 8 then @o_id else @oid8 end,
       @oid9 = case @d_id when 9 then @o_id else @oid9 end,
       @oid10 = case @d_id when 10 then @o_id else @oid10 end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go
```

stocklev.sql

```
-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.00
-- Copyright Microsoft, 1996
-- Purpose: Creates stock level transaction stored procedure

use tpcc
go
```

```
if exists (select name from sysobjects where name = "tpcc_stocklevel" )
    drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel    @w_id           smallint,
                                @d_id           tinyint,
                                @threshold     smallint
as

    declare @o_id_low int,
            @o_id_high int

    select @o_id_low = (d_next_o_id - 20),
          @o_id_high = (d_next_o_id - 1)
    from district
    where d_w_id = @w_id and
          d_id     = @d_id

    select count(distinct(s_i_id))
        from stock, order_line
    where ol_w_id      = @w_id and
          ol_d_id      = @d_id and
          ol_o_id between @o_id_low and @o_id_high and
          s_w_id       = ol_w_id and
          s_i_id       = ol_i_id and
          s_quantity < @threshold

go
```

Loader Source Code

tpcc.h

```
//      File:          TPCC.H
//                                         Microsoft TPC-C Kit Ver. 4.00
//                                         Copyright Microsoft, 1996, 1997, 1998

//      Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TFCKIT_VER "4.00"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stddarg.h>
#include <string.h>
```

Appendix B - Database Design

```

#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcsql.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEFILDPACKSIZE 32768
#define ORDERS_PER_DIST 3000
#define LOADER_RES_FILE "logs\\load.out"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1 // build both data
and indexes
#define INDEX_ORDER 1 // build indexes
before load
#define SCALE_DOWN 0 // build a normal scale
database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if loading
WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set if
loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
}
TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OI_NEW_ORDER_ITEMS 15
#define MAX_OI_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();

```

Appendix B - Database Design

```
void PaddString();
```

tpccldr.c

```
// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations

void HandleErrorDBC (SQLHDBC hdbc1);

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate();
```

```
// Shared memory structures

typedef struct
{
    long          ol;
    long          ol_i_id;
    short         ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long          o_id;
    short         o_d_id;
    short         o_w_id;
    long          o_c_id;
    short         o_carrier_id;
    short         o.ol_cnt;
    short         o.all_local;
    ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long          c_id;
    short         c_d_id;
    short         c_w_id;
    char          c_first[FIRST_NAME_LEN+1];
    char          c_middle[MIDDLE_NAME_LEN+1];
    char          c_last[LAST_NAME_LEN+1];
    char          c_street_1[ADDRESS_LEN+1];
    char          c_street_2[ADDRESS_LEN+1];
    char          c_city[ADDRESS_LEN+1];
    char          c_state[STATE_LEN+1];
    char          c_zip[ZIP_LEN+1];
    char          c_phone[PHONE_LEN+1];
    char          c_credit[CREDIT_LEN+1];
    double        c_credit_lim;
    double        c_discount;
    // fix to avoid ODBC float to numeric conversion problem.
    double        c_balance;
    char          c_balance[6];
    double        c_ytd_payment;
    short         c_payment_cnt;
    short         c_delivery_cnt;
    char          c_data[C_DATA_LEN+1];
    double        h_amount;
    char          h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char          c_last[LAST_NAME_LEN+1];
    char          c_first[FIRST_NAME_LEN+1];
    long          c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
```

Appendix B - Database Design

```
    long          time_start;
} LOADER_TIME_STRUCT;

// Global variables

char      szLastError[300];
HENV     henv;

HDBC     i_hdbc1;                                // for ITEM table
HDBC     w_hdbc1;                                // for WAREHOUSE, DISTRICT,
STOCK
HDBC     c_hdbc1;                                // for CUSTOMER
HDBC     c_hdbc2;                                // for HISTORY
HDBC     o_hdbc1;                                // for ORDERS
HDBC     o_hdbc2;                                // for NEW-ORDER

HDBC     o_hdbc3;                                // for ORDER-LINE

HSTMT   i_hstmt1;
HSTMT   w_hstmt1;
HSTMT   c_hstmt1, c_hstmt2;
HSTMT   o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long      orders_rows_loaded;
long      new_order_rows_loaded;
long      order_line_rows_loaded;
long      history_rows_loaded;
long      customer_rows_loaded;
long      stock_rows_loaded;
long      district_rows_loaded;
long      item_rows_loaded;
long      warehouse_rows_loaded;
long      main_time_start;
long      main_time_end;
long      max_items;
long      customers_per_district;
long      orders_per_district;
long      first_new_order;
long      last_new_order;

TPCCLDR_ARGS *aptr, args;

//=====================================================================
// Function name: main
//=====================================================================

int main(int argc, char **argv)
{
    DWORD      dwThreadID[MAX_MAIN_THREADS];
    HANDLE     hThread[MAX_MAIN_THREADS];
    FILE      *fLoader;
    char      buffer[255];
    int         i;
```

```
for (i=0; i<MAX_MAIN_THREADS; i++)
    hThread[i] = NULL;

printf("\n*****\n");
printf("  Microsoft SQL Server\n");
printf("  TPC-C BENCHMARK KIT: Database loader\n");
printf("  Version %s\n", TPCKIT_VER);
printf("\n*****\n");

// process command line arguments

aptr = &args;
GetArgsLoader(argc, argv, aptr);

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk load.\n");
else
    printf("Clustered indexes will be created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("*** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
```

Appendix B - Database Design

```
sprintf(buffer,"TPC-C load started for %ld warehouses.\n",aptr->num_warehouses);

printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadItem,
                             NULL,
                             0,
                             &dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread = 0.\n");
        exit(-1);
    }
}

if (aptr->tables_all || aptr->table_warehouse)
{
    fprintf(fLoader, "Starting loader threads for: warehouse\n");

    hThread[1] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadWarehouse,
                             NULL,
                             0,
                             &dwThreadID[1]);

    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating creating thread = 1.\n");
        exit(-1);
    }
}

if (aptr->tables_all || aptr->table_customer)
{
    fprintf(fLoader, "Starting loader threads for: customer\n");

    hThread[2] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadCustomer,
                             NULL,
                             0,
                             &dwThreadID[2]);
}

if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating main thread = 2.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_orders)
{
    fprintf(fLoader, "Starting loader threads for: orders\n");

    hThread[3] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadOrders,
                             NULL,
                             0,
                             &dwThreadID[3]);

    if (hThread[3] == NULL)
    {
        printf("Error, failed in creating creating main thread = 3.\n");
        exit(-1);
    }

    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);

    sprintf(buffer,"\nTPC-C load completed successfully in %ld minutes.\n",
           (main_time_end - main_time_start)/60);

    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

    SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
// Function name: LoadItem
// =====
```

Appendix B - Database Design

```
void LoadItem()
{
    long      i_id;
    long      i_im_id;
    char      i_name[I_NAME_LEN+1];
    double    i_price;
    char      i_data[I_DATA_LEN+1];
    char      name[20];
    long      time_start;
    RETCODE   rc;
    DBINT    rcount;
    char      bcphint[128];

    // Seed with unique number
    seed(1);

    printf("Loading item table...\n");

    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH = 100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
4);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
```

```
    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);
        MakeAlphaString(14, 24, I_NAME_LEN, i_name);
        i_price = ((float) RandomNumber(100L, 10000L)) / 100.0;
        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcount = bcp_done(i_hdbc1);
    if (rcnt < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDISconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
// Function : LoadWarehouse
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//=====

void LoadWarehouse()
{
    short w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double   w_tax;
    double   w_ytd;
    char    name[20];
    long    time_start;
    RETCODE  rc;
    DBINT   rcount;
```

Appendix B - Database Design

```
char      bcphint[128];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s..%s", aptr->database, "warehouse");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (%d), ROWS_PER_BATCH = %d", aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, 2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
```

```
9);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaString(6,10, W_NAME_LEN, w_name);

    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded, "warehouse",
&time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();

}

//=====
// Function : District
//=====
void District()
{
    short d_id;
    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
```

Appendix B - Database Design

```
char d_state[STATE_LEN+1];
char d_zip[ZIP_LEN+1];
double      d_tax;
double      d_ytd;
char       name[20];
long   d_next_o_id;
long   time_start;
int    w_id;
RETCODE   rc;
DBINT    rcint;
char    bcphint[128];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdiscl");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
sprintf(name, "%s..%s", aptr->database, "district");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH =
%u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
```

```
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
10);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
SQLINT4, 11);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;

d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses; w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaString(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1, district_rows_loaded,
"district", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");
```

Appendix B - Database Design

```
    return;
}

//=====
// Function : Stock
//=====
void Stock()
{
    long s_i_id;
    short s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcount;
    char bcphint[128];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database, "stock");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id), ROWS_PER_BATCH =
%u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
```

```
    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0, 11);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0, 12);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0, 13);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
14);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 15);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 16);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
```

Appendix B - Database Design

```
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0, 17);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstml1, stock_rows_loaded,
"stock", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstml1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====
```

```
//
// Function      : LoadCustomer
//
//=====

void LoadCustomer()
{
    LOADER_TIME_STRUCT      customer_time_start;
    LOADER_TIME_STRUCT      history_time_start;
    short                   w_id;
    short                   d_id;
    DWORD                  dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE                 hThread[MAX_CUSTOMER_THREADS];
    char                   name[20];
    RETCODE                rc;
    DBINT                  rcint;
    char                   bcpinh[128];
    char                   cmd[256];
    // SQLRETURN             rc_1;
    // SQLSMALLINT           recnum;
    // SQLCHAR                MsgLen;
    // SQLSTATE[6],           SqlState[6],
    // SQLINTEGER              NativeError;

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxcuscl");

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpinh, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcpinh);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcpinh, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcpinh);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    customer_rows_loaded      = 0;
    history_rows_loaded       = 0;
```

Appendix B - Database Design

```
CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);
        // Start parallel loading threads here...
        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id =
%d\n", d_id, w_id);
        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);
        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread
= 0.\n");
            exit(-1);
        }
        // Start History table thread
        printf("...Loading history table for: d_id = %d, w_id =
%d\n", d_id, w_id);
        hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread
= 1.\n");
            exit(-1);
        }
    }
}
```

```
WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );
if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing customer thread
handle with errno: %d\n", GetLastError());
}
if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing history thread
handle with errno: %d\n", GetLastError());
}

}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);
rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);
printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "sql -S% -U% -P% -e -Q\"update customer set c_first =
'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > logs\\nurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}
```

Appendix B - Database Design

```
=====  
//  
// Function : CustomerBufInit  
//  
=====  
  
void CustomerBufInit()  
{  
    int i;  
  
    for (i=0;i<customers_per_district;i++)  
    {  
        customer_buf[i].c_id = 0;  
        customer_buf[i].c_d_id = 0;  
        customer_buf[i].c_w_id = 0;  
  
        strcpy(customer_buf[i].c_first,"");  
        strcpy(customer_buf[i].c_middle,"");  
        strcpy(customer_buf[i].c_last,"");  
        strcpy(customer_buf[i].c_street_1,"");  
        strcpy(customer_buf[i].c_street_2,"");  
        strcpy(customer_buf[i].c_city,"");  
        strcpy(customer_buf[i].c_state,"");  
        strcpy(customer_buf[i].c_zip,"");  
        strcpy(customer_buf[i].c_phone,"");  
        strcpy(customer_buf[i].c_credit,"");  
  
        customer_buf[i].c_credit_lim = 0;  
        customer_buf[i].c_discount = (float) 0;  
  
        // fix to avoid ODBC float to numeric conversion problem.  
        // customer_buf[i].c_balance = 0;  
        strcpy(customer_buf[i].c_balance,"");  
  
        customer_buf[i].c_ytd_payment = 0;  
        customer_buf[i].c_payment_cnt = 0;  
        customer_buf[i].c_delivery_cnt = 0;  
  
        strcpy(customer_buf[i].c_data,"");  
        customer_buf[i].h_amount = 0;  
        strcpy(customer_buf[i].h_data,"");  
    }  
}  
  
=====  
//  
// Function : CustomerBufLoad  
//  
// Fills shared buffer for HISTORY and CUSTOMER  
//=====  
  
void CustomerBufLoad(int d_id, int w_id)  
{  
    long i;  
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];
```

```
for (i=0;i<customers_per_district;i++)  
{  
    if (i < 1000)  
        LastName(i, c[i].c_last);  
    else  
        LastName(NURand(255,0,999,LOADER_NURAND_C), c[i].c_last);  
  
    MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);  
    c[i].c_id = i+1;  
}  
  
printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",  
      d_id, w_id);  
  
for (i=0;i<customers_per_district;i++)  
{  
    customer_buf[i].c_d_id = d_id;  
    customer_buf[i].c_w_id = w_id;  
    customer_buf[i].h_amount = 10.0;  
  
    customer_buf[i].c_ytd_payment = 10.0;  
    customer_buf[i].c_payment_cnt = 1;  
    customer_buf[i].c_delivery_cnt = 0;  
  
    // Generate CUSTOMER and HISTORY data  
  
    customer_buf[i].c_id = c[i].c_id;  
    strcpy(customer_buf[i].c_first, c[i].c_first);  
    strcpy(customer_buf[i].c_last, c[i].c_last);  
    customer_buf[i].c_middle[0] = 'O';  
    customer_buf[i].c_middle[1] = 'E';  
  
    MakeAddress(customer_buf[i].c_street_1,  
                customer_buf[i].c_street_2,  
                customer_buf[i].c_city,  
                customer_buf[i].c_state,  
                customer_buf[i].c_zip);  
  
    MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);  
  
    if (RandomNumber(1L, 100L) > 10)  
        customer_buf[i].c_credit[0] = 'G';  
    else  
        customer_buf[i].c_credit[0] = 'B';  
    customer_buf[i].c_credit[1] = 'C';  
  
    customer_buf[i].c_credit_lim = 50000.0;  
    customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /  
        10000.0;  
  
    // fix to avoid ODBC float to numeric conversion problem.  
    // customer_buf[i].c_balance = -10.0;  
    strcpy(customer_buf[i].c_balance,"-10.0");
```

Appendix B - Database Design

```
        MakeAlphaString(500, 500, C_DATA_LEN, customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN, customer_buf[i].h_data);
    }

//=====
// Function : LoadCustomerTable
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
    // double c_balance;
    char c_balance[6];

    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    char c_since[C_SINCE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0, 5);
```

```
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, 10);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, 12);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit, 0, CREDIT_LEN, NULL, 0, 0, 14);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
15);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
16);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        // fix to avoid ODBC float to numeric conversion problem.
        // rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
17);
        // if (rc != SUCCEED)
        //     HandleErrorDBC(c_hdbc1);
        rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, 17);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
18);
```

Appendix B - Database Design

```
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
19);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
20);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;

    // fix to avoid ODBC float to numeric conversion problem.

    // c_balance = customer_buf[i].c_balance;
    strcpy(c_balance, customer_buf[i].c_balance);

    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;
    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
    rc = bcp_sendrow(c_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    customer_rows_loaded++;
    CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded, "customer",
&customer_time_start->time_start);
}

}
```

```
//=====================================================================
// Function      : LoadHistoryTable
// =====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int          i;
    long         c_id;
    short        c_d_id;
    short        c_w_id;
    double       h_amount;
    char         h_data[H_DATA_LEN+1];
    char         h_date[H_DATE_LEN+1];
    RETCODE      rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0, SQLCHARACTER,
6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
```

Appendix B - Database Design

```
HandleErrorDBC(c_hdbc2);

history_rows_loaded++;
CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded, "history",
&history_time_start->time_start);
}

//=====
// Function : LoadOrders
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    short                 w_id;
    short                 d_id;
    DWORD                 dwThreadID[MAX_ORDER_THREADS];
    HANDLE                hThread[MAX_ORDER_THREADS];
    char                  name[20];
    RETCODE               rc;
    char                  bcphint[128];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnodcl");
        BuildIndex("idxodcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neworder.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
```

```
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
    rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
}

sprintf(name, "%s..%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 300000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded      = 0;
new_order_rows_loaded  = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {

        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...

        // start Orders table thread

        printf "...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,
&dwThreadID[0]);
    }
}

if (hThread[0] == NULL)
```

Appendix B - Database Design

```
= 0.\n");
{
    printf("Error, failed in creating creating thread
          exit(-1);
}

// start NewOrder table thread
printf("...Loading New-Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);
hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating thread
= 1.\n");
    exit(-1);
}

// start Order-Line table thread
printf("...Loading Order-Line Table for: d_id = %d, w_id =
%d\n", d_id, w_id);
hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating thread
= 2.\n");
    exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );
WaitForSingleObject( hThread[2], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing Orders thread
handle with errno: %d\n", GetLastError());
}
```

```
if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing NewOrder thread
handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[2]) == FALSE)
{
    printf("Error, failed in closing OrderLine thread
handle with errno: %d\n", GetLastError());
}

}

printf("Finished loading orders.\n");

return;
}

//=====================================================================
// Function  : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====================================================================

void OrdersBufInit()
{
    int     i;
    int     j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o.ol_cnt = 0;
        orders_buf[i].o.all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o.ol[j].ol = 0;
            orders_buf[i].o.ol[j].ol_i_id = 0;
            orders_buf[i].o.ol[j].ol_supply_w_id = 0;
            orders_buf[i].o.ol[j].ol_quantity = 0;
            orders_buf[i].o.ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o.ol[j].ol_dist_info,"");
        }
    }
}

//=====================================================================
```

Appendix B - Database Design

```
// Function  : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int      cust[ORDERS_PER_DIST+1];
    long     o_id;
    short    ol;
    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);
    GetPermutation(cust, ORDERS_PER_DIST);
    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id = (short)RandomNumber(1L,
10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
        {
            orders_buf[o_id].o.ol[ol].ol = ol+1;
            orders_buf[o_id].o.ol[ol].ol_i_id = RandomNumber(1L,
max_items);
            orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o.ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o.ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set properly
during load

                FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);
            }
        }
    }
}

else
{
    RandomNumber(1,999999)/100.0;
    // Added to insure ol_delivery_d set properly
during load

    // odbc datetime format
    strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 12:00:00.000");
}
}

//=====
// Function  : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int      i;
    long     o_id;
    short    o_d_id;
    short    o_w_id;
    long     o_c_id;
    short    o_carrier_id;
    short    o.ol_cnt;
    short    o.all_local;
    char     o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE  rc;
    DBINT   rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}
```

Appendix B - Database Design

```
rc = bcp_bind(o_hdbc1, (BYTE *) &o.ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

rc = bcp_bind(o_hdbc1, (BYTE *) &o.all_local, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o.ol_cnt = orders_buf[i].o.ol_cnt;
    o.all_local = orders_buf[i].o.all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

// rcount = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcount = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}

//=====
// Function : LoadNewOrderTable
//=====
```

```
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int          i;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    RETCODE      rc;
    DBINT       rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded, "new_order",
&new_order_time_start->time_start);
    }

    // rcount = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcount = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxnodcl");
    }
}

//=====
```

Appendix B - Database Design

```
//  
// Function : LoadOrderLineTable  
//  
//=====  
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)  
{  
    int i, j;  
    long o_id;  
    short o_d_id;  
    short o_w_id;  
    long ol;  
    long ol_i_id;  
    short ol_supply_w_id;  
    short ol_quantity;  
    double ol_amount;  
    char ol_dist_info[DIST_INFO_LEN+1];  
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];  
    RETCODE rc;  
    DBINT rcount;  
  
    // bind ORDER-LINE data  
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 5);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL, 0,  
SQLINT2, 6);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN, NULL, 0,  
SQLCHARACTER, 7);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,  
8);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);  
    if (rc != SUCCEED)  
        HandleErrorDBC(o_hdbc3);  
  
    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0, 10);  
    if (rc != SUCCEED)
```

```
        HandleErrorDBC(o_hdbc3);  
  
    for (i = 0; i < orders_per_district; i++)  
    {  
        o_id      = orders_buf[i].o_id;  
        o_d_id    = orders_buf[i].o_d_id;  
        o_w_id    = orders_buf[i].o_w_id;  
  
        for (j=0; j < orders_buf[i].o.ol_cnt; j++)  
        {  
            ol          = orders_buf[i].o.ol[j].ol;  
            ol_i_id     = orders_buf[i].o.ol[j].ol_i_id;  
            ol_supply_w_id = orders_buf[i].o.ol[j].ol_supply_w_id;  
            ol_quantity  = orders_buf[i].o.ol[j].ol_quantity;  
            ol_amount    = orders_buf[i].o.ol[j].ol_amount;  
            strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);  
            strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);  
            rc = bcp_sendrow(o_hdbc3);  
            if (rc != SUCCEED)  
                HandleErrorDBC(o_hdbc3);  
  
            order_line_rows_loaded++;  
            CheckForCommit(o_hdbc3, o_hstmt3, order_line_rows_loaded,  
"order_line", &order_line_time_start->time_start);  
        }  
  
        // rcount = bcp_batch(o_hdbc3);  
        // if (rcint < 0)  
        //     HandleErrorDBC(o_hdbc3);  
  
        if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))  
        {  
            rcount = bcp_done(o_hdbc3);  
            if (rcint < 0)  
                HandleErrorDBC(o_hdbc3);  
  
            SQLFreeStmt(o_hstmt3, SQL_DROP);  
            SQLDisconnect(o_hdbc3);  
            SQLFreeConnect(o_hdbc3);  
  
            // if build index after load...  
            if ((aptr->build_index == 1) && (aptr->index_order == 0))  
                BuildIndex("idxodlc1");  
        }  
    }  
  
//=====  
// Function : GetPermutation  
//=====  
void GetPermutation(int perm[], int n)  
{  
    int i, r, t;
```

Appendix B - Database Design

```
for (i=1;i<=n;i++)
    perm[i] = i;

for (i=1;i<=n;i++)
{
    r = RandomNumber(i,n);
    t = perm[i];
    perm[i] = perm[r];
    perm[r] = t;
}

//=====
// Function : CheckForCommit
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff :
1L));

        *time_start = time_end;
    }
    return;
}

//=====
// Function : OpenConnections
//=====
```

```
void OpenConnections()
{
    RETCODE rc;
    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON, SQL_IS_INTEGER
);

    // Open connections to SQL Server
    // Connection 1

    sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption ( i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
                           NULL,
                           (SQLCHAR*)&szDriverString[0]
                           SQL_NTS,
                           (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEEDED)
```

Appendix B - Database Design

```
HandleErrorDBC(i_hdbc1);

// Connection 2

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

// Connection 3

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// Connection 4

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

// Connection 5

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

// Connection 6

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);
```

Appendix B - Database Design

```
rc = SQLDriverConnect ( o_hdbc2,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

// Connection 7

sprintf( szDriverString , "DRIVER=(SQL
Server);SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

}

//=====
// Function name: BuildIndex
//=====
void BuildIndex(char *index_script)
{
    char cmd[256];
    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
```

```
index_script,
index_script);

system(cmd);
printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER        NativeError;
    SQLSMALLINT      i, MsgLen;
    SQLRETURN         rc2;
    char              timebuf[128];
    char              datebuf[128];
    FILE              *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                                         Msg, sizeof(Msg) , &MsgLen ) ) != SQL_NO_DATA )
    {

        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void FormatDate ( char* szTimeOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );
```

Appendix B - Database Design

```
return;
}

getargs.c

// File:           GETARGS.C
//                  Microsoft TPC-C Kit Ver. 4.00
//                  Copyright Microsoft, 1996, 1997, 1998
// Purpose:        Source file for command line processing

// Includes
#include "tpcc.h"

//=====
// Function name: GetArgsLoader
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int             i;
    char  *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server          = SERVER;
    pargs->user             = USER;
    pargs->password         = PASSWORD;
    pargs->database         = DATABASE;
    pargs->batch             = BATCH;
    pargs->num_warehouses   = UNDEF;
    pargs->tables_all       = TRUE;
    pargs->table_item        = FALSE;
    pargs->table_warehouse   = FALSE;
    pargs->table_customer    = FALSE;
```

```
pargs->table_orders      = FALSE;
pargs->loader_res_file    = LOADER_RES_FILE;
pargs->pack_size           = DEFDPACKSIZE;
pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
pargs->build_index         = BUILD_INDEX;
pargs->index_order         = INDEX_ORDER;
pargs->index_script_path   = INDEX_SCRIPT_PATH;
pargs->scale_down           = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' && argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case 'h': /* Fall through */
        case 'H':
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;

        case 'W':
            pargs->num_warehouses = atol(ptr+2);
            break;

        case 's':
            pargs->starting_warehouse = atol(ptr+2);
            break;

        case 't':
            {
                pargs->tables_all = FALSE;
                if (strcmp(ptr+2,"item") == 0)
```

Appendix B - Database Design

```
0)
TRUE;
    pargs->table_item = TRUE;
else if (strcmp(ptr+2,"warehouse") ==
        pargs->table_warehouse =
else if (strcmp(ptr+2,"customer") == 0)
    pargs->table_customer = TRUE;
else if (strcmp(ptr+2,"orders") == 0)
    pargs->table_orders = TRUE;
else
{
    printf("\nUnrecognized command");
    GetArgsLoaderUsage();
    exit(1);
}

break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
    break;

case 'p':
    pargs->pack_size = atol(ptr+2);
    break;

case 'i':
    pargs->build_index = atol(ptr+2);
    break;

case 'o':
    pargs->index_order = atol(ptr+2);
    break;

case 'c':
    pargs->scale_down = atol(ptr+2);
    break;

case 'd':
    pargs->index_script_path = ptr+2;
    break;

default:
    GetArgsLoaderUsage();
    exit(-1);
    break;
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}
//=====
//=====
```

```
// Function name: GetArgsLoaderUsage
// =====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

printf("TPCCLDR:\n\n");
    printf("Parameter
    printf("-----\n");
printf("-W Number of Warehouses to Load
printf("-S Server
printf("-U Username
printf("-P Password
printf("-D Database
    printf("-b Batch Size
BATCH);
    printf("-p TDS packet size
DEFLDPACKSIZE);
    printf("-f Loader Results Output Filename
LOADER_RES_FILE);
    printf("-s Starting Warehouse
DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1)
BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0)
INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1)
SCALE_DOWN);
    printf("-d Index Script Path
INDEX_SCRIPT_PATH);
    printf("-t Table to Load
    printf(" [item|warehouse|customer|orders]\n");
    printf(" Notes: \n");
    printf(" - the '-t' parameter may be included multiple times to \n");
    printf(" specify multiple tables to be loaded \n");
    printf(" - 'item' loads ITEM table \n");
    printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
    printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

    printf("\nNote: Command line switches are case sensitive.\n");
exit(0);
}

}

random.c
```

```
// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
```

Appendix B - Database Design

```
//      Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A      16807
#define M     2147483647
#define Q     127773 /* M div A */
#define R     2836  /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

/*********************************************
* random -
*     Implements a GOOD pseudo random number generator. This generator
*     will/should? run the complete period before repeating.
*
* Copied from:
*     Random Numbers Generators: Good Ones Are Hard to Find.
*     Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
*     long must be 2 ^ 31 - 1 or greater.
*
********************************************/

/*********************************************
* seed - load the Seed value used in irand and drand. Should be used before
* first call to irand or drand.
********************************************/

void seed(long val)
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
        printf("Old Seed %ld New Seed %ld\n", Seed, val);
    #endif

    if (val < 0)
        val = abs(val);

    Seed = val;
}

/*********************************************
* irand - returns a 32 bit integer pseudo random number with a period of
*         1 to 2 ^ 32 - 1.
*
* parameters:
*     none.
*
* returns:
*     32 bit integer - defined as long ( see above ). */
}

/*
* side effects:
*     seed get recomputed.
*****
long irand()
{
    register long s; /* copy of seed */
    register long test; /* test flag */
    register long hi; /* tmp value for speed */
    register long lo; /* tmp value for speed */

    #ifdef DEBUG
        printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
    #endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if (test > 0)
        Seed = test;
    else
        Seed = test + M;

    return(Seed);
}

/*********************************************
* drand - returns a double pseudo random number between 0.0 and 1.0.
*     See irand.
*****
double drand()
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
    #endif

    return( (double)irand() / 2147483647.0);
}

=====

// Function : RandomNumber
//
// Description:
=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

    #ifdef DEBUG
        printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
    #endif

    if (upper == lower) /* pgd 08-13-96 perf enhancement */
        return lower;
    upper++;
}
```

Appendix B - Database Design

```
if ( upper <= lower )
    rand_num = upper;
else
    rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96 perf
enhancement */

#ifndef DEBUG
printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
       (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}

#endif 0

//Orginal code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifndef DEBUG
printf("[%ld]DBG: Entering RandomNumber()\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifndef DEBUG
printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
       (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;
```

```
#ifdef DEBUG
printf("[%ld]DBG: Entering NURand()\n", (int) GetCurrentThreadId());
#endif

rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifndef DEBUG
printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}
```

strings.c

```
//      File:          STRINGS.C
//                                         Microsoft TPC-C Kit Ver. 4.00
//                                         Copyright Microsoft, 1996, 1997, 1998
//      Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
// // Function name: MakeAddress
// // =====
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{

#ifndef DEBUG
printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
MakeAlphaString (10, 20, ADDRESS_LEN, city);
MakeAlphaString (2, 2, STATE_LEN, state);
MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifndef DEBUG
printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s, zip:
%s\n",
(int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif
}
```

Appendix B - Database Design

```
return;
}

//=====
// Function name: LastName
//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR", "OUGHT", "ABLE", "PRI", "PRES",
        "ESE", "ANTI", "CALLY", "ATION", "EING"
    };

#ifndef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range (0,999)\n",
               num);
        exit(-1);
    }

#ifndef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
           (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
           num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(), name);
#endif

    return;
}

//=====
// Function name: MakeAlphaString
//=====

```

```
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int             len;
    int             i;
    static   char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static   int     chArrayMax = 61;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0, chArrayMax)];
    if ( len < z )
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

//=====
// Function name: MakeOriginalAlphaString
//=====
int MakeOriginalAlphaString(int x,
                            int y,
                            int z,
                            char *str,
                            int percent)
{
    int             len;
    int             val;
    int             start;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int) GetCurrentThreadId());
#endif

    // verify prercentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n", percent);
        exit(-1);
    }
}
```

Appendix B - Database Design

```
// verify string is at least 8 chars in length
if ((x + y) <= 8)
{
    printf("MakeOriginalAlphaString: string length must be >= 8\n");
    exit(-1);
}

// Make Alpha String
len = MakeAlphaString(x, y, z, str);

val = RandomNumber(1,100);
if (val <= percent)
{
    start = RandomNumber(0, len - 8);
    strncpy(str + start, "ORIGINAL", 8);
}

#ifndef DEBUG
printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
       (int) GetCurrentThreadId(), str);
#endif

return strlen(str);
}

//=====
// Function name: MakeNumberString
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
// Function name: MakeZipNumberString
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9, string)
    strcpy(str, "000011111");
```

```
itoa(RandomNumber(0, 9999), tmp, 10);
memcpy(str, tmp, strlen(tmp));

return 9;
}

//=====
// Function name: InitString
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
// Function name: InitAddress
// Description:
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
// Function name: PaddString
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;
```

Appendix B - Database Design

```
    return;  
}
```

time.c

```
//      File:          TIME.C  
//                           Microsoft TPC-C Kit Ver. 4.00  
//                           Copyright Microsoft, 1996, 1997, 1998  
//  
//      Purpose:  Source file for time functions  
  
// Includes  
#include "tpcc.h"  
  
// Globals  
static long start_sec;  
  
//=====  
//  
// Function name: TimeNow  
//  
//=====  
  
long TimeNow()  
{  
    long           time_now;  
    struct _timeb el_time;  
  
#ifdef DEBUG  
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());  
#endif  
  
    _ftime(&el_time);  
    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;  
    return time_now;  
}
```

Appendix C – Tunable Parameters

Appendix C - Tunable Parameters

Server Configuration Parameters

Microsoft Windows 2003 Server Parameters

The following registry key was added to disable the kernel counters for Global and Per-Process I/Os:

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Session Manager\I/O System]  
"CountOperations"=dword:00000000
```

Microsoft Windows 2003 Server Configuration

The following services were disabled on the server:

- Alerter
- Automatic Updates
- Computer Browser
- Cryptographic Services
- DHCP Client
- Distributed File System
- Distributed Link Tracking Client
- DNS Client
- Global Array Manager Server
- Help and Support
- IPSEC Policy Agent
- License Logging Service
- Messenger
- MSSQLserver
- Microsoft Search
- Print Spooler
- Process Control Service
- Remote Registry Service
- Removable Storage
- Run as Service
- System Event Notification
- SSDP Discovery service
- Task Scheduler
- Wireless configuration

Microsoft SQL Server 2000 Startup Parameters

Microsoft SQL Server was started with the following command line options

sqlservr -c -x -T3502 -g100

where

-c Start SQL Server independently of the Microsoft Windows NT Service Control Manager.

Appendix C – Tunable Parameters

-x	Disable the keeping of CPU time and cache-hit ratio statistics.	
-T3502	Prints a message to the log at the beginning and end of each checkpoint.	
-g150	Reserve 150 MB for non-buffer pool allocations	

Microsoft SQL Server Stack Size

The default stack size of Microsoft SQL Server was changed using the EDITBIN utility. The EDITBIN utility ships with Microsoft Visual C++. The command used was editbin /stack:131072 sqlservr.exe.

Microsoft SQL Server 2000 Configuration Parameters

name	maximum	config_value	run_value	minimum
affinity mask				-2147483648
2147483647	255	255		
allow updates				0
1	0	0		
awe enabled				0
1	1	1		
c2 audit mode				0
1	0	0		
cost threshold for parallelism				0
32767	5	5		
Cross DB Ownership Chaining				0
1	0	0		
cursor threshold				-1
2147483647	-1	-1		
default full-text language				0
2147483647	1033	1033		
default language				0
9999	0	0		
fill factor (%)				0
100	0	0		
index create memory (KB)				704
2147483647	0	0		
lightweight pooling				0
1	1	1		
locks				5000
2147483647	0	0		
max degree of parallelism				0
32	1	1		
max server memory (MB)				4
2147483647	31150	31150		
max text repl size (B)				0
2147483647	65536	65536		
max worker threads				32
32767	380	380		
media retention				0
365	0	0		
min memory per query (KB)				512
2147483647	1024	1024		
min server memory (MB)				0
2147483647	0	0		
nested triggers				0
1	1	1		
network packet size (B)				512
65536	4096	4096		
open objects				0
2147483647	0	0		

Appendix C – Tunable Parameters

priority boost			0
1	1	1	
query governor cost limit			0
2147483647	0	0	
query wait (s)			-1
2147483647	-1	-1	
recovery interval (min)			0
32767	80	80	
remote access			0
1	1	1	
remote login timeout (s)			0
2147483647	20	20	
remote proc trans			0
1	0	0	
remote query timeout (s)			0
2147483647	600	600	
scan for startup procs			0
1	0	0	
set working set size			0
1	0	0	
show advanced options			0
1	1	1	
two digit year cutoff			1753
9999	2049	2049	
user connections			0
32767	0	0	
user options			0
32767	0	0	

1>

Appendix C – Tunable Parameters

System Information report written at: 05/17/04 16:19:14

System Name: PE6600

[System Summary]

Item Value

OS Name Microsoft(R) Windows(R) Server 2003, Enterprise Edition

Version 5.2.3790 Build 3790

OS Manufacturer Microsoft Corporation

System Name PE6600

System Manufacturer Dell Computer Corporation

System Model PowerEdge 6600

System Type X86-based PC

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2981 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

Processor x86 Family 15 Model 2 Stepping 6 GenuineIntel ~2982 Mhz

BIOS Version/Date Dell Computer Corporation A13, 10/7/2003

SMBIOS Version 2.3

Windows Directory C:\WINDOWS

System Directory C:\WINDOWS\system32

Boot Device \Device\HarddiskVolume1

Locale United States

Hardware Abstraction Layer Version = "5.2.3790.0 (srv03_rtm.030324-2048)"

User Name PE6600\Administrator

Time Zone Central Daylight Time

Total Physical Memory 32,768.00 MB

Available Physical Memory 56.23 MB

Total Virtual Memory 64.15 GB

Available Virtual Memory 2.08 GB

Page File Space 32.90 GB

Page File C:\pagefile.sys

Appendix C – Tunable Parameters

[Hardware Resources]

[Conflicts/Sharing]

Resource Device

I/O Port 0x00000000-0x000003AF PCI bus

I/O Port 0x00000000-0x000003AF Direct memory access controller

Memory Address 0xF4000000-0xFCFFFFFF PCI bus

Memory Address 0xF4000000-0xFCFFFFFF DELL PERC 3/QC Plus RAID Controller

Memory Address 0xD8000000-0xDFFFFFFF PCI bus

Memory Address 0xD8000000-0xDFFFFFFF DELL PERC 3/DC Plus RAID Controller

Memory Address 0xE8000000-0xF3DFFFFF PCI bus

Memory Address 0xE8000000-0xF3DFFFFF DELL PERC 3/QC Plus RAID Controller

IRQ 15 System board

IRQ 15 Secondary IDE Channel

Memory Address 0xFD000000-0xFE1FFFFF PCI bus

Memory Address 0xFD000000-0xFE1FFFFF RAGE XL PCI Family (Microsoft Corporation)

Memory Address 0xD0000000-0xD7FFFFFF PCI bus

Memory Address 0xD0000000-0xD7FFFFFF DELL PERC 3/QC Plus RAID Controller

Memory Address 0xE0000000-0xE7FFFFFF PCI bus

Memory Address 0xE0000000-0xE7FFFFFF DELL PERC 3/QC Plus RAID Controller

Memory Address 0xA0000-0xBFFFF PCI bus

Memory Address 0xA0000-0xBFFFF RAGE XL PCI Family (Microsoft Corporation)

I/O Port 0x000003B0-0x000003DF PCI bus

I/O Port 0x000003B0-0x000003DF RAGE XL PCI Family (Microsoft Corporation)

Appendix C – Tunable Parameters

[DMA]

Resource	Device Status
Channel 4	Direct memory access controller OK
Channel 2	Standard floppy disk controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource	Device Status
0x00000000-0x000003AF	PCI busOK
0x00000000-0x000003AF	Direct memory access controller OK
0x000003B0-0x000003DF	PCI busOK
0x000003B0-0x000003DF	RAGE XL PCI Family (Microsoft Corporation) OK
0x000003E0-0x0000CF7	PCI busOK
0x00000D00-0x00000FFF	PCI busOK
0x0000E000-0x0000EFFF	PCI busOK
0x0000EC00-0x0000ECFF	Adaptec AIC-7892 Ultra160 PCI SCSI Card OK
0x0000E800-0x0000E8FF	RAGE XL PCI Family (Microsoft Corporation) OK
0x000003C0-0x000003DF	RAGE XL PCI Family (Microsoft Corporation) OK
0x00000080-0x0000009F	Direct memory access controller OK
0x000000C0-0x000000DF	Direct memory access controller OK
0x0000040B-0x0000040B	Direct memory access controller OK
0x000004D6-0x000004D6	Direct memory access controller OK
0x000000F0-0x000000FF	Numeric data processor OK
0x00000020-0x0000003F	Programmable interrupt controller OK
0x000000A0-0x000000BF	Programmable interrupt controller OK
0x000004D0-0x000004D1	Programmable interrupt controller OK
0x00000061-0x00000061	System speakerOK
0x00000040-0x0000005F	System timer OK
0x000003F0-0x000003F5	Standard floppy disk controller OK

Appendix C – Tunable Parameters

0x0000003F7-0x000003F7	Standard floppy disk controller	OK
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x000003F8-0x000003FF	Communications Port (COM1)	OK
0x00000070-0x0000007F	System CMOS/real time clock	OK
0x00000800-0x0000087F	System board	OK
0x000008A0-0x000008AF	System board	OK
0x000008E0-0x000008E3	System board	OK
0x000000E0-0x000000EF	System board	OK
0x000000C00-0x00000CD7	System board	OK
0x00000F50-0x00000F58	System board	OK
0x000008B0-0x000008BF	CSB5 IDE Controller	OK
0x000001F0-0x000001F7	Primary IDE Channel	OK
0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000376-0x00000376	Secondary IDE Channel	OK
0x00000A79-0x00000A79	ISAPNP Read Data Port	OK
0x00000279-0x00000279	ISAPNP Read Data Port	OK
0x00000274-0x00000277	ISAPNP Read Data Port	OK
0x0000D000-0x0000DFFF	PCI bus	OK

[IRQs]

Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 16	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
IRQ 13	Numeric data processor	OK
IRQ 0	System timer	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 4	Communications Port (COM1)	OK
IRQ 8	System CMOS/real time clock	OK
IRQ 15	System board	OK

Appendix C – Tunable Parameters

IRQ 15 Secondary IDE Channel OK
IRQ 14 Primary IDE Channel OK
IRQ 5 ServerWorks (RCC) PCI to USB Open Host Controller OK
IRQ 21 DELL PERC 3/QC Plus RAID Controller OK
IRQ 22 DELL PERC 3/QC Plus RAID Controller OK
IRQ 17 Broadcom NetXtreme Gigabit Ethernet OK
IRQ 18 Broadcom NetXtreme Gigabit Ethernet #2 OK
IRQ 25 DELL PERC 3/QC Plus RAID Controller OK
IRQ 26 DELL PERC 3/QC Plus RAID Controller OK
IRQ 23 DELL PERC 3/QC Plus RAID Controller OK
IRQ 29 DELL PERC 3/DC Plus RAID Controller OK
IRQ 28 DELL PERC 3/QC Plus RAID Controller OK

[Memory]

Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xDC000-0xE7FFF	PCI bus	OK
0xFD000000-0xFE1FFFFF	PCI bus	OK
0xFD000000-0xFE1FFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFE102000-0xFE102FFF	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
0xFE101000-0xFE101FFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFE100000-0xFE100FFF	ServerWorks (RCC) PCI to USB Open Host Controller	OK
0xF4000000-0xFCFFFFFF	PCI bus	OK
0xF4000000-0xFCFFFFFF	DELL PERC 3/QC Plus RAID Controller	OK
0xF8000000-0xFBFFFFFF	DELL PERC 3/QC Plus RAID Controller	OK
0xF3E00000-0xF3FFFFFF	PCI bus	OK
0xF3F10000-0xF3F1FFFF	Broadcom NetXtreme Gigabit Ethernet	OK
0xF3F00000-0xF3F0FFFF	Broadcom NetXtreme Gigabit Ethernet #2	OK
0xE8000000-0xF3DFFFFFF	PCI bus	OK
0xE8000000-0xF3DFFFFFF	DELL PERC 3/QC Plus RAID Controller	OK
0xEC000000-0xFFFFFFFF	DELL PERC 3/QC Plus RAID Controller	OK
0xE0000000-0xE7FFFFFF	PCI bus	OK
0xE0000000-0xE7FFFFFF	DELL PERC 3/QC Plus RAID Controller	OK
0xD8000000-0xDFFFFFFF	PCI bus	OK

Appendix C – Tunable Parameters

0xD8000000-0xFFFFFFFF	DELL PERC 3/DC Plus RAID Controller OK
0xD0000000-0xDFFFFFFF	PCI busOK
0xD0000000-0xD7FFFFFF	DELL PERC 3/QC Plus RAID Controller OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\tssoft32.acm	DSP GROUP, INC.		OK	C:\WINDOWS\system32\TSSOFT32.ACM	1.01	9.50 KB (9,728 bytes)	3/29/2003 12:00 AM
c:\windows\system32\msadp32.acm	Microsoft Corporation		OK	C:\WINDOWS\system32\MSADP32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	14.50 KB (14,848 bytes)	3/29/2003 12:00 AM
c:\windows\system32\msg711.acm	Microsoft Corporation		OK	C:\WINDOWS\system32\MSG711.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	10.00 KB (10,240 bytes)	3/29/2003 12:00 AM
c:\windows\system32\imaadp32.acm	Microsoft Corporation		OK	C:\WINDOWS\system32\IMAADP32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	15.50 KB (15,872 bytes)	3/29/2003 12:00 AM
c:\windows\system32\msaud32.acm	Microsoft Corporation	Windows Media Audio Codec	OK	C:\WINDOWS\system32\MSAUD32.ACM	8.00.00.4487	288.00 KB	(294,912 bytes) 3/29/2003 12:00 AM
c:\windows\system32\sl_anet.acm	Sipro Lab Telecom Inc.	Sipro Lab Telecom Audio Codec	OK	C:\WINDOWS\system32\SL_ANET.ACM	3.02	84.00 KB (86,016 bytes)	3/29/2003 12:00 AM
c:\windows\system32\msgsm32.acm	Microsoft Corporation		OK	C:\WINDOWS\system32\MSGSM32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	20.50 KB (20,992 bytes)	3/29/2003 12:00 AM

Appendix C – Tunable Parameters

c:\windows\system32\l3codeca.acm Fraunhofer Institut Integrierte Schaltungen IIS
Fraunhofer IIS MPEG Layer-3 Codec OK
C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816 bytes) 3/29/2003 12:00 AM
c:\windows\system32\msg723.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSG723.ACM 4.4.4000 116.00 KB (118,784 bytes) 2/5/2004 4:23 PM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\msh261.drv	Microsoft Corporation		OK	C:\WINDOWS\system32\MSH261.DRV	4.4.4000	180.00 KB (184,320 bytes)	2/5/2004 4:23 PM
c:\windows\system32\iyuv_32.dll	Microsoft Corporation		OK	C:\WINDOWS\system32\IYUV_32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	45.00 KB (46,080 bytes)	3/24/2003 7:49 PM
c:\windows\system32\msyuv.dll	Microsoft Corporation		OK	C:\WINDOWS\system32\MSYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)	3/24/2003 7:49 PM
c:\windows\system32\msvidc32.dll	Microsoft Corporation		OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	26.50 KB (27,136 bytes)	3/29/2003 12:00 AM
c:\windows\system32\msh263.drv	Microsoft Corporation		OK	C:\WINDOWS\system32\MSH263.DRV	4.4.4000	284.00 KB (290,816 bytes)	3/24/2003 7:46 PM
c:\windows\system32\msrle32.dll	Microsoft Corporation		OK	C:\WINDOWS\system32\MSRLE32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	10.50 KB (10,752 bytes)	3/29/2003 12:00 AM
c:\windows\system32\tsbyuv.dll	Microsoft Corporation		OK	C:\WINDOWS\system32\TSBYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes)	3/24/2003 7:50 PM

[CD-ROM]

Item	Value
------	-------

Dell	184	May 2004
TPC-C Full Disclosure Report		
Copyright Dell		

Appendix C – Tunable Parameters

Drive D:

Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name TEAC CD-224E
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMTEAC_CD-
224E_____3.7D_____\5&3125DC91&0&0.0.0
Driver c:\windows\system32\drivers\cdrom.sys (5.2.3790.0 (srv03_rtm.030324-2048), 49.50 KB
(50,688 bytes), 3/29/2003 12:00 AM)

[Sound Device]

Item Value

[Display]

Item Value

Name RAGE XL PCI Family (Microsoft Corporation)
PNP Device ID PCI\VEN_1002&DEV_4752&SUBSYS_01091028&REV_27\3&13C0B0C5&0&20
Adapter Type ATI RAGE XL PCI (B41), ATI Technologies Inc. compatible
Adapter Description RAGE XL PCI Family (Microsoft Corporation)
Adapter RAM 8.00 MB (8,388,608 bytes)
Installed Driversati2drad.dll
Driver Version 5.10.3663.6013
INF File atiixpad.inf (ati2mpad section)
Color Planes 1
Color Table Entries 65536
Resolution 1024 x 768 x 60 hertz
Bits/Pixel 16
Memory Address 0xFD000000-0xFE1FFFFF
I/O Port 0x0000E800-0x0000E8FF
Memory Address 0xFE101000-0xFE101FFF

Appendix C – Tunable Parameters

I/O Port 0x000003B0-0x000003DF
I/O Port 0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFF
Driver c:\windows\system32\drivers\ati2mpad.sys (5.10.3663.6013, 335.38 KB (343,424 bytes),
2/5/2004 9:42 AM)

[Infrared]

Item Value

[Input]

[Keyboard]

Item Value

Description Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID ACPI\PNP0303\4&25F73A82&0
Number of Function Keys 12
I/O Port 0x00000060-0x00000060
I/O Port 0x00000064-0x00000064
IRQ Channel IRQ 1
Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3790.0 (srv03_rtm.030324-2048), 68.50
KB (70,144 bytes), 3/29/2003 12:00 AM)

[Pointing Device]

Item Value

Hardware Type PS/2 Compatible Mouse
Number of Buttons 2
Status OK
PNP Device ID ACPI\PNP0F13\4&25F73A82&0
Power Management Supported No

Appendix C – Tunable Parameters

Double Click Threshold 6
Handedness Right Handed Operation
IRQ Channel IRQ 12
Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3790.0 (srv03_rtm.030324-2048), 68.50 KB (70,144 bytes), 3/29/2003 12:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item Value

Name [00000001] Broadcom NetXtreme Gigabit Ethernet
Adapter Type Ethernet 802.3
Product Type Broadcom NetXtreme Gigabit Ethernet
Installed Yes
PNP Device ID PCI\VEN_14E4&DEV_1644&SUBSYS_01091028&REV_14\3&29E81982&0&08
Last Reset 5/14/2004 11:01 AM
Index 1
Service Name b57w2k
IP Address 192.1.1.69
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:06:5B:0E:0A:C9
Memory Address 0xF3F10000-0xF3F1FFFF
IRQ Channel IRQ 17

Appendix C – Tunable Parameters

Driver c:\windows\system32\drivers\b57xp32.sys (2.91.0.0 built by: WinDDK, 137.00 KB
(140,288 bytes), 2/5/2004 9:42 AM)

Name [00000002] RAS Async Adapter

Adapter Type Not Available

Product Type RAS Async Adapter

Installed Yes

PNP Device ID Not Available

Last Reset 5/14/2004 11:01 AM

Index 2

Service Name AsyncMac

IP Address Not Available

IP Subnet Not Available

Default IP Gateway Not Available

DHCP Enabled No

DHCP Server Not Available

DHCP Lease Expires Not Available

DHCP Lease Obtained Not Available

MAC Address Not Available

Name [00000003] WAN Miniport (L2TP)

Adapter Type Not Available

Product Type WAN Miniport (L2TP)

Installed Yes

PNP Device ID ROOT\MS_L2TPMINIPORT\0000

Last Reset 5/14/2004 11:01 AM

Index 3

Service Name Rasl2tp

IP Address Not Available

IP Subnet Not Available

Default IP Gateway Not Available

DHCP Enabled No

DHCP Server Not Available

DHCP Lease Expires Not Available

DHCP Lease Obtained Not Available

MAC Address Not Available

Appendix C – Tunable Parameters

Driver c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.0 (srv03_rtm.030324-2048), 77.00 KB (78,848 bytes), 3/29/2003 12:00 AM)

Name [00000004] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset 5/14/2004 11:01 AM
Index 4
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Driver c:\windows\system32\drivers\rasppp.sys (5.2.3790.0 (srv03_rtm.030324-2048), 70.50 KB (72,192 bytes), 3/29/2003 12:00 AM)

Name [00000005] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
Last Reset 5/14/2004 11:01 AM
Index 5
Service Name RasPppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available

Appendix C – Tunable Parameters

DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30
Driver c:\windows\system32\drivers\raspppoe.sys (5.2.3790.0 (srv03_rtm.030324-2048), 38.00 KB (38,912 bytes), 3/29/2003 12:00 AM)

Name [00000006] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTIMINIPORT\0000
Last Reset 5/14/2004 11:01 AM
Index 6
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\raspti.sys (5.2.3790.0 (srv03_rtm.030324-2048), 18.50 KB (18,944 bytes), 3/29/2003 12:00 AM)

Name [00000007] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 5/14/2004 11:01 AM
Index 7
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No

Appendix C – Tunable Parameters

DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3790.0 (srv03_rtm.030324-2048), 96.50 KB (98,816 bytes), 3/29/2003 12:00 AM)

Name [00000008] Broadcom NetXtreme Gigabit Ethernet
Adapter Type Ethernet 802.3
Product Type Broadcom NetXtreme Gigabit Ethernet
Installed Yes
PNP Device ID PCI\VEN_14E4&DEV_1644&SUBSYS_01091028&REV_14\3&29E81982&0&10
Last Reset 5/14/2004 11:01 AM
Index 8
Service Name b57w2k
IP Address 10.3.1.69
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:06:5B:0E:0A:CA
Memory Address 0xF3F00000-0xF3F0FFFF
IRQ Channel IRQ 18
Driver c:\windows\system32\drivers\b57xp32.sys (2.91.0.0 built by: WinDDK, 137.00 KB (140,288 bytes), 2/5/2004 9:42 AM)

Name [00000009] Alacritech Accelerator
Adapter Type Not Available
Product Type Alacritech Accelerator
Installed Yes
PNP Device ID Not Available
Last Reset 5/14/2004 11:01 AM
Index 9
Service Name SLIC

Appendix C – Tunable Parameters

IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Appendix C – Tunable Parameters

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)
Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes

Appendix C – Tunable Parameters

Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_ATCP_{187E7A7B-DEBC-4E84-B3DB-7CEF3245220A}] SEQPACKET 5

Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_ATCP_{187E7A7B-DEBC-4E84-B3DB-7CEF3245220A}] DATAGRAM 5

Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No

Appendix C – Tunable Parameters

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting Yes

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_ATCP_{33A3E16A-B65A-47F6-8466-784F775626D3}]

SEQPACKET 6

Connectionless Service No

Guarantees Delivery Yes

Guarantees Sequencing Yes

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting No

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_ATCP_{33A3E16A-B65A-47F6-8466-784F775626D3}]

DATAGRAM 6

Connectionless Service Yes

Appendix C – Tunable Parameters

Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [/Device\NetBT_ATCP_{769ED940-EF33-4BB0-BE3D-16DF4B639754}] SEQPACKET 7
Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Appendix C – Tunable Parameters

Name MSAFD NetBIOS [\Device\NetBT_ATCP_{769ED940-EF33-4BB0-BE3D-16DF4B639754}] DATAGRAM 7
Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_Tcpip_{769ED940-EF33-4BB0-BE3D-16DF4B639754}] SEQPACKET 4
Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No

Appendix C – Tunable Parameters

Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_Tcpip_{769ED940-EF33-4BB0-BE3D-16DF4B639754}] DATAGRAM 4

Connectionless Service Yes

Guarantees Delivery No

Guarantees SequencingNo

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting Yes

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_Tcpip_{33A3E16A-B65A-47F6-8466-784F775626D3}]

SEQPACKET 3

Connectionless Service No

Guarantees Delivery Yes

Guarantees SequencingYes

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting No

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Appendix C – Tunable Parameters

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{33A3E16A-B65A-47F6-8466-784F775626D3}]

DATAGRAM 3

Connectionless Service Yes

Guarantees Delivery No

Guarantees SequencingNo

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting Yes

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{187E7A7B-DEBC-4E84-B3DB-}

7CEF3245220A}] SEQPACKET 0

Connectionless Service No

Guarantees Delivery Yes

Guarantees SequencingYes

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting No

Supports Connect Data No

Supports Disconnect Data No

Appendix C – Tunable Parameters

Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{187E7A7B-DEBC-4E84-B3DB-7CEF3245220A}] DATAGRAM 0

Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{3AE0C021-6DFB-49F9-BF59-E47D4C2F2A46}] SEQPACKET 1

Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No

Appendix C – Tunable Parameters

Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{3AE0C021-6DFB-49F9-BF59-E47D4C2F2A46}] DATAGRAM 1

Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{DFFD3E16-9AA4-41BD-BFB5-9A340054E599}] SEQPACKET 2

Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes

Appendix C – Tunable Parameters

Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\\Device\\NetBT_Tcpip_{DFFD3E16-9AA4-41BD-BFB5-9A340054E599}] DATAGRAM 2

Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item	Value
File	c:\\windows\\system32\\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10

Appendix C – Tunable Parameters

File c:\windows\system32\wsock32.dll
Size 22.00 KB (22,528 bytes)
Version 5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\1
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLSD	Yes
Supports RLSD	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No

Appendix C – Tunable Parameters

DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXmit Threshold 512
XOn Character 17
XOnXmit Threshold 2048
XOnXOff InFlow Control0
XOnXOff OutFlow Control 0
I/O Port 0x000003F8-0x000003FF
IRQ Channel IRQ 4
Driver c:\windows\system32\drivers\serial.sys (5.2.3790.0 (srv03_rtm.030324-2048), 76.00 KB
(77,824 bytes), 3/29/2003 12:00 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value

Drive A:

Description 3 1/2 Inch Floppy Drive

Drive B:

Description Local Fixed Disk

Appendix C – Tunable Parameters

Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup3
Volume Serial Number 20229B5E

Drive C:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 16.94 GB (18,194,284,544 bytes)
Free Space 12.61 GB (13,541,867,520 bytes)
Volume Name
Volume Serial Number F8F8481D

Drive D:
Description CD-ROM Disc

Drive E:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive F:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Appendix C – Tunable Parameters

Drive G:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup4
Volume Serial Number 78F6DCBB

Drive H:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive I:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive J:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup5
Volume Serial Number CC6BBC10

Appendix C – Tunable Parameters

Drive K:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive L:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive M:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive N:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Appendix C – Tunable Parameters

Drive O:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive S:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive U:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup1
Volume Serial Number 888E2E45

Drive V:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup2
Volume Serial Number 28E6CC63

Appendix C – Tunable Parameters

Drive W:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive X:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 358.94 GB (385,411,907,584 bytes)
Free Space 260.37 GB (279,575,396,352 bytes)
Volume Name Backup6
Volume Serial Number 748BC5D0

Drive Y:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive Z:

Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Appendix C – Tunable Parameters

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	3
SCSI Bus	4
SCSI Logical Unit	0
SCSI Port	7
SCSI Target ID	0
Sectors/Track	63
Size	944.89 GB (1,014,563,612,160 bytes)
Total Cylinders	123,347
Total Sectors	1,981,569,555
Total Tracks	31,453,485
Tracks/Cylinder	255
Partition	Disk #6, Partition #0
Partition Size	292.97 GB (314,575,801,344 bytes)
Partition Starting Offset	32,256 bytes
Partition	Disk #6, Partition #1
Partition Size	292.97 GB (314,575,833,600 bytes)
Partition Starting Offset	314,575,833,600 bytes
Partition	Disk #6, Partition #2
Partition Size	358.94 GB (385,411,944,960 bytes)
Partition Starting Offset	629,151,667,200 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes

Appendix C – Tunable Parameters

Media Type Fixed hard disk
Partitions 3
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 6
SCSI Target ID 0
Sectors/Track 63
Size 944.89 GB (1,014,563,612,160 bytes)
Total Cylinders 123,347
Total Sectors 1,981,569,555
Total Tracks 31,453,485
Tracks/Cylinder 255
Partition Disk #5, Partition #0
Partition Size 292.97 GB (314,575,801,344 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #5, Partition #1
Partition Size 292.97 GB (314,575,833,600 bytes)
Partition Starting Offset 314,575,833,600 bytes
Partition Disk #5, Partition #2
Partition Size 358.94 GB (385,411,944,960 bytes)
Partition Starting Offset 629,151,667,200 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 1
SCSI Target ID 0
Sectors/Track 63
Size 944.89 GB (1,014,563,612,160 bytes)
Total Cylinders 123,347

Appendix C – Tunable Parameters

Total Sectors 1,981,569,555
Total Tracks 31,453,485
Tracks/Cylinder 255
Partition Disk #0, Partition #0
Partition Size 292.97 GB (314,575,801,344 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #0, Partition #1
Partition Size 292.97 GB (314,575,833,600 bytes)
Partition Starting Offset 314,575,833,600 bytes
Partition Disk #0, Partition #2
Partition Size 358.94 GB (385,411,944,960 bytes)
Partition Starting Offset 629,151,667,200 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 5
SCSI Target ID 0
Sectors/Track 63
Size 944.89 GB (1,014,563,612,160 bytes)
Total Cylinders 123,347
Total Sectors 1,981,569,555
Total Tracks 31,453,485
Tracks/Cylinder 255
Partition Disk #4, Partition #0
Partition Size 292.97 GB (314,575,801,344 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #4, Partition #1
Partition Size 292.97 GB (314,575,833,600 bytes)
Partition Starting Offset 314,575,833,600 bytes

Appendix C – Tunable Parameters

Partition Disk #4, Partition #2
Partition Size 358.94 GB (385,411,944,960 bytes)
Partition Starting Offset 629,151,667,200 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 3
SCSI Target ID 0
Sectors/Track 63
Size 944.89 GB (1,014,563,612,160 bytes)
Total Cylinders 123,347
Total Sectors 1,981,569,555
Total Tracks 31,453,485
Tracks/Cylinder 255
Partition Disk #2, Partition #0
Partition Size 292.97 GB (314,575,801,344 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #2, Partition #1
Partition Size 292.97 GB (314,575,833,600 bytes)
Partition Starting Offset 314,575,833,600 bytes
Partition Disk #2, Partition #2
Partition Size 358.94 GB (385,411,944,960 bytes)
Partition Starting Offset 629,151,667,200 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes

Appendix C – Tunable Parameters

Media Type Fixed hard disk
Partitions 3
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 0
Sectors/Track 63
Size 944.89 GB (1,014,563,612,160 bytes)
Total Cylinders 123,347
Total Sectors 1,981,569,555
Total Tracks 31,453,485
Tracks/Cylinder 255
Partition Disk #1, Partition #0
Partition Size 292.97 GB (314,575,801,344 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #1, Partition #1
Partition Size 292.97 GB (314,575,833,600 bytes)
Partition Starting Offset 314,575,833,600 bytes
Partition Disk #1, Partition #2
Partition Size 358.94 GB (385,411,944,960 bytes)
Partition Starting Offset 629,151,667,200 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model PERC LD 0 PERCRAID SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 3
SCSI Logical Unit 0
SCSI Port 4
SCSI Target ID 0
Sectors/Track 63
Size 270.92 GB (290,895,252,480 bytes)
Total Cylinders 35,366

Appendix C – Tunable Parameters

Total Sectors 568,154,790
Total Tracks 9,018,330
Tracks/Cylinder 255
Partition Disk #3, Partition #0
Partition Size 270.92 GB (290,895,220,224 bytes)
Partition Starting Offset 32,256 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model SEAGATE ST318453LC SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 8
SCSI Target ID 0
Sectors/Track 63
Size 16.95 GB (18,202,544,640 bytes)
Total Cylinders 2,213
Total Sectors 35,551,845
Total Tracks 564,315
Tracks/Cylinder 255
Partition Disk #7, Partition #0
Partition Size 16.94 GB (18,194,287,104 bytes)
Partition Starting Offset 32,256 bytes

[SCSI]

Item	Value
Name	Adaptec AIC-7892 Ultra160 PCI SCSI Card
Manufacturer	Adaptec
Status	OK
PNP Device ID	PCI\VEN_9005&DEV_008F&SUBSYS_01091028&REV_02\3&13C0B0C5&0&18
I/O Port	0x0000EC00-0x0000ECFF

Appendix C – Tunable Parameters

Memory Address 0xFE102000-0xFE102FFF

IRQ Channel IRQ 16

Driver c:\windows\system32\drivers\adpu160m.sys (RTC_XP07 (lab01_n(storbuild).010917-1031), 99.63 KB (102,016 bytes), 3/29/2003 12:00 AM)

Name DELL PERC 3/QC Plus RAID Controller

Manufacturer DELL

Status OK

PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&1070020&0&08

Memory Address 0xF8000000-0xFBFFFFFF

IRQ Channel IRQ 21

Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/QC Plus RAID Controller

Manufacturer DELL

Status OK

PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&1070020&0&10

Memory Address 0xF4000000-0xFCFFFFFF

IRQ Channel IRQ 22

Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/QC Plus RAID Controller

Manufacturer DELL

Status OK

PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&172E68DD&0&08

Memory Address 0xEC000000-0xFFFFFFFF

IRQ Channel IRQ 25

Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/QC Plus RAID Controller

Manufacturer DELL

Status OK

PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&172E68DD&0&10

Appendix C – Tunable Parameters

Memory Address 0xE8000000-0xF3DFFFFF
IRQ Channel IRQ 26
Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/QC Plus RAID Controller
Manufacturer DELL
Status OK
PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&474B838&0&08
Memory Address 0xE0000000-0xE7FFFFFF
IRQ Channel IRQ 23
Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/DC Plus RAID Controller
Manufacturer DELL
Status OK
PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_04941028&REV_01\3&E44F86D&0&08
Memory Address 0xD8000000-0xDFFFFFFF
IRQ Channel IRQ 29
Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

Name DELL PERC 3/QC Plus RAID Controller
Manufacturer DELL
Status OK
PNP Device ID PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&20FEA912&0&10
Memory Address 0xD0000000-0xD7FFFFFF
IRQ Channel IRQ 28
Driver c:\windows\system32\drivers\mraid35x.sys (5.2.22.4 built by: WinDDK, 17.88 KB (18,304 bytes), 1/9/2003 11:54 AM)

[IDE]

Item	Value
Name	CSB5 IDE Controller

Appendix C – Tunable Parameters

Manufacturer ServerWorks

Status OK

PNP Device ID PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_93\3&13C0B0C5&0&79

I/O Port 0x000008B0-0x000008BF

Driver c:\windows\system32\drivers\pciide.sys (5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB
(5,632 bytes), 3/29/2003 12:00 AM)

Name Primary IDE Channel

Manufacturer (Standard IDE ATA/ATAPI controllers)

Status OK

PNP Device ID PCIIDE\IDECHANNEL\4&10A8249&0&0

I/O Port 0x000001F0-0x000001F7

I/O Port 0x000003F6-0x000003F6

IRQ Channel IRQ 14

Driver c:\windows\system32\drivers\atapi.sys (5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB
(91,136 bytes), 3/29/2003 12:00 AM)

Name Secondary IDE Channel

Manufacturer (Standard IDE ATA/ATAPI controllers)

Status Error

PNP Device ID PCIIDE\IDECHANNEL\4&10A8249&0&1

I/O Port 0x00000170-0x00000177

I/O Port 0x00000376-0x00000376

IRQ Channel IRQ 15

Driver c:\windows\system32\drivers\atapi.sys (5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB
(91,136 bytes), 3/29/2003 12:00 AM)

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code

Secondary IDE ChannelPCIIDE\IDECHANNEL\4&10A8249&0&1 This device cannot find
enough free resources that it can use.

Appendix C – Tunable Parameters

[USB]

Device PNP Device ID

ServerWorks (RCC) PCI to USB Open Host Controller

PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_05\3&13C0B0C5&0&7A

USB Root Hub USB\ROOT_HUB\4&1A0F8909&0

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode	State	Status	Error Control
	Accept Pause	Accept Stop						
abiosdsk	Abiosdsk		Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Ignore	No	No			
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys		Kernel Driver	Yes			
	Boot	Running	OK	Normal	No	Yes		
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No				
	Disabled	Stopped	OK	Normal	No	No		
adpu160m	adpu160m	c:\windows\system32\drivers\adpu160m.sys		Kernel Driver				
	Yes	Boot	Running	OK	Normal	No	Yes	
adpu320	adpu320		Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No			
afcmt	afcmt	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal	No	No					
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys		Kernel				
Driver	Yes	Auto	Running	OK	Normal	No	Yes	
aha154x	Aha154x		Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No			
aic78u2	aic78u2	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal	No	No					
aic78xx	aic78xx	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal	No	No					

Appendix C – Tunable Parameters

aliide	Alilide	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys		Kernel Driver	No	Manual	
		Stopped	OK	Normal No	No		
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel				
Driver	Yes	Boot	Running	OK	Normal No	Yes	
atcp	Alacritech TCP Fast-path driver	c:\windows\system32\drivers\atcp.sys	Kernel Driver				
	Yes	System	Running	OK	Normal No	Yes	
atdisk	Atdisk	Not Available	Kernel Driver	No	Disabled	Stopped	OK
	Ignore	No	No				
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys	Kernel Driver				
	Yes	Manual	Running	OK	Ignore No	Yes	
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys					
	Kernel Driver	No	Manual	Stopped	OK	Normal No	No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver				
	Yes	Manual	Running	OK	Normal No	Yes	
b57w2k	Broadcom NetXtreme Gigabit Ethernet	c:\windows\system32\drivers\b57xp32.sys					
	Kernel Driver	Yes	Manual	Running	OK	Normal No	Yes
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes	System		
	Running	OK	Normal No	Yes			
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No	Disabled		
	Stopped	OK	Normal No	No			
cd20xrnt	cd20xrnt		Not Available	Kernel Driver	No	Disabled	
	Stopped	OK	Normal No	No			
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver		Yes		
	Disabled	Running	OK	Normal No	Yes		
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	System		
	Running	OK	Normal No	Yes			
changer	Changer		Not Available	Kernel Driver	No	System	Stopped
	OK	Ignore	No	No			
clusdisk	Cluster Disk Driver	c:\windows\system32\drivers\clusdisk.sys	Kernel Driver				
	No	Disabled	Stopped	OK	Normal No	No	
cmdide	Cmdlde	Not Available	Kernel Driver	No	Disabled	Stopped	OK
	Normal No	No					

Appendix C – Tunable Parameters

cpqarray	Cpqarray	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	
cpqarry2	cpqarry2	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	
cpqcissm	cpqcissm	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	
cpqfcalm	cpqfcalm	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	
crcdisk	CRC Disk Filter Driver	c:\windows\system32\drivers\crcdisk.sys	Kernel Driver	Yes	
	Boot	Running	OK	Normal	Yes
dac960nt	dac960nt	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	
dcesmwdm	Instrumentation service device driver	c:\windows\system32\drivers\dcesmwdm.sys	Kernel Driver	No	Manual
	Stopped	OK	Normal	No	
dellcerc	dellcerc	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		Stopped
	OK				
dfsdriver	DfsDriver	c:\windows\system32\drivers\dfs.sys	File System Driver		
	Yes	Boot	Running	OK	Normal
				No	Yes
disk	Disk Driver	c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes	Boot
	Running	OK	Normal	No	Yes
dmboot	dmboot	c:\windows\system32\drivers\dmboot.sys	Kernel Driver	No	
	Disabled	Stopped	OK	Normal	No
dmio	Logical Disk Manager Driver	c:\windows\system32\drivers\dmio.sys	Kernel Driver		
	Yes	Boot	Running	OK	Normal
				No	Yes
dmload	dmload	c:\windows\system32\drivers\dmload.sys	Kernel Driver	Yes	Boot
	Running	OK	Normal	No	Yes
dpti2o	dpti2o	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		Stopped
	OK				
e100b	Intel(R) PRO Adapter Driver	c:\windows\system32\drivers\e100b325.sys	Kernel		
Driver	No	Manual	Stopped	OK	Normal
				No	
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys	File System Driver		No
	Disabled	Stopped	OK	Normal	No
fdc	Floppy Disk Controller Driver	c:\windows\system32\drivers\fdc.sys	Kernel Driver		
	Yes	Manual	Running	OK	Normal
				No	Yes

Appendix C – Tunable Parameters

fips	Fips	c:\windows\system32\drivers\fips.sys	Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	
flpydisk	Floppy Disk Driver	c:\windows\system32\drivers\flpydisk.sys		Kernel Driver	
	Yes	Manual Running	OK	Normal No	Yes
ftdisk	Volume Manager Driver	c:\windows\system32\drivers\ftdisk.sys	Kernel Driver	Yes	
	Boot	Running	OK	Normal No	Yes
gpc	Generic Packet Classifier	c:\windows\system32\drivers\msgpc.sys	Kernel Driver		
	Yes	Manual Running	OK	Normal No	Yes
hpn	hpn	Not Available	Kernel Driver	No	Disabled
	Normal No	No			
hpt3xx	hpt3xx	Not Available	Kernel Driver	No	Disabled
	Normal No	No			
http	HTTP	c:\windows\system32\drivers\http.sys	Kernel Driver	No	Manual
	Stopped	OK	Normal No	No	
i20mgmt	i20mgmt	Not Available	Kernel Driver	No	System Stopped
	OK	Normal No	No		
i2omp	i2omp	Not Available	Kernel Driver	No	Disabled
	Normal No	No			
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver				
	c:\windows\system32\drivers\i8042prt.sys		Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	
iirsp	iirsp	Not Available	Kernel Driver	No	Disabled
	Normal No	No			
imapi	CD-Burning Filter Driver	c:\windows\system32\drivers\imapi.sys	Kernel Driver	No	
	System Stopped	OK	Normal No	No	
intelide	Intelide	Not Available	Kernel Driver	No	Disabled
	Normal No	No			
ipfilterdriver	IP Traffic Filter Driver	c:\windows\system32\drivers\ipfldrv.sys	Kernel Driver		
	No	Manual Stopped	OK	Normal No	No
ipinip	IP in IP Tunnel Driver	c:\windows\system32\drivers\ipinip.sys	Kernel Driver	No	
	Manual Stopped	OK	Normal No	No	
ipnat	IP Network Address Translator	c:\windows\system32\drivers\ipnat.sys	Kernel Driver		
	No	Manual Stopped	OK	Normal No	No
ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys	Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	

Appendix C – Tunable Parameters

ipsraidenabled	ipsraidenabled	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal	No	No			
isapnp	PnP ISA/EISA Bus Driver	c:\windows\system32\drivers\isapnp.sys	Kernel Driver				
	Yes	Boot	Running	OK	Critical	No	Yes
kbdclass	Keyboard Class Driver	c:\windows\system32\drivers\kbdclass.sys					Kernel
Driver	Yes	System	Running	OK	Normal	No	Yes
ksecdd	KSecDD	c:\windows\system32\drivers\ksecdd.sys	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes		
lp6nds35	lp6nds35	Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No		
mnmdd	mnmdd	c:\windows\system32\drivers\mnmdd.sys				Kernel Driver	Yes
	Running	OK	Ignore	No	Yes		System
modem	Modem	c:\windows\system32\drivers\modem.sys				Kernel Driver	No
	Stopped	OK	Ignore	No	No		Manual
mouclass	Mouse Class Driver	c:\windows\system32\drivers\mouclass.sys				Kernel	
Driver	Yes	System	Running	OK	Normal	No	Yes
mountmgr	Mount Point Manager	c:\windows\system32\drivers\mountmgr.sys				Kernel	
Driver	Yes	Boot	Running	OK	Normal	No	Yes
mraid35x	mraid35x	c:\windows\system32\drivers\mraid35x.sys				Kernel Driver	
	Yes	Boot	Running	OK	Normal	No	Yes
mrxdav	WebDav Client Redirector	c:\windows\system32\drivers\mrxdav.sys				File	
System Driver	No	Manual	Stopped	OK	Normal	No	
mrxsmbMRXSMB	c:\windows\system32\drivers\mrxsmb.sys					File System Driver	
	Yes	System	Running	OK	Normal	No	Yes
msfs	Msfs	c:\windows\system32\drivers\msfs.sys				File System Driver	Yes
	Running	OK	Normal	No	Yes		System
mup	Mup	c:\windows\system32\drivers\mup.sys				File System Driver	Yes
	Running	OK	Normal	No	Yes		Boot
ndis	NDIS System Driver	c:\windows\system32\drivers\ndis.sys				Kernel Driver	Yes
	Boot	Running	OK	Normal	No	Yes	
ndistapi	Remote Access NDIS TAPI Driver	c:\windows\system32\drivers\ndistapi.sys					
	Kernel Driver	Yes	Manual	Running	OK	Normal	Yes
ndisuiwo	NDIS Usermode I/O Protocol	c:\windows\system32\drivers\ndisuiwo.sys				Kernel Driver	
	Yes	Manual	Running	OK	Normal	No	Yes

Appendix C – Tunable Parameters

ndiswan	Remote Access NDIS WAN Driver	c:\windows\system32\drivers\ndiswan.sys	Kernel Driver	Yes	Manual
	Running	OK	Normal	No	Yes
ndproxyNDIS Proxy	c:\windows\system32\drivers\ndproxy.sys		Kernel Driver	Yes	
	Manual	Running	OK	Normal	No
netbios	NetBIOS Interface	c:\windows\system32\drivers\netbios.sys	File System		
Driver	Yes	System	Running	OK	Normal
netbt	NetBios over Tcpip	c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes	
	System	Running	OK	Normal	No
nfrd960	nfrd960	Not Available	Kernel Driver	No	Disabled
	Normal	No			Stopped
					OK
npfs	Npfs	c:\windows\system32\drivers\npfs.sys	File System	Driver	Yes
	Running	OK	Normal	No	Yes
ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys	File System	Driver	Yes
	Disabled	Running	OK	Normal	No
null	Null	c:\windows\system32\drivers\null.sys	Kernel	Driver	Yes
	Running	OK	Normal	No	System
parport	Parport	c:\windows\system32\drivers\parport.sys	Kernel	Driver	No
	Stopped	OK	Ignore	No	No
partmgr	Partition Manager	c:\windows\system32\drivers\partmgr.sys	Kernel	Driver	
	Yes	Boot	Running	OK	Normal
pci	PCI Bus Driver	c:\windows\system32\drivers\pci.sys	Kernel	Driver	Yes
	Running	OK	Critical	No	Yes
pciidc	PCIIde	c:\windows\system32\drivers\pciidc.sys	Kernel	Driver	Yes
	Running	OK	Normal	No	Boot
pcmcia	Pcmcia	c:\windows\system32\drivers\pcmcia.sys	Kernel	Driver	No
	Stopped	OK	Normal	No	Disabled
pdcomp	PDCOMP	Not Available	Kernel	Driver	No
	Ignore	No	No		Manual
					Stopped
pdframe	PDFRAME	Not Available	Kernel	Driver	No
	OK	Ignore	No	No	Manual
					Stopped
pdreli	PDRELI	Not Available	Kernel	Driver	No
	Ignore	No	No		Manual
					Stopped
pdrframe	PDRFRAME	Not Available	Kernel	Driver	No
	OK	Ignore	No	No	Manual
					Stopped

Appendix C – Tunable Parameters

perc2	perc2	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
perc2hib	perc2hib	Not Available	Kernel Driver	No	Disabled		
		Stopped	OK	Normal No	No		
pmxdrv	pmxdrv \??\c:\windows\system32\drivers\pmxdrv.sys		Kernel Driver	No	Manual		
		Stopped	OK	Normal No	No		
pptpminiport	WAN Miniport (PPTP) Driver	c:\windows\system32\drivers\rasppp.sys			Kernel		
Yes	Manual Running	OK	Normal No	Yes			
processor	Processor Driver Driver	c:\windows\system32\drivers\processr.sys			Kernel		
Yes	Manual Running	OK	Normal No	Yes			
ptilink	Direct Parallel Link Driver	c:\windows\system32\drivers\ptilink.sys	Kernel Driver				
	Yes	Manual Running	OK	Normal No	Yes		
ql1080	ql1080 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql10wnt	QI10wnt	Not Available	Kernel Driver	No	Disabled	Stopped	
OK	Normal No	No					
ql12160	ql12160 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql1240	ql1240 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql1280	ql1280 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql2100	ql2100 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql2200	ql2200 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
ql2300	ql2300 Not Available	Kernel Driver	No	Disabled	Stopped	OK	
	Normal No	No					
rasacd	Remote Access Auto Connection Driver	c:\windows\system32\drivers\rasacd.sys	Kernel				
Driver	Yes	System Running	OK	Normal No	Yes		
rasl2tp	WAN Miniport (L2TP)	c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver	Yes			
	Manual Running	OK	Normal No	Yes			
raspppoe	Remote Access PPPOE Driver	c:\windows\system32\drivers\raspppoe.sys					
	Kernel Driver	Yes	Manual Running	OK	Normal No	Yes	
raspti	Direct Parallel	c:\windows\system32\drivers\raspti.sys	Kernel Driver	Yes	Manual		
	Running	OK	Normal No	Yes			

Appendix C – Tunable Parameters

rdbs	Rdbss	c:\windows\system32\drivers\rdbs.sys	File System Driver	Yes	System
	Running	OK	Normal No	Yes	
rdpcdd	RDPCDD	c:\windows\system32\drivers\rdpcdd.sys	Kernel Driver	Yes	System
	Running	OK	Ignore No	Yes	
rdpdr	Terminal Server Device Redirector Driver		c:\windows\system32\drivers\rdpdr.sys		
	Kernel Driver	Yes	Manual Running	OK	Normal No Yes
rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys	Kernel Driver	Yes	Manual
	Running	OK	Ignore No	Yes	
redbook	Digital CD Audio Playback Filter Driver				
	c:\windows\system32\drivers\redbook.sys		Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	
secdrv	Secdrv	c:\windows\system32\drivers\secdrv.sys	Kernel Driver	No	Manual
	Stopped	OK	Normal No	No	
serenum	Serenum Filter Driver	c:\windows\system32\drivers\serenum.sys			Kernel
Driver	Yes	Manual Running	OK	Normal No	Yes
serial	Serial port driver	c:\windows\system32\drivers\serial.sys	Kernel Driver	Yes	
	System Running	OK	Ignore No	Yes	
sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys	Kernel Driver	No	System
	Stopped	OK	Ignore No	No	
simbad	Simbad Not Available	Kernel Driver	No	Disabled	Stopped OK
	Normal No	No			
slic	Alacritech Accelerator	c:\windows\system32\drivers\slic100.sys	Kernel Driver	No	
	Manual Stopped	OK	Normal No	No	
sparrow	Sparrow	Not Available	Kernel Driver	No	Disabled
	OK	Normal No	No		Stopped
srv	Srv	c:\windows\system32\drivers\srv.sys	File System Driver	Yes	Manual
	Running	OK	Normal No	Yes	
swenum	Software Bus Driver	c:\windows\system32\drivers\swenum.sys			Kernel
Driver	Yes	Manual Running	OK	Normal No	Yes
symc810	symc810	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
symc8xx	symc8xx	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
sympmi	sympmi	Not Available	Kernel Driver	No	Disabled
	Normal No	No			OK

Appendix C – Tunable Parameters

sym_hi	sym_hi	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
sym_u3	sym_u3	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
tcpip	TCP/IP Protocol Driver	c:\windows\system32\drivers\tcpip.sys	Kernel Driver	Yes			
		System Running	OK	Normal No	Yes		
tdpipe	TDPIPE	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver	No	Manual		
		Stopped	OK	Ignore	No	No	
tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Yes	Manual		
		Running	OK	Ignore	No	Yes	
termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	Yes			
		System Running	OK	Normal No	Yes		
toside	Toslide	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
udfs	Udfs	c:\windows\system32\drivers\udfs.sys	File System Driver	No			
		Disabled	Stopped	OK	Normal No	No	
ultra	ultra	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
update	Microcode Update Driver	c:\windows\system32\drivers\update.sys	Kernel Driver				
		Yes	Manual	Running	OK	Normal No	Yes
usbhub	USB2 Enabled Hub	c:\windows\system32\drivers\usbhub.sys					Kernel Driver
		Yes	Manual	Running	OK	Normal No	Yes
usbohci	Microsoft USB Open Host Controller Miniport Driver	c:\windows\system32\drivers\usbohci.sys	Kernel Driver	Yes	Manual		
		Running	OK	Normal No	Yes		
usbstor	USB Mass Storage Driver	c:\windows\system32\drivers\usbstor.sys					Kernel
Driver	No	Manual	Stopped	OK	Normal No	No	
vgasave	VGA Display Controller	c:\windows\system32\drivers\vga.sys	Kernel Driver				
		Yes	System	Running	OK	Ignore	No
						Yes	
viaide	Vialde	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
volsnap	Storage volumes	c:\windows\system32\drivers\volsnap.sys					Kernel Driver
		Yes	Boot	Running	OK	Normal No	Yes
wanarp	Remote Access IP ARP Driver	c:\windows\system32\drivers\wanarp.sys					Kernel
Driver	Yes	Manual	Running	OK	Normal No	Yes	

Appendix C – Tunable Parameters

wdica	WDICA Not Available	Kernel Driver	No	Manual Stopped	OK	Ignore
	No	No				
wlbs	Network Load Balancing	c:\windows\system32\drivers\wlbs.sys		Kernel Driver		
	No	Manual Stopped	OK	Normal No	No	

[Signed Drivers]

Device Name	Signed	Device Class	Driver Version	Driver Date	Manufacturer	INF
Name	Driver Name	Device ID				
Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
			HTREE\ROOT\0			
ACPI Multiprocessor	PCNo	COMPUTER	5.2.3790.0	10/1/2002	(Standard	
computers)	hal.inf	Not Available	ROOT\ACPI_HAL\0000			
Microsoft ACPI-Compliant System		No	SYSTEM	5.2.3790.0	10/1/2002	
	Microsoft	acpi.inf	Not Available	ACPI_HAL\PNP0C08\0		
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\0			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\1			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\2			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\3			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\4			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\5			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\6			
Processor	No	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\7			
PCI busNo	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)		
	machine.inf	Not Available	ACPI\PNP0A03\1			
ServerWorks Grand Champion CMIC_HE - NorthBridge High End				No	SYSTEM	
5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available		
PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_22\3&13C0B0C5&0&00						

Appendix C – Tunable Parameters

ServerWorks Grand Champion CMIC_HE - NorthBridge High End No SYSTEM
5.2.3790.0 10/1/2002 ServerWorks (RCC) machine.inf Not Available
PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_00\3&13C0B0C5&0&01

ServerWorks Grand Champion CMIC_HE - NorthBridge High End No SYSTEM
5.2.3790.0 10/1/2002 ServerWorks (RCC) machine.inf Not Available
PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_00\3&13C0B0C5&0&02

ServerWorks Grand Champion CMIC_HE - NorthBridge High End No SYSTEM
5.2.3790.0 10/1/2002 ServerWorks (RCC) machine.inf Not Available
PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_00\3&13C0B0C5&0&03

Adaptec AIC-7892 Ultra160 PCI SCSI Card No SCSIADAPTER 5.2.3790.0
10/1/2002 Adaptec pnpscsi.inf Not Available
PCI\VEN_9005&DEV_008F&SUBSYS_01091028&REV_02\3&13C0B0C5&0&18

Disk drive No DISKDRIVE 5.2.3790.0 10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_SEAGATE&PROD_ST318453LC&REV_DX09\4&39BE13D2&0&000

PE 1x8 Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_PE/PV&PROD_1X8_SCSI_BP&REV_1.0\4&39BE13D2&0&0

60

RAGE XL PCI Family (Microsoft Corporation) No DISPLAY 5.10.2600.6014
8/8/2001 ATI Technologies Inc. atiixpad.inf Not Available
PCI\VEN_1002&DEV_4752&SUBSYS_01091028&REV_27\3&13C0B0C5&0&20

Default Monitor No MONITOR 5.1.2001.0 6/6/2001 (Standard monitor
types) monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\4&C321929&0&80000000&00&04

ServerWorks Champion CSB5 - SouthBridge 5 No SYSTEM 5.2.3790.0
10/1/2002 ServerWorks (RCC) machine.inf Not Available
PCI\VEN_1166&DEV_0201&SUBSYS_00000000&REV_93\3&13C0B0C5&0&78

Direct memory access controller No SYSTEM 5.2.3790.0 10/1/2002
(Standard system devices) machine.inf Not Available
ACPI\PNP0200\4&25F73A82&0

Numeric data processor No SYSTEM 5.2.3790.0 10/1/2002 (Standard
system devices) machine.inf Not Available ACPI\PNP0C04\4&25F73A82&0

Programmable interrupt controller No SYSTEM 5.2.3790.0 10/1/2002
(Standard system devices) machine.inf Not Available
ACPI\PNP0000\4&25F73A82&0

Appendix C – Tunable Parameters

System speaker	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0800\4&25F73A82&0	
System timer	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0100\4&25F73A82&0	
Standard floppy disk controller	No	FDC	5.2.3790.0	10/1/2002	(Standard floppy disk controllers)
		fdc.inf	Not Available	ACPI\PNP0700\4&25F73A82&0	
Floppy disk drive	No	FLOPPYDISK	5.2.3790.0	10/1/2002	(Standard floppy disk drives)
		fpydisk.inf	Not Available	FDC\GENERIC_FLOPPY_DRIVE\5&1AE2F47D&0&0	
Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	No	KEYBOARD			
	5.2.3790.0	10/1/2002	(Standard keyboards)	keyboard.inf	Not Available
			ACPI\PNP0303\4&25F73A82&0		
PS/2 Compatible Mouse	No	MOUSE	5.2.3790.0	10/1/2002	Microsoft
		msmouse.inf	Not Available	ACPI\PNP0F13\4&25F73A82&0	
Communications Port	No	PORTS	5.2.3790.0	10/1/2002	(Standard port types)
		msports.inf	Not Available	ACPI\PNP0501\1	
System CMOS/real time clock	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0B00\4&25F73A82&0	
System board	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0C01\2	
CSB5 IDE Controller	No	HDC	5.2.3790.0	10/1/2002	ServerWorks
		mshdc.inf	Not Available	PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_93\3&13C0B0C5&0&79	
Primary IDE Channel	No	HDC	5.2.3790.0	10/1/2002	(Standard IDE ATA/ATAPI controllers)
		mshdc.inf	Not Available	PCIIDE\IDECHANNEL\4&10A8249&0&0	
CD-ROM Drive	No	CDROM	5.2.3790.0	10/1/2002	(Standard CD-ROM drives)
		cdrom.inf	Not Available	IDE\CDROMTEAC_CD-224E_3.7D_\5&3125DC91&0&0.0.0	
Secondary IDE Channel	No	HDC	5.2.3790.0	10/1/2002	(Standard IDE ATA/ATAPI controllers)
		mshdc.inf	Not Available	PCIIDE\IDECHANNEL\4&10A8249&0&1	
ServerWorks (RCC) PCI to USB Open Host Controller	No	USB	5.2.3790.0		
10/1/2002	ServerWorks (RCC)	usbport.inf	Not Available		
				PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_05\3&13C0B0C5&0&7A	

Appendix C – Tunable Parameters

USB Root Hub	No	USB	5.2.3790.0	10/1/2002	(Standard USB Host Controller)
	usbport.inf		Not Available	USB\ROOT_HUB\4&1A0F8909&0	
Serverworks Champion	CSB5 - SouthBridge 5	LPC	No	SYSTEM	5.2.3790.0
	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available	
			PCI\VEN_1166&DEV_0225&SUBSYS_00000000&REV_00\3&13C0B0C5&0&7B		
ISAPNP Read Data Port		No	SYSTEM	5.2.3790.0	10/1/2002
	(Standard system devices)		machine.inf	Not Available	
			ISAPNP\READDATAPORT\0		
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&80			
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&82			
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&88			
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&8A			
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&90			
ServerWorks Grand Champion	CIOB_X - I/O Bridge	100 Mhz	No	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_03\3&13C0B0C5&0&92			
PCI busNo	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)	
	machine.inf	Not Available	ACPI\PNP0A03\2		
DELL PERC 3/QC Plus RAID Controller	No	SCSIADAPTER	5.2.22.4		12/3/2002
	DELL oem0.inf		Not Available		
		PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&1070020&0&08			
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
	scsidev.inf	Not Available			
		SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&339A7227&0&060			

Appendix C – Tunable Parameters

DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&339A7227&0&160					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&339A7227&0&260					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&339A7227&0&360					
Disk drive	No	DISKDRIVE	5.2.3790.0	10/1/2002	(Standard disk drives)
disk.inf	Not Available				
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_\4&339A7227&0&400					
RAID Virtual Device	No	SYSTEM	5.2.3790.0	10/1/2002	American
Megatrends, Inc.	scsidev.inf	Not Available			
SCSI\OTHER&VEN_RAID&PROD_DUMMYDEVICE&REV_0000\4&339A7227&0&4F					
0					
DELL PERC 3/QC Plus RAID Controller	No	SCSIADAPTER	5.2.22.4		12/3/2002
DELL oem0.inf	Not Available				
PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&1070020&0&10					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&3626F71A&0&060					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&3626F71A&0&160					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&3626F71A&0&260					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&3626F71A&0&360					
Disk drive	No	DISKDRIVE	5.2.3790.0	10/1/2002	(Standard disk drives)
disk.inf	Not Available				
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_\4&3626F71A&0&400					
RAID Virtual Device	No	SYSTEM	5.2.3790.0	10/1/2002	American
Megatrends, Inc.	scsidev.inf	Not Available			

Appendix C – Tunable Parameters

SCSI\OTHER&VEN__RAID&PROD__DUMMYDEVICE&REV_0000\4&3626F71A&0&4F
0

PCI busNo	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
	machine.inf	Not Available	ACPI\PNP0A03\3	
Broadcom	NetXtreme Gigabit Ethernet	No	NET	2.91.0.0
	Broadcom	netb57xp.inf	Not Available	
		PCI\VEN_14E4&DEV_1644&SUBSYS_01091028&REV_14\3&29E81982&0&08		
Broadcom	NetXtreme Gigabit Ethernet	No	NET	2.91.0.0
	Broadcom	netb57xp.inf	Not Available	
		PCI\VEN_14E4&DEV_1644&SUBSYS_01091028&REV_14\3&29E81982&0&10		
PCI busNo	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
	machine.inf	Not Available	ACPI\PNP0A03\4	
DELL PERC 3/QC Plus RAID Controller	No	SCSIADAPTER5.2.22.4		12/3/2002
	DELL	oem0.inf	Not Available	
		PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&172E68DD&0&08		
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002
	scsidev.inf	Not Available		Dell
		SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&344086EB&0&060		
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002
	scsidev.inf	Not Available		Dell
		SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&344086EB&0&160		
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002
	scsidev.inf	Not Available		Dell
		SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&344086EB&0&260		
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002
	scsidev.inf	Not Available		Dell
		SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&344086EB&0&360		
Disk drive	No	DISKDRIVE	5.2.3790.0	10/1/2002
	disk.inf	Not Available		(Standard disk drives)
		SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_\4&344086EB&0&400		
RAID Virtual Device	No	SYSTEM	5.2.3790.0	10/1/2002
Megatrends, Inc.	scsidev.inf	Not Available		American
		SCSI\OTHER&VEN__RAID&PROD__DUMMYDEVICE&REV_0000\4&344086EB&0&4F		
0				

Appendix C – Tunable Parameters

DELL PERC 3/QC Plus RAID Controller No SCSIADAPTER5.2.22.4 12/3/2002
DELL oem0.inf Not Available
PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&172E68DD&0&10

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&1537843A&0&060

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&1537843A&0&160

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&1537843A&0&260

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&1537843A&0&360

Disk drive No DISKDRIVE 5.2.3790.0 10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_4&1537843A&0&400

RAID Virtual Device No SYSTEM 5.2.3790.0 10/1/2002 American
Megatrends, Inc. scsidev.inf Not Available
SCSI\OTHER&VEN_RAID&PROD_DUMMYDEVICE&REV_0000\4&1537843A&0&4F

0

PCI busNo SYSTEM 5.2.3790.0 10/1/2002 (Standard system devices)
machine.inf Not Available ACPI\PNP0A03\5

DELL PERC 3/QC Plus RAID Controller No SCSIADAPTER5.2.22.4 12/3/2002
DELL oem0.inf Not Available
PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&474B838&0&08

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&24CFDEA1&0&060

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&24CFDEA1&0&160

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&24CFDEA1&0&260

Appendix C – Tunable Parameters

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&24CFDEA1&0&360

Disk drive No DISKDRIVE 5.2.3790.0 10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_4&24CFDEA1&0&400

RAID Virtual Device No SYSTEM 5.2.3790.0 10/1/2002 American
Megatrends, Inc. scsidev.inf Not Available
SCSI\OTHER&VEN_RAID&PROD_DUMMYDEVICE&REV_0000\4&24CFDEA1&0&4

F0
PCI busNo SYSTEM 5.2.3790.0 10/1/2002 (Standard system devices)
machine.inf Not Available ACPI\PNP0A03\6

DELL PERC 3/DC Plus RAID Controller No SCSIADAPTER5.2.22.4 12/3/2002
DELL oem0.inf Not Available
PCI\VEN_101E&DEV_1960&SUBSYS_04941028&REV_01\3&E44F86D&0&08

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&FCC4443&0&060

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&FCC4443&0&160

RAID Virtual Device No SYSTEM 5.2.3790.0 10/1/2002 American
Megatrends, Inc. scsidev.inf Not Available
SCSI\OTHER&VEN_RAID&PROD_DUMMYDEVICE&REV_0000\4&FCC4443&0&2F

0
Disk drive No DISKDRIVE 5.2.3790.0 10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_4&FCC4443&0&300

PCI busNo SYSTEM 5.2.3790.0 10/1/2002 (Standard system devices)
machine.inf Not Available ACPI\PNP0A03\7

DELL PERC 3/QC Plus RAID Controller No SCSIADAPTER5.2.22.4 12/3/2002
DELL oem0.inf Not Available
PCI\VEN_101E&DEV_1960&SUBSYS_05031028&REV_01\3&20FEA912&0&10

DELL PV22XS Backplane No SYSTEM 5.2.3790.0 10/1/2002 Dell
scsidev.inf Not Available
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&399B85F9&0&060

Appendix C – Tunable Parameters

DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&399B85F9&0&160					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&399B85F9&0&260					
DELL PV22XS Backplane	No	SYSTEM	5.2.3790.0	10/1/2002	Dell
scsidev.inf	Not Available				
SCSI\PROCESSOR&VEN_DELL&PROD_PV22XS&REV_E.14\4&399B85F9&0&360					
Disk drive	No	DISKDRIVE	5.2.3790.0	10/1/2002	(Standard disk drives)
disk.inf	Not Available				
SCSI\DISK&VEN_PERC&PROD_LD_0_PERCRAID&REV_\4&399B85F9&0&400					
RAID Virtual Device	No	SYSTEM	5.2.3790.0	10/1/2002	American
Megatrends, Inc.	scsidev.inf	Not Available			
SCSI\OTHER&VEN_RAID&PROD_DUMMYDEVICE&REV_0000\4&399B85F9&0&4F					
0					
ACPI Fixed Feature Button	No	SYSTEM	5.2.3790.0	10/1/2002	
(Standard system devices)	machine.inf	Not Available			
ACPI\FIXEDBUTTON\2&DABA3FF&0					
Logical Disk Manager	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard
system devices)machine.inf	Not Available	ROOT\DMIO\0000			
Volume Manager	No	SYSTEM	5.2.3790.0	10/1/2002	(Standard
system devices)machine.inf	Not Available	ROOT\FTDISK\0000			
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft	
volume.inf	Not Available				
STORAGE\VOLUME\1&30A96598&0&SIGNATURE8A518A51OFFSET7E00LENGTH43					
C76CA00					
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft	
volume.inf	Not Available				
STORAGE\VOLUME\1&30A96598&0&SIGNATURED5493F18OFFSET7E00LENGTH49					
3E2DCC00					
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft	
volume.inf	Not Available				
STORAGE\VOLUME\1&30A96598&0&SIGNATURED5493F18OFFSET493E2E4A00LE					
NGTH493E2E4A00					

Appendix C – Tunable Parameters

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED5493F18OFFSET927C5C9400LE
NGTH59BC579200

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE460EE8EAOFFSET7E00LENGTH49
3E2DCC00

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE460EE8EAOFFSET493E2E4A00LE
NGTH493E2E4A00

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE460EE8EAOFFSET927C5C9400LE
NGTH59BC579200

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE75FB6071OFFSET7E00LENGTH49
3E2DCC00

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE75FB6071OFFSET493E2E4A00LEN
GTH493E2E4A00

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE75FB6071OFFSET927C5C9400LEN
GTH59BC579200

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E7OFFSET7E00LENGTH49
3E2DCC00

Generic volume No VOLUME 5.2.3790.0 10/1/2002 Microsoft
volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E7OFFSET493E2E4A00LE
NGTH493E2E4A00

Appendix C – Tunable Parameters

Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E7OFFSET927C5C9400LE			
NGTH59BC579200				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E6OFFSET7E00LENGTH49			
3E2DCC00				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E6OFFSET493E2E4A00LE			
NGTH493E2E4A00				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E6OFFSET927C5C9400LE			
NGTH59BC579200				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE566B47E4OFFSET7E00LENGTH43			
BAB4CE00				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE71FF6294OFFSET7E00LENGTH49			
3E2DCC00				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE71FF6294OFFSET493E2E4A00LEN			
GTH493E2E4A00				
Generic volume No	VOLUME	5.2.3790.0	10/1/2002	Microsoft
	volume.inf	Not Available		
	STORAGE\VOLUME\1&30A96598&0&SIGNATURE71FF6294OFFSET927C5C9400LEN			
GTH59BC579200				
AFD Networking Support Environment	Not Available	LEGACYDRIVER	Not Available	
	Not Available	Not Available	Not Available	Not Available
	ROOT\LEGACY_AFD\0000			

Appendix C – Tunable Parameters

Alacritech TCP Fast-path driver	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_ATCP\0000
Beep	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_BEEP\0000	
CRC Disk Filter Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_CRCDISK\0000
dmboot	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
dmload	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_DMLOAD\0000	
Fips	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_FIPS\0000	
Generic Packet Classifier		Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_GPC\0000
IPSEC driver	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_IPSEC\0000
ksecdd	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_KSECDD\0000	
mnmdd	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_MNMDD\0000	
mountmgr	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_MOUNTMGR\0000
NDIS System Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_NDIS\0000
Remote Access NDIS TAPI Driver		Not Available	LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available	Not Available	
	ROOT\LEGACY_NDISTAPI\0000			
NDIS Usermode I/O Protocol	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_NDISUIO\0000
NDProxy	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_NDPROXY\0000
NetBios over Tcpip	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_NETBT\0000
Null	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_NULL\0000	

Appendix C – Tunable Parameters

Partition Manager	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_PARTMGR\0000
pmxdrv	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_PMXDRV\0000
Remote Access Auto Connection Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	Not Available
		ROOT\LEGACY_RASACD\0000		
RDP CDD	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_RDPCDD\0000
RDPWD	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_RDPWD\0000
TCP/IP Protocol Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_TCPIP\0000
TDTCP	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_TDTCP\0000
VGA Display Controller	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_VGASAVE\0000
volsnap	Not Available	LEGACYDRIVER	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_VOLSNAP\0000
Remote Access IP ARP Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	
		ROOT\LEGACY_WANARP\0000		
Audio Codecs	No	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMACM	
Legacy Audio Drivers	No	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMDRV	
Media Control Devices	No	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMCI	
Legacy Video Capture Devices	No	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMVCD	
Video Codecs	No	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMVID	
WAN Miniport (L2TP)	No	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_L2TPMINIPORT\0000	
WAN Miniport (IP)	No	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_NDISWANIP\0000	

Appendix C – Tunable Parameters

WAN Miniport (PPPOE)	No	NET	5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_PPPOEMINIPORT\0000		
WAN Miniport (PPTP)	No	NET	5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_PPTPMINIPORT\0000		
Direct Parallel	No	NET	5.2.3790.0	10/1/2002	Microsoft
	Not Available	ROOT\MS_PTIMINIPORT\0000			netrasa.inf
Terminal Server Device Redirector		No	SYSTEM	5.2.3790.0	10/1/2002
(Standard system devices)		machine.inf	Not Available	ROOT\RDPDR\0000	
Terminal Server Keyboard Driver		No	SYSTEM	5.2.3790.0	10/1/2002
(Standard system devices)		machine.inf	Not Available	ROOT\RDP_KBD\0000	
Terminal Server Mouse Driver	No	SYSTEM	5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\RDP_MOU\0000	
Plug and Play Software Device Enumerator	No	SYSTEM	5.2.3790.0		
10/1/2002	(Standard system devices)	machine.inf	Not Available		
	ROOT\SYSTEM\0000				
Microcode Update Device	No	SYSTEM	5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\SYSTEM\0001	

[Environment Variables]

Variable	Value	User Name
ClusterLog	C:\WINDOWS\Cluster\cluster.log	<SYSTEM>
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>
HOME	C:/Documents and Settings/Administrator	<SYSTEM>
NUMBER_OF_PROCESSORS	8	<SYSTEM>
OS	Windows_NT	<SYSTEM>
Path	C:\mksnt;C:\WINDOWS\system32;C:\WINDOWS;C:\WINDOWS\System32\Wbem;C:\PROGRA~1\MICROS~1\80\Tools\BINN; C:\pmx32\bin; c:\pmx32;C:\Program Files\Microsoft SQL Server\80\Tools\BINN	<SYSTEM>
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH	<SYSTEM>
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2 Stepping 6, GenuineIntel	<SYSTEM>
PROCESSOR_LEVEL	15	<SYSTEM>
PROCESSOR_REVISION	0206	<SYSTEM>
ROOTDIR	C:/	<SYSTEM>

Appendix C – Tunable Parameters

```
SHELL C:/mksnt/sh.exe<SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
TMPDIR C:/WINDOWS/TEMP <SYSTEM>
windir %SystemRoot% <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp PE6600\Administrator
TMP %USERPROFILE%\Local Settings\Temp PE6600\Administrator
```

[Print Jobs]

Document	Size	Owner	Notify	Status	Time Submitted	Start Time	Until Time
Elapsed Time	Pages Printed		Job ID	Priority	Parameters	Driver	Print Processor
Host Print Queue		Data Type		Name			

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
------------	-------------	------	--------	-----------

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max Working Set	Start Time
		Version	Size	File Date		
system	idle process		Not Available	0	0	Not Available
			Not Available	Not Available	Not Available	
system		Not Available	4	8	0	1413120
			Not Available	Not Available	Not Available	
smss.exe		Not Available	416	11	204800	1413120
			Not Available	Not Available	Not Available	5/14/2004 11:02 AM
csrss.exe		Not Available	620	13	Not Available	Not Available
			11:02 AM	Not Available	Not Available	5/14/2004
				Not Available	Not Available	

Appendix C – Tunable Parameters

winlogon.exe	c:\windows\system32\winlogon.exe	644	13	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		536.50 KB (549,376 bytes)	
bytes)	3/29/2003 12:00 AM				
services.exe	c:\windows\system32\services.exe	688	9	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		102.00 KB (104,448 bytes)	
bytes)	3/29/2003 12:00 AM				
lsass.exe	c:\windows\system32\lsass.exe	700	9	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)	
	3/29/2003 12:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	848	8	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)	
	3/29/2003 12:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	920	8	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)	
	3/29/2003 12:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	1080	8	204800	1413120
	5/14/2004 11:02 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)	
	3/29/2003 12:00 AM				
msdtc.exe	Not Available	1280	8	Not Available	Not Available
	11:03 AM	Not Available	Not Available	Not Available	5/14/2004
svchost.exe	c:\windows\system32\svchost.exe	1448	8	204800	1413120
	5/14/2004 11:03 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)	
	3/29/2003 12:00 AM				
svchost.exe	Not Available	1488	8	Not Available	Not Available
	11:03 AM	Not Available	Not Available	Not Available	5/14/2004
mssearch.exe	c:\program files\common files\system\mssearch\bin\mssearch.exe			1572	
	8	204800	1413120	5/14/2004 11:03 AM	9.107.8320.0 68.00 KB
(69,632 bytes)	2/12/2004 10:26 AM				
explorer.exe	c:\windows\explorer.exe	1836	8	204800	1413120
	5/14/2004 11:03 AM	6.00.3790.0 (srv03_rtm.030324-2048)		1,008.50 KB (1,032,704 bytes)	5/14/2004
	3/29/2003 12:00 AM				
winvnc.exe	c:\program files\orl\vnc\winvnc.exe	1936	8	204800	1413120
	5/14/2004 11:03 AM	3, 3, 3, 7		204.00 KB (208,896 bytes)	2/16/2004 9:27 AM

Appendix C – Tunable Parameters

sqlmangr.exe c:\program files\microsoft sql server\80\tools\binn\sqlmangr.exe 1960 8
204800 1413120 5/14/2004 11:03 AM 2000.080.0760.00 72.57 KB
(74,308 bytes) 5/5/2004 11:10 AM

wmiprvse.exe Not Available 580 8 Not Available Not Available 5/14/2004
11:03 AM Not Available Not Available Not Available

sqlservr.exe c:\program files\microsoft sql server\mssql\binn\sqlservr.exe 1212 13
204800 1413120 5/14/2004 11:05 AM 2000.080.0857.00 7.18 MB
(7,532,584 bytes) 5/5/2004 11:08 AM

cmd.exe c:\windows\system32\cmd.exe 1300 8 204800 1413120
5/17/2004 11:00 AM 5.2.3790.0 (srv03_rtm.030324-2048) 374.00 KB (382,976
bytes) 3/29/2003 12:00 AM

helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr.exe 1220 8 204800
1413120 5/17/2004 4:17 PM 5.2.3790.0 (srv03_rtm.030324-2048) 764.00
KB (782,336 bytes) 2/5/2004 4:23 PM

helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsvc.exe 772 8 204800
1413120 5/17/2004 4:17 PM 5.2.3790.0 (srv03_rtm.030324-2048) 720.00
KB (737,280 bytes) 2/5/2004 4:23 PM

helphost.exe c:\windows\pchealth\helpctr\binaries\helphost.exe 1120 8 204800
1413120 5/17/2004 4:17 PM 5.2.3790.0 (srv03_rtm.030324-2048) 106.00
KB (108,544 bytes) 2/5/2004 4:23 PM

wmiprvse.exe Not Available 544 8 Not Available Not Available 5/17/2004 4:18
PM Not Available Not Available Not Available

helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr.exe 1968 8 204800
1413120 5/17/2004 4:18 PM 5.2.3790.0 (srv03_rtm.030324-2048) 764.00
KB (782,336 bytes) 2/5/2004 4:23 PM

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
winlogon	5.2.3790.0 (srv03_rtm.030324-2048)	536.50 KB (549,376 bytes)			
			3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\winlogon.exe
ntdll	5.2.3790.0 (srv03_rtm.030324-2048)	722.50 KB (739,840 bytes)			
			3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\ntdll.dll
kernel32	5.2.3790.0 (srv03_rtm.030324-2048)	965.00 KB (988,160 bytes)			
			3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\kernel32.dll

Appendix C – Tunable Parameters

msvcrt	7.0.3790.0 (srv03_rtm.030324-2048)	319.50 KB (327,168 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\msvcrt.dll	
advapi32	5.2.3790.0 (srv03_rtm.030324-2048)	559.50 KB (572,928 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll
rpcrt4	5.2.3790.0 (srv03_rtm.030324-2048)	643.50 KB (658,944 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\rpcrt4.dll	
user32	5.2.3790.0 (srv03_rtm.030324-2048)	562.00 KB (575,488 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\user32.dll	
gdi32	5.2.3790.0 (srv03_rtm.030324-2048)	263.00 KB (269,312 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\gdi32.dll	
userenv	5.2.3790.0 (srv03_rtm.030324-2048)	732.50 KB (750,080 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll	
nddeapi	5.2.3790.0 (srv03_rtm.030324-2048)	16.00 KB (16,384 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\nddeapi.dll	
crypt32	5.131.3790.0 (srv03_rtm.030324-2048)	598.00 KB (612,352 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll	
msasn1	5.2.3790.0 (srv03_rtm.030324-2048)	58.00 KB (59,392 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\msasn1.dll	
secur32	5.2.3790.0 (srv03_rtm.030324-2048)	63.00 KB (64,512 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\secur32.dll	
winsta	5.2.3790.0 (srv03_rtm.030324-2048)	51.00 KB (52,224 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\winsta.dll	
netapi32	5.2.3790.0 (srv03_rtm.030324-2048)	317.00 KB (324,608 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\netapi32.dll
profmap	5.2.3790.0 (srv03_rtm.030324-2048)	22.00 KB (22,528 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\profmap.dll	
regapi	5.2.3790.0 (srv03_rtm.030324-2048)	48.50 KB (49,664 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\regapi.dll	
ws2_32	5.2.3790.0 (srv03_rtm.030324-2048)	87.50 KB (89,600 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\ws2_32.dll	
ws2help	5.2.3790.0 (srv03_rtm.030324-2048)	19.50 KB (19,968 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ws2help.dll	
psapi	5.2.3790.0 (srv03_rtm.030324-2048)	21.50 KB (22,016 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\psapi.dll	
version	5.2.3790.0 (srv03_rtm.030324-2048)	17.00 KB (17,408 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\version.dll	

Appendix C – Tunable Parameters

setupapi	5.2.3790.0 (srv03_rtm.030324-2048)	1,014.50 KB (1,038,848 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll
msgina	5.2.3790.0 (srv03_rtm.030324-2048)	1.14 MB (1,191,936 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\msgina.dll
shsvcs	6.00.3790.0 (srv03_rtm.030324-2048)	121.50 KB (124,416 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\shsvcs.dll
shlwapi	6.00.3790.0 (srv03_rtm.030324-2048)	281.00 KB (287,744 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\shlwapi.dll
sfc	5.2.3790.0 (srv03_rtm.030324-2048)	4.50 KB (4,608 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.0 (srv03_rtm.030324-2048)	133.00 KB (136,192 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\sfc_os.dll
wintrust	5.131.3790.0 (srv03_rtm.030324-2048)	161.50 KB (165,376 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\wintrust.dll
ole32	5.2.3790.0 (srv03_rtm.030324-2048)	1.13 MB (1,187,328 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\ole32.dll
imagehlp	5.2.3790.0 (srv03_rtm.030324-2048)	142.50 KB (145,920 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll
comctl32	6.0 (srv03_rtm.030324-2048)	907.00 KB (928,768 bytes)	2/5/2004 9:34 AM
	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_6.0.100.0_x-ww_8417450b\comctl32.dll	
winscard	5.2.3790.0 (srv03_rtm.030324-2048)	98.50 KB (100,864 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\winscard.dll
wtsapi32	5.2.3790.0 (srv03_rtm.030324-2048)	17.50 KB (17,920 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll
sxs	5.2.3790.0 (srv03_rtm.030324-2048)	733.00 KB (750,592 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll
winmm	5.2.3790.0 (srv03_rtm.030324-2048)	166.00 KB (169,984 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll
wldap32	5.2.3790.0 (srv03_rtm.030324-2048)	158.00 KB (161,792 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll
rsaenh	5.2.3790.0 (srv03_rtm.030324-2048)	176.83 KB (181,072 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\rsaenh.dll
cscdll	5.2.3790.0 (srv03_rtm.030324-2048)	99.00 KB (101,376 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\cscdll.dll

Appendix C – Tunable Parameters

wlnotify 5.2.3790.0 (srv03_rtm.030324-2048) 87.50 KB (89,600 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wlnotify.dll

winspool 5.2.3790.0 (srv03_rtm.030324-2048) 140.00 KB (143,360 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\winspool.drv

mpr 5.2.3790.0 (srv03_rtm.030324-2048) 56.00 KB (57,344 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\mpr.dll

shell32 6.00.3790.0 (srv03_rtm.030324-2048) 7.79 MB (8,166,400 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\shell32.dll

comctl32 5.82 (srv03_rtm.030324-2048) 561.00 KB (574,464 bytes) 2/5/2004 9:34
AM Microsoft Corporation c:\windows\winsxs\x86_microsoft.windows.common-
controls_6595b64144ccf1df_5.82.0.0_x-ww_8a69ba05\comctl32.dll

uxtheme 6.00.3790.0 (srv03_rtm.030324-2048) 196.00 KB (200,704 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\uxtheme.dll

samlib 5.2.3790.0 (srv03_rtm.030324-2048) 49.00 KB (50,176 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\samlib.dll

cscui 5.2.3790.0 (srv03_rtm.030324-2048) 305.00 KB (312,320 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\cscui.dll

oleaut32 5.2.3790.0 486.00 KB (497,664 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\oleaut32.dll

clbcatq 2001.12.4720.0 (srv03_rtm.030324-2048) 481.00 KB (492,544 bytes)
2/5/2004 4:20 PM Microsoft Corporation c:\windows\system32\clbcatq.dll

comres 2001.12.4720.0 (srv03_rtm.030324-2048) 778.00 KB (796,672 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\comres.dll

ntmarta 5.2.3790.0 (srv03_rtm.030324-2048) 114.00 KB (116,736 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ntmarta.dll

wbemprox 5.2.3790.0 (srv03_rtm.030324-2048) 17.50 KB (17,920 bytes) 2/5/2004 4:20
PM Microsoft Corporation c:\windows\system32\wbem\wbemprox.dll

wbemcomm 5.2.3790.0 (srv03_rtm.030324-2048) 211.50 KB (216,576 bytes)
3/29/2003 12:00 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcomm.dll

wbemsrv 5.2.3790.0 (srv03_rtm.030324-2048) 42.50 KB (43,520 bytes) 2/5/2004 4:20
PM Microsoft Corporation c:\windows\system32\wbem\wbemsrv.dll

fastprox 5.2.3790.0 (srv03_rtm.030324-2048) 443.00 KB (453,632 bytes) 2/5/2004 4:20
PM Microsoft Corporation c:\windows\system32\wbem\fastprox.dll

msvcp60 6.05.2144.0 388.00 KB (397,312 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msvcp60.dll

Appendix C – Tunable Parameters

ntdsapi 5.2.3790.0 (srv03_rtm.030324-2048) 76.00 KB (77,824 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ntdsapi.dll

dnsapi 5.2.3790.0 (srv03_rtm.030324-2048) 147.50 KB (151,040 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\dnsapi.dll

services 5.2.3790.0 (srv03_rtm.030324-2048) 102.00 KB (104,448 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\services.exe

scesrv 5.2.3790.0 (srv03_rtm.030324-2048) 316.50 KB (324,096 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\scesrv.dll

authz 5.2.3790.0 (srv03_rtm.030324-2048) 67.00 KB (68,608 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\authz.dll

umpnppmgr 5.2.3790.0 (srv03_rtm.030324-2048) 121.50 KB (124,416 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\umpnppmgr.dll

ncobjapi 5.2.3790.0 (srv03_rtm.030324-2048) 34.50 KB (35,328 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ncobjapi.dll

eventlog 5.2.3790.0 (srv03_rtm.030324-2048) 60.50 KB (61,952 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\eventlog.dll

lsass 5.2.3790.0 (srv03_rtm.030324-2048) 13.00 KB (13,312 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\lsass.exe

lsasrv 5.2.3790.0 (srv03_rtm.030324-2048) 780.50 KB (799,232 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\lsasrv.dll

samsrv 5.2.3790.0 (srv03_rtm.030324-2048) 452.00 KB (462,848 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\samsrv.dll

cryptdll 5.2.3790.0 (srv03_rtm.030324-2048) 34.00 KB (34,816 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\cryptdll.dll

msprivs 5.2.3790.0 (srv03_rtm.030324-2048) 46.50 KB (47,616 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msprivs.dll

kerberos 5.2.3790.0 (srv03_rtm.030324-2048) 332.50 KB (340,480 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\kerberos.dll

msv1_0 5.2.3790.0 (srv03_rtm.030324-2048) 127.00 KB (130,048 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\msv1_0.dll

netlogon 5.2.3790.0 (srv03_rtm.030324-2048) 409.00 KB (418,816 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\netlogon.dll

w32time 5.2.3790.0 (srv03_rtm.030324-2048) 216.00 KB (221,184 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\w32time.dll

iphlpapi 5.2.3790.0 (srv03_rtm.030324-2048) 82.50 KB (84,480 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\iphlpapi.dll

Appendix C – Tunable Parameters

schannel 5.2.3790.0 (srv03_rtm.030324-2048) 149.50 KB (153,088 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\schannel.dll

wdigest 5.2.3790.0 (srv03_rtm.030324-2048) 61.00 KB (62,464 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wdigest.dll

rassfm 5.2.3790.0 (srv03_rtm.030324-2048) 20.50 KB (20,992 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\rassfm.dll

kdcsvc 5.2.3790.0 (srv03_rtm.030324-2048) 221.00 KB (226,304 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\kdcsvc.dll

ntdsa 5.2.3790.0 (srv03_rtm.030324-2048) 1.45 MB (1,520,640 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ntdsa.dll

ntdsatq 5.2.3790.0 (srv03_rtm.030324-2048) 32.00 KB (32,768 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ntdsatq.dll

mswsock 5.2.3790.0 (srv03_rtm.030324-2048) 254.00 KB (260,096 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\mswsock.dll

esent 5.2.3790.0 (srv03_rtm.030324-2048) 1.01 MB (1,056,256 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\esent.dll

scecli 5.2.3790.0 (srv03_rtm.030324-2048) 179.50 KB (183,808 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\scecli.dll

wshtcpip 5.2.3790.0 (srv03_rtm.030324-2048) 18.00 KB (18,432 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wshtcpip.dll

pstorsvc 5.2.3790.0 (srv03_rtm.030324-2048) 24.00 KB (24,576 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\pstorsvc.dll

psbase 5.2.3790.0 (srv03_rtm.030324-2048) 81.00 KB (82,944 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\psbase.dll

dssenh 5.2.3790.0 (srv03_rtm.030324-2048) 131.33 KB (134,480 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\dssenh.dll

svchost 5.2.3790.0 (srv03_rtm.030324-2048) 13.00 KB (13,312 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\svchost.exe

rpcss 5.2.3790.0 (srv03_rtm.030324-2048) 276.50 KB (283,136 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\rpcss.dll

termsrv 5.2.3790.0 (srv03_rtm.030324-2048) 216.50 KB (221,696 bytes) 2/5/2004 4:20 PM
PM Microsoft Corporation c:\windows\system32\termsrv.dll

icaapi 5.2.3790.0 (srv03_rtm.030324-2048) 10.50 KB (10,752 bytes) 2/5/2004 4:20 PM
Microsoft Corporation c:\windows\system32\icaapi.dll

mstlsapi 5.2.3790.0 (srv03_rtm.030324-2048) 104.50 KB (107,008 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\mstlsapi.dll

Appendix C – Tunable Parameters

activeds 5.2.3790.0 (srv03_rtm.030324-2048) 189.00 KB (193,536 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\activeds.dll
adsldpc 5.2.3790.0 (srv03_rtm.030324-2048) 142.50 KB (145,920 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\adsldpc.dll
credui 5.2.3790.0 (srv03_rtm.030324-2048) 159.00 KB (162,816 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\credui.dll
atl 3.05.2283 83.00 KB (84,992 bytes) 3/29/2003 12:00 AM Microsoft Corporation
c:\windows\system32\atl.dll
rdpwsx 5.2.3790.0 (srv03_rtm.030324-2048) 80.13 KB (82,056 bytes) 2/5/2004 4:20 PM
Microsoft Corporation c:\windows\system32\rdpwsx.dll
wzcsvc 5.2.3790.0 (srv03_rtm.030324-2048) 272.50 KB (279,040 bytes) 3/25/2003 6:15
AM Microsoft Corporation c:\windows\system32\wzcsvc.dll
rtutils 5.2.3790.0 (srv03_rtm.030324-2048) 32.00 KB (32,768 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\rtutils.dll
wmi 5.2.3790.0 (srv03_rtm.030324-2048) 6.50 KB (6,656 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wmi.dll
dhcpcsvc 5.2.3790.0 (srv03_rtm.030324-2048) 101.50 KB (103,936 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\dhcpcsvc.dll
rastls 5.2.3790.0 (srv03_rtm.030324-2048) 155.00 KB (158,720 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\rastls.dll
cryptui 5.131.3790.0 (srv03_rtm.030324-2048) 473.50 KB (484,864 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\cryptui.dll
mprapi 5.2.3790.0 (srv03_rtm.030324-2048) 81.00 KB (82,944 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\mprapi.dll
rasapi32 5.2.3790.0 (srv03_rtm.030324-2048) 227.50 KB (232,960 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\rasapi32.dll
rasman 5.2.3790.0 (srv03_rtm.030324-2048) 56.50 KB (57,856 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\rasman.dll
tapi32 5.2.3790.0 (srv03_rtm.030324-2048) 175.00 KB (179,200 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\tapi32.dll
raschap 5.2.3790.0 (srv03_rtm.030324-2048) 106.00 KB (108,544 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\raschap.dll
wkssvc 5.2.3790.0 (srv03_rtm.030324-2048) 125.00 KB (128,000 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wkssvc.dll
wiarpcc 5.2.3790.0 (srv03_rtm.030324-2048) 30.00 KB (30,720 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wiarpcc.dll

Appendix C – Tunable Parameters

es	2001.12.4720.0 (srv03_rtm.030324-2048)	221.50 KB (226,816 bytes)
	3/29/2003 12:00 AM	Microsoft Corporation c:\windows\system32\es.dll
pchsvc	5.2.3790.0 (srv03_rtm.030324-2048)	31.50 KB (32,256 bytes) 2/5/2004 4:23 PM
	Microsoft Corporation c:\windows\pchealth\helpctr\binaries\pchsvc.dll	
srvsvc	5.2.3790.0 (srv03_rtm.030324-2048)	89.00 KB (91,136 bytes) 3/29/2003 12:00 AM
	Microsoft Corporation c:\windows\system32\srvsvc.dll	
seclogon	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\seclogon.dll
sens	5.2.3790.0 (srv03_rtm.030324-2048)	35.50 KB (36,352 bytes) 3/29/2003 12:00 AM
	Microsoft Corporation c:\windows\system32\sens.dll	
wmisvc	5.2.3790.0 (srv03_rtm.030324-2048)	131.00 KB (134,144 bytes) 2/5/2004 4:20 PM
	Microsoft Corporation c:\windows\system32\wbem\wmisvc.dll	
vssapi	5.2.3790.0 (srv03_rtm.030324-2048)	528.00 KB (540,672 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\vssapi.dll
winrnr	5.2.3790.0 (srv03_rtm.030324-2048)	15.00 KB (15,360 bytes) 3/29/2003 12:00 AM
	Microsoft Corporation c:\windows\system32\winrnr.dll	
comsvcs	2001.12.4720.0 (srv03_rtm.030324-2048)	1.14 MB (1,199,616 bytes)
	2/5/2004 4:20 PM	Microsoft Corporation c:\windows\system32\comsvcs.dll
netman	5.2.3790.0 (srv03_rtm.030324-2048)	209.00 KB (214,016 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\netman.dll
wzcsapi	5.2.3790.0 (srv03_rtm.030324-2048)	24.50 KB (25,088 bytes) 3/25/2003 6:15 AM
	Microsoft Corporation c:\windows\system32\wzcsapi.dll	
rasadhlp	5.2.3790.0 (srv03_rtm.030324-2048)	6.50 KB (6,656 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\rasadhlp.dll
netshell	5.2.3790.0 (srv03_rtm.030324-2048)	1.67 MB (1,747,456 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\netshell.dll
clusapi	5.2.3790.0 (srv03_rtm.030324-2048)	56.00 KB (57,344 bytes) 3/29/2003 12:00 AM
	Microsoft Corporation c:\windows\system32\clusapi.dll	
hnetcfg	5.2.3790.0 (srv03_rtm.030324-2048)	243.50 KB (249,344 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\hnetcfg.dll
wininet	6.00.3790.0 (srv03_rtm.030324-2048)	609.00 KB (623,616 bytes) 3/29/2003
	12:00 AM	Microsoft Corporation c:\windows\system32\wininet.dll
wbemcore	5.2.3790.0 (srv03_rtm.030324-2048)	457.00 KB (467,968 bytes)
	2/5/2004 4:20 PM	Microsoft Corporation
	c:\windows\system32\wbem\wbemcore.dll	

Appendix C – Tunable Parameters

esscli	5.2.3790.0 (srv03_rtm.030324-2048)	235.50 KB (241,152 bytes)	2/5/2004 4:20
PM	Microsoft Corporation	c:\windows\system32\wbem\esscli.dll	
wmiutils	5.2.3790.0 (srv03_rtm.030324-2048)	90.50 KB (92,672 bytes)	2/5/2004 4:20 PM
	Microsoft Corporation	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	5.2.3790.0 (srv03_rtm.030324-2048)	165.00 KB (168,960 bytes)	
	2/5/2004 4:20 PM	Microsoft Corporation	c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd	5.2.3790.0 (srv03_rtm.030324-2048)	405.50 KB (415,232 bytes)	
	2/5/2004 4:20 PM	Microsoft Corporation	c:\windows\system32\wbem\wmiprvsd.dll
wbemess	5.2.3790.0 (srv03_rtm.030324-2048)	256.50 KB (262,656 bytes)	
	2/5/2004 4:20 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemess.dll
rasdlg	5.2.3790.0 (srv03_rtm.030324-2048)	642.00 KB (657,408 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\rasdlg.dll
ncprov	5.2.3790.0 (srv03_rtm.030324-2048)	43.00 KB (44,032 bytes)	2/5/2004 4:20 PM
	Microsoft Corporation	c:\windows\system32\wbem\ncprov.dll	
ersvc	5.2.3790.0 (srv03_rtm.030324-2048)	22.00 KB (22,528 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\ersvc.dll	
mssearch	9.107.8320.0	68.00 KB (69,632 bytes)	2/12/2004 10:26 AM
Corporation	c:\program files\common files\system\mssearch\bin\mssearch.exe	Microsoft	
mssws	9.107.8320.0	32.00 KB (32,768 bytes)	2/12/2004 10:26 AM
	Microsoft Corporation	c:\program files\common files\system\mssearch\bin\mssws.dll	
mssrch	9.107.8320.0	1.24 MB (1,302,528 bytes)	2/12/2004 10:26 AM
Corporation	c:\progra~1\common~1\mssearch\bin\mssrch.dll	Microsoft	
security	5.2.3790.0 (srv03_rtm.030324-2048)	5.50 KB (5,632 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\security.dll	
tquery	9.107.8320.0	1.46 MB (1,536,000 bytes)	2/12/2004 10:26 AM
Corporation	c:\program files\common files\system\mssearch\bin\tquery.dll	Microsoft	
propdefs	9.107.8320.0	136.00 KB (139,264 bytes)	2/12/2004 10:26 AM
	Microsoft Corporation	c:\progra~1\common~1\mssearch\bin\propdefs.dll	
srchidx	9.107.8320.0	384.00 KB (393,216 bytes)	2/12/2004 10:26 AM
Corporation	c:\progra~1\common~1\mssearch\bin\srchidx.dll	Microsoft	
iprop	5.2.3790.0 (srv03_rtm.030324-2048)	3.50 KB (3,584 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\iprop.dll	
explorer	6.00.3790.0 (srv03_rtm.030324-2048)	1,008.50 KB (1,032,704 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\explorer.exe

Appendix C – Tunable Parameters

browseui	6.00.3790.0 (srv03_rtm.030324-2048)	1.01 MB (1,057,280 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\browseui.dll
shdocvw	6.00.3790.0 (srv03_rtm.030324-2048)	1.33 MB (1,393,664 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\shdocvw.dll
apphelp5.2.3790.0 (srv03_rtm.030324-2048)	122.00 KB (124,928 bytes)	3/29/2003	
12:00 AM	Microsoft Corporation	c:\windows\system32\apphelp.dll	
themeui6.00.3790.0 (srv03_rtm.030324-2048)	360.50 KB (369,152 bytes)	3/29/2003	
12:00 AM	Microsoft Corporation	c:\windows\system32\themeui.dll	
msimg32	5.2.3790.0 (srv03_rtm.030324-2048)	4.50 KB (4,608 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\msimg32.dll	
linkinfo	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\linkinfo.dll	
ntshru1	6.00.3790.0 (srv03_rtm.030324-2048)	136.00 KB (139,264 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ntshru1.dll	
urlmon	6.00.3790.0 (srv03_rtm.030324-2048)	501.50 KB (513,536 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\urlmon.dll	
webcheck	6.00.3790.0 (srv03_rtm.030324-2048)	261.50 KB (267,776 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\webcheck.dll
wsock32	5.2.3790.0 (srv03_rtm.030324-2048)	22.00 KB (22,528 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\wsock32.dll	
stobject	5.2.3790.0 (srv03_rtm.030324-2048)	117.50 KB (120,320 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\stobject.dll	
batmeter	6.00.3790.0 (srv03_rtm.030324-2048)	28.50 KB (29,184 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\batmeter.dll	
powrprof	6.00.3790.0 (srv03_rtm.030324-2048)	14.50 KB (14,848 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\powrprof.dll	
printui	5.2.3790.0 (srv03_rtm.030324-2048)	536.50 KB (549,376 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\printui.dll	
cfgmgr32	5.2.3790.0 (srv03_rtm.030324-2048)	17.50 KB (17,920 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\cfgmgr32.dll	
drprov	5.2.3790.0 (srv03_rtm.030324-2048)	12.50 KB (12,800 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\drprov.dll	
ntlanman	5.2.3790.0 (srv03_rtm.030324-2048)	41.00 KB (41,984 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ntlanman.dll	
netui0	5.2.3790.0 (srv03_rtm.030324-2048)	75.50 KB (77,312 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\netui0.dll	

Appendix C – Tunable Parameters

netui1	5.2.3790.0 (srv03_rtm.030324-2048)	184.00 KB (188,416 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\netui1.dll	
davclnt	5.2.3790.0 (srv03_rtm.030324-2048)	23.50 KB (24,064 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\davclnt.dll	
browselc	6.00.3790.0 (srv03_rtm.030324-2048)	62.00 KB (63,488 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\browselc.dll	
shdoclc	6.00.3790.0 (srv03_rtm.030324-2048)	588.50 KB (602,624 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\shdoclc.dll	
netrap	5.2.3790.0 (srv03_rtm.030324-2048)	11.50 KB (11,776 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\netrap.dll	
zipfldr	6.00.3790.0 (srv03_rtm.030324-2048)	316.00 KB (323,584 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\zipfldr.dll	
actxprxy	6.00.3790.0 (srv03_rtm.030324-2048)	95.00 KB (97,280 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\actxprxy.dll	
mstask	5.2.3790.0 (srv03_rtm.030324-2048)	285.00 KB (291,840 bytes)	2/5/2004 4:22
PM	Microsoft Corporation	c:\windows\system32\mstask.dll	
comdlg32	6.00.3790.0 (srv03_rtm.030324-2048)	261.00 KB (267,264 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\comdlg32.dll
twext	6.00.3790.0 (srv03_rtm.030324-2048)	66.50 KB (68,096 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\twext.dll	
winvnc	3, 3, 3, 7	204.00 KB (208,896 bytes)	2/16/2004 9:27 AM
Labs Cambridge		c:\program files\orl\vnc\winvnc.exe	AT&T Research
vnchooks	3, 3, 3, 6	32.00 KB (32,768 bytes)	2/16/2004 9:27 AM
Labs Cambridge		c:\program files\orl\vnc\vnchooks.dll	AT&T Research
omnithread_rt	Not Available	44.00 KB (45,056 bytes)	2/16/2004 9:27 AM
	c:\windows\system32\omnithread_rt.dll		Not Available
sqlmangr	2000.080.0760.00	72.57 KB (74,308 bytes)	5/5/2004 11:10 AM
	Microsoft Corporation	c:\program files\microsoft sql server\80\tools\binn\sqlmangr.exe	
sqlunirl	2000.080.0728.00	176.56 KB (180,800 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\sqlunirl.dll	
w95scm	2000.080.0760.00	48.56 KB (49,728 bytes)	5/5/2004 11:10 AM
	Microsoft Corporation	c:\program files\microsoft sql server\80\tools\binn\w95scm.dll	
odbc32	3.525.1022.0 (srv03_rtm.030324-2048)	232.00 KB (237,568 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\odbc32.dll	
sqlsvc	2000.080.0760.00	92.56 KB (94,784 bytes)	5/5/2004 11:10 AM
Corporation	c:\program files\microsoft sql server\80\tools\binn\sqlsvc.dll		Microsoft

Appendix C – Tunable Parameters

odbchcp 2000.085.1022.00 (srv03_rtm.030324-2048) 24.00 KB (24,576 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\odbchcp.dll
sqlresld 2000.080.0382.00 28.56 KB (29,248 bytes) 5/5/2004 11:10 AM Microsoft
Corporation c:\program files\microsoft sql server\80\tools\binn\sqlresld.dll
odbcint 3.525.1022.0 (srv03_rtm.030324-2048) 92.00 KB (94,208 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\odbcint.dll
resutils 5.2.3790.0 (srv03_rtm.030324-2048) 59.00 KB (60,416 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\resutils.dll
mfc42u 6.05.3014.0 960.00 KB (983,040 bytes) 3/29/2003 12:00 AM Microsoft
Corporation c:\windows\system32\mfc42u.dll
sqlsvc 2000.080.0194.00 24.00 KB (24,576 bytes) 5/5/2004 11:10 AM Microsoft
Corporation c:\program files\microsoft sql server\80\tools\binn\resources\1033\sqlsvc.rll
sqlmangr 2000.080.0194.00 96.00 KB (98,304 bytes) 5/5/2004 11:10 AM
Microsoft Corporation c:\program files\microsoft sql
server\80\tools\binn\resources\1033\sqlmangr.rll
sqlservr 2000.080.0857.00 7.18 MB (7,532,584 bytes) 5/5/2004 11:08 AM
Microsoft Corporation c:\program files\microsoft sql server\mssql\binn\sqlservr.exe
opends60 2000.080.0194.00 24.06 KB (24,639 bytes) 5/5/2004 11:08 AM
Microsoft Corporation c:\program files\microsoft sql server\mssql\binn\opends60.dll
ums 2000.080.0760.00 52.55 KB (53,808 bytes) 5/5/2004 11:08 AM Microsoft
Corporation c:\program files\microsoft sql server\mssql\binn\ums.dll
sqlsort 2000.080.0760.00 576.56 KB (590,396 bytes) 5/5/2004 11:08 AM
Microsoft Corporation c:\program files\microsoft sql server\mssql\binn\sqlsort.dll
msvcirt 7.0.3790.0 (srv03_rtm.030324-2048) 50.00 KB (51,200 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msvcirt.dll
sqlevn70 2000.080.0760.00 28.00 KB (28,672 bytes) 5/5/2004 11:08 AM
Microsoft Corporation c:\program files\microsoft sql
server\mssql\binn\resources\1033\sqlevn70.rll
xolehlp 2001.12.4720.0 (srv03_rtm.030324-2048) 8.50 KB (8,704 bytes) 2/5/2004 4:20
PM Microsoft Corporation c:\windows\system32\xolehlp.dll
msdtcprx 2001.12.4720.0 (srv03_rtm.030324-2048) 427.50 KB (437,760 bytes)
2/5/2004 4:20 PM Microsoft Corporation c:\windows\system32\msdtcprx.dll
mtxclu 2001.12.4720.0 (srv03_rtm.030324-2048) 74.50 KB (76,288 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\mtxclu.dll
ssnetlib 2000.080.0851.00 80.07 KB (81,989 bytes) 5/5/2004 11:08 AM Microsoft
Corporation c:\program files\microsoft sql server\mssql\binn\ssnetlib.dll

Appendix C – Tunable Parameters

ssmslpcn	2000.080.0760.00	28.56 KB (29,244 bytes)	5/5/2004 11:08 AM	
	Microsoft Corporation	c:\program files\microsoft sql server\mssql\binn\ssmslpcn.dll		
sqlftqry	2000.080.0760.00	192.57 KB (197,196 bytes)	5/5/2004 11:09 AM	
	Microsoft Corporation	c:\program files\microsoft sql server\mssql\binn\sqlftqry.dll		
sqloledb	2000.085.1022.00 (srv03_rtm.030324-2048)	536.00 KB (548,864 bytes)		
	2/5/2004 4:22 PM	Microsoft Corporation	c:\program files\common files\system\ole db\sqloledb.dll	
msdart	2.80.1022.0 (srv03_rtm.030324-2048)	164.00 KB (167,936 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\msdart.dll	
msdatl32	2.80.1022.0 (srv03_rtm.030324-2048)	96.00 KB (98,304 bytes)	2/5/2004 4:22 PM	
	Microsoft Corporation	c:\program files\common files\system\ole db\msdatl3.dll		
oledb32	2.80.1022.0 (srv03_rtm.030324-2048)	500.00 KB (512,000 bytes)	2/5/2004 4:22 PM	
	Microsoft Corporation	c:\program files\common files\system\ole db\oledb32.dll		
oledb32r	2.80.1022.0 (srv03_rtm.030324-2048)	68.00 KB (69,632 bytes)	2/5/2004 4:22 PM	
	Microsoft Corporation	c:\program files\common files\system\ole db\oledb32r.dll		
cmd	5.2.3790.0 (srv03_rtm.030324-2048)	374.00 KB (382,976 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\cmd.exe	
helpctr	5.2.3790.0 (srv03_rtm.030324-2048)	764.00 KB (782,336 bytes)	2/5/2004 4:23 PM	
	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\helpctr.exe		
hcappres	5.2.3790.0 (srv03_rtm.030324-2048)	6.50 KB (6,656 bytes)	2/5/2004 4:23 PM	
	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\hcappres.dll		
itss	5.2.3790.0 (srv03_rtm.030324-2048)	119.50 KB (122,368 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\itss.dll	
pchshell	5.2.3790.0 (srv03_rtm.030324-2048)	100.50 KB (102,912 bytes)		
	2/5/2004 4:23 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\pchshell.dll	
mlang	6.00.3790.0 (srv03_rtm.030324-2048)	570.00 KB (583,680 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\mlang.dll	
mshtml	6.00.3790.0 (srv03_rtm.030324-2048)	2.78 MB (2,916,352 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\mshtml.dll	
msimtf	5.2.3790.0 (srv03_rtm.030324-2048)	149.00 KB (152,576 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\msimtf.dll	
msctf	5.2.3790.0 (srv03_rtm.030324-2048)	287.00 KB (293,888 bytes)	3/29/2003	
	12:00 AM	Microsoft Corporation	c:\windows\system32\msctf.dll	
msxml3	8.40.9419.0	1.28 MB (1,337,344 bytes)	3/29/2003	12:00 AM
	Microsoft Corporation	c:\windows\system32\msxml3.dll		

Appendix C – Tunable Parameters

jscript	5.6.0.8515	436.00 KB (446,464 bytes)	3/29/2003 12:00 AM	Microsoft
Corporation		c:\windows\system32\jscript.dll		
msls31	3.10.349.0	147.00 KB (150,528 bytes)	3/29/2003 12:00 AM	Microsoft
Corporation		c:\windows\system32\msls31.dll		
imm32	5.2.3790.0 (srv03_rtm.030324-2048)	105.50 KB (108,032 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\imm32.dll		
mshtmled	6.00.3790.0 (srv03_rtm.030324-2048)	443.50 KB (454,144 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\mshtmled.dll		
imgutil	5.2.3790.0 (srv03_rtm.030324-2048)	35.00 KB (35,840 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\imgutil.dll		
wbemdisp	5.2.3790.0 (srv03_rtm.030324-2048)	165.50 KB (169,472 bytes)	2/5/2004 4:20 PM	Microsoft Corporation
		c:\windows\system32\wbem\wbemdisp.dll		
wshom	5.6.0.8515	92.00 KB (94,208 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\wshom.ocx		
scrrun	5.6.0.8515	148.00 KB (151,552 bytes)	3/29/2003 12:00 AM	Microsoft
Corporation		c:\windows\system32\scrrun.dll		
mfc42	6.05.3014.0	960.00 KB (983,040 bytes)	3/29/2003 12:00 AM	Microsoft
Corporation		c:\windows\system32\mfc42.dll		
helpsvc	5.2.3790.0 (srv03_rtm.030324-2048)	720.00 KB (737,280 bytes)	2/5/2004 4:23 PM	Microsoft Corporation
		c:\windows\pchealth\helpctr\binaries\helpsvc.exe		
helphost	5.2.3790.0 (srv03_rtm.030324-2048)	106.00 KB (108,544 bytes)	2/5/2004 4:23 PM	Microsoft Corporation
		c:\windows\pchealth\helpctr\binaries\helphost.exe		
sensapi	5.2.3790.0 (srv03_rtm.030324-2048)	6.00 KB (6,144 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\sensapi.dll		
vbscript	5.6.0.8515	404.00 KB (413,696 bytes)	3/29/2003 12:00 AM	Microsoft
Corporation		c:\windows\system32\vbscript.dll		
msinfo	5.2.3790.0 (srv03_rtm.030324-2048)	358.50 KB (367,104 bytes)	2/5/2004 4:23 PM	Microsoft Corporation
		c:\windows\pchealth\helpctr\binaries\msinfo.dll		
riched32	5.2.3790.0 (srv03_rtm.030324-2048)	3.50 KB (3,584 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\riched32.dll		
riched20	5.31.23.1218	406.00 KB (415,744 bytes)	3/29/2003 12:00 AM	Microsoft Corporation
		c:\windows\system32\riched20.dll		

[Services]

Appendix C – Tunable Parameters

Display Name	Name	State	Start Mode	Service Type	Path	Error Control	Start Name	Tag ID
Alerter	Alerter	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k localservice	Normal NT		
AUTORITY\LocalService		0						
Application Layer Gateway Service		ALG	Stopped	Manual Own Process	c:\windows\system32\alg.exe	Normal NT	AUTORITY\LocalService	0
Application Management		AppMgmt	Stopped	Manual Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Windows Audio	AudioSrv	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Background Intelligent Transfer Service	BITS	Stopped	Disabled	Manual Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Computer Browser	Browser	Stopped	Disabled	Manual Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Indexing Service	CiSvc	Stopped	Disabled	Share Process	c:\windows\system32\cisvc.exe	Normal LocalSystem	0	
ClipBook	ClipSrv	Stopped	Disabled	Own Process	c:\windows\system32\clipsrv.exe	Normal LocalSystem	0	
COM+ System Application	COMSysApp	Stopped	Disabled	Manual Own Process	c:\windows\system32\dllhost.exe /processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}	Normal LocalSystem	0	
Distributed File System	Dfs	Stopped	Disabled	Manual Own Process	c:\windows\system32\dfssvc.exe	Normal LocalSystem	0	
DHCP Client	Dhcp	Stopped	Disabled	Manual Share Process	c:\windows\system32\svchost.exe -k networkservice	Normal NT		
AUTORITY\NetworkService		0						
Logical Disk Manager Administrative Service	dmadmin	Stopped	Disabled	Manual Share				
Process		c:\windows\system32\dmadmin.exe /com		Normal LocalSystem	0			
Logical Disk Manager	dmserver	Stopped	Disabled	Manual Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	

Appendix C – Tunable Parameters

DNS Client	Dnscache	Stopped	Manual Share Process		
	c:\windows\system32\svchost.exe -k networkservice		Normal NT		
AUTHORITY\NetworkService	0				
Error Reporting Service	ERSvc	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k winerr		Ignore LocalSystem	0	
Event Log	Eventlog	Running	Auto	Share Process	
	c:\windows\system32\services.exe		Normal LocalSystem	0	
COM+ Event System	EventSystem	Running		Manual Share Process	
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0	
Help and Support	helpsvc	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0	
Human Interface Device Access	HidServ	Stopped		Disabled	Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0	
HTTP SSL	HTTPFilter	Stopped		Manual Share Process	
	c:\windows\system32\lsass.exe	Normal LocalSystem	0		
IMAPI CD-Burning COM Service	ImapiService	Stopped	Disabled	Own	
Process	c:\windows\system32\imapi.exe	Normal LocalSystem	0		
Intersite Messaging	IsmServ	Stopped	Disabled	Own Process	
	c:\windows\system32\ismserv.exe	Normal LocalSystem	0		
Kerberos Key Distribution Center	kdc	Stopped	Disabled	Share Process	
	c:\windows\system32\lsass.exe	Normal LocalSystem	0		
Server	lanmanserver	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0		
Workstation	lanmanworkstation	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0		
License Logging	LicenseService	Stopped	Disabled	Own Process	
	c:\windows\system32\llssrv.exe	Normal NT AUTHORITY\NetworkService	0		
TCP/IP NetBIOS Helper	LmHosts	Stopped	Manual Share Process		
	c:\windows\system32\svchost.exe -k localservice		Normal NT		
AUTHORITY\LocalService	0				
Messenger	Messenger	Stopped	Disabled	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0		
NetMeeting Remote Desktop Sharing	mnmsrv	Stopped	Disabled	Own	
Process	c:\windows\system32\mnmsrv.exe	Normal LocalSystem	0		
Distributed Transaction Coordinator	MSDTC	Running	Auto	Own Process	
	c:\windows\system32\msdtc.exe	Normal NT AUTHORITY\NetworkService	0		

Appendix C – Tunable Parameters

Windows Installer	MSIServer	Stopped	Manual Share Process
	c:\windows\system32\msiexec.exe /v	Normal LocalSystem	0
Microsoft Search	MSSEARCH	Running	Auto Share Process "c:\program
	files\common files\system\mssearch\bin\mssearch.exe"	Normal LocalSystem	0
MSSQLSERVER	MSSQLSERVER	Stopped	Manual Own Process
	c:\progra~1\micros~1\mssql\binn\sqlservr.exe	Normal LocalSystem	0
MSSQLServerADHelper	MSSQLServerADHelper	Stopped	Manual Own Process
	c:\program files\microsoft sql server\80\tools\binn\sqladhlpxe	Normal LocalSystem	0
Network DDE	NetDDE	Stopped	Disabled Share Process
	c:\windows\system32\netdde.exe	Normal LocalSystem	0
Network DDE	DSDM	NetDDEdsm	Stopped Disabled Share Process
	c:\windows\system32\netdde.exe	Normal LocalSystem	0
Net Logon	Netlogon	Stopped	Manual Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0
Network Connections	Netman	Running	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0
Network Location Awareness (NLA)	Nla	Running	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0
File Replication	NtFrs	Stopped	Manual Own Process c:\windows\system32\ntfrs.exe
	Ignore	LocalSystem	0
NT LM Security Support Provider	NtLmSsp	Running	Manual Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0
Removable Storage	NtmsSvc	Stopped	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0
Plug and Play	PlugPlay	Running	Auto Share Process
	c:\windows\system32\services.exe	Normal LocalSystem	0
IPSEC Services	PolicyAgent	Stopped	Manual Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0
Protected Storage	ProtectedStorage	Running	Auto Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0
Remote Access	Auto Connection Manager	RasAuto	Stopped Manual Share
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0
Remote Access	Connection Manager	RasMan	Stopped Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0

Appendix C – Tunable Parameters

Remote Desktop Help Session Manager	RDSessMgr	Stopped	Manual	Own Process
	c:\windows\system32\sessmgr.exe	Normal	LocalSystem	0
Routing and Remote Access	RemoteAccess	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Remote Registry	RemoteRegistry	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k regsvc	Normal	NT AUTHORITY\LocalService	0
Remote Procedure Call (RPC) Locator	RpcLocator	Stopped	Manual	Own Process
	c:\windows\system32\locator.exe	Normal	NT AUTHORITY\NetworkService	0
Remote Procedure Call (RPC)	RpcSs	Running	Auto	Share Process
	c:\windows\system32\svchost -k rpcss	Normal	LocalSystem	0
Resultant Set of Policy Provider	RSoPProv	Stopped	Manual	Share Process
	c:\windows\system32\rsopprov.exe	Normal	LocalSystem	0
Special Administration Console Helper	sacsvr	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Security Accounts Manager	SamSs	Running	Manual	Share Process
	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
Smart Card	SCardSvr	Stopped	Manual	Share Process
	c:\windows\system32\scardsvr.exe	Ignore	NT AUTHORITY\LocalService	0
Task Scheduler Schedule	Stopped	Manual	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Secondary Logon	seclogon	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Ignore	LocalSystem	0
System Event Notification	SENS	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Internet Connection Firewall (ICF) / Internet Connection Sharing (ICS)	SharedAccess			
	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k
netsvcs	Normal	LocalSystem	0	
Shell Hardware Detection	ShellHWDetection	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Ignore	LocalSystem	0
Print Spooler	Spooler	Stopped	Manual	Own Process
	c:\windows\system32\spoolsv.exe	Normal	LocalSystem	0
SQLSERVERAGENT	SQLSERVERAGENT	Stopped	Manual	Own Process
	c:\progra~1\micros~1\mssql\binn\sqlagent.exe	Normal	LocalSystem	0

Appendix C – Tunable Parameters

Windows Image Acquisition (WIA)	stisvc	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k imagsvc		Normal NT AUTHORITY\LocalService	
	0			
Microsoft Software Shadow Copy Provider	swprv	Stopped	Manual Own Process	
	c:\windows\system32\svchost.exe -k swprv		Normal LocalSystem	0
Performance Logs and Alerts	SysmonLog	Stopped	Manual Own Process	
	c:\windows\system32\smlogsvc.exe		Normal NT Authority\NetworkService	0
Telephony	TapiSrv	Stopped	Manual Share Process	
	c:\windows\system32\svchost.exe -k tapisrv		Normal LocalSystem	0
Terminal Services	TermService	Running	Manual Share Process	
	c:\windows\system32\svchost.exe -k termsvcs		Normal LocalSystem	0
Themes	Themes	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0
Telnet	TlntSvr	Stopped	Disabled	Own Process c:\windows\system32\tlntsvr.exe
	Normal NT AUTHORITY\LocalService	0		
Distributed Link Tracking Server	TrkSvr	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0
Distributed Link Tracking Client	TrkWks	Stopped	Manual Share Process	
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0
Terminal Services Session Directory	Tssdis	Stopped	Disabled	Own Process
	c:\windows\system32\tssdis.exe	Normal LocalSystem	0	
Upload Manager	uploadmgr	Stopped	Manual Share Process	
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0
Uninterruptible Power Supply	UPS	Stopped	Manual Own Process	
	c:\windows\system32\ups.exe	Normal NT AUTHORITY\LocalService	0	
Virtual Disk Service	vds	Stopped	Manual Own Process	
	c:\windows\system32\vds.exe	Normal LocalSystem	0	
Volume Shadow Copy	VSS	Stopped	Manual Own Process	
	c:\windows\system32\vssvc.exe	Normal LocalSystem	0	
Windows Time	W32Time	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal LocalSystem	0
WebClient	WebClient	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k localservice		Normal NT	
AUTHORITY\LocalService		0		

Appendix C – Tunable Parameters

WinHTTP Web Proxy Auto-Discovery Service		WinHttpAutoProxySvc	Stopped	Manual
	Share Process	c:\windows\system32\svchost.exe -k localservice		Normal NT
AUTHORITY\LocalService	0			
Windows Management Instrumentation	winmgmt	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Ignore	LocalSystem	0
Portable Media Serial Number Service	WmdmPmSN	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Windows Management Instrumentation Driver Extensions		Wmi	Stopped	Manual
	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
	0			
WMI Performance Adapter	WmiApSrv	Stopped	Manual	Own Process
	c:\windows\system32\wbem\wmiapsrv.exe	Normal	LocalSystem	0
Automatic Updates	wuauserv	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Wireless Configuration	WZCSV	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0

[Program Groups]

Group Name	Name	User Name
Accessories	Default User:Accessories	Default User
Accessories\Accessibility	Default User:Accessories\Accessibility	Default User
Accessories\Entertainment	Default User:Accessories\Entertainment	Default User
Startup	Default User:Startup	Default User
Accessories	All Users:Accessories	All Users
Accessories\Accessibility	All Users:Accessories\Accessibility	All Users
Accessories\Communications	All Users:Accessories\Communications	All Users
Accessories\Entertainment	All Users:Accessories\Entertainment	All Users
Accessories\System Tools	All Users:Accessories\System Tools	All Users
Administrative Tools	All Users:Administrative Tools	All Users
Alacritech	All Users:Alacritech	All Users
Microsoft SQL Server	All Users:Microsoft SQL Server	All Users
Microsoft SQL Server - Switch	All Users:Microsoft SQL Server - Switch	All Users
MKS Toolkit	All Users:MKS Toolkit	All Users
Startup	All Users:Startup	All Users
VNC	All Users:VNC	All Users

Appendix C – Tunable Parameters

VNC\Administrative Tools	All Users:VNC\Administrative Tools	All Users
Accessories	NT AUTHORITY\SYSTEM:Accessories	NT AUTHORITY\SYSTEM
Accessories\Accessibility	NT AUTHORITY\SYSTEM:Accessories\Accessibility	NT AUTHORITY\SYSTEM
Accessories\Entertainment	NT AUTHORITY\SYSTEM:Accessories\Entertainment	NT AUTHORITY\SYSTEM
Startup	NT AUTHORITY\SYSTEM:Startup	NT AUTHORITY\SYSTEM
Accessories	PE6600\Administrator:Accessories	PE6600\Administrator
Accessories\Accessibility	PE6600\Administrator:Accessories\Accessibility	PE6600\Administrator
Accessories\Entertainment	PE6600\Administrator:Accessories\Entertainment	PE6600\Administrator
Administrative Tools	PE6600\Administrator:Administrative Tools	PE6600\Administrator
Startup	PE6600\Administrator:Startup	PE6600\Administrator

[Startup Programs]

Program	Command	User Name	Location
desktop\desktop.ini	NT AUTHORITY\SYSTEM		Startup
desktop\desktop.ini	PE6600\Administrator		Startup
desktop\desktop.ini	.DEFAULT		Startup
desktop\desktop.ini	All Users		Common Startup
Run WinVNC (App Mode)	c:\progra~1\orl\vnc\winvnc.exe	All Users	Common
Startup			
Service Manager	c:\progra~1\micros~1\80\tools\binn\sqlmangr.exe /n	All Users	Common
			Common Startup

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available

Appendix C – Tunable Parameters

WordPad Document "%programfiles%\windows nt\accessories\wordpad.exe"

Windows Media Services DRM Storage object Not Available

Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

2/23/2004 10:41 AM Application Error Faulting application lometer.exe, version 0.0.0.0, faulting module lometer.exe, version 0.0.0.0, fault address 0x00033fa0.

4/20/2004 11:48 AM Application Hang Hanging application mmc.exe, version 5.2.3790.0, hang module hungapp, version 0.0.0.0, hang address 0x00000000.

4/20/2004 11:45 AM Application Hang Hanging application mmc.exe, version 5.2.3790.0, hang module hungapp, version 0.0.0.0, hang address 0x00000000.

4/20/2004 11:41 AM Application Hang Hanging application mmc.exe, version 5.2.3790.0, hang module hungapp, version 0.0.0.0, hang address 0x00000000.

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]

[Summary]

Item Value

Version 6.0.3790.0

Build 63790

Application Path C:\Program Files\Internet Explorer

Language English (United States)

Active Printer Not Available

Cipher Strength 128-bit

Appendix C – Tunable Parameters

Content AdvisorDisabled

IEAK Install No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3790.0	95 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
adpack.dll	6.0.3790.0	94 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
asctrls.ocx	6.0.3790.0	90 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browselc.dll	6.0.3790.0	62 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3790.0	1,033 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
cdfview.dll	6.0.3790.0	144 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3790.0	561 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtrans.dll	6.3.3790.0	198 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtmsft.dll	6.3.3790.0	344 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.0	300 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
ipeers.dll	6.0.3790.0	230 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3790.0	59 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
ieuinit.inf	Not Available	20 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Not Available
iexplore.exe	6.0.3790.0	90 KB	3/29/2003 1:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation

Appendix C – Tunable Parameters

imgutil.dll	5.2.3790.0	35 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
inetcpl.cpl	6.0.3790.0	303 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
inetcplc.dll	6.0.3790.0	109 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
inseng.dll	6.0.3790.0	72 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mlang.dll	6.0.3790.0	570 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
msencode.dll	2002.10.4.0	112 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Not Available		
mshta.exe	6.0.3790.0	26 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mshtml.dll	6.0.3790.0	2,848 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mshtml.tlb	6.0.3790.0	1,319 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mshtmled.dll	6.0.3790.0	444 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mshtuler.dll	6.0.3790.0	55 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
msident.dll	6.0.3790.0	47 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
msidntld.dll	6.0.3790.0	15 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
msieftp.dll	6.0.3790.0	230 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
msrating.dll	6.0.3790.0	132 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
mstime.dll	6.0.3790.0	491 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
occache.dll	6.0.3790.0	89 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Microsoft Corporation		
proctexe.ocx	6.3.3790.0	78 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
		Intel Corporation		

Appendix C – Tunable Parameters

sendmail.dll	6.0.3790.0	52 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
shdoclc.dll	6.0.3790.0	589 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
shdocvw.dll	6.0.3790.0	1,361 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
shfolder.dll	6.0.3790.0	23 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
shlwapi.dll	6.0.3790.0	281 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
tdc.ocx	1.3.0.3130	58 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
url.dll	6.0.3790.0	36 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
urlmon.dll	6.0.3790.0	502 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
webcheck.dll	6.0.3790.0	262 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
wininet.dll	6.0.3790.0	609 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	Not Available
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

Appendix C – Tunable Parameters

[Following are sub-categories of this main category]

[Summary]

Item Value

Page Refresh Type Automatic

Temporary Internet Files Folder C:\Documents and Settings\NetworkService\Local
Settings\Temporary Internet Files

Total Disk Space Not Available

Available Disk Space Not Available

Maximum Cache Size Not Available

Available Cache Size Not Available

[List of Objects]

Program File Status CodeBase

No cached object information available

[Content]

[Following are sub-categories of this main category]

[Summary]

Item Value

Content AdvisorDisabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm

No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm

No other people certificate information available

Appendix C – Tunable Parameters

[Publishers]

Name

No publisher information available

[Security]

Zone Security Level

My Computer Custom

Local intranet Medium-low

Trusted sites Medium

Internet High

Restricted sites High

Microsoft Windows 2003 Server System Info For PE1600SC

System Information report written at: 05/18/04 14:05:14

System Name: CLIENT77

[System Summary]

Item Value

OS Name Microsoft(R) Windows(R) Server 2003, Standard Edition

Version 5.2.3790 Build 3790

OS Manufacturer Microsoft Corporation

System Name CLIENT77

System Manufacturer Dell Computer Corporation

System Model PowerEdge 1600SC

System Type X86-based PC

Processor x86 Family 15 Model 2 Stepping 7 GenuineIntel ~3056 Mhz

Processor x86 Family 15 Model 2 Stepping 7 GenuineIntel ~3056 Mhz

Processor x86 Family 15 Model 2 Stepping 7 GenuineIntel ~3056 Mhz

Processor x86 Family 15 Model 2 Stepping 7 GenuineIntel ~3056 Mhz

BIOS Version/Date Dell Computer Corporation X22, 1/14/2003

SMBIOS Version 2.3

Windows Directory C:\WINDOWS

System Directory C:\WINDOWS\system32

Boot Device \Device\HarddiskVolume1

Appendix C – Tunable Parameters

Locale United States

Hardware Abstraction Layer Version = "5.2.3790.0 (srv03_rtm.030324-2048)"

User Name CLIENT77\Administrator

Time Zone Central Daylight Time

Total Physical Memory 1,024.00 MB

Available Physical Memory 583.00 MB

Total Virtual Memory 3.41 GB

Available Virtual Memory 2.66 GB

Page File Space 2.41 GB

Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device

I/O Port 0x00000000-0x000003AF PCI bus

I/O Port 0x00000000-0x000003AF Direct memory access controller

Memory Address 0xFD000000-0xFE1FFFFF PCI bus

Memory Address 0xFD000000-0xFE1FFFFF RAGE XL PCI Family (Microsoft Corporation)

Memory Address 0xA0000-0xBFFFF PCI bus

Memory Address 0xA0000-0xBFFFF RAGE XL PCI Family (Microsoft Corporation)

I/O Port 0x000003B0-0x000003DF PCI bus

I/O Port 0x000003B0-0x000003DF RAGE XL PCI Family (Microsoft Corporation)

Memory Address 0xFCA00000-0xFCDFFFFF PCI bus

Memory Address 0xFCA00000-0xFCDFFFFF Intel(R) PRO/100+ Server Adapter (PILA8470B)

[DMA]

Appendix C – Tunable Parameters

Resource	Device Status
Channel 4	Direct memory access controller OK
Channel 2	Standard floppy disk controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource	Device Status
0x00000000-0x000003AF	PCI busOK
0x00000000-0x000003AF	Direct memory access controller OK
0x000003B0-0x000003DF	PCI busOK
0x000003B0-0x000003DF	RAGE XL PCI Family (Microsoft Corporation) OK
0x000003E0-0x0000FFF	PCI busOK
0x0000E000-0x0000FFFF	PCI busOK
0x0000ECC0-0x0000ECFF	Intel(R) PRO/1000 MT Network Connection OK
0x0000E800-0x0000E8FF	RAGE XL PCI Family (Microsoft Corporation) OK
0x000003C0-0x000003DF	RAGE XL PCI Family (Microsoft Corporation) OK
0x00000080-0x0000009F	Direct memory access controller OK
0x000000C0-0x000000DF	Direct memory access controller OK
0x000000F0-0x000000FF	Numeric data processor OK
0x00000020-0x0000003F	Programmable interrupt controller OK
0x000000A0-0x000000BF	Programmable interrupt controller OK
0x000004D0-0x000004D1	Programmable interrupt controller OK
0x00000061-0x00000061	System speakerOK
0x00000040-0x0000005F	System timer OK
0x000003F0-0x000003F5	Standard floppy disk controller OK
0x000003F7-0x000003F7	Standard floppy disk controller OK
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
0x000003F8-0x000003FF	Communications Port (COM1) OK
0x00000378-0x0000037F	ECP Printer Port (LPT1)OK

Appendix C – Tunable Parameters

0x00000778-0x0000077F	ECP Printer Port (LPT1)	OK
0x00000070-0x0000007F	System CMOS/real time clock	OK
0x00000814-0x0000085B	System board	OK
0x00000820-0x0000083F	System board	OK
0x000008A0-0x000008AF	System board	OK
0x00000C00-0x00000CD7	System board	OK
0x00000F50-0x00000F58	System board	OK
0x000008B0-0x000008BF	Standard Dual Channel PCI IDE Controller	OK
0x000001F0-0x000001F7	Primary IDE Channel	OK
0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000376-0x00000376	Secondary IDE Channel	OK
0x00000A79-0x00000A79	ISAPNP Read Data Port	OK
0x00000279-0x00000279	ISAPNP Read Data Port	OK
0x00000274-0x00000277	ISAPNP Read Data Port	OK
0x0000D000-0x0000DFFF	PCI bus	OK
0x0000DC00-0x0000DCFF	LSI Logic PCI-X Ultra320 SCSI Host Adapter	OK
0x0000C000-0x0000CFFF	PCI bus	OK
0x0000CC80-0x0000CCBF	Intel(R) PRO/100+ Server Adapter (PILA8470B)	OK

[IRQs]

Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 16	Intel(R) PRO/1000 MT Network Connection	OK
IRQ 13	Numeric data processor	OK
IRQ 0	System timer	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 4	Communications Port (COM1)	OK
IRQ 8	System CMOS/real time clock	OK
IRQ 15	Secondary IDE Channel	OK
IRQ 10	ServerWorks (RCC) PCI to USB Open Host Controller	OK
IRQ 29	LSI Logic PCI-X Ultra320 SCSI Host Adapter	OK
IRQ 24	Intel(R) PRO/100+ Server Adapter (PILA8470B)	OK

Appendix C – Tunable Parameters

[Memory]

Resource	Device	Status
0xA0000-0xBFFFF	PCI busOK	
0xA0000-0xBFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xD0000-0xE7FFF	PCI busOK	
0xFD000000-0xFE1FFFFFF	PCI busOK	
0xFD000000-0xFE1FFFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFE100000-0xFE11FFFFFF	Intel(R) PRO/1000 MT Network Connection	OK
0xFE121000-0xFE121FFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFE120000-0xFE120FFF	ServerWorks (RCC) PCI to USB Open Host Controller	OK
0x0000-0x9FFFF	System board	OK
0x100000-0x3FFFFFFF	System board	OK
0xF0000-0xFFFFF	System board	OK
0xFEC00000-0xFEC0FFFF	System board	OK
0xFEE00000-0xFEE0FFFF	System board	OK
0xFFE00000-0xFFFFFFFF	System board	OK
0xFCE00000-0xFCFFFFFF	PCI busOK	
0xFCF10000-0xFCF1FFFF	LSI Logic PCI-X Ultra320 SCSI Host Adapter	OK
0xFCF00000-0xFCF0FFFF	LSI Logic PCI-X Ultra320 SCSI Host Adapter	OK
0xFCA00000-0xFCDFFFFFF	PCI busOK	
0xFCA00000-0xFCDFFFFFF	Intel(R) PRO/100+ Server Adapter (PILA8470B)	OK
0xFCD00000-0xFCD00FFF	Intel(R) PRO/100+ Server Adapter (PILA8470B)	OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
Dell TPC-C Full Disclosure Report Copyright Dell			274				May 2004

Appendix C – Tunable Parameters

c:\windows\system32\msadp32.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSADP32.ACM 5.2.3790.0 (srv03_rtm.030324-2048)
14.50 KB (14,848 bytes) 3/29/2003 12:00 AM

c:\windows\system32\msg711.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSG711.ACM 5.2.3790.0 (srv03_rtm.030324-2048) 10.00
KB (10,240 bytes) 3/29/2003 12:00 AM

c:\windows\system32\msgsm32.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM 5.2.3790.0 (srv03_rtm.030324-2048)
20.50 KB (20,992 bytes) 3/29/2003 12:00 AM

c:\windows\system32\msaud32.acm Microsoft Corporation Windows Media Audio Codec
OK C:\WINDOWS\system32\MSAUD32.ACM 8.00.00.4487 288.00 KB
(294,912 bytes) 3/29/2003 12:00 AM

c:\windows\system32\imaadp32.acm Microsoft Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM 5.2.3790.0 (srv03_rtm.030324-2048)
15.50 KB (15,872 bytes) 3/29/2003 12:00 AM

c:\windows\system32\sl_anet.acm Sipro Lab Telecom Inc. Sipro Lab Telecom Audio Codec
OK C:\WINDOWS\system32\SL_ANET.ACM 3.02 84.00 KB (86,016 bytes)
3/29/2003 12:00 AM

c:\windows\system32\tssoft32.acm DSP GROUP, INC. OK
C:\WINDOWS\system32\TSSOFT32.ACM 1.01 9.50 KB (9,728 bytes)
3/29/2003 12:00 AM

c:\windows\system32\msg723.acm Microsoft Corporation OK
C:\WINDOWS\system32\MSG723.ACM 4.4.4000 116.00 KB (118,784 bytes)
11/13/2003 1:32 PM

c:\windows\system32\l3codeca.acm Fraunhofer Institut Integrierte Schaltungen IIS
Fraunhofer IIS MPEG Layer-3 Codec OK
C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816
bytes) 3/29/2003 12:00 AM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\msh261.drv	Microsoft Corporation		OK	C:\WINDOWS\system32\MSH261.DRV	4.4.4000	180.00 KB (184,320 bytes)	
							11/13/2003 1:32 PM

Appendix C – Tunable Parameters

c:\windows\system32\tsbyuv.dll Microsoft Corporation OK
C:\WINDOWS\system32\TSBYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 8.00 KB
(8,192 bytes) 3/24/2003 7:50 PM

c:\windows\system32\msyuv.dll Microsoft Corporation OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 16.50 KB (16,896 bytes) 3/24/2003 7:49 PM

c:\windows\system32\iyuv_32.dll Microsoft Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 45.00 KB (46,080 bytes) 3/24/2003 7:49 PM

c:\windows\system32\msvidc32.dll Microsoft Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL 5.2.3790.0 (srv03_rtm.030324-2048)
26.50 KB (27,136 bytes) 3/29/2003 12:00 AM

c:\windows\system32\msh263.drv Microsoft Corporation OK
C:\WINDOWS\system32\MSH263.DRV 4.4.4000 284.00 KB (290,816 bytes)
3/24/2003 7:46 PM

c:\windows\system32\msrle32.dll Microsoft Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 10.50 KB (10,752 bytes) 3/29/2003 12:00 AM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	LITEON DVD-ROM LTD163
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMLITEON_DVD- ROM_LTD163_____GDHB____\5&1A6C219A&0&0.0.0
Driver	c:\windows\system32\drivers\cdrom.sys (5.2.3790.0 (srv03_rtm.030324-2048), 49.50 KB (50,688 bytes), 3/29/2003 12:00 AM)

Appendix C – Tunable Parameters

[Sound Device]

Item Value

[Display]

Item Value

Name RAGE XL PCI Family (Microsoft Corporation)
PNP Device ID PCI\VEN_1002&DEV_4752&SUBSYS_01351028&REV_27\3&13C0B0C5&0&70
Adapter Type ATI RAGE XL PCI (B41), ATI Technologies Inc. compatible
Adapter Description RAGE XL PCI Family (Microsoft Corporation)
Adapter RAM 8.00 MB (8,388,608 bytes)
Installed Driversati2drad.dll
Driver Version 5.10.3663.6013
INF File atiixpad.inf (ati2mpad section)
Color Planes 1
Color Table Entries 65536
Resolution 1024 x 768 x 60 hertz
Bits/Pixel 16
Memory Address 0xFD000000-0xFE1FFFFF
I/O Port 0x0000E800-0x0000E8FF
Memory Address 0xFE121000-0xFE121FFF
I/O Port 0x000003B0-0x000003DF
I/O Port 0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFFFF
Driver c:\windows\system32\drivers\ati2mpad.sys (5.10.3663.6013, 335.38 KB (343,424 bytes),
11/13/2003 7:22 AM)

[Infrared]

Item Value

[Input]

Appendix C – Tunable Parameters

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&25F73A82&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.0 (srv03_rtm.030324-2048), 68.50 KB (70,144 bytes), 3/29/2003 12:00 AM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	3
Status	OK
PNP Device ID	ACPI\PNP0F13\4&25F73A82&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.0 (srv03_rtm.030324-2048), 68.50 KB (70,144 bytes), 3/29/2003 12:00 AM)

[Modem]

Item	Value
------	-------

[Network]

Appendix C – Tunable Parameters

[Adapter]

Item Value

Name [00000001] Intel(R) PRO/1000 MT Network Connection
Adapter Type Ethernet 802.3
Product Type Intel(R) PRO/1000 MT Network Connection
Installed Yes
PNP Device ID PCI\VEN_8086&DEV_100E&SUBSYS_01351028&REV_02\3&13C0B0C5&0&10
Last Reset 5/13/2004 10:27 AM
Index 1
Service Name E1000
IP Address 192.1.100.77
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:C0:9F:1D:77:0D
Memory Address 0xFE100000-0xFE11FFFF
I/O Port 0x0000ECC0-0x0000ECFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\e1000325.sys (6.3.6.31 built by: WinDDK, 99.00 KB
(101,376 bytes), 11/13/2003 7:22 AM)

Name [00000002] Intel(R) PRO/100+ Server Adapter (PILA8470B)

Adapter Type Ethernet 802.3
Product Type Intel(R) PRO/100+ Server Adapter (PILA8470B)
Installed Yes
PNP Device ID PCI\VEN_8086&DEV_1229&SUBSYS_100C8086&REV_08\3&29E81982&0&20
Last Reset 5/13/2004 10:27 AM
Index 2
Service Name E100B
IP Address 192.1.1.77
IP Subnet 255.255.255.0
Default IP Gateway Not Available

Appendix C – Tunable Parameters

DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:D0:B7:9E:A8:B9
Memory Address 0xFCD00000-0xFCD00FFF
I/O Port 0x0000CC80-0x0000CCBF
Memory Address 0xFCA00000-0xFCDFFFFF
IRQ Channel IRQ 24
Driver c:\windows\system32\drivers\e100b325.sys (6.6.8.1 built by: WinDDK, 138.50 KB (141,824 bytes), 11/13/2003 7:22 AM)

Name [00000003] Intel(R) PRO/100+ Dual Port Server Adapter
Adapter Type Not Available
Product Type Intel(R) PRO/100+ Dual Port Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/13/2004 10:27 AM
Index 3
Service Name E100B
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000004] Intel(R) PRO/100+ Dual Port Server Adapter
Adapter Type Not Available
Product Type Intel(R) PRO/100+ Dual Port Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/13/2004 10:27 AM
Index 4

Appendix C – Tunable Parameters

Service Name E100B
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000005] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/13/2004 10:27 AM
Index 5
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000006] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPORT\0000
Last Reset 5/13/2004 10:27 AM
Index 6
Service Name Rasl2tp
IP Address Not Available

Appendix C – Tunable Parameters

IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.0 (srv03_rtm.030324-2048), 77.00 KB
(78,848 bytes), 3/29/2003 12:00 AM)

Name [00000007] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset 5/13/2004 10:27 AM
Index 7
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Driver c:\windows\system32\drivers\rasppp.sys (5.2.3790.0 (srv03_rtm.030324-2048), 70.50
KB (72,192 bytes), 3/29/2003 12:00 AM)

Name [00000008] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
Last Reset 5/13/2004 10:27 AM
Index 8

Appendix C – Tunable Parameters

Service Name RasPppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30
Driver c:\windows\system32\drivers\raspppoe.sys (5.2.3790.0 (srv03_rtm.030324-2048), 38.00 KB (38,912 bytes), 3/29/2003 12:00 AM)

Name [00000009] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTMINIPORT\0000
Last Reset 5/13/2004 10:27 AM
Index 9
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\raspti.sys (5.2.3790.0 (srv03_rtm.030324-2048), 18.50 KB (18,944 bytes), 3/29/2003 12:00 AM)

Name [00000010] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000

Appendix C – Tunable Parameters

Last Reset 5/13/2004 10:27 AM
Index 10
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3790.0 (srv03_rtm.030324-2048), 96.50 KB (98,816 bytes), 3/29/2003 12:00 AM)

Name [00000011] Intel(R) PRO/100+ Server Adapter (PILA8470B)
Adapter Type Not Available
Product Type Intel(R) PRO/100+ Server Adapter (PILA8470B)
Installed Yes
PNP Device ID PCI\VEN_8086&DEV_1229&SUBSYS_100C8086&REV_08\3&29E81982&0&10
Last Reset 5/13/2004 10:27 AM
Index 11
Service Name E100B
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\e100b325.sys (6.6.8.1 built by: WinDDK, 138.50 KB (141,824 bytes), 11/13/2003 7:22 AM)

[Protocol]

Item	Value
Dell	284
TPC-C Full Disclosure Report	May 2004
Copyright Dell	

Appendix C – Tunable Parameters

Name MSAFD Tcpip [TCP/IP]
Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)
Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Appendix C – Tunable Parameters

Name RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)
Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Appendix C – Tunable Parameters

Name MSAFD NetBIOS [\\Device\\NetBT_Tcpip_{1A960D77-0F2A-4841-A941-56885342F2E0}]
SEQPACKET 6
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\\Device\\NetBT_Tcpip_{1A960D77-0F2A-4841-A941-56885342F2E0}]
DATAGRAM 6
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No

Appendix C – Tunable Parameters

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{833FA836-11FC-4387-9F56-9082062D338A}]

SEQPACKET 0

Connectionless Service No

Guarantees Delivery Yes

Guarantees SequencingYes

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting No

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{833FA836-11FC-4387-9F56-9082062D338A}]

DATAGRAM 0

Connectionless Service Yes

Guarantees Delivery No

Guarantees SequencingNo

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting Yes

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Appendix C – Tunable Parameters

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{915E7CCF-F641-4E79-A07A-8707F1BF2257}]

SEQPACKET 1

Connectionless Service No

Guarantees Delivery Yes

Guarantees Sequencing Yes

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting No

Supports Connect Data No

Supports Disconnect Data No

Supports Encryption No

Supports Expedited Data No

Supports Graceful Closing No

Supports Guaranteed Bandwidth No

Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{915E7CCF-F641-4E79-A07A-8707F1BF2257}]

DATAGRAM 1

Connectionless Service Yes

Guarantees Delivery No

Guarantees Sequencing No

Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes

Minimum Address Size 20 bytes

Pseudo Stream Oriented No

Supports Broadcasting Yes

Supports Connect Data No

Supports Disconnect Data No

Appendix C – Tunable Parameters

Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{D92CDA13-25CE-4C24-8E01-DEE40289EF21}] SEQPACKET 2

Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{D92CDA13-25CE-4C24-8E01-DEE40289EF21}] DATAGRAM 2

Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes

Appendix C – Tunable Parameters

Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A92BF397-E0A5-448C-B3AE-8B34875D7FA4}] SEQPACKET 3

Connectionless Service No
Guarantees Delivery Yes
Guarantees SequencingYes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A92BF397-E0A5-448C-B3AE-8B34875D7FA4}] DATAGRAM 3

Connectionless Service Yes
Guarantees Delivery No
Guarantees SequencingNo
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes

Appendix C – Tunable Parameters

Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A1741045-84FE-47EA-904F-5DFCE3307C20}]

SEQPACKET 4

Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A1741045-84FE-47EA-904F-5DFCE3307C20}]

DATAGRAM 4

Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Appendix C – Tunable Parameters

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_Tcpip_{F767E01D-2EAF-4E3A-AC93-B92C2D2CB4A4}] SEQPACKET 5

Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS [\Device\NetBT_Tcpip_{F767E01D-2EAF-4E3A-AC93-B92C2D2CB4A4}] DATAGRAM 5

Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No

Appendix C – Tunable Parameters

Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)
Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

Item	Value
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\1
Maximum Input Buffer Size	0

Appendix C – Tunable Parameters

Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue XMit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0

Appendix C – Tunable Parameters

I/O Port 0x000003F8-0x000003FF

IRQ Channel IRQ 4

Driver c:\windows\system32\drivers\serial.sys (5.2.3790.0 (srv03_rtm.030324-2048), 76.00 KB
(77,824 bytes), 3/29/2003 12:00 AM)

[Parallel]

Item Value

Name LPT1

PNP Device ID ACPI\PNP0401\4&25F73A82&0

I/O Port 0x00000378-0x0000037F

I/O Port 0x00000778-0x0000077F

Driver c:\windows\system32\drivers\parport.sys (5.2.3790.0 (srv03_rtm.030324-2048), 76.50 KB
(78,336 bytes), 3/24/2003 5:04 PM)

[Storage]

[Drives]

Item Value

Drive A:

Description 3 1/2 Inch Floppy Drive

Drive C:

Description Local Fixed Disk

Compressed No

File System NTFS

Size 7.81 GB (8,389,750,784 bytes)

Free Space 4.10 GB (4,400,635,904 bytes)

Volume Name

Volume Serial Number 98DEBC9B

Drive D:

Description CD-ROM Disc

Appendix C – Tunable Parameters

Drive E:

Description Local Fixed Disk
Compressed No
File System NTFS
Size 26.10 GB (28,023,521,280 bytes)
Free Space 19.45 GB (20,887,044,096 bytes)
Volume Name Work
Volume Serial Number 5C407C96

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	SEAGATE ST336752LW SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	2
SCSI Bus	0
SCSI Logical Unit	0
SCSI Port	2
SCSI Target ID	0
Sectors/Track	63
Size	33.91 GB (36,413,314,560 bytes)
Total Cylinders	4,427
Total Sectors	71,119,755
Total Tracks	1,128,885
Tracks/Cylinder	255
Partition	Disk #0, Partition #0
Partition Size	7.81 GB (8,389,753,344 bytes)
Partition Starting Offset	32,256 bytes
Partition	Disk #0, Partition #1
Partition Size	26.10 GB (28,023,528,960 bytes)
Partition Starting Offset	8,389,785,600 bytes

Appendix C – Tunable Parameters

[SCSI]

Item	Value
Name	LSI Logic PCI-X Ultra320 SCSI Host Adapter
Manufacturer	LSI Logic Inc.
Status	OK
PNP Device ID	PCI\VEN_1000&DEV_0030&SUBSYS_01351028&REV_07\3&1070020&0&20
I/O Port	0x0000DC00-0x0000DCFF
Memory Address	0xFCF10000-0xFCF1FFFF
Memory Address	0xFCF00000-0xFCF0FFFF
IRQ Channel	IRQ 29
Driver	c:\windows\system32\drivers\sympmpi.sys (1.08.18.00 (NT.021001-2000), 25.88 KB (26,496 bytes), 3/29/2003 12:00 AM)

[IDE]

Item	Value
Name	Standard Dual Channel PCI IDE Controller
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\VEN_1166&DEV_0212&SUBSYS_41351028&REV_93\3&13C0B0C5&0&79
I/O Port	0x000008B0-0x000008BF
Driver	c:\windows\system32\drivers\pciide.sys (5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632 bytes), 3/29/2003 12:00 AM)

Name	Primary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&68D74DF&0&0
I/O Port	0x000001F0-0x000001F7
I/O Port	0x000003F6-0x000003F6
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB (91,136 bytes), 3/29/2003 12:00 AM)

Name	Secondary IDE Channel
------	-----------------------

Appendix C – Tunable Parameters

Manufacturer (Standard IDE ATA/ATAPI controllers)

Status OK

PNP Device ID PCIIDE\IDECHANNEL\4&68D74DF&0&1

I/O Port 0x00000170-0x00000177

I/O Port 0x00000376-0x00000376

IRQ Channel IRQ 15

Driver c:\windows\system32\drivers\atapi.sys (5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB (91,136 bytes), 3/29/2003 12:00 AM)

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code

Intel(R) PRO/100+ Server Adapter (PILA8470B) #2

PCI\VEN_8086&DEV_1229&SUBSYS_100C8086&REV_08\3&29E81982&0&10 This device is disabled.

[USB]

Device PNP Device ID

ServerWorks (RCC) PCI to USB Open Host Controller

PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_05\3&13C0B0C5&0&7A

USB Root Hub USB\ROOT_HUB\4&1A0F8909&0

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode	State	Status	Error Control
	Accept Pause	Accept Stop						

Appendix C – Tunable Parameters

abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Ignore	No	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	
	Boot	Running	OK	Normal	No Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No	
	Disabled	Stopped	OK	Normal	No No
adpu160m	adpu160m	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	No
adpu320	adpu320	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	No
afcnt	afcnt	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	Kernel		
Driver	Yes	Auto	Running	OK	Normal No Yes
aha154x	Aha154x	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	No
aic78u2	aic78u2	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		
aic78xx	aic78xx	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		
aliide	Alilide	Not Available	Kernel Driver	No	Disabled
	Normal	No	No		
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	Kernel Driver	No	Manual
	Stopped	OK	Normal	No	No
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel		
Driver	Yes	Boot	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver	No	Disabled
	Ignore	No	No		
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys	Kernel Driver		
	Yes	Manual	Running	OK	Ignore No Yes
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver		
	Kernel Driver	No	Manual	Stopped	OK Normal No No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver		
	Yes	Manual	Running	OK	Normal No Yes

Appendix C – Tunable Parameters

beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes	
	Disabled	Running	OK	Normal No	Yes
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	System
	Running	OK	Normal No	Yes	
changer	Changer	Not Available	Kernel Driver	No	System Stopped
	OK	Ignore	No	No	
clusdisk	Cluster Disk Driver	c:\windows\system32\drivers\clusdisk.sys	Kernel Driver		
	No	Disabled	Stopped	OK	Normal No
cmdide	Cmdlde	Not Available	Kernel Driver	No	Disabled
	Normal No	No	Stopped		OK
cpqarray	Cpqarray	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
cpqarry2	cpqarry2	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
cpqcissm	cpqcissm	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
cpqfcalm	cpqfcalm	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
crcdisk	CRC Disk Filter Driver	c:\windows\system32\drivers\crcdisk.sys	Kernel Driver	Yes	
	Boot	Running	OK	Normal No	Yes
dac960nt	dac960nt	Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal No	No	
dellcerc	dellcerc	Not Available	Kernel Driver	No	Disabled
	Normal No	No	Stopped		OK
dfsdriver	DfsDriver	c:\windows\system32\drivers\dfs.sys	File System Driver		
	Yes	Boot	Running	OK	Normal No
disk	Disk Driver	c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes	Boot
	Running	OK	Normal No	Yes	
dmboot	dmboot	c:\windows\system32\drivers\dmboot.sys	Kernel Driver	No	
	Disabled	Stopped	OK	Normal No	No

Appendix C – Tunable Parameters

dmio	Logical Disk Manager Driver	c:\windows\system32\drivers\dmio.sys	Kernel Driver				
	Yes	Boot	Running	OK	Normal	No	Yes
dmload	dmload	c:\windows\system32\drivers\dmload.sys		Kernel Driver	Yes	Boot	
	Running	OK	Normal	No	Yes		
dpti2o	dpti2o	Not Available	Kernel Driver	No	Disabled	Stopped	OK
	Normal	No					
e1000	Intel(R) PRO/1000 Device Driver	c:\windows\system32\drivers\e1000325.sys					
	Kernel Driver	Yes	Manual	Running	OK	Normal	No
e100b	Intel(R) PRO Adapter Driver	c:\windows\system32\drivers\e100b325.sys	Kernel				
Driver	Yes	Manual	Running	OK	Normal	No	Yes
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys	File System	Driver			No
	Disabled	Stopped	OK	Normal	No	No	
fdc	Floppy Disk Controller Driver	c:\windows\system32\drivers\fdc.sys	Kernel	Driver			
	Yes	Manual	Running	OK	Normal	No	Yes
fips	Fips	c:\windows\system32\drivers\fips.sys	Kernel	Driver	Yes	System	
	Running	OK	Normal	No	Yes		
fipydisk	Floppy Disk Driver	c:\windows\system32\drivers\fipydisk.sys	Kernel	Driver			
	Yes	Manual	Running	OK	Normal	No	Yes
ftdisk	Volume Manager Driver	c:\windows\system32\drivers\ftdisk.sys	Kernel	Driver	Yes		
	Boot	Running	OK	Normal	No	Yes	
gpc	Generic Packet Classifier	c:\windows\system32\drivers\msgpc.sys	Kernel	Driver			
	Yes	Manual	Running	OK	Normal	No	Yes
hpn	hpn	Not Available	Kernel	Driver	No	Disabled	Stopped
	Normal	No					OK
hpt3xx	hpt3xx	Not Available	Kernel	Driver	No	Disabled	Stopped
	Normal	No					OK
http	HTTP	c:\windows\system32\drivers\http.sys	Kernel	Driver	Yes	Manual	
	Running	OK	Normal	No	Yes		
i20mgmt	i20mgmt	Not Available	Kernel	Driver	No	System	Stopped
	OK	Normal	No				
i2omp	i2omp	Not Available	Kernel	Driver	No	Disabled	Stopped
	Normal	No					OK
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver	c:\windows\system32\drivers\i8042prt.sys	Kernel	Driver	Yes	System	
	Running	OK	Normal	No	Yes		

Appendix C – Tunable Parameters

iirsp	iirsp	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
imapi	CD-Burning Filter Driver	c:\windows\system32\drivers\imapi.sys	Kernel Driver	No			
	System Stopped	OK	Normal No	No			
intelide	Intellide	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
ipfilterdriver	IP Traffic Filter Driver	c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver				
	No	Manual Stopped	OK	Normal No	No		
ipinip	IP in IP Tunnel Driver	c:\windows\system32\drivers\ipinip.sys	Kernel Driver	No			
	Manual Stopped	OK	Normal No	No			
ipnat	IP Network Address Translator	c:\windows\system32\drivers\ipnat.sys	Kernel Driver				
	No	Manual Stopped	OK	Normal No	No		
ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys	Kernel Driver	Yes	System		
	Running	OK	Normal No	Yes			
ipsraiden	ipsraiden	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
irenum	IR Enumerator Service	c:\windows\system32\drivers\irenum.sys	Kernel Driver	No			
	Manual Stopped	OK	Normal No	No			
isapnp	PnP ISA/EISA Bus Driver	c:\windows\system32\drivers\isapnp.sys	Kernel Driver				
	Yes	Boot	Running	OK	Critical No	Yes	
kbdclass	Keyboard Class Driver	c:\windows\system32\drivers\kbdclass.sys					Kernel
Driver	Yes	System	Running	OK	Normal No	Yes	
ksecdd	KSecDD	c:\windows\system32\drivers\ksecdd.sys	Kernel Driver	Yes	Boot		
	Running	OK	Normal No	Yes			
lp6nds35	lp6nds35	Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Normal No	No			
mnmdd	mnmdd	c:\windows\system32\drivers\mnmdd.sys				Kernel Driver	Yes
	Running	OK	Ignore	No	Yes		System
modem	Modem	c:\windows\system32\drivers\modem.sys				Kernel Driver	No
	Stopped	OK	Ignore	No	No		Manual
mouclass	Mouse Class Driver	c:\windows\system32\drivers\mouclass.sys					Kernel
Driver	Yes	System	Running	OK	Normal No	Yes	
mountmgr	Mount Point Manager	c:\windows\system32\drivers\mountmgr.sys					Kernel
Driver	Yes	Boot	Running	OK	Normal No	Yes	
mraid35x	mraid35x	Not Available	Kernel Driver	No	Disabled		
	Stopped	OK	Normal No	No			

Appendix C – Tunable Parameters

mrx dav	WebDav Client Redirector	c:\windows\system32\drivers\mrx dav.sys					File	
System	Driver	No	Manual	Stopped	OK	Normal	No	No
mrx smb	MRXSMB	c:\windows\system32\drivers\mrx smb.sys					File System	Driver
	Yes	System	Running	OK	Normal	No	Yes	
msfs	Msfs	c:\windows\system32\drivers\msfs.sys					File System	Driver
	Running	OK	Normal	No	Yes			System
mup	Mup	c:\windows\system32\drivers\mup.sys					File System	Driver
	Running	OK	Normal	No	Yes			Boot
ndis	NDIS System Driver	c:\windows\system32\drivers\ndis.sys					Kernel	Driver
	Boot	Running	OK	Normal	No	Yes		
ndistapi	Remote Access NDIS TAPI Driver	c:\windows\system32\drivers\ndistapi.sys						
	Kernel	Driver	Yes	Manual	Running	OK	Normal	No
							Yes	
ndis ui o	NDIS Usermode I/O Protocol	c:\windows\system32\drivers\ndis ui o.sys					Kernel	Driver
	Yes	Manual	Running	OK	Normal	No	Yes	
ndis wan	Remote Access NDIS WAN Driver	c:\windows\system32\drivers\ndis wan.sys					Kernel	Driver
	Running	OK	Normal	No	Yes		Yes	Manual
nd proxy	NDIS Proxy	c:\windows\system32\drivers\nd proxy.sys					Kernel	Driver
	Manual	Running	OK	Normal	No	Yes		
net bios	NetBIOS Interface	c:\windows\system32\drivers\net bios.sys					File	System
Driver	Yes	System	Running	OK	Normal	No	Yes	
net bt	NetBios over Tcpip	c:\windows\system32\drivers\net bt.sys					Kernel	Driver
	System	Running	OK	Normal	No	Yes		
nfrd960	nfrd960 Not Available	Kernel	Driver	No	Disabled	Stopped	OK	
	Normal	No						
np fs	Npfs	c:\windows\system32\drivers\np fs.sys					File	System
	Running	OK	Normal	No	Yes			
nt fs	Ntfs	c:\windows\system32\drivers\nt fs.sys					File	System
	Disabled	Running	OK	Normal	No	Yes		
null	Null	c:\windows\system32\drivers\null.sys					Kernel	Driver
	Running	OK	Normal	No	Yes			System
par port	Parallel port driver	c:\windows\system32\drivers\par port.sys					Kernel	Driver
	Manual	Running	OK	Normal	No	Yes		
part mgr	Partition Manager	c:\windows\system32\drivers\part mgr.sys					Kernel	Driver
	Yes	Boot	Running	OK	Normal	No	Yes	

Appendix C – Tunable Parameters

parvdm	Parvdm	c:\windows\system32\drivers\parvdm.sys		Kernel Driver	Yes	Auto
	Running	OK	Ignore	No	Yes	
pci	PCI Bus Driver	c:\windows\system32\drivers\pci.sys		Kernel Driver	Yes	Boot
	Running	OK	Critical	No	Yes	
pciidc	PCIIdc	c:\windows\system32\drivers\pciidc.sys		Kernel Driver	Yes	Boot
	Running	OK	Normal	No	Yes	
pcmcia	Pcmcia	c:\windows\system32\drivers\pcmcia.sys	Kernel Driver	No	Disabled	
	Stopped	OK	Normal	No	No	
pdcomp	PDCOMP		Not Available	Kernel Driver	No	Manual Stopped
	Ignore	No	No			OK
pdframe	PDFRAME		Not Available	Kernel Driver	No	Manual Stopped
	OK	Ignore	No	No		
pdreli	PDRELI		Not Available	Kernel Driver	No	Manual Stopped
	Ignore	No	No			OK
pdrframe	PDRFRAME		Not Available	Kernel Driver	No	Manual Stopped
	OK	Ignore	No	No		
perc2	perc2	Not Available	Kernel Driver	No	Disabled	Stopped
	Normal	No	No			OK
perc2hib	perc2hib		Not Available	Kernel Driver	No	Disabled
	Stopped	OK	Normal	No	No	
pptpminiport	WAN Miniport (PPTP)	c:\windows\system32\drivers\rasppp.sys		Kernel		
Driver	Yes	Manual	Running	OK	Normal	No
processor	Processor Driver		c:\windows\system32\drivers\processr.sys		Kernel	
Driver	Yes	Manual	Running	OK	Normal	No
ptilink	Direct Parallel Link Driver		c:\windows\system32\drivers\ptilink.sys	Kernel Driver		
	Yes	Manual	Running	OK	Normal	No
ql1080	ql1080	Not Available	Kernel Driver	No	Disabled	Stopped
	Normal	No	No			OK
ql10wnt	QI10wnt		Not Available	Kernel Driver	No	Disabled
	OK	Normal	No	No		Stopped
ql12160	ql12160	Not Available	Kernel Driver	No	Disabled	Stopped
	Normal	No	No			OK
ql1240	ql1240	Not Available	Kernel Driver	No	Disabled	Stopped
	Normal	No	No			OK
ql1280	ql1280	Not Available	Kernel Driver	No	Disabled	Stopped
	Normal	No	No			OK

Appendix C – Tunable Parameters

ql2100	ql2100	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
ql2200	ql2200	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
ql2300	ql2300	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
rasacd	Remote Access Auto Connection Driver	c:\windows\system32\drivers\rasacd.sys	Kernel Driver	Yes	System Running	OK	Normal No Yes
rasl2tp	WAN Miniport (L2TP)	c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver	Yes	Manual Running	OK	Normal No Yes
raspppoe	Remote Access PPPOE Driver	c:\windows\system32\drivers\raspppoe.sys	Kernel Driver	Yes	Manual Running	OK	Normal No Yes
raspti	Direct Parallel	c:\windows\system32\drivers\raspti.sys	Kernel Driver	Yes	Manual Running	OK	Normal No Yes
rdbss	Rdbss	c:\windows\system32\drivers\rdbss.sys	File System Driver		Running	OK	Normal No Yes
rdpcdd	RDPCDD	c:\windows\system32\drivers\rdpcdd.sys	Kernel Driver	Yes	Running	OK	Ignore No Yes
rdpdr	Terminal Server Device Redirector Driver		c:\windows\system32\drivers\rdpdr.sys	Kernel Driver	Yes	Manual Running	OK Normal No Yes
rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys	Kernel Driver	Yes	Running	OK	Ignore No Yes
redbook	Digital CD Audio Playback Filter Driver	c:\windows\system32\drivers\redbook.sys	Kernel Driver	Yes	System Running	OK	Normal No Yes
secdrv	Secdrv	c:\windows\system32\drivers\secdrv.sys	Kernel Driver	No	Manual Stopped	OK	Normal No No
serenum	Serenum Filter Driver	c:\windows\system32\drivers\serenum.sys			Kernel Driver	Yes	System Manual
serial	Serial port driver	c:\windows\system32\drivers\serial.sys	Kernel Driver	Yes	System Running	OK	Ignore No Yes
sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys	Kernel Driver	No	System Stopped	OK	Ignore No No
simbad	Simbad	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				

Appendix C – Tunable Parameters

	sparrow	Sparrow	Not Available	Kernel Driver	No	Disabled	Stopped
		OK	Normal No	No			
srv	Srv	c:\windows\system32\drivers\srv.sys		File System Driver	Yes	Manual	
		Running	OK	Normal No	Yes		
swenum		Software Bus Driver	c:\windows\system32\drivers\swenum.sys		Kernel		
Driver	Yes	Manual	Running	OK	Normal No	Yes	
symc810	symc810	Not Available	Kernel Driver	No	Disabled		
		Stopped	OK	Normal No	No		
symc8xx	symc8xx	Not Available	Kernel Driver	No	Disabled		
		Stopped	OK	Normal No	No		
sympipi	sympipi	c:\windows\system32\drivers\sympipi.sys		Kernel Driver	Yes	Boot	
		Running	OK	Normal No	Yes		
sym_hi	sym_hi	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
sym_u3	sym_u3	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
tcpip	TCP/IP Protocol Driver	c:\windows\system32\drivers\tcpip.sys	Kernel Driver	Kernel Driver	Yes		
		System	Running	OK	Normal No	Yes	
tdpipe	TDPIPE	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver	No	Manual		
		Stopped	OK	Ignore	No	No	
tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Yes	Manual		
		Running	OK	Ignore	No	Yes	
termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	Kernel Driver	Yes		
		System	Running	OK	Normal No	Yes	
toside	Toslde	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
udfs	Udfs	c:\windows\system32\drivers\udfs.sys	File System Driver		No		
		Disabled	Stopped	OK	Normal No	No	
ultra	ultra	Not Available	Kernel Driver	No	Disabled	Stopped	OK
		Normal No	No				
update	Microcode Update Driver	c:\windows\system32\drivers\update.sys	Kernel Driver				
		Yes	Manual	Running	OK	Normal No	Yes
usbhub	USB2 Enabled Hub	c:\windows\system32\drivers\usbhub.sys		Kernel Driver			
		Yes	Manual	Running	OK	Normal No	Yes

Appendix C – Tunable Parameters

usbohci	Microsoft USB Open Host Controller Miniport Driver						
	c:\windows\system32\drivers\usbohci.sys	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes		
usbstor	USB Mass Storage Driver	c:\windows\system32\drivers\usbstor.sys				Kernel	
Driver	No	Manual	Stopped	OK	Normal	No	
vgasave	VGA Display Controller.	c:\windows\system32\drivers\vga.sys	Kernel	Driver			
	Yes	System	Running	OK	Ignore	No	Yes
viaide	Vialde	Not Available	Kernel	Driver	No	Disabled	Stopped
							OK
	Normal	No					
volsnap	Storage volumes	c:\windows\system32\drivers\volsnap.sys	Kernel	Driver			
	Yes	Boot	Running	OK	Normal	No	Yes
wanarp	Remote Access IP ARP Driver	c:\windows\system32\drivers\wanarp.sys	Kernel	Driver			
Driver	Yes	Manual	Running	OK	Normal	No	Yes
wdica	WDICA	Not Available	Kernel	Driver	No	Manual	Stopped
							OK
	No	No					
wlbs	Network Load Balancing	c:\windows\system32\drivers\wlbs.sys	Kernel	Driver			
	No	Manual	Stopped	OK	Normal	No	

[Signed Drivers]

Device Name	Signed	Device Class	Driver Version	Driver Date	Manufacturer	INF
Name	Driver Name	Device ID				
Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
			Not Available	Not Available	HTREE\ROOT\0	
ACPI Multiprocessor	PCYes	COMPUTER	5.2.3790.0	10/1/2002	(Standard	
computers)	hal.inf	Not Available	ROOT\ACPI_HAL\0000			
Microsoft ACPI-Compliant System		Yes	SYSTEM	5.2.3790.0	10/1/2002	
	Microsoft	acpi.inf	Not Available	ACPI_HAL\PNP0C08\0		
Processor	Yes	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\0			
Processor	Yes	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\1			
Processor	Yes	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\2			
Processor	Yes	PROCESSOR	5.2.3790.0	10/1/2002	(Standard processor	
types)	cpu.inf	Not Available	ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\3			

Appendix C – Tunable Parameters

PCI bus	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0A03\1	
ServerWorks Grand Champion CMIC_SL - NorthBridge Super Lite				Yes	SYSTEM
5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available	
PCI\VEN_1166&DEV_0017&SUBSYS_00000000&REV_32\3&13C0B0C5&0&00					
ServerWorks Grand Champion CMIC_SL - NorthBridge Super Lite				Yes	SYSTEM
5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available	
PCI\VEN_1166&DEV_0017&SUBSYS_00000000&REV_00\3&13C0B0C5&0&01					
Intel(R) PRO/1000 MT Network Connection			Yes	NET	6.3.6.31
Intel	nete1000.inf	Not Available			10/1/2002
PCI\VEN_8086&DEV_100E&SUBSYS_01351028&REV_02\3&13C0B0C5&0&10					
RAGE XL PCI Family (Microsoft Corporation)			Yes	DISPLAY	5.10.2600.6014
8/8/2001	ATI Technologies Inc.	atiixpad.inf	Not Available		
PCI\VEN_1002&DEV_4752&SUBSYS_01351028&REV_27\3&13C0B0C5&0&70					
Default Monitor	Yes	MONITOR	5.1.2001.0	6/6/2001	(Standard monitor
types)	monitor.inf	Not Available			
		DISPLAY\DEFAULT_MONITOR\4&38274D1&0&80000000&00&0E			
ServerWorks Champion CSB5 - SouthBridge	5	Yes	SYSTEM	5.2.3790.0	
10/1/2002	ServerWorks (RCC)	machine.inf	Not Available		
PCI\VEN_1166&DEV_0201&SUBSYS_00000000&REV_93\3&13C0B0C5&0&78					
Direct memory access controller	Yes	SYSTEM	5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available		
		ACPI\PNP0200\4&25F73A82&0			
Numeric data processor	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard
system devices)	machine.inf	Not Available	ACPI\PNP0C04\4&25F73A82&0		
Programmable interrupt controller		Yes	SYSTEM	5.2.3790.0	10/1/2002
(Standard system devices)		machine.inf	Not Available		
		ACPI\PNP0000\4&25F73A82&0			
System speaker	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system
devices)	machine.inf	Not Available	ACPI\PNP0800\4&25F73A82&0		
System timer	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system
devices)	machine.inf	Not Available	ACPI\PNP0100\4&25F73A82&0		
Standard floppy disk controller	Yes	FDC	5.2.3790.0	10/1/2002	(Standard
floppy disk controllers)	fdc.inf	Not Available	ACPI\PNP0700\4&25F73A82&0		

Appendix C – Tunable Parameters

Floppy disk drive	Yes	FLOPPYDISK	5.2.3790.0	10/1/2002	(Standard)
floppy disk drives)		flpydisk.inf	Not Available		
			FDC\GENERIC_FLOPPY_DRIVE\5&1AE2F47D&0&0		
Standard 101/102-Key or Microsoft Natural PS/2 Keyboard			Yes	KEYBOARD	
5.2.3790.0	10/1/2002	(Standard keyboards)	keyboard.inf	Not Available	
			ACPI\PNP0303\4&25F73A82&0		
PS/2 Compatible Mouse	Yes	MOUSE	5.2.3790.0	10/1/2002	Microsoft
	msmouse.inf	Not Available	ACPI\PNP0F13\4&25F73A82&0		
Communications Port	Yes	PORTS	5.2.3790.0	10/1/2002	(Standard port types)
	msports.inf	Not Available	ACPI\PNP0501\1		
ECP Printer Port	Yes	PORTS	5.2.3790.0	10/1/2002	(Standard port types)
	msports.inf	Not Available	ACPI\PNP0401\4&25F73A82&0		
Printer Port Logical Interface	Yes	SYSTEM	5.2.3790.0	10/1/2002	
	(Standard system devices)	machine.inf	Not Available		
	LPTENUM\MICROSOFTRAWPORT\5&39F3CAEA&0&LPT1				
System CMOS/real time clock	Yes	SYSTEM	5.2.3790.0	10/1/2002	
	(Standard system devices)	machine.inf	Not Available		
	ACPI\PNP0B00\4&25F73A82&0				
System board	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system
devices)		machine.inf	Not Available	ACPI\PNP0C01\2	
Standard Dual Channel PCI IDE Controller		Yes	HDC	5.2.3790.0	10/1/2002
	(Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available		
	PCI\VEN_1166&DEV_0212&SUBSYS_41351028&REV_93\3&13C0B0C5&0&79				
Primary IDE Channel	Yes	HDC	5.2.3790.0	10/1/2002	(Standard IDE
ATA/ATAPI controllers)		mshdc.inf	Not Available		
	PCIIDE\IDECHANNEL\4&68D74DF&0&0				
Secondary IDE Channel	Yes	HDC	5.2.3790.0	10/1/2002	(Standard IDE
ATA/ATAPI controllers)		mshdc.inf	Not Available		
	PCIIDE\IDECHANNEL\4&68D74DF&0&1				
CD-ROM Drive	Yes	CDROM	5.2.3790.0	10/1/2002	(Standard CD-ROM
drives)		cdrom.inf	Not Available	IDE\CDROMLITEON_DVD-	
			ROM_LTD163	GDHB	\5&1A6C219A&0&0.0.0
ServerWorks (RCC) PCI to USB Open Host Controller	Yes	USB	5.2.3790.0		
10/1/2002	ServerWorks (RCC)	usbport.inf	Not Available		
	PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_05\3&13C0B0C5&0&7A				

Appendix C – Tunable Parameters

USB Root Hub	Yes	USB	5.2.3790.0	10/1/2002	(Standard USB Host Controller)
	usbport.inf		Not Available	USB\ROOT_HUB\4&1A0F8909&0	
Serverworks Champion	CSB5 - SouthBridge 5	LPC	Yes	SYSTEM	5.2.3790.0
	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available	
			PCI\VEN_1166&DEV_0225&SUBSYS_00000000&REV_00\3&13C0B0C5&0&7B		
ISAPNP Read Data Port		Yes	SYSTEM	5.2.3790.0	10/1/2002
	(Standard system devices)		machine.inf	Not Available	
			ISAPNP\READDATAPORT\0		
ServerWorks Grand Champion	CIOB_X2 - I/O Bridge	133 Mhz	Yes	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0101&SUBSYS_00000000&REV_03\3&13C0B0C5&0&80			
ServerWorks Grand Champion	CIOB_X2 - I/O Bridge	133 Mhz	Yes	SYSTEM	
	5.2.3790.0	10/1/2002	ServerWorks (RCC)	machine.inf	Not Available
		PCI\VEN_1166&DEV_0101&SUBSYS_00000000&REV_03\3&13C0B0C5&0&82			
System board	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system
devices)		machine.inf	Not Available	ACPI\PNP0C01\1	
PCI bus	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0A03\2	
LSI Logic PCI-X Ultra320 SCSI Host Adapter		Yes	SCSIADAPTER	5.2.3790.0	
	10/1/2002	LSI Logic Inc.	pnpscsi.inf	Not Available	
		PCI\VEN_1000&DEV_0030&SUBSYS_01351028&REV_07\3&1070020&0&20			
Disk drive	Yes	DISKDRIVE	5.2.3790.0	10/1/2002	(Standard disk drives)
		disk.inf	Not Available		
		SCSI\DISK&VEN_SEAGATE&PROD_ST336752LW&REV_2212\4&1E63B2AC&0&000			
PCI bus	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard system devices)
		machine.inf	Not Available	ACPI\PNP0A03\3	
Intel(R) PRO/100+ Server Adapter (PILA8470B)	Yes	NET	6.6.8.1	10/1/2002	Intel
	net557.inf		Not Available		
		PCI\VEN_8086&DEV_1229&SUBSYS_100C8086&REV_08\3&29E81982&0&10			
Intel(R) PRO/100+ Server Adapter (PILA8470B)	Yes	NET	6.6.8.1	10/1/2002	Intel
	net557.inf		Not Available		
		PCI\VEN_8086&DEV_1229&SUBSYS_100C8086&REV_08\3&29E81982&0&20			
ACPI Fixed Feature Button	Yes	SYSTEM	5.2.3790.0	10/1/2002	
	(Standard system devices)		machine.inf	Not Available	
		ACPI\FIXEDBUTTON\2&DABA3FF&			

Appendix C – Tunable Parameters

Logical Disk Manager	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard)
system devices)machine.inf		Not Available	ROOT\DMIO\0000		
Volume Manager	Yes	SYSTEM	5.2.3790.0	10/1/2002	(Standard)
system devices)machine.inf		Not Available	ROOT\FTDISK\0000		
Generic volume	Yes	VOLUME	5.2.3790.0	10/1/2002	Microsoft
volume.inf		Not Available			
			STORAGE\VOLUME\1&30A96598&0&SIGNATUREA7EFA7EFOFFSET7E00LENGTH1		
F4117A00					
Generic volume	Yes	VOLUME	5.2.3790.0	10/1/2002	Microsoft
volume.inf		Not Available			
			STORAGE\VOLUME\1&30A96598&0&SIGNATUREA7EFA7EFOFFSET1F411F800LEN		
GTH686551E00					
AFD Networking Support Environment		Not Available	LEGACYDRIVER		Not Available
	Not Available	Not Available	Not Available	Not Available	
		Not Available	Not Available		
Beep	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_BEEP\0000		
CRC Disk Filter Driver	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_CRCDISK\0000	
dmboot	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_DMBOOT\0000		
dmload	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_DMLOAD\0000		
Fips	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_FIPS\0000		
Generic Packet Classifier		Not Available	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not Available	ROOT\LEGACY_GPC\0000	
HTTP	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_HTTP\0000		
IPSEC driver	Not Available	LEGACYDRIVER	Not Available	Not Available	Not
Available	Not Available	Not Available	ROOT\LEGACY_IPSEC\0000		
ksecdd	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_KSECDD\0000		
mnmdd	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_MNMDD\0000		

Appendix C – Tunable Parameters

mountmgr	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_MOUNTMGR\0000			
NDIS System Driver	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_NDIS\0000		
Remote Access NDIS TAPI Driver		Not Available	LEGACYDRIVER	Not Available		
	Not Available	Not Available	Not Available	Not Available		
	ROOT\LEGACY_NDISTAPI\0000					
NDIS Usermode I/O Protocol	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_NDISUIO\0000		
NDProxy	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_NDPROXY\0000			
NetBios over Tcpip	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_NETBT\0000		
Null	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_NULL\0000			
Partition Manager	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_PARTMGR\0000		
Parvdm	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_PARVDM\0000			
Remote Access Auto Connection Driver	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	Not Available		
	ROOT\LEGACY_RASACD\0000					
RDPCCCDD	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_RDPCCCDD\0000			
RDPWD	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_RDPWD\0000			
TCP/IP Protocol Driver	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_TCPIP\0000		
TDTCP	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_TDTCP\0000			
VGA Display Controller	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	ROOT\LEGACY_VGASAVE\0000		
volsnap	Not Available	LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	ROOT\LEGACY_VOLSNAP\0000			

Appendix C – Tunable Parameters

Remote Access IP ARP Driver	Not Available	LEGACYDRIVER	Not Available	Not Available
Available	Not Available	Not Available	Not Available	
ROOT\LEGACY_WANARP\0000				
Audio Codecs	Yes	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMACM	
Legacy Audio Drivers	Yes	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMDRV	
Media Control Devices	Yes	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMMCI	
Legacy Video Capture Devices	Yes	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMVCD	
Video Codecs	Yes	MEDIA 5.2.3790.0	10/1/2002	(Standard system devices)
	wave.inf	Not Available	ROOT\MEDIA\MS_MMVID	
WAN Miniport (L2TP)	Yes	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_L2TPMINIPORT\0000	
WAN Miniport (IP)	Yes	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_NDISWANIP\0000	
WAN Miniport (PPPOE)	Yes	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_PPPOEMINIPORT\0000	
WAN Miniport (PPTP)	Yes	NET 5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	ROOT\MS_PPTPMINIPORT\0000	
Direct Parallel	Yes	NET 5.2.3790.0	10/1/2002	Microsoft
	Not Available	ROOT\MS_PTIMINIPORT\0000		netrasa.inf
Terminal Server Device Redirector	Yes	SYSTEM 5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\RDPDR\0000
Terminal Server Keyboard Driver	Yes	SYSTEM 5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\RDP_KBD\0000
Terminal Server Mouse Driver	Yes	SYSTEM 5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\RDP_MOU\0000
Plug and Play Software Device Enumerator	Yes	SYSTEM 5.2.3790.0		
10/1/2002 (Standard system devices)		machine.inf	Not Available	
	ROOT\SYSTEM\0000			
Microcode Update Device	Yes	SYSTEM 5.2.3790.0	10/1/2002	
(Standard system devices)		machine.inf	Not Available	ROOT\SYSTEM\0001

[Environment Variables]

Appendix C – Tunable Parameters

Variable	Value	User Name
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>
Path	C:\mksnt;C:\WINDOWS\system32;C:\WINDOWS;C:\WINDOWS\System32\Wbem;C:\PR OGRA~1\MICROS~1\80\Tools\BINN;	<SYSTEM>
windir	%SystemRoot%	<SYSTEM>
OS	Windows_NT	<SYSTEM>
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>
PROCESSOR_LEVEL	15	<SYSTEM>
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2 Stepping 7, GenuineIntel	<SYSTEM>
PROCESSOR_REVISION	0207	<SYSTEM>
NUMBER_OF_PROCESSORS	4	<SYSTEM>
ClusterLog	C:\WINDOWS\Cluster\cluster.log	<SYSTEM>
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH;.VBS	<SYSTEM>
TEMP	%SystemRoot%\TEMP	<SYSTEM>
TMP	%SystemRoot%\TEMP	<SYSTEM>
ROOTDIR	C:/	<SYSTEM>
SHELL	C:/mksnt/sh.exe	<SYSTEM>
HOME	C:/Documents and Settings/Administrator	<SYSTEM>
TMPDIR	C:/WINDOWS/TEMP	<SYSTEM>
TEMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\SYSTEM
TMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\SYSTEM
TEMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\LOCAL SERVICE
TMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\LOCAL SERVICE
TEMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\NETWORK SERVICE
TMP	%USERPROFILE%\Local Settings\Temp	NT AUTHORITY\NETWORK SERVICE
TEMP	%USERPROFILE%\Local Settings\Temp	CLIENT77\Administrator
TMP	%USERPROFILE%\Local Settings\Temp	CLIENT77\Administrator

[Print Jobs]

Document	Size	Owner	Notify	Status	Time Submitted	Start Time	Until Time
Elapsed Time	Pages Printed	Job ID	Priority	Parameters	Driver	Print Processor	
Host Print Queue	Data Type	Name					

Appendix C – Tunable Parameters

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
------------	-------------	------	--------	-----------

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max Working Set	Start Time
						Version Size
						File Date
system idle process		Not Available	0	0	Not Available	Not Available
		Not Available	Not Available	Not Available	Not Available	
system	Not Available	4	8	0	1413120	Not Available
		Not Available	Not Available	Not Available	Not Available	
smss.exe		Not Available	492	11	204800 1413120	5/13/2004 10:20 AM
		Not Available	Not Available	Not Available	Not Available	
csrss.exe		Not Available	540	13	Not Available	Not Available
		Not Available	Not Available	Not Available	Not Available	5/13/2004
10:20 AM		Not Available	Not Available	Not Available	Not Available	
winlogon.exe	c:\windows\system32\winlogon.exe		572	13	204800 1413120	
	5/13/2004 10:20 AM	5.2.3790.0 (srv03_rtm.030324-2048)		536.50 KB (549,376 bytes)		
bytes)	3/29/2003 12:00 AM					
services.exe	c:\windows\system32\services.exe		616	9	204800 1413120	
	5/13/2004 10:20 AM	5.2.3790.0 (srv03_rtm.030324-2048)		102.00 KB (104,448 bytes)		
bytes)	3/29/2003 12:00 AM					
lsass.exe	c:\windows\system32\lsass.exe	628	9	204800 1413120		
	5/13/2004 10:20 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)		
3/29/2003 12:00 AM						
svchost.exe	c:\windows\system32\svchost.exe		792	8	204800 1413120	
	5/13/2004 10:20 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)		
3/29/2003 12:00 AM						
svchost.exe	c:\windows\system32\svchost.exe		844	8	204800 1413120	
	5/13/2004 10:20 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)		
3/29/2003 12:00 AM						
svchost.exe	Not Available	1008	8	Not Available	Not Available	5/13/2004
10:21 AM	Not Available	Not Available	Not Available	Not Available	Not Available	
svchost.exe	Not Available	1080	8	Not Available	Not Available	5/13/2004
10:21 AM	Not Available	Not Available	Not Available	Not Available	Not Available	

Appendix C – Tunable Parameters

svchost.exe	c:\windows\system32\svchost.exe	1092	8	204800	1413120
	5/13/2004 10:21 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB	(13,312 bytes)
	3/29/2003 12:00 AM				
spoolsv.exe	c:\windows\system32\spoolsv.exe	1316	8	204800	1413120
	5/13/2004 10:21 AM	5.2.3790.0 (srv03_rtm.030324-2048)		55.00 KB	(56,320 bytes)
	3/29/2003 12:00 AM				
msdtc.exe	Not Available	1348	8	Not Available	Not Available
	10:21 AM	Not Available	Not Available	Not Available	
svchost.exe	c:\windows\system32\svchost.exe	1508	8	204800	1413120
	5/13/2004 10:21 AM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB	(13,312 bytes)
	3/29/2003 12:00 AM				
inetinfo.exe	c:\windows\system32\inetsrv\inetinfo.exe	1576	8	204800	
	1413120	5/13/2004 10:21 AM	6.0.3790.0 (srv03_rtm.030324-2048)		13.00 KB (13,312 bytes)
		11/13/2003 2:13 PM			
svchost.exe	Not Available	1692	8	Not Available	Not Available
	10:21 AM	Not Available	Not Available	Not Available	
dfssvc.exe	c:\windows\system32\dfssvc.exe	1900	8	204800	1413120
	5/13/2004 10:21 AM	5.2.3790.0 (srv03_rtm.030324-2048)		130.50 KB	(133,632 bytes)
	3/29/2003 12:00 AM				
wmiprvse.exe	Not Available	424	8	Not Available	Not Available
	10:22 AM	Not Available	Not Available	Not Available	
explorer.exe	c:\windows\explorer.exe	1048	8	204800	1413120
	10:24 AM	6.0.3790.0 (srv03_rtm.030324-2048)		1,008.50 KB	(1,032,704 bytes)
	3/29/2003 12:00 AM				
sh.exe	c:\mksnt\sh.exe	312	8	204800	1413120
	build 64271.50 KB (278,016 bytes)			5/13/2004 10:27 AM	5.2
				11/14/2003 9:50 AM	
dllhost.exe	c:\windows\system32\dllhost.exe	2156	8	204800	1413120
	5/13/2004 10:27 AM	5.2.3790.0 (srv03_rtm.030324-2048)		5.50 KB	(5,632 bytes)
	3/29/2003 12:00 AM				
cmd.exe	c:\windows\system32\cmd.exe	3524	8	204800	1413120
	5/17/2004 11:17 AM	5.2.3790.0 (srv03_rtm.030324-2048)		374.00 KB	(382,976 bytes)
	3/29/2003 12:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	3920	8	204800	1413120
	5/17/2004 3:03 PM	5.2.3790.0 (srv03_rtm.030324-2048)		13.00 KB	(13,312 bytes)
	3/29/2003 12:00 AM				

Appendix C – Tunable Parameters

w3wp.exe	c:\windows\system32\inetsrv\w3wp.exe	4220	8	204800	1413120
	5/18/2004 9:25 AM	6.0.3790.0 (srv03_rtm.030324-2048)		6.50 KB (6,656 bytes)	
	11/13/2003 2:13 PM				
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe	5472	8	204800	
	1413120	5/18/2004 2:03 PM	5.2.3790.0 (srv03_rtm.030324-2048)	764.00	
	KB (782,336 bytes)	11/13/2003 1:32 PM			
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsvc.exe	940	8	204800	
	1413120	5/18/2004 2:03 PM	5.2.3790.0 (srv03_rtm.030324-2048)	720.00	
	KB (737,280 bytes)	11/13/2003 1:32 PM			
wmiprvse.exe	Not Available	1196	8	Not Available	Not Available
	PM	Not Available	Not Available	Not Available	5/18/2004 2:03

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
winlogon	5.2.3790.0 (srv03_rtm.030324-2048)	536.50 KB (549,376 bytes)			
	3/29/2003 12:00 AM		Microsoft Corporation	c:\windows\system32\winlogon.exe	
ntdll	5.2.3790.0 (srv03_rtm.030324-2048)	722.50 KB (739,840 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\ntdll.dll	
kernel32	5.2.3790.0 (srv03_rtm.030324-2048)	965.00 KB (988,160 bytes)			
	3/29/2003 12:00 AM		Microsoft Corporation	c:\windows\system32\kernel32.dll	
msvcrt	7.0.3790.0 (srv03_rtm.030324-2048)	319.50 KB (327,168 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\msvcrt.dll	
advapi32	5.2.3790.0 (srv03_rtm.030324-2048)	559.50 KB (572,928 bytes)			
	3/29/2003 12:00 AM		Microsoft Corporation	c:\windows\system32\advapi32.dll	
rpcrt4	5.2.3790.0 (srv03_rtm.030324-2048)	643.50 KB (658,944 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\rpcrt4.dll	
user32	5.2.3790.0 (srv03_rtm.030324-2048)	562.00 KB (575,488 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\user32.dll	
gdi32	5.2.3790.0 (srv03_rtm.030324-2048)	263.00 KB (269,312 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\gdi32.dll	
userenv	5.2.3790.0 (srv03_rtm.030324-2048)	732.50 KB (750,080 bytes)			3/29/2003
	12:00 AM		Microsoft Corporation	c:\windows\system32\userenv.dll	
nddeapi	5.2.3790.0 (srv03_rtm.030324-2048)	16.00 KB (16,384 bytes)			3/29/2003 12:00 AM
	Microsoft Corporation		c:\windows\system32\nddeapi.dll		

Appendix C – Tunable Parameters

crypt32 5.131.3790.0 (srv03_rtm.030324-2048) 598.00 KB (612,352 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\crypt32.dll

msasn1 5.2.3790.0 (srv03_rtm.030324-2048) 58.00 KB (59,392 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msasn1.dll

secur32 5.2.3790.0 (srv03_rtm.030324-2048) 63.00 KB (64,512 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\secur32.dll

winsta 5.2.3790.0 (srv03_rtm.030324-2048) 51.00 KB (52,224 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\winsta.dll

netapi32 5.2.3790.0 (srv03_rtm.030324-2048) 317.00 KB (324,608 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\netapi32.dll

profmap 5.2.3790.0 (srv03_rtm.030324-2048) 22.00 KB (22,528 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\profmap.dll

regapi 5.2.3790.0 (srv03_rtm.030324-2048) 48.50 KB (49,664 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\regapi.dll

ws2_32 5.2.3790.0 (srv03_rtm.030324-2048) 87.50 KB (89,600 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ws2_32.dll

ws2help 5.2.3790.0 (srv03_rtm.030324-2048) 19.50 KB (19,968 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ws2help.dll

psapi 5.2.3790.0 (srv03_rtm.030324-2048) 21.50 KB (22,016 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\psapi.dll

version 5.2.3790.0 (srv03_rtm.030324-2048) 17.00 KB (17,408 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\version.dll

setupapi 5.2.3790.0 (srv03_rtm.030324-2048) 1,014.50 KB (1,038,848 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\setupapi.dll

msgina 5.2.3790.0 (srv03_rtm.030324-2048) 1.14 MB (1,191,936 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\msgina.dll

shsvcs 6.00.3790.0 (srv03_rtm.030324-2048) 121.50 KB (124,416 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\shsvcs.dll

shlwapi 6.00.3790.0 (srv03_rtm.030324-2048) 281.00 KB (287,744 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\shlwapi.dll

sfc 5.2.3790.0 (srv03_rtm.030324-2048) 4.50 KB (4,608 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\sfc.dll

sfc_os 5.2.3790.0 (srv03_rtm.030324-2048) 133.00 KB (136,192 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\sfc_os.dll

wintrust 5.131.3790.0 (srv03_rtm.030324-2048) 161.50 KB (165,376 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wintrust.dll

Appendix C – Tunable Parameters

ole32	5.2.3790.0 (srv03_rtm.030324-2048)	1.13 MB (1,187,328 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ole32.dll	
imagehlp	5.2.3790.0 (srv03_rtm.030324-2048)	142.50 KB (145,920 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll
comctl32	6.0 (srv03_rtm.030324-2048)	907.00 KB (928,768 bytes)	11/13/2003
7:16 AM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_6.0.100.0_x-ww_8417450b\comctl32.dll	
winscard	5.2.3790.0 (srv03_rtm.030324-2048)	98.50 KB (100,864 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\winscard.dll
wtsapi32	5.2.3790.0 (srv03_rtm.030324-2048)	17.50 KB (17,920 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll	
sxs	5.2.3790.0 (srv03_rtm.030324-2048)	733.00 KB (750,592 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll	
winmm	5.2.3790.0 (srv03_rtm.030324-2048)	166.00 KB (169,984 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll	
shell32	6.00.3790.0 (srv03_rtm.030324-2048)	7.79 MB (8,166,400 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\shell32.dll	
wldap32	5.2.3790.0 (srv03_rtm.030324-2048)	158.00 KB (161,792 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll
rsaenh	5.2.3790.0 (srv03_rtm.030324-2048)	176.83 KB (181,072 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\rsaenh.dll	
cscdll	5.2.3790.0 (srv03_rtm.030324-2048)	99.00 KB (101,376 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\cscdll.dll	
wlnotify	5.2.3790.0 (srv03_rtm.030324-2048)	87.50 KB (89,600 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\wlnotify.dll	
winspool	5.2.3790.0 (srv03_rtm.030324-2048)	140.00 KB (143,360 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\winspool.drv
mpr	5.2.3790.0 (srv03_rtm.030324-2048)	56.00 KB (57,344 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\mpr.dll	
comctl32	5.82 (srv03_rtm.030324-2048)	561.00 KB (574,464 bytes)	11/13/2003
7:16 AM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_5.82.0.0_x-ww_8a69ba05\comctl32.dll	
uxtheme	6.00.3790.0 (srv03_rtm.030324-2048)	196.00 KB (200,704 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\uxtheme.dll
samlib	5.2.3790.0 (srv03_rtm.030324-2048)	49.00 KB (50,176 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\samlib.dll	

Appendix C – Tunable Parameters

cscui	5.2.3790.0 (srv03_rtm.030324-2048)	305.00 KB (312,320 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\cscui.dll	
oleaut32	5.2.3790.0	486.00 KB (497,664 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\oleaut32.dll	
clbcatq	2001.12.4720.0 (srv03_rtm.030324-2048)	481.00 KB (492,544 bytes)	
11/13/2003 1:29 PM	Microsoft Corporation	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.0 (srv03_rtm.030324-2048)	778.00 KB (796,672 bytes)	
3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll	
ntmarta	5.2.3790.0 (srv03_rtm.030324-2048)	114.00 KB (116,736 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ntmarta.dll	
wbemprox	5.2.3790.0 (srv03_rtm.030324-2048)	17.50 KB (17,920 bytes)	11/13/2003
1:29 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemprox.dll	
wbemcomm	5.2.3790.0 (srv03_rtm.030324-2048)	211.50 KB (216,576 bytes)	
3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomm.dll	
wbemsvc	5.2.3790.0 (srv03_rtm.030324-2048)	42.50 KB (43,520 bytes)	11/13/2003
1:29 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll	
fastprox	5.2.3790.0 (srv03_rtm.030324-2048)	443.00 KB (453,632 bytes)	11/13/2003
1:29 PM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll	
msvcp60	6.05.2144.0	388.00 KB (397,312 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\msvcp60.dll	
ntdsapi	5.2.3790.0 (srv03_rtm.030324-2048)	76.00 KB (77,824 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.0 (srv03_rtm.030324-2048)	147.50 KB (151,040 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\dnsapi.dll	
services	5.2.3790.0 (srv03_rtm.030324-2048)	102.00 KB (104,448 bytes)	
3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\services.exe	
scesrv	5.2.3790.0 (srv03_rtm.030324-2048)	316.50 KB (324,096 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\scesrv.dll	
authz	5.2.3790.0 (srv03_rtm.030324-2048)	67.00 KB (68,608 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\authz.dll	
umpnppmgr	5.2.3790.0 (srv03_rtm.030324-2048)	121.50 KB (124,416 bytes)	
3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\umpnppmgr.dll	
ncobjapi	5.2.3790.0 (srv03_rtm.030324-2048)	34.50 KB (35,328 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ncobjapi.dll	

Appendix C – Tunable Parameters

eventlog 5.2.3790.0 (srv03_rtm.030324-2048) 60.50 KB (61,952 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\eventlog.dll

lsass 5.2.3790.0 (srv03_rtm.030324-2048) 13.00 KB (13,312 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\lsass.exe

lsasrv 5.2.3790.0 (srv03_rtm.030324-2048) 780.50 KB (799,232 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\lsasrv.dll

samsrv 5.2.3790.0 (srv03_rtm.030324-2048) 452.00 KB (462,848 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\samsrv.dll

cryptdll 5.2.3790.0 (srv03_rtm.030324-2048) 34.00 KB (34,816 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\cryptdll.dll

msprivs 5.2.3790.0 (srv03_rtm.030324-2048) 46.50 KB (47,616 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msprivs.dll

kerberos 5.2.3790.0 (srv03_rtm.030324-2048) 332.50 KB (340,480 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\kerberos.dll

msv1_0 5.2.3790.0 (srv03_rtm.030324-2048) 127.00 KB (130,048 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\msv1_0.dll

netlogon 5.2.3790.0 (srv03_rtm.030324-2048) 409.00 KB (418,816 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\netlogon.dll

w32time 5.2.3790.0 (srv03_rtm.030324-2048) 216.00 KB (221,184 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\w32time.dll

iphlpapi 5.2.3790.0 (srv03_rtm.030324-2048) 82.50 KB (84,480 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\iphlpapi.dll

schannel 5.2.3790.0 (srv03_rtm.030324-2048) 149.50 KB (153,088 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\schannel.dll

wdigest 5.2.3790.0 (srv03_rtm.030324-2048) 61.00 KB (62,464 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wdigest.dll

rassfm 5.2.3790.0 (srv03_rtm.030324-2048) 20.50 KB (20,992 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\rassfm.dll

kdcsvc 5.2.3790.0 (srv03_rtm.030324-2048) 221.00 KB (226,304 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\kdcsvc.dll

ntdsa 5.2.3790.0 (srv03_rtm.030324-2048) 1.45 MB (1,520,640 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ntdsa.dll

ntdsatq 5.2.3790.0 (srv03_rtm.030324-2048) 32.00 KB (32,768 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ntdsatq.dll

mswsock 5.2.3790.0 (srv03_rtm.030324-2048) 254.00 KB (260,096 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\mswsock.dll

Appendix C – Tunable Parameters

esent	5.2.3790.0 (srv03_rtm.030324-2048)	1.01 MB (1,056,256 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\esent.dll	
scecli	5.2.3790.0 (srv03_rtm.030324-2048)	179.50 KB (183,808 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\scecli.dll	
wshtcpip	5.2.3790.0 (srv03_rtm.030324-2048)	18.00 KB (18,432 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\wshtcpip.dll	
ipseccsvc	5.2.3790.0 (srv03_rtm.030324-2048)	162.50 KB (166,400 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\ipseccsvc.dll
oakley	5.2.3790.0 (srv03_rtm.030324-2048)	325.50 KB (333,312 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\oakley.dll	
winipsec	5.2.3790.0 (srv03_rtm.030324-2048)	34.50 KB (35,328 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\winipsec.dll	
pstorvc	5.2.3790.0 (srv03_rtm.030324-2048)	24.00 KB (24,576 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\pstorvc.dll	
psbase	5.2.3790.0 (srv03_rtm.030324-2048)	81.00 KB (82,944 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\psbase.dll	
dssenh	5.2.3790.0 (srv03_rtm.030324-2048)	131.33 KB (134,480 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\dssenh.dll	
wlbsctrl	5.2.3790.0 (srv03_rtm.030324-2048)	78.00 KB (79,872 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\wlbsctrl.dll	
w3ssl	6.0.3790.0 (srv03_rtm.030324-2048)	15.00 KB (15,360 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\w3ssl.dll	
strmfilt	6.0.3790.0 (srv03_rtm.030324-2048)	70.50 KB (72,192 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\strmfilt.dll	
httpapi	5.2.3790.0 (srv03_rtm.030324-2048)	26.50 KB (27,136 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\httpapi.dll	
iissuba	6.0.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\iissuba.dll	
svchost	5.2.3790.0 (srv03_rtm.030324-2048)	13.00 KB (13,312 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\svchost.exe	
rpcss	5.2.3790.0 (srv03_rtm.030324-2048)	276.50 KB (283,136 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\rpcss.dll	
termsrv	5.2.3790.0 (srv03_rtm.030324-2048)	216.50 KB (221,696 bytes)	11/13/2003
1:29 PM	Microsoft Corporation	c:\windows\system32\termsrv.dll	
icaapi	5.2.3790.0 (srv03_rtm.030324-2048)	10.50 KB (10,752 bytes)	11/13/2003 1:29 PM
	Microsoft Corporation	c:\windows\system32\icaapi.dll	

Appendix C – Tunable Parameters

mstlsapi	5.2.3790.0 (srv03_rtm.030324-2048)	104.50 KB (107,008 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll
activeds	5.2.3790.0 (srv03_rtm.030324-2048)	189.00 KB (193,536 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\activeds.dll
adsldpc	5.2.3790.0 (srv03_rtm.030324-2048)	142.50 KB (145,920 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\adsldpc.dll
credui	5.2.3790.0 (srv03_rtm.030324-2048)	159.00 KB (162,816 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\credui.dll
atl	3.05.2283	83.00 KB (84,992 bytes)	3/29/2003 12:00 AM
			Microsoft Corporation
	c:\windows\system32\atl.dll		
rdpwsx	5.2.3790.0 (srv03_rtm.030324-2048)	80.13 KB (82,056 bytes)	11/13/2003 1:29 PM
	Microsoft Corporation	c:\windows\system32\rdpwsx.dll	
wzcsvc	5.2.3790.0 (srv03_rtm.030324-2048)	272.50 KB (279,040 bytes)	3/25/2003 6:15
	AM	Microsoft Corporation	c:\windows\system32\wzcsvc.dll
rtutils	5.2.3790.0 (srv03_rtm.030324-2048)	32.00 KB (32,768 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\rtutils.dll	
wmi	5.2.3790.0 (srv03_rtm.030324-2048)	6.50 KB (6,656 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\wmi.dll	
dhcpcsvc	5.2.3790.0 (srv03_rtm.030324-2048)	101.50 KB (103,936 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\dhcpcsvc.dll
rastls	5.2.3790.0 (srv03_rtm.030324-2048)	155.00 KB (158,720 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\rastls.dll
cryptui	5.131.3790.0 (srv03_rtm.030324-2048)	473.50 KB (484,864 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\cryptui.dll
mprapi	5.2.3790.0 (srv03_rtm.030324-2048)	81.00 KB (82,944 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\mprapi.dll	
rasapi32	5.2.3790.0 (srv03_rtm.030324-2048)	227.50 KB (232,960 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\rasapi32.dll
rasman	5.2.3790.0 (srv03_rtm.030324-2048)	56.50 KB (57,856 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\rasman.dll	
tapi32	5.2.3790.0 (srv03_rtm.030324-2048)	175.00 KB (179,200 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\tapi32.dll
raschap	5.2.3790.0 (srv03_rtm.030324-2048)	106.00 KB (108,544 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\raschap.dll
schedsvc	5.2.3790.0 (srv03_rtm.030324-2048)	176.00 KB (180,224 bytes)	
	11/13/2003 1:32 PM	Microsoft Corporation	c:\windows\system32\schedsvc.dll

Appendix C – Tunable Parameters

msidle 6.00.3790.0 (srv03_rtm.030324-2048) 5.50 KB (5,632 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\msidle.dll

audiosrv 5.2.3790.0 (srv03_rtm.030324-2048) 38.00 KB (38,912 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\audiosrv.dll

wiarpc 5.2.3790.0 (srv03_rtm.030324-2048) 30.00 KB (30,720 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\wiarpc.dll

wkssvc 5.2.3790.0 (srv03_rtm.030324-2048) 125.00 KB (128,000 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wkssvc.dll

cryptsvc 5.2.3790.0 (srv03_rtm.030324-2048) 51.00 KB (52,224 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\cryptsvc.dll

certcli 5.2.3790.0 (srv03_rtm.030324-2048) 228.00 KB (233,472 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\certcli.dll

vssapi 5.2.3790.0 (srv03_rtm.030324-2048) 528.00 KB (540,672 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\vssapi.dll

dmserver 5.2.3790.0 (srv03_rtm.030324-2048) 24.00 KB (24,576 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\dmserver.dll

es 2001.12.4720.0 (srv03_rtm.030324-2048) 221.50 KB (226,816 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\es.dll

pchsvc 5.2.3790.0 (srv03_rtm.030324-2048) 31.50 KB (32,256 bytes) 11/13/2003 1:32 PM
Microsoft Corporation c:\windows\pchealth\helpctr\binaries\pchsvc.dll

srvsvc 5.2.3790.0 (srv03_rtm.030324-2048) 89.00 KB (91,136 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\srvsvc.dll

seclogon 5.2.3790.0 (srv03_rtm.030324-2048) 16.50 KB (16,896 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\seclogon.dll

sens 5.2.3790.0 (srv03_rtm.030324-2048) 35.50 KB (36,352 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\sens.dll

trkwks 5.2.3790.0 (srv03_rtm.030324-2048) 85.00 KB (87,040 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\trkwks.dll

wmisvc 5.2.3790.0 (srv03_rtm.030324-2048) 131.00 KB (134,144 bytes) 11/13/2003
1:29 PM Microsoft Corporation c:\windows\system32\wbem\wmisvc.dll

wuauserv 5.4.3790.0 (srv03_rtm.030324-2048) 10.50 KB (10,752 bytes) 11/13/2003
1:29 PM Microsoft Corporation c:\windows\system32\wuauserv.dll

wuaueng 5.4.3790.0 (srv03_rtm.030324-2048) 188.50 KB (193,024 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\wuaueng.dll

advpack 6.00.3790.0 (srv03_rtm.030324-2048) 93.50 KB (95,744 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\advpack.dll

Appendix C – Tunable Parameters

wininet 6.00.3790.0 (srv03_rtm.030324-2048) 609.00 KB (623,616 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wininet.dll

winrnr 5.2.3790.0 (srv03_rtm.030324-2048) 15.00 KB (15,360 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\winrnr.dll

comsvcs 2001.12.4720.0 (srv03_rtm.030324-2048) 1.14 MB (1,199,616 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\comsvcs.dll

browser5.2.3790.0 (srv03_rtm.030324-2048) 70.50 KB (72,192 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\browser.dll

netrap 5.2.3790.0 (srv03_rtm.030324-2048) 11.50 KB (11,776 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\netrap.dll

rasadhlp 5.2.3790.0 (srv03_rtm.030324-2048) 6.50 KB (6,656 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\rasadhlp.dll

winhttp 5.2.3790.0 (srv03_rtm.030324-2048) 327.50 KB (335,360 bytes) 11/13/2003
7:16 AM Microsoft Corporation
c:\windows\winsxs\x86_microsoft.windows.winhttp_6595b64144ccf1df_5.1.0.0_x-
ww_e0651936\winhttp.dll

wbemcore 5.2.3790.0 (srv03_rtm.030324-2048) 457.00 KB (467,968 bytes)
11/13/2003 1:29 PM Microsoft Corporation
c:\windows\system32\wbem\wbemcore.dll

esscli 5.2.3790.0 (srv03_rtm.030324-2048) 235.50 KB (241,152 bytes) 11/13/2003
1:29 PM Microsoft Corporation c:\windows\system32\wbem\lesscli.dll

wmiutils5.2.3790.0 (srv03_rtm.030324-2048) 90.50 KB (92,672 bytes) 11/13/2003 1:29 PM
Microsoft Corporation c:\windows\system32\wbem\wmiutils.dll

repdrvfs 5.2.3790.0 (srv03_rtm.030324-2048) 165.00 KB (168,960 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\wbem\repdrvfs.dll

wmiprvsd 5.2.3790.0 (srv03_rtm.030324-2048) 405.50 KB (415,232 bytes)
11/13/2003 1:29 PM Microsoft Corporation
c:\windows\system32\wbem\wmiprvsd.dll

wbemess 5.2.3790.0 (srv03_rtm.030324-2048) 256.50 KB (262,656 bytes)
11/13/2003 1:29 PM Microsoft Corporation
c:\windows\system32\wbem\wbemess.dll

sensapi 5.2.3790.0 (srv03_rtm.030324-2048) 6.00 KB (6,144 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\sensapi.dll

ncprov 5.2.3790.0 (srv03_rtm.030324-2048) 43.00 KB (44,032 bytes) 11/13/2003 1:29 PM
Microsoft Corporation c:\windows\system32\wbem\ncprov.dll

Appendix C – Tunable Parameters

netman 5.2.3790.0 (srv03_rtm.030324-2048) 209.00 KB (214,016 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\netman.dll

wzcsapi5.2.3790.0 (srv03_rtm.030324-2048) 24.50 KB (25,088 bytes) 3/25/2003 6:15 AM
Microsoft Corporation c:\windows\system32\wzcsapi.dll

netshell5.2.3790.0 (srv03_rtm.030324-2048) 1.67 MB (1,747,456 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\netshell.dll

clusapi 5.2.3790.0 (srv03_rtm.030324-2048) 56.00 KB (57,344 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\clusapi.dll

hnetcfg 5.2.3790.0 (srv03_rtm.030324-2048) 243.50 KB (249,344 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\hnetcfg.dll

rasdlg 5.2.3790.0 (srv03_rtm.030324-2048) 642.00 KB (657,408 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\rasdlg.dll

ntlsapi 5.2.3790.0 (srv03_rtm.030324-2048) 8.00 KB (8,192 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ntlsapi.dll

spoolsv 5.2.3790.0 (srv03_rtm.030324-2048) 55.00 KB (56,320 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\spoolsv.exe

spoolss 5.2.3790.0 (srv03_rtm.030324-2048) 79.00 KB (80,896 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\spoolss.dll

localspl 5.2.3790.0 (srv03_rtm.030324-2048) 304.50 KB (311,808 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\localspl.dll

cnbjmon 5.2.3680.0 (Lab03_dev(skatari).020509-1043) 45.50 KB (46,592 bytes)
3/24/2003 7:48 PM Microsoft Corporation c:\windows\system32\cnbjmon.dll

pjlmon 5.2.3790.0 (srv03_rtm.030324-2048) 15.00 KB (15,360 bytes) 3/24/2003 7:49 PM
Microsoft Corporation c:\windows\system32\pjlmmon.dll

tcpmon 5.2.3790.0 (srv03_rtm.030324-2048) 44.00 KB (45,056 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\tcpmon.dll

mgmtapi 5.2.3790.0 (srv03_rtm.030324-2048) 14.00 KB (14,336 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\mgmtapi.dll

snmpapi 5.2.3790.0 (srv03_rtm.030324-2048) 17.50 KB (17,920 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\snmpapi.dll

wsnmp32 5.2.3790.0 (srv03_rtm.030324-2048) 39.50 KB (40,448 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\wsnmp32.dll

usbmon5.2.3790.0 (srv03_rtm.030324-2048) 17.00 KB (17,408 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\usbmon.dll

win32spl 5.2.3790.0 (srv03_rtm.030324-2048) 94.50 KB (96,768 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\win32spl.dll

Appendix C – Tunable Parameters

inetpp 5.2.3790.0 (srv03_rtm.030324-2048) 71.50 KB (73,216 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\inetpp.dll

icmp 5.2.3790.0 (srv03_rtm.030324-2048) 4.50 KB (4,608 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\icmp.dll

ersvc 5.2.3790.0 (srv03_rtm.030324-2048) 22.00 KB (22,528 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ersvc.dll

inetinfo 6.0.3790.0 (srv03_rtm.030324-2048) 13.00 KB (13,312 bytes) 11/13/2003 2:13 PM
Microsoft Corporation c:\windows\system32\inetsrv\inetinfo.exe

iisutil 6.0.3790.0 (srv03_rtm.030324-2048) 177.00 KB (181,248 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\inetsrv\iisutil.dll

rpcref 6.0.3790.0 (srv03_rtm.030324-2048) 4.00 KB (4,096 bytes) 11/13/2003 2:13 PM
Microsoft Corporation c:\windows\system32\inetsrv\rpcref.dll

iisrtl 6.0.3790.0 (srv03_rtm.030324-2048) 129.00 KB (132,096 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\iisrtl.dll

iisadmin 6.0.3790.0 (srv03_rtm.030324-2048) 18.50 KB (18,944 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\inetsrv\iisadmin.dll

coadmin 6.0.3790.0 (srv03_rtm.030324-2048) 48.50 KB (49,664 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\inetsrv\coadmin.dll

admwprox 6.0.3790.0 (srv03_rtm.030324-2048) 44.00 KB (45,056 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\admwprox.dll

iiscfg 6.0.3790.0 (srv03_rtm.030324-2048) 1.06 MB (1,116,160 bytes) 11/13/2003
2:13 PM Microsoft Corporation c:\windows\system32\inetsrv\iiscfg.dll

metadata 6.0.3790.0 (srv03_rtm.030324-2048) 218.50 KB (223,744 bytes)
11/13/2003 2:13 PM Microsoft Corporation
c:\windows\system32\inetsrv\metadata.dll

msxml3 8.40.9419.0 1.28 MB (1,337,344 bytes) 3/29/2003 12:00 AM Microsoft
Corporation c:\windows\system32\msxml3.dll

svcext 6.0.3790.0 (srv03_rtm.030324-2048) 41.50 KB (42,496 bytes) 11/13/2003 2:13 PM
Microsoft Corporation c:\windows\system32\inetsrv\svcext.dll

security 5.2.3790.0 (srv03_rtm.030324-2048) 5.50 KB (5,632 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\security.dll

iismap 6.0.3790.0 (srv03_rtm.030324-2048) 55.00 KB (56,320 bytes) 11/13/2003 2:13 PM
Microsoft Corporation c:\windows\system32\iismap.dll

wamreg 6.0.3790.0 (srv03_rtm.030324-2048) 52.00 KB (53,248 bytes) 11/13/2003 2:13 PM
Microsoft Corporation c:\windows\system32\inetsrv\wamreg.dll

Appendix C – Tunable Parameters

dfssvc	5.2.3790.0 (srv03_rtm.030324-2048)	130.50 KB (133,632 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\dfssvc.exe	
resutils	5.2.3790.0 (srv03_rtm.030324-2048)	59.00 KB (60,416 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\resutils.dll	
mfc42u	6.05.3014.0	960.00 KB (983,040 bytes)	3/29/2003 12:00 AM
Corporation		c:\windows\system32\mfc42u.dll	Microsoft
wsock32	5.2.3790.0 (srv03_rtm.030324-2048)	22.00 KB (22,528 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\wsock32.dll	
explorer	6.00.3790.0 (srv03_rtm.030324-2048)	1,008.50 KB (1,032,704 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\explorer.exe
browseui	6.00.3790.0 (srv03_rtm.030324-2048)	1.01 MB (1,057,280 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\browseui.dll
shdocvw	6.00.3790.0 (srv03_rtm.030324-2048)	1.33 MB (1,393,664 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\shdocvw.dll
apphelp5.2.3790.0	(srv03_rtm.030324-2048)	122.00 KB (124,928 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\apphelp.dll	
themeui6.00.3790.0	(srv03_rtm.030324-2048)	360.50 KB (369,152 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\themeui.dll	
msimg32	5.2.3790.0 (srv03_rtm.030324-2048)	4.50 KB (4,608 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\msimg32.dll	
linkinfo	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\linkinfo.dll	
ntshrui	6.00.3790.0 (srv03_rtm.030324-2048)	136.00 KB (139,264 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\ntshrui.dll	
webcheck	6.00.3790.0 (srv03_rtm.030324-2048)	261.50 KB (267,776 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\webcheck.dll
stobject5.2.3790.0	(srv03_rtm.030324-2048)	117.50 KB (120,320 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\stobject.dll	
batmeter	6.00.3790.0 (srv03_rtm.030324-2048)	28.50 KB (29,184 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\batmeter.dll	
powrprof	6.00.3790.0 (srv03_rtm.030324-2048)	14.50 KB (14,848 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\powrprof.dll	
printui	5.2.3790.0 (srv03_rtm.030324-2048)	536.50 KB (549,376 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\printui.dll	
cfgmgr32	5.2.3790.0 (srv03_rtm.030324-2048)	17.50 KB (17,920 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\cfgmgr32.dll	

Appendix C – Tunable Parameters

drprov 5.2.3790.0 (srv03_rtm.030324-2048) 12.50 KB (12,800 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\drprov.dll

ntlanman 5.2.3790.0 (srv03_rtm.030324-2048) 41.00 KB (41,984 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\ntlanman.dll

netui0 5.2.3790.0 (srv03_rtm.030324-2048) 75.50 KB (77,312 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\netui0.dll

netui1 5.2.3790.0 (srv03_rtm.030324-2048) 184.00 KB (188,416 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\netui1.dll

davclnt 5.2.3790.0 (srv03_rtm.030324-2048) 23.50 KB (24,064 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\davclnt.dll

urlmon 6.00.3790.0 (srv03_rtm.030324-2048) 501.50 KB (513,536 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\urlmon.dll

shdoclc 6.00.3790.0 (srv03_rtm.030324-2048) 588.50 KB (602,624 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\shdoclc.dll

browselc 6.00.3790.0 (srv03_rtm.030324-2048) 62.00 KB (63,488 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\browselc.dll

sh 5.2 build 64 271.50 KB (278,016 bytes) 11/14/2003 9:50 AM Mortice Kern
Systems Inc. c:\mksnt\sh.exe

comdlg32 6.00.3790.0 (srv03_rtm.030324-2048) 261.00 KB (267,264 bytes)
3/29/2003 12:00 AM Microsoft Corporation c:\windows\system32\comdlg32.dll

dllhost 5.2.3790.0 (srv03_rtm.030324-2048) 5.50 KB (5,632 bytes) 3/29/2003 12:00 AM
Microsoft Corporation c:\windows\system32\ dllhost.exe

mtxoci 2001.12.4720.0 (srv03_rtm.030324-2048) 101.00 KB (103,424 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\mtxoci.dll

txflog 2001.12.4720.0 (srv03_rtm.030324-2048) 92.50 KB (94,720 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\txflog.dll

xolehlp 2001.12.4720.0 (srv03_rtm.030324-2048) 8.50 KB (8,704 bytes) 11/13/2003
1:29 PM Microsoft Corporation c:\windows\system32\xolehlp.dll

msdtcprx 2001.12.4720.0 (srv03_rtm.030324-2048) 427.50 KB (437,760 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\msdtcprx.dll

mtxclu 2001.12.4720.0 (srv03_rtm.030324-2048) 74.50 KB (76,288 bytes) 3/29/2003
12:00 AM Microsoft Corporation c:\windows\system32\mtxclu.dll

catsrv 2001.12.4720.0 (srv03_rtm.030324-2048) 256.00 KB (262,144 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\catsrv.dll

clbcatex 2001.12.4720.0 (srv03_rtm.030324-2048) 96.00 KB (98,304 bytes)
11/13/2003 1:29 PM Microsoft Corporation c:\windows\system32\clbcatex.dll

Appendix C – Tunable Parameters

cmd	5.2.3790.0 (srv03_rtm.030324-2048)	374.00 KB (382,976 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\cmd.exe	
iisw3adm	6.0.3790.0 (srv03_rtm.030324-2048)	199.50 KB (204,288 bytes)	
	11/13/2003 2:13 PM	Microsoft Corporation	
	c:\windows\system32\inetsrv\iisw3adm.dll		
w3cache	6.0.3790.0 (srv03_rtm.030324-2048)	21.00 KB (21,504 bytes)	11/13/2003
2:13 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3cache.dll	
w3tp	6.0.3790.0 (srv03_rtm.030324-2048)	12.50 KB (12,800 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\w3tp.dll	
lonsint	6.0.3790.0 (srv03_rtm.030324-2048)	11.50 KB (11,776 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\lonsint.dll	
w3wp	6.0.3790.0 (srv03_rtm.030324-2048)	6.50 KB (6,656 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\w3wp.exe	
w3core	6.0.3790.0 (srv03_rtm.030324-2048)	329.50 KB (337,408 bytes)	11/13/2003
2:13 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3core.dll	
w3dt	6.0.3790.0 (srv03_rtm.030324-2048)	36.00 KB (36,864 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\w3dt.dll	
w3comlog	6.0.3790.0 (srv03_rtm.030324-2048)	9.50 KB (9,728 bytes)	11/13/2003
2:13 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3comlog.dll	
iisres	6.0.3790.0 (srv03_rtm.030324-2048)	119.50 KB (122,368 bytes)	11/13/2003
2:13 PM	Microsoft Corporation	c:\windows\system32\inetsrv\iisres.dll	
w3isapi	6.0.3790.0 (srv03_rtm.030324-2048)	61.50 KB (62,976 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\w3isapi.dll	
gzip	6.0.3790.0 (srv03_rtm.030324-2048)	23.00 KB (23,552 bytes)	11/13/2003 2:13 PM
	Microsoft Corporation	c:\windows\system32\inetsrv\gzip.dll	
"\\?\c:\inetpub\wwwroot\tpcc.dll"		"\\?\c:\inetpub\wwwroot\tpcc.dll"	
tpcc_com	Not Available	24.00 KB (24,576 bytes)	11/13/2003 2:17 PM
	c:\inetpub\wwwroot\tpcc_com.dll		Not Available
tpcc_odbc	Not Available	28.00 KB (28,672 bytes)	11/13/2003 2:17 PM
	c:\inetpub\wwwroot\tpcc_odbc.dll		Not Available
odbc32	3.525.1022.0 (srv03_rtm.030324-2048)	232.00 KB (237,568 bytes)	3/29/2003
12:00 AM	Microsoft Corporation	c:\windows\system32\odbc32.dll	
odbcint	3.525.1022.0 (srv03_rtm.030324-2048)	92.00 KB (94,208 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\odbcint.dll	
sqlsrv32	2000.085.1022.00 (srv03_rtm.030324-2048)	404.00 KB (413,696 bytes)	
3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\sqlsrv32.dll	

Appendix C – Tunable Parameters

sqlunirl	2000.080.0728.00	176.56 KB (180,800 bytes)	3/29/2003 12:00 AM
	Microsoft Corporation	c:\windows\system32\sqlunirl.dll	
sqlsrv32	2000.085.1022.00 (srv03_rtm.030324-2048)	88.00 KB (90,112 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\sqlsrv32.rll
odbccp32	3.525.1022.0 (srv03_rtm.030324-2048)	100.00 KB (102,400 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\odbccp32.dll
dbnetlib	2000.085.1022 (srv03_rtm.030324-2048)	76.00 KB (77,824 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\dbnetlib.dll
tpcc_com_all	1, 0, 0, 1	80.00 KB (81,920 bytes)	11/13/2003 2:17 PM
	c:\inetpub\wwwroot\tpcc_c~2.dll		
dbnmpntw	2000.085.1022 (srv03_rtm.030324-2048)	28.00 KB (28,672 bytes)	
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\dbnmpntw.dll
helpctr	5.2.3790.0 (srv03_rtm.030324-2048)	764.00 KB (782,336 bytes)	11/13/2003
	1:32 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\helpctr.exe
hcappres	5.2.3790.0 (srv03_rtm.030324-2048)	6.50 KB (6,656 bytes)	11/13/2003
	1:32 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\hcappres.dll
itss	5.2.3790.0 (srv03_rtm.030324-2048)	119.50 KB (122,368 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\itss.dll
pchshell	5.2.3790.0 (srv03_rtm.030324-2048)	100.50 KB (102,912 bytes)	
	11/13/2003 1:32 PM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\pchshell.dll		
mlang	6.00.3790.0 (srv03_rtm.030324-2048)	570.00 KB (583,680 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\mlang.dll
mshtml	6.00.3790.0 (srv03_rtm.030324-2048)	2.78 MB (2,916,352 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\mshtml.dll
msimtf	5.2.3790.0 (srv03_rtm.030324-2048)	149.00 KB (152,576 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\msimtf.dll
msctf	5.2.3790.0 (srv03_rtm.030324-2048)	287.00 KB (293,888 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\msctf.dll
jscript	5.6.0.8515	436.00 KB (446,464 bytes)	3/29/2003 12:00 AM
Corporation	c:\windows\system32\jscript.dll		Microsoft
msls31	3.10.349.0	147.00 KB (150,528 bytes)	3/29/2003 12:00 AM
Corporation	c:\windows\system32\msls31.dll		Microsoft
imm32	5.2.3790.0 (srv03_rtm.030324-2048)	105.50 KB (108,032 bytes)	3/29/2003
	12:00 AM	Microsoft Corporation	c:\windows\system32\imm32.dll

Appendix C – Tunable Parameters

mshtmled	6.00.3790.0 (srv03_rtm.030324-2048)	443.50 KB (454,144 bytes)			
	3/29/2003 12:00 AM	Microsoft Corporation	c:\windows\system32\mshtmled.dll		
vbscript	5.6.0.8515	404.00 KB (413,696 bytes)	3/29/2003 12:00 AM	Microsoft	
Corporation		c:\windows\system32\vbscript.dll			
mfc42	6.05.3014.0	960.00 KB (983,040 bytes)	3/29/2003 12:00 AM	Microsoft	
Corporation		c:\windows\system32\mfc42.dll			
msinfo	5.2.3790.0 (srv03_rtm.030324-2048)	358.50 KB (367,104 bytes)		11/13/2003	
	1:32 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\msinfo.dll		
riched32	5.2.3790.0 (srv03_rtm.030324-2048)	3.50 KB (3,584 bytes)	3/29/2003		
	12:00 AM	Microsoft Corporation	c:\windows\system32\riched32.dll		
riched20	5.31.23.1218	406.00 KB (415,744 bytes)	3/29/2003 12:00 AM		
	Microsoft Corporation	c:\windows\system32\riched20.dll			
helpsvc	5.2.3790.0 (srv03_rtm.030324-2048)	720.00 KB (737,280 bytes)		11/13/2003	
	1:32 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\helpsvc.exe		

[Services]

Display Name	Name	State	Start Mode	Service Type	Path	Error Control	Start Name	Tag ID
Alerter	Alerter	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k localservice	Normal	NT AUTHORITY\LocalService	0
Application Layer Gateway Service	ALG	Stopped		Manual	Own Process			
	c:\windows\system32\alg.exe	Normal	NT AUTHORITY\LocalService	0				
Application Management	AppMgmt	Stopped		Manual	Share Process			
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0				
Windows Audio	AudioSrv	Running	Auto	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0				
Background Intelligent Transfer Service	BITS	Stopped		Manual	Share Process			
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0				
Computer Browser	Browser	Running	Auto	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0				
Indexing Service	CiSvc	Stopped	Disabled	Share Process	c:\windows\system32\cisvc.exe	Normal	LocalSystem	0
ClipBook	ClipSrv	Stopped	Disabled	Own Process	c:\windows\system32\clipsrv.exe	Normal	LocalSystem	0

Appendix C – Tunable Parameters

COM+ System Application	COMSysApp	Running	Manual	Own Process
c:\windows\system32\dllhost.exe /processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}				
Normal	LocalSystem	0		
Cryptographic Services	CryptSvc	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k netsvcs				
Distributed File System	Dfs	Running	Auto	Own Process
c:\windows\system32\dfssvc.exe				
DHCP Client	Dhcp	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k networkservice				
AUTHORITY\NetworkService	0		Normal	NT
Logical Disk Manager	Administrative Service	dmadmin	Stopped	Manual Share
Process	c:\windows\system32\dmadmin.exe /com			Normal LocalSystem 0
Logical Disk Manager	dmserver	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k netsvcs				
DNS Client	Dnscache	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k networkservice				
AUTHORITY\NetworkService	0		Normal	NT
Error Reporting Service	ERSvc	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k winerr				
Event Log	Eventlog	Running	Auto	Share Process
c:\windows\system32\services.exe				
COM+ Event System	EventSystem	Running	Manual	Share Process
c:\windows\system32\svchost.exe -k netsvcs				
Help and Support	helpsvc	Running	Auto	Share Process
c:\windows\system32\svchost.exe -k netsvcs				
Human Interface Device Access	HidServ	Stopped	Disabled	Share Process
c:\windows\system32\svchost.exe -k netsvcs				
HTTP SSL	HTTPFilter	Running	Manual	Share Process
c:\windows\system32\lsass.exe				
IIS Admin Service	IISADMIN	Running	Auto	Share Process
c:\windows\system32\inetsrv\inetinfo.exe				
IMAPI CD-Burning COM Service	ImapiService	Stopped	Disabled	Own
Process	c:\windows\system32\imapi.exe			Normal LocalSystem 0
Intersite Messaging	IsmServ	Stopped	Disabled	Own Process
c:\windows\system32\ismserv.exe				

Appendix C – Tunable Parameters

Kerberos Key Distribution Center	kdc	Stopped	Disabled	Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0	
Server lanmanserver	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Workstation lanmanworkstation	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
License Logging	LicenseService	Stopped	Disabled	Own Process
	c:\windows\system32\lssrv.exe	Normal NT AUTHORITY\NetworkService	0	
TCP/IP NetBIOS Helper LmHosts	Running	Auto	Share Process	
	c:\windows\system32\svchost.exe -k localservice	Normal NT		
AUTHORITY\LocalService	0			
Messenger Messenger	Stopped	Disabled	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
NetMeeting Remote Desktop Sharing	mnmsrvc	Stopped	Disabled	Own
Process	c:\windows\system32\mnmsrvc.exe	Normal LocalSystem	0	
Distributed Transaction Coordinator	MSDTC	Running	Auto	Own Process
	c:\windows\system32\msdtc.exe	Normal NT AUTHORITY\NetworkService	0	
Windows Installer	MSI Server	Stopped	Manual	Share Process
	c:\windows\system32\msiexec.exe /v	Normal LocalSystem	0	
Network DDE	NetDDE	Stopped	Disabled	Share Process
	c:\windows\system32\netdde.exe	Normal LocalSystem	0	
Network DDE	DSDM	NetDDEdsm	Stopped	Disabled
	c:\windows\system32\netdde.exe	Normal LocalSystem	0	Share Process
Net Logon	Netlogon	Stopped	Manual	Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0	
Network Connections	Netman	Running	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
Network Location Awareness (NLA)	Nla	Running	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	
File Replication	NtFrs	Stopped	Manual	Own Process
	c:\windows\system32\ntfrs.exe	Ignore	LocalSystem	0
NT LM Security Support Provider	NtLmSsp	Stopped	Manual	Share Process
	c:\windows\system32\lsass.exe	Normal LocalSystem	0	
Removable Storage	NtmsSvc	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal LocalSystem	0	

Appendix C – Tunable Parameters

Plug and Play	PlugPlay	Running	Auto	Share Process
	c:\windows\system32\services.exe		Normal	LocalSystem 0
IPSEC Services	PolicyAgent	Running	Auto	Share Process
	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
Protected Storage	ProtectedStorage	Running	Auto	Share Process
	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
Remote Access	Auto Connection Manager	RasAuto	Stopped	Manual Share
Process	c:\windows\system32\svchost.exe -k netsvcs		Normal	LocalSystem 0
Remote Access	Connection Manager	RasMan	Stopped	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal	LocalSystem 0
Remote Desktop	Help Session Manager	RDSessMgr	Stopped	Manual Own Process
	c:\windows\system32\sessmgr.exe	Normal	LocalSystem	0
Routing and Remote Access	RemoteAccess	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k netsvcs		Normal	LocalSystem 0
Remote Registry	RemoteRegistry	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k regsvc		Normal	NT AUTHORITY\LocalService
	0			
Remote Procedure Call (RPC)	Locator	RpcLocator	Stopped	Manual Own Process
	c:\windows\system32\locator.exe		Normal	NT AUTHORITY\NetworkService
	0			
Remote Procedure Call (RPC)	RpcSs	Running	Auto	Share Process
	c:\windows\system32\svchost -k rpcss	Normal	LocalSystem	0
Resultant Set of Policy Provider	RSoPProv	Stopped	Manual	Share Process
	c:\windows\system32\rsopprov.exe	Normal	LocalSystem	0
Special Administration Console Helper	sacsvr	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Security Accounts Manager	SamSs	Running	Auto	Share Process
	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
Smart Card	SCardSvr	Stopped	Manual	Share Process
	c:\windows\system32\scardsvr.exe	Ignore	NT AUTHORITY\LocalService	0
Task Scheduler	Schedule	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Secondary Logon	seclogon	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Ignore	LocalSystem	0
System Event Notification	SENS	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0

Appendix C – Tunable Parameters

Internet Connection Firewall (ICF) / Internet Connection Sharing (ICS) SharedAccess
Stopped Disabled Share Process c:\windows\system32\svchost.exe -k
netsvcs Normal LocalSystem 0

Shell Hardware Detection ShellHWDetection Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs Ignore LocalSystem 0

Print Spooler Spooler Running Auto Own Process
c:\windows\system32\spoolsv.exe Normal LocalSystem 0

Windows Image Acquisition (WIA) stisvc Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc Normal NT AUTHORITY\LocalService
0

Microsoft Software Shadow Copy Provider swprv Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv Normal LocalSystem 0

Performance Logs and Alerts SysmonLog Stopped Manual Own Process
c:\windows\system32\smlogsvc.exe Normal NT Authority\NetworkService 0

Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv Normal LocalSystem 0

Terminal Services TermService Running Manual Share Process
c:\windows\system32\svchost.exe -k termsvcs Normal LocalSystem 0

Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Telnet TlntSrv Stopped Disabled Own Process c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0

Distributed Link Tracking Server TrkSvr Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Distributed Link Tracking Client TrkWks Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Terminal Services Session Directory Tssdis Stopped Disabled Own Process
c:\windows\system32\tssdis.exe Normal LocalSystem 0

Upload Manager uploadmgr Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Uninterruptible Power Supply UPS Stopped Manual Own Process
c:\windows\system32\ups.exe Normal NT AUTHORITY\LocalService 0

Virtual Disk Service vds Stopped Manual Own Process
c:\windows\system32\vds.exe Normal LocalSystem 0

Volume Shadow Copy VSS Stopped Manual Own Process
c:\windows\system32\vssvc.exe Normal LocalSystem 0

Appendix C – Tunable Parameters

Windows Time	W32Time	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
World Wide Web Publishing Service		W3SVCRunning	Auto	Share Process
	c:\windows\system32\svchost.exe -k iissvcs	Normal	LocalSystem	0
WebClient	WebClient	Stopped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k localservice			Normal NT
AUTHORITY\LocalService		0		
WinHTTP Web Proxy Auto-Discovery Service		WinHttpAutoProxySvc	Stopped	Manual
	Share Process	c:\windows\system32\svchost.exe -k localservice		Normal NT
AUTHORITY\LocalService		0		
Windows Management Instrumentation	winmgmt	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Ignore	LocalSystem	0
Portable Media Serial Number Service	WmdmPmSN	Stopped	Manual	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Windows Management Instrumentation Driver Extensions		Wmi	Stopped	Manual
	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
	0			
WMI Performance Adapter	WmiApSrv	Stopped	Manual	Own Process
	c:\windows\system32\wbem\wmiapsrv.exe	Normal	LocalSystem	0
Automatic Updates	wuauserv	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0
Wireless Configuration	WZCSVC	Running	Auto	Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0

[Program Groups]

Group Name	Name	User Name
Accessories	Default User:Accessories	Default User
Accessories\Accessibility	Default User:Accessories\Accessibility	Default User
Accessories\Entertainment	Default User:Accessories\Entertainment	Default User
Startup	Default User:Startup	Default User
Accessories	All Users:Accessories	All Users
Accessories\Accessibility	All Users:Accessories\Accessibility	All Users
Accessories\Communications	All Users:Accessories\Communications	All Users
Accessories\Entertainment	All Users:Accessories\Entertainment	All Users
Accessories\System Tools	All Users:Accessories\System Tools	All Users

Appendix C – Tunable Parameters

Administrative Tools All Users:Administrative Tools All Users
Microsoft SQL Server All Users:Microsoft SQL Server All Users
MKS Toolkit All Users:MKS Toolkit All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories NT AUTHORITY\SYSTEM
Accessories\Accessibility NT AUTHORITY\SYSTEM:Accessories\Accessibility NT AUTHORITY\SYSTEM
Accessories\Entertainment NT AUTHORITY\SYSTEM:Accessories\Entertainment NT AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT AUTHORITY\SYSTEM
Accessories CLIENT77\Administrator:Accessories CLIENT77\Administrator
Accessories\Accessibility CLIENT77\Administrator:Accessories\Accessibility
CLIENT77\Administrator
Accessories\Entertainment CLIENT77\Administrator:Accessories\Entertainment
CLIENT77\Administrator
Administrative Tools CLIENT77\Administrator:Administrative Tools
CLIENT77\Administrator
Startup CLIENT77\Administrator:StartupCLIENT77\Administrator

[Startup Programs]

Program	Command	User Name	Location
desktop\desktop.ini	NT AUTHORITY\SYSTEM		Startup
desktop\desktop.ini	CLIENT77\Administrator		Startup
desktop\desktop.ini	.DEFAULT		Startup
desktop\desktop.ini	All Users		Common Startup

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available

Appendix C – Tunable Parameters

WordPad Document "%programfiles%\windows nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object Not Available
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]
[Summary]

Item Value

Version 6.0.3790.0
Build 63790
Application Path C:\Program Files\Internet Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 128-bit

Content AdvisorDisabled

IEAK Install No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3790.0	95 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
advpack.dll	6.0.3790.0	94 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation

Appendix C – Tunable Parameters

asctrls.ocx	6.0.3790.0	90 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
browselc.dll	6.0.3790.0	62 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
browseui.dll	6.0.3790.0	1,033 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
cdfview.dll	6.0.3790.0	144 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
comctl32.dll	5.82.3790.0	561 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
dctrans.dll	6.3.3790.0	198 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
dxtmsft.dll	6.3.3790.0	344 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.0	300 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
ipeers.dll	6.0.3790.0	230 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
iesetup.dll	6.0.3790.0	59 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
ieuinit.inf	Not Available	20 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Not Available			
iexplore.exe	6.0.3790.0	90 KB	3/29/2003 1:00:00 AM	C:\Program Files\Internet Explorer
	Microsoft Corporation			
imgutil.dll	5.2.3790.0	35 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
inetcpl.cpl	6.0.3790.0	303 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
inetcplc.dll	6.0.3790.0	109 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
inseng.dll	6.0.3790.0	72 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			
mlang.dll	6.0.3790.0	570 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
	Microsoft Corporation			

Appendix C – Tunable Parameters

msencode.dll	2002.10.4.0	112 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Not Available				
mshta.exe	6.0.3790.0	26 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
mshtml.dll	6.0.3790.0	2,848 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3790.0	1,319 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmled.dll	6.0.3790.0	444 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmler.dll	6.0.3790.0	55 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3790.0	47 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll	6.0.3790.0	15 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msieftp.dll	6.0.3790.0	230 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3790.0	132 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3790.0	491 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
occache.dll	6.0.3790.0	89 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx	6.3.3790.0	78 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Intel Corporation
sendmail.dll	6.0.3790.0	52 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll	6.0.3790.0	589 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll	6.0.3790.0	1,361 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll	6.0.3790.0	23 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll	6.0.3790.0	281 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation

Appendix C – Tunable Parameters

tdc.ocx	1.3.0.3130	58 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
url.dll	6.0.3790.0	36 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
urlmon.dll	6.0.3790.0	502 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
webcheck.dll	6.0.3790.0	262 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				
wininet.dll	6.0.3790.0	609 KB	3/29/2003 1:00:00 AM	C:\WINDOWS\system32
Microsoft Corporation				

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	Not Available
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available

Appendix C – Tunable Parameters

Maximum Cache Size Not Available

Available Cache Size Not Available

[List of Objects]

Program File Status CodeBase

No cached object information available

[Content]

[Following are sub-categories of this main category]

[Summary]

Item Value

Content AdvisorDisabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm

No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm

No other people certificate information available

[Publishers]

Name

No publisher information available

[Security]

Zone Security Level

My Computer Custom

Local intranet Medium-low

Appendix C – Tunable Parameters

Trusted sites Medium
Internet High
Restricted sites High

COM+ Settings

TPCC.AllTxns:

Activation:
 Enable Object Pooling selected
 Minimum Pool Size: 750
 Maximum Pool Size: 750
 Creation Timeout: 60,000
 Enable Object Construction
 Enable Just in Time Activation
Concurrency:
 Concurrency Required

TPCC Application Registry Parameters

Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]

"Path"="C:\\Inetpub\\wwwroot\\\"

"NumberOfDeliveryThreads"=dword:0000007d

"MaxConnections"=dword:00007d00

"MaxPendingDeliveries"=dword:00000271

"DB_Protocol"="ODBC"

"TxnMonitor"="COM"

"DbServer"="pe6600"

"DbName"="tpcc"

"DbUser"="sa"

"DbPassword"=""

"COM_SinglePool"="YES"

Microsoft Internet Information Server Registry Parameters

Appendix C – Tunable Parameters

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]  
  
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]  
"ListenBackLog"=dword:00000019  
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,00,00,00,00  
"PoolThreadLimit"=dword:000000be  
"ThreadTimeout"=dword:00015180  
  
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance]  
"Library"="infoctrs.dll"  
"Open"="OpenINFOPerformanceData"  
"Close"="CloseINFOPerformanceData"  
"Collect"="CollectINFOPerformanceData"  
"Last Counter"=dword:00000842  
"Last Help"=dword:00000843  
"First Counter"=dword:00000802  
"First Help"=dword:00000803  
"Library Validation Code"=hex:de,fc,ed,18,0a,98,c0,01,10,25,00,00,00,00,00,00  
"WbemAdapFileTime"=hex:00,60,4e,96,aa,40,bf,01  
"WbemAdapFileSize"=dword:00002510  
"WbemAdapStatus"=dword:00000000
```

World Wide Web Service Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]  
"Type"=dword:00000020  
"Start"=dword:00000002  
"ErrorControl"=dword:00000001  
"ImagePath"=hex(2):25,00,53,00,79,00,73,00,74,00,65,00,6d,00,52,00,6f,00,6f,00,\  
    74,00,25,00,5c,00,53,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,73,\  
    00,76,00,63,00,68,00,6f,00,73,00,74,00,2e,00,65,00,78,00,65,00,20,00,2d,00,\  
    6b,00,20,00,69,00,69,00,73,00,73,00,76,00,63,00,73,00,00,00  
"DisplayName"="World Wide Web Publishing Service"  
"DependOnService"=hex(7):52,00,50,00,43,00,53,00,53,00,00,00,48,00,54,00,54,00,\  
    50,00,46,00,69,00,6c,00,74,00,65,00,72,00,00,00,49,00,49,00,53,00,41,00,44,\  
    00,4d,00,49,00,4e,00,00,00,00,00  
"DependOnGroup"=hex(7):00,00  
"ObjectName"="LocalSystem"  
"Description"="Provides Web connectivity and administration through the Internet Information  
Services Manager"  
"FailureActions"=hex:80,51,01,00,01,00,00,00,00,00,00,03,00,00,00,53,00,65,\  
    00,01,00,00,00,01,00,00,00,01,00,00,00,01,00,00,01,00,00,00  
  
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]  
"MajorVersion"=dword:00000006  
"MinorVersion"=dword:00000000  
"InstallPath"="C:\WINDOWS\system32\inetsrv"  
"AccessDeniedMessage"="Error: Access is Denied."  
"ServiceDll"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,00,44,00,4f,00,57,00,53,\  
    00,5c,00,73,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00,6e,00,\  
    65,00,74,00,73,00,72,00,76,00,5c,00,69,00,69,00,73,00,77,00,33,00,61,00,64,\  
    00,6d,00,2e,00,64,00,6c,00,6c,00,00,00  
"AcceptExOutstanding"=dword:00000028  
  
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLau  
ch]
```

Appendix C – Tunable Parameters

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\VirtualRoots]
"/"="c:\inetpub\wwwroot,,205"
"/Scripts"="c:\inetpub\scripts,,204"
"/IISHelp"="c:\winnt\help\iishelp,,201"
"/IISAdmin"="C:\WINNT\System32\inetsrv\iisadmin,,201"
"/IISSamples"="c:\inetpub\iissamples,,201"
"/MSADC"="c:\program files\common files\system\msadc,,205"
"/_vti_bin"="C:\Program Files\Common Files\Microsoft Shared\Web Server Extensions\40\isapi,,205"
"/Printers"="C:\WINNT\web\printers,,201"

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]

"Library"="C:\WINDOWS\system32\inetsrv\w3ctrs.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"PerfIniFile"="w3ctrs.ini"
"Last Counter"=dword:00000a9e
"Last Help"=dword:00000a9f
"First Counter"=dword:000009a8
"First Help"=dword:000009a9
"Object List"="2472 2646"
"Library Validation Code"=hex:00,07,89,ab,22,aa,c3,01,00,5e,00,00,00,00,00,00
"WbemAdapFileSignature"=hex:39,e3,6c,2c,b4,be,59,f5,17,7c,c4,d5,2f,dc,f7,1a
"WbemAdapFileTime"=hex:52,ba,5b,ab,22,aa,c3,01
"WbemAdapFileSize"=dword:00005e00
"WbemAdapStatus"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security]

"Security"=hex:01,00,14,80,90,00,00,00,9c,00,00,00,14,00,00,00,30,00,00,00,02,\
00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00,00,00,00,00,01,00,00,\
00,00,02,00,60,00,04,00,00,00,00,14,00,fd,01,02,00,01,01,00,00,00,00,00,\
05,12,00,00,00,00,00,18,00,ff,01,0f,00,01,02,00,00,00,00,05,20,00,00,00,\
20,02,00,00,00,00,14,00,8d,01,02,00,01,01,00,00,00,00,00,05,0b,00,00,00,00,\
00,18,00,fd,01,02,00,01,02,00,00,00,00,05,20,00,00,00,23,02,00,00,01,01,\
00,00,00,00,05,12,00,00,00,01,01,00,00,00,00,05,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum]

"0"="Root\LEGACY_W3SVC\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001

RTE Input Parameters

Profile: 7620_4_4_2_pe6600_distributed

Appendix C – Tunable Parameters

```
File Path: C:\Program  
Files\BenchCraft\7620_4_4_2_pe6600_distributed.pro  
Version: 4

Number of Engines: 11

Name: DRIVER1
Description: rte104_1
Directory: c:\tpcclog\rte104_1.log
Machine: rte104
Parameter Set: PARAM2
Index: 0
Seed: 59915
Configured Users: 7000
Pipe Name: DRIVER1-1592073371
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0
Additional Options:

Name: DRIVER2
Description: rte104_2
Directory: c:\tpcclog\rte104_2.log
Machine: rte104
Parameter Set: PARAM2
Index: 100000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER2-1592035877
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1
Additional Options:

Name: DRIVER3
Description: rte104_3
Directory: c:\tpcclog\rte104_3.log
Machine: rte104
Parameter Set: PARAM2
Index: 200000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER3-1424974335
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2
```

Appendix C – Tunable Parameters

Additional Options:

```
Name: DRIVER4
Description: rte104_4
Directory: c:\tpcclog\rte104_4.log
Machine: rte104
Parameter Set: PARAM2
Index: 3000000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER4-1424942349
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3
Additional Options:
```

```
Name: DRIVER5
Description: rte103_1
Directory: c:\tpcclog\rte103_1.log
Machine: rte103
Parameter Set: PARAM2
Index: 4000000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER5-1092333052
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0
Additional Options:
```

```
Name: DRIVER6
Description: rte103_2
Directory: c:\tpcclog\rte103_2.log
Machine: rte103
Parameter Set: PARAM2
Index: 5000000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER6-1092296610
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1
Additional Options:
```

```
Name: DRIVER7
Description: rte103_3
```

Appendix C – Tunable Parameters

```
Directory: c:\tpcclog\rte103_3.log
Machine: rte103
Parameter Set: PARAM2
Index: 600000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER7-983775444
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2
Additional Options:

Name: DRIVER8
Description: rte103_4
Directory: c:\tpcclog\rte103_4.log
Machine: rte103
Parameter Set: PARAM2
Index: 700000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER8-922426029
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3
Additional Options:

Name: DRIVER9
Description: rte103_5
Directory: c:\tpcclog\rte103_5.log
Machine: rte103
Parameter Set: PARAM2
Index: 800000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER9-921151736
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1
Additional Options:

Name: DRIVER10
Description: rte104_5
Directory: c:\tpcclog\rte104_5.log
Machine: rte104
Parameter Set: PARAM2
Index: 900000000
```

Appendix C – Tunable Parameters

```
Seed: 59915
Configured Users: 4220
Pipe Name: DRIVER10-908058810
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 4
Additional Options:

Name: DRIVER11
Description: rte103_6
Directory: c:\tpcclog\rte103_6.log
Machine: rte103
Parameter Set: PARAM2
Index: 1000000000
Seed: 59915
Configured Users: 7220
Pipe Name: DRIVER11191462171
Connect Rate: 2000
Start Rate: 1500
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2
Additional Options:

Number of User groups: 11

Driver Engine: DRIVER1
IIS Server: client80
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 700
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7000
District id: 1
Scale Down: No

Driver Engine: DRIVER2
IIS Server: client82
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 701 - 1422
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
```

Appendix C – Tunable Parameters

```
District id: 1
Scale Down: No

Driver Engine: DRIVER3
IIS Server: client82
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1423 - 2144
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER4
IIS Server: client82
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2145 - 2866
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER5
IIS Server: client77
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2867 - 3588
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER6
IIS Server: client81
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3589 - 4310
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
```

Appendix C – Tunable Parameters

```
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER7
IIS Server: client77
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 4311 - 5032
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER8
IIS Server: client81
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5033 - 5754
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER9
IIS Server: client77
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5755 - 6476
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No

Driver Engine: DRIVER10
IIS Server: client80
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7199 - 7620
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
```

Appendix C – Tunable Parameters

```
Scale: Normal
User Count: 4220
District id: 1
Scale Down: No

Driver Engine: DRIVER11
IIS Server: client81
SQL Server: pe6600
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6477 - 7198
w_id Min Warehouse: 1
w_id Max Warehouse: 8000
Scale: Normal
User Count: 7220
District id: 1
Scale Down: No
```

Number of Parameter Sets: 5

Default Parameter Set						
Menu	Delay	Txn	Think	Key	RT	RT
		Weight	Time	Time	Delay	Fence
	New Order	10.00	12.05		18.01	0.10
5.00	0.10					
	Payment	10.00	12.05		3.01	0.10
5.00	0.10					
	Delivery	1.00	5.05		2.01	0.10
5.00	0.10					
	Stock Level	1.00	5.05		2.01	0.10
20.00	0.10					
	Order Status	1.00	10.05		2.01	0.10
5.00	0.10					
PARAM2						
Menu	Delay	Txn	Think	Key	RT	RT
		Weight	Time	Time	Delay	Fence
	New Order	44.84	12.04		18.02	0.10
5.00	0.10					
	Payment	43.04	12.04		3.02	0.10
5.00	0.10					
	Delivery	4.05	5.04		2.02	0.10
5.00	0.10					
	Stock Level	4.05	5.04		2.02	0.10
20.00	0.10					
	Order Status	4.05	10.04		2.02	0.10
5.00	0.10					

Appendix C – Tunable Parameters

50run

Menu	Delay	Txn	Txn	Think	Key	RT	RT
			Weight	Time	Time	Delay	Fence
New Order	5.00	0.10	44.84	30.00		18.02	0.10
Payment	5.00	0.10	43.04	30.00		3.02	0.10
Delivery	5.00	0.10	4.05	15.00		2.02	0.10
Stock Level	20.00	0.10	4.05	15.00		2.02	0.10
Order Status	5.00	0.10	4.05	25.00		2.02	0.10

50run2

Menu	Delay	Txn	Txn	Think	Key	RT	RT
			Weight	Time	Time	Delay	Fence
New Order	5.00	0.10	44.84	33.00		18.02	0.10
Payment	5.00	0.10	43.04	33.00		3.02	0.10
Delivery	5.00	0.10	4.05	18.00		2.02	0.10
Stock Level	20.00	0.10	4.05	18.00		2.02	0.10
Order Status	5.00	0.10	4.05	28.00		2.02	0.10

80run

Menu	Delay	Txn	Txn	Think	Key	RT	RT
			Weight	Time	Time	Delay	Fence
New Order	5.00	0.10	44.84	19.00		18.02	0.10
Payment	5.00	0.10	43.04	19.00		3.02	0.10
Delivery	5.00	0.10	4.05	14.00		2.02	0.10
Stock Level	20.00	0.10	4.05	14.00		2.02	0.10
Order Status	5.00	0.10	4.05	9.00		2.02	0.10

Appendix D – Disk Storage

Appendix D – Disk Storage

TPCC 60 Day Space Requirements							Fill in blue cells	
Warehouses	8000			TpmC	94,172.00			
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB	Msc_fg	Bg_fg
Warehouse	8000	856	56	46		958		
District	80000	8896	72	448		9416		
Customer	240000000	174545456	10407720	9,247,659		194200835	0	194200835
Hstry	240000000	13333344	48		2,511,255	13333392		15844647
NewOrder	7200000	1138344	2656			1141000		1141000
Orders	240000000	7356328	3345152		1,385,520	10701480		12087000
OrderLine	2,147,483,647	150000096	317520		28,251,618	150317616		178569234
Item	100000	9528	72	480		10080		10080
Stock	800000000	256000000	478200	12,823,910		269302110	0	269302110
Total		602,392,848	14,551,496	22,072,543	32,148,394	639,016,887		
MB								
Dynamic Space	166,689	Sum of Data for Order, Orderline and Hstry						
Static Space	457,351	Sum of Data+Index+5% Dynamic Space						
Free Space	na	Total Allocated Spec - (Dynamic + Static Space)						
Daily Growth	31,385	(Dynamic Space/(W625)*TpmC)						
Daily Spread	-	(Free Space-1.5*Daily Growth) Zero Assumed						
60 Day Space MB	2,341,046							
60 Day Space GB	2,286.18 GB							
Log Size	54,000 MB							
KB Per NewOrder	4,7006 KB							
8 hr log MB	207,498 MB							
8 hr log GB	202.6349 GB							
Space Usage								
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size			
60 Day Space DB	2,286.18	336	5669.34	18GB	16.873			
Total DB		336.00	5669.34	9GB				
8-hr log + mirror	405.2698	16	539.94	36GB	33.746			
OS Swap	3	1	16.87	18GB	16.873			
Total Storage	2,694.45 GB		6,226.15 GB					

files= 6 6
 size= 180,000,000 270,000,000
 8K pages 8 8
 Total= 8,640,000,000 12,960,000,000
 OK OK

Appendix E – Price Quotations

Appendix E - Price Quotations

Appendix E – Price Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



May 20, 2004

Dell Computer
Corporation
Kong Yang
RR5
One Dell Way
Round Rock, TX 78682

Mr. Yang:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00846	SQL Server 2000 Enterprise Edition <i>Per processor licensing</i> <i>Discount Schedule: Open Program Level C</i> <i>Unit Price reflects a 17% discount from the retail unit price of \$19,999.</i>	\$16,541	4	\$66,164
P73-00295	Windows Server 2003, Standard Edition <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 26% discount from the retail unit price of \$999.</i>	\$738	4	\$2,952
P72-00264	Windows Server 2003, Enterprise Edition <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 40% discount from the retail unit price of \$3,999.</i>	\$2,399	1	\$2,399
254-00170	Visual C++ Standard <i>No discounts applied</i>	\$109	1	\$109
PRO-PRORS-16U-01	Database Server Support Package <i>1 Year Term</i>	\$1,950	3	\$5,850

All products are currently orderable through Microsoft's normal distribution channels.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at
(425) 703-0510 or jamiere@microsoft.com.

Appendix E – Price Quotations

Reference ID: PCkoya0420057087

Please include this Reference ID in any correspondence regarding this price quote.