



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant ML570 G4/3.4GHz Dual Core
using
Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1)
and
Windows Server 2003 Enterprise (x64) Edition (SP1)

First Edition
Submitted for Review
October 19, 2006

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2006 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2006

HP, NonStop, ProLiant ML570 G4, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003, Windows Server 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	3
PREFACE	5
TPC BENCHMARK C OVERVIEW	5
ABSTRACT	6
OVERVIEW	6
TPC BENCHMARK C METRICS	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	6
AUDITOR	6
GENERAL ITEMS	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:	14
INSERT AND DELETE OPERATIONS.....	14
PARTITIONING	14
REPLICATION, DUPLICATION OR ADDITIONS	14
CLAUSE 2 RELATED ITEMS	15
RANDOM NUMBER GENERATION	15
INPUT/OUTPUT SCREEN LAYOUT.....	15
PRICED TERMINAL FEATURE VERIFICATION.....	15
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	15
TRANSACTION STATISTICS	15
QUEUEING MECHANISM	16
CLAUSE 3 RELATED ITEMS	17
TRANSACTION SYSTEM PROPERTIES (ACID)	17
ATOMICITY	17
<i>Completed Transactions</i>	17
<i>Aborted Transactions</i>	17
CONSISTENCY.....	17
ISOLATION	17
DURABILITY	18
<i>Durable Media Failure</i>	18
<i>Instantaneous Interruption and Loss of Memory</i>	19
CLAUSE 4 RELATED ITEMS	20
INITIAL CARDINALITY OF TABLES	20

DATABASE LAYOUT	20
TYPE OF DATABASE.....	21
DATABASE MAPPING.....	21
60 DAY SPACE.....	21
CLAUSE 5 RELATED ITEMS	22
THROUGHPUT	22
KEYING AND THINK TIMES.....	22
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	23
STEADY STATE DETERMINATION	28
WORK PERFORMED DURING STEADY STATE.....	28
MEASUREMENT PERIOD DURATION.....	28
REGULATION OF TRANSACTION MIX	29
TRANSACTION STATISTICS	29
CHECKPOINT COUNT AND LOCATION	30
CHECKPOINT DURATION.....	30
CLAUSE 6 RELATED ITEMS	31
RTE DESCRIPTIONS.....	31
EMULATED COMPONENTS	31
FUNCTIONAL DIAGRAMS	31
NETWORKS	31
OPERATOR INTERVENTION	31
CLAUSE 7 RELATED ITEMS	32
SYSTEM PRICING	32
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE	32
COUNTRY SPECIFIC PRICING.....	32
USAGE PRICING	32
CLAUSE 9 RELATED ITEMS	33
AUDITOR'S REPORT.....	33
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	33
APPENDIX A: SOURCE CODE	A-1 - A-111
APPENDIX B: DATABASE DESIGN	B-1 – B-51
APPENDIX C: TUNABLE PARAMETERS	C-1 - C-73
APPENDIX D: 60-DAY SPACE	D-1 - D-3
APPENDIX E: THIRD PARTY QUOTES	E-1 - E-4
APPENDIX F: PRICE VERIFICATION	F-1

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.7.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant ML570 G4. The operating system used for the benchmark was Windows Server 2003, Enterprise (x64) Edition (SP1). The DBMS used was Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1).

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

318,407 tpmC
USD \$1.88 per tpmC

The availability date is April 19, 2007.

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.


Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company	HP ProLiant ML570 G4 3.4GHz/16MB Intel 7140	TPC-C Rev. 5.7
	C/S with 12 HP ProLiant DL360G4p	Report Date: Oct 19, 2006

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
USD \$596,689	318,407	USD \$1.88	April 19, 2007

Database Server Processors /Cores/Threads	Database Manager	Operating System	Other Software	Number of Users
4/8/16 Intel Xeon 7140 3.4GHz DC	Microsoft SQL Server 2005 Enterprise x64 Edition SP1	Windows Server 2003 Enterprise x64 Edition SP1	Microsoft Visual C++ Microsoft COM+	254,160

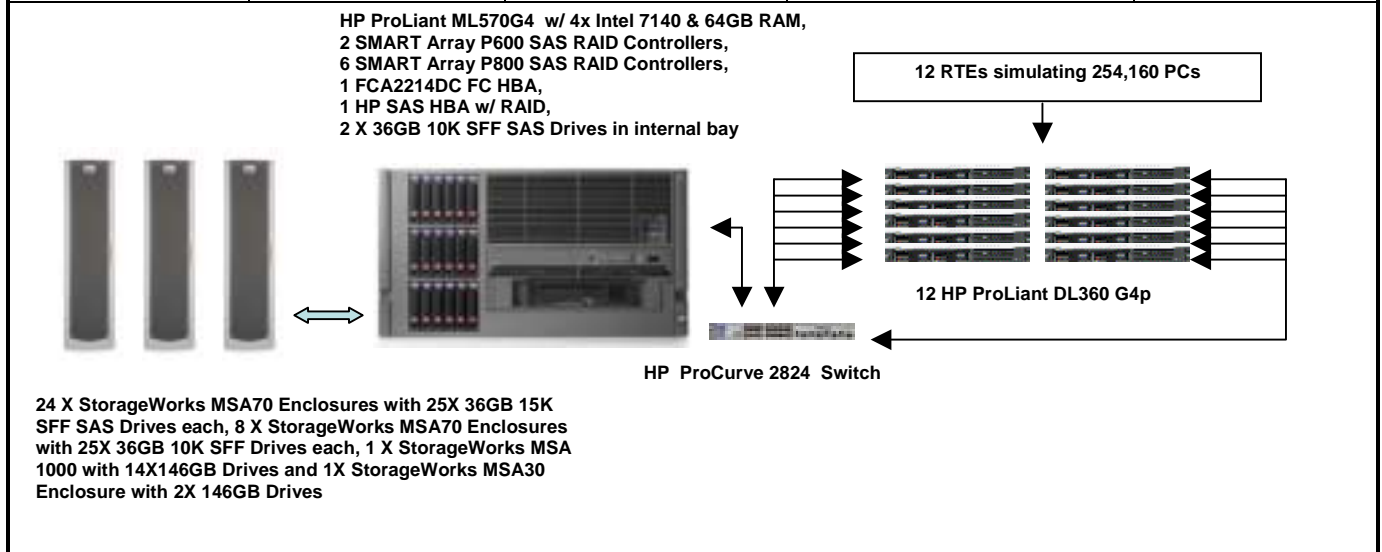

System Components	Server		Each Client	
	Quantity	Description	Quantity	Description
Processors/Cores/Threads	4/8/16	Intel Xeon 7140 3.4GHz/16MB	1/1/2	3.6 GHz Intel Xeon w/ 2MB cache
Memory	64GB	(16x 4GB) GB DDR2	1GB	1024 MB
Disk Controllers	2 6 1 1	Smart P600 Controller Smart P800 Controller FCA2214DC FCA HP SAS HBA w/ RAID	1	Integrated Smart Array 6i Controller
Disk Drives	600 202 16	36GB 15K SFF SAS 36 GB 10K SFF SAS 146GB 15K U320	2	36 GB SCSI Drive
Total Storage		29,227 GB		36 GB

Hewlett-Packard Company	HP ProLiant ML570 G4			TPC-C Rev. 5.7			
	3.4GHz/16MB DC Client/Server			Report Date	19-Oct-06		
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price	
Server Hardware							
		Brand Pricing					
HP ML570R04 X7140M 2P US Svr	430808-001	1	11,799	1	11,799		
HP X7140 570/580G4 DC Kit	430816-B21	1	2,799	2	5,598		
HP DL580G4 Memory Expansion Board Kit	410061-B21	1	499	3	1,497		
HP 8GB REG PC2-3200 2X4GB Memory	348106-B21	1	6,299	8	50,392		
HP s7540 17in. CRT Monitor	PF997AA#ABA	1	139	1	139		
HP PS/2 Scroll Mouse carbonite	DG169AV	1	5	1	5		
HP Enhanced Keyboard	DG170AV#ABA	1	10	1	10		
HP 5642 Pallet Unassembled Rack	358254-B21	1	689	3	2,067		
UPS R1500 XR Low Voltage US	204404-001	1	866	1	866		
HP Smart Array P800/512MB SAS Controller	381513-B21	1*	1,099	6	6,594		
HP Smart Array P600/256MB SAS Controller	337972-B21	1	729	2	1,458		
HP 8 Internal Port SAS HBA with RAID	347786-B21	1	249	1	249		
FCA2214DC dual channel Host Adapter	321835-B21	1	2,250	1	2,250		
HP StorageWorks MSA-70 Storage	418800-B21	1*	3,250	32	104,000		
HP StorageWorks MSA-70 Storage (10% Spares)	418800-B21	1*	3,250	4		13,000	
Modular SAN Array 1000 (incl. 2 Gb SFP SW Transceiver Kit)	201723-B22	1	6,995	1	6,995		
HP 3y 4h 24x7 StorWrks MSA 1000 HWSupp	U6357E	1	3,222	1		3,222	
Storage Works LC/LC 15m Fibre Cable	221692-B23	1	103	1	103		
Storage Works LC/LC 15m Fibre Cable (10% spares)	221692-B23	1	103	2		206	
HP Storageworks MSA 30 SB Storage	302969-B21	1	2,829	1	2,829		
HP 3y 4h 24x7 MSA20/30/50 HW Support HP 3y 4h 24x7 MSA20/30/50 HW	U8130E	1	1,827	1		1,827	
146GB 15Krpm U320 UNI HDD	347708-B22	1	599	16	9,584		
36GB 15Krpm SFF SAS HDD	431933-B21	1*	375	600	225,000		
36GB 15Krpm SFF SAS HDD (10% spares)	431933-B21	1*	375	60	22,500		
HP 36GB 10K SAS SFF Hot Plug Hard Drive	375859-B21	1	279	200	55,800		
HP 36GB 10K SAS SFF Hot Plug Hard Drive (10% Spares)	375859-B21	1	279	20	5,580		
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive (O/S)	375859-B21	1	279	2	558		
HP 3y 4h 24x7 ProLiant ML570 HW Support ,ProLiant Server ML570	U4592E	1	1,575	1		1,575	
					Subtotal	515,873	
						19,830	
Server Software							
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03150	Microsoft	2	23,432	4	93,728	Incl Below
Microsoft Visual C++ Standard	254-00170	Microsoft	2	109	1	109	Incl Below
Microsoft Windows 2003 Server, Enterprise Edition X64	P72-00274	Microsoft	2	2,334	1	2,334	Incl Below
Microsoft Problem Resolution Services		Microsoft	2	245	1		245
					Subtotal	96,171	245
Client Hardware							
HP DL360G4p X3.6GHz/2MB/1GB SCSI US Svr	376236-001	1	2,699	12	32,388		
Dual Integrated Gigabit NIC, Integrated Smart Array Controller 6i							
36GB 15K U320 Pluggable Hard Drive	286776-B22	1	269	24	6,456		
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	162675-002	1	599	12		7,188	
					Subtotal	38,844	7,188
Client Software							
Windows Server 2003, Standard Edition	P73-00295	Microsoft	2	719	12	8,628	Incl. Above
					Subtotal	8,628	0
User Connectivity							
HP ProCurve Switch 2824	J4903A#ABA	1	2499	1	2,499		
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E	1	1000	1		1,000	
10 foot Cat5E Non Booted Network Patch Cables (plus 10% spares)	cblc5ENB10	3	3	16	48		
					Subtotal	2,547	1,000
Large Purchase and Net 30 discount (See Note 1)	16.0%	1			(\$89,155)	(\$4,483)	
					Total	\$572,908	\$23,780
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				Three-Year Cost of Ownership: USD		\$596,689	
				tpmC Rating:		318,407	
				\$/ tpmC: USD		\$1.88	
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= LanAdapters.com							
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1							
* = These components are not immediately orderable. See the FDR for more information.							
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics							

Numerical Quantities Summary

MQTH, Computed Maximum Qualified Throughput

318,407 tpmC

Response Times (in seconds)	Average	90%	Maximum
New-Order	0.40	0.63	5.91
Payment	0.35	0.59	5.10
Order-Status	0.38	0.62	5.32
Delivery (interactive portion)	0.11	0.12	2.39
Delivery (deferred portion)	0.17	0.24	5.34
Stock-Level	0.39	0.63	3.02
Menu	0.11	0.12	2.40

Transaction Mix, in percent of total transaction

New-Order	44.95%
Payment	43.01%
Order-Status	4.01%
Delivery	4.01%
Stock-Level	4.03%

Emulation Delay (in seconds)

	Resp.Time	Menu
New-Order	0.10	0.10
Payment	0.10	0.10
Order-Status	0.10	0.10
Delivery (interactive)	0.10	0.10
Stock-Level	0.10	0.10

Keying/Think Times (in seconds)

	Min.	Average	Max.
New-Order	18.02/0.00	18.03/12.04	18.34/120.33
Payment	3.02/0.00	3.03/12.04	3.35/120.33
Order-Status	2.02/0.00	2.03/10.03	2.35/100.32
Delivery (interactive)	2.02/0.00	2.03/5.05	2.34/50.33
Stock-Level	2.02/0.00	2.03/5.05	2.34/50.33

Test Duration

Ramp-up time	49 minutes
Measurement interval	120 minutes
Transactions (all types) completed during measurement interval	88,030,518
Ramp down time	7 minutes

Checkpointing

Number of checkpoints	4
Checkpoint interval	30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are included on the following page.

Figure 1. Benchmarked Configuration


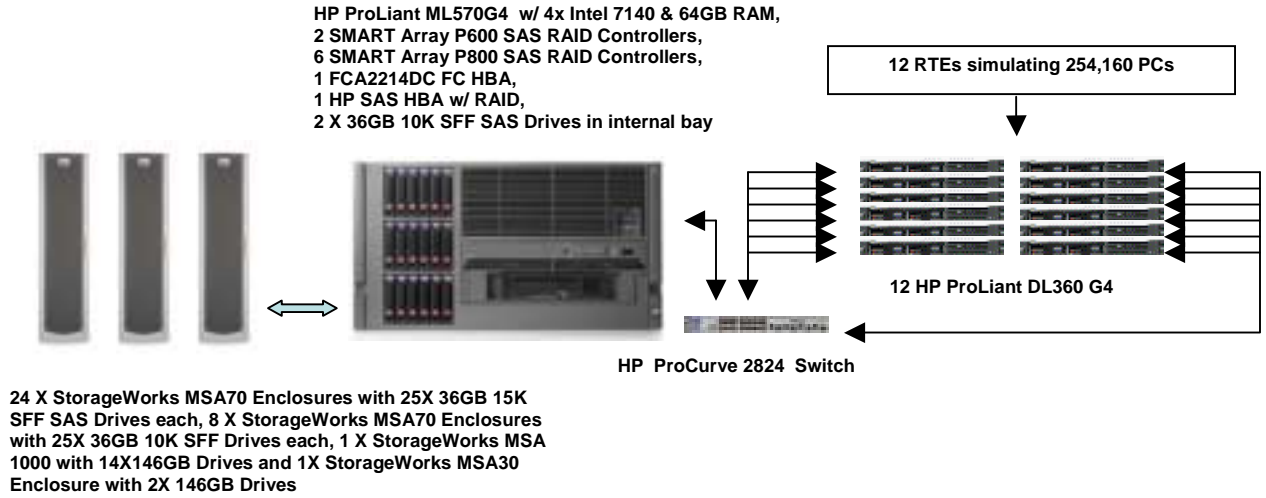


Figure 2. Priced Configuration

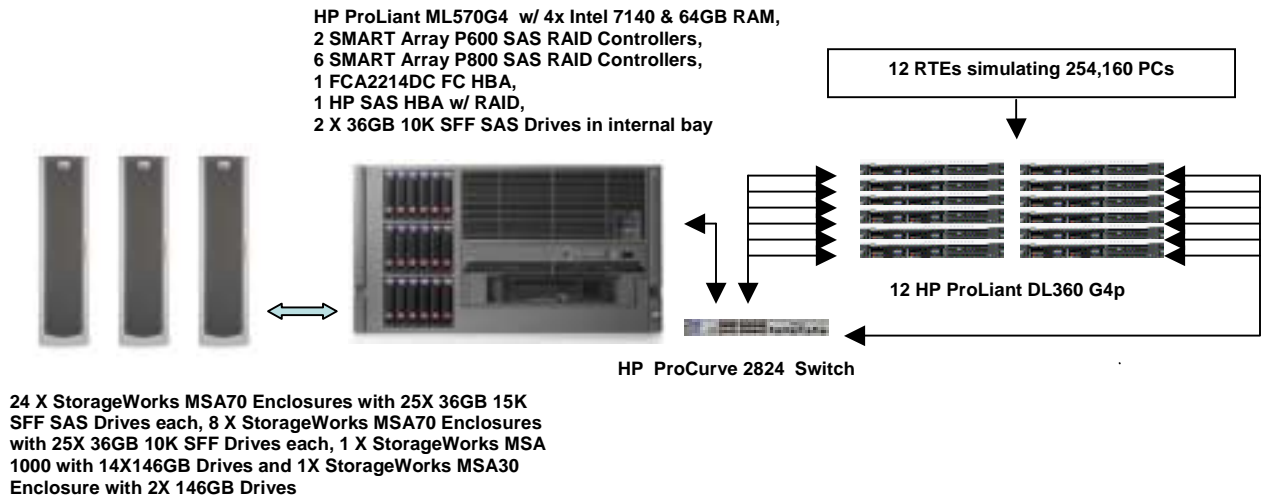

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 800 drives at 36GB for database data, two 36GB drives for the operating system, and 16 drives at 146GB for database log. There were 600 X 36GB drives for database data on six SMART P800 controllers, 200 X 36GB drives for database data on two SMART P600 controllers, 16 X 146GB drives on the StorageWorks MSA1000 controller, and 2 X 36GB drives on the HP SAS HBA with RAID.

Benchmarked Configuration:

Smart Array P600 Controller, Slot 3, Array A

<u>LOGICAL DRIVE C:\mount\customer7:</u> Customer_fg	<u>Total Capacity = 78.02GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\stock6:</u> Stock_fg	<u>Total Capacity = 108.10GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\orderline7:</u> Orderline_fg	<u>Total Capacity = 92.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\misc7:</u> Misc_fg	<u>Total Capacity = 12.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Y:</u> Backup1	<u>Total Capacity = 2048GB</u>	<u>RAID 6</u>

Smart Array P600 Controller, Slot 4, Array A

<u>LOGICAL DRIVE C:\mount\customer8:</u> Customer_fg	<u>Total Capacity = 78.02GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\stock7:</u> Stock_fg	<u>Total Capacity = 108.10GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\orderline8:</u> Orderline_fg	<u>Total Capacity = 92.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\misc8:</u> Misc_fg	<u>Total Capacity = 12.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Z:</u> Backup2	<u>Total Capacity = 2048GB</u>	<u>RAID 6</u>

Smart Array P800 Controller, Slot 5, Array A

<u>LOGICAL DRIVE C:\mount\customer1:</u> Customer_fg	<u>Total Capacity = 78.02GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\stock8:</u> Stock_fg	<u>Total Capacity = 108.10GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\orderline1:</u> Orderline_fg	<u>Total Capacity = 92.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\misc1:</u>	<u>Total Capacity = 12.59GB</u>	<u>RAID 0</u>

Misc_fg
LOGICAL DRIVE U: Total Capacity = 700GB RAID 6
 TpcBackup1

Smart Array P800 Controller, Slot 6, Array A

LOGICAL DRIVE C:\mount\customer3: Total Capacity = 78.02GB RAID 0
 Customer_fg
LOGICAL DRIVE C:\mount\stock2: Total Capacity = 108.10GB RAID 0
 Stock_fg
LOGICAL DRIVE C:\mount\orderline3: Total Capacity = 92.08GB RAID 0
 Orderline_fg
LOGICAL DRIVE C:\mount\misc3: Total Capacity = 12.59GB RAID 0
 Misc_fg
LOGICAL DRIVE V: Total Capacity = 700GB RAID 6
 TpcBackup2

Smart Array P800 Controller, Slot 7, Array A

LOGICAL DRIVE C:\mount\customer5: Total Capacity = 78.02GB RAID 0
 Customer_fg
LOGICAL DRIVE C:\mount\stock4: Total Capacity = 108.10GB RAID 0
 Stock_fg
LOGICAL DRIVE C:\mount\orderline5: Total Capacity = 92.08GB RAID 0
 Orderline_fg
LOGICAL DRIVE C:\mount\misc5: Total Capacity = 12.59GB RAID 0
 Misc_fg
LOGICAL DRIVE W: Total Capacity = 700GB RAID 6
 TpcBackup3

Smart Array P800 Controller, Slot 8, Array A

LOGICAL DRIVE C:\mount\customer6: Total Capacity = 78.02GB RAID 0
 Customer_fg
LOGICAL DRIVE C:\mount\stock5: Total Capacity = 108.10GB RAID 0
 Stock_fg
LOGICAL DRIVE C:\mount\orderline6: Total Capacity = 92.08GB RAID 0
 Orderline_fg
LOGICAL DRIVE C:\mount\misc6: Total Capacity = 12.59GB RAID 0
 Misc_fg
LOGICAL DRIVE X: Total Capacity = 700GB RAID 6
 TpcBackup4

Smart Array P800 Controller, Slot 9, Array A

LOGICAL DRIVE C:\mount\customer4: Total Capacity = 78.02GB RAID 0
 Customer_fg
LOGICAL DRIVE C:\mount\stock3: Total Capacity = 108.10GB RAID 0
 Stock_fg
LOGICAL DRIVE C:\mount\orderline4: Total Capacity = 92.08GB RAID 0
 Orderline_fg
LOGICAL DRIVE C:\mount\misc4: Total Capacity = 12.59GB RAID 0
 Misc_fg

Smart Array P800 Controller, Slot 10, Array A

<u>LOGICAL DRIVE C:\mount\customer2:</u> Customer_fg	<u>Total Capacity = 78.02GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\stock1:</u> Stock_fg	<u>Total Capacity = 108.10GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\orderline2:</u> Orderline_fg	<u>Total Capacity = 92.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\mount\misc2:</u> Misc_fg	<u>Total Capacity = 12.59GB</u>	<u>RAID 0</u>

StorageWorks MSA1000 Controller, Slot 1, Array A

<u>LOGICAL DRIVE E:</u> Tpcc Transaction Log	<u>Total Capacity = 1093.85GB</u>	<u>RAID 0+1</u>
---	-----------------------------------	-----------------

HP SAS HBA with RAID Controller, Slot 2, Array A

<u>LOGICAL DRIVE C:</u> Operating System	<u>Total Capacity = 33.51GB</u>	<u>RAID 1</u>
---	---------------------------------	---------------

Priced Configuration vs. Measured Configuration:

The benchmarked configuration used DL360G4 servers for clients. The priced configuration used DL360G4P servers.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	84.99%

Statistic		Value
	Remote warehouse payments	15.01%
	Accessed by last name	60.01%
Order Status	Accessed by last name	59.99%
Transaction Mix	New Order	44.95%
	Payment	43.01%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.03%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included 4 checkpoints.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 25600 warehouses of which 2544 were used under a load of 25440 users.

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 25440 users.
- The test was allowed to run for a minimum of 10 minutes.
- One disk was removed from the MSA1000 cabinet containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one MSA70 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- After the RAID recovery process finished Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 25600 warehouses under a full load of 254160 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 254160 users.
- The test was allowed to run for a minimum of 10 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	25,600
District	256,000
Customer	768,000,000
History	768,000,000
Orders	768,000,000
New Order	230,400,000
Order Line	7,679,978,523
Stock	2,560,000,000
Item	100,000
Unused Warehouses	184

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 800 SAS drives at 36GB for database data, two 36GB SAS drives for the operating system, and 16 U320 drives at 146GB for database log. Six Smart Array P800 controllers connected to 4 StorageWorks MSA70 drive boxes each (2 StorageWorks MSA70's on each of two ports of the controller). Each StorageWorks MSA70 contained (25) 36GB SFF SAS drives. Two Smart Array P600 controllers connected to 4 StorageWorks MSA70 drive boxes each (2 StorageWorks MSA70's on each of two ports of the controller). Each StorageWorks MSA70 contained (25) 36GB SAS drives.

Each array had four RAID 0 logical drives for data, and on four of the controllers each port also contained a RAID 6 logical drive for database backup files. The StorageWorks MSA1000 contained 14 146GB drives and was connected to a StorageWorks MS30 containing 2 146GB drives. This was configured as an array with one RAID 0+1 logical drive for the database log. The HP SAS HBA with RAID controller was connected to the internal drive cage which contained 2 X 36GB SAS drives configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were configured as 100% write cache and

were enabled for all logical drives containing “misc” and “orderline” file groups. The StorageWorks MSA1000 controller had cache disabled for the transaction log. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise (x64) Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 318,407tpmC
Price per tpmC USD \$1.96

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.40	0.63	5.91
Payment	0.35	0.59	5.10
Order-Status	0.38	0.62	5.32
Interactive Delivery	0.11	0.12	2.39
Deferred Delivery	0.17	0.24	5.34
Stock-Level	0.39	0.63	3.02
Menu	0.11	0.12	2.40

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.34
Payment	3.02	3.03	3.35
Order-Status	2.02	2.03	2.35
Interactive Delivery	2.02	2.03	2.34
Stock-Level	2.02	2.03	2.34

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.04	120.33
Payment	0.00	12.04	120.33
Order-Status	0.00	10.03	100.32
Interactive Delivery	0.00	5.05	50.33
Stock-Level	0.00	5.05	50.33

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

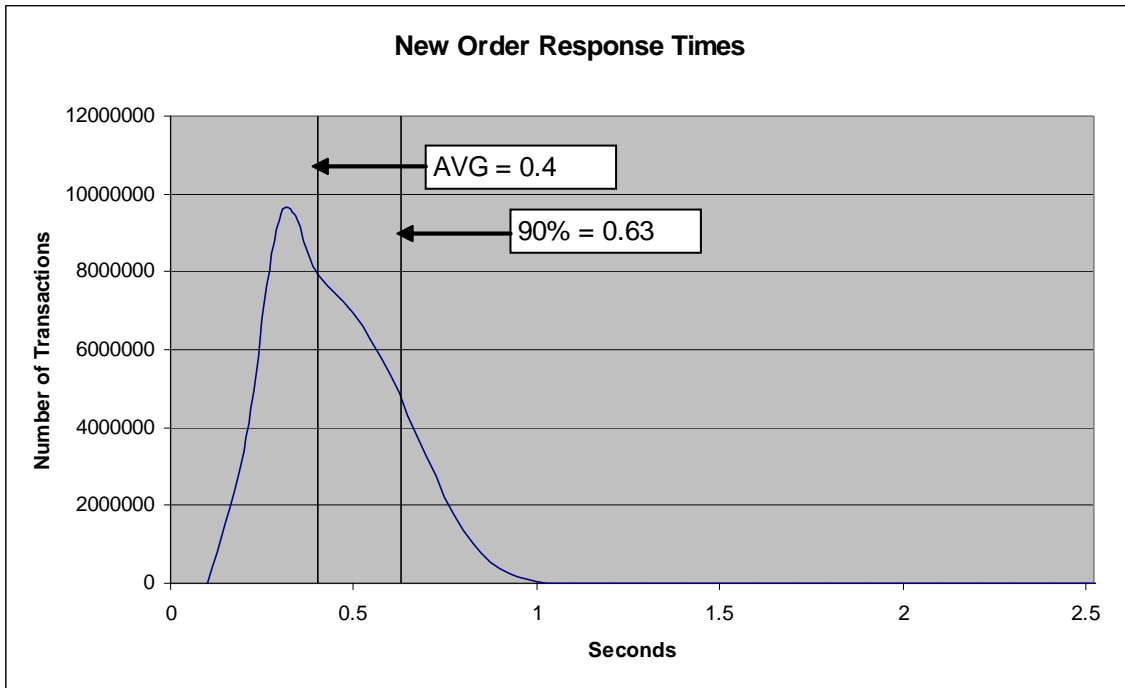


Figure 4. Payment Response Time Distribution

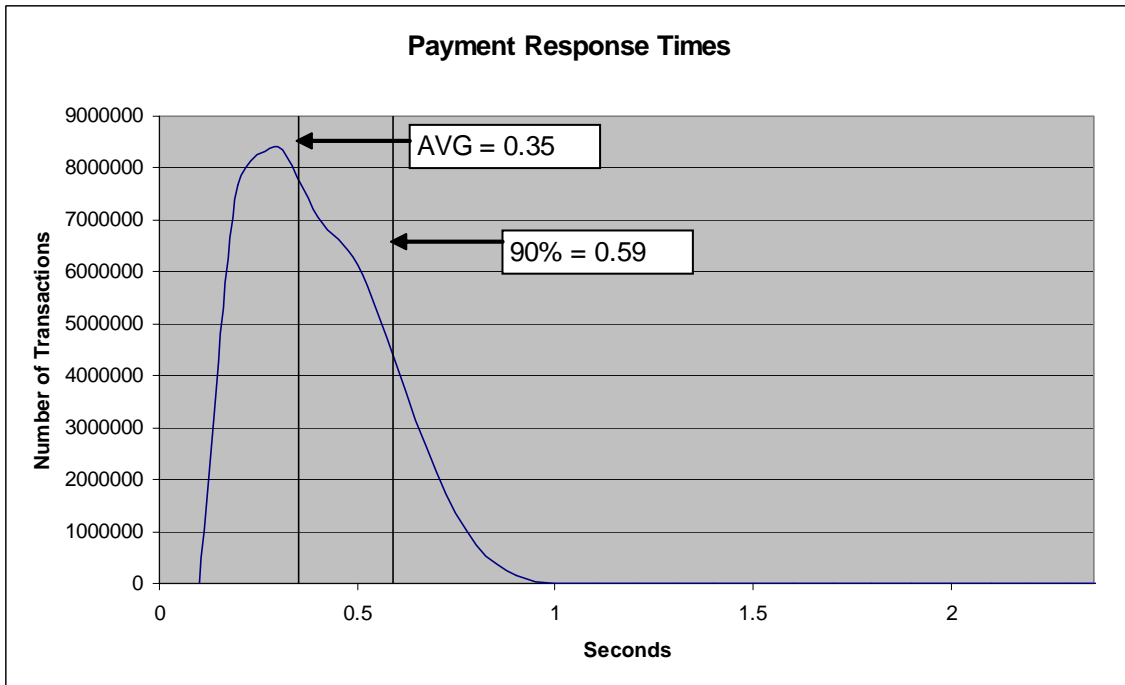


Figure 5. Order Status Response Time Distribution

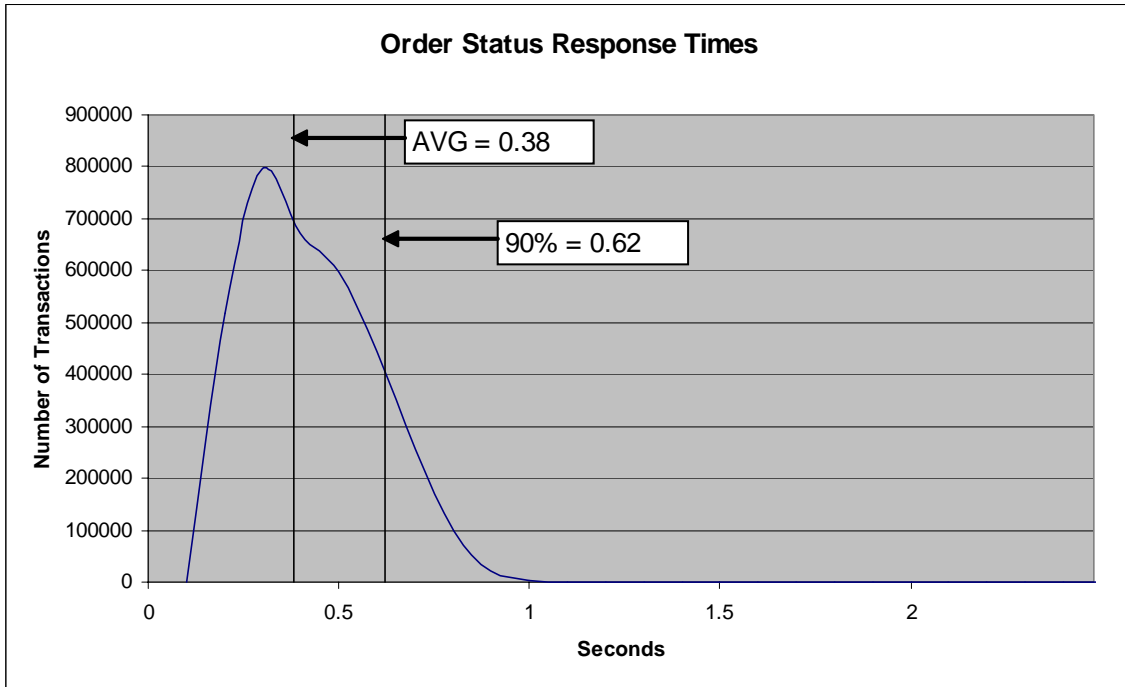


Figure 6. Delivery Response Time Distribution

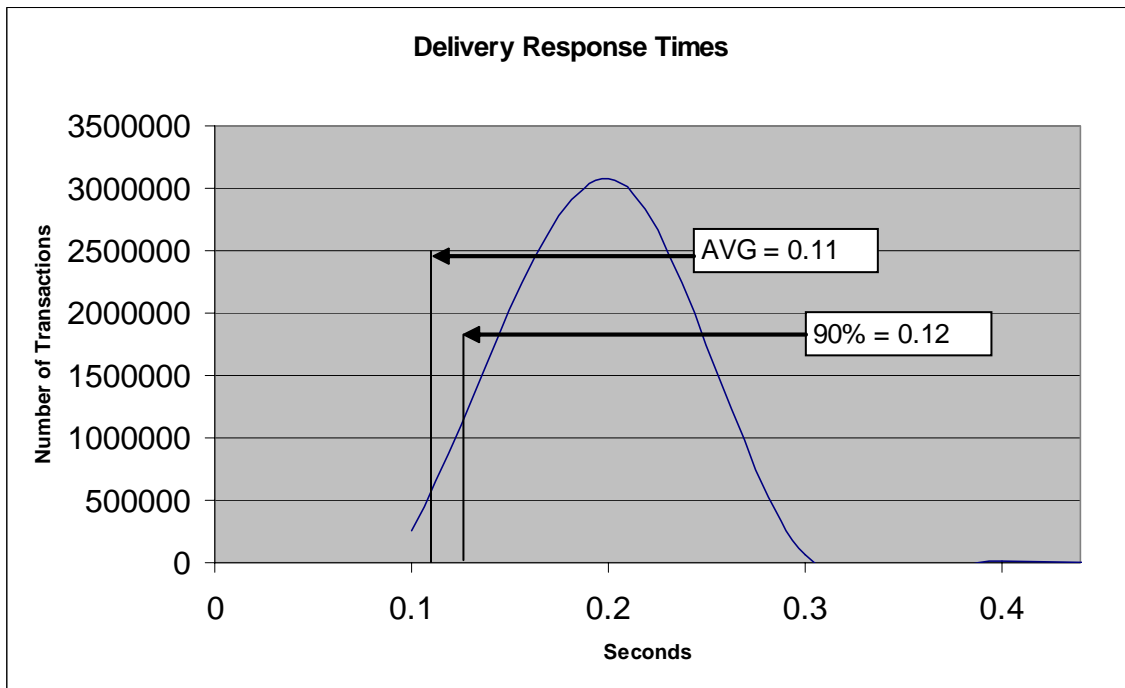


Figure 7. Stock Level Response Time Distribution

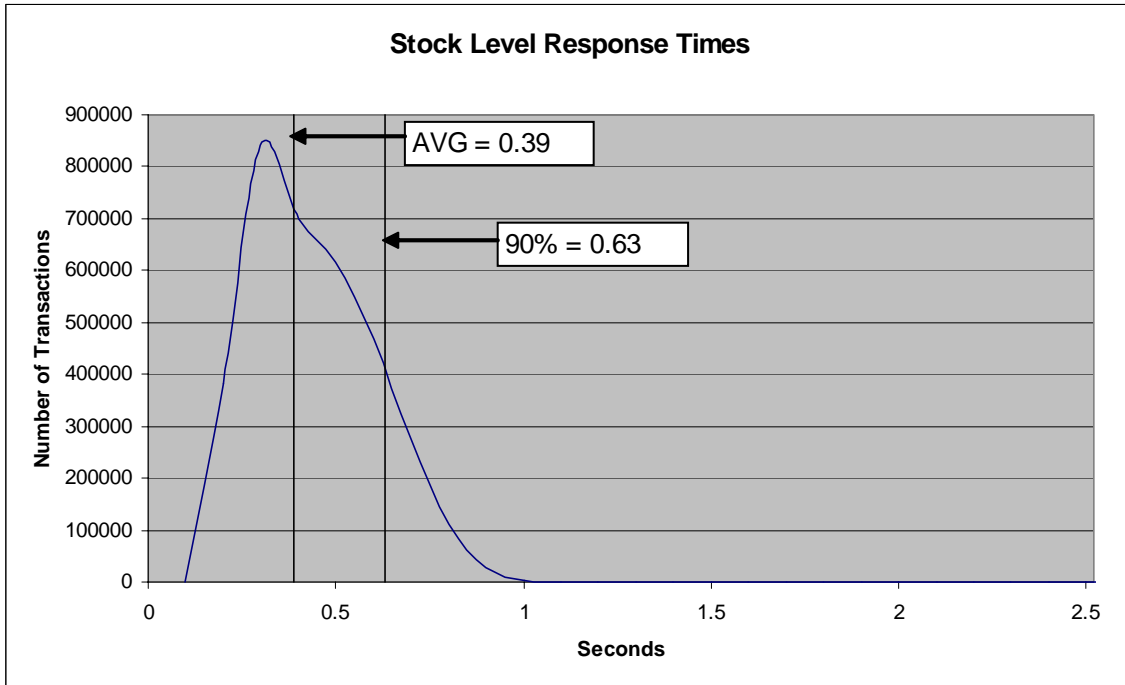


Figure 8. Response Time vs. Throughput

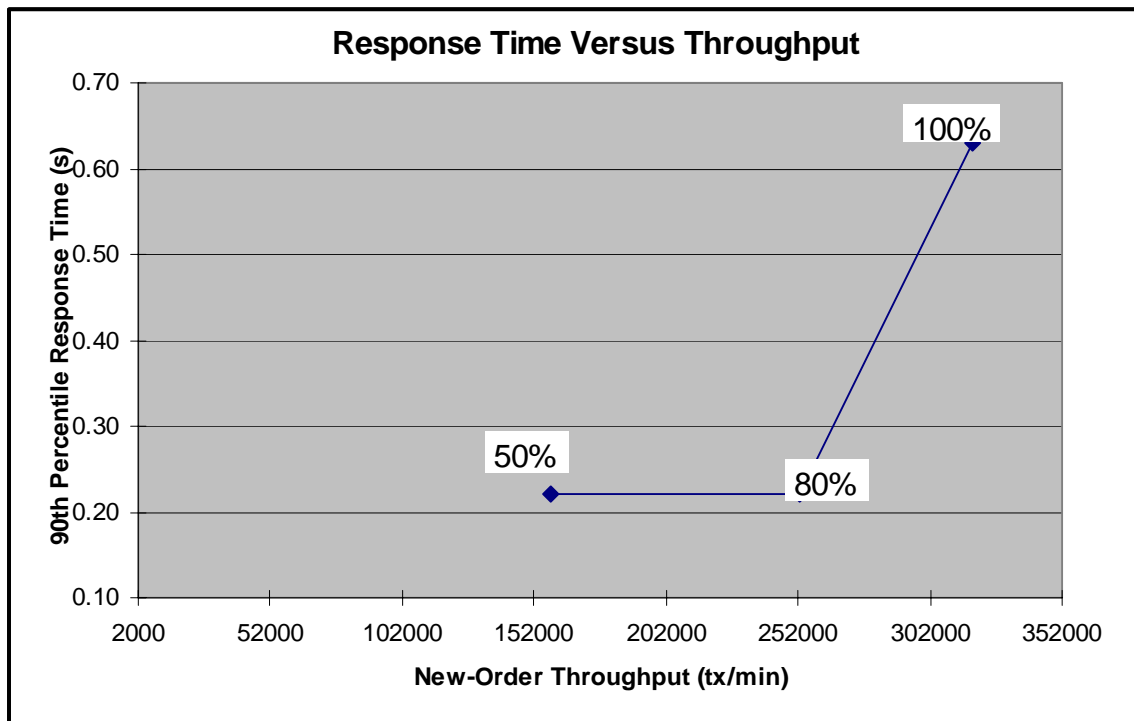


Figure 9. New Order Think Time Distribution


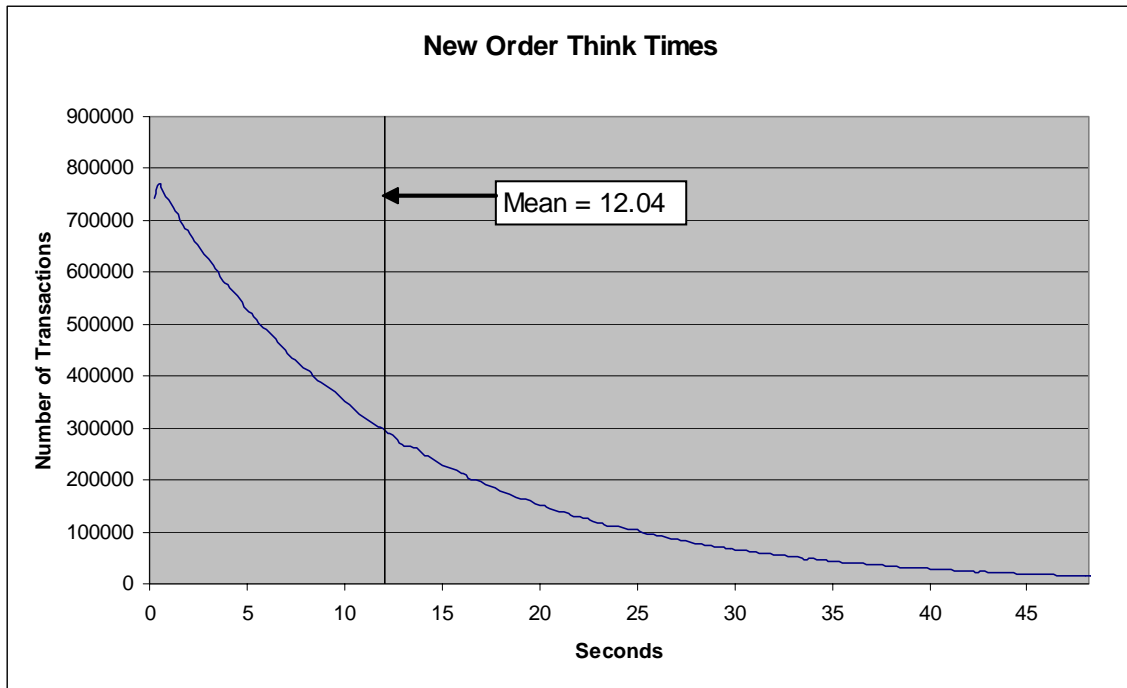


Figure 10. Throughput vs. Time Distribution

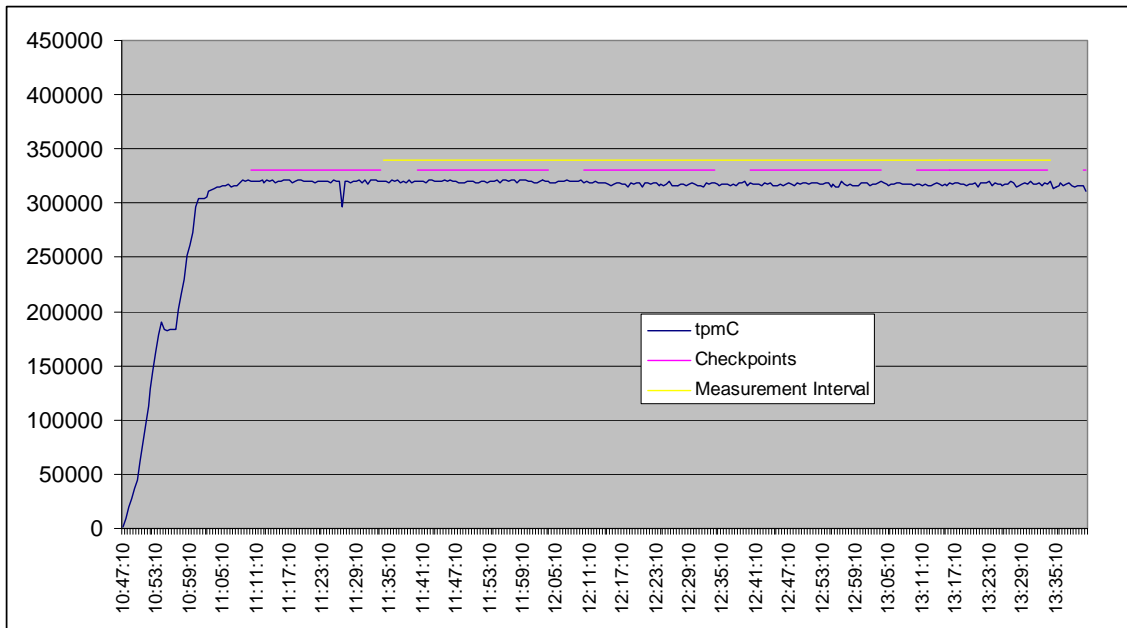

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	84.99%
	Remote warehouse payments	15.01%
	Accessed by last name	60.01%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	59.99%
Transaction Mix	New Order	44.95%
	Payment	43.01%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.03%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 24 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 24 minutes. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
11:39:53.64 pm	24 minutes
12:09:50.60 pm	24 minutes
12:39:47.60 pm	24 minutes
13:09:44.60 pm	24 minutes

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 8 HP ProLiant servers. These driver machines emulated the users' web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 12 driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- **Maximum Qualified Throughput** **318,407tpmC**
- **Price per tpmC** **USD \$1.88 per tpmC**
- **Availability** **April 19, 2007**

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 12 Microsoft Windows Server 2003 Standard Edition
- 1 Microsoft Windows Server 2003 Enterprise x64 Edition (SP1)
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) (SP1)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
PO Box 984
Klamath CA 95548
(phone) 707-482-0523
(fax) 707-482-0575
e-mail: lornaL@perfmetrics.com

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC
Presidio of San Francisco
Building 572B Ruger St. (surface)
P.O. Box 29920 (mail)
San Francisco, CA 94129-0920

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



October 19, 2006

Mr. Brean Campbell
 Hewlett-Packard Company
 20555 SH 249
 Houston, TX 77077

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant ML570 G4
 Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition
 Operating System: Microsoft Windows 2003 Server Enterprise X64 Edition
 Transaction Monitor: COM+

System Under Test: HP ProLiant DL585 G1 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 Intel EM64T @3.4GHz	Main: 64 GB	800 @36GB 16 @ 72GB 2 @ 36GB (os)	0.63	318,407
12 clients: DL360G4 each with:				
1 Intel Xeon @3.6 GHz	Main: 1 GB	1 @ 36GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 25,600 warehouses, of which 25,416 were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Data loss durability was demonstrated on a subset of the SUT configured with a database properly populated for 2,544 warehouses.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.

- The controller cache for the log disks was enabled and mirrored.
- The steady state portion of the test was 120 minutes.
- One checkpoint was taken in steady state before the measured interval opened.
- Four checkpoints were completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.
- Client pricing was verified to be compliant with all requirements for substitution.

Auditor Notes:

None.

Sincerely,

A handwritten signature in cursive script that reads "Lorna Livingtree".

Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

dlldata.c

```
*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file
compile.

To completely reconstruct this file, delete it and
rerun MIDL
on all the IDL files in this DLL, specifying this
file for the
/dlldata command line option

*****
****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */
```

error.h

```
/* FILE: ERROR.H Microsoft
* TPC-C Kit Ver. 4.20.000 Copyright
* Microsoft, 1999 All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
* PURPOSE: Header file for error exception
classes.
* Change history:
* 4.20.000 - updated rev number to
match kit
* 4.21.000 - fixed bug: ~CBaseErr
needed to be declared virtual
*/

#pragma once

#ifndef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError;
    char szMsg[256];
    //message to sent to browser
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL = 1,
    ERR_WARNING_LEVEL = 2,
    ERR_INFORMATION_LEVEL = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC -1
//logic error in program; internal error
#define ERR_SUCCESS 0
//success (a non-error error)
#define ERR_BAD_ITEM_ID 1
//expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST 2
//expected delivery post failed
```

```
#define ERR_TYPE_WEBDLL 3
//tpcc web generated error
#define ERR_TYPE_SQL 4
//sql server generated error
#define ERR_TYPE_DBLIB 5
//dblib generated error
#define ERR_TYPE_ODBC 6
//odbc generated error
#define ERR_TYPE_SOCKET 7
//error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK 8
//dblib and odbc only deadlock condition
#define ERR_TYPE_COM 9
//error from COM call
#define ERR_TYPE_TUXEDO 10
//tuxedo error
#define ERR_TYPE_OS 11
//operating system error
#define ERR_TYPE_MEMORY 12
//memory allocation error
#define ERR_TYPE_TPCC_ODBC 13
//error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB 14
//error from tpcc dblib txn module
#define ERR_TYPE_DELIISRV 15
//delivery server error
#define ERR_TYPE_TXNLOG 16
//txn log error
#define ERR_TYPE_BCCONN 17
//Benchcraft connection class
#define ERR_TYPE_TPCC_CONN 18
//Benchcraft connection class
#define ERR_TYPE_ENCINA 19
//Encina error
#define ERR_TYPE_COMPONENT 20
//error from COM component
#define ERR_TYPE_RTE 21
//Benchcraft rte
#define ERR_TYPE_AUTOMATION 22
//Benchcraft automation errors
```

```

#define ERR_TYPE_DRIVER                23
        //Driver engine errors
#define ERR_TYPE_RTE_BASE              24
        //Framework errors
#define ERR_BUF_OVERFLOW              25
        //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP            26
        //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB                27
        //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB           28
        //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN            50
        //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML            51
        //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER            52
        //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE        53
#define ERR_TYPE_TPCW_ENG_OS          54
#define ERR_TYPE_HTML_RESP            55
#define ERR_TYPE_TPCW_ODBC            56
#define ERR_TYPE_SCHANNEL             57
#define ERR_TYPE_THINK_LIST           58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE          59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN            60
        //TPC-E pipe connection errors
#define ERR_TYPE_TPCE_RTE             61
        //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE        62
        //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS          63
        //Tpce Driver engine system errors
// #define ERR_TYPE_TPCE_MEE_ENG_BASE 64
// Tpce MEE Driver engine errors
// #define ERR_TYPE_TPCE_MEE_ENG_OS 65
// Tpce MEE Driver engine system errors

```

```

#define ERR_INS_MEMORY                "Insufficient Memory to continue."
#define ERR_UNKNOWN                   "Unknown error."
#define ERR_MSG_BUF_SIZE              512
#define INV_ERROR_CODE                -1
#define ERR_INS_BUF_OVERFLOW          "Insufficient Buffer size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg =
GetLastError(); //take the error code
immediately before it is reset by other functions

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new
char[m_szApp_size];

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new
char[m_szApp_size];

```

```

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];

        if (szStr)
            j = wsprintf(szTmp,
"%s\n",szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }

    virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
    virtual char *ErrorTypeStr() = 0; // text
representation of the error type
    virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error
    virtual int ErrorAction() { return eNone; }
    // the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where
the error occurred
    int m_idMsg;

    //short m_errType;
};

class CSocketErr : public CBaseErr
{

```

```

public:
enum Action
{
    eNone = 0,
    eSend,
    eSocket,
    eBind,
    eConnect,
    eListen,
    eHost,
    eRecv,
    eGetHostByName,
    eWSACreateEvent,
    eWSASend,
    eWSAGetOverlappedResult,
    eWSARecv,
    eWSAWaitForMultipleEvents,
    eWSAStartup,
    eWSAResetEvent,
    eWSAEnumNetworkEvents,
    eWSAEventSelect,
    eSelect,
    eAccept,
    eNonRetryable
};

CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

~CSocketErr()
{
    if (m_szErrorText != NULL)
        delete []
m_szErrorText;
};

Action m_eAction;
char *m_szErrorText;

int ErrorType() { return
ERR_TYPE_SOCKET;};
char* ErrorTypeStr() { return "SOCKET";
}
char* ErrorText(void);
int ErrorAction() { return
(int)m_eAction; }
};

class CSystemErr : public CBaseErr
{
public:
enum Action
{
    eNone = 0,
    eTransactNamedPipe,
    eWaitNamedPipe,
    eSetNamedPipeHandleState,
    eCreateFile,
    eCreateProcess,
    eCallNamedPipe,
    eCreateEvent,
    eCreateThread,

```

```

eVirtualAlloc,
eReadFile = 10,
eWriteFile,
eMapViewOfFile,
eCreateFileMapping,
eInitializeSecurityDescriptor,
eSetSecurityDescriptorDacl,
eCreateNamedPipe,
eConnectNamedPipe,
eWaitForSingleObject,
eRegOpenKeyEx,
eRegQueryValueEx = 20,
eBeginThread,
eRegEnumValue,
eRegSetValueEx,
eRegCreateKeyEx,
eWaitForMultipleObjects,
eRegisterClassEx,
eCreateWindow,
eCreateSemaphore,
eReleaseSemaphore,
eFSeek,
eFRead,
eFWrite,
eTmpFile,
eSetFilePointer,
eNew,
eCloseHandle,
eGetOverlappedResult
};

CSystemErr(Action
eAction, LPCTSTR szLocation);
CSystemErr(int iError,
Action eAction, LPCTSTR szLocation);
int ErrorType() { return
ERR_TYPE_OS;};
char* ErrorTypeStr() { return "SYSTEM";
}
char *ErrorText(void);
int ErrorAction() { return
(int)m_eAction; }
void Draw(HWND hwnd, LPCTSTR szStr =
NULL);
Action m_eAction;

private:
char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
CMemoryErr();

int ErrorType() {return
ERR_TYPE_MEMORY;};
char* ErrorTypeStr() { return "OUT OF
MEMORY"; }
char* ErrorText() {return
ERR_INS_MEMORY; }
};

```

```

class CBufferOverflowErr : public CBaseErr
{
public:
CBufferOverflowErr(int,LPCTSTR);

int ErrorType() {return
ERR_BUF_OVERFLOW;};
char* ErrorTypeStr() { return "BUFFER
OVERFLOW"; }
char* ErrorText() {return
ERR_INS_BUF_OVERFLOW;};
};

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
enum Action
{
    LoadProfile = 1,
    LoadSchema,
    ValidateProfile,
    SaveProfile,
    LoadFromXML,
    SaveToXML,
    ApplyProcessingInstruction,
    ApplyAttribute,
    ApplyNode
};

CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
{
    m_eAction = eAction;
    m_eCode = eCode;
    m_bOverload = true;
};

CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
{
    m_eAction = eAction;
    m_eCode = eCode;
    strcpy(m_szMsg, szMsg);
    m_bOverload = false;
};

virtual int
ErrorType() { return
ERR_TYPE_XML_PROFILE;};
virtual char
*ErrorTypeStr() { return "XML PROFILE"; };
virtual char *ErrorText();

virtual int
ErrorCode() { return m_eCode; };
int
ErrorAction() { return (int)m_eAction; }
//virtual void Draw(HWND
hwnd, LPCTSTR szStr = NULL)
//{

```

```

        //      ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //};
    private:
        char
        m_szMsg[ERR_MSG_BUF_SIZE];
        LPCTSTR m_szLoc;
        int      m_eCode;
        bool     m_bOverload;
        Action   m_eAction;
};

```

install.c

```

/*      FILE:      INSTALL.C
 *      Microsoft
TPC-C Kit Ver. 4.51.000
 *      Copyright
 *      Microsoft, 2003
 *      All Rights Reserved
 *      not audited
 *      PURPOSE:  Automated installation
application for TPC-C Web Kit
 *      Contact:  Charles Levine
(clevine@microsoft.com)
 *      Change history:
 *      4.20.000 - added COM installation
steps
 *      4.50.000 - added IIS6 configuration options
 *      4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
 *      to
SystemRoot\System32
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON      hIcon;
HINSTANCE  hInst;

DWORD      versionExeMS;
DWORD      versionExeLS;
DWORD      versionExeMM;
DWORD      versionDllMS;
DWORD      versionDllLS;

```

```

// TPC-C registry settings
TPCCREGISTRYDATA  Reg;

static int  iPoolThreadLimit;
static int  iMaxPoolThreads;
static int  iThreadTimeout;
static int  iListenBackLog;
static int  iAcceptExOutstanding;
static int  iUriEnableCache;
static int  iUriScavengerPeriod;
static int  iMaxConnections;

static int  iIISMajorVersion;
static int  iNumberOfProcessors;

static int  iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; //
last file we worked on (for error reporting)

BOOL  CALLBACK  LicenseDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL  CALLBACK  UpdatedDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL  CALLBACK  MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL  CALLBACK  CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void  ProcessOK(HWND hwnd,
char *szDllPath, char *szWindowsPath);
static void  ReadRegistrySettings(void);
static void  WriteRegistrySettings(char *szDllPath);
static BOOL  RegisterDLL(char
*szFileName);
static int  CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath);
static BOOL  GetInstallPath(char
*szDllPath);
static BOOL  GetWindowsInstallPath(char *szWindowsPath);
static void  GetVersionInfo(char
*szDLLPath, char *szExePath);
static BOOL  CheckWWWWebService(void);
static BOOL  StartWWWWebService(void);
static BOOL  StopWWWWebService(void);
static void  UpdateDialog(HWND
hDlg);
static void  ConfigureIIS6(HWND
hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL  install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

```

```

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE
hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    HGLOBAL      hRes;
    HRSRC        hResInfo;
    BYTE         *pSrc, *pDst;
    DWORD        dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0) );
            PostMessage(hwnd,
WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo );
            pSrc = (BYTE
*)LockResource(hRes);

```

```

        pDst = (unsigned char
*)malloc(dwSize+1);
        if ( pDst )
        {
            memcpy(pDst,
pSrc, dwSize);
            pDst[dwSize]
= 0;

            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
            free(pDst);
        }
        else
        {
            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
            return TRUE;
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL )
                EndDialog(hwnd, FALSE);
            default:
                break;
        }
        return FALSE;
    }

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:

                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
            default:
                break;
        }
        return FALSE;
    }
}

```

```

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char
szDllPath[256];
    static char
szWindowsPath[256];
    static char
szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:

            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);

            if (
GetWindowsInstallPath(szWindowsPath) )
            {
                MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP |
MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections =
100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.eDB_Protocol =
ODBC;
            Reg.eTxnMon = None;
            strcpy(Reg.szDbServer,
"");
            strcpy(Reg.szDbName,
"tpcc");
            strcpy(Reg.szDbUser,
"sa");

```

```

            strcpy(Reg.szDbPassword,
"");
            iPoolThreadLimit =
iMaxPhysicalMemory * 2;
            iThreadTimeout = 86400;
            iListenBackLog = 15;
            iAcceptExOutstanding =
40;

            ReadTPCCRegistrySettings( &Reg );
            ReadRegistrySettings();

            // copy the hardware
information to the SYSTEM_INFO structure
            GetSystemInfo(&siSysInfo);
            // store the number of
processors on this system
            iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

            GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
            GetVersionInfo(szDllPath, szExePath);

            wsprintf(szTmp,
"Version %d.%2d.%3d", versionExeMS, versionExeMM,
versionExeLS);
            SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
            SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
            SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
            SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
            SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
            SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
            SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
            SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

```



```

// check OS version
level for COM. Must be at least Windows 2000
= sizeof(VI);
5)
    GetVersionEx( &VI );
    if (VI.dwMajorVersion <
    {
        HWND hDlg =
    GetDlgItem( hwnd, IDC_TM_MTS );
    hDlg, 0 ); // disable COM option
    if
    (Reg.eTxnMon == COM)
        Reg.eTxnMon = None;
    }
    CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
    CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
    switch (Reg.eTxnMon)
    {
    case None:
        CheckDlgButton(hwnd, IDC_TM_NONE, 1);
        break;
    case COM:
        CheckDlgButton(hwnd, IDC_TM_MTS, 1);
        break;
    }
    return TRUE;
    case WM_PAINT:
        if ( IsIconic(hwnd) )
        {
            BeginPaint(hwnd, &ps);
            DrawIcon(ps.hdc, 0, 0, hIcon);
            EndPaint(hwnd, &ps);
            return TRUE;
        }
        break;
    case WM_COMMAND:
        if ( HIWORD(wParam) ==
BN_CLICKED )
        {
            LOWORD(wParam) )
            switch(
            {
            case IDOK:
                ProcessOK(hwnd, szDllPath, szWindowsPath);
                return TRUE;
            case IDCANCEL:

```

```

EndDialog(hwnd, FALSE);
return TRUE;
default:
return FALSE;
}
}
default: break;
default: break;
}
return FALSE;
}
static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
    int d;
    HWND hDlg;
    int rc;
    BOOL bSvcRunning;
    char szFullName[256];
    char szErrMsg[128];
    // Check whether Service Pack 1 has been
    installed if
    // running on Windows Server 2003. The RTM
    version has
    // a limitation on the number of concurrent
    HTTP connections.
    //
    OSVERSIONINFOEX VersionInfo;
    VersionInfo.dwOSVersionInfoSize =
    sizeof(OSVERSIONINFOEX);
    if
    (GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
    {
        if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
        VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
        VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
        {
            TCHAR szMsg[256];
            _sntprintf(szMsg,
sizeof(szMsg),
            "Warning:
running on Windows Server 2003 without at least
Service Pack 1\n"
            "limits the
number of concurrent HTTP connections to around
8000.");

```

```

MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}
// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);
GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));
if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE)
)
    Reg.eTxnMon = None;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
    Reg.eTxnMon = COM;
    iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
    iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
    iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
    iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);
    ShowWindow(hwnd, SW_HIDE);
    hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
    ShowWindow(hDlg, SW_SHOWNA);
    UpdateDialog(hDlg);
    // check to see if the web services are
    running
    bSvcRunning = CheckWWWWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
        StopWWWWebService();
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }
}

```

```

// write binaries to inetpub\wwwroot
rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s)
occured when creating " );
    strcat( szErrTxt, szLastFileName
);
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// while we have the web services shutdown,
check to see if this
// is IIS6. If it is, then call
ConfigureIIS6
if ( iIISMajorVersion == 6)
{
    ConfigureIIS6(hwnd, hDlg);
}

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    StartWWWebService();
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred
when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// if using COM
if (Reg.eTxnMon == COM)

```

```

{
    SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    if (install_com(szDllPath))
    {
        ShowWindow(hwnd,
SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt,
"Error occurred when configuring COM settings." );
        MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

Sleep(100);

ShowWindow(hwnd, SW_SHOWNA);
DestroyWindow(hDlg);

EndDialog(hwnd, rc);
return;
}

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD   size;
    DWORD   type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion )
                iIISMajorVersion = 5;
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        if ( iIISMajorVersion == 6)
        {
            // since IIS6 handles
the pool thread parameters differently, we need to
fill in the dialog
            // with the
MaxPoolThreads rather than PoolThreadLimit

```

```

// for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
    size = sizeof(iPoolThreadLimit);
    if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
        if ( !iPoolThreadLimit )
            iPoolThreadLimit = iMaxPhysicalMemory * 2;
        else
        {
            size =
sizeof(iPoolThreadLimit);
            if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                if ( !iPoolThreadLimit )
                    iPoolThreadLimit = iMaxPhysicalMemory * 2;
        }

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
        {
            size =
sizeof(iAcceptExOutstanding);
            if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
                if (
!iAcceptExOutstanding )
                    iAcceptExOutstanding = 40;

            RegCloseKey(hKey);
        }
        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\HTTP\\Parameter
s", 0, KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

    {
        size = sizeof(iUriEnableCache);
        if ( RegQueryValueEx(hKey,
"UriEnableCache", 0, &type, (char *)&iUriEnableCache,
&size) == ERROR_SUCCESS )
            if ( !iUriEnableCache )

                iUriEnableCache = 0;

        size =
sizeof(iUriScavengerPeriod);
        if ( RegQueryValueEx(hKey,
"UriScavengerPeriod", 0, &type, (char
*)&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
            if (
!iUriScavengerPeriod )

                iUriScavengerPeriod = 10800;

        size = sizeof(iMaxConnections);
        if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (char *)&iMaxConnections,
&size) == ERROR_SUCCESS )
            if ( !iMaxConnections )

                iMaxConnections = 100000;

        RegCloseKey(hKey);
    }

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char

```

```

*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        // if this is IIS6, then we need
to treat the PoolThreadLimit differently
        // if IIS6, then PoolThreadLimit
is the maximum number of threads for the entire
system.
        // IIS6 added MaxPoolThreads
which controls the number of threads per processor.
For IIS6
        // we will set MaxPoolThreads to
the value the user provided in the dialog and then
set
        // PoolThreadLimit to
MaxPoolThreads * number of processors on this system
        if ( iIISMajorVersion == 6 )
        {
            iMaxPoolThreads =
iPoolThreadLimit;
            iPoolThreadLimit =
iMaxPoolThreads * iNumberOfProcessors;
            RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
            RegSetValueEx(hKey,
"MaxPoolThreads", 0, REG_DWORD, (char
*)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
        }
        else

```

```

    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
    }

    RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));
    RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramet
rs", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;

}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKEPARAM(0, 13));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC    lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
    if ( lpDllEntryPoint != NULL )
    {

```

```

        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE          hFile;
    DWORD           dwSize;
    BYTE            *pSrc;
    DWORD           d;
    char            szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo);
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC_DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
}

```

```

UpdateDialog(hDlg);

// install MSVCR71.DLL
strcpy( szLastFileName, "msvcr71.dll" );
if (!FileFromResource( "MSVCR71",
IDR_MSVCR71, szWindowsPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb"
);
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll"
);
if (!FileFromResource( "COM_PS_DLL",
IDR_COMPS_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll"
);
if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
}

```

```

    return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
// IIS default web site directory and
determine that IIS is installed.

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath,
szData);
            len =
strlen(szDllPath);
            if ( szDllPath[len-1]
:= '\\')
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
            RegCloseKey(hKey);
        }
        return bRc;
    }

static BOOL GetWindowsInstallPath(char
*szWindowsPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;
}

```

```

// Registry key
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
NT\CurrentVersion\SystemRoot is used to find the
// system root to install the VC70 DLL.

szWindowsPath[0] = 0;
bRc = TRUE;
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szWindowsPath,
szData);
        len =
strlen(szWindowsPath);
        if ( szWindowsPath[len-
1] != '\\' )
        {
            szWindowsPath[len] = '\\';
            szWindowsPath[len+1] = 0;
        }
        // now append the path
        strcat(szWindowsPath,
to SYSTEM32
"SYSTEM32\");
    }
    RegCloseKey(hKey);
}
return bRc;
}
static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD
    DWORD
    dwSize;
    DWORD
    dwBytes;
    char
    *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char
*)malloc(dwSize);

```

```

        GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
        VerQueryValue(ptr,
"\\",&vs, &dwBytes);
        versionDllMS = vs-
>dwProductVersionMS;
        versionDllLS = vs-
>dwProductVersionLS;
        free(ptr);
    }
}
    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs,
&dwBytes);
        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}
static BOOL CheckWWWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
}

```

```

return TRUE;
ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}
static BOOL StartWWWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD
    dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWebErr;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWebErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint) //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StartWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}
static BOOL StopWWWebService(void)

```

```

{
    SC_HANDLE      schSCManager;
    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;
    DWORD          dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
    SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWWebErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWWebErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {
        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint) //Break if
    the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

```

```

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int      irc;
    char     szErrTxt[128];
    FILE     *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6...");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
    configuration error." );
        strcat( szErrTxt, "Check
    iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

```

install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1      101
#define IDI_ICON1       102
#define IDR_TPCCDLL     103
#define IDD_DIALOG2     105
#define IDI_ICON2       106
#define IDR_DELIVERY    107
#define IDD_DIALOG3     108

```

```

#define BN_LOG          1001
#define ED_KEEP         1002
#define ED_THREADS     1003
#define ED_THREADS2    1004
#define IDC_PATH       1007
#define IDC_VERSION    1009
#define IDC_RESULTS    1010
#define IDC_PROGRESS1  1011
#define IDC_STATUS     1012
#define IDC_BUTTON1    1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_ODBC       1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

```

```

// Next default values for new objects
//

```

install.rc

```

// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

```

```

#if !defined(APX_RESOURCE_DLL) ||
defined(APX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////
////////////////////////////////////
//
// Dialog
//

IDD_DIALOG1 DIALOGEX 0, 0, 219, 324
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT          ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
        WS_EX_RTLEADING

    EDITTEXT
ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
        WS_EX_RTLEADING

    EDITTEXT
ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
        WS_EX_RTLEADING

    CONTROL
"None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
        WS_GROUP |
WS_TABSTOP, 43, 104, 33, 10

    CONTROL
"COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
        WS_TABSTOP, 94, 104, 32, 10

    EDITTEXT
ED_DB_SERVER, 131, 145, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_USER_ID, 131, 158, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_PASSWORD, 131, 171, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_NAME, 131, 184, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_IIS_MAX_THREAD_POOL_LIMIT, 164, 226, 34, 12, ES_RIGHT |
        ES_NUMBER, WS_EX_RTLEADING

    EDITTEXT
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, 164, 240, 34, 12, ES_RI
GHT |
        ES_NUMBER, WS_EX_RTLEADING

    EDITTEXT
ED_IIS_THREAD_TIMEOUT, 164, 254, 34, 12, ES_RIGHT |
ES_NUMBER,
        WS_EX_RTLEADING

    EDITTEXT
ED_IIS_LISTEN_BACKLOG, 164, 268, 34, 12, ES_RIGHT |
ES_NUMBER,
        WS_EX_RTLEADING

    DEFPUSHBUTTON    "OK", IDOK, 53, 296, 50, 14
    PUSHBUTTON      "Cancel", IDCANCEL, 119, 296, 50, 14
    EDITTEXT
IDC_PATH, 106, 26, 91, 13, ES_AUTOHSCROLL | ES_READONLY

```

```

LTEXT          "Number of Delivery
Threads:", IDC_STATIC, 35, 45, 115, 12
LTEXT          "Max Number of
Connections:", IDC_STATIC, 35, 73, 115, 12
RTEXT          "Version
4.11", IDC_VERSION, 120, 4, 89, 9
LTEXT          "IIS Max Thread Pool
Limit:", IDC_STATIC, 36, 226, 115, 12
LTEXT          "Web Service Backlog Queue
Size:", IDC_STATIC, 36, 240, 115,
12
LTEXT          "IIS Thread Timeout
(seconds):", IDC_STATIC, 36, 254, 115, 12
LTEXT          "IIS Listen
Backlog:", IDC_STATIC, 36, 270, 115, 10
LTEXT          "Installation
directory:", IDC_STATIC, 35, 29, 71, 10
GROUPBOX      "Transaction
Monitor", IDC_STATIC, 33, 90, 165, 33
LTEXT          "Server
Name:", IDC_STATIC, 35, 148, 56, 8
LTEXT          "User ID:", IDC_STATIC, 35, 161, 60, 8
LTEXT          "User
Password:", IDC_STATIC, 35, 174, 83, 8
LTEXT          "Database
Name:", IDC_STATIC, 35, 187, 54, 8
GROUPBOX      "SQL Server Connection
Properties", IDC_STATIC, 22, 132, 187,
74
GROUPBOX      "Web Client
Properties", IDC_STATIC, 22, 15, 187, 113
GROUPBOX      "IIS
Settings", IDC_STATIC, 22, 210, 187, 79
LTEXT          "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETFOREGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON    "OK", IDOK, 33, 45, 50, 9
    CTEXT           "HTML TPC-C Installation
Successful", IDC_RESULTS, 7, 22,
102, 18, 0, WS_EX_CLIENTEDGE

    ICON
IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
"Progress1", IDC_PROGRESS1, "msctl1_progress32", WS_BORD
ER,

```

```

7, 20, 77, 13

CTEXT
"Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
|
        ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON    "I & Agree", IDOK, 87, 181, 50, 14
    PUSHBUTTON      "&Cancel", IDCANCEL, 153, 181, 50, 14
END

////////////////////////////////////
////////////////////////////////////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END

```

```

        END
    END
    #endif // APSTUDIO_INVOKED

    #ifdef APSTUDIO_INVOKED
    //////////////////////////////////////
    //////////////////////////////////////
    //////////////////////////////////////
    //
    // TEXTINCLUDE
    //
    1 TEXTINCLUDE
    BEGIN
        "resource.h\0"
    END

    2 TEXTINCLUDE
    BEGIN
        "#include "afxres.h"\r\n"
        "\0"
    END

    3 TEXTINCLUDE
    BEGIN
        "\r\n"
        "\0"
    END

    #endif // APSTUDIO_INVOKED

    //////////////////////////////////////
    //////////////////////////////////////
    //
    // Icon
    //
    // Icon with lowest ID value placed first to ensure
    // application icon
    // remains consistent on all systems.
    IDI_ICON1 ICON
    "icon1.ico"
    IDI_ICON2 ICON
    "icon2.ico"

    //////////////////////////////////////
    //////////////////////////////////////
    //
    // TPCCDLL
    //
    IDR_TPCCDLL TPCCDLL
    "..\..\isapi_dll\bin\tpcc.dll"

    //////////////////////////////////////
    //////////////////////////////////////
    //
    // Version
    //
    VS_VERSION_INFO VERSIONINFO
    FILEVERSION 0,4,50,0

```

```

PRODUCTVERSION 0,4,50,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client"
        END
    END
    Installer"
        VALUE "CompanyName", "Microsoft"
        VALUE "FileDescription", "install"
        VALUE "FileVersion", "0, 4, 20, 0"
        VALUE "InternalName", "install"
        VALUE "LegalCopyright", "Copyright ©
1999"
        VALUE "OriginalFilename", "install.exe"
        VALUE "ProductName", "Microsoft install"
        VALUE "ProductVersion", "0, 4, 20, 0"
    END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

////////////////////////////////////
////////////////////////////////////
//
// LICENSE
//
IDR_LICENSE1 LICENSE
"license.txt"

////////////////////////////////////
////////////////////////////////////
//
// ODBC_DLL
//
IDR_ODBC_DLL ODBC_DLL
"..\..\db_odbc_dll\bin\Release\tpcc_odbc.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_DLL
//
IDR_COM_DLL COM_DLL
"..\..\tm_com_dll\bin\tpcc_com.dll"

```

```

////////////////////////////////////
////////////////////////////////////
//
// COM_PS_DLL
//
IDR_COMPS_DLL COM_PS_DLL
"..\..\tpcc_com_ps\bin\tpcc_com_ps.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_ALL_DLL
//
IDR_COMALL_DLL COM_ALL_DLL
"..\..\tpcc_com_all\bin\tpcc_com_all.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL COM_TYPLIB
"..\..\tpcc_com_all\src\tpcc_com_all.tlb"

////////////////////////////////////
////////////////////////////////////
//
// MSVCRT71
//
IDR_MSVCRT71 MSVCRT71
"C:\WINDOWS\system32\msvcr71.dll"
#endif // English (U.S.) resources
////////////////////////////////////
////////////////////////////////////

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
////////////////////////////////////
#endif // not APSTUDIO_INVOKED

-----
install_com.cp
p
-----
/* FILE: INSTALL_COM.CPP
* Microsoft
TPC-C Kit Ver. 4.51.000

```



```

*                                     Copyright
Microsoft, 1999
*                                     All Rights Reserved
*
*                                     not audited
*
* PURPOSE: installation code for COM
application for TPC-C Web Kit
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection*
pCatalogCollectionMethod = NULL;

    ICatalogObject*
pCatalogObjectApp = NULL;
    ICatalogObject*
pCatalogObjectCo = NULL;
    ICatalogObject*
pCatalogObjectItf = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

```

```

HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
                NULL,
                CLSCTX_INPROC_SERVER,
                IID_ICOMAdminCatalog,
                (void**)
&pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in
the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
                                    (IDispatch**)
&pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications"
collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp-
>get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete
existing "TPC-C" application (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)
&pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp-
>get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-
C"))
        {
            lCount--;
            continue;
        }
        else
        {
            hr =
pCatalogCollectionApp->Remove(lCount - 1);
            if (!SUCCEEDED(hr))
goto Error;

            break;
        }
    }

```

```

    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    // add the new application
    hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    // set properties
    bstrTemp = "Name";
    vTmp = "TPC-C";
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // set as a library (in process)
application
    bstrTemp = "Activation";
    lActProp = COMAdminActivationInproc;
    vTmp = lActProp;
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // set security level to process
    bstrTemp = "AccessChecksLevel";
    lActProp =
COMAdminAccessChecksApplicationLevel;
    vTmp = lActProp;
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the Components
collection later
    hr = pCatalogObjectApp->get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    // save changes (app creation) so component
installation will work
    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogObjectApp->Release();
    pCatalogObjectApp = NULL;

    bstrTemp = "TPC-C";
    // app name
    bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
    bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
    bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll"; // proxy/stub dll

    hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
bstrTemp2,

```

```

bstrTemp3,

bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in
application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)
&pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;

    // used for debugging (view the
name)
    hr = pCatalogObjectCo-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructionEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructorString";
    bstrTemp2 = "dummy string (do not
remove)";
    vTmp = bstrTemp2;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"JustInTimeActivation";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "MaxPoolSize";

```

```

vTmp.Clear(); // clear
variant so it isn't stored as a bool (_variant_t
feature)

vTmp = (long)30;
hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp =
"ObjectPoolingEnabled";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the
InterfacesForComponent collection
hr = pCatalogObjectCo-
>get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp =
"InterfacesForComponent";
hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionItf);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionItf-
>Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
if (!SUCCEEDED(hr)) goto Error;

// iterate through interfaces in
component
while (lCountItf > 0)
{
    hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**) &pCatalogObjectItf);
    if (!SUCCEEDED(hr))
goto Error;

    // save key to get the
MethodsForInterface collection
    hr = pCatalogObjectItf-
>get_Key(&vKey);
    if (!SUCCEEDED(hr))
goto Error;

    bstrTemp =
"MethodsForInterface";
    hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionMethod);
    if (!SUCCEEDED(hr))
goto Error;

```

```

hr =
pCatalogCollectionMethod->Populate();
if (!SUCCEEDED(hr))
goto Error;

hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
if (!SUCCEEDED(hr))
goto Error;

// iterate through
methods of interface
while (lCountMethod >
0)
{
    hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**) &pCatalogObjectMethod);
    if
(!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"AutoComplete";
    bTmp = TRUE;
    vTmp = bTmp;
    hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
    if
(!SUCCEEDED(hr)) goto Error;

    pCatalogObjectMethod->Release();
    pCatalogObjectMethod = NULL;

    lCountMethod-
}

// save changes
hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
if (!SUCCEEDED(hr))
goto Error;

pCatalogObjectItf-
>Release();
pCatalogObjectItf =
NULL;

lCountItf--;
}

pCatalogObjectCo->Release();
pCatalogObjectCo = NULL;

lCountCo--;
}

```

```

// save changes
hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

Error:
CoUninitialize();

if (!SUCCEEDED(hr))
{
    LPTSTR lpBuf;
    DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
                NULL,
                hr,
                MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
                (LPTSTR)
&lpBuf,
                0,
                NULL);
//          _tprintf(__T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
    return TRUE;
}
else
    return FALSE;
}

```

license.txt

END-USER LICENSE AGREEMENT FOR
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may

include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:
Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.
--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.
--You may not distribute copies of the SOFTWARE PRODUCT to third parties.
--You may not rent, lease or lend the SOFTWARE PRODUCT.
--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.
-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the

SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS. The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS. You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS
This EULA is governed by the laws of the State of Washington, U.S.A.
Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:
Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis @ comme tels sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage

particulier. Le risque total d, coulant de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS. Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'existence de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer ... votre pays. La présente Convention est régie par les lois de la province d'Ontario, Canada.

Chacune des parties ... la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent ... instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire ...: Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

Methods.h

/* FILE: METHODS.H

```

Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
* audited
*
* PURPOSE: Header file for COM components.
*
* Change history:
* 4.20.000 - first version
*/

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL,
    ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR
Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CCOMPONENT_ERR(COMPONENT_ERROR
Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail !=
NULL)
            delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
            delete []
m_szErrorText;
    };

    COMPONENT_ERROR m_Error;

```

```

        char
        *m_szTextDetail;
        char
        *m_szErrorText;
        DWORD
        m_SystemErr;

        int ErrorType() {return
ERR_TYPE_COMPONENT;};
        char *ErrorTypeStr() { return
"COMPONENT"; }
        int ErrorNum() {return m_Error;};
        char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
    public ITPCC,
    public IObjectControl,
    public IObjectConstruct,
    public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IObjectControl)
    COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IObjectControl
    STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; }
    // we don't support COM Services
    transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /*
nothing to do */ }

```

```

// IObjectConstruct
    STDMETHODIMP Construct(IDispatch * pUnk);

// helper methods
private:
    BOOL                m_bCanBePooled;
    CTPCC_BASE         *m_pTxn;

    struct COM_DATA
    {
        int retval;
        int error;
        union
        {
            NewOrder;
            Payment;
            Delivery;
            StockLevel;
            OrderStatus;
        } u;
    };
};

////////////////////////////////////
////////////////////////////////////
// CTPCC
class CTPCC :
    public CTPCC_Common,
    public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};

////////////////////////////////////
////////////////////////////////////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)

```

```

// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
// HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

////////////////////////////////////
////////////////////////////////////
// COrderStatus
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    // COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
    // HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

////////////////////////////////////
////////////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
&CLSID_Payment>

```

```

{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// CStockLevel
class CStockLevel :
public CTPCC_Common,
public CComCoClass<CStockLevel,
&CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

ReadRegistry. cpp

```

/* FILE: READREGISTRY.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. There parameters are
* under the TPCC key.
*
* RETURNS FALSE = no errors
TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
HKEY hKey;
DWORD size;
DWORD type;
DWORD dwTmp;
char szTmp[256];

if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
return TRUE;

// determine database protocol to use;
always has to be ODBC
pReg->eDB_Protocol = ODBC;
size = sizeof(szTmp);
//if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
//{
//if ( !strcmp(szTmp,
szDBNames[ODBC]) )
// pReg->eDB_Protocol =
ODBC;
//}

pReg->eTxnMon = None;

```

```

// determine txn monitor to use; may be
either COM, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
if ( !strcmp(szTmp, "YES") )
pReg->bCOM_SinglePool =
TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
&& (type == REG_DWORD) )
pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
&& (type == REG_DWORD) )
pReg->dwMaxPendingDeliveries =
dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
&& (type == REG_DWORD) )
pReg->dwNumberOfDeliveryThreads =
dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS )
pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )
pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );

```

```

        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) !=
ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) !=
ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) !=
ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueEx(hKey, L"SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) !=
ERROR_SUCCESS )
            pReg->szSPPrefix[0] = L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->bCallNoDuplicatesNewOrder =
dwTmp;

        RegCloseKey(hKey);

    return FALSE;
}

```

ReadRegistry.h

```

/*      FILE:      ReadRegistry.h
*
*      Microsoft
TPC-C Kit Ver. 4.20.000
*
*      Copyright
Microsoft, 1999
*
*      All Rights Reserved
*
*
*      not audited
*
*      PURPOSE:  Header for registry related code.
*
*      Change history:
*
*      4.20.000 - first version
*/

```

```

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMN { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMN eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odbc.dll stored procedures prefix
    DWORD dwConnectDelay; // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder; //
whether to check for non-duplicate item ids and call
a different New Order SP
} TPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1          101
#define IDI_ICON1           102
#define IDR_TPCCDLL         103
#define IDD_DIALOG2         105
#define IDI_ICON2           106
#define IDR_DELIVERY        107
#define IDD_DIALOG3         108
#define IDR_LICENSE1        112
#define IDD_DIALOG4         113
#define IDR_TPCCOBJ1        117
#define IDR_TPCCSTUB1        118
#define IDR_ODBC_DLL        123
#define IDR_COM_DLL         126
#define IDR_COMPS_DLL        127
#define IDR_COMALL_DLL       128
#define IDR_COMTYPLIB_DLL   129
#define IDR_MSVC71          130
#define BN_LOG               1001
#define ED_KEEP              1002
#define ED_THREADS          1003
#define ED_THREADS2         1004
#define IDC_PATH             1007
#define IDC_VERSION         1009

```

```

#define IDC_RESULTS          1010
#define IDC_PROGRESS1       1011
#define IDC_STATUS          1012
#define IDC_BUTTON1         1013
#define ED_MAXCONNECTION    1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES    1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB           1021
#define IDC_LICENSE         1022
#define IDC_ODBC            1022
#define IDC_CONNECT_POOL    1023
#define ED_DB_SERVER        1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID       1024
#define IDC_MTS              1025
#define IDC_TM_MTS          1025
#define IDC_TM_TUXEDO       1026
#define IDC_TM_NONE         1027
#define ED_DB_PASSWORD      1028
#define ED_DB_NAME          1029
#define IDC_TM_ENCINA       1030

```

```

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE        131
#define _APS_NEXT_COMMAND_VALUE        40001
#define _APS_NEXT_CONTROL_VALUE        1031
#define _APS_NEXT_SYMED_VALUE          101
#endif
#endif

```

tpcc.cpp

```

/*      FILE:      TPCC.C
*
*      Microsoft
TPC-C Kit Ver. 4.20.000
*
*      Copyright
Microsoft, 1999
*
*      All Rights Reserved
*
*
*      Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE:  Main module for TPCC.DLL which is
an ISAPI service dll.
*      Contact:  Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*
*      4.20.000 - reworked error
handling; added options for COM and Encina txn
monitors
*/

#include <windows.h>
#include <process.h>

```

```

#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on
TPC-C txns

#include "httpext.h"
//ISAPI DLL information header
#include "tpcc.h"
//this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.
// The RTE must be synchronized with the interface
level on login, otherwise the login

```

```

// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:
CTxnLog *txnDelilog = NULL;
//used to log delivery transaction
information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent =
INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;

DWORD dwDelBuffSize = 100;
// size of circular buffer for delivery

txns
DWORD dwDelBuffFreeCount;
// number of buffers free

DWORD dwDelBuffBusyIndex = 0; //
index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0; //
index position of unused entry

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
*

```

```

* PURPOSE: This function is the entry point
for the DLL. This implementation is based on the
* fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS: HANDLE hModule
module handle
*
* ul_reason_for_call reason for call
* LPVOID LPVOID
*
* lpReserved reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in
initialization
*
* TRUE DLL
successfully initialized
*/

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...
// DebugBreak();

try
{
switch( ul_reason_for_call )
{
case
DLL_PROCESS_ATTACH:
{
DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);
szMyComputerName[dwSize] = 0;
}
DisableThreadLibraryCalls((HMODULE)hModule)
;
InitializeCriticalSection(&TermCriticalSection);
if (
ReadTPCCRegistrySettings( &Reg ) )
throw new CWEBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );
}
}

```



```

        dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

        TermInit();

        if
(Reg.eTxnMon == COM)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_com.dll");

            hLibInstanceTm = LoadLibrary( szDllName );
            if
(hLibInstanceTm == NULL)
                throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

            //
get function pointer to wrapper for class constructor
            pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
            if
(pCTPCC_COM_new == NULL)
                throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

            // load DLL
            if
((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
            {
                if
(Reg.eDB_Protocol == ODBC)
                {
                    strcpy( szDllName, Reg.szPath );
                    strcat( szDllName, "tpcc_odbc.dll");

                    hLibInstanceDb = LoadLibrary( szDllName );
                    if (hLibInstanceDb == NULL)
                        throw new CWBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get function pointer to wrapper for
class constructor
                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");

```

```

        if (pCTPCC_ODBC_new == NULL)
            throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
    }

    // Check
whether Service Pack 1 has been installed if
running on
Windows Server 2003. The RTM version has
// a
limitation on concurrent HTTP connections.
//
    OSVERSIONINFOEX    VersionInfo;

    VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
    if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
    {
        if
(VersionInfo.dwMajorVersion == 5 && // Windows
2000/2003 Server?
        VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
        VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
        {
            TCHAR szMsg[256];

            _sntprintf(szMsg, sizeof(szMsg),
                    "\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
                    "limits the
number of concurrent HTTP connections to around
8000");

            // Use event logging to log the error.
            //
            HANDLE    hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));

            LPTSTR    lpszStrings[1] = { szMsg };

            if (hEventSource != NULL)

```

```

        {
            ReportEvent(hEventSource, //
handle of event source
            EVENTLOG_WARNING_TYPE,
            // event type
            0,
            // event category
            0,
            // event ID
            NULL,
            // current user's SID
            1,
            // strings in lpszStrings
            0,
            // no bytes of raw data
            (LPCTSTR *)lpszStrings,
            // array of error strings
            NULL);
            // no raw data
            (VOID)
DeregisterEventSource(hEventSource);
        }
    }

    if
(dwNumDeliveryThreads)
    {
        Initialize delivery delay critical section
        //
        InitializeCriticalSection(&hConnectCritical
Section);
        //
for deferred delivery txns:
        hDoneEvent = CreateEvent( NULL, TRUE /*
manual reset */, FALSE /* initially not signalled */,
NULL );
        InitializeCriticalSection(&DelBuffCriticalS
ection);
        hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
    }
}

```

```

dwDelBuffFreeCount = dwDelBuffSize;

InitJulianTime(NULL);

create unique log file name based on delilog-yyymmdd-
hhmm.log

SYSTEMTIME Time;

GetLocalTime( &Time );

wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d-%2.2ds%2.2dms.log",

Reg.szPath, Time.wYear % 100, Time.wMonth,
Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
Time.wMilliseconds );

txxDelilog = new CTxnLog(szLogFile,
TXN_LOG_WRITE);

//write event into txn log for START

txxDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName));

//
allocate structures for delivery buffers and thread
mgmt

pDeliHandles = new
HANDLE[dwNumDeliveryThreads];

pDelBuff = new
DELIVERY_TRANSACTION[dwDelBuffSize];

//
launch DeliveryWorkerThread to perform actual
delivery txns

for(i=0; i<dwNumDeliveryThreads; i++)
{
pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );

if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)

throw new CWEBCLNT_ERR(
ERR_DELIVERY_THREAD_FAILED );

}

break;

case
DLL_PROCESS_DETACH:

```

```

if
(dwNumDeliveryThreads)
{
if
(txnDelilog != NULL)
{
//write event into txn log for STOP

txxDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));

// This will do a clean shutdown of the
delivery log file

CTxnLog *txxDelilogLocal = txxDelilog;

txxDelilog= NULL;

delete txxDelilogLocal;

delete [] pDeliHandles;

delete [] pDelBuff;

CloseHandle( hWorkerSemaphore );

CloseHandle( hDoneEvent );

DeleteCriticalSection(&DelBuffCriticalSection);

Delete delivery delay critical section

DeleteCriticalSection(&hConnectCriticalSection);

DeleteCriticalSection(&TermCriticalSection);

if
(hLibInstanceTm != NULL)

FreeLibrary( hLibInstanceTm );

hLibInstanceTm = NULL;

if
(hLibInstanceDb != NULL)

FreeLibrary( hLibInstanceDb );

hLibInstanceDb = NULL;

```

```

Sleep(500);
break;

default: /* nothing
*/;

}
}
catch (CBaseErr *e)
{
TCHAR szMsg[256];

_sntprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
WriteMessageToEventLog( szMsg );
delete e;
TerminateExtension(0);
return FALSE;
}
catch (...)
{
WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load.));
TerminateExtension(0);
return FALSE;
}

return TRUE;

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
*
* RETURNS: TRUE inet service
expected return value.
*/

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
lstrcpy(pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN);

return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.

```

```

*           Release all resources
in anticipation of being unloaded.
*
* RETURNS:   TRUE      inet service
expected return value.
*/

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for( DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:   This function is the main entry
point for the TPCC DLL. The internet service
*           calls this function
passing in the http string.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*           service information.
*
* RETURNS:   DWORD
HSE_STATUS_SUCCESS
connection can be dropped if
error
*
HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:   None
*/

DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int          TermId,
iSyncId;
    char         szBuffer[4096];

    int          lpbSize;
    static char  szHeader[] = "200 Ok";
    DWORD        dwSize = 6;
    // initial value is strlen(szHeader)
    char         szHeader1[4096];
    DWORD        dwAddr; // used to
store Win32 exception address

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifdef ICECAP
    StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address

EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
    VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = wsprintf(szMsg,
TEXT("Unhandled exception (%#x) in Web Client's
HttpExtensionProc. "
"Occured at
address %#x, base %#x, tpcc_com.dll at %#x, tpcc.dll
at %#x, tpcc_com_all.dll at %#x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);
    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}

```

```

#ifdef ICECAP
    StopCAP();
#endif

    lpbSize = strlen(szBuffer);
    dwSize += lpbSize;
    dwSize += wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
    strcat( szHeader1, szBuffer );

    (*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

    //finish up and keep connection
pECB->dwHttpStatusCode = 200;
    return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:   This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*           service information.
*
* RETURNS:   None (outputs into the
szBuffer parameter).
*
* COMMENTS:   Separated from HttpExtensionProc
to be able to use structured exception handling in
*
HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int          iCmd, FormId;

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )

```

```

        {
            //
            debugging...
            char
            szTmp[128];
            wsprintf(
            szTmp, "Invalid term ID; TermId = %d", TermId );
            WriteMessageToEventLog( szTmp );
            throw new
            CWEBCLNT_ERR( ERR_INVALID_TERMID );
        }
        //must have a valid
        syncid here since termid is valid
        if (iSyncId !=
        Term.pClientData[TermId].iSyncId)
            throw new
            CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
        //set use time
        Term.pClientData[TermId].iTickCount =
        GetTickCount();
    }
    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 1:
        switch( FormId )
        {
        case WELCOME_FORM:
        case MAIN_MENU_FORM:
            break;
        case NEW_ORDER_FORM:
            ProcessNewOrderForm(pECB, TermId,
            szBuffer);
            break;
        case PAYMENT_FORM:
            ProcessPaymentForm(pECB, TermId, szBuffer);
            break;
        case DELIVERY_FORM:
            ProcessDeliveryForm(pECB, TermId,
            szBuffer);
            break;
        case ORDER_STATUS_FORM:
            ProcessOrderStatusForm(pECB, TermId,
            szBuffer);
            break;
        case STOCK_LEVEL_FORM:
            ProcessStockLevelForm(pECB, TermId,
            szBuffer);
        }
    }
}

```

```

        break;
    }
    case 2:
        // new-order selected
        from menu; display new-order input form
        MakeNewOrderForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 3:
        // payment selected
        from menu; display payment input form
        MakePaymentForm(TermId,
        NULL, INPUT_FORM, szBuffer);
        break;
    case 4:
        // delivery selected
        from menu; display delivery input form
        MakeDeliveryForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 5:
        // order-status
        selected from menu; display order-status input form
        MakeOrderStatusForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 6:
        // stock-level selected
        from menu; display stock-level input form
        MakeStockLevelForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 8:
        SubmitCmd(pECB,
        szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
        Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all
        connections; should only be used when no other
        connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB,
        szBuffer);
        break;
}

```

```

        case 11: // CMD=Stats
            StatsCmd(pECB,
            szBuffer);
            break;
        }
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(),
        e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
        szBuffer );
        delete e;
    }
}
void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("TPCC.DLL"));
    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
        source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
            SID
            2, // strings in
            lpszStrings
            0, // no bytes of raw
            data
            (LPCTSTR *)lpszStrings, // array of
            error strings
            NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE: This function processes deferred
            delivery txns. There are typically several
            threads running this
            routine. The number of threads is determined by an
            entry
            * read from the registry.
            The thread waits for work by waiting on semaphore.
            * When a delivery txn is
            posted, the semaphore is released. After processing

```

```

*           the delivery txn,
information is logged to record the txn status and
execution
*           time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE          *pTxn = NULL;

    DELIVERY_TRANSACTION
    delivery;
    PDELIVERY_DATA
    pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF    txnDeliRec;

    DWORD
    index;
    HANDLE
    handles[2];

    SYSTEMTIME          trans_end;
    //delivery transaction finished
time
    SYSTEMTIME          trans_start;
    //delivery transaction start time

    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
                > 0)
            {
                //
                Synchronize connect (for VIA)
                //
                EnterCriticalSection(&hConnectCriticalSection);

                Sleep(Reg.dwConnectDelay);

                LeaveCriticalSection(&hConnectCriticalSection);
            }

            pTxn = pCTPCC_ODBC_new(
            Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
                szMyComputerName, Reg.szDbName,
                Reg.szSPPrefix,
            Reg.bCallNoDuplicatesNewOrder );
            pDeliveryData = pTxn-
            >BuffAddr_Delivery();
        }
    }
}

```

```

        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "Error in
            Delivery Txn thread. Could not connect to database.
            "
                "%s.
            Server=%s, User=%s, Password=%s, Database=%s",
                e-
                >ErrorText(), Reg.szDbServer, Reg.szDbUser,
            Reg.szDbPassword, Reg.szDbName );
            WriteMessageToEventLog( szTmp );
            delete e;
            goto ErrorExit;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled
            exception caught in DeliveryWorkerThread.));
            goto ErrorExit;
        }

        while (TRUE)
        {
            try
            {
                //while delivery thread
                running, i.e. user has not requested termination
                while (TRUE)
                {
                    // need to
                    wait for multiple objects: program exit or worker
                    semaphore;
                    hDoneEvent;
                    handles[0] =
                    hWorkerSemaphore;
                    handles[1] =
                    index =
                    WaitForMultipleObjects( 2, &handles[0], FALSE,
                    INFINITE );
                    if (index ==
                    WAIT_OBJECT_0)
                    goto ErrorExit;

                    ZeroMemory(&txnDeliRec,
                    sizeof(txnDeliRec));

                    txnDeliRec.TxnType =
                    TXN_REC_TYPE_TPCC_DELIV_DEF;

                    // make a
                    local copy of current entry from delivery buffer and
                    increment buffer index
                    EnterCriticalSection(&DelBuffCriticalSection);
                    delivery =
                    *(pDelBuff+dwDelBuffBusyIndex);

                    dwDelBuffFreeCount++;
                }
            }
        }
    }
}

```

```

        dwDelBuffBusyIndex++;
        if
        (dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
        around if at end of buffer
        dwDelBuffBusyIndex = 0;

        LeaveCriticalSection(&DelBuffCriticalSection);
    n);

    pDeliveryData->w_id = delivery.w_id;

    pDeliveryData->o_carrier_id =
    delivery.o_carrier_id;

    txnDeliRec.w_id = pDeliveryData->w_id;

    txnDeliRec.o_carrier_id = pDeliveryData-
    >o_carrier_id;

    txnDeliRec.TxnStartT0 =
    Get64BitTime(&delivery.queue);

    GetLocalTime(
    &trans_start );
    pTxn-
    GetLocalTime(
    &trans_end );

    //log txn

    txnDeliRec.TxnStatus = ERR_SUCCESS;
    for (int i=0;
    i<10; i++)
    {
        txnDeliRec.o_id[i] = pDeliveryData-
        >o_id[i];

        txnDeliRec.DeltaT4 =
        (int)(Get64BitTime(&trans_end) -
        txnDeliRec.TxnStartT0);

        txnDeliRec.DeltaTxnExec =
        (int)(Get64BitTime(&trans_end) -
        Get64BitTime(&trans_start));

        if
        (txnDeliLog != NULL)
        {
            txnDeliLog->WriteToLog(&txnDeliRec);
        }
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "%s
        Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
WriteMessageToEventLog(
szTmp );

// log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
if (txnDeliLog != NULL)
WriteToLog(&txnDeliRec);
delete e;
}
catch (...)
{
// unhandled exception;
shouldn't happen; not much we can do...
WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
}
}
ErrorExit:
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
EnterCriticalSection(&hConnectCriticalSecti
on);
Sleep(Reg.dwConnectDelay);
}
delete pTxn;
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
LeaveCriticalSection(&hConnectCriticalSecti
on);
}
_endthread();
}
/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS: BOOL FALSE
delivery information posted successfully
*
TRUE error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
BOOL bError;
EnterCriticalSection(&DelBuffCriticalSectio
n);
if (dwDelBuffFreeCount > 0)
{
bError = FALSE;
(pDelBuff+dwDelBuffFreeIndex)-
= w_id;
(pDelBuff+dwDelBuffFreeIndex)-
= o_carrier_id;
GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);
dwDelBuffFreeCount--;
dwDelBuffFreeIndex++;
if (dwDelBuffFreeIndex ==
dwDelBuffSize)
dwDelBuffFreeIndex = 0;
// wrap-around if at end of
buffer
}
else
// No free buffers. Return an
error, which indicates that the delivery buffer is
full.
// Most likely, the number of
delivery worker threads needs to be increased to keep
up
// with the txn rate.
bError = TRUE;
LeaveCriticalSection(&DelBuffCriticalSectio
n);
if (!bError)
// increment worker semaphore to
wake up a worker thread
ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );
}
return bError;
}
/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the
relevent information out of the http command passed
in from
the browser.
*
* COMMENTS: If this is the initial connection
i.e. client is at welcome screen then
there will
not be a terminal id or current form id. If this is
the case
then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId)
{
char *ptr = pECB->lpszQueryString;
char szBuffer[25];
int i;
//allowable client command strings i.e.
CMD=command
static char *szCmds[] =
{
"Process", "..NewOrder..",
"..Payment..", "..Delivery..", "..Order-Status..",
"..Stock-Level..",
"..Exit..", "Submit", "Menu",
"Clear", "Stats", ""
};
*pCmd = 0; // default is
the login screen
*pTermId = 0;
// if no params (i.e., empty query string),
then return login screen
if (strlen(pECB->lpszQueryString) == 0)
return;
// parse FORMID, TERMID, and SYNCID
*pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
*pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
*pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);
// parse CMD
GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);
// see which command it matches
for(i=0; i++)
{
if (szCmds[i][0] == 0)
// no more; no match;
return error
throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
if (!strcmp(szCmds[i], szBuffer)
)
{
*pCmd = i+1;
break;
}
}
}
/* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)

```

```

{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
    is first form client sees.
    strcpy( szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"

        "<font face=\\"Courier New\\"><PRE>"

        "Compiled: \"__DATE__\", \"__TIME__\" <BR>"

        "Source:  \"__FILE__\" ( \"__TIMESTAMP__\" )
<BR>"

        "</PRE></font>"

        "<FORM ACTION=\\"tpcc.dll\" METHOD=\\"GET\\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"STATUSID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"ERROR\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"FORMID\"
VALUE=\\"1\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"TERMID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"SYNCID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"VERSION\"
VALUE=\\" \" WEBCLIENT_VERSION \">"
        );

    sprintf( szTmp,
        "Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "Txn Monitor          = <B>%s</B><BR>"

        "Database protocol      = <B>%s</B><BR>"

        "Max Connections        = <B>%d</B><BR>"
        "#
of Delivery Threads = <B>%d</B><BR>"

        "Max Pending Deliveries = <B>%d</B><BR>"

        ,
        szTxnMonNames[Reg.eTxnMon],
        szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
        dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTxnMon == COM)

```

```

{
    sprintf( szTmp,
        "COM Single
Pool          = <B>%s</B><BR>",
        Reg.bCOM_SinglePool ?
"YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTxnMon == None)
    // connection options may be
    specified when not using a txn monitor
    sprintf( szTmp,
        "Please enter
your database options for this connection:<BR>"

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "DB Server          = <INPUT NAME=\\"db_server\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB User ID         = <INPUT NAME=\\"db_user\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Password        = <INPUT NAME=\\"db_passwd\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Name            = <INPUT NAME=\\"db_name\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "</PRE></font>"

        ,
        Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
        Reg.szDbName );
    else
        // if using a txn monitor,
        connection options are determined from registry;
        can't
        // set per user. show options
        fyi
        sprintf( szTmp,
            "Database
options which will be used by the transaction
monitor:<BR>"

            "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

            "DB Server          = <B>%s</B><BR>"

            "DB User ID         = <B>%s</B><BR>"

            "DB Password        = <B>%s</B><BR>"

            "DB Name            = <B>%s</B><BR>"

            "</PRE></font>"

            ,
            Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
            Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp,
        "Please enter your
Warehouse and District for this session:<BR>"

```

```

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>" );
    strcat( szBuffer, szTmp);
    strcat( szBuffer,
        "Warehouse ID = <INPUT
NAME=\\"w_id\" SIZE=6><BR>"

        "District ID = <INPUT NAME=\\"d_id\"
SIZE=2><BR>"

        "</PRE></font><HR>"

        "<INPUT TYPE=\\"submit\" NAME=\\"CMD\"
VALUE=\\"Submit\">"

        "</FORM></BODY></HTML>");
}

/* FUNCTION: SubmitCmd
 *
 * PURPOSE:      This function allocated a new
terminal id in the Term structure array.
 *
 */

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int          iNewTerm;
    char        *ptr = pECB->lpszQueryString;

    char        szVersion[32]    = { 0 };
    char        szServer[32]     = { 0 };
    char        szUser[32]       =
"sa";
    char        szPassword[32]   = { 0 };
    char        szDatabase[32]   = "tpcc";

    // validate version field; the version
    field ensures that the RTE is synchronized with the
    web client
    GetKeyValue(&ptr, "VERSION", szVersion,
    sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION )
)
        throw new CWBCLNT_ERR(
        ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
        szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
        szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
        szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
        szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```

```

// parse warehouse ID
int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
if ( w_id < 1 )
    throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

// parse district ID
int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
if ( d_id < 1 || d_id > 10 )
    throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

iNewTerm = TermAdd();

Term.pClientData[iNewTerm].w_id = w_id;
Term.pClientData[iNewTerm].d_id = d_id;

try
{
    if (Reg.eTxnMon == COM)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
    else if (Reg.eDB_Protocol ==
ODBC)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

szDatabase, Reg.szSPPrefix,

Reg.bCallNoDuplicatesNewOrder );
}
catch (...)
{
    TermDelete(iNewTerm);
    throw; // pass
exception upward
}

MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 *
 * PURPOSE: This function returns to the
browser the total number of active terminal ids.
 * This routine is for
development/debugging purposes.
 */

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotals;

    EnterCriticalSection(&TermCriticalSection);

    iTotals = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)

            iTotals++;

    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,

"<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"

"<BODY><B><BIG> Total
Active Connections: %d </B><BR></BODY></HTML>"
, iTotals );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_COMMAND_UNDEFINED,

"Command undefined."

},

{ ERR_D_ID_INVALID,

"Invalid District ID Must be 1 to 10."

},

},

ERR_DELIVERY_CARRIER_ID_RANGE,
"Delivery Carrier ID out of range
must be 1 - 10."
},

{
ERR_DELIVERY_CARRIER_INVALID,
"Delivery Carrier ID invalid must be
numeric 1 - 10."
},

{
ERR_DELIVERY_MISSING_OCD_KEY,
"Delivery missing Carrier ID key \"OCD*\"."
},

},

ERR_DELIVERY_THREAD_FAILED,
"Could not start delivery worker
thread."
},

{
ERR_GETPROCADDR_FAILED,

```

```

"Could not map proc in DLL. GetProcAddr
error. DLL="
{ ERR_HTML_ILL_FORMED,
},

"Required key field is missing from HTML
string."
{
ERR_INVALID_SYNC_CONNECTION,
"Invalid Terminal Sync ID."
},

{
ERR_INVALID_TERMINID,
"Invalid Terminal ID."
},

{
ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},

{
ERR_MAX_CONNECTIONS_EXCEEDED,
"No connections available. Max Connections
is probably too low."
},

{
ERR_MISSING_REGISTRY_ENTRIES,
"Required registry entries are missing.
Rerun INSTALL to correct."
},

{
ERR_NEWORDER_CUSTOMER_INVALID,
"New Order customer id invalid
data type, range = 1 to 3000."
},

{
ERR_NEWORDER_CUSTOMER_KEY,
"New Order missing Customer key
\"CID*\"."
},

{
ERR_NEWORDER_DISTRICT_INVALID,
"New Order District ID Invalid
range 1 - 10."
},

{
ERR_NEWORDER_FORM_MISSING_DID,
"New Order missing District key
\"DID*\"."
},

{
ERR_NEWORDER_ITEMID_INVALID,
"New Order Item Id is wrong data type, must
be numeric."
},

{
ERR_NEWORDER_ITEMID_RANGE,
"New Order Item Id is out of
range. Range = 1 to 99999."
},

{
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
"New Order Item_Id field entered without a
corresponding Supp_W."
},

{
ERR_NEWORDER_MISSING_IID_KEY,
"New Order missing Item Id key \"IID*\"."
}

```



```

    },
    {
        ERR_NEWORDER_MISSING_QTY_KEY,
        "New Order Missing Qty key \"Qty##*\"."
    },
    {
        ERR_NEWORDER_MISSING_SUPPW_KEY,
        "New Order missing Supp_W key
        \"SP##*\"."
    },
    {
        ERR_NEWORDER_NOITEMS_ENTERED,
        "New Order No order lines entered."
    },
    {
        ERR_NEWORDER_QTY_INVALID,
        "New Order Qty invalid must be
        numeric range 1 - 99."
    },
    {
        ERR_NEWORDER_QTY_RANGE,
        "New Order Qty is out of range. Range = 1
        to 99."
    },
    {
        ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered
        without a corresponding Supp_W."
    },
    {
        ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data
        type must be numeric."
    },
    {
        ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {
        ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name
        may be entered, not both."
    },
    {
        ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range
        must be numeric 1 - 3000."
    },
    {
        ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name
        longer than 16 characters."
    },
    {
        ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must
        be numeric 1 - 10."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last
        Name must be entered."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key

```

```

        \"CID*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name
        key \"CLT*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key
        \"DID*\"."
    },
    {
        ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district
        invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last
        Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must
        be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse
        invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1
        - 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type
        must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name
        longer than 16 characters."
    },
    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key
        \"CDI*\"."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name
        must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
    },
    },

```

```

    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key
        \"CLT*\"."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key
        \"CWI*\"."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
    },
    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
        "Stock Level; missing Threshold key
        \"TT*\"."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in
        the range = 1 - 99."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_RANGE,
        "Stock Level Threshold out of
        range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client
        are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
    },
    {
        0,
        ""
    },
};
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
        error number." );
        break;
    }
    if (m_Error ==
    errorMsgs[i].iError)
    {

```

```

        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}
if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for specific key values.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey              key
value to look for
                char
                *pValue            character array into which to place key's
value
                int
                iMax              maximum length of key value array.
                WEBERROR
                err               error value to throw
 *
 * RETURNS:     nothing.
 *
 * ERROR:       if (the pKey value is not found)
then
 *
 * (err == 0)   if
 *
 *              return (empty string)
 *
 *              else
 *
 *              throw CWEBCLNT_ERR(err)
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
 *
 *              TPC-C input
fields in such a manner that the keys can be
extracted in the
 *
 *              above manner.
 */

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
null
    while( *ptr && *ptr != '&'amp; iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for a specific key value.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey              key
value to look for
                WEBERROR
                NoKeyErr          error value to throw if
key not found
 *
                WEBERROR
                NotIntErr        error value to throw if
value not numeric
 *
 * RETURNS:     integer
 *
 * ERROR:       if (the pKey value is not found)
then
 *
 * (NoKeyErr != NO_ERR)   if
 *
 *              throw CWEBCLNT_ERR(err)
 *
 *              else
 *
 *              return 0
 *
 *              else if (non-
numeric char found) then

```

```

 *
 * (NotIntErr != NO_ERR) then
 *
 *              throw CWEBCLNT_ERR(err)
 *
 *              else
 *
 *              return 0
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
 *
 *              TPC-C input
fields in such a manner that the keys can be
extracted in the
 *
 *              above manner.
 */

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember
starting point
    // scan string until a terminator (null or
&) or a non-digit
    while( *ptr && *ptr != '&'amp; && isdigit(*ptr)
)
        ptr++;

    // make sure we stopped scanning for the
right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCLNT_ERR(
NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr
);
    return 0;
}

/* FUNCTION: TermInit
 *
 * PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL

```

```

*                               is first loaded by the
inet service.
*
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

{
    if (Term.pClientData[i].iNextFree
== -1)
        delete
Term.pClientData[i].pTxn;
}

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
          assigned terminal id
*
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than
one minute old, it probably means that more
connections

```

```

// are being attempted than were
specified as "Max Connections" at install. In this
case,
// do not bump existing
connection; instead, return error to requester.
    if ((GetTickCount() - iTickCount)
< 60000)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTickCount =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int id
          Terminal id of client exiting
*
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

        wsprintf(szBuffer,
            "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
            "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
            "<BOLD>An Error
Occurred</BOLD><BR><BR>"
            "%s"
            "<BR><BR><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , iType, iErrorNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
        "Select Desired
Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"

```

```

            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , MAIN_MENU_FORM, iTermId,
iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the
Stock Level HTML page.
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
            be freed
            except when the client terminal id is no longer
            needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
Stock-Level<BR>"
        "Warehouse: %6.6d District:
%2.2d<BR> <BR>,"
        STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold:
<INPUT NAME=\"TT\" SIZE=2><BR> <BR>"
            "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"

```

```

            "<BR> <BR> <BR> <BR> <BR>
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
            "</FORM></HTML>" );
        }
        else
        {
            wsprintf(szForm+c,
                "Stock Level Threshold:
%2.2d<BR> <BR>"
                "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
            "<BR> <BR> <BR> <BR></PRE><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></HTML>"
            , pStockLevelData-
>threshold, pStockLevelData->low_stock);
        }
    }

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
            be freed
            except when the client terminal id is no longer
            needed.
*/

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int i, c;
    BOOL bValid;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( (pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem) );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

```

```

        c = sprintf(szForm,
            " <HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>"
            " <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
            " <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
            " <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
            " <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
            " <INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
            " <INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
            " <PRE><font face=\"Courier\">
New Order<BR>"
            " , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( bInput )
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

            strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %8.2f <BR>"
                "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR>"
                " Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR>"
                " <INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\"
SIZE=6> <INPUT
NAME=\"Qty00*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\"
SIZE=6> <INPUT
NAME=\"Qty01*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\"
SIZE=6> <INPUT
NAME=\"Qty02*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\"
SIZE=6> <INPUT
NAME=\"Qty03*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\"
SIZE=6> <INPUT
NAME=\"Qty04*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\"

```

```

SIZE=6> <INPUT
NAME=\"Qty05*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\"
SIZE=6> <INPUT
NAME=\"Qty06*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\"
SIZE=6> <INPUT
NAME=\"Qty07*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\"
SIZE=6> <INPUT
NAME=\"Qty08*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\"
SIZE=6> <INPUT
NAME=\"Qty09*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\"
SIZE=6> <INPUT
NAME=\"Qty10*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\"
SIZE=6> <INPUT
NAME=\"Qty11*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\"
SIZE=6> <INPUT
NAME=\"Qty12*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\"
SIZE=6> <INPUT
NAME=\"Qty13*\" SIZE=1><BR>"
                " <INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\"
SIZE=6> <INPUT
NAME=\"Qty14*\" SIZE=1><BR>"
                "Execution Status:
Total:<BR>"
                " </font></PRE><HR>"
                " <INPUT TYPE=\"submit\">"
NAME=\"CMD\" VALUE=\"Process\">"
                " <INPUT TYPE=\"submit\">"
NAME=\"CMD\" VALUE=\"Menu\">"
                " </FORM></HTML>"
            );
        }
        else
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ",
                pNewOrderData->w_id,
                pNewOrderData->d_id);

            if ( bValid )
            {
                c += sprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                pNewOrderData->o_entry_d.day,

```

```

                pNewOrderData->o_entry_d.month,
                pNewOrderData->o_entry_d.year,
                pNewOrderData->o_entry_d.hour,
                pNewOrderData->o_entry_d.minute,
                pNewOrderData->o_entry_d.second);
            }
            c += sprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s
",
                pNewOrderData->c_id,
                pNewOrderData->c_last, pNewOrderData->c_credit);

            if ( bValid )
            {
                c += sprintf(szForm+c,
                "%8.2f <BR>"
                "Order Number: %8.8d Number of Lines:
                W_tax: %5.2f D_tax: %5.2f <BR> <BR>"
                " Supp_W Item_Id Item Name
                B/G Price Amount<BR>",
                100.0*pNewOrderData->c_discount,
                pNewOrderData->o_id,
                pNewOrderData->o_ol_cnt,
                100.0 *
                pNewOrderData->w_tax,
                100.0 *
                pNewOrderData->d_tax);

            for(i=0;
            i<pNewOrderData->o_ol_cnt; i++)
            {
                c +=
                sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
                %3.3d %1.1s %8.2f %8.2f <BR>",
                pNewOrderData->OL[i].ol_supply_w_id,
                pNewOrderData->OL[i].ol_i_id,
                pNewOrderData->OL[i].ol_i_name,
                pNewOrderData->OL[i].ol_quantity,
                pNewOrderData->OL[i].ol_stock,
                pNewOrderData->OL[i].ol_brand_generic,
                pNewOrderData->OL[i].ol_i_price,
                pNewOrderData->OL[i].ol_amount );
            }

```

```

    }
    else
    {
        c += sprintf(szForm+c,
                    "%Disc:<BR>"
                    "Order
Number: %8.8d Number of Lines:      W_tax:
D_tax:<BR> <BR>"
                    " Supp_W
Item_Id Item Name      Qty Stock B/G
Price  Amount<BR>"
                    ,
pNewOrderData->o_id);
        i = 0;
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    if ( bValid )
        c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total:  $%8.2f  ",
        pNewOrderData->total_amount);
    else
        c += sprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");
    strcpy(szForm+c,
"
<BR></font></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></HTML>"
        );
}
/* FUNCTION: MakePaymentForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;
    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">"
Payment<BR>"
                "Date: "
                , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);
    if ( !bInput )
    {
        c += sprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pPaymentData-
>h_date.day,
pPaymentData-
>h_date.month,
pPaymentData-
>h_date.year,
pPaymentData-
>h_date.hour,
pPaymentData-
>h_date.minute,
pPaymentData-
>h_date.second);
    }
    if ( bInput )
    {
        c += sprintf(szForm+c,
                    "<BR> <BR>Warehouse:
%6.6d"
                    "
District: <INPUT NAME=\"DID\" SIZE=1><BR> <BR> <BR>
<BR> <BR>"
                    "Customer: <INPUT
NAME=\"CID\" SIZE=4>"
                    "Cust-Warehouse: <INPUT
NAME=\"CWI\" SIZE=4> "
                    "Cust-District: <INPUT
NAME=\"CDI\" SIZE=1><BR>"
                    "Name:
<INPUT NAME=\"CLT\" SIZE=16>
Since:<BR>"
                    "
Credit:<BR>"
                    );
    }
}

```

```

"
Disc:<BR>"
"
Phone:<BR> <BR>"
"Amount Paid:
$<INPUT NAME=\"HAM\" SIZE=7>      New Cust-
Balance:<BR>"
"Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"
"
"
NAME=\"CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
"</BODY></FORM></HTML>"
Term.pClientData[iTermId].w_id);
}
else
{
    c += sprintf(szForm+c,
                "<BR> <BR>Warehouse:
%6.6d      District: %2.2d<BR>"
                "%-20s
%-20s
%-20s
%-20s %2s %5.5s-%4.4s<BR> <BR>"
                "%-20s
%-20s
%-20s %2s %5.5s-%4.4s<BR> <BR>"
                "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>"
                "Name: %16s %2s %16s
Since: %2.2d-%2.2d-%4.4d<BR>"
                "%-20s
Credit: %2s<BR>"
                ,
Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_state, pPaymentData->w_city,
pPaymentData->w_zip+5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+5
, pPaymentData->c_id,
pPaymentData->c_d_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);
    c += sprintf(szForm+c,
                "
%&Disc:  %5.2f<BR>",
                "%-20s

```

```

        pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);
        c += sprintf(szForm+c,
                    "    %-20s %-2s
%5.5s-%4.4s    Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR>
<BR>",
                    pPaymentData->c_city,
pPaymentData->c_state, pPaymentData->c_zip,
pPaymentData->c_zip+5,
                    pPaymentData->c_phone,
pPaymentData->c_phone+6, pPaymentData->c_phone+9,
pPaymentData->c_phone+12 );
        c += sprintf(szForm+c,
                    "Amount Paid:
$$$7.2f    New Cust-Balance: $$$14.2f<BR>
                    "Credit Limit:
$$$13.2f<BR> <BR>"
                    , pPaymentData-
>h_amount, pPaymentData->c_balance
                    , pPaymentData-
>c_credit_lim
                    );
        if ( pPaymentData->c_credit[0] ==
'B' && pPaymentData->c_credit[1] == 'C' )
            c += sprintf(szForm+c,
                "Cust-Data: %5.50s<BR>    %-
50.50s<BR>    %5.50s<BR>    %-
50.50s<BR>",
                pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
            else
                strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");
                strcat(szForm,
                    "
<BR></font></PRE><HR>"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
                    "
<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
                    "
</BODY></FORM></HTML>");
            }

```

```

}
/* FUNCTION: MakeOrderStatusForm
 *
 * COMMENTS:    The internal client buffer is
created when the terminal id is assigned and should
not
 *
 *              be freed
except when the client terminal id is no longer
needed.
 */
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>";
    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
Order-Status<BR>"
                "Warehouse: %6.6d ",
                ORDER_STATUS_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId,
                Term.pClientData[iTermId].w_id);
    if ( bInput )
        {
            strcpy(szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1><BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
<INPUT NAME=\"CLT*\" SIZE=23><BR>"
                "<BR>"
                "Order-Number:
Carrier-
Number:<BR>"
                "Supply-W Item-Id
Qty Amount Delivery-Date<BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></font></PRE>"
            );
        }
}

```

```

" <HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
" </BODY></FORM></HTML>"
);
    }
    else
    {
        c += sprintf(szForm+c,
                    "District: %2.2d<BR>"
                    "Customer: %4.4d
Name: %16s %-2s %-16s<BR>",
                    pOrderStatusData->d_id,
pOrderStatusData->c_id,
                    pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);
        c += sprintf(szForm+c, "Cust-
Balance: $$$9.2f<BR> <BR>",
                    pOrderStatusData-
>c_balance);
        c += sprintf(szForm+c,
                    "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>"
                    "Supply-W Item-Id
Qty Amount Delivery-Date<BR>",
                    pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.day,
                    pOrderStatusData-
>o_entry_d.month,
                    pOrderStatusData-
>o_entry_d.year,
                    pOrderStatusData-
>o_entry_d.hour,
                    pOrderStatusData-
>o_entry_d.minute,
                    pOrderStatusData-
>o_entry_d.second,
                    pOrderStatusData-
>o_carrier_id);
        for(i=0; i< pOrderStatusData-
>o_ol_cnt; i++)
            {
                c += sprintf(szForm+c,
                    " %6.6d %6.6d %2.2d $$$8.2f %2.2d-
%2.2d-%4.4d<BR>",
                    pOrderStatusData->OL[i].ol_supply_w_id,
                    pOrderStatusData->OL[i].ol_i_id,
                    pOrderStatusData->OL[i].ol_quantity,
                    pOrderStatusData->OL[i].ol_amount,
                    pOrderStatusData->OL[i].ol_delivery_d.day,

```

```

        pOrderStatusData-
>OL[i].ol_delivery_d.month,
        pOrderStatusData-
>OL[i].ol_delivery_d.year);
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
        "</BODY></FORM></HTML>\"
);
    }
}
/* FUNCTION: MakeDeliveryForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int    c;
    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>\"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">\"
        "<PRE><font face=\"Courier\">
Delivery<BR>\"

```

```

        "Warehouse: %6.6d<BR> <BR>\",
        (!bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
        DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT
NAME=\"OCD*\" SIZE=1><BR> <BR>\"
            "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">\"
            "</BODY></FORM></HTML>\"
        );
    }
    else
    {
        sprintf( szForm+c,
            "Carrier Number:
%2.2d<BR> <BR>\"
            "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>\"
            "<CHR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
            "</BODY></FORM></HTML>\"
        ), pDeliveryData-
>o_carrier_id,
        (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed
";
    }
}
/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE:      This function gets and validates
the input data from the new order form
*                filling in the required
input variables. it then calls the SQLNewOrder

```

```

*                transaction, constructs
the output form and writes it back to client
*                browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA    pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);
    Term.pClientData[iTermId].pTxn->NewOrder();
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}
/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates
the input data from the payment form
*                filling in the required
input variables. It then calls the SQLPayment
transaction, constructs
the output form and writes it back to client
*                browser.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK
                *pECB    passed in structure pointer from
inetsrv.
                int
                iTermId    client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA    pPayment;
    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);
    Term.pClientData[iTermId].pTxn->Payment();

```



```

        pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
        MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: ProcessOrderStatusForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Order Status
 *              form filling in the
required input variables. It then calls the
 *              SQLOrderStatus
transaction, constructs the output form and writes it
 *              back to client browser.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
 *
 * PURPOSE:      This function gets and validates
the input data from the delivery form
 *              filling in the required
input variables. It then calls the PostDeliveryInfo
 *              Api, The client is then
informed that the transaction has been posted.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.

```

```

 *              int
 *              iTermId  client browser terminal id
 */

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )
        throw new CWBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id ) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Stock Level
 *              form filling in the
required input variables. It then calls the
 *              SQLStockLevel
transaction, constructs the output form and writes it
 *              back to client browser.
 *

```

```

 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;

    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
        throw new CWBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
 *
 * PURPOSE:      This function extracts and
validates the new order form data from an http
command string.
 *
 * ARGUMENTS:    LPSTR
 *lpszQueryString  client
browser http command string
 *
 *              NEW_ORDER_DATA *pNewOrderData
 *              pointer to new order data structure
 *
 */

```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char        szTmp[26];
    int         i;
    short      items;
    int         ol_i_id, ol_quantity;
    char        *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
=
    { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*",
"SP05*", "SP06*", "SP07*",
"SP08*", "SP09*",
"SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" };
    static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*",
"IID05*", "IID06*", "IID07*",
"IID08*", "IID09*",
"IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" };
    static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*",
"Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*",
"Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
            if ( !IsNumeric(szTmp)
                throw new
CWEBCLNT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
                if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

                throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_RANGE );
                ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
                if ( ol_quantity > 99
|| ol_quantity < 1 )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_RANGE );
                items++;
            }
            else
            {
                // nothing entered for
supply warehouse, so item id and qty must also be
blank
                GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
                if ( szTmp[0] )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
                GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
                if ( szTmp[0] )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
            }
            if ( items == 0 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );

            pNewOrderData->o_ol_cnt = items;
        }
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS:   LPSTR          client
                lpszQueryString browser http command string
*
                *pPaymentData  PAYMENT_DATA
                payment data structure pointer to
*/

void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    BOOL        bCustIdBlank;
    int         iLen;

```

```

        pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

        GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
        if ( szTmp[0] == 0 )
            {
                bCustIdBlank = TRUE;
                pPaymentData->c_id = 0;
            }
        else
            // parse customer id and verify
that last name was NOT entered
            bCustIdBlank = FALSE;
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
                pPaymentData->c_id = atoi(szTmp);
            }

            pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
            pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

            if ( bCustIdBlank )
            {
                // customer id is blank, so last
name must be entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] == 0 )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

                _strupr( szTmp );
                if ( strlen(szTmp) >
LAST_NAME_LEN )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );

                strcpy(pPaymentData->c_last,
szTmp);
                // pad with spaces so that the
client layer doesn't have to do it
                // before passing parameters to
stored procedure
                iLen = strlen(pPaymentData-
>c_last);
                memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
                pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
            }
            else
            {
                // parse customer id and verify
that last name was NOT entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] != 0 )

```

```

                                throw new CWBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
 *
 * PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
 *
 */
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    int         iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);

```

```

                                pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
 *
 * ARGUMENTS:    char
                 *ptr
                 pointer to string to check.
 *
 * RETURNS:      BOOL   FALSE   if
string is not all numeric
 *
                TRUE    if string contains only numeric
characters i.e. '0' - '9'
 */
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is a non-negative decimal value.
 *
 * It fails if any characters other than a
series of numbers followed by
 *
                a decimal point,
another series of numbers, and a null terminator are
present.
 *
 * ARGUMENTS:    char
                 *ptr
                 pointer to string to check.
 *
 * RETURNS:      BOOL   FALSE   if
string is not a valid non-negative decimal value

```

```

 *
 * TRUE      if string is OK
 */
BOOL IsDecimal(char *ptr)
{
    char *dotp;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotp = strchr( ptr, '.' );
    if (dotp == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotp = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotp+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if (*(dotp+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotp+1);

    *dotp = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE: TPCC.H
 *
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

*
* PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
    101
#define _APS_NEXT_COMMAND_VALUE
    40001
#define _APS_NEXT_CONTROL_VALUE
    1000
#define _APS_NEXT_SYMED_VALUE
    101

#define TP_MAX_RETRIES
    50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
    1
    //beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
    2
    //term id assigned main menu form id
#define NEW_ORDER_FORM
    3
    //new order form id
#define PAYMENT_FORM
    4
    //payment form id
#define DELIVERY_FORM
    5
    //delivery form id
#define ORDER_STATUS_FORM
    6
    //order
status id
#define STOCK_LEVEL_FORM
    7
    //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree;
    //index of
next free element or -1 if this entry in use.
    int w_id;
    //warehouse
id assigned at welcome form

```

```

    int d_id;
    //district id
assigned at welcome form

    int iSyncId;
    //synchronization id
    int iTickCount;
    //time of
last access;

    CTPCC_BASE *pTxn;

} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;

    //total allocated terminal array entries
    int iFreeList;

    //next available terminal array element or
-1 if none
    int iMasterSyncId;
    //synchronization id
    CLIENTDATA *pClientData;
    //pointer to
allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,
    ERR_NEWORDER_CUSTOMER_KEY,
    ERR_NEWORDER_DISTRICT_INVALID,
    ERR_NEWORDER_FORM_MISSING_DID,
    ERR_NEWORDER_ITEMID_INVALID,
    ERR_NEWORDER_ITEMID_RANGE,

```

```

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,

ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    };
};

```

```

        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };
    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail !=
NULL)
            delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
            delete []
m_szErrorText;
    };
    WEBERROR m_Error;
    char
*m_szTextDetail; //
    char
*m_szErrorText;
    DWORD
m_SystemErr;

    int ErrorType() {return
ERR_TYPE_WEBDLL;};
    char *ErrorTypeStr() { return
"WEBCLIENT"; }

    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL WINAPI DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPCTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

    int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
    void TermInit(void);
    void TermDeleteAll(void);
    int TermAdd(void);
    void TermDelete(int id);
    void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer);
    void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
    void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
    void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
    void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
    void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
    void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
    void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
    void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
    void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
    void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
    void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
    void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
    void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
    void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
    BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
    BOOL IsNumeric(char *ptr);
    BOOL IsDecimal(char *ptr);
    void DeliveryWorkerThread(void *ptr);
    // Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#ifdef _WIN32
#define _AFX_RESOURCE_DLL
#ifdef _AFX_TARG_ENU
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGS 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL
Server\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL
Server\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END
#endif // !_MAC

```

```

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END
2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END
3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON   "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON     "Cancel", IDCANCEL, 129, 24, 50, 14
END

////////////////////////////////////
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

```

```

#ifdef // English (U.S.) resources
////////////////////////////////////
//
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
//
#endif // not APSTUDIO_INVOKED

tpcc_com.cpp
/* FILE: TPCC_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 *
 * PURPOSE: Source file for TPC-C COM+ class
 * implementation.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec( dllexport ) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
    SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
    >pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
    COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
        NULL, CLSCTX_SERVER, IID_ITPCC, (void
        **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
        component
            m_pPayment = m_pNewOrder;
            m_pStockLevel = m_pNewOrder;
            m_pOrderStatus = m_pNewOrder;
        }
        else
        {
            // use different components for
            each txn

            hr =
            CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
            IID_ITPCC, (void **)&m_pNewOrder);
            if (FAILED(hr))
                throw new CCOMERR(hr);

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each
    component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT                vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::Payment()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::StockLevel()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::OrderStatus()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }
}

tpcc_com.h
-----
/*      FILE:      TPCC_COM.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999
*      All Rights Reserved
*
*      not yet
audited
*
*      PURPOSE:  Header file for TPC-C COM+ class
implementation.
*
*      Change history:
*      4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

```

```

public:
    // use this interface for genuine
    COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    impersonate a non-COM error type
    CCOMERR( int iErrorType, int
    iError )
    {
        m_iErrorType =
    iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can
    impersonate another class, which happens if the error
    // was not actually a COM
    Services error, but was simply transmitted back via
    COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
    ERR_TYPE_COM;
        else
            return
    m_iErrorType;
    }

    char *ErrorTypeStr() { return
    "COM*"; }

    int ErrorNum()
    {
        if (m_iErrorType == 0)
            return m_hr;
        // return COM error
        else
            return
    m_iError; // return impersonated error
    }

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf(
    m_szErrorText, "Error: Class %d, error # %d",
    m_iErrorType, m_iError );
        else
            sprintf(
    m_szErrorText, "Error: COM HRESULT %x", m_hr );
    }

```

```

        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*
    m_pNewOrder;
    ITPCC*
    m_pPayment;
    ITPCC*
    m_pStockLevel;
    ITPCC*
    m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } u;
    } *m_pTxn;
    VARIANT m_vTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
    &m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
    &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
    &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
    &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
    &m_pTxn->u.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void StockLevel ();
    void OrderStatus ();
}

```

```

void Delivery ();
{ throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

tpcc_com_all.
cpp
/* FILE: TPC_COM_ALL.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

#define STRICT
#define WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```



```

// #include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
// tpckit transaction
header contains definations of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD
dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ))
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

                if (Reg.eDB_Protocol ==
ODBC)
                {
                    strcpy(
szDllName, Reg.szPath );

                    strcat(
szDllName, "tpcc_odbc.dll");

                    hLibInstanceDb = LoadLibrary( szDllName );

                    if
(hLibInstanceDb == NULL)

                        throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get
function pointer to wrapper for class constructor

                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");

                    if
(pCTPCC_ODBC_new == NULL)

                        throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

                    else
                        throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );

                    if (Reg.dwConnectDelay
> 0)
                    {
                        InitializeCriticalSection(&hConnectCritical
Section);
                    }

                }
            }
        }
        else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                _Module.Term();
            }
        }
        catch (CBaseErr *e)
        {
            TCHAR szMsg[256];

            _sntprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
            WriteMessageToEventLog( szMsg );

            delete e;
            return FALSE;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
            return FALSE;
        }

        return TRUE; // OK
    }

////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
        EVENTLOG_ERROR_TYPE, // event type
        0, // event category
        0, // event ID
        NULL, // current user's
SID
        2, // strings in
lpszStrings
        0, // no bytes of raw
data
        (LPCTSTR *)lpszStrings, // array of
error strings
        NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
        },
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
        },
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddress
error. DLL="
        },
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
        },
        { 0, ""
        }
    };

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown
error number." );
            break;
        }
        if (m_Error ==
errorMsgs[i].iError)
        {
            strcpy( szTmp,
errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~~CTPCC_Common()
{

```

```

// Pace connection close for VIA.
//
if (Reg.dwConnectDelay > 0)
{
    EnterCriticalSection(&hConnectCriticalSecti
on);

    Sleep(Reg.dwConnectDelay);

    LeaveCriticalSection(&hConnectCriticalSecti
on);
}

if (m_pTxn)
{
    delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    //
    if (!pUnk)
        return E_UNEXPECTED;
    //
    IObjectConstructString * pString
= NULL;
    //
    HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void
**)&pString);
    //
    pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSecti
on);

            Sleep(Reg.dwConnectDelay);

```

```

        LeaveCriticalSection(&hConnectCriticalSection);
    }
    if (Reg.eDB_Protocol == ODBC)
        m_pTxn =
pCTPCC_ODBC_new(
    Reg.szDbServer, Reg.szDbUser,
    Reg.szDbPassword,

    szMyComputerName, Reg.szDbName,

    Reg.szSPPrefix,
    Reg.bCallNoDuplicatesNewOrder );
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _sntprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
    e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
    return E_FAIL;
}
return S_OK;
}
HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA    pNewOrder;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
    }

```

```

        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder(); //
do the actual txn

        memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
            m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();

        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
        pOutData->retval =
ERR_TYPE_LOGIC;

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}
HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA    pPayment;
    COM_DATA          *pData;
    COM_DATA          *pOutData;

    try

```

```

    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        m_pTxn->Payment(); //
do the actual txn

        memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
            m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();

        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
        pOutData->retval =
ERR_TYPE_LOGIC;

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA  pStockLevel;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));

        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."););
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA  pOrderStatus;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."););
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

```

tpcc_com_all. def

; tpcc_com_all.def : Declares the module parameters.

```

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject    PRIVATE
    DllRegisterServer    PRIVATE
    DllUnregisterServer  PRIVATE

```

tpcc_com_all.h

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined(MSC_VER) && (MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __cplusplus */

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus

class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus

class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus

class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus

class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus

class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif /* __cplusplus */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

```

tpcc_com_all_i. C

```
/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
```

```
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
```

```
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)
```

```

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

```

```

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

```

tpcc_com_ ***errorcode.h***

```

/* FILE: TPCC_COM_ERRORCODE.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
* Change history:
* 4.20.000 - first version
*/

// Error return value for methods in ITPCC interface.
//
// Define as 0x80042345 (decimal -2147212475 ).
//
const HRESULT E_TPCCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITP, 0x2345);

```

tpcc_com_ps. ***def***

```

LIBRARY "tpcc_com_ps"

EXPORTS
    DllGetClassObject PRIVATE
    DllCanUnloadNow PRIVATE
    GetProxyDllInfo PRIVATE
    DllRegisterServer PRIVATE
    DllUnregisterServer PRIVATE

```

tpcc_com_ps.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */

```

```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_s_ifspec;

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEEB6AA2-84B1-11d2-BA47-00C04FBFE08B")
    ITPCC : public IUnknown
    {
    public:
        virtual HRESULT __stdcall NewOrder(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT __stdcall Payment(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT __stdcall Delivery(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT __stdcall StockLevel(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT __stdcall OrderStatus(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT __stdcall CallSetComplete(
            void) = 0;
    };

#else /* C style interface */

    typedef struct ITPCCVtbl
    {
        BEGIN_INTERFACE

        HRESULT ( STDMETHODCALLTYPE *QueryInterface
        )(
            ITPCC * This,
            /* [in] */ REFIID riid,
            /* [iid_is][out] */ void **ppvObject);

```

```

        ULONG ( STDMETHODCALLTYPE *AddRef )(
            ITPCC * This);

        ULONG ( STDMETHODCALLTYPE *Release )(
            ITPCC * This);

        HRESULT ( STDMETHODCALLTYPE *NewOrder )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Payment )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Delivery )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *StockLevel )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *OrderStatus )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *CallSetComplete )(
            ITPCC * This);

        END_INTERFACE
    } ITPCCVtbl;

    interface ITPCC
    {
        CONST_VTBL struct ITPCCVtbl *lpVtbl;
    };

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \

```

```

        (This)->lpVtbl->Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl->Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl->StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl->OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl->CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_StockLevel_Proxy(
    ITPCC * This,

```



```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
ITPCC * This,
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long             __RPC_USER
VARIANT_UserSize(        unsigned long *, unsigned long
, VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char
*, VARIANT * );
void                    __RPC_USER
VARIANT_UserFree(        unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif

```

tpcc_com_ps. idl

```

/* FILE: ITPCC.IDL
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++
components.
*
* Change history:
* 4.20.000 - first version
*/

// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEB6AA2-84B1-11d2-BA47-
00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Payment(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Delivery(
        (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall StockLevel(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall OrderStatus(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall CallSetComplete(
(
);
); // interface ITPCC

```

tpcc_com_ps_i .c

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

```

```

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xc
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xc
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/



---



tpcc_com_ps_  
p.c



---



```

/* this ALWAYS GENERATED file contains the proxy stub
code */

```


```

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/*
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
short Pad;
unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
0,
{
/* Procedure NewOrder */

FC_AUTO_HANDLE */ 0x33, /*
Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
*/
/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */
/* Return value */

/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 32 */ 0x8, /* FC_LONG */
0x0, /*
*/
/* Procedure Payment */

/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
*/
/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
}
}
}

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /*
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
/* 178 */ NdrFcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
/* 0x1, /*
1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

0x0

};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */

```

```

                                0x12, 0x0,      /*
FC_UP */
/* 4 */ NdrFcShort( 0x3ca ),      /* Offset=
970 (974) */
/* 6 */
                                0x2b,      /*
FC_NON_ENCAPSULATED_UNION */
                                0x9,      /*
FC_ULONG */
/* 8 */ 0x7,      /* Corr desc: FC_USHORT
*/
                                0x0,      /*
*/
/* 10 */ NdrFcShort( 0xffff8 ),      /* -8 */
/* 12 */ NdrFcShort( 0x2 ),      /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ),      /* 16 */
/* 16 */ NdrFcShort( 0x2f ),      /* 47 */
/* 18 */ NdrFcLong( 0x14 ),      /* 20 */
/* 22 */ NdrFcShort( 0x800b ),      /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ),      /* 3 */
/* 28 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ),      /* 17 */
/* 34 */ NdrFcShort( 0x8001 ),      /* Simple arm
type: FC_BYTE */
/* 36 */ NdrFcLong( 0x2 ),      /* 2 */
/* 40 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ),      /* 4 */
/* 46 */ NdrFcShort( 0x800a ),      /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ),      /* 5 */
/* 52 */ NdrFcShort( 0x800c ),      /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ),      /* 11 */
/* 58 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ),      /* 10 */
/* 64 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ),      /* 6 */
/* 70 */ NdrFcShort( 0xe8 ),      /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ),      /* 7 */
/* 76 */ NdrFcShort( 0x800c ),      /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ),      /* 8 */
/* 82 */ NdrFcShort( 0xe2 ),      /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ),      /* 13 */
/* 88 */ NdrFcShort( 0xf4 ),      /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ),      /* 9 */
/* 94 */ NdrFcShort( 0x100 ),      /* Offset=
256 (350) */
/* 96 */ NdrFcLong( 0x2000 ),      /* 8192 */
/* 100 */ NdrFcShort( 0x10c ),      /* Offset=
268 (368) */
/* 102 */ NdrFcLong( 0x24 ),      /* 36 */
/* 106 */ NdrFcShort( 0x31a ),      /* Offset=
794 (900) */
/* 108 */ NdrFcLong( 0x4024 ),      /* 16420 */
/* 112 */ NdrFcShort( 0x314 ),      /* Offset=
788 (900) */
/* 114 */ NdrFcLong( 0x4011 ),      /* 16401 */

```

```

/* 118 */ NdrFcShort( 0x312 ),      /* Offset=
786 (904) */
/* 120 */ NdrFcLong( 0x4002 ),      /* 16386 */
/* 124 */ NdrFcShort( 0x310 ),      /* Offset=
784 (908) */
/* 126 */ NdrFcLong( 0x4003 ),      /* 16387 */
/* 130 */ NdrFcShort( 0x30e ),      /* Offset=
782 (912) */
/* 132 */ NdrFcLong( 0x4014 ),      /* 16404 */
/* 136 */ NdrFcShort( 0x30c ),      /* Offset=
780 (916) */
/* 138 */ NdrFcLong( 0x4004 ),      /* 16388 */
/* 142 */ NdrFcShort( 0x30a ),      /* Offset=
778 (920) */
/* 144 */ NdrFcLong( 0x4005 ),      /* 16389 */
/* 148 */ NdrFcShort( 0x308 ),      /* Offset=
776 (924) */
/* 150 */ NdrFcLong( 0x400b ),      /* 16395 */
/* 154 */ NdrFcShort( 0x2f2 ),      /* Offset=
754 (908) */
/* 156 */ NdrFcLong( 0x400a ),      /* 16394 */
/* 160 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (912) */
/* 162 */ NdrFcLong( 0x4006 ),      /* 16390 */
/* 166 */ NdrFcShort( 0x2fa ),      /* Offset=
762 (928) */
/* 168 */ NdrFcLong( 0x4007 ),      /* 16391 */
/* 172 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (924) */
/* 174 */ NdrFcLong( 0x4008 ),      /* 16392 */
/* 178 */ NdrFcShort( 0x2f2 ),      /* Offset=
754 (932) */
/* 180 */ NdrFcLong( 0x400d ),      /* 16397 */
/* 184 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (936) */
/* 186 */ NdrFcLong( 0x4009 ),      /* 16393 */
/* 190 */ NdrFcShort( 0x2ee ),      /* Offset=
750 (940) */
/* 192 */ NdrFcLong( 0x6000 ),      /* 24576 */
/* 196 */ NdrFcShort( 0x2ec ),      /* Offset=
748 (944) */
/* 198 */ NdrFcLong( 0x400c ),      /* 16396 */
/* 202 */ NdrFcShort( 0x2ea ),      /* Offset=
746 (948) */
/* 204 */ NdrFcLong( 0x10 ),      /* 16 */
/* 208 */ NdrFcShort( 0x8002 ),      /* Simple arm
type: FC_CHAR */
/* 210 */ NdrFcLong( 0x12 ),      /* 18 */
/* 214 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 216 */ NdrFcLong( 0x13 ),      /* 19 */
/* 220 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x15 ),      /* 21 */
/* 226 */ NdrFcShort( 0x800b ),      /* Simple arm
type: FC_HYPER */
/* 228 */ NdrFcLong( 0x16 ),      /* 22 */
/* 232 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 234 */ NdrFcLong( 0x17 ),      /* 23 */
/* 238 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 240 */ NdrFcLong( 0xe ),      /* 14 */

```

```

/* 244 */ NdrFcShort( 0x2c8 ),      /* Offset=
712 (956) */
/* 246 */ NdrFcLong( 0x400e ),      /* 16398 */
/* 250 */ NdrFcShort( 0x2cc ),      /* Offset=
716 (966) */
/* 252 */ NdrFcLong( 0x4010 ),      /* 16400 */
/* 256 */ NdrFcShort( 0x2ca ),      /* Offset=
714 (970) */
/* 258 */ NdrFcLong( 0x4012 ),      /* 16402 */
/* 262 */ NdrFcShort( 0x286 ),      /* Offset=
646 (908) */
/* 264 */ NdrFcLong( 0x4013 ),      /* 16403 */
/* 268 */ NdrFcShort( 0x284 ),      /* Offset=
644 (912) */
/* 270 */ NdrFcLong( 0x4015 ),      /* 16405 */
/* 274 */ NdrFcShort( 0x282 ),      /* Offset=
642 (916) */
/* 276 */ NdrFcLong( 0x4016 ),      /* 16406 */
/* 280 */ NdrFcShort( 0x278 ),      /* Offset=
632 (912) */
/* 282 */ NdrFcLong( 0x4017 ),      /* 16407 */
/* 286 */ NdrFcShort( 0x272 ),      /* Offset=
626 (912) */
/* 288 */ NdrFcLong( 0x0 ),      /* 0 */
/* 292 */ NdrFcShort( 0x0 ),      /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ),      /* 1 */
/* 298 */ NdrFcShort( 0x0 ),      /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffff ),      /* Offset= -1
(299) */
/* 302 */
                                0x15,      /*
FC_STRUCT */
                                0x7,      /*
7 */
/* 304 */ NdrFcShort( 0x8 ),      /* 8 */
/* 306 */ 0xb,      /* FC_HYPER */
                                0x5b,      /*
FC_END */
/* 308 */
                                0x12, 0x0,      /*
FC_UP */
/* 310 */ NdrFcShort( 0xc ),      /* Offset= 12 (322) */
/* 312 */
                                0x1b,      /*
FC_CARRAY */
                                0x1,      /*
1 */
/* 314 */ NdrFcShort( 0x2 ),      /* 2 */
/* 316 */ 0x9,      /* Corr desc: FC_ULONG
*/
                                0x0,      /*
*/
/* 318 */ NdrFcShort( 0xffffc ),      /* -4 */
/* 320 */ 0x6,      /* FC_SHORT */
                                0x5b,      /*
FC_END */
/* 322 */
                                0x17,      /*
FC_CSTRUCT */
                                0x3,      /*
3 */
/* 324 */ NdrFcShort( 0x8 ),      /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= -
14 (312) */
/* 328 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 330 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 332 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */
/* 342 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 344 */ 0x0, /* 0 */
0x0, /*
0 */
/* 346 */ 0x0, /* 0 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x46, /*
70 */
/* 350 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */
/* 360 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 362 */ 0x0, /* 0 */
0x0, /*
0 */
/* 364 */ 0x0, /* 0 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x46, /*
70 */
/* 368 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */
0x12, 0x0, /*
FC_UP */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset=
508 (882) */
/* 376 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x49, /*
73 */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset=
276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset=
304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset=
328 (750) */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset=
352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset=
376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset=
400 (840) */
/* 442 */ NdrFcShort( 0xfffff ), /* Offset= -1
(441) */
/* 444 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 454 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xff6e ), /* Offset= -
146 (322) */
/* 470 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 472 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 474 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 480 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (444) */
/* 490 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 492 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 494 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 508 */ NdrFcShort( 0xff50 ), /* Offset= -
176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 512 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
/* 522 */ 0x5c, /* FC_PAD */
/* 524 */
FC_POINTER */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (494) */
/* 528 */
FC_BOGUS_ARRAY */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -
192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
/* 546 */
FC_BOGUS_STRUCT */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
/* 556 */ 0x5c, /* FC_PAD */
/* 558 */
FC_POINTER */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (528) */
/* 562 */
FC_CARRAY */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 568 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 570 */
FC_PP */
/* 572 */
FC_VARIABLE_REPEAT */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset=
388 (974) */
/* 588 */
FC_END */
/* 590 */ 0x5c, /* FC_PAD */
/* 592 */
FC_BOGUS_STRUCT */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
/* 602 */ 0x5c, /* FC_PAD */
/* 604 */
FC_END */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (562) */
/* 608 */
FC_IP */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
/* 620 */ 0x0, /* 0 */
/* 622 */ 0x0, /* 0 */
/* 624 */ 0x0, /* 0 */

```

```

/* 624 */ 0x0, /* 0 */
/* 626 */
FC_CARRAY */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYTE */
/* 636 */
FC_END */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -
40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
/* 652 */
FC_END */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -
28 (626) */
/* 656 */
FC_UP */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
FC_PP */
/* 666 */
FC_VARIABLE_REPEAT */
/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 672 */ NdrFcShort( 0x0 ), /* 0 */
/* 674 */
FC_FIXED_OFFSET */

```

```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (636) */
/* 682 */
FC_END */
0x5b, /*
FC_LONG */
0x8, /*
/* 684 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 686 */
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 688 */ NdrFcShort( 0x8 ), /* 8 */
/* 690 */ NdrFcShort( 0x0 ), /* 0 */
/* 692 */ NdrFcShort( 0x6 ), /* Offset= 6 (698) */
/* 694 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 696 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 698 */
FC_RP */
/* 700 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (656) */
/* 702 */
0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 704 */ NdrFcShort( 0x8 ), /* 8 */
/* 706 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 708 */
FC_STRUCT */
0x15, /*
0x3, /*
3 */
/* 710 */ NdrFcShort( 0x10 ), /* 16 */
/* 712 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 714 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 716 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (702) */
0x5b, /*
FC_END */
/* 720 */

```

```

0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /*
0 */
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 736 */
0x11, 0x0, /*
FC_RP */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -
244 (494) */
/* 740 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 750 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 756 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (740) */
/* 766 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 768 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 770 */
FC_CARRAY */
0x1b, /*
0x1, /*
1 */
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 780 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 786 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (770) */
/* 796 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 798 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 800 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */

```



```

/* 810 */
FC_PSTRUCT */
3 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */
FC_PP */
FC_PAD */
/* 816 */
FC_NO_REPEAT */
FC_PAD */
/* 818 */ NdrFcShort( 0x4 ), /* 4 */
/* 820 */ NdrFcShort( 0x4 ), /* 4 */
/* 822 */ 0x12, 0x0, /* FC_UP */
/* 824 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (800) */
/* 826 */
FC_END */
FC_LONG */
/* 828 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 830 */
FC_CARRAY */
0x1b, /*
7 */
/* 832 */ NdrFcShort( 0x8 ), /* 8 */
/* 834 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 836 */ NdrFcShort( 0x0 ), /* 0 */
/* 838 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 840 */
FC_PSTRUCT */
0x16, /*
0x3, /*
3 */
/* 842 */ NdrFcShort( 0x8 ), /* 8 */
/* 844 */
FC_PP */
FC_PAD */
/* 846 */
FC_NO_REPEAT */
FC_PAD */
/* 848 */ NdrFcShort( 0x4 ), /* 4 */
/* 850 */ NdrFcShort( 0x4 ), /* 4 */
/* 852 */ 0x12, 0x0, /* FC_UP */

```

```

/* 854 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (830) */
/* 856 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 858 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 860 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 862 */ NdrFcShort( 0x8 ), /* 8 */
/* 864 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 866 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 868 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 870 */ NdrFcShort( 0x8 ), /* 8 */
/* 872 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 874 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 878 */ NdrFcShort( 0xffee ), /* Offset= -
18 (860) */
/* 880 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 882 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 884 */ NdrFcShort( 0x28 ), /* 40 */
/* 886 */ NdrFcShort( 0xffee ), /* Offset= -
18 (868) */
/* 888 */ NdrFcShort( 0x0 ), /* Offset= 0 (888) */
/* 890 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 892 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */

```

```

/* 896 */ NdrFcShort( 0xfd8 ), /* Offset= -
520 (376) */
/* 898 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 900 */
0x12, 0x0, /*
FC_UP */
/* 902 */ NdrFcShort( 0xfef6 ), /* Offset= -
266 (636) */
/* 904 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 906 */ 0x1, /* FC_BYTE */
0x5c, /*
FC_PAD */
/* 908 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 910 */ 0x6, /* FC_SHORT */
0x5c, /*
FC_PAD */
/* 912 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 914 */ 0x8, /* FC_LONG */
0x5c, /*
FC_PAD */
/* 916 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 918 */ 0xb, /* FC_HYPER */
0x5c, /*
FC_PAD */
/* 920 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 922 */ 0xa, /* FC_FLOAT */
0x5c, /*
FC_PAD */
/* 924 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 926 */ 0xc, /* FC_DOUBLE */
0x5c, /*
FC_PAD */
/* 928 */
0x12, 0x0, /*
FC_UP */
/* 930 */ NdrFcShort( 0xfd8c ), /* Offset= -
628 (302) */
/* 932 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 934 */ NdrFcShort( 0xfd8e ), /* Offset= -
626 (308) */
/* 936 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 938 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (332) */
/* 940 */

```

```

                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xfdb0 ), /* Offset= -
592 (350) */
/* 944 */
                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xfdb0 ), /* Offset= -
578 (368) */
/* 948 */
                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ), /* Offset= 2 (952) */
/* 952 */
                                0x12, 0x0, /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ), /* Offset= 20 (974) */
/* 956 */
FC_STRUCT */
                                0x7, /*
7 */
/* 958 */ NdrFcShort( 0x10 ), /* 16 */
/* 960 */ 0x6, /* FC_SHORT */
                                0x1, /*
FC_BYTE */
/* 962 */ 0x1, /* FC_BYTE */
                                0x8, /*
FC_LONG */
/* 964 */ 0xb, /* FC_HYPER */
                                0x5b, /*
FC_END */
/* 966 */
                                0x12, 0x0, /*
FC_UP */
/* 968 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (956) */
/* 970 */
                                0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 972 */ 0x2, /* FC_CHAR */
                                0x5c, /*
FC_PAD */
/* 974 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x7, /*
7 */
/* 976 */ NdrFcShort( 0x20 ), /* 32 */
/* 978 */ NdrFcShort( 0x0 ), /* 0 */
/* 980 */ NdrFcShort( 0x0 ), /* Offset= 0 (980) */
/* 982 */ 0x8, /* FC_LONG */
                                0x8, /*
FC_LONG */
/* 984 */ 0x6, /* FC_SHORT */
                                0x6, /*
FC_SHORT */
/* 986 */ 0x6, /* FC_SHORT */
                                0x6, /*
FC_SHORT */
/* 988 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/

```

```

                                0x0, /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ), /* Offset= -
984 (6) */
/* 992 */ 0x5c, /* FC_PAD */
                                0x5b, /*
FC_END */
/* 994 */ 0xb4, /* FC_USER_MARSHAL */
                                0x83, /*
131 */
/* 996 */ NdrFcShort( 0x0 ), /* 0 */
/* 998 */ NdrFcShort( 0x10 ), /* 16 */
/* 1000 */ NdrFcShort( 0x0 ), /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ), /*
Offset= -1000 (2) */
/* 1004 */
                                0x11, 0x4, /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ), /* Offset= 6
(1012) */
/* 1008 */
                                0x13, 0x0, /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ), /*
Offset= -36 (974) */
/* 1012 */ 0xb4, /*
FC_USER_MARSHAL */
                                0x83, /*
131 */
/* 1014 */ NdrFcShort( 0x0 ), /* 0 */
/* 1016 */ NdrFcShort( 0x10 ), /* 16 */
/* 1018 */ NdrFcShort( 0x0 ), /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (1008) */
                                0x0
}
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,

```

```

GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0x00,0
x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete
*/
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,

```



```

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 16 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
        /* 18 */ NdrFcShort( 0x20 ), /* 32 */
        /* 20 */ NdrFcShort( 0x20 ), /* 32 */
        /* 22 */ NdrFcShort( 0x0 ), /* 0 */
        /* 24 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */
        /* 26 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 28 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
        /* 30 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

        /* Parameter txn_out */
        /* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
        /* 34 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
        /* 36 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

        /* Return value */
        /* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
        /* 40 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
        /* 42 */ 0x8, /* FC_LONG */
        0x0, /* 0 */
    }
}

```

```

/* Procedure Payment */
/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */
/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure StockLevel */
/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 148 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /*
3 */
/* 192 */ 0xa, /* 10 */
0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
0x1, /*
1 */
/* 236 */ 0xa, /* 10 */
0x1, /*
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

    /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /*
0x0
*/
};

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3b6 ), /* Offset=
950 (954) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2f ), /* 47 */
/* 20 */ NdrFcLong( 0x14 ), /* 20 */
/* 24 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 26 */ NdrFcLong( 0x3 ), /* 3 */
/* 30 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 32 */ NdrFcLong( 0x11 ), /* 17 */
/* 36 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 38 */ NdrFcLong( 0x2 ), /* 2 */
/* 42 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 44 */ NdrFcLong( 0x4 ), /* 4 */
/* 48 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 50 */ NdrFcLong( 0x5 ), /* 5 */
/* 54 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 56 */ NdrFcLong( 0xb ), /* 11 */
/* 60 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 62 */ NdrFcLong( 0xa ), /* 10 */
/* 66 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 68 */ NdrFcLong( 0x6 ), /* 6 */
/* 72 */ NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
/* 74 */ NdrFcLong( 0x7 ), /* 7 */
/* 78 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 80 */ NdrFcLong( 0x8 ), /* 8 */
/* 84 */ NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
/* 86 */ NdrFcLong( 0xd ), /* 13 */
/* 90 */ NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
/* 92 */ NdrFcLong( 0x9 ), /* 9 */
/* 96 */ NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 102 */ NdrFcShort( 0x10e ), /* Offset=
270 (372) */
/* 104 */ NdrFcLong( 0x24 ), /* 36 */
/* 108 */ NdrFcShort( 0x304 ), /* Offset=
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ), /* Offset=
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ), /* Offset=
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ), /* Offset=
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ), /* Offset=
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (904) */
/* 152 */ NdrFcLong( 0x400b ), /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ), /* Offset=
732 (888) */
/* 158 */ NdrFcLong( 0x400a ), /* 16394 */
/* 162 */ NdrFcShort( 0x2da ), /* Offset=
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 174 */ NdrFcShort( 0x2da ), /* Offset=
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ), /* Offset=
732 (912) */
/* 182 */ NdrFcLong( 0x400d ), /* 16397 */
/* 186 */ NdrFcShort( 0x2da ), /* Offset=
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ), /* Offset=
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (924) */
/* 200 */ NdrFcLong( 0x400c ), /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ), /* Offset=
724 (928) */
/* 206 */ NdrFcLong( 0x10 ), /* 16 */
/* 210 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ), /* 18 */
/* 216 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ), /* 19 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ), /* 21 */
/* 228 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ), /* 22 */
/* 234 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ), /* 23 */
/* 240 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ), /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ), /* Offset=
690 (936) */
/* 248 */ NdrFcLong( 0x400e ), /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ), /* Offset=
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ), /* Offset=
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 264 */ NdrFcShort( 0x270 ), /* Offset=
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 270 */ NdrFcShort( 0x26e ), /* Offset=
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 276 */ NdrFcShort( 0x26c ), /* Offset=
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 282 */ NdrFcShort( 0x262 ), /* Offset=
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 288 */ NdrFcShort( 0x25c ), /* Offset=
604 (892) */
/* 290 */ NdrFcLong( 0x0 ), /* 0 */
/* 294 */ NdrFcShort( 0x0 ), /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ), /* 1 */
/* 300 */ NdrFcShort( 0x0 ), /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ), /* Offset= -1
(301) */
/* 304 */
FC_STRUCT */
0x15, /*
0x7, /*
7 */
/* 306 */ NdrFcShort( 0x8 ), /* 8 */
/* 308 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 310 */
0x12, 0x0, /*
FC_UP */
/* 312 */ NdrFcShort( 0xe ), /* Offset= 14 (326) */
/* 314 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 316 */ NdrFcShort( 0x2 ), /* 2 */
/* 318 */ 0x9, /* Corr desc: FC_ULONG
*/
0x0, /*
*/
/* 320 */ NdrFcShort( 0xfffc ), /* -4 */

```

```

/* 322 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 324 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 326 */
FC_CSTRUCT */
0x17, /*
0x3, /*
3 */
/* 328 */ NdrFcShort( 0x8 ), /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ), /* Offset= -
16 (314) */
/* 332 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 334 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 336 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 338 */ NdrFcLong( 0x0 ), /* 0 */
/* 342 */ NdrFcShort( 0x0 ), /* 0 */
/* 344 */ NdrFcShort( 0x0 ), /* 0 */
/* 346 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x0, /*
0 */
/* 350 */ 0x0, /* 0 */
0x0, /*
0 */
/* 352 */ 0x0, /* 0 */
0x46, /*
70 */
/* 354 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 356 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 360 */ NdrFcShort( 0x0 ), /* 0 */
/* 362 */ NdrFcShort( 0x0 ), /* 0 */
/* 364 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x0, /*
0 */
/* 368 */ 0x0, /* 0 */
0x0, /*
0 */
/* 370 */ 0x0, /* 0 */
0x46, /*
70 */
/* 372 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 374 */ NdrFcShort( 0x2 ), /* Offset= 2 (376) */

```

```

/* 376 */
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ), /* Offset=
484 (862) */
/* 380 */
FC_ENCAPSULATED_UNION */
0x2a, /*
0x89, /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffff ), /* Offset= -1
(445) */
/* 448 */
FC_BOGUS_ARRAY */
0x21, /*
0x3, /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
0x12, 0x0, /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */

```

```

/* 470 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 480 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 482 */
0x11, 0x0, /*
FC_RP */
/* 484 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (448) */
/* 486 */
0x21, /*
0x3, /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 504 */ NdrFcShort( 0xff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 508 */
0x1a, /*
0x3, /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 518 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 520 */
0x11, 0x0, /*
FC_RP */
/* 522 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (486) */
/* 524 */

```

```

0x21, /*
0x3, /*
3 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 534 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 538 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xff44 ), /* Offset= -
188 (354) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 556 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (524) */
/* 562 */
0x21, /*
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
0x12, 0x0, /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c, /* FC_PAD */

```

```

0x5b, /*
FC_END */
/* 584 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 586 */ NdrFcShort( 0x10 ), /* 16 */
/* 588 */ NdrFcShort( 0x0 ), /* 0 */
/* 590 */ NdrFcShort( 0x6 ), /* Offset= 6 (596) */
/* 592 */ 0x8, /* FC_LONG */
/* 594 */ 0x40, /*
FC_STRUCTPAD4 */
/* 594 */ 0x36, /* FC_POINTER */
/* 596 */
0x5b, /*
FC_END */
/* 596 */
0x11, 0x0, /*
FC_RP */
/* 598 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (562) */
/* 600 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 602 */ NdrFcLong( 0x2f ), /* 47 */
/* 606 */ NdrFcShort( 0x0 ), /* 0 */
/* 608 */ NdrFcShort( 0x0 ), /* 0 */
/* 610 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 612 */ 0x0, /* 0 */
0x0, /*
0 */
/* 614 */ 0x0, /* 0 */
0x0, /*
0 */
/* 616 */ 0x0, /* 0 */
0x46, /*
70 */
/* 618 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 620 */ NdrFcShort( 0x1 ), /* 1 */
/* 622 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 624 */ NdrFcShort( 0x4 ), /* 4 */
/* 626 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 628 */ 0x1, /* FC_BYTE */
/* 630 */
0x5b, /*
FC_END */
/* 630 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 632 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0xa ), /* Offset= 10 (646) */
/* 638 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 642 */ NdrFcShort( 0xffd6 ), /* Offset= -
42 (600) */
/* 644 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 646 */
0x12, 0x0, /*
FC_UP */
/* 648 */ NdrFcShort( 0xffe2 ), /* Offset= -
30 (618) */
/* 650 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 656 */ NdrFcShort( 0x0 ), /* 0 */
/* 658 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 660 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 664 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 666 */
0x12, 0x0, /*
FC_UP */
/* 668 */ NdrFcShort( 0xffda ), /* Offset= -
38 (630) */
/* 670 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 672 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ NdrFcShort( 0x6 ), /* Offset= 6 (684) */
/* 680 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 682 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 684 */
0x11, 0x0, /*
FC_RP */
/* 686 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (650) */
/* 688 */

```

```

0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 690 */ NdrFcShort( 0x8 ), /* 8 */
/* 692 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 694 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 696 */ NdrFcShort( 0x10 ), /* 16 */
/* 698 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 700 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 702 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (688) */
0x5b, /*
FC_END */
/* 706 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 708 */ NdrFcShort( 0x20 ), /* 32 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0xa ), /* Offset= 10 (722) */
/* 714 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 716 */ 0x36, /* FC_POINTER */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 718 */ 0x0, /* 0 */
NdrFcShort( 0xffe7 ),
/* Offset= -25 (694) */
0x5b, /*
FC_END */
/* 722 */
0x11, 0x0, /*
FC_RP */
/* 724 */ NdrFcShort( 0xff12 ), /* Offset= -
238 (486) */
/* 726 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 728 */ NdrFcShort( 0x1 ), /* 1 */
/* 730 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 732 */ NdrFcShort( 0x0 ), /* 0 */
/* 734 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 736 */ 0x1, /* FC_BYTE */

```


<pre> 0x5b, /* FC_END */ /* 738 */ FC_BOGUS_STRUCT */ 0x1a, /* 0x3, /* 3 */ /* 740 */ NdrFcShort(0x10), /* 16 */ /* 742 */ NdrFcShort(0x0), /* 0 */ /* 744 */ NdrFcShort(0x6), /* Offset= 6 (750) */ /* 746 */ 0x8, /* FC_LONG */ FC_STRUCTUREPAD4 */ /* 748 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 750 */ FC_UP */ /* 752 */ NdrFcShort(0xffe6), /* Offset= - 26 (726) */ /* 754 */ FC_CARRAY */ 0x1b, /* 1 */ /* 756 */ NdrFcShort(0x2), /* 2 */ /* 758 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, /* */ /* 760 */ NdrFcShort(0x0), /* 0 */ /* 762 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 764 */ 0x6, /* FC_SHORT */ 0x5b, /* FC_END */ /* 766 */ FC_BOGUS_STRUCT */ 0x1a, /* 0x3, /* 3 */ /* 768 */ NdrFcShort(0x10), /* 16 */ /* 770 */ NdrFcShort(0x0), /* 0 */ /* 772 */ NdrFcShort(0x6), /* Offset= 6 (778) */ /* 774 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTUREPAD4 */ /* 776 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 778 */ FC_UP */ /* 780 */ NdrFcShort(0xffe6), /* Offset= - 26 (754) */ /* 782 */ FC_CARRAY */ 0x1b, /* 0x3, /* 3 */ /* 784 */ NdrFcShort(0x4), /* 4 */ </pre>	<pre> /* 786 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, /* */ /* 788 */ NdrFcShort(0x0), /* 0 */ /* 790 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 792 */ 0x8, /* FC_LONG */ 0x5b, /* FC_END */ /* 794 */ FC_BOGUS_STRUCT */ 0x1a, /* 0x3, /* 3 */ /* 796 */ NdrFcShort(0x10), /* 16 */ /* 798 */ NdrFcShort(0x0), /* 0 */ /* 800 */ NdrFcShort(0x6), /* Offset= 6 (806) */ /* 802 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTUREPAD4 */ /* 804 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 806 */ FC_UP */ /* 808 */ NdrFcShort(0xffe6), /* Offset= - 26 (782) */ /* 810 */ FC_CARRAY */ 0x1b, /* 0x7, /* 7 */ /* 812 */ NdrFcShort(0x8), /* 8 */ /* 814 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, /* */ /* 816 */ NdrFcShort(0x0), /* 0 */ /* 818 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 820 */ 0xb, /* FC_HYPER */ 0x5b, /* FC_END */ /* 822 */ FC_BOGUS_STRUCT */ 0x1a, /* 0x3, /* 3 */ /* 824 */ NdrFcShort(0x10), /* 16 */ /* 826 */ NdrFcShort(0x0), /* 0 */ /* 828 */ NdrFcShort(0x6), /* Offset= 6 (834) */ /* 830 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTUREPAD4 */ /* 832 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 834 */ FC_UP */ 0x12, 0x0, /* </pre>	<pre> /* 836 */ NdrFcShort(0xffe6), /* Offset= - 26 (810) */ /* 838 */ FC_STRUCTURE */ 0x15, /* 0x3, /* 3 */ /* 840 */ NdrFcShort(0x8), /* 8 */ /* 842 */ 0x8, /* FC_LONG */ 0x8, /* FC_LONG */ /* 844 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 846 */ FC_CARRAY */ 0x1b, /* 0x3, /* 3 */ /* 848 */ NdrFcShort(0x8), /* 8 */ /* 850 */ 0x7, /* Corr desc: FC_USHORT */ 0x0, /* */ /* 852 */ NdrFcShort(0xffc8), /* -56 */ /* 854 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 856 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ 0x0, /* 0 */ /* 858 */ NdrFcShort(0xffec), /* Offset= - 20 (838) */ /* 860 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 862 */ FC_BOGUS_STRUCT */ 0x1a, /* 0x3, /* 3 */ /* 864 */ NdrFcShort(0x38), /* 56 */ /* 866 */ NdrFcShort(0xffec), /* Offset= - 20 (846) */ /* 868 */ NdrFcShort(0x0), /* Offset= 0 (868) */ /* 870 */ 0x6, /* FC_SHORT */ 0x6, /* FC_SHORT */ /* 872 */ 0x8, /* FC_LONG */ 0x8, /* FC_LONG */ /* 874 */ 0x40, /* FC_STRUCTUREPAD4 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 876 */ 0x0, /* 0 */ NdrFcShort(0xfe0f), /* Offset= -497 (380) */ 0x5b, /* FC_END */ /* 880 */ FC_UP */ 0x12, 0x0, /* </pre>
--	--	--

```

/* 882 */ NdrFcShort( 0xff04 ), /* Offset= -
252 (630) */
/* 884 */
FC_UP [simple_pointer] */
/* 886 */ 0x1, /* FC_BYTE */
FC_PAD */
/* 888 */
FC_UP [simple_pointer] */
/* 890 */ 0x6, /* FC_SHORT */
FC_PAD */
/* 892 */
FC_UP [simple_pointer] */
/* 894 */ 0x8, /* FC_LONG */
FC_PAD */
/* 896 */
FC_UP [simple_pointer] */
/* 898 */ 0xb, /* FC_HYPER */
FC_PAD */
/* 900 */
FC_UP [simple_pointer] */
/* 902 */ 0xa, /* FC_FLOAT */
FC_PAD */
/* 904 */
FC_UP [simple_pointer] */
/* 906 */ 0xc, /* FC_DOUBLE */
FC_PAD */
/* 908 */
FC_UP */
/* 910 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (304) */
/* 912 */
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfda4 ), /* Offset= -
604 (310) */
/* 916 */
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfdba ), /* Offset= -
582 (336) */
/* 920 */
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0xfdc8 ), /* Offset= -
568 (354) */
/* 924 */
FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xfdd6 ), /* Offset= -
554 (372) */

```

```

/* 928 */
FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ), /* Offset= 2 (932) */
/* 932 */
FC_UP */
/* 934 */ NdrFcShort( 0x14 ), /* Offset= 20 (954) */
/* 936 */
FC_STRUCT */
7 */
/* 938 */ NdrFcShort( 0x10 ), /* 16 */
/* 940 */ 0x6, /* FC_SHORT */
FC_BYTE */
/* 942 */ 0x1, /* FC_BYTE */
FC_LONG */
/* 944 */ 0xb, /* FC_HYPER */
FC_END */
/* 946 */
FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (936) */
/* 950 */
FC_UP [simple_pointer] */
/* 952 */ 0x2, /* FC_CHAR */
FC_PAD */
/* 954 */
FC_BOGUS_STRUCT */
7 */
/* 956 */ NdrFcShort( 0x20 ), /* 32 */
/* 958 */ NdrFcShort( 0x0 ), /* 0 */
/* 960 */ NdrFcShort( 0x0 ), /* Offset= 0 (960) */
/* 962 */ 0x8, /* FC_LONG */
FC_LONG */
/* 964 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 966 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 968 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0 */
/* 970 */ NdrFcShort( 0xfc3c ), /* Offset= -
964 (6) */
/* 972 */ 0x5c, /* FC_PAD */
FC_END */
/* 974 */ 0xb4, /* FC_USER_MARSHAL */
131 */

```

```

/* 976 */ NdrFcShort( 0x0 ), /* 0 */
/* 978 */ NdrFcShort( 0x18 ), /* 24 */
/* 980 */ NdrFcShort( 0x0 ), /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ), /* Offset= -
980 (2) */
/* 984 */
FC_RP [allocated_on_stack] */
/* 986 */ NdrFcShort( 0x6 ), /* Offset= 6 (992) */
/* 988 */
FC_OP */
/* 990 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (954) */
/* 992 */ 0xb4, /* FC_USER_MARSHAL */
131 */
/* 994 */ NdrFcShort( 0x0 ), /* 0 */
/* 996 */ NdrFcShort( 0x18 ), /* 24 */
/* 998 */ NdrFcShort( 0x0 ), /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (988) */
};
static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    VARIANT_UserSize
    ,VARIANT_UserMarshal
    ,VARIANT_UserUnmarshal
    ,VARIANT_UserFree
};
/* Standard interface: __MIDL_itf_tpc_c_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */
/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */
/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */
#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &
    _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
    _tpcc_com_ps_StubVtblList,

```

```

(const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};
#if _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/



---


tpcc_dblib.cpp


---


/* FILE: TPCC_DBLIB.CPP
Microsoft
TPC-C Kit Ver. 4.42.000
Copyright
Microsoft, 2002
All Rights Reserved
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
PURPOSE: Implements dblib calls for TPC-C
txns.
Contact: Charles Levine
(clevine@microsoft.com)
Change history:
4.42.000 - changed wid fields
from short to long to support >32K warehouses
4.20.000 - updated rev number to
match kit
4.10.001 - not deleting error
class in catch handler on deadlock retry;
not a
functional bug, but a memory leak
- had to
tweak some declarations to compile with latest SDK;
no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); //
            initialize dblib break;

        case DLL_PROCESS_DETACH: //
            dbexit();
            close all dblib structures/connections
            break;

        default: //
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
    (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDblibError( severity,
        dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS *dbproc
DBPROCESS id pointer
DBINT
*
* message number
*
* message state int
*
* message severity int
*
* message severity char
printable
*msgtext
message description
*
* RETURNS: int
INT_CONTINUE continue if
error is SQLETIME else INT_CANCEL action
*
INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
    (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
        msgstate, severity, msgtext );
    }

    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDest and places a
* null character at the
end of the destination string.
*
* ARGUMENTS: char
*pDest destination string pointer
char
*pSrc source string pointer
int
n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
always null
terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };
}

```

```

        static char szNotFound[] = "Unknown error
number.";

        for(i=0; errorMsgs[i].szMsg[0]; i++)
        {
            if ( m_errno ==
errorMsgs[i].iError )
                break;
        }
        if ( !errorMsgs[i].szMsg[0] )
            return szNotFound;
        else
            return errorMsgs[i].szMsg;
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
        LPCSTR szServer,           // name of
SQL server
        LPCSTR szUser,             //
user name for login
        LPCSTR szPassword,        // password
for login
        LPCSTR szHost,            //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )       // name of
database to use
    {
        return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
    }

    CTPCC_DBLIB::CTPCC_DBLIB (
        LPCSTR szServer,          // name of
SQL server
        LPCSTR szUser,            //
user name for login
        LPCSTR szPassword,        // password
for login
        LPCSTR szHost,           //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )      // name of
database to use
    {
        LOGINREC *login;
        const BYTE *pData;

        // initialization
        m_dbproc = NULL;
        m_DbLibErr = (CDBLIBERR*)NULL;
        m_SqlErr = (CSQLERR*)NULL;

        m_MaxRetries = 10;        // how many
retries on deadlock

        // increase max number of connections if
getting close
        if ( dbgetmaxprocs() < (iConnectionCount+5)
)
            {

```

```

                if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
                    ThrowError(CDBLIBERR::eDbSetMaxProcs);
            }

            // allocate a login structure
            login = dblogin();
            if (login == NULL)
                ThrowError(CDBLIBERR::eLogin);
            InterlockedIncrement( &iConnectionCount );

            // register error and message handler
            if (dbprocerrhandle(login, err_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            if (dbprocmsghandle(login, msg_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            DBSETLUSER(login, szUser);
            DBSETLPWD(login, szPassword);
            DBSETHOST(login, szHost);
            DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
            DBSETLVERSION(login, DBVER60);
            // use dblib ver 6.0 client behavior

            // set time to wait for login
            if (dbsetlogintime(60) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            // set time to wait for statement execution
            if (dbsettime(180) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            m_dbproc = dbopen(login, szServer);

            // deallocate login structure before
checking for success
            dbfreelogin( login );

            if (m_dbproc == NULL)
                ThrowError(CDBLIBERR::eDbOpen);

            // save address of class instance so that
the message and error handler
            // can get to data.
            dbsetuserdata(m_dbproc, (LPVOID)this);

            // Use the the right database
            if (dbuse(m_dbproc, szDatabase) == FAIL)
                ThrowError(CDBLIBERR::eDbUse);

            dbcmd(m_dbproc, "set nocount on ");
            // do not return row counts
            dbcmd(m_dbproc, "set XACT_ABORT ON");
            // rollback transaction on abort

```

```

            if (dbsqlxexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbSqlExec);
            DiscardNextResults(2);

            // verify that version of stored procs on
server is correct
            dbrpcinit(m_dbproc, "tpcc_version", 0);
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            char szSrvVersion[16];
            pData=dbdata(m_dbproc, 1);
            if (pData)
                UtilStrCpy(szSrvVersion, pData,
dbdatalen(m_dbproc, 1));
            else
                szSrvVersion[0]=0;
            if (strcmp(szSrvVersion,sVersion))
                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

            DiscardNextRows(0);
            DiscardNextResults(0);
        }

        CTPCC_DBLIB::~CTPCC_DBLIB( void )
        {
            // close db connection and deallocate
resources
            dbclose(m_dbproc);
            InterlockedDecrement( &iConnectionCount );
            if (m_DbLibErr != NULL)
                delete m_DbLibErr;
            if (m_SqlErr != NULL)
                delete m_SqlErr;
        }

        void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
        {
            delete m_DbLibErr;
            m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

            if (dberrstr != NULL)
                {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLErr();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLErr *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
// but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; //
clear our pointer to instance; catch handler will
delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int iRowsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
(iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
{
    int iResultsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
            if (rc == FAIL)
            {
                if (iExpectedCount >=
0)
                    ThrowError(CDBLIBERR::eDbResults);
                else
                    break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
(iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

void CTPCC_DBLIB::StockLevel()
{
    int iTryCount =
0;
    const BYTE *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshold
            smallint

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

```

```

        if
        (pData=dbdata(m_dbproc, 1))
        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
        (e->m_msgno
        == iErrOleDbProvider &&
        strstr(e-
        >m_msgtext, sErrTimeoutExpired) != NULL)) &&
        (++iTryCount
        <= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

    //if (iTryCount)
    //    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT              commit_flag;
    DBDATETIME         datetime;
    DBDATERECD         daterec;

    int                iTryCount =
0;
    const BYTE         *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

```

```

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_ol_cnt);

            // check whether any
            order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
                (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
                    least one remote warehouse

                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);

            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            results

            // Get order line

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
            {

```

```

            if
            (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if
            (dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if
            (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));
            if(pData=dbdata(m_dbproc, 2))
                m_txn.NewOrder.OL[i].ol_stock =
                (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 3))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge
neric, pData, dbdatlen(m_dbproc, 3));
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
            if(pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

            m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

            DiscardNextRows(0);
        }

        // get remaining values
        for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag

```

```

        if (dbresults(m_dbproc)
!= SUCCEEDED)
        ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);

        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);

        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = (*(DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
                datetime =
*((DBDATETIME *) pData);

                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.NewOrder.o_entry_d.year =
daterec.year;

```

```

        m_txn.NewOrder.o_entry_d.month =
daterec.month;

        m_txn.NewOrder.o_entry_d.day =
daterec.day;

        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

        m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 8))

        commit_flag =
(*(DBTINYINT *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
        {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

                return;
        }
        catch (CSQLERR *e)
        {
                if ((e->m_msgno == 1205

||
== iErrOleDbProvider &&
(e->m_msgno
== iMaxRetries))
                {
                        // hit
                        deadlock; backoff for increasingly longer period
                        delete e;
                        Sleep(10 *
iTryCount);
                }
                else
                {
                        throw;
                }
        }
        // while (TRUE)
}

```

```

//        if (iTryCount)
//                throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
        DBDATETIME        datetime;
        DBDATEREC daterec;

        int                iTryCount =
0;
        const BYTE        *pData;

        ResetError();

        while (TRUE)
        {
                try
                {
                        dbrpcinit(m_dbproc,
"tpcc_payment", 0);

                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);

                        // if customer id is
                        // zero, then payment is by name
                        if (m_txn.Payment.c_id
== 0)

                                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)&m_txn.Payment.c_last);

                        if (dbrpcexec(m_dbproc)
== FAIL)

                                ThrowError(CDBLIBERR::eDbRpcExec);

                        if (dbresults(m_dbproc)
!= SUCCEEDED)

                                ThrowError(CDBLIBERR::eDbResults);

```



```

                if (dbnextrow(m_dbproc)
:= REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);
                if (dbnumcols(m_dbproc)
:= 27)
                    ThrowError(CDBLIBERR::eWrongNumCols);
                if
(pData=dbdata(m_dbproc, 1))
                    m_txn.Payment.c_id = *((DBINT *) pData);
                if
(pData=dbdata(m_dbproc, 2))
                    UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
                if
(pData=dbdata(m_dbproc, 3))
                {
                    datetime =
*((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.Payment.h_date.year = daterec.year;
                    m_txn.Payment.h_date.month =
daterec.month;
                    m_txn.Payment.h_date.day = daterec.day;
                    m_txn.Payment.h_date.hour = daterec.hour;
                    m_txn.Payment.h_date.minute =
daterec.minute;
                    m_txn.Payment.h_date.second =
daterec.second;
                }
                if
(pData=dbdata(m_dbproc, 4))
                    UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
                if
(pData=dbdata(m_dbproc, 5))
                    UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
                if
(pData=dbdata(m_dbproc, 6))
                    UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
                if
(pData=dbdata(m_dbproc, 7))
                    UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

```

```

                if
(pData=dbdata(m_dbproc, 8))
                    UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
                if
(pData=dbdata(m_dbproc, 9))
                    UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
                if
(pData=dbdata(m_dbproc, 10))
                    UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
                if
(pData=dbdata(m_dbproc, 11))
                    UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
                if
(pData=dbdata(m_dbproc, 12))
                    UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
                if
(pData=dbdata(m_dbproc, 13))
                    UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
                if
(pData=dbdata(m_dbproc, 14))
                    UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
                if
(pData=dbdata(m_dbproc, 15))
                    UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
                if
(pData=dbdata(m_dbproc, 16))
                    UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
                if
(pData=dbdata(m_dbproc, 17))
                    UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
                if
(pData=dbdata(m_dbproc, 18))
                    UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
                if
(pData=dbdata(m_dbproc, 19))
                    UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
                if
(pData=dbdata(m_dbproc, 20))

```

```

                    UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
                if
(pData=dbdata(m_dbproc, 21))
                    UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
                if
(pData=dbdata(m_dbproc, 22))
                {
                    datetime =
*((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.Payment.c_since.year =
daterec.year;
                    m_txn.Payment.c_since.month =
daterec.month;
                    m_txn.Payment.c_since.day = daterec.day;
                    m_txn.Payment.c_since.hour =
daterec.hour;
                    m_txn.Payment.c_since.minute =
daterec.minute;
                    m_txn.Payment.c_since.second =
daterec.second;
                }
                if(pData=dbdata(m_dbproc, 23))
                    UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
                if(pData=dbdata(m_dbproc, 24))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
                if(pData=dbdata(m_dbproc, 25))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
                if(pData=dbdata(m_dbproc, 26))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
                if(pData=dbdata(m_dbproc, 27))
                    UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
                DiscardNextRows(0);

```

```

DiscardNextResults(0);

if (m_txn.Payment.c_id
== 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else
    m_txn.Payment.exec_status_code = eOK;

return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
    (e->m_msgno
== iErrOleDbProvider &&
    strstr(e-
>m_msgtext, sErrTimeoutExpired) != NULL) &&
    (++iTryCount
<= iMaxRetries))
    {
        // hit
        deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATERECD daterec;

    int iTryCount =
0;
    RETCODE rc;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

// if customer id is
zero, then order status is by name
if
(m_txn.OrderStatus.c_id == 0)
    dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

if (dbrpcexec(m_dbproc)
== FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

// Get order lines
if (dbresults(m_dbproc)
!= SUCCEED)
{
    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))
        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
    else
        ThrowError(CDBLIBERR::eDbResults);
}

if (dbnumcols(m_dbproc)
!= 5)
    ThrowError(CDBLIBERR::eWrongNumCols);

i = 0;
while (TRUE)
{
    rc =
dbnextrow(m_dbproc);
    if (rc ==
NO_MORE_ROWS)
        break;
    if (rc !=
REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

    if(pData=dbdata(m_dbproc, 1))
        m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*(DBSMALLINT *) pData);

```

```

if(pData=dbdata(m_dbproc, 2))
    m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
*) pData);
if(pData=dbdata(m_dbproc, 3))
    m_txn.OrderStatus.OL[i].ol_quantity =
(*(DBSMALLINT *) pData);
if(pData=dbdata(m_dbproc, 4))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);
if(pData=dbdata(m_dbproc, 5))
{
    datetime = (*(DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.OrderStatus.OL[i].ol_delivery_d.year
= daterec.year;
    m_txn.OrderStatus.OL[i].ol_delivery_d.month
= daterec.month;
    m_txn.OrderStatus.OL[i].ol_delivery_d.day
= daterec.day;
    m_txn.OrderStatus.OL[i].ol_delivery_d.hour
= daterec.hour;
    m_txn.OrderStatus.OL[i].ol_delivery_d.minut
e = daterec.minute;
    m_txn.OrderStatus.OL[i].ol_delivery_d.secon
d = daterec.second;
}
i++;
m_txn.OrderStatus.o_ol_cnt = i;

if (dbresults(m_dbproc)
!= SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);
if (dbnextrow(m_dbproc)
!= REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowError(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

if(pData=dbdata(m_dbproc, 2))
UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
{
datetime =
*((DBDATETIME *) pData);
dbdatecrack(m_dbproc, &daterec, &datetime);

m_txn.OrderStatus.o_entry_d.year =
daterec.year;
m_txn.OrderStatus.o_entry_d.month =
daterec.month;
m_txn.OrderStatus.o_entry_d.day =
daterec.day;
m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;
m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;
m_txn.OrderStatus.o_entry_d.second =
daterec.second;
}

if(pData=dbdata(m_dbproc, 6))
m_txn.OrderStatus.o_carrier_id =
*((DBSMALLINT *) pData);

if(pData=dbdata(m_dbproc, 7))
dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

```

```

if(pData=dbdata(m_dbproc, 8))
m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o_ol_cnt == 0)
throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else
m_txn.OrderStatus.exec_status_code = eOK;

return;
}
catch (CSQLERR *e)
{
if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
{
// hit
deadlock; backoff for increasingly longer period
delete e;
Sleep(10 *
iTryCount);
}
else
throw;
}
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
int i;
int iTryCount =
0;
const BYTE *pData;

ResetError();

```

```

while (TRUE)
{
try
{
dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

if (dbrpcexec(m_dbproc)
== FAIL)
ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc)
!= SUCCEED)
ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc)
!= REG_ROW)
ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc)
!= 10)
ThrowError(CDBLIBERR::eWrongNumCols);

for (i=0; i<10; i++)
{
if (pData =
dbdata(m_dbproc, i+1))
m_txn.Delivery.o_id[i] = (*(DBINT *)pData);
}

DiscardNextRows(0);
DiscardNextResults(0);

m_txn.Delivery.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
{
// hit
deadlock; backoff for increasingly longer period

```

```

        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
//
// if (iTryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

```

tpcc_odbc.cpp

```

/*
 * FILE: TPC_C_ODBC.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2002
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Implements ODBC calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 * Change history:
 * 4.42.000 - changed w_id fields
 * from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 * match kit
 * 4.10.001 - not deleting error
 * class in catch handler on deadlock retry;
 * not a
 * functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

// #define COMPILER_FOR_SNAC // define that to
// compile for SQL Native Client; comment out to use
// MDAC

#ifdef COMPILER_FOR_SNAC
#include <odbcss.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 3; // how many
retries on deadlock
//const iMaxRetries = 0; // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
                break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
    }
}

```

```

        break;
        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 *
 */

char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
"New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login

```

```

        LPCSTR szHost,                //
not used
        LPCSTR szDatabase,           // name of
database to use
        LPCWSTR szSPPrefix,         // prefix to
append to the stored procedure names
        BOOL bCallNoDuplicatesNewOrder ) // whether
to check for non-duplicate items in NewOrder and call
a new SP
{
        return new CTPCC_ODBC( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix,
bCallNoDuplicatesNewOrder );
}

CTPCC_ODBC::CTPCC_ODBC (
        LPCSTR szServer,
        // name of SQL server
        LPCSTR szUser,
        // user name for login
        LPCSTR szPassword,
        // password for login
        LPCSTR szHost,
        // not used
        LPCSTR szDatabase,
        // name of database to use
        LPCWSTR szSPPrefix,
        // prefix to append to the stored procedure
names
        BOOL bCallNoDuplicatesNewOrder //
whether to check for non-duplicate items in NewOrder
and call a new SP
)
:
m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder)
{
        RETCODE rc;

        // initialization
        m_hdbc = SQL_NULL_HDBC;
        m_hstmt = SQL_NULL_HSTMT;

        m_hstmtNewOrder = SQL_NULL_HSTMT;
        m_hstmtPayment = SQL_NULL_HSTMT;
        m_hstmtDelivery = SQL_NULL_HSTMT;
        m_hstmtOrderStatus = SQL_NULL_HSTMT;
        m_hstmtStockLevel = SQL_NULL_HSTMT;

        m_descNewOrderCols1 = SQL_NULL_HDESC;
        m_descNewOrderCols2 = SQL_NULL_HDESC;
        m_descOrderStatusCols1 = SQL_NULL_HDESC;
        m_descOrderStatusCols2 = SQL_NULL_HDESC;

        wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

        if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )

                ThrowError(CODBCERR::eAllocHandle);

```

```

        if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )

                ThrowError(CODBCERR::eConnOption);

        {
                char
                szConnectStr[256];
                char
                szOutStr[1024];
                SQLSMALLINT
                iOutStrLen;

#ifdef COMPILE_FOR_SNAC
                sprintf( szConnectStr,
"DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#else
                // Compile for SNAC
                sprintf( szConnectStr,
"DRIVER=SQL Native
Client;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#endif
                rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT);

                if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                        ThrowError(CODBCERR::eConnect);
        }

        if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)

                ThrowError(CODBCERR::eAllocHandle);

        {
                char                buffer[128];

                // set some options affecting
connection behavior
                strcpy(buffer, "set nocount on
set XACT_ABORT ON");
                rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
                if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                        ThrowError(CODBCERR::eExecDirect);

                // verify that version of stored
procs on server is correct
                char db_sp_version[10];
                strcpy(buffer, "{call
tpcc_version}");

```

```

                rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
                if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                        ThrowError(CODBCERR::eExecDirect);
                if ( SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

                        ThrowError(CODBCERR::eBindCol);
                if ( SQLFetch(m_hstmt) ==
SQL_ERROR )

                        ThrowError(CODBCERR::eFetch);
                if
                (strcmp(db_sp_version,sVersion))
                throw new
                CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION
);

                SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
        }

        // Bind parameters for each of the
transactions
        InitNewOrderParams();
        InitPaymentParams();
        InitOrderStatusParams();
        InitDeliveryParams();
        InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
        // note: descriptors are automatically
released when the connection is dropped
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

        SQLDisconnect(m_hdbc);
        SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION
eAction )
void CTPCC_ODBC::ThrowError( RETCODE eAction )
{
        RETCODE rc;
        DWORD lNativeError;
        char szState[6];
        char
        szMsg[SQL_MAX_MESSAGE_LENGTH];

```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODBCERR *pODBCERR;
// not allocated until needed (maybe never)

pODBCERR = new CODBCERR();

pODBCERR->m_NativeError = 0;
//pODBCERR->m_eAction = eAction;
pODBCERR->m_eAction =
(CODBCERR::ACTION)eAction;
pODBCERR->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLError(henv, m_hdbc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }
    if (rc != SQL_SUCCESS)
    {
        break;
    }
    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)
    pODBCERR->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCERR->m_NativeError == 0
&& lNativeError != 0)
        pODBCERR->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
        strcat( szTmp, szMsg );
}

if (pODBCERR->m_odbcerrstr != NULL)
{
    delete [] pODBCERR->m_odbcerrstr;
    pODBCERR->m_odbcerrstr = NULL;
}

```

```

}
if (strlen(szTmp) > 0)
{
    pODBCERR->m_odbcerrstr = new
char[ strlen(szTmp)+1 ];
    strcpy( pODBCERR->m_odbcerrstr,
szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCERR;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_TINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindCol);

    //Compose Stock Level statement
    _snprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCo
mmand[0]),
        L" {call %stpcck_stocklevel
(?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR )
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        m_txn.StockLevel.exec_status_code = eOK;
        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;
}

```

```

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

        // set the bind offset pointer
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_bindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NoCommit_flag, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderComman
d[0]),
                // 0      1      2
                //
012345678901234567890123456789
                L"call
%stpcp_neworder(?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,
?, ?, ?, ?, ?, ?"
                L"?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,
?, ?, ?, ?)", m_szSPPrefix);

```

```

        m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix); // fixed part + prefix
part

        //
        //
        // Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
        // and returns one result set for
lineitem details.
        //
        //
        m_hstmt = m_hstmtNewOrderNoDuplicates;

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

```

```

        // set row-wise binding
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UIINTEGER) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNe
wOrderNoDuplicatesCommand[0]),
        L"call
%tpcc_neworder_new(?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,"
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?
,?,?,?,?,?)", m_szSPPrefix);

        m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
    }

    //
    // Returns true if there are duplicate
(warehouse_id, item_id)
    // lineitem pairs in New Order input
parameters.
    //
    bool CTPCC_ODBC::DuplicatesInNewOrder()
    {
        int i, j;

        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
++i)
        {
            for (j = i+1; j<
m_txn.NewOrder.o_ol_cnt; ++j)
            {
                if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
                    return true;
            }
        }

        return false;
    }

    void CTPCC_ODBC::NewOrder()
    {
        if (m_bCallNoDuplicatesNewOrder)
        {
            if (DuplicatesInNewOrder())
            {
                NewOrderDuplicates();
            }
            else
            {
                NewOrderNoDuplicates();
            }
        }
    }

```

```

        else
        {
            NewOrderDuplicates();
        }
    }

    void CTPCC_ODBC::NewOrderDuplicates()
    {
        int
        i;
        RETCODE
        int
        iTryCount = 0;
        rc;

        0 1 2
        //
        //
        012345678901234567890123456789
        wchar_t
        szSqlTemplate[IMAX_SP_NAME_LEN];

        tpcc_neworder(?,?,?,?,," // L"call
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        m_hstmt = m_hstmtNewOrder;

        // associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 29 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate, m_szNewOrderCommand);
        i = m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L" )" );

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {

```



```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
        break;
    }
}
while (TRUE)
{
    try
    {
        m_BindOffset = 0;
        rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        // Get order line
results
        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
i < m_txn.NewOrder.o_ol_cnt; i++)
        {
            // set the
bind offset value...
            m_BindOffset
= i * sizeof(m_txn.NewOrder.OL[0]);

            if (
SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            // move to
the next resultset
            if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eMoreResults);

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
bindings for the second result set
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR)
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

        break;
    }
    catch (CODBCERR *e)
    {
        if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

//
// No lineitem duplicates optimized version.
//
void CTPCC_ODBC::NewOrderNoDuplicates()
{
    int
i;
    RETCODE rc;
    int
iTryCount = 0;

    0 1 2 3 //
//
0123456789012345678901234567890123
wchar_t
szSqlTemplate[IMAX_SP_NAME_LEN];

tpcc_neworder_new(?,?,?,?," //
L"?,?,?,?,?,?,?,?,?,?,?,?,?," //

```

```

L"?,?,?,?,?,?,?,?,?,?,?,?,?," //
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?," //
m_hstmt = m_hstmtNewOrderNoDuplicates;

// associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 33 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate,
m_szNewOrderNoDuplicatesCommand);
        i =
m_iBeginNewOrderNoDuplicatesVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L" ) );

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }

        while (TRUE)
        {
            try
            {
                // configure block
cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
                if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

```

```

        ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
            if
            (SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
            (SQLPOINTER)MAX_OL_NEW_ORDER_ITEMS, 0) !=
            SQL_SUCCESS)

            ThrowError(CODBCERR::eSetStmtAttr);

        // Get order line
        results
            if ( SQLFetch(m_hstmt)
            == SQL_ERROR)

            ThrowError(CODBCERR::eFetch);

        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
        i < m_txn.NewOrder.o_ol_cnt; i++)
        {

            m_txn.NewOrder.total_amount +=
            m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
        bindings for the second result set
            if ( SQLSetStmtAttrW(
            m_hstmt, SQL_ATTR_APP_ROW_DESC,
            m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
            SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // move to the next
        resultset
            if (
            SQLMoreResults(m_hstmt) == SQL_ERROR )

            ThrowError(CODBCERR::eMoreResults);

            if ( rc =
            SQLFetch(m_hstmt)) == SQL_ERROR)

            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
        SQL_CLOSE);

        // Check Fetch return
        code for no rows returned.
        // It means customer id
        or warehouse id were invalid.
        //
        if (rc == SQL_NO_DATA)

```

```

        throw new
        CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
        PARAM);

        if (m_no_commit_flag ==
        1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
            m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
            m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
            eInvalidItem;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
            || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
    iTryCount);

    void CTPCC_ODBC::InitPaymentParams()
    {
        if ( SQLAllocHandle(SQL_HANDLE_STMT,
        m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

            ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtPayment;

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
        &m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
        &m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
        &m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
        &m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS

```

```

            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
        &m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
        &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
        SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
        sizeof(m_txn.Payment.c_last), 0,
        &m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
        NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
        SQL_C_SLONG, &m_txn.Payment.c_id,
        0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.c_last,
        sizeof(m_txn.Payment.c_last), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
        0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.w_street_1,
        sizeof(m_txn.Payment.w_street_1), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.w_street_2,
        sizeof(m_txn.Payment.w_street_2), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.w_city,
        sizeof(m_txn.Payment.w_city), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.w_state,
        sizeof(m_txn.Payment.w_state), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.w_zip,
        sizeof(m_txn.Payment.w_zip), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.d_street_1,
        sizeof(m_txn.Payment.d_street_1), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.d_street_2,
        sizeof(m_txn.Payment.d_street_2), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.d_city,
        sizeof(m_txn.Payment.d_city), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.d_state,
        sizeof(m_txn.Payment.d_state), NULL) !=
        SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
        SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Payment statement
    _snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[
0]),
        L"%s{call %stppc_payment
(?,?,?,?,,?)}", m_szSPPrefix);

```

```

    }
void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount =
0;
    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id
== 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
                throw;

            // hit deadlock;
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtOrderStatus;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        // configure block cursor
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) !=
SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatus
Command[0]),
        L"call %stppc_orderstatus
(?,?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int
    RETCODE
    rc;

    int
    iTryCount = 0;
}

```

```

m_hstmt = m_hstmtOrderStatus;

if (m_txn.OrderStatus.c_id != 0)
    m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
    try
    {
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // configure block
        cursor
        if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
        if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
        //
        if ( !(rc ==
SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0))) )
            if ( rc !=
SQL_SUCCESS )

                ThrowError(CODBCERR::eFetchScroll);

        m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

        if
        (m_txn.OrderStatus.o_ol_cnt != 0)
        {
            if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

```

```

        ThrowError(CODBCERR::eSetStmtAttr);

        //
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
            if ( rc =
SQLMoreResults(m_hstmt) != SQL_SUCCESS )
            {
                ThrowError(CODBCERR::eMoreResults);
            }

        //
        if ( rc =
SQLFetch(m_hstmt) == SQL_ERROR )
            if ( rc =
SQLFetch(m_hstmt) != SQL_SUCCESS )
                ThrowError(CODBCERR::eFetch);
    }

    SQLFreeStmt(m_hstmt,
SQL_CLOSE);

    if
    (m_txn.OrderStatus.o_ol_cnt == 0)
        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
    else if
    (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
    else
        m_txn.OrderStatus.exec_status_code = eOK;

        break;
    }
    catch (CODBCERR *e)
    {
        if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

//
if (iTryCount)
//
throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowError(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if ( SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS )

        ThrowError(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snpprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryComman
d[0]),
        L"{call %stpcc_delivery (?,?)}",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE        rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_odbc.h
/* FILE: TPCC_ODBC.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class
implementation.
 *
 * Change history:
 *
 * 4.20.000 - updated rev number to
match kit
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define IMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
    }
};

```

```

        eConnOption,
// error from SQLSetConnectOption
        eConnect,
// error from SQLConnect
        eAllocStmt,
// error from SQLAllocStmt
        eExecDirect,
// error from SQLExecDirect
        eBindParam,
// error from SQLBindParameter
        eBindCol,
// error from SQLBindCol
        eFetch,
// error from SQLFetch
        eFetchScroll,
// error from SQLFetchScroll
        eMoreResults,
// error from SQLMoreResults
        ePrepare,
// error from SQLPrepare
        eExecute,
// error from SQLExecute
        eSetEnvAttr,
// error from SQLSetEnvAttr
        eSetStmtAttr,
// error from SQLSetStmtAttr
    };

    CODBCERR(void)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

    ~CODBCERR()
    {
        if (m_odbcerrstr !=
NULL)
            delete []
m_odbcerrstr;
    };

    ACTION m_eAction;
    int m_NativeError;
    BOOL m_bDeadLock;
    char *m_odbcerrstr;

    int ErrorType()
    {return ERR_TYPE_ODBC;}
    char* ErrorTypeStr() { return
"ODBC"; }
    int ErrorNum()
    {return m_NativeError;}
    char* ErrorText() {return
m_odbcerrstr;}
    int ErrorAction()
    { return (int)m_eAction; }
};

class CTPCC_ODBC_ERR : public CBaseErr

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO_SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRIED_TRANS,
            // "Retries before transaction
succeeded."

            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int m_errno;
        int m_iTryCount;

        int ErrorType()
{return ERR_TYPE_TPCC_ODBC;};
        char* ErrorTypeStr() { return
"TPCC ODBC"; }
        int ErrorNum()
{return m_errno;};

        char* ErrorText();

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL m_bDeadlock;
        // transaction was selected as
deadlock victim
        int m_MaxRetries; // retry
count on deadlock

        SQLHENV m_henv;
        // ODBC environment
handle
        SQLHDBC m_hdbc;
        SQLHSTMT m_hstmt;
        // the current hstmt

        SQLHSTMT m_hstmtNewOrder;
        SQLHSTMT
m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

        SQLHSTMT m_hstmtPayment;
        SQLHSTMT m_hstmtDelivery;
        SQLHSTMT m_hstmtOrderStatus;
        SQLHSTMT m_hstmtStockLevel;

        SQLHDESC m_descNewOrderCols1;
        SQLHDESC m_descNewOrderCols2;
        SQLHDESC
m_descNewOrderNoDuplicatesCols1; //
NewOrder with one result set for lineitem details
        SQLHDESC
m_descNewOrderNoDuplicatesCols2; //
NewOrder with one result set for lineitem details
        SQLHDESC m_descOrderStatusCols1;
        SQLHDESC m_descOrderStatusCols2;

        wchar_t
m_szSPPrefix[32]; // stored procedures
prefix

        wchar_t
m_szNewOrderCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szNewOrderNoDuplicatesCommand[IMAX_SP_NAME
E_LEN];

        int
m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
        int
m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement
        wchar_t
m_szPaymentCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szDeliveryCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szOrderStatusCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szStockLevelCommand[IMAX_SP_NAME_LEN];

        // new-order specific fields
        SQLINTEGER m_BindOffset;
        SQLINTEGER
m_RowsFetched;
        int
m_no_commit_flag;

        // tpcc_neworder_new flag
        BOOL
m_bCallNoDuplicatesNewOrder;

        //void ThrowError(
COBCEER::ACTION eAction );
        void ThrowError( RETCODE eAction
);

        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

```

```

        union
        {
            NEW_ORDER_DATA
NewOrder;
            PAYMENT_DATA
Payment;
            DELIVERY_DATA
Delivery;
            STOCK_LEVEL_DATA
StockLevel;
            ORDER_STATUS_DATA
OrderStatus;
        }
        m_txn;

        bool DuplicatesInNewOrder();
        void NewOrderDuplicates();
        void NewOrderNoDuplicates();

    public:
        CTPCC_ODBC( LPCWSTR
szServer, LPCWSTR szUser, LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder);
        ~CTPCC_ODBC(void);

        inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
        inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
        inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
        inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder ();
        void Payment ();
        void Delivery ();
        void StockLevel ();
        void OrderStatus ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
( LPCWSTR szServer, LPCWSTR szUser,
LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

tpcc_oledb.cpp

```
/* FILE: TPC_C_OLEDB.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2004
 * Written by
 * Sergey Vasilevskiy
 * All Rights Reserved
 *
 * PURPOSE: Implements OLEDB calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
// #include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifdef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 * */
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;
    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
```

```

    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
not used
LPCSTR szDatabase, // name of
database to use
LPCWSTR szSPPrefix ) //
prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
LPCSTR szServer,
// name of SQL server
LPCSTR szUser,
// user name for login
LPCSTR szPassword,
// password for login
LPCSTR szHost,
// not used
LPCSTR szDatabase,
// name of database to use
LPCWSTR szSPPrefix
// prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int
iRc;
int
i;
HRESULT hr;

IDBInitialize*
pIDBInitialize = NULL; //
data source interface
IDBProperties*
pIDBProperties = NULL;
ICommandText*
pICommandText;
// SQL command without parameters
wchar_t
szwServer[iMaxNameLen]; //
Unicode string used to convert to BSTR
```

```

        wchar_t
        szwDatabase[iMaxNameLen];    // Unicode
string used to convert to BSTR
        wchar_t
        szwUser[iMaxNameLen];        //
Unicode string used to convert to BSTR
        wchar_t
        szwPassword[iMaxNameLen];    // Unicode
string used to convert to BSTR

        // Copy stored procedures prefix
        wcsncpy(m_szsppPrefix, szsppPrefix,
sizeof(m_szsppPrefix)/sizeof(m_szsppPrefix[0]));

        // Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

        // Initialize COM library to be able to use
OLE-DB interfaces
        CoInitialize(NULL);

        // Initialization - create SQLOLEDB
component
        //hr = CoCreateInstance(CLSID_SQLOLEDB, //
GUID of SQLOLEDB component
        // Compile for SNAC
        hr = CoCreateInstance(CLSID_SQLNCLI, //
GUID of SQLNCLI component
        NULL,
        // not defining an aggregate
component, so NULL
        CLSCTX_INPROC_SERVER, //
run the component in our process
        IID_IDBInitialize,
        (void **) &pIDBInitialize);

        /*
        Initialize the property values needed
        to establish the connection.
        */
        for(i = 0; i < 4; i++)
            VariantInit(&m_InitProperties[i].vValue);
        //Server name.
        m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
        m_InitProperties[0].vValue.vt = VT_BSTR;
        m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
        m_InitProperties[0].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[0].colid = DB_NULLID;
        //Database.

```

```

        m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
        m_InitProperties[1].vValue.vt = VT_BSTR;
        m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
        m_InitProperties[1].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[1].colid = DB_NULLID;
        //Username (login).
        m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
        m_InitProperties[2].vValue.vt = VT_BSTR;
        m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
        m_InitProperties[2].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[2].colid = DB_NULLID;
        //Password.
        m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
        m_InitProperties[3].vValue.vt = VT_BSTR;
        m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
        m_InitProperties[3].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[3].colid = DB_NULLID;
        /*
        Construct the DBPROPSET
        structure(m_rgInitPropSet). The
        DBPROPSET structure is used to pass an array of
        DBPROP
        structures (m_InitProperties) to the
        SetProperties method.
        */
        m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
        m_rgInitPropSet.cProperties = 4;
        m_rgInitPropSet.rgProperties =
m_InitProperties;
        //Set initialization properties.
        if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
        (void **) &pIDBProperties)))
        {
            ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
        }

        hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);

        pIDBProperties->Release();
        //Now establish the connection to the data
source.
        hr = pIDBInitialize->Initialize();

        // Free BSTR property strings
        for(i = 0; i < 4; i++)
        {

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
        }

        hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

        // Releasing this has no effect on the SQL
Server connection
        // of the data source object because of the
reference maintained by
        // m_pIDBCreateSession.
        pIDBInitialize->Release();
        pIDBInitialize = NULL;

        hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
        }

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
        }

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
        }

        hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
        }

        pICommandText->Release();

        // verify that version of stored procs on
server is correct
        CheckSPVersion();

        // Get IMalloc interface
        hr = CoGetMalloc(1, (LPMalloc
**) &m_pIMalloc);

```



```

        // Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
}

library
{
    /*
    * Check stored procedures version on the
    server.
    */
    void CTPCC_OLEDB::CheckSPVersion()
    {
        HRESULT hr;
        char
        db_sp_version[10];
        ICommandText* pICommandText;
        IAccessor* pIAccessor;
        IRowset* pRowset;
        const ULONG nOutputParams
= 1;
        // output 1st result set columns
        HACCESSOR
        hTpccVersionOutputAccessor;
        // Structure to bind in accessor
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
        LONG cRows = 1;
        // number of rows returned in the rowset
        ULONG
        cRowsObtained;
        HROW rghRow;
        //returned row handles
        HROW* prghRow =
&rghRow;

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
        }
    }
}

```

```

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"{call tpcc_version}");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
        }

        hr = pICommandText-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
        }

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset
        SetBinding(&acOutputDBBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_ROWDATA,
            nOutputParams,
            acOutputDBBinding,
            sizeof(db_sp_version),
            &hTpccVersionOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
        }

        hr = pICommandText->Execute(NULL,
IID_IRowset, NULL, NULL, (IUnknown **) &pRowset);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
        }

        // Fetch the result row handle(s)
        hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
0, cRows, &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
        }

        // Fetch the actual row data by handle
        hr = pRowset->GetData(rghRow,
hTpccVersionOutputAccessor, &db_sp_version);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
        }
    }
}

```

```

    }

    // Release row(s)
    hr = pRowset->Release();

    pICommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
    CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT
    hr;
    //char
    szState[6];
    char
    szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
    szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr;
    //
    not allocated until needed (maybe never)
    int
    iLen;
    // Interfaces
    IErrorInfo* pIErrorInfoAll
= NULL;
    IErrorInfo* pIErrorInfoRecord
= NULL;
    IErrorRecords* pIErrorRecords
= NULL;
    ISupportErrorInfo* pISupportErrorInfo
= NULL;
    ISQLServerErrorInfo*
pISQLServerErrorInfo = NULL;
    ISQLErrorInfo*
pISQLErrorInfo = NULL;

    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG nRecs;
    ULONG nRec;

    // SQL Server error information from
ISQLServerErrorInfo.
    SSERRORINFO* pSSErrorInfo =
NULL;
    OLECHAR* pSSErrorStrings =
NULL;

    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)
&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw pOLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError
interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}*/
return;

// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pErrorInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pErrorInfoAll);

if (pErrorInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
    {
        pIErrorRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.
    pIErrorRecords->GetCustomErrorObject(nRec,

    IID_ISQLErrorInfo, // generic SQL error
interface
    (IUnknown**) &pISQLErrorInfo);

    if
    (pISQLErrorInfo != NULL)
    {
        //
Request SQL Server-specific error interface, not the
generic SQL error interface.
        pISQLErrorInfo->QueryInterface(

        IID_ISQLServerErrorInfo, // SQL Server
error interface

        (void**) &pISQLServerErrorInfo);
    }
    // Test to
ensure the reference is valid, then
    // get error
information from ISQLServerErrorInfo.
    if
    (pISQLServerErrorInfo != NULL)
    {
        pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);

        //
ISQLServerErrorInfo::GetErrorInfo succeeds
        //
even when it has nothing to return. Test the
        //
pointers before using.
        if
        (pSSErrorInfo)
        {
            // First, add the error message.

            // Convert Unicode error string to ANSI.
            WideCharToMultiByte(CP_THREAD_ACP, 0,

            pSSErrorInfo->pwszMessage, -1,

            szMsg, sizeof(szMsg),

            NULL, NULL);

```

```

// quit if there isn't enough room to
concatenate error text
    if ( (strlen(szMsg) + 2) > (sizeof(szTmp) -
strlen(szTmp)) )
        break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\r\n");

// concatenate the error record to the
overall error message
    strcat( szTmp, szMsg );

// Second, add the stored procedure name
and line number, if available.

if (wcslen(pSSErrorInfo->pwszProcedure)>0)
{
    // Prefix with a line break
    iLen = sprintf(szMsg,
"\r\nProcedure: ");

    // Convert Unicode error string
to ANSI.
    WideCharToMultiByte(CP_THREAD_ACP, 0,

    pSSErrorInfo-
>pwszProcedure, -1,

    &szMsg[iLen],

    sizeof(szMsg) - iLen,

    NULL, NULL);

    // Check if have space to add the
line number.
    // Assume the line number takes
no more than 3 digits.
    if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
sizeof(szMsg),
                "%d",
pSSErrorInfo->wLineNumber);
    }

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // concatenate the error record
to the overall error message
    strcat( szTmp, szMsg );

    // copy the overall error string
to the exception
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szTmp)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szTmp);
}

// Third, capture the (first) database
error
    if (pOLEDBErr->m_NativeError == 0 &&
pSSErrorInfo->lNative != 0)
    {
        pOLEDBErr->m_NativeError =
pSSErrorInfo->lNative;

        // Check for deadlock error code
and set the deadlock flag
        if (pSSErrorInfo->lNative ==
1205)
        {
            pOLEDBErr->m_bDeadLock
= TRUE;
        }
    }

```

```

    }

    // IMalloc::Free needed to release
references
    // on returned values.
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc-
>Free(pSSErrorStrings);
        m_pIMalloc->Free(pSSErrorInfo);
    }

    pISQLServerErrorInfo->Release();
    }
    else
    {
        Custom error object is not supported. //
        Use general OLE-DB error interface. //
        Get the numeric error code //
        pIErrorRecords->GetBasicErrorInfo(nRec,
&BasicErrorInfo);
        if
        (pOLEDBErr->m_NativeError == 0)
        {
            // Get the failed call HRESULT code, which
is not really the native error
            pOLEDBErr->m_NativeError =
BasicErrorInfo.hrError;
        }
        //
        Try to get the string description of the error. //
        pIErrorRecords->GetErrorInfo(nRec,
LOCALE_USER_DEFAULT,
(IErrorInfo**)&pIErrorInfoRecord);
        if
        (pIErrorInfoRecord)
        {
            pIErrorInfoRecord-
>GetDescription(&bstrDescription);

```

```

        // Convert Unicode error string to ANSI.
        WideCharToMultiByte(CP_THREAD_ACP, 0,
                bstrDescription, -1,
                szMsg, sizeof(szMsg),
                NULL, NULL);

        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
        strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);
    }
} // for()
} // if
(SUCCEEDED(pIErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
    else
    {
        // No IErrorRecords
interface supported. Use default IErrorInfo.
        // Note: SQLOLEDB
supports IErrorRecords, so this check is for good
style only.
        _snprintf(szMsg,
sizeof(szMsg), "IErrorRecords interface not
supported");
        pOLEDBErr-
>m_OLEDBErrStr = new char[strlen(szMsg)+1];
        strcpy(pOLEDBErr-
>m_OLEDBErrStr, szMsg);
    }
    pIErrorInfoAll->Release();
} // if (pIErrorInfoAll != NULL)
else
{
    // No IErrorInfo interface
supported.
    // Note: SQLOLEDB supports
IErrorInfo, so this check is for good style only.
    _snprintf(szMsg, sizeof(szMsg),
"IErrorInfo interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}
    throw pOLEDBErr;
}
/*
*

```

```

*      Create a new command object from the SQL
text passed in.
*
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSqlCommand, // I: SQL
query for the command

                                ICommandText**
ppICommandText // O: returned command object
{
    HRESULT hr;

    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)-
>SetCommandText(DBGUID_SQL, szSqlCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
*      QueryInterface and Prepare in one function
for simplicity.
*      DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
rowSetPropSet;
    DBPROP
rowSetProp;

    // Set the deferred prepare property to
false.
    rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
    memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));

```

```

    rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
    rowSetProp.colid = DB_NULLID;

    rowSetPropSet.cProperties = 1;
    rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
    rowSetPropSet.rgProperties = &rowSetProp;

    // Query interface for setting properties
    hr = pICommandText-
>QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Set the property set
    hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Get interface for preparing commands
    hr = pICommandText-
>QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Prepare Payment command
    hr = pICommandPrepare->Prepare(0xFFFFFFFF);
    if (FAILED(hr))
    {
        ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
    }
}

/*
*      Initialize fields of an array of bindings
structures.
*      Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings, // IO: array of bindings
                                int iCount, // I: number of
                                elements in the array

```

```

                                eBindingType BindingType) //
I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false); //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }
}

/*
*      Perform binding for one parameter or output
column.
*
*/
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure
                                size_t obValue, // I: parameter (column) offset in the user
                                buffer
                                size_t cbMaxLen, // I: parameter (column) length

```

```

        DBTYPE wType
    // I: parameter (column) type
    {
        )
        pDBBinding->obValue = (ULONG)obValue;
        pDBBinding->cbMaxLen = (ULONG)cbMaxLen;
        pDBBinding->wType = wType;
    }
void CTPCC_OLEDB::InitStockLevelParams()
{
    int            i;
    HRESULT        hr;
    wchar_t        szName[IMAX_SP_NAME_LEN];
    IAccessor*     pIAccessor;
    const ULONG    nInputParams = 3; // input parameters
    const ULONG    nOutputParams = 1; // output 1st result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];

    // Set command text
    _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
        L"call
%stpcck_stocklevel (?,?,?)", m_szSPPrefix);

    // Create and Prepare a new command object
for StockLevel.
    CreateCommand(szName,
&m_pIStockLevelCommand);

    // Describe the consumer buffer by filling
in the array
    // of DBBINDING structures. Each binding
associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // StockLevel parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, w_id),
sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

    // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, d_id),
sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

    // StockLevel parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, threshold),
sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

    hr = m_pIStockLevelCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIStockLevelCommand,
COLEDBERR::eQueryInterface,
"InitStockLevelParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelInputAccessor,
        acInputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
    }

    m_StockLevelExecuteParams.cParamSets = 1;
    m_StockLevelExecuteParams.hAccessor =
m_hStockLevelInputAccessor;
    m_StockLevelExecuteParams.pData =
&m_txn.StockLevel;

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

    // Binding for a rowset that may return
more than one row.
    i = 0;
    // StockLevel output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, low_stock),
sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelOutputAccessor,
        acOutputDBBindStatus);

    if (FAILED(hr))
    {

```

```

        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
    }
}

void CTPCC_OLEDB::StockLevel()
{
    HRESULT        hr;
    int            iTryCount = 0;
    IRowset*       pRowset;
    LONG           cRows = 1;
    ULONG          // number of rows returned in the rowset
    cRowsObtained;
    HROW           rghRow;
    //returned row handles
    HROW*          prghRow =

&rghRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
&m_StockLevelExecuteParams, NULL,

                (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eExecute, "StockLevel()");
            }

            // Fetch the result row
handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetNextRows, "StockLevel()");
            }

            // Fetch the actual row
data by handle
            hr = pRowset-
>GetData(rghRow, m_hStockLevelOutputAccessor,
&m_txn.StockLevel);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetData, "StockLevel()");
            }
        }
    }
}

```

```

        // Release row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
        // Release rowset
        hr = pRowset-
>Release();

        m_txn.StockLevel.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int        i, j, iOlCount;
    HRESULT    hr;
    wchar_t    wchar_t
szName[IMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG
nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
    const ULONG
nOutputParams = 5; // output 1st result
set columns
    const ULONG
nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
acInputDBBinding[nInputParams];
    DBBINDSTATUS
acInputDBBindStatus[nInputParams];
    DBBINDING
acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
    DBBINDING
acOutputDBBinding2[nOutputParams2];

```

```

    DBBINDSTATUS
acOutputDBBindStatus2[nOutputParams2];

    // Describe the consumer buffer by filling
in the array
    // of DBBINDING structures. Each binding
associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // NewOrder parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, w_id),
sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

    // NewOrder parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, d_id),
sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

    // NewOrder parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, c_id),
sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

    // NewOrder parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_ol_cnt),
sizeof(m_txn.NewOrder.o_ol_cnt), DBTYPE_UI1);

    // NewOrder parameter 5
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_all_local),
sizeof(m_txn.NewOrder.o_all_local), DBTYPE_UI1);

    for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
    {
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

    // Binding for the order line rowsets (each
consist of one row).

```

```

    // Bind to offsets of the OL_NEW_ORDER_DATA
structure instead of NEW_ORDER_DATA.
    // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
    // from the row set.

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_name),
sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_stock),
sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
DBTYPE_STR);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_price),
sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

    // NewOrder output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_amount),
sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

    // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, w_tax),
sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, d_tax),
sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_id),
sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_last),
sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

    // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_discount),
sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_credit),
sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_entry_d),
sizeof(m_txn.NewOrder.o_entry_d),
DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_commit_flag),
sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first
            // Print the fixed first portion
            // of parameters
            i = _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
            L"call %stpc_neworder (?,?,?,?,"
m_szSPPrefix);

            // Now print the variable portion
            // depending on the number of order line parameters
            for (iOlCount = 0; iOlCount <= j;
++iOlCount)
            {
                i +=
                _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",?,?,?");
            }

            // Print the fixed end
            if (j != MAX_OL_NEW_ORDER_ITEMS -
1)
            {
                // append 'default' for
                // the parameters that are not used
                i +=
                _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",default}");
            }
            else // using all 15 order
            line parameters
            {
                i +=
                _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L"}");
            }

            // Create and Prepare a new
            // command object for NewOrder.

```

```

        CreateCommand(szName,
&m_pINewOrderCommand[j]);

        // Now create the input accessor
        // for this prepared command
        hr = m_pINewOrderCommand[j]-
>QueryInterface(IID_IAccessor, (void **)&piAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[j],
COLEDBERR::eQueryInterface, "InitNewOrderParams()");
        }

        hr = piAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

3 * (j + 1),

        acInputDBBinding,

        sizeof(NEW_ORDER_DATA),

        &m_hNewOrderInputAccessor[j],

        acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        m_NewOrderExecuteParams[j].cParamSets = 1;
        //
        m_NewOrderExecuteParams.hAccessor is set dynamically
        // at run-time
        // based on the number of new
        // order items for the particular transaction call.

        m_NewOrderExecuteParams[j].hAccessor =
m_hNewOrderInputAccessor[j];
        m_NewOrderExecuteParams[j].pData
        = &m_txn.NewOrder;

        // Create accessor for the first
        rowset
        hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,

        nOutputParams,
        acOutputDBBinding,

        sizeof(OL_NEW_ORDER_DATA),

```

```

        &m_hNewOrderOutputAccessor[j],
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        // Create accessor for the second
        rowset
        hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),

        &m_hNewOrderOutputAccessor2[j],
        acOutputDBBindStatus2);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        piAccessor->Release();
    }

void CTPCC_OLEDB::NewOrder()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = 1; // number of rows
    returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows; //returned row handles
    for the 1st result set
    HROW* prghRows = &rghRows;
    LONG cRows2 = 1; // number of rows
    returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle
    for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of
    affected rows for a rowset

```

```

        int
        iHandleIndex; // index into the
handle arrays based on the orders count

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }

        iHandleIndex = m_txn.NewOrder.o_ol_cnt - 1;
// for convenience

        while (TRUE)
        {
            try
            {
                // Execute the prepared
command (according to the number of new orders)
                // Ask for
IMultipleResults because it returns 2 rowsets.
                hr =
m_pINewOrderCommand[iHandleIndex]->Execute(

                NULL, IID_IMultipleResults,

                &m_NewOrderExecuteParams[iHandleIndex],

                NULL,

                (IUnknown **)&pMultipleResults);
                if (FAILED(hr))
                {
                    ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eExecute, "NewOrder()");
                }

                // Get order line
results

                // Get order line
results

                m_txn.NewOrder.total_amount = 0;
                for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; ++i)

```

```

        {
            // Get the
first rowset object
            hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset);
            if
(FAILED(hr))
            {
                char szTmp[256];

                _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);

                ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o_ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
            }

            // Fetch the
result row handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
            }

            // Fetch the
actual row data by handle
            hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
            }

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;

            // Release
row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);

            // Release
rowset
            hr = pRowset-
>Release();
        }

```

```

        // Get the second
rowset object
        hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset2);
        if (FAILED(hr))
        {
            char
szTmp[256];

            _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
        }

        // Fetch the result row
handle(s)
        hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
        }

        // Fetch the actual row
data by handle
        hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
        }

        // Release row(s)
        hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);

        // Release rowset
        hr = pRowset2-
>Release();

        // Release the common
MultipleResults interface
        hr = pMultipleResults-
>Release();

        if
(m_txn.NewOrder.o_all_local == 1)

```



```

        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
            m_txn.NewOrder.exec_status_code =
eInvalidItem;
        }
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            ++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
        // throw new
        CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[iMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const ULONG
        nInputParams = 7; // input parameters
        const ULONG
        nOutputParams = 27; // output result set
columns

    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];

    // Set command text

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"call
%stpc_payment(?,?,?,?,?,?)", m_szSPPrefix);

        // Create and Prepare a new command object
        for Payment.
        CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

```

```

nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
        }

        m_PaymentExecuteParams.cParamSets = 1;
        m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
        m_PaymentExecuteParams.pData =
&m_txn.Payment;

        // Now fill the binding information for
        output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        i = 0;
        // Payment output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        // Payment output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

        // Payment output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

        // Payment output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

        // Payment output column 6
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

        // Payment output column 7
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

        // Payment output column 8
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

    // Payment output column 9
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

    // Payment output column 10
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

    // Payment output column 11
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

    // Payment output column 12
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

    // Payment output column 13
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

    // Payment output column 14
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

    // Payment output column 15
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

    // Payment output column 16
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

    // Payment output column 17
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

    // Payment output column 18
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

    // Payment output column 19
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

    // Payment output column 20
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

    // Payment output column 21

```

```

    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

    // Payment output column 22
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

    // Payment output column 23
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

    // Payment output column 24
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

    // Payment output column 25
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

    // Payment output column 26
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

    // Payment output column 27
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(PAYMENT_DATA),
        &m_hPaymentOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
        COLEDBERR::eCreateAccessor, "InitPaymentParams()");
    }

void CTPCC_OLEDB::Payment()
{
    HRESULT hr;
    int
    iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW rghRow;
    //returned row handles

```

```

    HROW* prghRow =
&rghRow;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,

            (IUnknown **)&rRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIPaymentCommand,
                COLEDBERR::eExecute, "Payment()");
            }

            // Fetch the result row
            handle(s)
            hr = pRowset->
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {
                ThrowError(m_pIPaymentCommand,
                COLEDBERR::eGetNextRows, "Payment()");
            }

            // Fetch the actual row
            data by handle
            hr = pRowset->
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
            if (FAILED(hr))
            {
                ThrowError(m_pIPaymentCommand,
                COLEDBERR::eGetData, "Payment()");
            }

            // Release row(s)
            hr = pRowset->
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset->
>Release();
            if (m_txn.Payment.c_id
== 0)
                throw new
                CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
            else

```

```

        m_txn.Payment.exec_status_code = eOK;
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            if (++iTryCount > iMaxRetries)
            {
                throw;
            }
            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount)
    //     throw new
    CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
    iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int
    HRESULT
    hr;
    wchar_t
    szName[MAX_SP_NAME_LEN];
    IAccessor*
    pIAccessor;
    const ULONG
    nInputParams = 4; // input parameters
    const ULONG
    nOutputParams = 5; // output 1st result
set columns
    const ULONG
    nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    DBBINDING
    acOutputDBBinding2[nOutputParams2];
    DBBINDSTATUS
    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snwprintf(szName,
    sizeof(szName)/sizeof(szName[0]),
    L"{call
    %stpcc_orderstatus (?,?,?,?)}", m_szSPPrefix);

```

```

    // Create and Prepare a new command object
    for OrderStatus.
    CreateCommand(szName,
    &m_pIOrderStatusCommand);

    // Describe the consumer buffer by filling
    in the array
    // of DBBINDING structures. Each binding
    associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
    nInputParams, eInputParameter);

    i = 0;
    // OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, w_id),
    sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

    // OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, d_id),
    sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

    // OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_id),
    sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_last),
    sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOrderStatusCommand-
    >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
        COLEDBERR::eQueryInterface,
        "InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
        &m_hOrderStatusInputAccessor,
        acInputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor,
        "InitOrderStatusParams()");
    }

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
    m_hOrderStatusInputAccessor;

```

```

    m_OrderStatusExecuteParams.pData =
    &m_txn.OrderStatus;

    // Now fill the binding information for
    result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
    nOutputParams, eOutputColumn);

    // Binding for a rowset that may return
    more than one row.
    // Bind to offsets of the
    OL_ORDER_STATUS_DATA structure instead of
    ORDER_STATUS_DATA.
    // IRowset::GetData() will be passed
    individual array slots OL[i] to fetch the data
    // from the row set.

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
    sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
    DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
    sizeof(m_txn.OrderStatus.OL[0].ol_i_id),
    DBTYPE_I4);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
    sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
    DBTYPE_I2);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_amount),
    sizeof(m_txn.OrderStatus.OL[0].ol_amount),
    DBTYPE_R8);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
    sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
    DBTYPE_DBTIMESTAMP);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_ORDER_STATUS_DATA),
        &m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor,
        "InitOrderStatusParams()");
    }

```

```

// Now fill the binding information for
result set 2 output columns
InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

i = 0;
// OrderStatus output column 1
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

// OrderStatus output column 2
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

// OrderStatus output column 3
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

// OrderStatus output column 4
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

// OrderStatus output column 5
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

// OrderStatus output column 7
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

// OrderStatus output column 8
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

// OrderStatus output column 9
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
acOutputDBBindStatus2);

if (FAILED(hr))
{
ThrowError(piAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
}

```

```

}

void CTPCC_OLEDB::OrderStatus()
{
HRESULT hr;
int iTryCount = 0;
IMultipleResults* pMultipleResults;
IRowset* pRowset;
IRowset* pRowset2;
LONG cRows = MAX_OL_ORDER_STATUS_ITEMS; //
number of rows returned in the 1st rowset
ULONG cRowsObtained;
HROW rghRows[MAX_OL_ORDER_STATUS_ITEMS];
//returned row handles for the 1st result
set
HROW* prghRows = &rghRows[0];
LONG cRows2 = 1; // number of rows
returned in the 2nd rowset
ULONG cRowsObtained2;
HROW rghRows2; //returned row handle
for the 2nd result set
HROW* prghRows2 = &rghRows2;
int i;
long lRowsAffected; // the number of
affected rows for a rowset

if (m_txn.OrderStatus.c_id != 0)
m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
try
{
// Execute the prepared
command // Ask for
IMultipleResults because it returns 2 rowsets.
hr =
m_piOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,

(IUnknown **)&pMultipleResults);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
}
}
}

```

```

// Get order line
results

// Get the first rowset
object
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}

// Fetch the result row
handle(s)
hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}

m_txn.OrderStatus.o_ol_cnt =
(short)cRowsObtained;

// Get the data from
multiple rows in this rowset
for (i = 0; i <
m_txn.OrderStatus.o_ol_cnt; ++i)
{
// Fetch the
actual row data by handle
hr = pRowset-
>GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
if
(FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();

```

```

////////////////////////////////////
// Get the second
rowset object

////////////////////////////////////
if
(m_txn.OrderStatus.o_ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}
// Fetch the
result row handle(s)
hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}
// Fetch the
actual row data by handle
hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
// Release
row(s)
hr =
pRowset2->Release();
}
// Release the common
MultipleResults interface
hr = pMultipleResults-
>Release();

if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);

```

```

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else
    m_txn.OrderStatus.exec_status_code = eOK;

    break;
}
catch (COLEDBERR *e)
{
    if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;
// hit deadlock;
delete e;
Sleep(10 * iTryCount);
}
}
// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitDeliveryParams()
{
    int i;
    HRESULT hr;
    wchar_t
szName[IMAX_SP_NAME_LEN];
    IAccessor*
pIAccessor;
    const ULONG
nInputParams = 2; // input parameters
    const ULONG
nOutputParams = 10; // output 1st result
set columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];

// Set command text
_snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);
// Delivery parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);

hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}

hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(DELIVERY_DATA),
&m_hDeliveryInputAccessor,
acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}

m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;

// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1

```

```

        SetBinding(&acOutputDBBinding[i],
offsetof(DELVIVERY_DATA, o_id[i]),
sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DELVIVERY_DATA),
&m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }
}

void CTPCC_OLEDB::Delivery()
{
    HRESULT          hr;
    int
    iTryCount = 0;
    IRowset*         pRowset;
    LONG             cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW             rgRow;
    //returned row handles
    HROW*           prghRow =
&rgRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,

            (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eExecute, "Delivery()");
            }

            // Fetch the result row
handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {

```

```

                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetNextRows, "Delivery()");
            }
        }
        // Fetch the actual row
data by handle
            hr = pRowset-
>GetData(rgRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetData, "Delivery()");
            }
            // Release row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset-
>Release();

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (COLEDBERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            // backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_oledb.h
/* FILE: TPC_C_OLEDB.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999-2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
 *

```

```

 * PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
 *
 *
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        // = 6
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
        // = 11
    };

    COLEDBERR(LPCTSTR szLoc)
        : CBaseErr(szLoc)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_OLEDBErrStr = NULL;
    };

    ~COLEDBERR()
    {
        if (m_OLEDBErrStr !=
NULL)
            delete []
m_OLEDBErrStr;
    }
};

```

```

};

ACTION    m_eAction;
int       m_NativeError;
BOOL      m_bDeadLock;
char      *m_OLEDBErrStr;

int       ErrorType()
{return ERR_TYPE_OLEDB;}
char*     ErrorTypeStr() { return
"OLEDB"; }
int       ErrorNum()
{return m_NativeError;}
char*     ErrorText() {return
m_OLEDBErrStr;}
int       ErrorAction()
{ return (int)m_eAction; }
};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
    enum TPCC_OLEDB_ERRS
    {
        ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
// "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
// "No orders found for
customer."
        ERR_RETRIED_TRANS,
// "Retries before transaction
succeeded."
    };
    CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };
    CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

    int       m_errno;
    int       m_iTryCount;

    int       ErrorType()
{return ERR_TYPE_TPCC_OLEDB;}
    char*     ErrorTypeStr() { return
"TPCC OLEDB"; }
    int       ErrorNum()
{return m_errno;}
    char*     ErrorText();
};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

// declare variables and private
functions here...
BOOL      m_bDeadlock; //
transaction was selected as deadlock victim
int       m_MaxRetries;
// retry count on deadlock

DBPROPSET m_rgInitPropSet; //
initialization property set used to establish a
connection
DBPROP     m_InitProperties[4]; //
individual initialization properties
IDBCreateSession*
m_pIDBCreateSession; // session
(connection) interface
IDBCreateCommand*
m_pIDBCreateCommand; // SQL
command creation interface

IMalloc*   m_pIMalloc;
// Needed to release error strings.

// StockLevel
ICommandText*
m_pIStockLevelCommand;
ACCESSOR   m_hStockLevelInputAccessor; // accessor
to bind input parameters
ACCESSOR   m_hStockLevelOutputAccessor; // accessor
to bind output columns
DBPARAMS  m_StockLevelExecuteParams; //
parameter structure for Execute

// NewOrder
// One prepared command for each
possible number of new order line items
ICommandText*
m_pINewOrderCommand[MAX_OL_NEW_ORDER_ITEMS]
;
// accessors to bind input
parameters
// one for each possible number
of new order line items
ACCESSOR   m_hNewOrderInputAccessor[MAX_OL_NEW_ORDER_I
TEMS];
// accessor to bind output
columns of the first rowset
ACCESSOR   m_hNewOrderOutputAccessor[MAX_OL_NEW_ORDER_
ITEMS];
// accessor to bind output
columns of the second rowset

```

```

HACCESSOR
m_hNewOrderOutputAccessor2[MAX_OL_NEW_ORDER
_ITEMS];
// parameter structure for
Execute
DBPARAMS
m_NewOrderExecuteParams[MAX_OL_NEW_ORDER_IT
EMS];

// Payment
ICommandText*
m_pIPaymentCommand;
HACCESSOR
m_hPaymentInputAccessor; // accessor
to bind input parameters
HACCESSOR
m_hPaymentOutputAccessor; // accessor
to bind output columns
DBPARAMS
m_PaymentExecuteParams; //
parameter structure for Execute

// OrderStatus
ICommandText*
m_pIOrderStatusCommand;
HACCESSOR
m_hOrderStatusInputAccessor; // accessor
to bind input parameters
HACCESSOR
m_hOrderStatusOutputAccessor; // accessor
to bind output columns
HACCESSOR
m_hOrderStatusOutputAccessor2; //
accessor to bind output columns
DBPARAMS
m_OrderStatusExecuteParams; //
parameter structure for Execute

// Delivery
ICommandText*
m_pIDeliveryCommand;
HACCESSOR
m_hDeliveryInputAccessor; // accessor
to bind input parameters
HACCESSOR
m_hDeliveryOutputAccessor; // accessor
to bind output columns
DBPARAMS
m_DeliveryExecuteParams; // parameter
structure for Execute

wchar_t
m_szSPPrefix[32]; // stored
procedures prefix

// new-order specific fields
int       m_no_commit_flag;

void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```

```

void CheckSPVersion();

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

// Helper function to create and
prepare a command
void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppiCommandText);
// Helper function to prepare a
command
void PrepareCommand(ICommandText*
piCommand);

// Helper function to fill one
binding
// Used for both input parameter
and output column bindings
void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

// Helper function to initialize
an array of bindings
void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

union
{
    NEW_ORDER_DATA
NewOrder;
    PAYMENT_DATA
Payment;
    DELIVERY_DATA
Delivery;
    STOCK_LEVEL_DATA
StockLevel;
    ORDER_STATUS_DATA
OrderStatus;
}
m_txn;

public:
    CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
    ~CTPCC_OLEDB(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

    inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

void NewOrder ();
void Payment ();
void Delivery ();
void StockLevel ();
void OrderStatus ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

trans.h

```

/* FILE: TRANS.H Microsoft
 * TPC-C Kit Ver. 4.42.000 Copyright
 * Microsoft, 2002 Copyright
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C structure
 * templates.
 * Change history:
 * 4.42.000 - changed w_id fields
 * from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 * match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqltypes.h, but is not available
// when compiling with dblink, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    /* SQLSMALLINT */ short
    /* unsigned short */ year;
    /* SQLSMALLINT */ month; unsigned short /*
    /* SQLSMALLINT */ day; unsigned short /*
    /* SQLSMALLINT */ hour; unsigned short /*
    /* SQLSMALLINT */ minute; unsigned short /*
    /* SQLSMALLINT */ second; unsigned short /*
    /* SQLINTEGER */ fraction; unsigned long /*
    } TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction committed."
    eInvalidItem, // 1 "Item number
    is not valid."
    eDeliveryFailed // 2 "Delivery
    Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;

```



```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short       o_ol_cnt;

    // output params
    EXEC_STATUS  exec_status_code;
    char        c_last[LAST_NAME_LEN+1];
    char        c_credit[CREDIT_LEN+1];
    double      c_discount;
    double      w_tax;
    double      d_tax;
    long        o_id;
    short       o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short       o_all_local;
    double      total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short       c_d_id;
    long        c_w_id;
    double      h_amount;
    char        c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;

```

```

TIMESTAMP_STRUCT  h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN + 1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT  c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    TIMESTAMP_STRUCT  ol_delivery_d;
} OL_ORDER_STATUS_DATA;

```

```

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    char
c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;
    char
c_first[FIRST_NAME_LEN+1];
    char
c_middle[MIDDLE_NAME_LEN+1];
    double      c_balance;
    long        o_id;
    TIMESTAMP_STRUCT  o_entry_d;
    short       o_carrier_id;
    OL_ORDER_STATUS_DATA
    OL[MAX_OL_ORDER_STATUS_ITEMS];
    short       o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        o_carrier_id;

    // output params
    EXEC_STATUS  exec_status_code;
    SYSTEMTIME   queue_time;
    long        o_id[10];
    // id's of delivered
    orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME   queue;
    //time delivery transaction queued
    long        w_id;
    //delivery warehouse
    short       o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    short        c_id;
    short        threshold;

    // output params

```

```

EXEC_STATUS
exec_status_code;
long
low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/* FILE: TXN_BASE.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C txn class
 * implementation.
 * Change history:
 * 4.20.000 - updated rev number to
 * match kit
 */

#pragma once

// need to declare functions for import, unless
// define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
    BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
    BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
    BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
    BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
    () = 0;
    virtual void Payment
    () = 0;
    virtual void Delivery
    () = 0;
    virtual void StockLevel
    () = 0;

```

```

virtual void OrderStatus
()
= 0;
};

```

resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer
// Studio generated
// include file.
// Used by
// tpcc_com_all.rc
//
#define IDS_PROJNAME
100
#define IDR_TPCC
101
#define IDR_NEWORDER
102
#define IDR_ORDERSTATUS
103
#define IDR_PAYMENT
104
#define IDR_STOCKLEVEL
105

// Next default values
// for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
LS
#define
_APS_NEXT_RESOURCE_VALU
E 202
#define
_APS_NEXT_COMMAND_VALU
E 32768
#define
_APS_NEXT_CONTROL_VALU
E 201
#define
_APS_NEXT_SYMED_VALU
E 106
#endif
#endif

```

resource_.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

removedb.sql

```
-----
-- File:      REMOVEDB.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.61
--            Copyright Microsoft, 2005
--
-----
USE master
GO

-----
-- remove any existing database and backup files
-----
EXEC sp_dbrremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
GO
EXEC sp_dropdevice 'tpccback2'
GO
EXEC sp_dropdevice 'tpccback3'
GO
EXEC sp_dropdevice 'tpccback4'
GO
```

backupdev.sql

```
-----
-- File:      BACKUPDEV.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.61
--            Copyright Microsoft, 2005
--
-----
USE master
GO

-----
-- create backup devices
-----
```

```
EXEC sp_addumpdevice 'disk','tpccback1','u:\tpccback1.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback2','v:\tpccback2.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback3','w:\tpccback3.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback4','x:\tpccback4.dmp'
GO
```

version.sql

```
-----
-- File:      VERSION.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.68
--            Copyright Microsoft, 2006
--
-- Returns version level of TPC-C stored procs
--
-- Always update the return value of this proc for
-- any interface changes or 'must have' bug fixes.
--
-- The value returned by this SP defines the
-- 'interface level', which must match between the
-- stored procs and the client code. The
-- interface level may be down rev from the
-- current kit. This indicates that the interface
-- hasn't changed since that version.
--
-- Interface Level:      4.20.000
--
-----
USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO

CREATE PROCEDURE    tpcc_version
AS
DECLARE @version    char(8)

BEGIN
    SELECT @version    = '4.20.000'

    SELECT @version    AS 'Version'
END
GO
```

createdb.sql

```
-----
-- File:      CREATEDB.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.61
--            Copyright Microsoft, 2005
--
-----
SET ANSI_NULL_DFLT_OFF ON
```

```

GO

USE master
GO

-----
-- Create temporary table for timing
-----
IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date CHAR(30),
     end_date CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-----
-- Store starting time
-----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

-----
-- create main database files
-----
CREATE DATABASE tpcc
ON PRIMARY
    ( NAME = MSSQL_tpcc_root,
      FILENAME = 'c:\MSSQL_tpcc_root.mdf',
      SIZE = 8MB,
      FILEGROWTH = 0),

FILEGROUP MSSQL_cust_fg
    ( NAME = MSSQL_cust1,
      FILENAME = 'c:\mount\customer_1\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust2,
      FILENAME = 'c:\mount\customer_2\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust3,
      FILENAME = 'c:\mount\customer_3\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust4,
      FILENAME = 'c:\mount\customer_4\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust5,
      FILENAME = 'c:\mount\customer_5\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust6,
      FILENAME = 'c:\mount\customer_6\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust7,

```

```

      FILENAME = 'c:\mount\customer_7\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_cust8,
      FILENAME = 'c:\mount\customer_8\'',
      SIZE = 79800MB,
      FILEGROWTH = 0),
FILEGROUP MSSQL_ordln_fg
    ( NAME = MSSQL_ordln1,
      FILENAME = 'c:\mount\orderline_1\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln2,
      FILENAME = 'c:\mount\orderline_2\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln3,
      FILENAME = 'c:\mount\orderline_3\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln4,
      FILENAME = 'c:\mount\orderline_4\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln5,
      FILENAME = 'c:\mount\orderline_5\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln6,
      FILENAME = 'c:\mount\orderline_6\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln7,
      FILENAME = 'c:\mount\orderline_7\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_ordln8,
      FILENAME = 'c:\mount\orderline_8\'',
      SIZE = 94200MB,
      FILEGROWTH = 0),
FILEGROUP MSSQL_stock_fg
    ( NAME = MSSQL_stock1,
      FILENAME = 'c:\mount\stock_1\'',
      SIZE = 110600MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_stock2,
      FILENAME = 'c:\mount\stock_2\'',
      SIZE = 110600MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_stock3,
      FILENAME = 'c:\mount\stock_3\'',
      SIZE = 110600MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_stock4,
      FILENAME = 'c:\mount\stock_4\'',
      SIZE = 110600MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_stock5,
      FILENAME = 'c:\mount\stock_5\'',
      SIZE = 110600MB,
      FILEGROWTH = 0),
    ( NAME = MSSQL_stock6,
      FILENAME = 'c:\mount\stock_6\'',

```

```

        SIZE                = 110600MB,
        FILEGROWTH          = 0),
        NAME                = MSSQL_stock7,
        FILENAME = 'c:\mount\stock_7\'',
        SIZE                = 110600MB,
        FILEGROWTH          = 0),
        NAME                = MSSQL_stock8,
        FILENAME = 'c:\mount\stock_8\'',
        SIZE                = 110600MB,
        FILEGROWTH          = 0),
FILEGROUP MSSQL_misc_fg
(
    NAME                = MSSQL_misc1,
    FILENAME = 'c:\mount\misc_1\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc2,
    FILENAME = 'c:\mount\misc_2\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc3,
    FILENAME = 'c:\mount\misc_3\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc4,
    FILENAME = 'c:\mount\misc_4\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc5,
    FILENAME = 'c:\mount\misc_5\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc6,
    FILENAME = 'c:\mount\misc_6\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc7,
    FILENAME = 'c:\mount\misc_7\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0),
(
    NAME                = MSSQL_misc8,
    FILENAME = 'c:\mount\misc_8\'',
    SIZE                = 12800MB,
    FILEGROWTH          = 0)

LOG ON
(
    NAME                = MSSQL_tpcc_log,
    FILENAME = 'E:',
    SIZE                = 107000MB,
    FILEGROWTH          = 0)
COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET   end_date  = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

SELECT DATEDIFF(second, (SELECT start_date FROM tpcc_timer), (SELECT end_date FROM
tpcc_timer))
GO

```

```

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

```

dbopt1.sql

```

-----
--
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Sets database options for load
-----
USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc, 'trunc. log on chkpt.', TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE
GO

USE tpcc
GO

CHECKPOINT
GO

```

dbopt2.sql

```

-----
--
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Sets database options after load
-----
ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates', 1
GO

```

```

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg          varchar(50)

-----
--          OPTIONS FOR SQL SERVER 2000          --
-- Set option values for user-defined indexes --
-----

SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg

EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', False
GO

Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ' '

SELECT name,
lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line') = id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id

ORDER BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc, 'auto update statistics', FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO

```

```

DECLARE @db_id int,
        @tbl_id int

SET @db_id = DB_ID('tpcc')
SET @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO

```

RunSQLCfg.sql

```

-----
-- File: RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets suggested runtime server configuration
-- parameters
-----

EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

----- change this value to approximately the number of connected users
-----
EXEC sp_configure 'max worker threads',255

----- increase priority of user threads
-----
EXEC sp_configure 'priority boost',1

----- disable automatic checkpointing
-----
EXEC sp_configure 'recovery interval',32767

----- change to a mask appropriate for the number of processors on the server
-----
EXEC sp_configure 'affinity mask',0xf

----- enable fibers
-----
EXEC sp_configure 'lightweight pooling',1
GO

RECONFIGURE WITH OVERRIDE

```

GO

VerifyTpccLoad.sql

```
-----
--
-- File:   VerifyTPCCLoad.SQL
--        Microsoft TPC-C Benchmark Kit Ver. 4.68
--        Copyright Microsoft, 2006
--
-----
SET NOCOUNT ON
PRINT ' '
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ' '

USE      tpcc
GO

IF EXISTS (SELECT name
           FROM sysobjects
           WHERE name = 'TPCC_INFO' AND
                 type = 'U')
    DROP TABLE TPCC_INFO
GO
PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
```

```
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

CREATE TABLE TPCC_INFO
(
    INFO_DATE          datetime,
    NUM_WAREHOUSE      bigint,
    WAREHOUSE_TARGET  bigint,
    NUM_DISTRICT       bigint,
    DISTRICT_TARGET   bigint,
    NUM_ITEM           bigint,
    ITEM_TARGET        bigint,
    NUM_CUSTOMER       bigint,
    CUSTOMER_TARGET   bigint,
    NUM_ORDERS         bigint,
    ORDERS_TARGET      bigint,
    ORDERS_TARGET_LOW  bigint,
    ORDERS_TARGET_HIGH bigint,
    NUM_ORDER_LINE     bigint,
    ORDER_LINE_TARGET  bigint,
    ORDER_LINE_TARGET_LOW  bigint,
    ORDER_LINE_TARGET_HIGH  bigint,
    NUM_NEW_ORDER      bigint,
    NEW_ORDER_TARGET   bigint,
    NEW_ORDER_TARGET_LOW  bigint,
    NEW_ORDER_TARGET_HIGH  bigint,
    NUM_HISTORY        bigint,
    HISTORY_TARGET     bigint,
    NUM_STOCK          bigint,
    STOCK_TARGET       bigint)
GO

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET  bigint,
        @NUM_DISTRICT      bigint,
        @DISTRICT_TARGET   bigint,
        @NUM_ITEM          bigint,
        @ITEM_TARGET        bigint,
        @NUM_CUSTOMER       bigint,
        @CUSTOMER_TARGET   bigint,
        @NUM_ORDERS        bigint,
        @ORDERS_TARGET      bigint,
        @ORDERS_TARGET_LOW  bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE     bigint,
        @ORDER_LINE_TARGET  bigint,
        @ORDER_LINE_TARGET_LOW  bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER      bigint,
        @NEW_ORDER_TARGET   bigint,
        @NEW_ORDER_TARGET_LOW  bigint,
        @NEW_ORDER_TARGET_HIGH  bigint,
        @NUM_HISTORY        bigint,
        @HISTORY_TARGET     bigint,
        @NUM_STOCK          bigint,
        @STOCK_TARGET       bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE      = COUNT_BIG(*)
```

```

FROM warehouse

SELECT @NUM_DISTRICT = COUNT_BIG(*)
FROM district

SELECT @NUM_ITEM = COUNT_BIG(*)
FROM item

SELECT @NUM_CUSTOMER = COUNT_BIG(*)
FROM customer

SELECT @NUM_ORDERS = COUNT_BIG(*)
FROM orders

SELECT @NUM_ORDER_LINE = COUNT_BIG(*)
FROM order_line

SELECT @NUM_NEW_ORDER = COUNT_BIG(*)
FROM new_order

SELECT @NUM_HISTORY = COUNT_BIG(*)
FROM history

SELECT @NUM_STOCK = COUNT_BIG(*)
FROM stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET = @NUM_WAREHOUSE,
@DISTRICT_TARGET = @NUM_WAREHOUSE * 10,
@ITEM_TARGET = 100000,
@CUSTOMER_TARGET = @NUM_WAREHOUSE * 30000,
@ORDERS_TARGET = @NUM_WAREHOUSE * 30000,
@ORDERS_TARGET_LOW = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
@ORDERS_TARGET_HIGH = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
@ORDER_LINE_TARGET = @NUM_WAREHOUSE * 300000,
@ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET *
.01),
@ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET *
.01),
@NEW_ORDER_TARGET = @NUM_WAREHOUSE * 9000,
@NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET *
.01),
@NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET *
.01),
@HISTORY_TARGET = @NUM_WAREHOUSE * 30000,
@STOCK_TARGET = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES (GETDATE(),
@NUM_WAREHOUSE,
@WAREHOUSE_TARGET,
@NUM_DISTRICT,
@DISTRICT_TARGET,
@NUM_ITEM,
@ITEM_TARGET,
@NUM_CUSTOMER,
@CUSTOMER_TARGET,
@NUM_ORDERS,
@ORDERS_TARGET,
@ORDERS_TARGET_LOW,
@ORDERS_TARGET_HIGH,
@NUM_ORDER_LINE,
@ORDER_LINE_TARGET,

```

```

@ORDER_LINE_TARGET_LOW,
@ORDER_LINE_TARGET_HIGH,
@NUM_NEW_ORDER,
@NEW_ORDER_TARGET,
@NEW_ORDER_TARGET_LOW,
@NEW_ORDER_TARGET_HIGH,
@NUM_HISTORY,
@HISTORY_TARGET,
@NUM_STOCK,
@STOCK_TARGET)

GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_WAREHOUSE AS 'Warehouse Rows',
WAREHOUSE_TARGET AS 'Warehouse Target',
CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_DISTRICT AS 'District Rows',
DISTRICT_TARGET AS 'District Target',
CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ITEM AS 'Item Rows',
ITEM_TARGET AS 'Item Target',
CASE WHEN (NUM_ITEM = ITEM_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''

```



```

PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_CUSTOMER AS 'Customer Rows',
  CUSTOMER_TARGET AS 'Customer Target',
  CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ORDERS AS 'Orders Rows',
  ORDERS_TARGET AS 'Orders Target',
  CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'Orders Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ORDER_LINE AS 'Order Line Rows',
  ORDER_LINE_TARGET AS 'Order Line Target',
  CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
  ORDER_LINE_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'Order Line Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_NEW_ORDER AS 'New Order Rows',
  NEW_ORDER_TARGET AS 'New Order Target',
  CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
    THEN 'OK!'

```

```

    WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
  NEW_ORDER_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'New Order Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| HISTORY TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_HISTORY AS 'History Rows',
  HISTORY_TARGET AS 'History Target',
  CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'History Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| STOCK TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_STOCK AS 'Stock Rows',
  STOCK_TARGET AS 'Stock Target',
  CASE WHEN (NUM_STOCK = STOCK_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Stock Message'
FROM TPCC_INFO
GO

-----
-- Check Indexes
-----
USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| TPC-C INDEXES |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders
EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

backup.sql

```
--
-- File:    BACKUP.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.61
--          Copyright Microsoft, 2005
--
-----

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate, 21)

DUMP DATABASE tpcc TO tpccback1, tpccback2, tpccback3, tpccback4 WITH init, stats =
1

SELECT @enddate = GETDATE()
SELECT 'End date: ',
       CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO
```

restore.sql

```
--
-- File:    RESTORE.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.61
--          Copyright Microsoft, 2005
--
-----

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate, 21)

LOAD DATABASE tpcc FROM tpccback1, tpccback2, tpccback3, tpccback4 WITH stats = 1,
replace

SELECT @enddate = GETDATE()
SELECT 'End date: ',
       CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

use tpcc
Go
DROP INDEX orders.orders_nc1
go
```

sqlshutdown.sql

```
--
-- File:    SQLSHUTDOWN.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.68
--          Copyright Microsoft, 2006
--
--          Checkpoints tpcc database and issues a shutdown
--
-----

USE tpcc
GO

CHECKPOINT
GO

SHUTDOWN
GO
```

idxcuscl.sql

```
--
-- File:    IDXCUSCL.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.68
--          Copyright Microsoft, 2006
--
--          Creates clustered index on customer table
--
-----

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_c1' )
    DROP INDEX customer.customer_c1

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON customer(c_w_id, c_d_id, c_id)
ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO
```

idxcusnc.sql

```
--
-- File:    IDXCUSNC.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.68
--
```

```

--          Copyright Microsoft, 2006          --
--          Creates non-clustered index on customer table          --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_nc1' )
    DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON customer(c_w_id, c_d_id, c_last,
c_first, c_id)
ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxdiscl.sql

```

--          File:  IDXDISCL.SQL          --
--          Microsoft TPC-C Benchmark Kit Ver. 4.68          --
--          Copyright Microsoft, 2006          --
--          Creates clustered index on district table          --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

CREATE UNIQUE CLUSTERED INDEX district_c1 ON district(d_w_id, d_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxitmcl.sql

```

--          File:  IDXITMCL.SQL          --
--          Microsoft TPC-C Benchmark Kit Ver. 4.68          --
--          Copyright Microsoft, 2006          --
--          Creates clustered index on item table          --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_c1' )
    DROP INDEX item.item_c1

CREATE UNIQUE CLUSTERED INDEX item_c1 ON item(i_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxhiscl.sql

```

--          File:  IDXHISCL.SQL          --
--          Microsoft TPC-C Benchmark Kit Ver. 4.68          --
--          Copyright Microsoft, 2006          --
--          Creates clustered index on history table          --
--          CAUTION: This index is only beneficial for systems --
--          CAUTION: with 8 or more processors.              --
--          CAUTION: It may negatively impact performance on --
--          CAUTION: systems with less than 8 processors.    --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

```

```

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_cl' )
    DROP INDEX history.history_cl

CREATE UNIQUE CLUSTERED INDEX history_cl ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
    CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
    DATEDIFF(second, @startdate, @enddate)
GO

```

idxnodcl.sql

```

-----
-- File:      IDXNODCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on new-order table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
    CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_cl' )
    DROP INDEX new_order.new_order_cl

CREATE UNIQUE CLUSTERED INDEX new_order_cl ON new_order(no_w_id, no_d_id, no_o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
    CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
    DATEDIFF(second, @startdate, @enddate)
GO

```

idxodlcl.sql

```

-----
-- File:      IDXODLCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on order-line table
-----
USE tpcc

```

```

GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
    CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_cl' )
    DROP INDEX order_line.order_line_cl

CREATE UNIQUE CLUSTERED INDEX order_line_cl ON order_line(ol_w_id, ol_d_id, ol_o_id,
ol_number)
    ON MSSQL_ordln_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
    CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
    DATEDIFF(second, @startdate, @enddate)
GO

```

idxordcl.sql

```

-----
-- File:      IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on orders table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
    CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_cl' )
    DROP INDEX orders.orders_cl

CREATE UNIQUE CLUSTERED INDEX orders_cl ON orders(o_w_id, o_d_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
    CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
    DATEDIFF(second, @startdate, @enddate)
GO

```

idxstkcl.sql

```

-----
--
-----

```

```

-- File:   IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on stock table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_cl' )
    DROP INDEX stock.stock_cl

CREATE UNIQUE CLUSTERED INDEX stock_cl ON stock(s_i_id, s_w_id)
ON MSSQL_stock_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxwarcl.sql

```

-- File:   IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on warehouse table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_cl' )
    DROP INDEX warehouse.warehouse_cl

CREATE UNIQUE CLUSTERED INDEX warehouse_cl ON warehouse(w_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

GO

tables.sql

```

-- File:   TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates TPC-C tables
--
-----
SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

-----
-- Remove all existing TPC-C tables
-----
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

-----
-- Create new tables
-----
create table warehouse
(
        w_id          int,
        w_ytd         money,
        w_tax         smallmoney,
        w_name        char(10),
        w_street_1    char(20),
        w_street_2    char(20),
        w_city        char(20),

```

```

        w_state          char(2),
        w_zip            char(9)
) on MSSQL_misc_fg
go

create table district
(
    d_id                tinyint,
    d_w_id              int,
    d_ytd               money,
    d_next_o_id         int,
    d_tax               smallmoney,
    d_name              char(10),
    d_street_1          char(20),
    d_street_2          char(20),
    d_city              char(20),
    d_state             char(2),
    d_zip              char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              int,
    c_discount          smallmoney,
    c_credit_lim        money,
    c_last              char(16),
    c_first             char(16),
    c_credit            char(2),
    c_balance           money,
    c_ytd_payment       money,
    c_payment_cnt       smallint,
    c_delivery_cnt      smallint,
    c_street_1          char(20),
    c_street_2          char(20),
    c_city              char(20),
    c_state             char(2),
    c_zip              char(9),
    c_phone            char(16),
    c_since             datetime,
    c_middle            char(2),
    c_data              char(500)
) on MSSQL_cust_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
    h_c_id              int,
    h_c_d_id            tinyint,
    h_c_w_id            int,
    h_d_id              tinyint,
    h_w_id              int,
    h_date              datetime,
    h_amount            smallmoney,
    h_data              char(24)
) on MSSQL_misc_fg
go

```

```

create table new_order
(
    no_o_id             int,
    no_d_id             tinyint,
    no_w_id             int
) on MSSQL_misc_fg
go

create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              int,
    o_c_id              int,
    o_carrier_id        tinyint,
    o_ol_cnt            tinyint,
    o_all_local         tinyint,
    o_entry_d           datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id             int,
    ol_d_id             tinyint,
    ol_w_id             int,
    ol_number           tinyint,
    ol_i_id             int,
    ol_delivery_d        datetime,
    ol_amount           smallmoney,
    ol_supply_w_id      int,
    ol_quantity         smallint,
    ol_dist_info        char(24)
) on MSSQL_ordln_fg
go

create table item
(
    i_id                int,
    i_name              char(24),
    i_price             smallmoney,
    i_data              char(50),
    i_im_id             int
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id              int,
    s_w_id              int,
    s_quantity          smallint,
    s_ytd               int,
    s_order_cnt         smallint,
    s_remote_cnt        smallint,
    s_data              char(50),
    s_dist_01           char(24),
    s_dist_02           char(24),
    s_dist_03           char(24),
    s_dist_04           char(24),
    s_dist_05           char(24),
    s_dist_06           char(24),
    s_dist_07           char(24),

```

```

        s_dist_08      char(24),
        s_dist_09      char(24),
        s_dist_10      char(24)
) on MSSQL_stock_fg
go

```

neworder.sql

```

-----
-- File:      NEWORDER.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates neworder stored procedure
--
-- Interface Level: 4.20.000
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE      tpcc_neworder
        @w_id          int,
        @d_id          tinyint,
        @c_id          int,
        @o_ol_cnt      tinyint,
        @o_all_local   tinyint,
        @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
        @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
        @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
        @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
        @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
        @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
        @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
        @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
        @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
        @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
        @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
        @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
        @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
        @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
        @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax          smallmoney,
        @d_tax          smallmoney,
        @c_last         char(16),
        @c_credit        char(2),
        @c_discount     smallmoney,
        @i_price         smallmoney,

```

```

        @i_name         char(24),
        @i_data         char(50),
        @o_entry_d      datetime,
        @remote_flag    int,
        @s_quantity     smallint,
        @s_data         char(50),
        @s_dist         char(24),
        @li_no          int,
        @o_id           int,
        @commit_flag    tinyint,
        @li_id          int,
        @li_s_w_id      int,
        @li_qty         smallint,
        @ol_number      int,
        @c_id_local     int

```

BEGIN

BEGIN TRANSACTION n

```

-----
-- get district tax and next available order id and update
-- plus initialize local variables
-----

```

```

UPDATE district
SET      @d_tax          = d_tax,
        @o_id           = d_next_o_id,
        d_next_o_id     = d_next_o_id + 1,
        @o_entry_d      = GETDATE(),
        @li_no          = 0,
        @commit_flag    = 1
WHERE    d_w_id         = @w_id AND
        d_id            = @d_id

```

```

-----
-- process orderlines
-----

```

```

WHILE (@li_no < @o_ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1

```

```

-----
-- set i_id, s_w_id, and qty for this lineitem
-----

```

```

SELECT @li_id = CASE @li_no
                WHEN 1 THEN @i_id1
                WHEN 2 THEN @i_id2
                WHEN 3 THEN @i_id3
                WHEN 4 THEN @i_id4
                WHEN 5 THEN @i_id5
                WHEN 6 THEN @i_id6
                WHEN 7 THEN @i_id7
                WHEN 8 THEN @i_id8
                WHEN 9 THEN @i_id9
                WHEN 10 THEN @i_id10
                WHEN 11 THEN @i_id11
                WHEN 12 THEN @i_id12
                WHEN 13 THEN @i_id13
                WHEN 14 THEN @i_id14
                WHEN 15 THEN @i_id15

```

END,

@li_s_w_id = CASE @li_no

```

        WHEN 1 THEN @s_w_id1
        WHEN 2 THEN @s_w_id2
        WHEN 3 THEN @s_w_id3
        WHEN 4 THEN @s_w_id4
        WHEN 5 THEN @s_w_id5
        WHEN 6 THEN @s_w_id6
        WHEN 7 THEN @s_w_id7
        WHEN 8 THEN @s_w_id8
        WHEN 9 THEN @s_w_id9
        WHEN 10 THEN @s_w_id10
        WHEN 11 THEN @s_w_id11
        WHEN 12 THEN @s_w_id12
        WHEN 13 THEN @s_w_id13
        WHEN 14 THEN @s_w_id14
        WHEN 15 THEN @s_w_id15
    END,

    @li_qty = CASE @li_no
        WHEN 1 THEN @ol_qty1
        WHEN 2 THEN @ol_qty2
        WHEN 3 THEN @ol_qty3
        WHEN 4 THEN @ol_qty4
        WHEN 5 THEN @ol_qty5
        WHEN 6 THEN @ol_qty6
        WHEN 7 THEN @ol_qty7
        WHEN 8 THEN @ol_qty8
        WHEN 9 THEN @ol_qty9
        WHEN 10 THEN @ol_qty10
        WHEN 11 THEN @ol_qty11
        WHEN 12 THEN @ol_qty12
        WHEN 13 THEN @ol_qty13
        WHEN 14 THEN @ol_qty14
        WHEN 15 THEN @ol_qty15
    END

-- get item data (no one updates item)
-----
SELECT @i_price = i_price,
       @i_name   = i_name,
       @i_data   = i_data
FROM   item WITH (repeatableread)
WHERE  i_id      = @li_id

-----
-- update stock values
-----
UPDATE stock
SET    s_ytd      = s_ytd + @li_qty,
       @s_quantity = s_quantity - @li_qty +
           CASE WHEN (s_quantity - @li_qty < 10) THEN 91
ELSE 0 END,
       s_order_cnt = s_order_cnt + 1,
       s_remote_cnt = s_remote_cnt +
           CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1
END,

       @s_data     = s_data,
       @s_dist     = CASE @d_id
           WHEN 1 THEN s_dist_01
           WHEN 2 THEN s_dist_02
           WHEN 3 THEN s_dist_03
           WHEN 4 THEN s_dist_04
           WHEN 5 THEN s_dist_05

```

```

           WHEN 6 THEN s_dist_06
           WHEN 7 THEN s_dist_07
           WHEN 8 THEN s_dist_08
           WHEN 9 THEN s_dist_09
           WHEN 10 THEN s_dist_10
        END
WHERE  s_i_id     = @li_id AND
       s_w_id     = @li_s_w_id

-----
-- if there actually is a stock (and item) with these ids, go to work
-----
IF (@@rowcount > 0)
BEGIN
-----
-- insert order_line data (using data from item and stock)
-----
INSERT INTO order_line VALUES( @o_id,
                                @d_id,
                                @w_id,
                                @li_no,
                                @li_id,
                                'dec 31, 1899',
                                @i_price * @li_qty,
                                @li_s_w_id,
                                @li_qty,
                                @s_dist)

-----
-- send line-item data to client
-----
SELECT @i_name,
       @s_quantity,
       b_g = CASE WHEN ( (patindex('%ORIGINAL%',@i_data) > 0) AND
                                (patindex('%ORIGINAL%',@s_data) > 0) )
           THEN 'B' ELSE 'G' END,
       @i_price,
       @i_price * @li_qty
END
ELSE
BEGIN
-----
-- no item (or stock) found - triggers rollback condition
-----
SELECT '',0,0,0
SELECT @commit_flag = 0
END

-----
-- get customer last name, discount, and credit rating
-----
SELECT @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
FROM   customer WITH (repeatableread)
WHERE  c_id      = @c_id AND
       c_w_id    = @w_id AND
       c_d_id    = @d_id

-----
-- insert fresh row into orders table

```



```

-----
INSERT INTO orders VALUES ( @o_id,
                             @d_id,
                             @w_id,
                             @c_id_local,
                             0,
                             @o_ol_cnt,
                             @o_all_local,
                             @o_entry_d)

-----
-- insert corresponding row into new-order table
-----
INSERT INTO new_order VALUES ( @o_id,
                               @d_id,
                               @w_id)

-----
-- select warehouse tax
-----
SELECT @w_tax = w_tax
FROM   warehouse WITH (repeatableread)
WHERE  w_id = @w_id

IF (@commit_flag = 1)
    COMMIT TRANSACTION n
ELSE
    -- all that work for nuthin!!!
    ROLLBACK TRANSACTION n

-----
-- return order data to client
-----
SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

tpcc_neworder_new.sql

```

-----
--
-- File:      TPCC_NEWORDER_NEW.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This acid stored procedure implements the neworder
-- transaction. It outputs timestamps at the

```

```

--
-- beginning of the transaction, before the commit
-- delay, and after the commit.
--
-----
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder_new' )
    DROP PROCEDURE tpcc_neworder_new
GO

-- neworder_new v2.5 6/23/05 PeterCa
-- lq stock/order_line/client. upd district & ins neworder.
-- cust/warehouse select together, ins order separate
-- uses rownumber to distinct w any transform
-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

CREATE PROCEDURE tpcc_neworder_new
    @w_id int,
    @d_id tinyint,
    @c_id int,
    @o_ol_cnt tinyint,
    @o_all_local tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
BEGIN
DECLARE @o_id int,
        @d_tax smallmoney,
        @o_entry_d datetime,
        @commit_flag tinyint

BEGIN TRANSACTION n
-- get district tax and next available order id and update
-- insert corresponding row into new-order table
-- plus initialize local variables

UPDATE district
SET @d_tax = d_tax,
    @o_id = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,

```

```

        @o_entry_d      = GETDATE(),
        @commit_flag    = 1
OUTPUT  deleted.d_next_o_id,
        @d_id,
        @w_id
INTO    new_order
WHERE   d_w_id          = @w_id AND
        d_id            = @d_id

-- update stock from stock join (item join (params))
-- output to orderline, output to client
-- NOTE: @@rowcount != @ol_o_cnt
--      if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

UPDATE  stock
SET     s_ytd          = s_ytd + info.ol_qty,
        s_quantity     = s_quantity - info.ol_qty +
            CASE WHEN (s_quantity - info.ol_qty < 10) THEN 91 ELSE
0 END,
        s_order_cnt    = s_order_cnt + 1,
        s_remote_cnt   = s_remote_cnt +
            CASE WHEN (info.w_id = @w_id) THEN 0

ELSE 1 END

OUTPUT  @o_id,
        @d_id,
        @w_id,
        info.lino,
        info.i_id,
        "dec 31, 1899",
        info.i_price * info.ol_qty,
        info.w_id,
        info.ol_qty,
CASE    @d_id  WHEN 1 THEN inserted.s_dist_01
              WHEN 2 THEN inserted.s_dist_02
              WHEN 3 THEN inserted.s_dist_03
              WHEN 4 THEN inserted.s_dist_04
              WHEN 5 THEN inserted.s_dist_05
              WHEN 6 THEN inserted.s_dist_06
              WHEN 7 THEN inserted.s_dist_07
              WHEN 8 THEN inserted.s_dist_08
              WHEN 9 THEN inserted.s_dist_09
              WHEN 10 THEN inserted.s_dist_10

INTO    order_line

OUTPUT  info.i_name,inserted.s_quantity,
CASE WHEN ((charindex("ORIGINAL",info.i_data) > 0) AND
           (charindex("ORIGINAL",inserted.s_data) > 0) )
        THEN "B" ELSE "G" END,
        info.i_price,
        info.i_price*info.ol_qty
FROM    stock INNER JOIN
        (SELECT iid,
               wid,
                   lino,
                   ol_qty,
                   i_price,
                   i_name,
                   i_data
        FROM   (SELECT iid,
                       wid,
                       lino,

```

```

        qty,
                row_number() OVER (PARTITION BY iid,wid
ORDER BY iid,wid)
FROM   (SELECT @i_id1,@s_w_id1,1,@ol_qty1 UNION ALL
        SELECT @i_id2,@s_w_id2,2,@ol_qty2 UNION ALL
        SELECT @i_id3,@s_w_id3,3,@ol_qty3 UNION ALL
        SELECT @i_id4,@s_w_id4,4,@ol_qty4 UNION ALL
        SELECT @i_id5,@s_w_id5,5,@ol_qty5 UNION ALL
        SELECT @i_id6,@s_w_id6,6,@ol_qty6 UNION ALL
        SELECT @i_id7,@s_w_id7,7,@ol_qty7 UNION ALL
        SELECT @i_id8,@s_w_id8,8,@ol_qty8 UNION ALL
        SELECT @i_id9,@s_w_id9,9,@ol_qty9 UNION ALL
        SELECT @i_id10,@s_w_id10,10,@ol_qty10 UNION ALL
        SELECT @i_id11,@s_w_id11,11,@ol_qty11 UNION ALL
        SELECT @i_id12,@s_w_id12,12,@ol_qty12 UNION ALL
        SELECT @i_id13,@s_w_id13,13,@ol_qty13 UNION ALL
        SELECT @i_id14,@s_w_id14,14,@ol_qty14 UNION ALL
        SELECT @i_id15,@s_w_id15,15,@ol_qty15) AS
uol(iid,wid,lino,qty)
        ) AS ol(iid,wid,lino,ol_qty,rownum)
INNER JOIN
item (repeatableread) ON i_id = iid AND -- filters
out invalid items
        rownum = 1
        ) AS info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
ON s_i_id = info.i_id AND
s_w_id = info.w_id

IF (@@rowcount <> @o_ol_cnt) -- must have an invalid item
SELECT @commit_flag = 0 -- 2.4.2.3 requires rest to proceed

-- insert fresh row into orders table
INSERT INTO orders VALUES ( @o_id,
                            @d_id,
                            @w_id,
                            @c_id,
                            0,
                            @o_ol_cnt,
                            @o_all_local,
                            @o_entry_d)

-- get customer last name, discount, and credit rating
-- get warehouse tax
-- return order_data to client
SELECT w_tax,
       @d_tax,
       @o_id,
       c_last,
       c_discount,
       c_credit,
       @o_entry_d,
       @commit_flag
FROM   warehouse(repeatableread),
       customer(repeatableread)
WHERE  w_id = @w_id AND
       c_id = @c_id AND
       c_w_id = @w_id AND
       c_d_id = @d_id

-- @@rowcount checks that previous select found a valid customer
IF (@@rowcount = 0)
BEGIN
        RAISERROR( 'Invalid Customer ID', 11, 1 )

```

```

ROLLBACK TRANSACTION n
END
ELSE IF (@commit_flag = 1)
COMMIT TRANSACTION n
ELSE -- all that work for nothing.
ROLLBACK TRANSACTION n

END
GO

```

delivery.sql

```

-----
-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates delivery stored procedure
--
-- Interface Level: 4.20.000
-----

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id int,
    @o_carrier_id smallint
AS
DECLARE @d_id tinyint,
        @o_id int,
        @c_id int,
        @total money,
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

SELECT @d_id = 0

BEGIN TRANSACTION d
    WHILE (@d_id < 10)

```

```

BEGIN
SELECT @d_id = @d_id + 1,
       @total = 0,
       @o_id = 0

SELECT TOP 1
    @o_id = no_o_id
FROM new_order WITH (serializable uplock)
WHERE no_w_id = @w_id AND
      no_d_id = @d_id
ORDER BY no_o_id ASC

IF (@@rowcount <> 0)
BEGIN
-- claim the order for this district
DELETE new_order
WHERE no_w_id = @w_id AND
      no_d_id = @d_id AND
      no_o_id = @o_id

-- set carrier_id on this order (and get customer id)
UPDATE orders
SET o_carrier_id = @o_carrier_id,
    @c_id = o_c_id
WHERE o_w_id = @w_id AND
      o_d_id = @d_id AND
      o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)
UPDATE order_line
SET ol_delivery_d = GETDATE(),
    @total = @total + ol_amount
WHERE ol_w_id = @w_id AND
      ol_d_id = @d_id AND
      ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer
UPDATE customer
SET c_balance = c_balance + @total,
    c_delivery_cnt = c_delivery_cnt + 1
WHERE c_w_id = @w_id AND
      c_d_id = @d_id AND
      c_id = @c_id

END

SELECT @oid1 = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
       @oid2 = CASE @d_id WHEN 2 THEN @o_id ELSE @oid2 END,
       @oid3 = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
       @oid4 = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
       @oid5 = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
       @oid6 = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
       @oid7 = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
       @oid8 = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
       @oid9 = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
       @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END

END

COMMIT TRANSACTION d

-- return delivery data to client

SELECT @oid1,
       @oid2,

```

```

        @oid3,
        @oid4,
        @oid5,
        @oid6,
        @oid7,
        @oid8,
        @oid9,
        @oid10
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

-----
ordstat.sql
-----
--
-- File:   ORDSTAT.SQL
--         Microsoft TPC-C Benchmark Kit Ver. 4.68
--         Copyright Microsoft, 2006
--
--         Creates order status stored procedure
--
--         Interface Level:   4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE    tpcc_orderstatus
        @w_id      int,
        @d_id      tinyint,

        @c_id      int,
        @c_last    char(16) = ''

AS
DECLARE @c_balance    money,
        @c_first     char(16),
        @c_middle    char(2),
        @o_id        int,
        @o_entry_d   datetime,
        @o_carrier_id smallint,
        @cnt         smallint

BEGIN TRANSACTION o
    IF (@c_id = 0)
        BEGIN
            -----

```

```

-- get customer id and info using last name
-----
SELECT @cnt = (count(*)+1)/2
FROM   customer WITH (repeatableread)
WHERE  c_last = @c_last AND
       c_w_id = @w_id AND
       c_d_id = @d_id

SET    rowcount @cnt

SELECT @c_id      = c_id,
       @c_balance = c_balance,
       @c_first   = c_first,
       @c_last    = c_last,
       @c_middle  = c_middle
FROM   customer WITH (repeatableread)
WHERE  c_last    = @c_last AND
       c_w_id    = @w_id AND
       c_d_id    = @d_id

ORDER  BY c_w_id, c_d_id, c_last, c_first

SET rowcount 0
END
ELSE
BEGIN
    -----
    -- get customer info if by id
    -----
    SELECT @c_balance = c_balance,
           @c_first   = c_first,
           @c_middle  = c_middle,
           @c_last    = c_last
    FROM   customer WITH (repeatableread)
    WHERE  c_id      = @c_id AND
           c_d_id    = @d_id AND
           c_w_id    = @w_id

    SELECT @cnt      = @@rowcount
END

-----
-- if no such customer
-----
IF (@cnt = 0)
BEGIN
    RAISERROR('Customer not found',18,1)
    GOTO custnotfound
END

-----
-- get order info
-----
SELECT @o_id      = o_id,
       @o_entry_d = o_entry_d,
       @o_carrier_id = o_carrier_id
FROM   orders WITH (serializable)
WHERE  o_c_id     = @c_id AND
       o_d_id     = @d_id AND
       o_w_id     = @w_id

ORDER  BY o_id ASC

-----
-- select order lines for the current order

```

```

-----
SELECT  ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
FROM    order_line WITH (repeatableread)
WHERE   ol_o_id = @o_id AND
        ol_d_id = @d_id AND
        ol_w_id = @w_id

```

custnotfound:

```
COMMIT TRANSACTION o
```

```

-----
-- return data to client
-----

```

```

SELECT  @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id

```

GO

payment.sql

```

-----
-- File:      PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates payment stored procedure
--
-- Interface Level:  4.20.000
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
  DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE    tpcc_payment
        @w_id      int,
        @c_w_id   int,
        @h_amount  smallmoney,
        @d_id     tinyint,
        @c_d_id   tinyint,
        @c_id     int,
        @c_last   char(16) = ""

```

```

AS
DECLARE @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first    char(16),
        @c_middle   char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city     char(20),
        @c_state    char(2),
        @c_zip      char(9),
        @c_phone    char(16),
        @c_since    datetime,
        @c_credit   char(2),
        @c_credit_lim money,
        @c_balance  money,
        @c_discount smallmoney,
        @c_data     char(42),
        @datetime   datetime,
        @w_ytd      money,
        @d_ytd      money,
        @cnt        smallint,
        @val        smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local int,
        @c_id_local int

```

```
SELECT @screen_data = ""
```

```

BEGIN TRANSACTION p
-- get payment date
SELECT @datetime = GETDATE()

```

```

IF (@c_id = 0)
BEGIN
-- get customer id and info using last name
SELECT @cnt = COUNT(*)
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

```

```
SELECT @val = (@cnt + 1) / 2
```

```
SET rowcount @val
```

```

SELECT @c_id = c_id
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

```

```

ORDER BY c_last, c_first

SET rowcount 0
END

-- get customer info and update balances
UPDATE customer
SET @c_balance = c_balance - @h_amount,
    c_payment_cnt = c_payment_cnt + 1,
    c_ytd_payment = c_ytd_payment + @h_amount,
    @c_first = c_first,
    @c_middle = c_middle,
    @c_last = c_last,
    @c_street_1 = c_street_1,
    @c_street_2 = c_street_2,
    @c_city = c_city,
    @c_state = c_state,
    @c_zip = c_zip,
    @c_phone = c_phone,
    @c_credit = c_credit,
    @c_credit_lim = c_credit_lim,
    @c_discount = c_discount,
    @c_since = c_since,
    @c_id_local = c_id
WHERE c_id = @c_id AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
    -- compute new info
    SELECT @c_data = convert(char(5),@c_id) +
                  convert(char(4),@c_d_id) +
                  convert(char(5),@c_w_id) +
                  convert(char(4),@d_id) +
                  convert(char(5),@w_id) +
                  convert(char(19),@h_amount)

    -- update customer info
    UPDATE customer
    SET c_data = @c_data + substring(c_data, 1, 458),
        @screen_data = @c_data + substring(c_data, 1, 158)

    WHERE c_id = @c_id AND
          c_w_id = @c_w_id AND
          c_d_id = @c_d_id
END

-- get district data and update year-to-date
UPDATE district
SET d_ytd = d_ytd + @h_amount,
    @d_street_1 = d_street_1,
    @d_street_2 = d_street_2,
    @d_city = d_city,
    @d_state = d_state,
    @d_zip = d_zip,
    @d_name = d_name,
    @d_id_local = d_id
WHERE d_w_id = @w_id AND
      d_id = @d_id

-- get warehouse data and update year-to-date

```

```

UPDATE warehouse
SET w_ytd = w_ytd + @h_amount,
    @w_street_1 = w_street_1,
    @w_street_2 = w_street_2,
    @w_city = w_city,
    @w_state = w_state,
    @w_zip = w_zip,
    @w_name = w_name,
    @w_id_local = w_id
WHERE w_id = @w_id

-- create history record
INSERT INTO history VALUES (@c_id_local,
                             @c_d_id,
                             @c_w_id,
                             @d_id_local,
                             @w_id_local,
                             @datetime,
                             @h_amount,
                             @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

stocklev.sql

```

--                                     --
-- File:   STOCKLEV.SQL                 --
-- Microsoft TPC-C Benchmark Kit Ver. 4.68 --
-- Copyright Microsoft, 2006           --
--                                     --
-- Creates stock level stored procedure --
--                                     --
-- Interface Level:   4.20.000         --
--                                     --
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE    tpcc_stocklevel
                   @w_id      int,
                   @d_id      tinyint,
                   @threshold  smallint
AS
DECLARE @o_id_low  int,
        @o_id_high int

SELECT @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id = @w_id AND
       d_id   = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id = @w_id AND
       ol_d_id = @d_id and
       ol_o_id BETWEEN @o_id_low AND
                       @o_id_high AND
       s_w_id = ol_w_id AND
       s_i_id = ol_i_id AND
       s_quantity < @threshold

OPTION (ORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

getargs.c

```

// File:           GETARGS.C
// Microsoft TPC-C Kit Ver. 4.51

```

```

//                                     Copyright Microsoft, 1996, 1997, 1998, 1999,
//                                     2000, 2001, 2002, 2003
//                                     Purpose: Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCCLR_ARGS *pargs)
{
    int      i;
    char *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user         = USER;
    pargs->password     = PASSWORD;
    pargs->database     = DATABASE;
    pargs->batch        = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all   = TRUE;
    pargs->table_item   = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders  = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->log_path      = LOADER_LOG_PATH;
    pargs->pack_size     = DEFLDPACKSIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index   = BUILD_INDEX;
    pargs->index_order   = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down    = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for ( i = 1; i < argc; ++i)
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }

        ptr = argv[i];

        switch (ptr[1])
        {
            case '?': /* Fall throught */
                GetArgsLoaderUsage();

```

```

                break;
    case 'D':
        pargs->database = ptr+2;
        break;
    case 'P':
        pargs->password = ptr+2;
        break;
    case 'S':
        pargs->server = ptr+2;
        break;
    case 'U':
        pargs->user = ptr+2;
        break;
    case 'b':
        pargs->batch = atol(ptr+2);
        break;
    case 'W':
        pargs->num_warehouses = atol(ptr+2);
        break;
    case 's':
        pargs->starting_warehouse = atol(ptr+2);
        break;
    case 't':
        {
            pargs->tables_all = FALSE;
            if (strcmp(ptr+2,"item") == 0)
                pargs->table_item =
                else if (strcmp(ptr+2,"warehouse")
                pargs->table_warehouse =
                else if (strcmp(ptr+2,"customer")
                pargs->table_customer =
                else if (strcmp(ptr+2,"orders") ==
                pargs->table_orders =
            else
            {
                printf("\nUnrecognized command");
                GetArgsLoaderUsage();
                exit(1);
            }
            break;
        }
    case 'f':
        pargs->loader_res_file = ptr+2;
        break;
    case 'L':

```

```

TRUE;
== 0)
TRUE;
== 0)
TRUE;
0)
TRUE;

```

```

        pargs->log_path = ptr+2;
        break;
    case 'p':
        pargs->pack_size = atol(ptr+2);
        break;
    case 'i':
        pargs->build_index = atol(ptr+2);
        break;
    case 'o':
        pargs->index_order = atol(ptr+2);
        break;
    case 'c':
        pargs->scale_down = atol(ptr+2);
        break;
    case 'd':
        pargs->index_script_path = ptr+2;
        break;
    default:
        GetArgsLoaderUsage();
        exit(-1);
        break;
    }
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====
//
// Function name: GetArgsLoaderUsage
//
//=====

void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n\n");
    printf("Parameter                                     Default\n");
    printf("-----\n\n");
    printf("-W Number of Warehouses to Load                Required \n");
    printf("-S Server                                           %s\n", SERVER);
    printf("-U Username                                           %s\n", USER);
    printf("-P Password                                           %s\n", PASSWORD);

```



```

printf("-D Database %s\n", DATABASE);
printf("-b Batch Size %ld\n",
(long) BATCH);
printf("-p TDS packet size %ld\n",
(long) DEFLDPACKSIZE);
printf("-L Loader BCP Log Path %s\n",
LOADER_LOG_PATH);
printf("-f Loader Results Output Filename %s\n",
LOADER_RES_FILE);
printf("-s Starting Warehouse %ld\n",
(long) DEF_STARTING_WAREHOUSE);
printf("-i Build Option (data = 0, data and index = 1) %ld\n",
(long) BUILD_INDEX);
printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n",
(long) SCALE_DOWN);
printf("-d Index Script Path %s\n",
INDEX_SCRIPT_PATH);
printf("-t Table to Load %s\n",
all tables
\n");
printf(" [item|warehouse|customer|orders]\n");
printf(" Notes: \n");
printf(" - the '-t' parameter may be included multiple times to \n");
printf(" specify multiple tables to be loaded \n");
printf(" - 'item' loads ITEM table \n");
printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

printf("\nNote: Command line switches are case sensitive.\n");

exit(0);
}

```

random.c

```

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.62
// Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2005
// Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

/*****
*

```

```

* random -
* Implements a GOOD pseudo random number generator. This generator
* will/should? run the complete period before repeating.
*
* Copied from:
* Random Numbers Generators: Good Ones Are Hard to Find.
* Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
* long must be 2 ^ 31 - 1 or greater.
*
*****/
/*****
* seed - load the Seed value used in irand and drand. Should be used before
* first call to irand or drand.
*
*****/
void seed(long val)
{
#ifdef DEBUG
printf("[%d]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

if ( val < 0 )
val = abs(val);

Seed = val;
}

/*****
*
* irand - returns a 32 bit integer pseudo random number with a period of
* 1 to 2 ^ 32 - 1.
*
* parameters:
* none.
*
* returns:
* 32 bit integer - defined as long ( see above ).
*
* side effects:
* seed get recomputed.
*****/
long irand()
{
register long s; /* copy of seed */
register long test; /* test flag */
register long hi; /* tmp value for speed */
register long lo; /* tmp value for speed */

#ifdef DEBUG
printf("[%d]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

s = Seed;
hi = s / Q;
lo = s % Q;

```

```

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
 *
 * drand - returns a double pseudo random number between 0.0 and 1.0.
 * See irand.
 *****/
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

    return rand_num;
}

```

```

#ifdef 0
//Original code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

strings.c

```

//      File:          STRINGS.C
//
//      Microsoft TPC-C Kit Ver. 4.51
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//      Purpose:  Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
                (int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====
//
// Function name: LastName
//
//=====

void LastName(int num,
             char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES" ,
        "ESE" , "ANTI" , "CALLY" , "ATION" , "EING"
    };

#ifdef DEBUG

```

```

printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num < %ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
                (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
name);
#endif

    return;
}

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//-Clevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

```

```

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);
    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaStringPadded()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);
    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;
    return padLen;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====
int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify prcentage is valid
    if ((percent < 0) || (percent > 100))
    {

```

```

        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return len;
}

//=====
//
// Function name: MakeNumberString
//
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char *str)

```

```

{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%d]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)

```

```

{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

time.c

```

// File: TIME.C
// Microsoft TPC-C Kit Ver. 4.62
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2005
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%d]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

// File: TPCC.H
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003, 2005
// Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit

```

```

#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "C:\\MSTPCC.450\\SETUP\\LOGS\\load.out"
#define LOADER_LOG_PATH "C:\\MSTPCC.450\\SETUP\\LOGS\\"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1 // build both
data and indexes
#define INDEX_ORDER 1 // build
indexes before load
#define SCALE_DOWN 0 // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    char *tables_all;
    BOOL // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically

```

```

        BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
        BOOL table_customer; //
set if loading CUSTOMER and HISTORY
        BOOL table_orders; //
set if loading NEW-ORDER, ORDERS, ORDER-LINE
        long num_warehouses;
        long batch;
        long verbose;
        long pack_size;
        char *loader_res_file;
        char *log_path;
        char *synch_servername;
        long case_sensitivity;
        long starting_warehouse;
        long build_index;
        long index_order;
        long scale_down;
        char *index_script_path;
} TPCCCLR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

```

```
// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();
```

```
// Functions in time.c
long TimeNow();
```

```
// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PadString();
```

tpccldr.c

```

//=====
// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for TPC-C database loader
//=====
// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4
#define MAX_SQL_ERRORS 10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();

```

```

void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

```

```
// Shared memory structures
```

```
typedef struct
{
    double ol_i_id; ol;
    long ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;
```

```
typedef struct
{
    long o_id;
    short o_d_id; o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o_ol_cnt;
    short o_all_local;
    ORDER_LINE_STRUCT o_ol[15];
} ORDERS_STRUCT;
```

```
typedef struct
{
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;
    double c_balance[6];
    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    double h_amount;
    char h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;
```

```
typedef struct
{
    char c_last[LAST_NAME_LEN+1];
    char c_first[FIRST_NAME_LEN+1];

```

```

        long                c_id;
    } CUSTOMER_SORT_STRUCT;

typedef struct
{
    long                time_start;
} LOADER_TIME_STRUCT;

// Global variables
char                szLastError[300];

HENV                henv;

HDBC                v_hdbc;                // for SQL
Server version verification
HDBC                i_hdbc1;                // for ITEM table
HDBC                w_hdbc1;                // for WAREHOUSE,
DISTRICT, STOCK
HDBC                c_hdbc1;                // for CUSTOMER
HDBC                c_hdbc2;                // for HISTORY
HDBC                o_hdbc1;                // for ORDERS
HDBC                o_hdbc2;                // for NEW-ORDER

HDBC                o_hdbc3;                // for ORDER-LINE

HSTMT                v_hstmt;                // for SQL Server
version verification
HSTMT                i_hstmt1;
HSTMT                w_hstmt1;
HSTMT                c_hstmt1, c_hstmt2;
HSTMT                o_hstmt1, o_hstmt2, o_hstmt3;

int                total_db_errors;

ORDERS_STRUCT        orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT        customer_buf[CUSTOMERS_PER_DISTRICT];
long                orders_rows_loaded;
double                new_order_rows_loaded;
double                order_line_rows_loaded;
long                history_rows_loaded;
long                customer_rows_loaded;
double                stock_rows_loaded;
long                district_rows_loaded;
long                item_rows_loaded;
long                warehouse_rows_loaded;
long                main_time_start;
long                main_time_end;
long                max_items;
long                customers_per_district;
long                orders_per_district;
long                first_new_order;
long                last_new_order;

TPCC_LDR_ARGS        *aptr, args;

//=====
//
// Function name: main
//
//=====
int main(int argc, char **argv)
{

```

```

DWORD                dwThreadID[MAX_MAIN_THREADS];
HANDLE                hThread[MAX_MAIN_THREADS];
FILE                *fLoader;
char                buffer[255];
int                i;

for (i=0; i<MAX_MAIN_THREADS; i++)
    hThread[i] = NULL;

printf("\n*****\n");
printf("\n*
printf("\n* Microsoft SQL Server
printf("\n*
printf("\n* TPC-C BENCHMARK KIT: Database loader
printf("\n* Version %s
printf("\n*
printf("\n*****\n\n");

// process command line arguments
aptr = &args;
GetArgsLoader(argc, argv, aptr);

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk load.\n");
else
    printf("Clustered indexes will be created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("**** Scaled Down Database ****\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{

```



```

        printf("Error, loader result file open failed.");
        exit(-1);
    }

    // start loading data
    sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
    if (aptr->scale_down == 1)
    {
        sprintf(buffer, "SCALED DOWN DATABASE.\n");
    }

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    main_time_start = (TimeNow() / MILLI);

    // start parallel load threads
    if (aptr->tables_all || aptr->table_item)
    {
        fprintf(fLoader, "\nStarting loader threads for: item\n");

        hThread[0] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadItem,
                                NULL,
                                0,
                                &dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread =
0.\n");
            exit(-1);
        }
    }

    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for: warehouse\n");

        hThread[1] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadWarehouse,
                                NULL,
                                0,
                                &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread =
1.\n");
            exit(-1);
        }
    }

    if (aptr->tables_all || aptr->table_customer)

```

```

        fprintf(fLoader, "Starting loader threads for: customer\n");

        hThread[2] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadCustomer,
                                NULL,
                                0,
                                &dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating main thread
= 2.\n");
            exit(-1);
        }
    }

    if (aptr->tables_all || aptr->table_orders)
    {
        fprintf(fLoader, "Starting loader threads for: orders\n");

        hThread[3] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadOrders,
                                NULL,
                                0,
                                &dwThreadID[3]);

        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main thread
= 3.\n");
            exit(-1);
        }
    }

    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);

    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

```

```

        SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    int                i;
    long              i_id;
    long              i_im_id;
    char              i_name[I_NAME_LEN+1];
    double            i_price;
    char              i_data[I_DATA_LEN+1];
    char              name[20];
    long              time_start;
    RETCODE           rc;
    DBINT             rcint;
    char              bcpint[128];
    char              err_log_path[256];

    // Seed with unique number
    seed(11);

    printf("Loading item table...\n");

    //if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "item.err");
    rc = bcp_init(i_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpint, "tablock, order (i_id), ROWS_PER_BATCH =
100000*");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcpint);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
    }

    i = 0;
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);

```

```

    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
//
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//
//=====
void LoadWarehouse()
{

```

```

int          i;
long         w_id;
char         w_name[W_NAME_LEN+1];
char         w_street_1[ADDRESS_LEN+1];
char         w_street_2[ADDRESS_LEN+1];
char         w_city[ADDRESS_LEN+1];
char         w_state[STATE_LEN+1];
char         w_zip[ZIP_LEN+1];
double       w_tax;
double       w_ytd;
char         name[20];
long         time_start;
RETCODE     rc;
DBINT       rcint;
char         bcphint[128];
char         err_log_path[256];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarc1");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s..%s", aptr->database, "warehouse");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "whouse.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaStringPadded(6,10, W_NAME_LEN, w_name);
    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarc1");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
//
// Function   : District
//

```

```

//=====
void District()
{
    int            i;
    short          d_id;
    long           d_w_id;
    char           d_name[D_NAME_LEN+1];
    char           d_street_1[ADDRESS_LEN+1];
    char           d_street_2[ADDRESS_LEN+1];
    char           d_city[ADDRESS_LEN+1];
    char           d_state[STATE_LEN+1];
    char           d_zip[ZIP_LEN+1];
    double         d_tax;
    double         d_ytd;
    char           name[20];
    long           d_next_o_id;
    long           time_start;
    long           w_id;
    RETCODE        rc;
    DBINT          rcint;
    char           bcphint[128];
    char           err_log_path[256];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s.%s", aptr->database, "district");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "district.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcp hint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcp hint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }

    i = 0;
    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)

```

```

        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    d_ytd = 30000.0;

    d_next_o_id = orders_per_district+1;

    time_start = (TimeNow() / MILLI);

    for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        d_w_id = w_id;

        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);

            MakeAddress(d_street_1, d_street_2, d_city, d_state,

            d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEEDED)
                HandleErrorDBC(w_hdbc1);

            district_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
        }
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

```

```

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");

return;
}

//=====
//
// Function   : Stock
//
//=====
void Stock()
{
    int          i;
    long         s_i_id;
    long         s_w_id;
    short        s_quantity;
    char         s_dist_01[S_DIST_LEN+1];
    char         s_dist_02[S_DIST_LEN+1];
    char         s_dist_03[S_DIST_LEN+1];
    char         s_dist_04[S_DIST_LEN+1];
    char         s_dist_05[S_DIST_LEN+1];
    char         s_dist_06[S_DIST_LEN+1];
    char         s_dist_07[S_DIST_LEN+1];
    char         s_dist_08[S_DIST_LEN+1];
    char         s_dist_09[S_DIST_LEN+1];
    char         s_dist_10[S_DIST_LEN+1];
    long         s_ytd;
    short        s_order_cnt;
    short        s_remote_cnt;
    char         s_data[S_DATA_LEN+1];
    short        len;
    char         name[20];
    long         time_start;
    RETCODE      rc;
    DBINT        rcint;
    char         bcphint[128];
    char         err_log_path[256];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s.%s", aptr->database, "stock");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcpint);
    }
}

```

```

        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }

    i = 0;
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
}

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbcl);
rc = bcp_bind(w_hdbcl, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbcl);
rc = bcp_bind(w_hdbcl, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbcl);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

rc = bcp_sendrow(w_hdbcl);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbcl);

stock_rows_loaded++;
CheckForCommit_Big(w_hdbcl, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }
}

rcint = bcp_done(w_hdbcl);
if (rcint < 0)
    HandleErrorDBC(w_hdbcl);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbcl);
SQLFreeConnect(w_hdbcl);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

```

```

return;
}

//=====
//
// Function : LoadCustomer
//
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT customer_time_start;
    LOADER_TIME_STRUCT history_time_start;
    long w_id;
    short d_id;
    DWORD dwThreadId[MAX_CUSTOMER_THREADS];
    HANDLE hThread[MAX_CUSTOMER_THREADS];
    char name[20];
    RETCODE rc;
    DBINT rcint;
    char bcpHint[128];
    char cmd[256];
    int num_procs;
    char err_log_path_cust[256];
    char err_log_path_hist[256];

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if ( num_procs >= 8 )
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s.%s", aptr->database, "customer");

    strcpy(err_log_path_cust, aptr->log_path);
    strcat(err_log_path_cust, "customer.err");
    rc = bcp_init(c_hdbcl, name, NULL, err_log_path_cust, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbcl);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpHint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbcl, BCPHINTS, (void*) bcpHint);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbcl);
    }

    sprintf(name, "%s.%s", aptr->database, "history");

    rc = bcp_init(c_hdbcl2, name, NULL, "logs\\history.err", DB_IN);

```

```

strcpy(err_log_path_hist,aptr->log_path);
strcat(err_log_path_hist,"history.err");
rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded = 0;
history_rows_loaded = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...
        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadCustomerTable,

&customer_time_start,

0,

&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread
        printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadHistoryTable,

&history_time_start,

```

```

0,

&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
        }
    }
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
aptr->server,
aptr->user,
aptr->password,

```

```

                                aptr->database,
                                LOADER_NURAND_C,
                                aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
//
// Function   : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    long    i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function   : CustomerBufLoad

```

```

//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long    i;
    CUSTOMER_SORT_STRUCT  c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
                    c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);
        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';
        MakeAddress(customer_buf[i].c_street_1,
                   customer_buf[i].c_street_2,
                   customer_buf[i].c_city,
                   customer_buf[i].c_state,
                   customer_buf[i].c_zip);
        MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';
        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
        10000.0;

        strcpy(customer_buf[i].c_balance,"-10.0");
        MakeAlphaStringPadded(300, 500, C_DATA_LEN,
                             customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaStringPadded(12, 24, H_DATA_LEN,
                             customer_buf[i].h_data);
    }
}

//=====

```



```

//
// Function   : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long      long      i;
    long      c_id;
    short     c_d_id;
    long      c_w_id;
    char      c_first[FIRST_NAME_LEN+1];
    char      c_middle[MIDDLE_NAME_LEN+1];
    char      c_last[LAST_NAME_LEN+1];
    char      c_street_1[ADDRESS_LEN+1];
    char      c_street_2[ADDRESS_LEN+1];
    char      c_city[ADDRESS_LEN+1];
    char      c_state[STATE_LEN+1];
    char      c_zip[ZIP_LEN+1];
    char      c_phone[PHONE_LEN+1];
    char      c_credit[CREDIT_LEN+1];
    double    c_credit_lim;
    double    c_discount;
    char      c_balance[6];
    double    c_ytd_payment;
    short     c_payment_cnt;
    short     c_delivery_cnt;
    char      c_data[C_DATA_LEN+1];
    char      c_since[C_SINCE_LEN+1];
    RETCODE   rc;

    i = 0;
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)

```

```

        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;

        strcpy(c_first, customer_buf[i].c_first);
        strcpy(c_middle, customer_buf[i].c_middle);
        strcpy(c_last, customer_buf[i].c_last);
        strcpy(c_street_1, customer_buf[i].c_street_1);
        strcpy(c_street_2, customer_buf[i].c_street_2);
        strcpy(c_city, customer_buf[i].c_city);
        strcpy(c_state, customer_buf[i].c_state);
        strcpy(c_zip, customer_buf[i].c_zip);
        strcpy(c_phone, customer_buf[i].c_phone);
        strcpy(c_credit, customer_buf[i].c_credit);

        FormatDate(&c_since);
    }

```

```

        c_credit_lim = customer_buf[i].c_credit_lim;
        c_discount = customer_buf[i].c_discount;
        strcpy(c_balance, customer_buf[i].c_balance);
        c_ytd_payment = customer_buf[i].c_ytd_payment;
        c_payment_cnt = customer_buf[i].c_payment_cnt;
        c_delivery_cnt = customer_buf[i].c_delivery_cnt;
        strcpy(c_data, customer_buf[i].c_data);

        // Send data to server
        rc = bcp_sendrow(c_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        customer_rows_loaded++;
        CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
    }
}

//=====
//
// Function : LoadHistoryTable
//
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    i = 0;
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEEDED)

```

```

        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }
}

//=====
//
// Function : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;
    LOADER_TIME_STRUCT order_line_time_start;
    long w_id;
    short d_id;
    DWORD dwThreadID[MAX_ORDER_THREADS];
    HANDLE hThread[MAX_ORDER_THREADS];
    char name[20];
    RETCODE rc;
    char bcp_hint[128];
    char err_log_path_ord[256];
    char err_log_path_nord[256];
    char err_log_path_ordl[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordc1");
        BuildIndex("idxnodc1");
        BuildIndex("idxodlc1");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

```

```

rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
strcpy(err_log_path_ord, aptr->log_path);
strcat(err_log_path_ord, "orders.err");
rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

sprintf(name, "%s.%s", aptr->database, "new_order");

rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
strcpy(err_log_path_nord, aptr->log_path);
strcat(err_log_path_nord, "neword.err");
rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
    rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
}

sprintf(name, "%s.%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
strcpy(err_log_path_ordl, aptr->log_path);
strcat(err_log_path_ordl, "ordline.err");
rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 300000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded = 0;
new_order_rows_loaded = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

```

```

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...
        // start Orders table thread
        printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadOrdersTable,

&orders_time_start,

0,

&dwThreadId[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread
        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadNewOrderTable,

&new_order_time_start,

0,

&dwThreadId[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread
        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[2] = CreateThread(NULL,

0,

```

```

(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

    if (hThread[2] == NULL)
    {
        printf("Error, failed in creating creating
thread = 2.\n");
        exit(-1);
    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );
    WaitForSingleObject( hThread[2], INFINITE );

    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[2]) == FALSE)
    {
        printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
    }
}

printf("Finished loading orders.\n");

return;
}

//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;

```

```

orders_buf[i].o_carrier_id = 0;
orders_buf[i].o_ol_cnt = 0;
orders_buf[i].o_all_local = 0;

for (j=0;j<=14;j++)
{
    orders_buf[i].o_ol[j].ol = 0;
    orders_buf[i].o_ol[j].ol_i_id = 0;
    orders_buf[i].o_ol[j].ol_supply_w_id = 0;
    orders_buf[i].o_ol[j].ol_quantity = 0;
    orders_buf[i].o_ol[j].ol_amount = 0;
    strcpy(orders_buf[i].o_ol[j].ol_dist_info,"");
}
}

//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(short d_id, long w_id)
{
    int    cust[ORDERS_PER_DISTRICT+1];
    long   o_id;
    long   ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
        {
            orders_buf[o_id].o_ol[ol].ol = ol+1;
            orders_buf[o_id].o_ol[ol].ol_i_id = RandomNumber(1L,
max_items);
            orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;

```

```

        orders_buf[o_id].o_ol[ol].ol_quantity = 5;
        MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

        // Generate ORDER-LINE data
        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_ol[ol].ol_amount = 0;
            // Added to insure ol_delivery_d set
properly during load

            FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
        }
        else
        {
            orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
            // Added to insure ol_delivery_d set
properly during load
            // odbc datetime format

            strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
        }
    }
}

//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int         i;
    long        o_id;
    short       o_d_id;
    long        o_w_id;

    long        o_c_id;
    short       o_carrier_id;
    short       o_ol_cnt;
    short       o_all_local;

    char        o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE     rc;
    DBINT       rcint;

    // bind ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        for (i = 0; i < orders_per_district; i++)
        {
            o_id         = orders_buf[i].o_id;
            o_d_id       = orders_buf[i].o_d_id;
            o_w_id       = orders_buf[i].o_w_id;
            o_c_id       = orders_buf[i].o_c_id;
            o_carrier_id = orders_buf[i].o_carrier_id;
            o_ol_cnt     = orders_buf[i].o_ol_cnt;
            o_all_local  = orders_buf[i].o_all_local;

            FormatDate(&o_entry_d);

            // send data to server
            rc = bcp_sendrow(o_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc1);

            orders_rows_loaded++;
            CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
        }

        if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
        {
            rcint = bcp_done(o_hdbc1);
            if (rcint < 0)
                HandleErrorDBC(o_hdbc1);

            SQLFreeStmt(o_hstmt1, SQL_DROP);
            SQLDisconnect(o_hdbc1);
            SQLFreeConnect(o_hdbc1);

            // if build index after load...
            if ((aptr->build_index == 1) && (aptr->index_order == 0))
                BuildIndex("idxordc1");

            // build non-clustered index
            if (aptr->build_index == 1)
                BuildIndex("idxordnc");
        }
    }
}

//=====
//

```

```

// Function : LoadNewOrderTable
//
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long          i;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    RETCODE       rc;
    DBINT         rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
        "new_order", &new_order_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxnodc1");
    }
}

//=====
//
// Function : LoadOrderLineTable
//
//=====

```

```

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long          i;
    long          j;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    double        ol;
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE       rc;
    DBINT         rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
    NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
    0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
    ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id = orders_buf[i].o_id;

```

```

o_d_id = orders_buf[i].o_d_id;
o_w_id = orders_buf[i].o_w_id;

for (j=0; j < orders_buf[i].o_ol_cnt; j++)
{
    ol            = orders_buf[i].o_ol[j].ol;
    ol_i_id       = orders_buf[i].o_ol[j].ol_i_id;
    ol_supply_w_id = orders_buf[i].o_ol[j].ol_supply_w_id;
    ol_quantity   = orders_buf[i].o_ol[j].ol_quantity;
    ol_amount     = orders_buf[i].o_ol[j].ol_amount;

strcpy(ol_delivery_d,orders_buf[i].o_ol[j].ol_delivery_d);

strcpy(ol_dist_info,orders_buf[i].o_ol[j].ol_dist_info);

    rc = bcp_sendrow(o_hdbc3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);

    order_line_rows_loaded++;

    CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxodlcl");
}
}

//=====
//
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

```

```

}

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,

                    HSTMT hstmt,
                    long rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
                    aptr->batch,
                    table_name,
                    time_diff,
                    rows_loaded,
                    (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====
//
// Function : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,

                        HSTMT hstmt,
                        double rows_loaded,
                        char *table_name,
                        long *time_start)
{
    long time_end, time_diff;

    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.0f
(%.2f rps)\n",
                    aptr->batch,
                    table_name,
                    time_diff,
                    rows_loaded,
                    (float) aptr->batch / (time_diff ? time_diff
: 1L));
    }
}

```

```

        *time_start = time_end;
    }
    return;
}
//=====
//
// Function   : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE      rc;

    char          szDriverString[300];
    char          szDriverStringOut[1024];
    SQLSMALLINT   cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server
    // Connection 1
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,

```

```

                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );
    if ( ( rc != SUCCEED) &&
        (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(i_hdbc1);
        printf("TPC-C Loader aborted!\n");
        exit(9);
    }

    // Connection 2
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = SQLDriverConnect ( w_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );
    if ( ( rc != SUCCEED) &&
        (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(w_hdbc1);
        printf("TPC-C Loader aborted!\n");
        exit(9);
    }

    // Connection 3
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)

```



```

        HandleErrorDBC(c_hdbc1);
rc = SQLDriverConnect ( c_hdbc1,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 4
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                        aptr->server,
                        aptr->user,
                        aptr->password,
                        aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                        aptr->server,
                        aptr->user,
                        aptr->password,
                        aptr->database );

```

```

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                        aptr->server,
                        aptr->user,
                        aptr->password,
                        aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                        aptr->server,

```

```

                                aptr->user,
                                aptr->password,
                                aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(o_hdbc3);
        printf("TPC-C Loader aborted!\n");
        exit(9);
    }
}

//=====
//
// Function name: BuildIndex
//
//=====
void BuildIndex(char          *index_script)
{
    char      cmd[256];

    printf("Starting index creation:  %s\n",index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation:  %s\n",index_script);
}

//=====
//
// Function name: HandleErrorDBC
//
//=====
void HandleErrorDBC (SQLHDBC hdbc1)
{

```

```

                                SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
                                SQLLEN            NativeError;
                                SQLSMALLINT i, MsgLen;
                                SQLRETURN rc2;
                                char              timebuf[128];
                                char              datebuf[128];
                                char              err_log_path[256];
                                FILE              *fp1;

                                i = 1;
                                while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
                                &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
                                SQL_NO_DATA )
                                {
                                    sprintf( szLastError , "%s" , Msg );

                                    _strtime(timebuf);
                                    _strdate(datebuf);

                                    printf( "[%s : %s] %s\n==>SQLState: %s\n" , datebuf, timebuf,
                                    szLastError, SqlState);

                                    strcpy(err_log_path,aptr->log_path);
                                    strcat(err_log_path,"tpccldr.err");
                                    fp1 = fopen(err_log_path,"a+");
                                    if (fp1 == NULL)
                                        printf("ERROR:  Unable to open errorlog file.\n");
                                    else
                                    {
                                        fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
                                        timebuf, szLastError, SqlState);
                                        fclose(fp1);
                                    }

                                    i++;
                                }
}

//=====
//
// Function : HandleErrorSTMT
//
//=====
void HandleErrorSTMT (HSTMT hstmt1)
{
                                SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
                                SQLLEN            NativeError;
                                SQLSMALLINT i, MsgLen;
                                SQLRETURN rc2;
                                char              timebuf[128];
                                char              datebuf[128];
                                char              err_log_path[256];
                                FILE              *fp1;

                                i = 1;
                                while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
                                &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
                                SQL_NO_DATA )
                                {
                                    if (total_db_errors >= MAX_SQL_ERRORS)
                                    {

```

```

                printf(">>>> Maximum SQL errors of %d exceeded.
Terminating TPCCLDR.<<<<\n",total_db_errors);
                exit(9);
            }
            total_db_errors++;

            sprintf( szLastError , "%s" ,  Msg );

            _strtime(timebuf);
            _strdate(datebuf);

            printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

            strcpy(err_log_path,aptr->log_path);
            strcat(err_log_path,"tpccldr.err");
            fp1 = fopen(err_log_path,"a+");
            if (fp1 == NULL)
                printf("ERROR:  Unable to open errorlog file.\n");
            else
            {
                fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
                fclose(fp1);
            }

            i++;
        }
    }

//=====
//
// Function   : FormatDate
//
//=====
void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );

    return;
}

```

Appendix C: Tunable Parameters

Microsoft SQL Server 2005 Installation Procedures

Microsoft SQL Server 2005 Enterprise (x64) Edition
Installation Procedures
Type of installation: custom
During the custom installation, use the default
settings for all except the following two areas:
Services accounts:
SQL Server - local system account
SQL Server Agent - local system account
Set the sort order/collation as Latin1_General / BIN

Microsoft SQL Server 2005 Startup Commands

```
start sqlservr.exe -c -x -T3502 -T8011 -T8012 -T8018
-T8019 -T661 -T8710 -T836 -T834
```

Where:

```
-c Start SQL Server independently of the
Windows NT Service Control Manager
-x Disables the keeping of CPU time and cache-
hit ratio statistics
-T3502-Prints a message to the SQL Server log at the
start and end of each checkpoint
-T8011-Disable diagnostics for resource monitor
-T8012-Disable ring buffer for scheduler
-T8018-Disable exceptions rung buffer
-T8019-Disable stack collection for exception ring
buffer
-T661-Disable ghost writer
-T8710-Disable HP checks.
-T836-Make use of all physical memory
-T834-Large Pages
```

File locations:
sqlservr.exe- C:\Program Files\Microsoft SQL
Server\MSSQL.1\MSSQL\Binn

ERRORLOG-C:\Program Files\Microsoft SQL
Server\MSSQL.1\MSSQL\LOG

Microsoft SQL Server Configuration Parameters

name	config_value	run_value	minimum
maximum			
-----	-----	-----	-----
Ad Hoc Distributed Queries			0
1	0	0	
affinity I/O mask			-2147483648
2147483647	0	0	
affinity mask			-2147483648
2147483647	65535	65535	
affinity64 I/O mask			-2147483648
2147483647	0	0	
affinity64 mask			-2147483648
2147483647	0	0	
Agent XPs			0
1	0	0	
allow updates			0
1	0	0	
awe enabled			0
1	0	0	
blocked process threshold			0
86400	0	0	
c2 audit mode			0
1	0	0	
clr enabled			0
1	0	0	
cost threshold for parallelism			0
32767	5	5	
cross db ownership chaining			0
1	0	0	
cursor threshold			-1
2147483647	-1	-1	
Database Mail XPs			0
1	0	0	
default full-text language			0
2147483647	1033	1033	
default language			0
9999	0	0	
default trace enabled			0
1	0	0	
disallow results from triggers			0
1	0	0	
fill factor (%)			0
100	0	0	
ft crawl bandwidth (max)			0
32767	100	100	
ft crawl bandwidth (min)			0
32767	0	0	

ft notify bandwidth (max)			0
32767	100	100	
ft notify bandwidth (min)			0
32767	0	0	
in-doubt xact resolution			0
2	0	0	
index create memory (KB)			704
2147483647	704	704	
lightweight pooling			0
1	1	1	
locks			5000
2147483647	0	0	
max degree of parallelism			0
64	1	1	
max full-text crawl range			0
256	4	4	
max server memory (MB)			16
2147483647	62000	62000	
max text repl size (B)			0
2147483647	65536	65536	
max worker threads			128
32767	1100	1100	
media retention			0
365	0	0	
min memory per query (KB)			512
2147483647	512	512	
min server memory (MB)			0
2147483647	0	0	
nested triggers			0
1	1	1	
network packet size (B)			512
32767	2048	2048	
Ole Automation Procedures			0
1	0	0	
open objects			0
2147483647	0	0	
PH timeout (s)			1
3600	60	60	
precompute rank			0
1	0	0	
priority boost			0
1	1	1	
query governor cost limit			0
2147483647	0	0	
query wait (s)			-1
2147483647	-1	-1	
recovery interval (min)			0
32767	32767	32767	
remote access			0
1	1	1	
remote admin connections			0
1	0	0	
remote login timeout (s)			0
2147483647	20	20	
remote proc trans			0
1	0	0	
remote query timeout (s)			0
2147483647	600	600	
Replication XPs			0
1	0	0	
scan for startup procs			0
1	0	0	

```

server trigger recursion          0
1 1 1 1
set working set size              0
1 0 0
show advanced options             0
1 1 1
SMO and DMO XPs                   0
1 1 1
SQL Mail XPs                       0
1 0 0
transform noise words             0
1 0 0
two digit year cutoff             1753
9999 2049 2049
user connections                   0
32767 0 0
user options                       0
32767 0 0
Web Assistant Procedures          0
1 0 0
xp_cmdshell                       0
1 0 0

```

Microsoft SQL Server Node Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 11:16 AM

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 2:11 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xff

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 2:11 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xff00

Microsoft SQL Server Super Socket Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 5:58 PM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: ListenOnAllIPs
Type: REG_DWORD
Data: 0x1

Value 2
Name: NoDelay
Type: REG_DWORD
Data: 0

Value 3
Name: KeepAlive
Type: REG_DWORD
Data: 0x7530

Value 4
Name: DisplayName
Type: REG_SZ
Data: TCP/IP

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 2:12 PM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: Active
Type: REG_DWORD
Data: 0x1

Value 2

Name: TcpPort
Type: REG_SZ
Data: 2001

Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:

Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address

Value 5
Name: IpAddress
Type: REG_SZ
Data: 130.168.206.74

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 2:12 PM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: Active
Type: REG_DWORD
Data: 0x1

Value 2
Name: TcpPort
Type: REG_SZ
Data: 2001

Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:

Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address

Value 5
Name: IpAddress
Type: REG_SZ
Data: 130.169.206.74

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 2:12 PM

Value 0
Name: Enabled

Hardware Abstraction Layer Version =
 "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
 User Name Not Available
 Time Zone Central Daylight Time
 Total Physical Memory 65,534.16 MB
 Available Physical Memory 61.62 GB
 Total Virtual Memory 64.43 GB
 Available Virtual Memory 63.50 GB
 Page File Space 2.00 GB
 Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device	
I/O Port 0x0000A000-0x0000AFFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x0000A000-0x0000AFFF	Smart Array
P800 Controller (Non-Miniport)	
I/O Port 0x00000000-0x00000CF7	PCI bus
I/O Port 0x00000000-0x00000CF7	Direct memory
access controller	
IRQ 10 Base System Device	
IRQ 10 Base System Device	
I/O Port 0x00009000-0x00009FFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x00009000-0x00009FFF	Smart Array
P800 Controller (Non-Miniport)	
I/O Port 0x00006000-0x00006FFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x00006000-0x00006FFF	Smart Array
P800 Controller (Non-Miniport)	
I/O Port 0x0000B000-0x0000BFFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x0000B000-0x0000BFFF	Smart Array
P800 Controller (Non-Miniport)	
Memory Address 0xF6000000-0xFD3FFFFF	PCI standard
PCI-to-PCI bridge	
Memory Address 0xF6000000-0xFD3FFFFF	Intel(R)
6700PXH PCI Express-to-PCI Bridge A - 0329	
Memory Address 0xF6000000-0xFD3FFFFF	HP NC371i
Virtual Bus Device	
IRQ 16 Smart Array P800 Controller (Non-Miniport)	
IRQ 16 Smart Array P800 Controller (Non-Miniport)	
IRQ 16 Smart Array P800 Controller (Non-Miniport)	
IRQ 16 Smart Array P800 Controller (Non-Miniport)	
IRQ 16 Smart Array P800 Controller (Non-Miniport)	

IRQ 16 Smart Array P800 Controller (Non-Miniport)	
IRQ 16 Intel(R) 82801EB USB Universal Host	
Controller - 24D2	
IRQ 16 Intel(R) 82801EB USB Universal Host	
Controller - 24DE	
I/O Port 0x00005000-0x00005FFF	Intel(R)
6700PXH PCI Express-to-PCI Bridge B - 032A	
I/O Port 0x00005000-0x00005FFF	QLogic Fibre
Channel Adapter	
Memory Address 0xD0000000-0xFEFFFFFF	PCI bus
Memory Address 0xD0000000-0xFEFFFFFF	Motherboard
resources	
Memory Address 0xA0000-0xBFFFF	PCI bus
Memory Address 0xA0000-0xBFFFF	Standard VGA
Graphics Adapter	
I/O Port 0x00007000-0x00007FFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x00007000-0x00007FFF	Smart Array
P800 Controller (Non-Miniport)	
Memory Address 0xFA000000-0xFD3FFFFF	Intel(R)
6700PXH PCI Express-to-PCI Bridge B - 032A	
Memory Address 0xFA000000-0xFD3FFFFF	HP NC371i
Virtual Bus Device	
I/O Port 0x00004000-0x00005FFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x00004000-0x00005FFF	Intel(R)
6700PXH PCI Express-to-PCI Bridge A - 0329	
I/O Port 0x00004000-0x00005FFF	Smart Array
P600 Controller (Non-Miniport)	
I/O Port 0x00008000-0x00008FFF	PCI standard
PCI-to-PCI bridge	
I/O Port 0x00008000-0x00008FFF	Smart Array
P800 Controller (Non-Miniport)	
[DMA]	
Resource Device Status	
Channel 7 Direct memory access controller	OK
Channel 0 Printer Port (LPT1)	OK
Channel 2 Standard floppy disk controller	OK
[Forced Hardware]	
Device PNP Device ID	
[I/O]	
Resource Device Status	
0x00000000-0x00000CF7	PCI bus OK
0x00000000-0x00000CF7	Direct memory access
controller	OK
0x00000D00-0x0000FFFF	PCI bus OK

0x00004000-0x00005FFF	PCI standard
bridge	OK
0x00004000-0x00005FFF	Intel(R) 6700PXH PCI
Express-to-PCI Bridge A - 0329	OK
0x00004000-0x00005FFF	Smart Array P600
Controller (Non-Miniport)	OK
0x00004400-0x000044FF	Smart Array P600
Controller (Non-Miniport)	OK
0x00005000-0x00005FFF	Intel(R) 6700PXH PCI
Express-to-PCI Bridge B - 032A	OK
0x00005000-0x00005FFF	QLogic Fibre Channel
Adapter	OK
0x00005400-0x000054FF	QLogic Fibre Channel
Adapter	OK
0x00005800-0x000058FF	LSI Adapter, SAS 3000
series, 8-port with 1068 -StorPort	OK
0x00006000-0x00006FFF	PCI standard PCI-to-PCI
bridge	OK
0x00006000-0x00006FFF	Smart Array P800
Controller (Non-Miniport)	OK
0x00007000-0x00007FFF	PCI standard PCI-to-PCI
bridge	OK
0x00007000-0x00007FFF	Smart Array P800
Controller (Non-Miniport)	OK
0x00008000-0x00008FFF	PCI standard PCI-to-PCI
bridge	OK
0x00008000-0x00008FFF	Smart Array P800
Controller (Non-Miniport)	OK
0x00009000-0x00009FFF	PCI standard PCI-to-PCI
bridge	OK
0x00009000-0x00009FFF	Smart Array P800
Controller (Non-Miniport)	OK
0x0000A000-0x0000AFFF	PCI standard PCI-to-PCI
bridge	OK
0x0000A000-0x0000AFFF	Smart Array P800
Controller (Non-Miniport)	OK
0x0000B000-0x0000BFFF	PCI standard PCI-to-PCI
bridge	OK
0x0000B000-0x0000BFFF	Smart Array P800
Controller (Non-Miniport)	OK
0x00001000-0x0000101F	Intel(R) 82801EB USB
Universal Host Controller - 24D2	OK
0x00001020-0x0000103F	Intel(R) 82801EB USB
Universal Host Controller - 24D4	OK
0x00001040-0x0000105F	Intel(R) 82801EB USB
Universal Host Controller - 24D7	OK
0x00001060-0x0000107F	Intel(R) 82801EB USB
Universal Host Controller - 24DE	OK
0x00003000-0x000030FF	Standard VGA Graphics
Adapter	OK
0x000003B0-0x000003BB	Standard VGA Graphics
Adapter	OK
0x000003C0-0x000003DF	Standard VGA Graphics
Adapter	OK
0x00002800-0x000028FF	Base System Device
	OK
0x00003400-0x000034FF	Base System Device
	OK
0x00003800-0x0000381F	Standard Universal PCI
to USB Host Controller	OK
0x00000070-0x00000077	Motherboard resources
	OK

0x00000408-0x0000040F	Motherboard resources	OK
0x000004D0-0x000004D1	Motherboard resources	OK
0x00000020-0x0000003F	Motherboard resources	OK
0x000000A0-0x000000BF	Motherboard resources	OK
0x00000090-0x0000009F	Motherboard resources	OK
0x00000050-0x00000053	Motherboard resources	OK
0x00000700-0x0000071F	Motherboard resources	OK
0x00000800-0x0000083F	Motherboard resources	OK
0x00000900-0x0000097F	Motherboard resources	OK
0x00000010-0x0000001F	Motherboard resources	OK
0x00000C80-0x00000C83	Motherboard resources	OK
0x00000CD4-0x00000CD7	Motherboard resources	OK
0x00000F50-0x00000F58	Motherboard resources	OK
0x000002F8-0x000002FF	Motherboard resources	OK
0x00000040-0x00000043	System timer	OK
0x00000080-0x0000008F	Direct memory access controller	OK
0x000000C0-0x000000DF	Direct memory access controller	OK
0x00000061-0x00000061	System speaker	OK
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x0000002E-0x0000002F	Extended IO Bus	OK
0x0000004E-0x0000004F	Extended IO Bus	OK
0x00000220-0x0000025F	Extended IO Bus	OK
0x00000280-0x0000029F	Extended IO Bus	OK
0x00000378-0x0000037F	Printer Port (LPT1)	OK
0x00000778-0x0000077D	Printer Port (LPT1)	OK
0x000003F8-0x000003FF	Communications Port (COM1)	OK
0x000003F2-0x000003F5	Standard floppy disk controller	OK
0x000003F7-0x000003F7	Standard floppy disk controller	OK
0x00000500-0x0000050F	Intel(R) 82801EB Ultra ATA Storage Controllers - 24DB	OK
0x000001F0-0x000001F7	Primary IDE Channel	OK

0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000376-0x00000376	Secondary IDE Channel	OK
[IRQs]		
Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 25	Smart Array P600 Controller (Non-Miniport)	OK
IRQ 30	Smart Array P600 Controller (Non-Miniport)	OK
IRQ 31	HP NC371i Virtual Bus Device	OK
IRQ 49	QLogic Fibre Channel Adapter	OK
IRQ 50	QLogic Fibre Channel Adapter	OK
IRQ 54	LSI Adapter, SAS 3000 series, 8-port with 1068 -StorPort	OK
IRQ 55	HP NC371i Virtual Bus Device	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Intel(R) 82801EB USB Universal Host Controller - 24D2	OK
IRQ 16	Intel(R) 82801EB USB Universal Host Controller - 24DE	OK
IRQ 19	Intel(R) 82801EB USB Universal Host Controller - 24D4	OK
IRQ 18	Intel(R) 82801EB USB Universal Host Controller - 24D7	OK
IRQ 23	Intel(R) 82801EB USB2 Enhanced Host Controller - 24DD	OK
IRQ 10	Base System Device	OK
IRQ 10	Base System Device	OK
IRQ 22	Standard Universal PCI to USB Host Controller	OK
IRQ 0	System timer	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 4	Communications Port (COM1)	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 14	Primary IDE Channel	OK
IRQ 15	Secondary IDE Channel	OK
[Memory]		
Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK

0xA0000-0xBFFFF	Standard VGA Graphics Adapter	OK
0xD0000000-0xFEBFFFFF	PCI bus	OK
0xD0000000-0xFEBFFFFF	Motherboard resources	OK
0xF6000000-0xFD3FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF6000000-0xFD3FFFFF	Intel(R) 6700PXH PCI Express-to-PCI Bridge A - 0329	OK
0xF6000000-0xFD3FFFFF	HP NC371i Virtual Bus Device	OK
0xF9FF0000-0xF9FF1FFF	Smart Array P600 Controller (Non-Miniport)	OK
0xF9F80000-0xF9FBFFFF	Smart Array P600 Controller (Non-Miniport)	OK
0xF9F70000-0xF9F71FFF	Smart Array P600 Controller (Non-Miniport)	OK
0xF9F00000-0xF9F3FFFF	Smart Array P600 Controller (Non-Miniport)	OK
0xFA000000-0xFD3FFFFF	Intel(R) 6700PXH PCI Express-to-PCI Bridge B - 032A	OK
0xFA000000-0xFD3FFFFF	HP NC371i Virtual Bus Device	OK
0xFD3F0000-0xFD3F0FFF	QLogic Fibre Channel Adapter	OK
0xFD3E0000-0xFD3E0FFF	QLogic Fibre Channel Adapter	OK
0xFD3D0000-0xFD3D3FFF	LSI Adapter, SAS 3000 series, 8-port with 1068 -StorPort	OK
0xFD3C0000-0xFD3CFFFF	LSI Adapter, SAS 3000 series, 8-port with 1068 -StorPort	OK
0xFD400000-0xFD5FFFFF	PCI standard PCI-to-PCI bridge	OK
0xFD500000-0xFD5FFFFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFD4F0000-0xFD4F0FFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFD600000-0xFD7FFFFF	PCI standard PCI-to-PCI bridge	OK
0xFD700000-0xFD7FFFFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFD6F0000-0xFD6F0FFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFD800000-0xFD9FFFFF	PCI standard PCI-to-PCI bridge	OK
0xFD900000-0xFD9FFFFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFD8F0000-0xFD8F0FFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFDA00000-0xFDBFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFDB00000-0xFDBFFFFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFDAF0000-0xFDAF0FFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFDC00000-0xFDDFFFFF	PCI standard PCI-to-PCI bridge	OK
0xFDD00000-0xFDDFFFFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFDCF0000-0xFDCF0FFF	Smart Array P800 Controller (Non-Miniport)	OK
0xFDE00000-0xFDEFFFFF	PCI standard PCI-to-PCI bridge	OK


```

0xFDF00000-0xFDF00000 Smart Array P800
Controller (Non-Miniport) OK
0xFDEF0000-0xFDEF0000 Smart Array P800
Controller (Non-Miniport) OK
0xF5EF0000-0xF5EF03FF Intel(R) 82801EB USB2
Enhanced Host Controller - 24DD OK
0xE8000000-0xE8000000 Standard VGA Graphics
Adapter OK
0xF5FF0000-0xF5FF0000 Standard VGA Graphics
Adapter OK
0xF5FE0000-0xF5FE01FF Base System Device OK
0xF5FD0000-0xF5FD07FF Base System Device OK
0xF5FC0000-0xF5FC1FFF Base System Device OK
0xF5F00000-0xF5F7FFFF Base System Device OK
0xFE60C000-0xFE60FFFF Motherboard resources
OK
0xFEBFFC00-0xFEBFFFFF Intel(R) 82801EB Ultra
ATA Storage Controllers - 24DB OK

[Components]

[Multimedia]

[Audio Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
23.50 KB (24,064 bytes) 3/25/2005
6:00 AM
c:\windows\system32\tssoft32.acm DSP GROUP,
INC. OK
C:\WINDOWS\system32\tSSOFT32.ACM
1.01 13.50 KB (13,824 bytes)
3/25/2005 6:00 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
34.50 KB (35,328 bytes) 3/25/2005
6:00 AM
c:\windows\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 3/25/2005
6:00 AM
c:\windows\system32\msg711.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)

```

```

13.50 KB (13,824 bytes) 3/25/2005
6:00 AM
[Video Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msyuv.dll Microsoft Corporation
OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 21.00 KB (21,504 bytes)
3/24/2005 11:21 AM
c:\windows\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
43.00 KB (44,032 bytes) 3/25/2005
6:00 AM
c:\windows\system32\msrle32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
15.50 KB (15,872 bytes) 3/25/2005
6:00 AM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
52.50 KB (53,760 bytes) 3/24/2005
11:19 AM
c:\windows\system32\tsbyuv.dll Microsoft
Corporation OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.50 KB (12,800 bytes) 3/24/2005
11:34 AM
[CD-ROM]
Item Value
Drive D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name TEAC DV-28E-C
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMTEAC_DV-28E-
C_4F_5&33D30D07&0&0.0
Driver c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 75.50 KB
(77,312 bytes), 3/25/2005 6:00 AM)
[Sound Device]
Item Value
[Display]

```

```

Item Value
Name Standard VGA Graphics Adapter
PNP Device ID
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&3A321F38&0&18F0
Adapter Type ATI ES1000, (Standard display
types) compatible
Adapter Description Standard VGA Graphics Adapter
Adapter RAM 32.00 MB (33,554,432 bytes)
Installed Drivers
vga.dll,framebuf.dll,vga256,vga64k
Driver Version 5.2.3790.1830
INF File display.inf (vga section)
Color Planes 1
Color Table Entries 4294967296
Resolution 1024 x 768 x 1 hertz
Bits/Pixel 32
Memory Address 0xE8000000-0xE8000000
I/O Port 0x00003000-0x000030FF
Memory Address 0xF5FF0000-0xF5FF0000
I/O Port 0x000003B0-0x000003BB
I/O Port 0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFFF
Driver c:\windows\system32\drivers\vgapnp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 33.00 KB
(33,792 bytes), 9/22/2006 10:18 AM)
[Infrared]
Item Value
[Input]
[Keyboard]
Item Value
Description USB Human Interface Device
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID
USB\VID_03F0&PID_1027&MI_00\7&12CAF17&0&000
0
Number of Function Keys 12
Driver c:\windows\system32\drivers\hidusb.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
(18,944 bytes), 3/25/2005 6:00 AM)
Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID ACPI\PNP0303\4&369939D9&0
Number of Function Keys 12
I/O Port 0x00000060-0x00000060
I/O Port 0x00000064-0x00000064
IRQ Channel IRQ 1
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 3/25/2005 6:00 AM)
[Pointing Device]

```

Item Value
 Hardware Type USB Human Interface Device
 Number of Buttons 5
 Status OK
 PNP Device ID
 USB\VID_03F0&PID_1027&MI_01\7&12CAF17&0&000

1
 Power Management Supported No
 Double Click Threshold 6
 Handedness Right Handed Operation
 Driver c:\windows\system32\drivers\hidusb.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
 (18,944 bytes), 3/25/2005 6:00 AM)

Hardware Type PS/2 Compatible Mouse
 Number of Buttons 5
 Status OK
 PNP Device ID ACPI\PNP0F13\4&369939D9&0
 Power Management Supported No
 Double Click Threshold 6
 Handedness Right Handed Operation
 IRQ Channel IRQ 12
 Driver c:\windows\system32\drivers\i804prt.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
 (93,184 bytes), 3/25/2005 6:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item Value
 Name [00000001] RAS Async Adapter
 Adapter Type Not Available
 Product Type RAS Async Adapter
 Installed Yes
 PNP Device ID Not Available
 Last Reset 10/15/2006 4:44 PM
 Index 1
 Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Name [00000002] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Type WAN Miniport (L2TP)
 Installed Yes
 PNP Device ID ROOT\MS_L2TPMINIPORT\0000
 Last Reset 10/15/2006 4:44 PM
 Index 2
 Service Name Rasl2tp

IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\rasl2tp.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 132.00 KB
 (135,168 bytes), 3/25/2005 6:00 AM)

Name [00000003] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPTP)
 Installed Yes
 PNP Device ID ROOT\MS_PPTPMINIPORT\0000
 Last Reset 10/15/2006 4:44 PM
 Index 3
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\rasppptp.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 117.50 KB
 (120,320 bytes), 3/25/2005 6:00 AM)

Name [00000004] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
 Last Reset 10/15/2006 4:44 PM
 Index 4
 Service Name Raspppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 33:50:6F:45:30:30
 Driver c:\windows\system32\drivers\raspppoe.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 67.50 KB
 (69,120 bytes), 3/25/2005 6:00 AM)

Name [00000005] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTMINIPORT\0000
 Last Reset 10/15/2006 4:44 PM
 Index 5
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available

DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\raspti.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB
 (31,232 bytes), 3/25/2005 6:00 AM)

Name [00000006] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 10/15/2006 4:44 PM
 Index 6
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\ndiswan.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 157.50 KB
 (161,280 bytes), 3/25/2005 6:00 AM)

Name [00000007] HP NC371i Multifunction Gigabit
 Server Adapter
 Adapter Type Ethernet 802.3
 Product Type HP NC371i Multifunction Gigabit
 Server Adapter
 Installed Yes
 PNP Device ID
 B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
 EV_02\6&2ACCEB87&0&20050703
 Last Reset 10/15/2006 4:44 PM
 Index 7
 Service Name l2nd
 IP Address 130.170.206.74, 130.171.206.74

IP Subnet 255.255.0.0, 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:0B:CD:C4:E4:B4
 Driver c:\windows\system32\drivers\bxnd52a.sys
 (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes),
 9/22/2006 3:47 PM)

Name [00000008] HP NC371i Multifunction Gigabit
 Server Adapter
 Adapter Type Ethernet 802.3
 Product Type HP NC371i Multifunction Gigabit
 Server Adapter
 Installed Yes
 PNP Device ID
 B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
 EV_02\6&39A52BEF&0&20050303

Last Reset 10/15/2006 4:44 PM
Index 8
Service Name l2nd
IP Address 130.168.206.74, 130.169.206.74

IP Subnet 255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:0B:CD:C4:E4:B6
Driver c:\windows\system32\drivers\bxd52a.sys
(2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes),
9/22/2006 3:47 PM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Item	Value
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Item	Value
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Item	Value
Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Item	Value
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Item	Value
Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

[WinSock]

Item	Value
File	c:\windows\system32\wsock32.dll
Size	24.50 KB (25,088 bytes)
Version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	Not Available
Maximum Output Buffer Size	Not Available
Settable Baud Rate	Not Available
Settable Data Bits	Not Available
Settable Flow Control	Not Available
Settable Parity	Not Available
Settable Parity Check	Not Available
Settable Stop Bits	Not Available
Settable RLSD	Not Available
Supports RLSD	Not Available
Supports 16 Bit Mode	Not Available
Supports Special Characters	Not Available
Baud Rate	9600
Bits/Byte	8
Stop Bits	1

Item	Value
Parity	None
Busy	No
Abort Read/Write on Error	Not Available
Binary Mode Enabled	Not Available
Continue Xmit on Xoff	Not Available
CTS Outflow Control	Not Available
Discard NULL Bytes	Not Available
DSR Outflow Control	Not Available
DSR Sensitivity	Not Available
DTR Flow Control Type	Not Available
EOF Character	Not Available
Error Replace Character	Not Available
Error Replacement Enabled	Not Available
Event Character	Not Available
Parity Check Enabled	Yes
RTS Flow Control Type	Not Available
Xoff Character	19
XoffXmit Threshold	512
Xon Character	17
XonXmit Threshold	2048
XonXoff InFlow Control	Not Available
XonXoff OutFlow Control	Not Available
IRQ Channel	IRQ 4
I/O Port	0x00003F8-0x000003FF
Driver	c:\windows\system32\drivers\serial.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 118.50 KB (121,344 bytes), 3/25/2005 6:00 AM)

[Parallel]

Item	Value
Name	LPT1
PNP Device ID	ACPI\PNP0400\5&A5A94E2&0
DMA Channel	Channel 0
I/O Port	0x00000378-0x0000037F
I/O Port	0x00000778-0x0000077D
Driver	c:\windows\system32\drivers\parport.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 131.00 KB (134,144 bytes), 3/24/2005 11:22 AM)

[Storage]

[Drives]

Item	Value
Drive A:	
Description	3 1/2 Inch Floppy Drive
Drive C:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.51 GB (35,985,563,648 bytes)
Free Space	24.02 GB (25,792,815,104 bytes)
Volume Name	
Volume Serial Number	E48C38F4
Drive D:	
Description	CD-ROM Disc

```

Drive E:
Description      Local Fixed Disk
Compressed       Not Available
File System      Not Available
Size             Not Available
Free Space       Not Available
Volume Name      Not Available
Volume Serial Number      Not Available

Drive T:
Description      Network Connection
Provider Name    \\inforb\audit_fdr

Drive U:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             700.00 GB (751,617,826,816 bytes)
Free Space       224.06 GB (240,585,420,800 bytes)

Volume Name      TpscBack1
Volume Serial Number      B8E6210F

Drive V:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             700.00 GB (751,617,826,816 bytes)
Free Space       224.06 GB (240,585,490,432 bytes)

Volume Name      TpscBack2
Volume Serial Number      B0F3E99E

Drive W:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             700.00 GB (751,617,826,816 bytes)
Free Space       224.06 GB (240,585,490,432 bytes)

Volume Name      TpscBack3
Volume Serial Number      4CFPD2E8

Drive X:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             700.00 GB (751,617,826,816 bytes)
Free Space       224.06 GB (240,585,490,432 bytes)

Volume Name      TpscBack4
Volume Serial Number      D40BB521

Drive Y:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             2.00 TB (2,199,018,926,080 bytes)
Free Space       1.06 TB (1,170,765,688,832 bytes)

Volume Name      back1
Volume Serial Number      6C02FD6B

```

```

Drive Z:
Description      Local Fixed Disk
Compressed       No
File System      NTFS
Size             2.00 TB (2,199,020,347,392 bytes)
Free Space       1.06 TB (1,170,755,309,568 bytes)

Volume Name      back2
Volume Serial Number      C0103929

[Disks]

Item      Value
Description      \\.\PHYSICALDRIVE25
Manufacturer      Not Available
Model      Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type      Fixed hard disk
Partitions      1
SCSI Bus      Not Available
SCSI Logical Unit      Not Available
SCSI Port      Not Available
SCSI Target ID      Not Available
Sectors/Track      63
Size             78.02 GB (83,774,476,800 bytes)
Total Cylinders      10,185
Total Sectors      163,622,025
Total Tracks      2,597,175
Tracks/Cylinder      255
Partition Disk #25, Partition #0
Partition Size      78.02 GB (83,773,882,368 bytes)

Partition Starting Offset      65,536 bytes

Description      \\.\PHYSICALDRIVE26
Manufacturer      Not Available
Model      Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type      Fixed hard disk
Partitions      1
SCSI Bus      Not Available
SCSI Logical Unit      Not Available
SCSI Port      Not Available
SCSI Target ID      Not Available
Sectors/Track      63
Size             108.10 GB (116,075,151,360 bytes)
Total Cylinders      14,112
Total Sectors      226,709,280
Total Tracks      3,598,560
Tracks/Cylinder      255
Partition Disk #26, Partition #0
Partition Size      108.10 GB (116,074,217,472 bytes)

Partition Starting Offset      65,536 bytes

Description      \\.\PHYSICALDRIVE27
Manufacturer      Not Available
Model      Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type      Fixed hard disk

```

```

Partitions      1
SCSI Bus      Not Available
SCSI Logical Unit      Not Available
SCSI Port      Not Available
SCSI Target ID      Not Available
Sectors/Track      63
Size             92.09 GB (98,876,090,880 bytes)
Total Cylinders      12,021
Total Sectors      193,117,365
Total Tracks      3,065,355
Tracks/Cylinder      255
Partition Disk #27, Partition #0
Partition Size      92.08 GB (98,875,473,920 bytes)

Partition Starting Offset      65,536 bytes

Description      \\.\PHYSICALDRIVE28
Manufacturer      Not Available
Model      Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type      Fixed hard disk
Partitions      1
SCSI Bus      Not Available
SCSI Logical Unit      Not Available
SCSI Port      Not Available
SCSI Target ID      Not Available
Sectors/Track      63
Size             12.59 GB (13,522,360,320 bytes)
Total Cylinders      1,644
Total Sectors      26,410,860
Total Tracks      419,220
Tracks/Cylinder      255
Partition Disk #28, Partition #0
Partition Size      12.59 GB (13,521,387,520 bytes)

Partition Starting Offset      65,536 bytes

Description      \\.\PHYSICALDRIVE29
Manufacturer      Not Available
Model      Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type      Fixed hard disk
Partitions      1
SCSI Bus      Not Available
SCSI Logical Unit      Not Available
SCSI Port      Not Available
SCSI Target ID      Not Available
Sectors/Track      63
Size             700.00 GB (751,617,861,120 bytes)
Total Cylinders      91,379
Total Sectors      1,468,003,635
Total Tracks      23,301,645
Tracks/Cylinder      255
Partition Disk #29, Partition #0
Partition Size      700.00 GB (751,617,828,864 bytes)

Partition Starting Offset      32,256 bytes

Description      \\.\PHYSICALDRIVE30
Manufacturer      Not Available
Model      Not Available

```

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 78.02 GB (83,774,476,800 bytes)
 Total Cylinders 10,185
 Total Sectors 163,622,025
 Total Tracks 2,597,175
 Tracks/Cylinder 255
 Partition Disk #30, Partition #0
 Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE31
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 108.10 GB (116,075,151,360 bytes)
 Total Cylinders 14,112
 Total Sectors 226,709,280
 Total Tracks 3,598,560
 Tracks/Cylinder 255
 Partition Disk #31, Partition #0
 Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE32
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 92.09 GB (98,876,090,880 bytes)
 Total Cylinders 12,021
 Total Sectors 193,117,365
 Total Tracks 3,065,355
 Tracks/Cylinder 255
 Partition Disk #32, Partition #0
 Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE33
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 12.59 GB (13,522,360,320 bytes)
 Total Cylinders 1,644
 Total Sectors 26,410,860
 Total Tracks 419,220
 Tracks/Cylinder 255
 Partition Disk #33, Partition #0
 Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE15
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 78.02 GB (83,774,476,800 bytes)
 Total Cylinders 10,185
 Total Sectors 163,622,025
 Total Tracks 2,597,175
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE16
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 108.10 GB (116,075,151,360 bytes)
 Total Cylinders 14,112
 Total Sectors 226,709,280
 Total Tracks 3,598,560
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0

Partition Size 108.10 GB (116,074,217,472 bytes)
 Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE17
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 92.09 GB (98,876,090,880 bytes)
 Total Cylinders 12,021
 Total Sectors 193,117,365
 Total Tracks 3,065,355
 Tracks/Cylinder 255
 Partition Disk #17, Partition #0
 Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE18
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 12.59 GB (13,522,360,320 bytes)
 Total Cylinders 1,644
 Total Sectors 26,410,860
 Total Tracks 419,220
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE19
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 700.00 GB (751,617,861,120 bytes)
 Total Cylinders 91,379
 Total Sectors 1,468,003,635

Total Tracks 23,301,645
Tracks/Cylinder 255
Partition Disk #19, Partition #0
Partition Size 700.00 GB (751,617,828,864 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE34
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 78.02 GB (83,774,476,800 bytes)
Total Cylinders 10,185
Total Sectors 163,622,025
Total Tracks 2,597,175
Tracks/Cylinder 255
Partition Disk #34, Partition #0
Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE35
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 108.10 GB (116,075,151,360 bytes)
Total Cylinders 14,112
Total Sectors 226,709,280
Total Tracks 3,598,560
Tracks/Cylinder 255
Partition Disk #35, Partition #0
Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE36
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

Size 92.09 GB (98,876,090,880 bytes)
Total Cylinders 12,021
Total Sectors 193,117,365
Total Tracks 3,065,355
Tracks/Cylinder 255
Partition Disk #36, Partition #0
Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE37
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 12.59 GB (13,522,360,320 bytes)
Total Cylinders 1,644
Total Sectors 26,410,860
Total Tracks 419,220
Tracks/Cylinder 255
Partition Disk #37, Partition #0
Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE10
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 78.02 GB (83,774,476,800 bytes)
Total Cylinders 10,185
Total Sectors 163,622,025
Total Tracks 2,597,175
Tracks/Cylinder 255
Partition Disk #10, Partition #0
Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE11
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available

SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 108.10 GB (116,075,151,360 bytes)
Total Cylinders 14,112
Total Sectors 226,709,280
Total Tracks 3,598,560
Tracks/Cylinder 255
Partition Disk #11, Partition #0
Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE12
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 92.09 GB (98,876,090,880 bytes)
Total Cylinders 12,021
Total Sectors 193,117,365
Total Tracks 3,065,355
Tracks/Cylinder 255
Partition Disk #12, Partition #0
Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE13
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 12.59 GB (13,522,360,320 bytes)
Total Cylinders 1,644
Total Sectors 26,410,860
Total Tracks 419,220
Tracks/Cylinder 255
Partition Disk #13, Partition #0
Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE14
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 700.00 GB (751,617,861,120 bytes)
 Total Cylinders 91,379
 Total Sectors 1,468,003,635
 Total Tracks 23,301,645
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 700.00 GB (751,617,828,864 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE20
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 78.02 GB (83,774,476,800 bytes)
 Total Cylinders 10,185
 Total Sectors 163,622,025
 Total Tracks 2,597,175
 Tracks/Cylinder 255
 Partition Disk #20, Partition #0
 Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE21
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 108.10 GB (116,075,151,360 bytes)
 Total Cylinders 14,112
 Total Sectors 226,709,280
 Total Tracks 3,598,560
 Tracks/Cylinder 255
 Partition Disk #21, Partition #0
 Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE22
 Manufacturer Not Available
 Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 92.09 GB (98,876,090,880 bytes)
 Total Cylinders 12,021
 Total Sectors 193,117,365
 Total Tracks 3,065,355
 Tracks/Cylinder 255
 Partition Disk #22, Partition #0
 Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE23
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 12.59 GB (13,522,360,320 bytes)
 Total Cylinders 1,644
 Total Sectors 26,410,860
 Total Tracks 419,220
 Tracks/Cylinder 255
 Partition Disk #23, Partition #0
 Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE24
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 700.00 GB (751,617,861,120 bytes)
 Total Cylinders 91,379
 Total Sectors 1,468,003,635
 Total Tracks 23,301,645
 Tracks/Cylinder 255
 Partition Disk #24, Partition #0
 Partition Size 700.00 GB (751,617,828,864 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 78.02 GB (83,774,476,800 bytes)
 Total Cylinders 10,185
 Total Sectors 163,622,025
 Total Tracks 2,597,175
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE6
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 108.10 GB (116,075,151,360 bytes)
 Total Cylinders 14,112
 Total Sectors 226,709,280
 Total Tracks 3,598,560
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE7
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 92.09 GB (98,876,090,880 bytes)
 Total Cylinders 12,021
 Total Sectors 193,117,365
 Total Tracks 3,065,355
 Tracks/Cylinder 255
 Partition Disk #7, Partition #0

Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE8
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 12.59 GB (13,522,360,320 bytes)
Total Cylinders 1,644
Total Sectors 26,410,860
Total Tracks 419,220
Tracks/Cylinder 255
Partition Disk #8, Partition #0
Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE9
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 2.00 TB (2,199,020,382,720 bytes)
Total Cylinders 267,349
Total Sectors 4,294,961,685
Total Tracks 68,173,995
Tracks/Cylinder 255
Partition Disk #9, Partition #0
Partition Size 2.00 TB (2,199,020,350,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE0
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 78.02 GB (83,774,476,800 bytes)
Total Cylinders 10,185
Total Sectors 163,622,025

Total Tracks 2,597,175
Tracks/Cylinder 255
Partition Disk #0, Partition #0
Partition Size 78.02 GB (83,773,882,368 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE1
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 108.10 GB (116,075,151,360 bytes)
Total Cylinders 14,112
Total Sectors 226,709,280
Total Tracks 3,598,560
Tracks/Cylinder 255
Partition Disk #1, Partition #0
Partition Size 108.10 GB (116,074,217,472 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE2
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 92.09 GB (98,876,090,880 bytes)
Total Cylinders 12,021
Total Sectors 193,117,365
Total Tracks 3,065,355
Tracks/Cylinder 255
Partition Disk #2, Partition #0
Partition Size 92.08 GB (98,875,473,920 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE3
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

Size 12.59 GB (13,522,360,320 bytes)

Total Cylinders 1,644
Total Sectors 26,410,860
Total Tracks 419,220
Tracks/Cylinder 255
Partition Disk #3, Partition #0
Partition Size 12.59 GB (13,521,387,520 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE4
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 2.00 TB (2,199,020,382,720 bytes)
Total Cylinders 267,349
Total Sectors 4,294,961,685
Total Tracks 68,173,995
Tracks/Cylinder 255
Partition Disk #4, Partition #0
Partition Size 2.00 TB (2,199,018,930,176 bytes)

Partition Starting Offset 16,384 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model COMPAQ MSA1000 VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 2
SCSI Target ID 0
Sectors/Track 63
Size 1.07 TB (1,174,512,407,040 bytes)
Total Cylinders 142,793
Total Sectors 2,293,969,545
Total Tracks 36,412,215
Tracks/Cylinder 255
Partition Disk #38, Partition #0
Partition Size 1.07 TB (1,174,512,074,752 bytes)

Partition Starting Offset 65,536 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model LSILOGIC Logical Volume SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0

SCSI Logical Unit 0
SCSI Port 4
SCSI Target ID 16
Sectors/Track 63
Size 33.52 GB (35,993,825,280 bytes)
Total Cylinders 4,376
Total Sectors 70,300,440
Total Tracks 1,115,880
Tracks/Cylinder 255
Partition Disk #39, Partition #0
Partition Size 33.51 GB (35,985,567,744 bytes)

Partition Starting Offset 32,256 bytes

[SCSI]

Item Value
Name Smart Array P600 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&17D5B762&0&080008
Memory Address 0xF9FF0000-0xF9FF1FFF
I/O Port 0x00004000-0x00005FFF
Memory Address 0xF9F80000-0xF9FBFFFF
IRQ Channel IRQ 25
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P600 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&17D5B762&0&100008
Memory Address 0xF9F70000-0xF9F71FFF
I/O Port 0x00004400-0x000044FF
Memory Address 0xF9F00000-0xF9F3FFFF
IRQ Channel IRQ 30
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name QLogic Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID
PCI\VEN_1077&DEV_2312&SUBSYS_01010E11&REV_0
2\5&1F3A0720&0&080208
I/O Port 0x00005000-0x00005FFF
Memory Address 0xFD3F0000-0xFD3F0FFF
IRQ Channel IRQ 49
Driver c:\windows\system32\drivers\ql2300.sys
(9.1.0.18 (wx64), 1.12 MB (1,172,480 bytes),
3/25/2005 6:00 AM)

Name QLogic Fibre Channel Adapter
Manufacturer QLogic
Status OK

PNP Device ID
PCI\VEN_1077&DEV_2312&SUBSYS_01010E11&REV_0
2\5&1F3A0720&0&090208
I/O Port 0x00005400-0x000054FF
Memory Address 0xFD3E0000-0xFD3E0FFF
IRQ Channel IRQ 50
Driver c:\windows\system32\drivers\ql2300.sys
(9.1.0.18 (wx64), 1.12 MB (1,172,480 bytes),
3/25/2005 6:00 AM)

Name LSI Adapter, SAS 3000 series, 8-port with
1068 -StorPort
Manufacturer LSI Logic
Status OK
PNP Device ID
PCI\VEN_1000&DEV_0054&SUBSYS_3228103C&REV_0
0\5&1F3A0720&0&100208
I/O Port 0x00005800-0x000058FF
Memory Address 0xFD3D0000-0xFD3D3FFF
Memory Address 0xFD3C0000-0xFD3CFFFF
IRQ Channel IRQ 54
Driver c:\windows\system32\drivers\lsi_sas.sys
(1.21.17.00 built by: WindDK, 128.00 KB (131,072
bytes), 9/22/2006 10:05 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&1A83C761&0&0010
Memory Address 0xFD500000-0xFD50FFFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0xFD4F0000-0xFD4F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&11C9632C&0&0018
Memory Address 0xFD700000-0xFD70FFFF
I/O Port 0x00007000-0x00007FFF
Memory Address 0xFD6F0000-0xFD6F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&89DED6&0&0020
Memory Address 0xFD900000-0xFD90FFFF

I/O Port 0x00008000-0x00008FFF
Memory Address 0xFD8F0000-0xFD8F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&3B7E5332&0&0028
Memory Address 0xFDB00000-0xFDB0FFFF
I/O Port 0x00009000-0x00009FFF
Memory Address 0xFDAF0000-0xFDAF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&1ADCC485&0&0030
Memory Address 0xFDD00000-0xFDD0FFFF
I/O Port 0x0000A000-0x0000AFFF
Memory Address 0xFDCF0000-0xFDCF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&239728BA&0&0038
Memory Address 0xFDF00000-0xFDF0FFFF
I/O Port 0x0000B000-0x0000BFFF
Memory Address 0xFDEF0000-0xFDEF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 9/22/2006 4:14 PM)

[IDE]

Item Value
Name Intel(R) 82801EB Ultra ATA Storage
Controllers - 24DB
Manufacturer Intel
Status OK
PNP Device ID
PCI\VEN_8086&DEV_24DB&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F

```

Memory Address      0xFEBFFC00-0xFEBFFFFF
Driver      c:\windows\system32\drivers\intelide.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 9.00 KB
(9,216 bytes), 9/22/2006 10:18 AM)

Name      Primary IDE Channel
Manufacturer      (Standard IDE ATA/ATAPI
controllers)
Status      OK
PNP Device ID      PCI\IDE\IDECHANNEL\4&B60E41D&0&0

I/O Port      0x000001F0-0x000001F7
I/O Port      0x000003F6-0x000003F6
IRQ Channel      IRQ 14
Driver      c:\windows\system32\drivers\ataapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)

Name      Secondary IDE Channel
Manufacturer      (Standard IDE ATA/ATAPI
controllers)
Status      OK
PNP Device ID      PCI\IDE\IDECHANNEL\4&B60E41D&0&1

I/O Port      0x00000170-0x00000177
I/O Port      0x00000376-0x00000376
IRQ Channel      IRQ 15
Driver      c:\windows\system32\drivers\ataapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)

[Printing]

Name      Driver      Port Name Server Name

[Problem Devices]

Device      PNP Device ID      Error Code
Base System Device
      PCI\VEN_0E11&DEV_B203&SUBSYS_3304103C&REV_0
3\4&3A321F38&0&22F0 The drivers for this device are
not installed.
Base System Device
      PCI\VEN_0E11&DEV_B204&SUBSYS_3304103C&REV_0
3\4&3A321F38&0&22F0 The drivers for this device are
not installed.

[USB]

Device      PNP Device ID
Intel(R) 82801EB USB Universal Host Controller - 24D2
      PCI\VEN_8086&DEV_24D2&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&E8
Intel(R) 82801EB USB Universal Host Controller - 24D4
      PCI\VEN_8086&DEV_24D4&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&E9
Intel(R) 82801EB USB Universal Host Controller - 24D7
      PCI\VEN_8086&DEV_24D7&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&EA
Intel(R) 82801EB USB Universal Host Controller - 24DE
      PCI\VEN_8086&DEV_24DE&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&EB

```

```

Intel(R) 82801EB USB2 Enhanced Host Controller - 24DD
      PCI\VEN_8086&DEV_24DD&SUBSYS_3201103C&REV_0
2\3&61AAA01&0&EF
Standard Universal PCI to USB Host Controller
      PCI\VEN_103C&DEV_3300&SUBSYS_3304103C&REV_0
0\4&3A321F38&0&24F0

[Software Environment]

[System Drivers]

Name      Description      File      Type
Started      Start Mode      State
Status      Error Control      Accept Pause
Accept Stop
abiosdsk      Abiosdsk      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Ignore      No      No
acpi      Microsoft ACPI Driver
      c:\windows\system32\drivers\acpi.sys
Kernel Driver      Yes      Boot
Running      OK      Normal      No      Yes
acpiec      ACPIEC
      c:\windows\system32\drivers\acpiec.sys
Kernel Driver      No      Disabled
Stopped      OK      Normal      No      No
adpu160m      adpu160m      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
adpu320      adpu320      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
afd      AFD
      c:\windows\system32\drivers\afd.sys
Kernel Driver      Yes      System
Running      OK      Normal      No      Yes
aic78u2      aic78u2      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
aic78xx      aic78xx      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
aliide      AliIde      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
amdide      AmdIde      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
arc      arc      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
asynccmac      RAS Asynchronous Media Driver
      c:\windows\system32\drivers\asynccmac.sys
Kernel Driver      No      Manual
Stopped      OK      Normal      No      No
atapi      Standard IDE/ESDI Hard Disk Controller
      c:\windows\system32\drivers\atapi.sys

```

```

Kernel Driver      Yes      Boot
Running      OK      Normal      No      Yes
atdisk      Atdisk      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Ignore      No      No
atmarpc      ATM ARP Client Protocol
      c:\windows\system32\drivers\atmarpc.sys
Kernel Driver      No      Manual
Stopped      OK      Normal      No      No
audstub      Audio Stub Driver
      c:\windows\system32\drivers\audstub.sys
Kernel Driver      Yes      Manual
Running      OK      Normal      No      Yes
b06bdrv      HP Virtual Bus Device
      c:\windows\system32\drivers\bxbvda.sys
Kernel Driver      Yes      Boot
Running      OK      Normal      No      Yes
beep      Beep
      c:\windows\system32\drivers\beep.sys
Kernel Driver      Yes      System
Running      OK      Normal      No      Yes
cdac15ba      CdaC15BA
      c:\windows\system32\drivers\cdac15ba.sys
Kernel Driver      Yes      Auto
Running      OK      Normal      No      Yes
cdad10ba      CdaD10BA
      c:\windows\system32\drivers\cdad10ba.sys
Kernel Driver      Yes      Auto
Running      OK      Normal      No      Yes
cdfs      CdFs
      c:\windows\system32\drivers\cdfs.sys
File System Driver      Yes      Disabled
Running      OK      Normal      No      Yes
cdrom      CD-ROM Driver
      c:\windows\system32\drivers\cdrom.sys
Kernel Driver      Yes      System
Running      OK      Normal      No      Yes
changer      Changer      Not Available      Kernel Driver
No      System      Stopped      OK
Ignore      No      No
clusdisk      Cluster Disk Driver
      c:\windows\system32\drivers\clusdisk.sys
Kernel Driver      No      Disabled
Stopped      OK      Normal      No      No
cmdide      CmdIde      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
cpqciism      cpqciism      Not Available      Kernel Driver
No      Disabled      Stopped      OK
Normal      No      No
cpqteam      HP Network Configuration Utility
      c:\windows\system32\drivers\cpqteam.sys
Kernel Driver      No      Manual

```


	Kernel Driver	Yes	Boot			Kernel Driver	Yes	Manual		Kernel Driver	Yes	Boot	
	Running	OK	Normal	No	Yes	Running	OK	Normal	No	Running	OK	Normal	No
nmdd	nmdd					ndisuiio	NDIS Usermode I/O Protocol			pcmcia	Pcmcia		
	c:\windows\system32\drivers\nmdd.sys						c:\windows\system32\drivers\ndisuiio.sys				c:\windows\system32\drivers\pcmcia.sys		
	Kernel Driver	Yes	System				Kernel Driver	No	Manual		Kernel Driver	No	Disabled
	Running	OK	Ignore	No	Yes		Stopped	OK	Normal	No	Stopped	OK	Normal
modem	Modem					ndiswan	Remote Access NDIS WAN Driver			pdcomp	PDCOMP	Not Available	Kernel Driver
	c:\windows\system32\drivers\modem.sys						c:\windows\system32\drivers\ndiswan.sys				No	Manual	Stopped
	Kernel Driver	No	Manual				Kernel Driver	Yes	Manual		Ignore	No	No
	Stopped	OK	Ignore	No	No		Running	OK	Normal	No	Running	OK	Normal
mouclass	Mouse Class Driver					ndproxy	NDIS Proxy			pdframe	PDFRAME	Not Available	Kernel Driver
	c:\windows\system32\drivers\mouclass.sys						c:\windows\system32\drivers\ndproxy.sys				No	Manual	Stopped
	Kernel Driver	Yes	System				Kernel Driver	Yes	Manual		Ignore	No	No
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Running	OK	Normal
mouhid	Mouse HID Driver					netbios	NetBIOS Interface			pdreli	PDRELI	Not Available	Kernel Driver
	c:\windows\system32\drivers\mouhid.sys						c:\windows\system32\drivers\netbios.sys				No	Manual	Stopped
	Kernel Driver	Yes	Manual				File System Driver	Yes	System		Ignore	No	No
	Running	OK	Ignore	No	Yes		Running	OK	Normal	No	Running	OK	Normal
mountmgr	Mount Point Manager					netbt	NetBios over Tcpip			pdrframe	PDRFRAME	Not Available	Kernel Driver
	c:\windows\system32\drivers\mountmgr.sys						c:\windows\system32\drivers\netbt.sys				No	Manual	Stopped
	Kernel Driver	Yes	Boot				Kernel Driver	Yes	System		Ignore	No	No
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Running	OK	Normal
mraid35x	mraid35x	Not Available		Kernel Driver		nfrd960	nfrd960	Not Available		Kernel Driver			
	No	Disabled	Stopped	OK			No	Disabled	Stopped	OK			
	Normal	No	No				Normal	No	No				
mrxdav	WebDav Client Redirector					npfs	Npfs			ql2300	QLogic Fibre Channel STOR Miniport Driver (wx64 IP)		
	c:\windows\system32\drivers\mrxdav.sys						c:\windows\system32\drivers\npfs.sys				c:\windows\system32\drivers\ql2300.sys		
	File System Driver	No	Manual				File System Driver	Yes	System		Kernel Driver	Yes	Boot
	Stopped	OK	Normal	No	No		Running	OK	Normal	No	Running	OK	Normal
mrxsmb	MRXSMB					ntfs	Ntfs			qldirect	qldirect		
	c:\windows\system32\drivers\mrxsmb.sys						c:\windows\system32\drivers\ntfs.sys				c:\windows\system32\drivers\qldirect.sys		
	File System Driver	Yes	System				File System Driver	Yes	Disabled		Kernel Driver	No	Auto
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Stopped	OK	Normal
msfs	Msfs					null	Null			rasacd	Remote Access Auto Connection Driver		
	c:\windows\system32\drivers\msfs.sys						c:\windows\system32\drivers\null.sys				c:\windows\system32\drivers\rasacd.sys		
	File System Driver	Yes	System				Kernel Driver	Yes	System		Kernel Driver	Yes	System
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Running	OK	Normal
mssmbios	Microsoft System Management BIOS Driver					parport	Parallel port driver			rasl2tp	WAN Miniport (L2TP)		
	c:\windows\system32\drivers\mssmbios.sys						c:\windows\system32\drivers\parport.sys				c:\windows\system32\drivers\rasl2tp.sys		
	Kernel Driver	Yes	Manual				Kernel Driver	Yes	Manual		Kernel Driver	Yes	Manual
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Running	OK	Normal
mup	Mup					partmgr	Partition Manager			rasppoe	Remote Access PPPOE Driver		
	c:\windows\system32\drivers\mup.sys						c:\windows\system32\drivers\partmgr.sys				c:\windows\system32\drivers\rasppoe.sys		
	File System Driver	Yes	Boot				Kernel Driver	Yes	Boot		Kernel Driver	Yes	Manual
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Running	OK	Normal
ndis	NDIS System Driver					pci	PCI Bus Driver			raspti	Direct Parallel		
	c:\windows\system32\drivers\ndis.sys						c:\windows\system32\drivers\pci.sys				c:\windows\system32\drivers\raspti.sys		
	Kernel Driver	Yes	Boot				Kernel Driver	Yes	Boot		Kernel Driver	Yes	Manual
	Running	OK	Normal	No	Yes		Running	OK	Critical	No	Running	OK	Normal
ndistapi	Remote Access NDIS TAPI Driver					pciide	PCIide			rdbss	Rdbss		
	c:\windows\system32\drivers\ndistapi.sys						c:\windows\system32\drivers\pciide.sys				c:\windows\system32\drivers\rdbss.sys		
											File System Driver	Yes	System

	Running	OK	Normal	No	Yes
rdpcdd	RDPcDD				
	c:\windows\system32\drivers\rdpcdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
rdpdr	Terminal Server Device Redirector Driver				
	c:\windows\system32\drivers\rdpdr.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdpwd	RDPWD				
	c:\windows\system32\drivers\rdpwd.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
redbook	Digital CD Audio Playback Filter Driver				
	c:\windows\system32\drivers\redbook.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
secdrv	Security Driver				
	c:\windows\system32\drivers\secdrv.sys				
	Kernel Driver	Yes	Auto		
	Running	OK	Normal	No	Yes
serenum	Serenum Filter Driver				
	c:\windows\system32\drivers\serenum.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
serial	Serial port driver				
	c:\windows\system32\drivers\serial.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
sfloppy	Sfloppy				
	c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
simbad	Simbad	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
srv	Srv				
	c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
startdss	HP ProLiant Virtual Install Disk Support Driver				
	c:\windows\system32\drivers\startdss.sys				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
swenum	Software Bus Driver				
	c:\windows\system32\drivers\swenum.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
symc8xx	symc8xx	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		

symmpi	symmpi	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
sym_hi	sym_hi	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
sym_u3	sym_u3	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
tcpip	TCP/IP Protocol Driver				
	c:\windows\system32\drivers\tcpip.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
tdpipe	TDPIPE				
	c:\windows\system32\drivers\tdpipe.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
tdtcp	TDTCP				
	c:\windows\system32\drivers\tdtcp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
termdd	Terminal Device Driver				
	c:\windows\system32\drivers\termdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
toside	TosIde	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
udfs	Udfs				
	c:\windows\system32\drivers\udfs.sys				
	File System Driver	No	Disabled		
	Stopped	OK	Normal	No	No
ultra	ultra	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
update	Microcode Update Driver				
	c:\windows\system32\drivers\update.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbccgp	Microsoft USB Generic Parent Driver				
	c:\windows\system32\drivers\usbccgp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbhci	Microsoft USB 2.0 Enhanced Host Controller Miniport Driver				
	c:\windows\system32\drivers\usbhci.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbhub	Microsoft USB Standard Hub Driver				
	c:\windows\system32\drivers\usbhub.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbstor	USB Mass Storage Driver				
	c:\windows\system32\drivers\usbstor.sys				

	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
usbuhci	Microsoft USB Universal Host Controller Miniport Driver				
	c:\windows\system32\drivers\usbuhci.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
vga	vga				
	c:\windows\system32\drivers\vgapnp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
vgasave	VGA Display Controller.				
	c:\windows\system32\drivers\vga.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
viaide	ViaIde	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
volsnap	Storage volumes				
	c:\windows\system32\drivers\volsnap.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
wanarp	Remote Access IP ARP Driver				
	c:\windows\system32\drivers\wanarp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
wdica	WDICA	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
wlbs	Network Load Balancing				
	c:\windows\system32\drivers\wlbs.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
[Signed Drivers]					
Device Name	Signed	Device Class			
Driver Version	Driver Date				
Manufacturer	INF Name	Driver Name			
Device ID					
Microsoft System Management BIOS Driver	Yes				
SYSTEM 5.2.3790.1830	10/1/2002				
(Standard system devices)	machine.inf				
Not Available	ROOT\SYSTEM\0002				
Microcode Update Device	Yes	SYSTEM			
5.2.3790.1830	10/1/2002	(Standard			
system devices)	machine.inf	Not Available			
ROOT\SYSTEM\0001					
Plug and Play Software Device Enumerator	Yes				
SYSTEM 5.2.3790.1830	10/1/2002				
(Standard system devices)	machine.inf				
Not Available	ROOT\SYSTEM\0000				
Terminal Server Mouse Driver	Yes	SYSTEM			
5.2.3790.1830	10/1/2002	(Standard			
system devices)	machine.inf	Not Available			
ROOT\RDP_MOU\0000					

Terminal Server Keyboard Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf		
Not Available	ROOT\RDP_KBD\0000		
Terminal Server Device Redirector	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf		
Not Available	ROOT\RDPDR\0000		
Direct Parallel	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_PTMINIPORT\0000		
WAN Miniport (PPTP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_PPTPMINIPORT\0000		
WAN Miniport (PPPOE)	Yes	NET	
5.2.3790.1830	10/1/2002 Microsoft		
netrasa.inf			Not
Available	ROOT\MS_PPPOEMINIPORT\0000		
WAN Miniport (IP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_NDISWANIP\0000		
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available	ROOT\MS_L2TPMINIPORT\0000		
Video Codecs	Yes	MEDIA	5.2.3790.1830
10/1/2002 (Standard system devices)			
wave.inf	Not Available		
Available	ROOT\MEDIA\MS_MMVID		
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002 (Standard		
system devices)	wave.inf	Not Available	
Available	ROOT\MEDIA\MS_MMVCD		
Media Control Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002 (Standard		
system devices)	wave.inf	Not Available	
Available	ROOT\MEDIA\MS_MMMCI		
Legacy Audio Drivers	Yes	MEDIA	
5.2.3790.1830	10/1/2002 (Standard		
system devices)	wave.inf	Not Available	
Available	ROOT\MEDIA\MS_MMDRV		
Audio Codecs	Yes	MEDIA	5.2.3790.1830
10/1/2002 (Standard system devices)			
wave.inf	Not Available		
Available	ROOT\MEDIA\MS_MMACM		
Remote Access IP ARP Driver	Not Available		
LEGACYDRIVER		Not Available	Not
Available	Not Available		Not
Available	ROOT\LEGACY_WANARP\0000		
volenap	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_VOLSNAP\0000		
TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_TDTCP\0000	
TCP/IP Protocol Driver	Not Available		
LEGACYDRIVER		Not Available	Not
Available	Not Available		Not
Available	ROOT\LEGACY_TCPIP\0000		
HP ProLiant Virtual Install Disk Support Driver	Not		
Available	LEGACYDRIVER	Not Available	Not

Available	Not Available		Not Available	Not
Available	ROOT\LEGACY_STARTDSS\0000			
Security Driver	Not Available	LEGACYDRIVER		
Not Available				Not
Available	Not Available		Not Available	Not
Available	ROOT\LEGACY_SECDRV\0000			
RDPWD	Not Available	LEGACYDRIVER		Not
Available	Not Available		Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPWD\0000		
RDPCCDD	Not Available	LEGACYDRIVER		Not
Available	Not Available		Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPCCDD\0000		
Remote Access Auto Connection Driver			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	ROOT\LEGACY_RASACD\0000			
PCIId	Not Available	LEGACYDRIVER		Not
Available	Not Available		Not Available	Not
Available	Not Available	ROOT\LEGACY_PCIIIDE\0000		
Partition Manager	Not Available	LEGACYDRIVER		
Not Available				Not
Available	Not Available			Not
Available	ROOT\LEGACY_PARTMGR\0000			
Null	Not Available	LEGACYDRIVER		Not
Available	Not Available		Not Available	Not
Available	Not Available	ROOT\LEGACY_NULL\0000		
NetBios over Tcpip	Not Available	LEGACYDRIVER		
Not Available				Not
Available	Not Available			Not
Available	ROOT\LEGACY_NETBT\0000			
NDProxy	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	ROOT\LEGACY_NDPROXY\0000			
NDIS Usermode I/O Protocol			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	ROOT\LEGACY_NDISUIO\0000			
Remote Access NDIS TAPI Driver			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	ROOT\LEGACY_NDISTAPI\0000			
NDIS System Driver	Not Available	LEGACYDRIVER		
Not Available				Not
Available	Not Available			Not
Available	ROOT\LEGACY_NDIS\0000			
mountmgr	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	ROOT\LEGACY_MOUNTMGR\0000			
modem	Not Available	LEGACYDRIVER		Not
Available	Not Available		Not Available	Not
Available	Not Available	ROOT\LEGACY_MODEM\0000		
mnmdd	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	ROOT\LEGACY_MNMDD\0000			

ksecdd	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_KSECCDD\0000		
IPSEC driver	Not Available	LEGACYDRIVER		
Not Available				Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_IPSEC\0000		
IP Network Address Translator			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_IPNAT\0000		
HpCISSs2	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_HPCISSS2\0000		
hpcisss	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_HPCISSS\0000		
Generic Packet Classifier			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	ROOT\LEGACY_GPC\0000			
Fips	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_FIPS\0000		
dmload	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_DMLOAD\0000		
dmboot	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000		
CRC Disk Filter Driver			Not Available	
LEGACYDRIVER			Not Available	Not
Available	Not Available			Not
Available	ROOT\LEGACY_CRCDISK\0000			
CdaD10BA	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	ROOT\LEGACY_CDAD10BA\0000			
CdaC15BA	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available			Not
Available	ROOT\LEGACY_CDAC15BA\0000			
BEEP	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_BEEP\0000		
AFD	Not Available	LEGACYDRIVER		Not
Available	Not Available			Not
Available	Not Available	ROOT\LEGACY_AFD\0000		
Generic volume	Yes	VOLUME	5.2.3790.1830	
10/1/2002 Microsoft	volume.inf			Not
Available				
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB59CB				
59OFFSET7E00LENGTH860E83000				
Generic volume	Yes	VOLUME	5.2.3790.1830	
10/1/2002 Microsoft	volume.inf			Not

Generic volume Yes VOLUME 5.2.3790.1830
 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATURE5F07EA40OFFSET10000LENGTH1381500000
 Volume Manager Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ROOT\FTDISK\0000
 Logical Disk Manager Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ROOT\DMIO\0000
 ACPI Fixed Feature Button Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\FIXEDBUTTON\2&DABA3FF&0
 ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\THERMALZONE\THM0
 Secondary IDE Channel Yes HDC 5.2.3790.1830
 10/1/2002 (Standard IDE ATA/ATAPI controllers) mshdc.inf Not Available
 PCIIDE\IDECHANNEL\4&B60E41D&0&1
 CD-ROM Drive Yes CDROM 5.2.3790.1830
 10/1/2002 (Standard CD-ROM drives) cdrom.inf Not Available
 IDE\CDROMTEAC_DV-28E-B.4F\5&33D30D07&0&0.0
 Primary IDE Channel Yes HDC 5.2.3790.1830
 10/1/2002 (Standard IDE ATA/ATAPI controllers) mshdc.inf Not Available
 PCIIDE\IDECHANNEL\4&B60E41D&0&0
 Intel(R) 82801EB Ultra ATA Storage Controllers - 24DB Yes HDC 5.2.3790.1830
 10/1/2002 Intel mshdc.inf Not Available
 PCI\VEN_8086&DEV_24DB&SUBSYS_3201103C&REV_02\3&61AAA01&0&F9
 Floppy disk drive Yes FLOPPYDISK 5.2.3790.1830
 10/1/2002 (Standard floppy disk drives) flpydisk.inf Not Available
 FDC\GENERIC_FLOPPY_DRIVE\6&2A0CB5EB&0&0
 Standard floppy disk controller Yes FDC 5.2.3790.1830
 10/1/2002 (Standard floppy disk controllers) fdcc.inf Not Available
 ACPI\PNP0700\5&A5A94E2&0
 Communications Port Yes PORTS 5.2.3790.1830
 10/1/2002 (Standard port types) msports.inf Not Available
 ACPI\PNP0501\0
 Printer Port Logical Interface Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 LPTENUM\MICROSOFTRAWPORT\6&1863B140&0&LPT1
 Printer Port Yes PORTS 5.2.3790.1830
 10/1/2002 (Standard port types) msports.inf Not Available
 ACPI\PNP0400\5&A5A94E2&0

Extended IO Bus Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP0A06\4&369939D9&0
 PS/2 Compatible Mouse Yes MOUSE 5.2.3790.1830
 10/1/2002 Microsoft msmouse.inf Not Available
 ACPI\PNP0F13\4&369939D9&0
 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard Yes KEYBOARD 5.2.3790.1830
 10/1/2002 (Standard keyboards) keyboard.inf Not Available
 ACPI\PNP0303\4&369939D9&0
 System speaker Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP0800\4&369939D9&0
 Direct memory access controller Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP0200\4&369939D9&0
 System timer Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP0100\4&369939D9&0
 Motherboard resources Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP0C02\0
 Intel(R) 82801EB LPC Interface Controller - 24D0 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_24D0&SUBSYS_00000000&REV_02\3&61AAA01&0&F8
 Generic USB Hub Yes USB 5.2.3790.1830
 10/1/2002 (Generic USB Hub) usb.inf Not Available
 USB\VID_03F0&PID_1327\6&15249B36&0&2
 HID-compliant mouse Yes MOUSE 5.2.3790.1830
 10/1/2002 Microsoft msmouse.inf Not Available
 HID\VID_03F0&PID_1027&MI_01\8&20B016A&0&0000
 USB Human Interface Device Yes HIDCLASS 5.2.3790.1830
 10/1/2002 (Standard system devices) input.inf Not Available
 USB\VID_03F0&PID_1027&MI_01\7&12CAF17&0&0001
 HID Keyboard Device Yes KEYBOARD 5.2.3790.1830
 10/1/2002 (Standard keyboards) keyboard.inf Not Available
 HID\VID_03F0&PID_1027&MI_00\8&2A75AF33&0&0000
 USB Human Interface Device Yes HIDCLASS 5.2.3790.1830
 10/1/2002 (Standard system devices) input.inf Not Available
 USB\VID_03F0&PID_1027&MI_00\7&12CAF17&0&0000
 USB Composite Device Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usb.inf Not Available
 USB\VID_03F0&PID_1027\6&15249B36&0&1

USB Root Hub Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available
 USB\ROOT_HUB\5&C1B41BA&0
 Standard Universal PCI to USB Host Controller Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available
 PCI\VEN_103C&DEV_3300&SUBSYS_3304103C&REV_00\4&3A321F38&0&24F0
 Base System Device Not Available UNKNOWN Not Available Not Available
 Not Available Not Available Not Available Not Available
 PCI\VEN_0E11&DEV_B204&SUBSYS_3304103C&REV_03\4&3A321F38&0&22F0
 Base System Device Not Available UNKNOWN Not Available Not Available
 Not Available Not Available Not Available Not Available
 PCI\VEN_0E11&DEV_B203&SUBSYS_3304103C&REV_03\4&3A321F38&0&20F0
 Default Monitor Yes MONITOR 5.2.3790.1830
 10/1/2002 (Standard monitor types) monitor.inf Not Available
 DISPLAY\DEFAULT_MONITOR\5&64D83BD&0&12345678&01&03
 Standard VGA Graphics Adapter Yes DISPLAY 5.2.3790.1830
 10/1/2002 (Standard display types) display.inf Not Available
 PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_02\4&3A321F38&0&18F0
 Intel(R) 82801 PCI Bridge - 244E Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_C2\3&61AAA01&0&F0
 USB Root Hub Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available
 USB\ROOT_HUB20\4&2FD212BF&0
 Intel(R) 82801EB USB2 Enhanced Host Controller - 24DD Yes USB 5.2.3790.1830
 10/1/2002 Intel usbport.inf Not Available
 PCI\VEN_8086&DEV_24DD&SUBSYS_3201103C&REV_02\3&61AAA01&0&EF
 USB Root Hub Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available
 USB\ROOT_HUB\4&30F23CBA&0
 Intel(R) 82801EB USB Universal Host Controller - 24DE Yes USB 5.2.3790.1830
 10/1/2002 Intel usbport.inf Not Available
 PCI\VEN_8086&DEV_24DE&SUBSYS_3201103C&REV_02\3&61AAA01&0&EB
 USB Root Hub Yes USB 5.2.3790.1830
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available
 USB\ROOT_HUB\4&37C515E4&0
 Intel(R) 82801EB USB Universal Host Controller - 24D7 Yes USB 5.2.3790.1830
 10/1/2002 Intel usbport.inf Not Available

Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&E
EFEEEE&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&E
EFEEEE&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&E
EFEEEE&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&E
EFEEEE&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oeml2.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&89DED6&0&0020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2604&SUBSYS_00000000&REV_1
1\3&61AAA01&0&20
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
572F3F3&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
572F3F3&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
572F3F3&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
572F3F3&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
572F3F3&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oeml2.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&11C9632C&0&0018
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002

(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2603&SUBSYS_00000000&REV_1
1\3&61AAA01&0&18
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
786079&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
786079&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
786079&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
786079&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oeml2.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&1A83C761&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2602&SUBSYS_00000000&REV_1
1\3&61AAA01&0&10
HP NC371i Multifunction Gigabit Server Adapter No
NET 2.8.13.0 6/30/2006 Hewlett-
Packard Company oem3.inf Not Available
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\6&2ACCEB87&0&20050703
HP NC371i Virtual Bus Device No SYSTEM
2.8.15.0 7/12/2006 Hewlett-Packard Company
oem6.inf Not Available
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
2\5&1F3A0720&0&180208
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_LSILOGIC&PROD_LOGICAL_VOLUME&
REV_3000\6&6A91072&0&0100
LSI Adapter, SAS 3000 series, 8-port with 1068 -
StorPort Yes SCSIADAPTER 1.21.17.0
4/7/2006 LSI Logic oeml.inf Not Available
PCI\VEN_1000&DEV_0054&SUBSYS_3228103C&REV_0
0\5&1F3A0720&0&100208
QLogic Fibre Channel Adapter Yes SCSIADAPTER
9.1.0.18 10/11/2005 QLogic
oeml1.inf Not Available

PCI\VEN_1077&DEV_2312&SUBSYS_01010E11&REV_0
2\5&1F3A0720&0&090208
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_COMPAQ&PROD_MSA1000_VOLUME&RE
V_4.48\6&15D5F13F&1&001
HP MSA1000 Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsaside.inf Not
Available
SCSI\ARRAY&VEN_COMPAQ&PROD_MSA1000&REV_4.48
\6&15D5F13F&1&000
QLogic Fibre Channel Adapter Yes SCSIADAPTER
9.1.0.18 10/11/2005 QLogic
oem11.inf Not Available
PCI\VEN_1077&DEV_2312&SUBSYS_01010E11&REV_0
2\5&1F3A0720&0&080208
Intel(R) 6700PXH PCI Express-to-PCI Bridge B - 032A
Yes SYSTEM 5.2.3790.1830
10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_032A&SUBSYS_00000000&REV_0
9\4&17EB8CDA&0&0208
HP NC371i Multifunction Gigabit Server Adapter No
NET 2.8.13.0 6/30/2006 Hewlett-
Packard Company oem3.inf Not Available
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\6&39A52BEF&0&20050303
HP NC371i Virtual Bus Device No SYSTEM
2.8.15.0 7/12/2006 Hewlett-Packard Company
oem6.inf Not Available
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
2\5&17D5B762&0&180008
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
61AB1C2&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
61AB1C2&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
61AB1C2&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
61AB1C2&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
61AB1C2&0&0000004000000000
Smart Array P600 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oeml2.inf Not Available
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&17D5B762&0&100008

```

Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
8B5263&0&0400000400000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
8B5263&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
8B5263&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
8B5263&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oeml3.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\6&2
8B5263&0&0000004000000000
Smart Array P600 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oeml2.inf Not Available
PCI\VEN_103c&DEV_322&SUBSYS_3225103c&REV_0
0\5&17D5B762&0&080008
Intel(R) 6700PXH PCI Express-to-PCI Bridge A - 0329
Yes SYSTEM 5.2.3790.1830
10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_0329&SUBSYS_00000000&REV_0
9\4&17EB8CDA&0&0008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2601&SUBSYS_00000000&REV_1
1\3&61AAA01&0&08
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_2600&SUBSYS_00000000&REV_1
1\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\15
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\14
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\13

```

```

Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\12
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\11
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\10
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\9
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\8
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\7
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\6
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\5
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\4
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\3
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\2
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel
ACPI\GENUINEINTEL-_
_EM64T_FAMILY_15_MODEL_6\0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.1830 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor x64-based PC Yes
COMPUTER 5.2.3790.1830 10/1/2002
(Standard computers) hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Not Available Not Available Not Available

```

```

Available Not Available Not Available
HTRREE\ROOT\0

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%\SystemR
oot%\System32\Wbem;C:\Program Files (x86)\Microsoft
SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft
SQL Server\90\Tools\Binn\;C:\Program Files
(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program
Files (x86)\Microsoft SQL
Server\90\DTS\Binn\;C:\Program Files (x86)\Microsoft
SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files (x86)\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER EM64T Family 15 Model 6
Stepping 8, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0608 <SYSTEM>
NUMBER_OF_PROCESSORS 16 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log
<SYSTEM>
PATHEXT
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
OAK\Administrator
TMP %USERPROFILE%\Local Settings\Temp
OAK\Administrator

[Print Jobs]

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Print
Processor Host Print Queue Data Type Name

[Network Connections]

Local Name Remote Name Type
Status User Name

```

```

T:      \\inforb\audit_fdr Disk      Current
Connection      OAK\bcampbell

[Running Tasks]

Name      Path      Process ID      Priority  Min
Working Set      Max Working Set      Start Time
Version      Size      File Date
system idle process Not Available      0      0
Not Available      Not Available      Not
Available Not Available      Not Available      Not
Available
system      Not Available      4      8      0
1413120 Not Available      Not Available
smss.exe      Not Available      Not Available      Not
204800      1413120      804      11
10/15/2006 4:57 PM Not
Available Not Available      Not Available
csrss.exe Not Available      244      13      Not
Available Not Available      10/15/2006 4:57 PM Not
Available Not Available      Not Available
winlogon.exe c:\windows\system32\winlogon.exe
380      13      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 901.00 KB (922,624
bytes) 3/25/2005 6:00 AM
services.exe c:\windows\system32\services.exe
456      9      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 216.50 KB (221,696
bytes) 3/25/2005 6:00 AM
lsass.exe c:\windows\system32\lsass.exe 484      9
204800      1413120      10/15/2006 4:57 PM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
14.00 KB (14,336 bytes) 3/25/2005

6:00 AM
svchost.exe c:\windows\system32\svchost.exe
268      8      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
svchost.exe Not Available      708      8
Not Available      Not Available
10/15/2006 4:57 PM Not Available      Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
892      8      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
msdtc.exe Not Available      1256      8      Not
Available Not Available      10/15/2006 4:57 PM Not
Available Not Available      Not Available
svchost.exe c:\windows\system32\svchost.exe
1408      8      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
svchost.exe c:\windows\system32\svchost.exe
1556      8      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM

```

```

csrss.exe Not Available      252      13      Not
Available Not Available      10/15/2006 4:57 PM Not
Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
416      13      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 901.00 KB (922,624
bytes) 3/25/2005 6:00 AM
rdpclip.exe c:\windows\system32\rdpclip.exe
1120      8      204800      1413120
10/15/2006 4:57 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 99.00 KB (101,376
bytes) 9/22/2006 3:24 PM
explorer.exe c:\windows\explorer.exe
1208      8      204800      1413120
10/15/2006 4:57 PM 6.00.3790.1830
(srv03_spl_rtm.050324-1447) 1.30 MB (1,364,480
bytes) 3/25/2005 6:00 AM
cpqteam.exe c:\windows\system32\cpqteam.exe
1440      8      204800      1413120
10/15/2006 4:57 PM 8.40.0.24 59.50 KB
(60,928 bytes) 7/19/2006 5:13 AM
wmiprvse.exe Not Available      240      8
Not Available      Not Available
10/15/2006 4:57 PM Not Available      Not
Available Not Available
logon.scr Not Available      1072      4      Not
Available Not Available      10/15/2006 5:07 PM Not
Available Not Available
csrss.exe Not Available      860      13      Not
Available Not Available      10/16/2006 9:15 AM Not
Available Not Available      Not Available
winlogon.exe c:\windows\system32\winlogon.exe
712      13      204800      1413120
10/16/2006 9:15 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 901.00 KB (922,624
bytes) 3/25/2005 6:00 AM
rdpclip.exe c:\windows\system32\rdpclip.exe
1436      8      204800      1413120
10/16/2006 9:15 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 99.00 KB (101,376
bytes) 9/22/2006 3:24 PM
explorer.exe c:\windows\explorer.exe
1184      8      204800      1413120
10/16/2006 9:15 AM 6.00.3790.1830
(srv03_spl_rtm.050324-1447) 1.30 MB (1,364,480
bytes) 3/25/2005 6:00 AM
cpqteam.exe c:\windows\system32\cpqteam.exe
260      8      204800      1413120
10/16/2006 9:15 AM 8.40.0.24 59.50 KB
(60,928 bytes) 7/19/2006 5:13 AM
tsadmin.exe c:\windows\system32\tsadmin.exe
2208      8      204800      1413120
10/16/2006 9:15 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 423.00 KB (433,152
bytes) 9/22/2006 3:24 PM
cmd.exe c:\windows\system32\cmd.exe 2736      8
204800      1413120      10/16/2006 9:55 AM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 3/25/2005

6:00 AM
cmd.exe c:\windows\system32\cmd.exe 1708      8
204800      1413120      10/16/2006 11:41 AM

```

```

5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 3/25/2005

6:00 AM
sqlservr.exe c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe 3012      13
204800      1413120      10/16/2006 11:41 AM
2005.090.2047.00      37.44 MB (39,263,520
bytes) 4/14/2006 11:59 AM
osql.exe c:\program files\microsoft sql
server\90\tools\bin\osql.exe 2020      8
204800      1413120      10/16/2006 11:42 AM
2005.090.2047.00      81.78 KB (83,744 bytes)
4/14/2006 11:51 AM
helpctr.exe
c:\windows\pchealth\helpctr\binaries\helpctr
r.exe 3056      8      204800      1413120
10/16/2006 11:56 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 1.30 MB (1,363,456
bytes) 9/22/2006 3:26 PM
wmiprvse.exe Not Available      1956      8
Not Available      Not Available
10/16/2006 11:56 AM Not Available      Not
Available Not Available
helpsvcs.exe
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 2032      8      204800      1413120
10/16/2006 11:56 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 1.52 MB (1,591,296
bytes) 9/22/2006 3:26 PM

[Loaded Modules]

Name      Version      Size      File Date Manufacturer
Path
winlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
901.00 KB (922,624 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\winlogon.exe
ntdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.20 MB (1,257,472 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\ntdll.dll
kernel32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.43 MB (1,500,160 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\kernel32.dll
advapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.00 MB (1,051,136 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.63 MB (1,714,176 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\rpcrt4.dll
crypt32 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
1.36 MB (1,428,992 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\crypt32.dll
msasn1 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
152.50 KB (156,160 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\msasn1.dll

```

msvcrt 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
508.00 KB (520,192 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\msvcrt.dll

user32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.04 MB (1,085,952 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\user32.dll

gdi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
592.00 KB (606,208 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\gdi32.dll

nddeapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
25.00 KB (25,600 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\nddeapi.dll

profmap 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
36.00 KB (36,864 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\profmap.dll

netapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
589.00 KB (603,136 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\netapi32.dll

userenv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.02 MB (1,069,056 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\userenv.dll

psapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
29.00 KB (29,696 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\psapi.dll

regapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
108.50 KB (111,104 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\regapi.dll

secur32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
120.00 KB (122,880 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\secur32.dll

setupapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.45 MB (1,523,200 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\setupapi.dll

version 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
28.00 KB (28,672 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\version.dll

winsta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
89.00 KB (91,136 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\winsta.dll

ws2_32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
176.50 KB (180,736 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\ws2_32.dll

ws2help 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.50 KB (31,232 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\ws2help.dll

msgina 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.14 MB (1,193,472 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\msgina.dll

shsvcs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
193.50 KB (198,144 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\shsvcs.dll

shlwapi 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
606.50 KB (621,056 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\shlwapi.dll

sfc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.00 KB (6,144 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\sfc.dll

sfc_os 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
183.50 KB (187,904 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\sfc_os.dll

wintrust 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
297.50 KB (304,640 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\wintrust.dll

imagehlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
57.50 KB (58,880 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\imagehlp.dll

ole32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.43 MB (2,543,616 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\ole32.dll

comctl32 6.0 (srv03_spl_rtm.050324-1447)
1.51 MB (1,584,128 bytes) 9/22/2006

10:10 AM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.windows.c

ommon-controls_6595b64144ccf1df_6.0.3790.1830_x-
ww_aced72af\comctl32.dll

winscard 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
230.00 KB (235,520 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\winscard.dll

wtsapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
29.00 KB (29,696 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\wtsapi32.dll

sxs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.91 MB (2,003,968 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\sxs.dll

winmm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
303.50 KB (310,784 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\winmm.dll

shell32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
10.01 MB (10,492,416 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\shell32.dll

wldap32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
390.00 KB (399,360 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\wldap32.dll

rsaenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
241.96 KB (247,768 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\rsaenh.dll

cscdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
151.50 KB (155,136 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\cscdll.dll

dimntfy 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
28.00 KB (28,672 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\dimntfy.dll

wlnotify 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
148.00 KB (151,552 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\wlnotify.dll

mpr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
115.00 KB (117,760 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\mpr.dll

oleaut32 5.2.3790.1830 1.06 MB (1,116,160
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\oleaut32.dll

winspool 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
247.00 KB (252,928 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\winspool.drv

comctl32 5.82 (srv03_spl_rtm.050324-1447)
934.50 KB (956,928 bytes) 9/22/2006

10:10 AM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.windows.c

ommon-controls_6595b64144ccf1df_5.82.3790.1830_x-
ww_4d792d2a\comctl32.dll

uxtheme 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
494.50 KB (506,368 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\uxtheme.dll

clbcatq 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 865.00 KB (885,760 bytes) 9/22/2006

3:24 PM Microsoft Corporation
c:\windows\system32\clbcatq.dll

comres 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 779.50 KB (798,208 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\comres.dll

wbemprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
38.00 KB (38,912 bytes) 9/22/2006

3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll

wbemcomn 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
524.00 KB (536,576 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcomn.dll

xpsp2res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.77 MB (2,899,456 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\xpsp2res.dll

wbemsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
58.00 KB (59,392 bytes) 9/22/2006

3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wbemsvc.dll

fastprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
866.50 KB (887,296 bytes) 9/22/2006

3:23 PM Microsoft Corporation
c:\windows\system32\wbem\fastprox.dll

msvcp60 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
 919.50 KB (941,568 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\msvcp60.dll
 ntdsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 127.50 KB (130,560 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ntdsapi.dll
 dnsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 297.50 KB (304,640 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\dnsapi.dll
 services 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 216.50 KB (221,696 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\services.exe
 ncobjapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 80.00 KB (81,920 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ncobjapi.dll
 sceesrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 594.50 KB (608,768 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\sceesrv.dll
 authz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 167.00 KB (171,008 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\authz.dll
 umpnpgmgr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 205.00 KB (209,920 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\umpnpgmgr.dll
 eventlog 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 127.00 KB (130,048 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\eventlog.dll
 netevent 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 225.50 KB (230,912 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\netevent.dll
 lsass 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 14.00 KB (14,336 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\lsass.exe
 lsasrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.50 MB (1,568,256 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\lsasrv.dll
 samlib 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 69.00 KB (70,656 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\samlib.dll
 samsvr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.01 MB (1,059,328 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\samsrv.dll
 cryptdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 47.00 KB (48,128 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\cryptdll.dll
 msprivs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 47.50 KB (48,640 bytes) 3/25/2005

6:00 AM Microsoft Corporation
 c:\windows\system32\msprivs.dll
 kerberos 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 698.00 KB (714,752 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\kerberos.dll
 msvl_0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 253.00 KB (259,072 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\msvl_0.dll
 iphlpapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 177.00 KB (181,248 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\iphlpapi.dll
 netlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 666.00 KB (681,984 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\netlogon.dll
 w32time 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 400.50 KB (410,112 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\w32time.dll
 schannel 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 248.00 KB (253,952 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\schannel.dll
 wdigest 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 130.50 KB (133,632 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wdigest.dll
 rassfm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 36.00 KB (36,864 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\rassfm.dll
 kdcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 409.00 KB (418,816 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\kdcsvc.dll
 ntlsa 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 2.81 MB (2,948,096 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ntlsa.dll
 esent 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 2.26 MB (2,366,976 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\esent.dll
 ntdsatq 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 51.00 KB (52,224 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ntdsatq.dll
 mssock 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 478.00 KB (489,472 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\mssock.dll
 scecli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 308.00 KB (315,392 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\scecli.dll
 ws03res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 794.00 KB (813,056 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ws03res.dll

hnetcfg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 561.00 KB (574,464 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\hnetcfg.dll
 wshtccpip 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 29.00 KB (29,696 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wshtccpip.dll
 pstorsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 36.00 KB (36,864 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\pstorsvc.dll
 psbase 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 124.00 KB (126,976 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\psbase.dll
 dssenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 226.96 KB (232,408 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\dssenh.dll
 svchost 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 24.50 KB (25,088 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\svchost.exe
 rpcss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 672.00 KB (688,128 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\rpcss.dll
 ntmarta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 222.50 KB (227,840 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ntmarta.dll
 wkssvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 221.00 KB (226,304 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wkssvc.dll
 wiarpc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 57.00 KB (58,368 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wiarpc.dll
 aelupsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 31.50 KB (32,256 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\aelupsvc.dll
 apphelp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 241.00 KB (246,784 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\apphelp.dll
 cryptsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 114.00 KB (116,736 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\cryptsvc.dll
 certcli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 372.00 KB (380,928 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\certcli.dll
 atl 3.05.2284.96.50 KB (98,816 bytes)
 3/25/2005 6:00 AM Microsoft Corporation
 c:\windows\system32\atl1.dll
 vssapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.26 MB (1,320,960 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\vssapi.dll

es 2001.12.4720.1830 (srv03_spl_rtm.050324-1447) 357.00 KB (365,568 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\es.dll
srvsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 156.50 KB (160,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\srvsvc.dll
wmisvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 227.00 KB (232,448 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wmisvc.dll
sens 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 63.50 KB (65,024 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\sens.dll
comsvcs 2001.12.4720.1830 (srv03_spl_rtm.050324-1447) 2.06 MB (2,156,544 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\comsvcs.dll
netman 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 457.00 KB (467,968 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netman.dll
mprapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 154.50 KB (158,208 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mprapi.dll
activeds 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 348.50 KB (356,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\activeds.dll
adslidpc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 240.50 KB (246,272 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\adslidpc.dll
credui 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 202.00 KB (206,848 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\credui.dll
rtutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 66.00 KB (67,584 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rtutils.dll
netshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 2.32 MB (2,437,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netshell.dll
clusapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 127.00 KB (130,048 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\clusapi.dll
rasapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 410.00 KB (419,840 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasapi32.dll
rasman 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 95.50 KB (97,792 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasman.dll
tapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 332.50 KB (340,480 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\tapi32.dll
wininet 6.00.3790.1830 (srv03_spl_rtm.050324-1447) 1.13 MB (1,186,304 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wininet.dll
wzcsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 49.00 KB (50,176 bytes) 3/24/2005
11:35 AM Microsoft Corporation
c:\windows\system32\wzcsapi.dll
wzcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 492.00 KB (503,808 bytes) 3/24/2005
11:35 AM Microsoft Corporation
c:\windows\system32\wzcsvc.dll
wmi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 5.50 KB (5,632 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wmi.dll
dhcpcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 219.00 KB (224,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\dhcpcsvc.dll
wbemcore 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 1.24 MB (1,299,968 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wbemcore.dll
esscli 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 626.50 KB (641,536 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\esscli.dll
wmiutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 171.00 KB (175,104 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wmiutils.dll
repdrvfs 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 353.50 KB (361,984 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 743.00 KB (760,832 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wmiprvsd.dll
wbemess 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 532.50 KB (545,280 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wbemess.dll
rasdlg 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 859.50 KB (880,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasdlg.dll
ncprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 73.00 KB (74,752 bytes) 3/25/2005
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\ncprov.dll
netcfgx 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 1.29 MB (1,354,240 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netcfgx.dll
winipsec 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 52.50 KB (53,760 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\winipsec.dll

actxprxy 6.00.3790.1830 (srv03_spl_rtm.050324-1447) 220.50 KB (225,792 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\actxprxy.dll
pchsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 76.00 KB (77,824 bytes) 9/22/2006
3:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchsvc.dll
wbemcons 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 65.50 KB (67,072 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\wbem\wbemcons.dll
ersvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 31.00 KB (31,744 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ersvc.dll
termsrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 354.50 KB (363,008 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\termsrv.dll
icaapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 27.50 KB (28,160 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\icaapi.dll
mstlsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 187.00 KB (191,488 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mstlsapi.dll
rdpswx 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 170.13 KB (174,216 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\rdpswx.dll
rdpsnd 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 25.00 KB (25,600 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rdpsnd.dll
scredir 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 38.50 KB (39,424 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\scredir.dll
cscui 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 441.00 KB (451,584 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cscui.dll
msacm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 31.00 KB (31,744 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msacm32.drv
msacm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 112.00 KB (114,688 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msacm32.dll
imaadp32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 24.00 KB (24,576 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\imaadp32.acm
msadp32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 23.50 KB (24,064 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msadp32.acm
msg711 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 13.50 KB (13,824 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\msg711.acm
msgsm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
34.50 KB (35,328 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msgsm32.acm
tssoft32 1.01 13.50 KB (13,824 bytes)
3/25/2005 6:00 AM DSP GROUP, INC.
c:\windows\system32\tssoft32.acm
tsd32 1.03 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM DSP GROUP, INC.
c:\windows\system32\tsd32.dll
rdpclip 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
99.00 KB (101,376 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\rdpclip.exe
wsock32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.50 KB (25,088 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wsock32.dll
urlmon 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.02 MB (1,074,176 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32?urlmon.dll
explorer 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,364,480 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\explorer.exe
browseui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.53 MB (1,601,536 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browseui.dll
shdocvw 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
2.30 MB (2,416,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdocvw.dll
cryptui 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
705.50 KB (722,432 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cryptui.dll
themeui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
530.50 KB (543,232 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\themeui.dll
msimg32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.50 KB (6,656 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msimg32.dll
linkinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\linkinfo.dll
ntshrui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
184.00 KB (188,416 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntshrui.dll
webcheck 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
439.00 KB (449,536 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\webcheck.dll
stobject 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
142.50 KB (145,920 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\stobject.dll
batmeter 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
41.50 KB (42,496 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\batmeter.dll
powrprof 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
32.50 KB (33,280 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\powrprof.dll
drprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\drprov.dll
ntlanman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
71.50 KB (73,216 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntlanman.dll
netui0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
130.00 KB (133,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netui0.dll
netuil 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
338.50 KB (346,624 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netuil.dll
davclnt 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
38.00 KB (38,912 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\davclnt.dll
browselc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
63.00 KB (64,512 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browselc.dll
shdoclc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
589.50 KB (603,648 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll
mlang 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
686.00 KB (702,464 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mlang.dll
mprui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
67.50 KB (69,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mprui.dll
netui2 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
542.00 KB (555,008 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netui2.dll
comdlg32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
446.50 KB (457,216 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
netmsg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
179.00 KB (183,296 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netmsg.dll
netplwiz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
938.50 KB (961,024 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netplwiz.dll

mydocs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
101.00 KB (103,424 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mydocs.dll
zipfldr 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
449.50 KB (460,288 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\zipfldr.dll
cpqteam 8.40.0.24 59.50 KB (60,928 bytes)
7/19/2006 5:13 AM Hewlett-Packard Company
c:\windows\system32\cpqteam.exe
tsadmin 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
423.00 KB (433,152 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\tsadmin.exe
mfc42u 6.50.9146.0 1.39 MB (1,462,272
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
utildll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
37.00 KB (37,888 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\utildll.dll
rdpcfgex 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 9/22/2006
3:24 PM Microsoft Corporation
c:\windows\system32\rdpcfgex.dll
cmd 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cmd.exe
sqlservr 2005.090.2047.00 37.44 MB (39,263,520
bytes) 4/14/2006 11:59 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe
msvcr80 8.00.50727.42 803.50 KB (822,784
bytes) 9/22/2005 11:26 PM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt_
1fc8b3b9a1e18e3b8.0.50727.42_x-
ww_3fea50ad\msvcr80.dll
msvcp80 8.00.50727.42 1.05 MB (1,097,728
bytes) 9/22/2005 11:28 PM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt_
1fc8b3b9a1e18e3b8.0.50727.42_x-
ww_3fea50ad\msvcp80.dll
opends60 2005.090.1399.00 22.21 KB (22,744 bytes)
10/14/2005 2:31 PM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\opends60.dll
instapi 2005.090.1399.00 40.71 KB (41,688 bytes)
10/14/2005 2:23 PM Microsoft Corporation
c:\program files\microsoft sql
server\90\shared\instapi.dll
sqllevn70 2005.090.2047.00 1.58 MB (1,652,512
bytes) 4/14/2006 11:53 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\resources\1033\sqllevn70.rll
sqlos 2005.090.1399.00 15.71 KB (16,088 bytes)
10/14/2005 2:35 PM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlos.dll
mscoree 2.0.50727.42 (RTM.050727-4200)
441.00 KB (451,584 bytes) 9/22/2005

```

11:37 PM Microsoft Corporation
c:\windows\system32\mscoree.dll
xolehlp 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 10.50 KB (10,752 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\xolehlp.dll
msdtcprx 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 805.50 KB (824,832 bytes) 9/22/2006
3:23 PM Microsoft Corporation
c:\windows\system32\msdtcprx.dll
mtxclu 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 141.50 KB (144,896 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mtxclu.dll
resutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
98.50 KB (100,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\resutils.dll
winnr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\winnr.dll
rasadhlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.00 KB (12,288 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasadhlp.dll
security 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.00 KB (6,144 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\security.dll
msfte 12.0.6214.0 3.63 MB (3,805,904
bytes) 2/14/2006 3:19 AM Microsoft Corporation
c:\program files\microsoft
server\mssql.1\mssql\bin\msfte.dll
dbghelp 6.6.0003.5 (vbl_core_fbrel(DrewB).051022-
1733) 1.25 MB (1,312,032 bytes) 4/14/2006
11:51 AM Microsoft Corporation c:\program
files\microsoft sql server\90\shared\dbghelp.dll
sqlncli 2005.090.2047.00 2.72 MB (2,854,744
bytes) 4/14/2006 11:59 AM Microsoft Corporation
c:\windows\system32\sqlncli.dll
sqlnclir 2005.090.1399.00 201.21 KB (206,040
bytes) 10/14/2005 2:31 PM Microsoft Corporation
c:\windows\system32\sqlnclir.rll
osql 2005.090.2047.00 81.78 KB (83,744 bytes)
4/14/2006 11:51 AM Microsoft Corporation
c:\program files\microsoft sql
server\90\tools\bin\osql.exe
odbc32 3.526.1830.0 (srv03_spl_rtm.050324-1447)
408.00 KB (417,792 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\odbc32.dll
odbcint 3.526.1830.0 (srv03_spl_rtm.050324-1447)
96.00 KB (98,304 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\odbcint.dll
osql 2005.090.1399.00 15.21 KB (15,576 bytes)
10/14/2005 2:31 PM Microsoft Corporation
c:\program files\microsoft sql
server\90\tools\bin\resources\1033\osql.rll
helpctr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,363,456 bytes) 9/22/2006
3:26 PM Microsoft Corporation

```

```

c:\windows\pchealth\helpctr\binaries\helpctr
r.exe
hcappres 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.50 KB (7,680 bytes) 9/22/2006
3:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\hcappr
es.dll
itss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\itss.dll
msxml3 8.70.1104.0 2.04 MB (2,141,184
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msxml3.dll
pchshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
155.00 KB (158,720 bytes) 9/22/2006
3:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchshe
ll.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
5.65 MB (5,928,448 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
msls31 3.10.349.0 357.00 KB (365,568
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll
msimtf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
380.50 KB (389,632 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msimtf.dll
msctf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
617.50 KB (632,320 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msctf.dll
jscript 5.6.0.8827 974.50 KB (997,888
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\jscript.dll
imm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\imm32.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
905.50 KB (927,232 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
vbscript 5.6.0.8827 646.50 KB (662,016
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
636.00 KB (651,264 bytes) 9/22/2006
3:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
riched32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\riched32.dll
riched20 5.31.23.1224 1.10 MB (1,157,120
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
helpsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.52 MB (1,591,296 bytes) 9/22/2006
3:26 PM Microsoft Corporation

```

```

c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CIsvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe

```

```

/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmdadmin Stopped Manual Share Process
c:\windows\system32\dmdadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client DnsCache Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped
Manual Share Process
c:\windows\syswow64\svchost.exe -k iasjet
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped Disabled Own Process

```

```

c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismsserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
Stopped Disabled Own Process
c:\windows\system32\mnmsrvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
SQL Server FullText Search (MSSQLSERVER)
msftesql Stopped Disabled Own Process
"c:\program files\microsoft sql
server\mssql.1\mssql\bin\msftesql.exe" -s:mssql.1 -
f:mssqlserver Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
SQL Server (MSSQLSERVER) MSSQLSERVER
Stopped Manual Own Process
"c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe" -smssqlserver
Normal NT AUTHORITY\NetworkService 0
SQL Server Active Directory Helper
MSSQLServerADHelper Stopped Disabled Own
Process "c:\program files\microsoft sql
server\90\shared\sqladhlp90.exe" Normal NT
AUTHORITY\NetworkService 0
Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0

```

```

Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication Ntfrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Stopped
Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k regsvc

```

```

Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT AUTHORITY\NetworkService 0
Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process
c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
SQL Server Browser SQLBrowser Stopped
Disabled Own Process "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe"
Normal NT
AUTHORITY\LocalService 0
SQL Server Agent (MSSQLSERVER)
SQLSERVERAGENT Stopped Manual Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlagent90.exe" -i

```

```

mssqlserver Normal LocalSystem 0
SQL Server VSS Writer SQLWriter Stopped
Manual Own Process "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0
Telephony Tapisrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Auto Share Process
c:\windows\system32\svchost.exe -k termsvc
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process "c:\windows\system32\vssvc.exe Normal
LocalSystem 0

```

```

Windows Time W32Time Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmsN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiaprv.exe
Normal LocalSystem 0
Automatic Updates wuauerv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users

```

```

Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Configuration Utility All
Users:HP System Tools\HP Array Configuration Utility
All Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories OAK\Administrator:Accessories
OAK\Administrator
Accessories\Accessibility
OAK\Administrator:Accessories\Accessibility
OAK\Administrator
Accessories\Communications
OAK\Administrator:Accessories\Communication
s
OAK\Administrator
Accessories\Communications\HyperTerminal
OAK\Administrator:Accessories\Communication
s\HyperTerminal OAK\Administrator
Accessories\Entertainment
OAK\Administrator:Accessories\Entertainment
OAK\Administrator
Administrative Tools
OAK\Administrator:Administrative Tools
OAK\Administrator

```

```

Startup OAK\Administrator:Startup
OAK\Administrator

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini OAK\Administrator
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup
CPQTEAM cpqteam.exe All Users
ion\Run
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document *%programfiles%\windows
nt\accessories\wordpad.exe*
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item Value
Version 6.0.3790.1830
Build 63790.1830
Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 128-bit
Content Advisor Disabled
IEAK Install No

[File Versions]

File Version Size Date Path
actxprxy.dll 6.0.3790.1830 221 KB
3/25/2005 7:00:00 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation
advpack.dll 6.0.3790.1830 146 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx 6.0.3790.1830 147 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
browselc.dll 6.0.3790.1830 63 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
browseui.dll 6.0.3790.1830 1,564 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll 6.0.3790.1830 216 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll 5.82.3790.1830 935 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll 6.3.3790.1830 320 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll 6.3.3790.1830 549 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
iecont.dll <File Missing> Not Available
Not Available Not Available Not
Available
iecontlc.dll <File Missing> Not Available
Not Available Not Available Not
Available
iedkcs32.dll 16.0.3790.1830 417 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
iepeers.dll 6.0.3790.1830 361 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll 6.0.3790.1830 71 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf Not Available 24 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Not Available
ieexplore.exe 6.0.3790.1830 94 KB
3/25/2005 7:00:00 AM
C:\Program
Files\Internet Explorer Microsoft Corporation
imgutil.dll 6.0.3790.1830 61 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

```

```

inetcp1.cpl      6.0.3790.1830      428 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

inetcp1c.dll    6.0.3790.1830      110 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

inseng.dll      6.0.3790.1830      147 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mlang.dll 6.0.3790.1830      686 KB 3/25/2005
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
msencode.dll    <File Missing>      Not Available Not
Available
Not Available Not Available Not
Available
mshta.exe 6.0.3790.1830      38 KB 3/25/2005
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
mshtml.dll      6.0.3790.1830      5,790 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.tlb     6.0.3790.1830      1,320 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtmlmed.dll  6.0.3790.1830      906 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtmlmer.dll  6.0.3790.1830      56 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msident.dll    6.0.3790.1830      69 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msidntld.dll   6.0.3790.1830      16 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msieftp.dll    6.0.3790.1830      369 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msrating.dll   6.0.3790.1830      240 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mstime.dll     6.0.3790.1830      878 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

occache.dll    6.0.3790.1830      126 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

```

```

proctexe.ocx    <File Missing>      Not Available Not
Available Not Available Not
Available
sendmail.dll    6.0.3790.1830      64 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shdoclc.dll     6.0.3790.1830      590 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shdocvw.dll    6.0.3790.1830      2,360 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shfolder.dll   6.0.3790.1830      34 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shlwapi.dll    6.0.3790.1830      607 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

tdc.ocx 1.3.0.3130      91 KB 3/25/2005
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
url.dll 6.0.3790.1830      40 KB 3/25/2005
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll     6.0.3790.1830      1,049 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll   6.0.3790.1830      439 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

wininet.dll    6.0.3790.1830      1,159 KB
3/25/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item Value
Connection Preference Never dial

LAN Settings

AutoConfigProxy wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]
[Summary]

Item Value

```

```

Page Refresh Type Automatic
Temporary Internet Files Folder C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space Not Available
Available Disk Space Not Available
Maximum Cache Size Not Available
Available Cache Size Not Available

[List of Objects]

Program File Status CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]
[Summary]

Item Value
Content Advisor Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone Security Level
My Computer Custom
Local intranet Custom
Trusted sites Custom
Internet High
Restricted sites Custom

```

Server Bus Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 10:12 AM
Value 0
  Name: Type
  Type: REG_DWORD
  Data: 0x1
Value 1
  Name: Start
  Type: REG_DWORD
  Data: 0
Value 2
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1
Value 3
  Name: Tag
  Type: REG_DWORD
  Data: 0x102
Value 4
  Name: ImagePath
  Type: REG_EXPAND_SZ
  Data: system32\DRIVERS\hpqcissb.sys
Value 5
  Name: DisplayName
  Type: REG_SZ
  Data: Smart Array Controllers Non-
Miniport Bus Driver
Value 6
  Name: Group
  Type: REG_SZ
  Data: port
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Parameters
Class Name: <NO CLASS>
Last Write Time: 10/15/2006 - 3:04 PM
Value 0
  Name: CompletionMode
  Type: REG_DWORD
  Data: 0x2
Value 1
  Name: CosTimerRate
  Type: REG_DWORD
  Data: 0xc
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Security
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 5:21 PM

```

```

Value 0
  Name: Security
  Type: REG_BINARY
  Data:
00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ä.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý....
00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 ...ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Enum
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 10:12 AM
Value 0
  Name: 0
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_00\5&17d5b7
62&0&080008
Value 1
  Name: Count
  Type: REG_DWORD
  Data: 0x8
Value 2
  Name: NextInstance
  Type: REG_DWORD
  Data: 0x8
Value 3
  Name: 1
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_00\5&17d5b7
62&0&100008
Value 4

```

```

Name: 2
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&1a83c7
61&0&0010
Value 5
  Name: 3
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&11c963
2c&0&0018
Value 6
  Name: 4
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&89ded6
0&0&0020
Value 7
  Name: 5
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&3b7e53
32&0&0028
Value 8
  Name: 6
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&1adcc4
85&0&0030
Value 9
  Name: 7
  Type: REG_SZ
  Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&239728
ba&0&0038
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissd
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 10:12 AM
Value 0

```

Server Disk Device Performance Driver Registry Parameters

```

Name: Type
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start
Type: REG_DWORD
Data: 0

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpcicssd.sys

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-
Miniport Disk Driver

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcicssd\Security
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 5:21 PM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ã.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....

```

```

00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcicssd\Enum
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 10:12 AM
Value 0
Name: 0
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&28b5263&0&0
0000040000000000

Value 1
Name: Count
Type: REG_DWORD
Data: 0x26

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x26

Value 3
Name: 1
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&28b5263&0&0
1000040000000000

Value 4
Name: 2
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&28b5263&0&0
2000040000000000

Value 5
Name: 3
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&28b5263&0&0
3000040000000000

Value 6
Name: 4
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&28b5263&0&0
4000040000000000

Value 7
Name: 5

```

```

Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&261ab1c2&0&0
0000040000000000

Value 8
Name: 6
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&261ab1c2&0&0
0100040000000000

Value 9
Name: 7
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&261ab1c2&0&0
0200040000000000

Value 10
Name: 8
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&261ab1c2&0&0
0300040000000000

Value 11
Name: 9
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\6&261ab1c2&0&0
0400040000000000

Value 12
Name: 10
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8786079&0&0
0000040000000000

Value 13
Name: 11
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8786079&0&0
1000040000000000

Value 14
Name: 12
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8786079&0&0
2000040000000000

Value 15
Name: 13
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8786079&0&0
3000040000000000

Value 16
Name: 14

```



```

Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8786079&0&0
4000040000000000

Value 17
Name:          15
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&3572f3f3&0&0
0000040000000000

Value 18
Name:          16
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&3572f3f3&0&0
1000040000000000

Value 19
Name:          17
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&3572f3f3&0&0
2000040000000000

Value 20
Name:          18
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&3572f3f3&0&0
3000040000000000

Value 21
Name:          19
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&3572f3f3&0&0
4000040000000000

Value 22
Name:          20
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&eeffeeef&0&0
0000040000000000

Value 23
Name:          21
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&eeffeeef&0&0
1000040000000000

Value 24
Name:          22
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&eeffeeef&0&0
2000040000000000

Value 25
Name:          23

```

```

Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&eeffeeef&0&0
3000040000000000

Value 26
Name:          24
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&eeffeeef&0&0
4000040000000000

Value 27
Name:          25
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1446bc99&0&0
0000040000000000

Value 28
Name:          26
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1446bc99&0&0
1000040000000000

Value 29
Name:          27
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1446bc99&0&0
2000040000000000

Value 30
Name:          28
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1446bc99&0&0
3000040000000000

Value 31
Name:          29
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1446bc99&0&0
4000040000000000

Value 32
Name:          30
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&2d9500d1&0&0
0000040000000000

Value 33
Name:          31
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&2d9500d1&0&0
1000040000000000

Value 34
Name:          32

```

```

Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&2d9500d1&0&0
0200004000000000

Value 35
Name:          33
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&2d9500d1&0&0
0300004000000000

Value 36
Name:          34
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&37057481&0&0
0000040000000000

Value 37
Name:          35
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&37057481&0&0
0100004000000000

Value 38
Name:          36
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&37057481&0&0
0200004000000000

Value 39
Name:          37
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&37057481&0&0
0300004000000000

```

Server Network Driver Registry Parameters (NIC 1)

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Cl
ass\{4D36E97D-E325-11CE-BF01-08002BE10318}\0088
Class Name:      <NO CLASS>
Last Write Time: 10/6/2006 - 10:10 AM
Value 0
Name:           create_pdo_flag
Type:           REG_SZ
Data:           4

```

```

Value 1
Name: target_ips
Type: REG_SZ
Data: 1500

Value 2
Name: optimize_ips
Type: REG_SZ
Data: 0

Value 3
Name: mtu
Type: REG_SZ
Data: 1500

Value 4
Name: req_medium
Type: REG_SZ
Data: 0

Value 5
Name: InfPath
Type: REG_SZ
Data: oem6.inf

Value 6
Name: InfSection
Type: REG_SZ
Data: NC371i_inst_amd64

Value 7
Name: ProviderName
Type: REG_SZ
Data: Hewlett-Packard Company

Value 8
Name: DriverDateData
Type: REG_BINARY
Data: 00 40 39 1e 46 a5 c6 01 -
.@9.FYÆ.

Value 9
Name: DriverDate
Type: REG_SZ
Data: 7-12-2006

Value 10
Name: DriverVersion
Type: REG_SZ
Data: 2.8.15.0

Value 11
Name: MatchingDeviceId
Type: REG_SZ
Data: pci\ven_14e4&dev_164a&subsys_1709103c

Value 12
Name: DriverDesc
Type: REG_SZ
Data: HP NC371i Virtual Bus Device

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088\ndi
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088\ndi\params
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0
Name: paramdesc
Type: REG_SZ
Data: Maximum Transfer Unit

Value 1
Name: default
Type: REG_SZ
Data: 1500

Value 2
Name: type
Type: REG_SZ
Data: dword

Value 3
Name: min
Type: REG_SZ
Data: 1500

Value 4
Name: max
Type: REG_SZ
Data: 9000

Value 5
Name: step
Type: REG_SZ
Data: 500

Value 6
Name: base
Type: REG_SZ
Data: 10

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088\ndi\params\req_medium
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0

```

```

Name: paramDesc
Type: REG_SZ
Data: Speed & Duplex

Value 1
Name: default
Type: REG_SZ
Data: 0

Value 2
Name: type
Type: REG_SZ
Data: enum

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088\ndi\params\req_medium\enum
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0
Name: 0
Type: REG_SZ
Data: Auto

Value 1
Name: 65794
Type: REG_SZ
Data: 10 Mb Half

Value 2
Name: 258
Type: REG_SZ
Data: 10 Mb Full

Value 3
Name: 66050
Type: REG_SZ
Data: 100 Mb Half

Value 4
Name: 514
Type: REG_SZ
Data: 100 Mb Full



---


Server Network  
Driver Registry  
Parameters  
(NIC 2)


---


Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
lass\{4D36E97D-E325-11CE-BFCl-08002BE10318}\0088
Class Name: <NO CLASS>

```

Last Write Time: 10/6/2006 - 10:10 AM

Value 0

Name: create_pdo_flag
Type: REG_SZ
Data: 4

Value 1

Name: target_ips
Type: REG_SZ
Data: 1500

Value 2

Name: optimize_ips
Type: REG_SZ
Data: 0

Value 3

Name: mtu
Type: REG_SZ
Data: 1500

Value 4

Name: req_medium
Type: REG_SZ
Data: 0

Value 5

Name: InfPath
Type: REG_SZ
Data: oem6.inf

Value 6

Name: InfSection
Type: REG_SZ
Data: NC371i_inst_amd64

Value 7

Name: ProviderName
Type: REG_SZ
Data: Hewlett-Packard Company

Value 8

Name: DriverDateData
Type: REG_BINARY
Data: 00 40 39 1e 46 a5 c6 01 -
. @9.FY&

Value 9

Name: DriverDate
Type: REG_SZ
Data: 7-12-2006

Value 10

Name: DriverVersion
Type: REG_SZ
Data: 2.8.15.0

Value 11

Name: MatchingDeviceId
Type: REG_SZ
Data: pci\ven_14e4&dev_164a&subsys_1709103c

Value 12

Name: DriverDesc
Type: REG_SZ
Data: HP NC371i Virtual Bus Device

Key Name:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BF1-08002BE10318}\0088\ndi\params
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Key Name:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BF1-08002BE10318}\0088\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Key Name:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BF1-08002BE10318}\0088\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0

Name: paramdesc
Type: REG_SZ
Data: Maximum Transfer Unit

Value 1

Name: default
Type: REG_SZ
Data: 1500

Value 2

Name: type
Type: REG_SZ
Data: dword

Value 3

Name: min
Type: REG_SZ
Data: 1500

Value 4

Name: max
Type: REG_SZ
Data: 9000

Value 5

Name: step
Type: REG_SZ
Data: 500

Value 6

Name: base
Type: REG_SZ
Data: 10

Key Name:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BF1-08002BE10318}\0088\ndi\params\req_medium
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0

Name: paramDesc
Type: REG_SZ
Data: Speed & Duplex

Value 1

Name: default
Type: REG_SZ
Data: 0

Value 2

Name: type
Type: REG_SZ
Data: enum

Key Name:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BF1-08002BE10318}\0088\ndi\params\req_medium\enum
Class Name: <NO CLASS>
Last Write Time: 9/22/2006 - 3:47 PM

Value 0

Name: 0
Type: REG_SZ
Data: Auto

Value 1

Name: 65794
Type: REG_SZ
Data: 10 Mb Half

Value 2

Name: 258
Type: REG_SZ
Data: 10 Mb Full

Value 3

Name: 66050
Type: REG_SZ
Data: 100 Mb Full

Value 4

Name: 514
Type: REG_SZ
Data: 100 Mb Full

**Web Client
Hardware
Configuration**

System Information report written at: 10/16/06
 11:31:13
 System Name: CL55
 [System Summary]

Item Value
 OS Name Microsoft(R) Windows(R) Server 2003,
 Standard Edition
 Version 5.2.3790 Service Pack 1 Build 3790
 Other OS Description Not Available
 OS Manufacturer Microsoft Corporation
 System Name CL55
 System Manufacturer HP
 System Model ProLiant DL360 G4
 System Type X86-based PC
 Processor x86 Family 15 Model 4 Stepping 1
 GenuineIntel ~3600 Mhz
 Processor x86 Family 15 Model 4 Stepping 1
 GenuineIntel ~3600 Mhz
 BIOS Version/Date HP P52, 12/2/2004
 SMBIOS Version 2.3
 Windows Directory C:\WINDOWS
 System Directory C:\WINDOWS\system32
 Boot Device \Device\HarddiskVolume1
 Locale United States
 Hardware Abstraction Layer Version =
 "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
 User Name Not Available
 Time Zone Central Daylight Time
 Total Physical Memory 1,023.47 MB
 Available Physical Memory 774.67 MB
 Total Virtual Memory 2.42 GB
 Available Virtual Memory 2.26 GB
 Page File Space 1.50 GB
 Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
 I/O Port 0x00000000-0x00000CF7 PCI bus
 I/O Port 0x00000000-0x00000CF7 Direct memory
 access controller
 IRQ 5 Base System Device
 IRQ 5 Base System Device
 I/O Port 0x00002F8-0x000002FF Motherboard
 resources
 I/O Port 0x00002F8-0x000002FF Communications Port (COM2)
 IRQ 16 Intel(R) E7525/E7520/E7320 PCI Express Root
 Port A0 - 3595
 IRQ 16 Intel(R) E7525/E7520 PCI Express Root Port
 B0 - 3597
 IRQ 16 Intel(R) E7520 PCI Express Root Port C0 -
 3599
 IRQ 16 Standard Universal PCI to USB Host
 Controller

Memory Address 0xA0000-0xBFFFF PCI bus
 Memory Address 0xA0000-0xBFFFF RAGE XL PCI
 Family (Microsoft Corporation)
 I/O Port 0x00004000-0x00004FFF Intel(R)
 6300ESB 64-bit PCI-X Bridge - 25AE
 I/O Port 0x00004000-0x00004FFF Smart Array
 6i
 [DMA]
 Resource Device Status
 Channel 7 Direct memory access controller OK
 Channel 2 Standard floppy disk controller OK
 [Forced Hardware]
 Device PNP Device ID
 [I/O]
 Resource Device Status
 0x00000000-0x00000CF7 PCI bus OK
 0x00000000-0x00000CF7 Direct memory access
 controller OK
 0x00000D00-0x0000FFFF PCI bus OK
 0x00004000-0x00004FFF Intel(R) 6300ESB 64-bit
 PCI-X Bridge - 25AE OK
 0x00004000-0x00004FFF Smart Array 6i OK
 0x00002000-0x0000201F to USB Host Controller
 OK
 0x00002020-0x0000203F to USB Host Controller
 OK
 0x00003000-0x000030FF RAGE XL PCI Family
 (Microsoft Corporation) OK
 0x00003B0-0x00003BB (Microsoft Corporation)
 OK
 0x00003C0-0x00003DF RAGE XL PCI Family
 (Microsoft Corporation) OK
 0x00001800-0x000018FF Base System Device OK
 0x00003400-0x000034FF Base System Device OK
 0x0000A79-0x0000A79 ISAPNP Read Data Port
 OK
 0x00000279-0x00000279 ISAPNP Read Data Port
 OK
 0x00000274-0x00000277 ISAPNP Read Data Port
 OK
 0x00000070-0x00000077 Motherboard resources
 OK
 0x00000408-0x0000040F Motherboard resources
 OK
 0x000004D0-0x000004D1 Motherboard resources
 OK
 0x00000020-0x0000003F Motherboard resources
 OK

0x00000A0-0x00000BFF Motherboard resources
 OK
 0x00000090-0x0000009F Motherboard resources
 OK
 0x00000050-0x00000053 Motherboard resources
 OK
 0x00000700-0x0000071F Motherboard resources
 OK
 0x00000800-0x0000083F Motherboard resources
 OK
 0x00000900-0x0000097F Motherboard resources
 OK
 0x00000010-0x0000001F Motherboard resources
 OK
 0x00000C80-0x00000C83 Motherboard resources
 OK
 0x00000CD4-0x00000CD7 Motherboard resources
 OK
 0x00000F50-0x00000F58 Motherboard resources
 OK
 0x000002F8-0x000002FF Motherboard resources
 OK
 0x000002F8-0x000002FF Communications Port
 (COM2) OK
 0x00000040-0x00000043 System timer OK
 0x00000080-0x0000008F Direct memory access
 controller OK
 0x000000C0-0x000000DF Direct memory access
 controller OK
 0x00000061-0x00000061 System speaker OK
 0x00000060-0x00000060 Standard 101/102-Key or
 Microsoft Natural PS/2 Keyboard OK
 0x00000064-0x00000064 Standard 101/102-Key or
 Microsoft Natural PS/2 Keyboard OK
 0x0000002E-0x0000002F Extended IO Bus OK
 0x0000004E-0x0000004F Extended IO Bus OK
 0x00000220-0x0000025F Extended IO Bus OK
 0x00000280-0x0000029F Extended IO Bus OK
 0x000003F8-0x000003FF Communications Port
 (COM1) OK
 0x00003F2-0x000003F5 Standard floppy disk
 controller OK
 0x000003F7-0x000003F7 Standard floppy disk
 controller OK
 0x00000500-0x0000050F Standard Dual Channel
 PCI IDE Controller OK
 0x000001F0-0x000001F7 Primary IDE Channel OK
 0x000003F6-0x000003F6 Primary IDE Channel OK
 0x00000170-0x00000177 Secondary IDE Channel
 OK
 0x00000376-0x00000376 Secondary IDE Channel
 OK
 [IRQs]

Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 16	Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 - 3595	OK
IRQ 16	Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597	OK
IRQ 16	Intel(R) E7520 PCI Express Root Port C0 - 3599	OK
IRQ 16	Standard Universal PCI to USB Host Controller	OK
IRQ 24	Smart Array 6i	OK
IRQ 25	HP NC7782 Gigabit Server Adapter	OK
IRQ 26	HP NC7782 Gigabit Server Adapter #2	OK
IRQ 19	Standard Universal PCI to USB Host Controller	OK
IRQ 23	Standard Enhanced PCI to USB Host Controller	OK
IRQ 5	Base System Device	OK
IRQ 5	Base System Device	OK
IRQ 0	System timer	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 4	Communications Port (COM1)	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 14	Primary IDE Channel	OK
IRQ 3	Communications Port (COM2)	OK

[Memory]

Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0x40000000-0xFEFFFFFF	PCI bus	OK
0xFDF00000-0xFDFFFFFFF	Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE	OK
0xFDF00000-0xFDF1FFF	Smart Array 6i	OK
0xFDF80000-0xFDFBFFFF	Smart Array 6i	OK
0xFDF70000-0xFDF7FFFF	HP NC7782 Gigabit Server Adapter	OK
0xFDF60000-0xFDF6FFFF	HP NC7782 Gigabit Server Adapter #2	OK
0xFBEE0000-0xFBEE000F	Intel(R) 6300ESB Watchdog Timer - 25AB	OK
0xFBEE0000-0xFBEE03FF	Standard Enhanced PCI to USB Host Controller	OK
0xFC000000-0xFCFFFFFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFBFF0000-0xFBFF0FFF	RAGE XL PCI Family (Microsoft Corporation)	OK
0xFBFE0000-0xFBFE01FF	Base System Device	OK
0xFBFD0000-0xFBFD07FF	Base System Device	OK
0xFBFC0000-0xFBFC1FFF	Base System Device	OK

Resource	Device	Status
0x00000000-0x0000FFFF	Base System Device	OK
0xE0000000-0xEFFFFFFF	Motherboard resources	OK
0xFEBFFC00-0xFEBFFFFFF	Standard Dual Channel PCI IDE Controller	OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\msg711.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSG711.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	10.00 KB (10,240 bytes)	3/25/2003
6:00 AM							
c:\windows\system32\msadp32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSADP32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	14.50 KB (14,848 bytes)	3/25/2003
6:00 AM							
c:\windows\system32\sl_anet.acm	Sipro Lab Telecom Inc.	Sipro Lab Telecom Audio Codec	OK	C:\WINDOWS\system32\SL_ANET.ACM	3.02	84.00 KB (86,016 bytes)	3/25/2003 6:00 AM
6:00 AM							
c:\windows\system32\tssoft32.acm	DSP GROUP, INC.	DSP GROUP, INC.	OK	C:\WINDOWS\system32\TSSOFT32.ACM	1.01	9.50 KB (9,728 bytes)	3/25/2003 6:00 AM
6:00 AM							
c:\windows\system32\imaadp32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\IMAADP32.ACM	5.2.3790.1830	120.00 KB (122,880 bytes)	12/7/2005 1:25 PM
6:00 AM							
c:\windows\system32\msg723.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSG723.ACM	5.2.3790.1830	120.00 KB (122,880 bytes)	12/7/2005 1:25 PM
6:00 AM							
c:\windows\system32\msaud32.acm	Microsoft Corporation	Windows Media Audio Codec	OK	C:\WINDOWS\system32\MSAUD32.ACM	8.00.00.4487	288.00 KB (294,912 bytes)	3/25/2003 6:00 AM
6:00 AM							
c:\windows\system32\msgsm32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSGSM32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)		

Item	Value
20.50 KB (20,992 bytes)	3/25/2003
6:00 AM	
c:\windows\system32\l3codeca.acm	Fraunhofer Institut Integrierte Schaltungen IIS
c:\windows\system32\l3codeca.acm	Fraunhofer IIS MPEG Layer-3 Codec
C:\WINDOWS\system32\L3CODECA.ACM	1,
9, 0, 0305	284.00 KB (290,816 bytes)
3/25/2003 6:00 AM	

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\tsbyuv.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\TSBYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes)	3/24/2003
7:50 PM							
c:\windows\system32\msyuv.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)	3/24/2003 7:49 PM
6:00 AM							
c:\windows\system32\msvidc32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	26.50 KB (27,136 bytes)	3/25/2003
6:00 AM							
c:\windows\system32\msrle32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSRLE32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	10.50 KB (10,752 bytes)	3/25/2003
6:00 AM							
c:\windows\system32\iyuv_32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\IYUV_32.DLL	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	46.50 KB (47,616 bytes)	12/7/2005
1:25 PM							
c:\windows\system32\msh263.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH263.DRV	5.2.3790.1830	288.00 KB (294,912 bytes)	12/7/2005 1:25 PM
1:25 PM							
c:\windows\system32\msh261.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH261.DRV	5.2.3790.1830	184.00 KB (188,416 bytes)	12/7/2005 1:25 PM

[CD-ROM]

Item	Value
Drive D:	
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	COMPAQ CRN-8245B
Manufacturer	(Standard CD-ROM drives)

```

Status      OK
Transfer Rate      Not Available
SCSI Target ID    0
PNP Device ID     IDE\CDROMCOMPAQ_CRN-8245B
                2.19\5&180B77CF&0&0.0
Driver         c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 51.00 KB
(52,224 bytes), 3/25/2003 6:00 AM)

[Sound Device]

Item      Value

[Display]

Item      Value
Name      RAGE XL PCI Family (Microsoft Corporation)

PNP Device ID
PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_27\4&2183A681&0&18F0
Adapter Type  ATI RAGE XL PCI (B41), ATI Technologies Inc. compatible
Adapter Description RAGE XL PCI Family (Microsoft Corporation)
Adapter RAM   8.00 MB (8,388,608 bytes)
Installed Drivers ati2drad.dll
Driver Version 5.10.3663.6013
INF File      atiixpad.inf (ati2mpad section)
Color Planes  1
Color Table Entries 4294967296
Resolution    640 x 480 x 60 hertz
Bits/Pixel    32
Memory Address 0xFC000000-0xFCFFFFFF
I/O Port      0x00003000-0x000030FF
Memory Address 0xFBFF0000-0xFBFF0FFF
I/O Port      0x000003B0-0x000003BB
I/O Port      0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFFF
Driver         c:\windows\system32\drivers\ati2mpad.sys
(5.10.3663.6013, 335.38 KB (343,424 bytes), 12/7/2005
4:18 AM)

[Infrared]

Item      Value

[Input]

[Keyboard]

Item      Value
Description Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name      Enhanced (101- or 102-key)
Layout    00000409
PNP Device ID ACPI\PNP0303\4&1F443D2A&0
Number of Function Keys 12
I/O Port  0x00000060-0x00000060
I/O Port  0x00000064-0x00000064

```

```

IRQ Channel      IRQ 1
Driver           c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 3/25/2003 6:00 AM)

[Pointing Device]

Item      Value
Hardware Type PS/2 Compatible Mouse
Number of Buttons 2
Status     OK
PNP Device ID ACPI\PNP0F13\4&1F443D2A&0
Power Management Supported No
Double Click Threshold 6
Handedness Right Handed Operation
IRQ Channel      IRQ 12
Driver           c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 3/25/2003 6:00 AM)

[Modem]

Item      Value

[Network]

[Adapter]

Item      Value
Name      [00000001] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset  10/15/2006 4:31 PM
Index      1
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name      [00000002] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPORT\0000
Last Reset  10/15/2006 4:31 PM
Index      2
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available

```

```

MAC Address      Not Available
Driver           c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 66.00 KB
(67,584 bytes), 3/25/2003 6:00 AM)

Name      [00000003] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset  10/15/2006 4:31 PM
Index      3
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address     50:50:54:50:30:30
Driver           c:\windows\system32\drivers\rasppptp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 61.00 KB
(62,464 bytes), 3/25/2003 6:00 AM)

Name      [00000004] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
Last Reset  10/15/2006 4:31 PM
Index      4
Service Name Rasppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address     33:50:6F:45:30:30
Driver           c:\windows\system32\drivers\rasppoe.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 40.00 KB
(40,960 bytes), 3/25/2003 6:00 AM)

Name      [00000005] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTMINIPORT\0000
Last Reset  10/15/2006 4:31 PM
Index      5
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address     Not Available

```

```

Driver c:\windows\system32\drivers\raspti.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 19.50 KB
(19,968 bytes), 3/25/2003 6:00 AM)

Name [00000006] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 10/15/2006 4:31 PM
Index 6
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 3/25/2003 6:00 AM)

Name [00000007] HP NC7782 Gigabit Server Adapter

Adapter Type Ethernet 802.3
Product Type HP NC7782 Gigabit Server Adapter

Installed Yes
PNP Device ID PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
0\4&19638ECB&0&10E0
Last Reset 10/15/2006 4:31 PM
Index 7
Service Name q57w2k
IP Address 130.172.11.55
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:13:21:B1:EE:18
Memory Address 0xFDF70000-0xFDF7FFFF
IRQ Channel IRQ 25
Driver c:\windows\system32\drivers\q57xp32.sys
(8.48.0.0 built by: WinDDK, 139.38 KB (142,720
bytes), 12/7/2005 12:44 PM)

Name [00000008] HP NC7782 Gigabit Server Adapter

Adapter Type Ethernet 802.3
Product Type HP NC7782 Gigabit Server Adapter

Installed Yes
PNP Device ID PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
0\4&19638ECB&0&11E0
Last Reset 10/15/2006 4:31 PM
Index 8
Service Name q57w2k
IP Address 130.168.40.55

```

```

IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:13:21:B1:EE:17
Memory Address 0xFDF60000-0xFDF6FFFF
IRQ Channel IRQ 26
Driver c:\windows\system32\drivers\q57xp32.sys
(8.48.0.0 built by: WinDDK, 139.38 KB (142,720
bytes), 12/7/2005 12:44 PM)

[Protocol]

Item Value
Name MSAFD Tcpip [TCP/IP]
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No

```

```

Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS
{\Device\NetBT_Tcpip_{DC824356-0607-4BEB-A371-
29F054512430}} SEQPACKET 3
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD NetBIOS
{\Device\NetBT_Tcpip_{DC824356-0607-4BEB-A371-
29F054512430}} DATAGRAM 3
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No

```

Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{F82C0051-EEE6-4419-B00E-FBD3C9B049CB}] SEQPACKE T 0
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{F82C0051-EEE6-4419-B00E-FBD3C9B049CB}] DATAGRAM 0
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{AF08E806-A2B0-4001-B24F-28D7AE290B39}] SEQPACKE T 1
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No

Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{AF08E806-A2B0-4001-B24F-28D7AE290B39}] DATAGRAM 1
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}] SEQPACKE T 2
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}] DATAGRAM 2
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No

Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

[WinSock]
 Item Value
 File c:\windows\system32\winsock.dll
 Size 2.80 KB (2,864 bytes)
 Version 3.10
 File c:\windows\system32\wsock32.dll
 Size 22.00 KB (22,528 bytes)
 Version 5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item Value
 Name Communications Port (COM2)
 Status OK
 PNP Device ID ROOT*PNP0501\1_0_17_1_0_0
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size 0
 Settable Baud Rate Yes
 Settable Data Bits Yes
 Settable Flow Control Yes
 Settable Parity Yes
 Settable Parity Check Yes
 Settable Stop Bits Yes
 Settable RLSD Yes
 Supports RLSD Yes
 Supports 16 Bit Mode No
 Supports Special Characters No
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy No
 Abort Read/Write on Error No
 Binary Mode Enabled Yes
 Continue XMit on XOff No
 CTS Outflow Control No
 Discard NULL Bytes No
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled No
 Event Character 0
 Parity Check Enabled No
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0

XOnXOff OutFlow Control 0
 I/O Port 0x00002F8-0x00002FF
 IRQ Channel IRQ 3
 Driver c:\windows\system32\drivers\serial.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
 (65,536 bytes), 3/25/2003 6:00 AM)

Name Communications Port (COM1)
 Status OK
 PNP Device ID ACPI\PNP0501\0
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size No
 Settable Baud Rate Yes
 Settable Data Bits Yes
 Settable Flow Control Yes
 Settable Parity Yes
 Settable Parity Check Yes
 Settable Stop Bits Yes
 Settable RLSD Yes
 Supports RLSD Yes
 Supports 16 Bit Mode No
 Supports Special Characters No
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy No
 Abort Read/Write on Error No
 Binary Mode Enabled Yes
 Continue XMit on XOff No
 CTS Outflow Control No
 Discard NULL Bytes No
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled No
 Event Character 0
 Parity Check Enabled No
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 IRQ Channel IRQ 4
 I/O Port 0x00003F8-0x00003FF
 Driver c:\windows\system32\drivers\serial.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
 (65,536 bytes), 3/25/2003 6:00 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value
 Drive A:
 Description 3 1/2 Inch Floppy Drive
 Drive C:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 33.91 GB (36,410,552,320 bytes)
 Free Space 24.30 GB (26,094,538,752 bytes)

Volume Name
 Volume Serial Number C8186725

Drive D:
 Description CD-ROM Disc

Drive Z:
 Description Network Connection
 Provider Name \\inforb\audit_fdr

[Disks]

Item Value
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 2
 SCSI Target ID 4
 Sectors/Track 32
 Size 33.91 GB (36,414,750,720 bytes)
 Total Cylinders 8,716
 Total Sectors 71,122,560
 Total Tracks 2,222,580
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 33.91 GB (36,410,556,416 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item Value
 Name Smart Array 6i
 Manufacturer Hewlett-Packard Company
 Status OK
 PNP Device ID
 PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_0
 1\4&19638ECB&0&08E0
 Memory Address 0xFDF0000-0xFDF1FFF
 I/O Port 0x00004000-0x00004FFF
 Memory Address 0xFDF80000-0xFDFBFFF
 IRQ Channel IRQ 24
 Driver c:\windows\system32\drivers\cpqccissm.sys
 (5.68.0.32 Build 1 (x86), 16.13 KB (16,512 bytes),
 5/20/2005 12:16 PM)

[IDE]

Item Value
 Name Standard Dual Channel PCI IDE Controller
 Manufacturer (Standard IDE ATA/ATAPI
 controllers)
 Status OK
 PNP Device ID
 PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&F9
 I/O Port 0x00000500-0x0000050F
 Memory Address 0xFEBFFC00-0xFEBFFFFF
 Driver c:\windows\system32\drivers\pciide.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632
 bytes), 3/25/2003 6:00 AM)

Name Primary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI
 controllers)
 Status OK
 PNP Device ID PCIIDE\IDECHANNEL\4&2BBEC4C6&0&0

I/O Port 0x000001F0-0x000001F7
 I/O Port 0x000003F6-0x000003F6
 IRQ Channel IRQ 14
 Driver c:\windows\system32\drivers\atapi.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
 (95,744 bytes), 3/25/2003 6:00 AM)

Name Secondary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI
 controllers)
 Status OK
 PNP Device ID PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1

I/O Port 0x00000170-0x00000177
 I/O Port 0x00000376-0x00000376
 Driver c:\windows\system32\drivers\atapi.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
 (95,744 bytes), 3/25/2003 6:00 AM)

[Printing]

Name Driver Port Name Server Name
 CCA15109 on CCAPRINT02 (from CAMPBELLBRXP) in session
 1 HP LaserJet 4100 Series PCL TS003
 Labprinter on INFORB (from CAMPBELLBRXP) in session 1
 HP LaserJet 5Si/5Si MX PS TS001

[Problem Devices]

Device PNP Device ID Error Code
 Base System Device
 PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
 1\4&2183A681&0&20F0 The drivers for this device are
 not installed.
 Base System Device
 PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
 1\4&2183A681&0&22F0 The drivers for this device are
 not installed.

[USB]

Device PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_02\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_02\3&61AAA01&0&E9
Standard Enhanced PCI to USB Host Controller
PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_02\3&61AAA01&0&EF

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode	State	Accept	Pause
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal No
adpu160m	adpu160m	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
adpu320	adpu320	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
afcnc	afcnc	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes	System	Running	OK	Normal No Yes
ahal54x	Ahal54x	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
aic78u2	aic78u2	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
aic78xx	aic78xx	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
aliide	Aliide	Not Available	Kernel Driver	No	Disabled	Stopped	OK	

asynmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asynmac.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No No
ataapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\ataapi.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys	Kernel Driver	Yes	Manual	Running	OK	Ignore No Yes
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver	No	Manual	Stopped	OK	Normal No No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No Yes
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes	System	Running	OK	Normal No Yes
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal No No
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes	Disabled	Running	OK	Normal No Yes
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	System	Running	OK	Normal No Yes
changer	Changer	Not Available	Kernel Driver	No	System	Stopped	OK	
clusdisk	Cluster Disk Driver	c:\windows\system32\drivers\clusdisk.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal No No
cmdide	CmdIde	Not Available	Kernel Driver	No	Disabled	Stopped	OK	

cpqarray	Cpqarray	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
cpqarray2	cpqarray2	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
cpqcissm	cpqcissm	c:\windows\system32\drivers\cpqcissm.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
cpqfcalm	cpqfcalm	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
crtdisk	CRC Disk Filter Driver	c:\windows\system32\drivers\crtdisk.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
dac960nt	dac960nt	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
dellcerc	dellcerc	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
dfsdriver	DfsDriver	c:\windows\system32\drivers\dfs.sys	File System Driver	Yes	Boot	Running	OK	Normal No Yes
disk	Disk Driver	c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
dmboot	dmboot	c:\windows\system32\drivers\dmboot.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal No No
dmio	Logical Disk Manager Driver	c:\windows\system32\drivers\dmio.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
dmload	dmload	c:\windows\system32\drivers\dmload.sys	Kernel Driver	Yes	Boot	Running	OK	Normal No Yes
dpti2o	dpti2o	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys	File System Driver	No	Disabled	Stopped	OK	Normal No No
fdc	Floppy Disk Controller Driver	c:\windows\system32\drivers\fdc.sys	Kernel Driver	Yes	Manual	Running	OK	Normal No Yes

fips	Fips				
	c:\windows\system32\drivers\fips.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
flpydisk	Floppy Disk Driver				
	c:\windows\system32\drivers\flpydisk.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
fltmgr	FltMgr				
	c:\windows\system32\drivers\fltmgr.sys				
	File System Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
ftdisk	Volume Manager Driver				
	c:\windows\system32\drivers\ftdisk.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
gpc	Generic Packet Classifier				
	c:\windows\system32\drivers\msgpc.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
hpn	hpn	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
hpt3xx	hpt3xx	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
http	HTTP				
	c:\windows\system32\drivers\http.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
i2omgmt	i2omgmt	Not Available	Kernel Driver		
	No	System	Stopped	OK	
	Normal	No	No		
i2omp	i2omp	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver				
	c:\windows\system32\drivers\i8042prt.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
iirsp	iirsp	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
imapi	CD-Burning Filter Driver				
	c:\windows\system32\drivers\imapi.sys				
	Kernel Driver	No	System		
	Stopped	OK	Normal	No	No
intelide	IntelIde	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
intelppm	Intel Processor Driver				
	c:\windows\system32\drivers\intelppm.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes

ip6fw	IPv6 Windows Firewall Driver				
	c:\windows\system32\drivers\ip6fw.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
ipfilterdriver	IP Traffic Filter Driver				
	c:\windows\system32\drivers\ipfltdrv.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
ipinip	IP in IP Tunnel Driver				
	c:\windows\system32\drivers\ipinip.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
ipnat	IP Network Address Translator				
	c:\windows\system32\drivers\ipnat.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
ipsec	IPSEC driver				
	c:\windows\system32\drivers\ipsec.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
ipsraidn	ipsraidn	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
irenum	IR Enumerator Service				
	c:\windows\system32\drivers\irenum.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
isapnp	PnP ISA/EISA Bus Driver				
	c:\windows\system32\drivers\isapnp.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Critical	No	Yes
kbdclass	Keyboard Class Driver				
	c:\windows\system32\drivers\kbdclass.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
ksecdd	KSecDD				
	c:\windows\system32\drivers\ksecdd.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
lp6nds35	lp6nds35	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
mnmdd	mnmdd				
	c:\windows\system32\drivers\mnmdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
modem	Modem				
	c:\windows\system32\drivers\modem.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
mouclass	Mouse Class Driver				
	c:\windows\system32\drivers\mouclass.sys				

	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
mountmgr	Mount Point Manager				
	c:\windows\system32\drivers\mountmgr.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
mrraid35x	mrraid35x	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
mrxdav	WebDav Client Redirector				
	c:\windows\system32\drivers\mrxdav.sys				
	File System Driver	No	Manual		
	Stopped	OK	Normal	No	No
mrxsmb	MRXSMB				
	c:\windows\system32\drivers\mrxsmb.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
msfs	Msfs				
	c:\windows\system32\drivers\msfs.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
mssmbios	Microsoft System Management BIOS Driver				
	c:\windows\system32\drivers\mssmbios.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
mup	Mup				
	c:\windows\system32\drivers\mup.sys				
	File System Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
ndis	NDIS System Driver				
	c:\windows\system32\drivers\ndis.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
ndistapi	Remote Access NDIS TAPI Driver				
	c:\windows\system32\drivers\ndistapi.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ndisuio	NDIS Usermode I/O Protocol				
	c:\windows\system32\drivers\ndisuio.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ndiswan	Remote Access NDIS WAN Driver				
	c:\windows\system32\drivers\ndiswan.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ndproxy	NDIS Proxy				
	c:\windows\system32\drivers\ndproxy.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
netbios	NetBIOS Interface				
	c:\windows\system32\drivers\netbios.sys				

	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
netbt	NetBios over Tcpip				
	c:\windows\system32\drivers\netbt.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
nfrd960	nfrd960	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
npfs	Npfs				
	c:\windows\system32\drivers\npfs.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
ntfs	Ntfs				
	c:\windows\system32\drivers\ntfs.sys				
	File System Driver	Yes	Disabled		
	Running	OK	Normal	No	Yes
null	Null				
	c:\windows\system32\drivers\null.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
parport	Parport				
	c:\windows\system32\drivers\parport.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
partmgr	Partition Manager				
	c:\windows\system32\drivers\partmgr.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
pci	PCI Bus Driver				
	c:\windows\system32\drivers\pci.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Critical	No	Yes
pciide	PCIIde				
	c:\windows\system32\drivers\pciide.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
pcmcia	Pcmcia				
	c:\windows\system32\drivers\pcmcia.sys				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
pdcomp	PDCOMP	Not Available	Kernel Driver		
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdframe	PDFRAME	Not Available	Kernel Driver		
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdreli	PDRELI	Not Available	Kernel Driver		
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdrframe	PDRFRAME	Not Available	Kernel Driver		
	No	Manual	Stopped	OK	
	Ignore	No	No		

perc2	perc2	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
perc2hib	perc2hib	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
pptpminiport	WAN Miniport (PPTP)				
	c:\windows\system32\drivers\rasppptp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
processor	Processor Driver				
	c:\windows\system32\drivers\processr.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
ptilink	Direct Parallel Link Driver				
	c:\windows\system32\drivers\ptilink.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
q57w2k	HP NC7782 Gigabit Server Adapter				
	c:\windows\system32\drivers\q57xp32.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ql1080	ql1080	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql10wnt	ql10wnt	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql12160	ql12160	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql1240	ql1240	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql1280	ql1280	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2100	ql2100	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2200	ql2200	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2300	ql2300	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
rasacd	Remote Access Auto Connection Driver				
	c:\windows\system32\drivers\rasacd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
rasl2tp	WAN Miniport (L2TP)				
	c:\windows\system32\drivers\rasl2tp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
raspppoe	Remote Access PPPOE Driver				
	c:\windows\system32\drivers\raspppoe.sys				
	Kernel Driver	Yes	Manual		

	Running	OK	Normal	No	Yes
raspti	Direct Parallel				
	c:\windows\system32\drivers\raspti.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdbss	Rdbss				
	c:\windows\system32\drivers\rdbss.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
rdpcdd	RDPCCDD				
	c:\windows\system32\drivers\rdpcdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
rdpdr	Terminal Server Device Redirector Driver				
	c:\windows\system32\drivers\rdpdr.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdpwd	RDPWD				
	c:\windows\system32\drivers\rdpwd.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
redbook	Digital CD Audio Playback Filter Driver				
	c:\windows\system32\drivers\redbook.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
secdrv	Secdrv				
	c:\windows\system32\drivers\secdrv.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
serenum	Serenum Filter Driver				
	c:\windows\system32\drivers\serenum.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
serial	Serial port driver				
	c:\windows\system32\drivers\serial.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
sfloppy	Sfloppy				
	c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
simbad	Simbad	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
sparrow	Sparrow	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
	Normal	No	No		
srv	Srv				
	c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual		
	Running	OK	Normal	No	Yes

```

swenum Software Bus Driver
c:\windows\system32\drivers\swenum.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

symc810 symc810 Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

symc8xx symc8xx Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

symmpi symmpi Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

sym_hi sym_hi Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

sym_u3 sym_u3 Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

tcpip TCP/IP Protocol Driver
c:\windows\system32\drivers\tcpip.sys
Kernel Driver Yes System
Running OK Normal No Yes

tdpipe TDIPIPE
c:\windows\system32\drivers\tdpipe.sys
Kernel Driver No Manual
Stopped OK Ignore No No

tdtcp TDTCIP
c:\windows\system32\drivers\tdtcp.sys
Kernel Driver Yes Manual
Running OK Ignore No Yes

termdd Terminal Device Driver
c:\windows\system32\drivers\termdd.sys
Kernel Driver Yes System
Running OK Normal No Yes

toside TosIde Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

udfs Udfs
c:\windows\system32\drivers\udfs.sys
File System Driver No Disabled
Stopped OK Normal No No

ultra ultra Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

update Microcode Update Driver
c:\windows\system32\drivers\update.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

usbehci Microsoft USB 2.0 Enhanced Host Controller
Miniport Driver
c:\windows\system32\drivers\usbehci.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

```

```

usbhub Microsoft USB Standard Hub Driver
c:\windows\system32\drivers\usbhub.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

usbstor USB Mass Storage Driver
c:\windows\system32\drivers\usbstor.sys
Kernel Driver No Manual
Stopped OK Normal No No

usbuhci Microsoft USB Universal Host Controller
Miniport Driver
c:\windows\system32\drivers\usbuhci.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

vgasave VGA Display Controller.
c:\windows\system32\drivers\vga.sys
Kernel Driver Yes System
Running OK Ignore No Yes

viaide ViaIde Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

volsnap Storage volumes
c:\windows\system32\drivers\volsnap.sys
Kernel Driver Yes Boot
Running OK Normal No Yes

wanarp Remote Access IP ARP Driver
c:\windows\system32\drivers\wanarp.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

wdica WDICA Not Available Kernel Driver
No Manual Stopped OK
Ignore No No

wlbs Network Load Balancing
c:\windows\system32\drivers\wlbs.sys
Kernel Driver No Manual
Stopped OK Normal No No

[Signed Drivers]
Device Name Signed Device Class
Driver Version Driver Date
Manufacturer INF Name Driver Name
Device ID
Communications Port Yes PORTS 5.2.3790.0
10/1/2002 (Standard port types)
msports.inf Not Available
ROOT\*PNP0501\1_0_17_1_0_0
Microsoft System Management BIOS Driver Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\SYSTEM\0002
Microcode Update Device Yes SYSTEM
5.2.3790.0 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\SYSTEM\0001
Plug and Play Software Device Enumerator Yes
SYSTEM 5.2.3790.0 10/1/2002

```

```

(Standard system devices) machine.inf
Not Available ROOT\SYSTEM\0000
Terminal Server Mouse Driver Yes SYSTEM
5.2.3790.0 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\RDP_MOU\0000
Terminal Server Keyboard Driver Yes
SYSTEM 5.2.3790.0 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\RDP_KBD\0000
Terminal Server Device Redirector Yes
SYSTEM 5.2.3790.0 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\RDPDR\0000
Direct Parallel Yes NET 5.2.3790.0
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_PTMINIPORT\0000
WAN Miniport (PPTP) Yes NET 5.2.3790.0
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_PPTPMINIPORT\0000
WAN Miniport (PPPOE) Yes NET
5.2.3790.0 10/1/2002 Microsoft
netrasa.inf Not Available
ROOT\MS_PPPOEMINIPORT\0000
WAN Miniport (IP) Yes NET 5.2.3790.0
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_NDISWANIP\0000
WAN Miniport (L2TP) Yes NET 5.2.3790.0
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_L2TPMINIPORT\0000
Video Codecs Yes MEDIA 5.2.3790.0
10/1/2002 (Standard system devices)
wave.inf Not Available
ROOT\MEDIA\MS_MMVID
Legacy Video Capture Devices Yes MEDIA
5.2.3790.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMVCD
Media Control Devices Yes MEDIA
5.2.3790.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMMCI
Legacy Audio Drivers Yes MEDIA
5.2.3790.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMDRV
Audio Codecs Yes MEDIA 5.2.3790.0
10/1/2002 (Standard system devices)
wave.inf Not Available
ROOT\MEDIA\MS_MMACH
Remote Access IP ARP Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_WANARP\0000
volsnap Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available ROOT\LEGACY_VOLSNAP\0000
VGA Display Controller. Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_VGASAVE\0000

```

TDTCP	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_TDTCP\0000	
TDPIPE	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_TDPIPE\0000	
TCP/IP Protocol Driver	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_TCPIP\0000	
RDPWD	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_RDPWD\0000	
RDPDCCD	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_RDPDCCD\0000	
Remote Access Auto Connection Driver	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_RASACD\0000	
Partition Manager	Not Available	LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_PARTMGR\0000	
Null	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NULL\0000	
NetBios over Tcpip	Not Available	LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NETBT\0000	
NDProxy	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NDPROXY\0000	
NDIS Usermode I/O Protocol	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NDISUIO\0000	
Remote Access NDIS TAPI Driver	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NDISTAPI\0000	
NDIS System Driver	Not Available	LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_NDIS\0000	
mountmgr	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_MOUNTMGR\0000	
mnmdd	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_MNMD\0000	
ksecdd	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available

Available	Not Available	ROOT\LEGACY_KSECDD\0000	
IPSEC driver	Not Available	LEGACYDRIVER	Not Available
Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_IPSEC\0000	
HTTP	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_HTTP\0000	
Generic Packet Classifier	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_GPC\0000	
Fips	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_FIPS\0000	
dmload	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_DMLOAD\0000	
dmboot	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
CRC Disk Filter Driver	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_CRCDISK\0000	
Beeper	Not Available	LEGACYDRIVER	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_BEEP\0000	
AFD Networking Support Environment	Not Available		
LEGACYDRIVER	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Available	Not Available	ROOT\LEGACY_AFD\0000	
Generic volume	Yes	VOLUME	5.2.3790.0
10/1/2002	Microsoft	volume.inf	Not Available
Available			
STORAGE\OLUME\1&30A96598&0&SIGNATURE8B278B			
270FFSET4000LENGT87A3D0000			
Volume Manager	Yes	SYSTEM	5.2.3790.0
10/1/2002	(Standard	system devices)	
machine.inf		Not Available	
ROOT\FTDISK\0000			
Logical Disk Manager	Yes	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ROOT\DMIO\0000			
ACPI Fixed Feature Button	Yes	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
machine.inf			
ACPI\FIXEDBUTTON\2&DABA3FF&0			
ACPI Thermal Zone	Yes	SYSTEM	5.2.3790.0
10/1/2002	(Standard	system devices)	
machine.inf		Not Available	
ACPI\THERMALZONE\THM0			
Secondary IDE Channel	Yes	HDC	
5.2.3790.0	10/1/2002	(Standard	
ATA/ATAPI controllers)	mshdc.inf	Not Available	
PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1			

CD-ROM Drive	Yes	CDROM	5.2.3790.0
10/1/2002	(Standard	CD-ROM drives)	
cdrom.inf	Not Available		
IDE\CDROMCOMPAQ_CRN-			
8245B	2.19	\5&180B77CF&0&0.0.0	
Primary IDE Channel	Yes	HDC	5.2.3790.0
10/1/2002	(Standard	IDE ATA/ATAPI controllers)	
mshdc.inf	Not Available		
PCIIDE\IDECHANNEL\4&2BBEC4C6&0&0			
Standard Dual Channel PCI IDE Controller	Yes		
HDC	5.2.3790.0	10/1/2002	
(Standard	IDE ATA/ATAPI controllers)		
mshdc.inf	Not Available		
PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_02\3&61AAA01&0&F9			
Floppy disk drive	Yes	FLOPPYDISK	
5.2.3790.0	10/1/2002	(Standard	
floppy disk drives) flpydisk.inf		Not Available	
FDC\GENERIC_FLOPPY_DRIVE\6&27F7A21&0&0			
Standard floppy disk controller	Yes	FDC	
5.2.3790.0	10/1/2002	(Standard	
floppy disk controllers)	fdc.inf	Not Available	
ACPI\PNP0700\5&13608CEC&0			
Communications Port	Yes	PORTS	5.2.3790.0
10/1/2002	(Standard	port types)	
msports.inf		Not Available	
ACPI\PNP0501\0			
Extended IO Bus	Yes	SYSTEM	5.2.3790.0
10/1/2002	(Standard	system devices)	
machine.inf		Not Available	
ACPI\PNP0A06\4&1F443D2A&0			
PS/2 Compatible Mouse	Yes	MOUSE	
5.2.3790.0	10/1/2002	Microsoft	
msmouse.inf		Not Available	
ACPI\PNP0F13\4&1F443D2A&0			
Standard 101/102-Key or Microsoft Natural PS/2			
Keyboard	Yes	KEYBOARD	5.2.3790.0
10/1/2002	(Standard	keyboards)	
keyboard.inf		Not Available	
ACPI\PNP0303\4&1F443D2A&0			
System speaker	Yes	SYSTEM	5.2.3790.0
10/1/2002	(Standard	system devices)	
machine.inf		Not Available	
ACPI\PNP0800\4&1F443D2A&0			
Direct memory access controller		Yes	
SYSTEM	5.2.3790.0	(Standard	
(Standard	system devices)	machine.inf	
Not Available			
ACPI\PNP0200\4&1F443D2A&0			
System timer	Yes	SYSTEM	5.2.3790.0
10/1/2002	(Standard	system devices)	
machine.inf		Not Available	
ACPI\PNP0100\4&1F443D2A&0			
Motherboard resources	Yes	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ACPI\PNP0C02\0			
ISAPNP Read Data Port	Yes	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ISAPNP\READDATAPORT\0			

```

Intel(R) 6300ESB LPC Interface Controller - 25A1 Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_25A1&SUBSYS_00000000&REV_0
2\3&61AAA01&0&F8
Base System Device Not Available UNKNOWN Not
Available Not Available Not Available Not
Available Not Available
PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
1\4&2183A681&0&22F0
Base System Device Not Available UNKNOWN Not
Available Not Available Not Available Not
Available Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
1\4&2183A681&0&20F0
Default Monitor Yes MONITOR 5.1.2001.0
6/6/2001 (Standard monitor types)
monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\5&1CAD663B&0&800000
00&01&03
RAGE XL PCI Family (Microsoft Corporation) Yes
DISPLAY 5.10.2600.6014 8/8/2001 ATI
Technologies Inc. atiixpad.inf Not Available
PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
7\4&2183A681&0&18F0
Intel(R) 82801 PCI Bridge - 244E Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_0
A\3&61AAA01&0&F0
USB Root Hub Yes USB 5.2.3790.0
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB20\4&27805AAC&0
Standard Enhanced PCI to USB Host Controller Yes
USB 5.2.3790.0 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&EF
Intel(R) 6300ESB I/O Advanced Programmable Interrupt
Controller - 25AC Yes SYSTEM 6.1.0.1008
6/9/2004 Intel oem1.inf Not Available
PCI\VEN_8086&DEV_25AC&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&ED
Intel(R) 6300ESB Watchdog Timer - 25AB Yes
SYSTEM 6.1.0.1008 6/9/2004
Intel oem1.inf Not Available
PCI\VEN_8086&DEV_25AB&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&EC
USB Root Hub Yes USB 5.2.3790.0
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&24B43ADC&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.0 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&E9
USB Root Hub Yes USB 5.2.3790.0
10/1/2002 (Standard USB Host Controller)

```

```

usbport.inf Not Available
USB\ROOT_HUB\4&312B1C17&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.0 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&E8
HP NC7782 Gigabit Server Adapter Yes NET
8.48.0.0 10/17/2005 Hewlett-
Packard Company oem2.inf Not Available
PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
0\4&19638ECB&0&11E0
HP NC7782 Gigabit Server Adapter Yes NET
8.48.0.0 10/17/2005 Hewlett-
Packard Company oem2.inf Not Available
PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
0\4&19638ECB&0&10E0
Disk drive Yes DISKDRIVE 5.2.3790.0
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_2.
36\5&12B8725B&0&040
Compaq Virtual LUN Yes SYSTEM 5.2.3790.0
10/1/2002 Compaq scsidesv.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CISS\5&12B8725B&0&000
Smart Array 6i Yes SCSIADAPTER
5.68.0.32 5/20/2005 Hewlett-Packard Company
oem0.inf Not Available
PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_0
1\4&19638ECB&0&08E0
Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_25AE&SUBSYS_00000000&REV_0
2\3&61AAA01&0&E0
Intel(R) E7520 PCI Express Root Port C0 - 3599 Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_3599&SUBSYS_00000000&REV_0
C\3&61AAA01&0&30
Intel(R) 6700PXH PCI Express-to-PCI Bridge B - 032A
Yes SYSTEM 5.2.3790.1830
10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_032A&SUBSYS_00000000&REV_0
9\4&253DB27D&0&0220
Intel(R) 6700PXH PCI Express-to-PCI Bridge A - 0329
Yes SYSTEM 5.2.3790.1830
10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_0329&SUBSYS_00000000&REV_0
9\4&253DB27D&0&0020
Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597
Yes SYSTEM 5.2.3790.1830
10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_3597&SUBSYS_00000000&REV_0
C\3&61AAA01&0&20
Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 -
3595 Yes SYSTEM 5.2.3790.1830

```

```

10/1/2002 Intel machine.inf Not
Available
PCI\VEN_8086&DEV_3595&SUBSYS_00000000&REV_0
C\3&61AAA01&0&10
Intel(R) E7520 Memory Controller Hub - 3590 Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_3590&SUBSYS_00000000&REV_0
C\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.0
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_X86_FAMILY_15_MODEL_4\_1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_X86_FAMILY_15_MODEL_4\_0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.0 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor PC Yes COMPUTER
5.2.3790.0 10/1/2002 (Standard
computers) hal.inf Not Available
ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Not Available Not Available Not Available Not
Available Not Available Not Available
HTREE\ROOT\0
Not Available Yes Not Available
2:5.0,2:5.1,2:5.2 Not Available Not
Available Not Available
CCA15109 on CCAPRINT02 (from CAMPBELLBRXP)
in session 1
Not Available Yes Not Available
2:5.0,2:5.1,2:5.2 Not Available Not
Available Not Available Not Available
Labprinter on INFORB (from CAMPBELLBRXP) in
session 1
[Environment Variables]
Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem;C:\Program Files\Microsoft SQL
Server\80\Tools\Binn\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 15 Model 4
Stepping 1, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0401 <SYSTEM>
NUMBER_OF_PROCESSORS 2 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log
<SYSTEM>

```

```

PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
; .WSH
<SYSTEM>
TEMP %SystemRoot%\Temp <SYSTEM>
TMP %SystemRoot%\Temp <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
CL55\Administrator
TMP %USERPROFILE%\Local Settings\Temp
CL55\Administrator

```

[Print Jobs]

Document	Size	Owner	Notify	Status
			Time Submitted	Start Time
			Until Time	Elapsed Time
	Pages Printed	Job ID	Priority	
	Parameters	Driver	Print	
Processor	Host Print Queue	Data Type	Name	

[Network Connections]

Local Name	Remote Name	Type
Status	User Name	
Z:	\\inforb\audit_fdr	Disk Current
Connection	CL55\bcampbell	

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time		
Version	Size	File Date		
system idle process	Not Available	0	0	
Available	Not Available	Not Available	Not	
Available	Not Available	Not Available	Not	
system	Not Available	4	8	0
	1413120	Not Available	Not Available	
	Not Available	Not Available		
smss.exe	Not Available	424	11	
	204800	1413120	10/15/2006 4:31 PM	Not
Available	Not Available	Not Available	Not Available	Not
csrss.exe	Not Available	564	13	Not
Available	Not Available	10/15/2006 4:31 PM	Not	
Available	Not Available	Not Available	Not Available	Not
winlogon.exe	c:\windows\system32\winlogon.exe	604	13	204800
	10/15/2006 4:31 PM	5.2.3790.1830		
(srv03_spl_rtm.050324-1447)	497.00 KB (508,928 bytes)	12/7/2005 1:24 PM		

```

services.exe c:\windows\system32\services.exe
648 9 204800 1413120
10/15/2006 4:31 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 107.50 KB (110,080 bytes)
3/25/2003 6:00 AM
lsass.exe c:\windows\system32\lsass.exe 660 9
204800 1413120 10/15/2006 4:31 PM
5.2.3790.0 (srv03_rtm.030324-2048)
13.00 KB (13,312 bytes) 3/25/2003
6:00 AM
svchost.exe c:\windows\system32\svchost.exe
856 8 204800 1413120
10/15/2006 4:31 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:24 PM
svchost.exe Not Available 928 8
Not Available Not Available
10/15/2006 4:31 PM Not Available Not
Available Not Available
svchost.exe Not Available 1028 8
Not Available Not Available
10/15/2006 4:31 PM Not Available Not
Available Not Available
svchost.exe Not Available 1104 8
Not Available Not Available
10/15/2006 4:31 PM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1116 8 204800 1413120
10/15/2006 4:31 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:24 PM
spoolsv.exe c:\windows\system32\spoolsv.exe
1620 8 204800 1413120
10/15/2006 4:31 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 57.00 KB (58,368 bytes)
12/7/2005 1:24 PM
msdtc.exe Not Available 1652 8 Not
Available Not Available 10/15/2006 4:31 PM Not
Available Not Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1832 8 204800 1413120
10/15/2006 4:31 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:24 PM
inetinfo.exe c:\windows\system32\inetinfo.exe
1904 8 204800 1413120
10/15/2006 4:31 PM 6.0.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:27 PM
svchost.exe Not Available 1992 8
Not Available Not Available
10/15/2006 4:31 PM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
864 8 204800 1413120
10/15/2006 4:32 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:24 PM
svchost.exe c:\windows\system32\svchost.exe
1092 8 204800 1413120
10/15/2006 4:32 PM 5.2.3790.1830

```

```

(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/7/2005 1:24 PM
wmiprvse.exe Not Available 900 8
Not Available Not Available
10/15/2006 4:33 PM Not Available Not
Available Not Available
w3wp.exe c:\windows\system32\inethttp\w3wp.exe
1416 8 204800 1413120
10/15/2006 4:34 PM 6.0.3790.1830
(srv03_spl_rtm.050324-1447) 7.00 KB (7,168 bytes)
12/7/2005 1:26 PM
dllhost.exe c:\windows\system32\dllhost.exe
1648 8 204800 1413120
10/15/2006 4:34 PM 5.2.3790.0
(srv03_rtm.030324-2048) 5.50 KB (5,632 bytes)
3/25/2003 6:00 AM
logon.scr Not Available 3848 4 Not
Available Not Available 10/15/2006 4:41 PM Not
Available Not Available Not Available
csrss.exe Not Available 2392 13 Not
Available Not Available 10/16/2006 11:28 AM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
536 13 204800 1413120
10/16/2006 11:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 497.00 KB (508,928 bytes)
12/7/2005 1:24 PM
rdpclip.exe c:\windows\system32\rdpclip.exe
2472 8 204800 1413120
10/16/2006 11:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 68.00 KB (69,632 bytes)
12/7/2005 1:25 PM
explorer.exe c:\windows\explorer.exe
1332 8 204800 1413120
10/16/2006 11:28 AM 6.00.3790.1830
(srv03_spl_rtm.050324-1447) 1.00 MB (1,050,624 bytes)
12/7/2005 1:25 PM
helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr
r.exe 3288 8 204800 1413120
10/16/2006 11:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 778.00 KB (796,672 bytes)
12/7/2005 1:26 PM
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 340 8 204800 1413120
10/16/2006 11:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 745.00 KB (762,880 bytes)
12/7/2005 1:26 PM
wmiprvse.exe Not Available 1668 8
Not Available Not Available
10/16/2006 11:28 AM Not Available Not
Available Not Available

```

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer
winlogon	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	497.00 KB (508,928 bytes)	12/7/2005
1:24 PM		Microsoft Corporation		
		c:\windows\system32\winlogon.exe		

ntdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
748.50 KB (766,464 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\ntdll.dll
kernel32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1,014.00 KB (1,038,336 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\kernel32.dll
advapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
605.50 KB (620,032 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
627.00 KB (642,048 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\rpcrt4.dll
crypt32 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
582.00 KB (595,968 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\crypt32.dll
msasn1 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
56.50 KB (57,856 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msasn1.dll
msvcrt 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
340.50 KB (348,672 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msvcrt.dll
user32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
574.50 KB (588,288 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\user32.dll
gdi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
273.00 KB (279,552 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\gdi32.dll
nddeapi 5.2.3790.0 (srv03_rtm.030324-2048)
16.00 KB (16,384 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\nddeapi.dll
profmap 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
22.50 KB (23,040 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\profmap.dll
netapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
341.50 KB (349,696 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\netapi32.dll
userenv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
771.00 KB (789,504 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\userenv.dll
psapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
20.00 KB (20,480 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\psapi.dll
regapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
55.00 KB (56,320 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\regapi.dll
secur32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
64.00 KB (65,536 bytes) 12/7/2005

1:24 PM Microsoft Corporation
c:\windows\system32\secur32.dll
setupapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.03 MB (1,079,808 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\setupapi.dll
version 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
18.00 KB (18,432 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\version.dll
winsta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
54.50 KB (55,808 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\winsta.dll
ws2_32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
82.00 KB (83,968 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\ws2_32.dll
ws2help 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
19.50 KB (19,968 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\ws2help.dll
msgina 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.16 MB (1,211,904 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msgina.dll
shsvcs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
131.50 KB (134,656 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\shsvcs.dll
shlwapi 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
313.50 KB (321,024 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\shlwapi.dll
sfc 5.2.3790.0 (srv03_rtm.030324-2048)
4.50 KB (4,608 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\sfc.dll
sfc_os 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
138.00 KB (141,312 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\sfc_os.dll
wintrust 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
162.00 KB (165,888 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wintrust.dll
imagehlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
145.50 KB (148,992 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\imagehlp.dll
ole32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.19 MB (1,245,184 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ole32.dll
comctl32 6.0 (srv03_spl_rtm.050324-1447)
1.00 MB (1,051,136 bytes) 3/24/2005
9:41 PM Microsoft Corporation
c:\windows\winsxs\x86_microsoft.windows.com
mon-controls_6595b64144ccf1df.6.0.3790.1830_x-
ww_7ae38ccf\comctl32.dll
wincard 5.2.3790.0 (srv03_rtm.030324-2048)
98.50 KB (100,864 bytes) 3/25/2003

6:00 AM Microsoft Corporation
c:\windows\system32\wincard.dll
wtsapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
19.00 KB (19,456 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wtsapi32.dll
sxs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
743.50 KB (761,344 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\sxs.dll
winmm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
172.50 KB (176,640 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\winmm.dll
shell32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
7.99 MB (8,379,392 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\shell32.dll
rsaenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
183.98 KB (188,392 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\rsaenh.dll
wldap32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
174.50 KB (178,688 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wldap32.dll
csccdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
100.00 KB (102,400 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\csccdll.dll
dimntfy 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
19.00 KB (19,456 bytes) 12/7/2005
1:28 PM Microsoft Corporation
c:\windows\system32\dimntfy.dll
wlnotify 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
94.50 KB (96,768 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wlnotify.dll
mpr 5.2.3790.0 (srv03_rtm.030324-2048)
56.00 KB (57,344 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\mpr.dll
oleaut32 5.2.3790.1830 543.00 KB (556,032
bytes) 3/25/2003 6:00 AM Microsoft Corporation
c:\windows\system32\oleaut32.dll
winspool 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
147.00 KB (150,528 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\winspool.drv
comctl32 5.82 (srv03_spl_rtm.050324-1447)
585.00 KB (599,040 bytes) 3/24/2005
9:41 PM Microsoft Corporation
c:\windows\winsxs\x86_microsoft.windows.com
mon-controls_6595b64144ccf1df.5.82.3790.1830_x-
ww_lb6f474a\comctl32.dll
uxtheme 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
202.00 KB (206,848 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\uxtheme.dll
clbcatq 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 502.50 KB (514,560 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\clbcatq.dll

comres 2001.12.4720.0 (srv03_rtm.030324-2048)
778.00 KB (796,672 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\comres.dll
wbemprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
20.50 KB (20,992 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll
wbemcomn 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
221.00 KB (226,304 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\wbem\wbemcomn.dll
xpsp2res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.76 MB (2,897,920 bytes) 12/7/2005
1:28 PM Microsoft Corporation
c:\windows\system32\xpsp2res.dll
wbemsvc 5.2.3790.0 (srv03_rtm.030324-2048)
42.50 KB (43,520 bytes) 12/7/2005
12:22 PM Microsoft Corporation
c:\windows\system32\wbem\wbemsvc.dll
fastprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
471.00 KB (482,304 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\wbem\fastprox.dll
msvcpc60 6.05.2144.0 388.00 KB (397,312
bytes) 3/25/2003 6:00 AM Microsoft Corporation
c:\windows\system32\msvcpc60.dll
ntdsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
71.00 KB (72,704 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ntdsapi.dll
dnsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
153.50 KB (157,184 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\dnsapi.dll
services 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
107.50 KB (110,080 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\services.exe
ncobjapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
36.00 KB (36,864 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ncobjapi.dll
scesrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
327.00 KB (334,848 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\scesrv.dll
authz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
66.50 KB (68,096 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\authz.dll
umpnpgmgr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
126.50 KB (129,536 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\umpnpgmgr.dll
eventlog 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
67.50 KB (69,120 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\eventlog.dll
lsass 5.2.3790.0 (srv03_rtm.030324-2048)
13.00 KB (13,312 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\lsass.exe

lsasrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
803.00 KB (822,272 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\lsasrv.dll
samlib 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
46.50 KB (47,616 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\samlib.dll
samsvr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
450.50 KB (461,312 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\samsvr.dll
cryptdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
32.00 KB (32,768 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\cryptdll.dll
msprivs 5.2.3790.0 (srv03_rtm.030324-2048)
46.50 KB (47,616 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\msprivs.dll
kerberos 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
340.50 KB (348,672 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\kerberos.dll
msvl_0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
141.00 KB (144,384 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msvl_0.dll
iphlpapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
92.50 KB (94,720 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\iphlpapi.dll
netlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
409.50 KB (419,328 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\netlogon.dll
w32time 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
222.00 KB (227,328 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\w32time.dll
schannel 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
141.00 KB (144,384 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\schannel.dll
wdigest 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
74.00 KB (75,776 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wdigest.dll
rassfm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
23.00 KB (23,552 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\system32\rassfm.dll
kdcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
213.50 KB (218,624 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\kdcsvc.dll
ntdsa 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.45 MB (1,516,032 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ntdsa.dll
esent 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1,022.50 KB (1,047,040 bytes) 12/7/2005

1:25 PM Microsoft Corporation
c:\windows\system32\esent.dll
ntdsatq 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
29.50 KB (30,208 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ntdsatq.dll
mswsock 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
250.50 KB (256,512 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\mswsock.dll
scecli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
186.50 KB (190,976 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\scecli.dll
ws03res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
793.50 KB (812,544 bytes) 12/7/2005
1:28 PM Microsoft Corporation
c:\windows\system32\ws03res.dll
hnetcfg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
343.50 KB (351,744 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\hnetcfg.dll
wshtcpip 5.2.3790.0 (srv03_rtm.030324-2048)
18.00 KB (18,432 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\wshtcpip.dll
ipsecsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
180.50 KB (184,832 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\ipsecsvc.dll
oakley 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
264.00 KB (270,336 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\oakley.dll
winipsec 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
35.50 KB (36,352 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\winipsec.dll
pstorsvc 5.2.3790.0 (srv03_rtm.030324-2048)
24.00 KB (24,576 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\pstorsvc.dll
psbase 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
84.00 KB (86,016 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\psbase.dll
dssenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
139.98 KB (143,336 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\dssenh.dll
wlbctrl 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
82.00 KB (83,968 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wlbctrl.dll
w3ssl 6.0.3790.0 (srv03_rtm.030324-2048)
15.00 KB (15,360 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\w3ssl.dll
strmfilt 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
84.00 KB (86,016 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\strmfilt.dll

httpapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 24.00 KB (24,576 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\httpapi.dll
 svchost 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 14.00 KB (14,336 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\svchost.exe
 rpcss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 406.00 KB (415,744 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\rpcss.dll
 ntmarta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 120.50 KB (123,392 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\ntmarta.dll
 wzcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 364.50 KB (373,248 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\wzcsvc.dll
 rtutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 34.50 KB (35,328 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\rtutils.dll
 wmi 5.2.3790.0 (srv03_rtm.030324-2048)
 6.50 KB (6,656 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\wmi.dll
 dhcpcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 113.50 KB (116,224 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\dhcpcsvc.dll
 atl 3.05.2283 83.00 KB (84,992 bytes)
 3/25/2003 6:00 AM Microsoft Corporation
 c:\windows\system32\atl.dll
 rastls 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 180.00 KB (184,320 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\rastls.dll
 cryptui 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
 496.50 KB (508,416 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\cryptui.dll
 mprapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 89.00 KB (91,136 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\mprapi.dll
 activeds 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 194.00 KB (198,656 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\activeds.dll
 adsldpc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 146.00 KB (149,504 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\adsldpc.dll
 credui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 162.00 KB (165,888 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\credui.dll
 rasapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 239.50 KB (245,248 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\rasapi32.dll

rasman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 61.50 KB (62,976 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\rasman.dll
 tapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 179.50 KB (183,808 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\tapi32.dll
 raschap 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 119.50 KB (122,368 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\raschap.dll
 schedsv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 197.50 KB (202,240 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\schedsv.dll
 wiarpc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 32.50 KB (33,280 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\wiarpc.dll
 msidle 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 6.50 KB (6,656 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\msidle.dll
 audiosrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 40.50 KB (41,472 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\audiosrv.dll
 wkssvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 130.00 KB (133,120 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\wkssvc.dll
 aelupsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 26.00 KB (26,624 bytes) 12/7/2005
 Microsoft Corporation
 1:28 PM c:\windows\system32\aelupsvc.dll
 apphelp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 146.50 KB (150,016 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\apphelp.dll
 cryptsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 55.50 KB (56,832 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\cryptsvc.dll
 certcli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 227.00 KB (232,448 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\certcli.dll
 vssapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 548.00 KB (561,152 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\vssapi.dll
 es 2001.12.4720.1830 (srv03_spl_rtm.050324-1447)
 233.00 KB (238,592 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\es.dll
 pchsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 39.00 KB (39,936 bytes) 12/7/2005
 Microsoft Corporation
 1:26 PM c:\windows\pchealth\helpctr\binaries\pchsvc
 .dll
 srvsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 93.50 KB (95,744 bytes) 3/25/2003

6:00 AM Microsoft Corporation
 c:\windows\system32\srvsvc.dll
 seclogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 18.50 KB (18,944 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\seclogon.dll
 sens 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 36.50 KB (37,376 bytes) 12/7/2005
 Microsoft Corporation
 1:24 PM c:\windows\system32\sens.dll
 trkwks 5.2.3790.0 (srv03_rtm.030324-2048)
 85.00 KB (87,040 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\trkwks.dll
 wmisvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 140.00 KB (143,360 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wmisvc.dll
 comsvcs 2001.12.4720.1830 (srv03_spl_rtm.050324-1447)
 1.19 MB (1,248,256 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\comsvcs.dll
 browser 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 76.50 KB (78,336 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\browser.dll
 netrap 5.2.3790.0 (srv03_rtm.030324-2048)
 11.50 KB (11,776 bytes) 3/25/2003
 Microsoft Corporation
 6:00 AM c:\windows\system32\netrap.dll
 wbemcore 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 497.50 KB (509,440 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\wbemcore.dll
 esscli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 250.00 KB (256,000 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\esscli.dll
 wmiutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 93.50 KB (95,744 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\wmiutils.dll
 repdrvfs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 172.50 KB (176,640 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\repdrvfs.dll
 wmiprvsd 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 404.00 KB (413,696 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\wmiprvsd.dll
 wbemess 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 271.50 KB (278,016 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\wbemess.dll
 ncprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 46.50 KB (47,616 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\wbem\ncprov.dll
 actxprxy 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 96.50 KB (98,816 bytes) 12/7/2005
 Microsoft Corporation
 1:25 PM c:\windows\system32\actxprxy.dll

netman 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 258.50 KB (264,704 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\netman.dll
 netshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 1.73 MB (1,812,992 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\netshell.dll
 clusapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 60.00 KB (61,440 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\clusapi.dll
 wininet 6.00.3790.1830 (srv03_spl_rtm.050324-1447) 646.00 KB (661,504 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\wininet.dll
 wzcsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 41.00 KB (41,984 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\wzcsapi.dll
 netcfgx 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 763.00 KB (781,312 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\netcfgx.dll
 wbemcons 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 45.50 KB (46,592 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\wbem\wbemcons.dll
 rasdlg 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 663.00 KB (678,912 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\rasdlg.dll
 rasadhlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 7.50 KB (7,680 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\rasadhlp.dll
 spoolsv 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 57.00 KB (58,368 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\spoolsv.exe
 spoolss 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 85.00 KB (87,040 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\spoolss.dll
 localspl 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 339.00 KB (347,136 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\localspl.dll
 cnbjmon 5.2.3790.1224 (dnsvr\skatari).040514-1058) 46.50 KB (47,616 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\cnbjmon.dll
 pjlmmon 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 15.00 KB (15,360 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\pjlmmon.dll
 tcpmon 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 47.00 KB (48,128 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\tcpmon.dll
 wsnmp32 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 43.00 KB (44,032 bytes) 12/7/2005

1:24 PM Microsoft Corporation
 c:\windows\system32\wsnmp32.dll
 tcpmib 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 17.50 KB (17,920 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\tcpmib.dll
 wsock32 5.2.3790.0 (srv03_rtm.030324-2048) 22.00 KB (22,528 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\wsock32.dll
 mgmtapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 15.50 KB (15,872 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\mgmtapi.dll
 snmpapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 19.50 KB (19,968 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\snmpapi.dll
 usbmon 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 17.00 KB (17,408 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\usbmon.dll
 winnr 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 17.00 KB (17,408 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\winnr.dll
 wshqos 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 24.00 KB (24,576 bytes) 12/7/2005
 1:24 PM Microsoft Corporation
 c:\windows\system32\wshqos.dll
 win32spl 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 100.50 KB (102,912 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\win32spl.dll
 inetpp 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 75.00 KB (76,800 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\inetpp.dll
 icmp 5.2.3790.0 (srv03_rtm.030324-2048) 4.50 KB (4,608 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\icmp.dll
 ps5ui 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 135.00 KB (138,240 bytes) 2/1/2006 3:17 PM
 Microsoft Corporation
 c:\windows\system32\ps5ui.dll
 unidrvui 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 201.50 KB (206,336 bytes) 2/1/2006 3:17 PM
 Microsoft Corporation
 c:\windows\system32\spool\drivers\w32x86\3\unidrvui.dll
 ersvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447) 24.00 KB (24,576 bytes) 12/7/2005
 1:25 PM Microsoft Corporation
 c:\windows\system32\ersvc.dll
 inetinfo 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\inetinfo.exe
 iisutil 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 164.00 KB (167,936 bytes) 12/7/2005

1:28 PM Microsoft Corporation
 c:\windows\system32\inetsrv\iisutil.dll
 rpcrnf 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 4.00 KB (4,096 bytes) 12/7/2005
 1:26 PM Microsoft Corporation
 c:\windows\system32\inetsrv\rpcrnf.dll
 iisrttl 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 138.50 KB (141,824 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\iisrttl.dll
 iisadmin 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 21.00 KB (21,504 bytes) 12/7/2005
 1:26 PM Microsoft Corporation
 c:\windows\system32\inetsrv\iisadmin.dll
 coadmin 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 62.50 KB (64,000 bytes) 12/7/2005
 1:26 PM Microsoft Corporation
 c:\windows\system32\inetsrv\coadmin.dll
 admwprox 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 47.00 KB (48,128 bytes) 12/7/2005
 1:28 PM Microsoft Corporation
 c:\windows\system32\admwprox.dll
 iisfcg 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 1.08 MB (1,133,056 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\inetsrv\iisfcg.dll
 metadata 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 229.00 KB (234,496 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\inetsrv\metadata.dll
 msxml3 8.70.1104.0 1.06 MB (1,107,456 bytes) 12/7/2005 1:25 PM Microsoft Corporation
 c:\windows\system32\msxml3.dll
 svcxext 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 43.50 KB (44,544 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\inetsrv\svcxext.dll
 security 5.2.3790.0 (srv03_rtm.030324-2048) 5.50 KB (5,632 bytes) 3/25/2003
 6:00 AM Microsoft Corporation
 c:\windows\system32\security.dll
 iismap 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 58.50 KB (59,904 bytes) 12/7/2005
 1:28 PM Microsoft Corporation
 c:\windows\system32\iismap.dll
 wamreg 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 54.50 KB (55,808 bytes) 12/7/2005
 1:27 PM Microsoft Corporation
 c:\windows\system32\inetsrv\wamreg.dll
 iisw3adm 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 211.00 KB (216,064 bytes) 12/7/2005
 1:28 PM Microsoft Corporation
 c:\windows\system32\inetsrv\iisw3adm.dll
 w3cache 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 19.00 KB (19,456 bytes) 12/7/2005
 1:26 PM Microsoft Corporation
 c:\windows\system32\inetsrv\w3cache.dll
 w3tp 6.0.3790.1830 (srv03_spl_rtm.050324-1447) 13.00 KB (13,312 bytes) 12/7/2005

1:28 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3tp.dll
lonsint 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
13.00 KB (13,312 bytes) 12/7/2005
1:27 PM Microsoft Corporation
c:\windows\system32\inetsrv\lonsint.dll
termsrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
239.00 KB (244,736 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\termsrv.dll
icaapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.50 KB (12,800 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\icaapi.dll
mstlsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
116.00 KB (118,784 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\mstlsapi.dll
rdpwsx 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
101.63 KB (104,072 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\rdpwsx.dll
w3wp 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3wp.exe
w3core 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
340.50 KB (348,672 bytes) 12/7/2005
1:27 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3core.dll
w3comlog 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
10.50 KB (10,752 bytes) 12/7/2005
1:27 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3comlog.dll
w3dt 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
38.50 KB (39,424 bytes) 12/7/2005
1:27 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3dt.dll
iisres 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
120.00 KB (122,880 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\system32\inetsrv\iisres.dll
w3isapi 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
61.00 KB (62,464 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3isapi.dll
gzip 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
25.00 KB (25,600 bytes) 12/7/2005
1:27 PM Microsoft Corporation
c:\windows\system32\inetsrv\gzip.dll
"\\?\c:\inetpub\wwwroot\tpcc.dll"
"\\?\c:\inetpub\wwwroot\tpcc.dll"
msvcr71 7.10.3052.4 340.00 KB (348,160
bytes) 9/14/2006 9:53 AM Microsoft Corporation
c:\windows\system32\msvcr71.dll
tpcc_com Not Available 11.50 KB (11,776 bytes)
12/7/2005 2:01 PM Not Available
c:\inetpub\wwwroot\tpcc_com.dll
tpcc_odbc Not Available 21.00 KB (21,504 bytes)
12/7/2005 2:01 PM Not Available
c:\inetpub\wwwroot\tpcc_odbc.dll

odbc32 3.526.1830.0 (srv03_spl_rtm.050324-1447)
240.00 KB (245,760 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\odbc32.dll
comdlg32 6.0.0.3790.1830 (srv03_spl_rtm.050324-1447)
274.50 KB (281,088 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
odbcint 3.526.1830.0 (srv03_spl_rtm.050324-1447)
92.00 KB (94,208 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\odbcint.dll
sqlserv32 2000.086.1830.00 (srv03_spl_rtm.050324-
1447) 436.00 KB (446,464 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\sqlserv32.dll
sqlunirl 2000.080.0728.00 176.56 KB (180,800
bytes) 12/7/2005 1:24 PM Microsoft Corporation
c:\windows\system32\sqlunirl.dll
sqlserv32 2000.086.1830.00 (srv03_spl_rtm.050324-
1447) 88.00 KB (90,112 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\sqlserv32.rll
odbccp32 3.526.1830.0 (srv03_spl_rtm.050324-1447)
100.00 KB (102,400 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\odbccp32.dll
dbnetlib 2000.086.1830 (srv03_spl_rtm.050324-1447)
112.00 KB (114,688 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\dbnetlib.dll
tpcc_com_all 1, 0, 0, 1 104.00 KB
(106,496 bytes) 12/7/2005 2:01 PM
c:\inetpub\wwwroot\tpcc_com_all.dll
dllhost 5.2.3790.0 (srv03_rtm.030324-2048)
5.50 KB (5,632 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\dllhost.exe
txflog 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 96.50 KB (98,816 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\txflog.dll
xolehlp 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 10.50 KB (10,752 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\xolehlp.dll
msdtcprx 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 455.50 KB (466,432 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msdtcprx.dll
mtxclu 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 77.00 KB (78,848 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\mtxclu.dll
resutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
63.50 KB (65,024 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\resutils.dll
catsrv 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 273.00 KB (279,552 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\catsrv.dll

clbcatex 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 102.50 KB (104,960 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\clbcatex.dll
rdpsnd 5.2.3790.0 (srv03_rtm.030324-2048)
18.00 KB (18,432 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\rdpsnd.dll
scredir 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
28.00 KB (28,672 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\scredir.dll
cscui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
319.50 KB (327,168 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\cscui.dll
msacm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
22.00 KB (22,528 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msacm32.drvc
msacm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
69.50 KB (71,168 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\msacm32.dll
imaadp32 5.2.3790.0 (srv03_rtm.030324-2048)
15.50 KB (15,872 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\imaadp32.acm
msadp32 5.2.3790.0 (srv03_rtm.030324-2048)
14.50 KB (14,848 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\msadp32.acm
msg711 5.2.3790.0 (srv03_rtm.030324-2048)
10.00 KB (10,240 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\msg711.acm
msgsm32 5.2.3790.0 (srv03_rtm.030324-2048)
20.50 KB (20,992 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\msgsm32.acm
tssoft32 1.01 9.50 KB (9,728 bytes)
3/25/2003 6:00 AM DSP GROUP, INC.
c:\windows\system32\tssoft32.acm
tsd32 1.03 16.50 KB (16,896 bytes)
3/25/2003 6:00 AM DSP GROUP, INC.
c:\windows\system32\tsd32.dll
msg723 5.2.3790.1830 120.00 KB (122,880
bytes) 12/7/2005 1:25 PM Microsoft Corporation
c:\windows\system32\msg723.acm
msaud32 8.00.00.4487 288.00 KB (294,912
bytes) 3/25/2003 6:00 AM Microsoft Corporation
c:\windows\system32\msaud32.acm
sl_anet 3.02 84.00 KB (86,016 bytes)
3/25/2003 6:00 AM Sipro Lab Telecom Inc.
c:\windows\system32\sl_anet.acm
l3codeca 1, 9, 0, 0305 284.00 KB (290,816
bytes) 3/25/2003 6:00 AM Fraunhofer Institut
Integrierte Schaltungen IIS
c:\windows\system32\l3codeca.acm
printui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
563.00 KB (576,512 bytes) 3/25/2003
6:00 AM Microsoft Corporation
c:\windows\system32\printui.dll

cfgmgr32 5.2.3790.0 (srv03_rtm.030324-2048)
 17.50 KB (17,920 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\cfgmgr32.dll
 cabinet 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 81.50 KB (83,456 bytes) 3/24/2005
 Microsoft Corporation
 c:\windows\system32\cabinet.dll
 cryptnet 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
 61.00 KB (62,464 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\cryptnet.dll
 sensapi 5.2.3790.0 (srv03_rtm.030324-2048)
 6.00 KB (6,144 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\sensapi.dll
 rdpclip 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 68.00 KB (69,632 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\rdpclip.exe
 urlmon 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 673.00 KB (689,152 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32?urlmon.dll
 explorer 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 1.00 MB (1,050,624 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\explorer.exe
 browseui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 1,009.00 KB (1,033,216 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\browseui.dll
 shdocvw 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 1.43 MB (1,502,720 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\shdocvw.dll
 themeui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 377.50 KB (386,560 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\themeui.dll
 msimg32 5.2.3790.0 (srv03_rtm.030324-2048)
 4.50 KB (4,608 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\msimg32.dll
 linkinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 19.00 KB (19,456 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\linkinfo.dll
 ntshrui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 140.00 KB (143,360 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\ntshrui.dll
 webcheck 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 272.50 KB (279,040 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\webcheck.dll
 stobject 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 120.50 KB (123,392 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\stobject.dll
 batmeter 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 31.50 KB (32,256 bytes) 12/7/2005

1:25 PM Microsoft Corporation
 c:\windows\system32\batmeter.dll
 powrprof 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 16.50 KB (16,896 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\powrprof.dll
 shdoclc 6.00.3790.0 (srv03_rtm.030324-2048)
 588.50 KB (602,624 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\shdoclc.dll
 browselc 6.00.3790.0 (srv03_rtm.030324-2048)
 62.00 KB (63,488 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\browselc.dll
 mprui 5.2.3790.0 (srv03_rtm.030324-2048)
 49.00 KB (50,176 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\mprui.dll
 netui0 5.2.3790.0 (srv03_rtm.030324-2048)
 75.50 KB (77,312 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\netui0.dll
 netui2 5.2.3790.0 (srv03_rtm.030324-2048)
 309.50 KB (316,928 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\netui2.dll
 netuil 5.2.3790.0 (srv03_rtm.030324-2048)
 184.00 KB (188,416 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\netuil.dll
 netmsg 5.2.3790.0 (srv03_rtm.030324-2048)
 178.00 KB (182,272 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\netmsg.dll
 netplwiz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 855.00 KB (875,520 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\netplwiz.dll
 drprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 14.00 KB (14,336 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\drprov.dll
 ntlanman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 43.50 KB (44,544 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\ntlanman.dll
 davclnt 5.2.3790.0 (srv03_rtm.030324-2048)
 23.50 KB (24,064 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\davclnt.dll
 helpctr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 778.00 KB (796,672 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\helpctr.exe
 hcappres 5.2.3790.0 (srv03_rtm.030324-2048)
 6.50 KB (6,656 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\hcappres.dll
 itss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 133.50 KB (136,704 bytes) 12/7/2005

1:25 PM Microsoft Corporation
 c:\windows\system32\itss.dll
 pchshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 104.50 KB (107,008 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\pchshell.dll
 mlang 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 577.50 KB (591,360 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\mlang.dll
 mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 2.96 MB (3,108,864 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\mshtml.dll
 msls31 3.10.349.0 142.00 KB (145,408 bytes) 12/7/2005 1:25 PM Microsoft Corporation
 c:\windows\system32\msls31.dll
 msimtf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 156.00 KB (159,744 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\msimtf.dll
 msctf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 311.00 KB (318,464 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\msctf.dll
 jscript 5.6.0.8827 448.00 KB (458,752 bytes) 12/7/2005 1:25 PM Microsoft Corporation
 c:\windows\system32\jscript.dll
 imm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 108.00 KB (110,592 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\imm32.dll
 mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 454.50 KB (465,408 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\mshtml.dll
 vbscript 5.6.0.8827 392.00 KB (401,408 bytes) 12/7/2005 1:24 PM Microsoft Corporation
 c:\windows\system32\vbscript.dll
 msinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 376.00 KB (385,024 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\msinfo.dll
 mfc42u 6.06.8063.0 1.11 MB (1,163,776 bytes) 12/7/2005 1:25 PM Microsoft Corporation
 c:\windows\system32\mfc42u.dll
 riched32 5.2.3790.0 (srv03_rtm.030324-2048)
 3.50 KB (3,584 bytes) 3/25/2003
 Microsoft Corporation
 c:\windows\system32\riched32.dll
 riched20 5.31.23.1224 439.00 KB (449,536 bytes) 12/7/2005 1:24 PM Microsoft Corporation
 c:\windows\system32\riched20.dll
 audiodev 5.2.3790.3700 (srv03_spl_rtm.050324-1447)
 470.00 KB (481,280 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\audiodev.dll
 mvmc core 10.00.00.3700 (srv03_spl_rtm.050324-1447)
 2.21 MB (2,314,240 bytes) 12/7/2005
 Microsoft Corporation
 c:\windows\system32\mvmc core.dll

```

wmasf 10.00.00.3700 (srv03_spl_rtm.050324-1447)
220.50 KB (225,792 bytes) 12/7/2005
Microsoft Corporation
c:\windows\system32\wmasf.dll
mydocs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
90.00 KB (92,160 bytes) 12/7/2005
Microsoft Corporation
c:\windows\system32\mydocs.dll
helpsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
745.00 KB (762,880 bytes) 12/7/2005
Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe

[Services]

Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507

```

```

27\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Running
Manual Own Process
c:\windows\system32\dlhloshost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmdadmin Stopped Manual Share Process
c:\windows\system32\dmdadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Dnscache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Running Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto
Share Process

```

```

c:\windows\system32\inetrv\inetinfo.exe
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmSrv Stopped Disabled Own
Process c:\windows\system32\ismsrv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Running
Auto Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrv
Stopped Disabled Own Process
c:\windows\system32\mnmsrv.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 1
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Running Manual Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process "c:\program
files\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Running
Auto Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT Authority\NetworkService 0
Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process

```

```

c:\windows\system32\rsopro.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0
Telephony Tapisrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termrvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdmfr.exe
Normal NT AUTHORITY\LocalService 0
Upload Manager uploadmgr Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
World Wide Web Publishing Service W3SVC
Running Auto Share Process
c:\windows\system32\svchost.exe -k iissvc
Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```



```

Windows Management Instrumentation Driver Extensions
  Wmi Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
  Manual Own Process
  c:\windows\system32\wbem\wmiaprv.exe
  Normal LocalSystem 0
Automatic Updates wuauclt Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Wireless Configuration WZCSVC Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
  Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
  Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User

Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Diagnostic Utility All
Users:HP System Tools\HP Array Diagnostic Utility All
Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM

```

```

Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories CL55\Administrator:Accessories
CL55\Administrator
Accessories\Accessibility
CL55\Administrator:Accessories\Accessibilit
y CL55\Administrator
Accessories\Entertainment
CL55\Administrator:Accessories\Entertainmen
t CL55\Administrator
Administrative Tools
CL55\Administrator:Administrative Tools
CL55\Administrator
Startup CL55\Administrator:Startup
CL55\Administrator

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini CL55\Administrator
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object Not
Available
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item Value
Version 6.0.3790.1830
Build 63790.1830

```

```

Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Labprinter on INFORB (from
CAMPBELLBRXP) in session 1,winspool,TS001

Cipher Strength 128-bit
Content Advisor Disabled
IEAK Install No

[File Versions]

File Version Size Date Path
Company
actxprxy.dll 6.0.3790.1830 97 KB
3/24/2005 6:55:26 PM
C:\WINDOWS\system32 Microsoft Corporation

advpack.dll 6.0.3790.1830 98 KB
3/24/2005 6:55:28 PM
C:\WINDOWS\system32 Microsoft Corporation

asctrls.ocx 6.0.3790.0 90 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

browselc.dll 6.0.3790.0 62 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

browseui.dll 6.0.3790.1830 1,009 KB
3/24/2005 6:56:10 PM
C:\WINDOWS\system32 Microsoft Corporation

cdfview.dll 6.0.3790.1830 149 KB
3/24/2005 6:56:32 PM
C:\WINDOWS\system32 Microsoft Corporation

comctl32.dll 5.82.3790.1830 585 KB
3/24/2005 6:57:56 PM
C:\WINDOWS\system32 Microsoft Corporation

dxtrans.dll 6.3.3790.1830 205 KB
3/24/2005 7:00:58 PM
C:\WINDOWS\system32 Microsoft Corporation

dxtmsft.dll 6.3.3790.1830 355 KB
3/24/2005 7:00:58 PM
C:\WINDOWS\system32 Microsoft Corporation

iecont.dll <File Missing> Not Available
Not Available Not Available Not
Available
iecontlc.dll <File Missing> Not Available
Not Available Not Available Not
Available
iedkcs32.dll 16.0.3790.1830 324 KB
3/24/2005 7:04:58 PM
C:\WINDOWS\system32 Microsoft Corporation

iepeers.dll 6.0.3790.1830 248 KB
3/24/2005 7:04:58 PM

```

```

C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll 6.0.3790.1830 61 KB
3/24/2005 7:04:58 PM
C:\WINDOWS\system32 Microsoft Corporation
ieunit.inf Not Available 24 KB
3/24/2005 7:04:58 PM
C:\WINDOWS\system32 Not Available
iexplore.exe 6.0.3790.1830 92 KB
3/24/2005 7:04:58 PM C:\Program
Files\Internet Explorer Microsoft Corporation
imgutil.dll 6.0.3790.1830 38 KB
3/24/2005 7:05:04 PM
C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl 6.0.3790.1830 358 KB
3/24/2005 7:05:06 PM
C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll 6.0.3790.0 109 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
inseng.dll 6.0.3790.1830 94 KB
3/24/2005 7:05:06 PM
C:\WINDOWS\system32 Microsoft Corporation
mlang.dll 6.0.3790.1830 578 KB 3/24/2005
7:07:20 PM C:\WINDOWS\system32 Microsoft
Corporation
msencode.dll 2002.10.4.0 112 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 ?????v??
mshta.exe 6.0.3790.1830 30 KB 3/24/2005
7:07:26 PM C:\WINDOWS\system32 Microsoft
Corporation
mshtml.dll 6.0.3790.1830 3,036 KB
3/24/2005 7:07:26 PM
C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb 6.0.3790.1830 1,320 KB
3/24/2005 7:07:26 PM
C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll 6.0.3790.1830 455 KB
3/24/2005 7:07:26 PM
C:\WINDOWS\system32 Microsoft Corporation
mshtmlr.dll 6.0.3790.1830 56 KB
3/24/2005 7:07:26 PM
C:\WINDOWS\system32 Microsoft Corporation
msident.dll 6.0.3790.1830 48 KB
3/24/2005 7:07:28 PM
C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll 6.0.3790.0 15 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

```

```

msieftpl.dll 6.0.3790.1830 244 KB
3/24/2005 7:07:28 PM
C:\WINDOWS\system32 Microsoft Corporation
msrating.dll 6.0.3790.1830 144 KB
3/24/2005 7:07:36 PM
C:\WINDOWS\system32 Microsoft Corporation
mstime.dll 6.0.3790.1830 523 KB
3/24/2005 7:07:38 PM
C:\WINDOWS\system32 Microsoft Corporation
occache.dll 6.0.3790.1830 94 KB
3/24/2005 7:08:34 PM
C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx 6.3.3790.1830 83 KB
3/24/2005 7:12:26 PM
C:\WINDOWS\system32 Intel Corporation
sendmail.dll 6.0.3790.1830 56 KB
3/24/2005 7:13:36 PM
C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll 6.0.3790.0 589 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll 6.0.3790.1830 1,468 KB
3/24/2005 7:13:36 PM
C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll 6.0.3790.1830 25 KB
3/24/2005 7:13:36 PM
C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll 6.0.3790.1830 314 KB
3/24/2005 7:13:40 PM
C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx 1.3.0.3130 58 KB 3/25/2003
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
url.dll 6.0.3790.1830 37 KB 3/24/2005
7:26:12 PM C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll 6.0.3790.1830 673 KB
3/24/2005 7:26:12 PM
C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll 6.0.3790.1830 273 KB
3/24/2005 7:26:16 PM
C:\WINDOWS\system32 Microsoft Corporation
wininet.dll 6.0.3790.1830 646 KB
3/24/2005 7:26:18 PM
C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]
Item Value
Connection Preference Never dial

```

```

LAN Settings
AutoConfigProxy wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]
[Summary]
Item Value
Page Refresh Type Automatic
Temporary Internet Files Folder C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space Not Available
Available Disk Space Not Available
Maximum Cache Size Not Available
Available Cache Size Not Available

[List of Objects]
Program File Status CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]
[Summary]
Item Value
Content Advisor Disabled

[Personal Certificates]
Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]
Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]
Name
No publisher information available

[Security]
Zone Security Level
My Computer Custom
Local intranet Custom
Trusted sites Custom

```

Internet Custom
Restricted sites Custom

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server = myserver; UID= sa; pwd=; DATABASE= tpcc; The single queue TpcAllTxn object was used, with the Min and Max both being set to 62 queues. Delivery threads were set under the TPCC key in the registry.

Internet Information Server Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 9/14/2006 - 9:53 AM

Value 0
Name: ListenBackLog
Type: REG_DWORD
Data: 0x8ca0

Value 1
Name: PoolThreadLimit
Type: REG_DWORD
Data: 0x1ffc

Value 2
Name: MaxPoolThreads
Type: REG_DWORD
Data: 0xffe

Value 3
Name: ThreadTimeout
Type: REG_DWORD
Data: 0x15180

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Performance
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Value 0
Name: Library
Type: REG_SZ
Data: infoctrs.dll

Value 1
Name: Open
Type: REG_SZ
Data: OpenINFOPerformanceData

Value 2
Name: Close
Type: REG_SZ
Data: CloseINFOPerformanceData

Value 3
Name: Collect
Type: REG_SZ
Data: CollectINFOPerformanceData

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: infoctrs.ini

Value 5
Name: Last Counter
Type: REG_DWORD
Data: 0xc4c

Value 6
Name: Last Help
Type: REG_DWORD
Data: 0xc4d

Value 7
Name: First Counter
Type: REG_DWORD
Data: 0xc0c

Value 8
Name: First Help
Type: REG_DWORD
Data: 0xc0d

Value 9
Name: Object List
Type: REG_SZ
Data: 3084

Value 10
Name: Library Validation Code

Type: REG_BINARY
Data:
00000000 00 fa 22 9f 67 fb c5 01 - 00 20 00 00 00
00 00 00 .d*.gûÅ..

World Wide Web Service Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC
Class Name: <NO CLASS>
Last Write Time: 10/18/2006 - 10:08 AM

Value 0
Name: Type
Type: REG_DWORD
Data: 0x20

Value 1
Name: Start
Type: REG_DWORD
Data: 0x2

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: ImagePath
Type: REG_EXPAND_SZ
Data: %SystemRoot%\System32\svchost.exe
-k iissvcs

Value 4
Name: DisplayName
Type: REG_SZ
Data: World Wide Web Publishing Service

Value 5
Name: DependOnService
Type: REG_MULTI_SZ
Data: RPCSS
HTTPFilter
IISADMIN

Value 6
Name: DependOnGroup
Type: REG_MULTI_SZ
Data:

Value 7

Name: ObjectName
 Type: REG_SZ
 Data: LocalSystem

Value 8
 Name: Description
 Type: REG_SZ
 Data: Provides Web connectivity and administration through the Internet Information Services Manager

Value 9
 Name: FailureActions
 Type: REG_BINARY
 Data:
 00000000 80 51 01 00 00 00 00 00 - 00 00 00 00 03
 00 00 00 .Q.....
 00000010 43 00 4c 00 01 00 00 00 - 01 00 00 00 01
 00 00 00 C.L.....
 01 00 00 00 01 00 00 00 - 01 00 00 00

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 3:01 PM

Value 0
 Name: MajorVersion
 Type: REG_DWORD
 Data: 0x6

Value 1
 Name: MinorVersion
 Type: REG_DWORD
 Data: 0

Value 2
 Name: InstallPath
 Type: REG_SZ
 Data: C:\WINDOWS\system32\inetsrv

Value 3
 Name: AccessDeniedMessage
 Type: REG_SZ
 Data: Error: Access is Denied.

Value 4
 Name: ServiceDll
 Type: REG_EXPAND_SZ
 Data: C:\WINDOWS\system32\inetsrv\iisw3adm.dll

Value 5
 Name: AcceptExOutstanding
 Type: REG_DWORD
 Data: 0x28

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch

Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Value 0
 Name: Library
 Type: REG_SZ
 Data: C:\WINDOWS\system32\inetsrv\w3ctrs.dll

Value 1
 Name: Open
 Type: REG_SZ
 Data: OpenW3PerformanceData

Value 2
 Name: Close
 Type: REG_SZ
 Data: CloseW3PerformanceData

Value 3
 Name: Collect
 Type: REG_SZ
 Data: CollectW3PerformanceData

Value 4
 Name: PerfIniFile
 Type: REG_SZ
 Data: w3ctrs.ini

Value 5
 Name: Last Counter
 Type: REG_DWORD
 Data: 0xd44

Value 6
 Name: Last Help
 Type: REG_DWORD
 Data: 0xd45

Value 7
 Name: First Counter
 Type: REG_DWORD
 Data: 0xc4e

Value 8
 Name: First Help

Type: REG_DWORD
 Data: 0xc4f

Value 9
 Name: Object List
 Type: REG_SZ
 Data: 3150 3324

Value 10
 Name: Library Validation Code
 Type: REG_BINARY
 Data:
 00000000 00 27 54 a0 67 fb c5 01 - 00 5e 00 00 00
 00 00 00 .T gŭĂ..^.....

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Value 0
 Name: Security
 Type: REG_BINARY
 Data:
 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
 00 00 00Ă.....
 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
 80 14 00 0.....
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
 00 00 00 Ÿ.....
 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
 01 02 00Ÿ...
 00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
 00 18 00
 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
 00 00 00 Ÿ.....
 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
 01 00 00
 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
 01 02 00
 00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
 00 14 00
 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
 00 00 00
 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
 00 00 05Ÿ.....
 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
 00 00 05 ...#.....
 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
 00 00 00
 Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum
 Class Name: <NO CLASS>
 Last Write Time: 10/18/2006 - 10:08 AM

Value 0
 Name: 0
 Type: REG_SZ

Data: Root\LEGACY_W3SVC\0000

Value 1
 Name: Count
 Type: REG_DWORD
 Data: 0x1

Value 2
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x1

TPCC Application Registry Parameters

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC
 Class Name: <NO CLASS>
 Last Write Time: 10/14/2006 - 3:49 PM

Value 0
 Name: Path
 Type: REG_SZ
 Data: C:\Inetpub\wwwroot\

Value 1
 Name: NumberOfDeliveryThreads
 Type: REG_DWORD
 Data: 0x19

Value 2
 Name: MaxConnections
 Type: REG_DWORD
 Data: 0x88b8

Value 3
 Name: MaxPendingDeliveries
 Type: REG_DWORD
 Data: 0x7d0

Value 4
 Name: DB_Protocol
 Type: REG_SZ
 Data: ODBC

Value 5
 Name: TxnMonitor
 Type: REG_SZ
 Data: COM

Value 6
 Name: DbServer
 Type: REG_SZ
 Data: oak_ip

Value 7
 Name: DbName
 Type: REG_SZ
 Data: tpcc

Value 8
 Name: DbUser
 Type: REG_SZ
 Data: sa

Value 9
 Name: DbPassword
 Type: REG_SZ
 Data:

Value 10
 Name: COM_SinglePool
 Type: REG_SZ
 Data: YES

Value 11
 Name: CallNoDuplicatesNewOrder
 Type: REG_DWORD
 Data: 0x1

Value 12
 Name: ConnectDelay
 Type: REG_DWORD
 Data: 0x1

Benchcraft Profile

Profile: oak_25416_12cl_24_eng-pmt-fixed
 File Path: C:\Program
 Files\BenchCraft\oak_25416_12cl_24_eng-pmt-fixed.xml
 Version: 5

Number of Engines: 24

Name: RTE1
 Description:
 Directory: c:\blog\rtel.log
 Machine: n25
 Parameter Set: 2.2
 Index: 1
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER44265281
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE1_5
 Description:
 Directory: c:\blog\rtel_5.log
 Machine: n25
 Parameter Set: 2.2
 Index: 10000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER17277125
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Name: RTE2
 Description:
 Directory: c:\blog\рте2.log
 Machine: n26
 Parameter Set: 2.2
 Index: 20000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER53164609
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE2_5
 Description:
 Directory: c:\blog\рте2_5.log
 Machine: n26
 Parameter Set: 2.2
 Index: 30000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER18656734
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Name: RTE3
 Description:
 Directory: c:\blog\рте3.log
 Machine: n27
 Parameter Set: 2.2
 Index: 40000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER3439676359
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0

Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE3_5
 Description:
 Directory: c:\blog\rte3_5.log
 Machine: n27
 Parameter Set: 2.2
 Index: 50000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER19687484
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

 Name: RTE4
 Description:
 Directory: c:\blog\rte4.log
 Machine: n28
 Parameter Set: 2.2
 Index: 60000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER4439706187
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE4_5
 Description:
 Directory: c:\blog\rte4_5.log
 Machine: n28
 Parameter Set: 2.2
 Index: 70000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER20708781
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

 Name: RTE5
 Description:
 Directory: c:\blog\rte5.log
 Machine: n29
 Parameter Set: 2.2
 Index: 80000000
 Seed: 4678

Configured Users: 10590
 Pipe Name: DRIVER5346413218
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE5_5
 Description:
 Directory: c:\blog\rte5_5.log
 Machine: n29
 Parameter Set: 2.2
 Index: 90000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER21731906
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

 Name: RTE6
 Description:
 Directory: c:\blog\rte6.log
 Machine: n30
 Parameter Set: 2.2
 Index: 100000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER62226046
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE6_5
 Description:
 Directory: c:\blog\rte6_5.log
 Machine: n30
 Parameter Set: 2.2
 Index: 110000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER22750671
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

 Name: RTE7
 Description:

Directory: c:\blog\rte7.log
 Machine: n45
 Parameter Set: 2.2
 Index: 120000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER72289718
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE7_5
 Description:
 Directory: c:\blog\rte7_5.log
 Machine: n45
 Parameter Set: 2.2
 Index: 130000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER23771281
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

 Name: RTE8
 Description:
 Directory: c:\blog\rte8.log
 Machine: n46
 Parameter Set: 2.2
 Index: 140000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER82325578
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

 Name: RTE8_5
 Description:
 Directory: c:\blog\rte8_5.log
 Machine: n46
 Parameter Set: 2.2
 Index: 150000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER24815281
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25

CPU: 2
 Additional Options:

Name: RTE9
 Description:
 Directory: c:\blog\rte9.log
 Machine: n2
 Parameter Set: 2.2
 Index: 160000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER92360187
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE9_5
 Description:
 Directory: c:\blog\rte9_5.log
 Machine: n2
 Parameter Set: 2.2
 Index: 170000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER25842781
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Name: RTE10
 Description:
 Directory: c:\blog\rte10.log
 Machine: n1
 Parameter Set: 2.2
 Index: 180000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER102399796
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE10_5
 Description:
 Directory: c:\blog\rte10_5.log
 Machine: n1
 Parameter Set: 2.2
 Index: 190000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER26883234

Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Name: RTE11
 Description:
 Directory: c:\blog\rte11.log
 Machine: n3
 Parameter Set: 2.2
 Index: 200000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER1122682203
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE11_5
 Description:
 Directory: c:\blog\rte11_5.log
 Machine: n3
 Parameter Set: 2.2
 Index: 210000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER27916812
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Name: RTE12
 Description:
 Directory: c:\blog\rte12.log
 Machine: n5
 Parameter Set: 2.2
 Index: 220000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER1222731546
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 0
 Additional Options:

Name: RTE12_5
 Description:
 Directory: c:\blog\rte12_5.log
 Machine: n5

Parameter Set: 2.2
 Index: 230000000
 Seed: 4678
 Configured Users: 10590
 Pipe Name: DRIVER28941000
 Connect Rate: 10
 Start Rate: 0
 Max. Concurrency: 0
 Concurrency Rate: 0
 CLIENT_NURAND: 25
 CPU: 2
 Additional Options:

Number of User groups: 24

Driver Engine: RTE1
 IIS Server: cr55
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 1 - 1059
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE1_5
 IIS Server: cr55
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 1060 - 2118
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE2
 IIS Server: cr56
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 2119 - 3177
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE2_5
 IIS Server: cr56
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML

w_id Range: 3178 - 4236
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE3
IIS Server: cr57
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 4237 - 5295
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE3_5
IIS Server: cr57
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5296 - 6354
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE4
IIS Server: cr58
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6355 - 7413
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE4_5
IIS Server: cr58
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7414 - 8472
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE5
IIS Server: cr59
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 8473 - 9531
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE5_5
IIS Server: cr59
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 9532 - 10590
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE6
IIS Server: cr60
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 10591 - 11649
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE6_5
IIS Server: cr60
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 11650 - 12708
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE7
IIS Server: cr79
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML

w_id Range: 12709 - 13767
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE7_5
IIS Server: cr79
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13768 - 14826
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE8
IIS Server: cr80
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14827 - 15885
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE8_5
IIS Server: cr80
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 15886 - 16944
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE9
IIS Server: cr75
SQL Server: oak_ip
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 16945 - 18003
w_id Min Warehouse: 1
w_id Max Warehouse: 25416
Scale: Normal
User Count: 10590
District id: 1
Scale Down: No

Driver Engine: RTE9_5
 IIS Server: cr75
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 18004 - 19062
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE10
 IIS Server: cr70
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 19063 - 20121
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE10_5
 IIS Server: cr70
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 20122 - 21180
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE11
 IIS Server: cr71
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 21181 - 22239
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE11_5
 IIS Server: cr71
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML

w_id Range: 22240 - 23298
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE12
 IIS Server: cr72
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 23299 - 24357
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Driver Engine: RTE12_5
 IIS Server: cr72
 SQL Server: oak_ip
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 24358 - 25416
 w_id Min Warehouse: 1
 w_id Max Warehouse: 25416
 Scale: Normal
 User Count: 10590
 District id: 1
 Scale Down: No

Number of Parameter Sets: 67

~Default
 Default Parameter Set

Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.05	18.01		New Order	5.00	10.00
				0.10	0.10
			Payment	10.00	
12.05	3.01		0.10	5.00	0.10
			Delivery	1.00	
5.05	2.01		0.10	5.00	0.10
			Stock Level	1.00	
5.05	2.01		0.10	20.00	0.10
			Order Status	1.00	
10.05	2.01		0.10	5.00	0.10

Tuned Distribution

Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.05	18.01		New Order	5.00	10.00
				0.10	0.10
			Payment	10.00	
12.05	3.01		0.10	5.00	0.10
			Delivery	1.00	
5.05	2.01		0.10	5.00	0.10
			Stock Level	1.00	
5.05	2.01		0.10	20.00	0.10
			Order Status	1.00	
10.05	2.01		0.10	5.00	0.10

						New Order	44.75
12.05	18.01		0.10	5.00	0.10		
			Payment	5.00	43.10		
12.05	3.01		0.10	5.00	0.10		
			Delivery	4.05			
5.05	2.01		0.10	5.00	0.10		
			Stock Level	4.05			
5.05	2.01		0.10	20.00	0.10		
			Order Status	4.05			
10.05	2.01		0.10	5.00	0.10		

No Think

Key	RT	RT	Menu	Txn	Think
				Weight	Time
0.00		0.00	New Order	5.00	10.00
				5.00	0.00
0.00		0.00	Payment	5.00	10.00
				5.00	0.00
0.00		0.00	Delivery	5.00	1.00
				5.00	0.00
0.00		0.00	Stock Level	20.00	1.00
				20.00	0.00
0.00		0.00	Order Status	5.00	1.00
				5.00	0.00

95%

Key	RT	RT	Menu	Txn	Think
				Weight	Time
13.00		18.01	New Order	5.00	44.75
				5.00	0.10
13.00		3.01	Payment	5.00	43.10
				5.00	0.10
6.00		2.01	Delivery	5.00	4.05
				5.00	0.10
6.00		2.01	Stock Level	20.00	4.05
				20.00	0.10
11.00		2.01	Order Status	5.00	4.05
				5.00	0.10

90%

Key	RT	RT	Menu	Txn	Think
				Weight	Time
16.00		18.01	New Order	5.00	44.83
				5.00	0.10
16.00		3.01	Payment	5.00	43.05
				5.00	0.10
9.00		2.01	Delivery	5.00	4.04
				5.00	0.10
9.00		2.01	Stock Level	20.00	4.04
				20.00	0.10
14.00		2.01	Order Status	5.00	4.04
				5.00	0.10

3.0

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
36.15	0.00	0.10	0.10	5.00	0.10
			Payment	43.10	
36.15	0.00	0.10	0.10	5.00	0.10
			Delivery	4.05	
15.15	0.00	0.10	0.10	5.00	0.10
			Stock Level	4.05	
15.15	0.00	0.10	0.10	20.00	0.10
			Order Status	4.05	
30.15	0.00	0.10	0.10	5.00	0.10
			4.0		
			4.0 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
48.20	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
48.20	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
20.20	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.05	
20.20	2.01	0.10	0.10	20.00	0.10
			Order Status	4.05	
40.20	2.01	0.10	0.10	5.00	0.10
			3.8		
			3.8 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
45.70	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
45.70	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
19.10	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.05	
19.10	2.01	0.10	0.10	20.00	0.10
			Order Status	4.05	
38.10	2.01	0.10	0.10	5.00	0.10
			3.6		
			3.6 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
43.30	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
43.30	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
18.10	2.01	0.10	0.10	5.00	0.10

18.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
36.18	2.01	0.10	5.00	0.10	
			3.4		
			3.4 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
40.90	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
40.90	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
17.10	2.01	0.10	5.00	4.05	0.10
			Stock Level	4.05	
17.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
17.10	2.01	0.10	5.00	0.10	
			3.2		
			3.2 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
38.50	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
38.50	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
16.10	2.01	0.10	5.00	4.05	0.10
			Stock Level	4.05	
16.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
32.10	2.01	0.10	5.00	0.10	
			2.8		
			2.8 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
33.74	18.01	0.10	0.10	5.00	0.10
			Payment	43.10	
33.74	3.01	0.10	0.10	5.00	0.10
			Delivery	4.05	
14.14	2.01	0.10	5.00	4.05	0.10
			Stock Level	4.05	
14.14	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
28.14	2.01	0.10	5.00	0.10	
			2.6		
			2.6 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time

31.30	18.01	0.10	5.00	44.75	0.10
			Payment	43.10	
31.30	3.01	0.10	5.00	0.10	
			Delivery	4.05	
13.10	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
13.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
26.10	2.01	0.10	5.00	0.10	
			2.4		
			2.4 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
28.90	18.01	0.10	5.00	44.75	0.10
			Payment	43.10	
28.90	3.01	0.10	5.00	0.10	
			Delivery	4.05	
12.10	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
12.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
24.10	2.01	0.10	5.00	0.10	
			2.2		
			2.2 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
28.90	18.01	0.10	5.00	44.75	0.10
			Payment	43.10	
28.90	3.01	0.10	5.00	0.10	
			Delivery	4.05	
12.10	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
12.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
24.12	2.01	0.10	5.00	0.10	
			2.0		
			2.0 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
24.10	18.01	0.10	5.00	44.75	0.10
			Payment	43.10	
24.10	3.01	0.10	5.00	0.10	
			Delivery	4.05	
10.10	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
10.10	2.01	0.10	20.00	4.05	0.10
			Order Status	4.05	
20.10	2.01	0.10	5.00	0.10	
			5.0		

```

5.0 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
60.25 18.01 0.10 5.00 44.75 0.10
      Payment
60.25 3.01 0.10 5.00 43.10 0.10
      Delivery
25.25 2.01 0.10 5.00 4.05 0.10
      Stock Level
25.25 2.01 0.10 20.00 4.05 0.10
      Order Status
50.25 2.01 0.10 5.00 4.05 0.10

4.5
4.5 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
54.20 18.01 0.10 5.00 44.75 0.10
      Payment
54.20 3.01 0.10 5.00 43.10 0.10
      Delivery
22.70 2.01 0.10 5.00 4.05 0.10
      Stock Level
22.70 2.01 0.10 20.00 4.05 0.10
      Order Status
45.20 2.01 0.10 5.00 4.05 0.10

3.5
3.5 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
42.10 18.01 0.10 5.00 44.75 0.10
      Payment
42.10 3.01 0.10 5.00 43.10 0.10
      Delivery
17.60 2.01 0.10 5.00 4.05 0.10
      Stock Level
17.60 2.01 0.10 20.00 4.05 0.10
      Order Status
35.10 2.01 0.10 5.00 4.05 0.10

1.8
1.8 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
21.60 18.01 0.10 5.00 44.75 0.10
      Payment
21.60 3.01 0.10 5.00 43.10 0.10
      Delivery
9.09 2.01 0.10 5.00 4.05 0.10

```

```

Stock Level 4.05
9.09 2.01 0.10 20.00 4.05 0.10
Order Status
18.09 2.01 0.10 5.00 4.05 0.10

4.2
4.2 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
54.20 18.01 0.10 5.00 44.75 0.10
      Payment
54.20 3.01 0.10 5.00 43.10 0.10
      Delivery
22.70 2.01 0.10 5.00 4.05 0.10
      Stock Level
22.70 2.01 0.10 20.00 4.05 0.10
      Order Status
45.20 2.01 0.10 5.00 4.05 0.10

1.6
1.6 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
19.20 18.01 0.10 5.00 44.75 0.10
      Payment
19.20 3.01 0.10 5.00 43.10 0.10
      Delivery
8.08 2.01 0.10 5.00 4.05 0.10
      Stock Level
8.08 2.01 0.10 20.00 4.05 0.10
      Order Status
16.08 2.01 0.10 5.00 4.05 0.10

1.4
1.4 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
16.87 18.01 0.10 5.00 44.75 0.10
      Payment
16.87 3.01 0.10 5.00 43.10 0.10
      Delivery
7.07 2.01 0.10 5.00 4.05 0.10
      Stock Level
7.07 2.01 0.10 20.00 4.05 0.10
      Order Status
14.07 2.01 0.10 5.00 4.05 0.10

1.2
1.2 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time

```

```

New Order 44.83
14.46 18.01 0.10 5.00 44.83 0.10
Payment 43.05
14.46 3.01 0.10 5.00 43.05 0.10
Delivery 4.04
6.06 2.01 0.10 5.00 4.04 0.10
Stock Level 4.04
6.06 2.01 0.10 20.00 4.04 0.10
Order Status 4.04
12.06 2.01 0.10 5.00 4.04 0.10

3.5
3.5 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
42.10 18.01 0.10 5.00 44.75 0.10
      Payment
42.10 3.01 0.10 5.00 43.10 0.10
      Delivery
17.60 2.01 0.10 5.00 4.05 0.10
      Stock Level
17.60 2.01 0.10 20.00 4.05 0.10
      Order Status
35.10 2.01 0.10 5.00 4.05 0.10

1.9
1.9 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
22.89 18.01 0.10 5.00 44.75 0.10
      Payment
22.89 3.01 0.10 5.00 43.10 0.10
      Delivery
9.59 2.01 0.10 5.00 4.05 0.10
      Stock Level
9.59 2.01 0.10 20.00 4.05 0.10
      Order Status
19.09 2.01 0.10 5.00 4.05 0.10

1.1
1.1 tt
Key   RT   RT   Menu   Txn   Think
Time  Delay Fence Delay   Weight Time
      New Order
13.25 18.01 0.10 5.00 44.83 0.10
      Payment
13.25 3.01 0.10 5.00 43.05 0.10
      Delivery
5.55 2.01 0.10 5.00 4.04 0.10
      Stock Level
5.55 2.01 0.10 20.00 4.04 0.10
      Order Status
11.05 2.01 0.10 5.00 4.04 0.10

1.05 better

```

1.05 tt better						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.92		
12.65	18.01		0.10	5.00	0.10	
			Payment	43.01		
12.65	3.01		0.10	5.00	0.10	
			Delivery	4.02		
5.30	2.01		0.10	5.00	0.10	
			Stock Level	4.03		
5.30	2.01		0.10	20.00	0.10	
			Order Status	4.02		
10.55	2.01		0.10	5.00	0.10	
			1.09			
			1.09 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
13.13	18.01		0.10	5.00	0.10	
			Payment	43.05		
13.13	3.01		0.10	5.00	0.10	
			Delivery	4.04		
5.50	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
5.50	2.01		0.10	20.00	0.10	
			Order Status	4.04		
10.95	2.01		0.10	5.00	0.10	
			1.08			
			1.08 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
13.01	18.01		0.10	5.00	0.10	
			Payment	43.05		
13.01	3.01		0.10	5.00	0.10	
			Delivery	4.04		
5.45	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
5.45	2.01		0.10	20.00	0.10	
			Order Status	4.04		
10.85	2.01		0.10	5.00	0.10	
			1.07			
			1.07 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
12.89	18.01		0.10	5.00	0.10	
			Payment	43.05		
12.89	3.01		0.10	5.00	0.10	
			Delivery	4.04		
5.40	2.01		0.10	5.00	0.10	

5.40	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
			Order Status	4.04		
10.75	2.01		0.10	5.00	0.10	
			1.06			
			1.06 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
12.77	18.01		0.10	5.00	0.10	
			Payment	43.05		
12.77	3.01		0.10	5.00	0.10	
			Delivery	4.04		
5.35	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
5.35	2.01		0.10	20.00	0.10	
			Order Status	4.04		
10.65	2.01		0.10	5.00	0.10	
			1.15			
			1.15 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
13.85	18.01		0.10	5.00	0.10	
			Payment	43.10		
13.85	3.01		0.10	5.00	0.10	
			Delivery	4.05		
5.80	2.01		0.10	5.00	0.10	
			Stock Level	4.05		
5.80	2.01		0.10	20.00	0.10	
			Order Status	4.05		
11.55	2.01		0.10	5.00	0.10	
			1.25			
			1.25 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
15.06	18.01		0.10	5.00	0.10	
			Payment	43.05		
15.06	3.01		0.10	5.00	0.10	
			Delivery	4.04		
6.31	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
6.31	2.01		0.10	20.00	0.10	
			Order Status	4.04		
12.56	2.01		0.10	5.00	0.10	
			1.3			
			1.3 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	

15.66	18.01		New Order	44.83		
			0.10	5.00	0.10	
			Payment	43.05		
15.66	3.01		0.10	5.00	0.10	
			Delivery	4.04		
6.56	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
6.56	2.01		0.10	20.00	0.10	
			Order Status	4.04		
13.06	2.01		0.10	5.00	0.10	
			1.12			
			1.12 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
13.49	18.01		0.10	5.00	0.10	
			Payment	43.10		
13.49	3.01		0.10	5.00	0.10	
			Delivery	4.05		
5.65	2.01		0.10	5.00	0.10	
			Stock Level	4.05		
5.65	2.01		0.10	20.00	0.10	
			Order Status	4.05		
11.25	2.01		0.10	5.00	0.10	
			1.18			
			1.18 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
14.21	18.01		0.10	5.00	0.10	
			Payment	43.10		
14.21	3.01		0.10	5.00	0.10	
			Delivery	4.05		
5.95	2.01		0.10	5.00	0.10	
			Stock Level	4.05		
5.95	2.01		0.10	20.00	0.10	
			Order Status	4.05		
11.85	2.01		0.10	5.00	0.10	
			1.22			
			1.22 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
14.70	18.01		0.10	5.00	0.10	
			Payment	43.10		
14.70	3.01		0.10	5.00	0.10	
			Delivery	4.05		
6.16	2.01		0.10	5.00	0.10	
			Stock Level	4.05		
6.16	2.01		0.10	20.00	0.10	
			Order Status	4.05		
12.26	2.01		0.10	5.00	0.10	
			1.28			

```

1.28 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
15.42 18.01 New Order 0.10 5.00 44.75 0.10
15.42 3.01 Payment 0.10 5.00 43.10 0.10
6.46 2.01 Delivery 0.10 5.00 4.05 0.10
6.46 2.01 Stock Level 0.10 20.00 4.05 0.10
12.86 2.01 Order Status 0.10 5.00 4.05 0.10

1.04
1.04 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.53 18.01 New Order 0.10 5.00 44.83 0.10
12.53 3.01 Payment 0.10 5.00 43.05 0.10
5.25 2.01 Delivery 0.10 5.00 4.04 0.10
5.25 2.01 Stock Level 0.10 20.00 4.04 0.10
10.45 2.01 Order Status 0.10 5.00 4.04 0.10

1.03
1.03 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.41 18.01 New Order 0.10 5.00 44.83 0.10
12.41 3.01 Payment 0.10 5.00 43.05 0.10
5.20 2.01 Delivery 0.10 5.00 4.04 0.10
5.20 2.01 Stock Level 0.10 20.00 4.04 0.10
10.35 2.01 Order Status 0.10 5.00 4.04 0.10

1.02
1.02 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.29 18.01 New Order 0.10 5.00 44.83 0.10
12.29 3.01 Payment 0.10 5.00 43.05 0.10
5.15 2.01 Delivery 0.10 5.00 4.04 0.10

```

```

Stock Level 4.04
5.15 2.01 0.10 20.00 0.10
Order Status 4.04
10.25 2.01 0.10 5.00 0.10

1.01
1.01 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.17 18.01 New Order 0.10 5.00 44.83 0.10
12.17 3.01 Payment 0.10 5.00 43.05 0.10
5.10 2.01 Delivery 0.10 5.00 4.04 0.10
5.10 2.01 Stock Level 0.10 20.00 4.04 0.10
10.15 2.01 Order Status 0.10 5.00 4.04 0.10

1.005_best
1.005 tt best
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.11 18.01 New Order 0.10 5.00 44.88 0.10
12.11 3.01 Payment 0.10 5.00 43.02 0.10
5.07 2.01 Delivery 0.10 5.00 4.03 0.10
5.07 2.01 Stock Level 0.10 20.00 4.03 0.10
10.10 2.01 Order Status 0.10 5.00 4.03 0.10

1.001_best
1.001 tt best
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.06 18.01 New Order 0.10 5.00 44.91 0.10
12.06 3.01 Payment 0.10 5.00 43.04 0.10
5.06 2.01 Delivery 0.10 5.00 4.01 0.10
5.06 2.01 Stock Level 0.10 20.00 4.02 0.10
10.06 2.01 Order Status 0.10 5.00 4.02 0.10

1.03_better
1.03 tt more aggressive
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time

```

```

New Order 44.92
12.41 18.01 0.10 5.00 0.10
Payment 43.01
12.41 3.01 0.10 5.00 0.10
Delivery 4.02
5.20 2.01 0.10 5.00 0.10
Stock Level 4.03
5.20 2.01 0.10 20.00 0.10
Order Status 4.02
10.35 2.01 0.10 5.00 0.10

1.005_better
1.005 tt more aggressive
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.11 18.01 New Order 0.10 5.00 44.90 0.10
12.11 3.01 Payment 0.10 5.00 43.05 0.10
5.07 2.01 Delivery 0.10 5.00 4.01 0.10
5.07 2.01 Stock Level 0.10 20.00 4.03 0.10
10.10 2.01 Order Status 0.10 5.00 4.01 0.10

1.02_better
1.02 tt more aggressive
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.29 18.01 New Order 0.10 5.00 44.92 0.10
12.29 3.01 Payment 0.10 5.00 43.01 0.10
5.15 2.01 Delivery 0.10 5.00 4.02 0.10
5.15 2.01 Stock Level 0.10 20.00 4.03 0.10
10.25 2.01 Order Status 0.10 5.00 4.02 0.10

1.01_best
1.01 tt best
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.17 18.01 New Order 0.10 5.00 44.90 0.10
12.17 3.01 Payment 0.10 5.00 43.05 0.10
5.10 2.01 Delivery 0.10 5.00 4.01 0.10
5.10 2.01 Stock Level 0.10 20.00 4.03 0.10
10.15 2.01 Order Status 0.10 5.00 4.01 0.10

1.02_best

```

1.02 tt best						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.96		
12.29	18.01		0.00	5.00	0.00	
			Payment	43.00		
12.29	3.01		0.00	5.00	0.00	
			Delivery	4.00		
5.15	2.01		0.00	5.00	0.00	
			Stock Level	4.03		
5.15	2.01		0.00	20.00	0.00	
			Order Status	4.01		
10.25	2.01		0.00	5.00	0.00	
1.03 best						
1.03 tt best						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.96		
12.41	18.01		0.10	5.00	0.10	
			Payment	43.01		
12.41	3.01		0.10	5.00	0.10	
			Delivery	4.01		
5.20	2.01		0.10	5.00	0.10	
			Stock Level	4.01		
5.20	2.01		0.10	20.00	0.10	
			Order Status	4.01		
10.35	2.01		0.10	5.00	0.10	
5.5						
5.5 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
66.28	18.01		0.10	5.00	0.10	
			Payment	43.05		
66.28	3.01		0.10	5.00	0.10	
			Delivery	4.04		
27.77	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
27.77	2.01		0.10	20.00	0.10	
			Order Status	4.04		
55.27	2.01		0.10	5.00	0.10	
6.0						
6.0 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
72.30	18.01		0.10	5.00	0.10	
			Payment	43.05		
72.30	3.01		0.10	5.00	0.10	
			Delivery	4.04		
30.30	2.01		0.10	5.00	0.10	

			Stock Level	4.04		
30.30	2.01		0.10	20.00	0.10	
			Order Status	4.04		
60.30	2.01		0.10	5.00	0.10	
6.5						
6.5 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
79.53	18.01		0.10	5.00	0.10	
			Payment	43.05		
79.53	3.01		0.10	5.00	0.10	
			Delivery	4.04		
33.33	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
33.33	2.01		0.10	20.00	0.10	
			Order Status	4.04		
66.33	2.01		0.10	5.00	0.10	
7.0						
7.0 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
84.35	18.01		0.10	5.00	0.10	
			Payment	43.05		
84.35	3.01		0.10	5.00	0.10	
			Delivery	4.04		
35.35	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
35.35	2.01		0.10	20.00	0.10	
			Order Status	4.04		
70.35	2.01		0.10	5.00	0.10	
7.5						
7.5 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
90.38	18.01		0.10	5.00	0.10	
			Payment	43.05		
90.38	3.01		0.10	5.00	0.10	
			Delivery	4.04		
37.88	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
37.88	2.01		0.10	20.00	0.10	
			Order Status	4.04		
75.38	2.01		0.10	5.00	0.10	
8.0						
8.0 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	

			New Order	44.83		
96.40	18.01		0.10	5.00	0.10	
			Payment	43.05		
96.40	3.01		0.10	5.00	0.10	
			Delivery	4.04		
40.40	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
40.40	2.01		0.10	20.00	0.10	
			Order Status	4.04		
80.40	2.01		0.10	5.00	0.10	
8.5						
8.5 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
102.43	18.01		0.10	5.00	0.10	
			Payment	43.05		
192.43	3.01		0.10	5.00	0.10	
			Delivery	4.04		
42.92	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
42.92	2.01		0.10	20.00	0.10	
			Order Status	4.04		
85.42	2.01		0.10	5.00	0.10	
9.0						
9.0 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
108.45	18.01		0.10	5.00	0.10	
			Payment	43.05		
108.45	3.01		0.10	5.00	0.10	
			Delivery	4.04		
45.45	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
45.45	2.01		0.10	20.00	0.10	
			Order Status	4.04		
90.45	2.01		0.10	5.00	0.10	
9.5						
9.5 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
114.47	18.01		0.10	5.00	0.10	
			Payment	43.05		
114.47	3.01		0.10	5.00	0.10	
			Delivery	4.04		
47.98	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
47.98	2.01		0.10	20.00	0.10	
			Order Status	4.04		
95.47	2.01		0.10	5.00	0.10	

10

10 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
120.50	18.01	0.10	0.10	5.00	0.10
			Payment	43.05	
120.50	3.01	0.10	0.10	5.00	0.10
			Delivery	4.04	
50.50	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.04	
50.50	2.01	0.10	0.10	20.00	0.10
			Order Status	4.04	
100.50	2.01	0.10	0.10	5.00	0.10

1.02 better
1.02 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.05	18.01	0.10	0.10	5.00	0.10
			Payment	43.01	
12.05	3.01	0.10	0.10	5.00	0.10
			Delivery	4.02	
5.05	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.03	
5.05	2.01	0.10	0.10	20.00	0.10
			Order Status	4.02	
10.05	2.01	0.10	0.10	5.00	0.10

1.01 better
1.01 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.17	18.01	0.10	0.10	5.00	0.10
			Payment	43.01	
12.17	3.01	0.10	0.10	5.00	0.10
			Delivery	4.02	
5.10	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.03	
5.10	2.01	0.10	0.10	20.00	0.10
			Order Status	4.02	
10.15	2.01	0.10	0.10	5.00	0.10

1.001 better
1.001 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.06	18.01	0.10	0.10	5.00	0.10
			Payment	43.01	
12.06	3.01	0.10	0.10	5.00	0.10
			Delivery	4.02	
5.06	2.01	0.10	0.10	5.00	0.10

5.06	2.01	0.10	20.00	4.03	0.10
			Order Status	4.02	
10.06	2.01	0.10	5.00	4.03	0.10

FullSpeed
1.000 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.91	
12.05	18.01	0.10	0.10	5.00	0.10
			Payment	43.01	
12.05	3.01	0.10	0.10	5.00	0.10
			Delivery	4.02	
5.05	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.03	
5.05	2.01	0.10	0.10	20.00	0.10
			Order Status	4.03	
10.05	2.01	0.10	0.10	5.00	0.10

1.003 best
1.003 best

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.90	
12.09	18.01	0.10	0.10	5.00	0.10
			Payment	43.05	
12.09	3.01	0.10	0.10	5.00	0.10
			Delivery	4.01	
5.07	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.03	
5.07	2.01	0.10	0.10	20.00	0.10
			Order Status	4.01	
10.08	2.01	0.10	0.10	5.00	0.10

ExtraKick
FullSpeedKick

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.03	18.01	0.10	0.10	5.00	0.10
			Payment	43.01	
12.03	3.01	0.10	0.10	5.00	0.10
			Delivery	4.02	
5.03	2.01	0.10	0.10	5.00	0.10
			Stock Level	4.02	
5.03	2.01	0.10	0.10	20.00	0.10
			Order Status	4.03	
10.03	2.01	0.10	0.10	5.00	0.10

HP Specific Drivers

The following Microsoft Windows 2003 Server device

drivers were replaced with HP-specific device drivers:
The Microsoft HP Smart Array P800/512MB SAS Controller Controller default device driver (hpciss.sys) was replaced with the HP Smart Array P800/512MB SAS Controller Non-miniport Performance Drivers for Microsoft Windows 2003 Server (hpqcissb.sys and hpqcissd.sys).

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements

Warehouses	25,600				TpmC	318,407
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	25,600	2,736	72	140		2,948
District	256,000	28,448	128	1,429		30,005
Customer	768,000,000	558,545,456	34,848,368	29,669,691		623,063,515
History	768,000,000	44,846,720	167,480		10,477,708	45,014,200
New_order	230,400,000	4,105,128	9,368	205,725		4,320,221
Orders	768,000,000	25,077,552	56,184		16,826,780	25,133,736
Order_line	7,679,978,523	503,605,152	1,185,984		189,490,610	504,791,136
Item	100,000	9,416	88	475		9,979
Stock	2,560,000,000	819,200,000	1,726,304	41,046,315		861,972,619
Total		1,955,420,608	37,993,976	70,923,776	216,795,098	2,064,338,360
	MB					
Dynamic Space	560,087	Sum of Data for Order, Orderline and History				
Static Space	1,455,868	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	111,460	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	8,143,458					
60 Day Space GB	7,952.60	GB				
Log Size	1,070,000.00	MB				
KB Per New Order	6.62	KB				
8 hr log MB	988,262	MB				
8 hr log GB	965.10	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	7,953	800	27,040.00	36GB	33.80	
			0.00			
			0.00			
Total DB			27,040.00			
8-hr log + mirror	1,930	16	2,187.68	146GB	136.73	
OS, Swap	3		0.00			
Total Storage	9,885.79	GB	29,227.68	GB		

	MSSQL_customer_fg	MSSQL_misc_fg	MSSQL_orderline_fg	MSSQL_stock_fg
	623,063,515	2,948 30,005 55,491,908 4,320,221 41,960,516 9,979	694,281,746	861,972,619
	623,063,515	101,815,577	694,281,746	861,972,619
files=	8	8	8	8
size=	10,214,400	1,638,400	12,057,600	14,156,800
Total=	81,715,200	13,107,200	96,460,800	113,254,400
8K blocks	653,721,600	104,857,600	771,686,400	906,035,200
	OK	OK	OK	OK

tpmC		318,407								
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB	8-Hr Growth MB
History	44,846,720	167,480	47,790,736	331,616	2,944,016	164,136	3,108,152	0.0686	10,477,707.82	10,232.14
Order	25,077,552	56,184	30,014,312	110,992	4,936,760	54,808	4,991,568	0.1101	16,826,780.36	16,432.40
Order-Line	503,605,152	1,185,984	558,656,040	2,346,400	55,050,888	1,160,416	56,211,304	1.2398	189,490,610.25	185,049.42
										211,713.96
	sum(*) Before	sum(*) After			Num New-					
d_next_o_id	768,256,000	813,593,734			45,337,734					
	Before MB	After MB			Grow MB	KB/New-Order	8-Hr Growth	8-Hr Growth		
Log	10,193.50	303,355.61			293,162.11	6.6214	988,261.51	965.10		
	1,070,000	0.952664			28.35099	6,780.2850	bytes			
Database tpcc log used (%)										

Appendix E:

Third Party Quotes

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

October 12, 2006

Hewlett-Packard Company
Brean Campbell
20555 SH 249
Houston, TX 77070

Mr. Campbell:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03150	SQL Server 2005 Enterprise Edition (x64) <i>Per Processor License</i> <i>Discount Schedule: Open Program – Level C</i> <i>Unit Price reflects a 6% discount from the retail unit price of \$24,999.</i>	\$23,432	4	\$93,728
P72-00274	Windows Server 2003 Enterprise (x64) Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 41% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
P73-00295	Windows Server 2003, Standard Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	12	\$8,628
254-00170	Visual C++ Standard Edition <i>No Discounts Applied</i>	\$109	1	\$109
N/A	Microsoft Problem Resolution Services <i>Professional Support</i> <i>(1 Incident)</i>	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of these distribution channels can be found at <http://www.microsoft.com/products/info/render.aspx?type=mnpc&content=22%2flicensing&View=22>.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCBrCa0618058239.

Please include this Reference ID in any correspondence regarding this price quote.


10 foot Category 5E Non Booted Network Patch Cables (Cat 5e)(backwards compatible with cat5) 3 - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Search Favorites

Address: http://lanadapters.com/cbdc5e/b10.html

LanAdapters.com



10 foot Category 5E Non Booted Network Patch Cables (Cat 5e)(backwards compatible with cat5) 350 MHz U/LS/ETL Verified PPP0000

Cat 5E LIFETIME WARRANTY (backwards compatible with cat5) 350 MHz U/LS/ETL Verified PPP0000

cbdc5e/b10 Regular price: \$3.00 Sale price: \$2.22, \$6188.00, 188!

\$188.00, 280/\$288.00, 400/\$508.00 color: AN7n8jgASAP

Home
10 foot 4 port 10/100/1000 Mbps
10 foot 8 port 10/100/1000 Mbps
10 foot 24 port 10/100/1000 Mbps
10 foot 48 port 10/100/1000 Mbps
10 foot 96 port 10/100/1000 Mbps
10 foot 192 port 10/100/1000 Mbps
10 foot 384 port 10/100/1000 Mbps
10 foot 768 port 10/100/1000 Mbps
10 foot 1536 port 10/100/1000 Mbps
10 foot 3072 port 10/100/1000 Mbps
10 foot 6144 port 10/100/1000 Mbps
10 foot 12288 port 10/100/1000 Mbps
10 foot 24576 port 10/100/1000 Mbps
10 foot 49152 port 10/100/1000 Mbps
10 foot 98304 port 10/100/1000 Mbps
10 foot 196608 port 10/100/1000 Mbps
10 foot 393216 port 10/100/1000 Mbps
10 foot 786432 port 10/100/1000 Mbps
10 foot 1572864 port 10/100/1000 Mbps
10 foot 3145728 port 10/100/1000 Mbps
10 foot 6291456 port 10/100/1000 Mbps
10 foot 12582912 port 10/100/1000 Mbps
10 foot 25165824 port 10/100/1000 Mbps
10 foot 50331648 port 10/100/1000 Mbps
10 foot 100663296 port 10/100/1000 Mbps
10 foot 201326592 port 10/100/1000 Mbps
10 foot 402653184 port 10/100/1000 Mbps
10 foot 805306368 port 10/100/1000 Mbps
10 foot 1610612736 port 10/100/1000 Mbps
10 foot 3221225472 port 10/100/1000 Mbps
10 foot 6442450944 port 10/100/1000 Mbps
10 foot 12884901888 port 10/100/1000 Mbps
10 foot 25769803776 port 10/100/1000 Mbps
10 foot 51539607552 port 10/100/1000 Mbps
10 foot 103079215104 port 10/100/1000 Mbps
10 foot 206158430208 port 10/100/1000 Mbps
10 foot 412316860416 port 10/100/1000 Mbps
10 foot 824633720832 port 10/100/1000 Mbps
10 foot 1649267441664 port 10/100/1000 Mbps
10 foot 3298534883328 port 10/100/1000 Mbps
10 foot 6597069766656 port 10/100/1000 Mbps
10 foot 13194139533312 port 10/100/1000 Mbps
10 foot 26388279066624 port 10/100/1000 Mbps
10 foot 52776558133248 port 10/100/1000 Mbps
10 foot 105553116266496 port 10/100/1000 Mbps
10 foot 211106232532992 port 10/100/1000 Mbps
10 foot 422212465065984 port 10/100/1000 Mbps
10 foot 844424930131968 port 10/100/1000 Mbps
10 foot 1688849860263936 port 10/100/1000 Mbps
10 foot 3377699720527872 port 10/100/1000 Mbps
10 foot 6755399441055744 port 10/100/1000 Mbps
10 foot 13510798882111488 port 10/100/1000 Mbps
10 foot 27021597764222976 port 10/100/1000 Mbps
10 foot 54043195528445952 port 10/100/1000 Mbps
10 foot 108086391056891840 port 10/100/1000 Mbps
10 foot 216172782113783680 port 10/100/1000 Mbps
10 foot 432345564227567360 port 10/100/1000 Mbps
10 foot 864691128455134720 port 10/100/1000 Mbps
10 foot 1729382256910269440 port 10/100/1000 Mbps
10 foot 3458764513820538880 port 10/100/1000 Mbps
10 foot 6917529027641077760 port 10/100/1000 Mbps
10 foot 13835058055282155520 port 10/100/1000 Mbps
10 foot 27670116110564311040 port 10/100/1000 Mbps
10 foot 55340232221128622080 port 10/100/1000 Mbps
10 foot 110680464442257244160 port 10/100/1000 Mbps
10 foot 221360928884514488320 port 10/100/1000 Mbps
10 foot 442721857769028976640 port 10/100/1000 Mbps
10 foot 885443715538057953280 port 10/100/1000 Mbps
10 foot 1770887431076115906560 port 10/100/1000 Mbps
10 foot 3541774862152231813120 port 10/100/1000 Mbps
10 foot 7083549724304463626240 port 10/100/1000 Mbps
10 foot 14167099448608927252480 port 10/100/1000 Mbps
10 foot 28334198897217854504960 port 10/100/1000 Mbps
10 foot 56668397794435709009920 port 10/100/1000 Mbps
10 foot 113336795588871418019840 port 10/100/1000 Mbps
10 foot 226673591177742836039680 port 10/100/1000 Mbps
10 foot 453347182355485672079360 port 10/100/1000 Mbps
10 foot 906694364710971344158720 port 10/100/1000 Mbps
10 foot 1813388729421942688317440 port 10/100/1000 Mbps
10 foot 3626777458843885376634880 port 10/100/1000 Mbps
10 foot 7253554917687770753269760 port 10/100/1000 Mbps
10 foot 14507109835375541506539520 port 10/100/1000 Mbps
10 foot 29014219670751083013079040 port 10/100/1000 Mbps
10 foot 58028439341502166026158080 port 10/100/1000 Mbps
10 foot 116056878683004332052316160 port 10/100/1000 Mbps
10 foot 232113757366008664104632320 port 10/100/1000 Mbps
10 foot 464227514732017328209264640 port 10/100/1000 Mbps
10 foot 928455029464034656418529280 port 10/100/1000 Mbps
10 foot 1856910058928069312837058560 port 10/100/1000 Mbps
10 foot 3713820117856138625674117120 port 10/100/1000 Mbps
10 foot 7427640235712277251354234240 port 10/100/1000 Mbps
10 foot 14855280471424554502708468480 port 10/100/1000 Mbps
10 foot 29710560942849109005416936960 port 10/100/1000 Mbps
10 foot 59421121885698218010833873920 port 10/100/1000 Mbps
10 foot 1188422437713964360216677578240 port 10/100/1000 Mbps
10 foot 2376844875427928720433355156480 port 10/100/1000 Mbps
10 foot 4753689750855857440866710312960 port 10/100/1000 Mbps
10 foot 9507379501711714881733420625920 port 10/100/1000 Mbps
10 foot 19014759003423429735466841251840 port 10/100/1000 Mbps
10 foot 38029518006846859470933682503680 port 10/100/1000 Mbps
10 foot 76059036013693718941867365007360 port 10/100/1000 Mbps
10 foot 152118072027387437883734730014720 port 10/100/1000 Mbps
10 foot 304236144054774875767469460029440 port 10/100/1000 Mbps
10 foot 608472288109549751534938920058880 port 10/100/1000 Mbps
10 foot 1216944576219099503069877840117760 port 10/100/1000 Mbps
10 foot 2433889152438199006139755680235520 port 10/100/1000 Mbps
10 foot 4867778304876398012279511360471040 port 10/100/1000 Mbps
10 foot 9735556609752796024559022720942080 port 10/100/1000 Mbps
10 foot 19471113219505592049118045441884160 port 10/100/1000 Mbps
10 foot 38942226439011184098236090883768320 port 10/100/1000 Mbps
10 foot 77884452878022368196472181767536640 port 10/100/1000 Mbps
10 foot 155768905756044736392944363535073280 port 10/100/1000 Mbps
10 foot 311537811512089472785888727070146560 port 10/100/1000 Mbps
10 foot 623075623024178945571777454140293120 port 10/100/1000 Mbps
10 foot 1246151246048357891143554908280586240 port 10/100/1000 Mbps
10 foot 2492302492096715782287109816561172480 port 10/100/1000 Mbps
10 foot 4984604984193431564574219633122344960 port 10/100/1000 Mbps
10 foot 9969209968386863129148439266244689920 port 10/100/1000 Mbps
10 foot 19938419936773726258296878532493779840 port 10/100/1000 Mbps
10 foot 39876839873547452516593757064987559680 port 10/100/1000 Mbps
10 foot 79753679747094905033187514129975119360 port 10/100/1000 Mbps
10 foot 159507359494189810066375028259950238720 port 10/100/1000 Mbps
10 foot 319014718988379620132750056519900477440 port 10/100/1000 Mbps
10 foot 638029437976759240265500113039800954880 port 10/100/1000 Mbps
10 foot 1276058875953518480531000226079601909760 port 10/100/1000 Mbps
10 foot 2552117751907036961062000452159203819520 port 10/100/1000 Mbps
10 foot 5104235503814073922124000904318407639040 port 10/100/1000 Mbps
10 foot 10208471007628147844248001808636815278080 port 10/100/1000 Mbps
10 foot 20416942015256295688496003617273630556160 port 10/100/1000 Mbps
10 foot 40833884030512591376992007234547261112320 port 10/100/1000 Mbps
10 foot 81667768061025182753984001447094522224640 port 10/100/1000 Mbps
10 foot 163335536122050365507968002894819044448960 port 10/100/1000 Mbps
10 foot 326671072244100731015936005789638088897920 port 10/100/1000 Mbps
10 foot 653342144488201462031872001157766177795840 port 10/100/1000 Mbps
10 foot 1306684288976402924063744002315532355591680 port 10/100/1000 Mbps
10 foot 2613368577952805848127488004631064711183360 port 10/100/1000 Mbps
10 foot 522673715590561169625497600926212942666720 port 10/100/1000 Mbps
10 foot 1045347431181122339250995200185425885333440 port 10/100/1000 Mbps
10 foot 2090694862362244678501990400370851770666880 port 10/100/1000 Mbps
10 foot 4181389724724489357003980800741703541333760 port 10/100/1000 Mbps
10 foot 8362779449448978714007961600147521082667520 port 10/100/1000 Mbps
10 foot 16725558898897957428015923200295042165335040 port 10/100/1000 Mbps
10 foot 33451117797795914856031846400590084330670080 port 10/100/1000 Mbps
10 foot 669022355955918297120636928001180168601341440 port 10/100/1000 Mbps
10 foot 1338044711911836594241273856002360337202682880 port 10/100/1000 Mbps
10 foot 2676089423823673188482547712004720674405365760 port 10/100/1000 Mbps
10 foot 5352178847647346376965095424009441348811311520 port 10/100/1000 Mbps
10 foot 10704357695294692753930190848018882697622623040 port 10/100/1000 Mbps
10 foot 21408715390589385507860381696037765395244446080 port 10/100/1000 Mbps
10 foot 42817430781178771015720763392075530790488892160 port 10/100/1000 Mbps
10 foot 85634861562357542031441526784015106181777776320 port 10/100/1000 Mbps
10 foot 171269723124715084062883053568030212373555552640 port 10/100/1000 Mbps
10 foot 342539446249430168125766107136060424747111105280 port 10/100/1000 Mbps
10 foot 685078892498860336251532214272120849484222210560 port 10/100/1000 Mbps
10 foot 13701577849977206725030644285442416988844444211200 port 10/100/1000 Mbps
10 foot 27403155699954413450061288570848233977688888422400 port 10/100/1000 Mbps
10 foot 54806311399908826900125771141696479555777768444800 port 10/100/1000 Mbps
10 foot 109612622799817653800251542283392959111555552889600 port 10/100/1000 Mbps
10 foot 21922524559963530760050308456678591222222117792000 port 10/100/1000 Mbps
10 foot 43845049119927061520100616913357182444444444444448000 port 10/100/1000 Mbps
10 foot 87690098239854123040201233826714368888888888888896000 port 10/100/1000 Mbps
10 foot 175380196479708246080402467653428737777777777777792000 port 10/100/1000 Mbps
10 foot 350760392959416492160804935306857475555555555555584000 port 10/100/1000 Mbps
10 foot 701520785918832984321609870613714911111111111111168000 port 10/100/1000 Mbps
10 foot 1403041571837665968643219401227429822222222222222336000 port 10/100/1000 Mbps
10 foot 2806083143675331937286438802454859644444444444444672000 port 10/100/1000 Mbps
10 foot 5612166287350663874572877604909719288888888888889344000 port 10/100/1000 Mbps
10 foot 11224332574701327749145755209819438577777777777778688000 port 10/100/1000 Mbps
10 foot 22448665149402655498291510419638877355555555555573376000 port 10/100/1000 Mbps
10 foot 44897330298805310996583020839277754111111111111146752000 port 10/100/1000 Mbps
10 foot 89794660597610621993166041678555508222222222222293504000 port 10/100/1000 Mbps
10 foot 179589321195221243986332083357110444444444444444187008000 port 10/100/1000 Mbps
10 foot 35917864239044248797266416671422088888888888888374016000 port 10/100/1000 Mbps
10 foot 718357284780884975945328333428451777777777777777548032000 port 10/100/1000 Mbps
10 foot 14367145695617699518906566668569035555555555555496064000 port 10/100/1000 Mbps
10 foot 28734291391235399037813133337138071111111111111992128000 port 10/100/1000 Mbps
10 foot 57468582782470798075626266674276142222222222223984256000 port 10/100/1000 Mbps
10 foot 114937165564941596151252533348552284444444444447968512000 port 10/100/1000 Mbps
10 foot 229874331129883192302505066697105568888888888895937024000 port 10/100/1000 Mbps
10 foot 459748662259766384605010133394211137777777777791874048000 port 10/100/1000 Mbps
10 foot 91949732451953276921002026678842227555555555593748096000 port 10/100/1000 Mbps
10 foot 18389946483390653884200405335764455111111111118748192000 port 10/100/1000 Mbps
10 foot 36779892966781307768400810671528910222222222235496384000 port 10/100/1000 Mbps
10 foot 7355978593356261553680162134305820444444444470992768000 port 10/100/1000 Mbps
10 foot 14711957186712523107360324688611640888888888141985536000 port 10/100/1000 Mbps
10 foot 29423914373425046214720649377223281777777777283971104000 port 10/100/1000 Mbps
10 foot 58847828746850092429441288754446563555555555647942208000 port 10/100/1000 Mbps
10 foot 1176956574937001848588825751889311311111111112958884416000 port 10/100/1000 Mbps
10 foot 23539131498740036971776515377782226222222225917768832000 port 10/100/1000 Mbps
10 foot 470782629974800739435530307555644524444444411835536664000 port 10/100/1000 Mbps
10 foot 941565259949601478871060615111289088888888236711073328000 port 10/100/1000 Mbps
10 foot 18831305198992029576421212302225777777774734221466656000 port 10/100/1000 Mbps
10 foot 37662610397984059152842424604451555555559468442933312000 port 10/100/1000 Mbps
10 foot 75325220795968118305684849208903111111111893685866624000 port 10/100/1000 Mbps
10 foot 150650441591936236611377698417806222222223787371733248000 port 10/100/1000 Mbps
10 foot 3013008831838724732227553968356124444444757474346648000 port 10/100/1000 Mbps
10 foot 6026017663677449464455107936712248888881514948732936000 port 10/100/1000 Mbps
10 foot 120520353273548989289102158734247777773029896658736000 port 10/100/1000 Mbps
10 foot 241040706547097978578204317468495555560597933315472000 port 10/100/1000 Mbps
10 foot 482081413094195957156408634936991111112119586666670944000 port 10/100/1000 Mbps
10 foot 96416282618839191431281726987398222222423917333341888000 port 10/100/1000 Mbps
10 foot 19283256527767838286256345397478444444847836666687376000 port 10/100/1000 Mbps
10 foot 385665130555356765725126897955688888174573333374752000 port 10/100/1000 Mbps
10 foot 7713302611107135314502537959113777773491466666149504000 port 10/100/1000 Mbps
10 foot 1542660522221427062900507518224755556982933333299008000 port 10/100/1000 Mbps
10 foot 30853210444428541258010150364495111114965866666598016000 port 10/100/1000 Mbps
10 foot 617064208888570825160203007289902222299317333331196032000 port 10/100/1000 Mbps
10 foot 1234128417771541650320406045799804444498634666662392064000 port 10/100/1000 Mbps
10 foot 246825683554308330064081209159960888897269333334784128000 port 10/100/1000 Mbps
10 foot 493651367108616660128162418319921777794538666669568256000 port 10/100/1000 Mbps
10 foot 9873027342172333202563248366398435555890773333319135104000 port 10/100/1000 Mbps
10 foot 19746054684344664405126496732788711111781546666638270208000 port 10/100/1000 Mbps
10 foot 39492109368689328810252993465576222223633093333376540416000 port 10/100/1000 Mbps
10 foot 78984218737378657620505986931152444447266186666615308096000 port 10/100/1000 Mbps
10 foot 1579684374747573152410119738623048888145323333330616192000 port 10/100/1000 Mbps
10 foot 315936874949514630482023957724617777290646666621232384000 port 10/100/1000 Mbps
10 foot 63187374989902926096404791544923555558173293333342464768000 port 10/100/1000 Mbps
10 foot 126374749979805852192809583089847111116346586666684929536000 port 10/100/1000 Mbps
10 foot 252749499959611704385619166179694222222669311337707168000 port 10/100/1000 Mbps
10 foot 5054989999192234087712383323593884444453786226666613854336000 port 10/100/1000 Mbps
10 foot 10109979998384468175424766647977768888107572453333327708704000 port 10/100/1000 Mbps
10 foot 20219959996768936350849533295955777772151448906666655417408000 port 10/100/1000 Mbps

Appendix F:

Price Verification

Description	Part Number	Order Date	Order Method	Price Verification
HP Smart Array P800/512MB SAS Controller	381513-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-70 Storage	418800-B21	4/19/2007	Note 1	Note 2
36GB 15Krpm SFF SAS HDD	431933-B21	11/22/2006	Note 1	Note 2

Note 1 = HP Direct: 800-203-6748
Note 2 = These components are not immediately orderable. For price verification before order date: e-mail hp.pricing.desk@hp.com