



# Hewlett-Packard Company

---

TPC Benchmark™ C  
Full Disclosure Report  
for  
HP ProLiant DL580 G5  
using  
Microsoft SQL Server 2005 Enterprise x64 Edition SP2  
and  
Windows Server 2003 R2 Enterprise x64 Edition

---

**First Edition  
Submitted for Review  
August 19, 2008**

First Edition –September 2008

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2008 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2008

HP ProLiant DL580 G5 and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows Server 2003, Windows Server 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

# Table of Contents

---

<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>PREFACE</b> .....	<b>5</b>
TPC BENCHMARK C OVERVIEW.....	5
<b>ABSTRACT</b> .....	<b>6</b>
OVERVIEW.....	6
TPC BENCHMARK C METRICS.....	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS .....	6
AUDITOR .....	6
<b>GENERAL ITEMS</b> .....	<b>10</b>
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS .....	10
PARAMETER SETTINGS .....	10
CONFIGURATION ITEMS .....	10
<b>CLAUSE 1 RELATED ITEMS</b> .....	<b>12</b>
TABLE DEFINITIONS .....	12
PHYSICAL ORGANIZATION OF DATABASE .....	12
<i>Benchmarked Configuration:</i> .....	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	15
INSERT AND DELETE OPERATIONS.....	15
PARTITIONING .....	15
REPLICATION, DUPLICATION OR ADDITIONS .....	15
<b>CLAUSE 2 RELATED ITEMS</b> .....	<b>16</b>
RANDOM NUMBER GENERATION.....	16
INPUT/OUTPUT SCREEN LAYOUT.....	16
PRICED TERMINAL FEATURE VERIFICATION.....	16
PRESENTATION MANAGER OR INTELLIGENT TERMINAL .....	16
TRANSACTION STATISTICS .....	17
QUEUEING MECHANISM .....	17
<b>CLAUSE 3 RELATED ITEMS</b> .....	<b>18</b>
TRANSACTION SYSTEM PROPERTIES (ACID) .....	18
ATOMICITY .....	18
<i>Completed Transactions</i> .....	18
<i>Aborted Transactions</i> .....	18
CONSISTENCY.....	18
ISOLATION .....	18
DURABILITY .....	19
<i>Durable Media Failure</i> .....	19
<i>Instantaneous Interruption and Loss of Memory</i> .....	20
<b>CLAUSE 4 RELATED ITEMS</b> .....	<b>21</b>
INITIAL CARDINALITY OF TABLES .....	21
DATABASE LAYOUT .....	21
TYPE OF DATABASE.....	21

DATABASE MAPPING .....	22
60 DAY SPACE .....	22
<b>CLAUSE 5 RELATED ITEMS .....</b>	<b>23</b>
THROUGHPUT .....	23
KEYING AND THINK TIMES .....	23
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS .....	24
STEADY STATE DETERMINATION .....	29
WORK PERFORMED DURING STEADY STATE .....	29
MEASUREMENT PERIOD DURATION .....	29
REGULATION OF TRANSACTION MIX .....	30
TRANSACTION STATISTICS .....	30
CHECKPOINT COUNT AND LOCATION .....	31
CHECKPOINT DURATION .....	31
<b>CLAUSE 6 RELATED ITEMS .....</b>	<b>32</b>
RTE DESCRIPTIONS .....	32
EMULATED COMPONENTS .....	32
FUNCTIONAL DIAGRAMS .....	32
NETWORKS .....	32
OPERATOR INTERVENTION .....	32
<b>CLAUSE 7 RELATED ITEMS .....</b>	<b>33</b>
SYSTEM PRICING .....	33
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE .....	33
COUNTRY SPECIFIC PRICING .....	33
USAGE PRICING .....	33
<b>CLAUSE 9 RELATED ITEMS .....</b>	<b>34</b>
AUDITOR'S REPORT .....	34
AVAILABILITY OF THE FULL DISCLOSURE REPORT .....	34
<b>APPENDIX A: SOURCE CODE .....</b>	<b>A-1 - A-111</b>
<b>APPENDIX B: DATABASE DESIGN .....</b>	<b>B-1 – B-54</b>
<b>APPENDIX C: TUNABLE PARAMETERS .....</b>	<b>C-1 - C-86</b>
<b>APPENDIX D: 60-DAY SPACE .....</b>	<b>D-1 - D-3</b>
<b>APPENDIX E: THIRD PARTY QUOTES .....</b>	<b>E-1 - E-4</b>
<b>APPENDIX F: PRICE VERIFICATION .....</b>	<b>F-1</b>

# Preface

---

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.9.

## TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

# *Abstract*

---

## **Overview**

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant DL580 G5. The operating system used for the benchmark was Windows Server 2003, Enterprise x64 Edition R2. The DBMS used was Microsoft SQL Server 2005 Enterprise x64 Edition SP2.

## **TPC Benchmark C Metrics**

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

634,825 tpmC  
USD \$1.10 per tpmC

The availability date is September 15, 2008.


## **Standard and Executive Summary Statements**

The following pages contain executive summary of results for this benchmark.

## **Auditor**

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

<b>Hewlett-Packard</b>		HP ProLiant DL580 G5 2.67GHz 16MB L2		TPC-C Rev. 5.9	
<b>Company</b>		C/S with 16 HP ProLiant DL360 G5		Report Date: Aug 19, 2008	
Total System Cost		TPC-C Throughput		Price/Performance	
<b>USD \$694,002</b>		<b>634,825</b>		<b>USD \$1.10</b>	
Database Server Processors /Cores/Threads		Database Manager		Operating System	
4/24/24 Intel Xeon 2.67GHz 16MB L2 cache		Microsoft SQL Server 2005 Enterprise x64 Edition SP2		Windows Server 2003 R2 Enterprise x64 Edition	
				Other Software	
				Microsoft Visual C++ Microsoft COM+	
				Number of Users	
				<b>508,320</b>	

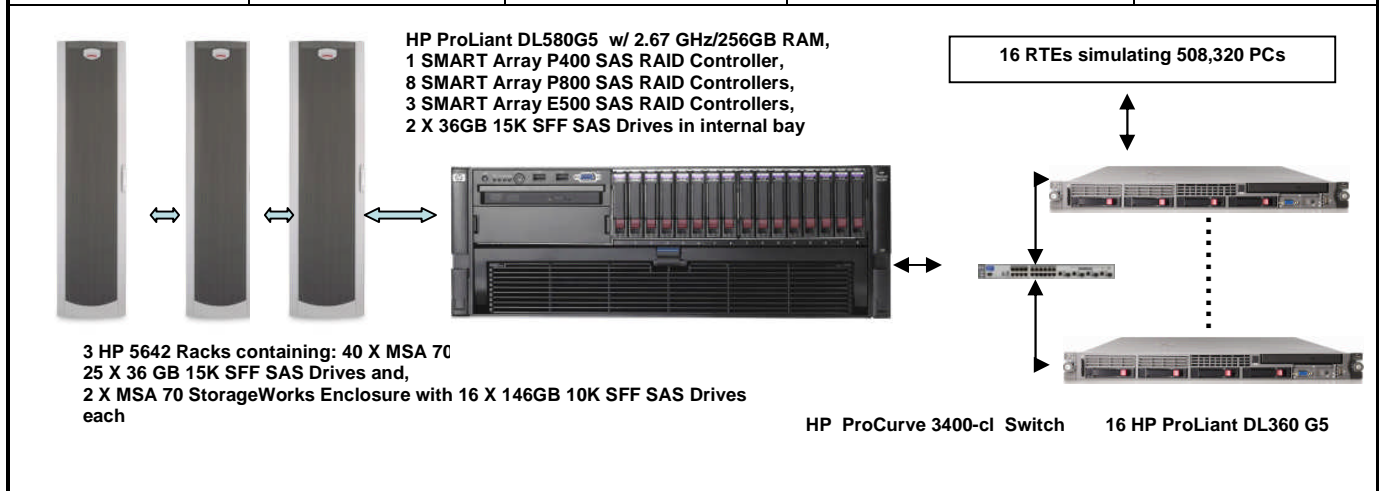

	Server		Each Client	
System Components	Quantity	Description	Quantity	Description
Processors/Cores/Threads	4/24/24	Intel Xeon 2.67GHz 16MB L2 cache	1/4/4	2.83 GHz Intel Xeon w/ 12MB L2 cache
Memory	256GB	(32x 8GB) GB FBD	1GB	1024 MB
Disk Controllers	1 8 3	Smart P400i Controller Smart P800 Controller Smart E500 Controller	1	Integrated Smart Array 400i Controller
Disk Drives	32 1000 2	146GB 10K SFF SAS 36 GB 15K SFF SAS 36 GB 15K SFF SAS	2	36 GB 15K SFF SAS
Total Storage		38,208.20 GB		36 GB

Hewlett-Packard Company	HP ProLiant DL580G5			TPC-C Rev. 5.9		
				Report Date	19-Aug-08	
Description	Part Number	Brand	Unit Price	Qty	Extended Price	3 yr. Maint. Price
<b>Server Hardware</b>						
DL580R05 CTO Chassis	487381-B21 *	1	4,755	1	4,755	
HP DL580G5 X7460 2.67 16M 6 core Kit	487373-L21 *	1	3,599	1	3,599	
HP DL580G5 X7460 2.67 16M 6 core Kit	487373-B21 *	1	3,599	3	10,797	
HP Slim 12.7mm SATA DVD Optical Kit	481041-B21	1	90	1	90	
512MB BBWC upgrade P400/256	405148-B21	1	319	1	319	
1200W 12V Hotplug AC Power Supply	437572-B21	1	349	2	698	
DL580G5 Memory Board	452179-B21	1	299	1	299	
HP DL580G5 PCI-E IO Option Kit	452181-B21	1	199	1	199	
HP 16GB Reg PC2-5300 2x8GB Kit	408855-B21	1	2,629	16	42,064	
HP Smart Array P800/512MB SAS Controller	381513-B21	1	949	8	7,592	
HP Smart Array E500/256 SAS Controller	435129-B21	1	499	3	1,497	
HP SA Cache Battery Kit	383280-B21	1	109	3	327	
HP w17e 17-inch Widescreen LCD Monitor	GV537AA#ABA	1	219	1	219	
HP PS/2 Keyboard And Mouse Bundle	RC464AA#ABA	1	39	1	39	
HP 5642 Pallet Unassembled Rack	358254-B21	1	865	3	2,595	
HP R1.5 kVA 1U NA UPS	AF419A	1	739	1	739	
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	1000	349,000	
HP 36GB 15k 2.5 Single Port HP SAS Drive (10% Spares)	431933-B21	1	349	100		34,900
HP 146GB 10k 2.5 SAS HP SP HDD	431958-B21	1	329	32	10,528	
HP 146GB 10k 2.5 SAS HP SP HDD (10% Spares)	431958-B21	1	329	4		1,316
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	2	698	
HP StorageWorks MSA-70 Storage	418800-B21	1	3,199	42	134,358	
HP StorageWorks MSA-70 Storage (10% Spares)	418408-B21	1	3,199	5		15,995
HP 3y 4h 24x7 ProLiant D58x HW Support ,ProLiant Server DL58x	U4608E	1	1,575	1		1,575
				<b>Subtotal</b>	<b>570,412</b>	<b>53,786</b>
<b>Server Software</b>						
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03134	2	23,432	4	93,728	Incl Below
Microsoft Visual Studio Standard 2005	127-00012	2	250	1	250	Incl Below
Microsoft Windows 2003 R2 Server, Enterprise Edition X64	P72-01684	2	2,334	1	2,334	Incl Below
Microsoft Problem Resolution Services		2	245	1		245
				<b>Subtotal</b>	<b>96,312</b>	<b>245</b>
<b>Client Hardware</b>						
HP DL360R05 E5440 2G US Svr	457923-001	1	2,799	16	44,784	
Dual Integrated Gigabit NIC, HP Smart Array P400i/256MB Controller						
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	32	11,168	
HP w17e 17-inch Widescreen LCD Monitor	GV537AA#ABA	1	219	1	219	
HP PS/2 Keyboard And Mouse Bundle	RC464AA#ABA	1	39	1	39	
HP CAT5 0x2x16 KVM Server Console Switch	336045-B21	1	1,099	1	1,099	
HP IP Console 8 pack Interface Adapter	262587-B21	1	709	2	1,418	
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	U4497E	1	550	12		6,600
				<b>Subtotal</b>	<b>58,727</b>	<b>6,600</b>
<b>Client Software</b>						
Windows Server 2003 R2 Standard Edition	P73-01972	2	719	16	11,504	Incl. Above
				<b>Subtotal</b>	<b>11,504</b>	<b>0</b>
<b>User Connectivity</b>						
HP ProCurve Switch 3400cl-48G	J4903A#ABA	1	6,899	1	6,899	
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E	1	1,000	1		1,000
CAT 6 7 Foot Gray Patch Cable	416-3007	3	3	34	94	
CAT 6 7 Foot Gray Patch Cable	416-3007	3	3	4		11
				<b>Subtotal</b>	<b>6,993</b>	<b>1,011</b>
Large Purchase and Net 30 discount (See Note 1)	16.0%	1			<b>(\$101,766)</b>	<b>(\$9,822)</b>
				<b>Total</b>	<b>\$642,181</b>	<b>\$51,820</b>
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.					<b>Three-Year Cost of Ownership: USD</b>	<b>\$694,002</b>
					<b>tpmC Rating:</b>	<b>634,825</b>
					<b>\$/ tpmC: USD</b>	<b>\$1.10</b>
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= graycables.com						
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1						
* = These components are not immediately orderable. See the FDR for more information.						
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics						



## Numerical Quantities Summary

**MQTH, Computed Maximum Qualified Throughput**

**634,825 tpmC**

<b>Response Times (in seconds)</b>	<b>Average</b>	<b>90%</b>	<b>Maximum</b>
New-Order	0.42	1.13	7.42
Payment	0.39	1.10	5.62
Order-Status	0.42	1.13	8.70
Delivery (interactive portion)	0.12	0.11	2.72
Delivery (deferred portion)	0.13	0.18	4.97
Stock-Level	0.45	1.17	4.00
Menu	0.12	0.11	2.74

### **Transaction Mix, in percent of total transaction**

New-Order	44.93%
Payment	43.04%
Order-Status	4.01%
Delivery	4.01%
Stock-Level	4.01%

### **Emulation Delay (in seconds)**

**Resp.Time      Menu**

New-Order	0.10	0.10
Payment	0.10	0.10
Order-Status	0.10	0.10
Delivery (interactive)	0.10	0.10
Stock-Level	0.10	0.10

### **Keying/Think Times (in seconds)**

**Min.      Average      Max.**

New-Order	18.02/0.00	18.03/12.07	18.64/120.57
Payment	3.02/0.00	3.03/12.06	3.62/120.53
Order-Status	2.02/0.00	2.03/10.06	2.62/100.53
Delivery (interactive)	2.02/0.00	2.03/5.07	2.62/50.53
Stock-Level	2.02/0.00	2.03/5.06	2.59/50.53

### **Test Duration**

Ramp-up time	59 minutes
Measurement interval	120 minutes
Transactions (all types) completed during measurement interval	176,342,530
Ramp down time	32 minutes

### **Checkpointing**

Number of checkpoints	4
Checkpoint interval	30 minutes

# General Items

---

## Test Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

## Application Code and Definition Statements

*The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.*

Appendix A contains all source code implemented in this benchmark.

## Parameter Settings

*Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:*

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

*This requirement can be satisfied by providing a full list of all parameters.*


Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

## Configuration Items


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.*

The configuration diagram for both the tested and priced systems are included on the following page.

**Figure 1. Benchmarked Configuration**

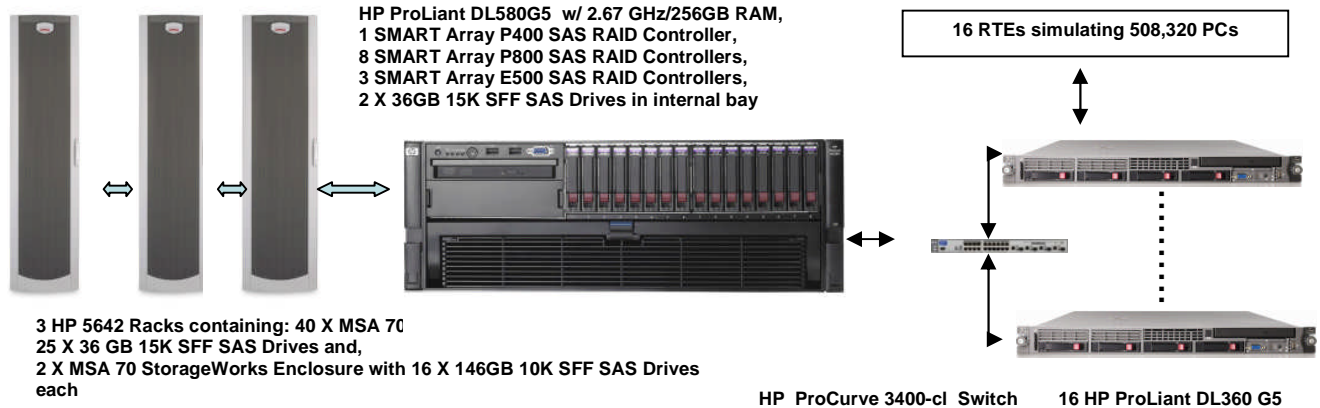

**Figure 2. Priced Configuration**

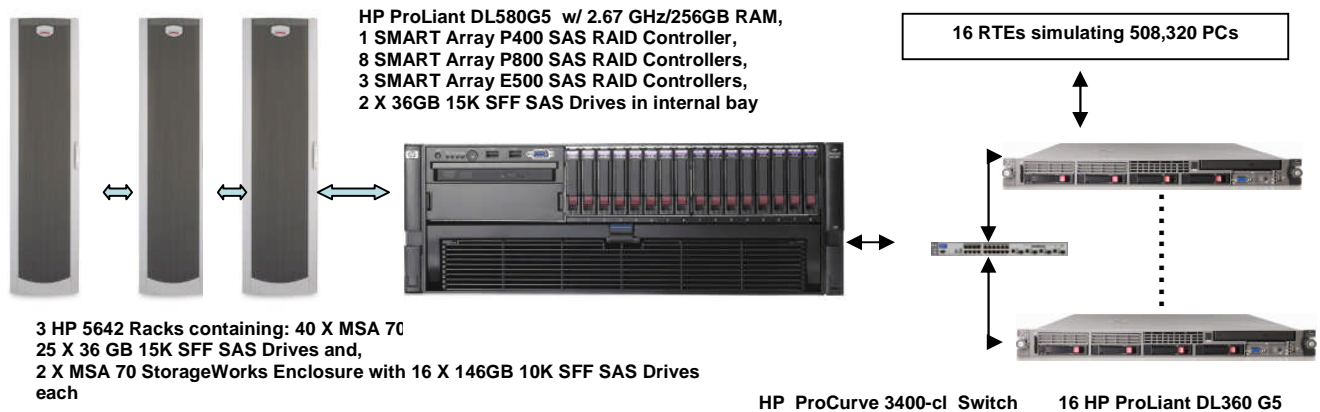

# Clause 1 Related Items

---

## Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

## Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 1000 drives at 36GB for database data, two 36GB drives for the operating system, and 32 drives at 146GB for database log. There were 1000 X 36GB drives for database data on eight SMART P800 controllers and two SMART E500 controllers, 32 X 146 GB drives on one SMART E500 controller for database log, and 2 X 36GB drives on the SMART P400 controller for the operating system.

### Benchmarked Configuration:

#### SMART-P400 Controller, Slot 0, Array A

LOGICAL DRIVE C: Total Capacity = 33.91 GB RAID 0+1  
Microsoft Windows Server 2003 R2 Enterprise x64 Edition

#### SMART-P800 Controller, Slot 1, Array A

LOGICAL DRIVE C:\stk\stk2: Total Capacity = 234.09 GB RAID 0  
Stk\_fg  
LOGICAL DRIVE C:\cust\cust2: Total Capacity = 151.36 GB RAID 0  
Cust\_fg  
LOGICAL DRIVE C:\ol\ol2: Total Capacity = 97.65 GB RAID 0  
ol\_fg  
LOGICAL DRIVE C:\misc\misc2: Total Capacity = 29.09 GB RAID 0  
Misc\_fg  
LOGICAL DRIVE Z: Total Capacity = 1428.42 GB RAID 0+1  
Tpcback4

#### SMART-P800 Controller, Slot 2, Array A

LOGICAL DRIVE C:\stk\stk3: Total Capacity = 234.09 GB RAID 0  
Stk\_fg  
LOGICAL DRIVE C:\cust\cust3: Total Capacity = 151.36 GB RAID 0  
Cust\_fg  
LOGICAL DRIVE C:\ol\ol3: Total Capacity = 97.65 GB RAID 0  
ol\_fg  
LOGICAL DRIVE C:\misc\misc3: Total Capacity = 29.09 GB RAID 0  
Misc\_fg  
LOGICAL DRIVE X: Total Capacity = 1428.42 GB RAID 0+1  
Tpcback2

**SMART-P800 Controller, Slot 3, Array A**

<u>LOGICAL DRIVE C:\stk\stk1:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust1:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol1:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc1:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE W:</u> Tpcback1	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-P800 Controller, Slot 4, Array A**

<u>LOGICAL DRIVE C:\stk\stk5:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust5:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol5:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc5:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Y:</u> Tpcback3	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-P800 Controller, Slot 5, Array A**

<u>LOGICAL DRIVE C:\stk\stk7:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust7:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol7:</u> ol_fg	<u>Total Capacity = 151.17GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc7:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE S:</u> Tpcback5	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-P800 Controller, Slot 6, Array A**

<u>LOGICAL DRIVE C:\stk\stk9:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust9:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol9:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc9:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE T:</u> Tpcback6	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-P800 Controller, Slot 7, Array A**

<u>LOGICAL DRIVE C:\stk\stk6:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust6:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol6:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc6:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE U:</u> Tpccback7	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-P800 Controller, Slot 8, Array A**

<u>LOGICAL DRIVE C:\stk\stk8:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust8:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol8:</u> ol_fg	<u>Total Capacity = 151.17GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc8:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE V:</u> Tpccback8	<u>Total Capacity = 1428.42 GB</u>	<u>RAID 0+1</u>

**SMART-E500 Controller, Slot 9, Array A**

<u>LOGICAL DRIVE C:\stk\stk10:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust10:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol10:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc10:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>

**SMART-E500 Controller, Slot 10, Array A**

<u>LOGICAL DRIVE C:\stk\stk4:</u> Stk_fg	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cust\cust4:</u> Cust_fg	<u>Total Capacity = 151.36 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol4:</u> ol_fg	<u>Total Capacity = 151.17 GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc4:</u> Misc_fg	<u>Total Capacity = 29.09 GB</u>	<u>RAID 0</u>

**SMART-E500 Controller, Slot 11, Array A**

<u>LOGICAL DRIVE E:</u> MSSQL_tpcc_log_1	<u>Total Capacity = 1953.12 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE F:</u> MSSQL_tpcc_log_2	<u>Total Capacity = 234.09 GB</u>	<u>RAID 0+1</u>

### **Priced Configuration vs. Measured Configuration:**

Priced configuration is identical to Benchmarked configuration.

### **Insert and Delete Operations**

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.*

All insert and delete functions were fully operational during the entire benchmark.

### **Partitioning**

*While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.*

No partitioning was used in this benchmark.

### **Replication, Duplication or Additions**

*Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.*

No replications, duplications or additional attributes were used in this benchmark.

# Clause 2 Related Items

---

## **Random Number Generation**

*The method of verification for the random number generation must be described.*

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

## **Input/Output Screen Layout**

*The actual layout of the terminal input/output screens must be disclosed.*

All screen layouts followed the specifications exactly.

## **Priced Terminal Feature Verification**

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).*

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

## **Presentation Manager or Intelligent Terminal**

*Any usage of presentation managers or intelligent terminals must be explained.*

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.



## Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

**Table 2.1 Transaction Statistics**

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.93%
	Payment	43.04%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.01%

## Queuing Mechanism

*The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.*

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

# Clause 3 Related Items

---

## Transaction System Properties (ACID)

*The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.*

All ACID property tests were successful. The executions are described below.

### Atomicity

*The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.*

#### Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

#### Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

### Consistency

*Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.*

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

### Isolation

*Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.*

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

## Durability

*The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.*

### Durable Media Failure

#### Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 56000 warehouses of which 5598 were used under a load of 55980 users.

- The total number of New Orders was determined by the sum of D\_NEXT\_O\_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 55980 users.
- The test was allowed to run for a minimum of 10 minutes.
- One disk was removed from one of the MSA 70 cabinets containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one MSA 70 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- After the RAID recovery process finished Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

## **Instantaneous Interruption and Loss of Memory**

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 50832 warehouses under a full load of 508320 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D\_NEXT\_O\_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 508320 users.
- The test was allowed to run for a minimum of 6 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

# Clause 4 Related Items

---

## Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

**Table 4.1 Number of Rows for Server**

Table	Cardinality as built
Warehouse	56000
District	560,000
Customer	1,680,000,000
History	1,680,000,000
Orders	1,680,000,000
New Order	504,000,000
Order Line	16,799,949,701
Stock	5,600,000,000
Item	100,000
Unused Warehouses	5120

## Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 1000 SAS drives at 36GB for database data, two 36GB SAS drives for the operating system, and 32 SAS drives at 146GB for database log. Eight SMART P800 controllers along with two SMART E500 controllers connected to 2 MSA70 drive boxes per port for each of two ports. Each MSA70 contained (25) 36GB SAS drives. Each controller was configured in an array. Each array had four RAID 0 logical drives for data, and on the eight P800 controllers a RAID 0+1 logical drive for database backup files. One SMART E500 controller was connected to (2) MSA 70's configured as an array with two RAID 0+1 logical drives for the database log. The SMART P400 controller was connected to the internal drive cage which contained 2 X 36GB SAS drives configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives except stock logical drives. The SMART E500 controller used for transaction log had cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

## Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise x64 Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

## **Database Mapping**

*The mapping of database partitions/replications must be explicitly described.*

The database was not replicated.

## **60 Day Space**

*Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.*

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d\_next\_o\_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

# Clause 5 Related Items

---

## Throughput

*Measured tpmC must be reported*

Measured tpmC 634,825 tpmC

Price per tpmC USD \$1.10

## Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.*

**Table 5.2: Response Times**

Type	Average	90 <sup>th</sup> %	Maximum
New-Order	0.42	1.13	7.42
Payment	0.39	1.10	5.62
Order-Status	0.42	1.13	8.70
Interactive Delivery	0.12	0.11	2.72
Deferred Delivery	0.13	0.18	4.97
Stock-Level	0.45	1.17	4.00
Menu	0.12	0.11	2.74

## Keying and Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type.*

**Table 5.3: Keying Times**

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.64
Payment	3.02	3.03	3.62
Order-Status	2.02	2.03	2.62
Interactive Delivery	2.02	2.03	2.62
Stock-Level	2.02	2.03	2.59

**Table 5.4: Think Times**

Type	Minimum	Average	Maximum
New-Order	0.00	12.07	120.57
Payment	0.00	12.06	120.53
Order-Status	0.00	10.06	100.53
Interactive Delivery	0.00	5.07	50.53
Stock-Level	0.00	5.06	50.53

**Response Time Frequency Distribution Curves and Other Graphs**

*Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.*

*The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.*


*Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.*

*Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.*


*A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.*




**Figure 3. New Order Response Time Distribution**

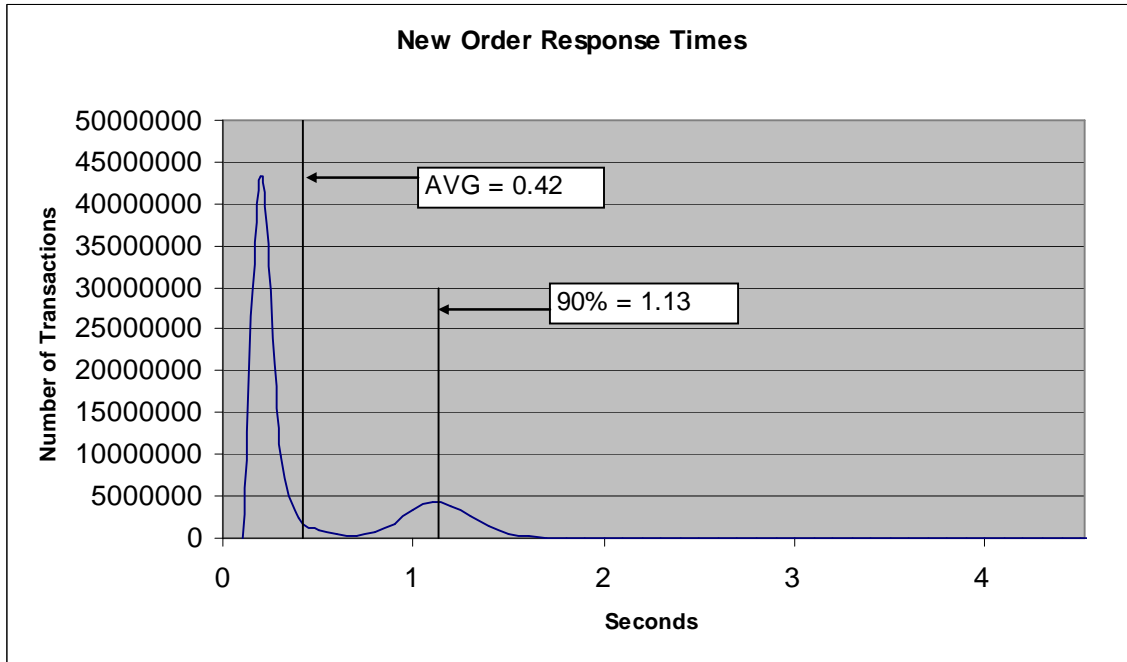


**Figure 4. Payment Response Time Distribution**

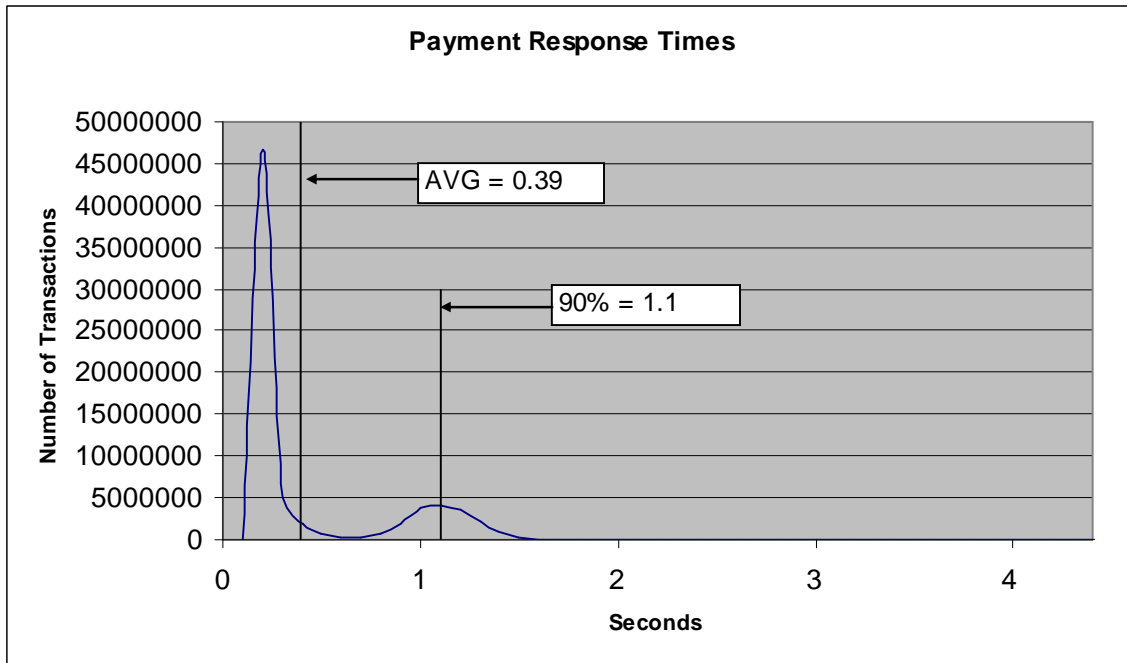


**Figure 5. Order Status Response Time Distribution**

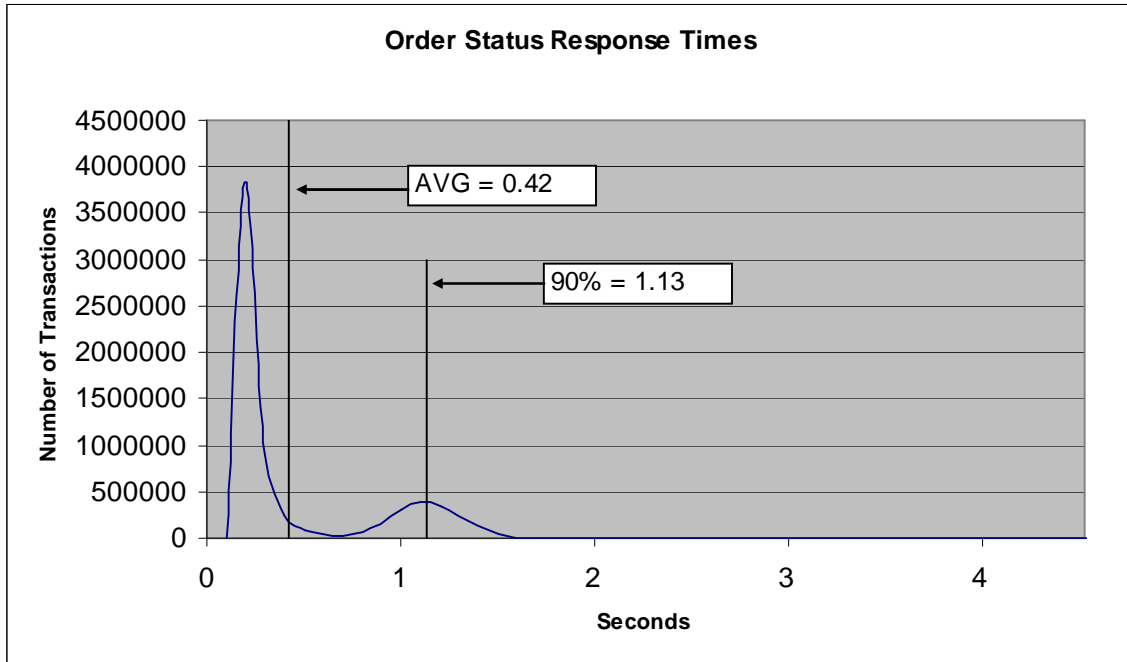


**Figure 6. Delivery Response Time Distribution**

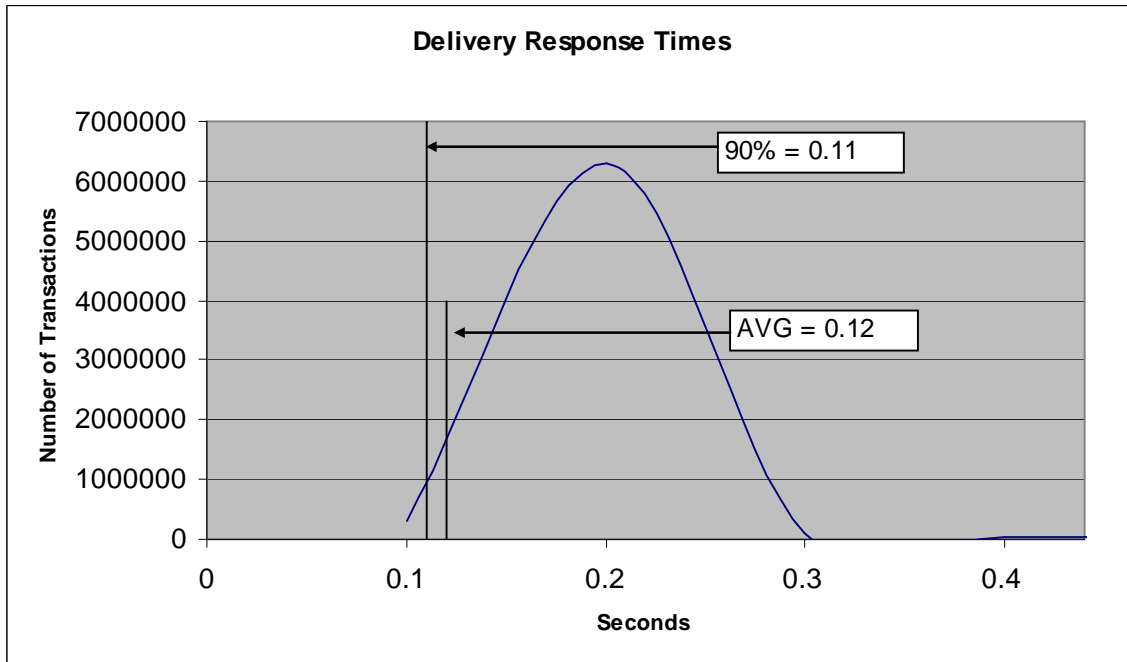


**Figure 7. Stock Level Response Time Distribution**

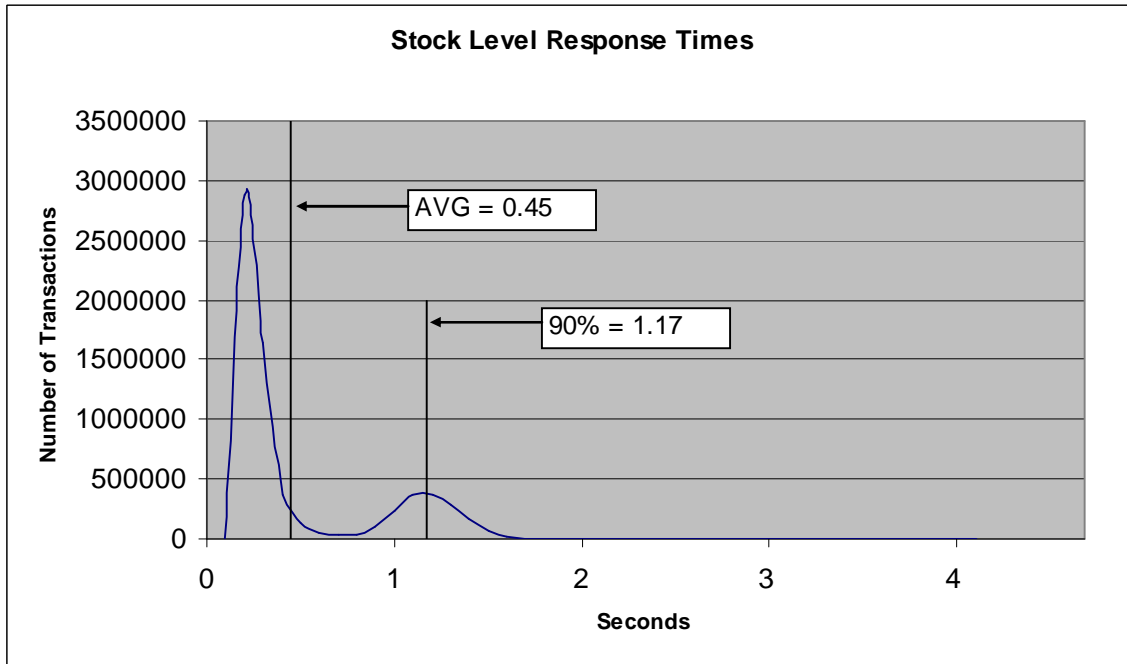


**Figure 8. Response Time vs. Throughput**

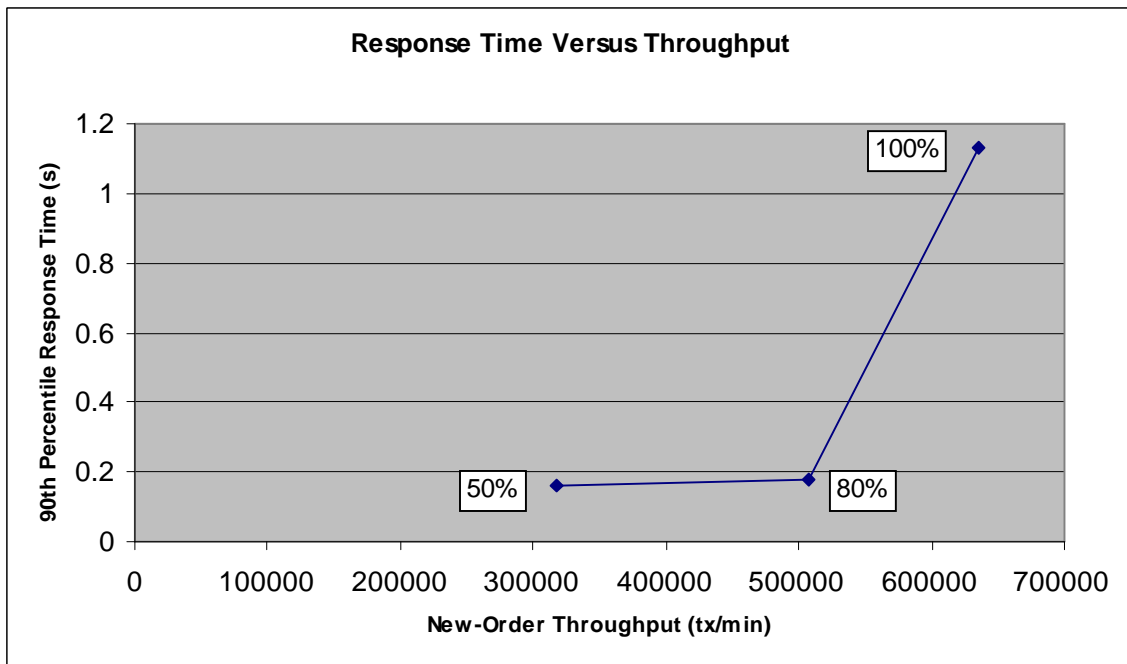

**Figure 9. New Order Think Time Distribution**

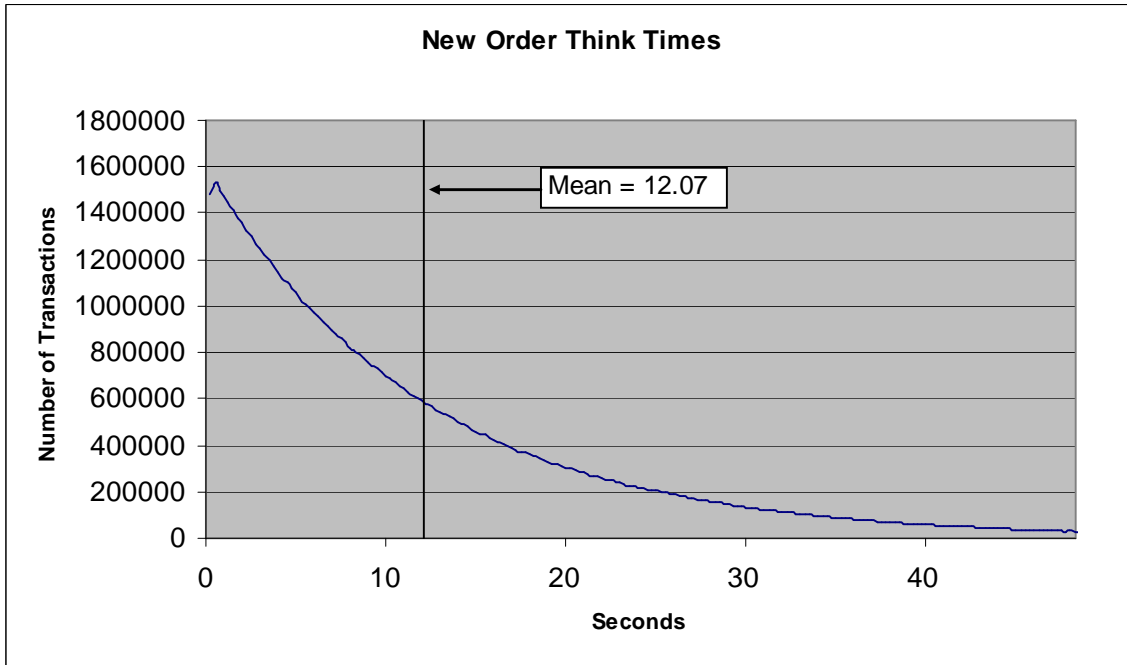

**Figure 10. Throughput vs. Time Distribution**

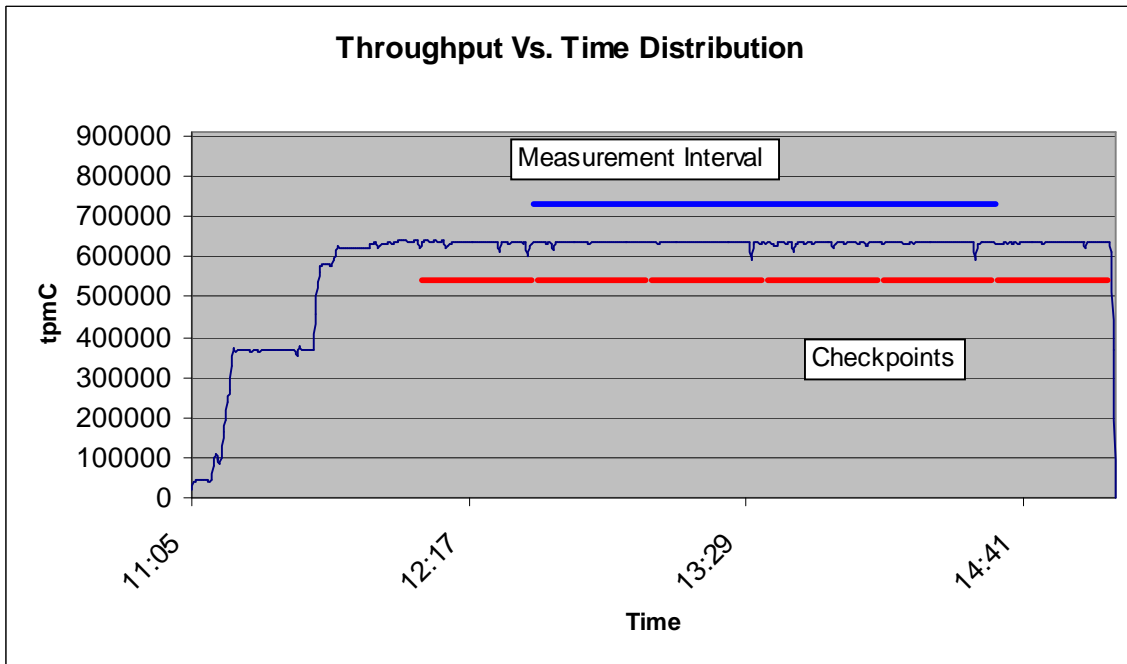

## Steady State Determination

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.*

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

## Work Performed During Steady State

*A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.*

The RTE generated the required input data to choose a transaction from the menu. This data was time stamped. The input screen for the requested transaction was returned and time stamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was time stamped. The return of the screen with the required response data was time stamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

## Measurement Period Duration

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.*

The reported measured interval was exactly 120 minutes long.

## Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

## Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

**Table 5.5: Transaction Statistics**

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.93%
	Payment	43.04%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.01%

## Checkpoint Count and Location

*The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.*

The initial checkpoint was started 59 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 28 minutes and 20 seconds. The measurement interval contains four checkpoints.

## Checkpoint Duration

*The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.*

Checkpoint Start Time	Duration
12:34:54 PM	28 minutes, 20 seconds
13:04:51 PM	28 minutes, 20 seconds
13:34:48 PM	28 minutes, 20 seconds
14:04:45 PM	28 minutes, 20 seconds

# Clause 6 Related Items

---

## RTE Descriptions

*If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.*

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

## Emulated Components

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.*

The driver system consisted of 16 HP ProLiant servers. These driver machines emulated the users' web browsers.

## Functional Diagrams

*A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.*

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

## Networks

*The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.*

*The bandwidth of the networks used in the tested/priced configuration must be disclosed.*

In the tested configuration, 16 driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

## Operator Intervention

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.*

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.



# Clause 7 Related Items

---

## System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

## Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- **Maximum Qualified Throughput**                      **634,825tpmC**
- **Price per tpmC**    **USD \$1.10 per tpmC**
- **Availability**    **September 15, 2008**

## Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

## Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 16 Microsoft Windows Server 2003 R2 Standard Edition
- 1 Microsoft Windows Server 2003 R2 Enterprise x64 Edition
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) SP2
- 1 Microsoft Visual Studio Standard 2005
- HP Servers include 3 years of support.

# Clause 9 Related Items

---

## Auditor's Report

*The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.*

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.  
PO Box 984  
Klamath CA 95548  
(phone) 707-482-0523  
(fax) 707-482-0575  
e-mail: lornaL@perfmetrics.com

## Availability of the Full Disclosure Report

*The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.*

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC  
Presidio of San Francisco  
Building 572B Ruger St. (surface)  
P.O. Box 29920 (mail)  
San Francisco, CA 94129-0920

or

Hewlett-Packard Company  
Database Performance Engineering  
P.O. Box 692000  
Houston, TX 77269-2000



**PERFORMANCE METRICS INC.**  
**TPC Certified Auditors**

Mr. David Adams  
Database Performance Engineer  
Hewlett-Packard Company  
20555 SH 249  
Houston, TX 77070

August 12, 2008

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant DL580 G5  
Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition  
Operating System: Microsoft Windows 2003 Server R2 Enterprise X64 Edition  
Transaction Monitor: Microsoft COM+

System Under Test:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 Intel 6 core @ 2.67 Ghz	Main: 256 GB	1002 @ 36 GB 32 @ 146 GB	1.13	<b>634,825</b>
Clients: 16 DL360 G5				
1 Intel quad core @ 2.83 Ghz	1 GB	2 @ 36 GB	NA	NA

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 56,000 warehouses, 50,832 of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The steady state portion of the test was 120 minutes.
- There was one complete checkpoint in steady state before the measured interval.
- There were 4 checkpoints started and completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None

Sincerely,

Lorna Livingtree, Certified Auditor

# Appendix A: Source Code

The client source code is listed below.

## dlldata.c

```
/*
*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file
compile.

To completely reconstruct this file, delete it and
rerun MIDL
on all the IDL files in this DLL, specifying this
file for the
/dlldata command line option
*****
*/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */
```

## error.h

```
/*
FILE: ERROR.H Microsoft
*
TPC-C Kit Ver. 4.20.000 Copyright
*
Microsoft, 1999
*
All Rights Reserved
*
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
PURPOSE: Header file for error exception
classes.
*
Change history:
*
4.20.000 - updated rev number to
match kit
*
4.21.000 - fixed bug: ~CBaseErr
needed to be declared virtual
*/

#pragma once

#ifndef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError;
    char szMsg[256];
    //message to sent to browser
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL = 1,
    ERR_WARNING_LEVEL = 2,
    ERR_INFORMATION_LEVEL = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC -1
//logic error in program; internal error
#define ERR_SUCCESS 0
//success (a non-error error)
#define ERR_BAD_ITEM_ID 1
//expected abort record in txnRecord
```

```
#define ERR_TYPE_DELIVERY_POST 2
//expected delivery post failed
#define ERR_TYPE_WEBDDL 3
//tpcc web generated error
#define ERR_TYPE_SQL 4
//sql server generated error
#define ERR_TYPE_DBLIB 5
//dblib generated error
#define ERR_TYPE_ODBC 6
//odbc generated error
#define ERR_TYPE_SOCKET 7
//error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK 8
//dblib and odbc only deadlock condition
#define ERR_TYPE_COM 9
//error from COM call
#define ERR_TYPE_TUXEDO 10
//tuxedo error
#define ERR_TYPE_OS 11
//operating system error
#define ERR_TYPE_MEMORY 12
//memory allocation error
#define ERR_TYPE_TPCC_ODBC 13
//error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB 14
//error from tpcc dblib txn module
#define ERR_TYPE_DELISRV 15
//delivery server error
#define ERR_TYPE_TXNLOG 16
//txn log error
#define ERR_TYPE_BCONN 17
//Benchcraft connection class
#define ERR_TYPE_TPCC_CONN 18
//Benchcraft connection class
#define ERR_TYPE_ENCINA 19
//Encina error
#define ERR_TYPE_COMPONENT 20
//error from COM component
#define ERR_TYPE RTE 21
//Benchcraft rte
```

```

#define ERR_TYPE_AUTOMATION
                22
                //Benchcraft automation errors
#define ERR_TYPE_DRIVER
                23
                //Driver engine errors
#define ERR_TYPE_RTE_BASE
                24
                //Framework errors
#define ERR_BUF_OVERFLOW
                25
                //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP
                26
                //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB
                27
                //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB
                28
                //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN
                50
                //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML
                51
                //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER
                52
                //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE
                53
#define ERR_TYPE_TPCW_ENG_OS
                54
#define ERR_TYPE_HTML_RESP
                55
#define ERR_TYPE_TPCW_ODBC
                56
#define ERR_TYPE_SCHANNEL
                57
#define ERR_TYPE_THINK_LIST
                58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE
                59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN
                60
                //TPC-E pipe connection errors
#define ERR_TYPE_TPCE_RTE
                61
                //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE
                62
                //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS
                63
                //Tpce Driver
engine system errors
//#define ERR_TYPE_TPCE_MEE_ENG_BASE
                64
                //Tpce MEE
Driver engine errors

```

```

//#define ERR_TYPE_TPCE_MEE_ENG_OS
                65
                //Tpce MEE
Driver engine system errors

#define ERR_INS_MEMORY
                "Insufficient Memory to continue."
#define ERR_UNKNOWN
                "Unknown error."
#define ERR_MSG_BUF_SIZE
                512
#define INV_ERROR_CODE
                -1
#define ERR_INS_BUF_OVERFLOW
                "Insufficient Buffer
size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg =
GetLastError(); //take the error code
immediately before it is reset by other functions

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new
char[m_szApp_size];

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
    }
}

```

```

        m_szApp = new
char[m_szApp_size];

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];

        if (szStr)
            j = wsprintf(szTmp,
"%s\n",szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }

    virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
    virtual char *ErrorTypeStr() = 0; // text
representation of the error type
    virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error
    virtual int ErrorAction() { return eNone; }
    // the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where
the error
occurred
    int m_idMsg;

    //short m_errType;
};

```

```

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eWSAEnumNetworkEvents,
        eWSAEventSelect,
        eSelect,
        eAccept,
        eNonRetryable
    };

    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

    ~CSocketErr()
    {
        if (m_szErrorText != NULL)
            delete []
m_szErrorText;
    };

    Action m_eAction;
    char *m_szErrorText;

    int ErrorType() { return
ERR_TYPE_SOCKET;};
    char* ErrorTypeStr() { return "SOCKET";}
    char* ErrorText(void);
    int ErrorAction() { return
(int)m_eAction; }
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,

```

```

        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eFSeek,
        eFRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
        eGetOverlappedResult
    };

    CSystemErr(Action
eAction, LPCTSTR szLocation);
    CSystemErr(int iError,
Action eAction, LPCTSTR szLocation);
    int ErrorType() { return
ERR_TYPE_OS;};
    char* ErrorTypeStr() { return "SYSTEM";}
    char *ErrorText(void);
    int ErrorAction() { return
(int)m_eAction; }
    void Draw(HWND hwnd, LPCTSTR szStr =
NULL);
    Action m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int ErrorType() {return
ERR_TYPE_MEMORY;};
    char* ErrorTypeStr() { return "OUT OF
MEMORY"; }

```

```

        char* ErrorText() {return
ERR_INS_MEMORY;};
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int ErrorType() {return
ERR_BUF_OVERFLOW;};
    char* ErrorTypeStr() { return "BUFFER
OVERFLOW"; }
    char* ErrorText() {return
ERR_INS_BUF_OVERFLOW;};
};

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
    enum Action
    {
        LoadProfile = 1,
        LoadSchema,
        ValidateProfile,
        SaveProfile,
        LoadFromXML,
        SaveToXML,
        ApplyProcessingInstruction,
        ApplyAttribute,
        ApplyNode
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        m_bOverload = true;
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        strcpy(m_szMsg, szMsg);
        m_bOverload = false;
    };

    virtual int
ErrorType() { return
ERR_TYPE_XML_PROFILE;};
    virtual char
*ErrorTypeStr() { return "XML PROFILE"; };
    virtual char
*ErrorText();

    virtual int
ErrorCode() { return m_eCode; };
    int
ErrorAction() { return (int)m_eAction; }

```

```

        //virtual void Draw(HWND
hwnd, LPCTSTR szStr = NULL)
        //{
        //      ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //};
private:
    char
m_szMsg[ERR_MSG_BUF_SIZE];
    LPCTSTR m_szLoc;
    int m_eCode;
    bool m_bOverload;
    Action m_eAction;
};

```

## install.c

```

/* FILE: INSTALL.C
 * Microsoft
TPC-C Kit Ver. 4.51.000
 * Copyright
Microsoft, 2003
 * All Rights Reserved
 *
 * not audited
 *
 * PURPOSE: Automated installation
application for TPC-C Web Kit
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - added COM installation
steps
 * 4.50.000 - added IIS6 configuration options
 * 4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
 * to
SystemRoot\System32
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeLS;

```

```

DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllLS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iMaxPoolThreads;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;
static int iUriEnableCache;
static int iUriScavengerPeriod;
static int iMaxConnections;

static int iIISMajorVersion;
static int iNumberOfProcessors;

static int iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; //
last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd,
char *szDllPath, char *szWindowsPath);
static void
ReadRegistrySettings(void);
static void
WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char
*szFileName);
static int
CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath);
static BOOL GetInstallPath(char
*szDllPath);
static BOOL
GetWindowsInstallPath(char *szWindowsPath);
static void GetVersionInfo(char
*szDLLPath, char *szExePath);
static BOOL
CheckWWWWebService(void);
static
StartWWWWebService(void);
static BOOL StopWWWWebService(void);
static void UpdateDialog(HWND
hDlg);
static void
ConfigureIIS6(HWND
hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL install_com(char *szDllPath);

```

```

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE
hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0) );
            PostMessage(hwnd,
WM_INITITEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);

```

```

        hRes =
LoadResource(hInst, hResInfo );
        pSrc = (BYTE
*)LockResource(hRes);
        pDst = (unsigned char
*)malloc(dwSize+1);
        if ( pDst )
        {
            memcpy(pDst,
pSrc, dwSize);
            pDst[dwSize]
= 0;
            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
            free(pDst);
        }
        else
            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        return TRUE;
    case WM_DESTROY:
        DeleteObject(hFont);
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
        if ( wParam == IDCANCEL)
            EndDialog(hwnd, FALSE);
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
}

```

```

        }
        return FALSE;
    }
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char
szDllPath[256];
    static char
szWindowsPath[256];
    static char
szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);

            if (
GetWindowsInstallPath(szWindowsPath) )
            {
                MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }

            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP |
MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }

            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections =
100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.eDB_Protocol =
ODBC;
            Reg.eTxnMon = None;
            strcpy(Reg.szDbServer,
"");
        }
    }
}

```

```

            strcpy(Reg.szDbName,
"tpcc");
            strcpy(Reg.szDbUser,
"sa");
            strcpy(Reg.szDbPassword,
"");
            iPoolThreadLimit =
iMaxPhysicalMemory * 2;
            iThreadTimeout = 86400;
            iListenBackLog = 15;
            iAcceptExOutstanding =
40;

            ReadTPCCRegistrySettings( &Reg );
            ReadRegistrySettings();

            // copy the hardware
information to the SYSTEM_INFO structure
            GetSystemInfo(&siSysInfo);
            // store the number of
processors on this system
            iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

            GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
            GetVersionInfo(szDllPath, szExePath);

            wsprintf(szTmp,
"Version %d.%2d.%3d", versionExeMS, versionExeMM,
versionExeLS);
            SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
            SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
            SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
            SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
            SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
            SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
            SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
        }
    }
}

```



```

        SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
        SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

        // check OS version
level for COM. Must be at least Windows 2000
        VI.dwOSVersionInfoSize
= sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion <
5)
        {
                HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
                EnableWindow(
hDlg, 0 ); // disable COM option
                if
(Reg.eTxnMon == COM)
                        Reg.eTxnMon = None;
        }
        CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
        CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
        switch (Reg.eTxnMon)
        {
        case None:
                CheckDlgButton(hwnd, IDC_TM_NONE, 1);
                break;
        case COM:
                CheckDlgButton(hwnd, IDC_TM_MTS, 1);
                break;
        }
        return TRUE;
        case WM_PAINT:
        if ( IsIconic(hwnd) )
        {
                BeginPaint(hwnd, &ps);
                DrawIcon(ps.hdc, 0, 0, hIcon);
                EndPaint(hwnd, &ps);
                return TRUE;
        }
        break;
        case WM_COMMAND:
        if ( HIWORD(wParam) ==
BN_CLICKED )
        {
                switch(
LOWORD(wParam) )
                {
                        case IDOK:

```

```

ProcessOK(hwnd, szDllPath, szWindowsPath);
return TRUE;
case IDCANCEL:
EndDialog(hwnd, FALSE);
return TRUE;
default:
return FALSE;
}
}
static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
        int                d;
        HWND              hDlg;
        int                rc;
        BOOL               bSvcRunning;
        char               szFullName[256];
        char               szErrTxt[128];

        // Check whether Service Pack 1 has been
installed if
        // running on Windows Server 2003. The RTM
version has
        // a limitation on the number of concurrent
HTTP connections.
        //
        OSVERSIONINFOEX          VersionInfo;
        VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
        if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
        {
                if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
                VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
                VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
                {
                        TCHAR szMsg[256];
                        _sntprintf(szMsg,
sizeof(szMsg),

```

```

"Warning:
running on Windows Server 2003 without at least
Service Pack 1\n"
        "limits the
number of concurrent HTTP connections to around
8000.");
        MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}
}
// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);
GetDlgItemText(hwnd, ED_DB_SERVER,
sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
sizeof(Reg.szDbName));
        if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE)
)
                Reg.eTxnMon = None;
        else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
                Reg.eTxnMon = COM;
        iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
        iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
        iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
        iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);
        ShowWindow(hwnd, SW_HIDE);
        hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
        ShowWindow(hDlg, SW_SHOWNA);
        UpdateDialog(hDlg);
        // check to see if the web services are
running
        bSvcRunning = CheckWWWService();
        if ( bSvcRunning )
        {
                SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
                SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
                UpdateDialog(hDlg);

```

```

        StopWWWService();
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error(s)
occured when creating " );
        strcat( szErrTxt, szLastFileName
);
        MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }

    // while we have the web services shutdown,
check to see if this
    // is IIS6. If it is, then call
ConfigureIIS6
    if ( iIISMajorVersion == 6)
    {
        ConfigureIIS6(hwnd, hDlg);
    }

    //if we stopped service restart it.
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
        StartWWWService();
    }

    // update registry
    SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    WriteRegistrySettings(szDllPath);

    // register com proxy stub
    strcpy(szFullName, szDllPath);
    strcat(szFullName, "tpcc_com.ps.dll");
    if (!RegisterDLL(szFullName))
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error occured
when registering " );
        strcat( szErrTxt, szFullName );
        MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);

```

```

        EndDialog(hwnd, 0);
        return;
    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd,
SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt,
"Error occured when configuring COM settings." );
            MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }
    }

    Sleep(100);

    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);

    EndDialog(hwnd, rc);
    return;
}

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD  size;
    DWORD  type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion
)
                iIISMajorVersion = 5;
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        if ( iIISMajorVersion == 6)
            if (

```

```

        // since IIS6 handles
the pool thread parameters differently, we need to
fill in the dialog

        // with the
MaxPoolThreads rather than PoolThreadLimit
        // for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
        size = sizeof(iPoolThreadLimit);
        if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit
)
                iPoolThreadLimit = iMaxPhysicalMemory * 2;
            else
                size =
sizeof(iPoolThreadLimit);
            if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                if ( !iPoolThreadLimit
)
                    iPoolThreadLimit = iMaxPhysicalMemory * 2;
            }
        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size =
sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if (
!iAcceptExOutstanding )
                iAcceptExOutstanding = 40;
    }

```

```

        RegCloseKey(hKey);
    }
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\HTTP\\Parameter
s", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iUriEnableCache);
        if ( RegQueryValueEx(hKey,
"UriEnableCache", 0, &type, (char *)&iUriEnableCache,
&size) == ERROR_SUCCESS )
            if ( !iUriEnableCache )
                iUriEnableCache = 0;

        size =
sizeof(iUriScavengerPeriod);
        if ( RegQueryValueEx(hKey,
"UriScavengerPeriod", 0, &type, (char
*)&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
            if (
!iUriScavengerPeriod )
                iUriScavengerPeriod = 10800;

        size = sizeof(iMaxConnections);
        if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (char *)&iMaxConnections,
&size) == ERROR_SUCCESS )
            if ( !iMaxConnections )
                iMaxConnections = 100000;

        RegCloseKey(hKey);
    }
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
    }
}

```

```

        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));

        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char
*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);

        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        // if this is IIS6, then we need
to treat the PoolThreadLimit differently
        // if IIS6, then PoolThreadLimit
is the maximum number of threads for the entire
system.
        // IIS6 added MaxPoolThreads
which controls the number of threads per processor.
For IIS6
        // we will set MaxPoolThreads to
the value the user provided in the dialog and then
set
        // PoolThreadLimit to
MaxPoolThreads * number of processors on this system
        if ( iIISMajorVersion == 6 )
            {
                iMaxPoolThreads =
iPoolThreadLimit;
                iPoolThreadLimit =
iMaxPoolThreads * iNumberOfProcessors;
            }
    }
}

```

```

        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));

        RegSetValueEx(hKey,
"MaxPoolThreads", 0, REG_DWORD, (char
*)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
    }
    else
    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
    }

    RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));

    RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 13));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC    lpDllEntryPoint;
}

```

```

        hLib = LoadLibrary(szFileName);
        if ( hLib == NULL )
            return FALSE;
        // Find the entry point.
        lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
        if (lpDllEntryPoint != NULL)
        {
            return ((*lpDllEntryPoint)() ==
_S_OK);
        }
        else
            return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;
    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

```

```

        // install TPCC.DLL
        strcpy( szLastFileName, "tpcc.dll" );
        if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install MSVCR71.DLL
        strcpy( szLastFileName, "msvcr71.dll" );
        if (!FileFromResource( "MSVCR71",
IDR_MSVCR71, szWindowsPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_odbc.dll
        strcpy( szLastFileName, "tpcc_odbc.dll" );
        if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com.dll
        strcpy( szLastFileName, "tpcc_com.dll" );
        if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.tlb
        strcpy( szLastFileName, "tpcc_com_all.tlb"
);
        if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_ps.dll
        strcpy( szLastFileName, "tpcc_com_ps.dll"
);
        if (!FileFromResource( "COM_PS_DLL",
IDR_COMPS_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.dll
        strcpy( szLastFileName, "tpcc_com_all.dll"
);
        if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))

```

```

        return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        return 1;
    }

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY    hKey;
    BYTE    szData[256];
    DWORD   sv;
    BOOL    bRc;
    int     len;
    int     iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
    // IIS default web site directory and
determine that IIS is installed.

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath,
szData);
            len =
strlen(szDllPath);
            if ( szDllPath[len-1]
!= '\\ ' )
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
            RegCloseKey(hKey);
        }

        return bRc;
    }

static BOOL GetWindowsInstallPath(char
*szWindowsPath)

```

```

{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
    NT\CurrentVersion\SystemRoot is used to find the
    // system root to install the VC70 DLL.

    szWindowsPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szWindowsPath,
szData);
            len =
strlen(szWindowsPath);
            if ( szWindowsPath[len-
1] != '\\' )
            {
                szWindowsPath[len] = '\\';
                szWindowsPath[len+1] = 0;
            }
            // now append the path
            strcat(szWindowsPath,
"SYSTEM32\");
        }

        RegCloseKey(hKey);
    }

    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD d;
    DWORD dwSize;
    DWORD dwBytes;
    char *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDllMS = 0;
    versionDllLS = 0;

```

```

        if ( _access(szDLLPath, 0) == 0 )
        {
            dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
            if ( dwSize )
            {
                ptr = (char
*)malloc(dwSize);

                GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
                VerQueryValue(ptr,
"\\",&vs, &dwBytes);
                >dwProductVersionMS;
                versionDllMS = vs-
                >dwProductVersionLS;
                versionDllLS = vs-
                free(ptr);
            }
        }

        versionExeMS = 0x7FFF;
        versionExeLS = 0x7FFF;
        dwSize = GetFileVersionInfoSize(szExePath,
&d);
        if ( dwSize )
        {
            ptr = (char *)malloc(dwSize);
            GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
            VerQueryValue(ptr, "\\",&vs,
&dwBytes);
            versionExeMS = vs-
            >dwProductVersionMS;
            versionExeLS = LOWORD(vs-
            >dwProductVersionLS);
            versionExeMM = HIWORD(vs-
            >dwProductVersionLS);
            free(ptr);
        }
        return;
    }

    static BOOL CheckWWWebService(void)
    {
        SC_HANDLE schSCManager;
        SC_HANDLE schService;
        SERVICE_STATUS ssStatus;

        schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
        schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
        if (schService == NULL)
            return FALSE;

        if (! QueryServiceStatus(schService,
&ssStatus) )
            goto ServiceNotRunning;

        if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )

```

```

            goto ServiceNotRunning;
        //start Service pending, Check the status
        until the service is running.
        if (! QueryServiceStatus(schService,
&ssStatus) )
            goto ServiceNotRunning;

        CloseServiceHandle(schService);
        return TRUE;
    }

    ServiceNotRunning:
        CloseServiceHandle(schService);
        return FALSE;
}

static BOOL StartWWWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWebErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StartWWWebErr;

    CloseServiceHandle(schService);

```

```

        return TRUE;
StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD              dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
    SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {
        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint) //Break if
    the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;
}

```

```

StopWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int         irc;
    char        szErrTxt[128];
    FILE        *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6...");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
    configuration error. " );
        strcat( szErrTxt, "Check
    iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

install.h
//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

```

```

#define IDD_DIALOG1          101
#define IDI_ICON1           102
#define IDR_TPCDDL         103
#define IDD_DIALOG2         105
#define IDI_ICON2           106
#define IDR_DELIVERY        107
#define IDD_DIALOG3         108

#define BN_LOG               1001
#define ED_KEEP              1002
#define ED_THREADS           1003
#define ED_THREADS2         1004
#define IDC_PATH             1007
#define IDC_VERSION          1009
#define IDC_RESULTS          1010
#define IDC_PROGRESS1       1011
#define IDC_STATUS           1012
#define IDC_BUTTON1         1013
#define ED_MAXCONNECTION    1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_ODBC             1022
#define IDC_CONNECT_POOL    1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
install.rc
// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////
////////////////////////////////////
//
// Dialog
//

IDD_DIALOG1 DIALOGEX 0, 0, 219, 324
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT        ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
        WS_EX_RTLREADING
    EDITTEXT
ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
        WS_EX_RTLREADING
    EDITTEXT
ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
        WS_EX_RTLREADING
    CONTROL
"None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
        WS_GROUP |
WS_TABSTOP, 43, 104, 33, 10
    CONTROL
"COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
        WS_TABSTOP, 94, 104, 32, 10
    EDITTEXT
ED_DB_SERVER, 131, 145, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_USER_ID, 131, 158, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_PASSWORD, 131, 171, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_NAME, 131, 184, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_IIS_MAX_THREAD_POOL_LIMIT, 164, 226, 34, 12, ES_RIGHT |
        ES_NUMBER, WS_EX_RTLREADING
    EDITTEXT
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, 164, 240, 34, 12, ES_RIGHT
    |
        ES_NUMBER, WS_EX_RTLREADING
    EDITTEXT
ED_IIS_THREAD_TIMEOUT, 164, 254, 34, 12, ES_RIGHT |
    ES_NUMBER,
        WS_EX_RTLREADING

```

```

EDITTEXT
ED_IIS_LISTEN_BACKLOG, 164, 268, 34, 12, ES_RIGHT |
    ES_NUMBER,
        WS_EX_RTLREADING
    DEFPUSHBUTTON    "OK", IDOK, 53, 296, 50, 14
    PUSHBUTTON      "Cancel", IDCANCEL, 119, 296, 50, 14
    EDITTEXT
IDC_PATH, 106, 26, 91, 13, ES_AUTOHSCROLL | ES_READONLY
    LTEXT            "Number of Delivery
Threads:", IDC_STATIC, 35, 45, 115, 12
    LTEXT            "Max Number of
Connections:", IDC_STATIC, 35, 73, 115, 12
    RTEXT            "Version
4.11", IDC_VERSION, 120, 4, 89, 9
    LTEXT            "IIS Max Thread Pool
Limit:", IDC_STATIC, 36, 226, 115, 12
    LTEXT            "Web Service Backlog Queue
Size:", IDC_STATIC, 36, 240, 115,
        12
    LTEXT            "IIS Thread Timeout
(seconds):", IDC_STATIC, 36, 254, 115, 12
    LTEXT            "IIS Listen
Backlog:", IDC_STATIC, 36, 270, 115, 10
    LTEXT            "Installation
directory:", IDC_STATIC, 35, 29, 71, 10
    GROUPBOX        "Transaction
Monitor", IDC_STATIC, 33, 90, 165, 33
    LTEXT            "Server
Name:", IDC_STATIC, 35, 148, 56, 8
    LTEXT            "User ID:", IDC_STATIC, 35, 161, 60, 8
    LTEXT            "User
Password:", IDC_STATIC, 35, 174, 83, 8
    LTEXT            "Database
Name:", IDC_STATIC, 35, 187, 54, 8
    GROUPBOX        "SQL Server Connection
Properties", IDC_STATIC, 22, 132, 187,
        74
    GROUPBOX        "Web Client
Properties", IDC_STATIC, 22, 15, 187, 113
    GROUPBOX        "IIS
Settings", IDC_STATIC, 22, 210, 187, 79
    LTEXT            "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
    END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETFOREGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
        WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON    "OK", IDOK, 33, 45, 50, 9
    CTEXT            "HTML TPC-C Installation
Successful", IDC_RESULTS, 7, 22,
        102, 18, 0, WS_EX_CLIENTEDGE
    ICON
IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
        WS_EX_TRANSPARENT
    END

IDD_DIALOG3 DIALOG 0, 0, 91, 40

```

```

STYLE DS_SYSDIALOG | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
        WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
"Progress1", IDC_PROGRESS1, "mctl_progress32", WS_BORDER,
        ER,
        7, 20, 77, 13
    CTEXT
"Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
    END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
        WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
|
        ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON    "I &Agree", IDOK, 87, 181, 50, 14
    PUSHBUTTON      "&Cancel", IDCANCEL, 153, 181, 50, 14
    END

////////////////////////////////////
////////////////////////////////////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
    END

```

```

        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END
END
#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE
BEGIN
    "#include \"afxres.h\"\\r\\n"
    "\\0"
END

3 TEXTINCLUDE
BEGIN
    "\\r\\n"
    "\\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
////////////////////////////////////
//
// Icon
//
// Icon with lowest ID value placed first to ensure
// remains consistent on all systems.
IDI_ICON1            ICON
"icon1.ico"
IDI_ICON2            ICON
"icon2.ico"

////////////////////////////////////
////////////////////////////////////
//
// TPCCDLL
//
IDR_TPCCDLL          TPCCDLL
"..\\..\\isapi_dll\\bin\\tpcc.dll"

```

```

////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,50,0
PRODUCTVERSION 0,4,50,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client"
        END
    END
    Installer
    VALUE "CompanyName", "Microsoft"
    VALUE "FileDescription", "install"
    VALUE "FileVersion", "0, 4, 20, 0"
    VALUE "InternalName", "install"
    VALUE "LegalCopyright", "Copyright ©
1999"
    VALUE "OriginalFilename", "install.exe"
    VALUE "ProductName", "Microsoft install"
    VALUE "ProductVersion", "0, 4, 20, 0"
    END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

////////////////////////////////////
////////////////////////////////////
//
// LICENSE
//
IDR_LICENSE1        LICENSE
"license.txt"

////////////////////////////////////
////////////////////////////////////
//
// ODBC_DLL
//
IDR_ODBC_DLL        ODBC_DLL
"..\\..\\db_odbc_dll\\bin\\Release\\tpcc_odbc.dll"

```

```

////////////////////////////////////
////////////////////////////////////
//
// COM_DLL
//
IDR_COM_DLL          COM_DLL
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_PS_DLL
//
IDR_COMPS_DLL        COM_PS_DLL
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_ALL_DLL
//
IDR_COMALL_DLL        COM_ALL_DLL
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL    COM_TYPLIB
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

////////////////////////////////////
////////////////////////////////////
//
// MSVCRT71
//
IDR_MSVCRT71         MSVCRT71
"C:\\WINDOWS\\system32\\msvcr71.dll"
#endif // English (U.S.) resources
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//
////////////////////////////////////
////////////////////////////////////
//
// not APSTUDIO_INVOKED
//
#endif // not APSTUDIO_INVOKED

```



## install\_com.cpp

```
/* FILE: INSTALL_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.51.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not audited
 *
 * PURPOSE: installation code for COM
 * application for TPC-C Web Kit
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection*
pCatalogCollectionMethod = NULL;

    ICatalogObject*
pCatalogObjectApp = NULL;
    ICatalogObject*
pCatalogObjectCo = NULL;
    ICatalogObject*
pCatalogObjectItf = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
```

```
bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
                NULL,
                CLSCTX_INPROC_SERVER,
                IID_ICOMAdminCatalog,
                (void**)
                &pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in
the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
                                    (IDispatch**)
                                    &pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications"
collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp-
>get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete
existing "TPC-C" application (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)
        &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp-
>get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-
C"))
        {
            lCount--;
            continue;
        }
        else
        {
```

```
hr =
pCatalogCollectionApp->Remove(lCount - 1);
    if (!SUCCEEDED(hr))
goto Error;
        }
        }
        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        // add the new application
        hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        // set properties
        bstrTemp = "Name";
        vTmp = "TPC-C";
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // set as a library (in process)
application
        bstrTemp = "Activation";
        lActProp = COMAdminActivationInproc;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // set security level to process
        bstrTemp = "AccessChecksLevel";
        lActProp =
COMAdminAccessChecksApplicationLevel;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the Components
collection later
        hr = pCatalogObjectApp->get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        // save changes (app creation) so component
installation will work
        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        pCatalogObjectApp->Release();
        pCatalogObjectApp = NULL;

        bstrTemp = "TPC-C";
        // app name
        bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
        bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
```

```

        bstrTemp4 =      bstrDllPath +
"tpcc_com_ps.dll";    // proxy/stub dll

        hr = pCOMAdminCat-
>InstallComponent(bstrTemp,

        bstrTemp2,

        bstrTemp3,

        bstrTemp4);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionCo);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
application and set the properties
        while (lCountCo > 0)
        {
            hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)
&pCatalogObjectCo);
            if (!SUCCEEDED(hr)) goto Error;

            // used for debugging (view the
name)
            hr = pCatalogObjectCo-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructionEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructorString";
            bstrTemp2 = "dummy string (do not
remove)";

            vTmp = bstrTemp2;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"JustInTimeActivation";
            bTmp = TRUE;

```

```

        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "MaxPoolSize";
        vTmp.Clear(); // clear
variant so it isn't
stored as a bool (_variant_t
feature)

        vTmp = (long)30;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"ObjectPoolingEnabled";
        bTmp = TRUE;
        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the
InterfacesForComponent
collection
        hr = pCatalogObjectCo-
>get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"InterfacesForComponent";
        hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionItf);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through interfaces in
component
        while (lCountItf > 0)
        {
            hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**) &pCatalogObjectItf);
            if (!SUCCEEDED(hr))
goto Error;

            // save key to get the
MethodsForInterface
collection
            hr = pCatalogObjectItf-
>get_Key(&vKey);
            if (!SUCCEEDED(hr))
goto Error;

```

```

        bstrTemp =
"MethodsForInterface";
        hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionMethod);
        if (!SUCCEEDED(hr))
goto Error;

        hr =
pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr))
goto Error;

        hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
        if (!SUCCEEDED(hr))
goto Error;

        // iterate through
methods of interface
        while (lCountMethod >
0)
        {
            hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**) &pCatalogObjectMethod);
            if
(!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"AutoComplete";
            bTmp = TRUE;
            vTmp = bTmp;
            hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
            if
(!SUCCEEDED(hr)) goto Error;

            pCatalogObjectMethod->Release();
            pCatalogObjectMethod = NULL;

            lCountMethod-
-;
        }

        // save changes
        hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
        if (!SUCCEEDED(hr))
goto Error;

        pCatalogObjectItf-
>Release();
        pCatalogObjectItf =
NULL;

        lCountItf--;
    }

```

```

        pCatalogObjectCo->Release();
        pCatalogObjectCo = NULL;

        lCountCo--;
    }

    // save changes
    hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;

    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;

    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;

    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,

                NULL,

                hr,

                MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),

                (LPTSTR)
&lpBuf,

                0,

                NULL);
//      _tprintf(_T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

## license.txt

END-USER LICENSE AGREEMENT FOR  
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-

User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:  
Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.  
--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.  
--You may not distribute copies of the SOFTWARE PRODUCT to third parties.  
--You may not rent, lease or lend the SOFTWARE PRODUCT.  
--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.  
-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.  
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights,

Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS. The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS. You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the

control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS  
This EULA is governed by the laws of the State of Washington, U.S.A.  
Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:  
Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le

LOGICIEL et toute autre documentation s'y rapportant sont fournis @ comme tels sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage particulier. Le risque total d'usage, coulant de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'exceedront pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS.  
Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'éventualité de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer ... votre pays. La présente Convention est régie par les lois de la province d'Ontario, Canada.  
Chacune des parties ... la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent ... instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire ...

Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

## Methods.h

```
/* FILE: METHODS.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 * PURPOSE: Header file for COM components.
 * Change history:
 * 4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL,
    ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR
Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CCOMPONENT_ERR(COMPONENT_ERROR
Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy(m_szTextDetail,
szTextDetail);
        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail !=
NULL)

```

```

delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
delete []
m_szErrorText;
};
        COMPONENT_ERROR m_Error;
        char
*m_szTextDetail;
        char
*m_szErrorText;
        DWORD
m_SystemErr;

        int ErrorType() {return
ERR_TYPE_COMPONENT;};
        char *ErrorTypeStr() { return
"COMPONENT"; }
        int ErrorNum() {return m_Error;};
        char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectControl,
public IObjectConstruct,
public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
COM_INTERFACE_ENTRY(ITPCC)
COM_INTERFACE_ENTRY(IObjectControl)
COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

        CTPCC_Common();
        ~CTPCC_Common();

// ITPCC
public:
        HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
        HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
        HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);

        HRESULT __stdcall CallSetComplete();

```

```

// IObjectControl
        STDMETHODCALLTYPE CanBePooled() { return
m_bCanBePooled; }
        STDMETHODCALLTYPE Activate() { return S_OK; }
// we don't support COM Services
transactions (no enlistment)
        STDMETHODCALLTYPE Deactivate() { /*
nothing to do */ }

// IObjectConstruct
        STDMETHODCALLTYPE Construct(IDispatch * pUnk);

// helper methods
private:
        BOOL m_bCanBePooled;
        CTPCC_BASE *m_pTxn;

        struct COM_DATA
        {
                int retval;
                int error;
                union
                {
                        NEW_ORDER_DATA
NewOrder;
                        PAYMENT_DATA
Payment;
                        DELIVERY_DATA
Delivery;
                        STOCK_LEVEL_DATA
StockLevel;
                        ORDER_STATUS_DATA
OrderStatus;
                } u;
        };
};

////////////////////////////////////
////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
//COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};

////////////////////////////////////
////////////////////////////////////
// CNewOrder
class CNewOrder :

```

```

        public CTPCC_Common,
        public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
// HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
        HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

////////////////////////////////////
////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
        HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
// HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

```

```

////////////////////////////////////
////////////////////////////////////
////////////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
    &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
//      COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //      HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
    &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
//      COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //      HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}

```

```

        HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

## ReadRegistry. cpp

```

/*      FILE:      READREGISTRY.CPP
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999
*      All Rights Reserved
*      not yet
audited
*
*      PURPOSE:  Implementation for TPC-C class.
*      Contact:  Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - first version
*/

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE:      This function reads the NT
registry for startup parameters. There parameters are
under the TPC key.
*
* RETURNS      FALSE = no errors
                TRUE  = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY    hKey;
    DWORD  size;
    DWORD  type;
    DWORD  dwTmp;
    char   szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use;
always has to be ODBC
    pReg->eDB_Protocol = ODBC;
    size = sizeof(szTmp);
    //if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    //{
        //if ( !strcmp(szTmp,
szDBNames[ODBC]) )

```

```

//      pReg->eDB_Protocol =
ODBC;
//}

    pReg->eTxnMon = None;
    // determine txn monitor to use; may be
either COM, or blank
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
            pReg->eTxnMon = COM;
    }

    pReg->bCOM_SinglePool = FALSE;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, "YES") )
            pReg->bCOM_SinglePool =
TRUE;
    }

    pReg->dwMaxConnections = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxConnections = dwTmp;

    pReg->dwMaxPendingDeliveries = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxPendingDeliveries =
dwTmp;

    pReg->dwNumberOfDeliveryThreads = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwNumberOfDeliveryThreads =
dwTmp;

    size = sizeof( pReg->szPath );
    if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
        pReg->szPath[0] = 0;

    size = sizeof( pReg->szDbServer );
    if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )

```

```

        pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) !=
ERROR_SUCCESS )

        pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) !=
ERROR_SUCCESS )

        pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) !=
ERROR_SUCCESS )

        pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueEx(hKey, "SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) !=
ERROR_SUCCESS )

        pReg->szSPPrefix[0] = 'L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )

        && (type == REG_DWORD) )
        pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )

        && (type == REG_DWORD) )
        pReg->bCallNoDuplicatesNewOrder =

dwTmp;

        RegCloseKey(hKey);

        return FALSE;
}

```

## ReadRegistry.h

```

/* FILE: ReadRegistry.h
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:

```

```

* 4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMON { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odbc.dll stored procedures prefix
    DWORD dwConnectDelay; // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder; //
whether to check for non-duplicate item ids and call
a different New Order SP
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

## RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSES1 112
#define IDD_DIALOG4 113
#define IDR_TPCCOBJ1 117
#define IDR_TPCCSTUB1 118
#define IDR_ODBC_DLL 123
#define IDR_COM_DLL 126
#define IDR_COMPS_DLL 127
#define IDR_COMALL_DLL 128
#define IDR_COMTYPLIB_DLL 129
#define IDR_MSVC71 130
#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003

```

```

#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES 1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_LICENSE 1022
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_DB_SERVER 1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID 1024
#define IDC_MTS 1025
#define IDC_TM_MTS 1025
#define IDC_TM_TUXEDO 1026
#define IDC_TM_NONE 1027
#define ED_DB_PASSWORD 1028
#define ED_DB_NAME 1029
#define IDC_TM_ENCINA 1030

```

```

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 131
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

## tpcc.cpp

```

/* FILE: TPCC.C
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error
handling; added options for COM and Encina txn
monitors
*/

```

```

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on
TPC-C txns

#include "httpext.h"
//ISAPI DLL information header
#include "tpcc.h"
//this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.

```

```

// The RTE must be synchronized with the interface
level on login, otherwise the login
// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
*txnDelilog = NULL;
//used to log delivery transaction
information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent =
INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;

DWORD dwDelBuffSize = 100;
// size of circular buffer for delivery

txns
DWORD dwDelBuffFreeCount;
// number of buffers free

DWORD dwDelBuffBusyIndex = 0; //
index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0; //
index position of unused entry

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

#include "..\..\common\src\ReadRegistry.cpp"

```

```

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point
for the DLL. This implementation is based on the
fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS: HANDLE hModule
module handle
DWORD
ul_reason_for_call reason for call
LPVOID
lpReserved
reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in
initialization
*
TRUE DLL
successfully initialized
*/

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...
// DebugBreak();

try
{
switch( ul_reason_for_call )
{
case
DLL_PROCESS_ATTACH:
{
DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);
szMyComputerName[dwSize] = 0;
}
DisableThreadLibraryCalls((HMODULE)hModule)
;
InitializeCriticalSection(&TermCriticalSection);
if (
ReadTPCCRegistrySettings( &Reg ) )
throw new CWEBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );
}
}
}

```



```

        dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

        TermInit();

        if
(Reg.eTxnMon == COM)
        {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName, "tpcc_com.dll");

                hLibInstanceTm = LoadLibrary( szDllName );
                if
(hLibInstanceTm == NULL)
                throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

                //
get function pointer to wrapper for class constructor
                pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
                if
(pCTPCC_COM_new == NULL)
                throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

                // load DLL
                if
((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
                {
                        if
(Reg.eDB_Protocol == ODBC)
                        {
                                strcpy( szDllName, Reg.szPath );
                                strcat( szDllName, "tpcc_odbc.dll");

                                hLibInstanceDb = LoadLibrary( szDllName );
                                if (hLibInstanceDb == NULL)
                                        throw new CWBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                                // get function pointer to wrapper for
class constructor
                                pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");

```

```

        if (pCTPCC_ODBC_new == NULL)
                throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
        // Check
whether Service Pack 1 has been installed if
// running on
Windows Server 2003. The RTM version has
// a
limitation on concurrent HTTP connections.
//
        OSVERSIONINFOEX VersionInfo;

        VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
        if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
        {
                if
(VersionInfo.dwMajorVersion == 5 && // Windows
2000/2003 Server?
                VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
                VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
                {
                        TCHAR szMsg[256];

                        _sntprintf(szMsg, sizeof(szMsg),
                                "\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
                                "limits the
number of concurrent HTTP connections to around
8000");

                        // Use event logging to log the error.
                        //
                        HANDLE hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));

                        LPTSTR lpszStrings[1] = { szMsg };

                        if (hEventSource != NULL)

```

```

        {
                ReportEvent(hEventSource, //
handle of event source
                EVENTLOG_WARNING_TYPE,
                // event type
                0,
                // event category
                0,
                // event ID
                NULL,
                // current user's SID
                1,
                // strings in lpszStrings
                0,
                // no bytes of raw data
                (LPCTSTR *)lpszStrings,
                // array of error strings
                NULL);
                // no raw data
                (VOID)
DeregisterEventSource(hEventSource);
        }
        if
(dwNumDeliveryThreads)
        {
                Initialize delivery delay critical section
                //
                InitializeCriticalSection(&hConnectCritical
Section);
                //
for deferred delivery txns:
                hDoneEvent = CreateEvent( NULL, TRUE /*
manual reset */, FALSE /* initially not signalled */,
NULL );
                InitializeCriticalSection(&DelBuffCriticalS
ection);
                hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );

```

```

        dwDelBuffFreeCount = dwDelBuffSize;

        InitJulianTime(NULL);

        //
        // create unique log file name based on delilog-yyymmdd-
        // hhmm.log
        SYSTEMTIME Time;
        GetLocalTime( &Time );

        wsprintf( szLogFile, "%sdelivery-
        %2.2d%2.2d%2.2d-%2.2d%2.2d-%2.2ds%2.2dms.log",
        Reg.szPath, Time.wYear % 100, Time.wMonth,
        Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
        Time.wMilliseconds );

        txnDelilog = new CTxnLog(szLogFile,
        TXN_LOG_WRITE);

        //write event into txn log for START
        txnDelilog-
        >WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
        sizeof(szMyComputerName));

        //
        // allocate structures for delivery buffers and thread
        // mgmt
        pDeliHandles = new
        HANDLE[dwNumDeliveryThreads];
        pDelBuff = new
        DELIVERY_TRANSACTION[dwDelBuffSize];

        //
        // launch DeliveryWorkerThread to perform actual
        // delivery txns
        for(i=0; i<dwNumDeliveryThreads; i++)
        {
            pDeliHandles[i] = (HANDLE) _beginthread(
            DeliveryWorkerThread, 0, NULL );
            if (pDeliHandles[i] ==
            INVALID_HANDLE_VALUE)
            {
                throw new CWEBCLNT_ERR(
                ERR_DELIVERY_THREAD_FAILED );
            }
        }
        break;
    case
        DLL_PROCESS_DETACH:
            if
            {
                if
                {
                    //write event into txn log for STOP
                    txnDelilog-
                    >WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
                    sizeof(szMyComputerName));

                    // This will do a clean shutdown of the
                    // delivery log file
                    CTxnLog *txnDelilogLocal = txnDelilog;
                    txnDelilog= NULL;
                    delete txnDelilogLocal;

                    delete [] pDeliHandles;
                    delete [] pDelBuff;

                    CloseHandle( hWorkerSemaphore );
                    CloseHandle( hDoneEvent );
                    DeleteCriticalSection(&DelBuffCriticalSection);

                    //
                    // Delete delivery delay critical section
                    //
                    DeleteCriticalSection(&hConnectCriticalSection);
                }
                DeleteCriticalSection(&TermCriticalSection);
            }
            if
            {
                if (hLibInstanceTm != NULL)
                    FreeLibrary( hLibInstanceTm );
                hLibInstanceTm = NULL;
            }
            if
            {
                if (hLibInstanceDb != NULL)
                    FreeLibrary( hLibInstanceDb );
                hLibInstanceDb = NULL;
            }
            Sleep(500);
            break;
        default: /* nothing
        */
    }
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _sntprintf(szMsg, sizeof(szMsg),
    "%s error, code %d: %s",
    e-
    >ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
    exception. DLL could not load.));
    TerminateExtension(0);
    return FALSE;
}
return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
* inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
* passed in structure in which to place
* expected version number.
*
* RETURNS: TRUE inet service
* expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
    pVer->dwExtensionVersion =
    MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C
    Server.", HSE_MAX_EXT_DLL_NAME_LEN);
    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE: This function is called by the
* inet service when the DLL is about to be unloaded.

```

```

*                               Release all resources
in anticipation of being unloaded.
*
* RETURNS:                       TRUE      inet service
expected return value.
*/

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for( DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:                       This function is the main entry
point for the TPCC DLL. The internet service
*                               calls this function
passing in the http string.
*
* ARGUMENTS:                     EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*                               service information.
*
* RETURNS:                       DWORD
HSE_STATUS_SUCCESS
error      connection can be dropped if
*
HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:                       None
*/

DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int      TermId,
iSyncId;
    char     szBuffer[4096];

    int      lpbSize;
    static char szHeader[] = "200 Ok";
    DWORD     dwSize = 6;
    // initial value is strlen(szHeader)
    char     szHeader1[4096];
    DWORD     dwAddr; // used to
store Win32 exception address

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifdef ICECAP
    StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
    pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
    dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address

EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
    VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = sprintf(szMsg,
TEXT("Unhandled exception (%#x) in Web Client's
HttpExtensionProc. "
"Occured at
address %#x, base %#x, tpcc_com.dll at %#x, tpcc.dll
at %#x, tpcc_com_all.dll at %#x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);
    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}

```

```

#ifdef ICECAP
    StopCAP();
#endif

    lpbSize = strlen(szBuffer);
    dwSize += lpbSize;
    dwSize += sprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
    strcat( szHeader1, szBuffer );

    (*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

    //finish up and keep connection
pECB->dwHttpStatusCode = 200;
    return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:                       This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS:                     EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*                               service information.
*
* RETURNS:                       None (outputs into the
szBuffer parameter).
*
* COMMENTS:                       Separated from HttpExtensionProc
to be able to use structured exception handling in
*
HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int      iCmd, FormId;

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )

```

```

        {
            //
            debugging...
            char
            szTmp[128];
            wsprintf(
            szTmp, "Invalid term ID; TermId = %d", TermId );
            WriteMessageToEventLog( szTmp );
            throw new
            CWEBCLNT_ERR( ERR_INVALID_TERMID );
        }
        //must have a valid
        syncid here since termid is valid
        if (iSyncId !=
        Term.pClientData[TermId].iSyncId)
            throw new
            CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
        //set use time
        Term.pClientData[TermId].iTickCount =
        GetTickCount();
    }
    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 1:
        switch( FormId )
        {
        case WELCOME_FORM:
        case MAIN_MENU_FORM:
            break;
        case NEW_ORDER_FORM:
            ProcessNewOrderForm(pECB, TermId,
            szBuffer);
            break;
        case PAYMENT_FORM:
            ProcessPaymentForm(pECB, TermId, szBuffer);
            break;
        case DELIVERY_FORM:
            ProcessDeliveryForm(pECB, TermId,
            szBuffer);
            break;
        case ORDER_STATUS_FORM:
            ProcessOrderStatusForm(pECB, TermId,
            szBuffer);
            break;
        case STOCK_LEVEL_FORM:
            ProcessStockLevelForm(pECB, TermId,
            szBuffer);
        }
    }
}

```

```

        break;
    }
    case 2:
        // new-order selected
        from menu; display new-order input form
        MakeNewOrderForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 3:
        // payment selected
        from menu; display payment input form
        MakePaymentForm(TermId,
        NULL, INPUT_FORM, szBuffer);
        break;
    case 4:
        // delivery selected
        from menu; display delivery input form
        MakeDeliveryForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 5:
        // order-status
        selected from menu; display order-status input form
        MakeOrderStatusForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 6:
        // stock-level selected
        from menu; display stock-level input form
        MakeStockLevelForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 8:
        SubmitCmd(pECB,
        szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
        Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all
        connections; should only be used when no other
        connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB,
        szBuffer);
        break;
}

```

```

        case 11: // CMD=Stats
            StatsCmd(pECB,
            szBuffer);
            break;
        }
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(),
        e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
        szBuffer );
        delete e;
    }
}
void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("TPCC.DLL"));
    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
        source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
            SID
            2, // strings in
            lpszStrings
            0, // no bytes of raw
            data
            (LPCTSTR *)lpszStrings, // array of
            error strings
            NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE: This function processes deferred
            delivery txns. There are typically several
            threads running this
            routine. The number of threads is determined by an
            entry
            * read from the registry.
            The thread waits for work by waiting on semaphore.
            * When a delivery txn is
            posted, the semaphore is released. After processing

```

```

*           the delivery txn,
information is logged to record the txn status and
execution
*           time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPOC_BASE          *pTxn = NULL;

    DELIVERY_TRANSACTION
    delivery;
    PDELIVERY_DATA
    pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF    txnDeliRec;

    DWORD
    index;
    HANDLE
    handles[2];

    SYSTEMTIME          trans_end;
    //delivery transaction finished
time
    SYSTEMTIME          trans_start;
    //delivery transaction start time

    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
                > 0)
            {
                //
                Synchronize connect (for VIA)
                //
                EnterCriticalSection(&hConnectCriticalSection);

                Sleep(Reg.dwConnectDelay);

                LeaveCriticalSection(&hConnectCriticalSection);
            }

            pTxn = pCTPOC_ODBC_new(
                Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
                szMyComputerName, Reg.szDbName,
                Reg.szSPPrefix,
                Reg.bCallNoDuplicatesNewOrder );
            pDeliveryData = pTxn-
            >BuffAddr_Delivery();
        }
    }
}

```

```

catch (CBaseErr *e)
{
    char szTmp[1024];
    wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
            "%s.
Server=%s, User=%s, Password=%s, Database=%s",
            e-
            >ErrorText(), Reg.szDbServer, Reg.szDbUser,
            Reg.szDbPassword, Reg.szDbName );
    WriteMessageToEventLog( szTmp );
    delete e;
    goto ErrorExit;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread.));
    goto ErrorExit;
}

while (TRUE)
{
    try
    {
        //while delivery thread
        running, i.e. user has not requested termination
        while (TRUE)
        {
            // need to
            wait for multiple objects: program exit or worker
            semaphore;
            hDoneEvent;
            handles[0] =
            hWorkerSemaphore;
            handles[1] =
            index =
            WaitForMultipleObjects( 2, &handles[0], FALSE,
            INFINITE );
            if (index ==
            WAIT_OBJECT_0)
            goto ErrorExit;

            ZeroMemory(&txnDeliRec,
            sizeof(txnDeliRec));

            txnDeliRec.TxnType =
            TXN_REC_TYPE_TPCC_DELIV_DEF;

            // make a
            local copy of current entry from delivery buffer and
            increment buffer index
            EnterCriticalSection(&DelBuffCriticalSection);
            delivery =
            *(pDelBuff+dwDelBuffBusyIndex);

            dwDelBuffFreeCount++;
        }
    }
}

```

```

dwDelBuffBusyIndex++;
if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer

dwDelBuffBusyIndex = 0;

LeaveCriticalSection(&DelBuffCriticalSection);
n);

pDeliveryData->w_id = delivery.w_id;

pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

txnDeliRec.w_id = pDeliveryData->w_id;

txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;

txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

GetLocalTime(
&trans_start );
pTxn-
GetLocalTime(
&trans_end );
//log txn

txnDeliRec.TxnStatus = ERR_SUCCESS;
for (int i=0;
i<10; i++)
    txnDeliRec.o_id[i] = pDeliveryData-
    >o_id[i];

txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);

txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));

if
(txnDeliLog != NULL)
    txnDeliLog->WriteToLog(&txnDeliRec);
}
catch (CBaseErr *e)
{
    char szTmp[1024];
    wsprintf( szTmp, "%s
Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
WriteMessageToEventLog(
szTmp );

// log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
if (txnDeliLog != NULL)
WriteToLog(&txnDeliRec);
delete e;
}
catch (...)
{
// unhandled exception;
shouldn't happen; not much we can do...
WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
}
}
ErrorExit:
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
EnterCriticalSection(&hConnectCriticalSecti
on);
Sleep(Reg.dwConnectDelay);
}
delete pTxn;
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
LeaveCriticalSection(&hConnectCriticalSecti
on);
}
_endthread();
}
/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS: BOOL FALSE
delivery information posted successfully
*
TRUE error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
BOOL bError;
EnterCriticalSection(&DelBuffCriticalSectio
n);
if (dwDelBuffFreeCount > 0)
{
bError = FALSE;
(pDelBuff+dwDelBuffFreeIndex)-
= w_id;
(pDelBuff+dwDelBuffFreeIndex)-
= o_carrier_id;
GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);
dwDelBuffFreeCount--;
dwDelBuffFreeIndex++;
if (dwDelBuffFreeIndex ==
dwDelBuffSize)
dwDelBuffFreeIndex = 0;
// wrap-around if at end of
buffer
}
else
// No free buffers. Return an
error, which indicates that the delivery buffer is
full.
// Most likely, the number of
delivery worker threads needs to be increased to keep
up
// with the txn rate.
bError = TRUE;
LeaveCriticalSection(&DelBuffCriticalSectio
n);
if (!bError)
// increment worker semaphore to
wake up a worker thread
ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );
}
return bError;
}
/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the
relevent information out of the http command passed
in from
*
the browser.
*
* COMMENTS: If this is the initial connection
i.e. client is at welcome screen then
*
there will
not be a terminal id or current form id. If this is
the case
*
then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId)
{
char *ptr = pECB->lpszQueryString;
char szBuffer[25];
int i;
//allowable client command strings i.e.
CMD=command
static char *szCmds[] =
{
"Process", "..NewOrder..",
"..Payment..", "..Delivery..", "..Order-Status..",
"..Stock-Level..",
"..Exit..", "Submit", "Menu",
"Clear", "Stats", ""
};
*pCmd = 0; // default is
the login screen
*pTermId = 0;
// if no params (i.e., empty query string),
then return login screen
if (strlen(pECB->lpszQueryString) == 0)
return;
// parse FORMID, TERMID, and SYNCID
*pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
*pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
*pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);
// parse CMD
GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);
// see which command it matches
for(i=0; i++)
{
if (szCmds[i][0] == 0)
// no more; no match;
return error
throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
if (!strcmp(szCmds[i], szBuffer)
)
{
*pCmd = i+1;
break;
}
}
}
/* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)

```

```

{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
    is first form client sees.
    strcpy( szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"

        "<font face=\\"Courier New\\"><PRE>"

        "Compiled: \"__DATE__\", \"__TIME__\" <BR>"

        "Source:  \"__FILE__\" ( \"__TIMESTAMP__\" )
<BR>"

        "</PRE></font>"

        "<FORM ACTION=\\"tpcc.dll\" METHOD=\\"GET\\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"STATUSID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"ERROR\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"FORMID\"
VALUE=\\"1\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"TERMINID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"SYNCID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"VERSION\"
VALUE=\\" \" WEBCLIENT_VERSION \">"
        );

    sprintf( szTmp,
        "Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "Txn Monitor          = <B>%s</B><BR>"

        "Database protocol     = <B>%s</B><BR>"

        "Max Connections       = <B>%d</B><BR>"
        "#
of Delivery Threads = <B>%d</B><BR>"

        "Max Pending Deliveries = <B>%d</B><BR>"

        ,
        szTxnMonNames[Reg.eTxnMon],
        szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
        dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTxnMon == COM)

```

```

{
    sprintf( szTmp,
        "COM Single
Pool          = <B>%s</B><BR>",
        Reg.bCOM_SinglePool ?
        "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTxnMon == None)
    // connection options may be
    specified when not using a txn monitor
    sprintf( szTmp,
        "Please enter
your database options for this connection:<BR>"

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "DB Server          = <INPUT NAME=\\"db_server\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB User ID         = <INPUT NAME=\\"db_user\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Password        = <INPUT NAME=\\"db_passwd\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Name             = <INPUT NAME=\\"db_name\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "</PRE></font>"

        ,
        Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
        Reg.szDbName );
    else
        // if using a txn monitor,
        connection options are determined from registry;
        can't
        // set per user. show options
        fyi
        sprintf( szTmp,
            "Database
options which will be used by the transaction
monitor:<BR>"

            "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

            "DB Server          = <B>%s</B><BR>"

            "DB User ID         = <B>%s</B><BR>"

            "DB Password        = <B>%s</B><BR>"

            "DB Name             = <B>%s</B><BR>"

            "</PRE></font>"

            ,
            Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
            Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp,
        "Please enter your
Warehouse and District for this session:<BR>"

```

```

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>" );
    strcat( szBuffer, szTmp);
    strcat( szBuffer,
        "Warehouse ID = <INPUT
NAME=\\"w_id\" SIZE=6><BR>"

        "District ID = <INPUT NAME=\\"d_id\"
SIZE=2><BR>"

        "</PRE></font><HR>"

        "<INPUT TYPE=\\"submit\" NAME=\\"CMD\"
VALUE=\\"Submit\">"

        "</FORM></BODY></HTML>");
}

/* FUNCTION: SubmitCmd
 *
 * PURPOSE: This function allocated a new
terminal id in the Term structure array.
 *
 */

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int          iNewTerm;
    char        *ptr = pECB->lpszQueryString;

    char        szVersion[32]    = { 0 };
    char        szServer[32]     = { 0 };
    char        szUser[32]       =
    "sa";
    char        szPassword[32]   = { 0 };
    char        szDatabase[32]   = "tpcc";

    // validate version field; the version
    field ensures that the RTE is synchronized with the
    web client
    GetKeyValue(&ptr, "VERSION", szVersion,
    sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION )
)
        throw new CWBCLNT_ERR(
        ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
        szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
        szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
        szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
        szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```

```

// parse warehouse ID
int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
if ( w_id < 1 )
    throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

// parse district ID
int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
if ( d_id < 1 || d_id > 10 )
    throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

iNewTerm = TermAdd();

Term.pClientData[iNewTerm].w_id = w_id;
Term.pClientData[iNewTerm].d_id = d_id;

try
{
    if (Reg.eTxnMon == COM)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
    else if (Reg.eDB_Protocol ==
ODBC)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

szDatabase, Reg.szSPPrefix,

Reg.bCallNoDuplicatesNewOrder );
}
catch (...)
{
    TermDelete(iNewTerm);
    throw; // pass
exception upward
}

MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 *
 * PURPOSE: This function returns to the
browser the total number of active terminal ids.
 * This routine is for
development/debugging purposes.
 */

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)

            iTTotal++;

    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,

"<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"

        "<BODY><B><BIG> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>"
        , iTTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_COMMAND_UNDEFINED,

"Command undefined."

},

        { ERR_D_ID_INVALID,

"Invalid District ID Must be 1 to 10."

},

        { ERR_DELIVERY_CARRIER_ID_RANGE,

"Delivery Carrier ID out of range
must be 1 - 10."

},

        { ERR_DELIVERY_CARRIER_INVALID,

"Delivery Carrier ID invalid must be
numeric 1 - 10."

},

        { ERR_DELIVERY_MISSING_OCD_KEY,

"Delivery missing Carrier ID key \"OCD*\"."

},

        { ERR_DELIVERY_THREAD_FAILED,

"Could not start delivery worker
thread."

},

        { ERR_GETPROCADDR_FAILED,

```

```

"Could not map proc in DLL. GetProcAddr
error. DLL="

},

        { ERR_HTML_ILL_FORMED,

"Required key field is missing from HTML
string."

},

        { ERR_INVALID_SYNC_CONNECTION,

"Invalid Terminal Sync ID."

},

        { ERR_INVALID_TERMINID,

"Invalid Terminal ID."

},

        { ERR_LOADDLL_FAILED,

"Load of DLL failed. DLL="

},

        { ERR_MAX_CONNECTIONS_EXCEEDED,

"Max connections available. Max Connections
is probably too low."

},

        { ERR_MISSING_REGISTRY_ENTRIES,

"Required registry entries are missing.
Rerun INSTALL to correct."

},

        { ERR_NEWORDER_CUSTOMER_INVALID,

"New Order customer id invalid
data type, range = 1 to 3000."

},

        { ERR_NEWORDER_CUSTOMER_KEY,

"New Order missing Customer key
\"CID*\"."

},

        { ERR_NEWORDER_DISTRICT_INVALID,

"New Order District ID Invalid
range 1 - 10."

},

        { ERR_NEWORDER_FORM_MISSING_DID,

"New Order missing District key
\"DID*\"."

},

        { ERR_NEWORDER_ITEMID_INVALID,

"New Order Item Id is wrong data type, must
be numeric."

},

        { ERR_NEWORDER_ITEMID_RANGE,

"New Order Item Id is out of
range. Range = 1 to 999999."

},

        { ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,

"New Order Item_Id field entered without a
corresponding Supp_W."

},

        { ERR_NEWORDER_MISSING_IID_KEY,

"New Order missing Item Id key \"IID*\"."

```



```

    },
    {
        ERR_NEWORDER_MISSING_QTY_KEY,
        "New Order Missing Qty key \"Qty##*\"."
    },
    {
        ERR_NEWORDER_MISSING_SUPPW_KEY,
        "New Order missing Supp_W key
        \"SP##*\"."
    },
    {
        ERR_NEWORDER_NOITEMS_ENTERED,
        "New Order No order lines entered."
    },
    {
        ERR_NEWORDER_QTY_INVALID,
        "New Order Qty invalid must be
        numeric range 1 - 99."
    },
    {
        ERR_NEWORDER_QTY_RANGE,
        "New Order Qty is out of range. Range = 1
        to 99."
    },
    {
        ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered
        without a corresponding Supp_W."
    },
    {
        ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data
        type must be numeric."
    },
    {
        ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {
        ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name
        may be entered, not both."
    },
    {
        ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range
        must be numeric 1 - 3000."
    },
    {
        ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name
        longer than 16 characters."
    },
    {
        ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must
        be numeric 1 - 10."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last
        Name must be entered."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key

```

```

        \"CID*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name
        key \"CLT*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key
        \"DID*\"."
    },
    {
        ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district
        invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last
        Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must
        be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse
        invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1
        - 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type
        must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name
        longer than 16 characters."
    },
    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key
        \"CDI*\"."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name
        must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
    },
    },

```

```

    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key
        \"CLT*\"."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key
        \"CWI*\"."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
    },
    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
        "Stock Level; missing Threshold key
        \"TT*\"."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in
        the range = 1 - 99."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_RANGE,
        "Stock Level Threshold out of
        range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client
        are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
    },
    {
        0,
        ""
    },
};
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
        error number." );
        break;
    }
    if (m_Error ==
    errorMsgs[i].iError)
    {

```

```

        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}
if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for specific key values.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey               key
value to look for
                char
                *pValue            character array into which to place key's
value
                int
                iMax              maximum length of key value array.
                WEBERROR
                err               error value to throw
 *
 * RETURNS:     nothing.
 *
 * ERROR:       if (the pKey value is not found)
then
                if
(err == 0)
                return (empty string)
                else
                throw CWEBCLNT_ERR(err)
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
                TPC-C input
fields in such a manner that the keys can be
extracted in the
                above manner.
 */

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
null
while( *ptr && *ptr != '&' && iMax)
{
    *pValue++ = *ptr++;
    iMax--;
}
*pValue = 0; // terminating null
*pQueryString = ptr;
return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for a specific key value.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey               key
value to look for
                WEBERROR
                NoKeyErr          error value to throw if
key not found
                WEBERROR
                NotIntErr        error value to throw if
value not numeric
 *
 * RETURNS:     integer
 *
 * ERROR:       if (the pKey value is not found)
then
                if
(NoKeyErr != NO_ERR)
                throw CWEBCLNT_ERR(err)
                else
                return 0
                else if (non-
numeric char found) then

```

```

 *
 * if
(NotIntErr != NO_ERR) then
 *
 *     throw CWEBCLNT_ERR(err)
 *
 *     else
 *
 *     return 0
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
 *
 *     TPC-C input
fields in such a manner that the keys can be
extracted in the
 *
 *     above manner.
 */

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember
starting point
    // scan string until a terminator (null or
&) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr)
)
        ptr++;

    // make sure we stopped scanning for the
right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCLNT_ERR(
NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr
);
    return 0;
}

/* FUNCTION: TermInit
 *
 * PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL

```

```

*                               is first loaded by the
inet service.
*
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

{
    if (Term.pClientData[i].iNextFree
== -1)
        delete
Term.pClientData[i].pTxn;
}

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
assigned terminal id
*
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than
one minute old, it probably means that more
connections

```

```

// are being attempted than were
specified as "Max Connections" at install. In this
case,
// do not bump existing
connection; instead, return error to requester.
    if ((GetTickCount() - iTickCount)
< 60000)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTickCount =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int id
Terminal id of client exiting
*
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

        wprintf(szBuffer,
            "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
            "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
            "<BOLD>An Error
Occurred</BOLD><BR><BR>"
            "%s"
            "<BR><BR><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , iType, iErrorNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
        "Select Desired
Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"

```

```

            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , MAIN_MENU_FORM, iTermId,
iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the
Stock Level HTML page.
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
            be freed
            except when the client terminal id is no longer
            needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
Stock-Level<BR>"
        "Warehouse: %6.6d District:
%2.2d<BR> <BR>,"
        STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold:
<INPUT NAME=\"TT\" SIZE=2><BR> <BR>"
            "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"

```

```

            "<BR> <BR> <BR> <BR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
            "</FORM></HTML>" );
        }
        else
        {
            wprintf(szForm+c,
                "Stock Level Threshold:
%2.2d<BR> <BR>"
                "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR></PRE><HR>"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
                "</FORM></HTML>"
                , pStockLevelData-
>threshold, pStockLevelData->low_stock);
        }
    }

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
            be freed
            except when the client terminal id is no longer
            needed.
*/

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int i, c;
    BOOL bValid;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( (pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem) );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

```

```

        c = sprintf(szForm,
            " <HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>
" <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">
" <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">
" <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">
" <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">
" <INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">
" <INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">
" <PRE><font face=\"Courier\">
New Order<BR>
"
            , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( bInput )
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

            strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>
"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %8.2f <BR>
"
                "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR>
"
                " Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR>
"
                " <INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\"
SIZE=6> <INPUT
NAME=\"Qty00*\" SIZE=1><BR>
"
                " <INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\"
SIZE=6> <INPUT
NAME=\"Qty01*\" SIZE=1><BR>
"
                " <INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\"
SIZE=6> <INPUT
NAME=\"Qty02*\" SIZE=1><BR>
"
                " <INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\"
SIZE=6> <INPUT
NAME=\"Qty03*\" SIZE=1><BR>
"
                " <INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\"
SIZE=6> <INPUT
NAME=\"Qty04*\" SIZE=1><BR>
"
                " <INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\"

```

```

SIZE=6> <INPUT
NAME=\"Qty05*\" SIZE=1><BR>
" <INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\"
SIZE=6> <INPUT
NAME=\"Qty06*\" SIZE=1><BR>
" <INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\"
SIZE=6> <INPUT
NAME=\"Qty07*\" SIZE=1><BR>
" <INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\"
SIZE=6> <INPUT
NAME=\"Qty08*\" SIZE=1><BR>
" <INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\"
SIZE=6> <INPUT
NAME=\"Qty09*\" SIZE=1><BR>
" <INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\"
SIZE=6> <INPUT
NAME=\"Qty10*\" SIZE=1><BR>
" <INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\"
SIZE=6> <INPUT
NAME=\"Qty11*\" SIZE=1><BR>
" <INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\"
SIZE=6> <INPUT
NAME=\"Qty12*\" SIZE=1><BR>
" <INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\"
SIZE=6> <INPUT
NAME=\"Qty13*\" SIZE=1><BR>
" <INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\"
SIZE=6> <INPUT
NAME=\"Qty14*\" SIZE=1><BR>
"
Total:<BR>
" </font></PRE><HR>
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">
" </FORM></HTML>
");
        }
        else
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ",
                pNewOrderData->w_id,
                pNewOrderData->d_id);

            if ( bValid )
            {
                c += sprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                pNewOrderData->o_entry_d.day,

```

```

                pNewOrderData->o_entry_d.month,
                pNewOrderData->o_entry_d.year,
                pNewOrderData->o_entry_d.hour,
                pNewOrderData->o_entry_d.minute,
                pNewOrderData->o_entry_d.second);
            }
        }
        c += sprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s
",
                pNewOrderData->c_id,
                pNewOrderData->c_last, pNewOrderData->c_credit);

        if ( bValid )
        {
            c += sprintf(szForm+c,
                "%8.2f <BR>
"
                "Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>
"
                " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>
",
                100.0*pNewOrderData->c_discount,
                pNewOrderData->o_id,
                pNewOrderData->o_ol_cnt,
                100.0 *
                pNewOrderData->w_tax,
                100.0 *
                pNewOrderData->d_tax);

            for(i=0;
i<pNewOrderData->o_ol_cnt; i++)
            {
                c +=
                sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
%3.3d %1.1s %5.2f %5.2f <BR>
",
                    pNewOrderData->OL[i].ol_supply_w_id,
                    pNewOrderData->OL[i].ol_i_id,
                    pNewOrderData->OL[i].ol_i_name,
                    pNewOrderData->OL[i].ol_quantity,
                    pNewOrderData->OL[i].ol_stock,
                    pNewOrderData->OL[i].ol_brand_generic,
                    pNewOrderData->OL[i].ol_i_price,
                    pNewOrderData->OL[i].ol_amount );
            }
        }
    }
}

```

```

    }
    else
    {
        c += sprintf(szForm+c,
                    "%Disc:<BR>"
                    "Order
Number: %8.8d Number of Lines:      W_tax:
D_tax:<BR> <BR>"
                    " Supp_W
Item_Id Item Name      Qty Stock B/G
Price  Amount<BR>"
                    ,
pNewOrderData->o_id);
        i = 0;
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    if ( bValid )
        c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total:  $%8.2f  ",
        pNewOrderData->total_amount);
    else
        c += sprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");
    strcpy(szForm+c,
"
<BR></font></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></HTML>"
        );
}

/* FUNCTION: MakePaymentForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                  be freed
except when the client terminal id is no longer
needed.
*/

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;
    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">"
Payment<BR>"
                "Date: "
                , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);
    if ( !bInput )
    {
        c += sprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
        pPaymentData-
>h_date.day,
        pPaymentData-
>h_date.month,
        pPaymentData-
>h_date.year,
        pPaymentData-
>h_date.hour,
        pPaymentData-
>h_date.minute,
        pPaymentData-
>h_date.second);
    }
    if ( bInput )
    {
        c += sprintf(szForm+c,
                    "<BR> <BR>Warehouse:
%6.6d"
                    "
District: <INPUT NAME=\"DID*\" SIZE=1><BR> <BR> <BR>
<BR> <BR>"
                    "Customer: <INPUT
NAME=\"CID*\" SIZE=4>"
                    "Cust-Warehouse: <INPUT
NAME=\"CWI*\" SIZE=4> "
                    "Cust-District: <INPUT
NAME=\"CDI*\" SIZE=1><BR>"
                    "Name:
<INPUT NAME=\"CLT*\" SIZE=16>
Since:<BR>"
                    "
Credit:<BR>"

```

```

"
Disc:<BR>"
"
Phone:<BR> <BR>"
"Amount Paid:
$<INPUT NAME=\"HAM*\" SIZE=7>      New Cust-
Balance:<BR>"
"Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"
"
"
NAME=\"CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
"
Term.pClientData[iTermId].w_id);
    }
    else
    {
        c += sprintf(szForm+c,
                    "<BR> <BR>Warehouse:
%6.6d      District: %2.2d<BR>"
                    "%-20s
                    "%-20s
                    "%-20s<BR>"
                    "%-20s %-2s %5.5s-%4.4s<BR> <BR>"
                    "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>"
                    "Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"
                    "%-20s
Credit: %-2s<BR>"
                    ,
Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_city,
pPaymentData->w_state, pPaymentData->w_zip,
pPaymentData->w_zip+5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+5
, pPaymentData->c_id,
pPaymentData->c_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);
        c += sprintf(szForm+c,
                    "
                    "%-20s
                    %%Disc:  %5.2f<BR>",

```

```

        pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);
        c += sprintf(szForm+c,
                    "      %-20s %-2s\n",
%5.5s-%4.4s      Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR>
<BR>",
                    pPaymentData->c_city,
pPaymentData->c_state, pPaymentData->c_zip,
pPaymentData->c_zip+5,
                    pPaymentData->c_phone,
pPaymentData->c_phone+6, pPaymentData->c_phone+9,
pPaymentData->c_phone+12 );
        c += sprintf(szForm+c,
                    "Amount Paid:\n",
%7.2f      New Cust-Balance: %14.2f<BR>
                    "Credit Limit:\n",
%13.2f<BR> <BR>"
                    , pPaymentData-
>h_amount, pPaymentData->c_balance
                    , pPaymentData-
>c_credit_lim
                    );
        if ( pPaymentData->c_credit[0] ==
'B' && pPaymentData->c_credit[1] == 'C' )
            c += sprintf(szForm+c,
                "Cust-Data: %5.5s<BR>      %-\n",
50.50s<BR>      %5.50s<BR>      %-\n",
50.50s<BR>,"
                , pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
            else
                strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");
                strcat(szForm,
" <BR></font></PRE><HR>"
                );
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
                " </BODY></FORM></HTML>";
            }

```

```

}
/* FUNCTION: MakeOrderStatusForm
 *
 * COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
 *
 *                  be freed
except when the client terminal id is no longer
needed.
 */
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>";
    c = sprintf(szForm,
                " <HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
                " <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                " <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                " <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                " <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                " <INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
                " <INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
                " <PRE><font face=\"Courier\">
Order-Status<BR>"
                " Warehouse: %6.6d ",
                ORDER_STATUS_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId,
                Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy(szForm+c,
            "District: <INPUT
NAME=\"DID*\" SIZE=1><BR>"
            "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
<INPUT NAME=\"CLT*\" SIZE=23><BR>"
            <BR>"
            "Order-Number:
Carrier-
Number:<BR>"
            "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></font></PRE>"
        );
    }

```

```

" <HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
" </BODY></FORM></HTML>"
);
    }
    else
    {
        c += sprintf(szForm+c,
                    "District: %2.2d<BR>"
                    "Customer: %4.4d
Name: %16s %-2s %-16s<BR>",
                    pOrderStatusData->d_id,
pOrderStatusData->c_id,
                    pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);
        c += sprintf(szForm+c, "Cust-
Balance: %9.2f<BR> <BR>",
                    pOrderStatusData-
>c_balance);
        c += sprintf(szForm+c,
                    "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>"
                    "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR>",
                    pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.day,
                    pOrderStatusData-
>o_entry_d.month,
                    pOrderStatusData-
>o_entry_d.year,
                    pOrderStatusData-
>o_entry_d.hour,
                    pOrderStatusData-
>o_entry_d.minute,
                    pOrderStatusData-
>o_entry_d.second,
                    pOrderStatusData-
>o_carrier_id);
        for(i=0; i< pOrderStatusData-
>o_ol_cnt; i++)
        {
            c += sprintf(szForm+c,
                " %6.6d %6.6d %2.2d %8.2f %2.2d-
%2.2d-%4.4d<BR>",
                pOrderStatusData->OL[i].ol_supply_w_id,
                pOrderStatusData->OL[i].ol_i_id,
                pOrderStatusData->OL[i].ol_quantity,
                pOrderStatusData->OL[i].ol_amount,
                pOrderStatusData->OL[i].ol_delivery_d.day,
            );
        }
    }

```

```

        pOrderStatusData-
>OL[i].ol_delivery_d.month,
        pOrderStatusData-
>OL[i].ol_delivery_d.year);
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
        "</BODY></FORM></HTML>\"
);
    }
}
/* FUNCTION: MakeDeliveryForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int    c;
    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>\"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">\"
        "<PRE><font face=\"Courier\">
Delivery<BR>\"

```

```

        "Warehouse: %6.6d<BR> <BR>\",
        (!bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
        DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT
NAME=\"OCD*\" SIZE=1><BR> <BR>\"
            "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">\"
            "</BODY></FORM></HTML>\"
        );
    }
    else
    {
        sprintf( szForm+c,
            "Carrier Number:
%2.2d<BR> <BR>\"
            "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>\"
            "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
            "</BODY></FORM></HTML>\"
        ), pDeliveryData-
>o_carrier_id,
        (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed
";
    }
}
/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE:      This function gets and validates
the input data from the new order form
*                filling in the required
input variables. it then calls the SQLNewOrder

```

```

*                transaction, constructs
the output form and writes it back to client
*                browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA    pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);
    Term.pClientData[iTermId].pTxn->NewOrder();
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}
/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates
the input data from the payment form
*                filling in the required
input variables. It then calls the SQLPayment
transaction, constructs
the output form and writes it back to client
*                browser.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK
                *pECB    passed in structure pointer from
inetsrv.
                int
                iTermId  client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA    pPayment;
    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);
    Term.pClientData[iTermId].pTxn->Payment();

```



```

        pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
        MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: ProcessOrderStatusForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Order Status
 *              form filling in the
required input variables. It then calls the
 *              SQLOrderStatus
transaction, constructs the output form and writes it
 *              back to client browser.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
 *
 * PURPOSE:      This function gets and validates
the input data from the delivery form
 *              filling in the required
input variables. It then calls the PostDeliveryInfo
 *              Api, The client is then
informed that the transaction has been posted.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.

```

```

 *              int
 *              iTermId  client browser terminal id
 */

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )
        throw new CWBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id ) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Stock Level
 *              form filling in the
required input variables. It then calls the
 *              SQLStockLevel
transaction, constructs the output form and writes it
 *              back to client browser.
 *

```

```

 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;

    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
        throw new CWBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
 *
 * PURPOSE:      This function extracts and
validates the new order form data from an http
command string.
 *
 * ARGUMENTS:    LPSTR
 *lpszQueryString  client
browser http command string
 *
 *              NEW_ORDER_DATA *pNewOrderData
 *              pointer to new order data structure
 */

```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char        szTmp[26];
    int         i;
    short      items;
    int         ol_i_id, ol_quantity;
    char        *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
=
    { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*",
"SP05*", "SP06*", "SP07*",
"SP08*", "SP09*",
"SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" };
    static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*",
"IID05*", "IID06*", "IID07*",
"IID08*", "IID09*",
"IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" };
    static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*",
"Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*",
"Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
            if ( !IsNumeric(szTmp)
                throw new
CWEBCLNT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
                if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

                throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_RANGE );
                ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
                if ( ol_quantity > 99
|| ol_quantity < 1 )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_RANGE );
                items++;
            }
        else
            { // nothing entered for
supply warehouse, so item id and qty must also be
blank
                GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
                if ( szTmp[0] )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
                GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
                if ( szTmp[0] )
                    throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
            }
        if ( items == 0 )
            throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );

        pNewOrderData->o_ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS:   LPSTR          client
                lpszQueryString
                browser http command string
*
                *pPaymentData
                payment data structure
                pointer to
*/

void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    BOOL        bCustIdBlank;
    int         iLen;

```

```

        pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

        GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
        if ( szTmp[0] == 0 )
            {
                bCustIdBlank = TRUE;
                pPaymentData->c_id = 0;
            }
        else
            { // parse customer id and verify
that last name was NOT entered
                bCustIdBlank = FALSE;
                if ( !IsNumeric(szTmp) )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
                pPaymentData->c_id = atoi(szTmp);
            }

        pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
        pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

        if ( bCustIdBlank )
            { // customer id is blank, so last
name must be entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] == 0 )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

                _strupr( szTmp );
                if ( strlen(szTmp) >
LAST_NAME_LEN )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );

                strcpy(pPaymentData->c_last,
szTmp);
                // pad with spaces so that the
client layer doesn't have to do it
                // before passing parameters to
stored procedure
                iLen = strlen(pPaymentData-
>c_last);
                memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
                pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
            }
        else
            { // parse customer id and verify
that last name was NOT entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] != 0 )

```

```

        throw new CWBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    int     iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strup( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);

```

```

        pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE:      This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
*
* ARGUMENTS:    char
                *ptr
                pointer to string to check.
*
* RETURNS:      BOOL    FALSE    if
string is not all numeric
*
                TRUE     if string contains only numeric
characters i.e. '0' - '9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE:      This function determines if a
string is a non-negative decimal value.
*
                It fails if any characters other than a
series of numbers followed by
*
                a decimal point,
another series of numbers, and a null terminator are
present.
*
* ARGUMENTS:    char
                *ptr
                pointer to string to check.
*
* RETURNS:      BOOL    FALSE    if
string is not a valid non-negative decimal value

```

```

*
*
* TRUE     if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotp;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotp = strchr( ptr, '.' );
    if (dotp == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotp = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotp+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if (*(dotp+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotp+1);

    *dotp = '.'; // replace decimal point
    return bValid;
}

```

## ***tpcc.def***

LIBRARY TPCC.DLL

EXPORTS

```

    GetExtensionVersion @1
    HttpExtensionProc @2
    TerminateExtension @3

```

## ***tpcc.h***

```

/* FILE: TPCC.H
*
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

*
* PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
    101
#define _APS_NEXT_COMMAND_VALUE
    40001
#define _APS_NEXT_CONTROL_VALUE
    1000
#define _APS_NEXT_SYMED_VALUE
    101

#define TP_MAX_RETRIES
    50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
    1
    //beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
    2
    //term id assigned main menu form id
#define NEW_ORDER_FORM
    3
    //new order form id
#define PAYMENT_FORM
    4
    //payment form id
#define DELIVERY_FORM
    5
    //delivery form id
#define ORDER_STATUS_FORM
    6
    //order
status id
#define STOCK_LEVEL_FORM
    7
    //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree;
    //index of
next free element or -1 if this entry in use.
    int w_id;
    //warehouse
id assigned at welcome form

```

```

    int d_id;
    //district id
assigned at welcome form

    int iSyncId;
    //synchronization id
    int iTickCount;
    //time of
last access;

    CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;
    //total allocated terminal array entries
    int iFreeList;
    //next available terminal array element or
-1 if none
    int iMasterSyncId;
    //synchronization id
    CLIENTDATA *pClientData;
    //pointer to
allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,
    ERR_NEWORDER_CUSTOMER_KEY,
    ERR_NEWORDER_DISTRICT_INVALID,
    ERR_NEWORDER_FORM_MISSING_DID,
    ERR_NEWORDER_ITEMID_INVALID,
    ERR_NEWORDER_ITEMID_RANGE,

```

```

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,

ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };
    CWEBCLNT_ERR(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );

```

```

        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };
    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail !=
NULL)
            delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
            delete []
m_szErrorText;
    };
    WEBERROR m_Error;
    char
    *m_szTextDetail; //
    char
    *m_szErrorText;
    DWORD
        m_SystemErr;

    int ErrorType() {return
ERR_TYPE_WEBDLL;};
    char *ErrorTypeStr() { return
"WEBCLIENT"; }

    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPCTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
// Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

---

**tpcc.rc**

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGS 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL"
Server\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL"
Server\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END
#endif // !_MAC

```

```

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END
2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END
3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON   "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON     "Cancel", IDCANCEL, 129, 24, 50, 14
END

////////////////////////////////////
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

```

```

#ifdef // English (U.S.) resources
////////////////////////////////////
//

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
#endif // not APSTUDIO_INVOKED

tpcc_com.cpp
/* FILE: TPC_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 *
 * PURPOSE: Source file for TPC-C COM+ class
 * implementation.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec( dllexport ) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
        component
            m_pPayment = m_pNewOrder;
            m_pStockLevel = m_pNewOrder;
            m_pOrderStatus = m_pNewOrder;
        }
        else
        {
            // use different components for
            each txn

            hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
            if (FAILED(hr))
                throw new CCOMERR(hr);

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each
    component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT                vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::Payment()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::StockLevel()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::OrderStatus()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }
}

tpcc_com.h
/*      FILE:      TPCC_COM.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999
*      All Rights Reserved
*
*      not yet
audited
*
*      PURPOSE:  Header file for TPC-C COM+ class
implementation.
*
*      Change history:
*      4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

```

```

public:
    // use this interface for genuine
    COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    impersonate a non-COM error type
    CCOMERR( int iErrorType, int
    iError )
    {
        m_iErrorType =
    iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can
    impersonate another class, which happens if the error
    // was not actually a COM
    Services error, but was simply transmitted back via
    COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
    ERR_TYPE_COM;
        else
            return
    m_iErrorType;
    }

    char *ErrorTypeStr() { return
    "COM*"; }

    int ErrorNum()
    {
        if (m_iErrorType == 0)
            return m_hr;
        // return COM error
        else
            return
    m_iError; // return impersonated error
    }

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf(
    m_szErrorText, "Error: Class %d, error # %d",
    m_iErrorType, m_iError );
        else
            sprintf(
    m_szErrorText, "Error: COM HRESULT %x", m_hr );
    }

```

```

        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*
    m_pNewOrder;
    ITPCC*
    m_pPayment;
    ITPCC*
    m_pStockLevel;
    ITPCC*
    m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } u;
    } *m_pTxn;

    VARIANT m_vTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
    &m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
    &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
    &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
    &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
    &m_pTxn->u.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void StockLevel ();
    void OrderStatus ();
}

```

```

void Delivery ()
{ throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

tpcc_com_all.
cpp
/* FILE: TPCC_COM_ALL.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```



```

// #include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
// tpckit transaction
header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC          *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD
dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ) )
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

                if (Reg.eDB_Protocol ==
ODBC)
                {
                    strcpy(
szDllName, Reg.szPath );

                    strcat(
szDllName, "tpcc_odbc.dll");

                    hLibInstanceDb = LoadLibrary( szDllName );
                    if
(hLibInstanceDb == NULL)
                        throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get
function pointer to wrapper for class constructor

                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
                    if
(pCTPCC_ODBC_new == NULL)
                        throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                    else
                        throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );

                    if (Reg.dwConnectDelay
> 0)
                    {
                        InitializeCriticalSection(&hConnectCritical
Section);
                    }
                }
            }
        }
        else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                _Module.Term();
            }
        }
        catch (CBaseErr *e)
        {
            TCHAR szMsg[256];

            _sntprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
            WriteMessageToEventLog( szMsg );

            delete e;
            return FALSE;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
            return FALSE;
        }

        return TRUE; // OK
    }

////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
        EVENTLOG_ERROR_TYPE, // event type
        0, // event category
        0, // event ID
        NULL, // current user's
SID
        2, // strings in
lpszStrings
        0, // no bytes of raw
data
        (LPCTSTR *)lpszStrings, // array of
error strings
        NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddress
error. DLL="
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
        { 0, ""
}
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{

```

```

// Pace connection close for VIA.
//
if (Reg.dwConnectDelay > 0)
{
    EnterCriticalSection(&hConnectCriticalSecti
on);

    Sleep(Reg.dwConnectDelay);

    LeaveCriticalSection(&hConnectCriticalSecti
on);
}

if (m_pTxn)
{
    delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    //
    if (!pUnk)
        return E_UNEXPECTED;
    //
    IObjectConstructString * pString
= NULL;
    //
    HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void
**)&pString);
    //
    pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSecti
on);

            Sleep(Reg.dwConnectDelay);

```

```

        LeaveCriticalSection(&hConnectCriticalSection);
    }
    if (Reg.eDB_Protocol == ODBC)
        m_pTxn =
pCTPCC_ODBC_new(
    Reg.szDbServer, Reg.szDbUser,
    Reg.szDbPassword,

    szMyComputerName, Reg.szDbName,

    Reg.szSPPrefix,
    Reg.bCallNoDuplicatesNewOrder );
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _sntprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
    e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
    return E_FAIL;
}
return S_OK;
}
HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA    pNewOrder;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
    }
}

```

```

        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
    {
        return E_OUTOFMEMORY;
    }
    pOutData = (COM_DATA*)txn_out-
>parray->pvData;

    pData = (COM_DATA*)txn_in.parray-
>pvData;
    pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

    memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));

    do the actual txn
    m_pTxn->NewOrder(); //

    memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

    pOutData->retval = ERR_SUCCESS;
    pOutData->error = 0;
    return S_OK;
}
catch (CBaseErr *e)
{
    // check for lost database
    connection; if yes, component is toast
    if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
        m_bCanBePooled = FALSE;

    pOutData->retval = e-
>ErrorType();

    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
    pOutData->retval =
ERR_TYPE_LOGIC;

    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}
}
HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA      pPayment;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try

```

```

    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
    {
        return E_OUTOFMEMORY;
    }
    pOutData = (COM_DATA*)txn_out-
>parray->pvData;

    pData = (COM_DATA*)txn_in.parray-
>pvData;
    pPayment = m_pTxn-
>BuffAddr_Payment();

    memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

    m_pTxn->Payment(); //

    memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

    pOutData->retval = ERR_SUCCESS;
    pOutData->error = 0;
    return S_OK;
}
catch (CBaseErr *e)
{
    // check for lost database
    connection; if yes, component is toast
    if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
        m_bCanBePooled = FALSE;

    pOutData->retval = e-
>ErrorType();

    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
    pOutData->retval =
ERR_TYPE_LOGIC;

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA  pStockLevel;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        // first because it is also used in the catch clauses.
        // VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));

        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."););
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA  pOrderStatus;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        // first because it is also used in the catch clauses.
        // VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."););
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

```

## ***tpcc\_com\_all. def***

; tpcc\_com\_all.def : Declares the module parameters.

```

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject    PRIVATE
    DllRegisterServer    PRIVATE
    DllUnregisterServer  PRIVATE

```

## ***tpcc\_com\_all.h***

/\* this ALWAYS GENERATED file contains the
definitions for the interfaces \*/

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined( _MSC_VER ) && ( _MSC_VER >= 1020 )
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __cplusplus */

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus

class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus

class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus

class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus

class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus

class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif /* __cplusplus */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

```

## tpcc\_com\_all\_i. C

```
/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
```

```
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
```

```
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)
```

```

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

```

```

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

```

## **tpcc\_com\_errorcode.h**

```

/* FILE: TPCC_COM_ERRORCODE.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
* Change history:
* 4.20.000 - first version
*/

// Error return value for methods in ITPCC interface.
//
// Define as 0x80042345 (decimal -2147212475 ).
//
const HRESULT E_TPCCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITP, 0x2345);

```

## **tpcc\_com\_ps.def**

```

LIBRARY "tpcc_com_ps"

EXPORTS
    DllGetClassObject PRIVATE
    DllCanUnloadNow PRIVATE
    GetProxyDllInfo PRIVATE
    DllRegisterServer PRIVATE
    DllUnregisterServer PRIVATE

```

## **tpcc\_com\_ps.h**

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */

```

```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_s_ifspec;

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEEB6AA2-84B1-11d2-BA47-00C04FBE08B")
    ITPCC : public IUnknown
    {
    public:
        virtual HRESULT STDMETHODCALLTYPE NewOrder(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE Payment(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE Delivery(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE StockLevel(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE OrderStatus(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE CallSetComplete(
            void) = 0;
    };

#else /* C style interface */

    typedef struct ITPCCVtbl
    {
        BEGIN_INTERFACE

        HRESULT ( STDMETHODCALLTYPE *QueryInterface
        )(
            ITPCC * This,
            /* [in] */ REFIID riid,
            /* [iid_is][out] */ void **ppvObject);

```

```

        ULONG ( STDMETHODCALLTYPE *AddRef )(
            ITPCC * This);

        ULONG ( STDMETHODCALLTYPE *Release )(
            ITPCC * This);

        HRESULT ( STDMETHODCALLTYPE *NewOrder )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Payment )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Delivery )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *StockLevel )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *OrderStatus )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *CallSetComplete )(
            ITPCC * This);

        END_INTERFACE
    } ITPCCVtbl;

    interface ITPCC
    {
        CONST_VTBL struct ITPCCVtbl *lpVtbl;
    };

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \

```

```

    (This)->lpVtbl->Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl->Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl->StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl->OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl->CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_StockLevel_Proxy(
    ITPCC * This,

```



```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
ITPCC * This,
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long             __RPC_USER
VARIANT_UserSize(        unsigned long *, unsigned long
, VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char
*, VARIANT * );
void                    __RPC_USER
VARIANT_UserFree(        unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif

```

## ***tpcc\_com\_ps. idl***

```

/* FILE: ITPCC.IDL
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++
components.
*
* Change history:
* 4.20.000 - first version
*/

// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEB6AA2-84B1-11d2-BA47-
00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Payment(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Delivery(
        (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall StockLevel(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall OrderStatus(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall CallSetComplete(
(
);
}); // interface ITPCC

```

## ***tpcc\_com\_ps\_i .c***

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

```

```

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0,
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0,
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/



---



tpcc_com_ps_  
p.c



---



```

/* this ALWAYS GENERATED file contains the proxy stub
code */

```


```

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/*
Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADER( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
short Pad;
unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
0,
{
/* Procedure NewOrder */
FC_AUTO_HANDLE /*
0x33, */
Old Flags: object, Oi2 /*
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
*/
/* Parameter txn_in */
/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */
/* Return value */
/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 32 */ 0x8, /* FC_LONG */
0x0, /*
*/
/* Procedure Payment */
/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
*/
/* Parameter txn_in */
/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
}
}
}

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /*
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
/* 178 */ NdrFcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
/* 0x1, /*
1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

0x0
};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */

```

```

                                0x12, 0x0,      /*
FC_UP */
/* 4 */ NdrFcShort( 0x3ca ),      /* Offset=
970 (974) */
/* 6 */
                                0x2b,      /*
FC_NON_ENCAPSULATED_UNION */
                                0x9,      /*
FC_ULONG */
/* 8 */ 0x7,      /* Corr desc: FC_USHORT
*/
                                0x0,      /*
*/
/* 10 */ NdrFcShort( 0xffff8 ),      /* -8 */
/* 12 */ NdrFcShort( 0x2 ),      /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ),      /* 16 */
/* 16 */ NdrFcShort( 0x2f ),      /* 47 */
/* 18 */ NdrFcLong( 0x14 ),      /* 20 */
/* 22 */ NdrFcShort( 0x800b ),      /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ),      /* 3 */
/* 28 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ),      /* 17 */
/* 34 */ NdrFcShort( 0x8001 ),      /* Simple arm
type: FC_BYTE */
/* 36 */ NdrFcLong( 0x2 ),      /* 2 */
/* 40 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ),      /* 4 */
/* 46 */ NdrFcShort( 0x800a ),      /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ),      /* 5 */
/* 52 */ NdrFcShort( 0x800c ),      /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ),      /* 11 */
/* 58 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ),      /* 10 */
/* 64 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ),      /* 6 */
/* 70 */ NdrFcShort( 0xe8 ),      /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ),      /* 7 */
/* 76 */ NdrFcShort( 0x800c ),      /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ),      /* 8 */
/* 82 */ NdrFcShort( 0xe2 ),      /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ),      /* 13 */
/* 88 */ NdrFcShort( 0xf4 ),      /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ),      /* 9 */
/* 94 */ NdrFcShort( 0x100 ),      /* Offset=
256 (350) */
/* 96 */ NdrFcLong( 0x2000 ),      /* 8192 */
/* 100 */ NdrFcShort( 0x10c ),      /* Offset=
268 (368) */
/* 102 */ NdrFcLong( 0x24 ),      /* 36 */
/* 106 */ NdrFcShort( 0x31a ),      /* Offset=
794 (900) */
/* 108 */ NdrFcLong( 0x4024 ),      /* 16420 */
/* 112 */ NdrFcShort( 0x314 ),      /* Offset=
788 (900) */
/* 114 */ NdrFcLong( 0x4011 ),      /* 16401 */

```

```

/* 118 */ NdrFcShort( 0x312 ),      /* Offset=
786 (904) */
/* 120 */ NdrFcLong( 0x4002 ),      /* 16386 */
/* 124 */ NdrFcShort( 0x310 ),      /* Offset=
784 (908) */
/* 126 */ NdrFcLong( 0x4003 ),      /* 16387 */
/* 130 */ NdrFcShort( 0x30e ),      /* Offset=
782 (912) */
/* 132 */ NdrFcLong( 0x4014 ),      /* 16404 */
/* 136 */ NdrFcShort( 0x30c ),      /* Offset=
780 (916) */
/* 138 */ NdrFcLong( 0x4004 ),      /* 16388 */
/* 142 */ NdrFcShort( 0x30a ),      /* Offset=
778 (920) */
/* 144 */ NdrFcLong( 0x4005 ),      /* 16389 */
/* 148 */ NdrFcShort( 0x308 ),      /* Offset=
776 (924) */
/* 150 */ NdrFcLong( 0x400b ),      /* 16395 */
/* 154 */ NdrFcShort( 0x2f2 ),      /* Offset=
754 (908) */
/* 156 */ NdrFcLong( 0x400a ),      /* 16394 */
/* 160 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (912) */
/* 162 */ NdrFcLong( 0x4006 ),      /* 16390 */
/* 166 */ NdrFcShort( 0x2fa ),      /* Offset=
762 (928) */
/* 168 */ NdrFcLong( 0x4007 ),      /* 16391 */
/* 172 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (924) */
/* 174 */ NdrFcLong( 0x4008 ),      /* 16392 */
/* 178 */ NdrFcShort( 0x2f2 ),      /* Offset=
754 (932) */
/* 180 */ NdrFcLong( 0x400d ),      /* 16397 */
/* 184 */ NdrFcShort( 0x2f0 ),      /* Offset=
752 (936) */
/* 186 */ NdrFcLong( 0x4009 ),      /* 16393 */
/* 190 */ NdrFcShort( 0x2ee ),      /* Offset=
750 (940) */
/* 192 */ NdrFcLong( 0x6000 ),      /* 24576 */
/* 196 */ NdrFcShort( 0x2ec ),      /* Offset=
748 (944) */
/* 198 */ NdrFcLong( 0x400c ),      /* 16396 */
/* 202 */ NdrFcShort( 0x2ea ),      /* Offset=
746 (948) */
/* 204 */ NdrFcLong( 0x10 ),      /* 16 */
/* 208 */ NdrFcShort( 0x8002 ),      /* Simple arm
type: FC_CHAR */
/* 210 */ NdrFcLong( 0x12 ),      /* 18 */
/* 214 */ NdrFcShort( 0x8006 ),      /* Simple arm
type: FC_SHORT */
/* 216 */ NdrFcLong( 0x13 ),      /* 19 */
/* 220 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x15 ),      /* 21 */
/* 226 */ NdrFcShort( 0x800b ),      /* Simple arm
type: FC_HYPER */
/* 228 */ NdrFcLong( 0x16 ),      /* 22 */
/* 232 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 234 */ NdrFcLong( 0x17 ),      /* 23 */
/* 238 */ NdrFcShort( 0x8008 ),      /* Simple arm
type: FC_LONG */
/* 240 */ NdrFcLong( 0xe ),      /* 14 */

```

```

/* 244 */ NdrFcShort( 0x2c8 ),      /* Offset=
712 (956) */
/* 246 */ NdrFcLong( 0x400e ),      /* 16398 */
/* 250 */ NdrFcShort( 0x2cc ),      /* Offset=
716 (966) */
/* 252 */ NdrFcLong( 0x4010 ),      /* 16400 */
/* 256 */ NdrFcShort( 0x2ca ),      /* Offset=
714 (970) */
/* 258 */ NdrFcLong( 0x4012 ),      /* 16402 */
/* 262 */ NdrFcShort( 0x286 ),      /* Offset=
646 (908) */
/* 264 */ NdrFcLong( 0x4013 ),      /* 16403 */
/* 268 */ NdrFcShort( 0x284 ),      /* Offset=
644 (912) */
/* 270 */ NdrFcLong( 0x4015 ),      /* 16405 */
/* 274 */ NdrFcShort( 0x282 ),      /* Offset=
642 (916) */
/* 276 */ NdrFcLong( 0x4016 ),      /* 16406 */
/* 280 */ NdrFcShort( 0x278 ),      /* Offset=
632 (912) */
/* 282 */ NdrFcLong( 0x4017 ),      /* 16407 */
/* 286 */ NdrFcShort( 0x272 ),      /* Offset=
626 (912) */
/* 288 */ NdrFcLong( 0x0 ),      /* 0 */
/* 292 */ NdrFcShort( 0x0 ),      /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ),      /* 1 */
/* 298 */ NdrFcShort( 0x0 ),      /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffff ),      /* Offset= -1
(299) */
/* 302 */
                                0x15,      /*
FC_STRUCT */
                                0x7,      /*
7 */
/* 304 */ NdrFcShort( 0x8 ),      /* 8 */
/* 306 */ 0xb,      /* FC_HYPER */
                                0x5b,      /*
FC_END */
/* 308 */
                                0x12, 0x0,      /*
FC_UP */
/* 310 */ NdrFcShort( 0xc ),      /* Offset= 12 (322) */
/* 312 */
                                0x1b,      /*
FC_CARRAY */
                                0x1,      /*
1 */
/* 314 */ NdrFcShort( 0x2 ),      /* 2 */
/* 316 */ 0x9,      /* Corr desc: FC_ULONG
*/
                                0x0,      /*
*/
/* 318 */ NdrFcShort( 0xffffc ),      /* -4 */
/* 320 */ 0x6,      /* FC_SHORT */
                                0x5b,      /*
FC_END */
/* 322 */
                                0x17,      /*
FC_CSTRUCT */
                                0x3,      /*
3 */
/* 324 */ NdrFcShort( 0x8 ),      /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= -
14 (312) */
/* 328 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 330 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 332 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */
/* 342 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 344 */ 0x0, /* 0 */
0x0, /*
0 */
/* 346 */ 0x0, /* 0 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x46, /*
70 */
/* 350 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */
/* 360 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 362 */ 0x0, /* 0 */
0x0, /*
0 */
/* 364 */ 0x0, /* 0 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x46, /*
70 */
/* 368 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */
0x12, 0x0, /*
FC_UP */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset=
508 (882) */
/* 376 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x49, /*
73 */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset=
276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset=
304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset=
328 (750) */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset=
352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset=
376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset=
400 (840) */
/* 442 */ NdrFcShort( 0xfffff ), /* Offset= -1
(441) */
/* 444 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 454 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xff6e ), /* Offset= -
146 (322) */
/* 470 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 472 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 474 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 480 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (444) */
/* 490 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 492 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 494 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 508 */ NdrFcShort( 0xff50 ), /* Offset= -
176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 512 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 522 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 524 */
0x11, 0x0, /*
FC_RP */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (494) */
/* 528 */
0x21, /*
FC_BOGUS_ARRAY */
/*
3 */
0x3, /*
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -
192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 556 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (528) */
/* 562 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 570 */
FC_PP */
0x4b, /*
/*
0x5c, /*
FC_PAD */
/* 572 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset=
388 (974) */
/* 588 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 590 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 592 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 602 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 604 */
0x11, 0x0, /*
FC_RP */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (562) */
/* 608 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 620 */ 0x0, /* 0 */
0x0, /*
0 */
/* 622 */ 0x0, /* 0 */
0x0, /*
0 */

```

```

/* 624 */ 0x0, /* 0 */
0x46, /*
70 */
/* 626 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 636 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -
40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 652 */
0x12, 0x0, /*
FC_UP */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -
28 (626) */
/* 656 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 666 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */

```

```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (636) */
/* 682 */
FC_END */
0x5b, /*
FC_LONG */
0x8, /*
/* 684 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 686 */
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 688 */ NdrFcShort( 0x8 ), /* 8 */
/* 690 */ NdrFcShort( 0x0 ), /* 0 */
/* 692 */ NdrFcShort( 0x6 ), /* Offset= 6 (698) */
/* 694 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 696 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 698 */
FC_RP */
/* 700 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (656) */
/* 702 */
0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 704 */ NdrFcShort( 0x8 ), /* 8 */
/* 706 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 708 */
FC_STRUCT */
0x15, /*
0x3, /*
3 */
/* 710 */ NdrFcShort( 0x10 ), /* 16 */
/* 712 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 714 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 716 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (702) */
0x5b, /*
FC_END */
/* 720 */

```

```

FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /*
0 */
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 736 */
0x11, 0x0, /*
FC_RP */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -
244 (494) */
/* 740 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 750 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 756 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (740) */
/* 766 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 768 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 770 */
FC_CARRAY */
0x1b, /*
0x1, /*
1 */
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 780 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 786 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (770) */
/* 796 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 798 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 800 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */

```



```

/* 810 */
FC_PSTRUCT */
3 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */
FC_PP */
FC_PAD */
/* 816 */
FC_NO_REPEAT */
FC_PAD */
/* 818 */ NdrFcShort( 0x4 ), /* 4 */
/* 820 */ NdrFcShort( 0x4 ), /* 4 */
/* 822 */ 0x12, 0x0, /* FC_UP */
/* 824 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (800) */
/* 826 */
FC_END */
FC_LONG */
/* 828 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 830 */
FC_CARRAY */
0x1b, /*
7 */
/* 832 */ NdrFcShort( 0x8 ), /* 8 */
/* 834 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 836 */ NdrFcShort( 0x0 ), /* 0 */
/* 838 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 840 */
FC_PSTRUCT */
0x16, /*
0x3, /*
3 */
/* 842 */ NdrFcShort( 0x8 ), /* 8 */
/* 844 */
FC_PP */
FC_PAD */
/* 846 */
FC_NO_REPEAT */
FC_PAD */
/* 848 */ NdrFcShort( 0x4 ), /* 4 */
/* 850 */ NdrFcShort( 0x4 ), /* 4 */
/* 852 */ 0x12, 0x0, /* FC_UP */

```

```

/* 854 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (830) */
/* 856 */
FC_END */
0x5b, /*
FC_LONG */
/* 858 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 860 */
FC_STRUCT */
0x15, /*
0x3, /*
3 */
/* 862 */ NdrFcShort( 0x8 ), /* 8 */
/* 864 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 866 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 868 */
FC_CARRAY */
0x1b, /*
0x3, /*
3 */
/* 870 */ NdrFcShort( 0x8 ), /* 8 */
/* 872 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 874 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 878 */ NdrFcShort( 0xffee ), /* Offset= -
18 (860) */
/* 880 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 882 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 884 */ NdrFcShort( 0x28 ), /* 40 */
/* 886 */ NdrFcShort( 0xffee ), /* Offset= -
18 (868) */
/* 888 */ NdrFcShort( 0x0 ), /* Offset= 0 (888) */
/* 890 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 892 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */

```

```

/* 896 */ NdrFcShort( 0xfd8 ), /* Offset= -
520 (376) */
/* 898 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 900 */
FC_UP */
/* 902 */ NdrFcShort( 0xfef6 ), /* Offset= -
266 (636) */
/* 904 */
FC_UP [simple_pointer] */
/* 906 */ 0x1, /* FC_BYTE */
0x5c, /*
FC_PAD */
/* 908 */
FC_UP [simple_pointer] */
/* 910 */ 0x6, /* FC_SHORT */
0x5c, /*
FC_PAD */
/* 912 */
FC_UP [simple_pointer] */
/* 914 */ 0x8, /* FC_LONG */
0x5c, /*
FC_PAD */
/* 916 */
FC_UP [simple_pointer] */
/* 918 */ 0xb, /* FC_HYPER */
0x5c, /*
FC_PAD */
/* 920 */
FC_UP [simple_pointer] */
/* 922 */ 0xa, /* FC_FLOAT */
0x5c, /*
FC_PAD */
/* 924 */
FC_UP [simple_pointer] */
/* 926 */ 0xc, /* FC_DOUBLE */
0x5c, /*
FC_PAD */
/* 928 */
FC_UP */
/* 930 */ NdrFcShort( 0xfd8c ), /* Offset= -
628 (302) */
/* 932 */
FC_UP [pointer_deref] */
/* 934 */ NdrFcShort( 0xfd8e ), /* Offset= -
626 (308) */
/* 936 */
FC_UP [pointer_deref] */
/* 938 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (332) */
/* 940 */

```

```

                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xfdb0 ), /* Offset= -
592 (350) */
/* 944 */
                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xfdb0 ), /* Offset= -
578 (368) */
/* 948 */
                                0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ), /* Offset= 2 (952) */
/* 952 */
                                0x12, 0x0, /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ), /* Offset= 20 (974) */
/* 956 */
FC_STRUCT */
                                0x7, /*
7 */
/* 958 */ NdrFcShort( 0x10 ), /* 16 */
/* 960 */ 0x6, /* FC_SHORT */
                                0x1, /*
FC_BYTE */
/* 962 */ 0x1, /* FC_BYTE */
                                0x8, /*
FC_LONG */
/* 964 */ 0xb, /* FC_HYPER */
                                0x5b, /*
FC_END */
/* 966 */
                                0x12, 0x0, /*
FC_UP */
/* 968 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (956) */
/* 970 */
                                0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 972 */ 0x2, /* FC_CHAR */
                                0x5c, /*
FC_PAD */
/* 974 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x7, /*
7 */
/* 976 */ NdrFcShort( 0x20 ), /* 32 */
/* 978 */ NdrFcShort( 0x0 ), /* 0 */
/* 980 */ NdrFcShort( 0x0 ), /* Offset= 0 (980) */
/* 982 */ 0x8, /* FC_LONG */
                                0x8, /*
FC_LONG */
/* 984 */ 0x6, /* FC_SHORT */
                                0x6, /*
FC_SHORT */
/* 986 */ 0x6, /* FC_SHORT */
                                0x6, /*
FC_SHORT */
/* 988 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/

```

```

                                0x0, /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ), /* Offset= -
984 (6) */
/* 992 */ 0x5c, /* FC_PAD */
                                0x5b, /*
FC_END */
/* 994 */ 0xb4, /* FC_USER_MARSHAL */
                                0x83, /*
131 */
/* 996 */ NdrFcShort( 0x0 ), /* 0 */
/* 998 */ NdrFcShort( 0x10 ), /* 16 */
/* 1000 */ NdrFcShort( 0x0 ), /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ), /*
Offset= -1000 (2) */
/* 1004 */
                                0x11, 0x4, /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ), /* Offset= 6
(1012) */
/* 1008 */
                                0x13, 0x0, /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ), /*
Offset= -36 (974) */
/* 1012 */ 0xb4, /*
FC_USER_MARSHAL */
                                0x83, /*
131 */
/* 1014 */ NdrFcShort( 0x0 ), /* 0 */
/* 1016 */ NdrFcShort( 0x10 ), /* 16 */
/* 1018 */ NdrFcShort( 0x0 ), /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (1008) */
                                0x0
}
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,

```

```

GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xc0,0
x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete
*/
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,

```

```

    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x6000169, /* MIDL Version 6.0.361 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* cs routines */
    0, /* proxy/server info */
    0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpsc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpsc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpsc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
    }
}

```

```

        return 1;
    }
}

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
    _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
    _tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &
    _tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#if _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif

```

```

#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 16 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
        /* 18 */ NdrFcShort( 0x20 ), /* 32 */
        /* 20 */ NdrFcShort( 0x20 ), /* 32 */
        /* 22 */ NdrFcShort( 0x0 ), /* 0 */
        /* 24 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */
        /* 26 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 28 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
        /* 30 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

        /* Parameter txn_out */
        /* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
        /* 34 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
        /* 36 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

        /* Return value */
        /* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
        /* 40 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
        /* 42 */ 0x8, /* FC_LONG */
        0x0, /* 0 */
    }
}

```

```

/* Procedure Payment */
/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */
/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure StockLevel */
/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 148 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /*
3 */
/* 192 */ 0xa, /* 10 */
0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
0x1, /*
1 */
/* 236 */ 0xa, /* 10 */
0x1, /*
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

    /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /*
0x0
*/
};

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3b6 ), /* Offset=
950 (954) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2f ), /* 47 */
/* 20 */ NdrFcLong( 0x14 ), /* 20 */
/* 24 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 26 */ NdrFcLong( 0x3 ), /* 3 */
/* 30 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 32 */ NdrFcLong( 0x11 ), /* 17 */
/* 36 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 38 */ NdrFcLong( 0x2 ), /* 2 */
/* 42 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 44 */ NdrFcLong( 0x4 ), /* 4 */
/* 48 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 50 */ NdrFcLong( 0x5 ), /* 5 */
/* 54 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 56 */ NdrFcLong( 0xb ), /* 11 */
/* 60 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 62 */ NdrFcLong( 0xa ), /* 10 */
/* 66 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 68 */ NdrFcLong( 0x6 ), /* 6 */
/* 72 */ NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
/* 74 */ NdrFcLong( 0x7 ), /* 7 */
/* 78 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 80 */ NdrFcLong( 0x8 ), /* 8 */
/* 84 */ NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
/* 86 */ NdrFcLong( 0xd ), /* 13 */
/* 90 */ NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
/* 92 */ NdrFcLong( 0x9 ), /* 9 */
/* 96 */ NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 102 */ NdrFcShort( 0x10e ), /* Offset=
270 (372) */
/* 104 */ NdrFcLong( 0x24 ), /* 36 */
/* 108 */ NdrFcShort( 0x304 ), /* Offset=
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ), /* Offset=
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ), /* Offset=
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ), /* Offset=
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ), /* Offset=
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (904) */
/* 152 */ NdrFcLong( 0x400b ), /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ), /* Offset=
732 (888) */
/* 158 */ NdrFcLong( 0x400a ), /* 16394 */
/* 162 */ NdrFcShort( 0x2da ), /* Offset=
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 174 */ NdrFcShort( 0x2da ), /* Offset=
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ), /* Offset=
732 (912) */
/* 182 */ NdrFcLong( 0x400d ), /* 16397 */
/* 186 */ NdrFcShort( 0x2da ), /* Offset=
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ), /* Offset=
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (924) */
/* 200 */ NdrFcLong( 0x400c ), /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ), /* Offset=
724 (928) */
/* 206 */ NdrFcLong( 0x10 ), /* 16 */
/* 210 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ), /* 18 */
/* 216 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ), /* 19 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ), /* 21 */
/* 228 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ), /* 22 */
/* 234 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ), /* 23 */
/* 240 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ), /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ), /* Offset=
690 (936) */
/* 248 */ NdrFcLong( 0x400e ), /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ), /* Offset=
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ), /* Offset=
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 264 */ NdrFcShort( 0x270 ), /* Offset=
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 270 */ NdrFcShort( 0x26e ), /* Offset=
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 276 */ NdrFcShort( 0x26c ), /* Offset=
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 282 */ NdrFcShort( 0x262 ), /* Offset=
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 288 */ NdrFcShort( 0x25c ), /* Offset=
604 (892) */
/* 290 */ NdrFcLong( 0x0 ), /* 0 */
/* 294 */ NdrFcShort( 0x0 ), /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ), /* 1 */
/* 300 */ NdrFcShort( 0x0 ), /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ), /* Offset= -1
(301) */
/* 304 */
FC_STRUCT */
0x15, /*
0x7, /*
7 */
/* 306 */ NdrFcShort( 0x8 ), /* 8 */
/* 308 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 310 */
0x12, 0x0, /*
FC_UP */
/* 312 */ NdrFcShort( 0xe ), /* Offset= 14 (326) */
/* 314 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 316 */ NdrFcShort( 0x2 ), /* 2 */
/* 318 */ 0x9, /* Corr desc: FC_ULONG
*/
0x0, /*
*/
/* 320 */ NdrFcShort( 0xfffc ), /* -4 */

```

```

/* 322 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 324 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 326 */
FC_CSTRUCT */
0x17, /*
0x3, /*
3 */
/* 328 */ NdrFcShort( 0x8 ), /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ), /* Offset= -
16 (314) */
/* 332 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 334 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 336 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 338 */ NdrFcLong( 0x0 ), /* 0 */
/* 342 */ NdrFcShort( 0x0 ), /* 0 */
/* 344 */ NdrFcShort( 0x0 ), /* 0 */
/* 346 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x0, /*
0 */
/* 350 */ 0x0, /* 0 */
0x0, /*
0 */
/* 352 */ 0x0, /* 0 */
0x46, /*
70 */
/* 354 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 356 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 360 */ NdrFcShort( 0x0 ), /* 0 */
/* 362 */ NdrFcShort( 0x0 ), /* 0 */
/* 364 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x0, /*
0 */
/* 368 */ 0x0, /* 0 */
0x0, /*
0 */
/* 370 */ 0x0, /* 0 */
0x46, /*
70 */
/* 372 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 374 */ NdrFcShort( 0x2 ), /* Offset= 2 (376) */

```

```

/* 376 */
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ), /* Offset=
484 (862) */
/* 380 */
FC_ENCAPSULATED_UNION */
0x2a, /*
0x89, /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffff ), /* Offset= -1
(445) */
/* 448 */
FC_BOGUS_ARRAY */
0x21, /*
0x3, /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
0x12, 0x0, /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */

```

```

/* 470 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 480 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 482 */
0x11, 0x0, /*
FC_RP */
/* 484 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (448) */
/* 486 */
0x21, /*
0x3, /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 504 */ NdrFcShort( 0xff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 508 */
0x1a, /*
0x3, /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 518 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 520 */
0x11, 0x0, /*
FC_RP */
/* 522 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (486) */
/* 524 */

```

```

0x21, /*
0x3, /*
3 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 534 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 538 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xff44 ), /* Offset= -
188 (354) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 556 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (524) */
/* 562 */
0x21, /*
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
0x12, 0x0, /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c, /* FC_PAD */

```

```

0x5b, /*
FC_END */
/* 584 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 586 */ NdrFcShort( 0x10 ), /* 16 */
/* 588 */ NdrFcShort( 0x0 ), /* 0 */
/* 590 */ NdrFcShort( 0x6 ), /* Offset= 6 (596) */
/* 592 */ 0x8, /* FC_LONG */
/* 594 */ 0x40, /*
FC_STRUCTUREPAD4 */
/* 594 */ 0x36, /* FC_POINTER */
/* 596 */
0x5b, /*
FC_END */
/* 596 */
0x11, 0x0, /*
FC_RP */
/* 598 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (562) */
/* 600 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 602 */ NdrFcLong( 0x2f ), /* 47 */
/* 606 */ NdrFcShort( 0x0 ), /* 0 */
/* 608 */ NdrFcShort( 0x0 ), /* 0 */
/* 610 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 612 */ 0x0, /* 0 */
0x0, /*
0 */
/* 614 */ 0x0, /* 0 */
0x0, /*
0 */
/* 616 */ 0x0, /* 0 */
0x46, /*
70 */
/* 618 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 620 */ NdrFcShort( 0x1 ), /* 1 */
/* 622 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 624 */ NdrFcShort( 0x4 ), /* 4 */
/* 626 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 628 */ 0x1, /* FC_BYTE */
/* 630 */
0x5b, /*
FC_END */
/* 630 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 632 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0xa ), /* Offset= 10 (646) */
/* 638 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 642 */ NdrFcShort( 0xffd6 ), /* Offset= -
42 (600) */
/* 644 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 646 */
0x12, 0x0, /*
FC_UP */
/* 648 */ NdrFcShort( 0xffe2 ), /* Offset= -
30 (618) */
/* 650 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 656 */ NdrFcShort( 0x0 ), /* 0 */
/* 658 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 660 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 664 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 666 */
0x12, 0x0, /*
FC_UP */
/* 668 */ NdrFcShort( 0xffda ), /* Offset= -
38 (630) */
/* 670 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 672 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ NdrFcShort( 0x6 ), /* Offset= 6 (684) */
/* 680 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 682 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 684 */
0x11, 0x0, /*
FC_RP */
/* 686 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (650) */
/* 688 */

```

```

0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 690 */ NdrFcShort( 0x8 ), /* 8 */
/* 692 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 694 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 696 */ NdrFcShort( 0x10 ), /* 16 */
/* 698 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 700 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 702 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (688) */
0x5b, /*
FC_END */
/* 706 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 708 */ NdrFcShort( 0x20 ), /* 32 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0xa ), /* Offset= 10 (722) */
/* 714 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 716 */ 0x36, /* FC_POINTER */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 718 */ 0x0, /* 0 */
NdrFcShort( 0xffe7 ),
/* Offset= -25 (694) */
0x5b, /*
FC_END */
/* 722 */
0x11, 0x0, /*
FC_RP */
/* 724 */ NdrFcShort( 0xff12 ), /* Offset= -
238 (486) */
/* 726 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 728 */ NdrFcShort( 0x1 ), /* 1 */
/* 730 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 732 */ NdrFcShort( 0x0 ), /* 0 */
/* 734 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 736 */ 0x1, /* FC_BYTE */

```



FC_END */	0x5b,	/*	/* 786 */ 0x19,	/* Corr desc: field	/* 836 */ NdrFcShort( 0xffe6 ),	/* Offset= -
/* 738 */			pointer, FC_ULONG */		26 (810) */	
FC_BOGUS_STRUCT */	0x1a,	/*	/*	0x0,	/* 838 */	
			/* 788 */ NdrFcShort( 0x0 ),	/* 0 */	FC_STRUCT */	0x15,
	0x3,	/*	/* 790 */ NdrFcShort( 0x1 ),	/* Corr flags: early,		0x3,
3 */			/*	/*	3 */	
/* 740 */ NdrFcShort( 0x10 ),	/* 16 */		/* 792 */ 0x8,	/* FC_LONG */	/* 840 */ NdrFcShort( 0x8 ),	/* 8 */
/* 742 */ NdrFcShort( 0x0 ),	/* 0 */		FC_END */	0x5b,	/* 842 */ 0x8,	/* FC_LONG */
/* 744 */ NdrFcShort( 0x6 ),	/* Offset= 6 (750) */		/* 794 */		0x8,	/*
/* 746 */ 0x8,	/* FC_LONG */		FC_BOGUS_STRUCT */	0x1a,	FC_LONG */	/*
	0x40,	/*		/*	/* 844 */ 0x5c,	/* FC_PAD */
FC_STRUCTPAD4 */	/* FC_POINTER */		3 */	0x3,	0x5b,	/*
/* 748 */ 0x36,	0x5b,	/*	/* 796 */ NdrFcShort( 0x10 ),	/* 16 */	FC_END */	/*
FC_END */			/* 798 */ NdrFcShort( 0x0 ),	/* 0 */	/* 846 */	
/* 750 */			/* 800 */ NdrFcShort( 0x6 ),	/* Offset= 6 (806) */	FC_CARRAY */	0x1b,
FC_UP */	0x12, 0x0,	/*	/* 802 */ 0x8,	/* FC_LONG */		0x3,
/* 752 */ NdrFcShort( 0xffe6 ),	/* Offset= -		FC_STRUCTPAD4 */	0x40,	/* 848 */ NdrFcShort( 0x8 ),	/* 8 */
26 (726) */	26 (726) */		/* 804 */ 0x36,	/* FC_POINTER */	/* 850 */ 0x7,	/* Corr desc: FC_USHORT
/* 754 */				0x5b,	/*	/*
FC_CARRAY */	0x1b,	/*	FC_END */	/*		0x0,
			/* 806 */		/* 852 */ NdrFcShort( 0xffc8 ),	/* -56 */
1 */	0x1,	/*		0x12, 0x0,	/* 854 */ NdrFcShort( 0x1 ),	/* Corr flags: early,
/* 756 */ NdrFcShort( 0x2 ),	/* 2 */		FC_UP */		/*	/*
/* 758 */ 0x19,	/* Corr desc: field		/* 808 */ NdrFcShort( 0xffe6 ),	/* Offset= -	/* 856 */ 0x4c,	/* FC_EMBEDDED_COMPLEX
pointer, FC_ULONG */	0x0,	/*	26 (782) */	/*	/*	/*
*/			/* 810 */			0x0,
/* 760 */ NdrFcShort( 0x0 ),	/* 0 */		FC_CARRAY */	0x1b,	0 */	/*
/* 762 */ NdrFcShort( 0x1 ),	/* Corr flags: early,			0x7,	/* 858 */ NdrFcShort( 0xffec ),	/* Offset= -
*/	*/		7 */		20 (838) */	/*
/* 764 */ 0x6,	/* FC_SHORT */		/* 812 */ NdrFcShort( 0x8 ),	/* 8 */	/* 860 */ 0x5c,	/* FC_PAD */
	0x5b,	/*	/* 814 */ 0x19,	/* Corr desc: field		/*
FC_END */			pointer, FC_ULONG */		FC_END */	/*
/* 766 */				0x0,	/* 862 */	
FC_BOGUS_STRUCT */	0x1a,	/*	/*		FC_BOGUS_STRUCT */	0x1a,
			/* 816 */ NdrFcShort( 0x0 ),	/* 0 */		/*
	0x3,	/*	/* 818 */ NdrFcShort( 0x1 ),	/* Corr flags: early,	FC_CARRAY */	0x3,
3 */			/*	/*	3 */	
/* 768 */ NdrFcShort( 0x10 ),	/* 16 */		/* 820 */ 0xb,	/* FC_HYPER */	/* 864 */ NdrFcShort( 0x38 ),	/* 56 */
/* 770 */ NdrFcShort( 0x0 ),	/* 0 */			0x5b,	/* 866 */ NdrFcShort( 0xffec ),	/* Offset= -
/* 772 */ NdrFcShort( 0x6 ),	/* Offset= 6 (778) */		FC_END */		20 (846) */	/*
/* 774 */ 0x8,	/* FC_LONG */		/* 822 */	0x1a,	/* 868 */ NdrFcShort( 0x0 ),	/* Offset= 0 (868) */
	0x40,	/*	FC_BOGUS_STRUCT */	0x3,	/* 870 */ 0x6,	/* FC_SHORT */
FC_STRUCTPAD4 */	/* FC_POINTER */			/*		/*
/* 776 */ 0x36,	0x5b,	/*	3 */		FC_SHORT */	/*
FC_END */			/* 824 */ NdrFcShort( 0x10 ),	/* 16 */	/* 872 */ 0x8,	/* FC_LONG */
/* 778 */			/* 826 */ NdrFcShort( 0x0 ),	/* 0 */	0x8,	/*
FC_UP */	0x12, 0x0,	/*	/* 828 */ NdrFcShort( 0x6 ),	/* Offset= 6 (834) */	FC_LONG */	/*
/* 780 */ NdrFcShort( 0xffe6 ),	/* Offset= -		/* 830 */ 0x8,	/* FC_LONG */	/* 874 */ 0x40,	/* FC_STRUCTPAD4 */
26 (754) */	26 (754) */			0x40,	0x4c,	/*
/* 782 */			FC_STRUCTPAD4 */	/* FC_POINTER */	FC_EMBEDDED_COMPLEX */	/*
FC_CARRAY */	0x1b,	/*	/* 832 */ 0x36,	0x5b,	/* 876 */ 0x0,	/* 0 */
					/* 876 */ 0x0,	NdrFcShort( 0xfe0f ),
	0x3,	/*	FC_END */	/*	/* Offset= -497 (380) */	0x5b,
3 */			/* 834 */			/*
/* 784 */ NdrFcShort( 0x4 ),	/* 4 */		FC_UP */	0x12, 0x0,	FC_END */	/*
					/* 880 */	
						0x12, 0x0,
					FC_UP */	/*

```

/* 882 */ NdrFcShort( 0xff04 ), /* Offset= -
252 (630) */
/* 884 */
FC_UP [simple_pointer] */
/* 886 */ 0x1, /* FC_BYTE */
FC_PAD */
/* 888 */
FC_UP [simple_pointer] */
/* 890 */ 0x6, /* FC_SHORT */
FC_PAD */
/* 892 */
FC_UP [simple_pointer] */
/* 894 */ 0x8, /* FC_LONG */
FC_PAD */
/* 896 */
FC_UP [simple_pointer] */
/* 898 */ 0xb, /* FC_HYPER */
FC_PAD */
/* 900 */
FC_UP [simple_pointer] */
/* 902 */ 0xa, /* FC_FLOAT */
FC_PAD */
/* 904 */
FC_UP [simple_pointer] */
/* 906 */ 0xc, /* FC_DOUBLE */
FC_PAD */
/* 908 */
FC_UP */
/* 910 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (304) */
/* 912 */
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfda4 ), /* Offset= -
604 (310) */
/* 916 */
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfdba ), /* Offset= -
582 (336) */
/* 920 */
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0xfdc8 ), /* Offset= -
568 (354) */
/* 924 */
FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xfdd6 ), /* Offset= -
554 (372) */

```

```

/* 928 */
FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ), /* Offset= 2 (932) */
/* 932 */
FC_UP */
/* 934 */ NdrFcShort( 0x14 ), /* Offset= 20 (954) */
/* 936 */
FC_STRUCT */
7 */
/* 938 */ NdrFcShort( 0x10 ), /* 16 */
/* 940 */ 0x6, /* FC_SHORT */
FC_BYTE */
/* 942 */ 0x1, /* FC_BYTE */
FC_LONG */
/* 944 */ 0xb, /* FC_HYPER */
FC_END */
/* 946 */
FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (936) */
/* 950 */
FC_UP [simple_pointer] */
/* 952 */ 0x2, /* FC_CHAR */
FC_PAD */
/* 954 */
FC_BOGUS_STRUCT */
7 */
/* 956 */ NdrFcShort( 0x20 ), /* 32 */
/* 958 */ NdrFcShort( 0x0 ), /* 0 */
/* 960 */ NdrFcShort( 0x0 ), /* Offset= 0 (960) */
/* 962 */ 0x8, /* FC_LONG */
FC_LONG */
/* 964 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 966 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 968 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0 */
/* 970 */ NdrFcShort( 0xfc3c ), /* Offset= -
964 (6) */
/* 972 */ 0x5c, /* FC_PAD */
FC_END */
/* 974 */ 0xb4, /* FC_USER_MARSHAL */
131 */

```

```

/* 976 */ NdrFcShort( 0x0 ), /* 0 */
/* 978 */ NdrFcShort( 0x18 ), /* 24 */
/* 980 */ NdrFcShort( 0x0 ), /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ), /* Offset= -
980 (2) */
/* 984 */
FC_RP [allocated_on_stack] */
/* 986 */ NdrFcShort( 0x6 ), /* Offset= 6 (992) */
/* 988 */
FC_OP */
/* 990 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (954) */
/* 992 */ 0xb4, /* FC_USER_MARSHAL */
131 */
/* 994 */ NdrFcShort( 0x0 ), /* 0 */
/* 996 */ NdrFcShort( 0x18 ), /* 24 */
/* 998 */ NdrFcShort( 0x0 ), /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (988) */
};
static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    VARIANT_UserSize
    ,VARIANT_UserMarshal
    ,VARIANT_UserUnmarshal
    ,VARIANT_UserFree
};
/* Standard interface: __MIDL_itf_tpc_c_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */
/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */
/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xba,0x47,0x00,0xc0,0
x4f,0xbf,0xe0,0x8b}} */
#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpc_com_ps_StubVtblList,

```

```

(const PCInterfaceName * ) &
_tpc_com_ps_InterfaceNamesList,
0, /* no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};
#endif
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/



---


tpcc_dblib.cpp


---


/* FILE: TPCC_DBLIB.CPP
Microsoft
TPC-C Kit Ver. 4.42.000
Copyright
Microsoft, 2002
All Rights Reserved
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
PURPOSE: Implements dblib calls for TPC-C
txns.
Contact: Charles Levine
(clevine@microsoft.com)
Change history:
4.42.000 - changed wid fields
from short to long to support >32K warehouses
4.20.000 - updated rev number to
match kit
4.10.001 - not deleting error
class in catch handler on deadlock retry;
not a
functional bug, but a memory leak
- had to
tweak some declarations to compile with latest SDK;
no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); //
            initialize dblib break;

        case DLL_PROCESS_DETACH: //
            dbexit();
            close all dblib structures/connections
            break;

        default: //
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDblibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS *dbproc
DBPROCESS id pointer
DBINT
msgno
message number
int
msgstate
int
severity
char
*msgtext
printable
message description
*
* RETURNS: int
INT_CONTINUE continue if
error is SQLETIME else INT_CANCEL action
*
INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }

    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDest and places a
* null character at the
end of the destination string.
*
* ARGUMENTS: char
*pDest destination string pointer
char
*pSrc source string pointer
int
n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
always null
terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    };
}
};

```

```

        static char szNotFound[] = "Unknown error
number.";

        for(i=0; errorMsgs[i].szMsg[0]; i++)
        {
            if ( m_errno ==
errorMsgs[i].iError )
                break;
        }
        if ( !errorMsgs[i].szMsg[0] )
            return szNotFound;
        else
            return errorMsgs[i].szMsg;
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
        LPCSTR szServer,          // name of
SQL server
        LPCSTR szUser,           //
user name for login
        LPCSTR szPassword,       // password
for login
        LPCSTR szHost,          //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )     // name of
database to use
    {
        return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
    }

    CTPCC_DBLIB::CTPCC_DBLIB (
        LPCSTR szServer,        // name of
SQL server
        LPCSTR szUser,         //
user name for login
        LPCSTR szPassword,     // password
for login
        LPCSTR szHost,         //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )    // name of
database to use
    {
        LOGINREC *login;
        const BYTE *pData;

        // initialization
        m_dbproc = NULL;
        m_DbLibErr = (CDBLIBERR*)NULL;
        m_SqlErr = (CSQLERR*)NULL;

        m_MaxRetries = 10;      // how many
retries on deadlock

        // increase max number of connections if
getting close
        if ( dbgetmaxprocs() < (iConnectionCount+5)
)
            {

```

```

                if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
                    ThrowError(CDBLIBERR::eDbSetMaxProcs);
            }

            // allocate a login structure
            login = dblogin();
            if (login == NULL)
                ThrowError(CDBLIBERR::eLogin);
            InterlockedIncrement( &iConnectionCount );

            // register error and message handler
            if (dbprocerrhandle(login, err_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            if (dbprocmsghandle(login, msg_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            DBSETLUSER(login, szUser);
            DBSETLPWD(login, szPassword);
            DBSETHOST(login, szHost);
            DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
            DBSETLVERSION(login, DBVER60);
            // use dblib ver 6.0 client behavior

            // set time to wait for login
            if (dbsetlogintime(60) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            // set time to wait for statement execution
            if (dbsettime(180) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            m_dbproc = dbopen(login, szServer);

            // deallocate login structure before
checking for success
            dbfreelogin( login );

            if (m_dbproc == NULL)
                ThrowError(CDBLIBERR::eDbOpen);

            // save address of class instance so that
the message and error handler
            // can get to data.
            dbsetuserdata(m_dbproc, (LPVOID)this);

            // Use the the right database
            if (dbuse(m_dbproc, szDatabase) == FAIL)
                ThrowError(CDBLIBERR::eDbUse);

            dbcmd(m_dbproc, "set nocount on ");
            // do not return row counts
            dbcmd(m_dbproc, "set XACT_ABORT ON");
            // rollback transaction on abort

```

```

            if (dbsqlxexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbSqlExec);
            DiscardNextResults(2);

            // verify that version of stored procs on
server is correct
            dbrpcinit(m_dbproc, "tpcc_version", 0);
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            char szSrvVersion[16];
            pData=dbdata(m_dbproc, 1);
            if (pData)
                UtilStrCpy(szSrvVersion, pData,
dbdatalen(m_dbproc, 1));
            else
                szSrvVersion[0]=0;
            if (strcmp(szSrvVersion,sVersion))
                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

            DiscardNextRows(0);
            DiscardNextResults(0);
        }

        CTPCC_DBLIB::~CTPCC_DBLIB( void )
        {
            // close db connection and deallocate
resources
            dbclose(m_dbproc);
            InterlockedDecrement( &iConnectionCount );
            if (m_DbLibErr != NULL)
                delete m_DbLibErr;
            if (m_SqlErr != NULL)
                delete m_SqlErr;
        }

        void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
        {
            delete m_DbLibErr;
            m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

            if (dberrstr != NULL)
                {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLErr();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DLib error.
    if (m_SqlErr != NULL)
    {
        CSQLErr *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; //
clear our pointer to instance; catch handler will
delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int iRowsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
(iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
{
    int iResultsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }

        DiscardNextRows(-1);
        iResultsRead++;
    }

    if ((iExpectedCount >= 0) &&
(iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int iTryCount =
0;
    const BYTE *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshold
            smallint

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

```

```

        if
        (pData=dbdata(m_dbproc, 1))
        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
        (e->m_msgno
        == iErrOleDbProvider &&
        >m_msgtext, sErrTimeoutExpired) != NULL) &&
        (++iTryCount
        <= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
    //if (iTryCount)
    //    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT             commit_flag;
    DBDATETIME        datetime;
    DBDATERECD        daterec;

    int                iTryCount =
0;
    const BYTE        *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

```

```

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_ol_cnt);

            // check whether any
            order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
                (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
                    least one remote warehouse

                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);

            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            results

            // Get order line

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
            {

```

```

            if
            (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if
            (dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if
            (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));

            if(pData=dbdata(m_dbproc, 2))
                m_txn.NewOrder.OL[i].ol_stock =
                (*(DBSMALLINT *) pData);

            if(pData=dbdata(m_dbproc, 3))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge
neric, pData, dbdatlen(m_dbproc, 3));

            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);

            if(pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

            m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

            DiscardNextRows(0);
        }

        // get remaining values
        for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag

```

```

        if (dbresults(m_dbproc)
!= SUCCEEDED)
        ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);

        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);

        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = *(DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
                datetime =
*((DBDATETIME *) pData);

                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.NewOrder.o_entry_d.year =
daterec.year;

```

```

        m_txn.NewOrder.o_entry_d.month =
daterec.month;

        m_txn.NewOrder.o_entry_d.day =
daterec.day;

        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

        m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 8))

        commit_flag =
(*(DBTINYINT *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
        {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

                return;
        }
        catch (CSQLERR *e)
        {
                if ((e->m_msgno == 1205

||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL)) &&
(++iTryCount
<= iMaxRetries))
        {
                // hit
                deadlock; backoff for increasingly longer period
                delete e;
                Sleep(10 *
iTryCount);
        }
        else
        {
                throw;
        }
        }
        // while (TRUE)

```

```

//        if (iTryCount)
//                throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
        DBDATETIME          datetime;
        DBDATEREC daterec;

        int                  iTryCount =
0;
        const BYTE          *pData;

        ResetError();

        while (TRUE)
        {
                try
                {
                        dbrpcinit(m_dbproc,
"tpcc_payment", 0);

                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);

                        // if customer id is
                        zero, then payment is by name
                        if (m_txn.Payment.c_id
== 0)

                                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)&m_txn.Payment.c_last);

                        if (dbrpcexec(m_dbproc)
== FAIL)

                                ThrowError(CDBLIBERR::eDbRpcExec);

                        if (dbresults(m_dbproc)
!= SUCCEEDED)

                                ThrowError(CDBLIBERR::eDbResults);

```



```

                if (dbnextrow(m_dbproc)
:= REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);
                if (dbnumcols(m_dbproc)
:= 27)
                    ThrowError(CDBLIBERR::eWrongNumCols);
                if
(pData=dbdata(m_dbproc, 1))
                    m_txn.Payment.c_id = *((DBINT *) pData);
                if
(pData=dbdata(m_dbproc, 2))
                    UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
                if
(pData=dbdata(m_dbproc, 3))
                {
                    datetime =
*((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.Payment.h_date.year = daterec.year;
                    m_txn.Payment.h_date.month =
daterec.month;
                    m_txn.Payment.h_date.day = daterec.day;
                    m_txn.Payment.h_date.hour = daterec.hour;
                    m_txn.Payment.h_date.minute =
daterec.minute;
                    m_txn.Payment.h_date.second =
daterec.second;
                }
                if
(pData=dbdata(m_dbproc, 4))
                    UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
                if
(pData=dbdata(m_dbproc, 5))
                    UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
                if
(pData=dbdata(m_dbproc, 6))
                    UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
                if
(pData=dbdata(m_dbproc, 7))
                    UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

```

```

                if
(pData=dbdata(m_dbproc, 8))
                    UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
                if
(pData=dbdata(m_dbproc, 9))
                    UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
                if
(pData=dbdata(m_dbproc, 10))
                    UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
                if
(pData=dbdata(m_dbproc, 11))
                    UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
                if
(pData=dbdata(m_dbproc, 12))
                    UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
                if
(pData=dbdata(m_dbproc, 13))
                    UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
                if
(pData=dbdata(m_dbproc, 14))
                    UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
                if
(pData=dbdata(m_dbproc, 15))
                    UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
                if
(pData=dbdata(m_dbproc, 16))
                    UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
                if
(pData=dbdata(m_dbproc, 17))
                    UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
                if
(pData=dbdata(m_dbproc, 18))
                    UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
                if
(pData=dbdata(m_dbproc, 19))
                    UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
                if
(pData=dbdata(m_dbproc, 20))

```

```

                    UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
                if
(pData=dbdata(m_dbproc, 21))
                    UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
                if
(pData=dbdata(m_dbproc, 22))
                {
                    datetime =
*((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.Payment.c_since.year =
daterec.year;
                    m_txn.Payment.c_since.month =
daterec.month;
                    m_txn.Payment.c_since.day = daterec.day;
                    m_txn.Payment.c_since.hour =
daterec.hour;
                    m_txn.Payment.c_since.minute =
daterec.minute;
                    m_txn.Payment.c_since.second =
daterec.second;
                }
                if(pData=dbdata(m_dbproc, 23))
                    UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
                if(pData=dbdata(m_dbproc, 24))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
                if(pData=dbdata(m_dbproc, 25))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
                if(pData=dbdata(m_dbproc, 26))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
                if(pData=dbdata(m_dbproc, 27))
                    UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
                DiscardNextRows(0);

```

```

DiscardNextResults(0);

if (m_txn.Payment.c_id
== 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else
    m_txn.Payment.exec_status_code = eOK;

return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
    (e->m_msgno
== iErrOleDbProvider &&
    strstr(e-
>m_msgtext, sErrTimeoutExpired) != NULL) &&
    (++iTryCount
<= iMaxRetries))
    {
        // hit
        deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATERECD daterec;

    int iTryCount =
0;
    RETCODE rc;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

// if customer id is
zero, then order status is by name
if
(m_txn.OrderStatus.c_id == 0)
    dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

if (dbrpcexec(m_dbproc)
== FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

// Get order lines
if (dbresults(m_dbproc)
!= SUCCEED)
{
    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))
        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
    else
        ThrowError(CDBLIBERR::eDbResults);
}

if (dbnumcols(m_dbproc)
!= 5)
    ThrowError(CDBLIBERR::eWrongNumCols);

i = 0;
while (TRUE)
{
    rc =
dbnextrow(m_dbproc);
    if (rc ==
NO_MORE_ROWS)
        break;
    if (rc !=
REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

    if(pData=dbdata(m_dbproc, 1))
        m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*(DBSMALLINT *) pData);

```

```

if(pData=dbdata(m_dbproc, 2))
    m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
*) pData);
if(pData=dbdata(m_dbproc, 3))
    m_txn.OrderStatus.OL[i].ol_quantity =
(*(DBSMALLINT *) pData);
if(pData=dbdata(m_dbproc, 4))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);
if(pData=dbdata(m_dbproc, 5))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.OrderStatus.OL[i].ol_delivery_d.year
= daterec.year;
    m_txn.OrderStatus.OL[i].ol_delivery_d.month
= daterec.month;
    m_txn.OrderStatus.OL[i].ol_delivery_d.day
= daterec.day;
    m_txn.OrderStatus.OL[i].ol_delivery_d.hour
= daterec.hour;
    m_txn.OrderStatus.OL[i].ol_delivery_d.minut
e = daterec.minute;
    m_txn.OrderStatus.OL[i].ol_delivery_d.secon
d = daterec.second;
}
i++;
m_txn.OrderStatus.o_ol_cnt = i;

if (dbresults(m_dbproc)
!= SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);
if (dbnextrow(m_dbproc)
!= REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowError(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

if(pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
    {
        datetime =
*((DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec, &datetime);
        m_txn.OrderStatus.o_entry_d.year =
daterec.year;
        m_txn.OrderStatus.o_entry_d.month =
daterec.month;
        m_txn.OrderStatus.o_entry_d.day =
daterec.day;
        m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;
        m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;
        m_txn.OrderStatus.o_entry_d.second =
daterec.second;
    }

if(pData=dbdata(m_dbproc, 6))
    m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

if(pData=dbdata(m_dbproc, 7))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCTSTR)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

```

```

if(pData=dbdata(m_dbproc, 8))
    m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else
    m_txn.OrderStatus.exec_status_code = eOK;

return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
    {
        // hit
        deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int i;
    int iTryCount =
0;
    const BYTE *pData;

    ResetError();

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 10)
            ThrowError(CDBLIBERR::eWrongNumCols);

        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = (*(DBINT *)pData);
        }

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.Delivery.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period

```

```

        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

```

## ***tpcc\_odbc.cpp***

```

/* FILE: TPC_C_ODBC.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2002
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Implements ODBC calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 * Change history:
 * 4.42.000 - changed w_id fields
 * from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 * match kit
 * 4.10.001 - not deleting error
 * class in catch handler on deadlock retry;
 * not a
 * functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

// #define COMPILER_FOR_SNAC // define that to
// compile for SQL Native Client; comment out to use
// MDAC

#ifdef COMPILER_FOR_SNAC
#include <odbcss.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
// tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 3; // how many
retries on deadlock
//const iMaxRetries = 0; // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
                break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
SQLFreeEnv(henv);
    }
}

```

```

        break;
        default: // nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 *
 */

char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
"New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login

```

```

        LPCSTR szHost,                //
not used
        LPCSTR szDatabase,           // name of
database to use
        LPCWSTR szSPPrefix,         // prefix to
append to the stored procedure names
        BOOL bCallNoDuplicatesNewOrder ) // whether
to check for non-duplicate items in NewOrder and call
a new SP
{
    return new CTPCC_ODBC( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix,
bCallNoDuplicatesNewOrder );
}

CTPCC_ODBC::CTPCC_ODBC (
    LPCSTR szServer,
    // name of SQL server
    LPCSTR szUser,
    // user name for login
    LPCSTR szPassword,
    // password for login
    LPCSTR szHost,
    // not used
    LPCSTR szDatabase,
    // name of database to use
    LPCWSTR szSPPrefix,
    // prefix to append to the stored procedure
names
    BOOL bCallNoDuplicatesNewOrder //
whether to check for non-duplicate items in NewOrder
and call a new SP
)
:
m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder
)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_hstmtNewOrder = SQL_NULL_HSTMT;
    m_hstmtPayment = SQL_NULL_HSTMT;
    m_hstmtDelivery = SQL_NULL_HSTMT;
    m_hstmtOrderStatus = SQL_NULL_HSTMT;
    m_hstmtStockLevel = SQL_NULL_HSTMT;

    m_descNewOrderCols1 = SQL_NULL_HDESC;
    m_descNewOrderCols2 = SQL_NULL_HDESC;
    m_descOrderStatusCols1 = SQL_NULL_HDESC;
    m_descOrderStatusCols2 = SQL_NULL_HDESC;

    wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);
}

```

```

        if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )

            ThrowError(CODBCERR::eConnOption);

        {
            char
szConnectStr[256];
            char
szOutStr[1024];
            SQLSMALLINT
iOutStrLen;

#ifdef COMPILER_FOR_SNAC
            sprintf( szConnectStr,
"DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#else
            // Compile for SNAC
            sprintf( szConnectStr,
"DRIVER=SQL Native
Client;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#endif
            rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT);

            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eConnect);
        }

        if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)

            ThrowError(CODBCERR::eAllocHandle);

        {
            char buffer[128];

            // set some options affecting
connection behavior
            strcpy(buffer, "set nocount on
set XACT_ABORT ON");
            rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            // verify that version of stored
procs on server is correct
            char db_sp_version[10];
            strcpy(buffer, "{call
tpcc_version}");

```

```

            rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);
            if ( SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

                ThrowError(CODBCERR::eBindCol);
            if ( SQLFetch(m_hstmt) ==
SQL_ERROR )

                ThrowError(CODBCERR::eFetch);
            if
(strcmp(db_sp_version,sVersion))
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION
);

            SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
        }

        // Bind parameters for each of the
transactions
        InitNewOrderParams();
        InitPaymentParams();
        InitOrderStatusParams();
        InitDeliveryParams();
        InitStockLevelParams();
    }

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically
released when the connection is dropped
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION
eAction )
void CTPCC_ODBC::ThrowError( RETCODE eAction )
{
    RETCODE rc;
    DWORD lNativeError;
    char szState[6];
    char
szMsg[SQL_MAX_MESSAGE_LENGTH];

```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODBCERR *pODBCERR;
// not allocated until needed (maybe never)

pODBCERR = new CODBCERR();

pODBCERR->m_NativeError = 0;
//pODBCERR->m_eAction = eAction;
pODBCERR->m_eAction =
(CODBCERR::ACTION)eAction;
pODBCERR->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLError(henv, m_hdbc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }
    if (rc != SQL_SUCCESS)
    {
        break;
    }
    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)
    pODBCERR->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCERR->m_NativeError == 0
&& lNativeError != 0)
        pODBCERR->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
        strcat( szTmp, szMsg );
}

if (pODBCERR->m_odbcerrstr != NULL)
{
    delete [] pODBCERR->m_odbcerrstr;
    pODBCERR->m_odbcerrstr = NULL;

```

```

}
if (strlen(szTmp) > 0)
{
    pODBCERR->m_odbcerrstr = new
char[ strlen(szTmp)+1 ];
    strcpy( pODBCERR->m_odbcerrstr,
szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCERR;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_TINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindCol);

    //Compose Stock Level statement
    _snprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCo
mmand[0]),
        L"%s[call %stpcck_stocklevel
(?,?,?)]", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR )
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        m_txn.StockLevel.exec_status_code = eOK;
        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

```

```

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_ROW_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

        // set the bind offset pointer
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_bindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NoCommitFlag, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderComman
d[0]),
                // 0      1      2
                //
012345678901234567890123456789
                L"call
%stppcc_neworder(?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,
L"?,?,?,?,?,?,?,?,?,?,?,?,?,
,?,?,?,?,?)", m_szSPPrefix);

```

```

        m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix); // fixed part + prefix
part

        ////////////////////////////////////////////////////
        //
        // Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
        // and returns one result set for
lineitem details.
        //
        //
        m_hstmt = m_hstmtNewOrderNoDuplicates;

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

```

```

        // set row-wise binding
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UIINTEGER) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNe
wOrderNoDuplicatesCommand[0]),
        L"{call
%stpcc_neworder_new(?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,"
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?})", m_szSPPrefix);

        m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
    }

    //
    // Returns true if there are duplicate
(warehouse_id, item_id)
    // lineitem pairs in New Order input
parameters.
    //
    bool CTPCC_ODBC::DuplicatesInNewOrder()
    {
        int i, j;

        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
++i)
        {
            for (j = i+1; j<
m_txn.NewOrder.o_ol_cnt; ++j)
            {
                if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
                    return true;
            }
        }

        return false;
    }

    void CTPCC_ODBC::NewOrder()
    {
        if (m_bCallNoDuplicatesNewOrder)
        {
            if (DuplicatesInNewOrder())
            {
                NewOrderDuplicates();
            }
            else
            {
                NewOrderNoDuplicates();
            }
        }
    }

```

```

        else
        {
            NewOrderDuplicates();
        }
    }

    void CTPCC_ODBC::NewOrderDuplicates()
    {
        int
        i;
        RETCODE
        int
        iTryCount = 0;
        rc;

        0 1 2
        //
        012345678901234567890123456789
        wchar_t
        szSqlTemplate[IMAX_SP_NAME_LEN];

        tpcc_neworder(?,?,?,?,," // L"{call
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        m_hstmt = m_hstmtNewOrder;

        // associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 29 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate, m_szNewOrderCommand);
        i = m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L")" );

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {

```



```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
        break;
    }
}
while (TRUE)
{
    try
    {
        m_BindOffset = 0;
        rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        // Get order line
results
        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
i < m_txn.NewOrder.o_ol_cnt; i++)
        {
            // set the
bind offset value...
            m_BindOffset
= i * sizeof(m_txn.NewOrder.OL[0]);

            if (
SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            // move to
the next resultset
            if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eMoreResults);

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
bindings for the second result set
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR)
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

//
// No lineitem duplicates optimized version.
//
void CTPCC_ODBC::NewOrderNoDuplicates()
{
    int
    i;
    RETCODE
    int
    iTryCount = 0;

    0    1    2    3

    0123456789012345678901234567890123
    wchar_t
    szSqlTemplate[IMAX_SP_NAME_LEN];

    tpcc_neworder_new(?,?,?,?,"
// L" {call
L"?,?,?,?,?,?,?,?,?,?,?,?,"
//

```

```

L"?,?,?,?,?,?,?,?,?,?,?,?,"
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?,"
//
m_hstmt = m_hstmtNewOrderNoDuplicates;

// associate the parameter and column
bindings for this transaction
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

// clip statement buffer based on number of
parameters
// fixed part is 33 chars and variable part
is 6 chars per line item
    wcsncpy(szSqlTemplate,
m_szNewOrderNoDuplicatesCommand);
    i =
m_iBeginNewOrderNoDuplicatesVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
    wcsncpy( &szSqlTemplate[i], L" ) );

// check whether any order lines are for a
remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
        {
            m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
            break;
        }
    }

    while (TRUE)
    {
        try
        {
            // configure block
cursor
            if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

```

```

        ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
            if
            (SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
            (SQLPOINTER)MAX_OL_NEW_ORDER_ITEMS, 0) !=
            SQL_SUCCESS)

            ThrowError(CODBCERR::eSetStmtAttr);

        // Get order line
        results
            if ( SQLFetch(m_hstmt)
            == SQL_ERROR)

            ThrowError(CODBCERR::eFetch);

        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
        i < m_txn.NewOrder.o_ol_cnt; i++)
        {

            m_txn.NewOrder.total_amount +=
            m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
        bindings for the second result set
            if ( SQLSetStmtAttrW(
            m_hstmt, SQL_ATTR_APP_ROW_DESC,
            m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
            SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // move to the next
        resultset
            if (
            SQLMoreResults(m_hstmt) == SQL_ERROR )

            ThrowError(CODBCERR::eMoreResults);

            if ( rc =
            SQLFetch(m_hstmt)) == SQL_ERROR)

            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
        SQL_CLOSE);

        // Check Fetch return
        code for no rows returned.
        // It means customer id
        or warehouse id were invalid.
        //
        if (rc == SQL_NO_DATA)

```

```

        throw new
        CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
        PARAM);

        if (m_no_commit_flag ==
        1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
            m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
            m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
            eInvalidItem;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
            || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    //
    // if (iTryCount)
    //     throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
    iTryCount);
}

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
    m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
    &m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
    &m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
    &m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
    &m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS

```

```

        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
    &m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
    &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
    sizeof(m_txn.Payment.c_last), 0,
    &m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
    NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
    SQL_C_SLONG, &m_txn.Payment.c_id, 0,
    NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.c_last,
    sizeof(m_txn.Payment.c_last), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
    0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.w_street_1,
    sizeof(m_txn.Payment.w_street_1), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.w_street_2,
    sizeof(m_txn.Payment.w_street_2), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.w_city,
    sizeof(m_txn.Payment.w_city), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.w_state,
    sizeof(m_txn.Payment.w_state), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.w_zip,
    sizeof(m_txn.Payment.w_zip), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.d_street_1,
    sizeof(m_txn.Payment.d_street_1), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.d_street_2,
    sizeof(m_txn.Payment.d_street_2), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.d_city,
    sizeof(m_txn.Payment.d_city), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.d_state,
    sizeof(m_txn.Payment.d_state), NULL) !=
    SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
    SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Payment statement
    _snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[
0]),
        L"%s{call %stppc_payment
(?,?,?,?,,?)}", m_szSPPrefix);

```

```

    }
void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount =
0;
    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id
== 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
                throw;

            // hit deadlock;
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtOrderStatus;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        // configure block cursor
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) !=
SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatus
Command[0]),
        L"call %stppc_orderstatus
(?,?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int
    RETCODE
    rc;

    int
    iTryCount = 0;
}

```

```

m_hstmt = m_hstmtOrderStatus;

if (m_txn.OrderStatus.c_id != 0)
    m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
    try
    {
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // configure block
        cursor
        if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
        if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
        //
        if ( !(rc ==
SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0))) )
            if ( rc !=
SQL_SUCCESS )

                ThrowError(CODBCERR::eFetchScroll);

        m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

        if
        (m_txn.OrderStatus.o_ol_cnt != 0)
        {
            if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

```

```

        ThrowError(CODBCERR::eSetStmtAttr);

//
SQLMoreResults(m_hstmt) == SQL_ERROR )
if ( rc =
SQLMoreResults(m_hstmt) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eMoreResults);
}

//
SQLFetch(m_hstmt) == SQL_ERROR )
if ( rc =
SQLFetch(m_hstmt) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eFetch);
}

SQLFreeStmt(m_hstmt,
SQL_CLOSE);

if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
else
    m_txn.OrderStatus.exec_status_code = eOK;

    break;
}
catch (CODBCERR *e)
{
    if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;

    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

//
if (iTryCount)
//
throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowError(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if ( SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS )

        ThrowError(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snpprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryComman
d[0]),
        L"{call %stpcc_delivery (?,?)}",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE        rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }

```

```

        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_odbc.h
/* FILE: TPC_C_ODBC.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class
implementation.
 *
 * Change history:
 *
 * 4.20.000 - updated rev number to
match kit
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define IMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle

```

```

        eConnOption,
// error from SQLSetConnectOption
        eConnect,
// error from SQLConnect
        eAllocStmt,
// error from SQLAllocStmt
        eExecDirect,
// error from SQLExecDirect
        eBindParam,
// error from SQLBindParameter
        eBindCol,
// error from SQLBindCol
        eFetch,
// error from SQLFetch
        eFetchScroll,
// error from SQLFetchScroll
        eMoreResults,
// error from SQLMoreResults
        ePrepare,
// error from SQLPrepare
        eExecute,
// error from SQLExecute
        eSetEnvAttr,
// error from SQLSetEnvAttr
        eSetStmtAttr,
// error from SQLSetStmtAttr
    };

    CODBCERR(void)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

    ~CODBCERR()
    {
        if (m_odbcerrstr !=
NULL)
            delete []
m_odbcerrstr;
    };

    ACTION m_eAction;
    int m_NativeError;
    BOOL m_bDeadLock;
    char *m_odbcerrstr;

    int ErrorType()
    {return ERR_TYPE_ODBC;}
    char* ErrorTypeStr() { return
"ODBC"; }
    int ErrorNum()
    {return m_NativeError;}
    char* ErrorText() {return
m_odbcerrstr;}
    int ErrorAction()
    { return (int)m_eAction; }
};

class CTPCC_ODBC_ERR : public CBaseErr

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1,          // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO_SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRIED_TRANS,
            // "Retries before transaction
succeeded."

            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int          m_errno;
        int          m_iTryCount;

        int          ErrorType()
{return ERR_TYPE_TPCC_ODBC;};
        char*       ErrorTypeStr() { return
"TPCC ODBC"; }
        int          ErrorNum()
{return m_errno;};

        char*       ErrorText();

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL         m_bDeadlock;
        // transaction was selected as
deadlock victim
        int          m_MaxRetries;          // retry
count on deadlock

        SQLHENV     m_henv;
        // ODBC environment

handle
        SQLHDBC     m_hdbc;
        SQLHSTMT    m_hstmt;
        // the current hstmt

        SQLHSTMT    m_hstmtNewOrder;
        SQLHSTMT
m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

        SQLHSTMT    m_hstmtPayment;
        SQLHSTMT    m_hstmtDelivery;
        SQLHSTMT    m_hstmtOrderStatus;
        SQLHSTMT    m_hstmtStockLevel;

        SQLHDESC    m_descNewOrderCols1;
        SQLHDESC    m_descNewOrderCols2;
        SQLHDESC
m_descNewOrderNoDuplicatesCols1; //
NewOrder with one result set for lineitem details
        SQLHDESC
m_descNewOrderNoDuplicatesCols2; //
NewOrder with one result set for lineitem details
        SQLHDESC    m_descOrderStatusCols1;
        SQLHDESC    m_descOrderStatusCols2;

        wchar_t
m_szSPPrefix[32]; // stored procedures

prefix
        wchar_t
m_szNewOrderCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szNewOrderNoDuplicatesCommand[IMAX_SP_NAME
E_LEN];

        int
m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
        int
m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement
        wchar_t
m_szPaymentCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szDeliveryCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szOrderStatusCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szStockLevelCommand[IMAX_SP_NAME_LEN];

        // new-order specific fields
        SQLINTEGER    m_BindOffset;
        SQLINTEGER
m_RowsFetched;
        int
m_no_commit_flag;

        // tpcc_neworder_new flag
        BOOL
m_bCallNoDuplicatesNewOrder;

        //void ThrowError(
COBCEER::ACTION eAction );
        void ThrowError( RETCODE eAction
);

        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

```

```

        union
        {
            NEW_ORDER_DATA
NewOrder;
            PAYMENT_DATA
Payment;
            DELIVERY_DATA
Delivery;
            STOCK_LEVEL_DATA
StockLevel;
            ORDER_STATUS_DATA
OrderStatus;
        }
        m_txn;

        bool DuplicatesInNewOrder();
        void NewOrderDuplicates();
        void NewOrderNoDuplicates();

    public:
        CTPCC_ODBC( LPCWSTR
szServer, LPCWSTR szUser, LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder);
        ~CTPCC_ODBC(void);

        inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
        inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
        inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
        inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder          ();
        void Payment           ();
        void Delivery          ();
        void StockLevel        ();
        void OrderStatus      ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
( LPCWSTR szServer, LPCWSTR szUser,
LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

## ***tpcc\_oledb.cpp***

```
/* FILE: TPC_C_OLEDB.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2004
 * Written by
 * Sergey Vasilevskiy
 * All Rights Reserved
 *
 * PURPOSE: Implements OLEDB calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
// #include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifdef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 *
 */

char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;
    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
```

```

    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
not used
LPCSTR szDatabase, // name of
database to use
LPCWSTR szSPPrefix ) //
prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
LPCSTR szServer,
// name of SQL server
LPCSTR szUser,
// user name for login
LPCSTR szPassword,
// password for login
LPCSTR szHost,
// not used
LPCSTR szDatabase,
// name of database to use
LPCWSTR szSPPrefix
// prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int
iRc;
int
i;
HRESULT hr;

IDBInitialize*
pIDBInitialize = NULL; //
data source interface
IDBProperties*
pIDBProperties = NULL;
ICommandText*
pICommandText;
// SQL command without parameters
wchar_t
szwServer[iMaxNameLen]; //
Unicode string used to convert to BSTR
```

```

        wchar_t
        szwDatabase[iMaxNameLen];    // Unicode
string used to convert to BSTR
        wchar_t
        szwUser[iMaxNameLen];        //
Unicode string used to convert to BSTR
        wchar_t
        szwPassword[iMaxNameLen];    // Unicode
string used to convert to BSTR

        // Copy stored procedures prefix
        wcsncpy(m_szsppPrefix, szsppPrefix,
sizeof(m_szsppPrefix)/sizeof(m_szsppPrefix[0]));

        // Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

        // Initialize COM library to be able to use
OLE-DB interfaces
        CoInitialize(NULL);

        // Initialization - create SQLOLEDB
component
        //hr = CoCreateInstance(CLSID_SQLOLEDB, //
GUID of SQLOLEDB component
        // Compile for SNAC
        hr = CoCreateInstance(CLSID_SQLNCLI, //
GUID of SQLNCLI component
        NULL,
        // not defining an aggregate
component, so NULL
        CLSCTX_INPROC_SERVER, //
run the component in our process
        IID_IDBInitialize,
        (void **) &pIDBInitialize);
        /*
        Initialize the property values needed
to establish the connection.
        */
        for(i = 0; i < 4; i++)
            VariantInit(&m_InitProperties[i].vValue);
        //Server name.
        m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
        m_InitProperties[0].vValue.vt = VT_BSTR;
        m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
        m_InitProperties[0].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[0].colid = DB_NULLID;
        //Database.

```

```

        m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
        m_InitProperties[1].vValue.vt = VT_BSTR;
        m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
        m_InitProperties[1].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[1].colid = DB_NULLID;
        //Username (login).
        m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
        m_InitProperties[2].vValue.vt = VT_BSTR;
        m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
        m_InitProperties[2].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[2].colid = DB_NULLID;
        //Password.
        m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
        m_InitProperties[3].vValue.vt = VT_BSTR;
        m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
        m_InitProperties[3].dwOptions =
DBPROP_OPTIONS_REQUIRED;
        m_InitProperties[3].colid = DB_NULLID;
        /*
        Construct the DBPROPSET
structure(m_rgInitPropSet). The
DBPROPSET structure is used to pass an array of
DBPROP
structures (m_InitProperties) to the
SetProperties method.
        */
        m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
        m_rgInitPropSet.cProperties = 4;
        m_rgInitPropSet.rgProperties =
m_InitProperties;
        //Set initialization properties.
        if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
        (void **) &pIDBProperties)))
        {
            ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
        }

        hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);

        pIDBProperties->Release();
        //Now establish the connection to the data
source.
        hr = pIDBInitialize->Initialize();

        // Free BSTR property strings
        for(i = 0; i < 4; i++)
        {

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
        }

        hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

        // Releasing this has no effect on the SQL
Server connection
        // of the data source object because of the
reference maintained by
        // m_pIDBCreateSession.
        pIDBInitialize->Release();
        pIDBInitialize = NULL;

        hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
        }

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
        }

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
        }

        hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
        }

        pICommandText->Release();

        // verify that version of stored procs on
server is correct
        CheckSPVersion();

        // Get IMalloc interface
        hr = CoGetMalloc(1, (LPMAALLOC
**) &m_pIMalloc);

```



```

        // Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
}

library
{
    /*
    * Check stored procedures version on the
    server.
    */
    void CTPCC_OLEDB::CheckSPVersion()
    {
        HRESULT hr;
        char
        db_sp_version[10];
        ICommandText* pICommandText;
        IAccessor* pIAccessor;
        IRowset* pRowset;
        const ULONG nOutputParams
= 1;
        // output 1st result set columns
        HACCESSOR
        hTpccVersionOutputAccessor;
        // Structure to bind in accessor
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
        LONG cRows = 1;
        // number of rows returned in the rowset
        ULONG
        cRowsObtained;
        HROW rghRow;
        //returned row handles
        HROW* prghRow =
&rghRow;

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
        }
    }
}

```

```

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"{call tpcc_version}");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
        }

        hr = pICommandText-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
        }

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset
        SetBinding(&acOutputDBBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_ROWDATA,
            nOutputParams,
            acOutputDBBinding,
            sizeof(db_sp_version),
            &hTpccVersionOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
        }

        hr = pICommandText->Execute(NULL,
IID_IRowset, NULL, NULL, (IUnknown **) &pRowset);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
        }

        // Fetch the result row handle(s)
        hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
0, cRows, &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
        }

        // Fetch the actual row data by handle
        hr = pRowset->GetData(rghRow,
hTpccVersionOutputAccessor, &db_sp_version);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
        }
    }
}

```

```

    }

    // Release row(s)
    hr = pRowset->Release();

    pICommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
    CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT
    hr;
    //char
    szState[6];
    char
    szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
    szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr;
    //
    not allocated until needed (maybe never)
    int
    iLen;
    // Interfaces
    IErrorInfo* pIErrorInfoAll
= NULL;
    IErrorInfo* pIErrorInfoRecord
= NULL;
    IErrorRecords* pIErrorRecords
= NULL;
    ISupportErrorInfo* pISupportErrorInfo
= NULL;
    ISQLServerErrorInfo*
pISQLServerErrorInfo = NULL;
    ISQLErrorInfo*
pISQLErrorInfo = NULL;

    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG nRecs;
    ULONG nRec;

    // SQL Server error information from
ISQLServerErrorInfo.
    SSERRORINFO* pSSErrorInfo =
NULL;
    OLECHAR* pSSErrorStrings =
NULL;

    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)
&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw pOLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError)))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError
interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}*/
return;

// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pErrorInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pErrorInfoAll);

if (pErrorInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pErrorRecords)))
    {
        pErrorRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.
    pErrorRecords->GetCustomErrorObject(nRec,

    IID_ISQLErrorInfo, // generic SQL error
interface
    (IUnknown**) &pISQLErrorInfo);

    if
    (pISQLErrorInfo != NULL)
    {
        //
Request SQL Server-specific error interface, not the
generic SQL error interface.
        pISQLErrorInfo->QueryInterface(

        IID_ISQLServerErrorInfo, // SQL Server
error interface

        (void**) &pISQLServerErrorInfo);
    }
    // Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
    if
    (pISQLServerErrorInfo != NULL)
    {
        pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);

        //
ISQLServerErrorInfo::GetErrorInfo succeeds
//
even when it has nothing to return. Test the
//
pointers before using.
        if
        (pSSErrorInfo)
        {
            // First, add the error message.

            // Convert Unicode error string to ANSI.
            WideCharToMultiByte(CP_THREAD_ACP, 0,

            pSSErrorInfo->pwszMessage, -1,

            szMsg, sizeof(szMsg),

            NULL, NULL);

```

```

// quit if there isn't enough room to
concatenate error text
    if ( (strlen(szMsg) + 2) > (sizeof(szTmp) -
strlen(szTmp)) )
        break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\r\n");

// concatenate the error record to the
overall error message
    strcat( szTmp, szMsg );

// Second, add the stored procedure name
and line number, if available.

    if (wcslen(pSSErrorInfo->pwszProcedure)>0)
    {
        // Prefix with a line break
        iLen = sprintf(szMsg,
"\r\nProcedure: ");

        // Convert Unicode error string
to ANSI.
        WideCharToMultiByte(CP_THREAD_ACP, 0,

        pSSErrorInfo-
>pwszProcedure, -1,

        &szMsg[iLen],

        sizeof(szMsg) - iLen,

        NULL, NULL);

        // Check if have space to add the
line number.
        // Assume the line number takes
no more than 3 digits.
        if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
sizeof(szMsg),
                "%:d",
pSSErrorInfo->wLineNumber);
    }

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // concatenate the error record
to the overall error message
    strcat( szTmp, szMsg );

    // copy the overall error string
to the exception
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szTmp)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szTmp);
}

// Third, capture the (first) database
error
    if (pOLEDBErr->m_NativeError == 0 &&
pSSErrorInfo->lNative != 0)
    {
        pOLEDBErr->m_NativeError =
pSSErrorInfo->lNative;

        // Check for deadlock error code
and set the deadlock flag
        if (pSSErrorInfo->lNative ==
1205)
        {
            pOLEDBErr->m_bDeadLock
= TRUE;
        }
    }

```

```

    }

    // IMalloc::Free needed to release
references
    // on returned values.
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc-
>Free(pSSErrorStrings);
        m_pIMalloc->Free(pSSErrorInfo);
    }

    pISQLServerErrorInfo->Release();
    }
    else
    {
        Custom error object is not supported. //
        Use general OLE-DB error interface. //
        Get the numeric error code //
        pIErrorRecords->GetBasicErrorInfo(nRec,
&BasicErrorInfo);
        if
        (pOLEDBErr->m_NativeError == 0)
        {
            // Get the failed call HRESULT code, which
is not really the native error
            pOLEDBErr->m_NativeError =
BasicErrorInfo.hrError;
        }
        //
        Try to get the string description of the error. //
        pIErrorRecords->GetErrorInfo(nRec,
LOCALE_USER_DEFAULT,
(IErrorInfo**)&pIErrorInfoRecord);
        if
        (pIErrorInfoRecord)
        {
            pIErrorInfoRecord-
>GetDescription(&bstrDescription);

```

```

        // Convert Unicode error string to ANSI.
        WideCharToMultiByte(CP_THREAD_ACP, 0,
                bstrDescription, -1,
                szMsg, sizeof(szMsg),
                NULL, NULL);

        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
        strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);
    }
} // for()
} // if
(SUCCEEDED(pIErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
    else
    {
        // No IErrorRecords
interface supported. Use default IErrorInfo.
        // Note: SQLOLEDB
supports IErrorRecords, so this check is for good
style only.
        _snprintf(szMsg,
sizeof(szMsg), "IErrorRecords interface not
supported");
        pOLEDBErr-
>m_OLEDBErrStr = new char[strlen(szMsg)+1];
        strcpy(pOLEDBErr-
>m_OLEDBErrStr, szMsg);
    }
    pIErrorInfoAll->Release();
} // if (pIErrorInfoAll != NULL)
else
{
    // No IErrorInfo interface
supported.
    // Note: SQLOLEDB supports
IErrorInfo, so this check is for good style only.
    _snprintf(szMsg, sizeof(szMsg),
"IErrorInfo interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}
    throw pOLEDBErr;
}
/*
*

```

```

*         Create a new command object from the SQL
text passed in.
*
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSqlCommand, // I: SQL
query for the command

                                ICommandText**
ppICommandText // O: returned command object
{
    HRESULT hr;

    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)-
>SetCommandText(DBGUID_SQL, szSqlCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
*         QueryInterface and Prepare in one function
for simplicity.
*         DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
rowSetPropSet;
DBPROP
rowSetProp;

    // Set the deferred prepare property to
false.
    rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
    memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));

```

```

    rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
    rowSetProp.colid = DB_NULLID;

    rowSetPropSet.cProperties = 1;
    rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
    rowSetPropSet.rgProperties = &rowSetProp;

    // Query interface for setting properties
    hr = pICommandText-
>QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Set the property set
    hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Get interface for preparing commands
    hr = pICommandText-
>QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
    }

    // Prepare Payment command
    hr = pICommandPrepare->Prepare(0xFFFFFFFF);
    if (FAILED(hr))
    {
        ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
    }
}

/*
*         Initialize fields of an array of bindings
structures.
*         Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings, // IO: array of bindings
                                int iCount, // I: number of
                                elements in the array

```

```

                                eBindingType BindingType) //
I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false); //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }
}

/*
*         Perform binding for one parameter or output
column.
*
*/
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure
                                size_t obValue, // I: parameter (column) offset in the user
                                buffer
                                size_t cbMaxLen, // I: parameter (column) length

```

```

        DBTYPE wType
    // I: parameter (column) type
    {
        )
        pDBBinding->obValue = (ULONG)obValue;
        pDBBinding->cbMaxLen = (ULONG)cbMaxLen;
        pDBBinding->wType = wType;
    }
void CTPCC_OLEDB::InitStockLevelParams()
{
    int            i;
    HRESULT        hr;
    wchar_t        szName[IMAX_SP_NAME_LEN];
    IAccessor*     pIAccessor;
    const ULONG    nInputParams = 3; // input parameters
    const ULONG    nOutputParams = 1; // output 1st result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];

    // Set command text
    _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
        L"call
%stpcck_stocklevel(?,?,?)", m_szSPPrefix);

    // Create and Prepare a new command object
for StockLevel.
    CreateCommand(szName,
&m_pIStockLevelCommand);

    // Describe the consumer buffer by filling
in the array
    // of DBBINDING structures. Each binding
associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // StockLevel parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, w_id),
sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

    // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, d_id),
sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

        // StockLevel parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, threshold),
sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

        hr = m_pIStockLevelCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
COLEDBERR::eQueryInterface,
"InitStockLevelParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,
            nInputParams,
            acInputDBBinding,
            sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelInputAccessor,
            acInputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
        }

        m_StockLevelExecuteParams.cParamSets = 1;
        m_StockLevelExecuteParams.hAccessor =
m_hStockLevelInputAccessor;
        m_StockLevelExecuteParams.pData =
&m_txn.StockLevel;

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
more than one row.
        i = 0;
        // StockLevel output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, low_stock),
sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
            nOutputParams,
            acOutputDBBinding,
            sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelOutputAccessor,
            acOutputDBBindStatus);

        if (FAILED(hr))
        {

```

```

            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
        }
    }
void CTPCC_OLEDB::StockLevel()
{
    HRESULT        hr;
    int            iTryCount = 0;
    IRowset*       pRowset;
    LONG           cRows = 1;
    // number of rows returned in the rowset
    ULONG          cRowsObtained;
    HROW           rghRow;
    //returned row handles
    HROW*          prghRow =
&rghRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
&m_StockLevelExecuteParams, NULL,

                (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eExecute, "StockLevel()");
            }

            // Fetch the result row
handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetNextRows, "StockLevel()");
            }

            // Fetch the actual row
data by handle
            hr = pRowset-
>GetData(rghRow, m_hStockLevelOutputAccessor,
&m_txn.StockLevel);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetData, "StockLevel()");
            }
        }
    }
}

```

```

        // Release row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
        // Release rowset
        hr = pRowset-
>Release();

        m_txn.StockLevel.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int        i, j, iOlCount;
    HRESULT    hr;
    wchar_t    wchar_t
szName[iMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG
nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
    const ULONG
nOutputParams = 5; // output 1st result
set columns
    const ULONG
nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
acInputDBBinding[nInputParams];
    DBBINDSTATUS
acInputDBBindStatus[nInputParams];
    DBBINDING
acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
    DBBINDING
acOutputDBBinding2[nOutputParams2];

```

```

    DBBINDSTATUS
acOutputDBBindStatus2[nOutputParams2];

    // Describe the consumer buffer by filling
in the array
    // of DBBINDING structures. Each binding
associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // NewOrder parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, w_id),
sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

    // NewOrder parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, d_id),
sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

    // NewOrder parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, c_id),
sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

    // NewOrder parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_ol_cnt),
sizeof(m_txn.NewOrder.o_ol_cnt), DBTYPE_UI1);

    // NewOrder parameter 5
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_all_local),
sizeof(m_txn.NewOrder.o_all_local), DBTYPE_UI1);

    for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
    {
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

    // Binding for the order line rowsets (each
consist of one row).

```

```

    // Bind to offsets of the OL_NEW_ORDER_DATA
structure instead of NEW_ORDER_DATA.
    // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
    // from the row set.

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_name),
sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_stock),
sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
DBTYPE_STR);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_price),
sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

    // NewOrder output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_amount),
sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

    // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, w_tax),
sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, d_tax),
sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_id),
sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_last),
sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

    // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_discount),
sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

// NewOrder output column 6
SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_credit),
sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

// NewOrder output column 7
SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_entry_d),
sizeof(m_txn.NewOrder.o_entry_d),
DBTYPE_DBTIMESTAMP);

// NewOrder output column 8
SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_commit_flag),
sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
{
    // Set command text first
    // Print the fixed first portion
of parameters
    i = _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
        L"call %stpc_neworder (?,?,?,?,"
m_szSPPrefix);

    // Now print the variable portion
depending on the number of order line parameters
for (iOlCount = 0; iOlCount <= j;
++iOlCount)
    {
        i +=
        _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",?,?,?");
    }

    // Print the fixed end
if (j != MAX_OL_NEW_ORDER_ITEMS -
1)
    {
        // append 'default' for
the parameters that are not used
        i +=
        _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",default)");
    }
    else // using all 15 order
line parameters
    {
        i +=
        _snwprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L")");
    }

    // Create and Prepare a new
command object for NewOrder.

```

```

        CreateCommand(szName,
&m_pINewOrderCommand[j]);

// Now create the input accessor
for this prepared command
hr = m_pINewOrderCommand[j]-
>QueryInterface(IID_IAccessor, (void **)&piAccessor);
if (FAILED(hr))
{
    ThrowError(m_pINewOrderCommand[j],
COLEDBERR::eQueryInterface, "InitNewOrderParams()");
}

hr = piAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

3 * (j + 1),

acInputDBBinding,

sizeof(NEW_ORDER_DATA),

&m_hNewOrderInputAccessor[j],

acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
}

m_NewOrderExecuteParams[j].cParamSets = 1;
//
m_NewOrderExecuteParams.hAccessor is set dynamically
at run-time
// based on the number of new
order items for the particular transaction call.

m_NewOrderExecuteParams[j].hAccessor =
m_hNewOrderInputAccessor[j];
m_NewOrderExecuteParams[j].pData
= &m_txn.NewOrder;

// Create accessor for the first
rowset
hr = piAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,

nOutputParams,
acOutputDBBinding,

sizeof(OL_NEW_ORDER_DATA),

```

```

        &m_hNewOrderOutputAccessor[j],
acOutputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
}

// Create accessor for the second
rowset
hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),

&m_hNewOrderOutputAccessor2[j],
acOutputDBBindStatus2);
if (FAILED(hr))
{
    ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
}

piAccessor->Release();
}

void CTPCC_OLEDB::NewOrder()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = 1; // number of rows
    returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows; //returned row handles
    for the 1st result set
    HROW* prghRows = &rghRows;
    LONG cRows2 = 1; // number of rows
    returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle
    for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of
affected rows for a rowset

```

```

        int
        iHandleIndex; // index into the
handle arrays based on the orders count

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }

        iHandleIndex = m_txn.NewOrder.o_ol_cnt - 1;
// for convenience

        while (TRUE)
        {
            try
            {
                // Execute the prepared
command (according to the number of new orders)
                // Ask for
IMultipleResults because it returns 2 rowsets.
                hr =
m_pINewOrderCommand[iHandleIndex]->Execute(

                NULL, IID_IMultipleResults,

                &m_NewOrderExecuteParams[iHandleIndex],

                NULL,

                (IUnknown **)&pMultipleResults);
                if (FAILED(hr))
                {
                    ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eExecute, "NewOrder()");
                }

                // Get order line
results

                // Get order line
results

                m_txn.NewOrder.total_amount = 0;
                for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; ++i)

```

```

        {
            // Get the
first rowset object
            hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset);
            if
(FAILED(hr))
            {
                char szTmp[256];

                _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);

                ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o_ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
            }

            // Fetch the
result row handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
            }

            // Fetch the
actual row data by handle
            hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
            }

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;

            // Release
row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);

            // Release
rowset
            hr = pRowset-
>Release();
        }

```

```

        // Get the second
rowset object
        hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset2);
        if (FAILED(hr))
        {
            char
szTmp[256];

            _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
        }

        // Fetch the result row
handle(s)
        hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
        }

        // Fetch the actual row
data by handle
        hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
        }

        // Release row(s)
        hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);

        // Release rowset
        hr = pRowset2-
>Release();

        // Release the common
MultipleResults interface
        hr = pMultipleResults-
>Release();

        if
(m_txn.NewOrder.o_all_local == 1)

```



```

        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
            m_txn.NewOrder.exec_status_code =
eInvalidItem;
        }
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            ++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
        // throw new
        CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[iMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const ULONG
        nInputParams = 7; // input parameters
        const ULONG
        nOutputParams = 27; // output result set
columns
    // Structure to bind in accessor
    DBBINDING
        acInputDBBinding[nInputParams];
    DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
    DBBINDING
        acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];

    // Set command text

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"call
%stpc_payment(?,?,?,?,?,?)", m_szSPPrefix);

        // Create and Prepare a new command object
        for Payment.
        CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

```

```

nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
        }

        m_PaymentExecuteParams.cParamSets = 1;
        m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
        m_PaymentExecuteParams.pData =
&m_txn.Payment;

        // Now fill the binding information for
        output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        i = 0;
        // Payment output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        // Payment output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

        // Payment output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

        // Payment output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

        // Payment output column 6
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

        // Payment output column 7
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

        // Payment output column 8
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

// Payment output column 9
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 10
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 11
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 12
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 13
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 14
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

// Payment output column 15
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

// Payment output column 16
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 17
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 18
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 19
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 20
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 21

```

```

SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

// Payment output column 22
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

// Payment output column 23
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

// Payment output column 24
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

// Payment output column 25
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

// Payment output column 26
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

// Payment output column 27
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentOutputAccessor,
acOutputDBBindStatus);
if (FAILED(hr))
{
ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

void CTPCC_OLEDB::Payment()
{
HRESULT hr;
int
iTryCount = 0;
IRowset* pRowset;
LONG cRows = 1;
// number of rows returned in the rowset
ULONG
cRowsObtained;
HROW rghRow;
//returned row handles

```

```

HROW* prghRow =
&rghRow;

if (m_txn.Payment.c_id != 0)
m_txn.Payment.c_last[0] = 0;

while (TRUE)
{
try
{
// Execute the prepared
command
hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,

(IUnknown **)&pRowset);
if (FAILED(hr))
{
ThrowError(m_pIPaymentCommand,
COLEDBERR::eExecute, "Payment()");
}

// Fetch the result row
handle(s)
hr = pRowset->
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
if (FAILED(hr))
{
ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetNextRows, "Payment()");
}

// Fetch the actual row
data by handle
hr = pRowset->
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
if (FAILED(hr))
{
ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetData, "Payment()");
}

// Release row(s)
hr = pRowset->
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
// Release rowset
hr = pRowset->
>Release();
if (m_txn.Payment.c_id
== 0)
throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

```

```

        m_txn.Payment.exec_status_code = eOK;
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            if (++iTryCount > iMaxRetries)
            {
                throw;
            }
            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount)
    //     throw new
    CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
    iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int i;
    HRESULT hr;
    wchar_t szName[MAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG
        nInputParams = 4; // input parameters
        const ULONG
        nOutputParams = 5; // output 1st result
set columns
        const ULONG
        nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    DBBINDING
    acOutputDBBinding2[nOutputParams2];
    DBBINDSTATUS
    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snwprintf(szName,
    sizeof(szName)/sizeof(szName[0]),
    L"%s",
    %stpcc_orderstatus(?,?,?,?)", m_szSPPrefix);

```

```

    // Create and Prepare a new command object
    for OrderStatus.
    CreateCommand(szName,
    &m_pIOrderStatusCommand);

    // Describe the consumer buffer by filling
    in the array
    // of DBBINDING structures. Each binding
    associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
    nInputParams, eInputParameter);

    i = 0;
    // OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, w_id),
    sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

    // OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, d_id),
    sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

    // OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_id),
    sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_last),
    sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOrderStatusCommand-
    >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
        COLEDBERR::eQueryInterface,
        "InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
        &m_hOrderStatusInputAccessor,
        acInputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor,
        "InitOrderStatusParams()");
    }

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
    m_hOrderStatusInputAccessor;

```

```

        m_OrderStatusExecuteParams.pData =
        &m_txn.OrderStatus;

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
        more than one row.
        // Bind to offsets of the
        OL_ORDER_STATUS_DATA structure instead of
        ORDER_STATUS_DATA.
        // IRowset::GetData() will be passed
        individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // OrderStatus output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
        sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
        DBTYPE_I4);

        // OrderStatus output column 2
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
        sizeof(m_txn.OrderStatus.OL[0].ol_i_id),
        DBTYPE_I4);

        // OrderStatus output column 3
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
        sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
        DBTYPE_I2);

        // OrderStatus output column 4
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_ORDER_STATUS_DATA, ol_amount),
        sizeof(m_txn.OrderStatus.OL[0].ol_amount),
        DBTYPE_R8);

        // OrderStatus output column 5
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
        sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
        DBTYPE_DBTIMESTAMP);

        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_ORDER_STATUS_DATA),
        &m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitOrderStatusParams()");
        }

```

```

// Now fill the binding information for
result set 2 output columns
InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

i = 0;
// OrderStatus output column 1
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

// OrderStatus output column 2
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

// OrderStatus output column 3
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

// OrderStatus output column 4
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

// OrderStatus output column 5
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

// OrderStatus output column 7
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

// OrderStatus output column 8
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

// OrderStatus output column 9
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
acOutputDBBindStatus2);

if (FAILED(hr))
{
ThrowError(piAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
}

```

```

}

void CTPCC_OLEDB::OrderStatus()
{
HRESULT hr;
int
iTryCount = 0;
IMultipleResults* pMultipleResults;
IRowset* pRowset;
IRowset* pRowset2;
LONG
cRows = MAX_OL_ORDER_STATUS_ITEMS; //
number of rows returned in the 1st rowset
ULONG
cRowsObtained;
HROW
rghRows[MAX_OL_ORDER_STATUS_ITEMS];
//returned row handles for the 1st result
set
HROW*
prghRows = &rghRows[0];
LONG
cRows2 = 1; // number of rows
returned in the 2nd rowset
ULONG
cRowsObtained2;
HROW
rghRows2; //returned row handle
for the 2nd result set
HROW*
prghRows2 = &rghRows2;
int
i;
long
lRowsAffected; // the number of
affected rows for a rowset

if (m_txn.OrderStatus.c_id != 0)
m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
try
{
// Execute the prepared
command // Ask for
IMultipleResults because it returns 2 rowsets.
hr =
m_piOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,

(IUnknown **)&pMultipleResults);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
}
}
}

```

```

// Get order line
results

// Get the first rowset
object
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}

// Fetch the result row
handle(s)
hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}

m_txn.OrderStatus.o_ol_cnt =
(short)cRowsObtained;

// Get the data from
multiple rows in this rowset
for (i = 0; i <
m_txn.OrderStatus.o_ol_cnt; ++i)
{
// Fetch the
actual row data by handle
hr = pRowset-
>GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
if
(FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();

```

```

////////////////////////////////////
// Get the second
rowset object

////////////////////////////////////
if
(m_txn.OrderStatus.o_ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}
// Fetch the
result row handle(s)
hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}
// Fetch the
actual row data by handle
hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
// Release
row(s)
hr =
pRowset2->Release();
}
// Release the common
MultipleResults interface
hr = pMultipleResults-
>Release();

if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);

```

```

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else
    m_txn.OrderStatus.exec_status_code = eOK;

    break;
}
catch (COLEDBERR *e)
{
    if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;

    // hit deadlock;
    delete e;
    Sleep(10 * iTryCount);
}
}

// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitDeliveryParams()
{
    int        i;
    HRESULT    hr;
    wchar_t    szName[IMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG
nInputParams = 2; // input parameters
const ULONG
nOutputParams = 10; // output 1st result
set columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];

// Set command text
_snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);

// Delivery parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);

hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}

hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(DELIVERY_DATA),
&m_hDeliveryInputAccessor,
acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}

m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;

// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1

```

```

        SetBinding(&acOutputDBBinding[i],
offsetof(DELIVERY_DATA, o_id[i]),
sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DELIVERY_DATA),
&m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }
}

void CTPCC_OLEDB::Delivery()
{
    HRESULT          hr;
    int
    iTryCount = 0;
    IRowset*         pRowset;
    LONG             cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW             rgRow;
    //returned row handles
    HROW*           prghRow =
&rgRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,

            (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eExecute, "Delivery()");
            }

            // Fetch the result row
handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {

```

```

                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetNextRows, "Delivery()");
            }
        }
        // Fetch the actual row
data by handle
            hr = pRowset-
>GetData(rgRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetData, "Delivery()");
            }
            // Release row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset-
>Release();

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (COLEDBERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            // backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_oledb.h
/* FILE: TPC_C_OLEDB.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999-2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
 *

```

```

 * PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
 *
 *
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        // = 6
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
        // = 11
    };

    COLEDBERR(LPCTSTR szLoc)
        : CBaseErr(szLoc)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_OLEDBErrStr = NULL;
    };

    ~COLEDBERR()
    {
        if (m_OLEDBErrStr !=
NULL)
            delete []
m_OLEDBErrStr;
    }
};

```

```

};
ACTION m_eAction;
int m_NativeError;
BOOL m_bDeadLock;
char *m_OLEDBErrStr;

int m_NativeError;
char *m_OLEDBErrStr;

int m_NativeError;
char *m_OLEDBErrStr;

int m_eAction;
};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
enum TPCC_OLEDB_ERRS
{
ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
ERR_INVALID_CUST, // "Invalid Customer id,name."
ERR_NO_SUCH_ORDER, // "No orders found for
customer."
ERR_RETRIED_TRANS, // "Retries before transaction
succeeded."
};
CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };
CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

int m_errno;
int m_iTryCount;

int m_NativeError;
char *m_OLEDBErrStr;

int m_NativeError;
char *m_OLEDBErrStr;

};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

// declare variables and private
functions here...
BOOL m_bDeadlock; //
transaction was selected as deadlock victim
int m_MaxRetries;
// retry count on deadlock

DBPROPSET m_rgInitPropSet; //
initialization property set used to establish a
connection
DBPROP m_InitProperties[4]; //
individual initialization properties
IDBCreateSession* m_pIDBCreateSession; // session
(connection) interface
IDBCreateCommand* m_pIDBCreateCommand; // SQL
command creation interface

IMalloc* m_pIMalloc; // Needed to release error strings.

// StockLevel
ICommandText* m_pIStockLevelCommand;
HACCESSOR m_hStockLevelInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hStockLevelOutputAccessor; // accessor
to bind output columns
DBPARAMS m_StockLevelExecuteParams; //
parameter structure for Execute

// NewOrder
// One prepared command for each
possible number of new order line items
ICommandText* m_pINewOrderCommand[MAX_OL_NEW_ORDER_ITEMS];
// accessors to bind input
parameters
// one for each possible number
of new order line items
HACCESSOR m_hNewOrderInputAccessor[MAX_OL_NEW_ORDER_I
TEMS];
// accessor to bind output
columns of the first rowset
HACCESSOR m_hNewOrderOutputAccessor[MAX_OL_NEW_ORDER_
ITEMS];
// accessor to bind output
columns of the second rowset

```

```

HACCESSOR m_hNewOrderOutputAccessor2[MAX_OL_NEW_ORDER
_ITEMS];
// parameter structure for
Execute
DBPARAMS m_NewOrderExecuteParams[MAX_OL_NEW_ORDER_IT
EMS];

// Payment
ICommandText* m_pIPaymentCommand;
HACCESSOR m_hPaymentInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hPaymentOutputAccessor; // accessor
to bind output columns
DBPARAMS m_PaymentExecuteParams; //
parameter structure for Execute

// OrderStatus
ICommandText* m_pIOrderStatusCommand;
HACCESSOR m_hOrderStatusInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hOrderStatusOutputAccessor; // accessor
to bind output columns
HACCESSOR m_hOrderStatusOutputAccessor2; //
accessor to bind output columns
DBPARAMS m_OrderStatusExecuteParams; //
parameter structure for Execute

// Delivery
ICommandText* m_pIDeliveryCommand;
HACCESSOR m_hDeliveryInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hDeliveryOutputAccessor; // accessor
to bind output columns
DBPARAMS m_DeliveryExecuteParams; // parameter
structure for Execute

wchar_t m_szSPPrefix[32]; // stored
procedures prefix

// new-order specific fields
int m_no_commit_flag;

void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```

```

void CheckSPVersion();

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

// Helper function to create and
prepare a command
void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppiCommandText);
// Helper function to prepare a
command
void PrepareCommand(ICommandText*
ppiCommand);

// Helper function to fill one
binding
// Used for both input parameter
and output column bindings
void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

// Helper function to initialize
an array of bindings
void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

union
{
    NEW_ORDER_DATA
    NewOrder;
    PAYMENT_DATA
    Payment;
    DELIVERY_DATA
    Delivery;
    STOCK_LEVEL_DATA
    StockLevel;
    ORDER_STATUS_DATA
    OrderStatus;
}
m_txn;

public:
    CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
    ~CTPCC_OLEDB(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void Delivery ();
    void StockLevel ();
    void OrderStatus ();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

## trans.h

```

/* FILE: TRANS.H Microsoft
 * TPC-C Kit Ver. 4.42.000 Copyright
 * Microsoft, 2002 Copyrigh
 * All Rights Reserved
 * Version
 4.10.000 audited by Richard Gimarc, Performance
 Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C structure
 templates.
 * Change history:
 * 4.42.000 - changed w_id fields
 from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqltypes.h, but is not available
// when compiling with dlib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    /* SQLSMALLINT */ short
    /* unsigned short */ year;
    /* SQLSMALLINT */ month; unsigned short
    /* SQLSMALLINT */ day; unsigned short
    /* SQLSMALLINT */ hour; unsigned short
    /* SQLSMALLINT */ minute; unsigned short
    /* SQLSMALLINT */ second; unsigned long
    /* SQLINTEGER */ fraction; unsigned long
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction committed."
    eInvalidItem, // 1 "Item number
is not valid."
    eDeliveryFailed // 2 "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;

```



```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short       o_ol_cnt;

    // output params
    EXEC_STATUS  exec_status_code;
    char        c_last[LAST_NAME_LEN+1];
    char        c_credit[CREDIT_LEN+1];
    double      c_discount;
    double      w_tax;
    double      d_tax;
    long        o_id;
    short       o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short       o_all_local;
    double      total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short       c_d_id;
    long        c_w_id;
    double      h_amount;
    char        c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;

```

```

TIMESTAMP_STRUCT  h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN + 1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT  c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long          ol_i_id;
    long          ol_supply_w_id;
    short        ol_quantity;
    double       ol_amount;
    TIMESTAMP_STRUCT  ol_delivery_d;
} OL_ORDER_STATUS_DATA;

```

```

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    char
c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;
    char
c_first[FIRST_NAME_LEN+1];
    char
c_middle[MIDDLE_NAME_LEN+1];
    double      c_balance;
    long        o_id;
    TIMESTAMP_STRUCT  o_entry_d;
    short       o_carrier_id;
    OL_ORDER_STATUS_DATA
    OL[MAX_OL_ORDER_STATUS_ITEMS];
    short       o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        o_carrier_id;

    // output params
    EXEC_STATUS  exec_status_code;
    SYSTEMTIME   queue_time;
    long         o_id[10];
    // id's of delivered
    orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME   queue;
    //time delivery transaction queued
    long        w_id;
    //delivery warehouse
    short       o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    short        c_id;
    short        threshold;

    // output params

```

```

EXEC_STATUS
exec_status_code;
long
low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

## txn\_base.h

```

/* FILE: TXN_BASE.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class
implementation.
 *
 * Change history:
 * 4.20.000 - updated rev number to
match kit
 */

#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
    BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
    BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
    BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
    BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
    () = 0;
    virtual void Payment
    () = 0;
    virtual void Delivery
    () = 0;
    virtual void StockLevel
    () = 0;

```

```

virtual void OrderStatus    ()
= 0;
};

```

## resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer
Studio generated
include file.
// Used by
tpcc_com_all.rc
//
#define IDS_PROJNAME
100
#define IDR_TPCC
101
#define IDR_NEWORDER
102
#define IDR_ORDERSTATUS
103
#define IDR_PAYMENT
104
#define IDR_STOCKLEVEL
105

// Next default values
for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
LS
#define
_APS_NEXT_RESOURCE_VALUE
E 202
#define
_APS_NEXT_COMMAND_VALUE
32768
#define
_APS_NEXT_CONTROL_VALUE
201
#define
_APS_NEXT_SYMED_VALUE
106
#endif
#endif

```

## resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102

```

```

#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif

```

# Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

## ***createdb.sql***

```
-----
-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2005
-----

SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

-----
-- Create temporary table for timing
-----
IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date CHAR(30),
     end_date   CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-----
-- Store starting time
-----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

-----
-- create main database files
-----
CREATE DATABASE tpcc
```

```
ON PRIMARY
(
    NAME             = MSSQL_tpcc_root,
    FILENAME         = 'c:\MSSQL_tpcc_root.mdf',
    SIZE              = 8MB,
    FILEGROWTH        = 0),

FILEGROUP MSSQL_stk_fg
(
    NAME             = MSSQL_stk1,
    FILENAME         = 'c:\stk\stk1\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk2,
    FILENAME         = 'c:\stk\stk2\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk3,
    FILENAME         = 'c:\stk\stk3\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk4,
    FILENAME         = 'c:\stk\stk4\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk5,
    FILENAME         = 'c:\stk\stk5\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk6,
    FILENAME         = 'c:\stk\stk6\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk7,
    FILENAME         = 'c:\stk\stk7\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk8,
    FILENAME         = 'c:\stk\stk8\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk9,
    FILENAME         = 'c:\stk\stk9\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_stk10,
    FILENAME         = 'c:\stk\stk10\'',
    SIZE              = 204950MB,
    FILEGROWTH        = 0),

FILEGROUP MSSQL_cust_fg
(
    NAME             = MSSQL_cust1,
    FILENAME         = 'c:\cust\cust1\'',
    SIZE              = 154950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_cust2,
    FILENAME         = 'c:\cust\cust2\'',
    SIZE              = 154950MB,
    FILEGROWTH        = 0),
(
    NAME             = MSSQL_cust3,
    FILENAME         = 'c:\cust\cust3\'',
    SIZE              = 154950MB,
```

```

FILEGROWTH      = 0),
(
  NAME          = MSSQL_cust4,
  FILENAME     = 'c:\cust\cust4\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust5,
  FILENAME     = 'c:\cust\cust5\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust6,
  FILENAME     = 'c:\cust\cust6\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust7,
  FILENAME     = 'c:\cust\cust7\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust8,
  FILENAME     = 'c:\cust\cust8\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust9,
  FILENAME     = 'c:\cust\cust9\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_cust10,
  FILENAME     = 'c:\cust\cust10\'',
  SIZE         = 154950MB,
  FILEGROWTH   = 0),
FILEGROUP MSSQL_ol_fg
(
  NAME          = MSSQL_ol1,
  FILENAME     = 'c:\ol\ol1\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol2,
  FILENAME     = 'c:\ol\ol2\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol3,
  FILENAME     = 'c:\ol\ol3\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol4,
  FILENAME     = 'c:\ol\ol4\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol5,
  FILENAME     = 'c:\ol\ol5\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol6,
  FILENAME     = 'c:\ol\ol6\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol7,
  FILENAME     = 'c:\ol\ol7\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol8,
  FILENAME     = 'c:\ol\ol8\'',

```

```

  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol9,
  FILENAME     = 'c:\ol\ol9\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_ol10,
  FILENAME     = 'c:\ol\ol10\'',
  SIZE         = 154000MB,
  FILEGROWTH   = 0),
FILEGROUP MSSQL_misc_fg
(
  NAME          = MSSQL_misc1,
  FILENAME     = 'c:\misc\misc1\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc2,
  FILENAME     = 'c:\misc\misc2\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc3,
  FILENAME     = 'c:\misc\misc3\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc4,
  FILENAME     = 'c:\misc\misc4\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc5,
  FILENAME     = 'c:\misc\misc5\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc6,
  FILENAME     = 'c:\misc\misc6\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc7,
  FILENAME     = 'c:\misc\misc7\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc8,
  FILENAME     = 'c:\misc\misc8\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc9,
  FILENAME     = 'c:\misc\misc9\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_misc10,
  FILENAME     = 'c:\misc\misc10\'',
  SIZE         = 29750MB,
  FILEGROWTH   = 0),
LOG ON
(
  NAME          = MSSQL_tpcc_log_1,
  FILENAME     = 'E:',
  SIZE         = 1999900MB,
  FILEGROWTH   = 0),
(
  NAME          = MSSQL_tpcc_log_2,
  FILENAME     = 'F:',
  SIZE         = 239699MB,

```

```

FILEGROWTH          = 0)
COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET   end_date   = (SELECT   CONVERT(Char(30), GETDATE(), 21))
GO

SELECT DATEDIFF(second,(SELECT start_date FROM tpcc_timer),(SELECT end_date FROM
tpcc_timer))
GO

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
DROP TABLE tpcc_timer
GO

```

---

## ***backupdev.sql***

---

```

-----
-- File:   BACKUPDEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2005
-----

USE master
GO

-----
-- create backup devices
-----
EXEC sp_addumpdevice 'disk','tpccback1','S:\tpccback1.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback2','T:\tpccback2.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback3','U:\tpccback3.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback4','V:\tpccback4.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback5','W:\tpccback5.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback6','X:\tpccback6.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback7','Y:\tpccback7.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback8','Z:\tpccback8.dmp'
GO

```

---

## ***backup.sql***

---

```

-----
-- File:   BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
-----

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate, 21)

DUMP DATABASE tpcc TO tpccback1, tpccback2, tpccback3, tpccback4, tpccback5,
tpccback6, tpccback7, tpccback8 WITH init, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date: ',
        CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate, @enddate)
GO

```

---

## ***restore.sql***

---

```

-----
-- File:   RESTORE.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
-----

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate, 21)

LOAD DATABASE tpcc FROM tpccback1, tpccback2, tpccback3, tpccback4, tpccback5,
tpccback6, tpccback7, tpccback8 WITH stats = 1, replace

SELECT @enddate = GETDATE()
SELECT 'End date: ',
        CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate, @enddate)
GO

```

---

## ***removedb.sql***

---

```

-----
-- File:   REMOVEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-----

```

```

--          Copyright Microsoft, 2005          --
--          --                                  --
-----
USE master
GO

-----
-- remove any existing database and backup files
-----
EXEC sp_dbremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
GO
EXEC sp_dropdevice 'tpccback2'
GO
EXEC sp_dropdevice 'tpccback3'
GO
EXEC sp_dropdevice 'tpccback4'
GO
EXEC sp_dropdevice 'tpccback5'
GO
EXEC sp_dropdevice 'tpccback6'
GO
EXEC sp_dropdevice 'tpccback7'
GO
EXEC sp_dropdevice 'tpccback8'
GO

```

## ***idxcuscl.sql***

```

-----
-- File:      IDXCUSCL.SQL                    --
-- Microsoft TPC-C Benchmark Kit Ver. 4.68    --
-- Copyright Microsoft, 2006                  --
--          --                                  --
--          Creates clustered index on customer table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT  'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_c1' )
    DROP INDEX customer.customer_c1

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON customer(c_w_id, c_d_id, c_id)
    ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT  'End date:',
        CONVERT(VARCHAR(30),@enddate,21)
SELECT  'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate, @enddate)

```

GO

## ***idxcusnc.sql***

```

-----
-- File:      IDXCUSNC.SQL                    --
-- Microsoft TPC-C Benchmark Kit Ver. 4.68    --
-- Copyright Microsoft, 2006                  --
--          --                                  --
--          Creates non-clustered index on customer table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT  'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_nc1' )
    DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON customer(c_w_id, c_d_id, c_last,
c_first, c_id)
    ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT  'End date:',
        CONVERT(VARCHAR(30),@enddate,21)
SELECT  'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate, @enddate)
GO

```

## ***idxdiscl.sql***

```

-----
-- File:      IDXDISCL.SQL                    --
-- Microsoft TPC-C Benchmark Kit Ver. 4.68    --
-- Copyright Microsoft, 2006                  --
--          --                                  --
--          Creates clustered index on district table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT  'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

```

```

CREATE UNIQUE CLUSTERED INDEX district_cl ON district(d_w_id, d_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## ***idxitmcl.sql***

```

-----
-- File:      IDXITMCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on item table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_cl' )
  DROP INDEX item.item_cl

CREATE UNIQUE CLUSTERED INDEX item_cl ON item(i_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## ***idxhiscl.sql***

```

-----
-- File:      IDXHISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on history table
--
-- CAUTION: This index is only beneficial for systems
-- CAUTION: with 8 or more processors.
-- CAUTION: It may negatively impact performance on
-----

```

```

-- CAUTION: systems with less than 8 processors.
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_cl' )
  DROP INDEX history.history_cl

CREATE UNIQUE CLUSTERED INDEX history_cl ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## ***idxnodcl.sql***

```

-----
-- File:      IDXNODCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on new-order table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_cl' )
  DROP INDEX new_order.new_order_cl

CREATE UNIQUE CLUSTERED INDEX new_order_cl ON new_order(no_w_id, no_d_id, no_o_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

```

GO

---

## ***idxodlcl.sql***

---

```
-----
--
-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on order-line table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_cl' )
    DROP INDEX order_line.order_line_cl

CREATE UNIQUE CLUSTERED INDEX order_line_cl ON order_line(ol_w_id, ol_d_id, ol_o_id,
ol_number)
    ON MSSQL_ol_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

---

## ***idxordcl.sql***

---

```
-----
--
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on orders table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)
```

```
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_cl' )
    DROP INDEX orders.orders_cl

CREATE UNIQUE CLUSTERED INDEX orders_cl ON orders(o_w_id, o_d_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

---

## ***idxstkcl.sql***

---

```
-----
--
-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on stock table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_cl' )
    DROP INDEX stock.stock_cl

CREATE UNIQUE CLUSTERED INDEX stock_cl ON stock(s_i_id, s_w_id)
    ON MSSQL_stk_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

---

## ***idxwarcl.sql***

---

```
-----
--
-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on warehouse table
--
-----
```



```

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_c1' )
    DROP INDEX warehouse.warehouse_c1

CREATE UNIQUE CLUSTERED INDEX warehouse_c1 ON warehouse(w_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## tables.sql

```

-----
-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates TPC-C tables
-----

SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

-----
-- Remove all existing TPC-C tables
-----
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse

go
if exists ( select name from sysobjects where name = 'district' )
    drop table district

go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer

go
if exists ( select name from sysobjects where name = 'history' )
    drop table history

go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order

go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders

```

```

go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line

go
if exists ( select name from sysobjects where name = 'item' )
    drop table item

go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock

go

-----
-- Create new tables
-----
create table warehouse
(
    w_id          int,
    w_ytd         money,
    w_tax         smallmoney,
    w_name        char(10),
    w_street_1    char(20),
    w_street_2    char(20),
    w_city        char(20),
    w_state       char(2),
    w_zip         char(9)
) on MSSQL_misc_fg
go

create table district
(
    d_id          tinyint,
    d_w_id        int,
    d_ytd         money,
    d_next_o_id   int,
    d_tax         smallmoney,
    d_name        char(10),
    d_street_1    char(20),
    d_street_2    char(20),
    d_city        char(20),
    d_state       char(2),
    d_zip         char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id          int,
    c_d_id        tinyint,
    c_w_id        int,
    c_discount    smallmoney,
    c_credit_lim  money,
    c_last        char(16),
    c_first       char(16),
    c_credit      char(2),
    c_balance     money,
    c_ytd_payment money,
    c_payment_cnt smallint,
    c_delivery_cnt smallint,
    c_street_1    char(20),
    c_street_2    char(20),
    c_city        char(20),

```

```

        c_state          char(2),
        c_zip            char(9),
        c_phone          char(16),
        c_since          datetime,
        c_middle         char(2),
        c_data           char(500)
) on MSSQL_cust_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
    h_c_id              int,
    h_c_d_id            tinyint,
    h_c_w_id            int,
    h_d_id              tinyint,
    h_w_id              int,
    h_date              datetime,
    h_amount            smallmoney,
    h_data              char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id             int,
    no_d_id             tinyint,
    no_w_id             int
) on MSSQL_misc_fg
go

create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              int,
    o_c_id              int,
    o_carrier_id        tinyint,
    o_ol_cnt            tinyint,
    o_all_local         tinyint,
    o_entry_d           datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id             int,
    ol_d_id             tinyint,
    ol_w_id             int,
    ol_number           tinyint,
    ol_i_id             int,
    ol_delivery_d        datetime,
    ol_amount           smallmoney,
    ol_supply_w_id      int,
    ol_quantity         smallint,
    ol_dist_info        char(24)
) on MSSQL_ol_fg
go

```

```

create table item
(
    i_id                int,
    i_name              char(24),
    i_price             smallmoney,
    i_data              char(50),
    i_im_id             int
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id              int,
    s_w_id              int,
    s_quantity          smallint,
    s_ytd               int,
    s_order_cnt         smallint,
    s_remote_cnt        smallint,
    s_data              char(50),
    s_dist_01           char(24),
    s_dist_02           char(24),
    s_dist_03           char(24),
    s_dist_04           char(24),
    s_dist_05           char(24),
    s_dist_06           char(24),
    s_dist_07           char(24),
    s_dist_08           char(24),
    s_dist_09           char(24),
    s_dist_10           char(24)
) on MSSQL_stk_fg
go

```

## ***neword.sql***

```

-----
--
-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates neworder stored procedure
--
--           Interface Level:      4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE      tpcc_neworder

```

```

        @w_id      int,
        @d_id      tinyint,
        @c_id      int,
        @o_ol_cnt  tinyint,
        @o_all_local tinyint,
        @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
        @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
        @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
        @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
        @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
        @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
        @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
        @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
        @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
        @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
        @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
        @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
        @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
        @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
        @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax      smallmoney,
        @d_tax      smallmoney,
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount smallmoney,
        @i_price    smallmoney,
        @i_name     char(24),
        @i_data     char(50),
        @o_entry_d  datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data     char(50),
        @s_dist     char(24),
        @li_no      int,
        @o_id       int,
        @commit_flag tinyint,
        @li_id      int,
        @li_s_w_id  int,
        @li_qty     smallint,
        @ol_number  int,
        @c_id_local int

BEGIN

BEGIN TRANSACTION n

-----
-- get district tax and next available order id and update
-- plus initialize local variables
-----
UPDATE district
SET   @d_tax      = d_tax,
      @o_id       = d_next_o_id,
      d_next_o_id = d_next_o_id + 1,
      @o_entry_d  = GETDATE(),
      @li_no      = 0,
      @commit_flag = 1
WHERE d_w_id      = @w_id AND

```

```

        d_id      = @d_id

-----
-- process orderlines
-----
WHILE (@li_no < @o_ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1

-----
-- set i_id, s_w_id, and qty for this lineitem
-----
    SELECT @li_id = CASE @li_no
        WHEN 1 THEN @i_id1
        WHEN 2 THEN @i_id2
        WHEN 3 THEN @i_id3
        WHEN 4 THEN @i_id4
        WHEN 5 THEN @i_id5
        WHEN 6 THEN @i_id6
        WHEN 7 THEN @i_id7
        WHEN 8 THEN @i_id8
        WHEN 9 THEN @i_id9
        WHEN 10 THEN @i_id10
        WHEN 11 THEN @i_id11
        WHEN 12 THEN @i_id12
        WHEN 13 THEN @i_id13
        WHEN 14 THEN @i_id14
        WHEN 15 THEN @i_id15
    END,

    @li_s_w_id = CASE @li_no
        WHEN 1 THEN @s_w_id1
        WHEN 2 THEN @s_w_id2
        WHEN 3 THEN @s_w_id3
        WHEN 4 THEN @s_w_id4
        WHEN 5 THEN @s_w_id5
        WHEN 6 THEN @s_w_id6
        WHEN 7 THEN @s_w_id7
        WHEN 8 THEN @s_w_id8
        WHEN 9 THEN @s_w_id9
        WHEN 10 THEN @s_w_id10
        WHEN 11 THEN @s_w_id11
        WHEN 12 THEN @s_w_id12
        WHEN 13 THEN @s_w_id13
        WHEN 14 THEN @s_w_id14
        WHEN 15 THEN @s_w_id15
    END,

    @li_qty = CASE @li_no
        WHEN 1 THEN @ol_qty1
        WHEN 2 THEN @ol_qty2
        WHEN 3 THEN @ol_qty3
        WHEN 4 THEN @ol_qty4
        WHEN 5 THEN @ol_qty5
        WHEN 6 THEN @ol_qty6
        WHEN 7 THEN @ol_qty7
        WHEN 8 THEN @ol_qty8
        WHEN 9 THEN @ol_qty9
        WHEN 10 THEN @ol_qty10
        WHEN 11 THEN @ol_qty11
        WHEN 12 THEN @ol_qty12

```

```

                WHEN 13 THEN @ol_qty13
                WHEN 14 THEN @ol_qty14
                WHEN 15 THEN @ol_qty15
            END

-----
-- get item data (no one updates item)
-----
SELECT @i_price = i_price,
       @i_name  = i_name,
       @i_data  = i_data
FROM   item WITH (repeatableread)
WHERE  i_id    = @li_id

-----
-- update stock values
-----
UPDATE stock
SET    s_ytd      = s_ytd + @li_qty,
       @s_quantity = s_quantity - s_quantity - @li_qty +
                   CASE WHEN (s_quantity - @li_qty < 10) THEN 91
ELSE 0 END,
       s_order_cnt = s_order_cnt + 1,
       s_remote_cnt = s_remote_cnt +
                   CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1
END,
       @s_data    = s_data,
       @s_dist    = CASE @d_id
                   WHEN 1 THEN s_dist_01
                   WHEN 2 THEN s_dist_02
                   WHEN 3 THEN s_dist_03
                   WHEN 4 THEN s_dist_04
                   WHEN 5 THEN s_dist_05
                   WHEN 6 THEN s_dist_06
                   WHEN 7 THEN s_dist_07
                   WHEN 8 THEN s_dist_08
                   WHEN 9 THEN s_dist_09
                   WHEN 10 THEN s_dist_10
                   END
WHERE  s_i_id    = @li_id AND
       s_w_id    = @li_s_w_id

-----
-- if there actually is a stock (and item) with these ids, go to work
-----
IF (@@rowcount > 0)
BEGIN
-----
-- insert order_line data (using data from item and stock)
-----
INSERT INTO order_line VALUES( @o_id,
                               @d_id,
                               @w_id,
                               @li_no,
                               @li_id,
                               'dec 31, 1899',
                               @i_price * @li_qty,
                               @li_s_w_id,
                               @li_qty,
                               @s_dist)

```

```

-----
-- send line-item data to client
-----
SELECT @i_name,
       @s_quantity,
       b_g = CASE WHEN ( (patindex('%ORIGINAL%',@i_data) > 0) AND
(patindex('%ORIGINAL%',@s_data) > 0) )
                   THEN 'B' ELSE 'G' END,
       @i_price,
       @i_price * @li_qty
END
ELSE
BEGIN
-----
-- no item (or stock) found - triggers rollback condition
-----
SELECT ',0,',0,0
SELECT @commit_flag = 0
END

-----
-- get customer last name, discount, and credit rating
-----
SELECT @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
FROM   customer WITH (repeatableread)
WHERE  c_id    = @c_id AND
       c_w_id  = @w_id AND
       c_d_id  = @d_id

-----
-- insert fresh row into orders table
-----
INSERT INTO orders VALUES ( @o_id,
                            @d_id,
                            @w_id,
                            @c_id_local,
                            0,
                            @o_ol_cnt,
                            @o_all_local,
                            @o_entry_d)

-----
-- insert corresponding row into new-order table
-----
INSERT INTO new_order VALUES ( @o_id,
                               @d_id,
                               @w_id)

-----
-- select warehouse tax
-----
SELECT @w_tax = w_tax
FROM   warehouse WITH (repeatableread)
WHERE  w_id    = @w_id

IF (@commit_flag = 1)
    COMMIT TRANSACTION n

```

```

ELSE
-----
-- all that work for nuthin!!!
-----
        ROLLBACK TRANSACTION n
-----
-- return order data to client
-----
        SELECT  @w_tax,
                @d_tax,
                @o_id,
                @c_last,
                @c_discount,
                @c_credit,
                @o_entry_d,
                @commit_flag
END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

## **tpcc\_neworder\_new.sql**

```

-----
-- File:      TPCC_NEWORDER_NEW.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-----
--          This acid stored procedure implements the neworder
--          transaction.  It outputs timestamps at the
--          beginning of the transaction, before the commit
--          delay, and after the commit.
-----
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder_new' )
    DROP PROCEDURE tpcc_neworder_new
GO

-- neworder_new v2.5 6/23/05 PeterCa
-- lq stock/order_line/client. upd district & ins neworder.
-- cust/warehouse select together, ins order separate
-- uses rownumber to distinct w any transform
-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

```

```

CREATE PROCEDURE tpcc_neworder_new
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o_ol_cnt      tinyint,
    @o_all_local   tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
BEGIN
DECLARE @o_id          int,
        @d_tax        smallmoney,
        @o_entry_d     datetime,
        @commit_flag   tinyint

BEGIN TRANSACTION n
-- get district tax and next available order id and update
-- insert corresponding row into new-order table
-- plus initialize local variables

UPDATE district
SET    @d_tax          = d_tax,
        @o_id          = d_next_o_id,
        d_next_o_id    = d_next_o_id + 1,
        @o_entry_d     = GETDATE(),
        @commit_flag   = 1

OUTPUT deleted.d_next_o_id,
        @d_id,
        @w_id

INTO new_order
WHERE d_w_id          = @w_id AND
      d_id            = @d_id

-- update stock from stock join (item join (params))
-- output to orderline, output to client
-- NOTE: @@rowcount != @ol_o_cnt
--       if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

UPDATE stock
SET    s_ytd          = s_ytd + info.ol_qty,
        s_quantity    = s_quantity - info.ol_qty +
        CASE WHEN (s_quantity - info.ol_qty < 10) THEN 91 ELSE

0 END,
        s_order_cnt   = s_order_cnt + 1,
        s_remote_cnt  = s_remote_cnt +

```

```

CASE WHEN (info.w_id = @w_id) THEN 0
ELSE 1 END

OUTPUT @o_id,
       @d_id,
       @w_id,
       info.lino,
       info.i_id,
       "dec 31, 1899",
       info.i_price * info.ol_qty,
       info.w_id,
       info.ol_qty,
CASE   @d_id WHEN 1 THEN inserted.s_dist_01
        WHEN 2 THEN inserted.s_dist_02
        WHEN 3 THEN inserted.s_dist_03
        WHEN 4 THEN inserted.s_dist_04
        WHEN 5 THEN inserted.s_dist_05
        WHEN 6 THEN inserted.s_dist_06
        WHEN 7 THEN inserted.s_dist_07
        WHEN 8 THEN inserted.s_dist_08
        WHEN 9 THEN inserted.s_dist_09
        WHEN 10 THEN inserted.s_dist_10

END
INTO order_line

OUTPUT info.i_name,inserted.s_quantity,
CASE WHEN ((charindex("ORIGINAL",info.i_data) > 0) AND
           (charindex("ORIGINAL",inserted.s_data) > 0))
        THEN "B" ELSE "G" END,
       info.i_price,
       info.i_price*info.ol_qty
FROM stock INNER JOIN
      (SELECT iid,
             wid,
             lino,
             ol_qty,
             i_price,
             i_name,
             i_data
      FROM (SELECT iid,
                 wid,
                 lino,
                 qty,
                 row_number() OVER (PARTITION BY iid,wid
ORDER BY iid,wid)
      FROM (SELECT @i_id1,@s_w_id1,1,@ol_qty1 UNION ALL
            SELECT @i_id2,@s_w_id2,2,@ol_qty2 UNION ALL
            SELECT @i_id3,@s_w_id3,3,@ol_qty3 UNION ALL
            SELECT @i_id4,@s_w_id4,4,@ol_qty4 UNION ALL
            SELECT @i_id5,@s_w_id5,5,@ol_qty5 UNION ALL
            SELECT @i_id6,@s_w_id6,6,@ol_qty6 UNION ALL
            SELECT @i_id7,@s_w_id7,7,@ol_qty7 UNION ALL
            SELECT @i_id8,@s_w_id8,8,@ol_qty8 UNION ALL
            SELECT @i_id9,@s_w_id9,9,@ol_qty9 UNION ALL
            SELECT @i_id10,@s_w_id10,10,@ol_qty10 UNION ALL
            SELECT @i_id11,@s_w_id11,11,@ol_qty11 UNION ALL
            SELECT @i_id12,@s_w_id12,12,@ol_qty12 UNION ALL
            SELECT @i_id13,@s_w_id13,13,@ol_qty13 UNION ALL
            SELECT @i_id14,@s_w_id14,14,@ol_qty14 UNION ALL
            SELECT @i_id15,@s_w_id15,15,@ol_qty15) AS
uol(iid,wid,lino,qty)

```

```

) AS ol(iid,wid,lino,ol_qty,rownum)
INNER JOIN
item (repeatableread) ON i_id = iid AND -- filters
out invalid items
rownum = 1
) AS info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
ON s_i_id = info.i_id AND
s_w_id = info.w_id

IF (@@rowcount <> @o_ol_cnt) -- must have an invalid item
SELECT @commit_flag = 0 -- 2.4.2.3 requires rest to proceed

-- insert fresh row into orders table
INSERT INTO orders VALUES ( @o_id,
                             @d_id,
                             @w_id,
                             @c_id,
                             0,
                             @o_ol_cnt,
                             @o_all_local,
                             @o_entry_d)

-- get customer last name, discount, and credit rating
-- get warehouse tax
-- return order_data to client
SELECT w_tax,
       @d_tax,
       @o_id,
       c_last,
       c_discount,
       c_credit,
       @o_entry_d,
       @commit_flag
FROM warehouse(repeatableread),
customer(repeatableread)
WHERE w_id = @w_id AND
      c_id = @c_id AND
      c_w_id = @w_id AND
      c_d_id = @d_id

-- @@rowcount checks that previous select found a valid customer
IF (@@rowcount = 0)
BEGIN
    RAISERROR( 'Invalid Customer ID', 11, 1 )
    ROLLBACK TRANSACTION n
END
ELSE IF (@commit_flag = 1)
    COMMIT TRANSACTION n
ELSE -- all that work for nothing.
    ROLLBACK TRANSACTION n

END
GO

-----
-- File: DELIVERY.SQL
--

```

## delivery.sql

```

--      Microsoft TPC-C Benchmark Kit Ver. 4.68      --
--      Copyright Microsoft, 2006                  --
--      Creates delivery stored procedure           --
--      Interface Level:      4.20.000             --
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id          int,
    @o_carrier_id smallint
AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int

SELECT @d_id = 0

BEGIN TRANSACTION d
    WHILE (@d_id < 10)
        BEGIN
            SELECT @d_id = @d_id + 1,
                   @total = 0,
                   @o_id = 0

            SELECT TOP 1
                @o_id = no_o_id
            FROM new_order WITH (serializable updlock)
            WHERE no_w_id = @w_id AND
                  no_d_id = @d_id
            ORDER BY no_o_id ASC

            IF (@@rowcount <> 0)
                BEGIN
                    -- claim the order for this district

```

```

DELETE new_order
WHERE no_w_id = @w_id AND
      no_d_id = @d_id AND
      no_o_id = @o_id

-- set carrier_id on this order (and get customer id)
UPDATE orders
SET o_carrier_id = @o_carrier_id,
    @c_id = o_c_id
WHERE o_w_id = @w_id AND
      o_d_id = @d_id AND
      o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)
UPDATE order_line
SET ol_delivery_d = GETDATE(),
    @total = @total + ol_amount
WHERE ol_w_id = @w_id AND
      ol_d_id = @d_id AND
      ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer
UPDATE customer
SET c_balance = c_balance + @total,
    c_delivery_cnt = c_delivery_cnt + 1
WHERE c_w_id = @w_id AND
      c_d_id = @d_id AND
      c_id = @c_id

END

SELECT @oid1 = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
       @oid2 = CASE @d_id WHEN 2 THEN @o_id ELSE @oid2 END,
       @oid3 = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
       @oid4 = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
       @oid5 = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
       @oid6 = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
       @oid7 = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
       @oid8 = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
       @oid9 = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
       @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END

END

COMMIT TRANSACTION d

-- return delivery data to client

SELECT @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

GO

SET QUOTED_IDENTIFIER OFF
GO

```

```
SET ANSI_NULLS ON
GO
```

## null-txns.sql

```
-----
-- File:      NULL-TXNS.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This script will create stored procs which
-- accept the same parameters and return correctly
-- formed results sets to match the standard TPC-C
-- stored procs. Of course, the advantage is that
-- these stored procs place almost no load on
-- SQL Server and do not require a database.
--
-- Interface Level: 4.10.000
-----
USE tpcc
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'order_line_null' )
    DROP PROCEDURE order_line_null
GO
CREATE PROCEDURE tpcc_delivery
    @w_id int,
    @o_carrier_id smallint
AS
DECLARE @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
```

```
@oid5 int,
@oid6 int,
@oid7 int,
@oid8 int,
@oid9 int,
@oid10 int,
@delaytime varchar(30)
```

```
-----
-- uniform random delay of 0 - 1 second; avg = 0.50
-----
```

```
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*1.00) AS decimal(4,3)) AS char(5))
```

```
WAITFOR delay @delaytime
```

```
SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
GO
```

```
CREATE PROCEDURE tpcc_neworder
    @w_id int,
    @d_id tinyint,
    @c_id int,
    @o_ol_cnt tinyint,
    @o_all_local tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0
```

```
AS
DECLARE @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @o_entry_d datetime,
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_qty smallint,
        @delaytime varchar(30)
```

```
BEGIN
```

```
-----
-- uniform random delay of 0 - 0.6 second; avg = 0.3
```



```

-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.60) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

-----
-- process orderlines
-----
SELECT @commit_flag = 1,
       @li_no = 0

WHILE (@li_no < @o_ol_cnt)
BEGIN
    SELECT @li_id = CASE @li_no
                   WHEN 1 THEN @i_id1
                   WHEN 2 THEN @i_id2
                   WHEN 3 THEN @i_id3
                   WHEN 4 THEN @i_id4
                   WHEN 5 THEN @i_id5
                   WHEN 6 THEN @i_id6
                   WHEN 7 THEN @i_id7
                   WHEN 8 THEN @i_id8
                   WHEN 9 THEN @i_id9
                   WHEN 10 THEN @i_id10
                   WHEN 11 THEN @i_id11
                   WHEN 12 THEN @i_id12
                   WHEN 13 THEN @i_id13
                   WHEN 14 THEN @i_id14
                   WHEN 15 THEN @i_id15
    END

    SELECT @li_no = @li_no + 1

    SELECT @i_price = 23.45, @li_qty = @li_no

    IF (@li_id = 999999)
    BEGIN
        SELECT ',0,',0,0
    END
    ELSE
    BEGIN
        SELECT @commit_flag = 0
        SELECT 'Item Name blah',
              17,
              'G',
              @i_price,
              @i_price * @li_qty
    END
END

-----
-- return order data to client
-----
SELECT @w_tax = 0.1234,
       @d_tax = 0.0987,
       @o_id = 3001,
       @c_last = 'BAROUGHTABLE',
       @c_discount = 0.2198,
       @c_credit = 'GC',

```

```

       @o_entry_d = GETDATE()

SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

END
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id int,
    @d_id tinyint,

    @c_id int,
    @c_last char(16) = ''

AS
DECLARE @c_balance numeric(12,2),
        @c_first char(16),
        @c_middle char(2),
        @o_id int,
        @o_entry_d datetime,
        @o_carrier_id smallint,
        @ol_cnt smallint,
        @delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.2 second; avg = 0.1
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT @c_id = 113,
       @c_balance = -10.00,
       @c_first = '8YCodgytqCj8',
       @c_middle = 'OE',
       @c_last = 'OUGHTOUGHTABLE',
       @o_id = 3456,
       @o_entry_d = GETDATE(),
       @o_carrier_id = 1

SELECT @ol_cnt = (RAND() * 11) + 5

SET ROWCOUNT @ol_cnt

SELECT ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
FROM order_line_null

SELECT @c_id,
       @c_last,

```

```

@c_first,
@c_middle,
@o_entry_d,
@o_carrier_id,
@c_balance,
@o_id
GO

CREATE PROCEDURE tpcsc_payment
    @w_id int,
    @c_w_id int,
    @h_amount numeric(6,2),
    @d_id tinyint,
    @c_d_id tinyint,
    @c_id int,
    @c_last char(16) = ''

AS
DECLARE @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city char(20),
        @w_state char(2),
        @w_zip char(9),
        @w_name char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city char(20),
        @d_state char(2),
        @d_zip char(9),
        @d_name char(10),
        @c_first char(16),
        @c_middle char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city char(20),
        @c_state char(2),
        @c_zip char(9),
        @c_phone char(16),
        @c_since datetime,
        @c_credit char(2),
        @c_credit_lim numeric(12,2),
        @c_balance numeric(12,2),
        @c_discount numeric(4,4),
        @data char(500),
        @c_data char(500),
        @datetime datetime,
        @w_ytd numeric(12,2),
        @d_ytd numeric(12,2),
        @cnt smallint,
        @val smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local int,
        @c_id_local int,
        @delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.3 second; avg = 0.15
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

```

```

WAITFOR delay @delaytime

SELECT @screen_data = ''

-----
-- get customer info and update balances
-----
SELECT @d_street_1 = 'rqSHHakqyV',
        @d_street_2 = 'zZ98nW3BR2s',
        @d_city = 'ArNr4GNFV9',
        @d_state = 'aV',
        @d_zip = '453511111'

-----
-- get warehouse data and update year-to-date
-----
SELECT @w_street_1 = 'rqSHHakqyV',
        @w_street_2 = 'zZ98nW3BR2s',
        @w_city = 'ArNr4GNFV9',
        @w_state = 'aV',
        @w_zip = '453511111'

SELECT @c_id = 123,
        @c_balance = -10000.00,
        @c_first = 'KmR03Xureb',
        @c_middle = 'OE',
        @c_last = 'BAROUGHTBAR',
        @c_street_1 = 'QpGdOHjv8mR9vNI8V',
        @c_street_2 = 'dzKoCOBqbc3yu',
        @c_city = 'zAKZXdC037FQxq',
        @c_state = 'QA',
        @c_zip = '700311111',
        @c_phone = '2967264064528555',
        @c_credit = 'GC',
        @c_credit_lim = 50000.00,
        @c_discount = 0.3069,
        @c_since = GETDATE(),
        @datetime = GETDATE()

-----
-- return data to client
-----
SELECT @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,

```

```

@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id int,
    @d_id tinyint,
    @threshold smallint
AS
DECLARE @delaytime varchar(30)
-----
-- uniform random delay of 0 - 3.6 second; avg = 1.8
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT 49
GO

CREATE PROCEDURE tpcc_version
AS
DECLARE @version char(8)
BEGIN
    SELECT @version = '4.10.000'

    SELECT @version AS 'Version'
END
GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [int] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

INSERT INTO order_line_null VALUES ( 101, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 102, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 103, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 104, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 105, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 106, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 107, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 108, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 109, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 110, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 111, 1, GETDATE(), 1, 123.45 )

```

```

INSERT INTO order_line_null VALUES ( 112, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 113, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1, GETDATE(), 5, 123.45 )
GO

```

## ordstat.sql

```

-----
-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates order status stored procedure
--
-- Interface Level: 4.20.000
-----

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id int,
    @d_id tinyint,

    @c_id int,
    @c_last char(16) = ''
AS
DECLARE @c_balance money,
    @c_first char(16),
    @c_middle char(2),
    @o_id int,
    @o_entry_d datetime,
    @o_carrier_id smallint,
    @cnt smallint

BEGIN TRANSACTION o
    IF (@c_id = 0)
        BEGIN
            -----
            -- get customer id and info using last name
            -----
            SELECT @cnt = (count(*)+1)/2
            FROM customer WITH (repeatableread)
            WHERE c_last = @c_last AND
                c_w_id = @w_id AND
                c_d_id = @d_id
        END
    END

```

```

SET      rowcount @cnt

SELECT  @c_id      = c_id,
        @c_balance = c_balance,
        @c_first   = c_first,
        @c_last    = c_last,
        @c_middle  = c_middle
FROM    customer WITH (repeatableread)
WHERE   c_last     = @c_last AND
        c_w_id     = @w_id AND
        c_d_id     = @d_id

ORDER  BY c_w_id, c_d_id, c_last, c_first

SET rowcount 0
END
ELSE
BEGIN
-----
-- get customer info if by id
-----
SELECT  @c_balance = c_balance,
        @c_first   = c_first,
        @c_middle  = c_middle,
        @c_last    = c_last
FROM    customer WITH (repeatableread)
WHERE   c_id       = @c_id AND
        c_d_id     = @d_id AND
        c_w_id     = @w_id

SELECT  @cnt      = @@rowcount
END

-----
-- if no such customer
-----
IF (@cnt = 0)
BEGIN
    RAISERROR('Customer not found',18,1)
    GOTO custnotfound
END

-----
-- get order info
-----
SELECT  @o_id      = o_id,
        @o_entry_d = o_entry_d,
        @o_carrier_id = o_carrier_id
FROM    orders WITH (serializable)
WHERE   o_c_id     = @c_id AND
        o_d_id     = @d_id AND
        o_w_id     = @w_id

ORDER  BY o_id ASC

-----
-- select order lines for the current order
-----
SELECT  ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d

```

```

FROM    order_line WITH (repeatableread)
WHERE   ol_o_id = @o_id AND
        ol_d_id = @d_id AND
        ol_w_id = @w_id

custnotfound:

COMMIT TRANSACTION 0

-----
-- return data to client
-----
SELECT  @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id

```

GO

## ***payment.sql***

```

-----
-- File:      PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates payment stored procedure
--
-- Interface Level: 4.20.000
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE    tpcc_payment
                    @w_id      int,
                    @c_w_id    int,
                    @h_amount  smallmoney,
                    @d_id      tinyint,
                    @c_d_id    tinyint,
                    @c_id      int,
                    @c_last    char(16) = ""
AS
DECLARE @w_street_1  char(20),
        @w_street_2  char(20),

```

```

@w_city          char(20),
@w_state        char(2),
@w_zip          char(9),
@w_name         char(10),
@d_street_1     char(20),
@d_street_2     char(20),
@d_city         char(20),
@d_state        char(2),
@d_zip          char(9),
@d_name         char(10),
@c_first        char(16),
@c_middle       char(2),
@c_street_1     char(20),
@c_street_2     char(20),
@c_city         char(20),
@c_state        char(2),
@c_zip          char(9),
@c_phone        char(16),
@c_since        datetime,
@c_credit       char(2),
@c_credit_lim   money,
@c_balance      money,
@c_discount     smallmoney,
@c_data         char(42),
@datetime       datetime,
@w_ytd          money,
@d_ytd          money,
@cnt            smallint,
@val            smallint,
@screen_data    char(200),
@d_id_local     tinyint,
@w_id_local     int,
@c_id_local     int

SELECT @screen_data = ""

BEGIN TRANSACTION p
-- get payment date
SELECT @datetime = GETDATE()

IF (@c_id = 0)
BEGIN
-- get customer id and info using last name
SELECT @cnt = COUNT(*)
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

SELECT @val = (@cnt + 1) / 2

SET rowcount @val

SELECT @c_id = c_id
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

ORDER BY c_last, c_first

```

```

SET rowcount 0
END

-- get customer info and update balances
UPDATE customer
SET @c_balance = c_balance - @h_amount,
    c_payment_cnt = c_payment_cnt + 1,
    c_ytd_payment = c_ytd_payment + @h_amount,
    @c_first = c_first,
    @c_middle = c_middle,
    @c_last = c_last,
    @c_street_1 = c_street_1,
    @c_street_2 = c_street_2,
    @c_city = c_city,
    @c_state = c_state,
    @c_zip = c_zip,
    @c_phone = c_phone,
    @c_credit = c_credit,
    @c_credit_lim = c_credit_lim,
    @c_discount = c_discount,
    @c_since = c_since,
    @c_id_local = c_id

WHERE c_id = @c_id AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
-- compute new info
SELECT @c_data = convert(char(5),@c_id) +
                convert(char(4),@c_d_id) +
                convert(char(5),@c_w_id) +
                convert(char(4),@d_id) +
                convert(char(5),@w_id) +
                convert(char(19),@h_amount)

-- update customer info
UPDATE customer
SET c_data = @c_data + substring(c_data, 1, 458),
    @screen_data = @c_data + substring(c_data, 1, 158)

WHERE c_id = @c_id AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

END

-- get district data and update year-to-date
UPDATE district
SET d_ytd = d_ytd + @h_amount,
    @d_street_1 = d_street_1,
    @d_street_2 = d_street_2,
    @d_city = d_city,
    @d_state = d_state,
    @d_zip = d_zip,
    @d_name = d_name,
    @d_id_local = d_id

WHERE d_w_id = @w_id AND
      d_id = @d_id

-- get warehouse data and update year-to-date

```

```

UPDATE warehouse
SET
  w_ytd      = w_ytd + @h_amount,
  @w_street_1 = w_street_1,
  @w_street_2 = w_street_2,
  @w_city    = w_city,
  @w_state   = w_state,
  @w_zip     = w_zip,
  @w_name    = w_name,
  @w_id_local = w_id
WHERE
  w_id      = @w_id

-- create history record
INSERT INTO
  history VALUES (@c_id_local,
                 @c_d_id,
                 @c_w_id,
                 @d_id_local,
                 @w_id_local,
                 @datetime,
                 @h_amount,
                 @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT
  @c_id,
  @c_last,
  @datetime,
  @w_street_1,
  @w_street_2,
  @w_city,
  @w_state,
  @w_zip,
  @d_street_1,
  @d_street_2,
  @d_city,
  @d_state,
  @d_zip,
  @c_first,
  @c_middle,
  @c_street_1,
  @c_street_2,
  @c_city,
  @c_state,
  @c_zip,
  @c_phone,
  @c_since,
  @c_credit,
  @c_credit_lim,
  @c_discount,
  @c_balance,
  @screen_data

GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

## stocklev.sql

```

-----
--
-- File:      STOCKLEV.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates stock level stored procedure
--
--           Interface Level:      4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
  DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE      tpcc_stocklevel
                   @w_id      int,
                   @d_id      tinyint,
                   @threshold smallint

AS
DECLARE @o_id_low  int,
        @o_id_high int

SELECT @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id = @w_id AND
       d_id   = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id = @w_id AND
       ol_d_id = @d_id and
       ol_o_id BETWEEN @o_id_low AND
                   @o_id_high AND
       s_w_id = ol_w_id AND
       s_i_id = ol_i_id AND
       s_quantity < @threshold

OPTION(ORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

## dbopt1.sql

```
-----
--
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Sets database options for load
--
-----
USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE
GO

USE tpcc
GO

CHECKPOINT
GO
```

## dbopt2.sql

```
-----
--
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Sets database options after load
--
-----
ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO
```

```
DECLARE @msg          varchar(50)

-----
--           OPTIONS FOR SQL SERVER 2000
--           Set option values for user-defined indexes
-----

SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg

EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', False
GO

Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '   Lockflag = 0 ==> No pre-specified hierarchy'
Print '   Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '   Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '   Lockflag = 3 ==> Lock at Table-level'
Print ' '

SELECT name,
       lockflags
FROM   sysindexes
WHERE  object_id('warehouse') = id OR
       object_id('district') = id OR
       object_id('customer') = id OR
       object_id('stock') = id OR
       object_id('orders') = id OR
       object_id('order_line') = id OR
       object_id('history') = id OR
       object_id('new_order') = id OR
       object_id('item') = id
ORDER BY lockflags asc

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc, 'auto update statistics', FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO

DECLARE @db_id int,
        @tbl_id int
```

```

SET @db_id = DB_ID('tpcc')
SET @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO

```

## version.sql

```

-----
-- File:      VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Extracts current version of SQL Server
--
-----
USE master
GO

SELECT CONVERT(char(20), SERVERPROPERTY('ProductVersion')),
       CONVERT(char(20), SERVERPROPERTY('ProductLevel')),
       CONVERT(char(29), SERVERPROPERTY('Edition'))
GO

SELECT CONVERT(char(30), GETDATE(), 21)
GO

```

## RunSQLCfg.sql

```

-----
-- File:      RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets suggested runtime server configuration
-- parameters
--
-----
EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

-----
-- change this value to approximately the number of connected users
-----

```

```

EXEC sp_configure 'max worker threads',255

-----
-- increase priority of user threads
-----
EXEC sp_configure 'priority boost',1

-----
-- disable automatic checkpointing
-----
EXEC sp_configure 'recovery interval',32767

-----
-- change to a mask appropriate for the number of processors on the server
-----
EXEC sp_configure 'affinity mask',0xf

-----
-- enable fibers
-----
EXEC sp_configure 'lightweight pooling',1
GO

RECONFIGURE WITH OVERRIDE
GO

```

## VerifyTpccLoad.sql

```

-----
-- File:      VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-----
SET NOCOUNT ON
PRINT ' '
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ' '

USE tpcc
GO

IF EXISTS (SELECT name
          FROM sysobjects
          WHERE name = 'TPCC_INFO' AND
                type = 'U')
    DROP TABLE TPCC_INFO
GO

PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO

PRINT 'ITEM TABLE = 100,000'

```



```

SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

CREATE TABLE TPCC_INFO
(
    INFO_DATE          datetime,
    NUM_WAREHOUSE      bigint,
    WAREHOUSE_TARGET  bigint,
    NUM_DISTRICT       bigint,
    DISTRICT_TARGET    bigint,
    NUM_ITEM            bigint,
    ITEM_TARGET        bigint,
    NUM_CUSTOMER       bigint,
    CUSTOMER_TARGET    bigint,
    NUM_ORDERS         bigint,
    ORDERS_TARGET      bigint,
    ORDERS_TARGET_LOW  bigint,
    ORDERS_TARGET_HIGH bigint,
    NUM_ORDER_LINE     bigint,
    ORDER_LINE_TARGET  bigint,
    ORDER_LINE_TARGET_LOW  bigint,
    ORDER_LINE_TARGET_HIGH  bigint,
    NUM_NEW_ORDER      bigint,
    NEW_ORDER_TARGET   bigint,
    NEW_ORDER_TARGET_LOW  bigint,
    NEW_ORDER_TARGET_HIGH  bigint,
    NUM_HISTORY        bigint,
    HISTORY_TARGET     bigint,
    NUM_STOCK          bigint,
    STOCK_TARGET       bigint)
GO

```

```

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET  bigint,
        @NUM_DISTRICT       bigint,
        @DISTRICT_TARGET    bigint,
        @NUM_ITEM           bigint,
        @ITEM_TARGET        bigint,
        @NUM_CUSTOMER       bigint,
        @CUSTOMER_TARGET    bigint,
        @NUM_ORDERS         bigint,
        @ORDERS_TARGET      bigint,
        @ORDERS_TARGET_LOW  bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE     bigint,
        @ORDER_LINE_TARGET  bigint,
        @ORDER_LINE_TARGET_LOW  bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER      bigint,
        @NEW_ORDER_TARGET   bigint,
        @NEW_ORDER_TARGET_LOW  bigint,
        @NEW_ORDER_TARGET_HIGH  bigint,
        @NUM_HISTORY        bigint,
        @HISTORY_TARGET     bigint,
        @NUM_STOCK          bigint,
        @STOCK_TARGET       bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE      = COUNT_BIG(*)
FROM   warehouse

SELECT @NUM_DISTRICT       = COUNT_BIG(*)
FROM   district

SELECT @NUM_ITEM           = COUNT_BIG(*)
FROM   item

SELECT @NUM_CUSTOMER       = COUNT_BIG(*)
FROM   customer

SELECT @NUM_ORDERS         = COUNT_BIG(*)
FROM   orders

SELECT @NUM_ORDER_LINE     = COUNT_BIG(*)
FROM   order_line

SELECT @NUM_NEW_ORDER      = COUNT_BIG(*)
FROM   new_order

SELECT @NUM_HISTORY        = COUNT_BIG(*)
FROM   history

SELECT @NUM_STOCK          = COUNT_BIG(*)
FROM   stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET  = @NUM_WAREHOUSE,
       @DISTRICT_TARGET    = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET        = 100000,
       @CUSTOMER_TARGET    = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET      = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW  = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),

```

```

@ORDERS_TARGET_HIGH      = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
@ORDER_LINE_TARGET      = @NUM_WAREHOUSE * 300000,
@ORDER_LINE_TARGET_LOW  = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET *
.01),
@ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET *
.01),
@NEW_ORDER_TARGET      = @NUM_WAREHOUSE * 9000,
@NEW_ORDER_TARGET_LOW  = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET *
.01),
@NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET *
.01),
@HISTORY_TARGET        = @NUM_WAREHOUSE * 30000,
@STOCK_TARGET          = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES (GETDATE(),
@NUM_WAREHOUSE,
@WAREHOUSE_TARGET,
@NUM_DISTRICT,
@DISTRICT_TARGET,
@NUM_ITEM,
@ITEM_TARGET,
@NUM_CUSTOMER,
@CUSTOMER_TARGET,
@NUM_ORDERS,
@ORDERS_TARGET,
@ORDERS_TARGET_LOW,
@ORDERS_TARGET_HIGH,
@NUM_ORDER_LINE,
@ORDER_LINE_TARGET,
@ORDER_LINE_TARGET_LOW,
@ORDER_LINE_TARGET_HIGH,
@NUM_NEW_ORDER,
@NEW_ORDER_TARGET,
@NEW_ORDER_TARGET_LOW,
@NEW_ORDER_TARGET_HIGH,
@NUM_HISTORY,
@HISTORY_TARGET,
@NUM_STOCK,
@STOCK_TARGET)

GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_WAREHOUSE AS 'Warehouse Rows',
WAREHOUSE_TARGET AS 'Warehouse Target',
CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''

```

```

PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_DISTRICT AS 'District Rows',
DISTRICT_TARGET AS 'District Target',
CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ITEM AS 'Item Rows',
ITEM_TARGET AS 'Item Target',
CASE WHEN (NUM_ITEM = ITEM_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_CUSTOMER AS 'Customer Rows',
CUSTOMER_TARGET AS 'Customer Target',
CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ORDERS AS 'Orders Rows',
ORDERS_TARGET AS 'Orders Target',
CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
THEN 'OK!'
WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
THEN 'OK! (within 1%)'
ELSE 'ERROR!!!'
END AS 'Orders Message'

```

```

FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDER_LINE AS 'Order Line Rows',
    ORDER_LINE_TARGET AS 'Order Line Target',
    CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END AS 'Order Line Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER AS 'New Order Rows',
    NEW_ORDER_TARGET AS 'New Order Target',
    CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
        THEN 'OK!'
        WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END AS 'New Order Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| HISTORY TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_HISTORY AS 'History Rows',
    HISTORY_TARGET AS 'History Target',
    CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'History Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| STOCK TABLE |'

```

```

PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_STOCK AS 'Stock Rows',
    STOCK_TARGET AS 'Stock Target',
    CASE WHEN (NUM_STOCK = STOCK_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'Stock Message'
FROM TPCC_INFO
GO

-----
-- Check Indexes
-----
USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| TPC-C INDEXES |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders
EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

---

## sqlshutdown.sql

---

```

-----
-- File: SQLSHUTDOWN.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Checkpoints tpcc database and issues a shutdown
-----

USE tpcc
GO

CHECKPOINT
GO

SHUTDOWN
GO

-----
getargs.c
-----
// File: GETARGS.C
// Microsoft TPC-C Kit Ver. 4.51

```

```

//                                     Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//                                     Purpose: Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int         i;
    char *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user         = USER;
    pargs->password     = PASSWORD;
    pargs->database     = DATABASE;
    pargs->batch        = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all   = TRUE;
    pargs->table_item    = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders  = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->log_path       = LOADER_LOG_PATH;
    pargs->pack_size      = DEFPLDPACKSIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index   = BUILD_INDEX;
    pargs->index_order   = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down    = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for (i = 1; i < argc; ++i)
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }

        ptr = argv[i];

        switch (ptr[1])
        {

```

```

case '?': /* Fall through */
            GetArgsLoaderUsage();
            break;

case 'D':
            pargs->database = ptr+2;
            break;

case 'P':
            pargs->password = ptr+2;
            break;

case 'S':
            pargs->server = ptr+2;
            break;

case 'U':
            pargs->user = ptr+2;
            break;

case 'b':
            pargs->batch = atol(ptr+2);
            break;

case 'W':
            pargs->num_warehouses = atol(ptr+2);
            break;

case 's':
            pargs->starting_warehouse = atol(ptr+2);
            break;

case 't':
            {
                pargs->tables_all = FALSE;
                if (strcmp(ptr+2,"item") == 0)
                    pargs->table_item =
TRUE;
                else if (strcmp(ptr+2,"warehouse")
== 0)
                    pargs->table_warehouse =
TRUE;
                else if (strcmp(ptr+2,"customer")
== 0)
                    pargs->table_customer =
TRUE;
                else if (strcmp(ptr+2,"orders") ==
0)
                    pargs->table_orders =
TRUE;
                else
                {
                    printf("\nUnrecognized command");
                    GetArgsLoaderUsage();
                    exit(1);
                }
                break;
            }

case 'f':

```

```

                pargs->loader_res_file = ptr+2;
                break;

        case 'L':
                pargs->log_path = ptr+2;
                break;

        case 'p':
                pargs->pack_size = atol(ptr+2);
                break;

        case 'i':
                pargs->build_index = atol(ptr+2);
                break;

        case 'o':
                pargs->index_order = atol(ptr+2);
                break;

        case 'c':
                pargs->scale_down = atol(ptr+2);
                break;

        case 'd':
                pargs->index_script_path = ptr+2;
                break;

        default:
                GetArgsLoaderUsage();
                exit(-1);
                break;
    }

    /* check for required args */
    if (pargs->num_warehouses == UNDEF )
    {
        printf("Number of Warehouses is required\n");
        exit(-2);
    }

    return;
}

//=====
//
// Function name: GetArgsLoaderUsage
//
//=====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCldr:\n\n");
    printf("Parameter                                Default\n");

```

```

                printf("-----\n");
                printf("-W Number of Warehouses to Load                Required \n");
                printf("-S Server                                        %s\n", SERVER);
                printf("-U Username                                        %s\n", USER);
                printf("-P Password                                        %s\n", PASSWORD);
                printf("-D Database                                        %s\n", DATABASE);
                printf("-b Batch Size                                %ld\n",
(long) BATCH);
                printf("-p TDS packet size                            %ld\n",
(long) DEFPLDPACKSIZE);
                printf("-L Loader BCP Log Path                        %s\n",
LOADER_LOG_PATH);
                printf("-f Loader Results Output Filename            %s\n",
LOADER_RES_FILE);
                printf("-s Starting Warehouse                          %ld\n",
(long) DEF_STARTING_WAREHOUSE);
                printf("-i Build Option (data = 0, data and index = 1) %ld\n",
(long) BUILD_INDEX);
                printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
                printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n",
(long) SCALE_DOWN);
                printf("-d Index Script Path                            %s\n",
INDEX_SCRIPT_PATH);
                printf("-t Table to Load                                all tables\n");
    }

    printf(" [item|warehouse|customer|orders]\n");
    printf(" Notes: \n");
    printf(" - the '-t' parameter may be included multiple times to \n");
    printf(" - specify multiple tables to be loaded \n");
    printf(" - 'item' loads ITEM table \n");
    printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
    printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

    printf("\nNote: Command line switches are case sensitive.\n");

    exit(0);
}

```

## random.c

```

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.62
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2005
// Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */

```

```

#define R          2836      /* M mod A */
#define Thread    __declspec(thread)

// Globals
long      Thread Seed = 0;    /* thread local seed */

/*****
 *
 * random -
 * Implements a GOOD pseudo random number generator. This generator
 * will/should? run the complete period before repeating.
 *
 * Copied from:
 * Random Numbers Generators: Good Ones Are Hard to Find.
 * Communications of the ACM - October 1988 Volume 31 Number 10
 *
 * Machine Dependencies:
 * long must be 2 ^ 31 - 1 or greater.
 *
 *****/

/*****
 * seed - load the Seed value used in irand and drand. Should be used before
 * first call to irand or drand.
 *****/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

/*****
 *
 * irand - returns a 32 bit integer pseudo random number with a period of
 * 1 to 2 ^ 32 - 1.
 *
 * parameters:
 * none.
 *
 * returns:
 * 32 bit integer - defined as long ( see above ).
 *
 * side effects:
 * seed get recomputed.
 *****/

long irand()
{
    register long  s;    /* copy of seed */
    register long  test; /* test flag */

```

```

    register long  hi;    /* tmp value for speed */
    register long  lo;    /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
 *
 * drand - returns a double pseudo random number between 0.0 and 1.0.
 * See irand.
 *****/

double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

```

```

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

return rand_num;
}

#if 0
//Original code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

return rand_num;
}
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

```

```

        rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;
#endif
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

return rand_num;
}

```

---

## strings.c

---

```

// File: STRINGS.C
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2, city,
           state, zip);
#endif

return;
}

```

```

//=====
//
// Function name: LastName
//
//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES" ,
        "ESE" , "ANTI" , "CALLY" , "ATION" , "EING"
    };

#ifdef DEBUG
    printf("[%d]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
    printf("[%d]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
           (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
           num%10);
    printf("[%d]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
           name);
#endif

    return;
}

//=====
//
// Function name: MakeAlphaString
//
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:

```

```

//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//-Clevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;

    char cc = 'a';
    static char chArray[] =
    "0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%d]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;

    char cc = 'a';
    static char chArray[] =
    "0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%d]DBG: Entering MakeAlphaStringPadded()\n", (int)
           GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;

    return padLen;
}

//=====
//
// Function name: MakeOriginalAlphaString
//

```



```

//=====
int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return len;
}

//=====
//
// Function name: MakeNumberString
//
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

```

```

//MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
//
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)

```

```

{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

---

## time.c

---

```

// File: TIME.C Microsoft TPC-C Kit Ver. 4.62
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2005
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long time_now;

```

```

    struct _timeb el_time;

#ifdef DEBUG
    printf("[%d]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

---

## tpcc.h

---

```

// File: TPCC.H Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003, 2005
// Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

```

```

// Default loader arguments
#define BATCH                                10000
#define DEFLDPACKSIZE                        32768
#define LOADER_RES_FILE                      "c:\\MSTPCC.450\\SETUP\\LOGS\\load.out"
#define LOADER_LOG_PATH                      "c:\\MSTPCC.450\\SETUP\\LOGS\\"
#define LOADER_NURAND_C                      123
#define DEF_STARTING_WAREHOUSE              1
#define BUILD_INDEX                          1 // build both
data and indexes
#define INDEX_ORDER                          1 // build
indexes before load
#define SCALE_DOWN                           0 // build a normal
scale database
#define INDEX_SCRIPT_PATH                    "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; //
set if loading CUSTOMER and HISTORY
    BOOL table_orders; //
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *log_path;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
    char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

```

```

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

```

```

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

```

```

// Functions in time.c
long TimeNow();

```

```

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

## tpccldr.c

```

//=====
// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for TPC-C database loader
//=====
// Includes
#include "tpcc.h"
#include "search.h"

```

```

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4
#define MAX_SQL_ERRORS 10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    double ol_i_id;
    long ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long o_id;
    short o_d_id;
    long o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o_ol_cnt;
    short o_all_local;
}

```

```

ORDER_LINE_STRUCT o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;
    char c_balance[6];
    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    double h_amount;
    char h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char c_last[LAST_NAME_LEN+1];
    char c_first[FIRST_NAME_LEN+1];
    long c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long time_start;
} LOADER_TIME_STRUCT;

// Global variables
char szLastError[300];

HENV henv;

HDBC v_hdbc; // for SQL
Server version verification
HDBC i_hdbc1; // for ITEM table
HDBC w_hdbc1; // for WAREHOUSE,
DISTRICT, STOCK
HDBC c_hdbc1; // for CUSTOMER
HDBC c_hdbc2; // for HISTORY
HDBC o_hdbc1; // for ORDERS
HDBC o_hdbc2; // for NEW-ORDER

HDBC o_hdbc3; // for ORDER-LINE

HSTMT v_hstmt; // for SQL Server
version verification

```

```

HSTMT      i_hstmt1;
HSTMT      w_hstmt1;
HSTMT      c_hstmt1, c_hstmt2;
HSTMT      o_hstmt1, o_hstmt2, o_hstmt3;

int          total_db_errors;

ORDERS_STRUCT  orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long          orders_rows_loaded;
double        new_order_rows_loaded;
double        order_line_rows_loaded;
long          history_rows_loaded;
long          customer_rows_loaded;
double        stock_rows_loaded;
long          district_rows_loaded;
long          item_rows_loaded;
long          warehouse_rows_loaded;
long          main_time_start;
long          main_time_end;
long          max_items;
long          customers_per_district;
long          orders_per_district;
long          first_new_order;
long          last_new_order;

TPCC_LDR_ARGS *aptr, args;

//=====
//
// Function name: main
//
//=====
int main(int argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE          hThread[MAX_MAIN_THREADS];
    FILE            *fLoader;
    char            buffer[255];
    int             i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*");
    printf("\n* Microsoft SQL Server");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database loader");
    printf("\n*");
    printf("\n* Version %s", TPCKIT_VER);
    printf("\n*");
    printf("\n*****\n\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)

```

```

        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk load.\n");
    else
        printf("Clustered indexes will be created before bulk load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("**** Scaled Down Database ****\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district = CUSTOMERS_SCALE_DOWN;
        orders_per_district = ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district = CUSTOMERS_PER_DISTRICT;
        orders_per_district = ORDERS_PER_DISTRICT;
        first_new_order = 2100;
        last_new_order = 3000;
    }

    // open connections to SQL Server
    OpenConnections();

    // open file for loader results
    fLoader = fopen(aptr->loader_res_file, "w");

    if (fLoader == NULL)
    {
        printf("Error, loader result file open failed.");
        exit(-1);
    }

    // start loading data
    sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
    if (aptr->scale_down == 1)
    {
        sprintf(buffer, "SCALED DOWN DATABASE.\n");
    }

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    main_time_start = (TimeNow() / MILLI);

    // start parallel load threads
    if (aptr->tables_all || aptr->table_item)
    {
        fprintf(fLoader, "\nStarting loader threads for: item\n");

        hThread[0] = CreateThread(NULL,

```

0,

```

(LPTHREAD_START_ROUTINE) LoadItem,
NULL,
                                0,
&dwThreadID[0]);
    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread =
0.\n");
        exit(-1);
    }
    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for: warehouse\n");
        hThread[1] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
                                0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread =
1.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for: customer\n");
            hThread[2] = CreateThread(NULL,
                                    0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
                                    0,
&dwThreadID[2]);
            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating creating main thread
= 2.\n");
                exit(-1);
            }
        }
        if (aptr->tables_all || aptr->table_orders)

```

```

    {
        fprintf(fLoader, "Starting loader threads for: orders\n");
        hThread[3] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
                                0,
&dwThreadID[3]);
        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main thread
= 3.\n");
            exit(-1);
        }
    }
    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }
    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);
    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);
    fclose(fLoader);
    SQLFreeEnv(henv);
    exit(0);
    return 0;
}
//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    int          i;
    long         i_id;
    long         i_im_id;
    char         i_name[I_NAME_LEN+1];

```

```

double          i_price;
char            i_data[I_DATA_LEN+1];
char            name[20];
long            time_start;
RETCODE         rc;
DBINT           rcint;
char            bcp[128];
char            err_log_path[256];

// Seed with unique number
seed(11);

printf("Loading item table...\n");

//if build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxitm1");

InitString(i_name, I_NAME_LEN+1);
InitString(i_data, I_DATA_LEN+1);

sprintf(name, "%s.%s", aptr->database, "item");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "item.err");
rc = bcp_init(i_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcp, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
    rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcp);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

i = 0;
rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

time_start = (TimeNow() / MILLI);

```

```

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);

    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

    MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

    rc = bcp_sendrow(i_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    item_rows_loaded++;
    CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
}

rcint = bcp_done(i_hdbc1);
if (rcint < 0)
    HandleErrorDBC(i_hdbc1);

printf("Finished loading item table.\n");

SQLFreeStmt(i_hstmt1, SQL_DROP);
SQLDisconnect(i_hdbc1);
SQLFreeConnect(i_hdbc1);

// if build index after load
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxitm1");
}

//=====
//
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//
//=====
void LoadWarehouse()
{
    int          i;
    long         w_id;
    char         w_name[W_NAME_LEN+1];
    char         w_street_1[ADDRESS_LEN+1];
    char         w_street_2[ADDRESS_LEN+1];
    char         w_city[ADDRESS_LEN+1];
    char         w_state[STATE_LEN+1];
    char         w_zip[ZIP_LEN+1];
    double       w_tax;
    double       w_ytd;
    char         name[20];
    long         time_start;
    RETCODE      rc;
    DBINT        rcint;
    char         bcp[128];
}

```

```

char    err_log_path[256];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarc1");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s.%s", aptr->database, "warehouse");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "whouse.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcp_hint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcp_hint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)

```

```

    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaStringPadded(6, 10, W_NAME_LEN, w_name);

    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    w_tax = ((float) RandomNumber(0L, 2000L)) / 10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarc1");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
//
// Function   : District
//
//=====
void District()
{
    int         i;
    short      d_id;
    long       d_w_id;
    char       d_name[D_NAME_LEN+1];
    char       d_street_1[ADDRESS_LEN+1];
    char       d_street_2[ADDRESS_LEN+1];
    char       d_city[ADDRESS_LEN+1];
    char       d_state[STATE_LEN+1];

```



```

char d_zip[ZIP_LEN+1];
double d_tax;
double d_ytd;
char name[20];
long d_next_o_id;
long time_start;
long w_id;
RETCODE rc;
DBINT rcint;
char bcphint[128];
char err_log_path[256];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdiscl");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
sprintf(name, "%s.%s", aptr->database, "district");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "district.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;
d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");

```

```

return;
}

//=====
// Function : Stock
//=====
void Stock()
{
    int i;
    long s_i_id;
    long s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s.%s", aptr->database, "stock");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    i = 0;

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

```

```

++i); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
++i); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

rc = bcp_sendrow(w_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

stock_rows_loaded++;
CheckForCommit_Big(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

```

```

return;
}

//=====
//
// Function : LoadCustomer
//
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT customer_time_start;
    LOADER_TIME_STRUCT history_time_start;
    long w_id;
    short d_id;
    DWORD dwThreadId[MAX_CUSTOMER_THREADS];
    HANDLE hThread[MAX_CUSTOMER_THREADS];
    char name[20];
    RETCODE rc;
    DBINT rcint;
    char bcpint[128];
    char cmd[256];
    int num_procs;
    char err_log_path_cust[256];
    char err_log_path_hist[256];

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if ( num_procs >= 8 )
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    strcpy(err_log_path_cust,aptr->log_path);
    strcat(err_log_path_cust,"customer.err");
    rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcpint);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

```

```

rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
strcpy(err_log_path_hist, aptr->log_path);
strcat(err_log_path_hist, "history.err");
rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded = 0;
history_rows_loaded = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...
        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadCustomerTable,

&customer_time_start,

0,

&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread
        printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,

0,

```

```

(LPTHREAD_START_ROUTINE) LoadHistoryTable,

&history_time_start,

0,

&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
        }
    }
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,

```

```

// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C,
        aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
//
// Function : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    long i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

```

```

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
                    c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);
        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';
        MakeAddress(customer_buf[i].c_street_1,
                   customer_buf[i].c_street_2,
                   customer_buf[i].c_city,
                   customer_buf[i].c_state,
                   customer_buf[i].c_zip);
        MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';
        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;
        strcpy(customer_buf[i].c_balance,"-10.0");

```

```

        MakeAlphaStringPadded(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaStringPadded(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
//
// Function   : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long          i;
    long          c_id;
    short         c_d_id;
    long          c_w_id;
    char          c_first[FIRST_NAME_LEN+1];
    char          c_middle[MIDDLE_NAME_LEN+1];
    char          c_last[LAST_NAME_LEN+1];
    char          c_street_1[ADDRESS_LEN+1];
    char          c_street_2[ADDRESS_LEN+1];
    char          c_city[ADDRESS_LEN+1];
    char          c_state[STATE_LEN+1];
    char          c_zip[ZIP_LEN+1];
    char          c_phone[PHONE_LEN+1];
    char          c_credit[CREDIT_LEN+1];
    double        c_credit_lim;
    double        c_discount;
    char          c_balance[6];
    double        c_ytd_payment;
    short         c_payment_cnt;
    short         c_delivery_cnt;
    char          c_data[C_DATA_LEN+1];
    char          c_since[C_SINCE_LEN+1];
    RETCODE       rc;

    i = 0;
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
}

```

```

    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
    }
}

```

```

strcpy(c_first, customer_buf[i].c_first);
strcpy(c_middle, customer_buf[i].c_middle);
strcpy(c_last, customer_buf[i].c_last);
strcpy(c_street_1, customer_buf[i].c_street_1);
strcpy(c_street_2, customer_buf[i].c_street_2);
strcpy(c_city, customer_buf[i].c_city);
strcpy(c_state, customer_buf[i].c_state);
strcpy(c_zip, customer_buf[i].c_zip);
strcpy(c_phone, customer_buf[i].c_phone);
strcpy(c_credit, customer_buf[i].c_credit);

FormatDate(&c_since);

c_credit_lim = customer_buf[i].c_credit_lim;
c_discount = customer_buf[i].c_discount;
strcpy(c_balance, customer_buf[i].c_balance);
c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;
strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}
}

//=====
//
// Function : LoadHistoryTable
//
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long          i;
    long          c_id;
    short         c_d_id;
    long          c_w_id;
    double        h_amount;
    char          h_data[H_DATA_LEN+1];
    char          h_date[H_DATE_LEN+1];
    RETCODE       rc;

    i = 0;
rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;
    h_amount = customer_buf[i].h_amount;
    strcpy(h_data, customer_buf[i].h_data);

    FormatDate(&h_date);

    // send to server
rc = bcp_sendrow(c_hdbc2);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

    history_rows_loaded++;
    CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
}
}

//=====
//
// Function : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT  orders_time_start;
    LOADER_TIME_STRUCT  new_order_time_start;
    LOADER_TIME_STRUCT  order_line_time_start;
    long                w_id;
    short               d_id;
    DWORD               dwThreadId[MAX_ORDER_THREADS];
    HANDLE              hThread[MAX_ORDER_THREADS];
    char                name[20];
    RETCODE             rc;
    char                bcphint[128];
    char                err_log_path_ord[256];
    char                err_log_path_nord[256];

```

```

char                                err_log_path_ord1[256];

// seed with unique number
seed(6);

printf("Loading orders...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    BuildIndex("idxordcl");
    BuildIndex("idxnodcl");
    BuildIndex("idxodlcl");
}

// initialize bulk copy
sprintf(name, "%s..%s", aptr->database, "orders");

rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
strcpy(err_log_path_ord, aptr->log_path);
strcat(err_log_path_ord, "orders.err");
rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "new_order");

rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
strcpy(err_log_path_nord, aptr->log_path);
strcat(err_log_path_nord, "neword.err");
rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc2);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
    rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);
}

sprintf(name, "%s..%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
strcpy(err_log_path_ord1, aptr->log_path);
strcat(err_log_path_ord1, "ordline.err");
rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ord1, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

```

```

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded = 0;
new_order_rows_loaded = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...
        // start Orders table thread
        printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadOrdersTable,

&orders_time_start,

0,

&dwThreadId[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread
        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadNewOrderTable,

```



```

        &new_order_time_start,
        0,
        &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread
        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[2] = CreateThread(NULL,

        0,
        (LPTHREAD_START_ROUTINE) LoadOrderLineTable,
        &order_line_time_start,
        0,
        &dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );
        WaitForSingleObject( hThread[2], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }
    }
}

```

```

        printf("Finished loading orders.\n");

    }
    return;
}

//=====
//
// Function : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int i;
    int j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info, "");
        }
    }
}

//=====
//
// Function : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(short d_id, long w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    long ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

```

```

orders_buf[o_id].o_d_id = d_id;
orders_buf[o_id].o_w_id = w_id;
orders_buf[o_id].o_id = o_id+1;
orders_buf[o_id].o_c_id = cust[o_id+1];
orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
    orders_buf[o_id].o_all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
{
    orders_buf[o_id].o_ol[ol].ol = ol+1;
    orders_buf[o_id].o_ol[ol].ol_i_id = RandomNumber(1L,
max_items);
    orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;
    orders_buf[o_id].o_ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o_ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d set
properly during load

        FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
properly during load

        // odbc datetime format
        strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}

//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int     i;

```

```

long     o_id;
short    o_d_id;
long     o_w_id;

long     o_c_id;
short    o_carrier_id;
short    o_ol_cnt;
short    o_all_local;

char     o_entry_d[O_ENTRY_D_LEN+1];
RETCODE  rc;
DBINT    rcint;

// bind ORDER data
i = 0;
rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id       = orders_buf[i].o_id;
    o_d_id     = orders_buf[i].o_d_id;
    o_w_id     = orders_buf[i].o_w_id;
    o_c_id     = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o_ol_cnt   = orders_buf[i].o_ol_cnt;
    o_all_local = orders_buf[i].o_all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(o_hdbc1);

        orders_rows_loaded++;
        CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc1);

        SQLFreeStmt(o_hstmt1, SQL_DROP);
        SQLDisconnect(o_hdbc1);
        SQLFreeConnect(o_hdbc1);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxordc1");

        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxordnc");
    }
}

//=====
//
// Function   : LoadNewOrderTable
//
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long      long      i;
    long      o_id;
    short     o_d_id;
    long      o_w_id;
    RETCODE   rc;
    DBINT     rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id   = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

```

```

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxnodc1");
    }
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long      long      i;
    long      long      j;
    long      o_id;
    short     o_d_id;
    long      o_w_id;
    double    ol;
    long      ol_i_id;
    long      ol_supply_w_id;
    short     ol_quantity;
    double    ol_amount;
    char      ol_dist_info[DIST_INFO_LEN+1];
    char      ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE   rc;
    DBINT     rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o_ol_cnt; j++)
        {
            ol = orders_buf[i].o_ol[j].ol;
            ol_i_id = orders_buf[i].o_ol[j].ol_i_id;
            ol_supply_w_id = orders_buf[i].o_ol[j].ol_supply_w_id;
            ol_quantity = orders_buf[i].o_ol[j].ol_quantity;
            ol_amount = orders_buf[i].o_ol[j].ol_amount;

            strcpy(ol_delivery_d,orders_buf[i].o_ol[j].ol_delivery_d);

            strcpy(ol_dist_info,orders_buf[i].o_ol[j].ol_dist_info);

            rc = bcp_sendrow(o_hdbc3);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc3);

            order_line_rows_loaded++;

            CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
        }
    }

```

```

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
        SQLDisconnect(o_hdbc3);
        SQLFreeConnect(o_hdbc3);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxodlcl");
    }
}

//=====
//
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    long rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
                    aptr->batch,
                    table_name,
                    time_diff,

```

```

                rows_loaded,
                (float) aptr->batch / (time_diff ? time_diff
: 1L));
        }
        *time_start = time_end;
    }
    return;
}

//=====
//
// Function   : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,
                        HSTMT hstmt,
                        double rows_loaded,
                        char *table_name,
                        long *time_start)
{
    long time_end, time_diff;

    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("> Loaded %ld rows into %s in %ld sec - Total = %.0f
(%%.2f rps)\n",
                aptr->batch,
                table_name,
                time_diff,
                rows_loaded,
                (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====
//
// Function   : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE      rc;

    char          szDriverString[300];
    char          szDriverStringOut[1024];
    SQLSMALLINT  cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

```

```

SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

// Open connections to SQL Server
// Connection 1
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->database );

rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );

if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(i_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 2
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,

```

```

aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );

if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(w_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 3
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s/DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc1);
    printf("TPC-C Loader aborted!\n");
}

```

```

        exit(9);
    }

    // Connection 4
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s/DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s/DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
}

```

```

if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                                aptr->server,
                                                aptr->user,
                                                aptr->password,
                                                aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                                aptr->server,
                                                aptr->user,
                                                aptr->password,
                                                aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],

```

```

sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
      (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

//=====
//
// Function name: BuildIndex
//
//=====
void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

//=====
//
// Function name: HandleErrorDBC
//
//=====
void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char timebuf[128];
    char datebuf[128];
    char err_log_path[256];
    FILE *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
    &NativeError,

```

```

                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);
        printf( "[%s : %s] %s\n=>SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);
        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }
        i++;
    }
}

//=====
//
// Function   : HandleErrorSTMT
//
//=====
void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN           NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN        rc2;
    char             timebuf[128];
    char             datebuf[128];
    char             err_log_path[256];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        if (total_db_errors >= MAX_SQL_ERRORS)
        {
            printf(">>>> Maximum SQL errors of %d exceeded.
Terminating TPCCLDR.<<<<<\n",total_db_errors);
            exit(9);
        }
        total_db_errors++;

        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

```

```

        printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);
        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }
        i++;
    }
}

//=====
//
// Function   : FormatDate
//
//=====
void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );

    return;
}

```



## Appendix C: Tunable Parameters

### Microsoft SQL Server 2005 Enterprise x64 Edition Installation Procedures

Microsoft SQL Server 2005 Enterprise x64 Edition  
Installation Procedures  
Type of installation: custom  
During the custom installation, use the default  
settings for all except the following two areas:  
Services accounts:  
SQL Server - local system account  
SQL Server Agent - local system account  
Set the sort order/collation as Latin1\_General / BIN

### Microsoft SQL Server 2005 Enterprise x64 Edition Startup Commands

```
start sqlservr.exe -c -x -T3502 -T8011 -T8012 -T8018
-T8019 -T661 -T836 -T834
```

Where:  
-c Start SQL Server independently of the  
Windows NT Service Control Manager  
-x Disables the keeping of CPU time and cache-  
hit ratio statistics  
-T3502-Prints a message to the SQL Server log at the  
start and end of each checkpoint  
-T8011-Disable diagnostics for resource monitor  
-T8012-Disable ring buffer for scheduler  
-T8018-Disable exceptions ring buffer  
-T8019-Disable stack collection for exception ring  
buffer

```
-T661-Disable ghost writer
-T836-Make use of all physical memory
-T834-Large Pages
```

File locations:  
sqlserver.exe- C:\Program Files\Microsoft SQL  
Server\MSSQL.1\MSSQL\Binn  
ERRORLOG-C:\Program Files\Microsoft SQL  
Server\MSSQL.1\MSSQL\LOG

### Microsoft SQL Server 2005 Enterprise x64 Edition Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> -----
--
-- File:   VERSION.SQL
--
--       Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--       Copyright Microsoft, 2005
--
--       - Extracts current version of SQL Server
--
-----
USE master
1> 2> 3> 4> 5>
SELECT CONVERT(char(20),
SERVERPROPERTY('ProductVersion')),
       CONVERT(char(20),
SERVERPROPERTY('ProductLevel')),
       CONVERT(char(29), SERVERPROPERTY('Edition'))
-----
9.00.3042.00      SP2              Enterprise
Edition (64-bit)
(1 row affected)
1> 2> 3>
```

```
SELECT CONVERT(char(30), GETDATE(), 21)
-----
2008-07-31 06:49:12.427
(1 row affected)
1>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> 13> 14>
-----
--
-- File:   CONFIG.SQL
--
--       Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--       Copyright Microsoft, 2005
--
--       - Collects SQL Server configuration
parameters
--
-----
PRINT ' '
SELECT CONVERT(char(30), GETDATE(), 21)
PRINT ' '
-----
2008-07-31 06:49:12.520
(1 row affected)
1> 2> 3> Configuration option 'show advanced options'
changed from 1 to 1. Run the RECONFIGURE statement to
install.
sp_configure 'show advanced',1
1> 2> 3>
RECONFIGURE WITH OVERRIDE
1> 2> 3>
sp_configure
name                                minimum
maximum    config_value run_value
-----
Ad Hoc Distributed Queries          0
1          0          0
affinity I/O mask                   -2147483648
2147483647          0          0
affinity mask                       -2147483648
2147483647    16777215    16777215
affinity64 I/O mask                 -2147483648
2147483647          0          0
affinity64 mask                     -2147483648
2147483647          0          0
Agent XPs                            0
1          0          0
```

```

allow updates 0
1 0 0
awe enabled 0
1 0 0
blocked process threshold 0
86400 0 0
c2 audit mode 0
1 0 0
clr enabled 0
1 0 0
common criteria compliance enabled 0
1 0 0
cost threshold for parallelism 0
32767 5 5
cross db ownership chaining 0
1 0 0
cursor threshold -1
2147483647 -1 -1
Database Mail XPs 0
1 0 0
default full-text language 0
2147483647 1033 1033
default language 0
9999 0 0
default trace enabled 0
1 0 0
disallow results from triggers 0
1 0 0
fill factor (%) 0
100 0 0
ft crawl bandwidth (max) 0
32767 100 100
ft crawl bandwidth (min) 0
32767 0 0
ft notify bandwidth (max) 0
32767 100 100
ft notify bandwidth (min) 0
32767 0 0
in-doubt xact resolution 0
2 0 0
index create memory (KB) 704
2147483647 704 704
lightweight pooling 0
1 1 1
locks 5000
2147483647 0 0
max degree of parallelism 0
64 1 1
max full-text crawl range 0
256 4 4
max server memory (MB) 16
2147483647 253200 253200
max text repl size (B) 0
2147483647 65536 65536
max worker threads 128
32767 1380 1380
media retention 0
365 0 0
min memory per query (KB) 512
2147483647 512 512
min server memory (MB) 0
2147483647 0 0

```

```

nested triggers 0
1 1 1
network packet size (B) 512
32767 2048 2048
Ole Automation Procedures 0
1 0 0
open objects 0
2147483647 0 0
PH timeout (s) 1
3600 60 60
precompute rank 0
1 0 0
priority boost 0
1 1 1
query governor cost limit 0
2147483647 0 0
query wait (s) -1
2147483647 -1 -1
recovery interval (min) 0
32767 32767 32767
remote access 0
1 1 1
remote admin connections 0
1 0 0
remote login timeout (s) 0
2147483647 20 20
remote proc trans 0
1 0 0
remote query timeout (s) 0
2147483647 600 600
Replication XPs 0
1 0 0
scan for startup procs 0
1 0 0
server trigger recursion 0
1 1 1
set working set size 0
1 0 0
show advanced options 0
1 1 1
SMO and DMO XPs 0
1 1 1
SQL Mail XPs 0
1 0 0
transform noise words 0
1 0 0
two digit year cutoff 1753
9999 2049 2049
user connections 0
32767 0 0
user options 0
32767 0 0
Web Assistant Procedures 0
1 0 0
xp_cmdshell 0
1 0 0
1>

```

## Microsoft SQL Server Node Configuration Parameters

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:16 AM

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0  
Class Name: <NO CLASS>  
Last Write Time: 7/17/2008 - 10:55 AM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0x3f

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1  
Class Name: <NO CLASS>  
Last Write Time: 7/17/2008 - 10:55 AM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0xfc0

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node2  
Class Name: <NO CLASS>  
Last Write Time: 7/17/2008 - 10:55 AM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0x3f000

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node3  
Class Name: <NO CLASS>  
Last Write Time: 7/17/2008 - 10:55 AM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0xfc0000

# Microsoft SQL Server Super Socket Configuration Parameters

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: ForceEncryption  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: HideInstance  
Type: REG\_DWORD  
Data: 0

Value 2  
Name: Certificate  
Type: REG\_SZ  
Data:

Value 3  
Name: DisplayName  
Type: REG\_SZ  
Data: SQL Server Network Configuration

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\AdminConnection  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: DisplayName  
Type: REG\_SZ  
Data: Dedicated Administrative Connection

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\AdminConnection\Tcp  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: TcpDynamicPorts  
Type: REG\_SZ

Data: 1434

Value 1  
Name: DisplayName  
Type: REG\_SZ  
Data: TCP/IP

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Np  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: PipeName  
Type: REG\_SZ  
Data: \\.\pipe\sql\query

Value 2  
Name: DisplayName  
Type: REG\_SZ  
Data: Named Pipes

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Sm  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: DisplayName  
Type: REG\_SZ  
Data: Shared Memory

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:04 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: ListenOnAllIPs  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NoDelay

Type: REG\_DWORD  
Data: 0

Value 3  
Name: KeepAlive  
Type: REG\_DWORD  
Data: 0x7530

Value 4  
Name: DisplayName  
Type: REG\_SZ  
Data: TCP/IP

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:05 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Active  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: TcpPort  
Type: REG\_SZ  
Data: 2001

Value 3  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 4  
Name: DisplayName  
Type: REG\_SZ  
Data: Specific IP Address

Value 5  
Name: IpAddress  
Type: REG\_SZ  
Data: 130.168.208.20

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:05 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Active

Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: TcpPort  
Type: REG\_SZ  
Data: 2002

Value 3  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 4  
Name: DisplayName  
Type: REG\_SZ  
Data: Specific IP Address

Value 5  
Name: IPAddress  
Type: REG\_SZ  
Data: 130.130.208.1

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:06 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Active  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: TcpPort  
Type: REG\_SZ  
Data: 2003

Value 3  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 4  
Name: DisplayName  
Type: REG\_SZ  
Data: Specific IP Address

Value 5  
Name: IPAddress  
Type: REG\_SZ  
Data: 130.131.208.2

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP4  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:07 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Active  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: TcpPort  
Type: REG\_SZ  
Data: 2004

Value 3  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 4  
Name: DisplayName  
Type: REG\_SZ  
Data: Specific IP Address

Value 5  
Name: IPAddress  
Type: REG\_SZ  
Data: 130.132.208.3

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP5  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 5:19 PM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Active  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: TcpPort  
Type: REG\_SZ  
Data: 1433

Value 3  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 4

Name: DisplayName  
Type: REG\_SZ  
Data: Specific IP Address

Value 5  
Name: IPAddress  
Type: REG\_SZ  
Data: 127.0.0.0

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IPAL1  
Class Name: <NO CLASS>  
Last Write Time: 6/11/2008 - 11:04 AM

Value 0  
Name: TcpPort  
Type: REG\_SZ  
Data: 2001[0x1],2002[0x2],2003[0x4],2004[0x8]

Value 1  
Name: TcpDynamicPorts  
Type: REG\_SZ  
Data:

Value 2  
Name: DisplayName  
Type: REG\_SZ  
Data: Any IP Address

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Via  
Class Name: <NO CLASS>  
Last Write Time: 6/20/2007 - 9:57 AM

Value 0  
Name: Enabled  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: DefaultServerPort  
Type: REG\_SZ  
Data: 0:1433

Value 2  
Name: ListenInfo  
Type: REG\_SZ  
Data: 0:1433

Value 3  
Name: DisplayName  
Type: REG\_SZ  
Data: VIA

# Database Server System Configuration

System Information report written at: 08/07/08  
12:11:25

System Name: WARSHIP  
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	R2
OS Manufacturer	Microsoft Corporation
System Name	WARSHIP
System Manufacturer	HP
System Model	ProLiant DL580 G5
System Type	x64-based PC
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	
Processor EM64T Family	6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz	

```

Processor EM64T Family 6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz
Processor EM64T Family 6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz
Processor EM64T Family 6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz
Processor EM64T Family 6 Model 29 Stepping 1
GenuineIntel ~2667 Mhz
BIOS Version/Date HP P61, Not Available
SMBIOS Version 2.5
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume51
Locale United States
Hardware Abstraction Layer Version =
"5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
User Name Not Available
Time Zone Central Daylight Time
Total Physical Memory 262,140.59 MB
Available Physical Memory 1.61 GB
Total Virtual Memory 252.53 GB
Available Virtual Memory 2.68 GB
Page File Space 2.00 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
I/O Port 0x0000A000-0x0000AFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000A000-0x0000AFFF Smart Array
E500 Controller (Non-Miniport)

IRQ 30 PCI standard PCI-to-PCI bridge
IRQ 30 Smart Array P800 Controller (Non-Miniport)

I/O Port 0x00000000-0x00000CF7 PCI bus
I/O Port 0x00000000-0x00000CF7 Direct memory
access controller

Memory Address 0xFC800000-0xFCDF7FFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFC800000-0xFCDF7FFF PCI standard
PCI-to-PCI bridge

IRQ 31 PCI standard PCI-to-PCI bridge
IRQ 31 Smart Array P800 Controller (Non-Miniport)

IRQ 31 PCI standard PCI-to-PCI bridge
IRQ 31 Smart Array P800 Controller (Non-Miniport)

Memory Address 0xFDA00000-0xFDF77FFF PCI standard
PCI-to-PCI bridge
  
```

```

Memory Address 0xFDA00000-0xFDF77FFF PCI standard
PCI-to-PCI bridge

IRQ 10 Base System Device
IRQ 10 PCI Device

I/O Port 0x0000F000-0x0000FFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000F000-0x0000FFFF Smart Array
P800 Controller (Non-Miniport)

IRQ 33 PCI standard PCI-to-PCI bridge
IRQ 33 PCI standard PCI-to-PCI bridge
IRQ 33 Smart Array P800 Controller (Non-Miniport)

I/O Port 0x00009000-0x00009FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00009000-0x00009FFF Smart Array
P800 Controller (Non-Miniport)

IRQ 34 PCI standard PCI-to-PCI bridge
IRQ 34 Smart Array E500 Controller (Non-Miniport)

IRQ 34 PCI standard PCI-to-PCI bridge
IRQ 34 Smart Array P800 Controller (Non-Miniport)

I/O Port 0x00006000-0x00006FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00006000-0x00006FFF Smart Array
P800 Controller (Non-Miniport)

IRQ 35 PCI standard PCI-to-PCI bridge
IRQ 35 Smart Array E500 Controller (Non-Miniport)

IRQ 35 PCI standard PCI-to-PCI bridge
IRQ 35 Smart Array E500 Controller (Non-Miniport)

I/O Port 0x0000E000-0x0000EFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000E000-0x0000EFFF Smart Array
P800 Controller (Non-Miniport)

I/O Port 0x0000B000-0x0000BFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000B000-0x0000BFFF Smart Array
E500 Controller (Non-Miniport)

IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 HP NC373i Virtual Bus Device
IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 Smart Array P400 Controller
IRQ 16 Standard Universal PCI to USB Host
Controller
IRQ 16 Standard Enhanced PCI to USB Host
Controller

I/O Port 0x00005000-0x00007FFF PCI standard
PCI-to-PCI bridge
  
```

I/O Port 0x00005000-0x00007FFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00005000-0x00007FFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00005000-0x00007FFF Smart Array  
P800 Controller (Non-Miniport)

IRQ 28 PCI standard PCI-to-PCI bridge  
IRQ 28 PCI standard PCI-to-PCI bridge  
IRQ 28 PCI standard PCI-to-PCI bridge  
IRQ 28 Smart Array P800 Controller (Non-Miniport)

IRQ 17 PCI standard PCI-to-PCI bridge  
IRQ 17 HP NC373i Virtual Bus Device  
IRQ 17 Standard Universal PCI to USB Host  
Controller

IRQ 29 PCI standard PCI-to-PCI bridge  
IRQ 29 Smart Array P800 Controller (Non-Miniport)

IRQ 29 PCI standard PCI-to-PCI bridge  
IRQ 29 Smart Array P800 Controller (Non-Miniport)

Memory Address 0xA000-0xBFFFF PCI bus  
Memory Address 0xA000-0xBFFFF ATI ES1000

I/O Port 0x00007000-0x00007FFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00007000-0x00007FFF Smart Array  
P800 Controller (Non-Miniport)

Memory Address 0xFCF00000-0xFD8FFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xFCF00000-0xFD8FFFFF PCI standard  
PCI-to-PCI bridge

Memory Address 0xFA000000-0xFBFFFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xFA000000-0xFBFFFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xFA000000-0xFBFFFFFF HP NC373i  
Virtual Bus Device

Memory Address 0xF8000000-0xFBFFFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xF8000000-0xFBFFFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xF8000000-0xFBFFFFFF PCI standard  
PCI-to-PCI bridge  
Memory Address 0xF8000000-0xFBFFFFFF HP NC373i  
Virtual Bus Device

I/O Port 0x00004000-0x00004FFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00004000-0x00004FFF Smart Array  
P400 Controller

I/O Port 0x0000C000-0x0000CFFF PCI standard  
PCI-to-PCI bridge

I/O Port 0x0000C000-0x0000CFFF Smart Array  
E500 Controller (Non-Miniport)

I/O Port 0x00008000-0x0000CFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00008000-0x0000CFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00008000-0x0000CFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x00008000-0x0000CFFF Smart Array  
P800 Controller (Non-Miniport)

I/O Port 0x0000D000-0x0000FFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x0000D000-0x0000FFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x0000D000-0x0000FFFF PCI standard  
PCI-to-PCI bridge  
I/O Port 0x0000D000-0x0000FFFF Smart Array  
P800 Controller (Non-Miniport)

[DMA]

Resource Device Status  
Channel 7 Direct memory access controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource Device Status  
0x00000000-0x00000CF7 PCI bus OK  
0x00000000-0x00000CF7 Direct memory access  
controller OK  
0x0000D000-0x0000FFFF PCI bus OK  
0x0000D000-0x0000FFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000D000-0x0000FFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000D000-0x0000FFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000D000-0x0000FFFF Smart Array P800  
Controller (Non-Miniport) OK  
0x0000F000-0x0000FFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000F000-0x0000FFFF Smart Array P800  
Controller (Non-Miniport) OK  
0x0000E000-0x0000EFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000E000-0x0000EFFF Smart Array P800  
Controller (Non-Miniport) OK  
0x00008000-0x0000CFFF PCI standard PCI-to-PCI  
bridge OK  
0x00008000-0x0000CFFF PCI standard PCI-to-PCI  
bridge OK  
0x00008000-0x0000CFFF PCI standard PCI-to-PCI  
bridge OK

0x00008000-0x0000CFFF Smart Array P800  
Controller (Non-Miniport) OK  
0x0000C000-0x0000CFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000C000-0x0000CFFF Smart Array E500  
Controller (Non-Miniport) OK  
0x0000B000-0x0000BFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000B000-0x0000BFFF Smart Array E500  
Controller (Non-Miniport) OK  
0x00009000-0x00009FFF PCI standard PCI-to-PCI  
bridge OK  
0x00009000-0x00009FFF Smart Array P800  
Controller (Non-Miniport) OK  
0x0000A000-0x0000AFFF PCI standard PCI-to-PCI  
bridge OK  
0x0000A000-0x0000AFFF Smart Array E500  
Controller (Non-Miniport) OK  
0x00005000-0x00007FFF PCI standard PCI-to-PCI  
bridge OK  
0x00005000-0x00007FFF PCI standard PCI-to-PCI  
bridge OK  
0x00005000-0x00007FFF PCI standard PCI-to-PCI  
bridge OK  
0x00005000-0x00007FFF Smart Array P800  
Controller (Non-Miniport) OK  
0x00007000-0x00007FFF PCI standard PCI-to-PCI  
bridge OK  
0x00007000-0x00007FFF Smart Array P800  
Controller (Non-Miniport) OK  
0x00006000-0x00006FFF PCI standard PCI-to-PCI  
bridge OK  
0x00006000-0x00006FFF Smart Array P800  
Controller (Non-Miniport) OK  
0x00004000-0x00004FFF PCI standard PCI-to-PCI  
bridge OK  
0x00004000-0x00004FFF Smart Array P400  
Controller OK  
0x00001000-0x0000101F Standard Universal PCI  
to USB Host Controller OK  
0x00001020-0x0000103F Standard Universal PCI  
to USB Host Controller OK  
0x00001040-0x0000105F Standard Universal PCI  
to USB Host Controller OK  
0x00001060-0x0000107F Standard Universal PCI  
to USB Host Controller OK  
0x00003000-0x000030FF ATI ES1000 OK

0x00003B0-0x00003BB ATI ES1000 OK  
0x000003C0-0x000003DF ATI ES1000 OK  
0x00002800-0x000028FF Base System Device OK  
0x00003400-0x000034FF Base System Device OK  
0x00003800-0x0000381F Standard Universal PCI  
to USB Host Controller OK  
0x00000070-0x00000077 Motherboard resources  
OK  
0x00000408-0x0000040F Motherboard resources  
OK

0x000004D0-0x000004D1 OK	Motherboard resources	0x000003F6-0x000003F6	Primary IDE Channel OK	IRQ 35	PCI standard PCI-to-PCI bridge	OK
0x00000020-0x0000003F OK	Motherboard resources	0x00000170-0x00000177 OK	Secondary IDE Channel	IRQ 35	Smart Array E500 Controller (Non-Miniport)	OK
0x000000A0-0x000000BF OK	Motherboard resources	0x00000376-0x00000376 OK	Secondary IDE Channel	IRQ 35	PCI standard PCI-to-PCI bridge	OK
0x00000090-0x0000009F OK	Motherboard resources			IRQ 35	Smart Array E500 Controller (Non-Miniport)	OK
0x00000050-0x00000053 OK	Motherboard resources	[IRQs]		IRQ 29	PCI standard PCI-to-PCI bridge	OK
0x00000700-0x0000071F OK	Motherboard resources	Resource Device Status		IRQ 29	Smart Array P800 Controller (Non-Miniport)	OK
0x00000800-0x0000081F OK	Motherboard resources	IRQ 9 Microsoft ACPI-Compliant System	OK	IRQ 29	PCI standard PCI-to-PCI bridge	OK
0x00000840-0x0000087F OK	Motherboard resources	IRQ 16 PCI standard PCI-to-PCI bridge	OK	IRQ 29	Smart Array P800 Controller (Non-Miniport)	OK
0x00000900-0x0000097F OK	Motherboard resources	IRQ 16 HP NC373i Virtual Bus Device OK	OK	IRQ 18	Standard Universal PCI to USB Host	OK
0x00000010-0x0000001F OK	Motherboard resources	IRQ 16 PCI standard PCI-to-PCI bridge	OK	IRQ 19	Standard Universal PCI to USB Host	OK
0x00000C80-0x00000C83 OK	Motherboard resources	IRQ 16 Smart Array P400 Controller OK	OK	IRQ 23	ATI ES1000	OK
0x00000CD4-0x00000CD7 OK	Motherboard resources	IRQ 16 Standard Enhanced PCI to USB Host	OK	IRQ 10	Base System Device	OK
0x00000F50-0x00000F58 OK	Motherboard resources	IRQ 17 PCI standard PCI-to-PCI bridge	OK	IRQ 10	PCI Device	OK
0x000000F0-0x000000F0 OK	Motherboard resources	IRQ 17 HP NC373i Virtual Bus Device OK	OK	IRQ 7	Base System Device	OK
0x00000CA0-0x00000CA1 OK	Motherboard resources	IRQ 17 Standard Universal PCI to USB Host	OK	IRQ 22	Standard Universal PCI to USB Host	OK
0x00000CA4-0x00000CA5 OK	Motherboard resources	Controller OK	OK	IRQ 0	System timer	OK
0x00000CA2-0x00000CA3 OK	System timer	IRQ 28 PCI standard PCI-to-PCI bridge	OK	IRQ 1	Standard 101/102-Key or Microsoft Natural	OK
0x00000040-0x00000043	System timer	IRQ 28 PCI standard PCI-to-PCI bridge	OK	PS/2 Keyboard	OK	OK
0x00000080-0x0000008F controller OK	Direct memory access	IRQ 28 Smart Array P800 Controller (Non-Miniport)	OK	IRQ 12	PS/2 Compatible Mouse	OK
0x000000C0-0x000000DF controller OK	Direct memory access	IRQ 30 PCI standard PCI-to-PCI bridge	OK	IRQ 14	Primary IDE Channel	OK
0x00000061-0x00000061	System speaker	IRQ 30 Smart Array P800 Controller (Non-Miniport)	OK			
0x00000060-0x00000060	Standard 101/102-Key or	IRQ 31 PCI standard PCI-to-PCI bridge	OK	[Memory]		
Microsoft Natural PS/2 Keyboard	OK	IRQ 31 Smart Array P800 Controller (Non-Miniport)	OK	Resource Device Status		
0x00000064-0x00000064	Standard 101/102-Key or	IRQ 31 PCI standard PCI-to-PCI bridge	OK	0xA0000-0xBFFFF	PCI bus	OK
Microsoft Natural PS/2 Keyboard	OK	IRQ 31 Smart Array P800 Controller (Non-Miniport)	OK	0xA0000-0xBFFFF	ATI ES1000	OK
0x0000002E-0x0000002F	Extended IO Bus	IRQ 33 PCI standard PCI-to-PCI bridge	OK	0xD0000000-0xDFFFFFFF	PCI bus	OK
0x00000620-0x0000065F	Extended IO Bus	IRQ 33 PCI standard PCI-to-PCI bridge	OK	0xF0000000-0xFEBFFFFFFF	PCI bus	OK
0x00000680-0x0000069F	Extended IO Bus	IRQ 33 PCI standard PCI-to-PCI bridge	OK	0xF7F00000-0xFBFFFFFFF	PCI standard PCI-to-PCI	OK
0x00000600-0x0000061F	Extended IO Bus	IRQ 33 Smart Array P800 Controller (Non-Miniport)	OK	bridge OK	PCI standard PCI-to-PCI	OK
0x00000660-0x0000067F	Extended IO Bus	IRQ 33 PCI standard PCI-to-PCI bridge	OK	0xF8000000-0xFBFFFFFFF	PCI standard PCI-to-PCI	OK
0x00000820-0x0000082F	Extended IO Bus	IRQ 33 Smart Array P800 Controller (Non-Miniport)	OK	bridge OK	HP NC373i Virtual Bus	OK
0x00000500-0x0000050F PCI IDE Controller OK	Standard Dual Channel	IRQ 34 PCI standard PCI-to-PCI bridge	OK	0xF8000000-0xFBFFFFFFF	PCI standard PCI-to-PCI	OK
0x000001F0-0x000001F7	Primary IDE Channel	IRQ 34 Smart Array E500 Controller (Non-Miniport)	OK	Device OK	PCI standard PCI-to-PCI	OK
		IRQ 34 PCI standard PCI-to-PCI bridge	OK	0xFA000000-0xFBFFFFFFF	PCI standard PCI-to-PCI	OK
		IRQ 34 Smart Array P800 Controller (Non-Miniport)	OK	bridge OK	PCI standard PCI-to-PCI	OK
		OK		0xFA000000-0xFBFFFFFFF	PCI standard PCI-to-PCI	OK
				0xF9000000-0xFDFFFFFFFF	PCI standard PCI-to-PCI	OK
				bridge OK	PCI standard PCI-to-PCI	OK
				0xFD9E0000-0xFD9FFFFFFF	PCI standard PCI-to-PCI	OK
				bridge OK	PCI standard PCI-to-PCI	OK
				0xFDA00000-0xFDFFFFFFFF	PCI standard PCI-to-PCI	OK
				bridge OK	PCI standard PCI-to-PCI	OK

```

0xFDA00000-0xFDFFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDE00000-0xFDFFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDF00000-0xFDFFFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDEF0000-0xFDEF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFDC00000-0xFDDFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDD00000-0xFDDFFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDC00000-0xFDC0FFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDB00000-0xFDBFFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDAF0000-0xFDAF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFCE00000-0xFD8FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFCE00000-0xFCEFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFCF00000-0xFD8FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFCF00000-0xFD8FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFD700000-0xFD8FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFD800000-0xFD8FFFFFFF Smart Array E500
Controller (Non-Miniport) OK
0xFD7F0000-0xFD7F0FFF Smart Array E500
Controller (Non-Miniport) OK
0xFD500000-0xFD6FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFD600000-0xFD6FFFFFFF Smart Array E500
Controller (Non-Miniport) OK
0xFD5F0000-0xFD5F0FFF Smart Array E500
Controller (Non-Miniport) OK
0xFD000000-0xFD0FFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFCF00000-0xFCFF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFD100000-0xFD2FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFD200000-0xFD2FFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFD1F0000-0xFD1F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFD300000-0xFD4FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFD400000-0xFD4FFFFFFF Smart Array E500
Controller (Non-Miniport) OK
0xFD3F0000-0xFD3F0FFF Smart Array E500
Controller (Non-Miniport) OK
0xFC700000-0xFCDFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFC7E0000-0xFC7FFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFC800000-0xFCDFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFC800000-0xFCDFFFFFFF PCI standard PCI-to-PCI
bridge OK

```

```

0xFCC00000-0xFCDFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFCD00000-0xFCDFFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFCCF0000-0xFCCF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFCA00000-0xFCBFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFCB00000-0xFCBFFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFCAF0000-0xFCAF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFC900000-0xFC9FFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFC8F0000-0xFC8F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xF7D00000-0xF7EFFFFFFF PCI standard PCI-to-PCI
bridge OK
0xF7E00000-0xF7EFFFFFFF Smart Array P400
Controller OK
0xF7DF0000-0xF7DF0FFF Smart Array P400
Controller OK
0xF7AF0000-0xF7AF03FF Standard Enhanced PCI
to USB Host Controller OK
0xD8000000-0xDFFFFFFF ATI ES1000 OK
0xF7CF0000-0xF7CFFFFFFF ATI ES1000 OK
0xF7CE0000-0xF7CE01FF Base System Device OK
0xF7CD0000-0xF7CD07FF Base System Device OK
0xF7CC0000-0xF7CC1FFF Base System Device OK
0xF7C00000-0xF7C7FFFF Base System Device OK
0xF7BF0000-0xF7BF00FF PCI Device OK
0xE0000000-0xEFFFFFFF Motherboard resources OK
0xFE000000-0xFEBFFFFFFF Motherboard resources OK
0xFED00000-0xFED003FF High precision event
timer OK

[Components]

[Multimedia]

[Audio Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\tsssoft32.acm DSP GROUP,
INC. OK
C:\WINDOWS\system32\TSSOFT32.ACM

```

```

1.01 13.50 KB (13,824 bytes)
11/30/2005 6:00 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
34.50 KB (35,328 bytes) 11/30/2005
6:00 AM
c:\windows\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 11/30/2005
6:00 AM
c:\windows\system32\msg711.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
13.50 KB (13,824 bytes) 11/30/2005
6:00 AM
c:\windows\system32\msadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
23.50 KB (24,064 bytes) 11/30/2005
6:00 AM
[Video Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msrle32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
15.50 KB (15,872 bytes) 11/30/2005
6:00 AM
c:\windows\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
43.00 KB (44,032 bytes) 11/30/2005
6:00 AM
c:\windows\system32\msyuv.dll Microsoft Corporation
OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 21.00 KB (21,504 bytes)
3/24/2005 12:21 PM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
52.50 KB (53,760 bytes) 3/24/2005
12:19 PM
c:\windows\system32\tsbyuv.dll Microsoft
Corporation OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.50 KB (12,800 bytes) 3/24/2005
12:34 PM

```



[CD-ROM]

```

Item      Value
Drive     D:
Description      CD-ROM Drive
Media Loaded     No
Media Type       CD-ROM
Name             TEAC DW-224E-V
Manufacturer     (Standard CD-ROM drives)
Status           OK
Transfer Rate    Not Available
SCSI Target ID  0
PNP Device ID   IDE\CDROMTEAC_DW-224E-
V_____C.CA_____5&5FD9AC6&0&0.0.0
  
```

```

Driver c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 75.50 KB
(77,312 bytes), 11/30/2005 6:00 AM)
  
```

[Sound Device]

```
Item      Value
```

[Display]

```

Item      Value
Name      ATI ES1000
PNP Device ID
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Adapter Type      ATI ES1000 (0x515E), ATI
Technologies Inc. compatible
Adapter Description      ATI ES1000
Adapter RAM            64.00 MB (67,108,864 bytes)
Installed Drivers      ati2dvag.dll
Driver Version         6.14.10.6606
INF File               oem17.inf (ati2mtag_RN50 section)
Color Planes           1
Color Table Entries    4294967296
Resolution             1024 x 768 x 60 hertz
Bits/Pixel             32
Memory Address         0xD8000000-0xDFFFFFFF
I/O Port               0x00003000-0x000030FF
Memory Address         0xF7CF0000-0xF7CFFFFF
IRQ Channel            IRQ 23
I/O Port               0x000003B0-0x000003BB
I/O Port               0x000003C0-0x000003DF
Memory Address         0xA0000-0xBFFFFF
Driver c:\windows\system32\drivers\ati2mtag.sys
(6.14.10.6606, 2.11 MB (2,210,304 bytes), 8/7/2007
8:08 AM)
  
```

[Infrared]

```
Item      Value
```

[Input]

[Keyboard]

```

Item      Value
Description      USB Human Interface Device
Name             Enhanced (101- or 102-key)
Layout           00000409
PNP Device ID   USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00
Number of Function Keys      12
Driver c:\windows\system32\drivers\hidusb.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
(18,944 bytes), 11/30/2005 6:00 AM)
  
```

```

Description      Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name             Enhanced (101- or 102-key)
Layout           00000409
PNP Device ID   ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys      12
I/O Port        0x00000060-0x00000060
I/O Port        0x00000064-0x00000064
IRQ Channel      IRQ 1
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 11/30/2005 6:00 AM)
  
```

[Pointing Device]

```

Item      Value
Hardware Type      USB Human Interface Device
Number of Buttons  5
Status           OK
PNP Device ID   USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01
Power Management Supported      No
Double Click Threshold          6
Handedness                      Right Handed Operation
Driver c:\windows\system32\drivers\hidusb.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
(18,944 bytes), 11/30/2005 6:00 AM)
  
```

```

Hardware Type      PS/2 Compatible Mouse
Number of Buttons  5
Status           OK
PNP Device ID   ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported      No
Double Click Threshold          6
Handedness                      Right Handed Operation
IRQ Channel      IRQ 12
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 11/30/2005 6:00 AM)
  
```

[Modem]

```
Item      Value
```

[Network]

[Adapter]

```

Item      Value
Name      [00000001] RAS Async Adapter
Adapter Type      Not Available
Product Type      RAS Async Adapter
Installed Yes
PNP Device ID     Not Available
Last Reset        8/7/2008 8:51 AM
Index            1
Service Name      AsyncMac
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway      Not Available
DHCP Enabled       No
DHCP Server        Not Available
DHCP Lease Expires  Not Available
DHCP Lease Obtained Not Available
MAC Address        Not Available
  
```

```

Name      [00000002] WAN Miniport (L2TP)
Adapter Type      Not Available
Product Type      WAN Miniport (L2TP)
Installed Yes
PNP Device ID     ROOT\MS_L2TPMINIPOINT\0000
Last Reset        8/7/2008 8:51 AM
Index            2
Service Name      Rasl2tp
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway      Not Available
DHCP Enabled       No
DHCP Server        Not Available
DHCP Lease Expires  Not Available
DHCP Lease Obtained Not Available
MAC Address        Not Available
Driver c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 132.00 KB
(135,168 bytes), 11/30/2005 6:00 AM)
  
```

```

Name      [00000003] WAN Miniport (PPTP)
Adapter Type      Wide Area Network (WAN)
Product Type      WAN Miniport (PPTP)
Installed Yes
PNP Device ID     ROOT\MS_PPTPMINIPOINT\0000
Last Reset        8/7/2008 8:51 AM
Index            3
Service Name      PptpMiniport
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway      Not Available
DHCP Enabled       No
DHCP Server        Not Available
DHCP Lease Expires  Not Available
DHCP Lease Obtained Not Available
MAC Address        50:50:54:50:30:30
Driver c:\windows\system32\drivers\raspptp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 117.50 KB
(120,320 bytes), 11/30/2005 6:00 AM)
  
```

```

Name      [00000004] WAN Miniport (PPPOE)
Adapter Type      Wide Area Network (WAN)
Product Type      WAN Miniport (PPPOE)
  
```

```

Installed Yes
PNP Device ID      ROOT\MS_PPPoEMINI\PORT\0000
Last Reset        8/7/2008 8:51 AM
Index             4
Service Name      RasPppoe
IP Address         Not Available
IP Subnet          Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       33:50:6F:45:30:30
Driver            c:\windows\system32\drivers\raspppoe.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 67.50 KB
(69,120 bytes), 11/30/2005 6:00 AM)

Name [00000005] Direct Parallel
Adapter Type      Not Available
Product Type      Direct Parallel
Installed Yes
PNP Device ID     ROOT\MS_PTIMINI\PORT\0000
Last Reset       8/7/2008 8:51 AM
Index            5
Service Name      Raspti
IP Address        Not Available
IP Subnet         Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available
Driver            c:\windows\system32\drivers\raspti.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB
(31,232 bytes), 11/30/2005 6:00 AM)

Name [00000006] WAN Miniport (IP)
Adapter Type      Not Available
Product Type      WAN Miniport (IP)
Installed Yes
PNP Device ID     ROOT\MS_NDISWANIP\0000
Last Reset       8/7/2008 8:51 AM
Index            6
Service Name      NdisWan
IP Address        Not Available
IP Subnet         Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available
Driver            c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 157.50 KB
(161,280 bytes), 11/30/2005 6:00 AM)

Name [00000007] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Not Available
Product Type      HP NC373i Multifunction Gigabit
Server Adapter

```

```

Installed Yes
PNP Device ID      Not Available
Last Reset        8/7/2008 8:51 AM
Index             7
Service Name      l2nd
IP Address         Not Available
IP Subnet          Not Available
Default IP Gateway Not Available
DHCP Enabled      Yes
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available

Name [00000008] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Not Available
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID     Not Available
Last Reset       8/7/2008 8:51 AM
Index            8
Service Name      l2nd
IP Address        Not Available
IP Subnet         Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available

Name [00000009] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Not Available
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID     Not Available
Last Reset       8/7/2008 8:51 AM
Index            9
Service Name      l2nd
IP Address        Not Available
IP Subnet         Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available

Name [00000010] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Not Available
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID     Not Available
Last Reset       8/7/2008 8:51 AM
Index            10
Service Name      l2nd

```

```

IP Address         Not Available
IP Subnet          Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available

Name [00000011] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Ethernet 802.3
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID     B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\8&1D0839D4&0&20050600
Last Reset       8/7/2008 8:51 AM
Index            11
Service Name      l2nd
IP Address        130.168.208.20, 130.130.208.1
IP Subnet         255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       00:16:35:82:80:F8
Driver            c:\windows\system32\drivers\bxnd52a.sys
(3.7.19.0 built by: WinDDK, 64.50 KB (66,048 bytes),
6/20/2007 8:36 AM)

Name [00000012] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Ethernet 802.3
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID     B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\8&8818209&0&20050800
Last Reset       8/7/2008 8:51 AM
Index            12
Service Name      l2nd
IP Address        130.131.208.2, 130.132.208.3
IP Subnet         255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       00:16:35:82:80:FA
Driver            c:\windows\system32\drivers\bxnd52a.sys
(3.7.19.0 built by: WinDDK, 64.50 KB (66,048 bytes),
6/20/2007 8:36 AM)

[Protocol]

Item      Value
Name      MSAFD Tcpip [TCP/IP]
Connectionless Service No

```

```

Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes

```

```

Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item Value
File c:\windows\system32\wsock32.dll
Size 24.50 KB (25,088 bytes)
Version 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item Value

[Parallel]

Item Value

[Storage]

[Drives]

Item Value
Drive C:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 33.88 GB (36,381,306,880 bytes)
Free Space 24.28 GB (26,073,743,360 bytes)

Volume Name
Volume Serial Number 64A01FE7

Drive D:
Description CD-ROM Disc

Drive E:
Description Local Fixed Disk
Compressed Not Available
File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive F:
Description Local Fixed Disk
Compressed Not Available

```

```

File System Not Available
Size Not Available
Free Space Not Available
Volume Name Not Available
Volume Serial Number Not Available

Drive S:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)
Free Space 907.83 GB (974,774,063,104 bytes)

Volume Name back1
Volume Serial Number E87736E7

Drive T:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)
Free Space 907.83 GB (974,774,128,640 bytes)

Volume Name back2
Volume Serial Number 9079E0B0

Drive U:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)
Free Space 907.83 GB (974,774,128,640 bytes)

Volume Name back3
Volume Serial Number 28C1E34A

Drive V:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)
Free Space 907.83 GB (974,774,128,640 bytes)

Volume Name back4
Volume Serial Number 60E8C07B

Drive W:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)
Free Space 907.83 GB (974,774,128,640 bytes)

Volume Name back5
Volume Serial Number 182DB75F

Drive X:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 1.39 TB (1,533,759,700,992 bytes)

```

```

Free Space      897.99 GB (964,212,719,616 bytes)

Volume Name     back6
Volume Serial Number  D054816E

Drive Y:
Description     Local Fixed Disk
Compressed      No
File System     NTFS
Size            1.39 TB (1,533,759,700,992 bytes)
Free Space     907.83 GB (974,774,128,640 bytes)

Volume Name     back7
Volume Serial Number  007D7E36

Drive Z:
Description     Local Fixed Disk
Compressed      No
File System     NTFS
Size            1.39 TB (1,533,759,700,992 bytes)
Free Space     907.83 GB (974,774,128,640 bytes)

Volume Name     back8
Volume Serial Number  C8A8878C

[Disks]

Item      Value
Description  \\.\PHYSICALDRIVE40
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      200.19 GB (214,951,242,240 bytes)
Total Cylinders  26,133
Total Sectors  419,826,645
Total Tracks  6,663,915
Tracks/Cylinder  255
Partition Disk #40, Partition #0
Partition Size  200.19 GB (214,950,739,968 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE41
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63

```

```

Size      151.36 GB (162,523,307,520 bytes)
Total Cylinders  19,759
Total Sectors  317,428,335
Total Tracks  5,038,545
Tracks/Cylinder  255
Partition Disk #41, Partition #0
Partition Size  151.36 GB (162,522,988,544 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE42
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      151.17 GB (162,317,675,520 bytes)
Total Cylinders  19,734
Total Sectors  317,026,710
Total Tracks  5,032,170
Tracks/Cylinder  255
Partition Disk #42, Partition #0
Partition Size  151.17 GB (162,317,467,648 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE43
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      29.09 GB (31,239,613,440 bytes)
Total Cylinders  3,798
Total Sectors  61,014,870
Total Tracks  968,490
Tracks/Cylinder  255
Partition Disk #43, Partition #0
Partition Size  29.09 GB (31,239,176,192 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE44
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available

```

```

SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      1.39 TB (1,533,759,736,320 bytes)
Total Cylinders  186,469
Total Sectors  2,995,624,485
Total Tracks  47,549,595
Tracks/Cylinder  255
Partition Disk #44, Partition #0
Partition Size  1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset  32,256 bytes

Description  \\.\PHYSICALDRIVE35
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      200.19 GB (214,951,242,240 bytes)
Total Cylinders  26,133
Total Sectors  419,826,645
Total Tracks  6,663,915
Tracks/Cylinder  255
Partition Disk #35, Partition #0
Partition Size  200.19 GB (214,950,739,968 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE36
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port  Not Available
SCSI Target ID Not Available
Sectors/Track  63
Size      151.36 GB (162,523,307,520 bytes)
Total Cylinders  19,759
Total Sectors  317,428,335
Total Tracks  5,038,545
Tracks/Cylinder  255
Partition Disk #36, Partition #0
Partition Size  151.36 GB (162,522,988,544 bytes)

Partition Starting Offset  131,072 bytes

Description  \\.\PHYSICALDRIVE37
Manufacturer Not Available
Model      Not Available
Bytes/Sector  512

```

Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 151.17 GB (162,317,675,520 bytes)  
 Total Cylinders 19,734  
 Total Sectors 317,026,710  
 Total Tracks 5,032,170  
 Tracks/Cylinder 255  
 Partition Disk #37, Partition #0  
 Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE38  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 29.09 GB (31,239,613,440 bytes)  
 Total Cylinders 3,798  
 Total Sectors 61,014,870  
 Total Tracks 968,490  
 Tracks/Cylinder 255  
 Partition Disk #38, Partition #0  
 Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE39  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 1.39 TB (1,533,759,736,320 bytes)  
 Total Cylinders 186,469  
 Total Sectors 2,995,624,485  
 Total Tracks 47,549,595  
 Tracks/Cylinder 255  
 Partition Disk #39, Partition #0  
 Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 200.19 GB (214,951,242,240 bytes)  
 Total Cylinders 26,133  
 Total Sectors 419,826,645  
 Total Tracks 6,663,915  
 Tracks/Cylinder 255  
 Partition Disk #5, Partition #0  
 Partition Size 200.19 GB (214,950,739,968 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE6  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 151.36 GB (162,523,307,520 bytes)  
 Total Cylinders 19,759  
 Total Sectors 317,428,335  
 Total Tracks 5,038,545  
 Tracks/Cylinder 255  
 Partition Disk #6, Partition #0  
 Partition Size 151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE7  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 151.17 GB (162,317,675,520 bytes)  
 Total Cylinders 19,734  
 Total Sectors 317,026,710  
 Total Tracks 5,032,170  
 Tracks/Cylinder 255  
 Partition Disk #7, Partition #0

Partition Size 151.17 GB (162,317,467,648 bytes)  
 Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE8  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 29.09 GB (31,239,613,440 bytes)  
 Total Cylinders 3,798  
 Total Sectors 61,014,870  
 Total Tracks 968,490  
 Tracks/Cylinder 255  
 Partition Disk #8, Partition #0  
 Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE9  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 1.39 TB (1,533,759,736,320 bytes)  
 Total Cylinders 186,469  
 Total Sectors 2,995,624,485  
 Total Tracks 47,549,595  
 Tracks/Cylinder 255  
 Partition Disk #9, Partition #0  
 Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE17  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 200.19 GB (214,951,242,240 bytes)  
 Total Cylinders 26,133

Total Sectors 419,826,645  
Total Tracks 6,663,915  
Tracks/Cylinder 255  
Partition Disk #17, Partition #0  
Partition Size 200.19 GB (214,950,739,968 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE18  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.36 GB (162,523,307,520 bytes)  
Total Cylinders 19,759  
Total Sectors 317,428,335  
Total Tracks 5,038,545  
Tracks/Cylinder 255  
Partition Disk #18, Partition #0  
Partition Size 151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE19  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.17 GB (162,317,675,520 bytes)  
Total Cylinders 19,734  
Total Sectors 317,026,710  
Total Tracks 5,032,170  
Tracks/Cylinder 255  
Partition Disk #19, Partition #0  
Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE20  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available

SCSI Target ID Not Available  
Sectors/Track 63  
Size 29.09 GB (31,239,613,440 bytes)  
Total Cylinders 3,798  
Total Sectors 61,014,870  
Total Tracks 968,490  
Tracks/Cylinder 255  
Partition Disk #20, Partition #0  
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE15  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 1.91 TB (2,097,150,289,920 bytes)  
Total Cylinders 254,964  
Total Sectors 4,095,996,660  
Total Tracks 65,015,820  
Tracks/Cylinder 255  
Partition Disk #15, Partition #0  
Partition Size 1.91 TB (2,097,149,902,848 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE16  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 234.09 GB (251,348,106,240 bytes)  
Total Cylinders 30,558  
Total Sectors 490,914,270  
Total Tracks 7,792,290  
Tracks/Cylinder 255  
Partition Disk #16, Partition #0  
Partition Size 234.09 GB (251,347,861,504 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE21  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk

Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 200.19 GB (214,951,242,240 bytes)  
Total Cylinders 26,133  
Total Sectors 419,826,645  
Total Tracks 6,663,915  
Tracks/Cylinder 255  
Partition Disk #21, Partition #0  
Partition Size 200.19 GB (214,950,739,968 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE22  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.36 GB (162,523,307,520 bytes)  
Total Cylinders 19,759  
Total Sectors 317,428,335  
Total Tracks 5,038,545  
Tracks/Cylinder 255  
Partition Disk #22, Partition #0  
Partition Size 151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE23  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.17 GB (162,317,675,520 bytes)  
Total Cylinders 19,734  
Total Sectors 317,026,710  
Total Tracks 5,032,170  
Tracks/Cylinder 255  
Partition Disk #23, Partition #0  
Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE24  
Manufacturer Not Available

```

Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       29.09 GB (31,239,613,440 bytes)
Total Cylinders 3,798
Total Sectors 61,014,870
Total Tracks 968,490
Tracks/Cylinder 255
Partition Disk #24, Partition #0
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE25
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       1.39 TB (1,533,759,736,320 bytes)
Total Cylinders 186,469
Total Sectors 2,995,624,485
Total Tracks 47,549,595
Tracks/Cylinder 255
Partition Disk #25, Partition #0
Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE26
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       200.19 GB (214,951,242,240 bytes)
Total Cylinders 26,133
Total Sectors 419,826,645
Total Tracks 6,663,915
Tracks/Cylinder 255
Partition Disk #26, Partition #0
Partition Size 200.19 GB (214,950,739,968 bytes)

```

```

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE27
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       151.36 GB (162,523,307,520 bytes)
Total Cylinders 19,759
Total Sectors 317,428,335
Total Tracks 5,038,545
Tracks/Cylinder 255
Partition Disk #27, Partition #0
Partition Size 151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE28
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       151.17 GB (162,317,675,520 bytes)
Total Cylinders 19,734
Total Sectors 317,026,710
Total Tracks 5,032,170
Tracks/Cylinder 255
Partition Disk #28, Partition #0
Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE29
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       29.09 GB (31,239,613,440 bytes)
Total Cylinders 3,798
Total Sectors 61,014,870
Total Tracks 968,490

```

```

Tracks/Cylinder 255
Partition Disk #29, Partition #0
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE30
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       1.39 TB (1,533,759,736,320 bytes)
Total Cylinders 186,469
Total Sectors 2,995,624,485
Total Tracks 47,549,595
Tracks/Cylinder 255
Partition Disk #30, Partition #0
Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE0
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size       200.19 GB (214,951,242,240 bytes)
Total Cylinders 26,133
Total Sectors 419,826,645
Total Tracks 6,663,915
Tracks/Cylinder 255
Partition Disk #0, Partition #0
Partition Size 200.19 GB (214,950,739,968 bytes)

Partition Starting Offset 131,072 bytes

Description  \\.\PHYSICALDRIVE1
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type  Fixed hard disk
Partitions  1
SCSI Bus   Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

```

Size 151.36 GB (162,523,307,520 bytes)  
Total Cylinders 19,759  
Total Sectors 317,428,335  
Total Tracks 5,038,545  
Tracks/Cylinder 255  
Partition Disk #1, Partition #0  
Partition Size 151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE2  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.17 GB (162,317,675,520 bytes)  
Total Cylinders 19,734  
Total Sectors 317,026,710  
Total Tracks 5,032,170  
Tracks/Cylinder 255  
Partition Disk #2, Partition #0  
Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE3  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 29.09 GB (31,239,613,440 bytes)  
Total Cylinders 3,798  
Total Sectors 61,014,870  
Total Tracks 968,490  
Tracks/Cylinder 255  
Partition Disk #3, Partition #0  
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE4  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available

SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 1.39 TB (1,533,759,736,320 bytes)  
Total Cylinders 186,469  
Total Sectors 2,995,624,485  
Total Tracks 47,549,595  
Tracks/Cylinder 255  
Partition Disk #4, Partition #0  
Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 200.19 GB (214,951,242,240 bytes)  
Total Cylinders 26,133  
Total Sectors 419,826,645  
Total Tracks 6,663,915  
Tracks/Cylinder 255  
Partition Disk #45, Partition #0  
Partition Size 200.19 GB (214,957,031,424 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE6  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.36 GB (162,523,307,520 bytes)  
Total Cylinders 19,759  
Total Sectors 317,428,335  
Total Tracks 5,038,545  
Tracks/Cylinder 255  
Partition Disk #46, Partition #0  
Partition Size 151.37 GB (162,529,280,000 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE7  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512

Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 151.17 GB (162,317,675,520 bytes)  
Total Cylinders 19,734  
Total Sectors 317,026,710  
Total Tracks 5,032,170  
Tracks/Cylinder 255  
Partition Disk #47, Partition #0  
Partition Size 151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE8  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 29.09 GB (31,239,613,440 bytes)  
Total Cylinders 3,798  
Total Sectors 61,014,870  
Total Tracks 968,490  
Tracks/Cylinder 255  
Partition Disk #48, Partition #0  
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description \\.\PHYSICALDRIVE9  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 1.39 TB (1,533,759,736,320 bytes)  
Total Cylinders 186,469  
Total Sectors 2,995,624,485  
Total Tracks 47,549,595  
Tracks/Cylinder 255  
Partition Disk #49, Partition #0  
Partition Size 1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes



```

Description          \\.\PHYSICALDRIVE10
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                200.19 GB (214,951,242,240 bytes)
Total Cylinders     26,133
Total Sectors       419,826,645
Total Tracks       6,663,915
Tracks/Cylinder    255
Partition Disk #10, Partition #0
Partition Size      200.19 GB (214,957,031,424 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE11
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                151.36 GB (162,523,307,520 bytes)
Total Cylinders     19,759
Total Sectors       317,428,335
Total Tracks       5,038,545
Tracks/Cylinder    255
Partition Disk #11, Partition #0
Partition Size      151.37 GB (162,529,280,000 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE12
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                151.17 GB (162,317,675,520 bytes)
Total Cylinders     19,734
Total Sectors       317,026,710
Total Tracks       5,032,170
Tracks/Cylinder    255
Partition Disk #12, Partition #0

```

```

Partition Size      151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE13
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                29.09 GB (31,239,613,440 bytes)
Total Cylinders     3,798
Total Sectors       61,014,870
Total Tracks       968,490
Tracks/Cylinder    255
Partition Disk #13, Partition #0
Partition Size      29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE14
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                1.39 TB (1,533,759,736,320 bytes)
Total Cylinders     186,469
Total Sectors       2,995,624,485
Total Tracks       47,549,595
Tracks/Cylinder    255
Partition Disk #14, Partition #0
Partition Size      1.39 TB (1,533,759,704,064 bytes)

Partition Starting Offset 32,256 bytes

Description          \\.\PHYSICALDRIVE31
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                200.19 GB (214,951,242,240 bytes)
Total Cylinders     26,133

```

```

Total Sectors       419,826,645
Total Tracks       6,663,915
Tracks/Cylinder    255
Partition Disk #31, Partition #0
Partition Size      200.19 GB (214,950,739,968 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE32
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                151.36 GB (162,523,307,520 bytes)
Total Cylinders     19,759
Total Sectors       317,428,335
Total Tracks       5,038,545
Tracks/Cylinder    255
Partition Disk #32, Partition #0
Partition Size      151.36 GB (162,522,988,544 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE33
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available
SCSI Target ID     Not Available
Sectors/Track      63
Size                151.17 GB (162,317,675,520 bytes)
Total Cylinders     19,734
Total Sectors       317,026,710
Total Tracks       5,032,170
Tracks/Cylinder    255
Partition Disk #33, Partition #0
Partition Size      151.17 GB (162,317,467,648 bytes)

Partition Starting Offset 131,072 bytes

Description          \\.\PHYSICALDRIVE34
Manufacturer         Not Available
Model               Not Available
Bytes/Sector        512
Media Loaded        Yes
Media Type          Fixed hard disk
Partitions          1
SCSI Bus            Not Available
SCSI Logical Unit   Not Available
SCSI Port           Not Available

```

SCSI Target ID Not Available  
Sectors/Track 63  
Size 29.09 GB (31,239,613,440 bytes)  
Total Cylinders 3,798  
Total Sectors 61,014,870  
Total Tracks 968,490  
Tracks/Cylinder 255  
Partition Disk #34, Partition #0  
Partition Size 29.09 GB (31,239,176,192 bytes)

Partition Starting Offset 131,072 bytes

Description Disk drive  
Manufacturer (Standard disk drives)  
Model HP LOGICAL VOLUME SCSI Disk Device  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus 0  
SCSI Logical Unit 0  
SCSI Port 2  
SCSI Target ID 4  
Sectors/Track 32  
Size 33.89 GB (36,385,505,280 bytes)  
Total Cylinders 8,709  
Total Sectors 71,065,440  
Total Tracks 2,220,795  
Tracks/Cylinder 255  
Partition Disk #50, Partition #0  
Partition Size 33.88 GB (36,381,310,976 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item	Value
Name	Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&2D3CC7DB&0&00000010  
Memory Address 0xFDF00000-0xFDF00000  
I/O Port 0x0000F000-0x0000FF00  
Memory Address 0xFDEF0000-0xFDEF0000  
IRQ Channel IRQ 30  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&34D91D7D&0&00080010  
Memory Address 0xFDD00000-0xFDD00000  
I/O Port 0x0000E000-0x0000EFFF  
Memory Address 0xFDCF0000-0xFDCF0000

IRQ Channel IRQ 31  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&FD36652&0&00480010  
Memory Address 0xFDB00000-0xFDB00000  
I/O Port 0x0000D000-0x0000FF00  
Memory Address 0xFDAF0000-0xFDAF0000  
IRQ Channel IRQ 31  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array E500 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3237103C&REV\_0  
3\6&25161807&0&00080020  
Memory Address 0xFD800000-0xFD800000  
I/O Port 0x0000C000-0x0000CFFF  
Memory Address 0xFD7F0000-0xFD7F0000  
IRQ Channel IRQ 34  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array E500 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3237103C&REV\_0  
3\6&D0AAD5F&0&00100020  
Memory Address 0xFD600000-0xFD600000  
I/O Port 0x0000B000-0x0000BFFF  
Memory Address 0xFD5F0000-0xFD5F0000  
IRQ Channel IRQ 35  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&266ABA75&0&00400020  
Memory Address 0xFD000000-0xFD000000  
I/O Port 0x00008000-0x0000CFFF  
Memory Address 0xFCFF0000-0xFCFF0000  
IRQ Channel IRQ 33

Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&1060DC&0&00480020  
Memory Address 0xFD200000-0xFD200000  
I/O Port 0x00009000-0x00009FFF  
Memory Address 0xFD1F0000-0xFD1F0000  
IRQ Channel IRQ 34  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array E500 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3237103C&REV\_0  
3\6&239FC03B&0&00500020  
Memory Address 0xFD400000-0xFD400000  
I/O Port 0x0000A000-0x0000AFFF  
Memory Address 0xFD3F0000-0xFD3F0000  
IRQ Channel IRQ 35  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&26310812&0&00000030  
Memory Address 0xFCDF0000-0xFCDF0000  
I/O Port 0x00007000-0x00007FFF  
Memory Address 0xFCDF0000-0xFCDF0000  
IRQ Channel IRQ 28  
Driver c:\windows\system32\drivers\hpcqissb.sys  
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_3230&SUBSYS\_3223103C&REV\_0  
3\6&4A133F&0&00080030  
Memory Address 0xFCB00000-0xFCB00000  
I/O Port 0x00006000-0x00006FFF  
Memory Address 0xFCAF0000-0xFCAF0000  
IRQ Channel IRQ 29

```

Driver c:\windows\system32\drivers\hpcqciissb.sys
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26
KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&16DF261B&0&00480030
Memory Address 0xFC900000-0xFC9FFFFF
I/O Port 0x00005000-0x00007FFF
Memory Address 0xFC8F0000-0xFC8F0FFF
IRQ Channel IRQ 29
Driver c:\windows\system32\drivers\hpcqciissb.sys
(6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26
KB (61,704 bytes), 6/20/2007 1:15 PM)

Name Smart Array P400 Controller
Manufacturer Hewlett-Packard Company
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3234103C&REV_0
3\4&187919FE&0&00E0
Memory Address 0xF7E00000-0xF7EFFFFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0xF7DF0000-0xF7DF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciissb2.sys
(6.6.0.64 Build 5 (x86-64) built by: buildsrv, 59.30
KB (60,728 bytes), 6/20/2007 4:57 PM)

[IDE]

Item Value
Name Standard Dual Channel PCI IDE Controller

Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F
Driver c:\windows\system32\drivers\pciide.sys
(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 6.00 KB
(6,144 bytes), 11/30/2005 6:00 AM)

Name Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14
Driver c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 145.00 KB
(148,480 bytes), 11/30/2005 6:00 AM)

```

```

Name Secondary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8

I/O Port 0x00000170-0x00000177
I/O Port 0x00000376-0x00000376
Driver c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 145.00 KB
(148,480 bytes), 11/30/2005 6:00 AM)

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code
Base System Device
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0
3\4&2014205D&0&20F0 The drivers for this device are
not installed.
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&2014205D&0&22F0 The drivers for this device are
not installed.
PCI Device
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0
0\4&2014205D&0&26F0 The drivers for this device are
not installed.
Not Available ACPI\IPI0001\0 The drivers
for this device are not installed.

[USB]

Device PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E9
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EA
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EB
Standard Enhanced PCI to USB Host Controller
PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EF
Standard Universal PCI to USB Host Controller
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&2014205D&0&24F0

[Software Environment]

[System Drivers]

```

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	
acpi	Microsoft ACPI Driver		
	c:\windows\system32\drivers\acpi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC		
	c:\windows\system32\drivers\acpiec.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
afd	AFD		
	c:\windows\system32\drivers\afd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
aic78xx	aic78xx	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
aliide	Aliide	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
amdide	AmdIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
arc	arc	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
asynctac	RAS Asynchronous Media Driver		
	c:\windows\system32\drivers\asynctac.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
atapi	Standard IDE/ESDI Hard Disk Controller		
	c:\windows\system32\drivers\atapi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	
ati2mtag	ati2mtag		
	c:\windows\system32\drivers\ati2mtag.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes

atmarpc	ATM ARP Client Protocol				
	c:\windows\system32\drivers\atmarpc.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
audstub	Audio Stub Driver				
	c:\windows\system32\drivers\audstub.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
b06bdrv	HP Virtual Bus Device				
	c:\windows\system32\drivers\bxvbda.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
b06diag	HP NC370 Diag Driver				
	c:\windows\system32\drivers\bxdiaga.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
beep	Beep				
	c:\windows\system32\drivers\beep.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
bus_use	bus_use.sys				
	\\??c:\windows\system32\drivers\bus_use.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
cdac15ba	CdaC15BA				
	c:\windows\system32\drivers\cdac15ba.sys				
	Kernel Driver	Yes	Auto		
	Running	OK	Normal	No	Yes
cdad10ba	CdaD10BA				
	c:\windows\system32\drivers\cdad10ba.sys				
	Kernel Driver	Yes	Auto		
	Running	OK	Normal	No	Yes
cdfs	Cdfs				
	c:\windows\system32\drivers\cdfs.sys				
	File System Driver	Yes	Disabled		
	Running	OK	Normal	No	Yes
cdrom	CD-ROM Driver				
	c:\windows\system32\drivers\cdrom.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
changer	Changer	Not Available			
	No	System	Stopped	OK	
	Ignore	No	No		
clusdisk	Cluster Disk Driver				
	c:\windows\system32\drivers\clusdisk.sys				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
cmdide	CmdIde	Not Available			
	No	Disabled	Stopped	OK	
	Normal	No	No		

cpqcissm	cpqcissm	Not Available			
	No	Disabled	Stopped	OK	
	Normal	No	No		
cpqteam	HP Network Configuration Utility				
	c:\windows\system32\drivers\cpqteam.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
crdisk	CRC Disk Filter Driver				
	c:\windows\system32\drivers\crdisk.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
dfsdriver	DfsDriver				
	c:\windows\system32\drivers\dfs.sys				
	File System Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
disk	Disk Driver				
	c:\windows\system32\drivers\disk.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
dmbboot	dmbboot				
	c:\windows\system32\drivers\dmbboot.sys				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
dmio	Logical Disk Manager Driver				
	c:\windows\system32\drivers\dmio.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
dmload	dmload				
	c:\windows\system32\drivers\dmload.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
dpti2o	dpti2o	Not Available			
	No	Disabled	Stopped	OK	
	Normal	No	No		
elxstor	elxstor	Not Available			
	No	Disabled	Stopped	OK	
	Normal	No	No		
em	em				
	\\??c:\windows\system32\drivers\em.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
fastfat	Fastfat				
	c:\windows\system32\drivers\fastfat.sys				
	File System Driver	No	Disabled		
	Stopped	OK	Normal	No	No
fdc	Floppy Disk Controller Driver				
	c:\windows\system32\drivers\fdc.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
fips	Fips				
	c:\windows\system32\drivers\fips.sys				
	Kernel Driver	Yes	System		

	Running	OK	Normal	No	Yes
flpydisk	Floppy Disk Driver				
	c:\windows\system32\drivers\flpydisk.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
fltmgr	FltMgr				
	c:\windows\system32\drivers\fltmgr.sys				
	File System Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
ftdisk	Volume Manager Driver				
	c:\windows\system32\drivers\ftdisk.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
gpc	Generic Packet Classifier				
	c:\windows\system32\drivers\msgpc.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
hidusb	Microsoft HID Class Driver				
	c:\windows\system32\drivers\hidusb.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
hpcisss	hpcisss				
	c:\windows\system32\drivers\hpcisss.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
hpcisss2	HpCISs2				
	c:\windows\system32\drivers\hpcisss2.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
hpqcissb	Smart Array Controllers Non-Miniport Bus Driver				
	c:\windows\system32\drivers\hpqcissb.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
hpqcissd	Smart Array Controllers Non-Miniport Disk Driver				
	c:\windows\system32\drivers\hpqcissd.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
http	HTTP				
	c:\windows\system32\drivers\http.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
i2omgmt	i2omgmt	Not Available			
	No	System	Stopped	OK	
	Normal	No	No		
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver				
	c:\windows\system32\drivers\i8042prt.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes

iirsp	iirsp	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
imapi	CD-Burning Filter Driver					
	c:\windows\system32\drivers\imapi.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
intelide	IntelIde	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
intelppm	Intel Processor Driver					
	c:\windows\system32\drivers\intelppm.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ip6fw	IPv6 Windows Firewall Driver					
	c:\windows\system32\drivers\ip6fw.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ipfilterdriver	IP Traffic Filter Driver					
	c:\windows\system32\drivers\ipfltdrv.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ipinip	IP in IP Tunnel Driver					
	c:\windows\system32\drivers\ipinip.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ipnat	IP Network Address Translator					
	c:\windows\system32\drivers\ipnat.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ipsec	IPSEC driver					
	c:\windows\system32\drivers\ipsec.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
isapnp	PnP ISA/EISA Bus Driver					
	c:\windows\system32\drivers\isapnp.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Critical	No	Yes	
kbdclass	Keyboard Class Driver					
	c:\windows\system32\drivers\kbdclass.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
kbdhid	Keyboard HID Driver					
	c:\windows\system32\drivers\kbdhid.sys					
	Kernel Driver	Yes	System			
	Running	OK	Ignore	No	Yes	
ksecdd	KSecDD					
	c:\windows\system32\drivers\ksecdd.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	

ksthunk	Kernel Streaming WOW64 Thunk Service					
	c:\windows\system32\drivers\ksthunk.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
l2nd	HP NC370 Multifunction Gigabit Server Adapter					
	c:\windows\system32\drivers\bxnd52a.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
lp6nds35	lp6nds35	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
mnmdd	mnmdd					
	c:\windows\system32\drivers\mnmdd.sys					
	Kernel Driver	Yes	System			
	Running	OK	Ignore	No	Yes	
modem	Modem					
	c:\windows\system32\drivers\modem.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Ignore	No	No	
mouclass	Mouse Class Driver					
	c:\windows\system32\drivers\mouclass.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
mouhid	Mouse HID Driver					
	c:\windows\system32\drivers\mouhid.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Ignore	No	Yes	
mountmgr	Mount Point Manager					
	c:\windows\system32\drivers\mountmgr.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
mraid35x	mraid35x	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
mrxdav	WebDav Client Redirector					
	c:\windows\system32\drivers\mrxdav.sys					
	File System Driver	No	Manual			
	Stopped	OK	Normal	No	No	
mrxsmmb	MRXSMB					
	c:\windows\system32\drivers\mrxsmmb.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
msfs	Msfs					
	c:\windows\system32\drivers\msfs.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
mssmbios	Microsoft System Management BIOS Driver					
	c:\windows\system32\drivers\mssmbios.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	

mup	Mup					
	c:\windows\system32\drivers\mup.sys					
	File System Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
ndis	NDIS System Driver					
	c:\windows\system32\drivers\ndis.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
ndistapi	Remote Access NDIS TAPI Driver					
	c:\windows\system32\drivers\ndistapi.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ndisuio	NDIS Usermode I/O Protocol					
	c:\windows\system32\drivers\ndisuio.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ndiswan	Remote Access NDIS WAN Driver					
	c:\windows\system32\drivers\ndiswan.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ndproxy	NDIS Proxy					
	c:\windows\system32\drivers\ndproxy.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
netbios	NetBIOS Interface					
	c:\windows\system32\drivers\netbios.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
netbt	NetBios over Tcpip					
	c:\windows\system32\drivers\netbt.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
nfrd960	nfrd960	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
npfs	Npfs					
	c:\windows\system32\drivers\npfs.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
ntfs	Ntfs					
	c:\windows\system32\drivers\ntfs.sys					
	File System Driver	Yes	Disabled			
	Running	OK	Normal	No	Yes	
null	Null					
	c:\windows\system32\drivers\null.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
parport	Parport					
	c:\windows\system32\drivers\parport.sys					
	Kernel Driver	No	Manual			

	Stopped	OK	Ignore	No	No
partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys Kernel Driver Yes Boot Running OK Normal No Yes				
pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys Kernel Driver Yes Boot Running OK Critical No Yes				
pciide	PCIIde c:\windows\system32\drivers\pciide.sys Kernel Driver Yes Boot Running OK Normal No Yes				
pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys Kernel Driver No Disabled Stopped OK Normal No No				
pdcomp	PDCOMP Not Available Kernel Driver No Manual Stopped OK Ignore No No				
pdframe	PDFRAME Not Available Kernel Driver No Manual Stopped OK Ignore No No				
pdreli	PDRELI Not Available Kernel Driver No Manual Stopped OK Ignore No No				
pdrframe	PDRFRAME Not Available Kernel Driver No Manual Stopped OK Ignore No No				
pmxdrv	pmxdrv \\??\c:\windows\system32\drivers\pmxdrv.sys Kernel Driver No Manual Stopped OK Normal No No				
pptpminiport	WAN Miniport (PPTP) c:\windows\system32\drivers\raspttp.sys Kernel Driver Yes Manual Running OK Normal No Yes				
ptilink	Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys Kernel Driver Yes Manual Running OK Normal No Yes				
ql2300	ql2300 Not Available Kernel Driver No Disabled Stopped OK Normal No No				
rasacd	Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys Kernel Driver Yes System Running OK Normal No Yes				
rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys Kernel Driver Yes Manual Running OK Normal No Yes				

raspppoe	Remote Access PPPOE Driver c:\windows\system32\drivers\raspppoe.sys Kernel Driver Yes Manual Running OK Normal No Yes				
raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys Kernel Driver Yes Manual Running OK Normal No Yes				
rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys File System Driver Yes System Running OK Normal No Yes				
rdpccd	RDPCCDD c:\windows\system32\drivers\rdpccd.sys Kernel Driver Yes System Running OK Ignore No Yes				
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys Kernel Driver Yes Manual Running OK Normal No Yes				
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys Kernel Driver Yes Manual Running OK Ignore No Yes				
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys Kernel Driver Yes System Running OK Normal No Yes				
rlndebug	RLN Debugger \\??\c:\windows\system32\drivers\rlndebug.sys Kernel Driver No Manual Stopped OK Normal No No				
secdrv	Security Driver c:\windows\system32\drivers\secdrv.sys Kernel Driver Yes Auto Running OK Normal No Yes				
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys Kernel Driver No Manual Stopped OK Normal No No				
serial	Serial port driver c:\windows\system32\drivers\serial.sys Kernel Driver No System Stopped OK Ignore No No				
sfloppy	High-Capacity Floppy Disk Drive c:\windows\system32\drivers\sfloppy.sys Kernel Driver No Manual Stopped OK Normal No No				

simbad	Simbad Not Available Kernel Driver No Disabled Stopped OK Normal No No			
srv	Srv c:\windows\system32\drivers\srv.sys File System Driver Yes Manual Running OK Normal No Yes			
swenum	Software Bus Driver c:\windows\system32\drivers\swenum.sys Kernel Driver Yes Manual Running OK Normal No Yes			
symc8xx	symc8xx Not Available Kernel Driver No Disabled Stopped OK Normal No No			
symmpi	symmpi Not Available Kernel Driver No Disabled Stopped OK Normal No No			
sym_hi	sym_hi Not Available Kernel Driver No Disabled Stopped OK Normal No No			
sym_u3	sym_u3 Not Available Kernel Driver No Disabled Stopped OK Normal No No			
tcpip	TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys Kernel Driver Yes System Running OK Normal No Yes			
tdpipe	TDPIPE c:\windows\system32\drivers\tdpipe.sys Kernel Driver No Manual Stopped OK Ignore No No			
tdtcp	TDTCP c:\windows\system32\drivers\tdtcp.sys Kernel Driver Yes Manual Running OK Ignore No Yes			
termdd	Terminal Device Driver c:\windows\system32\drivers\termdd.sys Kernel Driver Yes System Running OK Normal No Yes			
toside	TosIde Not Available Kernel Driver No Disabled Stopped OK Normal No No			
udfs	Udfs c:\windows\system32\drivers\udfs.sys File System Driver No Disabled Stopped OK Normal No No			
ultra	ultra Not Available Kernel Driver No Disabled Stopped OK Normal No No			
update	Microcode Update Driver c:\windows\system32\drivers\update.sys Kernel Driver Yes Manual Running OK Normal No Yes			

```

usbccgp Microsoft USB Generic Parent Driver
c:\windows\system32\drivers\usbccgp.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

usbhci Microsoft USB 2.0 Enhanced Host Controller
Miniport Driver
c:\windows\system32\drivers\usbhci.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

usbhub Microsoft USB Standard Hub Driver
c:\windows\system32\drivers\usbhub.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

usbstor USB Mass Storage Driver
c:\windows\system32\drivers\usbstor.sys
Kernel Driver No Manual
Stopped OK Normal No No

usbuhci Microsoft USB Universal Host Controller
Miniport Driver
c:\windows\system32\drivers\usbuhci.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

vga vga
c:\windows\system32\drivers\vgapnp.sys
Kernel Driver No Manual
Stopped OK Ignore No No

vgasave VGA Display Controller.
c:\windows\system32\drivers\vga.sys
Kernel Driver Yes System
Running OK Ignore No Yes

viaide ViaIde Not Available Kernel Driver
No Disabled Stopped OK
Normal No No

volsnap Storage volumes
c:\windows\system32\drivers\volsnap.sys
Kernel Driver Yes Boot
Running OK Normal No Yes

wanarp Remote Access IP ARP Driver
c:\windows\system32\drivers\wanarp.sys
Kernel Driver Yes Manual
Running OK Normal No Yes

wdf01000 Wdf01000
c:\windows\system32\drivers\wdf01000.sys
Kernel Driver Yes Boot
Running OK Normal No Yes

wdica WDICA Not Available Kernel Driver
No Manual Stopped OK
Ignore No No

wlbs Network Load Balancing
c:\windows\system32\drivers\wlbs.sys
Kernel Driver No Manual

```

```

Stopped OK Normal No No

[Signed Drivers]

Device Name Signed Device Class
Driver Version Driver Date
Manufacturer INF Name Driver Name
Device ID

Microsoft System Management BIOS Driver Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\SYSTEM\0002
Microcode Update Device Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\SYSTEM\0001
Plug and Play Software Device Enumerator Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\SYSTEM\0000
Terminal Server Mouse Driver Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\RDP_MOU\0000
Terminal Server Keyboard Driver Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\RDP_KBD\0000
Terminal Server Device Redirector Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available ROOT\RDPDR\0000
Direct Parallel Yes NET 5.2.3790.1830
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_PTMINIPORT\0000
WAN Miniport (PPTP) Yes NET 5.2.3790.1830
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_PPTPMINIPORT\0000
WAN Miniport (PPPOE) Yes NET
5.2.3790.1830 10/1/2002 Microsoft
netrasa.inf Not Available
ROOT\MS_PPPOEMINIPORT\0000
WAN Miniport (IP) Yes NET 5.2.3790.1830
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_NDISWANIP\0000
WAN Miniport (L2TP) Yes NET 5.2.3790.1830
10/1/2002 Microsoft netrasa.inf Not
Available ROOT\MS_L2TPMINIPORT\0000
Video Codecs Yes MEDIA 5.2.3790.1830
10/1/2002 (Standard system devices)
wave.inf Not Available
ROOT\MEDIA\MS_MMVID
Legacy Video Capture Devices Yes MEDIA
5.2.3790.1830 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMVCD
Media Control Devices Yes MEDIA
5.2.3790.1830 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMMCI

```

```

Legacy Audio Drivers Yes MEDIA
5.2.3790.1830 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMDRV
Audio Codecs Yes MEDIA 5.2.3790.1830
10/1/2002 (Standard system devices)
wave.inf Not Available
ROOT\MEDIA\MS_MMACM
Wdf01000 Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available ROOT\LEGACY_WDF01000\0000
Remote Access IP ARP Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_WANARP\0000
volsnap Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_VOLSNAP\0000
VGA Display Controller. Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_VGASAVE\0000
TDTCP Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_TDTCP\0000
TCP/IP Protocol Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_TCPIP\0000
Security Driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_SECDRV\0000
RLN Debugger Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_RLNDEBUG\0000
RDPWD Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_RDPWD\0000
RDPCCD Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_RDPCCD\0000
Remote Access Auto Connection Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_RASACD\0000
pmxdrv Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_PMXDRV\0000
Partition Manager Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_PARTMGR\0000
Null Not Available LEGACYDRIVER Not
Available Not Available Not Available Not

```

```

Available Not Available ROOT\LEGACY_NULL\0000
NetBios over Tcptip Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_NETBT\0000
NDProxy Not Available LEGACYDRIVER Not
Available Not Available Not Available
Available Not Available
ROOT\LEGACY_NDPROXY\0000
NDIS Usermode I/O Protocol Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_NDISUIO\0000
Remote Access NDIS TAPI Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_NDISIUIO\0000
NDIS System Driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_NDIS\0000
mountmgr Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_MOUNTMGR\0000
modem Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_MODEM\0000
mmdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_MMDD\0000
ksecdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_KSECDD\0000
IPSEC driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_IPSEC\0000
IP Network Address Translator Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_IPNAT\0000
hpcisss Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_HPCISSS\0000
Generic Packet Classifier Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_GPC\0000
Fips Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_FIPS\0000
em Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_EM\0000

```

```

dmload Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_DMLoad\0000
dmbboot Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_DMBOOT\0000
CRC Disk Filter Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_CRCDISK\0000
CdaD10BA Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_CDAD10BA\0000
CdaC15BA Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_CDAC15BA\0000
Beep Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_BEEP\0000
AFD Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOT\LEGACY_AFD\0000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF04AF0
4A0FFSET4000LENGTH8787EC000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
B70FFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
B90FFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
B80FFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
CE0FFSET20000LENGTH25D7800000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
CFOFFSET20000LENGTH320C700000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available

```

```

STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
BBOFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
BA0FFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
BDOFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
C30FFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
CO0FFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
BC0FFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C6
BFOFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
DE0FFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
DFOFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
410FFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
400FFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
D10FFSET20000LENGTH25D7200000

```



```

Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
D6OFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
43OFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
42OFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
45OFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
E8OFFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
E9OFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
44OFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
47OFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
46OFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
EDOFFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
D2OFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
49OFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not

```

```

Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
48OFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
D5OFFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
DAOFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE488A38
38OFFSET20000LENGTH3A85800000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE488A38
3BOFFSET20000LENGTH1E847E000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4BOFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4AOFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4DOFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
C4OFFSET20000LENGTH25D7800000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
CAOFFSET20000LENGTH320C700000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4COFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4FOFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available

```

```

STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
4EOFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
33OFFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
30OFFSET20000LENGTH320C100000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
51OFFSET7E00LENGTH1651B33CC00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
50OFFSET20000LENGTH746000000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURED8D7C7
53OFFSET20000LENGTH25CAE00000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
34OFFSET20000LENGTH25D7200000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREF49B13
35OFFSET20000LENGTH320C100000
Volume Manager Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ROOT\FTDISK\0000
Logical Disk Manager Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\DMIO\0000
ACPI Fixed Feature Button Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\FIXEDBUTTON\2&DABA3FF&0
ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\THERMALZONE\THM0
Secondary IDE Channel Yes HDC
5.2.3790.1830 10/1/2002 (Standard IDE
ATA/ATAPI controllers) mshdc.inf Not Available
PCIIDE\IDECHANNEL\4&56E2F28&0&1
CD-ROM Drive Yes CDROM 5.2.3790.1830
10/1/2002 (Standard CD-ROM drives)
cdrom.inf Not Available
IDE\CDROMTEAC_DW-224E-

```

V\_\_\_\_\_C.CA\_\_\_\_\_\5&5FD9AC6&0&0.0.0

Primary IDE Channel Yes HDC 5.2.3790.1830  
 10/1/2002 (Standard IDE ATA/ATAPI  
 controllers) mshdc.inf Not Available  
 PCIIDE\IDECHANNEL\4&56E2F28&0&0

Standard Dual Channel PCI IDE Controller Yes  
 HDC 5.2.3790.1830 10/1/2002  
 (Standard IDE ATA/ATAPI controllers)  
 mshdc.inf Not Available  
 PCI\VEN\_8086&DEV\_269E&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&F9

Extended IO Bus Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0A06\4&2AA4AD3D&0

PS/2 Compatible Mouse Yes MOUSE  
 5.2.3790.1830 10/1/2002 Microsoft  
 msmouse.inf Not Available  
 ACPI\PNP0F13\4&2AA4AD3D&0

Standard 101/102-Key or Microsoft Natural PS/2  
 Keyboard Yes KEYBOARD 5.2.3790.1830  
 10/1/2002 (Standard keyboards)  
 keyboard.inf Not Available  
 ACPI\PNP0303\4&2AA4AD3D&0

System speaker Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0800\4&2AA4AD3D&0

Direct memory access controller Yes  
 SYSTEM 5.2.3790.1830 10/1/2002  
 (Standard system devices) machine.inf  
 Not Available  
 ACPI\PNP0200\4&2AA4AD3D&0

High precision event timer Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ACPI\PNP0103\0

System timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0100\4&2AA4AD3D&0

Not Available Not Available Not Available  
 Not Available Not Available Not Available  
 Available Not Available Not Available  
 Available Not Available Not Available  
 ACPI\IPI001\0

Motherboard resources Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ACPI\PNP0C02\0

PCI standard ISA bridge Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 PCI\VEN\_8086&DEV\_2670&SUBSYS\_00000000&REV\_0  
 9\3&61AAA01&0&F8

PCI Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available  
 PCI\VEN\_103C&DEV\_3302&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&26F0

Generic USB Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Generic USB Hub) usb.inf Not  
 Available USB\VID\_03F0&PID\_1327\6&18FFBC52&0&2  
 HID-compliant mouse Yes MOUSE 5.2.3790.1830  
 10/1/2002 Microsoft msmouse.inf Not  
 Available  
 HID\VID\_03F0&PID\_1027&MI\_01\8&25B103E6&0&00  
 00  
 USB Human Interface Device Yes HIDCLASS  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_01\7&2CD6FDA9&0&00  
 01  
 HID Keyboard Device Yes KEYBOARD 5.2.3790.1830  
 10/1/2002 (Standard keyboards)  
 keyboard.inf Not Available  
 HID\VID\_03F0&PID\_1027&MI\_00\7&2CDED77A1&0&0000  
 0  
 USB Human Interface Device Yes HIDCLASS  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_00\7&2CD6FDA9&0&00  
 00  
 USB Composite Device Yes USB  
 5.2.3790.1830 10/1/2002 (Standard USB  
 Host Controller) usb.inf Not Available  
 USB\VID\_03F0&PID\_1027\6&18FFBC52&0&1  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\5&26BC3420&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_3300&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&24F0  
 Base System Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available  
 PCI\VEN\_0E11&DEV\_B204&SUBSYS\_3305103C&REV\_0  
 3\4&2014205D&0&22F0  
 Base System Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available  
 PCI\VEN\_0E11&DEV\_B203&SUBSYS\_3305103C&REV\_0  
 3\4&2014205D&0&20F0  
 Plug and Play Monitor Yes MONITOR  
 5.2.3790.1830 10/1/2002 (Standard  
 monitor types) monitor.inf Not Available  
 DISPLAY\AV00000\5&E64F3B&0&10000080&01&03

Default Monitor Yes MONITOR 5.2.3790.1830  
 10/1/2002 (Standard monitor types)  
 monitor.inf Not Available  
 DISPLAY\DEFAULT\_MONITOR\5&E64F3B&0&10000001  
 &01&03  
 ATI ES1000 Yes DISPLAY 8.24.3.0  
 4/5/2006 ATI Technologies Inc.  
 oem17.inf Not Available  
 PCI\VEN\_1002&DEV\_515E&SUBSYS\_31FB103C&REV\_0  
 2\4&2014205D&0&18F0

Intel(R) 82801 PCI Bridge - 244E Yes  
 SYSTEM 5.2.3790.1830 10/1/2002  
 Intel machine.inf Not Available  
 PCI\VEN\_8086&DEV\_244E&SUBSYS\_00000000&REV\_D  
 9\3&61AAA01&0&F0

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB20\4&392538C3&0  
 Standard Enhanced PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_268C&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EF

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\4&41C0314&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_268B&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EB

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\4&A54F890&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_268A&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EA

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\4&37897620&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_2689&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&E9

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\4&7353027&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_2688&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&E8

Disk drive Yes DISKDRIVE 5.2.3790.1830  
 10/1/2002 (Standard disk drives)  
 disk.inf Not Available  
 SCSI\DISK&VEN\_HP&PROD\_LOGICAL\_VOLUME&REV\_2.  
 08\5&C8B13FA&0&040

HP Virtual LUN Yes SYSTEM 5.2.3790.1830  
 10/1/2002 Compaq scsidesv.inf Not

```

Available
  SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5c8B13FA&0&000
Smart Array P400 Controller Yes SCSIADAPTER
6.6.0.64 3/20/2007 Hewlett-Packard Company
oem10.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3234103C&REV_0
3\4&187919FE&0&00E0
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2690&SUBSYS_00000000&REV_0
9\3&61AAA01&0&E0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_3610&SUBSYS_00000000&REV_0
1\3&61AAA01&0&B0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360F&SUBSYS_00000000&REV_0
1\3&61AAA01&0&A8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360E&SUBSYS_00000000&REV_0
1\3&61AAA01&0&98
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360D&SUBSYS_00000000&REV_0
1\3&61AAA01&0&8B
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360C&SUBSYS_00000000&REV_0
1\3&61AAA01&0&88
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360B&SUBSYS_00000000&REV_0
1\3&61AAA01&0&87
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_360A&SUBSYS_00000000&REV_0
1\3&61AAA01&0&80
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf

```

```

Not Available
PCI\VEN_8086&DEV_360A&SUBSYS_00000000&REV_0
1\3&61AAA01&0&38
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&5
4612BC&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&5
4612BC&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&5
4612BC&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&5
4612BC&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&5
4612BC&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&16DF261B&0&00480030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&D7EE50A&0&480030
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
69390B5&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
69390B5&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
69390B5&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
69390B5&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard

```

```

oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
69390B5&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&4A133F&0&00080030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&D7EE50A&0&080030
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
86C1187&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
86C1187&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
86C1187&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
86C1187&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
86C1187&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&26310812&0&00000030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&D7EE50A&0&000030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\4&3A6C1E79&0&0030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available

```

```

PCI\VEN_8086&DEV_3609&SUBSYS_00000000&REV_0
1\3&61AAA01&0&30
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3608&SUBSYS_00000000&REV_0
1\3&61AAA01&0&28
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&C
5353F8&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&C
5353F8&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&C
5353F8&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&C
5353F8&0&0000004000000000
Smart Array E500 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_0
3\6&239FC03B&0&00500020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&1896B7CC&0&500020
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
8803D3A&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
8803D3A&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
8803D3A&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
8803D3A&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard

```

```

oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
8803D3A&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&1060DC&0&00480020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&1896B7CC&0&480020
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
264DBAA&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
264DBAA&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
264DBAA&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
264DBAA&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
264DBAA&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&266ABA75&0&00400020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&1896B7CC&0&400020
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
C297700&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
C297700&0&0200004000000000

```

```

Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
C297700&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
C297700&0&0000004000000000
Smart Array E500 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_0
3\6&D0AAD5F&0&00100020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&1896B7CC&0&100020
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
CC6C638&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
CC6C638&0&0000004000000000
Smart Array E500 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_0
3\6&25161807&0&00080020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&1896B7CC&0&080020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\4&10B72E73&0&0020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3607&SUBSYS_00000000&REV_0
1\3&61AAA01&0&20
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3606&SUBSYS_00000000&REV_0
1\3&61AAA01&0&18

```

```

Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&8
5E16E&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&8
5E16E&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&8
5E16E&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&8
5E16E&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&8
5E16E&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&FD36652&0&00480010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&373EA348&0&480010
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
A93D419&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
A93D419&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
A93D419&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
A93D419&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
A93D419&0&0000004000000000

```

```

Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&34D91D7D&0&00080010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&373EA348&0&080010
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
A3E53A4&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
A3E53A4&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem20.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
A3E53A4&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem19.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&2D3CC7DB&0&00000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\5&373EA348&0&000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10B5&DEV_8533&SUBSYS_00000000&REV_A
A\4&18FDC193&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3605&SUBSYS_00000000&REV_0
1\3&61AAA01&0&10

```

```

PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
1\4&1C28C1D&0&0308
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
1\5&E0AB67A&0&100008
HP NC3731 Multifunction Gigabit Server Adapter Yes
NET 3.7.19.0 10/4/2007 Hewlett-
Packard Company oem21.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\8&8818209&0&20050800
HP NC3731i Virtual Bus Device Yes SYSTEM
3.7.23.0 10/17/2007 Hewlett-
Packard Company oem22.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\7&5E3615B&0&0000080008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\6&17790229&0&00080008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
1\5&E0AB67A&0&080008
HP NC3731 Multifunction Gigabit Server Adapter Yes
NET 3.7.19.0 10/4/2007 Hewlett-
Packard Company oem21.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\8&1D0839D4&0&20050600
HP NC3731i Virtual Bus Device Yes SYSTEM
3.7.23.0 10/17/2007 Hewlett-
Packard Company oem22.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\7&2E6F32A9&0&0000000008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\6&363D1B6C&0&00000008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
1\5&E0AB67A&0&000008
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
1\4&1C28C1D&0&0008

```

```

PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3604&SUBSYS_00000000&REV_0
1\3&61AAA01&0&08
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_3600&SUBSYS_00000000&REV_0
1\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNPOA03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\29
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\28
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\27
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\26
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\25
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\24
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\21
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\20
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\19
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\18
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\17
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available

```

```

ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\16
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\13
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\12
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\11
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\10
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\9
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\8
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\5
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\4
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\3
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\2
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_29\0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.1830 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor x64-based PC Yes
COMPUTER 5.2.3790.1830 10/1/2002
(Standard computers) hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Available Not Available Not Available
HTREE\ROOT\0

```

[Environment Variables]

Variable	Value	User Name
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>
Path	C:\Program Files\HP\NCU;%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\Program Files(x86)\Microsoft SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files(x86)\Microsoft Visual Studio 8\Common7\IDE\PrivateAssemblies\;c:\Program Files\Microsoft SQL Server\90\DTS\Binn\	<SYSTEM>
windir	%SystemRoot%	<SYSTEM>
FP_NO_HOST_CHECK	NO	<SYSTEM>
OS	Windows_NT	<SYSTEM>
PROCESSOR_ARCHITECTURE	AMD64	<SYSTEM>
PROCESSOR_LEVEL	6	<SYSTEM>
PROCESSOR_IDENTIFIER	EM64T Family 6 Model 29 Stepping 1, GenuineIntel	<SYSTEM>
PROCESSOR_REVISION	1d01	<SYSTEM>
NUMBER_OF_PROCESSORS	24	<SYSTEM>
ClusterLog	C:\WINDOWS\cluster\cluster.log	
<SYSTEM>		
PATHEXT		
	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH	<SYSTEM>
TEMP	%SystemRoot%\TEMP	<SYSTEM>
TMP	%SystemRoot%\TEMP	<SYSTEM>
lib	C:\Program Files\SQLXML 4.0\bin\	<SYSTEM>
TEMP	%USERPROFILE%\Local Settings\Temp	NT
AUTHORITY\SYSTEM		
TMP	%USERPROFILE%\Local Settings\Temp	NT
AUTHORITY\SYSTEM		
TEMP	%USERPROFILE%\Local Settings\Temp	NT
AUTHORITY\NETWORK SERVICE		
TMP	%USERPROFILE%\Local Settings\Temp	NT
AUTHORITY\NETWORK SERVICE		
TEMP	%USERPROFILE%\Local Settings\Temp	
WARSHIP\Administrator		
TMP	%USERPROFILE%\Local Settings\Temp	
WARSHIP\Administrator		

[Print Jobs]

Document	Size	Owner	Notify	Status
	Time Submitted		Start Time	
	Until Time		Elapsed Time	
	Pages Printed		Job ID	Priority
	Parameters		Driver	Print
Processor Host	Print Queue		Data	Type Name

[Network Connections]

Local Name	Remote Name	Type
Status	User Name	

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set
Version	Size	File Date	Start Time	
system	idle	process	Not Available	0
Available	Not Available	Not Available	Not Available	Not Available
system	Not Available	4	8	0
1413120	Not Available	Not Available	Not Available	
smss.exe	Not Available	1012	11	
204800	1413120	8/7/2008 8:57 AM	Not Available	
Available	Not Available	Not Available	Not Available	
csrss.exe	Not Available	420	13	Not Available
Available	Not Available	8/7/2008 8:57 AM	Not Available	
Available	Not Available	Not Available	Not Available	
winlogon.exe	c:\windows\system32\winlogon.exe	544	13	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830	901.00 KB (922,624 bytes)		
(srv03_spl_rtm.050324-1447)	11/30/2005 6:00 AM			
services.exe	c:\windows\system32\services.exe	632	9	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	216.50 KB (221,696 bytes)	
11/30/2005 6:00 AM				
lsass.exe	c:\windows\system32\lsass.exe	660	9	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	14.00 KB (14,336 bytes)		
11/30/2005 6:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	840	8	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	
11/30/2005 6:00 AM				
svchost.exe	Not Available	940	8	
Not Available	Not Available	Not Available	Not Available	
8/7/2008 8:57 AM	Not Available	Not Available	Not Available	
Available	Not Available	Not Available	Not Available	
svchost.exe	c:\windows\system32\svchost.exe	1056	8	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	
11/30/2005 6:00 AM				
msdtc.exe	Not Available	1424	8	
Available	Not Available	8/7/2008 8:57 AM	Not Available	
Available	Not Available	Not Available	Not Available	
svchost.exe	c:\windows\system32\svchost.exe	1568	8	204800 1413120
8/7/2008 8:57 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	
11/30/2005 6:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	360	8	204800 1413120

8/7/2008 8:57 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	
11/30/2005 6:00 AM				
wmiprvse.exe	Not Available	508	8	
Not Available	Not Available	Not Available	Not Available	
8/7/2008 8:58 AM	Not Available	Not Available	Not Available	
Available	Not Available	Not Available	Not Available	
csrss.exe	Not Available	1076	13	Not Available
Available	Not Available	8/7/2008 8:59 AM	Not Available	
Available	Not Available	Not Available	Not Available	
winlogon.exe	c:\windows\system32\winlogon.exe	1128	13	204800 1413120
8/7/2008 8:59 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	901.00 KB (922,624 bytes)	
11/30/2005 6:00 AM				
rdpclip.exe	c:\windows\system32\rdpclip.exe	1400	8	204800 1413120
8/7/2008 8:59 AM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	99.00 KB (101,376 bytes)	
6/19/2007 4:26 PM				
explorer.exe	c:\windows\explorer.exe	1560	8	204800 1413120
8/7/2008 8:59 AM	6.00.3790.1830	(srv03_spl_rtm.050324-1447)	1.30 MB (1,364,480 bytes)	
11/30/2005 6:00 AM				
cpqteam.exe	c:\program files\hp\ncu\cpqteam.exe	1968	8	204800 1413120
8/7/2008 8:59 AM	8.70.0.15 81.50 KB (83,456 bytes)	6/28/2007 1:10 PM		
logon.scr	Not Available	1960	4	Not Available
Available	Not Available	8/7/2008 10:03 AM	Not Available	
Available	Not Available	Not Available	Not Available	
cmd.exe	c:\windows\system32\cmd.exe	2432	8	204800 1413120
8/7/2008 11:59 AM	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	538.50 KB (551,424 bytes)		
11/30/2005 6:00 AM				
sqlservr.exe	c:\program files\microsoft sql server\mssql.1\mssql\binn\sqlservr.exe	920	13	204800 1413120
8/7/2008 11:59 AM	2005.090.3042.00	36.72 MB (38,507,376 bytes)		
2/10/2007 9:03 AM				
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe	820	8	204800 1413120
8/7/2008 12:08 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	1.30 MB (1,363,456 bytes)	
6/19/2007 4:28 PM				
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsvc.exe	2508	8	204800 1413120
8/7/2008 12:08 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	1.52 MB (1,591,296 bytes)	
6/19/2007 4:28 PM				
wmiprvse.exe	Not Available	2872	8	
Not Available	Not Available	Not Available	Not Available	
8/7/2008 12:08 PM	Not Available	Not Available	Not Available	
Available	Not Available	Not Available	Not Available	

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer Path
winlogon	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	901.00 KB (922,624 bytes)	11/30/2005	Microsoft Corporation
6:00 AM				
ntdll	c:\windows\system32\ntdll.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.20 MB (1,257,472 bytes)	11/30/2005
6:00 AM				
kernel32	c:\windows\system32\kernel32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.43 MB (1,500,160 bytes)	11/30/2005
6:00 AM				
advapi32	c:\windows\system32\advapi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.00 MB (1,051,136 bytes)	11/30/2005
6:00 AM				
rpcrt4	c:\windows\system32\rpcrt4.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.63 MB (1,714,176 bytes)	11/30/2005
6:00 AM				
crypt32	c:\windows\system32\crypt32.dll	5.131.3790.1830 (srv03_spl_rtm.050324-1447)	1.36 MB (1,428,992 bytes)	11/30/2005
6:00 AM				
msasn1	c:\windows\system32\msasn1.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	152.50 KB (156,160 bytes)	11/30/2005
6:00 AM				
msvcrt	c:\windows\system32\msvcrt.dll	7.0.3790.1830 (srv03_spl_rtm.050324-1447)	508.00 KB (520,192 bytes)	11/30/2005
6:00 AM				
user32	c:\windows\system32\user32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.04 MB (1,085,952 bytes)	11/30/2005
6:00 AM				
gdi32	c:\windows\system32\gdi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	592.00 KB (606,208 bytes)	11/30/2005
6:00 AM				
nddeapi	c:\windows\system32\nddeapi.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	25.00 KB (25,600 bytes)	11/30/2005
6:00 AM				
profmap	c:\windows\system32\profmap.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	36.00 KB (36,864 bytes)	11/30/2005
6:00 AM				
netapi32	c:\windows\system32\netapi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	589.00 KB (603,136 bytes)	11/30/2005
6:00 AM				
userenv	c:\windows\system32\userenv.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.02 MB (1,069,056 bytes)	11/30/2005
6:00 AM				
psapi	c:\windows\system32\psapi.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	29.00 KB (29,696 bytes)	11/30/2005
6:00 AM				

regapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
108.50 KB (111,104 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\regapi.dll  
secur32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
120.00 KB (122,880 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\secur32.dll  
setupapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.45 MB (1,523,200 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\setupapi.dll  
version 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
28.00 KB (28,672 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\version.dll  
winsta 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
89.00 KB (91,136 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\winsta.dll  
ws2\_32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
176.50 KB (180,736 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ws2\_32.dll  
ws2help 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
30.50 KB (31,232 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ws2help.dll  
msgina 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.14 MB (1,193,472 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msgina.dll  
shsvcs 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
193.50 KB (198,144 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\shsvcs.dll  
shlwapi 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
606.50 KB (621,056 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\shlwapi.dll  
sfc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
6.00 KB (6,144 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sfc.dll  
sfc\_os 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
183.50 KB (187,904 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sfc\_os.dll  
wintrust 5.131.3790.1830 (srv03\_spl\_rtm.050324-1447)  
297.50 KB (304,640 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wintrust.dll  
imagehlp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
57.50 KB (58,880 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\imagehlp.dll  
ole32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
2.43 MB (2,543,616 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ole32.dll  
comctl32 6.0 (srv03\_spl\_rtm.050324-1447)  
1.51 MB (1,584,128 bytes) 6/19/2007

12:14 PM Microsoft Corporation  
c:\windows\winsxs\amd64\_microsoft.windows.c  
ommon-controls\_6595b64144ccf1df\_6.0.3790.1830\_x-  
ww\_aced72af\comctl32.dll  
winscard 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
230.00 KB (235,520 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\winscard.dll  
wtsapi32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
29.00 KB (29,696 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wtsapi32.dll  
winmm 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
303.50 KB (310,784 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\winmm.dll  
shell32 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
10.01 MB (10,492,416 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\shell32.dll  
sxs 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.91 MB (2,003,968 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sxs.dll  
rsaenh 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
241.96 KB (247,768 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rsaenh.dll  
wildap32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
390.00 KB (399,360 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wildap32.dll  
cscdll 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
151.50 KB (155,136 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\cscdll.dll  
dimntfy 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
28.00 KB (28,672 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\dimntfy.dll  
wlnotify 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
148.00 KB (151,552 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wlnotify.dll  
mpr 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
115.00 KB (117,760 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\mpr.dll  
oleaut32 5.2.3790.1830 1.06 MB (1,116,160  
bytes) 11/30/2005 6:00 AM Microsoft Corporation  
c:\windows\system32\oleaut32.dll  
winspool 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
247.00 KB (252,928 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\winspool.drv  
comctl32 5.82 (srv03\_spl\_rtm.050324-1447)  
934.50 KB (956,928 bytes) 6/19/2007  
12:14 PM Microsoft Corporation  
c:\windows\winsxs\amd64\_microsoft.windows.c  
ommon-controls\_6595b64144ccf1df\_5.82.3790.1830\_x-  
ww\_4d792d2a\comctl32.dll

uxtheme 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
494.50 KB (506,368 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\uxtheme.dll  
clbcatq 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
1447) 865.00 KB (885,760 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\clbcatq.dll  
comres 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
1447) 779.50 KB (798,208 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\comres.dll  
wbemprox 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
38.00 KB (38,912 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemprox.dll  
wbemcomn 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
524.00 KB (536,576 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemcomn.dll  
xpssp2res 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
2.77 MB (2,899,456 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\xpssp2res.dll  
wbemsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
58.00 KB (59,392 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemsvc.dll  
fastprox 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
866.50 KB (887,296 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\fastprox.dll  
msvcp60 7.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
919.50 KB (941,568 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msvcp60.dll  
ntdsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
127.50 KB (130,560 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ntdsapi.dll  
dnsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
297.50 KB (304,640 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\dnsapi.dll  
services 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
216.50 KB (221,696 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\services.exe  
ncobjapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
80.00 KB (81,920 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ncobjapi.dll  
sceerv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
594.50 KB (608,768 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sceerv.dll  
authz 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
167.00 KB (171,008 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\authz.dll  
umpnpgmr 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
205.00 KB (209,920 bytes) 11/30/2005



6:00 AM Microsoft Corporation  
c:\windows\system32\umpnpgmgr.dll  
eventlog 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
127.00 KB (130,048 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\eventlog.dll  
lsass 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
14.00 KB (14,336 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\lsass.exe  
lsasrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.50 MB (1,568,256 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\lsasrv.dll  
samlib 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
69.00 KB (70,656 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\samlib.dll  
samsrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.01 MB (1,059,328 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\samsrv.dll  
cryptdll 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
47.00 KB (48,128 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\cryptdll.dll  
msprivs 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
47.50 KB (48,640 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msprivs.dll  
kerberos 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
698.00 KB (714,752 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\kerberos.dll  
msvl\_0 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
253.00 KB (259,072 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msvl\_0.dll  
iphlpapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
177.00 KB (181,248 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\iphlpapi.dll  
netlogon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
666.00 KB (681,984 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netlogon.dll  
w32time 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
400.50 KB (410,112 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\w32time.dll  
schannel 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
248.00 KB (253,952 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\schannel.dll  
wdigest 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
130.50 KB (133,632 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wdigest.dll  
rassfm 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
36.00 KB (36,864 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rassfm.dll

kdcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
409.00 KB (418,816 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\kdcsvc.dll  
ntdsa 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
2.81 MB (2,948,096 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ntdsa.dll  
esent 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
2.26 MB (2,366,976 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\esent.dll  
ntdsatq 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
51.00 KB (52,224 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ntdsatq.dll  
mswsock 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
478.00 KB (489,472 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\mswsock.dll  
scecli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
308.00 KB (315,392 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\scecli.dll  
ws03res 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
794.00 KB (813,056 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ws03res.dll  
hnetcfg 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
561.00 KB (574,464 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\hnetcfg.dll  
wshtcpip 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
29.00 KB (29,696 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wshtcpip.dll  
pstorsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
36.00 KB (36,864 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\pstorsvc.dll  
psbase 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
124.00 KB (126,976 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\psbase.dll  
dssenh 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
226.96 KB (232,408 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\dssenh.dll  
svchost 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
24.50 KB (25,088 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\svchost.exe  
rpcss 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
672.00 KB (688,128 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rpcss.dll  
ntmarta 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
222.50 KB (227,840 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ntmarta.dll  
wkssvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
221.00 KB (226,304 bytes) 11/30/2005

6:00 AM Microsoft Corporation  
c:\windows\system32\wkssvc.dll  
wiarpc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
57.00 KB (58,368 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wiarpc.dll  
aelupsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
31.50 KB (32,256 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\aelupsvc.dll  
apphelp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
241.00 KB (246,784 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\apphelp.dll  
dmserver 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
36.50 KB (37,376 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\dmserver.dll  
cryptsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
114.00 KB (116,736 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\cryptsvc.dll  
certcli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
372.00 KB (380,928 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\certcli.dll  
atl 3.05.2284 96.50 KB (98,816 bytes)  
11/30/2005 6:00 AM Microsoft Corporation  
c:\windows\system32\atl.dll  
vssapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.26 MB (1,320,960 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\vssapi.dll  
es 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447)  
357.00 KB (365,568 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\es.dll  
srvsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
156.50 KB (160,256 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\srvsvc.dll  
wmisvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
227.00 KB (232,448 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wmisvc.dll  
sens 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
63.50 KB (65,024 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sens.dll  
comsvcs 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447)  
2.06 MB (2,156,544 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\comsvcs.dll  
browser 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
125.50 KB (128,512 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\browser.dll  
netrap 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
26.00 KB (26,624 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netrap.dll

wbemcore 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.24 MB (1,299,968 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcore.dll  
esscli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
626.50 KB (641,536 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\esscli.dll  
wmiutils 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
171.00 KB (175,104 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wmiutils.dll  
repdrvfs 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
353.50 KB (361,984 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\repdrvfs.dll  
wmiprvsd 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
743.00 KB (760,832 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wmiprvsd.dll  
wbemess 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
532.50 KB (545,280 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemess.dll  
ncprov 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
73.00 KB (74,752 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\ncprov.dll  
netman 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
457.00 KB (467,968 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netman.dll  
mprapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
154.50 KB (158,208 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\mprapi.dll  
activeds 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
348.50 KB (356,864 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\activeds.dll  
adslrpc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
240.50 KB (246,272 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\adslrpc.dll  
credui 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
202.00 KB (206,848 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\credui.dll  
rtutils 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
66.00 KB (67,584 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rtutils.dll  
netshell 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
2.32 MB (2,437,120 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netshell.dll  
clusapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
127.00 KB (130,048 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\clusapi.dll  
rasapi32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
410.00 KB (419,840 bytes) 11/30/2005

6:00 AM Microsoft Corporation  
c:\windows\system32\rasapi32.dll  
rasman 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
95.50 KB (97,792 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rasman.dll  
tapi32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
332.50 KB (340,480 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\tapi32.dll  
wininet 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.13 MB (1,186,304 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wininet.dll  
wzcsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
49.00 KB (50,176 bytes) 3/24/2005  
12:35 PM Microsoft Corporation  
c:\windows\system32\wzcsapi.dll  
wzcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
492.00 KB (503,808 bytes) 3/24/2005  
12:35 PM Microsoft Corporation  
c:\windows\system32\wzcsvc.dll  
wmi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
5.50 KB (5,632 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wmi.dll  
dhcpcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
219.00 KB (224,256 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\dhcpcsvc.dll  
rasdlg 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
859.50 KB (880,128 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rasdlg.dll  
netcfgx 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.29 MB (1,354,240 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netcfgx.dll  
winipsec 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
52.50 KB (53,760 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\winipsec.dll  
pchevc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
76.00 KB (77,824 bytes) 6/19/2007  
4:28 PM Microsoft Corporation  
c:\windows\pchealth\helpctr\binaries\pchevc  
.dll  
wbemcons 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
65.50 KB (67,072 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcons.dll  
ersvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
31.00 KB (31,744 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ersvc.dll  
termsrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
354.50 KB (363,008 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\termsrv.dll  
icaapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
27.50 KB (28,160 bytes) 6/19/2007

4:26 PM Microsoft Corporation  
c:\windows\system32\icaapi.dll  
mstlsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
187.00 KB (191,488 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\mstlsapi.dll  
rdpwsx 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
170.13 KB (174,216 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\rdpwsx.dll  
rdpsnd 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
25.00 KB (25,600 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\rdpsnd.dll  
scredir 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
38.50 KB (39,424 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\scredir.dll  
cscui 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
441.00 KB (451,584 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\cscui.dll  
msacm32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
31.00 KB (31,744 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msacm32.drv  
msacm32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
112.00 KB (114,688 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msacm32.dll  
imaadp32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
24.00 KB (24,576 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\imaadp32.acm  
msadp32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
23.50 KB (24,064 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msadp32.acm  
msg711 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
13.50 KB (13,824 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msg711.acm  
msgsm32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
34.50 KB (35,328 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\msgsm32.acm  
tssoft32 1.01 13.50 KB (13,824 bytes)  
11/30/2005 6:00 AM DSP GROUP, INC.  
c:\windows\system32\tssoft32.acm  
tsd32 1.03 24.50 KB (25,088 bytes)  
11/30/2005 6:00 AM DSP GROUP, INC.  
c:\windows\system32\tsd32.dll  
rdpclip 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
99.00 KB (101,376 bytes) 6/19/2007  
4:26 PM Microsoft Corporation  
c:\windows\system32\rdpclip.exe  
wsock32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
24.50 KB (25,088 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wsock32.dll  
urlmon 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.02 MB (1,074,176 bytes) 11/30/2005

```

6:00 AM Microsoft Corporation
c:\windows\system32\urlmon.dll
explorer 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,364,480 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\explorer.exe
browseui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.53 MB (1,601,536 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browseui.dll
shdocvw 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
2.30 MB (2,416,128 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdocvw.dll
cryptui 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
705.50 KB (722,432 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cryptui.dll
themeui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
530.50 KB (543,232 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\themeui.dll
msimg32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.50 KB (6,656 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msimg32.dll
actxprxy 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
220.50 KB (225,792 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\actxprxy.dll
linkinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\linkinfo.dll
ntshrui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
184.00 KB (188,416 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntshrui.dll
webcheck 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
439.00 KB (449,536 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\webcheck.dll
stobject 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
142.50 KB (145,920 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\stobject.dll
batmeter 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
41.50 KB (42,496 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\batmeter.dll
powrprof 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
32.50 KB (33,280 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\powrprof.dll
browselc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
63.00 KB (64,512 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browselc.dll
shdoclc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
589.50 KB (603,648 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll

```

```

drprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\drprov.dll
ntlanman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
71.50 KB (73,216 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntlanman.dll
netui0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
130.00 KB (133,120 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netui0.dll
netuil 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
338.50 KB (346,624 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netuil.dll
davclnt 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
38.00 KB (38,912 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\davclnt.dll
mlang 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
686.00 KB (702,464 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mlang.dll
mydocs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
101.00 KB (103,424 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mydocs.dll
cpqteam 8.70.0.15 81.50 KB (83,456 bytes)
6/28/2007 1:10 PM Hewlett-Packard Company
c:\program files\hp\ncu\cpqteam.exe
cmd 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cmd.exe
sqlservr 2005.090.3042.00 36.72 MB (38,507,376
bytes) 2/10/2007 9:03 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe
msvcr80 8.00.50727.42 803.50 KB (822,784
bytes) 9/22/2005 11:26 PM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt_
1fc8b3b9a1e18e3b_8.0.50727.42_x-
ww_3fea50ad\msvcr80.dll
msvcpr80 8.00.50727.42 1.05 MB (1,097,728
bytes) 9/22/2005 11:28 PM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt_
1fc8b3b9a1e18e3b_8.0.50727.42_x-
ww_3fea50ad\msvcpr80.dll
opens60 2005.090.1399.00 22.21 KB (22,744 bytes)
10/14/2005 2:31 PM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\opens60.dll
instapi 2005.090.1399.00 40.71 KB (41,688 bytes)
10/14/2005 2:23 PM Microsoft Corporation
c:\program files\microsoft sql
server\90\shared\instapi.dll
sqllevn70 2005.090.3042.00 1.66 MB (1,740,656
bytes) 2/10/2007 9:02 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\resources\1033\sqllevn70.rll

```

```

sqlos 2005.090.3042.00 17.86 KB (18,288 bytes)
2/10/2007 9:03 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlos.dll
mscoree 2.0.50727.42 (RTM.050727-4200)
441.00 KB (451,584 bytes) 9/22/2005
11:37 PM Microsoft Corporation
c:\windows\system32\mscoree.dll
xolehlp 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 10.50 KB (10,752 bytes) 6/19/2007
4:26 PM Microsoft Corporation
c:\windows\system32\xolehlp.dll
msdtcprx 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 805.50 KB (824,832 bytes) 6/19/2007
4:26 PM Microsoft Corporation
c:\windows\system32\msdtcprx.dll
mtxclu 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 141.50 KB (144,896 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mtxclu.dll
resutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
98.50 KB (100,864 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\resutils.dll
winrnr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\winrnr.dll
rasadhlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.00 KB (12,288 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasadhlp.dll
security 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.00 KB (6,144 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\security.dll
msfte 12.0.6828.0 3.63 MB (3,804,952
bytes) 8/28/2006 4:17 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\msfte.dll
dbghelp 6.6.0007.5 (debuggers\dbg).051022-1733)
1.27 MB (1,329,520 bytes) 2/10/2007
8:56 AM Microsoft Corporation
c:\program
files\microsoft sql server\90\shared\dbghelp.dll
sqlncli 2005.090.3042.00 2.74 MB (2,868,592
bytes) 2/10/2007 9:03 AM Microsoft Corporation
c:\windows\system32\sqlncli.dll
comdlg32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
446.50 KB (457,216 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
sqlnclir 2005.090.1399.00 201.21 KB (206,040
bytes) 10/14/2005 2:31 PM Microsoft Corporation
c:\windows\system32\sqlnclir.rll
helpctr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,363,456 bytes) 6/19/2007
4:28 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpct
r.exe
hcappres 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.50 KB (7,680 bytes) 6/19/2007
4:28 PM Microsoft Corporation

```

```

es.dll c:\windows\pchealth\helpctr\binaries\hccapr
itss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\itss.dll
msxml3 8.70.1104.0 2.04 MB (2,141,184
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msxml3.dll
pchshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
155.00 KB (158,720 bytes) 6/19/2007
4:28 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchsh
11.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
5.65 MB (5,928,448 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
msls31 3.10.349.0 357.00 KB (365,568
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll
msimtf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
380.50 KB (389,632 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msimtf.dll
msctf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
617.50 KB (632,320 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msctf.dll
jscrip 5.6.0.8827 974.50 KB (997,888
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\jscrip.dll
imm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\imm32.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
905.50 KB (927,232 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
vbscrip 5.6.0.8827 646.50 KB (662,016
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\vbscrip.dll
msinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
636.00 KB (651,264 bytes) 6/19/2007
4:28 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u 6.50.9146.0 1.39 MB (1,462,272
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\riched32.dll
riched20 5.31.23.1224 1.10 MB (1,157,120
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
helpsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.52 MB (1,591,296 bytes) 6/19/2007
4:28 PM Microsoft Corporation

```

```

c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CsiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process

```

```

c:\windows\system32\dlhhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfsrv.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Dnscache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped
Manual Share Process
c:\windows\syswow64\svchost.exe -k iasjet
Normal LocalSystem 0

```

```

IMAPI CD-Burning COM Service  ImapiService
  Stopped Disabled Own Process
  c:\windows\system32\imapi.exe Normal
  LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismsserv.exe
  Normal LocalSystem 0
Kerberos Key Distribution Center kdc
  Stopped Disabled Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Server lanmanserver Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Workstation lanmanworkstation Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
License Logging LicenseService Stopped
  Disabled Own Process
  c:\windows\system32\llssrv.exe
  Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper LmHosts Stopped
  Disabled Share Process
  c:\windows\system32\svchost.exe -k
  Normal NT AUTHORITY\LocalService 0
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
  Stopped Disabled Own Process
  c:\windows\system32\mnmsrvc.exe
  Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
  Running Auto Own Process
  c:\windows\system32\msdtc.exe Normal NT
  AUTHORITY\NetworkService 0
SQL Server FullText Search (MSSQLSERVER)
  msftesql Stopped Disabled Own Process
  "c:\program files\microsoft sql
  server\mssql.1\mssql\bin\msftesql.exe" -s:mssql.1 -
  f:mssqlserver Normal LocalSystem 0

Windows Installer MSIServer Stopped Manual
  Share Process
  c:\windows\system32\msiexec.exe /v
  Normal LocalSystem 0
SQL Server (MSSQLSERVER) MSSQLSERVER
  Stopped Manual Own Process
  "c:\program files\microsoft sql
  server\mssql.1\mssql\bin\sqlservr.exe" -smssqlserver
  Normal LocalSystem 0
SQL Server Active Directory Helper
  MSSQLServerADHelper Stopped Disabled Own
  Process "c:\program files\microsoft sql
  server\90\shared\sqladhip90.exe" Normal NT
  AUTHORITY\NetworkService 0
Network DDE NetDDE Stopped Disabled
  Share Process

```

```

  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
  Disabled Share Process
  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Network Connections Netman Running Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Network Location Awareness (NLA) Nla
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
  LocalSystem 0
NT LM Security Support Provider NtLmSsp
  Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Office Source Engine ose Stopped
  Manual Own Process "c:\program
  files (x86)\common files\microsoft shared\source
  engine\ose.exe" Normal LocalSystem 0

Plug and Play PlugPlay Running Auto
  Share Process
  c:\windows\system32\services.exe
  Normal LocalSystem 0
IPSEC Services PolicyAgent Stopped
  Disabled Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Protected Storage ProtectedStorage Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Remote Access Auto Connection Manager RasAuto
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Access Connection Manager RasMan
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
  Stopped Manual Own Process
  c:\windows\system32\sessmgr.exe
  Normal LocalSystem 0
Routing and Remote Access RemoteAccess
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0

```

```

Remote Registry RemoteRegistry Stopped
  Disabled Share Process
  c:\windows\system32\svchost.exe -k regsvcs
  Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped Manual Own Process
  c:\windows\system32\locator.exe
  Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k rpcss
  Normal NT AUTHORITY\NetworkService 0
Resultant Set of Policy Provider RSoPProv
  Stopped Manual Share Process
  c:\windows\system32\rsopprov.exe
  Normal LocalSystem 0
Special Administration Console Helper sacsvr
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Security Accounts Manager SamSs Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Smart Card SCardSvr Stopped Manual
  Share Process
  c:\windows\system32\scardsvr.exe
  Ignore NT AUTHORITY\LocalService 0

Task Scheduler Schedule Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Secondary Logon seclogon Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
System Event Notification SENS Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
  SharedAccess Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsv.exe
  Normal LocalSystem 0
SQL Server Browser SQLBrowser Stopped
  Disabled Own Process "c:\program
  files (x86)\microsoft sql
  server\90\shared\sqlbrowser.exe" Normal
  LocalSystem 0

```

```

SQL Server Agent (MSSQLSERVER)
  SQLSERVERAGENT Stopped Manual Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlagent90.exe" -i
mssqlserver Normal LocalSystem 0

SQL Server VSS Writer SQLWriter Stopped
Manual Own Process "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0

Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0

Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termsvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0

Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdmfr.exe
Normal NT AUTHORITY\LocalService 0

Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process

```

```

c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiaprv.exe
Normal LocalSystem 0
Automatic Updates wuauerv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User

```

```

Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users\Administrative Tools All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Configuration Utility All
Users:HP System Tools\HP Array Configuration Utility
All Users
HP System Tools\HP Array Configuration Utility CLI
All Users:HP System Tools\HP Array
Configuration Utility CLI All Users
HP System Tools\HP Array Diagnostic Utility All
Users:HP System Tools\HP Array Diagnostic Utility All
Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
SelfTest All Users:SelfTest All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories WARSHIP\Administrator:Accessories
WARSHIP\Administrator

```

```

Accessories\Accessibility
    WARSHIP\Administrator:Accessories\Accessibi
lity
    WARSHIP\Administrator
Accessories\Communications
    WARSHIP\Administrator:Accessories\Communica
tions
    WARSHIP\Administrator
Accessories\Communications\HyperTerminal
    WARSHIP\Administrator:Accessories\Communica
tions\HyperTerminal
    WARSHIP\Administrator
Accessories\Entertainment
    WARSHIP\Administrator:Accessories\Entertain
ment
    WARSHIP\Administrator
Administrative Tools
    WARSHIP\Administrator:Administrative Tools
    WARSHIP\Administrator
Startup
    WARSHIP\Administrator:Startup
    WARSHIP\Administrator

```

[Startup Programs]

Program	Command	User Name	Location
desktop	desktop.ini		NT AUTHORITY\SYSTEM
desktop	desktop.ini	WARSHIP\Administrator	
desktop	desktop.ini	.DEFAULT	Startup
desktop	desktop.ini	All Users	Common
Startup	CPQTEAM	"c:\program files\hp\ncu\cpqteam.exe"	All Users
ion\Run		HKLM\SOFTWARE\Microsoft\Windows\CurrentVers	
DWQueuedReporting		"c:\progra-1\common-1\micros-1\dw\dwtrig20.exe" -t	All Users
ion\Run		HKLM\SOFTWARE\Microsoft\Windows\CurrentVers	

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available
WordPad Document	"%programfiles%\windows
nt\accessories\wordpad.exe"	
Bitmap Image	mspaint.exe

[Windows Error Reporting]

Time	Type	Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category ]  
[Summary]

Item	Value
Version	6.0.3790.1830
Build	63790.1830
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.1830	221 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
advpack.dll	6.0.3790.1830	146 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
asctrls.ocx	6.0.3790.1830	147 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
browseic.dll	6.0.3790.1830	63 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
browseui.dll	6.0.3790.1830	1,564 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
cdfview.dll	6.0.3790.1830	216 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
comctl32.dll	5.82.3790.1830	935 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
dxtrans.dll	6.3.3790.1830	320 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
dxtmsft.dll	6.3.3790.1830	549 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontl.c.dll	<File Missing>	Not Available	Not Available	Not Available

iedkcs32.dll	16.0.3790.1830	417 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
iepeers.dll	6.0.3790.1830	361 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
iesetup.dll	6.0.3790.1830	71 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
ieuinit.inf	Not Available	24 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Not Available
ieexplore.exe	6.0.3790.1830	94 KB	11/30/2005 7:00:00 AM	C:\Program Files\Internet Explorer\Microsoft Corporation
imgutil.dll	6.0.3790.1830	61 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
inetcpl.cpl	6.0.3790.1830	428 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
inetcplc.dll	6.0.3790.1830	110 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
inseng.dll	6.0.3790.1830	147 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
mlang.dll	6.0.3790.1830	686 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
msencode.dll	<File Missing>	Not Available	Not Available	Not Available
mshta.exe	6.0.3790.1830	38 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
mshtml.dll	6.0.3790.1830	5,790 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
mshtml.tlb	6.0.3790.1830	1,320 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
mshtmlmled.dll	6.0.3790.1830	906 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
mshtmlmle.r.dll	6.0.3790.1830	56 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32\Microsoft Corporation
msident.dll	6.0.3790.1830	69 KB	11/30/2005 7:00:00 AM	

```

C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll      6.0.3790.1830      16 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
msieftpl.dll     6.0.3790.1830      369 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
msrating.dll     6.0.3790.1830      240 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
mstime.dll       6.0.3790.1830      878 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
occache.dll      6.0.3790.1830      126 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx     <File Missing>     Not Available
                  Not Available     Not Available     Not Available
sendmail.dll     6.0.3790.1830      64 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll      6.0.3790.1830      590 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll     6.0.3790.1830      2,360 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll     6.0.3790.1830      34 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll     6.0.3790.1830      607 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx         1.3.0.3130         91 KB  11/30/2005
7:00:00 AM     C:\WINDOWS\system32 Microsoft
Corporation
url.dll         6.0.3790.1830      40 KB  11/30/2005
7:00:00 AM     C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll     6.0.3790.1830      1,049 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll    6.0.3790.1830      439 KB
                  11/30/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
wininet.dll     6.0.3790.1830      1,159 KB
                  11/30/2005 7:00:00 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item      Value
Connection Preference      Never dial

LAN Settings

AutoConfigProxy      wininet.dll
AutoProxyDetectMode  Disabled
AutoConfigURL
Proxy      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Page Refresh Type      Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space      Not Available
Available Disk Space      Not Available
Maximum Cache Size      Not Available
Available Cache Size      Not Available

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

```

```

Name
No publisher information available

[Security]

Zone      Security Level
My Computer      Custom
Local intranet      Custom
Trusted sites      Custom
Internet High
Restricted sites      Custom

```

## Server Bus Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb
Class Name:      <NO CLASS>
Last Write Time: 8/8/2008 - 8:48 AM
Value 0
Name:      Type
Type:      REG_DWORD
Data:      0x1

Value 1
Name:      Start
Type:      REG_DWORD
Data:      0

Value 2
Name:      ErrorControl
Type:      REG_DWORD
Data:      0x1

Value 3
Name:      Tag
Type:      REG_DWORD
Data:      0x102

Value 4
Name:      ImagePath
Type:      REG_EXPAND_SZ
Data:      system32\DRIVERS\hpqcissb.sys

Value 5
Name:      DisplayName
Type:      REG_SZ
Data:      Smart Array Controllers Non-
Miniport Bus Driver

Value 6
Name:      Group
Type:      REG_SZ

```



```

Data:          port

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Parameters
Class Name:    <NO CLASS>
Last Write Time: 8/4/2008 - 12:04 PM
Value 0
Name:         CompletionMode
Type:         REG_DWORD
Data:         0x2

Value 1
Name:         CosTimerRate
Type:         REG_DWORD
Data:         0x2

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Parameters\Controller3
Class Name:    <NO CLASS>
Last Write Time: 6/21/2007 - 9:49 AM
Value 0
Name:         CompletionMode
Type:         REG_DWORD
Data:         0x1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Security
Class Name:    <NO CLASS>
Last Write Time: 6/21/2007 - 7:46 AM
Value 0
Name:         Security
Type:         REG_BINARY
Data:
00000000  01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00  .....Ä.....
00000010  30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00  0.....
00000020  ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00  Ÿ.....
00000030  02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00  .....Ÿ...
00000040  01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00  .....
00000050  ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00  Ÿ.....
00000060  20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00  .....
00000070  00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00  .....
00000080  01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00  .....
00000090  00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00  .....
000000a0  00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05  .....Ÿ.....

```

```

000000b0  20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05  ...#.....
000000c0  12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00  .....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Enum
Class Name:    <NO CLASS>
Last Write Time: 8/8/2008 - 8:48 AM
Value 0
Name:         0
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&2d3cc7
db&0&00000010

Value 1
Name:         Count
Type:         REG_DWORD
Data:         0xb

Value 2
Name:         NextInstance
Type:         REG_DWORD
Data:         0xb

Value 3
Name:         1
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&34d91d
7d&0&00080010

Value 4
Name:         2
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&fd3665
2&0&00480010

Value 5
Name:         3
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_03\6&251618
07&0&00080020

Value 6
Name:         4
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_03\6&d0aad5
f&0&00100020

Value 7
Name:         5
Type:         REG_SZ

```

```

Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&266aba
75&0&00400020

Value 8
Name:         6
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&1060dc
&0&00480020

Value 9
Name:         7
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_03\6&239fc0
3b&0&00500020

Value 10
Name:         8
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&263108
12&0&00000030

Value 11
Name:         9
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&4a133f
&0&00080030

Value 12
Name:         10
Type:         REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&16df26
1b&0&00480030

Server Disk
Device
Performance
Driver Registry
Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissd
Class Name:    <NO CLASS>
Last Write Time: 8/8/2008 - 8:49 AM
Value 0
Name:         Type

```

```

Type:          REG_DWORD
Data:          0x1

Value 1
Name:          Start
Type:          REG_DWORD
Data:          0

Value 2
Name:          ErrorControl
Type:          REG_DWORD
Data:          0x1

Value 3
Name:          Tag
Type:          REG_DWORD
Data:          0x102

Value 4
Name:          ImagePath
Type:          REG_EXPAND_SZ
Data:          system32\DRIVERS\hpcqissd.sys

Value 5
Name:          DisplayName
Type:          REG_SZ
Data:          Smart Array Controllers Non-
Miniport Disk Driver

Value 6
Name:          Group
Type:          REG_SZ
Data:          Primary Disk

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcqissd\Security
Class Name:    <NO CLASS>
Last Write Time: 6/21/2007 - 7:47 AM
Value 0
Name:          Security
Type:          REG_BINARY
Data:          00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ä.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....

```

```

00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcqissd\Enum
Class Name:    <NO CLASS>
Last Write Time: 8/8/2008 - 8:49 AM
Value 0
Name:          0
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&2a3e53a4&0&
0000004000000000

Value 1
Name:          Count
Type:          REG_DWORD
Data:          0x32

Value 2
Name:          NextInstance
Type:          REG_DWORD
Data:          0x32

Value 3
Name:          1
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&2a3e53a4&0&
0100004000000000

Value 4
Name:          2
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&2a3e53a4&0&
0200004000000000

Value 5
Name:          3
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&2a3e53a4&0&
0300004000000000

Value 6
Name:          4
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&2a3e53a4&0&
0400004000000000

Value 7

```

```

Name:          5
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1a93d419&0&
0000004000000000

Value 8
Name:          6
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1a93d419&0&
0100004000000000

Value 9
Name:          7
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1a93d419&0&
0200004000000000

Value 10
Name:          8
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1a93d419&0&
0300004000000000

Value 11
Name:          9
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1a93d419&0&
0400004000000000

Value 12
Name:          10
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&85e16e&0&00
00004000000000

Value 13
Name:          11
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&85e16e&0&01
00004000000000

Value 14
Name:          12
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&85e16e&0&02
00004000000000

Value 15
Name:          13
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&85e16e&0&03
00004000000000

```

Value 16  
 Name: 14  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&85e16e&0&04  
 00004000000000

Value 17  
 Name: 15  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1cc6c638&0&  
 0000004000000000

Value 18  
 Name: 16  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1cc6c638&0&  
 0100004000000000

Value 19  
 Name: 17  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1c297700&0&  
 0000004000000000

Value 20  
 Name: 18  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1c297700&0&  
 0100004000000000

Value 21  
 Name: 19  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1c297700&0&  
 0200004000000000

Value 22  
 Name: 20  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1c297700&0&  
 0300004000000000

Value 23  
 Name: 21  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&2264dbaa&0&  
 0000004000000000

Value 24  
 Name: 22  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&2264dbaa&0&  
 0100004000000000

Value 25  
 Name: 23  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&2264dbaa&0&  
 0200004000000000

Value 26  
 Name: 24  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&2264dbaa&0&  
 0300004000000000

Value 27  
 Name: 25  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&2264dbaa&0&  
 0400004000000000

Value 28  
 Name: 26  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&28803d3a&0&  
 0000004000000000

Value 29  
 Name: 27  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&28803d3a&0&  
 0100004000000000

Value 30  
 Name: 28  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&28803d3a&0&  
 0200004000000000

Value 31  
 Name: 29  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&28803d3a&0&  
 0300004000000000

Value 32  
 Name: 30  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&28803d3a&0&  
 0400004000000000

Value 33  
 Name: 31  
 Type: REG\_SZ

Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&c5353f8&0&0  
 0000040000000000

Value 34  
 Name: 32  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&c5353f8&0&0  
 1000040000000000

Value 35  
 Name: 33  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&c5353f8&0&0  
 2000040000000000

Value 36  
 Name: 34  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&c5353f8&0&0  
 3000040000000000

Value 37  
 Name: 35  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&186c1187&0&  
 0000004000000000

Value 38  
 Name: 36  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&186c1187&0&  
 0100004000000000

Value 39  
 Name: 37  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&186c1187&0&  
 0200004000000000

Value 40  
 Name: 38  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&186c1187&0&  
 0300004000000000

Value 41  
 Name: 39  
 Type: REG\_SZ  
 Data:  
 HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&186c1187&0&  
 0400004000000000

Value 42  
 Name: 40

```

Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&169390b5&0&
00000400000000
Value 43
Name:          41
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&169390b5&0&
0100004000000000
Value 44
Name:          42
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&169390b5&0&
0200004000000000
Value 45
Name:          43
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&169390b5&0&
0300004000000000
Value 46
Name:          44
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&169390b5&0&
0400004000000000
Value 47
Name:          45
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&54612bc&0&0
0000040000000000
Value 48
Name:          46
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&54612bc&0&0
1000040000000000
Value 49
Name:          47
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&54612bc&0&0
2000040000000000
Value 50
Name:          48
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&54612bc&0&0
3000040000000000
Value 51

```

```

Name:          49
Type:          REG_SZ
Data:          HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&54612bc&0&0
4000040000000000

```

## Server Network Driver Registry Parameters (NIC 1)

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BF1-08002BE10318}\0153
Class Name:    <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
Name:          create_pdo_flag
Type:          REG_SZ
Data:          4
Value 1
Name:          target_ips
Type:          REG_SZ
Data:          1500
Value 2
Name:          optimize_ips
Type:          REG_SZ
Data:          0
Value 3
Name:          mtu
Type:          REG_SZ
Data:          1500
Value 4
Name:          InfPath
Type:          REG_SZ
Data:          oeml6.inf
Value 5
Name:          InfSection
Type:          REG_SZ
Data:          NC373i_inst_amd64
Value 6
Name:          ProviderName
Type:          REG_SZ
Data:          Hewlett-Packard Company
Value 7
Name:          DriverDateData
Type:          REG_BINARY

```

```

Data:          00 c0 ee 23 04 9c c7 01 -
.Äî#..Ç.
Value 8
Name:          DriverDate
Type:          REG_SZ
Data:          5-22-2007
Value 9
Name:          DriverVersion
Type:          REG_SZ
Data:          3.4.10.0
Value 10
Name:          MatchingDeviceId
Type:          REG_SZ
Data:          pci\ven_14e4&dev_164c&subsys_7038103c
Value 11
Name:          DriverDesc
Type:          REG_SZ
Data:          HP NC373i Virtual Bus Device
Value 12
Name:          CoInstallers32
Type:          REG_MULTI_SZ
Data:          wdfcoinstaller01005.dll,
WdfCoInstaller
Value 13
Name:          enable_fir
Type:          REG_SZ
Data:          0
Value 14
Name:          wol_cap
Type:          REG_SZ
Data:          3
Value 15
Name:          *SpeedDuplex
Type:          REG_SZ
Data:          0
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BF1-08002BE10318}\0153\ndi
Class Name:    <NO CLASS>
Last Write Time: 7/9/2007 - 3:04 AM
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BF1-08002BE10318}\0153\ndi\params
Class Name:    <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class

```

```

\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi\params\*SpeedDuplex
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: paramDesc
  Type: REG_SZ
  Data: Speed & Duplex

Value 1
  Name: default
  Type: REG_SZ
  Data: 0

Value 2
  Name: type
  Type: REG_SZ
  Data: enum

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi\params\*SpeedDuplex\enum
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: 0
  Type: REG_SZ
  Data: Auto

Value 1
  Name: 1
  Type: REG_SZ
  Data: 10 Mb Half

Value 2
  Name: 2
  Type: REG_SZ
  Data: 10 Mb Full

Value 3
  Name: 3
  Type: REG_SZ
  Data: 100 Mb Half

Value 4
  Name: 4
  Type: REG_SZ
  Data: 100 Mb Full

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: paramdesc
  Type: REG_SZ
  Data: Jumbo Mtu

```

```

Value 1
  Name: default
  Type: REG_SZ
  Data: 1500

Value 2
  Name: type
  Type: REG_SZ
  Data: dword

Value 3
  Name: min
  Type: REG_SZ
  Data: 1500

Value 4
  Name: max
  Type: REG_SZ
  Data: 9000

Value 5
  Name: step
  Type: REG_SZ
  Data: 500

Value 6
  Name: base
  Type: REG_SZ
  Data: 10

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi\params\wol_cap
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: paramDesc
  Type: REG_SZ
  Data: Wake Up Capabilities

Value 1
  Name: default
  Type: REG_SZ
  Data: 3

Value 2
  Name: type
  Type: REG_SZ
  Data: enum

Value 3
  Name: control
  Type: REG_SZ
  Data: 1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class

```

```

\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi\params\wol_cap\enum
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: 0
  Type: REG_SZ
  Data: None

Value 1
  Name: 1
  Type: REG_SZ
  Data: Magic Packet

Value 2
  Name: 2
  Type: REG_SZ
  Data: Wake Up Frame

Value 3
  Name: 3
  Type: REG_SZ
  Data: Both

```

---

## Server Network Driver Registry Parameters (NIC 2)

---

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153
Class Name: <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
  Name: create_pdo_flag
  Type: REG_SZ
  Data: 4

Value 1
  Name: target_ips
  Type: REG_SZ
  Data: 1500

Value 2
  Name: optimize_ips
  Type: REG_SZ
  Data: 0

Value 3
  Name: mtu
  Type: REG_SZ
  Data: 1500

```

Value 4  
 Name: InfPath  
 Type: REG\_SZ  
 Data: oeml6.inf

Value 5  
 Name: InfSection  
 Type: REG\_SZ  
 Data: NC373i\_inst\_amd64

Value 6  
 Name: ProviderName  
 Type: REG\_SZ  
 Data: Hewlett-Packard Company

Value 7  
 Name: DriverDateData  
 Type: REG\_BINARY  
 Data: 00 c0 ee 23 04 9c c7 01 -  
 .Ai#..Ç.

Value 8  
 Name: DriverDate  
 Type: REG\_SZ  
 Data: 5-22-2007

Value 9  
 Name: DriverVersion  
 Type: REG\_SZ  
 Data: 3.4.10.0

Value 10  
 Name: MatchingDeviceId  
 Type: REG\_SZ  
 Data: pci\ven\_14e4&dev\_164c&subsys\_7038103c

Value 11  
 Name: DriverDesc  
 Type: REG\_SZ  
 Data: HP NC373i Virtual Bus Device

Value 12  
 Name: CoInstallers32  
 Type: REG\_MULTI\_SZ  
 Data: wdfcoinstaller01005.dll,  
 WdfCoInstaller

Value 13  
 Name: enable\_fir  
 Type: REG\_SZ  
 Data: 0

Value 14  
 Name: wol\_cap  
 Type: REG\_SZ  
 Data: 3

Value 15  
 Name: \*SpeedDuplex  
 Type: REG\_SZ

Data: 0

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153\ndi  
 Class Name: <NO CLASS>  
 Last Write Time: 7/9/2007 - 3:04 AM

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-  
 08002BE10318}\0153\ndi\params  
 Class Name: <NO CLASS>  
 Last Write Time: 7/24/2007 - 9:44 AM

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-  
 08002BE10318}\0153\ndi\params\\*SpeedDuplex  
 Class Name: <NO CLASS>  
 Last Write Time: 7/24/2007 - 9:44 AM

Value 0  
 Name: paramDesc  
 Type: REG\_SZ  
 Data: Speed & Duplex

Value 1  
 Name: default  
 Type: REG\_SZ  
 Data: 0

Value 2  
 Name: type  
 Type: REG\_SZ  
 Data: enum

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-  
 08002BE10318}\0153\ndi\params\\*SpeedDuplex\enum  
 Class Name: <NO CLASS>  
 Last Write Time: 7/24/2007 - 9:44 AM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Auto

Value 1  
 Name: 1  
 Type: REG\_SZ  
 Data: 10 Mb Half

Value 2  
 Name: 2  
 Type: REG\_SZ  
 Data: 10 Mb Full

Value 3  
 Name: 3  
 Type: REG\_SZ

Data: 100 Mb Half

Value 4  
 Name: 4  
 Type: REG\_SZ  
 Data: 100 Mb Full

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-  
 08002BE10318}\0153\ndi\params\mtu  
 Class Name: <NO CLASS>  
 Last Write Time: 7/24/2007 - 9:44 AM

Value 0  
 Name: paramdesc  
 Type: REG\_SZ  
 Data: Jumbo Mtu

Value 1  
 Name: default  
 Type: REG\_SZ  
 Data: 1500

Value 2  
 Name: type  
 Type: REG\_SZ  
 Data: dword

Value 3  
 Name: min  
 Type: REG\_SZ  
 Data: 1500

Value 4  
 Name: max  
 Type: REG\_SZ  
 Data: 9000

Value 5  
 Name: step  
 Type: REG\_SZ  
 Data: 500

Value 6  
 Name: base  
 Type: REG\_SZ  
 Data: 10

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Control\Class  
 \{4D36E97D-E325-11CE-BFC1-  
 08002BE10318}\0153\ndi\params\wol\_cap  
 Class Name: <NO CLASS>  
 Last Write Time: 7/24/2007 - 9:44 AM

Value 0  
 Name: paramDesc  
 Type: REG\_SZ  
 Data: Wake Up Capabilities

Value 1

```

Name:          default
Type:          REG_SZ
Data:          3

Value 2
Name:          type
Type:          REG_SZ
Data:          enum

Value 3
Name:          control
Type:          REG_SZ
Data:          1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318}\0153\ndi\params\wol_cap\enum
Class Name:    <NO CLASS>
Last Write Time: 7/24/2007 - 9:44 AM
Value 0
Name:          0
Type:          REG_SZ
Data:          None

Value 1
Name:          1
Type:          REG_SZ
Data:          Magic Packet

Value 2
Name:          2
Type:          REG_SZ
Data:          Wake Up Frame

Value 3
Name:          3
Type:          REG_SZ
Data:          Both

```

```

System Name      CL122
System Manufacturer HP
System Model     ProLiant DL360 G5
System Type      X86-based PC
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
BIOS Version/Date HP P58, 1/24/2008
SMBIOS Version   2.4
Windows Directory C:\WINDOWS
System Directory  C:\WINDOWS\system32
Boot Device       \Device\HarddiskVolume1
Locale           United States
Hardware Abstraction Layer Version =
"5.2.3790.3959 (srv03_sp2_rtm.070216-1710)"
User Name Not Available
Time Zone Central Daylight Time
Total Physical Memory 1,021.86 MB
Available Physical Memory 824.09 MB
Total Virtual Memory 2.91 GB
Available Virtual Memory 2.82 GB
Page File Space 2.00 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
I/O Port 0x00000000-0x00000CF7 PCI bus
I/O Port 0x00000000-0x00000CF7 Direct memory
access controller

I/O Port 0x000002F8-0x000002FF Motherboard
resources
I/O Port 0x000002F8-0x000002FF
Communications Port (COM2)

IRQ 22 HP iLO Management Channel Interface Driver

IRQ 22 Standard Universal PCI to USB Host
Controller

IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 Smart Array P400I Controller
IRQ 16 Standard Universal PCI to USB Host
Controller
IRQ 16 Standard Enhanced PCI to USB Host
Controller

IRQ 17 PCI standard PCI-to-PCI bridge
IRQ 17 Standard Universal PCI to USB Host
Controller

IRQ 18 PCI standard PCI-to-PCI bridge

```

```

IRQ 18 HP NC373i Virtual Bus Device
IRQ 18 Standard Universal PCI to USB Host
Controller

IRQ 19 HP NC373i Virtual Bus Device
IRQ 19 Standard Universal PCI to USB Host
Controller

Memory Address 0xA0000-0xBFFFF PCI bus
Memory Address 0xA0000-0xBFFFF ATI ES1000

Memory Address 0xFA000000-0xFBFFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFA000000-0xFBFFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFA000000-0xFBFFFFFF HP NC373i
Virtual Bus Device

Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF HP NC373i
Virtual Bus Device

I/O Port 0x00004000-0x00004FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00004000-0x00004FFF Smart Array
P400I Controller

[DMA]

Resource Device Status
Channel 7 Direct memory access controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource Device Status
0x00000000-0x00000CF7 PCI bus OK
0x00000000-0x00000CF7 Direct memory access
controller OK
0x00000D00-0x0000FFFF PCI bus OK
0x00004000-0x00004FFF PCI standard PCI-to-PCI
bridge OK
0x00004000-0x00004FFF Smart Array P400I
Controller OK
0x00001000-0x0000101F Standard Universal PCI
to USB Host Controller OK
0x00001020-0x0000103F Standard Universal PCI
to USB Host Controller OK
0x00001040-0x0000105F Standard Universal PCI
to USB Host Controller OK
0x00001060-0x0000107F Standard Universal PCI
to USB Host Controller OK

```

## Web Client Hardware Configuration

System Information report written at: 07/31/08  
11:26:59  
System Name: CL122  
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003, Standard Edition
Version	5.2.3790 Service Pack 2 Build 3790
Other OS Description	R2
OS Manufacturer	Microsoft Corporation

0x00003000-0x000030FF	ATI ES1000	OK	0x000000C0-0x000000DF	Direct memory access controller	OK	IRQ 22	HP iLO Management Channel Interface Driver	OK
0x000003B0-0x000003BB	ATI ES1000	OK	0x00000061-0x00000061	System speaker	OK	IRQ 22	Standard Universal PCI to USB Host Controller	OK
0x000003C0-0x000003DF	ATI ES1000	OK	0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 21	HP ProLiant iLO 2 Management Controller Driver	OK
0x00002800-0x000028FF	HP ProLiant iLO 2	OK	0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 0	System timer	OK
0x00003400-0x000034FF	HP iLO Management Channel Interface Driver	OK	0x0000002E-0x0000002F	Extended IO Bus	OK	IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x00003800-0x0000381F	Standard Universal PCI to USB Host Controller	OK	0x0000004E-0x0000004F	Extended IO Bus	OK	IRQ 12	PS/2 Compatible Mouse	OK
0x00000A79-0x00000A79	ISAPNP Read Data Port	OK	0x00000062-0x00000065F	Extended IO Bus	OK	IRQ 4	Communications Port (COM1)	OK
0x00000279-0x00000279	ISAPNP Read Data Port	OK	0x00000680-0x0000069F	Extended IO Bus	OK	IRQ 3	Communications Port (COM2)	OK
0x00000274-0x00000277	ISAPNP Read Data Port	OK	0x00000600-0x0000061F	Extended IO Bus	OK	[Memory]		
0x00000070-0x00000077	Motherboard resources	OK	0x00000660-0x0000067F	Extended IO Bus	OK	Resource	Device	Status
0x00000408-0x0000040F	Motherboard resources	OK	0x00000300-0x0000030F	Extended IO Bus	OK	0xA0000-0xBFFFF	PCI bus	OK
0x000004D0-0x000004D1	Motherboard resources	OK	0x000003F8-0x000003FF	Communications Port (COM1)	OK	0xA0000-0xBFFFF	ATI ES1000	OK
0x00000020-0x0000003F	Motherboard resources	OK	0x00000500-0x0000050F	Standard Dual Channel PCI IDE Controller	OK	0x40000000-0xDFFFFFFF	PCI bus	OK
0x000000A0-0x000000BF	Motherboard resources	OK	0x000001F0-0x000001F7	Primary IDE Channel	OK	0xF0000000-0xFEBFFFFFFF	PCI bus	OK
0x00000090-0x0000009F	Motherboard resources	OK	0x000003F6-0x000003F6	Primary IDE Channel	OK	0xFDF00000-0xFDFFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0x00000050-0x00000053	Motherboard resources	OK	0x00000170-0x00000177	Secondary IDE Channel	OK	0xFDD00000-0xFDEF0000	PCI standard PCI-to-PCI bridge	OK
0x00000700-0x0000071F	Motherboard resources	OK	0x00000376-0x00000376	Secondary IDE Channel	OK	0xFDE00000-0xFDEF0000	Smart Array P400I Controller	OK
0x00000800-0x0000083F	Motherboard resources	OK	[IRQs]			0xFDDF0000-0xFDDF0000	Smart Array P400I Controller	OK
0x00000900-0x0000097F	Motherboard resources	OK	Resource	Device	Status	0xF8000000-0xF9FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0x00000010-0x0000001F	Motherboard resources	OK	IRQ 9	Microsoft ACPI-Compliant System	OK	0xF8000000-0xF9FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0x00000C80-0x00000C83	Motherboard resources	OK	IRQ 16	PCI standard PCI-to-PCI bridge	OK	0xF8000000-0xF9FFFFFFF	HP NC373i Virtual Bus Device	OK
0x00000CD4-0x00000CD7	Motherboard resources	OK	IRQ 16	Smart Array P400I Controller	OK	0xFA000000-0xFBFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0x00000F50-0x00000F58	Motherboard resources	OK	IRQ 16	Standard Universal PCI to USB Host Controller	OK	0xFA000000-0xFBFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0x000000F0-0x000000F0	Motherboard resources	OK	IRQ 16	Standard Enhanced PCI to USB Host Controller	OK	0xFA000000-0xFBFFFFFFF	HP NC373i Virtual Bus Device	OK
0x00000CA0-0x00000CA1	Motherboard resources	OK	IRQ 17	PCI standard PCI-to-PCI bridge	OK	0xF7DF0000-0xF7DF03FF	Standard Enhanced PCI to USB Host Controller	OK
0x00000CA4-0x00000CA5	Motherboard resources	OK	IRQ 17	Standard Universal PCI to USB Host Controller	OK	0xD8000000-0xDFFFFFFF	ATI ES1000	OK
0x000002F8-0x000002FF	Motherboard resources	OK	IRQ 18	PCI standard PCI-to-PCI bridge	OK	0xF7FF0000-0xF7FFFFFFF	ATI ES1000	OK
0x000002F8-0x000002FF	Communications Port (COM2)	OK	IRQ 18	HP NC373i Virtual Bus Device	OK	0xF7FE0000-0xF7FE01FF	HP ProLiant iLO 2 Legacy Support Function	OK
0x00000CA2-0x00000CA3	HP NULL IPMI Controller	OK	IRQ 18	Standard Universal PCI to USB Host Controller	OK	0xF7FD0000-0xF7FD07FF	HP iLO Management Channel Interface Driver	OK
0x00000040-0x00000043	System timer	OK	IRQ 19	HP NC373i Virtual Bus Device	OK	0xF7FC0000-0xF7FC1FFF	HP iLO Management Channel Interface Driver	OK
0x00000080-0x0000008F	Direct memory access controller	OK	IRQ 19	Standard Universal PCI to USB Host Controller	OK	0xF7F00000-0xF7F7FFFF	HP iLO Management Channel Interface Driver	OK
			IRQ 19	Standard Universal PCI to USB Host Controller	OK	0xF7EF0000-0xF7EF00FF	HP ProLiant iLO 2 Management Controller Driver	OK
			IRQ 23	ATI ES1000	OK	0xE0000000-0xEFFFFFFF	Motherboard resources	OK
			IRQ 5	HP ProLiant iLO 2 Legacy Support Function	OK	0xFE000000-0xFEBFFFFFFF	Motherboard resources	OK
						0xFED00000-0xFED003FF	High precision event timer	OK



[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size
c:\windows\system32\msadp32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSADP32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	14.50 KB (14,848 bytes)
6:00 AM						11/30/2005
c:\windows\system32\msg723.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSG723.ACM	5.2.3790.3959	120.00 KB (122,880 bytes)
4/15/2008 12:38 PM						
c:\windows\system32\l3codeca.acm	Fraunhofer Institut Integrierte Schaltungen IIS	Fraunhofer IIS MPEG Layer-3 Codec	OK	C:\WINDOWS\system32\L3CODECA.ACM	284.00 KB (290,816 bytes)	1,9,0,0305
11/30/2005 6:00 AM						
c:\windows\system32\msg711.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSG711.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	10.00 KB (10,240 bytes)
6:00 AM						11/30/2005
c:\windows\system32\imaadp32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\IMAADP32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	15.50 KB (15,872 bytes)
6:00 AM						11/30/2005
c:\windows\system32\sl_anet.acm	Sipro Lab Telecom Inc.	Sipro Lab Telecom Audio Codec	OK	C:\WINDOWS\system32\SL_ANET.ACM	3.02	84.00 KB (86,016 bytes)
11/30/2005 6:00 AM						
c:\windows\system32\msgsm32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSGSM32.ACM	5.2.3790.0 (srv03_rtm.030324-2048)	20.50 KB (20,992 bytes)
6:00 AM						11/30/2005
c:\windows\system32\msaud32.acm	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSAUD32.ACM	8.00.00.4487	288.00 KB (294,912 bytes)
11/30/2005 6:00 AM						
c:\windows\system32\tsssoft32.acm	DSP GROUP, INC.	DSP GROUP, INC.	OK	C:\WINDOWS\system32\TSSOFT32.ACM		

1.01 9.50 KB (9,728 bytes)  
11/30/2005 6:00 AM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size
c:\windows\system32\msh263.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH263.DRV	5.2.3790.3959	288.00 KB (294,912 bytes)
3/24/2005 1:07 PM						
c:\windows\system32\msvidc32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	26.50 KB (27,136 bytes)
6:00 AM						11/30/2005
c:\windows\system32\tsbyuv.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\TSBYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes)
3/24/2003						3/24/2003
8:50 PM						
c:\windows\system32\msh261.drv	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH261.DRV	5.2.3790.3959	184.00 KB (188,416 bytes)
8/7/2007 2:52 PM						
c:\windows\system32\mrle32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MRLE32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	10.50 KB (10,752 bytes)
11/30/2005						11/30/2005
6:00 AM						
c:\windows\system32\iyuv_32.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\IYUV_32.DLL	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	46.50 KB (47,616 bytes)
3/24/2005						3/24/2005
1:05 PM						
c:\windows\system32\msyuv.dll	Microsoft Corporation	Microsoft Corporation	OK	C:\WINDOWS\system32\MSYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)
3/24/2003 8:49 PM						3/24/2003 8:49 PM

[CD-ROM]

Item	Value
------	-------

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	ATI ES1000

PNP Device ID

PCI\VEN\_1002&DEV\_515E&SUBSYS\_31FB103C&REV\_02\4&2014205D&0&18F0  
 Adapter Type ATI ES1000 (0x515E), ATI Technologies Inc. compatible  
 Adapter Description ATI ES1000  
 Adapter RAM 32.00 MB (33,554,432 bytes)  
 Installed Drivers ati2dvag.dll  
 Driver Version 6.14.10.6606  
 INF File oem11.inf (ati2mtag\_RN50 section)  
 Color Planes 1  
 Color Table Entries 4294967296  
 Resolution 1024 x 768 x 60 hertz  
 Bits/Pixel 32  
 Memory Address 0xD8000000-0xDFFFFFFF  
 I/O Port 0x00003000-0x000030FF  
 Memory Address 0xF7FF0000-0xF7FFFFFF  
 IRQ Channel IRQ 23  
 I/O Port 0x000003B0-0x000003BB  
 I/O Port 0x000003C0-0x000003DF  
 Memory Address 0xA0000-0xBFFFFF  
 Driver c:\windows\system32\drivers\ati2mtag.sys (6.14.10.6606, 1.36 MB (1,431,040 bytes), 8/13/2007 1:53 PM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00	
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776 bytes), 11/30/2005 6:00 AM)

Description	Standard
Natural PS/2 Keyboard	101/102-Key or Microsoft Enhanced (101- or 102-key)
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 54.50 KB (55,808 bytes), 11/30/2005 6:00 AM)

[Pointing Device]

```

Item      Value
Hardware Type      USB Human Interface Device
Number of Buttons  3
Status            OK
PNP Device ID      USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01
Power Management Supported  No
Double Click Threshold      6
Handedness                   Right Handed Operation
Driver      c:\windows\system32\drivers\hidusb.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776
bytes), 11/30/2005 6:00 AM)

Hardware Type      PS/2 Compatible Mouse
Number of Buttons  3
Status            Error
PNP Device ID      ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported  No
Double Click Threshold      6
Handedness                   Right Handed Operation
IRQ Channel        IRQ 12
Driver      c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 54.50 KB
(55,808 bytes), 11/30/2005 6:00 AM)

[Modem]

Item      Value

[Network]

[Adapter]

Item      Value
Name      [00000001] RAS Async Adapter
Adapter Type      Not Available
Product Type      RAS Async Adapter
Installed Yes
PNP Device ID      Not Available
Last Reset        7/31/2008 10:26 AM
Index            1
Service Name      AsyncMac
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available

Name      [00000002] WAN Miniport (L2TP)
Adapter Type      Not Available
Product Type      WAN Miniport (L2TP)
Installed Yes
PNP Device ID      ROOT\MS_L2TPMINIPORT\0000
Last Reset        7/31/2008 10:26 AM
Index            2
Service Name      Rasl2tp

```

```

IP Address        Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available
Driver      c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 64.00 KB
(65,536 bytes), 11/30/2005 6:00 AM)

Name      [00000003] WAN Miniport (PPTP)
Adapter Type      Wide Area Network (WAN)
Product Type      WAN Miniport (PPTP)
Installed Yes
PNP Device ID      ROOT\MS_PPTPMINIPORT\0000
Last Reset        7/31/2008 10:26 AM
Index            3
Service Name      PptpMiniport
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       50:50:54:50:30:30
Driver      c:\windows\system32\drivers\raspptp.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 58.50 KB
(59,904 bytes), 11/30/2005 6:00 AM)

Name      [00000004] WAN Miniport (PPPOE)
Adapter Type      Wide Area Network (WAN)
Product Type      WAN Miniport (PPPOE)
Installed Yes
PNP Device ID      ROOT\MS_PPPOEMINIPORT\0000
Last Reset        7/31/2008 10:26 AM
Index            4
Service Name      RasPppoe
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       33:50:6F:45:30:30
Driver      c:\windows\system32\drivers\rasppoe.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 40.00 KB
(40,960 bytes), 11/30/2005 6:00 AM)

Name      [00000005] Direct Parallel
Adapter Type      Not Available
Product Type      Direct Parallel
Installed Yes
PNP Device ID      ROOT\MS_PTMINIPORT\0000
Last Reset        7/31/2008 10:26 AM
Index            5
Service Name      Raspti
IP Address        Not Available
IP Subnet Not Available

```

```

Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available
Driver      c:\windows\system32\drivers\raspti.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 19.50 KB
(19,968 bytes), 11/30/2005 6:00 AM)

Name      [00000006] WAN Miniport (IP)
Adapter Type      Not Available
Product Type      WAN Miniport (IP)
Installed Yes
PNP Device ID      ROOT\MS_NDISWANIP\0000
Last Reset        7/31/2008 10:26 AM
Index            6
Service Name      NdisWan
IP Address        Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       Not Available
Driver      c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 87.50 KB
(89,600 bytes), 11/30/2005 6:00 AM)

Name      [00000007] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Ethernet 802.3
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID      B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&30C55FC0&0&20050300
Last Reset        7/31/2008 10:26 AM
Index            7
Service Name      l2nd
IP Address        130.172.11.122
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled      No
DHCP Server       Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address       00:21:5A:4C:C8:E8
Driver      c:\windows\system32\drivers\bxnd52x.sys
(4.1.3.0 built by: WinDDK, 51.50 KB (52,736 bytes),
8/10/2007 9:49 AM)

Name      [00000008] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type      Ethernet 802.3
Product Type      HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes

```

PNP Device ID  
 B06BDRV\L2ND&PCI\_164C14E4&SUBSYS\_7038103C&R  
 EV\_12\6&29511DBC&0&20050500  
 Last Reset 7/31/2008 10:26 AM  
 Index 8  
 Service Name 12nd  
 IP Address 130.168.40.122  
 IP Subnet 255.255.0.0  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:21:5A:4C:C8:6E  
 Driver c:\windows\system32\drivers\bxnd52x.sys  
 (4.1.3.0 built by: WinDDK, 51.50 KB (52,736 bytes),  
 8/10/2007 9:49 AM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery Yes	
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery No	
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	Yes
Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery No	
Guarantees Sequencing	No

Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption Yes	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	Yes
Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery Yes	
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption Yes	
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD NetBIOS
{\Device\NetBT_Tcpip_{337E4A0F-1A8B-4B0D-8AB9-98DB7B9EC7AB}} SEQPACKET 3	
Connectionless Service	No
Guarantees Delivery Yes	
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD NetBIOS
{\Device\NetBT_Tcpip_{337E4A0F-1A8B-4B0D-8AB9-98DB7B9EC7AB}} DATAGRAM 3	
Connectionless Service	Yes
Guarantees Delivery No	
Guarantees Sequencing	No
Maximum Address Size	20 bytes

Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD NetBIOS
{\Device\NetBT_Tcpip_{8DB86463-9958-424F-A4C2-FB3B07FD6B39}} SEQPACKET 0	
Connectionless Service	No
Guarantees Delivery Yes	
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD NetBIOS
{\Device\NetBT_Tcpip_{8DB86463-9958-424F-A4C2-FB3B07FD6B39}} DATAGRAM 0	
Connectionless Service	Yes
Guarantees Delivery No	
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption No	
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth No	
Supports Multicasting	No
Name	MSAFD NetBIOS
{\Device\NetBT_Tcpip_{9F95CA4D-45AE-4E2B-8D26-D0A991E9DDD9}} SEQPACKET 1	
Connectionless Service	No
Guarantees Delivery Yes	
Guarantees Sequencing	Yes

Maximum Address Size 20 bytes  
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
Minimum Address Size 20 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting No  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting No

Name MSAFD NetBIOS  
[\\Device\\NetBT\_Tcpip\_{9F95CA4D-45AE-4E2B-8D26-D0A991E9DDDD}] DATAGRAM 1  
Connectionless Service Yes  
Guarantees Delivery No  
Guarantees Sequencing No  
Maximum Address Size 20 bytes  
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
Minimum Address Size 20 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting Yes  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting No

Name MSAFD NetBIOS  
[\\Device\\NetBT\_Tcpip\_{D746FA27-DFC0-4D82-B5DF-26123541D6A3}] SEQPACKET 2  
Connectionless Service No  
Guarantees Delivery Yes  
Guarantees Sequencing Yes  
Maximum Address Size 20 bytes  
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
Minimum Address Size 20 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting No  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting No

Name MSAFD NetBIOS  
[\\Device\\NetBT\_Tcpip\_{D746FA27-DFC0-4D82-B5DF-26123541D6A3}] DATAGRAM 2  
Connectionless Service Yes  
Guarantees Delivery No

Guarantees Sequencing No  
Maximum Address Size 20 bytes  
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
Minimum Address Size 20 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting Yes  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting No

[WinSock]

Item Value  
File c:\\windows\\system32\\winsock.dll  
Size 2.80 KB (2,864 bytes)  
Version 3.10

File c:\\windows\\system32\\wssock32.dll  
Size 22.00 KB (22,528 bytes)  
Version 5.2.3790.0 (srv03\_rtm.030324-2048)

[Ports]

[Serial]

Item Value  
Name Communications Port (COM2)  
Status OK  
PNP Device ID ROOT\\\*PNP0501\\1\_0\_17\_1\_0\_0  
Maximum Input Buffer Size 0  
Maximum Output Buffer Size No  
Settable Baud Rate Yes  
Settable Data Bits Yes  
Settable Flow Control Yes  
Settable Parity Yes  
Settable Parity Check Yes  
Settable Stop Bits Yes  
Settable RLS D Yes  
Supports RLS D Yes  
Supports 16 Bit Mode No  
Supports Special Characters No  
Baud Rate 9600  
Bits/Byte 8  
Stop Bits 1  
Parity None  
Busy No  
Abort Read/Write on Error No  
Binary Mode Enabled Yes  
Continue Xmit on Xoff No  
CTS Outflow Control No  
Discard NULL Bytes No  
DSR Outflow Control 0  
DSR Sensitivity 0  
DTR Flow Control Type Enable

EOF Character 0  
Error Replace Character 0  
Error Replacement Enabled No  
Event Character 0  
Parity Check Enabled No  
RTS Flow Control Type Enable  
Xoff Character 19  
XoffXmit Threshold 512  
XOn Character 17  
XOnXmit Threshold 2048  
XOnXoff InFlow Control 0  
XOnXoff OutFlow Control 0  
I/O Port 0x000002F8-0x000002FF  
IRQ Channel IRQ 3  
Driver c:\\windows\\system32\\drivers\\serial.sys  
(5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710), 64.00 KB  
(65,536 bytes), 11/30/2005 6:00 AM)

Name Communications Port (COM1)  
Status OK  
PNP Device ID ACPI\\PNP0501\\0  
Maximum Input Buffer Size 0  
Maximum Output Buffer Size No  
Settable Baud Rate Yes  
Settable Data Bits Yes  
Settable Flow Control Yes  
Settable Parity Yes  
Settable Parity Check Yes  
Settable Stop Bits Yes  
Settable RLS D Yes  
Supports RLS D Yes  
Supports 16 Bit Mode No  
Supports Special Characters No  
Baud Rate 9600  
Bits/Byte 8  
Stop Bits 1  
Parity None  
Busy No  
Abort Read/Write on Error No  
Binary Mode Enabled Yes  
Continue Xmit on Xoff No  
CTS Outflow Control No  
Discard NULL Bytes No  
DSR Outflow Control 0  
DSR Sensitivity 0  
DTR Flow Control Type Enable  
EOF Character 0  
Error Replace Character 0  
Error Replacement Enabled No  
Event Character 0  
Parity Check Enabled No  
RTS Flow Control Type Enable  
Xoff Character 19  
XoffXmit Threshold 512  
XOn Character 17  
XOnXmit Threshold 2048  
XOnXoff InFlow Control 0  
XOnXoff OutFlow Control 0  
IRQ Channel IRQ 4  
I/O Port 0x000003F8-0x000003FF

Driver c:\windows\system32\drivers\serial.sys  
(5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710), 64.00 KB  
(65,536 bytes), 11/30/2005 6:00 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value  
Drive C:  
Description Local Fixed Disk  
Compressed No  
File System NTFS  
Size 33.88 GB (36,381,306,880 bytes)  
Free Space 24.69 GB (26,512,138,240 bytes)

Volume Name  
Volume Serial Number 8C06AC55

[Disks]

Item Value  
Description Disk drive  
Manufacturer (Standard disk drives)  
Model HP LOGICAL VOLUME SCSI Disk Device  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus 0  
SCSI Logical Unit 0  
SCSI Port 2  
SCSI Target ID 4  
Sectors/Track 32  
Size 33.89 GB (36,385,505,280 bytes)  
Total Cylinders 8,709  
Total Sectors 71,065,440  
Total Tracks 2,220,795  
Tracks/Cylinder 255  
Partition Disk #0, Partition #0  
Partition Size 33.88 GB (36,381,310,976 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item Value  
Name Smart Array P400I Controller  
Manufacturer Hewlett-Packard Company  
Status OK  
PNP Device ID  
PCI\VEN\_103C&DEV\_2230&SUBSYS\_3235103C&REV\_03  
3\4&EFC3E79&0&0018  
Memory Address 0xFDE00000-0xFDEFFFFFFF  
I/O Port 0x00004000-0x00004FFF  
Memory Address 0xFDDF0000-0xFDDF0FFF

IRQ Channel IRQ 16  
Driver c:\windows\system32\drivers\hpcisss2.sys  
(6.6.0.32 Build 5 (x86) built by: buildsrv, 53.30 KB  
(54,584 bytes), 12/31/1979 6:00 PM)

[IDE]

Item Value  
Name Standard Dual Channel PCI IDE Controller

Manufacturer (Standard IDE ATA/ATAPI  
controllers)  
Status OK  
PNP Device ID  
PCI\VEN\_8086&DEV\_269E&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&F9  
I/O Port 0x00000500-0x0000050F  
Driver c:\windows\system32\drivers\pciide.sys  
(5.2.3790.0 (srv03\_rtm.030324-2048), 5.50 KB (5,632  
bytes), 11/30/2005 6:00 AM)

Name Primary IDE Channel  
Manufacturer (Standard IDE ATA/ATAPI  
controllers)  
Status OK  
PNP Device ID PCIIDE\IDECHANNEL\4&56E2F28&0&0

I/O Port 0x000001F0-0x000001F7  
I/O Port 0x000003F6-0x000003F6  
Driver c:\windows\system32\drivers\atapi.sys  
(5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710), 94.50 KB  
(96,768 bytes), 11/30/2005 6:00 AM)

Name Secondary IDE Channel  
Manufacturer (Standard IDE ATA/ATAPI  
controllers)  
Status OK  
PNP Device ID PCIIDE\IDECHANNEL\4&56E2F28&0&1

I/O Port 0x00000170-0x00000177  
I/O Port 0x00000376-0x00000376  
Driver c:\windows\system32\drivers\atapi.sys  
(5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710), 94.50 KB  
(96,768 bytes), 11/30/2005 6:00 AM)

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code  
Standard 101/102-Key or Microsoft Natural PS/2  
Keyboard ACPI\PNP0303\4&2AA4AD3D&0 This device  
is not present, is not working properly, or does not  
have all its drivers installed.  
PS/2 Compatible Mouse  
ACPI\PNP0F13\4&2AA4AD3D&0 This device  
is not present, is not working properly, or does not  
have all its drivers installed.

[USB]

Device PNP Device ID  
Standard Universal PCI to USB Host Controller  
PCI\VEN\_8086&DEV\_2688&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&E8  
Standard Universal PCI to USB Host Controller  
PCI\VEN\_8086&DEV\_2689&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&E9  
Standard Universal PCI to USB Host Controller  
PCI\VEN\_8086&DEV\_268A&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&EA  
Standard Universal PCI to USB Host Controller  
PCI\VEN\_8086&DEV\_268B&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&EB  
Standard Enhanced PCI to USB Host Controller  
PCI\VEN\_8086&DEV\_268C&SUBSYS\_31FE103C&REV\_09  
9\3&61AAA01&0&EF  
Standard Universal PCI to USB Host Controller  
PCI\VEN\_103C&DEV\_3300&SUBSYS\_3305103C&REV\_00  
0\4&2014205D&0&24F0

[Software Environment]

[System Drivers]

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	No
acpi	Microsoft ACPI Driver		
	c:\windows\system32\drivers\acpi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC		
	c:\windows\system32\drivers\acpiec.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
afcnt	afcnt	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
afd	AFD		
	c:\windows\system32\drivers\afd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No

aic78xx	aic78xx	Not Available	Kernel Driver	Stopped	OK	Normal	No	No	Running	OK	Normal	No	Yes
	No	Disabled	Stopped	OK									
	Normal	No	No										
aliide	AliIde	Not Available	Kernel Driver	cd20xrt	cd20xrt	Not Available	Kernel Driver	dmboot	dmboot				
	No	Disabled	Stopped	OK	No	Disabled	Stopped	OK	c:\windows\system32\drivers\dmboot.sys				
	Normal	No	No		Normal	No	No		Kernel Driver	No	Disabled		
alkernel	Altiris Kernel Driver				cdfs	Cdfs			Stopped	OK	Normal	No	No
	c:\windows\system32\drivers\alkernel.sys					c:\windows\system32\drivers\cdfs.sys			File System Driver	No	Disabled		
	Kernel Driver	Yes	Manual			Stopped	OK	Normal	No	No			
	Running	OK	Normal	No	Yes								
amdide	AmdIde			cdrom	CD-ROM Driver				dmio	Logical Disk Manager Driver			
	c:\windows\system32\drivers\amdide.sys				c:\windows\system32\drivers\cdrom.sys				c:\windows\system32\drivers\dmio.sys				
	Kernel Driver	No	Disabled		Kernel Driver	No	System		Kernel Driver	Yes	Boot		
	Stopped	OK	Normal	No	Stopped	OK	Normal	No	Running	OK	Normal	No	Yes
arc	arc			changer	Changer	Not Available	Kernel Driver		dmload	dmload			
	c:\windows\system32\drivers\arc.sys				No	System	Stopped	OK	c:\windows\system32\drivers\dmload.sys				
	Kernel Driver	No	Disabled		Ignore	No	No		Kernel Driver	Yes	Boot		
	Stopped	OK	Normal	No	Normal	No	No		Running	OK	Normal	No	Yes
asynmac	RAS Asynchronous Media Driver			clusdisk	Cluster Disk Driver				dpti2o	dpti2o	Not Available	Kernel Driver	
	c:\windows\system32\drivers\asynmac.sys				c:\windows\system32\drivers\clusdisk.sys				No	Normal	Disabled	Stopped	OK
	Kernel Driver	No	Manual		Kernel Driver	No	Disabled		Normal	No	No	No	
	Stopped	OK	Normal	No	Stopped	OK	Normal	No	Normal	No	No	No	
atapi	Standard IDE/ESDI Hard Disk Controller			cmdide	CmdIde	Not Available	Kernel Driver		elxstor	elxstor	Not Available	Kernel Driver	
	c:\windows\system32\drivers\atapi.sys				No	Disabled	Stopped	OK	No	Normal	Disabled	Stopped	OK
	Kernel Driver	Yes	Boot		Normal	No	No		Normal	No	No	No	
	Running	OK	Normal	No	Yes				File System Driver	No	Disabled	Stopped	OK
atdisk	Atdisk	Not Available	Kernel Driver	cpqarray	Cpqarray	Not Available	Kernel Driver		Stopped	OK	Normal	No	No
	No	Disabled	Stopped	OK	No	Disabled	Stopped	OK	fd	Fdc			
	Ignore	No	No		Normal	No	No		c:\windows\system32\drivers\fdc.sys				
ati2mtag	ati2mtag			cpqarray2	cpqarray2	Not Available	Kernel Driver		Kernel Driver	No	System		
	c:\windows\system32\drivers\ati2mtag.sys				No	Disabled	Stopped	OK	Stopped	OK	Ignore	No	No
	Kernel Driver	Yes	Manual		Normal	No	No		fips	Fips			
	Running	OK	Ignore	No	Yes				c:\windows\system32\drivers\fips.sys				
atmarpc	ATM ARP Client Protocol			cpqcidrv	HP iLO Management Channel Interface Driver				Kernel Driver	Yes	System		
	c:\windows\system32\drivers\atmarpc.sys				c:\windows\system32\drivers\cpqcidrv.sys				Running	OK	Normal	No	Yes
	Kernel Driver	No	Manual		Kernel Driver	Yes	Manual						
	Stopped	OK	Normal	No	Running	OK	Normal	No	Yes				
audstub	Audio Stub Driver			cpqcissm	cpqcissm	Not Available	Kernel Driver		flpydisk	Flpydisk			
	c:\windows\system32\drivers\audstub.sys				No	Disabled	Stopped	OK	c:\windows\system32\drivers\flpydisk.sys				
	Kernel Driver	Yes	Manual		Normal	No	No		Kernel Driver	No	System		
	Running	OK	Normal	No	Yes				Stopped	OK	Ignore	No	No
b06bdrv	HP Virtual Bus Device			cpqfcalm	cpqfcalm	Not Available	Kernel Driver		fltmgr	FltMgr			
	c:\windows\system32\drivers\bxvbdx.sys				No	Disabled	Stopped	OK	c:\windows\system32\drivers\fltmgr.sys				
	Kernel Driver	Yes	Boot		Normal	No	No		File System Driver	Yes	Boot		
	Running	OK	Normal	No	Yes				Running	OK	Normal	No	Yes
beep	Beep			dellcerc	dellcerc	Not Available	Kernel Driver		ftdisk	Volume Manager Driver			
	c:\windows\system32\drivers\beep.sys				No	Disabled	Stopped	OK	c:\windows\system32\drivers\ftdisk.sys				
	Kernel Driver	Yes	System		Normal	No	No		Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes				Running	OK	Normal	No	Yes
cbidf2k	cbidf2k			dfsdriver	DfsDriver				gpc	Generic Packet Classifier			
	c:\windows\system32\drivers\cbidf2k.sys				c:\windows\system32\drivers\dfs.sys				c:\windows\system32\drivers\msgpc.sys				
	Kernel Driver	No	Disabled		File System Driver	Yes	Boot		Kernel Driver	Yes	Manual		
					Running	OK	Normal	No	Running	OK	Normal	No	Yes
				disk	Disk Driver				hidusb	Microsoft HID Class Driver			
					c:\windows\system32\drivers\disk.sys				Kernel Driver	Yes	Manual		
					Kernel Driver	Yes	Boot						

	Running	OK	Ignore	No	Yes		Kernel Driver	No	Manual			Stopped	OK	Ignore	No	No	
hpcisss	hpcisss						Stopped	OK	Normal	No	No	mouclass	Mouse Class Driver				
	c:\windows\system32\drivers\hpcisss.sys						Kernel Driver	No	Disabled				c:\windows\system32\drivers\mouclass.sys				
	Stopped	OK	Normal	No	No		Stopped	OK	Normal	No	No		Kernel Driver	Yes	System		
hpcisss2	HpCISSs2						Stopped	OK	Normal	No	No		Running	OK	Normal	No	Yes
	c:\windows\system32\drivers\hpcisss2.sys						Kernel Driver	Yes	Boot				mouhid	Mouse HID Driver			
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		c:\windows\system32\drivers\mouhid.sys				
hpn	hpn	Not Available					Kernel Driver						Kernel Driver	Yes	Manual		
	No	Disabled	Stopped	OK			Stopped	OK	Normal	No	No		Running	OK	Ignore	No	Yes
hpqilo2	hpqilo2						Kernel Driver	Yes	Manual				mountmgr	Mount Point Manager			
	c:\windows\system32\drivers\hpqilo2.sys						Running	OK	Normal	No	Yes		c:\windows\system32\drivers\mountmgr.sys				
	Kernel Driver	Yes	Manual				Running	OK	Normal	No	Yes		Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
hpt3xx	hpt3xx	Not Available					Kernel Driver						mraid35x	mraid35x	Not Available		Kernel Driver
	No	Disabled	Stopped	OK			Normal	No	No				No	Disabled	Stopped	OK	
	Normal	No	No				Normal	No	No				Normal	No	No		
http	HTTP						Kernel Driver	No	Manual				mrxdav	WebDav Client Redirector			
	c:\windows\system32\drivers\http.sys						Stopped	OK	Normal	No	No		c:\windows\system32\drivers\mrxdav.sys				
	Kernel Driver	Yes	Manual				Stopped	OK	Normal	No	No		File System Driver	No	Manual		
	Running	OK	Normal	No	Yes		Stopped	OK	Normal	No	No		Stopped	OK	Normal	No	No
i2omgmt	i2omgmt	Not Available					Kernel Driver						mrxsmb	MRXSMB			
	No	System	Stopped	OK			Running	OK	Critical	No	Yes		c:\windows\system32\drivers\mrxsmb.sys				
	Normal	No	No				Running	OK	Critical	No	Yes		File System Driver	Yes	System		
i2omp	i2omp	Not Available					Kernel Driver						Running	OK	Normal	No	Yes
	No	Disabled	Stopped	OK			Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	Normal	No	No				Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver						Kernel Driver	Yes	System				mssmbios	Microsoft System Management BIOS Driver			
	c:\windows\system32\drivers\i8042prt.sys						Running	OK	Normal	No	Yes		c:\windows\system32\drivers\mssmbios.sys				
	Kernel Driver	Yes	System				Running	OK	Normal	No	Yes		Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes		Running	OK	Ignore	No	Yes		Running	OK	Normal	No	Yes
iirsp	iirsp	Not Available					Kernel Driver						mup	Mup			
	No	Disabled	Stopped	OK			Running	OK	Ignore	No	Yes		c:\windows\system32\drivers\mup.sys				
	Normal	No	No				Running	OK	Normal	No	Yes		File System Driver	Yes	Boot		
imapi	CD-Burning Filter Driver						Kernel Driver	No	System				Running	OK	Normal	No	Yes
	c:\windows\system32\drivers\imapi.sys						Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	Kernel Driver	No	System				Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	Stopped	OK	Normal	No	No		Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
intelide	IntelIde	Not Available					Kernel Driver						ndis	NDIS System Driver			
	No	Disabled	Stopped	OK			Running	OK	Normal	No	Yes		c:\windows\system32\drivers\ndis.sys				
	Normal	No	No				Running	OK	Normal	No	Yes		Kernel Driver	Yes	Boot		
intelppm	Intel Processor Driver						Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	c:\windows\system32\drivers\intelppm.sys						Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	Kernel Driver	Yes	Manual				Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
ip6fw	IPv6 Windows Firewall Driver						Kernel Driver	Yes	System				ndistapi	Remote Access NDIS TAPI Driver			
	c:\windows\system32\drivers\ip6fw.sys						Running	OK	Ignore	No	Yes		c:\windows\system32\drivers\ndistapi.sys				
	Kernel Driver	No	Manual				Running	OK	Ignore	No	Yes		Kernel Driver	Yes	Manual		
	Stopped	OK	Normal	No	No		Running	OK	Ignore	No	Yes		Running	OK	Normal	No	Yes
ipfilterdriver	IP Traffic Filter Driver						Kernel Driver	No	Manual				ndisuio	NDIS Usermode I/O Protocol			
	c:\windows\system32\drivers\ipfltdrv.sys						Running	OK	Ignore	No	Yes		c:\windows\system32\drivers\ndisuio.sys				
	Kernel Driver	No	Manual				Running	OK	Ignore	No	Yes		Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No		Running	OK	Ignore	No	Yes		Stopped	OK	Normal	No	No
modem	Modem						Kernel Driver	No	Manual				ndiswan	Remote Access NDIS WAN Driver			
	c:\windows\system32\drivers\modem.sys						Running	OK	Ignore	No	Yes		c:\windows\system32\drivers\ndiswan.sys				
	Kernel Driver	No	Manual				Running	OK	Ignore	No	Yes		Running	OK	Normal	No	No

	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ndproxy	NDIS Proxy				
	c:\windows\system32\drivers\ndproxy.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
netbios	NetBIOS Interface				
	c:\windows\system32\drivers\netbios.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
netbt	NetBios over Tcpip				
	c:\windows\system32\drivers\netbt.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
nfrd960	nfrd960	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
npfs	Npfs				
	c:\windows\system32\drivers\npfs.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
ntfs	Ntfs				
	c:\windows\system32\drivers\ntfs.sys				
	File System Driver	Yes	Disabled		
	Running	OK	Normal	No	Yes
null	Null				
	c:\windows\system32\drivers\null.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
parport	Parport				
	c:\windows\system32\drivers\parport.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
partmgr	Partition Manager				
	c:\windows\system32\drivers\partmgr.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
pci	PCI Bus Driver				
	c:\windows\system32\drivers\pci.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Critical	No	Yes
pciide	PCIIde				
	c:\windows\system32\drivers\pciide.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
pcmcia	Pcmcia				
	c:\windows\system32\drivers\pcmcia.sys				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No

pdcomp	PDCOMP	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdframe	PDFRAME	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdreli	PDRELI	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
pdrframe	PDRFRAME	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
perc2	perc2	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
perc2hib	perc2hib	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
pptpminiport	WAN Miniport (PPTP)				
	c:\windows\system32\drivers\raspptp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ptilink	Direct Parallel Link Driver				
	c:\windows\system32\drivers\ptilink.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
ql1080	ql1080	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql10wnt	Ql10wnt	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql12160	ql12160	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql1240	ql1240	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql1280	ql1280	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2100	ql2100	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2200	ql2200	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
ql2300	ql2300	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
rasacd	Remote Access Auto Connection Driver				
	c:\windows\system32\drivers\rasacd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
rasl2tp	WAN Miniport (L2TP)				
	c:\windows\system32\drivers\rasl2tp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes

raspppoe	Remote Access PPPOE Driver				
	c:\windows\system32\drivers\raspppoe.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
raspti	Direct Parallel				
	c:\windows\system32\drivers\raspti.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdbss	Rdbss				
	c:\windows\system32\drivers\rdbss.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
rdpcdd	RDPcDD				
	c:\windows\system32\drivers\rdpcdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
rdpdr	Terminal Server Device Redirector Driver				
	c:\windows\system32\drivers\rdpdr.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdpwd	RDPWD				
	c:\windows\system32\drivers\rdpwd.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
redbook	Digital CD Audio Playback Filter Driver				
	c:\windows\system32\drivers\redbook.sys				
	Kernel Driver	No	System		
	Stopped	OK	Normal	No	No
secdrv	Secdrv				
	c:\windows\system32\drivers\secdrv.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
serenum	Serenum Filter Driver				
	c:\windows\system32\drivers\serenum.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
serial	Serial port driver				
	c:\windows\system32\drivers\serial.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
sfloppy	Sfloppy				
	c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
simbad	Simbad	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
srv	Srv				
	c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual		



	Running	OK	Normal	No	Yes			
startdss Driver	HP ProLiant Virtual Disk Support	Kernel Driver	Stopped	OK	Normal	No	Disabled	No
swenum	Software Bus Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
symc810	symc810	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
symc8xx	symc8xx	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
symmpi	symmpi	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
sym_hi	sym_hi	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
sym_u3	sym_u3	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
tcpip	TCP/IP Protocol Driver	Kernel Driver	Running	OK	Normal	No	System	Yes
tdpipe	TDPIPE	Kernel Driver	Stopped	OK	Ignore	No	Manual	No
tdtcp	TDTCP	Kernel Driver	Running	OK	Ignore	No	Manual	Yes
termdd	Terminal Device Driver	Kernel Driver	Running	OK	Normal	No	System	Yes
toside	TosIde	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
udfs	Udfs	File System Driver	Stopped	OK	Normal	No	Disabled	No
ultra	ultra	Kernel Driver	Stopped	OK	Normal	No	Manual	Yes
update	Microcode Update Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes

usbccgp	Microsoft USB Generic Parent Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
usbhci Miniport	Microsoft USB 2.0 Enhanced Host Controller Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
usbhub	Microsoft USB Standard Hub Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
usbstor	USB Mass Storage Driver	Kernel Driver	Stopped	OK	Normal	No	Manual	No
usbuhci Miniport	Microsoft USB Universal Host Controller Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
vga	vga	Kernel Driver	Stopped	OK	Ignore	No	Manual	No
vgasave	VGA Display Controller	Kernel Driver	Running	OK	Ignore	No	System	Yes
viaide	ViaIde	Kernel Driver	Running	OK	Ignore	No	Manual	Yes
volsnap	Storage volumes	Kernel Driver	Running	OK	Normal	No	Boot	Yes
wanarp	Remote Access IP ARP Driver	Kernel Driver	Running	OK	Normal	No	Manual	Yes
wdf01000	Wdf01000	Kernel Driver	Running	OK	Normal	No	Boot	Yes
wdica	WDICA	Kernel Driver	Running	OK	Ignore	No	Manual	Yes
wlbs	Network Load Balancing	Kernel Driver	Running	OK	Ignore	No	Manual	Yes

Kernel Driver	Stopped	OK	No	Manual	No
[Signed Drivers]					
Device Name	Signed	Device Class	Driver Version	Driver Date	Manufacturer
Device ID	Manufacturer	INF Name	Driver Name	Device ID	Device ID
Communications Port	Yes	PORTS	5.2.3790.0	10/1/2002	(Standard port types)
msports.inf	Not Available	ROOT\*PNP0501\1_0_17_1_0_0			
Microsoft System Management BIOS Driver	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Microcode Update Device	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Plug and Play Software Device Enumerator	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Terminal Server Mouse Driver	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Terminal Server Keyboard Driver	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Terminal Server Device Redirector	Yes	SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
Direct Parallel	Yes	NET	5.2.3790.1830	10/1/2002	Microsoft netrasa.inf
WAN Miniport (PPTP)	Yes	NET	5.2.3790.1830	10/1/2002	Microsoft netrasa.inf
WAN Miniport (PPPOE)	Yes	NET	5.2.3790.1830	10/1/2002	Microsoft netrasa.inf
WAN Miniport (IP)	Yes	NET	5.2.3790.1830	10/1/2002	Microsoft netrasa.inf
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830	10/1/2002	Microsoft netrasa.inf
Video Codecs	Yes	MEDIA	5.2.3790.0	10/1/2002	(Standard system devices)
Legacy Video Capture Devices	Yes	MEDIA	5.2.3790.0	10/1/2002	(Standard system devices)

Media Control Devices	Yes	MEDIA	
5.2.3790.0	10/1/2002 (Standard		
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMMCI			
Legacy Audio Drivers	Yes	MEDIA	
5.2.3790.0	10/1/2002 (Standard		
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMDRV			
Audio Codecs	Yes	MEDIA	5.2.3790.0
10/1/2002 (Standard system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMACH			
Wdf01000	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_WDF01000\0000			
Remote Access IP ARP Driver	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_WANARP\0000		
volsnap	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_VOLSNAP\0000			
VGA Display Controller.	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_VGASAVE\0000		
TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_TDTCP\0000			
TCP/IP Protocol Driver	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_TCPIP\0000		
HP ProLiant Virtual Install Disk Support Driver	Not		
Available	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_STARTDSS\0000		
RDPWD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_RDPWD\0000			
RDPCCD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_RDPCCD\0000			
Remote Access Auto Connection Driver	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_RASACD\0000		
Partition Manager	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_PARTMGR\0000		
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_NULL\0000			
NetBios over Tcpi	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not	

Available	Not Available	Not Available	
ROOT\LEGACY_NETBT\0000			
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_NDPROXY\0000			
NDIS Usermode I/O Protocol	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISUIO\0000		
Remote Access NDIS TAPI Driver		Not Available	
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS System Driver	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDIS\0000		
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_MOUNTMGR\0000			
mmmd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_MMMD\0000			
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_KSECDD\0000			
IPSEC driver	Not Available	LEGACYDRIVER	
Not Available	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_IPSEC\0000		
IP Network Address Translator	Not Available		
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_IPNAT\0000		
HTTP	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_HTTP\0000			
Generic Packet Classifier		Not Available	
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_GPC\0000		
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_FIPS\0000			
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_DMLOAD\0000			
dmboot	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_DMBOOT\0000			
CRC Disk Filter Driver		Not Available	
LEGACYDRIVER	Not Available	Not	
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_CRCDISK\0000		

Beep	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_BEEP\0000			
Altiris Kernel Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_ALKERNEL\0000		
AFD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_AFD\0000			
Generic volume	Yes	VOLUME	5.2.3790.1830
10/1/2002 Microsoft	volume.inf		Not
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC8F5C8			
F50FFSET4000LENGTH8787EC00			
Volume Manager	Yes	SYSTEM	5.2.3790.1830
10/1/2002 (Standard system devices)	machine.inf		Not Available
ROOT\FTDISK\0000			
Logical Disk Manager		Yes	SYSTEM
5.2.3790.1830	10/1/2002 (Standard		
system devices)	machine.inf		Not Available
ROOT\DMIO\0000			
ACPI Fixed Feature Button	Yes	SYSTEM	
5.2.3790.1830	10/1/2002 (Standard		
system devices)	machine.inf		Not Available
ACPI\FIXEDBUTTON\2&DABA3FF&0			
ACPI Thermal Zone	Yes	SYSTEM	5.2.3790.1830
10/1/2002 (Standard system devices)	machine.inf		Not Available
ACPI\THERMALZONE\THM0			
Secondary IDE Channel	Yes	HDC	
5.2.3790.1830	10/1/2002 (Standard IDE		
ATA/ATAPI controllers)	mshdc.inf		Not Available
PCIIDE\IDECHANNEL\4&56E2F28&0&1			
Primary IDE Channel	Yes	HDC	5.2.3790.1830
10/1/2002 (Standard IDE ATA/ATAPI			
controllers)	mshdc.inf		Not Available
PCIIDE\IDECHANNEL\4&56E2F28&0&0			
Standard Dual Channel PCI IDE Controller		Yes	
HDC	5.2.3790.1830		10/1/2002
(Standard IDE ATA/ATAPI controllers)	mshdc.inf		Not Available
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0			
9\3&61AAA01&0&F9			
Communications Port	Yes	PORTS	5.2.3790.0
10/1/2002 (Standard port types)	msports.inf		Not Available
ACPI\PNP0501\0			
Extended IO Bus	Yes	SYSTEM	5.2.3790.1830
10/1/2002 (Standard system devices)	machine.inf		Not Available
ACPI\PNP0A06\4&2AA4AD3D&0			
PS/2 Compatible Mouse	Yes	MOUSE	
5.2.3790.1830	10/1/2002 Microsoft		
mmouse.inf			Not Available
ACPI\PNP0F13\4&2AA4AD3D&0			
Standard 101/102-Key or Microsoft Natural PS/2			
Keyboard	Yes	KEYBOARD	5.2.3790.0
10/1/2002 (Standard keyboards)			

```

keyboard.inf Not Available
ACPI\PNP0303\4&2AA4AD3D&0
System speaker Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0800\4&2AA4AD3D&0
Direct memory access controller Yes
SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices) machine.inf
Not Available
ACPI\PNP0200\4&2AA4AD3D&0
High precision event timer Yes SYSTEM
5.2.3790.3959 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0103\0
System timer Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0100\4&2AA4AD3D&0
HP NULL IPMI Controller Yes SYSTEM
1.0.0.0 1/1/2004 Hewlett-Packard Company
oem12.inf Not Available
ACPI\IPI0001\0
Motherboard resources Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0C02\0
ISAPNP Read Data Port Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ISAPNP\READDATAPORT\0
PCI standard ISA bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_2670&SUBSYS_00000000&REV_0
9\3&61AAA01&0&F8
HP ProLiant iLO 2 Management Controller Driver Yes
SYSTEM 1.3.0.0 3/30/2007 Hewlett-
Packard Company oem9.inf Not Available
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0
0\4&2014205D&0&26F0
Generic USB Hub Yes USB 5.2.3790.1830
10/1/2002 (Generic USB Hub) usb.inf Not
Available USB\VID_03F0&PID_1327\6&18FFBC52&0&2
HID-compliant mouse Yes MOUSE 5.2.3790.1830
10/1/2002 Microsoft msmouse.inf Not
Available
HID\VID_03F0&PID_1027&MI_01\8&25B103E6&0&00
00
USB Human Interface Device Yes HIDCLASS
5.2.3790.0 10/1/2002 (Standard
system devices) input.inf Not Available
USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01
HID Keyboard Device Yes KEYBOARD 5.2.3790.0
10/1/2002 (Standard keyboards)
keyboard.inf Not Available
HID\VID_03F0&PID_1027&MI_00\8&DED77A1&0&000
0
USB Human Interface Device Yes HIDCLASS
5.2.3790.0 10/1/2002 (Standard
system devices) input.inf Not Available

```

```

USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00
USB Composite Device Yes USB
5.2.3790.1830 10/1/2002 (Standard USB
Host Controller) usb.inf Not Available
USB\VID_03F0&PID_1027\6&18FFBC52&0&1
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\5&26BC3420&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&2014205D&0&24F0
HP iLO Management Channel Interface Driver Yes
MULTIFUNCTION 1.12.0.0 6/22/2007
Hewlett-Packard Company oem4.inf Not
Available
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&2014205D&0&22F0
HP ProLiant iLO 2 Legacy Support Function Yes
SYSTEM 1.3.0.0 3/30/2007 Hewlett-
Packard Company oem9.inf Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0
3\4&2014205D&0&20F0
Default Monitor Yes MONITOR 5.1.2001.0
6/6/2001 (Standard monitor types)
monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000000
&01&03
Default Monitor Yes MONITOR 5.1.2001.0
6/6/2001 (Standard monitor types)
monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000001
&01&03
ATI ES1000 Yes DISPLAY 8.24.3.0
4/5/2006 ATI Technologies Inc.
oem11.inf Not Available
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Intel(R) 82801 PCI Bridge - 244E Yes
SYSTEM 5.2.3790.3959 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_D
9\3&61AAA01&0&F0
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB20\4&392538C3&0
Standard Enhanced PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EF
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&41C0314&0

```

```

Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EB
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&A54F890&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EA
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&37897620&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E9
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&7353027&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&B0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F5&SUBSYS_00000000&REV_B
1\3&61AAA01&0&A8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&98
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
1\3&61AAA01&0&88
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&82

```

```

PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&81
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&80
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 4.1.3.0 1/10/2008 Hewlett-
Packard Company oem13.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&29511DBC&0&20050500
HP NC373i Virtual Bus Device Yes SYSTEM
4.1.5.0 2/15/2008 Hewlett-Packard Company
oem15.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&3687280D&0&000038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&8C20058&0&0038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E7&SUBSYS_00000000&REV_B
1\3&61AAA01&0&38
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 4.1.3.0 1/10/2008 Hewlett-
Packard Company oem13.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&30C55FC0&0&20050300
HP NC373i Virtual Bus Device Yes SYSTEM
4.1.5.0 2/15/2008 Hewlett-Packard Company
oem15.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&20B00FFE&0&000030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&79C23&0&0030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&30
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_B
1\3&61AAA01&0&28
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002

```

```

(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25F8&SUBSYS_00000000&REV_B
1\3&61AAA01&0&20
Disk drive Yes DISKDRIVE 5.2.3790.0
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_4.
12\5&526D07C&0&000400
HP Virtual LUN Yes SYSTEM 5.2.3790.3959
10/1/2002 Compaq scsivdev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&526D07C&0&000000
Smart Array P400I Controller Yes SCSIADAPTER
6.6.0.32 3/20/2007 Hewlett-Packard Company
oem10.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3235103C&REV_0
3\4&EFC3E79&0&0018
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&18
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
1\4&641DA44&0&0310
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
1\5&38BD847A&0&100010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
1\5&38BD847A&0&080010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
1\5&38BD847A&0&000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
1\4&641DA44&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_B
1\3&61AAA01&0&10

```

```

PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_B
1\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.3959
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_X86_FAMILY_6_MODEL_23\_3
Intel Processor Yes PROCESSOR 5.2.3790.3959
cpu.inf Not Available
10/1/2002 Intel
ACPI\GENUINEINTEL_-
_X86_FAMILY_6_MODEL_23\_2
Intel Processor Yes PROCESSOR 5.2.3790.3959
cpu.inf Not Available
10/1/2002 Intel
ACPI\GENUINEINTEL_-
_X86_FAMILY_6_MODEL_23\_1
Intel Processor Yes PROCESSOR 5.2.3790.3959
cpu.inf Not Available
10/1/2002 Intel
ACPI\GENUINEINTEL_-
_X86_FAMILY_6_MODEL_23\_0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.0 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor PC Yes COMPUTER
5.2.3790.1830 10/1/2002 (Standard
computers) hal.inf Not Available
ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Available Not Available Not Available Not
Available
HTREE\ROOT\0

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem\C:\Program Files\Microsoft SQL
Server\80\Tools\Binn\C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\Shell\IDE\;C:\Program
Files\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 6 Model 23
Stepping 6, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 1706 <SYSTEM>
NUMBER_OF_PROCESSORS 4 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log
<SYSTEM>

```

```

PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
. .WSH
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE

```

[Print Jobs]

Document	Size	Owner	Notify	Status
Time Submitted			Start Time	
Until Time			Elapsed Time	
Pages Printed		Job ID	Priority	
Parameters		Driver	Print	
Processor	Host	Print Queue	Data Type	Name

[Network Connections]

Local Name	Remote Name	Type
Status	User Name	

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time		
Version	Size	File Date		
system idle process	Not Available	Not Available	0	0
Available	Not Available	Not Available	Not	Not
Available	Not Available	Not Available	Not	Not
system	Not Available	4	8	0
	1380	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	Not Available
smss.exe	Not Available	332	11	200
	1380	7/31/2008 10:26 AM	Not Available	Not Available
	Not Available	Not Available	Not Available	Not Available
csrss.exe	Not Available	380	13	Not
Available	Not Available	7/31/2008 10:26 AM	Not	Not
Available	Not Available	Not Available	Not Available	Not Available
winlogon.exe	c:\windows\system32\winlogon.exe	408	13	200
	7/31/2008 10:26 AM	5.2.3790.3959		
(srv03_sp2_rtm.070216-1710) bytes)	4/15/2008 12:37 PM	516.00 KB (528,384 bytes)		
services.exe	c:\windows\system32\services.exe	456	9	200
	7/31/2008 10:26 AM	5.2.3790.3959		
(srv03_sp2_rtm.070216-1710) bytes)	11/30/2005 6:00 AM	108.50 KB (111,104 bytes)		

```

lsass.exe c:\windows\system32\lsass.exe 468 9
200 1380 7/31/2008 10:26 AM
<SYSTEM>
5.2.3790.0 (srv03_rtm.030324-2048)
13.00 KB (13,312 bytes) 11/30/2005
6:00 AM
svchost.exe c:\windows\system32\svchost.exe
644 8 200 1380
7/31/2008 10:26 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/15/2008 12:38 PM
svchost.exe Not Available 712 8
Not Available Not Available
7/31/2008 10:26 AM Not Available Not
Available Not Available
svchost.exe Not Available 772 8
Not Available Not Available
7/31/2008 10:26 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
796 8 200 1380
7/31/2008 10:26 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/15/2008 12:38 PM
msdtc.exe Not Available 900 8 Not
Available Not Available 7/31/2008 10:26 AM Not
Available Not Available Not Available
aclient.exe c:\program
files\altiris\aclient\aclient.exe 1004 8
200 1380 7/31/2008 10:26 AM
6.9.164 5.10 MB (5,349,452 bytes)
8/13/2007 3:16 PM
svchost.exe c:\windows\system32\svchost.exe
1088 8 200 1380
7/31/2008 10:26 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/15/2008 12:38 PM
inetinfo.exe c:\windows\system32\inetrv\inetinfo.exe
1172 8 200 1380
7/31/2008 10:26 AM 6.0.3790.3959
(srv03_sp2_rtm.070216-1710) 14.00 KB (14,336 bytes)
4/15/2008 12:39 PM
svchost.exe Not Available 1224 8
Not Available Not Available
7/31/2008 10:26 AM Not Available Not
Available Not Available
sysdown.exe c:\windows\system32\sysdown.exe
1256 8 200 1380
7/31/2008 10:26 AM 1.1.0.0 built by:
buildsrv 6.50 KB (6,656 bytes) 8/13/2007
1:52 PM
svchost.exe Not Available 1320 8
Not Available Not Available
7/31/2008 10:26 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1492 8 200 1380
7/31/2008 10:27 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/15/2008 12:38 PM
svchost.exe c:\windows\system32\svchost.exe
1632 8 200 1380

```

```

7/31/2008 10:27 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/15/2008 12:38 PM
wmiprvse.exe Not Available 1864 8
Not Available Not Available
7/31/2008 10:28 AM Not Available Not
Available Not Available
logon.scr Not Available 2004 4 Not
Available Not Available 7/31/2008 10:36 AM Not
Available Not Available Not Available
msinfo32.exe c:\program files\common
files\microsoft shared\msinfo\msinfo32.exe 780
8 200 1380 7/31/2008
11:25 AM 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
42.00 KB (43,008 bytes) 8/7/2007 2:52
PM
wmiprvse.exe Not Available 1036 8
Not Available Not Available
7/31/2008 11:25 AM Not Available Not
Available Not Available

```

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer
Path				
winlogon	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	516.00 KB (528,384 bytes)	4/15/2008	Microsoft Corporation
12:37 PM				
ntdll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	747.50 KB (765,440 bytes)	11/30/2005	Microsoft Corporation
6:00 AM				
kernel32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	1,013.00 KB (1,037,312 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				
advapi32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	604.00 KB (618,496 bytes)	11/30/2005	Microsoft Corporation
6:00 AM				
rpcrt4	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	627.00 KB (642,048 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				
secur32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	63.50 KB (65,024 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				
crypt32	5.131.3790.3959 (srv03_sp2_rtm.070216-1710)	581.50 KB (595,456 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				
msvcr7	7.0.3790.3959 (srv03_sp2_rtm.070216-1710)	340.50 KB (348,672 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				
user32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	570.00 KB (583,680 bytes)	4/15/2008	Microsoft Corporation
12:38 PM				

gdi32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 276.00 KB (282,624 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\gdi32.dll  
msasn1 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 56.00 KB (57,344 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\msasn1.dll  
nddeapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 17.50 KB (17,920 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\nddeapi.dll  
profmap 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 22.00 KB (22,528 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\profmap.dll  
netapi32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 337.00 KB (345,088 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\netapi32.dll  
userenv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 762.50 KB (780,800 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\userenv.dll  
psapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 20.00 KB (20,480 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\psapi.dll  
regapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 55.00 KB (56,320 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\regapi.dll  
setupapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 1.02 MB (1,069,568 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\setupapi.dll  
version 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 18.00 KB (18,432 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\version.dll  
winsta 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 55.00 KB (56,320 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\winsta.dll  
ws2\_32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 81.50 KB (83,456 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\ws2\_32.dll  
ws2help 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 19.00 KB (19,456 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\ws2help.dll  
msgina 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 1.15 MB (1,208,320 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\msgina.dll  
shsvcs 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710) 132.00 KB (135,168 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\shsvcs.dll  
shlwapi 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710) 312.50 KB (320,000 bytes) 4/15/2008

12:38 PM Microsoft Corporation  
c:\windows\system32\shlwapi.dll  
sfc 5.2.3790.0 (srv03\_rtm.030324-2048) 4.50 KB (4,608 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\sfc.dll  
sfc\_os 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 138.00 KB (141,312 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\sfc\_os.dll  
wintrust 5.131.3790.3959 (srv03\_sp2\_rtm.070216-1710) 162.00 KB (165,888 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\wintrust.dll  
imagehlp 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 144.50 KB (147,968 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\imagehlp.dll  
ole32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 1.21 MB (1,267,200 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\ole32.dll  
comctl32 6.0 (srv03\_sp2\_rtm.070216-1710) 1.00 MB (1,051,648 bytes) 2/18/2007  
Microsoft Corporation  
c:\windows\winsxs\x86\_microsoft.windows.common-controls\_6595b64144ccf1df\_6.0.3790.3959\_x-ww\_d8713e55\comctl32.dll  
winscard 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 97.00 KB (99,328 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\winscard.dll  
wtsapi32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 19.00 KB (19,456 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\wtsapi32.dll  
sxs 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 744.50 KB (762,368 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\sxs.dll  
winmm 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 170.00 KB (174,080 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\winmm.dll  
shell32 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710) 7.97 MB (8,359,936 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\shell32.dll  
rsaenh 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 208.34 KB (213,336 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\rsaenh.dll  
wildap32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 175.50 KB (179,712 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\wildap32.dll  
csccdll 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 99.50 KB (101,888 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\csccdll.dll  
dimntfy 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 19.00 KB (19,456 bytes) 4/15/2008

12:42 PM Microsoft Corporation  
c:\windows\system32\dimntfy.dll  
wlnotify 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 94.50 KB (96,768 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\wlnotify.dll  
winspool 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 147.00 KB (150,528 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\winspool.drv  
mpr 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 56.50 KB (57,856 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\mpr.dll  
oleaut32 5.2.3790.3959 540.00 KB (552,960 bytes) 11/30/2005 6:00 AM Microsoft Corporation  
c:\windows\system32\oleaut32.dll  
comctl32 5.82 (srv03\_sp2\_rtm.070216-1710) 585.00 KB (599,040 bytes) 2/18/2007  
Microsoft Corporation  
c:\windows\winsxs\x86\_microsoft.windows.common-controls\_6595b64144ccf1df\_5.82.3790.3959\_x-ww\_78fcf8d0\comctl32.dll  
uxtheme 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710) 202.00 KB (206,848 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\uxtheme.dll  
services 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 108.50 KB (111,104 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\services.exe  
scserv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 327.00 KB (334,848 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\scserv.dll  
authz 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 69.00 KB (70,656 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\authz.dll  
umpnpgmr 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 125.00 KB (128,000 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\umpnpgmr.dll  
ncobjapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 36.00 KB (36,864 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\ncobjapi.dll  
msvcp60 7.0.3790.3959 (srv03\_sp2\_rtm.070216-1710) 393.50 KB (402,944 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\msvcp60.dll  
eventlog 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 67.00 KB (68,608 bytes) 4/15/2008  
Microsoft Corporation  
c:\windows\system32\eventlog.dll  
lsass 5.2.3790.0 (srv03\_rtm.030324-2048) 13.00 KB (13,312 bytes) 11/30/2005  
Microsoft Corporation  
c:\windows\system32\lsass.exe  
lsasrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 796.00 KB (815,104 bytes) 11/30/2005

6:00 AM Microsoft Corporation  
 c:\windows\system32\lsasrv.dll  
 samsrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 444.00 KB (454,656 bytes) 11/30/2005  
 6:00 AM Microsoft Corporation  
 c:\windows\system32\samsrv.dll  
 cryptdll 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 32.50 KB (33,280 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\cryptdll.dll  
 dnsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 156.50 KB (160,256 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\dnsapi.dll  
 samlib 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 46.00 KB (47,104 bytes) 11/30/2005  
 6:00 AM Microsoft Corporation  
 c:\windows\system32\samlib.dll  
 ntdsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 70.00 KB (71,680 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\ntdsapi.dll  
 msprivs 5.2.3790.0 (srv03\_rtm.030324-2048)  
 46.50 KB (47,616 bytes) 11/30/2005  
 6:00 AM Microsoft Corporation  
 c:\windows\system32\msprivs.dll  
 kerberos 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 342.50 KB (350,720 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\kerberos.dll  
 msvl\_0 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 140.00 KB (143,360 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\msvl\_0.dll  
 iphlpapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 93.00 KB (95,232 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\iphlpapi.dll  
 netlogon 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 420.50 KB (430,592 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\netlogon.dll  
 w32time 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 222.00 KB (227,328 bytes) 4/15/2008  
 12:37 PM Microsoft Corporation  
 c:\windows\system32\w32time.dll  
 schannel 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 143.50 KB (146,944 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\schannel.dll  
 wdigest 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 74.50 KB (76,288 bytes) 4/15/2008  
 12:37 PM Microsoft Corporation  
 c:\windows\system32\wdigest.dll  
 rassfm 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 23.00 KB (23,552 bytes) 4/15/2008  
 12:39 PM Microsoft Corporation  
 c:\windows\system32\rassfm.dll  
 kdcsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 214.50 KB (219,648 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\kdcsvc.dll

ntdsa 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 1.45 MB (1,522,176 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\ntdsa.dll  
 ntdsatq 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 29.50 KB (30,208 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\ntdsatq.dll  
 mssock 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 250.00 KB (256,000 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\mssock.dll  
 esent 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 1,020.00 KB (1,044,480 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\esent.dll  
 scecli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 184.50 KB (188,928 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\scecli.dll  
 ws03res 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 793.50 KB (812,544 bytes) 4/15/2008  
 12:41 PM Microsoft Corporation  
 c:\windows\system32\ws03res.dll  
 pstorsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 24.50 KB (25,088 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\pstorsvc.dll  
 psbase 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 84.00 KB (86,016 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\psbase.dll  
 hnetcfg 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 347.00 KB (355,328 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\hnetcfg.dll  
 wshtccip 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 18.50 KB (18,944 bytes) 4/15/2008  
 12:37 PM Microsoft Corporation  
 c:\windows\system32\wshtccip.dll  
 w3ssl 6.0.3790.0 (srv03\_rtm.030324-2048)  
 15.00 KB (15,360 bytes) 11/30/2005  
 6:00 AM Microsoft Corporation  
 c:\windows\system32\w3ssl.dll  
 strmfilt 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 84.00 KB (86,016 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\strmfilt.dll  
 httpapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 24.00 KB (24,576 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\httpapi.dll  
 dsenh 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 143.84 KB (147,288 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\dsenh.dll  
 svchost 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 14.50 KB (14,848 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\svchost.exe  
 rpcss 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 470.50 KB (481,792 bytes) 4/15/2008

12:38 PM Microsoft Corporation  
 c:\windows\system32\rpcss.dll  
 xpsp2res 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 2.76 MB (2,897,920 bytes) 4/15/2008  
 12:41 PM Microsoft Corporation  
 c:\windows\system32\xpsp2res.dll  
 clbcatq 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
 499.00 KB (510,976 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\clbcatq.dll  
 comres 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
 778.50 KB (797,184 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\comres.dll  
 ntmarta 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 119.00 KB (121,856 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\ntmarta.dll  
 schedsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 197.50 KB (202,240 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\schedsvc.dll  
 wiarpc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 32.50 KB (33,280 bytes) 4/15/2008  
 12:37 PM Microsoft Corporation  
 c:\windows\system32\wiarpc.dll  
 msidle 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 6.50 KB (6,656 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\msidle.dll  
 audiosrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 40.50 KB (41,472 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\audiosrv.dll  
 wkssvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 130.00 KB (133,120 bytes) 11/30/2005  
 6:00 AM Microsoft Corporation  
 c:\windows\system32\wkssvc.dll  
 aelupsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 26.00 KB (26,624 bytes) 4/15/2008  
 12:42 PM Microsoft Corporation  
 c:\windows\system32\aelupsvc.dll  
 apphelp 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 145.50 KB (148,992 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\apphelp.dll  
 cryptsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 55.00 KB (56,320 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\cryptsvc.dll  
 certcli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 228.50 KB (233,984 bytes) 4/15/2008  
 12:38 PM Microsoft Corporation  
 c:\windows\system32\certcli.dll  
 atl 3.05.2283 83.00 KB (84,992 bytes)  
 11/30/2005 6:00 AM Microsoft Corporation  
 c:\windows\system32\atl.dll  
 vssapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 548.50 KB (561,664 bytes) 4/15/2008  
 12:37 PM Microsoft Corporation  
 c:\windows\system32\vssapi.dll

dmsrver 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
25.50 KB (26,112 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\dmsrver.dll  
es 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
233.00 KB (238,592 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\es.dll  
pchsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
39.00 KB (39,936 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\pchealth\helpctr\binaries\pchsvc.dll  
srvsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
93.00 KB (95,232 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\srvsvc.dll  
seclogon 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
18.00 KB (18,432 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\seclogon.dll  
sens 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
36.50 KB (37,376 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\sens.dll  
trkwks 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
84.50 KB (86,528 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\trkwks.dll  
wmisvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
140.00 KB (143,360 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wmisvc.dll  
comsvcs 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
1.24 MB (1,295,872 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\comsvcs.dll  
browser 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
76.50 KB (78,336 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\browser.dll  
wbemcore 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
498.50 KB (510,464 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcore.dll  
esscli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
250.00 KB (256,000 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\esscli.dll  
wbemcomn 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
220.50 KB (225,792 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcomn.dll  
fastprox 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
471.50 KB (482,816 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\fastprox.dll  
wbemsv 5.2.3790.0 (srv03\_rtm.030324-2048)  
42.50 KB (43,520 bytes) 8/7/2007 2:50  
PM Microsoft Corporation  
c:\windows\system32\wbem\wbemsv.dll

wmiutils 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
93.50 KB (95,744 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wmiutils.dll  
repdrvfs 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
172.50 KB (176,640 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\repdrvfs.dll  
wmiprvsd 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
404.00 KB (413,696 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wmiprvsd.dll  
wbemess 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
271.50 KB (278,016 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemess.dll  
netrap 5.2.3790.0 (srv03\_rtm.030324-2048)  
11.50 KB (11,776 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\netrap.dll  
ncprov 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
46.50 KB (47,616 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\ncprov.dll  
ntlsapi 5.2.3790.0 (srv03\_rtm.030324-2048)  
8.00 KB (8,192 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\ntlsapi.dll  
wbemcons 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
45.50 KB (46,592 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcons.dll  
aclient 6.9.164 5.10 MB (5,349,452 bytes)  
8/13/2007 3:16 PM Altiris, Inc.  
c:\program  
files\altiris\aclient\aclient.exe  
comdlg32 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
267.00 KB (273,408 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\comdlg32.dll  
wsoc32 5.2.3790.0 (srv03\_rtm.030324-2048)  
22.00 KB (22,528 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\wsoc32.dll  
riched32 5.2.3790.0 (srv03\_rtm.030324-2048)  
3.50 KB (3,584 bytes) 11/30/2005  
6:00 AM Microsoft Corporation  
c:\windows\system32\riched32.dll  
riched20 5.31.23.1225 433.00 KB (443,392  
bytes) 4/15/2008 12:38 PM Microsoft Corporation  
c:\windows\system32\riched20.dll  
activeds 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
195.50 KB (200,192 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\activeds.dll  
adsl dpc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
149.50 KB (153,088 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\adsl dpc.dll  
credui 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
162.00 KB (165,888 bytes) 4/15/2008

12:38 PM Microsoft Corporation  
c:\windows\system32\credui.dll  
mprapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
88.50 KB (90,624 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\mprapi.dll  
rtutils 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
34.00 KB (34,816 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\rtutils.dll  
ersvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
24.00 KB (24,576 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\ersvc.dll  
inetinfo 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
14.00 KB (14,336 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\inetinfo.exe  
iisutil 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
164.00 KB (167,936 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\iisutil.dll  
rpcref 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
4.00 KB (4,096 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\rpcref.dll  
iisrtl 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
138.50 KB (141,824 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\iisrtl.dll  
iisadmin 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
21.00 KB (21,504 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\iisadmin.dll  
coadmin 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
62.50 KB (64,000 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\coadmin.dll  
admwprox 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
47.00 KB (48,128 bytes) 4/15/2008  
12:38 PM Microsoft Corporation  
c:\windows\system32\admwprox.dll  
iiscfg 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
1.08 MB (1,133,056 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\iiscfg.dll  
metadata 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
229.00 KB (234,496 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\metadata.dll  
msxml3 8.80.1185.0 1.08 MB (1,131,520  
bytes) 4/15/2008 12:38 PM Microsoft Corporation  
c:\windows\system32\msxml3.dll  
svccxt 6.0.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
43.50 KB (44,544 bytes) 4/15/2008  
12:39 PM Microsoft Corporation  
c:\windows\system32\inetrv\svccxt.dll  
security 5.2.3790.0 (srv03\_rtm.030324-2048)  
5.50 KB (5,632 bytes) 11/30/2005



```

6:00 AM Microsoft Corporation
c:\windows\system32\security.dll
iismap 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
58.50 KB (59,904 bytes) 4/15/2008
12:38 PM Microsoft Corporation
c:\windows\system32\iismap.dll
wamreg 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
54.50 KB (55,808 bytes) 4/15/2008
12:39 PM Microsoft Corporation
c:\windows\system32\inetsrv\wamreg.dll
sysdown 1.1.0.0 built by: buildsrv 6.50 KB
(6,656 bytes) 8/13/2007 1:52 PM Hewlett-
Packard Company c:\windows\system32\sysdown.exe

iisw3adm 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
211.50 KB (216,576 bytes) 10/18/2007
3:19 PM Microsoft Corporation
c:\windows\system32\inetsrv\iisw3adm.dll

w3cache 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
19.00 KB (19,456 bytes) 10/18/2007
3:19 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3cache.dll
w3tp 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
13.00 KB (13,312 bytes) 10/18/2007
3:19 PM Microsoft Corporation
c:\windows\system32\inetsrv\w3tp.dll
lonsint 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
13.00 KB (13,312 bytes) 10/18/2007
3:19 PM Microsoft Corporation
c:\windows\system32\inetsrv\lonsint.dll
termsrv 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
240.00 KB (245,760 bytes) 4/15/2008
12:38 PM Microsoft Corporation
c:\windows\system32\termsrv.dll
icaapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
12.50 KB (12,800 bytes) 4/15/2008
12:38 PM Microsoft Corporation
c:\windows\system32\icaapi.dll
mstlsapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
117.00 KB (119,808 bytes) 4/15/2008
12:38 PM Microsoft Corporation
c:\windows\system32\mstlsapi.dll
rdpwsx 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
102.13 KB (104,584 bytes) 4/15/2008
12:38 PM Microsoft Corporation
c:\windows\system32\rdpwsx.dll
msinfo32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
42.00 KB (43,008 bytes) 8/7/2007 2:52
PM Microsoft Corporation c:\program
files\common files\microsoft
shared\msinfo\msinfo32.exe
mfc42u 6.06.8063.0 1.11 MB (1,163,776
bytes) 11/30/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
wininet 6.0.3790.3959 (srv03_sp2_rtm.070216-1710)
655.00 KB (670,720 bytes) 4/15/2008
12:37 PM Microsoft Corporation
c:\windows\system32\wininet.dll
odbc32 3.526.3959.0 (srv03_sp2_rtm.070216-1710)
240.00 KB (245,760 bytes) 11/30/2005

```

```

6:00 AM Microsoft Corporation
c:\windows\system32\odbc32.dll
odbcint 3.526.3959.0 (srv03_sp2_rtm.070216-1710)
92.00 KB (94,208 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\odbcint.dll
msinfo 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
376.00 KB (385,024 bytes) 8/7/2007 2:52
PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
wbemprox 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
20.50 KB (20,992 bytes) 4/15/2008
12:39 PM Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll

[Services]

Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Altiris Client Service Acllient Running
Auto Own Process c:\program
files\altiris\aclient\aclient.exe -service
Normal LocalSystem 0
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CIsvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0

```

```

ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0

COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
Normal LocalSystem 0
dcomlaunch Normal LocalSystem 0

Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Dnscache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Running Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto
Share Process
c:\windows\system32\inetrv\inetinfo.exe
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process
c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llsrrv.exe
Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper LmHosts Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
Stopped Disabled Own Process
c:\windows\system32\mnmsrvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
Visual Studio 2005 Remote Debugger msvsmon80
Stopped Disabled Own Process
"c:\program files\microsoft visual studio
8\common7\ide\remote debugger\x86\msvsmon.exe"
/service msvsmon80 Ignore LocalSystem 0

Network DDE NetDDE Stopped Disabled
Share Process

```

```

c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process
c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process "c:\program
files\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0

Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Stopped
Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Remote Registry RemoteRegistry Running
Auto Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0

Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0

Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT Authority\NetworkService 0

Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process
c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0

Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process
c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0

```

```

Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
HP ProLiant System Shutdown Service sysdown
Running Auto Own Process
c:\windows\system32\sysdown.exe
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0

Telephony Tapisrv Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0

Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdmfr.exe
Normal NT AUTHORITY\LocalService 0

Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Running Auto
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
World Wide Web Publishing Service W3SVC
Running Auto Share Process

```

```

c:\windows\system32\svchost.exe -k iissvcs
Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiaprv.exe
Normal LocalSystem 0
Automatic Updates wuauerv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netvcs
Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User

Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users

```

```

Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup
ACIntUsr c:\program
files\altiris\aclint\aclntusr.exe All Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available

```

```

WordPad Document      "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object      Not
Available
Bitmap Image          mspaint.exe

[Windows Error Reporting]

Time      Type      Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Version   6.0.3790.3959
Build     63790.3959
Application Path  C:\Program Files\Internet
Explorer
Language  English (United States)
Active Printer      Not Available

Cipher Strength      128-bit
Content Advisor      Disabled
IEAK Install         No

[File Versions]

File      Version      Size      Date      Path
Company
actxprxy.dll  6.0.3790.3959      97 KB
2/17/2007 2:16:16 AM
C:\WINDOWS\system32 Microsoft Corporation
advpack.dll  6.0.3790.3959      98 KB
2/17/2007 2:16:46 AM
C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx  6.0.3790.0          90 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
browselc.dll 6.0.3790.0          62 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
browseui.dll 6.0.3790.3959      1,009 KB
2/17/2007 2:22:54 AM
C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll  6.0.3790.3959      148 KB
2/17/2007 2:23:26 AM
C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll 5.82.3790.3959      585 KB
2/17/2007 2:31:40 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll  6.3.3790.3959      205 KB
2/17/2007 2:52:40 AM
C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll  6.3.3790.3959      353 KB
2/17/2007 2:52:36 AM
C:\WINDOWS\system32 Microsoft Corporation
iecont.dll   <File Missing>      Not Available
Not Available      Not Available      Not
Available
iecontlc.dll <File Missing>      Not Available
Not Available      Not Available      Not
Available
iedkcs32.dll 16.0.3790.3959      324 KB
2/17/2007 3:18:24 AM
C:\WINDOWS\system32 Microsoft Corporation
iepeers.dll  6.0.3790.3959      248 KB
2/17/2007 3:18:36 AM
C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll  6.0.3790.3959      61 KB
2/17/2007 3:18:36 AM
C:\WINDOWS\system32 Microsoft Corporation
ieuunit.inf  Not Available        24 KB
2/17/2007 3:18:36 AM
C:\WINDOWS\system32 Not Available
iexplore.exe 6.0.3790.3959      92 KB
2/17/2007 3:18:36 AM
C:\Program
Files\Internet Explorer      Microsoft Corporation
imgutil.dll  6.0.3790.3959      38 KB
2/17/2007 3:19:34 AM
C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl  6.0.3790.3959      361 KB
2/17/2007 3:19:44 AM
C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll 6.0.3790.0          109 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
inseng.dll   6.0.3790.3959      94 KB
2/17/2007 3:19:54 AM
C:\WINDOWS\system32 Microsoft Corporation
mlang.dll   6.0.3790.3959      576 KB 2/17/2007
3:32:54 AM
C:\WINDOWS\system32 Microsoft
Corporation
msencode.dll 2002.10.4.0          112 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 ????.??
mshta.exe   6.0.3790.3959      30 KB 2/17/2007
3:35:08 AM
C:\WINDOWS\system32 Microsoft
Corporation
mshtml.dll  6.0.3790.3959      3,058 KB
2/17/2007 3:35:20 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb  6.0.3790.3959      1,320 KB
2/17/2007 3:35:20 AM
C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll  6.0.3790.3959      447 KB
2/17/2007 3:35:22 AM
C:\WINDOWS\system32 Microsoft Corporation
mshtmlmer.dll 6.0.3790.3959      56 KB
2/17/2007 3:35:24 AM
C:\WINDOWS\system32 Microsoft Corporation
msident.dll  6.0.3790.3959      48 KB
2/17/2007 3:35:30 AM
C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll 6.0.3790.0          15 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
msieftp.dll  6.0.3790.3959      244 KB
2/17/2007 3:35:30 AM
C:\WINDOWS\system32 Microsoft Corporation
msrating.dll 6.0.3790.3959      144 KB
2/17/2007 3:36:24 AM
C:\WINDOWS\system32 Microsoft Corporation
mstime.dll   6.0.3790.3959      525 KB
2/17/2007 3:36:40 AM
C:\WINDOWS\system32 Microsoft Corporation
occache.dll  6.0.3790.3959      94 KB
2/17/2007 3:42:52 AM
C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx 6.3.3790.3959      83 KB
2/17/2007 3:52:42 AM
C:\WINDOWS\system32 Intel Corporation
sendmail.dll 6.0.3790.3959      56 KB
2/17/2007 3:58:56 AM
C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll  6.0.3790.0          589 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
shdocv.dll   6.0.3790.3959      1,473 KB
2/17/2007 3:59:20 AM
C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll 6.0.3790.3959      25 KB
2/17/2007 3:59:28 AM
C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll  6.0.3790.3959      313 KB
2/17/2007 3:59:42 AM
C:\WINDOWS\system32 Microsoft Corporation

```

```

tdc.ocx 1.3.0.3130 58 KB 11/30/2005
7:00:00 AM C:\WINDOWS\system32 Microsoft
Corporation
url.dll 6.0.3790.3959 37 KB 2/17/2007
4:07:34 AM C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll 6.0.3790.3959 682 KB
2/17/2007 4:07:36 AM
C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll 6.0.3790.3959 271 KB
2/17/2007 4:08:42 AM
C:\WINDOWS\system32 Microsoft Corporation

wininet.dll 6.0.3790.3959 655 KB
2/17/2007 4:09:04 AM
C:\WINDOWS\system32 Microsoft Corporation

```

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

```

AutoConfigProxy Not Available
AutoProxyDetectMode Enabled
AutoConfigURL
Proxy Disabled
ProxyServer
ProxyOverride

```

[Cache]

[ Following are sub-categories of this main category ]  
[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Default User\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[ Following are sub-categories of this main category ]  
[Summary]

Item	Value
------	-------

Content Advisor Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm  
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm  
No other people certificate information available

[Publishers]

Name  
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Medium
Internet High	High
Restricted sites	High

## Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server = myserver/ UID= sa; pwd=; DATABASE= tpcc; The single queue TpcallTxn object was used, with the Min and Max both being set to 74 queues. Delivery threads were set under the TPCC key in the registry.

## Internet Information Server Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:19 PM

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:41 PM

```

```

Value 0
Name: ListenBackLog
Type: REG_DWORD
Data: 0x19

```

```

Value 1
Name: PoolThreadLimit
Type: REG_DWORD
Data: 0xff4

```

```

Value 2
Name: MaxPoolThreads
Type: REG_DWORD
Data: 0x7fa

```

```

Value 3
Name: ThreadTimeout
Type: REG_DWORD
Data: 0x15180

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Performance
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:19 PM

```

```

Value 0
Name: Library
Type: REG_SZ
Data: infoctrs.dll

```

```

Value 1
Name: Open
Type: REG_SZ
Data: OpenINFOPerformanceData

```

```

Value 2
Name: Close
Type: REG_SZ
Data: CloseINFOPerformanceData

```

```

Value 3
Name: Collect
Type: REG_SZ
Data: CollectINFOPerformanceData

```

```

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: infoctrs.ini

```

Value 5  
 Name: Last Counter  
 Type: REG\_DWORD  
 Data: 0xc30

Value 6  
 Name: Last Help  
 Type: REG\_DWORD  
 Data: 0xc31

Value 7  
 Name: First Counter  
 Type: REG\_DWORD  
 Data: 0xbf0

Value 8  
 Name: First Help  
 Type: REG\_DWORD  
 Data: 0xbf1

Value 9  
 Name: Object List  
 Type: REG\_SZ  
 Data: 3056

Value 10  
 Name: Library Validation Code  
 Type: REG\_BINARY  
 Data: 00 00 00 00 b3 47 24 c4 11 c8 01 - 00 20 00 00 00  
 00 00 00 .3G\$Ä.È.. .....

## World Wide Web Service Registry Parameters

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC  
 Class Name: <NO CLASS>  
 Last Write Time: 8/8/2008 - 6:38 PM

Value 0  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x20

Value 1  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 2

Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: %SystemRoot%\System32\svchost.exe  
 -k iissvcs

Value 4  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: World Wide Web Publishing Service

Value 5  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: RPCSS  
 HTTPFilter  
 IISADMIN

Value 6  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 7  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 8  
 Name: Description  
 Type: REG\_SZ  
 Data: Provides Web connectivity and administration through the Internet Information Services Manager

Value 9  
 Name: FailureActions  
 Type: REG\_BINARY  
 Data: 00 00 00 00 80 51 01 00 01 00 00 00 - 00 00 00 00 03  
 00 00 00 .Q.....  
 00 00 00 10 43 00 4c 00 01 00 00 00 - 01 00 00 00 01  
 00 00 00 C.L.....  
 01 00 00 00 01 00 00 00 - 01 00 00 00  
 .....

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters  
 Class Name: <NO CLASS>  
 Last Write Time: 10/18/2007 - 3:41 PM

Value 0  
 Name: MajorVersion  
 Type: REG\_DWORD  
 Data: 0x6

Value 1

Name: MinorVersion  
 Type: REG\_DWORD  
 Data: 0

Value 2  
 Name: InstallPath  
 Type: REG\_SZ  
 Data: C:\WINDOWS\system32\inetrv

Value 3  
 Name: AccessDeniedMessage  
 Type: REG\_SZ  
 Data: Error: Access is Denied.

Value 4  
 Name: ServiceDll  
 Type: REG\_EXPAND\_SZ  
 Data: C:\WINDOWS\system32\inetrv\iisw3adm.dll

Value 5  
 Name: AcceptExOutstanding  
 Type: REG\_DWORD  
 Data: 0x28

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADLaunch  
 Class Name: <NO CLASS>  
 Last Write Time: 10/18/2007 - 3:19 PM

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADLaunch\AdvancedDataFactory  
 Class Name: <NO CLASS>  
 Last Write Time: 10/18/2007 - 3:19 PM

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADLaunch\RDSServer.DataFactory  
 Class Name: <NO CLASS>  
 Last Write Time: 10/18/2007 - 3:19 PM

Key Name:  
 HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance  
 Class Name: <NO CLASS>  
 Last Write Time: 10/18/2007 - 3:19 PM

Value 0  
 Name: Library  
 Type: REG\_SZ  
 Data: C:\WINDOWS\system32\inetrv\w3ctr.dll

Value 1  
 Name: Open  
 Type: REG\_SZ  
 Data: OpenW3PerformanceData

Value 2  
 Name: Close

```

Type: REG_SZ
Data: CloseW3PerformanceData

Value 3
Name: Collect
Type: REG_SZ
Data: CollectW3PerformanceData

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: w3ctrs.ini

Value 5
Name: Last Counter
Type: REG_DWORD
Data: 0xd28

Value 6
Name: Last Help
Type: REG_DWORD
Data: 0xd29

Value 7
Name: First Counter
Type: REG_DWORD
Data: 0xc32

Value 8
Name: First Help
Type: REG_DWORD
Data: 0xc33

Value 9
Name: Object List
Type: REG_SZ
Data: 3122 3296

Value 10
Name: Library Validation Code
Type: REG_BINARY
Data: 00 00 00 00 00 e0 78 25 c4 11 c8 01 - 00 5e 00 00 00
00 00 00 .ax%A.È.^.....

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Security
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:19 PM
Value 0
Name: Security
Type: REG_BINARY
Data: 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Å.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....

```

```

00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Enum
Class Name: <NO CLASS>
Last Write Time: 8/8/2008 - 6:38 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_W3SVC\0000

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

```

## TPCC Application Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC
Class Name: <NO CLASS>
Last Write Time: 7/7/2008 - 3:26 PM
Value 0
Name: Path

```

```

Type: REG_SZ
Data: C:\Inetpub\wwwroot\

Value 1
Name: NumberOfDeliveryThreads
Type: REG_DWORD
Data: 0xc

Value 2
Name: MaxConnections
Type: REG_DWORD
Data: 0xc350

Value 3
Name: MaxPendingDeliveries
Type: REG_DWORD
Data: 0x7d0

Value 4
Name: DB_Protocol
Type: REG_SZ
Data: ODBC

Value 5
Name: TxnMonitor
Type: REG_SZ
Data: COM

Value 6
Name: DbServer
Type: REG_SZ
Data: warship

Value 7
Name: DbName
Type: REG_SZ
Data: tpcc

Value 8
Name: DbUser
Type: REG_SZ
Data: sa

Value 9
Name: DbPassword
Type: REG_SZ
Data:

Value 10
Name: COM_SinglePool
Type: REG_SZ
Data: YES

Value 11
Name: CallNoDuplicatesNewOrder
Type: REG_DWORD
Data: 0x1

Value 12
Name: ConnectDelay
Type: REG_DWORD
Data: 0x1

```

---

## Benchcraft Profile

---

Profile: warship\_50832\_16cl  
File Path: C:\Program  
Files\BenchCraft\warship\_50832\_16cl.xml  
Version: 5

Number of Engines: 48

Name: d2  
Description:  
Directory: c:\blog\rte2.log  
Machine: n31  
Parameter Set: 2.2  
Index: 1600000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER53164609  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d1  
Description:  
Directory: c:\blog\rte1.log  
Machine: n31  
Parameter Set: 2.2  
Index: 750000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER44265281  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d3  
Description:  
Directory: c:\blog\rte3.log  
Machine: n31  
Parameter Set: 2.2  
Index: 250000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3439676359  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0

CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d4  
Description:  
Directory: c:\blog\rte4.log  
Machine: n32  
Parameter Set: 2.2  
Index: 300000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER4439706187  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d5  
Description:  
Directory: c:\blog\rte5.log  
Machine: n32  
Parameter Set: 2.2  
Index: 400000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER5346413218  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d6  
Description:  
Directory: c:\blog\rte6.log  
Machine: n32  
Parameter Set: 2.2  
Index: 500000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER62226046  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d7  
Description:  
Directory: c:\blog\rte7.log  
Machine: n33  
Parameter Set: 2.2  
Index: 600000000  
Seed: 4678

Configured Users: 10590  
Pipe Name: DRIVER72289718  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d8  
Description:  
Directory: c:\blog\rte8.log  
Machine: n33  
Parameter Set: 2.2  
Index: 220000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER82325578  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d9  
Description:  
Directory: c:\blog\rte9.log  
Machine: n33  
Parameter Set: 2.2  
Index: 800000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER92360187  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d10  
Description:  
Directory: c:\blog\rte10.log  
Machine: n34  
Parameter Set: 2.2  
Index: 900000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER102399796  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options: verberrors=1

Name: d11



Description:  
Directory: c:\blog\rtel1.log  
Machine: n34  
Parameter Set: 2.2  
Index: 1000000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER1122682203  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options: verberrors=1

Name: d12  
Description:  
Directory: c:\blog\rtel2.log  
Machine: n34  
Parameter Set: 2.2  
Index: 1100000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER1222731546  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options: verberrors=1

Name: d13  
Description:  
Directory: c:\blog\rtel3.log  
Machine: n35  
Parameter Set: 2.2  
Index: 1200000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER13-1439076421  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options: verberrors=1

Name: d14  
Description:  
Directory: c:\blog\rtel4.log  
Machine: n35  
Parameter Set: 2.2  
Index: 1300000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER14-1438943656  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0

Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options: verberrors=1

Name: d15  
Description:  
Directory: c:\blog\rtel5.log  
Machine: n35  
Parameter Set: 2.2  
Index: 1400000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER15-1438852265  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options: verberrors=1

Name: d16  
Description:  
Directory: c:\blog\rtel6.log  
Machine: n36  
Parameter Set: 2.2  
Index: 1500000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER16-1438790906  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options: verberrors=1

Name: d17  
Description:  
Directory: c:\blog\rtel7.log  
Machine: n36  
Parameter Set: 2.2  
Index: 2150000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER17-57150250  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options: verberrors=1

Name: d18  
Description:  
Directory: c:\blog\rtel8.log  
Machine: n36  
Parameter Set: 2.2  
Index: 1700000000

Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER18-57076468  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options: verberrors=1

Name: d19  
Description:  
Directory: c:\blog\rtel9.log  
Machine: n37  
Parameter Set: 2.2  
Index: 1800000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER19-57030562  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d20  
Description:  
Directory: c:\blog\rtel20.log  
Machine: n37  
Parameter Set: 2.2  
Index: 1900000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER20-56992625  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d21  
Description:  
Directory: c:\blog\rtel21.log  
Machine: n37  
Parameter Set: 2.2  
Index: 27000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER2191781  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d22  
Description:  
Directory: c:\blog\rte22.log  
Machine: n38  
Parameter Set: 2.2  
Index: 210000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER221814250  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d23  
Description:  
Directory: c:\blog\rte23.log  
Machine: n38  
Parameter Set: 2.2  
Index: 30000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER231877968  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d24  
Description:  
Directory: c:\blog\rte24.log  
Machine: n38  
Parameter Set: 2.2  
Index: 40000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER242206343  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d25  
Description:  
Directory: c:\blog\rte25.log  
Machine: n39  
Parameter Set: 2.2  
Index: 50000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER252251500  
Connect Rate: 10  
Start Rate: 0

Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d26  
Description:  
Directory: c:\blog\rte26.log  
Machine: n39  
Parameter Set: 2.2  
Index: 60000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER262289250  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d27  
Description:  
Directory: c:\blog\rte27.log  
Machine: n39  
Parameter Set: 2.2  
Index: 70000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER272340437  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d28  
Description:  
Directory: c:\blog\rte28.log  
Machine: n41  
Parameter Set: 2.2  
Index: 80000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER282382234  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d29  
Description:  
Directory: c:\blog\rte29.log  
Machine: n41  
Parameter Set: 2.2

Index: 90000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER292416328  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d30  
Description:  
Directory: c:\blog\rte30.log  
Machine: n41  
Parameter Set: 2.2  
Index: 100000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER302463687  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d31  
Description:  
Directory: c:\blog\rte31.log  
Machine: n42  
Parameter Set: 2.2  
Index: 25500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER315814328  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d32  
Description:  
Directory: c:\blog\rte32.log  
Machine: n42  
Parameter Set: 2.2  
Index: 35500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3255892765  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d33  
Description:  
Directory: c:\blog\rte33.log  
Machine: n42  
Parameter Set: 2.2  
Index: 45500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3355948500  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d34  
Description:  
Directory: c:\blog\rte34.log  
Machine: n43  
Parameter Set: 2.2  
Index: 55500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3455990593  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d35  
Description:  
Directory: c:\blog\rte35.log  
Machine: n43  
Parameter Set: 2.2  
Index: 65500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3556027390  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d36  
Description:  
Directory: c:\blog\rte36.log  
Machine: n43  
Parameter Set: 2.2  
Index: 75500000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER3656077062  
Connect Rate: 10

Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d37  
Description:  
Directory: c:\blog\rte37.log  
Machine: n27  
Parameter Set: 2.2  
Index: 2105000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER37766536203  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d38  
Description:  
Directory: c:\blog\rte38.log  
Machine: n27  
Parameter Set: 2.2  
Index: 2050000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER38766654375  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d39  
Description:  
Directory: c:\blog\rte39.log  
Machine: n27  
Parameter Set: 2.2  
Index: 1905000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER39766760968  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d40  
Description:  
Directory: c:\blog\rte40.log  
Machine: n28

Parameter Set: 2.2  
Index: 705000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER40766820328  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d41  
Description:  
Directory: c:\blog\rte38.log  
Machine: n28  
Parameter Set: 2.2  
Index: 1805000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER41766909890  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d42  
Description:  
Directory: c:\blog\rte42.log  
Machine: n28  
Parameter Set: 2.2  
Index: 1705000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER42766941343  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d43  
Description:  
Directory: c:\blog\rte43.log  
Machine: n29  
Parameter Set: 2.2  
Index: 1605000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER43766990906  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0

Additional Options:

Name: d44  
Description:  
Directory: c:\blog\rte44.log  
Machine: n29  
Parameter Set: 2.2  
Index: 1505000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER44767023437  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d45  
Description:  
Directory: c:\blog\rte45.log  
Machine: n29  
Parameter Set: 2.2  
Index: 1105000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER45767085000  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Name: d46  
Description:  
Directory: c:\blog\rte46.log  
Machine: n30  
Parameter Set: 2.2  
Index: 1050000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER46767120687  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: d47  
Description:  
Directory: c:\blog\rte47.log  
Machine: n30  
Parameter Set: 2.2  
Index: 905000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER47767168296

Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: d48  
Description:  
Directory: c:\blog\rte48.log  
Machine: n30  
Parameter Set: 2.2  
Index: 805000000  
Seed: 4678  
Configured Users: 10590  
Pipe Name: DRIVER48767212015  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 2  
Additional Options:

Number of User groups: 48

Driver Engine: d1  
IIS Server: cr121  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1 - 1059  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d2  
IIS Server: cr121  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1060 - 2118  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d3  
IIS Server: cr121  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2119 - 3177

w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d4  
IIS Server: cr122  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 3178 - 4236  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d5  
IIS Server: cr122  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 4237 - 5295  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d6  
IIS Server: cr122  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 5296 - 6354  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d7  
IIS Server: cr123  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 6355 - 7413  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d8  
IIS Server: cr123  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 7414 - 8472  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d9  
IIS Server: cr123  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 8473 - 9531  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d10  
IIS Server: cr124  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 9532 - 10590  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d11  
IIS Server: cr124  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 10591 - 11649  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d12  
IIS Server: cr124  
SQL Server: warship  
Database: tpcc  
User: sa

Protocol: HTML  
w\_id Range: 11650 - 12708  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d13  
IIS Server: cr125  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 12709 - 13767  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d14  
IIS Server: cr125  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 13768 - 14826  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d15  
IIS Server: cr125  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 14827 - 15885  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d16  
IIS Server: cr126  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 15886 - 16944  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590

District id: 1  
Scale Down: No

Driver Engine: d17  
IIS Server: cr126  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 16945 - 18003  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d18  
IIS Server: cr126  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 18004 - 19062  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d19  
IIS Server: cr127  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 19063 - 20121  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d20  
IIS Server: cr127  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 20122 - 21180  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d21  
IIS Server: cr127  
SQL Server: warship

Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 21181 - 22239  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d22  
IIS Server: cr128  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 22240 - 23298  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d23  
IIS Server: cr128  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 23299 - 24357  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d24  
IIS Server: cr128  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 24358 - 25416  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d25  
IIS Server: cr129  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 25417 - 26475  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832

Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d26  
IIS Server: cr129  
SQL Server: tpcc  
Database: warship  
User: sa  
Protocol: HTML  
w\_id Range: 26476 - 27534  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d27  
IIS Server: cr129  
SQL Server: tpcc  
Database: warship  
User: sa  
Protocol: HTML  
w\_id Range: 27535 - 28593  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d28  
IIS Server: cr130  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 28594 - 29652  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d29  
IIS Server: cr130  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 29653 - 30711  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d30

IIS Server: cr130  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 30712 - 31770  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d31  
IIS Server: cr131  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 31771 - 32829  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d32  
IIS Server: cr131  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 32830 - 33888  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d33  
IIS Server: cr131  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 33889 - 34947  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d34  
IIS Server: cr132  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 34948 - 36006

w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d35  
IIS Server: cr132  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 36007 - 37065  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d36  
IIS Server: cr132  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 37066 - 38124  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d37  
IIS Server: cr77  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 38125 - 39183  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d38  
IIS Server: cr77  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 39184 - 40242  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d39  
IIS Server: cr77  
SQL Server: warship  
Database:  
User:  
Protocol: HTML  
w\_id Range: 40243 - 41301  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d40  
IIS Server: cr78  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 41302 - 42360  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d41  
IIS Server: cr78  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 42361 - 43419  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d42  
IIS Server: cr78  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 43420 - 44478  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d43  
IIS Server: cr79  
SQL Server: warship  
Database: tpcc  
User: sa

Protocol: HTML  
w\_id Range: 44479 - 45537  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d44  
IIS Server: cr79  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 45538 - 46596  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d45  
IIS Server: cr79  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 46597 - 47655  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d46  
IIS Server: cr80  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 47656 - 48714  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590  
District id: 1  
Scale Down: No

Driver Engine: d47  
IIS Server: cr80  
SQL Server: warship  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 48715 - 49773  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 50832  
Scale: Normal  
User Count: 10590

District id: 1  
 Scale Down: No  
  
 Driver Engine: d48  
 IIS Server: cr80  
 SQL Server: warship  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 49774 - 50832  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 50832  
 Scale: Normal  
 User Count: 10590  
 District id: 1  
 Scale Down: No

Number of Parameter Sets: 67

~Default  
 Default Parameter Set

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
12.05	18.01		0.10	5.00	0.10
			Payment	10.00	
12.05	3.01		0.10	5.00	0.10
			Delivery	1.00	
5.05	2.01		0.10	5.00	0.10
			Stock Level	1.00	
5.05	2.01		0.10	20.00	0.10
			Order Status	1.00	
10.05	2.01		0.10	5.00	0.10

Tuned Distribution

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
12.05	18.01		0.10	5.00	0.10
			Payment	43.10	
12.05	3.01		0.10	5.00	0.10
			Delivery	4.05	
5.05	2.01		0.10	5.00	0.10
			Stock Level	4.05	
5.05	2.01		0.10	20.00	0.10
			Order Status	4.05	
10.05	2.01		0.10	5.00	0.10

No Think

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
0.00	0.00		0.00	5.00	0.00

			Payment	10.00	
0.00	0.00		0.00	5.00	0.00
			Delivery	1.00	
0.00	0.00		0.00	5.00	0.00
			Stock Level	1.00	
0.00	0.00		0.00	20.00	0.00
			Order Status	1.00	
0.00	0.00		0.00	5.00	0.00

95%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
13.00	18.01		0.10	5.00	0.10
			Payment	43.10	
13.00	3.01		0.10	5.00	0.10
			Delivery	4.05	
6.00	2.01		0.10	5.00	0.10
			Stock Level	4.05	
6.00	2.01		0.10	20.00	0.10
			Order Status	4.05	
11.00	2.01		0.10	5.00	0.10

90%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
16.00	18.01		0.10	5.00	0.10
			Payment	43.05	
16.00	3.01		0.10	5.00	0.10
			Delivery	4.04	
9.00	2.01		0.10	5.00	0.10
			Stock Level	4.04	
9.00	2.01		0.10	20.00	0.10
			Order Status	4.04	
14.00	2.01		0.10	5.00	0.10

3.0

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
36.15	0.00		0.10	5.00	0.10
			Payment	43.10	
36.15	0.00		0.10	5.00	0.10
			Delivery	4.05	
15.15	0.00		0.10	5.00	0.10
			Stock Level	4.05	
15.15	0.00		0.10	20.00	0.10
			Order Status	4.05	
30.15	0.00		0.10	5.00	0.10

4.0

4.0 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
48.20	18.01		0.10	5.00	0.10
			Payment	43.10	
48.20	3.01		0.10	5.00	0.10
			Delivery	4.05	
20.20	2.01		0.10	5.00	0.10
			Stock Level	4.05	
20.20	2.01		0.10	20.00	0.10
			Order Status	4.05	
40.20	2.01		0.10	5.00	0.10

3.8

3.8 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
45.70	18.01		0.10	5.00	0.10
			Payment	43.10	
45.70	3.01		0.10	5.00	0.10
			Delivery	4.05	
19.10	2.01		0.10	5.00	0.10
			Stock Level	4.05	
19.10	2.01		0.10	20.00	0.10
			Order Status	4.05	
38.10	2.01		0.10	5.00	0.10

3.6

3.6 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
43.30	18.01		0.10	5.00	0.10
			Payment	43.10	
43.30	3.01		0.10	5.00	0.10
			Delivery	4.05	
18.10	2.01		0.10	5.00	0.10
			Stock Level	4.05	
18.10	2.01		0.10	20.00	0.10
			Order Status	4.05	
36.18	2.01		0.10	5.00	0.10

3.4

3.4 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
40.90	18.01		0.10	5.00	0.10
			Payment	43.10	
40.90	3.01		0.10	5.00	0.10
			Delivery	4.05	
17.10	2.01		0.10	5.00	0.10



17.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
17.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.2			
			3.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
38.50	18.01		New Order	44.75		
			0.10	5.00	0.10	
38.50	3.01		Payment	43.10		
			0.10	5.00	0.10	
16.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
16.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
32.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.8			
			2.8 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
33.74	18.01		New Order	44.75		
			0.10	5.00	0.10	
33.74	3.01		Payment	43.10		
			0.10	5.00	0.10	
14.14	2.01		Delivery	4.05		
			0.10	5.00	0.10	
14.14	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
28.14	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.6			
			2.6 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
31.30	18.01		New Order	44.75		
			0.10	5.00	0.10	
31.30	3.01		Payment	43.10		
			0.10	5.00	0.10	
13.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
13.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
26.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.4			
			2.4 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	

28.90	18.01		New Order	44.75		
			0.10	5.00	0.10	
28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.2			
			2.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
28.90	18.01		New Order	44.75		
			0.10	5.00	0.10	
28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.12	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.0			
			2.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
24.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
24.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
10.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
10.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
20.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			5.0			
			5.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
60.25	18.01		New Order	44.75		
			0.10	5.00	0.10	
60.25	3.01		Payment	43.10		
			0.10	5.00	0.10	
25.25	2.01		Delivery	4.05		
			0.10	5.00	0.10	
25.25	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
50.25	2.01		Order Status	4.05		
			0.10	5.00	0.10	

			4.5			
			4.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.8			
			1.8 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
21.60	18.01		New Order	44.75		
			0.10	5.00	0.10	
21.60	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.09	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.09	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
18.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			4.2			
			4.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	

22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.6			
			1.6 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
19.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
19.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
8.08	2.01		Delivery	4.05		
			0.10	5.00	0.10	
8.08	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
16.08	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.4			
			1.4 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
16.87	18.01		New Order	44.75		
			0.10	5.00	0.10	
16.87	3.01		Payment	43.10		
			0.10	5.00	0.10	
7.07	2.01		Delivery	4.05		
			0.10	5.00	0.10	
7.07	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
14.07	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.2			
			1.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
14.46	18.01		New Order	44.83		
			0.10	5.00	0.10	
14.46	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.06	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.06	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			
Key	RT	RT	Menu	Txn	Think	

Time	Delay	Fence	Delay	Weight	Time	
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.9			
			1.9 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
22.89	18.01		New Order	44.75		
			0.10	5.00	0.10	
22.89	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.59	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.59	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
19.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.1			
			1.1 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
13.25	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.25	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.55	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.55	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
11.05	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.05 better			
			1.05 tt better			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.65	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.65	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.30	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.30	2.01		Stock Level	4.03		
			0.10	20.00	0.10	

10.55	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.09			
			1.09 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
13.13	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.13	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.50	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.50	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.95	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.08			
			1.08 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
13.01	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.01	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.45	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.45	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.85	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.07			
			1.07 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.89	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.89	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.40	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.40	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.75	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.06			
			1.06 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.77	18.01		New Order	44.83		
			0.10	5.00	0.10	

12.77	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.35	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.35	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.65	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.15			
			1.15 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.85	18.01		New Order	44.75		
			0.10	5.00	0.10	
13.85	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.80	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.80	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.55	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.25			
			1.25 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.06	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.06	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.31	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.31	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.56	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.3			
			1.3 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.66	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.66	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.56	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.56	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
13.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.12			
			1.12 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.49	18.01		New Order	44.75		
			0.10	5.00	0.10	
13.49	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.65	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.65	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.25	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.18			
			1.18 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.21	18.01		New Order	44.75		
			0.10	5.00	0.10	
14.21	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.95	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.95	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.85	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.22			
			1.22 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.70	18.01		New Order	44.75		
			0.10	5.00	0.10	
14.70	3.01		Payment	43.10		
			0.10	5.00	0.10	
6.16	2.01		Delivery	4.05		
			0.10	5.00	0.10	
6.16	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
12.26	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.28			
			1.28 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.42	18.01		New Order	44.75		
			0.10	5.00	0.10	
15.42	3.01		Payment	43.10		
			0.10	5.00	0.10	
6.46	2.01		Delivery	4.05		
			0.10	5.00	0.10	

6.46	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
12.86	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.04			
			1.04 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.53	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.53	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.25	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.25	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.45	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.03			
			1.03 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.41	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.41	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.20	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.20	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.35	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.02			
			1.02 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.29	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.29	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.15	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.15	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.25	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.01			
			1.01 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			

12.17	18.01		New Order	44.83		
		0.10	5.00	0.10		
12.17	3.01		Payment	43.05		
		0.10	5.00	0.10		
5.10	2.01		Delivery	4.04		
		0.10	5.00	0.10		
5.10	2.01		Stock Level	4.04		
		0.10	20.00	0.10		
10.15	2.01		Order Status	4.04		
		0.10	5.00	0.10		
			1.005_best			
			1.005 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.11	18.01		New Order	44.88		
		0.10	5.00	0.10		
12.11	3.01		Payment	43.02		
		0.10	5.00	0.10		
5.07	2.01		Delivery	4.03		
		0.10	5.00	0.10		
5.07	2.01		Stock Level	4.03		
		0.10	20.00	0.10		
10.10	2.01		Order Status	4.03		
		0.10	5.00	0.10		
			1.001_best			
			1.001 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.06	18.01		New Order	44.91		
		0.10	5.00	0.10		
12.06	3.01		Payment	43.04		
		0.10	5.00	0.10		
5.06	2.01		Delivery	4.01		
		0.10	5.00	0.10		
5.06	2.01		Stock Level	4.02		
		0.10	20.00	0.10		
10.06	2.01		Order Status	4.02		
		0.10	5.00	0.10		
			1.03 better			
			1.03 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.41	18.01		New Order	44.92		
		0.10	5.00	0.10		
12.41	3.01		Payment	43.01		
		0.10	5.00	0.10		
5.20	2.01		Delivery	4.02		
		0.10	5.00	0.10		
5.20	2.01		Stock Level	4.03		
		0.10	20.00	0.10		
10.35	2.01		Order Status	4.02		
		0.10	5.00	0.10		

			1.005 better			
			1.005 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.11	18.01		New Order	44.90		
		0.10	5.00	0.10		
12.11	3.01		Payment	43.05		
		0.10	5.00	0.10		
5.07	2.01		Delivery	4.01		
		0.10	5.00	0.10		
5.07	2.01		Stock Level	4.03		
		0.10	20.00	0.10		
10.10	2.01		Order Status	4.01		
		0.10	5.00	0.10		
			1.02 better			
			1.02 tt more aggressive			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.29	18.01		New Order	44.92		
		0.10	5.00	0.10		
12.29	3.01		Payment	43.01		
		0.10	5.00	0.10		
5.15	2.01		Delivery	4.02		
		0.10	5.00	0.10		
5.15	2.01		Stock Level	4.03		
		0.10	20.00	0.10		
10.25	2.01		Order Status	4.02		
		0.10	5.00	0.10		
			1.01 best			
			1.01 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.17	18.01		New Order	44.90		
		0.10	5.00	0.10		
12.17	3.01		Payment	43.05		
		0.10	5.00	0.10		
5.10	2.01		Delivery	4.01		
		0.10	5.00	0.10		
5.10	2.01		Stock Level	4.03		
		0.10	20.00	0.10		
10.15	2.01		Order Status	4.01		
		0.10	5.00	0.10		
			1.02 best			
			1.02 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.29	18.01		New Order	44.96		
		0.00	5.00	0.00		
12.29	3.01		Payment	43.00		
		0.00	5.00	0.00		

5.15	2.01		Delivery	4.00		
		0.00	5.00	0.00		
5.15	2.01		Stock Level	4.03		
		0.00	20.00	0.00		
10.25	2.01		Order Status	4.01		
		0.00	5.00	0.00		
			1.03 best			
			1.03 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.41	18.01		New Order	44.96		
		0.10	5.00	0.10		
12.41	3.01		Payment	43.01		
		0.10	5.00	0.10		
5.20	2.01		Delivery	4.01		
		0.10	5.00	0.10		
5.20	2.01		Stock Level	4.01		
		0.10	20.00	0.10		
10.35	2.01		Order Status	4.01		
		0.10	5.00	0.10		
			5.5			
			5.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
66.28	18.01		New Order	44.83		
		0.10	5.00	0.10		
66.28	3.01		Payment	43.05		
		0.10	5.00	0.10		
27.77	2.01		Delivery	4.04		
		0.10	5.00	0.10		
27.77	2.01		Stock Level	4.04		
		0.10	20.00	0.10		
55.27	2.01		Order Status	4.04		
		0.10	5.00	0.10		
			6.0			
			6.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
72.30	18.01		New Order	44.83		
		0.10	5.00	0.10		
72.30	3.01		Payment	43.05		
		0.10	5.00	0.10		
30.30	2.01		Delivery	4.04		
		0.10	5.00	0.10		
30.30	2.01		Stock Level	4.04		
		0.10	20.00	0.10		
60.30	2.01		Order Status	4.04		
		0.10	5.00	0.10		
			6.5			
			6.5 tt			
Key	RT	RT	Menu	Txn	Think	

Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
79.53	18.01		0.10	5.00	0.10
			Payment	43.05	
79.53	3.01		0.10	5.00	0.10
			Delivery	4.04	
33.33	2.01		0.10	5.00	0.10
			Stock Level	4.04	
33.33	2.01		0.10	20.00	0.10
			Order Status	4.04	
66.33	2.01		0.10	5.00	0.10
			7.0		
			7.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
84.35	18.01		0.10	5.00	0.10
			Payment	43.05	
84.35	3.01		0.10	5.00	0.10
			Delivery	4.04	
35.35	2.01		0.10	5.00	0.10
			Stock Level	4.04	
35.35	2.01		0.10	20.00	0.10
			Order Status	4.04	
70.35	2.01		0.10	5.00	0.10
			7.5		
			7.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
90.38	18.01		0.10	5.00	0.10
			Payment	43.05	
90.38	3.01		0.10	5.00	0.10
			Delivery	4.04	
37.88	2.01		0.10	5.00	0.10
			Stock Level	4.04	
37.88	2.01		0.10	20.00	0.10
			Order Status	4.04	
75.38	2.01		0.10	5.00	0.10
			8.0		
			8.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
96.40	18.01		0.10	5.00	0.10
			Payment	43.05	
96.40	3.01		0.10	5.00	0.10
			Delivery	4.04	
40.40	2.01		0.10	5.00	0.10
			Stock Level	4.04	
40.40	2.01		0.10	20.00	0.10

Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
80.40	2.01		0.10	5.00	0.10
			8.5		
			8.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
102.43	18.01		0.10	5.00	0.10
			Payment	43.05	
192.43	3.01		0.10	5.00	0.10
			Delivery	4.04	
42.92	2.01		0.10	5.00	0.10
			Stock Level	4.04	
42.92	2.01		0.10	20.00	0.10
			Order Status	4.04	
85.42	2.01		0.10	5.00	0.10
			9.0		
			9.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
108.45	18.01		0.10	5.00	0.10
			Payment	43.05	
108.45	3.01		0.10	5.00	0.10
			Delivery	4.04	
45.45	2.01		0.10	5.00	0.10
			Stock Level	4.04	
45.45	2.01		0.10	20.00	0.10
			Order Status	4.04	
90.45	2.01		0.10	5.00	0.10
			9.5		
			9.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
114.47	18.01		0.10	5.00	0.10
			Payment	43.05	
114.47	3.01		0.10	5.00	0.10
			Delivery	4.04	
47.98	2.01		0.10	5.00	0.10
			Stock Level	4.04	
47.98	2.01		0.10	20.00	0.10
			Order Status	4.04	
95.47	2.01		0.10	5.00	0.10
			10		
			10 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
120.50	18.01		0.10	5.00	0.10

Time	Delay	Fence	Delay	Weight	Time
			Payment	43.05	
120.50	3.01		0.10	5.00	0.10
			Delivery	4.04	
50.50	2.01		0.10	5.00	0.10
			Stock Level	4.04	
50.50	2.01		0.10	20.00	0.10
			Order Status	4.04	
100.50	2.01		0.10	5.00	0.10
			1.02 better		
			1.02 more aggressive		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.05	18.01		0.10	5.00	0.10
			Payment	43.01	
12.05	3.01		0.10	5.00	0.10
			Delivery	4.02	
5.05	2.01		0.10	5.00	0.10
			Stock Level	4.03	
5.05	2.01		0.10	20.00	0.10
			Order Status	4.02	
10.05	2.01		0.10	5.00	0.10
			1.01 better		
			1.01 more aggressive		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.17	18.01		0.10	5.00	0.10
			Payment	43.01	
12.17	3.01		0.10	5.00	0.10
			Delivery	4.02	
5.10	2.01		0.10	5.00	0.10
			Stock Level	4.03	
5.10	2.01		0.10	20.00	0.10
			Order Status	4.02	
10.15	2.01		0.10	5.00	0.10
			1.001 better		
			1.001 more aggressive		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.06	18.01		0.10	5.00	0.10
			Payment	43.01	
12.06	3.01		0.10	5.00	0.10
			Delivery	4.02	
5.06	2.01		0.10	5.00	0.10
			Stock Level	4.03	
5.06	2.01		0.10	20.00	0.10
			Order Status	4.02	
10.06	2.01		0.10	5.00	0.10
			FullSpeed		
			1.000 tt		

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.05	18.01		New Order	5.00	44.91
			0.10		0.10
			Payment		43.03
12.05	3.01		0.10	5.00	0.10
			Delivery		4.02
5.05	2.01		0.10	5.00	0.10
			Stock Level		4.02
5.05	2.01		0.10	20.00	0.10
			Order Status		4.02
10.05	2.01		0.10	5.00	0.10
			1.003 best		
			1.003 best		

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.09	18.01		New Order	5.00	44.90
			0.10		0.10
			Payment		43.05
12.09	3.01		0.10	5.00	0.10
			Delivery		4.01
5.07	2.01		0.10	5.00	0.10
			Stock Level		4.03
5.07	2.01		0.10	20.00	0.10
			Order Status		4.01
10.08	2.01		0.10	5.00	0.10

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			ExtraKick		
			FullSpeedKick		
12.03	18.01		New Order	5.00	44.92
			0.10		0.10
			Payment		43.01
12.03	3.01		0.10	5.00	0.10
			Delivery		4.02
5.03	2.01		0.10	5.00	0.10
			Stock Level		4.02
5.03	2.01		0.10	20.00	0.10
			Order Status		4.03
10.03	2.01		0.10	5.00	0.10

## HP Specific Drivers

The following Microsoft Windows 2003 Server x64 device drivers were replaced with HP-specific device drivers:  
The Microsoft HP Smart Array SAS Controller Controller default device driver (hpciss.sys) was replaced with the HP Smart Array SAS Controller Non-miniport Performance Drivers for Microsoft Windows 2003 Server x64 (hpcissb.sys and hpcissd.sys).

# *Appendix D: 60-Day Space*

TPC-C 60 Day Space Requirements

Warehouses	56,000				TpmC	634,825
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	56,000	5,976	104	304		6,384
District	560,000	62,224	200	3,121		65,545
Customer	1,680,000,000	1,221,818,184	76,229,984	64,902,408		1,362,950,576
History	1,680,000,000	98,102,192	366,384		19,252,358	98,468,576
New_order	504,000,000	8,979,960	20,376	450,017		9,450,353
Orders	1,680,000,000	54,857,144	122,792		23,016,658	54,979,936
Order_line	16,799,949,701	1,101,636,048	2,594,344		355,572,295	1,104,230,392
Item	100,000	9,416	104	476		9,996
Stock	5,600,000,000	1,792,000,000	3,776,176	89,788,809		1,885,564,985
Total		4,277,471,144	83,110,464	155,145,135	397,841,311	4,515,726,743
	MB					
Dynamic Space	1,225,191	Sum of Data for Order, Orderline and History				
Static Space	3,184,699	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - ( Dynamic + Static Space)				
Daily Growth	222,223	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	16,518,100					
60 Day Space GB	16,130.96	GB				
Log Size	2,239,599.00	MB				
KB Per New Order	6.46	KB				
8 hr log MB	1,922,607	MB				
8 hr log GB	1,877.55	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	16,131	1000	33,800.00	36GB	33.80	
			0.00			
			0.00			
Total DB			33,800.00			
8-hr log + mirror	3,755	32	4,374.40	146GB	136.70	
OS_Swap	3	2	33.80			
Total Storage	19,889.05	GB	38,208.20	GB		

	MSSQL_stk_fg	MSSQL_cust_fg	MSSQL_ol_fg	MSSQL_misc_fg
				6,384
				65,545
		1,362,950,576		
				117,720,934
				9,450,353
				77,996,594
			1,459,802,687	
				9,996
	1,885,564,985			
	1,885,564,985	1,362,950,576	1,459,802,687	205,249,806
files=	10	10	10	10
size=	26,233,600	19,833,600	19,712,000	3,808,000
Total=	262,336,000	198,336,000	197,120,000	38,080,000
8K blocks	2,098,688,000	1,586,688,000	1,576,960,000	304,640,000
	OK	OK	OK	OK



<b>tpmC</b>	<b>634,825</b>									
	<b>Data</b>	<b>Index</b>	<b>Data</b>	<b>Index</b>	<b>Data</b>	<b>Index</b>	<b>Total</b>	<b>KB/New-</b>	<b>8-Hr</b>	<b>8-Hr</b>
	<b>Before KB</b>	<b>Before KB</b>	<b>After KB</b>	<b>After KB</b>	<b>Grow KB</b>	<b>Grow KB</b>	<b>Grow KB</b>	<b>Order</b>	<b>Growth KB</b>	<b>Growth MB</b>
<b>History</b>	98,102,192	366,384	107,997,520	699,976	9,895,328	333,592	10,228,920	0.0632	19,252,358.28	18,801.13
<b>Order</b>	54,857,144	122,792	66,974,592	234,264	12,117,448	111,472	12,228,920	0.0755	23,016,657.60	22,477.20
<b>Order-Line</b>	1,101,636,048	2,594,344	1,288,195,496	4,953,080	186,559,448	2,358,736	188,918,184	1.1669	355,572,295.47	347,238.57
										<b>388,516.91</b>
	<b>sum(*)</b>		<b>sum(*)</b>		<b>Num</b>					
	<b>Before</b>		<b>After</b>		<b>New-Order</b>					
<b>d_next_o_id</b>	1,680,560,000		1,842,457,859		161,897,859					
	<b>Before MB</b>		<b>After MB</b>		<b>Grow MB</b>			<b>KB/New-</b>	<b>8-Hr Growth</b>	<b>8-Hr Growth</b>
<b>Log</b>	22,362.50		1,043,857.79		1,021,495.29			<b>Order</b>	<b>MB</b>	<b>GB</b>
								6.4609	1,922,607.01	1,877.55
								6,615.9951	bytes	
	<b>2,239,599</b>	<b>0.99850464</b>	<b>46.609138</b>							
Database tpcc log used (%)										

# *Appendix E:* *Third Party Letters*

CAT 6 7 Foot Gray Patch Cable - graycables.com - Microsoft Internet Explorer

Address: http://www.graycables.com/416-3007.html

**graycables** HOME | ABOUT US | PRIVACY POLICY | CONTACT US | SHOPPING CART

Home > Networking > Ethernet Patch Cables > CAT 6 PATCH CABLE > CAT 6 7 Foot Gray Patch Cable

**CAT 6 7 Foot Gray Patch Cable**

Item #	416-3007
Your Price:	\$2.75

[Add to Cart](#)
[Email to a Friend](#)

[Click For Larger Image](#)

**Cat 6 Molded Patch Cable.**  
 Category 6 high speed cabling is a pre-requisite for today's performance demanding Ethernet and gigabit networks. Graycables.com will keep you at the head of the pack with our high performance 500Mhz Cat6 patch cables. Our Cat6 500Mhz patch cables easily handle bandwidth intensive applications and more. With the UL certified patch cables that meet all the TIA/EIA standards. Graycables' Cat6 patch cables are well constructed using Cat6 bulk cable, which consists of 4 unshielded twisted pairs, 24 AWG, stranded conductors, and a PVC jacket. We terminate the snagless molded booted Cat6 cables with Cat6 certified RJ45 plugs, which are plated with 50 microns of gold plating per contact. Constructed with high-quality wire and a shortened body plug will keep Near-end Crosstalk (NEXT) levels to a minimum. Our molded, snagless boot prevents unwanted cable snags during installation/maintenance and provides extra strain-relief.

**About Category 6 (CAT 6):**  
 For 10/100Base-TX and 1000Base-TX (Gigabit Ethernet) Category 6 (ANSI/TIA/EIA-568-B 2-1) was ratified by the TIA/EIA in June 2002. CAT-6 provides higher performance than CAT-5e and features more stringent specifications for crosstalk and system noise. All CAT-6 components are backward compatible with CAT5e, CAT5, and Category 3. If different category components are used with higher category components, then the channel will be limited to the performance of the lower category. Using all Category 6 components throughout the signal path should result in a Power-Sum Attenuation-to-Crosstalk Ratio (PS-ACR) that is greater than or equal to zero at 200 MHz.

**Cat 6 Specifications:**

- Frequency: 250 MHz. Attenuation (Min. at 100 MHz) 19.8 dB.
- Characteristic Impedance: 100 ohms @ 15%.
- NEXT (Min. at 100 MHz) 44.3 dB.
- PS-NEXT (Min. at 100 MHz) 42.3 dB.
- ELFEXT (Min. at 100 MHz) 27.8 dB.
- PS-ELFEXT (Min. at 100 MHz) 24.8 dB.
- Return Loss (Min. at 100 MHz) 20.1 dB.
- Delay Skew (Max. per 100 m) 45 ns.

**Graycables.com Requirements:**

- Conductor: 4-pair 24 AWG Stranded Copper
- Connector: 50-micron gold plated RJ-45 Male to Male
- Frequency: 500Mhz
- Molded, Snagless boot prevents unwanted cable snags
- Jacket: PVC

**Applications:**

- Gigabit 1000 BASE-T; 100 BASE-T; 10 BASE-T (IEEE 802.3)
- 4/16 Mbps Token Ring (IEEE 802.5); 100 VG-Any LAN
- 100 Mbps TP-PMD (ANSI X3T9.5); 55/155 Mbps ATM
- Voice
- Designed For: Network Interface Cards, Hubs, Switches, Routers, DSL/Cable Modems, Patch Panels and all other twisted-pair applications
- Wired: TSB 568B (Standard US)
- Meets or Exceeds Category 6 specifications
- Certifications: TIA/EIA; UL Listed

[Authorize.Net](#)  
 Online Payments

[Secure Shopping](#)  
 128-bit SSL

Discussions not available on http://www.graycables.com/

javascrpt:popup('http://site.graycables.com/email.php?name=CAT 6 7 Foot Gray Patch Cable&url=http://www.graycables.com/416-3007')

Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052-6399

Tel 425 882 8080  
Fax 425 936 7329  
<http://www.microsoft.com/>

**Microsoft**

August 5, 2008

Hewlett-Packard Company  
David Adams  
20555 SH 249  
MS 150402  
Houston, TX 77040

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03134	<b>SQL Server 2005 Enterprise x64 Edition</b> <i>Per Processor License</i> <i>Discount Schedule: Open Program - Level C</i> <i>Unit Price reflects a 6% discount from the retail unit price of \$24,999.</i>	\$23,432	4	\$93,728
P73-01972	<b>Windows Server 2003 R2 Standard Edition</b> <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	16	\$11,504
P72-01684	<b>Windows Server 2003 R2 Enterprise x64 Edition</b> <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
127-00012	<b>Visual Studio Standard 2005</b> <i>Full License</i> <i>No Discount Applied</i>	\$250	1	\$250
N/A	<b>Microsoft Problem Resolution Services</b> <i>Professional Support</i> <i>(1 Incident)</i>	\$245	1	\$245

Windows Server 2008 and Windows Server 2003 are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found at **<http://www.microsoft.com/products/info/render.aspx?view=22&type=mdp&content=22/licensing>**

SQL Server 2008 will be orderable and available by August 30, 2008.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or [jamiere@microsoft.com](mailto:jamiere@microsoft.com).

Reference ID: PCdaad0808050000002314.

Please include this Reference ID in any correspondence regarding this price quote.

# *Appendix F:*

## *Price Verification*

Description	Part Number	Order Date	Order Method	Price Verification
DL580R05 CTO Chassis	487381-B21	9/15/2008	hp.com	Note 2
HP DL580G5 X7460 2.67 16M 6 core Kit	487373-L21	9/15/2008	hp.com	Note 2
HP DL580G5 X7460 2.67 16M 6 core Kit	487373-B21	9/15/2008	hp.com	Note 2

Note 1 = HP Direct : 800-203-6748.  
Note 2 = These components are not immediately orderable. For price verification before order date: e-mail [hp.pricing.desk@hp.com](mailto:hp.pricing.desk@hp.com)

HP Direct: 800-203-6748

For price verification before order date: e-mail [hp.pricing.desk@hp.com](mailto:hp.pricing.desk@hp.com)